

Nemko Korea Co., Ltd.

67-1 & 300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, KOREA

TEL:+82 31 330-1700

FAX:+82 31 322 2332

FCC and IC EVALUATION REPORT FOR CERTIFICATION

Applicant :**Samsung Electronics Co., Ltd.****416, Maetan-3Dong, Yeongtong-Gu,****Suwon-Si, Gyeonggi-Do, Korea.****(Post code : 443-742)****Attn. : Mr. Jay-woo, Lee****Dates of Issue : April 2, 2012****Test Report No. : NK-12-R-040****Test Site : Nemko Korea Co., Ltd.****FCC ID
IC****A3LSSMD1000
649E-SSMD1000****Brand Name****SAMSUNG****Contact Person****Samsung Electronics Co., Ltd.
416, Maetan-3Dong, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, Korea, 443-742.
Mr. Jaywoo. Lee
Telephone No. : +82-31-277-2569**

Applied Standard: FCC 47 CFR Part 15C and IC RSS-210
Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)
EUT Type: Bluetooth Module

The device bearing the brand name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Tested By : Jin-ha, Ko
Engineer

Apr. 2, 2012


Reviewed By : H.H. Kim
Manager & Chief Engineer

APR. 22. 2012

TABLE OF CONTENTS

1.	Scope	4
2.	Introduction (Site Description)	5
	2.1 Test facility	5
	2.2 Accreditation and listing	6
3.	Test Conditions & EUT Information	7
	3.1 Operation During Test	7
	3.2 Support Equipment	7
	3.3 Setup Drawing	7
	3.4 EUT Information	8
4.	Summary of Test Results	9
5.	Recommendation / Conclusion	10
6.	Antenna Requirements	10
7.	Description of Test	11
	7.1 Conducted Emissions	11
	7.2 Radiated Emissions	12
	7.3 20 dB Bandwidth and Carrier Frequency Separation	13
	7.4 Transmitter Average Time of Occupancy	13
	7.5 Number of Hopping Channels	14
	7.6 Maximum Peak Output Power	14
	7.7 Conducted Spurious Emissions	15
8.	Test Data	16
	8.1 Conducted Emissions	16
	8.2 Radiated Emissions	19
	8.3 20 dB Modulated Bandwidth	20
	8.4 Carrier Frequency Separation	24

8.5 Transmitter Average Time of Occupancy	26
8.6 Number of Hopping Channels	28
8.7 Peak Power Output	30
8.8 Conducted Spurious Emissions	34
8.9 Radiated Spurious Emissions	45
9. Test Equipment	52
10 Accuracy of Measurement	53
Appendix A: Labeling Requirement	55
Appendix B: Photographs of Test Set-up	56
Appendix C: EUT Photographs	58

1. SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15 and IC RSS-210.

Responsible Party :	Samsung Electronics Co., Ltd.
Contact Person :	Mr. Jaywoo. Lee
Manufacturer :	Samsung Electronics Co., Ltd. 416 Maetan-3Dong, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, 443-742 KOREA

- FCC ID: A3LSSMD1000
- Model: SSM-D1000
- Brand Name: SAMSUNG
- EUT Type: Bluetooth Module
- Classification: FCC Class B
- Applied Standard: FCC 47 CFR Part 15 subpart C and IC RSS-210
- Test Procedure(s): ANSI C63.4-2003 and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"
- Dates of Test: March 13, 2012 ~ March 27, 2012
- Place of Tests: Nemko Korea Co., Ltd.

2. INTRODUCTION

2.1 Test facility

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions emanating from **Samsung Electronics Co., Ltd.**

FCC ID : **A3LSSMD1000** and IC : **649E-SSMD1000**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory.**

The site address is 67-1 & 300-2, Osan-Ri, Mohyeon-Myeon, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, KOREA.

The area of Nemko Korea Corporation Ltd. EMC Test Site is located in a mountain area at 80 kilo-meters (48 miles) southeast and Incheon International Airport (Incheon Airport), 30 kilometers (18 miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 2003.



Nemko Korea Co., Ltd.
EMC Lab.
67-1 & 300-2, Osan-Ri,
Mohyeon-Myeon, Cheoin-Gu,
Yongin-Si, Gyeonggi-Do, KOREA
449-852
Tel)+82-31-330-1700
Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab. and Incheon Airport.

2.2 Accreditation and listing

Accreditation type		Accreditation number
	FCC part 15/18 Filing site	Registration No. 97992
	CAB Accreditation for DOC	Designation No. KR0026
	KOLAS Accredited Lab. (Korea Laboratory Accreditation Scheme)	Registration No. 155
	Canada IC Registered site	Site No. 2040E-1
	VCCI registration site(RE/CE/Telecom CE)	Member No. 2118
	EMC CBTL	-
	KCC(RRL)Designated Lab.	Registration No. KR0026
	SASO registered Lab and Certification Body	Registration No. 2008-15

3. TEST CONDITIONS & EUT INFORMATION


3.1 Operation During Test

The Laptop and Test Jig were used to control the EUT to transmit the wanted TX channel by the Bluetest testing program which manufacturer supported. The EUT was measured in Bluetooth Traffic mode with the maximum output power in accordance with the manufacturer's specifications. For the Maximum Peak output power, Carrier Frequency separation, 20 dB Bandwidth, Band Edge tests were tested with both GFSK and 8DPSK modulation. For the Radiation test was measured with GFSK modulation mode which was the worst case.

3.2 Support Equipment

Bluetooth Module (EUT)	Samsung Electronics Co., Ltd. Model: SSM-D1000 FCC ID : A3LSSMD1000	S/N: N/A
Laptop Computer	Samsung Electronics Co., Ltd. Model : NT-R520 0.3 m shielded USB cable	FCC DOC S/N: ZK6V93FS800012Y
AC/DC Adaptor for Laptop	Chicony Power Technology Co., Ltd. Model : AD-6019R 1.2 m unshielded power cable	FCC DOC S/N: CNBA440024ADON897I2602

3.3 Setup Drawing

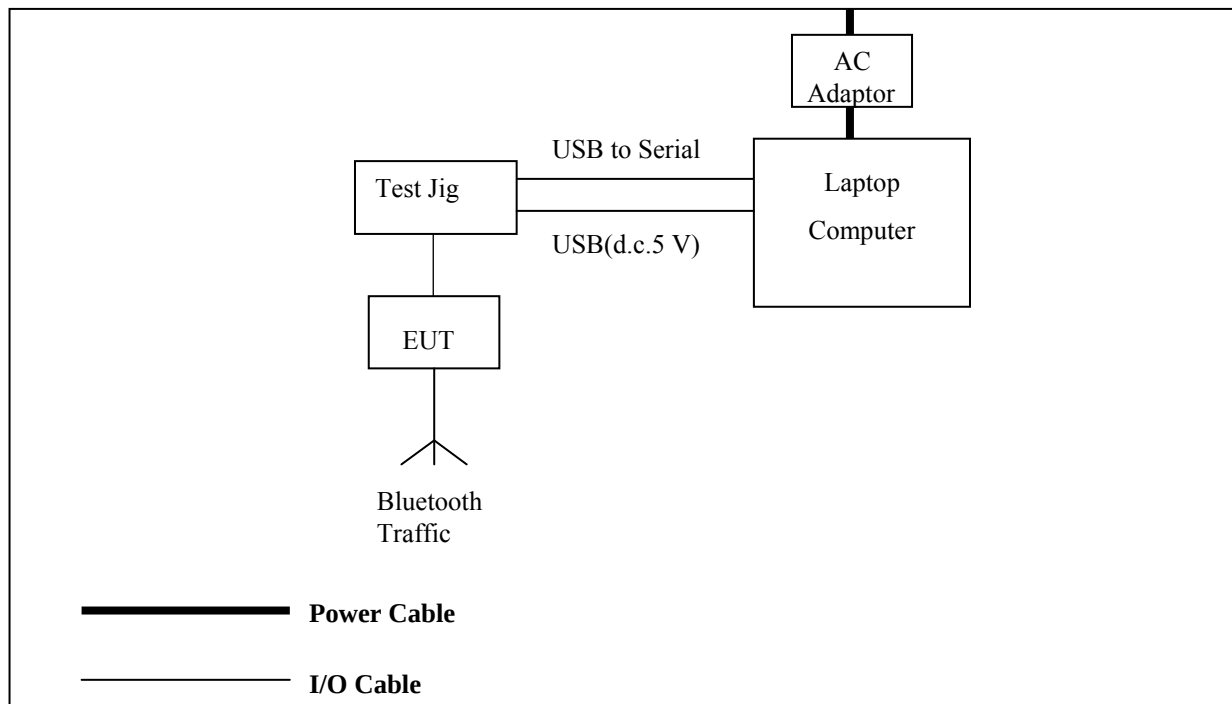

3.4 EUT Information

The EUT is the **Samsung Bluetooth Module FCC ID: A3LSSMD1000, IC: 649E-SSMD1000.**

This unit supports full qualified Bluetooth 3.0 standard system.

Specifications:

EUT Type	Bluetooth Module
Model Name	SSM-D1000
Brand Name	SAMSUNG
RF Frequency	2402 MHz ~ 2480 MHz
Peak Power Output (Conducted)	3.19 dBm
FCC Classification	FCC Part 15 Spread Spectrum Transmitter (DSS)
Method/System	Frequency Hopping Spread Spectrum (FHSS)
Channel Number	79
Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Gain	1.34 dBi (Peak)
Power	3.3 Vdc
Size (W x H x D)	50 mm x 24 mm x 7 mm
Weight	4 g

3.5 Description of change

- Refer to Appendix D for detail change items

4. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specification:

Name of Test	FCC Paragraph No.	IC Paragraph No.	Result	Remark
Conducted Emission	15.207	RSS-GEN 7.2.4	Complies	
Radiated Emission	15.209	RSS-210 A8.5	Complies	
20dB Bandwidth and Carrier Frequency Separation	15.247(a)(1)(iii)	RSS-210 A8.1	Complies	
Carrier Frequency Separation	15.247(a)(1)	RSS-210 A8.1(2)	Complies	
Transmitter Average Time of Occupancy	15.247(a)(1)(iii)	RSS-210 A8.1(4)	Complies	
Peak Power Output	15.247(b)(1)	RSS-210 A8.4(2)	Complies	
Conducted Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	
Radiated Spurious Emission	15.247(d)	RSS-210 A8.5	Complies	
Number of Hopping channels	15.247(a)(1)(iii)	RSS-210 A8.1(4)	Complies	

5. RECOMMENDATION/CONCLUSION

The data collected shows that the **Samsung Bluetooth Module FCC ID: A3LSSMD1000, IC: 649E-SSMD1000** is in compliance with Part 15 Subpart C 15.247 of the FCC Rules.

6. ANTENNA REQUIREMENTS

§15.203 of the FCC Rules part 15 Subpart C

: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the **Samsung Bluetooth Module FCC ID: A3LSSMD1000, IC: 649E-SSMD1000** is **permanently attached** and there are no provisions for connection to an external antenna. It complies with the requirement of §15.203.

7. DESCRIPTION OF TESTS

7.1 Conducted Emissions

The Line conducted emission test facility is located inside a 4 x 7 x 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1 m x 1.5 m wooden table 0.8 m height is placed 0.4 m away from the vertical wall and 1.5 m away from the side of wall of the shielded room Rohde & Schwarz (ESH3-Z5) and (ESH2-Z5) of the 50 ohm/50 μ H Line Impedance Stabilization Network(LISN) are bonded to the shielded room. The EUT is powered from the Rohde & Schwarz LISN (ESH3-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH2-Z5). Power to the LISNs are filtered by high-current high insertion loss Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1 / 2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150 kHz to 30 MHz with 200 msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector functions were set to CISPR quasi-peak mode & average mode.

The bandwidth of receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

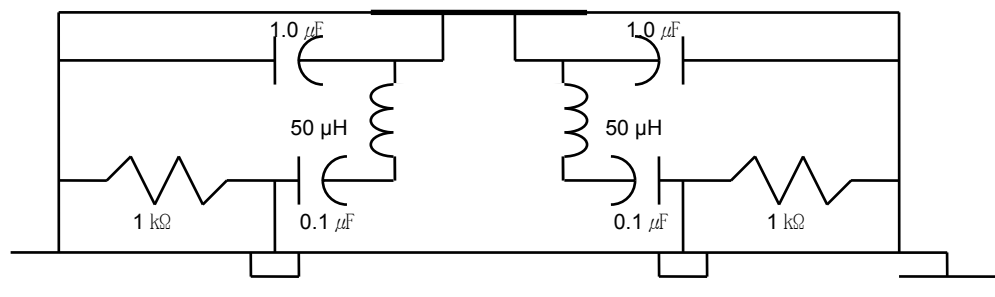


Fig. 2. LISN Schematic Diagram

7.2 Radiated Emissions

Preliminary measurements were made indoors at 3 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found. The spectrum was scanned from 9 kHz to 30 MHz using Loop Antenne(Rohde&Schwarz, HFH2-Z2) and 30 to 1000 MHz using Bi-conical log Antenna(ARA, LPB-2520/A). Above 1 GHz, Horn antenna (Scwarzbeck BBHA 9120D: up to 18 GHz, Q-par Angus QSH20S20 : 18 to 26.5 GHz, QSH22K20: up to 40 GHz) was used. Final Measurements were made outdoors at 3 or 10 m test range using Loop Antenne(Rohde&Schwarz, HFH2-Z2) and Logbicon Super Antenna (Schwarzbeck, VULB9168) or Horn antenna.(Scwarzbeck BBHA 9120D: up to 18 GHz , Q-par Angus QSH20S20 : 18 to 26.5 GHz, QSH22K20: up to 40 GHz).

The test equipment was placed on a wooden table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver (ESCS30) & (FSP40). The detector function was set to CISPR peak mode or quasi-peak mode or average mode and the band-width of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal. The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non- metallic 1.0 x 1.5 meter table. The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; whichever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.


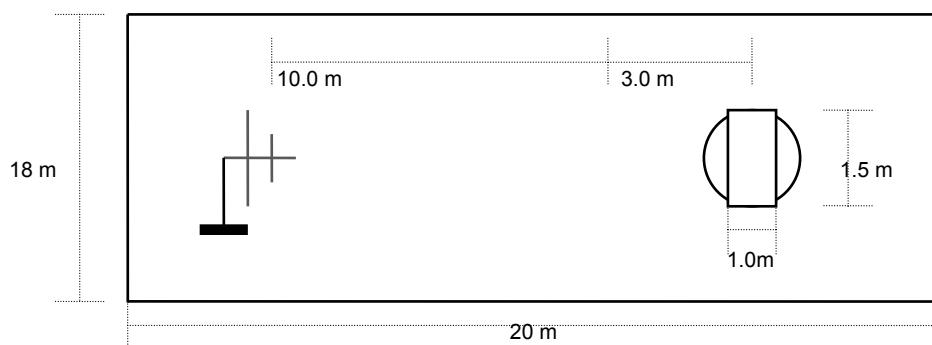


Fig. 3. Dimensions of Outdoor Test Site

7.3 20 dB Bandwidth and Carrier Frequency Separation

Test Setup



Test Procedure

The transmitter is set to the Low, Middle, High channels is connected to the spectrum analyzer. The RBW of spectrum analyzer is set to 15 kHz and VBW is set to the 30 kHz.


The sweep time is coupled.

The spectrum analyzer is set for peak detected and Max hold scan mode.

When Carrier Frequency separation is tested, Frequency hopping is set.

7.4 Transmitter Average Time of Occupancy

Test Setup



Test Procedure


The transmitter output is connected to a spectrum analyzer. The span is set to zero, centered on a single, selected hopping channel.

The width of a single pulse is measured in a fast scan. The number of pulses is measured in 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels x 0.4 second) is equal to 10 x number of pulses in 3.16 second x pulse width.

7.5 Number of Hopping Channels

Test Setup




Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, In either a single sweep or in multiple continuous sweeps. The RBW is set to 1% of the span.

The spectrum analyzer is set to Max Hold.

7.6 Maximum Peak Output Power

Test Setup




Test Procedure

The transmitter is set to the Low , Middle, High channels is connected to the spectrum analyzer. The RBW of spectrum analyzer is set to 3 MHz and VBW is set to the 3 MHz.

The sweep time is coupled.

7.7 Conducted Spurious Emission

Test Setup



Test Procedure

The transmitter is connected to the spectrum analyzer.

The RBW of spectrum analyzer is set to 100 kHz and VBW is set to the 300 kHz.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the Lowest, Middle and highest channels.

8. TEST DATA

8.1 Conducted Emissions

FCC §15.207, RSS-Gen 7.2.4

Frequency (MHz)	Level(dBμV)		*)Factor (dB)	**) Line	Limit(dBμV)		Margin(dB)	
	Q-Peak	Average			Q-Peak	Average	Q-Peak	Average
0.17	52.6	34.2	0.2	N	65.0	55.0	12.4	20.8
0.23	47.2	30.3	0.2	N	62.4	52.4	15.2	22.1
0.29	41.8	27.5	0.2	N	60.5	50.5	18.7	23.0
0.37	36.1	20.9	0.2	N	58.5	48.5	22.4	27.6
0.55	35.4	22.2	0.2	N	56.0	46.0	20.6	23.8
0.98	32.1	19.8	0.1	L	56.0	46.0	23.9	26.2

Line Conducted Emissions Tabulated Data

NOTES:

1. Measurements using CISPR quasi-peak mode & average mode.
2. All modes of operation were investigated and the worst -case emission were reported. See attached Plots.
3. *) Factor = LISN + Cable Loss
4. **) LINE : L = Line , N = Neutral
5. The limit is on the FCC Part section 15.207(a).

PLOTS OF EMISSIONS

Conducted Emission at the Mains port (Line)


NEMKO KOREA (NK-12-R-040)

27 Mar 2012 11:15

Conducted Emissions

EUT: Bluetooth module
 Manuf: Samsung Electronics
 Op Cond: a.c. 120 V, 60 Hz (TX mode, Mid channel)
 Operator: Jinha. KO
 Test Spec: FCC Part 15.207
 Comment: MODEL : SSM-D1000
 LINE : L1

Scan Settings		(1 Range)			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	30MHz	3.9063kHz	9kHz	PK+AV	20msec	20 dB	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	1	150kHz	30MHz	ESH3_Z5_Line					
Final Measurement:		Detectors:	X QP / + AV						
		Meas Time:	1sec						
		Subranges:	8						
		Acc Margin:	30 dB						

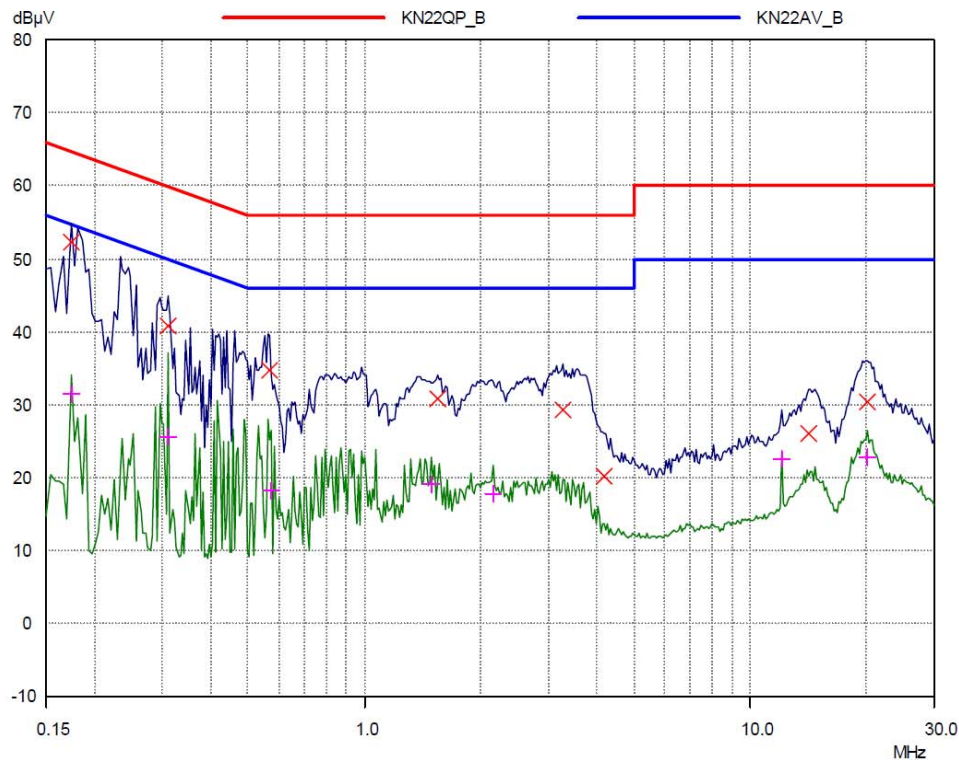

PLOTS OF EMISSIONS

Conducted Emission at the Mains port (Neutral)


NEMKO KOREA (NK-12-R-040)

27 Mar 2012 11:07

Conducted Emissions

EUT: Bluetooth module
Manuf: Samsung Electronics
Op Cond: a.c. 120 V, 60 Hz (TX mode, Mid channel)
Operator: Jinha. KO
Test Spec: FCC Part 15.207
Comment: MODEL : SSM-D1000
LINE : Neutral

Scan Settings		(1 Range)			Receiver Settings				
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
Start	Stop								
150kHz	30MHz	3.9063kHz	9kHz	PK+AV	20msec	20 dB	OFF	60dB	
Transducer	No.	Start	Stop	Name					
	1	150kHz	30MHz	ESH3_Z5_Neutral					
Final Measurement:		Detectors:	X QP / + AV						
		Meas Time:	1sec						
		Subranges:	8						
		Acc Margin:	30 dB						

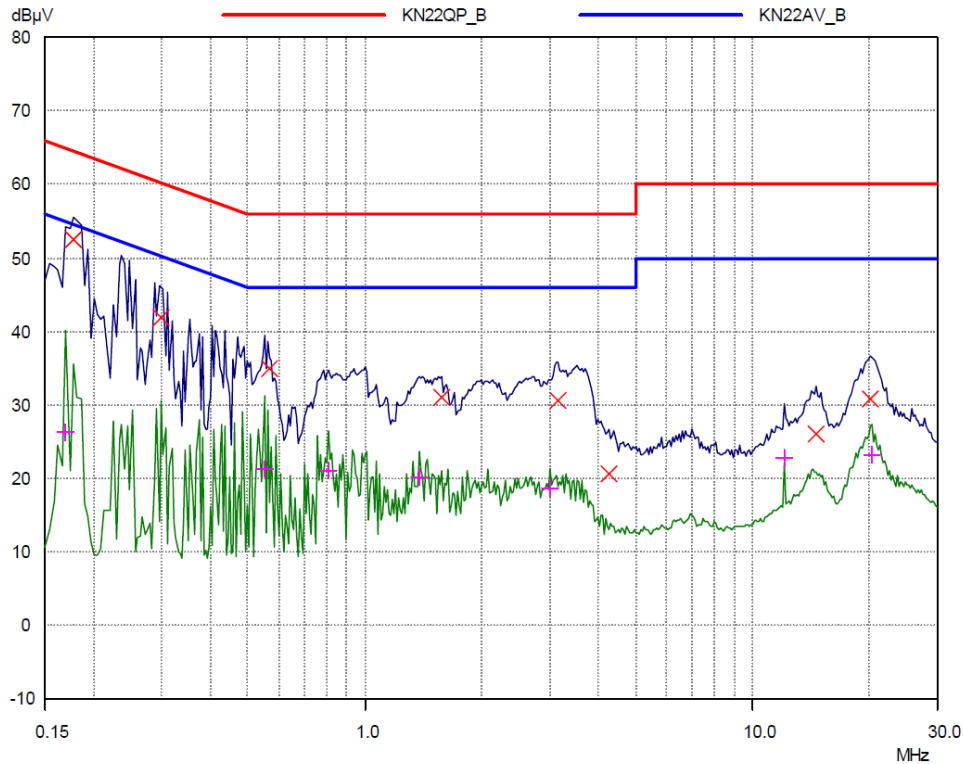

TEST DATA

8.2 Radiated Emissions

FCC §15.209, IC RSS-210 A8.5

Frequency (MHz)	Reading (dBμV/m)	Pol* (H/V)	Antenna Heights (cm)	Turntable Angles (°)	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
120.05	51.31	H	250	173	-19.9	31.4	43.5	12.1
192.02	48.31	H	187	154	-16.2	32.1	43.5	11.4
336.15	53.40	H	126	104	-13.6	39.8	46.0	6.2
360.17	52.40	H	105	97	-13.6	38.8	46.0	7.2
384.16	48.10	H	100	283	-13.6	34.5	46.0	11.5
408.19	46.30	H	102	281	-11.1	35.2	46.0	10.8

Radiated Measurements at 3 meters

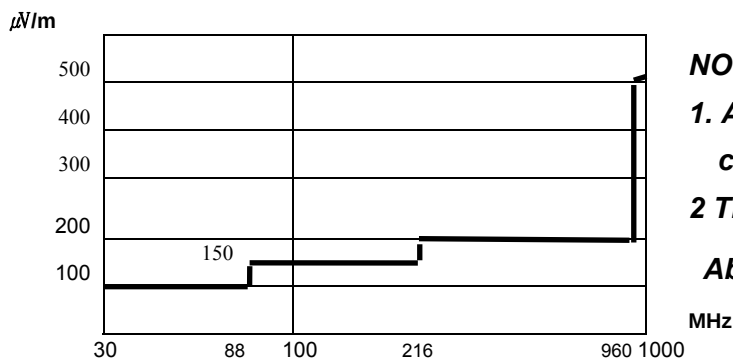


Fig. 4. Limits at 3 meters

NOTES:

1. All modes were measured and the worst-case emission was reported.
 - 2 The radiated limits are shown on Figure 4.
- Above 1GHz the limit is 500 μV /m.

NOTES:

1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode below 1 GHz.
4. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization. The worst date was recorded.
5. The limit is on the FCC Part section 15.209(a).

TEST DATA

8.3 20 dB Modulated Bandwidth

FCC §15.247(a)(1)(iii), RSS-210 A8.1


Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:


Modulation Mode	Frequency(MHz)	Result(kHz)	Limit(kHz)
GFSK	2402	785	Non specified
GFSK	2441	788	Non specified
GFSK	2480	788	Non specified
8DPSK	2402	1152	Non specified
8DPSK	2441	1145	Non specified
8DPSK	2480	1148	Non specified

PLOTS OF EMISSIONS

20 dB Bandwidth, Lowest Channel (2402 MHz, GFSK Mode)

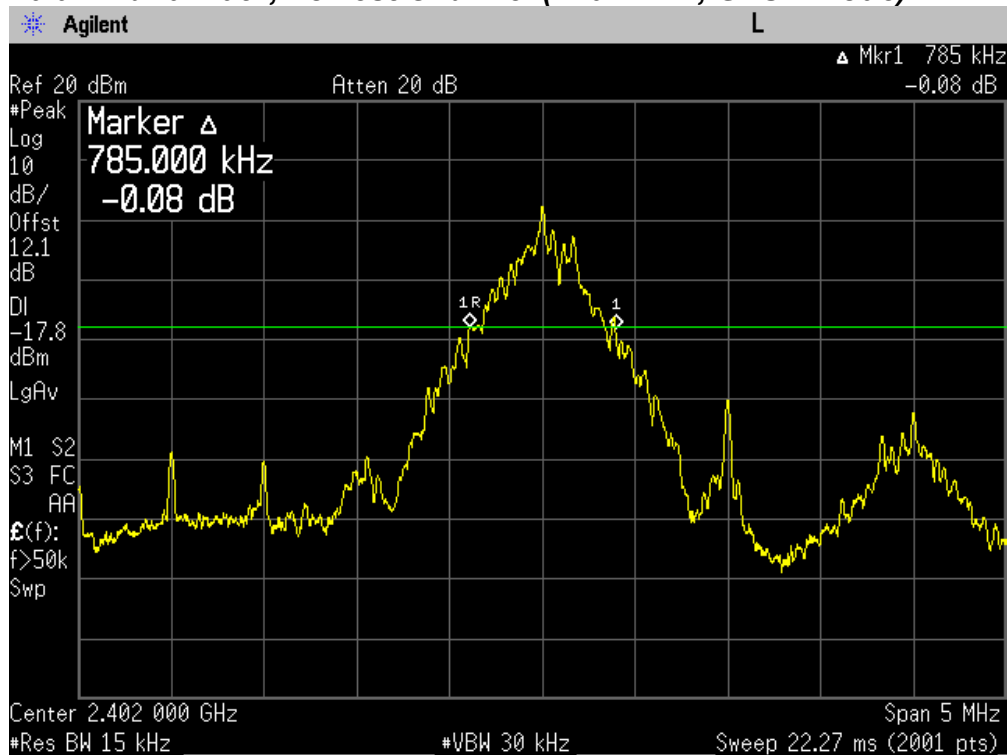

20 dB Bandwidth, Lowest Channel (2402 MHz, 8DPSK Mode)

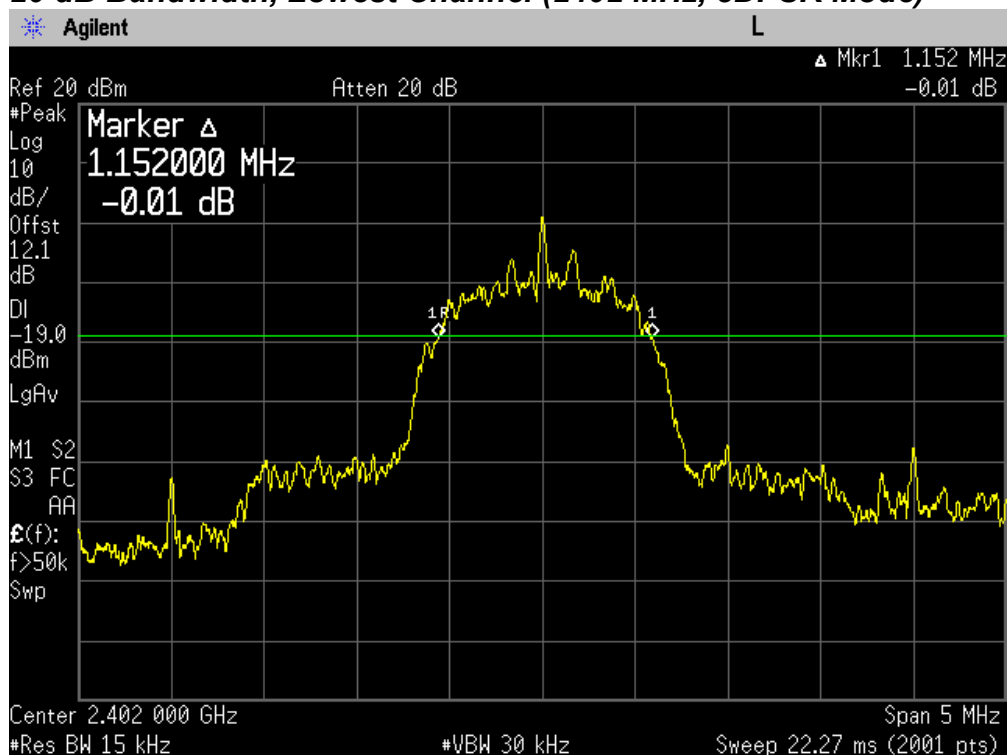


PLOTS OF EMISSIONS

20 dB Bandwidth, Middle Channel (2441 MHz, GFSK Mode)




20 dB Bandwidth, Middle Channel (2441 MHz, 8DPSK Mode)

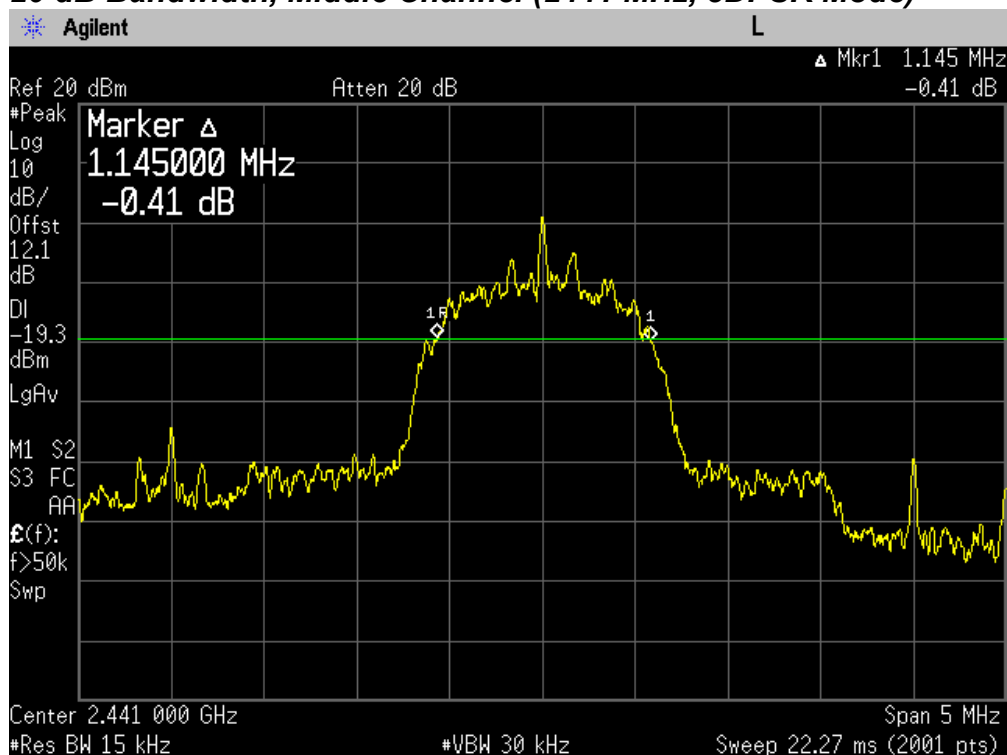


PLOTS OF EMISSIONS

20 dB Bandwidth, Highest Channel (2480 MHz, GFSK Mode)

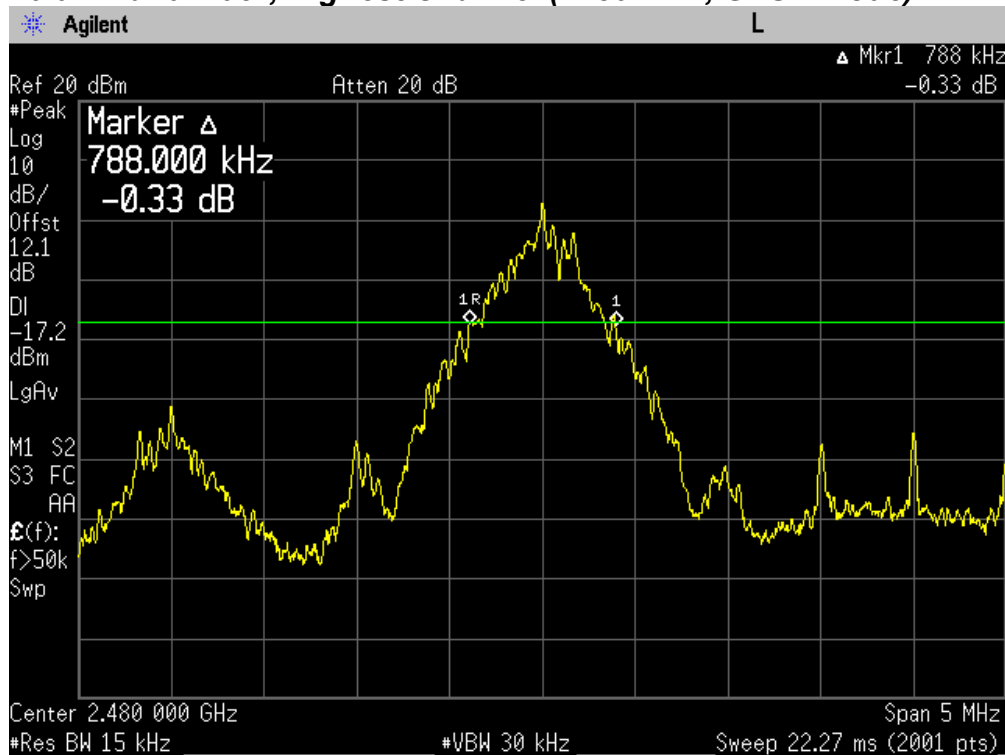

20 dB Bandwidth, Highest Channel (2480 MHz, 8DPSK Mode)

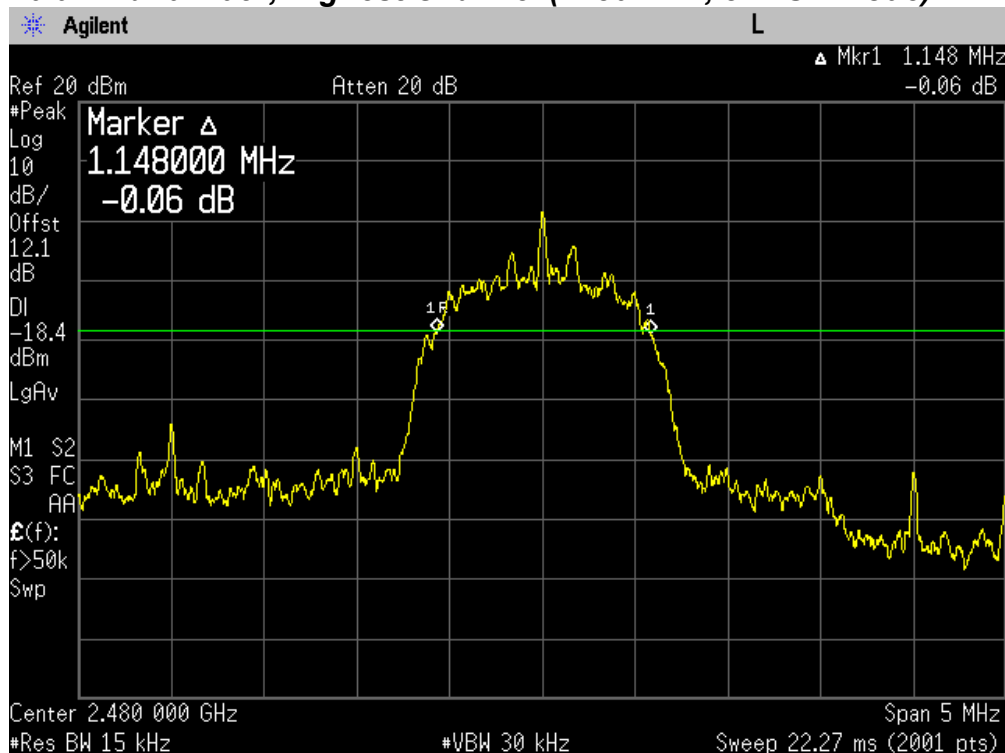

TEST DATA

8.4 Carrier Frequency Separation

FCC §15.247(a)(1), RSS-210 A8.1(2)


Test Mode : Set to Hopping mode

Result:


Modulation Mode	Carrier Frequency Separation (kHz)	Limit (2 / 3 of 20dB Bandwidth) (kHz)	Margin (kHz)
GFSK	1000	525	475
8DPSK	1000	768	232

PLOTS OF EMISSIONS

Carrier Frequency Separation (GFSK Mode)

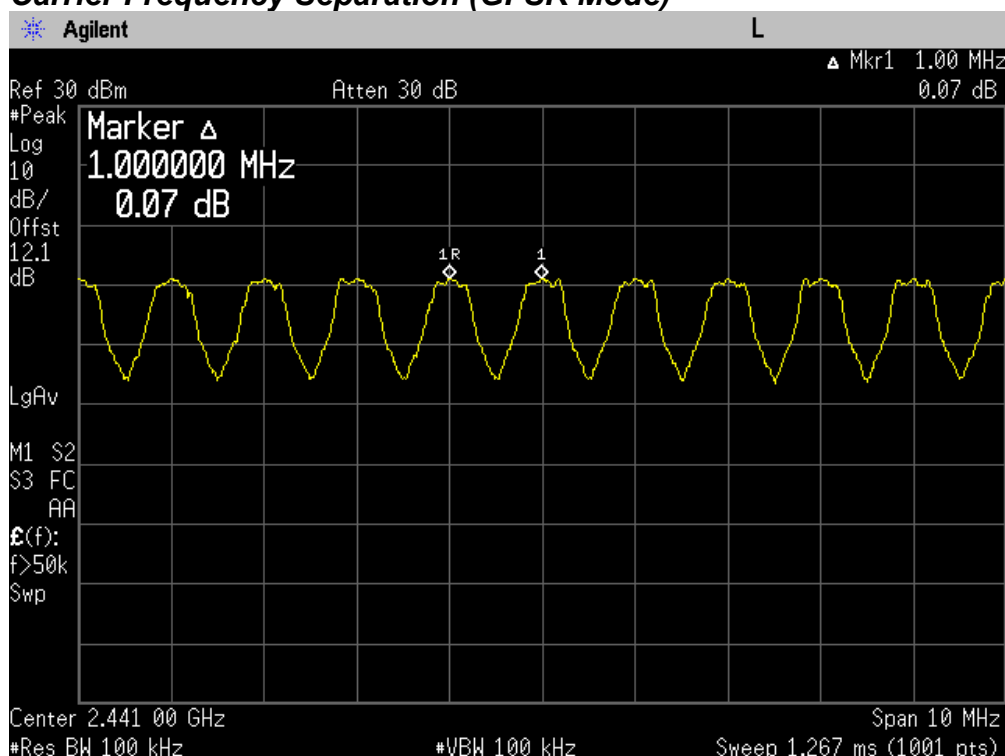

Carrier Frequency Separation (8DPSK Mode)

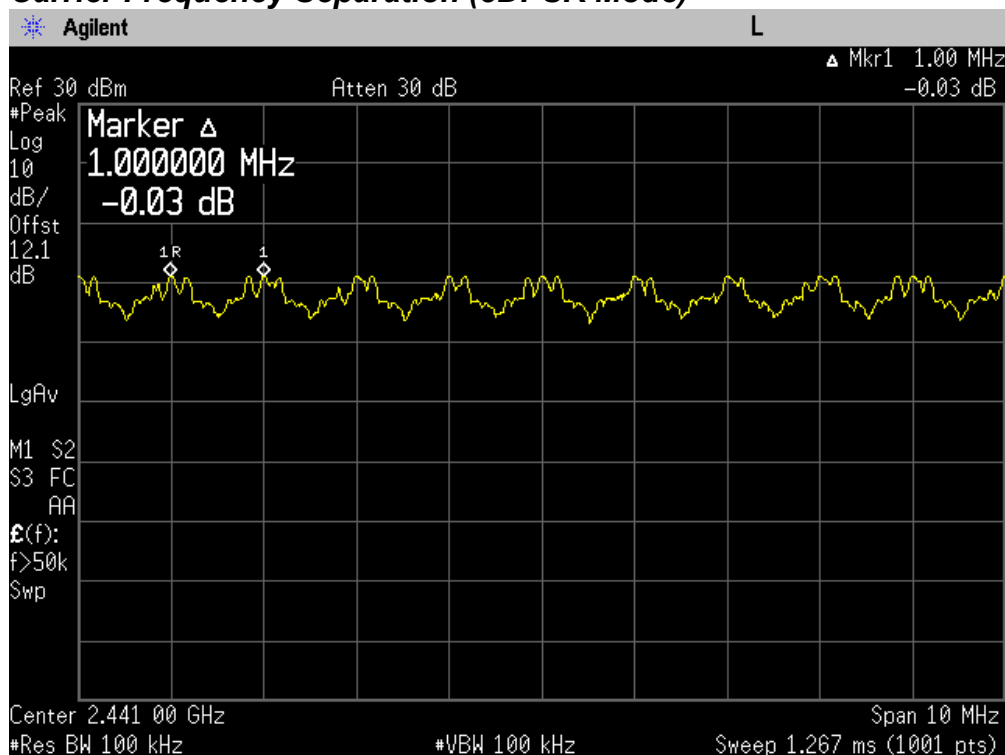

TEST DATA

8.5 Transmitter Average Time of Occupancy

FCC §15.247(a)(1)(iii), RSS-210 A8.1(4)

Test Mode : Set to Hopping mode

Result:


Modulation Mode	Pulse width (ms)	Number of 3.16 second	¹⁾ Average time of Occupancy(s)	Margin (s)
GFSK	2.94	11	0.3234	0.0766

Notes:


¹⁾ Average time of Occupancy = pulse width x Number of 3.16 sec x 10

PLOT OF TEST DATA

One pulse Width

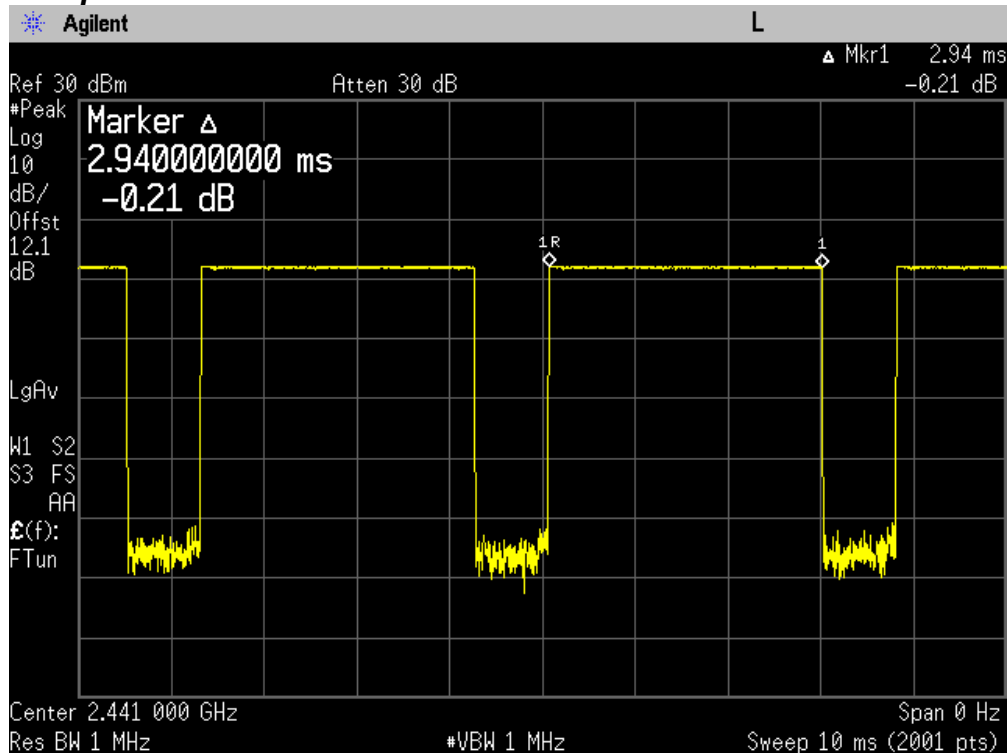

Number of pulses in 3.16 second period

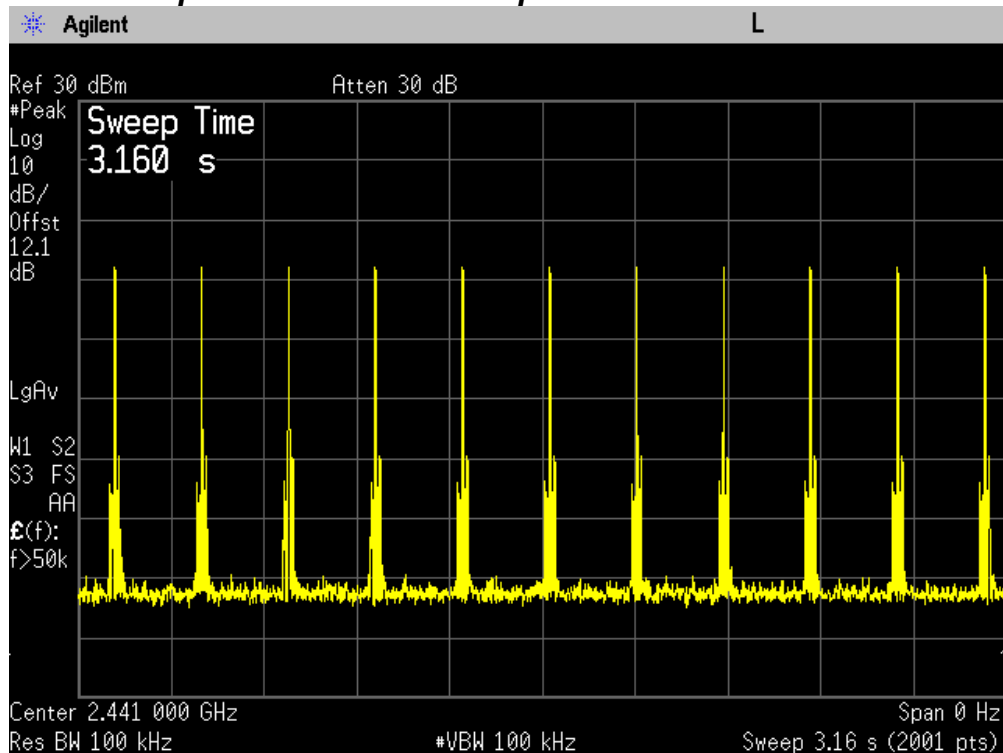

TEST DATA

8.6 Number of Hopping Channels

FCC §15.247(a)(1)(iii), RSS-210 A8.1(4)

Test Mode : Set to Hopping mode


Result:

Total Hopping Channels = 40 + 39 = 79


The EUT meets the specifications of Section 15.247(a)(1)(iii) for Number of Hopping Channels.

PLOT OF TEST DATA

Top half of Authorized band

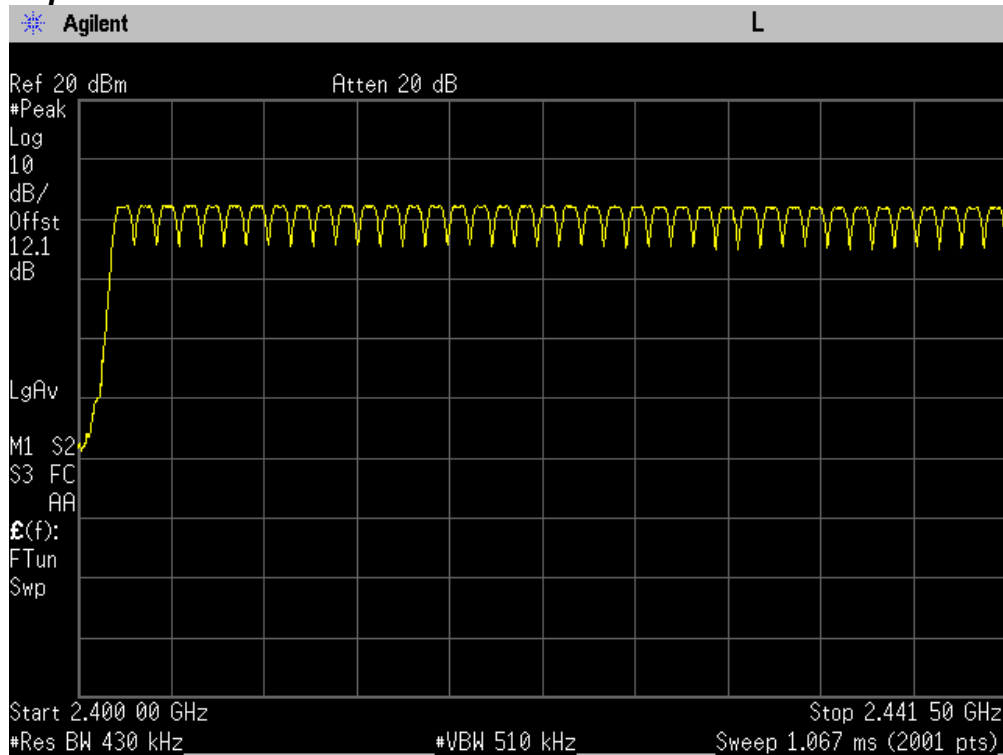

Bottom half of Authorized band

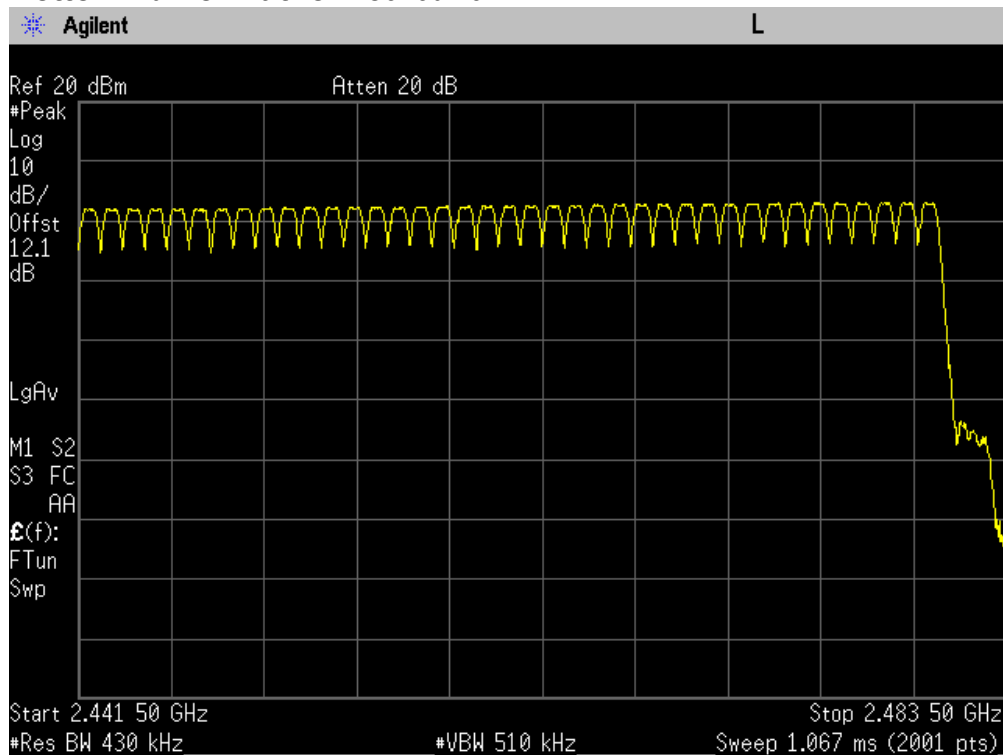

TEST DATA

8.7 Peak Power Output

FCC §15.247(b)(1), RSS-210 A8.4(2)

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

Modulation Mode	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)
GFSK	2402	2.31	30.00
GFSK	2441	2.17	30.00
GFSK	2480	3.19	30.00
8DPSK	2402	2.25	30.00
8DPSK	2441	1.93	30.00
8DPSK	2480	2.92	30.00


Note:

The following formular was used for spectrum offset:


Spectrum offset (dB) = Attenuator (dB) + Cable Loss (dB) + SMA Type Connector Loss (dB)

PLOT OF TEST DATA

Output Power, Lowest Channel (2402 MHz, GFSK Mode)

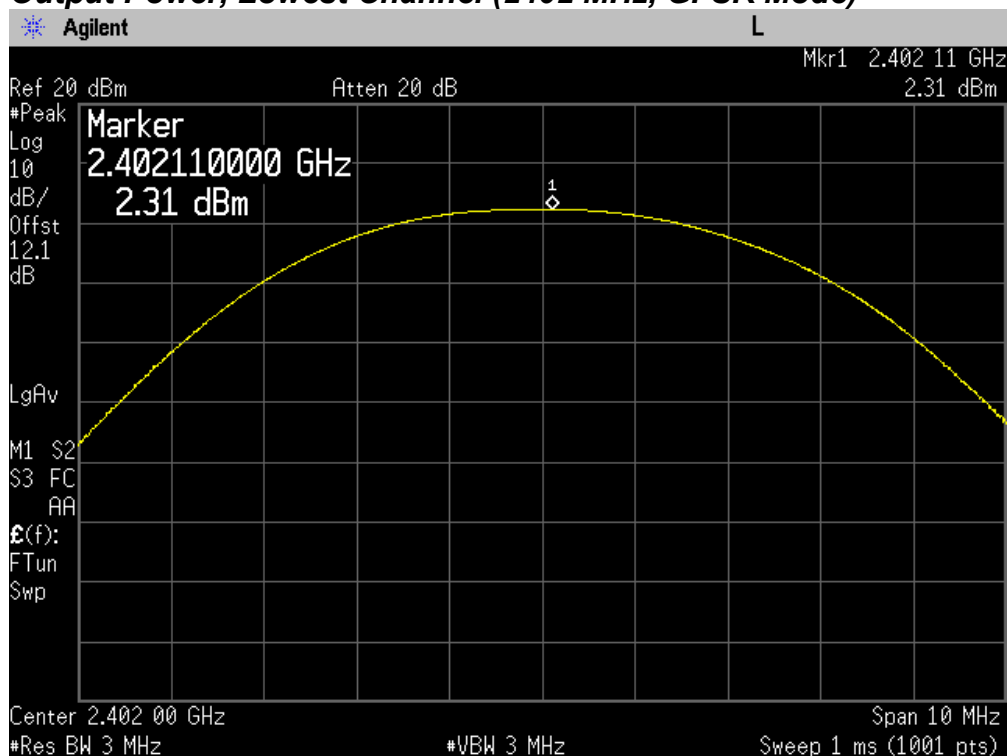


Output Power, Lowest Channel (2402 MHz, 8DPSK Mode)

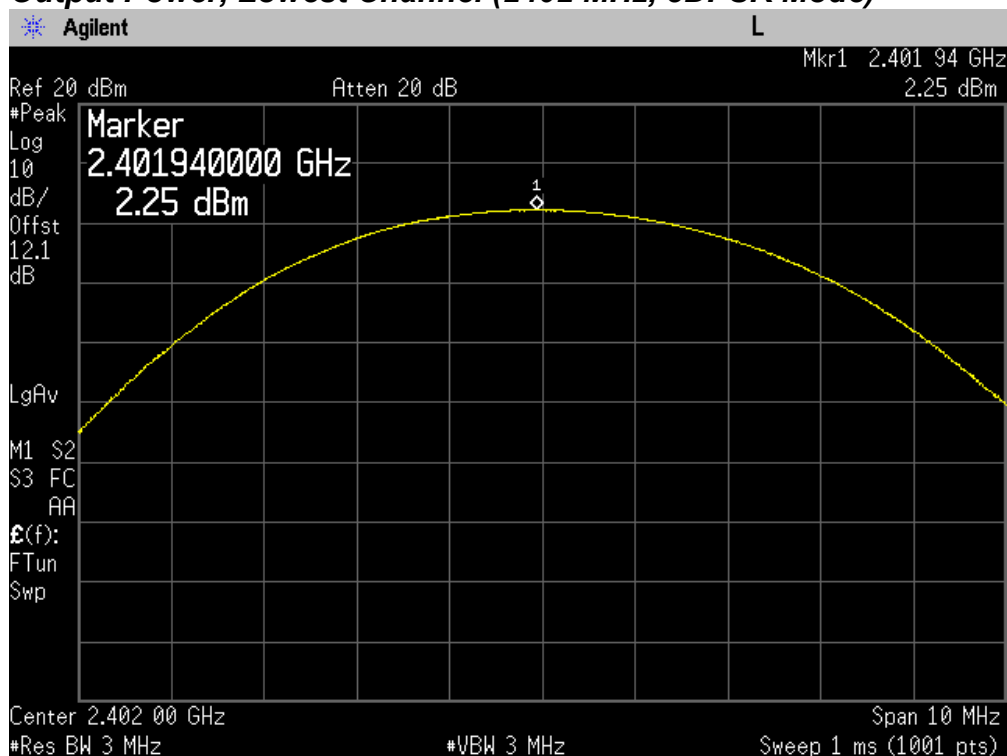


PLOT OF TEST DATA

Output Power, Middle Channel (2441 MHz, GFSK Mode)

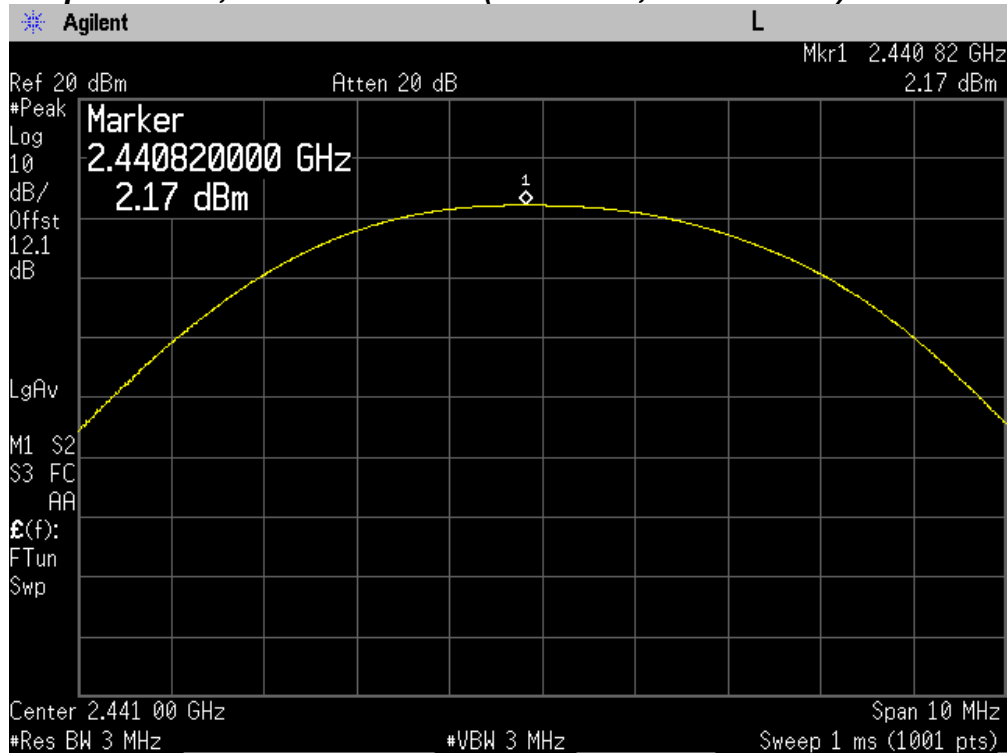


Output Power, Middle Channel (2441 MHz, 8DPSK Mode)

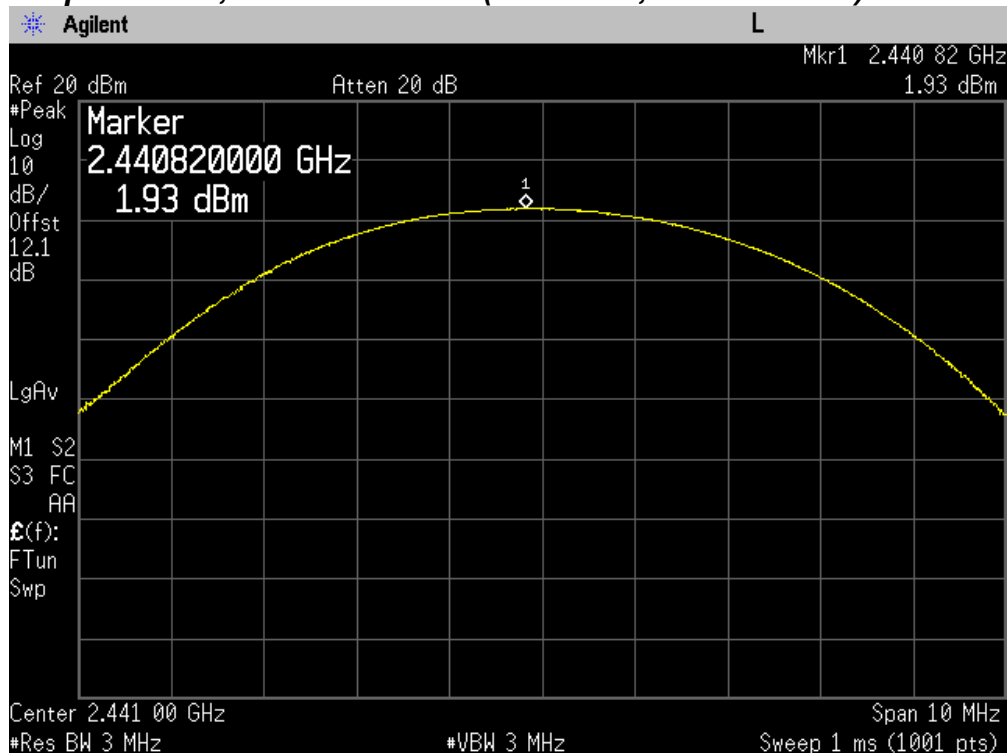


PLOT OF TEST DATA

Output Power, Highest Channel (2480 MHz, GFSK Mode)

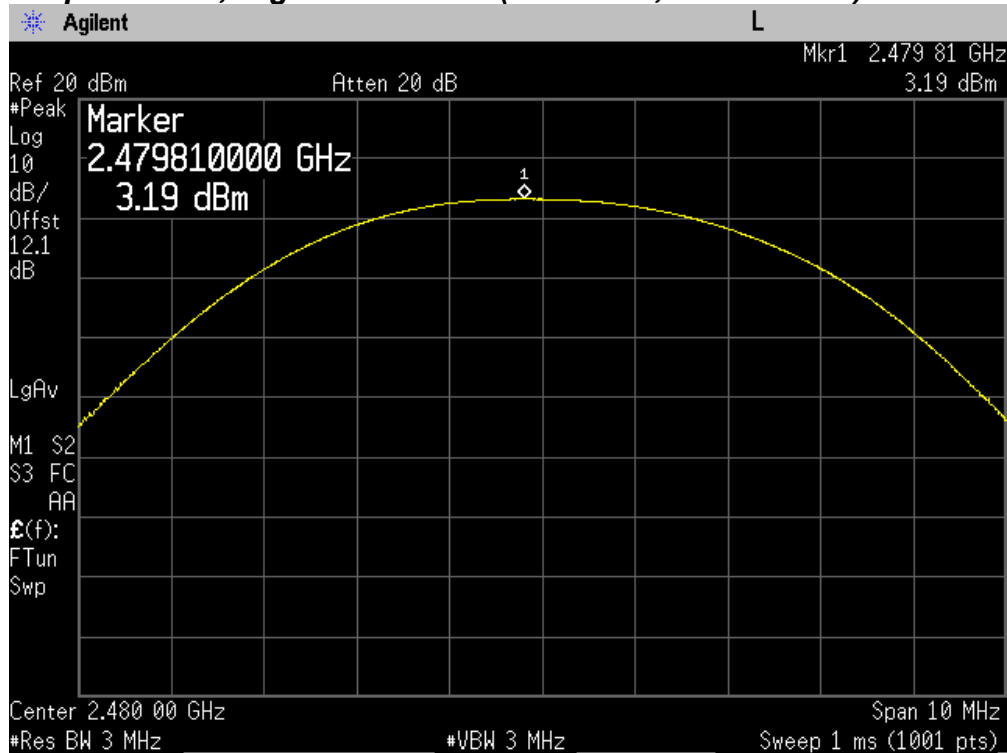

Output Power, Highest Channel (2480 MHz, 8DPSK Mode)

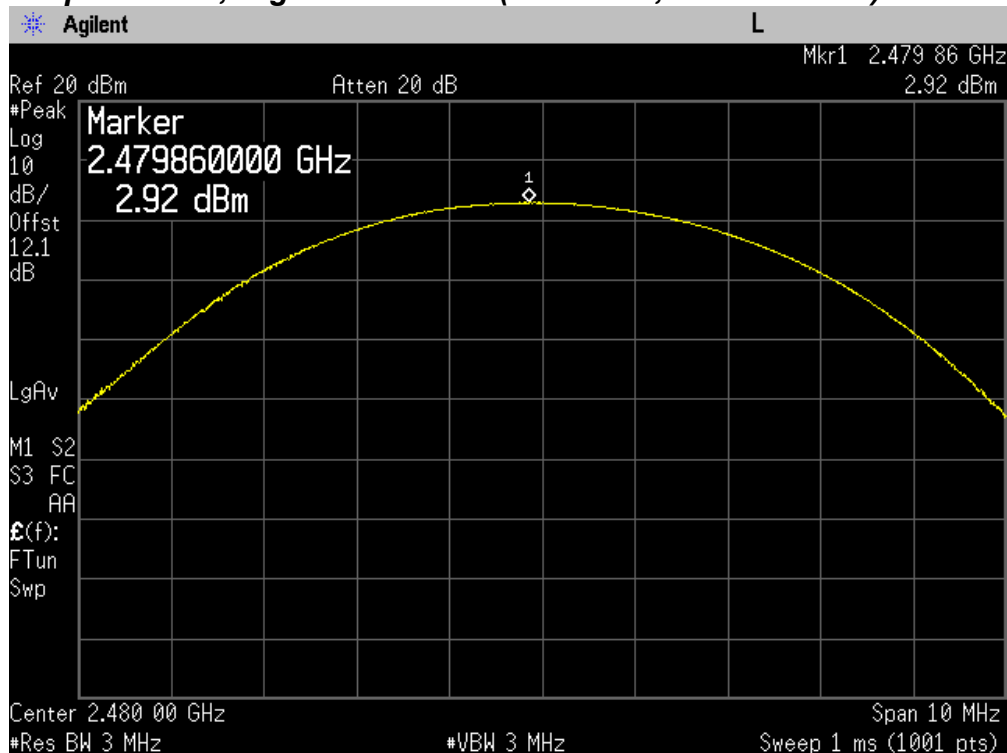

TEST DATA

8.8 Conducted Spurious Emission

FCC §15.247(d), RSS-210 A8.5


Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:


Modulation Mode	Frequency(MHz)	Result	Limit(dBc)
GFSK	2402	More than 30 dBc	20
GFSK	2441	More than 30 dBc	20
GFSK	2480	More than 30 dBc	20
8DPSK	2402	More than 30 dBc	20
8DPSK	2441	More than 30 dBc	20
8DPSK	2480	More than 30 dBc	20

PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2402 MHz, GFSK Mode)

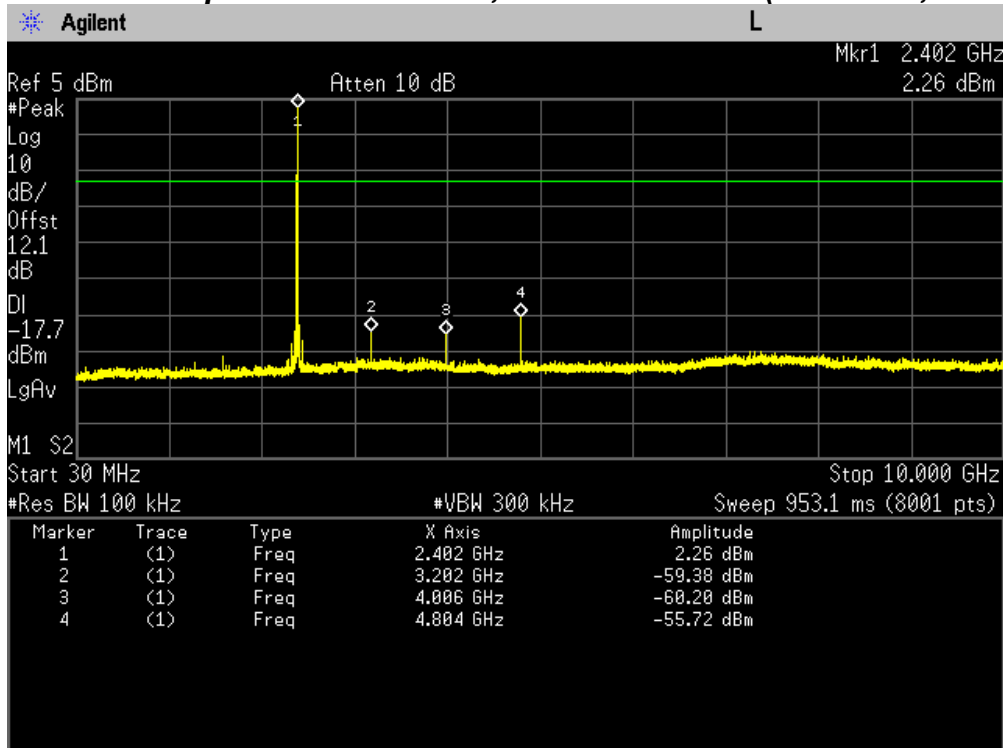


Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2402 MHz, GFSK Mode)

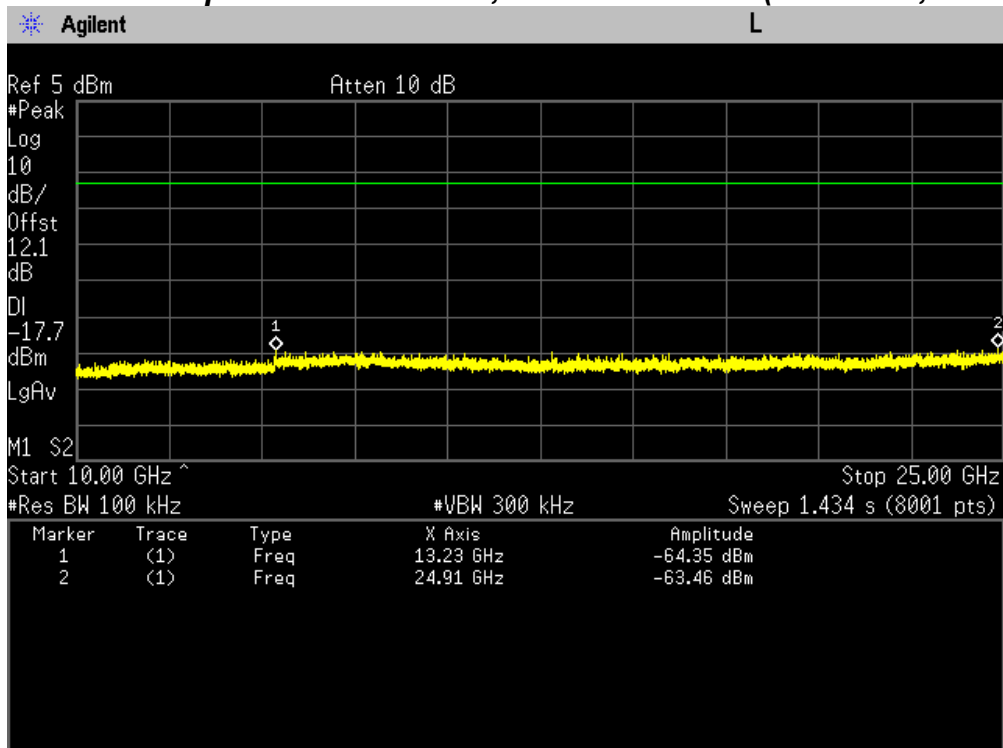


PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2441 MHz, GFSK Mode)

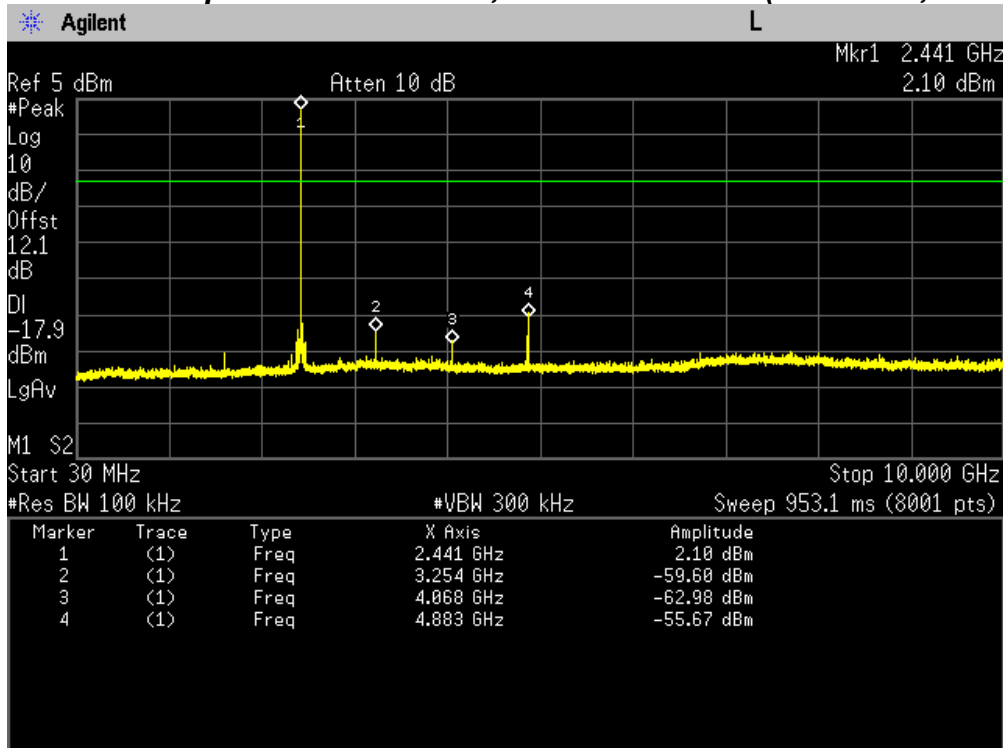


Conducted Spurious Emissions, 10 GHz ~ 25GHz(2441 MHz, GFSK Mode)

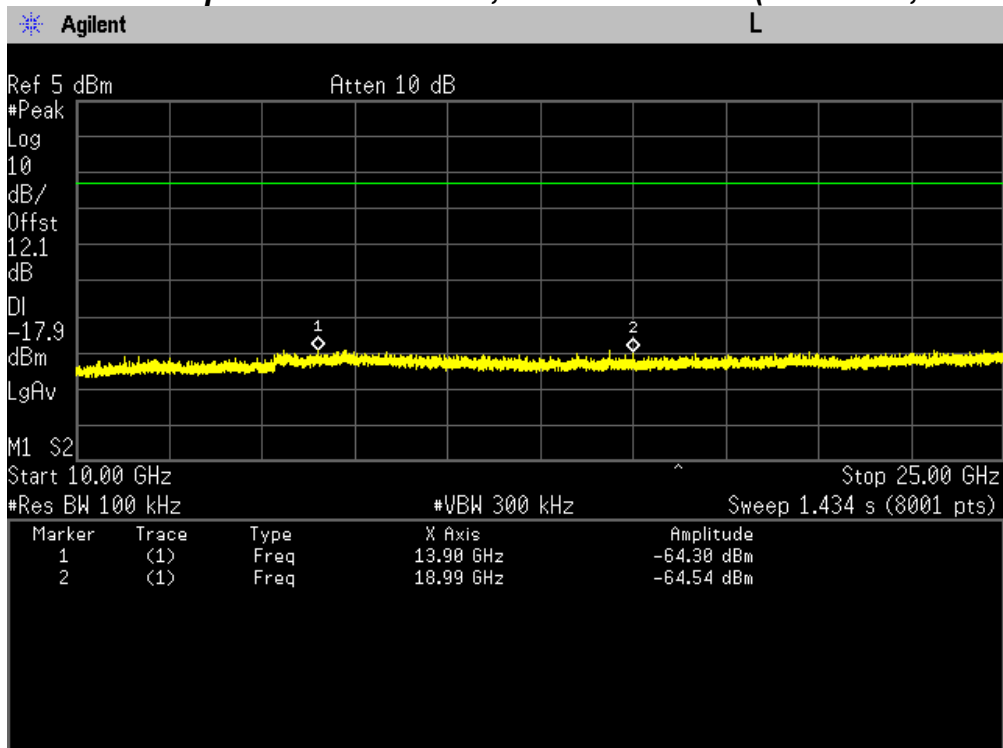


PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2480 MHz, GFSK Mode)

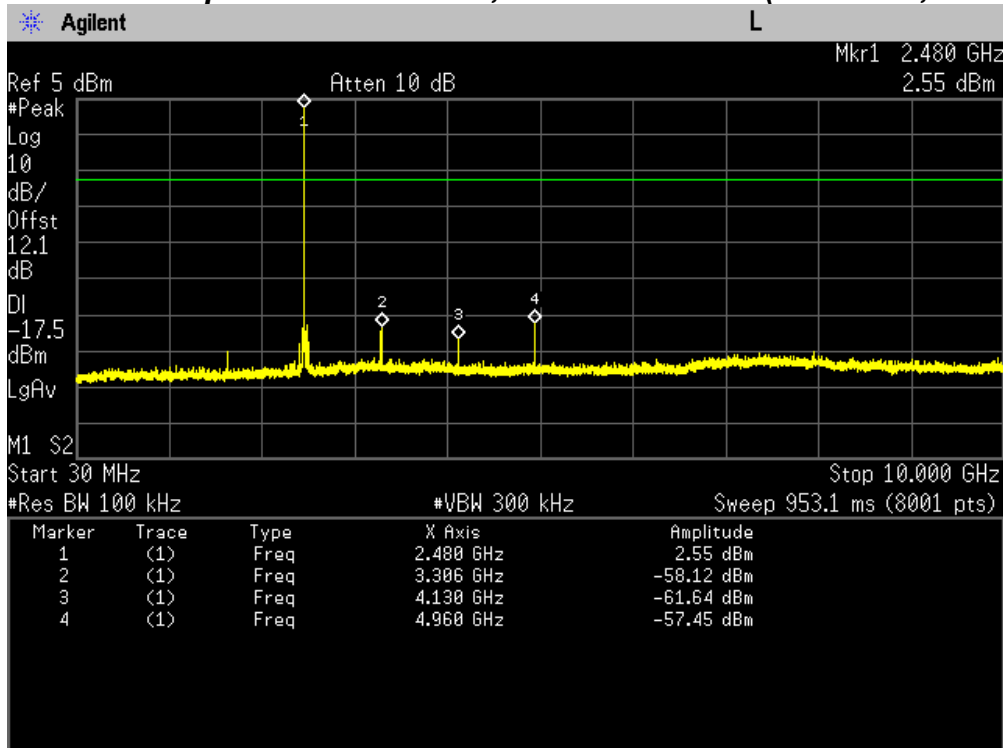


Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2480 MHz, GFSK Mode)

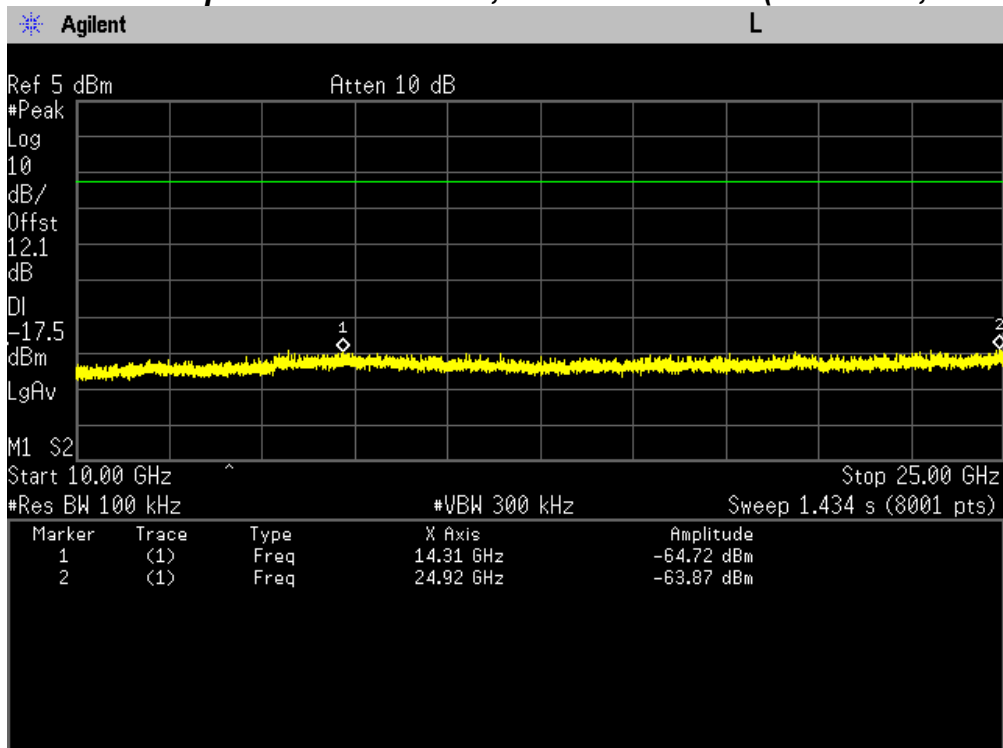


PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2402 MHz, 8DPSK Mode)

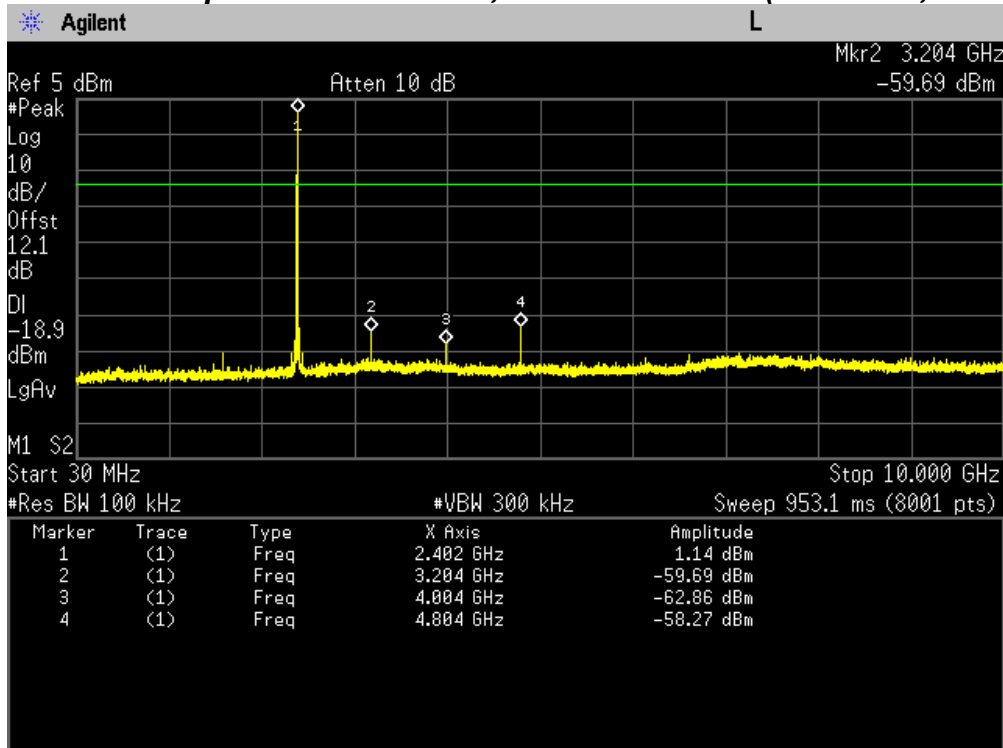


Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2402 MHz, 8DPSK Mode)

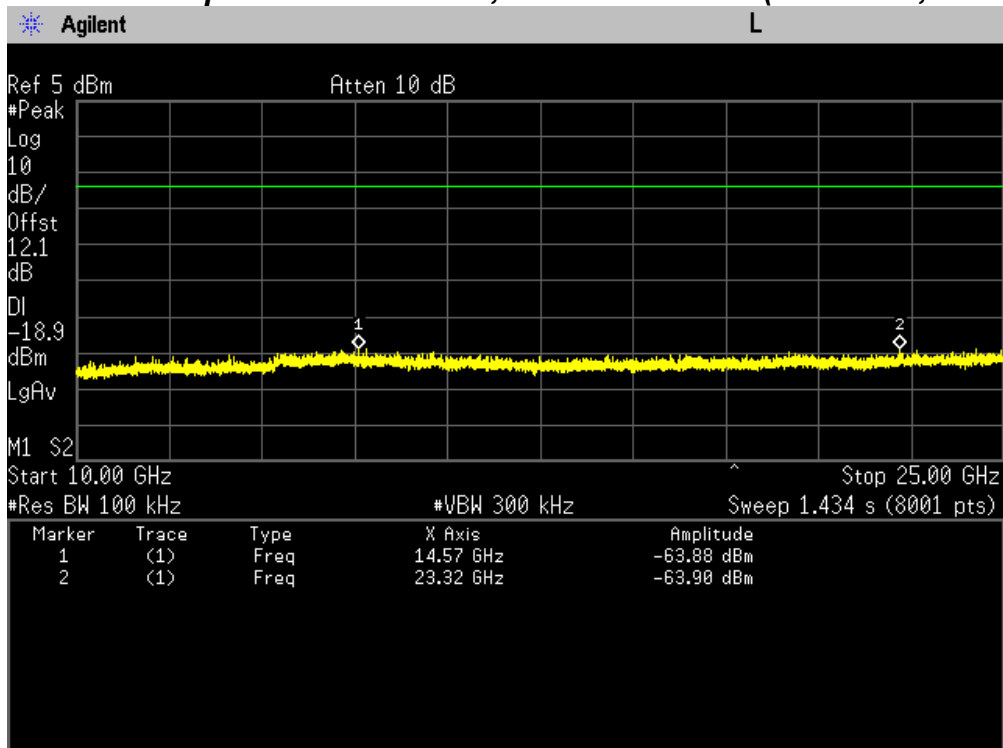


PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2441 MHz, 8DPSK Mode)

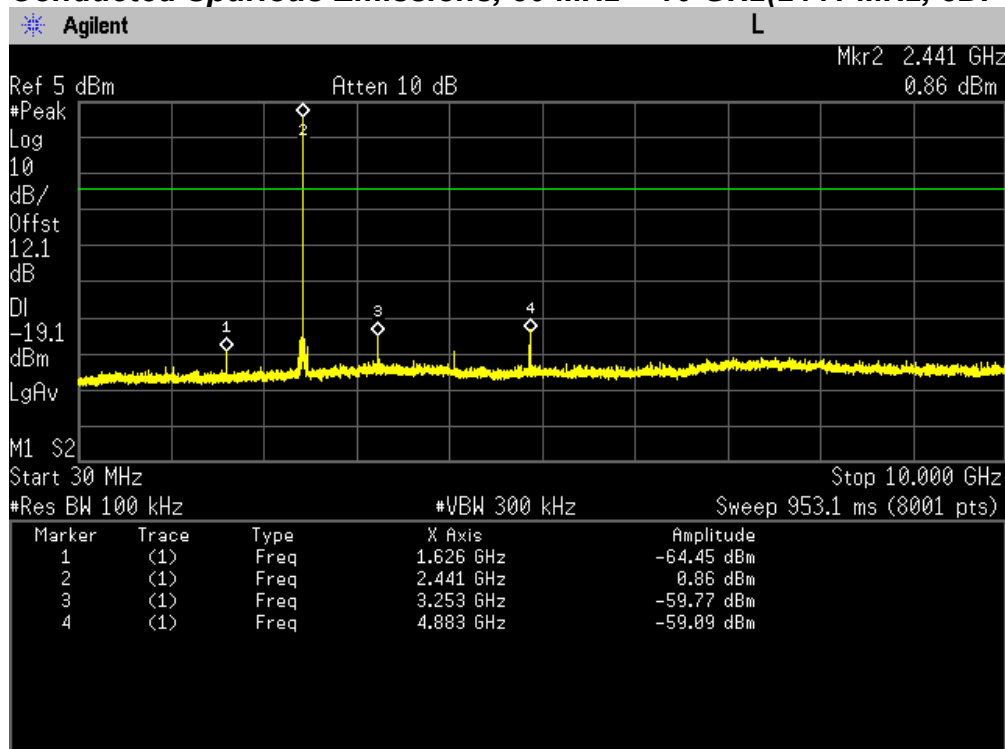


Conducted Spurious Emissions, 10 GHz ~ 25GHz(2441 MHz, 8DPSK Mode)

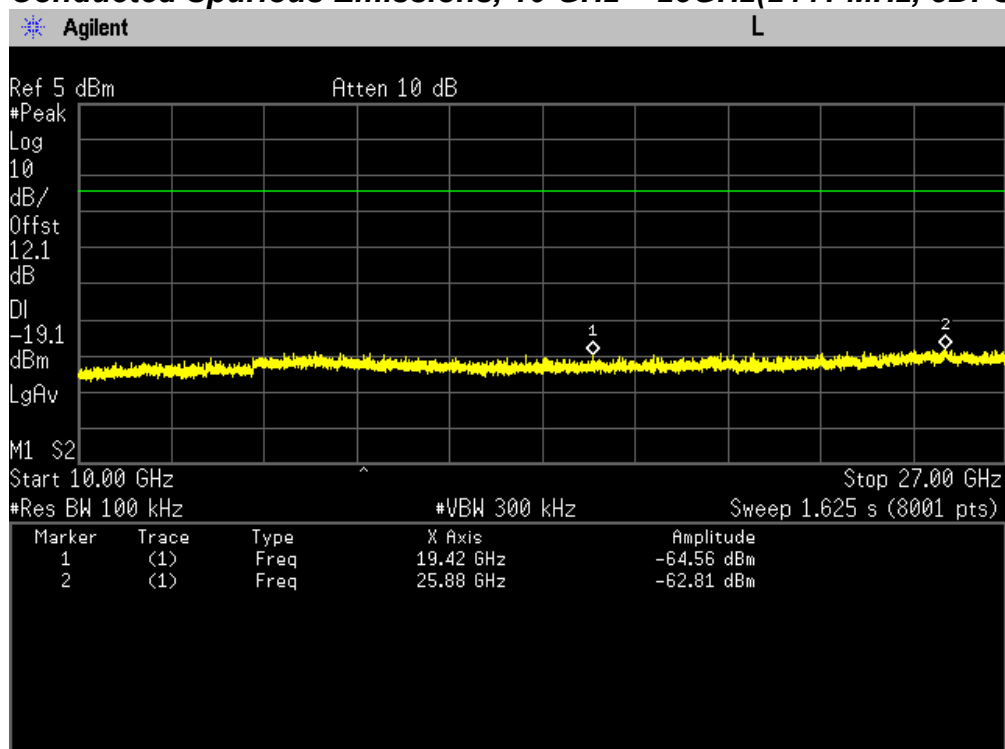


PLOT OF TEST DATA

Conducted Spurious Emissions, 30 MHz ~ 10 GHz(2480 MHz, 8DPSK Mode)

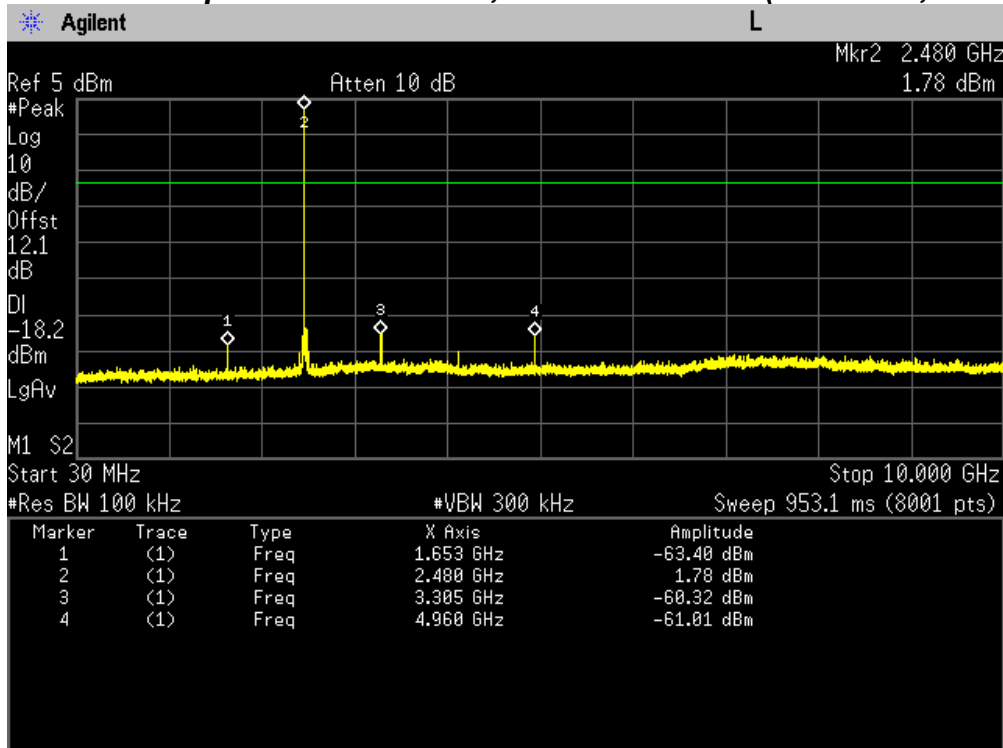


Conducted Spurious Emissions, 10 GHz ~ 25 GHz(2480 MHz, 8DPSK Mode)

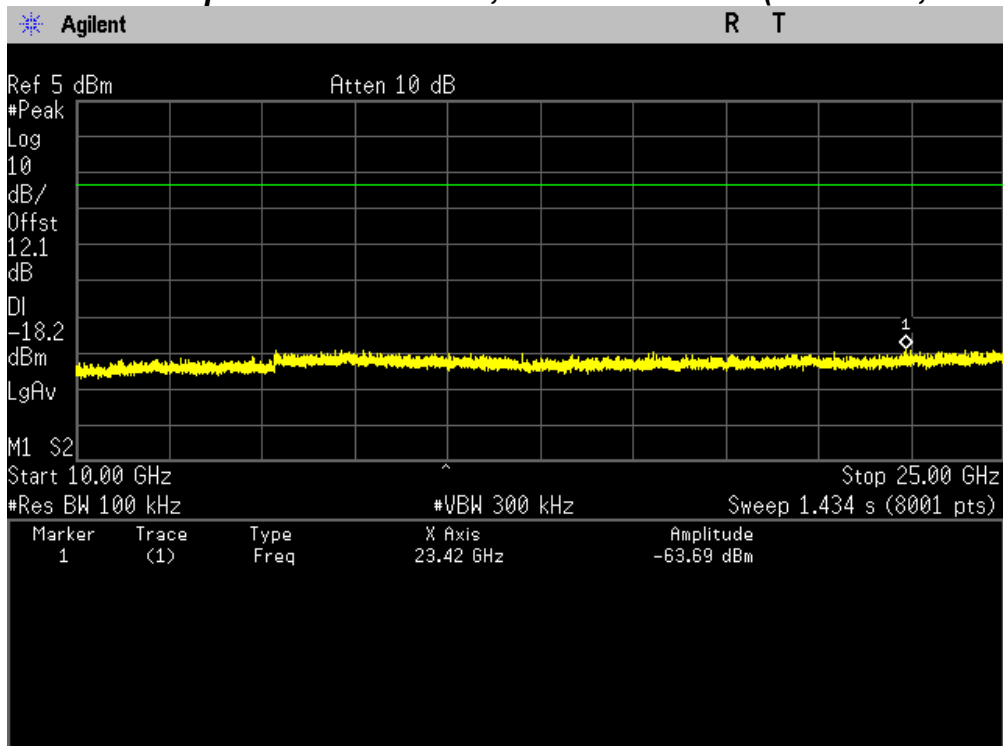


PLOT OF TEST DATA

Band Edge Lowest Channel(2402 MHz, GFSK)_Non-hopping mode

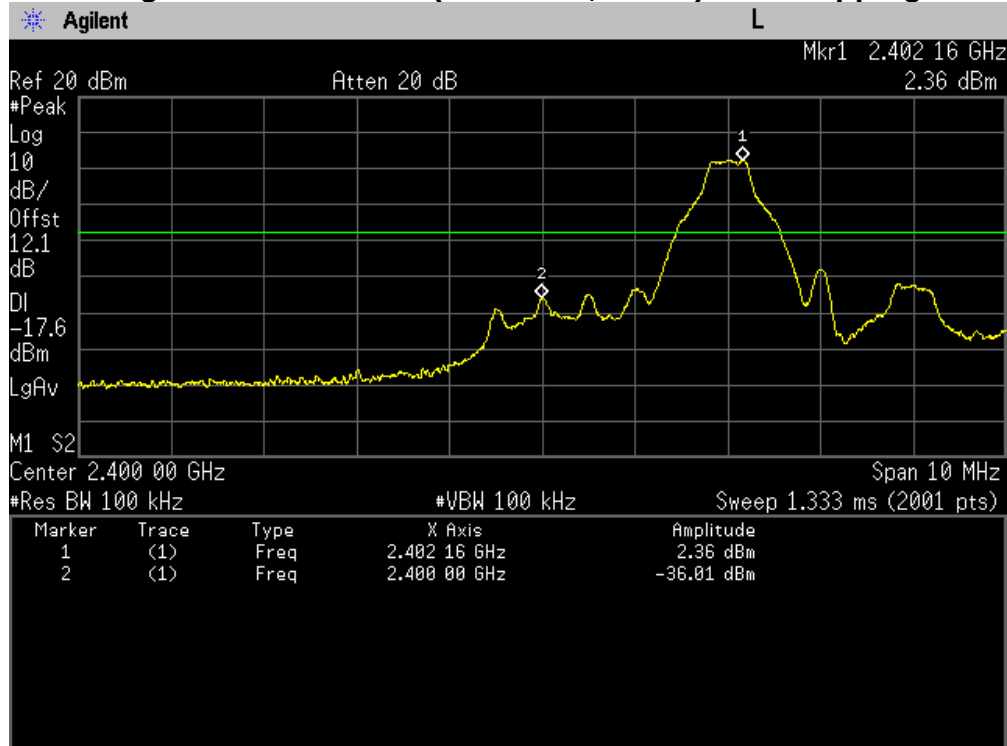


Band Edge Lowest Channel(2402 MHz, GFSK)_Hopping mode

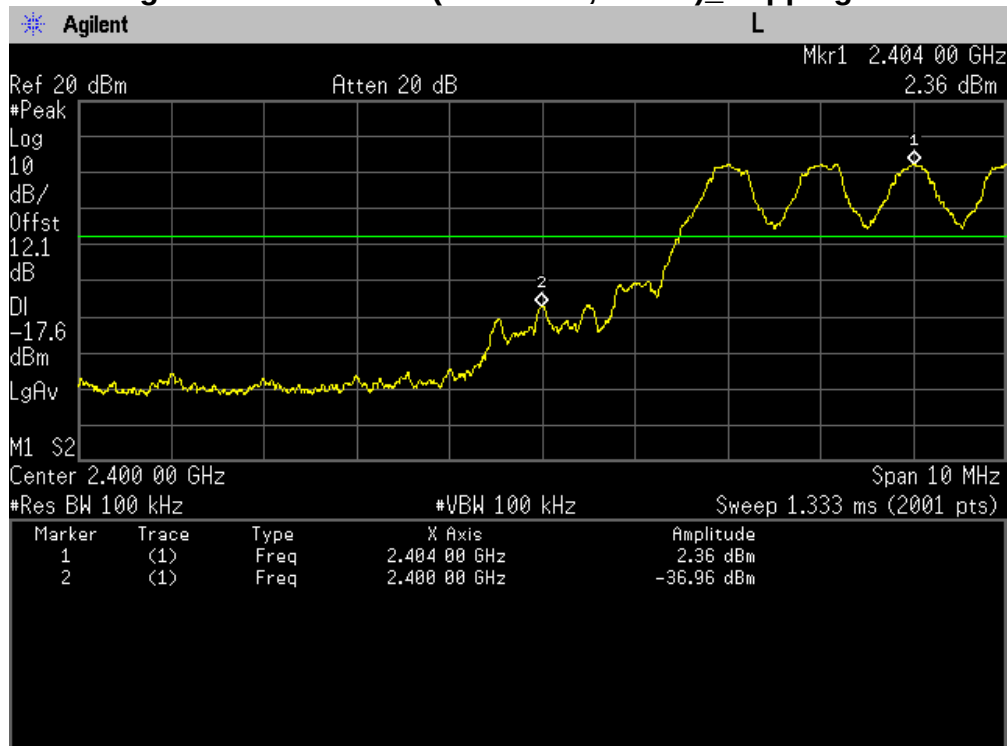


PLOT OF TEST DATA

Band Edge Highest Channel(2480 MHz, GFSK)_Non-hopping mode

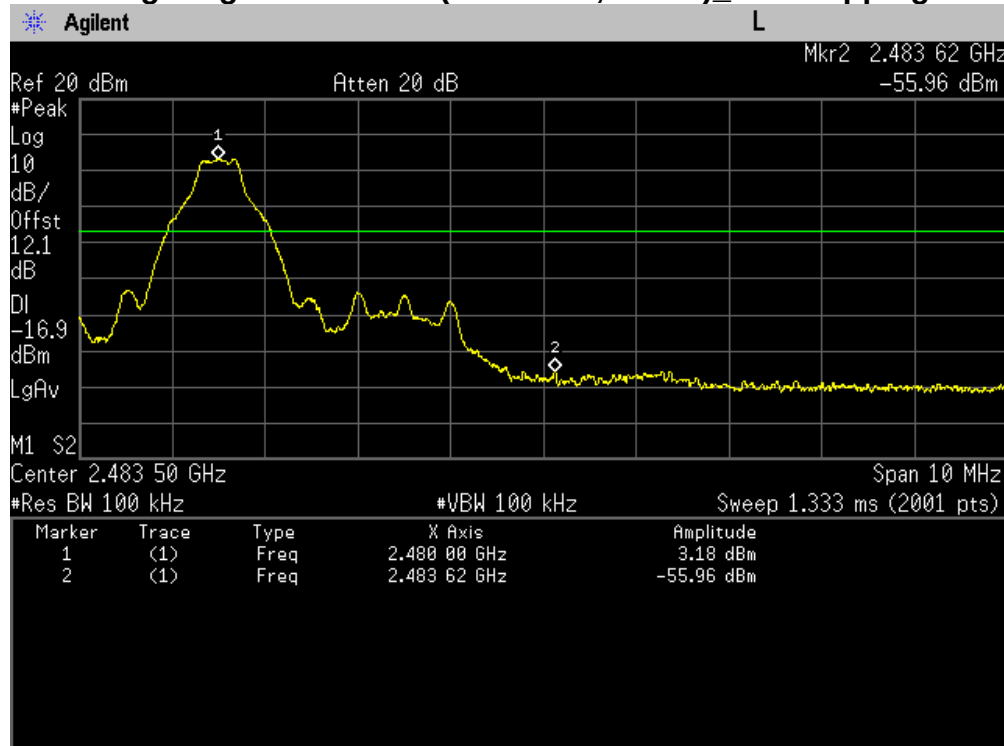


Band Edge Highest Channel(2480 MHz, GFSK)_Hopping mode

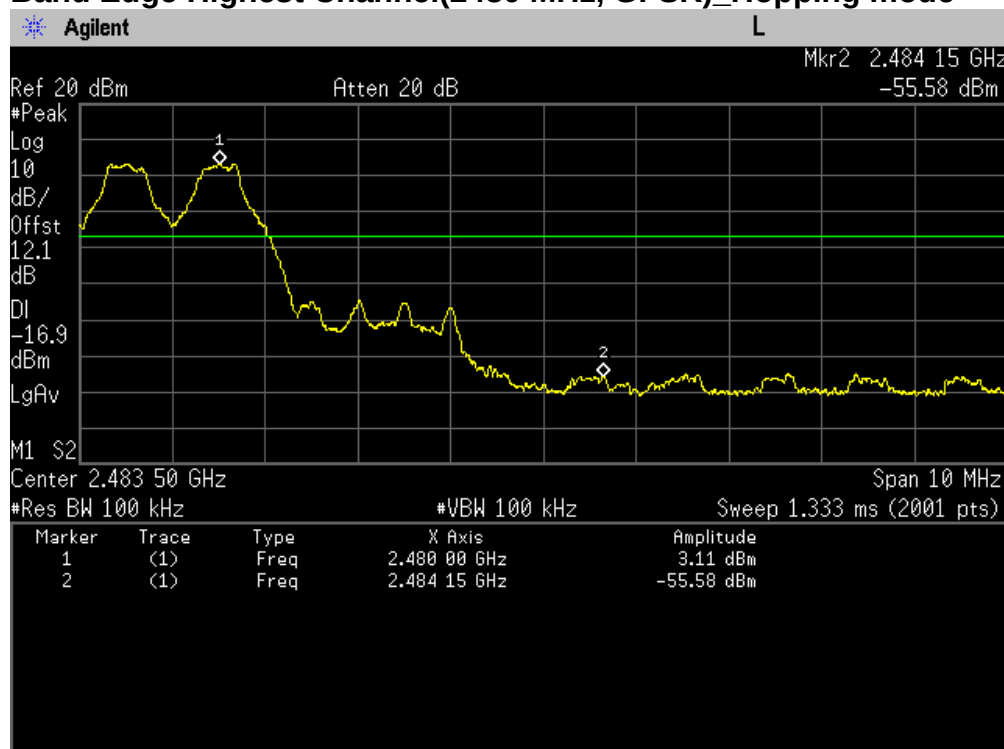


PLOT OF TEST DATA

Band Edge Lowest Channel(2402 MHz, 8DPSK)_Non-hopping mode

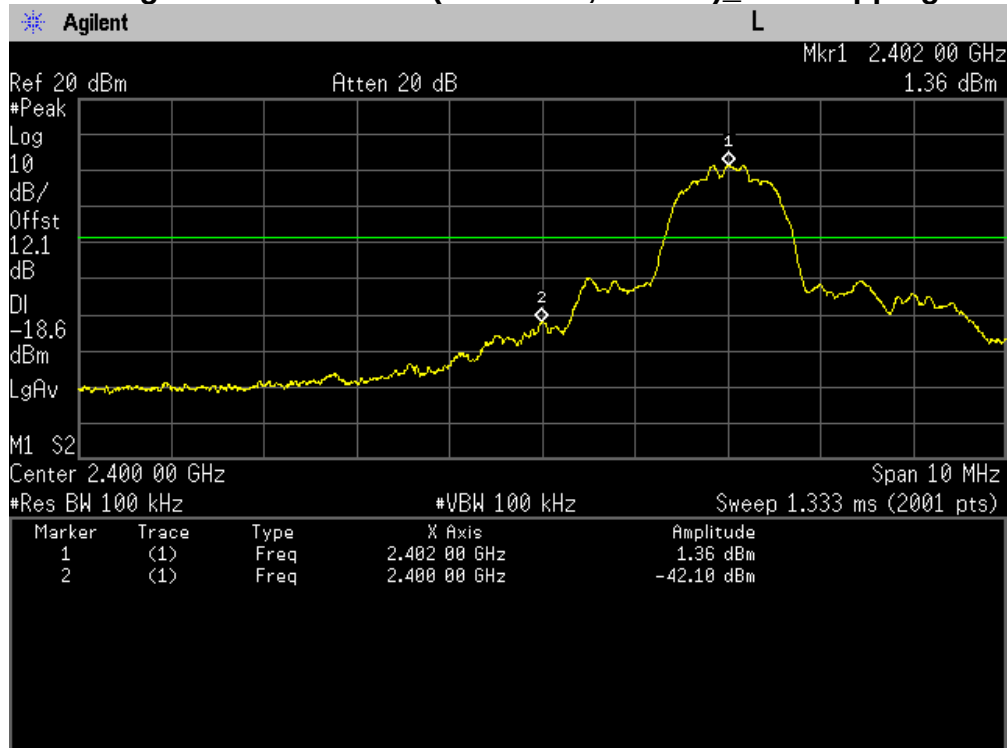


Band Edge Lowest Channel(2402 MHz, 8DPSK)_Hopping mode

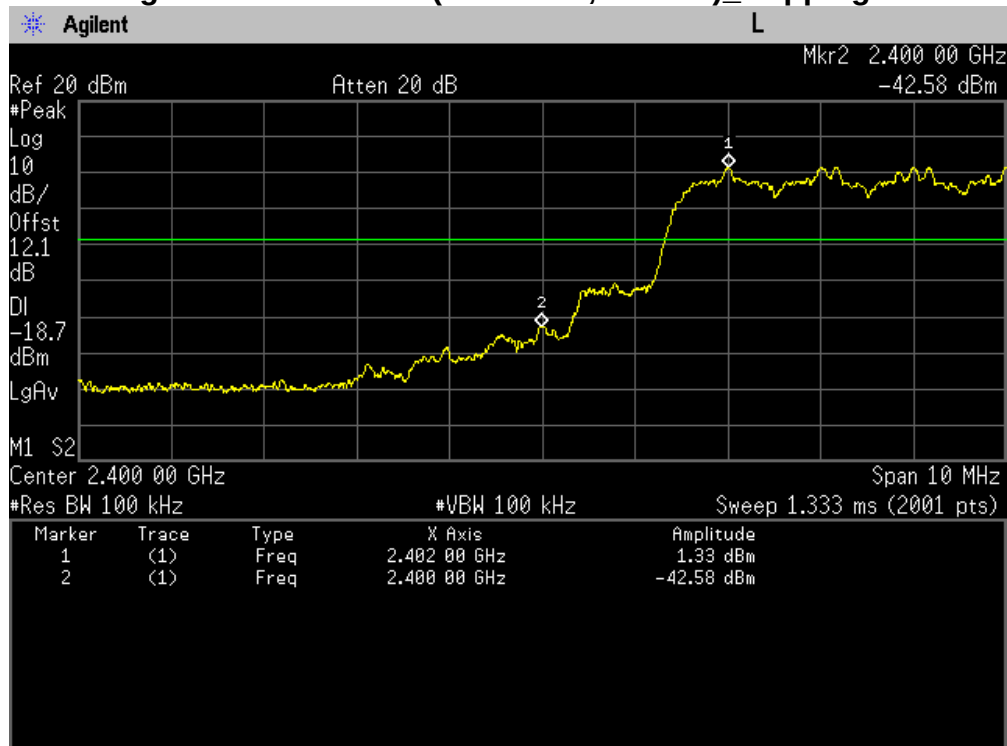


PLOT OF TEST DATA

Band Edge Highest Channel(2480 MHz, 8DPSK)_Non-hopping mode

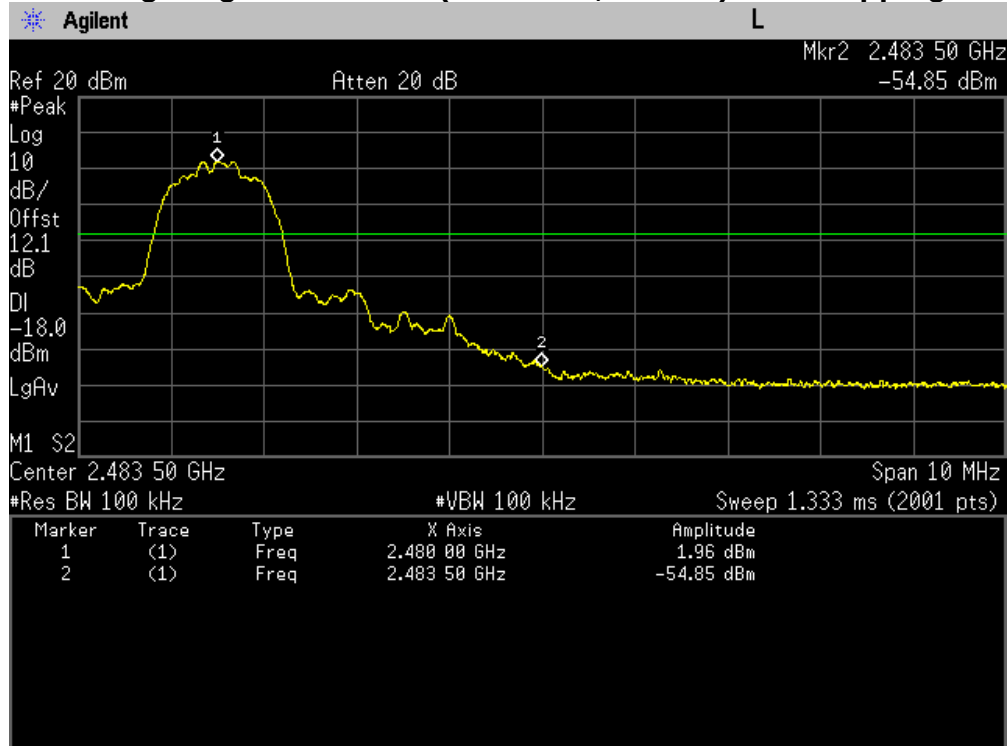

Band Edge Highest Channel(2480 MHz, 8DPSK)_Hopping mode

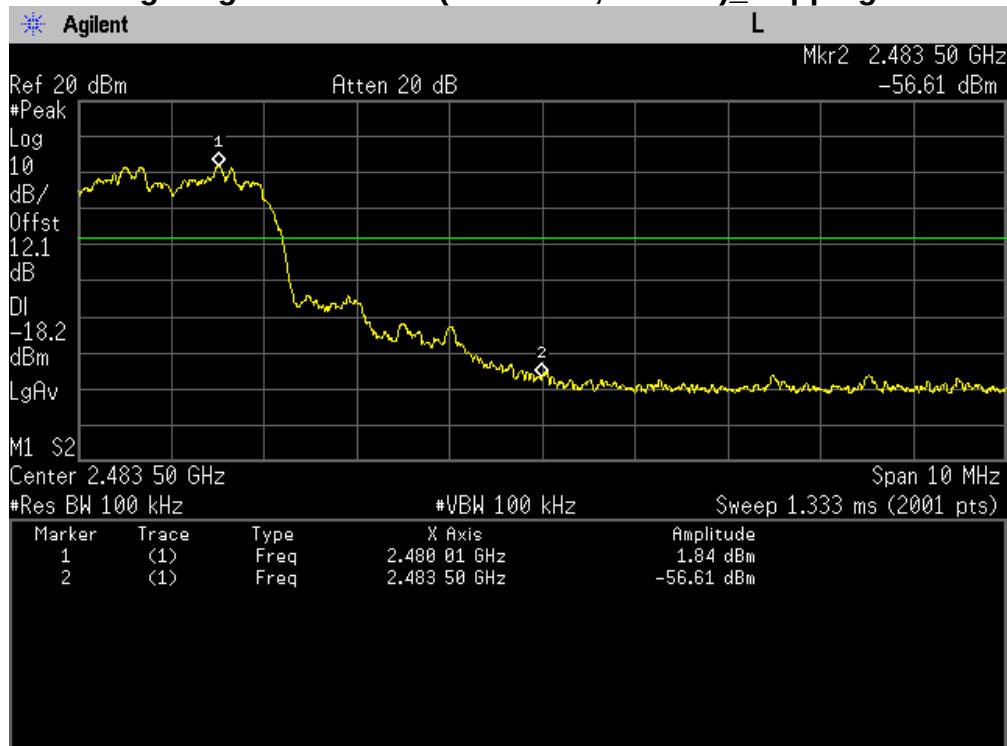

TEST DATA

8.9 Radiated Spurious Emission

FCC §15.247(d), RSS-210 A8.5

Test Mode : Set to Lowest channel, Middle channel and Highest channel

Result:

Lowest Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1497.50	48.60	H	peak	-4.60	44.00	74.0	30.00
1497.50	37.80	H	average	-4.60	33.20	54.0	20.80
1536.50	50.30	H	peak	-4.50	45.80	74.0	28.20
1536.50	46.00	H	average	-4.50	41.50	54.0	12.50
1602.00	49.00	V	peak	-4.30	44.70	74.0	29.30
1602.00	41.70	V	average	-4.30	37.40	54.0	16.60
1688.00	49.00	V	peak	-4.10	44.90	74.0	29.10
1688.00	38.60	V	average	-4.10	34.50	54.0	19.50
2247.00	48.80	V	peak	-2.40	46.40	74.0	27.60
2247.00	37.70	V	average	-2.40	35.30	54.0	18.70
4804.00	47.30	V	peak	9.20	56.50	74.0	17.50
4804.00	40.00	V	average	9.20	49.20	54.0	4.80

TEST DATA

Middle Channel

Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1331.00	48.10	H	peak	-5.00	43.10	74.0	30.90
1331.00	37.90	H	average	-5.00	32.90	54.0	21.10
1441.00	47.80	H	peak	-4.70	43.10	74.0	30.90
1441.00	37.80	H	average	-4.70	33.10	54.0	20.90
1496.50	49.60	V	peak	-4.60	45.00	74.0	29.00
1496.50	38.00	V	average	-4.60	33.40	54.0	20.60
1536.50	50.10	H	peak	-4.50	45.60	74.0	28.40
1536.50	45.00	H	average	-4.50	40.50	54.0	13.50
1626.50	50.10	H	peak	-4.20	45.90	74.0	28.10
1626.50	45.40	H	average	-4.20	41.20	54.0	12.80
2246.00	49.20	V	peak	-2.40	46.80	74.0	27.20
2246.00	38.20	V	average	-2.40	35.80	54.0	18.20
4882.00	44.60	V	peak	9.50	54.10	74.0	19.90
4882.00	39.50	V	average	9.50	49.00	54.0	5.00

TEST DATA

Highest Channel


Frequency (MHz)	Reading (dBμV)	Pol* (H/V)	mode	AF+CL+Amp (dB)**	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1328.00	48.10	H	peak	-5.00	43.10	74.0	30.90
1328.00	37.10	H	average	-5.00	32.10	54.0	21.90
1498.50	49.00	H	peak	-4.60	44.40	74.0	29.60
1498.50	37.60	H	average	-4.60	33.00	54.0	21.00
1536.50	50.20	H	peak	-4.50	45.70	74.0	28.30
1536.50	45.80	H	average	-4.50	41.30	54.0	12.70
2246.00	48.40	V	peak	-2.40	46.00	74.0	28.00
2246.00	37.50	V	average	-2.40	35.10	54.0	18.90
4960.00	44.20	V	peak	9.60	53.80	74.0	20.20
4960.00	37.20	V	average	9.60	46.80	54.0	7.20

Note:


1. *Pol. H = Horizontal V = Vertical
2. **AF + CL + Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Other spurious was under 20 dB below Fundamental.
4. The radiated emissions testing were made by rotating EUT through three orthogonal axes and rotating the receive antenna with horizontal, Vertical polarization.
The worst data was recorded.
5. GFSK modulation mode was the worst condition.
6. For measurements the resolution bandwidth was set to 1 MHz, and then the video bandwidth was set to 1 MHz for peak measurements and 10 Hz for average measurements.
7. The spectrum was measured from 9 kHz to 10th harmonic and the worst-case emissions were reported. No significant emissions were found beyond the fifth harmonic for this device.

PLOT OF TEST DATA

Restricted Band Spurious Emissions, Lowest channel(GFSK, Peak)

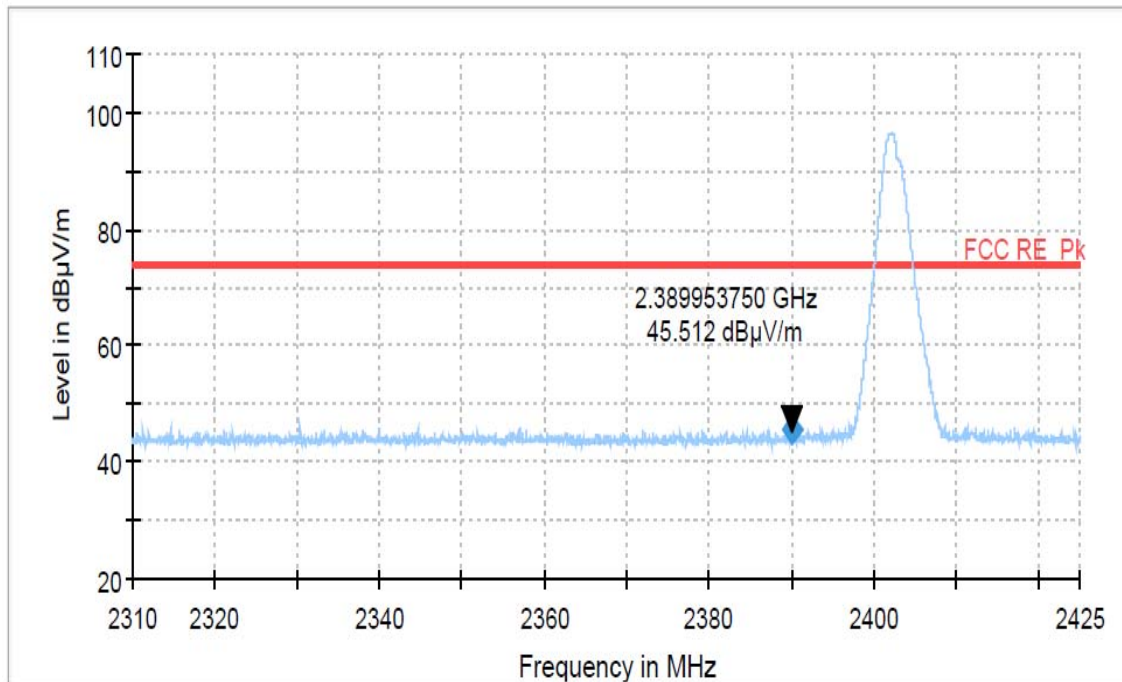


Restricted Band Spurious Emissions, Lowest channel(GFSK, Average)

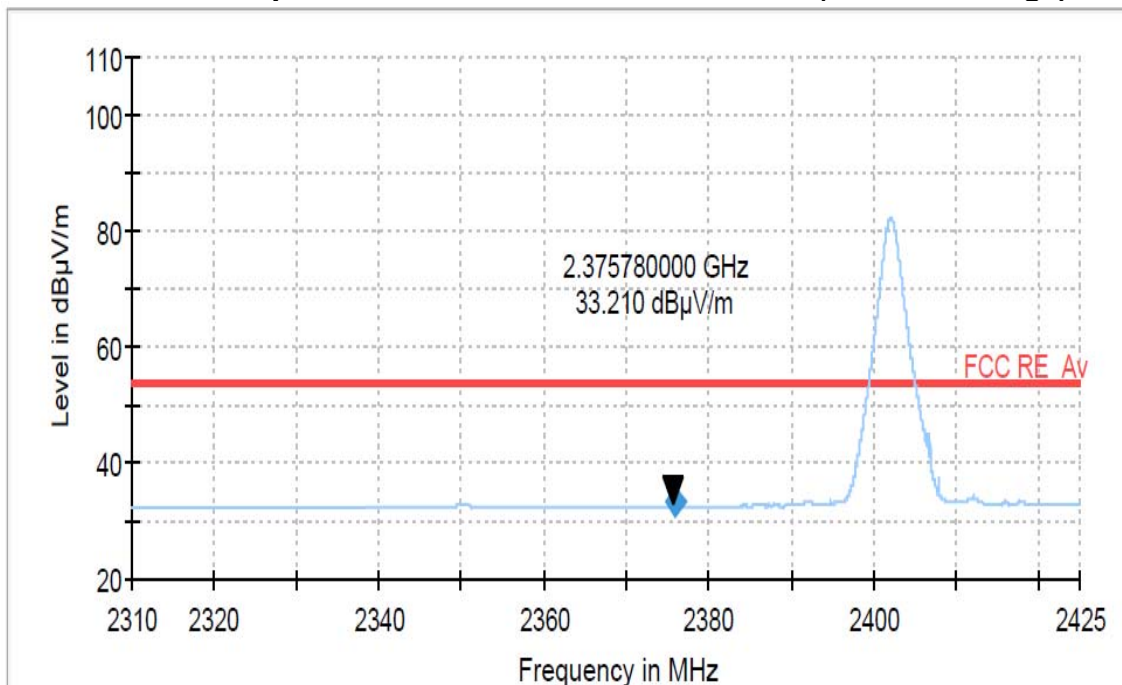


PLOT OF TEST DATA

Restricted Band Spurious Emissions, Highest channel(GFSK, Peak)

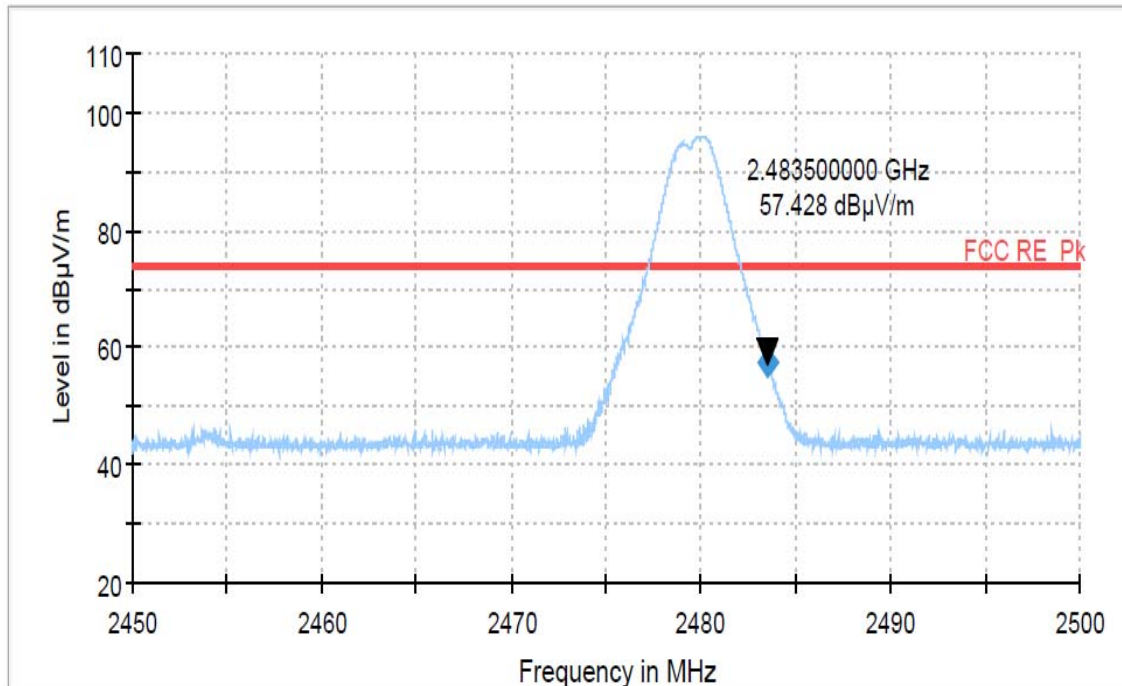


Restricted Band Spurious Emissions, Highest channel(GFSK, Average)

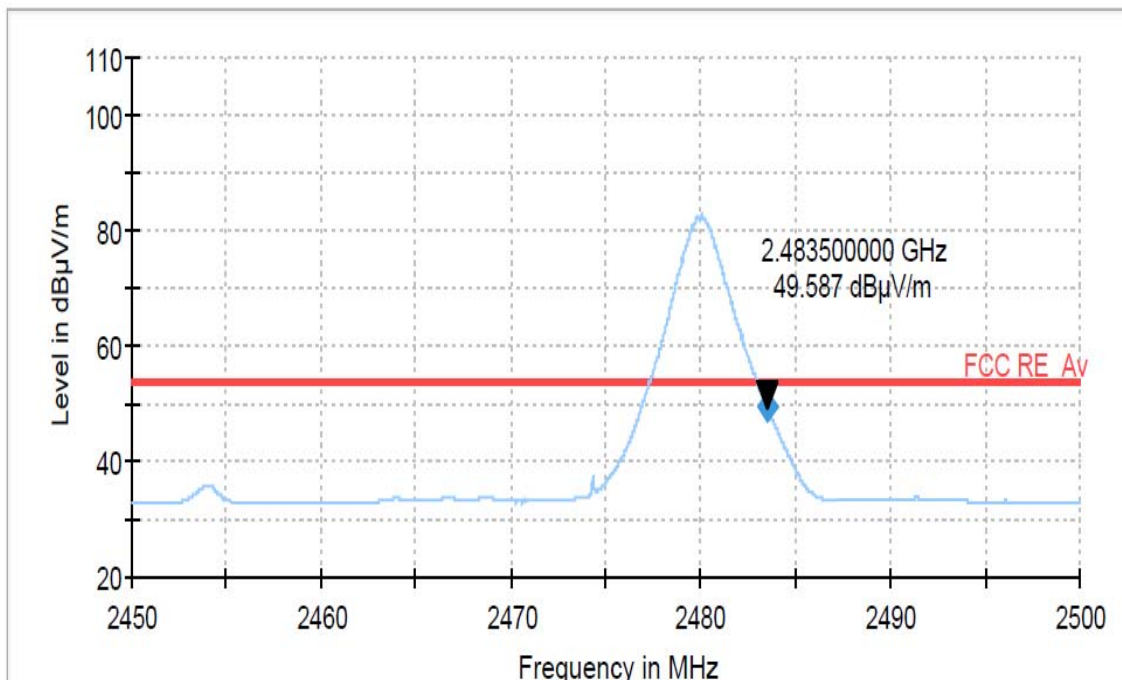


PLOT OF TEST DATA

Restricted Band Spurious Emissions, Lowest channel(8DPSK, Peak)

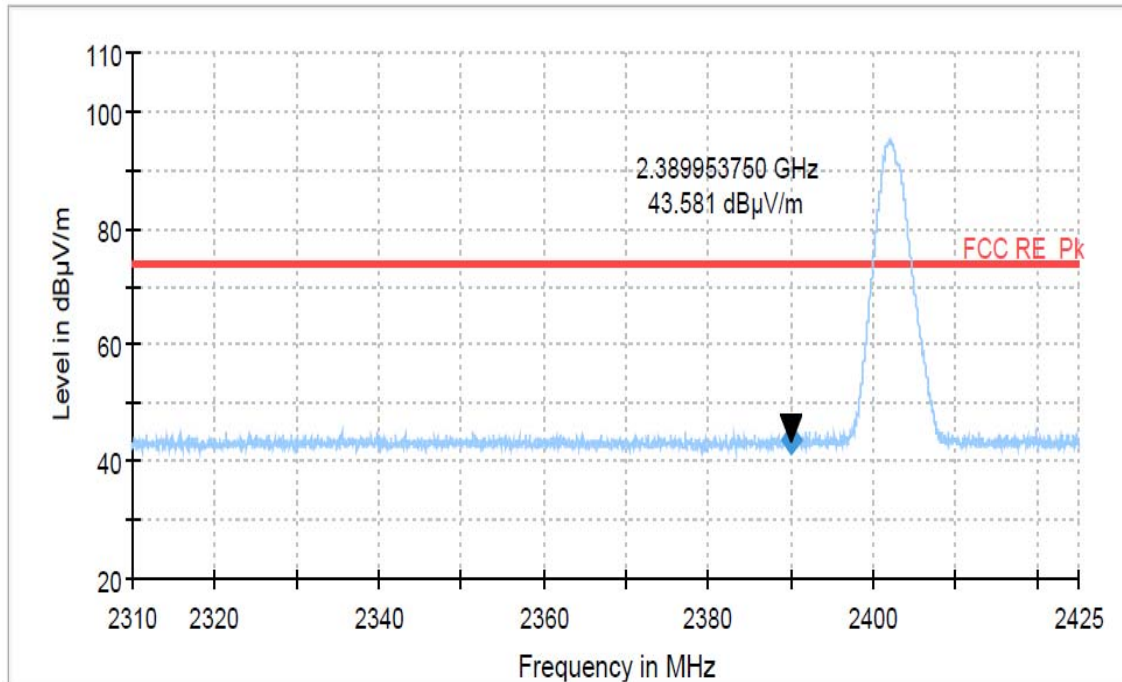


Restricted Band Spurious Emissions, Lowest channel(8DPSK, Average)

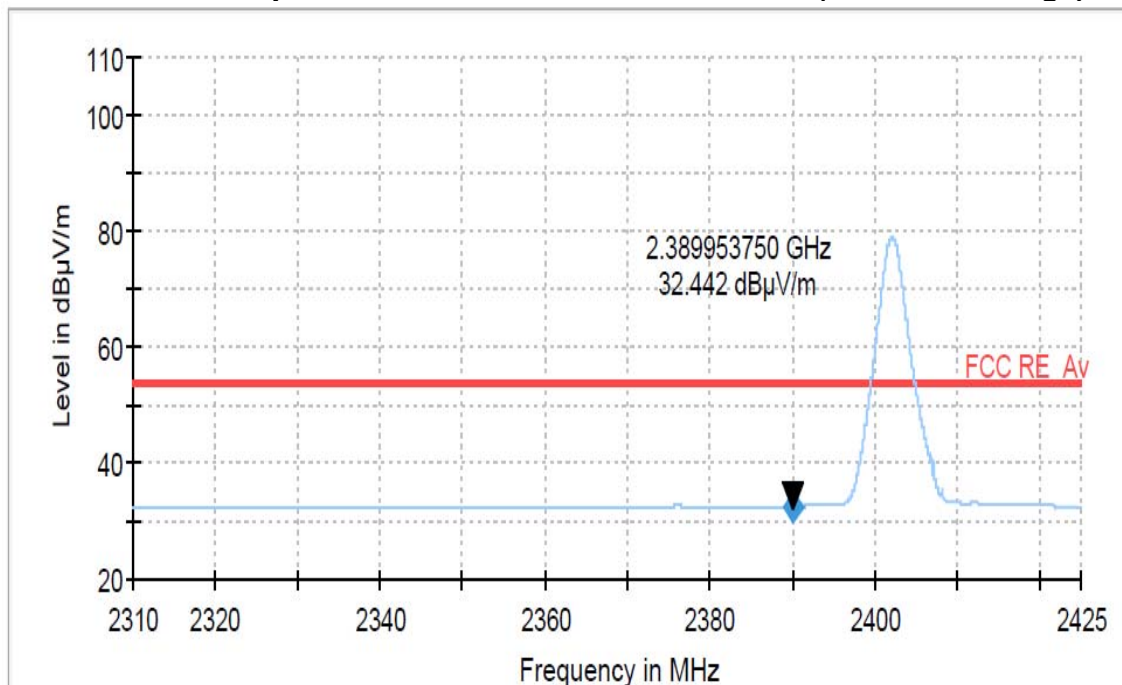


PLOT OF TEST DATA

Restricted Band Spurious Emissions, Highest channel(8DPSK, Peak)

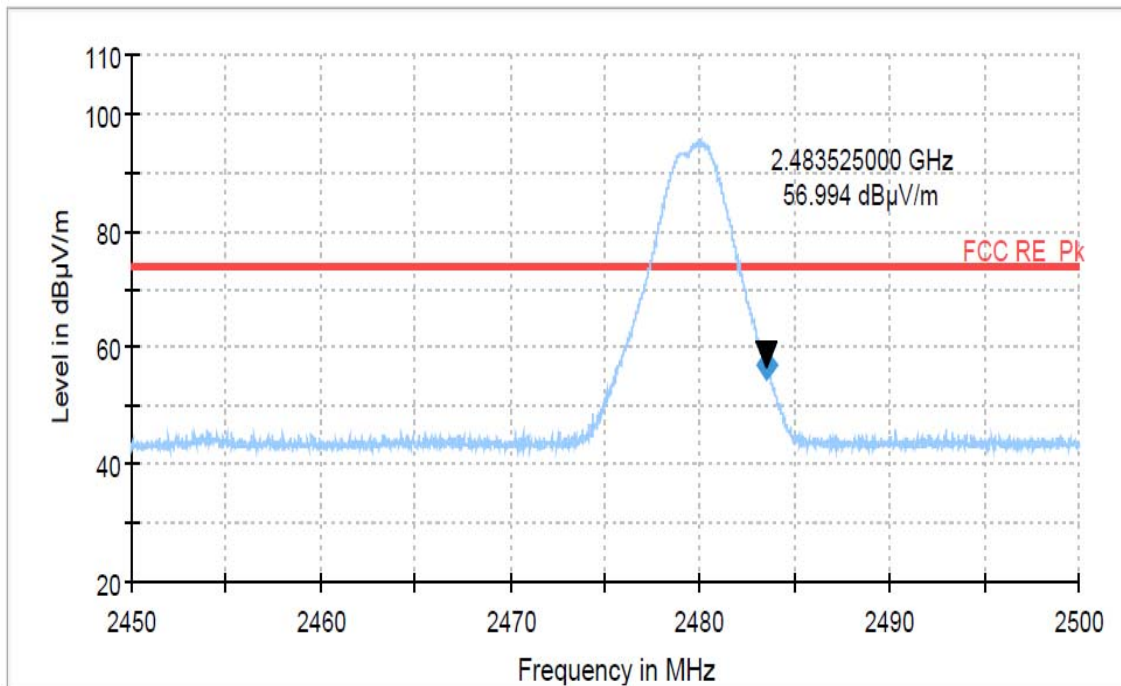

Restricted Band Spurious Emissions, Highest channel(8DPSK, Average)

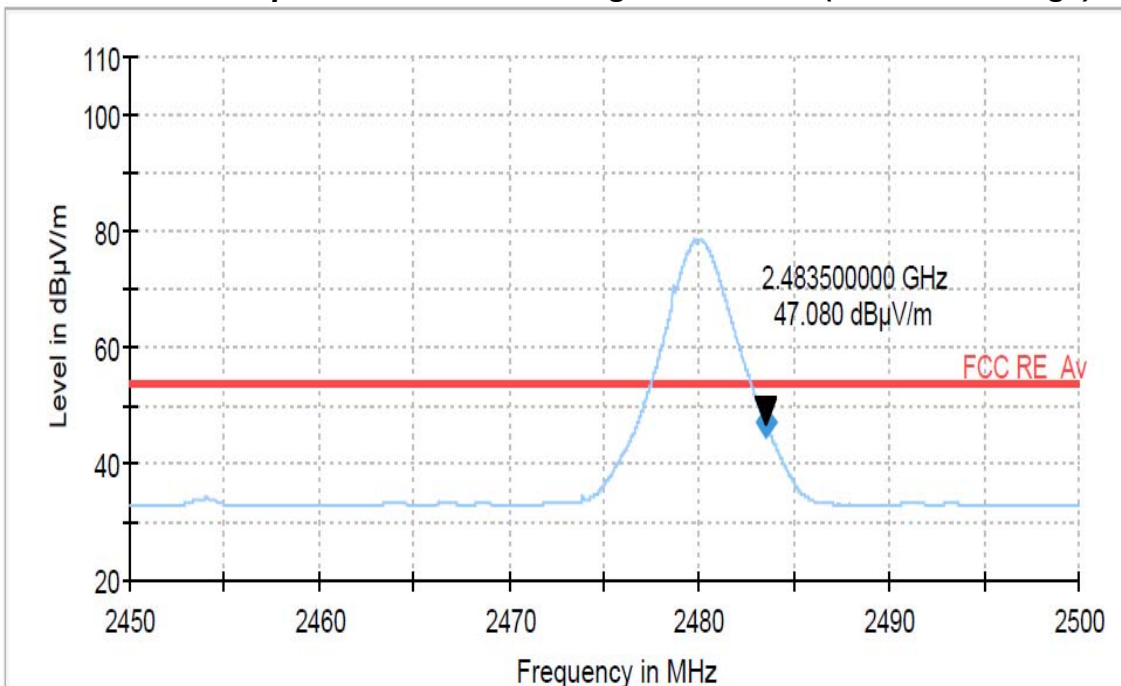

Note: For the radiated emission field strength measurements at the band edges, the resolution bandwidth was set to 1 MHz, and then the video bandwidth was set to 1 MHz for peak measurements and 10 Hz for average measurements.

9. TEST EQUIPMENT

No.	Instrument	Manufacturer	Model	Serial No.	Calibration Date	Calibration Interval
1	*Test Receiver	R & S	ESCS 30	833364/020	Jan. 12 2012	1 year
2	Test Receiver	R & S	ESCS 30	100302	Oct. 12 2011	1 year
3	*Amplifier	HP	8447F	2805A03427	Jul. 19 2011	1 year
4	*Amplifier	Sonoma Instrument	310N	291916	Jul. 19 2011	1 year
5	*Amplifier	R & S	SCU26	10011	Jun. 01 2011	1 year
6	*Amplifier	R & S	SCU01	10029	Apr. 06 2011	1 year
7	*Pre Amplifier	HP	8449B	3008A00107	Jan. 13 2012	1 year
8	*Pre Amplifier	HP	8447F	2805A03351	Oct. 06 2011	1 year
9	*Spectrum Analyzer	Agilent	E4440A	MY44303257	Jul. 19 2011	1 year
10	Spectrum Analyzer	Agilent	E4440A	MY44022567	Apr. 05 2011	1 year
11	*Spectrum Analyzer	R & S	FSP40	100361	Jul. 19 2011	1 year
12	*Loop Antenna	R & S	HFH2-Z2	100279	Aug. 31 2011	2 year
13	Wideband Power Sensor	R & S	NRP-Z81	100634	May. 03 2011	1 year
14	Peak Power Sensor	R & S	NRV-Z32	836019/028	Oct. 25 2011	1 year
15	*Biconical Log Antenna	ARA	LPB-2520/A	1180	Apr. 14 2010	2 year
16	*Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-508	Dec. 24 2010	2 year
17	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-474	Jul. 14 2010	2 year
18	*Horn Antenna	Q-par Angus	QSH20S20	8179	Mar. 28 2011	2 year
19	*Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-257	Apr. 14 2010	2 year
20	*LISN	R & S	ESH3-Z5	833874/006	Oct. 12 2011	1 year
21	LISN	R & S	ESH2-Z5	100227	Apr. 06 2011	1 year
22	*Position Controller	DAEIL EMC	N/A	N/A	N/A	N/A
23	*Turn Table	DAEIL EMC	N/A	N/A	N/A	N/A
24	*Antenna Mast	DAEIL EMC	N/A	N/A	N/A	N/A
25	*Anechoic Chamber	EM Eng.	N/A	N/A	N/A	N/A
26	*Shielded Room	EM Eng.	N/A	N/A	N/A	N/A
27	*Position Controller	Seo-Young EMC	N/A	N/A	N/A	N/A
28	*Turn Table	Seo-Young EMC	N/A	N/A	N/A	N/A
29	*Antenna Mast	Seo-Young EMC	N/A	N/A	N/A	N/A
30	*Anechoic Chamber	Seo-Young EMC	N/A	N/A	N/A	N/A
31	*Shielded Room	Seo-Young EMC	N/A	N/A	N/A	N/A

*) Test equipment used during the test

10. ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of measurement uncertainty contained in CISPR 16-4-2 with the confidence level of 95%

1. Conducted Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	RI	± 0.1	normal 1	1.000	0.1	1	0.1
Attenuation AMN-Receiver	LC	± 0.08	normal 2	2.000	0.04	1	0.04
AMN Voltage division factor	LAMN	± 0.8	normal 2	2.000	0.4	1	0.4
Sine wave voltage	dVSW	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	dVPA	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	dVPR	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	dVNF	± 0.00	-	-	0.00	1	0.00
AMN Impedance	dZ	± 1.80	triangular	2.449	0.73	1	0.73
Ⓐ Mismatch	M	+ 0.70	U-Shaped	1.414	0.49	1	0.49
Ⓑ Mismatch	M	- 0.80	U-Shaped	1.414	- 0.56	1	- 0.56
Measurement System Repeatability	RS	0.05	normal 1	1.000	0.05	1	0.05
Remark	Ⓐ: AMN-Receiver Mismatch : + Ⓑ: AMN-Receiver Mismatch : -						
Combined Standard Uncertainty	Normal			± 1.88			
Expanded Uncertainty U	Normal ($k = 2$)			± 3.76			

2. Radiation Uncertainty Calculation

Source of Uncertainty	X_i	Uncertainty of X_i		Coverage factor k	$u(X_i)$ (dB)	C_i	$C_i u(X_i)$ (dB)
		Value (dB)	Probability Distribution				
Receiver reading	RI	± 0.10	normal 1	1.000	0.10	1	0.10
Sine wave voltage	dV_{sw}	± 2.00	normal 2	2.000	1.00	1	1.00
Pulse amplitude response	dV_{pa}	± 1.50	rectangular	1.732	0.87	1	0.87
Pulse repetition rate response	dV_{pr}	± 1.50	rectangular	1.732	0.87	1	0.87
Noise floor proximity	dV_{nf}	± 0.50	normal 2	2.000	0.25	1	0.25
Antenna Factor Calibration	AF	± 1.50	normal 2	2.000	0.75	1	0.75
Attenuation Antenna-receiver	CL	± 0.52	normal 2	2.000	0.26	1	0.26
Antenna Directivity	AD	± 1.00	rectangular	1.732	0.58	1	0.58
Antenna Factor Height Dependence	AH	± 0.50	rectangular	1.732	0.29	1	0.29
Antenna Phase Centre Variation	AP	± 0.30	rectangular	1.732	0.17	1	0.17
Antenna Factor Frequency Interpolation	AI	± 0.30	rectangular	1.732	0.17	1	0.17
Site Imperfections	SI	± 4.00	triangular	2.449	1.63	1	1.63
Measurement Distance Variation	DV	± 0.10	rectangular	1.732	0.06	1	0.06
Antenna Balance	$Dbal$	± 0.90	rectangular	1.732	0.52	1	0.52
Cross Polarisation	$DCross$	± 0.90	rectangular	1.732	0.52	1	0.52
Ⓐ Mismatch	M	+ 0.25	U-Shaped	1.414	0.18	1	0.18
Ⓑ Mismatch	M	- 0.26	U-Shaped	1.414	- 0.18	1	- 0.18
Ⓒ Mismatch	M	+ 0.98	U-Shaped	1.414	0.69	1	0.69
Ⓓ Mismatch	M	- 1.11	U-Shaped	1.414	- 0.79	1	- 0.79
Measurement System Repeatability	RS	0.09	normal 1	1.000	0.09	1	0.09
Remark	Ⓐ: Biconical Antenna-receiver Mismatch : + (< 200 MHz) Ⓑ: Biconical Antenna-receiver Mismatch : - (< 200 MHz) Ⓒ: Log Periodic Antenna-receiver Mismatch : + ($\geq$ 200 MHz) Ⓓ: Log Periodic Antenna-receiver Mismatch : - ($\geq$ 200 MHz)						
Combined Standard Uncertainty	Normal			± 2.63 (< 200 MHz) ± 2.74 ($\geq$ 200 MHz)			
Expanded Uncertainty U	Normal ($k = 2$)			± 5.26 (< 200 MHz) ± 5.48 ($\geq$ 200 MHz)			