



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



MEASUREMENT REPORT FCC Part 22 & 24 / IC RSS-132/RSS-133

Applicant Name:

Samsung Electronics, Co. Ltd.
18600 Broadwick St.
Rancho Dominguez, CA 90220
United States

Date of Testing:

Feb. 15 - Mar. 14, 2012

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1202090175.A3L

FCC ID:

A3LSWDSC05D

APPLICANT:

SAMSUNG ELECTRONICS, CO. LTD.

Application Type:

Certification

Model(s):

SC-05D

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

§2; §22(H), §24(E)

IC Specification(s):

RSS-132 Issue 2; RSS-133 Issue 5

Test Procedure(s):

ANSI/TIA-603-C-2004

Test Device Serial No.:

identical prototype [S/N: FJ-028-A]

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 - 848.8	244KGXW	0.811	29.09
EDGE850	824.2 - 848.8	243KG7W	0.254	24.05
GSM1900	1850.2 - 1909.8	244KGXW	1.280	31.07
EDGE1900	1850.2 - 1909.8	249KG7W	0.458	26.61
WCDMA850	826.4 - 846.6	4M16F9W	0.125	20.96

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Randy Ortañez
President




FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 1 of 48

TABLE OF CONTENTS

FCC PART 22 & 24 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.5 LABELING REQUIREMENTS	5
3.0 DESCRIPTION OF TESTS	6
3.1 EVALUATION PROCEDURE	6
3.2 CELLULAR - BASE FREQUENCY BLOCKS	6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS	6
3.4 PCS - BASE FREQUENCY BLOCKS	6
3.5 PCS - MOBILE FREQUENCY BLOCKS	7
3.6 OCCUPIED BANDWIDTH	7
3.7 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	7
3.8 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	8
3.9 PEAK-AVERAGE RATIO	9
3.10 FREQUENCY STABILITY / TEMPERATURE VARIATION	9
4.0 TEST EQUIPMENT CALIBRATION DATA	10
5.0 SAMPLE CALCULATIONS	11
6.0 TEST RESULTS	12
6.1 SUMMARY	12
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA	13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA	14
6.4 CELLULAR GSM RADIATED MEASUREMENTS	15
6.5 CELLULAR WCDMA RADIATED MEASUREMENTS	18
6.6 PCS GSM RADIATED MEASUREMENTS	21
6.7 CELLULAR GSM FREQUENCY STABILITY MEASUREMENTS	24
6.8 CELLULAR WCDMA FREQUENCY STABILITY MEASUREMENTS	26
6.9 PCS GSM FREQUENCY STABILITY MEASUREMENTS	28
6.10 RECEIVER SPURIOUS EMISSIONS	30
7.0 PLOTS OF EMISSIONS	31
8.0 CONCLUSION	48

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 2 of 48



MEASUREMENT REPORT

FCC Part 22 & 24





§2.1033 General Information

APPLICANT: Samsung Electronics, Co. Ltd.
APPLICANT ADDRESS: 18600 Broadwick St.
 Rancho Dominguez, CA 90220, United States
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
IC SPECIFICATION(S): RSS-132 Issue 2; RSS-133 Issue 5
BASE MODEL: SC-05D
FCC ID: A3LSWDSC05D
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODE: GSM/EDGE/WCDMA
FREQUENCY TOLERANCE: ± 0.00025 % (2.5 ppm)
Test Device Serial No.: FJ-028-A ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: Feb. 15 - Mar. 14, 2012
TEST REPORT S/N: 0Y1202090175.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025:2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 3 of 48

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 10, 2012.

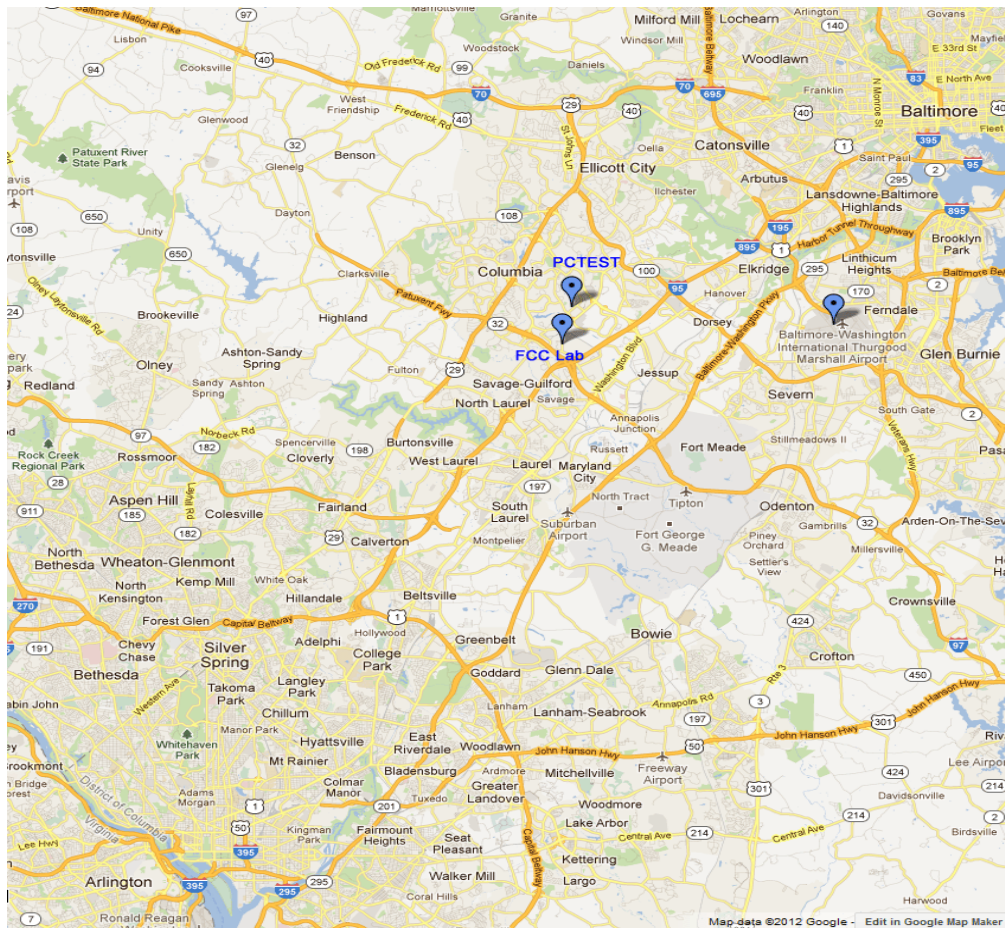


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 4 of 48

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSWDSC05D**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitter.

Note: All testing was performed using the rear cover that contains the RFID antenna.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, 802.11a/b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x,EDR), NFC

2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSWDSC05D was tested per the guidance of ANSI/TIA-603-C-2004. See Section 3 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 5 of 48


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure


The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-C-2004) was used in the measurement of the measurement of the **Samsung Portable Handset FCC ID: A3LSWDSC05D**.

Deviation from Measurement Procedure.....None


3.2 Cellular - Base Frequency Blocks

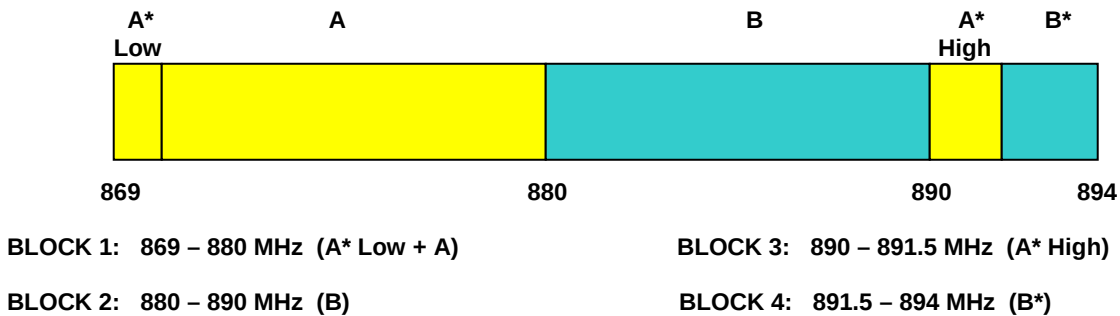

3.3 Cellular - Mobile Frequency Blocks

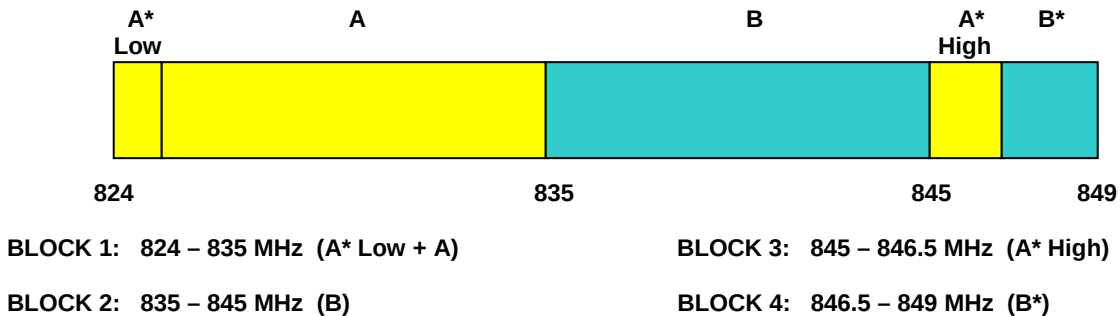


3.4 PCS - Base Frequency Blocks

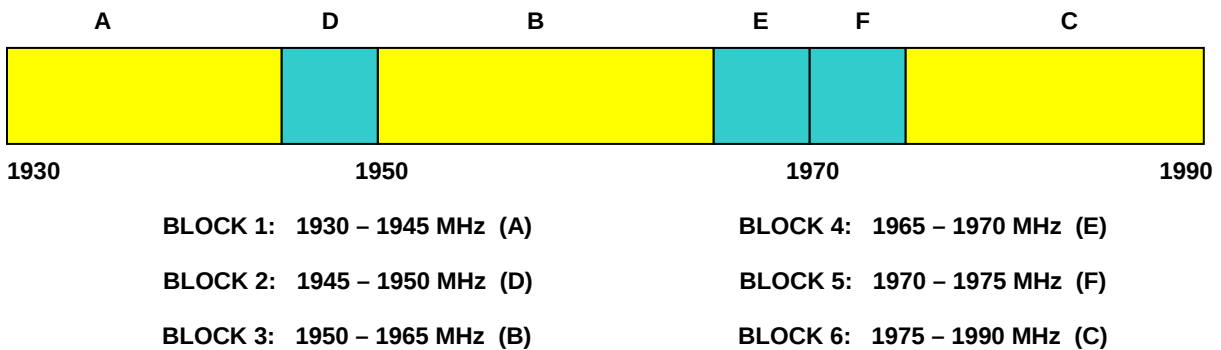

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 6 of 48

3.5 PCS - Mobile Frequency Blocks

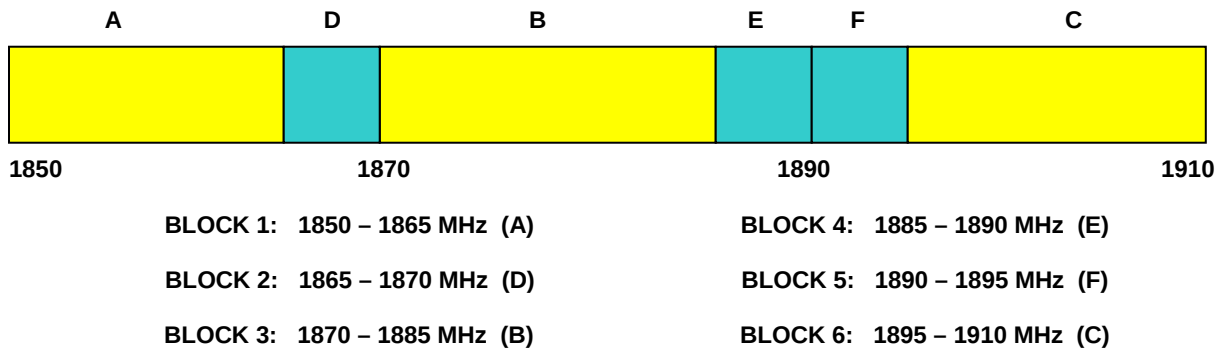

3.6 Occupied Bandwidth

§2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. These measurements were performed on Agilent N9020A MXA Signal Analyzer.

3.7 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, 22.917(a), 24.238(a)(b); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater for PCS band and 1% of occupied bandwidth or greater for Cellular band. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 7 of 48

3.8 Radiated Power and Radiated Spurious Emissions

§2.1053, 22.913(a)(2), 22.917(a), 24.232(c), 24.238(a); RSS-132 (4.5.1), RSS-133 (6.5.1)

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized. The level of the maximized emission is recorded with the spectrum analyzer using a peak detector with RBW = 1MHz, VBW = 3MHz for emissions greater than 1GHz. For emissions below 1GHz, the spectrum analyzer is set to RBW = 100kHz and VBW = 300kHz.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power}_{\text{[Watts]}})$ specified in 22.917(a) and 24.238(a).

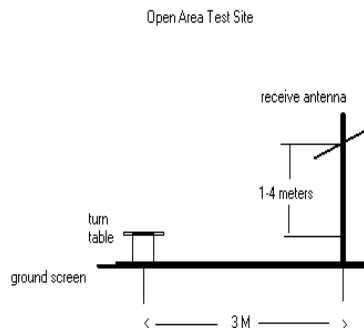


Figure 3-1. Diagram of 3-meter outdoor test range

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 8 of 48

3.9 Peak-Average Ratio

§24.232(d); RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

3.10 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-132 (4.3) / RSS-133 (6.3)

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – For PCS bands, The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For Cellular bands, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 9 of 48

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/7/2011	Annual	6/7/2012	N/A
Agilent	8447D	Broadband Amplifier	3/17/2011	Annual	3/17/2012	1937A03348
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/15/2012	Annual	2/15/2013	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	E5515C	Wireless Communications Test Set	2/12/2012	Annual	2/12/2013	GB45360985
Agilent	N9038A	MXE EMI Receiver	8/5/2011	Annual	8/5/2012	MY51210133
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Espec	ESX-2CA	Environmental Chamber	4/21/2011	Annual	4/21/2012	17620
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/31/2011	Annual	5/31/2012	135427
Mini-Circuits	VHF-1300+	High Pass Filter	2/7/2012	Annual	2/7/2013	30716
Mini-Circuits	VHF-3100+	High Pass Filter	2/7/2012	Annual	2/7/2013	31144
Pasternack	PE2208-6	Bidirectional Coupler	6/3/2011	Annual	6/3/2012	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/19/2011	Annual	4/19/2012	107826
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/17/2011	Biennial	6/17/2013	A042511

Table 4-1. Test Equipment

Note:

The Agilent N9030A is a new piece of equipment that was placed into service during the timeframe of testing for the A3LSWDSC05D. The equipment was calibrated prior to placing into service and therefore all testing performed using this instrument was performed with the current calibration.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 10 of 48

5.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: GSM Channel 512 PCS Mode 2nd Harmonic (3700.40 MHz)

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 11 of 48

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics, Co. Ltd.
 FCC ID: A3LSWDSC05D
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/EDGE/WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049, 22.917(a), 24.238(a)	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.0
24.232(d)	RSS-133 (6.4)	Peak-Average Ratio	< 13 dB		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
22.913(a)(2)	RSS-132 (4.4) [SRSP-503(5.1.3)]	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 6.2
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 6.3
2.1053, 22.917(a), 24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	< 43 + log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Sections 6.4, 6.5, 6.6
2.1055, 22.355, 24.235	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS	Sections 6.7, 6.8, 6.9
RECEIVER MODE (RX) / DIGITAL EMISSIONS						
N/A	RSS-132 (4.6) RSS-133 (6.6)	Receiver Spurious Emissions Limits	< RSS-Gen limits [Section 6; Table 1]	RADIATED	PASS	Section 6.10

Table 6-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 12 of 48	

6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-132 (4.4) [SRSP-503(5.1.3)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
824.20	GSM850	Standard	28.06	0.00	V	28.06	0.640	38.45	-10.39
836.60	GSM850	Standard	29.09	0.00	V	29.09	0.811	38.45	-9.36
848.80	GSM850	Standard	28.40	0.00	V	28.40	0.692	38.45	-10.05
836.60	EDGE850	Standard	24.05	0.00	V	24.05	0.254	38.45	-14.40

Table 6-2. Effective Radiated Power Output Data (GSM)

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
826.40	WCDMA850	Standard	20.27	0.00	V	20.27	0.106	38.45	-18.18
836.60	WCDMA850	Standard	19.40	0.00	V	19.40	0.087	38.45	-19.05
846.60	WCDMA850	Standard	20.96	0.00	V	20.96	0.125	38.45	-17.49

Table 6-3. Effective Radiated Power Output Data (WCDMA)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 13 of 48

6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

Frequency [MHz]	Mode	Battery Type	Substitute Level [dBm]	Antenna Gain [dBi]	Pol [H/V]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	Standard	20.95	7.95	H	28.90	0.777	33.01	-4.11
1880.00	GSM1900	Standard	21.62	7.99	H	29.61	0.913	33.01	-3.41
1909.80	GSM1900	Standard	23.01	8.06	H	31.07	1.280	33.01	-1.94
1909.80	EDGE1900	Standard	18.55	8.06	H	26.61	0.458	33.01	-6.40

Table 6-4. Equivalent Isotropic Radiated Power Output Data (GSM)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 14 of 48

6.4 Cellular GSM Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.20 MHz
 CHANNEL: 128
 MEASURED OUTPUT POWER: 28.06 dBm = 0.640 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.06 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1648.40	-51.83	6.16	-45.67	V	73.7
2472.60	-49.48	6.34	-43.14	V	71.2
3296.80	-47.17	6.70	-40.46	V	68.5
4121.00	-44.52	7.38	-37.14	V	65.2
4945.20	-90.59	8.91	-81.68	V	109.7

Table 6-5. Radiated Spurious Data (Cellular GSM Mode – Ch. 128)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 15 of 48

Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 190
 MEASURED OUTPUT POWER: 29.09 dBm = 0.811 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.09 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-45.37	6.09	-39.28	V	68.4
2509.80	-47.51	6.38	-41.13	V	70.2
3346.40	-48.98	6.90	-42.08	V	71.2
4183.00	-45.22	7.80	-37.42	V	66.5
5019.60	-90.16	8.83	-81.33	V	110.4

Table 6-6. Radiated Spurious Data (Cellular GSM Mode – Ch. 190)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 16 of 48

Cellular GSM Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.80 MHz
 CHANNEL: 251
 MEASURED OUTPUT POWER: 28.40 dBm = 0.692 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.40 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1697.60	-50.27	6.01	-44.26	V	72.7
2546.40	-47.17	6.48	-40.69	V	69.1
3395.20	-51.04	7.10	-43.94	V	72.3
4244.00	-52.92	8.10	-44.82	V	73.2
5092.80	-89.84	8.86	-80.98	V	109.4

Table 6-7. Radiated Spurious Data (Cellular GSM Mode – Ch. 251)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 17 of 48

6.5 Cellular WCDMA Radiated Measurements

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 826.40 MHz
 CHANNEL: 4132
 MEASURED OUTPUT POWER: 20.27 dBm = 0.106 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.27 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1652.80	-54.76	6.15	-48.61	V	68.9
2479.20	-94.88	6.34	-88.54	V	108.8
3305.60	-92.53	6.73	-85.79	V	106.1
4132.00	-90.82	7.45	-83.37	V	103.6
4958.40	-90.51	8.89	-81.62	V	101.9

Table 6-8. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 18 of 48

Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.60 MHz
 CHANNEL: 4183
 MEASURED OUTPUT POWER: 19.40 dBm = 0.087 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 32.40 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1673.20	-53.54	6.10	-47.44	V	66.8
2509.80	-94.82	6.37	-88.45	V	107.9
3346.40	-92.68	6.88	-85.80	V	105.2
4183.00	-91.25	7.74	-83.50	V	102.9
5019.60	-90.20	8.82	-81.38	V	100.8

Table 6-9. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 19 of 48

Cellular WCDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-132 (4.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 846.60 MHz
 CHANNEL: 4233
 MEASURED OUTPUT POWER: 20.96 dBm = 0.125 W
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.96 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
1693.20	-49.40	6.02	-43.37	V	64.3
2539.80	-94.87	6.46	-88.41	V	109.4
3386.40	-92.88	7.07	-85.81	V	106.8
4233.00	-91.66	8.05	-83.61	V	104.6
5079.60	-89.89	8.85	-81.04	V	102.0

Table 6-10. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 20 of 48

6.6 PCS GSM Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1850.20 MHz
 CHANNEL: 512
 MEASURED OUTPUT POWER: 28.90 dBm = 0.777 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 41.90 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3700.40	-49.92	9.63	-40.29	H	69.2
5550.60	-43.39	10.60	-32.79	H	61.7
7400.80	-45.98	10.85	-35.13	H	64.0
9251.00	-83.63	12.20	-71.43	H	100.3
11101.20	-81.12	12.85	-68.27	H	97.2

Table 6-11. Radiated Spurious Data (PCS GSM Mode – Ch. 512)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 21 of 48

PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 661
 MEASURED OUTPUT POWER: 29.61 dBm = 0.913 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 42.61 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-50.26	9.30	-40.96	H	70.6
5640.00	-42.06	10.89	-31.17	H	60.8
7520.00	-84.82	10.85	-73.96	H	103.6
9400.00	-83.38	12.17	-71.21	H	100.8
11280.00	-81.40	13.05	-68.35	H	98.0

Table 6-12. Radiated Spurious Data (PCS GSM Mode – Ch. 661)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 22 of 48

PCS GSM Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1909.80 MHz
 CHANNEL: 810
 MEASURED OUTPUT POWER: 31.07 dBm = 1.280 W
 MODULATION SIGNAL: GSM (GMSK)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 44.07 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
3819.60	-49.76	9.05	-40.72	H	71.8
5729.40	-40.35	11.08	-29.27	H	60.3
7639.20	-85.16	11.11	-74.05	H	105.1
9549.00	-83.52	12.37	-71.15	H	102.2
11458.80	-81.52	13.23	-68.29	H	99.4

Table 6-13. Radiated Spurious Data (PCS GSM Mode – Ch. 810)

NOTES:

1. This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GPRS mode while transmitting with one slot active.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found in the vertical polarity for cellular band and horizontal polarity for PCS band. The data reported in the table above was measured in this test setup.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 23 of 48

6.7 Cellular GSM Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 190

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,599,988	-12	-0.000001
100 %		- 30	836,600,018	18	0.000002
100 %		- 20	836,600,024	24	0.000003
100 %		- 10	836,599,984	-16	-0.000002
100 %		0	836,599,980	-20	-0.000002
100 %		+ 10	836,599,986	-14	-0.000002
100 %		+ 20	836,599,988	-12	-0.000001
100 %		+ 30	836,600,010	10	0.000001
100 %		+ 40	836,599,981	-19	-0.000002
100 %		+ 50	836,599,984	-16	-0.000002
115 %	4.26	+ 20	836,599,978	-22	-0.000003
BATT. ENDPOINT	3.40	+ 20	836,599,972	-28	-0.000003

Table 6-14. Frequency Stability Data (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 24 of 48	

Cellular GSM Frequency Stability Measurements (Cont'd)
§2.1055, 22.355; RSS-132 (4.3)

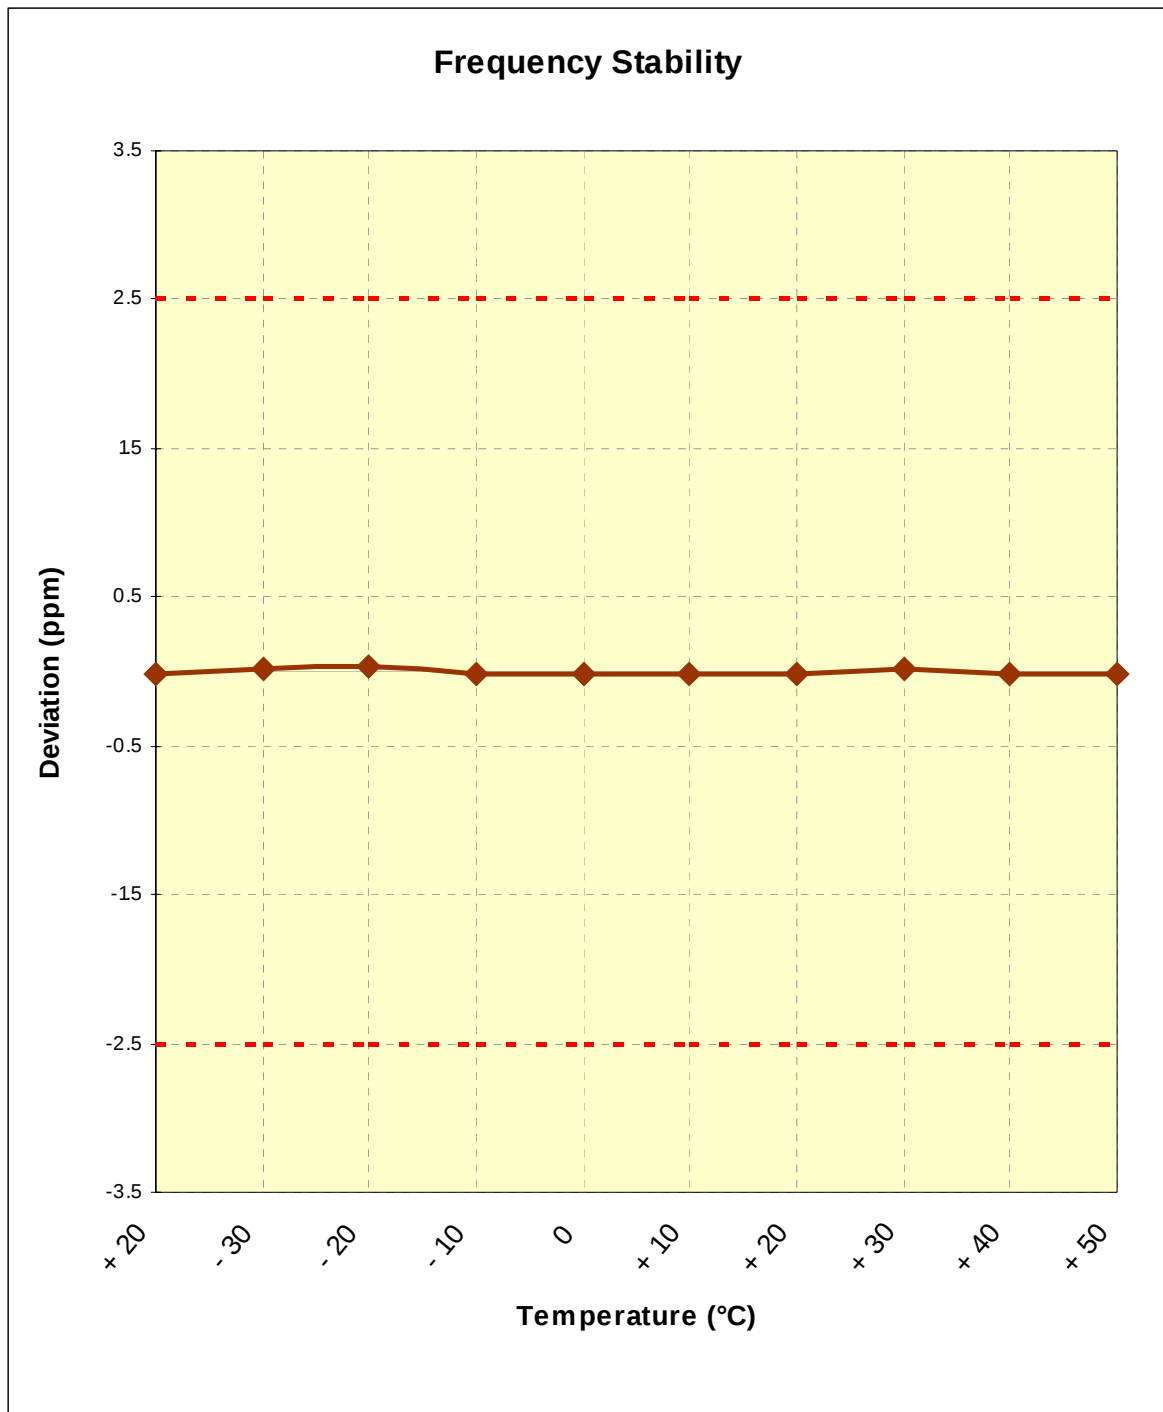


Figure 6-1. Frequency Stability Graph (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 25 of 48

6.8 Cellular WCDMA Frequency Stability Measurements

§2.1055, 22.355; RSS-132 (4.3)

CHANNEL: 4183

REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	836,599,983	-17	-0.000002
100 %		- 30	836,599,986	-14	-0.000002
100 %		- 20	836,599,978	-22	-0.000003
100 %		- 10	836,599,986	-14	-0.000002
100 %		0	836,599,990	-10	-0.000001
100 %		+ 10	836,599,979	-21	-0.000003
100 %		+ 20	836,599,983	-17	-0.000002
100 %		+ 30	836,599,984	-16	-0.000002
100 %		+ 40	836,599,980	-20	-0.000002
100 %		+ 50	836,599,982	-18	-0.000002
115 %	4.26	+ 20	836,599,979	-21	-0.000003
BATT. ENDPOINT	3.40	+ 20	836,599,976	-24	-0.000003

Table 6-15. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 26 of 48

Cellular WCDMA Frequency Stability Measurements (Cont'd)
§2.1055, 22.355; RSS-132 (4.3)

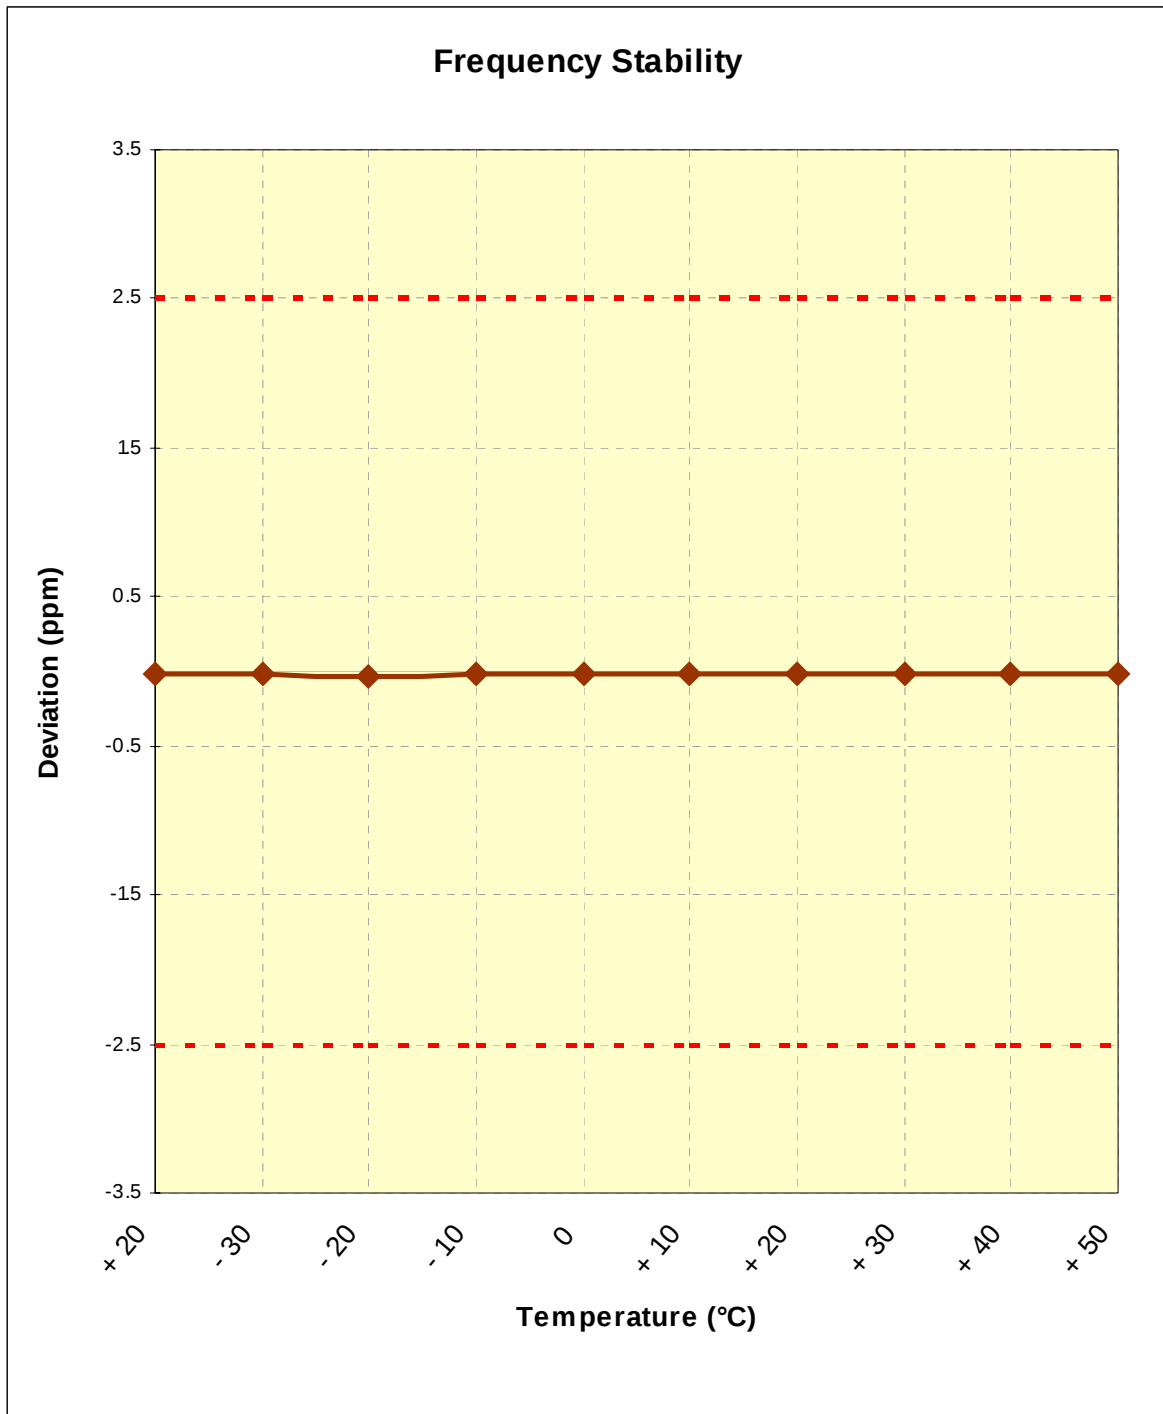


Figure 6-2. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 27 of 48

6.9 PCS GSM Frequency Stability Measurements

§2.1055, 24.235; RSS-133 (6.3)

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 661

REFERENCE VOLTAGE: 3.7 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	1,879,999,984	-16	-0.000001
100 %		- 30	1,880,000,021	21	0.000001
100 %		- 20	1,880,000,010	10	0.000001
100 %		- 10	1,880,000,012	12	0.000001
100 %		0	1,879,999,983	-17	-0.000001
100 %		+ 10	1,879,999,981	-19	-0.000001
100 %		+ 20	1,879,999,984	-16	-0.000001
100 %		+ 30	1,879,999,978	-22	-0.000001
100 %		+ 40	1,880,000,018	18	0.000001
100 %		+ 50	1,879,999,983	-17	-0.000001
115 %	4.26	+ 20	1,879,999,976	-24	-0.000001
BATT. ENDPOINT	3.40	+ 20	1,879,999,973	-27	-0.000001

Table 6-16. Frequency Stability Data (PCS GSM Mode – Ch. 661)

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 28 of 48

PCS GSM Frequency Stability Measurements (Cont'd)
§2.1055, 24.235; RSS-133 (6.3)

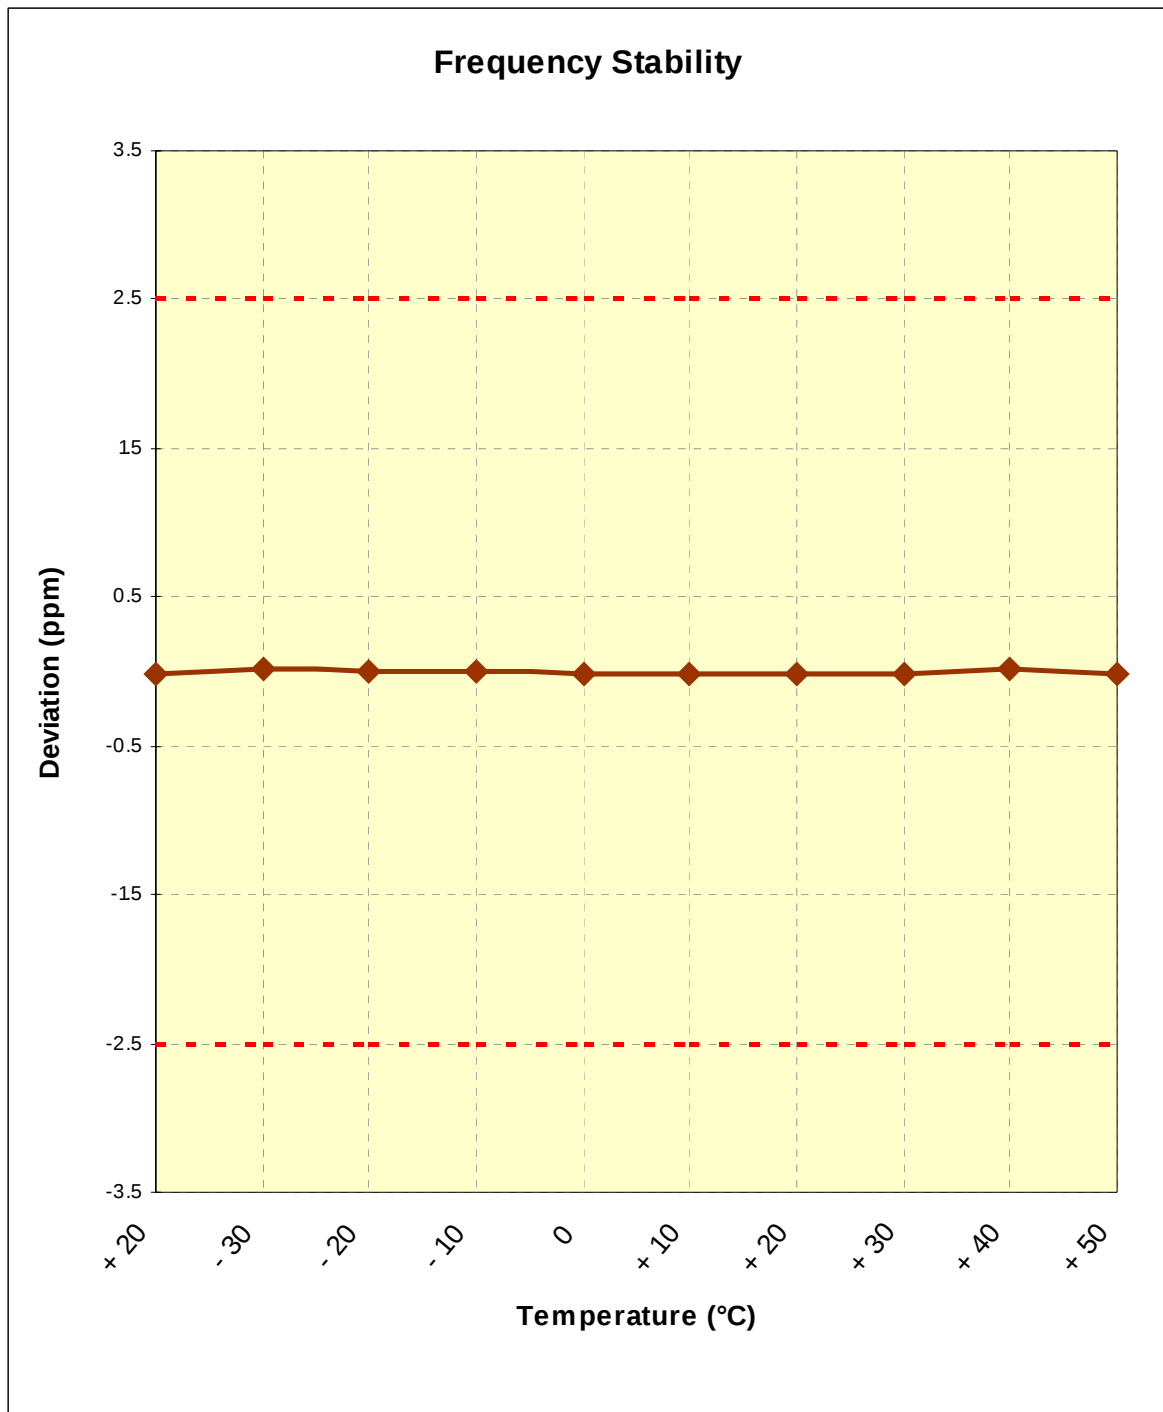


Figure 6-3. Frequency Stability Graph (PCS GSM Mode – Ch. 661)

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 29 of 48

6.10 Receiver Spurious Emissions

RSS-132 (4.6), RSS-133 (6.6)

Frequency [MHz]	Level [dBm]	AFCL [dB/m]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
42.61	-98.46	13.34	H	1.2	45	21.87	40.00	-18.13
154.16	-100.98	14.16	H	1.1	165	20.18	43.52	-23.34
164.83	-99.31	14.19	H	1.2	170	21.88	43.52	-21.64
322.94	-102.84	16.86	H	1.2	165	21.02	46.02	-25.00
353.01	-100.64	17.66	H	1.1	235	24.02	46.02	-22.00
368.53	-103.23	18.05	H	1.1	270	21.81	46.02	-24.21


Table 6-17. Radiated Measurements at 3-meters

NOTES:


1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated emissions were measured from 30MHz – 6000MHz to ensure that the provisions of 15.33(b)(1) are satisfied with respect to the upper frequency scanning range.
3. The radiated limits for unintentional radiators at a distance of 3 meters are used in the table above, as specified in 15.109(a).
4. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. AFCL (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
6. Level (dBμV/m) = Analyzer Reading (dBm) + AFCL (dB/m) + 107
7. Margin (dB) = Field strength (dBμV/m) – Limit (dBμV/m)
8. Measurements are made using a CISPR quasi-peak detector with a 100kHz resolution bandwidth. Above 1GHz, peak measurements are made using a peak detector with a resolution bandwidth of 1MHz and a video bandwidth of 3MHz and average measurements are made with a peak detector using a resolution bandwidth of 1MHz and a video bandwidth of 10Hz.
9. Calibrated linearly polarized broadband and horn antennas were used for measurements below and above 1GHz, respectively. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy.
10. Calibrated low-loss microwaves cables and broadband amplifiers are used.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 30 of 48

7.0 PLOTS OF EMISSIONS

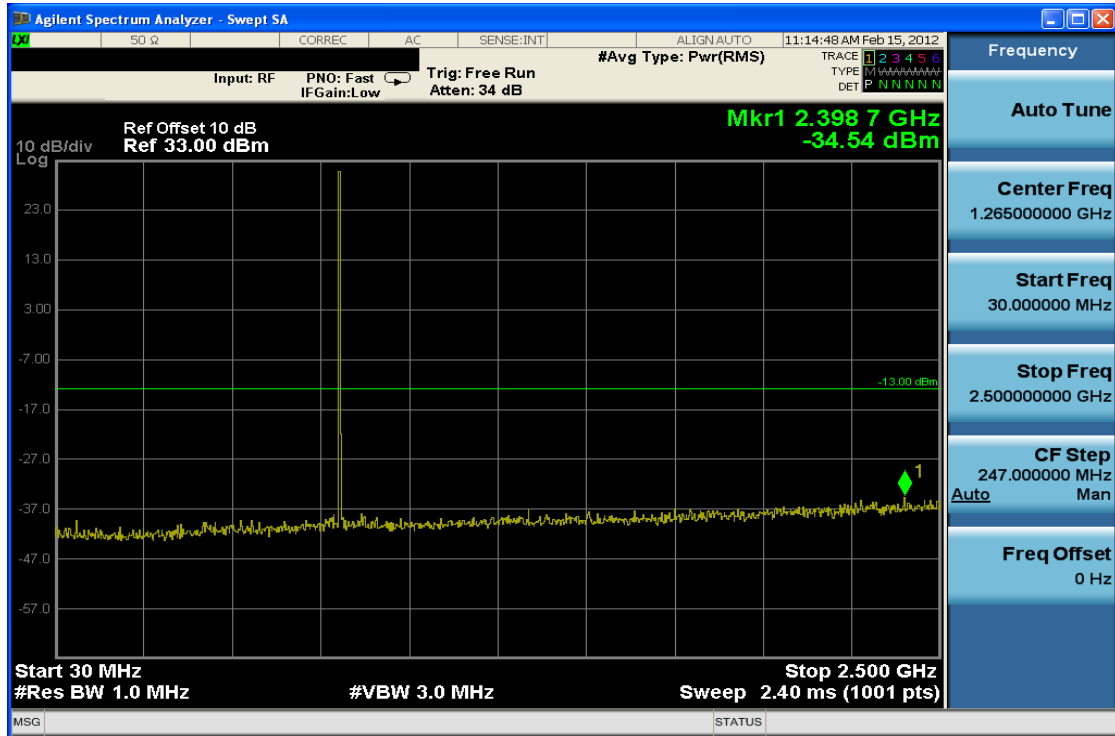


Plot 7-1. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

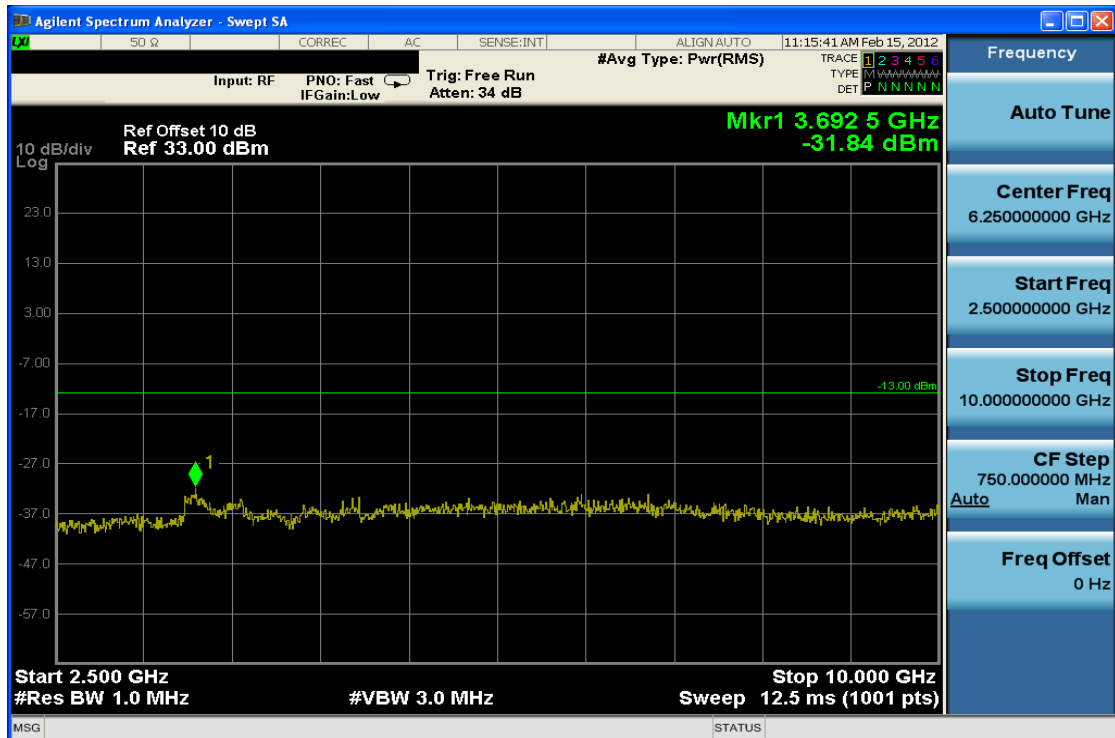


Plot 7-2. Conducted Spurious Plot (Cellular GSM Mode – Ch. 128)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 31 of 48

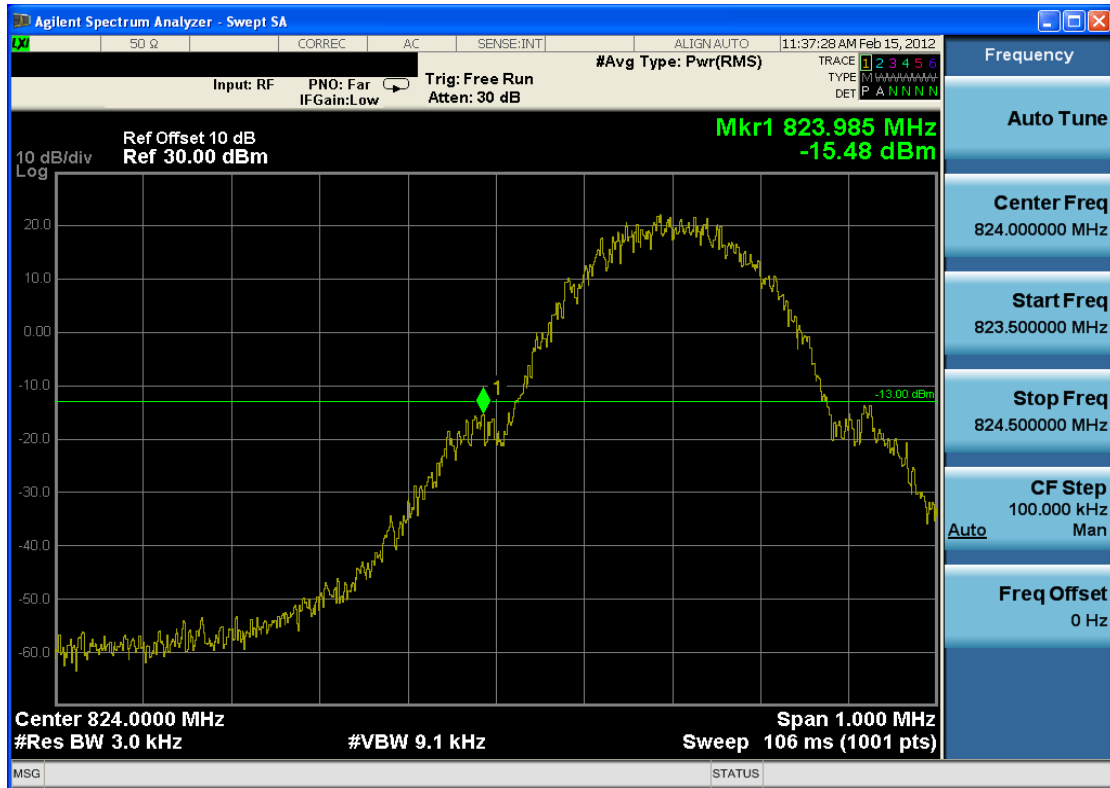


Plot 7-3. Band Edge Plot (Cellular GSM Mode – Ch. 128)

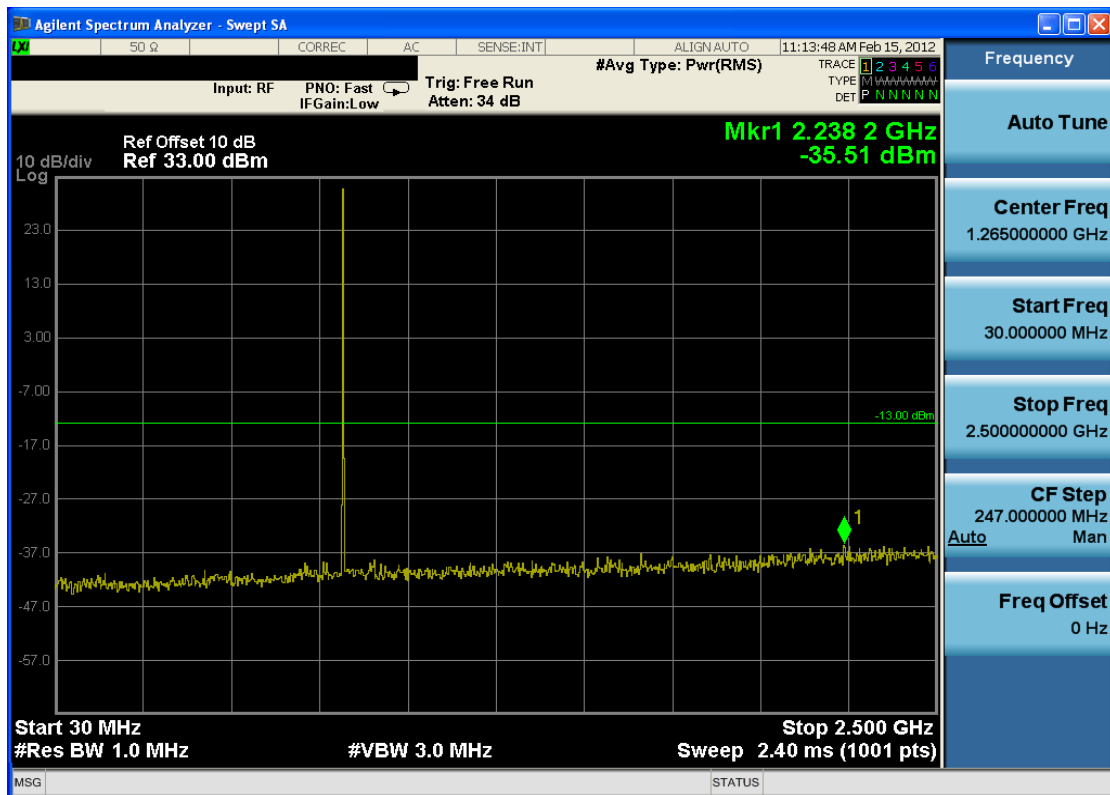


Plot 7-4. Conducted Spurious (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSWDSC05D	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 32 of 48

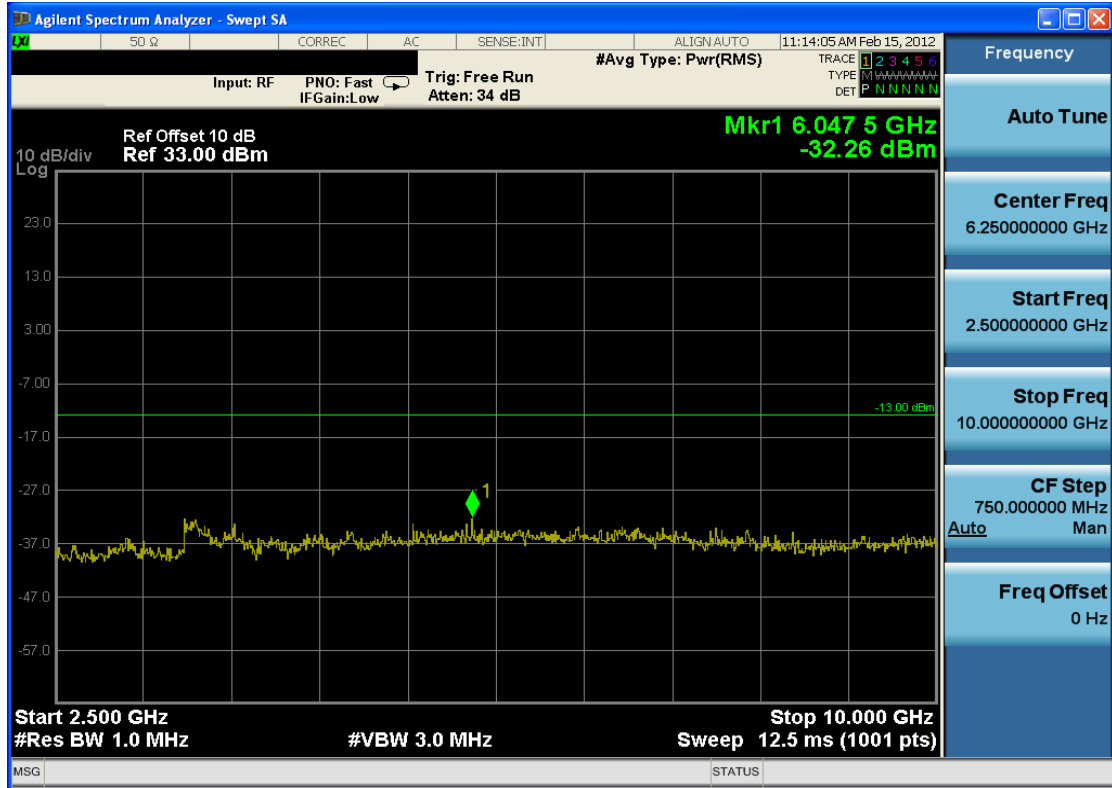


Plot 7-5. Conducted Spurious Plot (Cellular GSM Mode – Ch. 190)

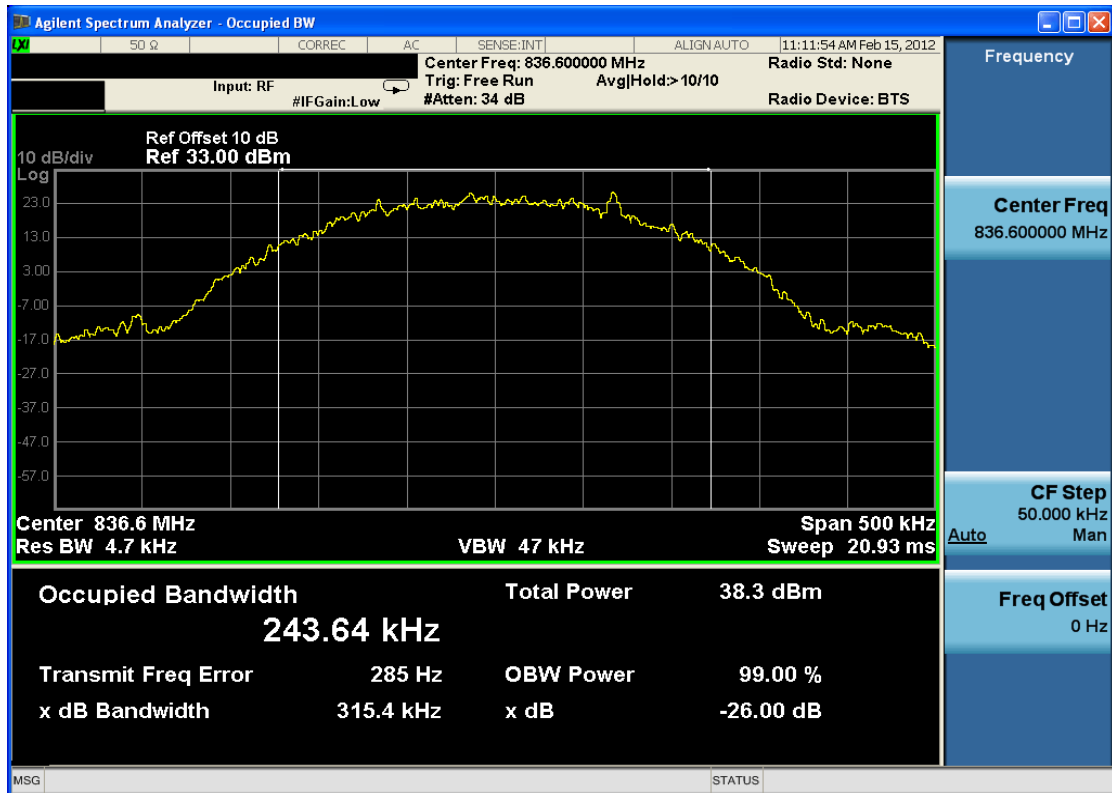


Plot 7-6. Occupied Bandwidth Plot (Cellular GSM Mode – Ch. 190)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 33 of 48

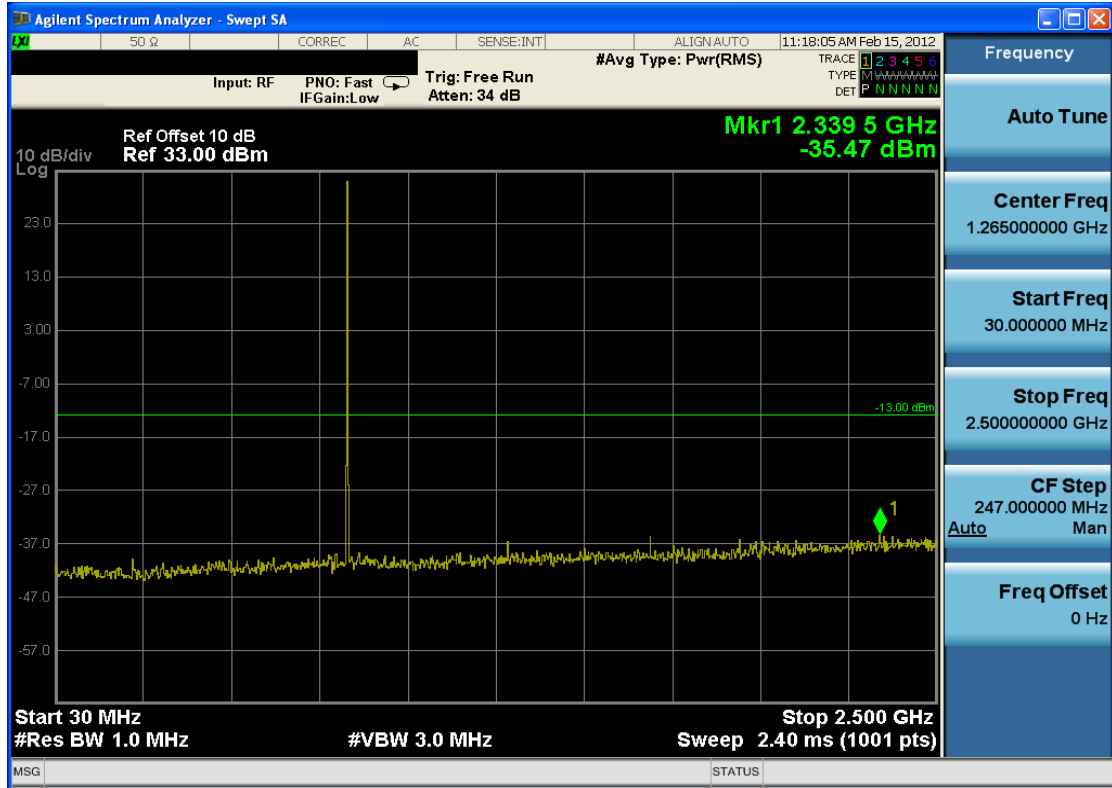


Plot 7-7. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

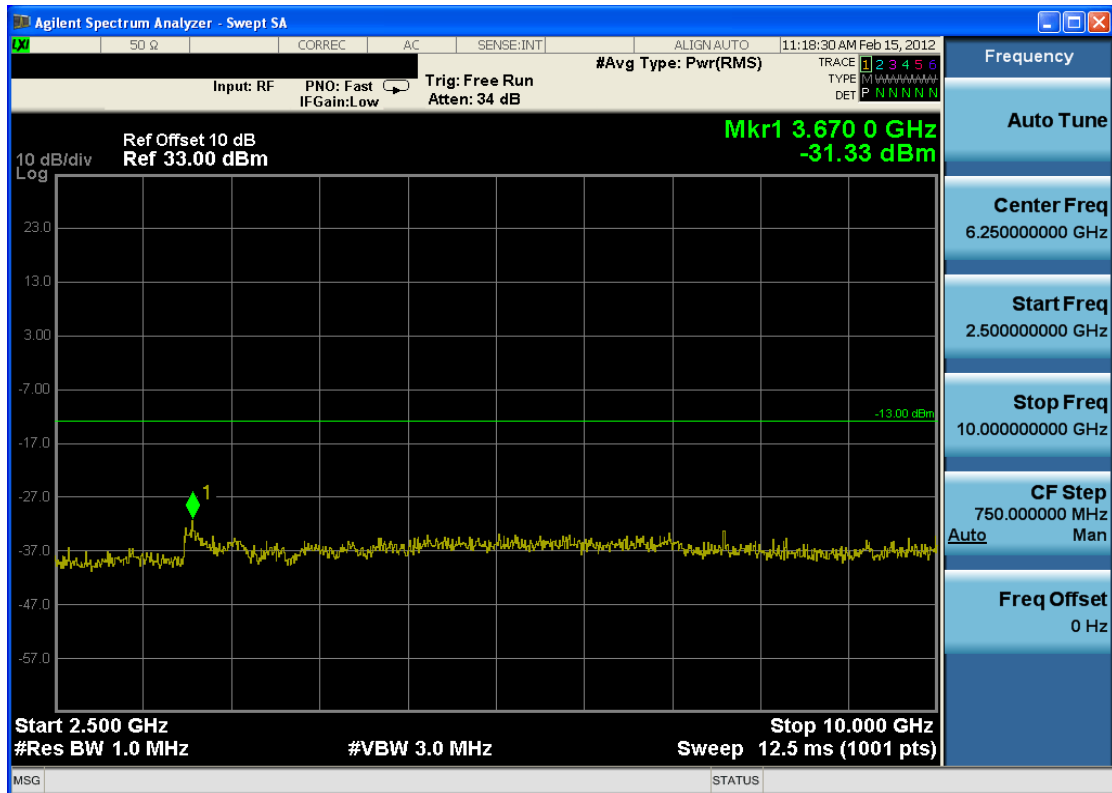


Plot 7-8. Conducted Spurious Plot (Cellular GSM Mode – Ch. 251)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 34 of 48

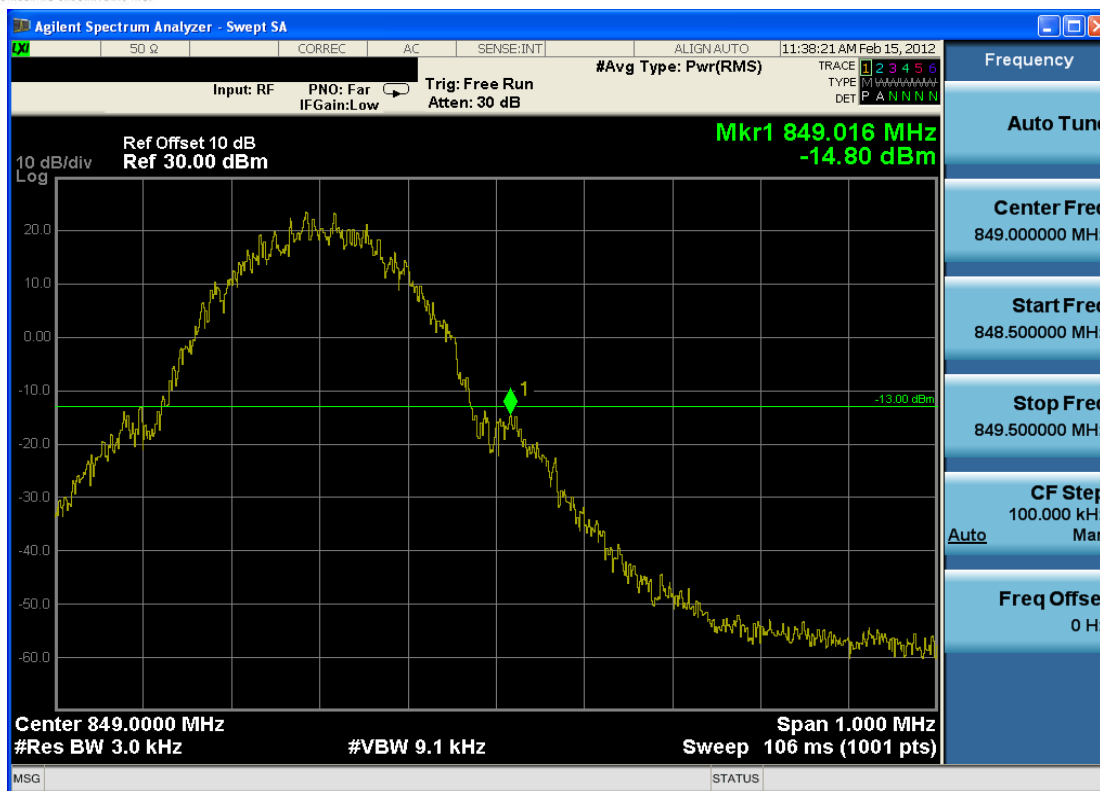


Plot 7-9. Band Edge Plot (Cellular GSM Mode – Ch. 251)

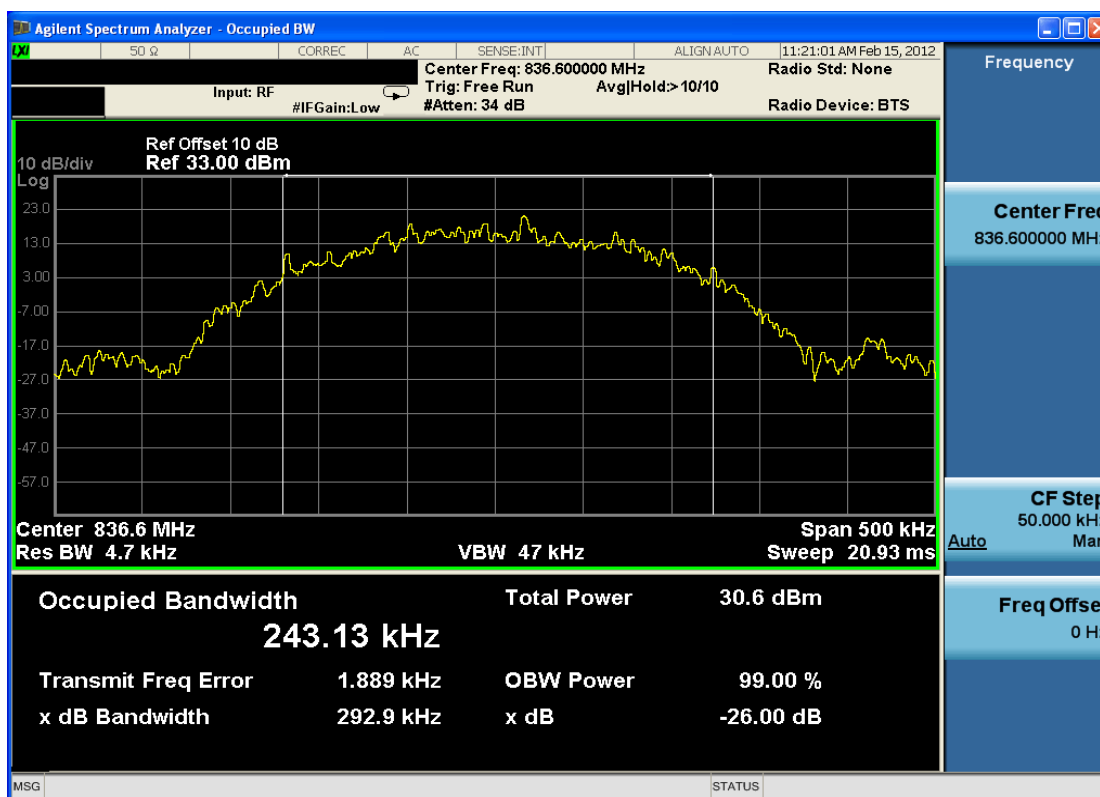


Plot 7-10. Occupied Bandwidth Plot (EDGE850 Mode – Ch. 190)

FCC ID: A3LSWDSC05D	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 35 of 48

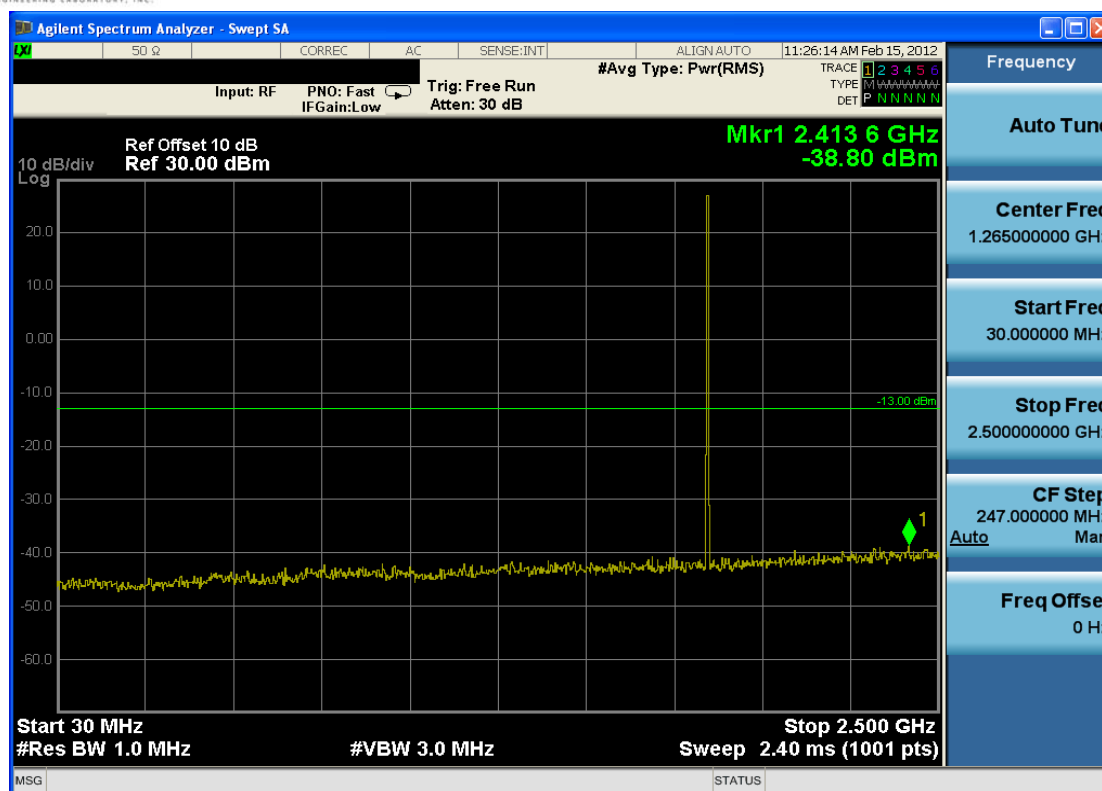


Plot 7-11. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

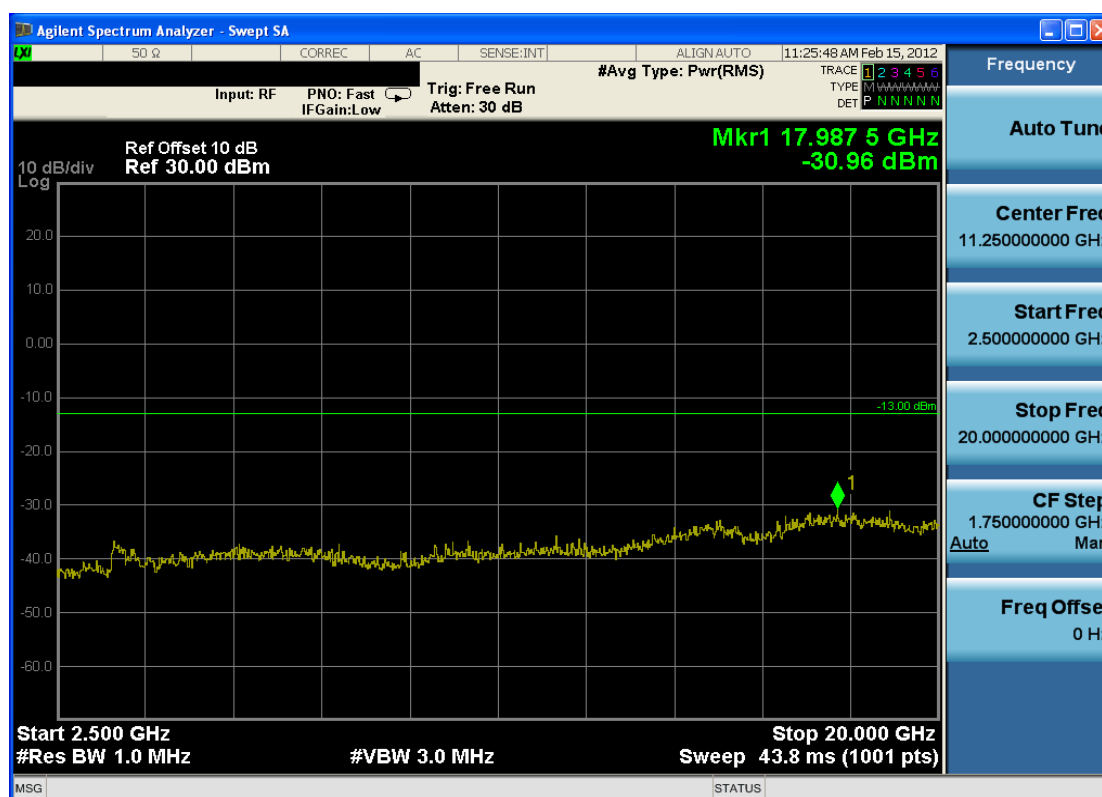


Plot 7-12. Conducted Spurious Plot (PCS GSM Mode – Ch. 512)

FCC ID: A3LSWDSC05D	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 36 of 48

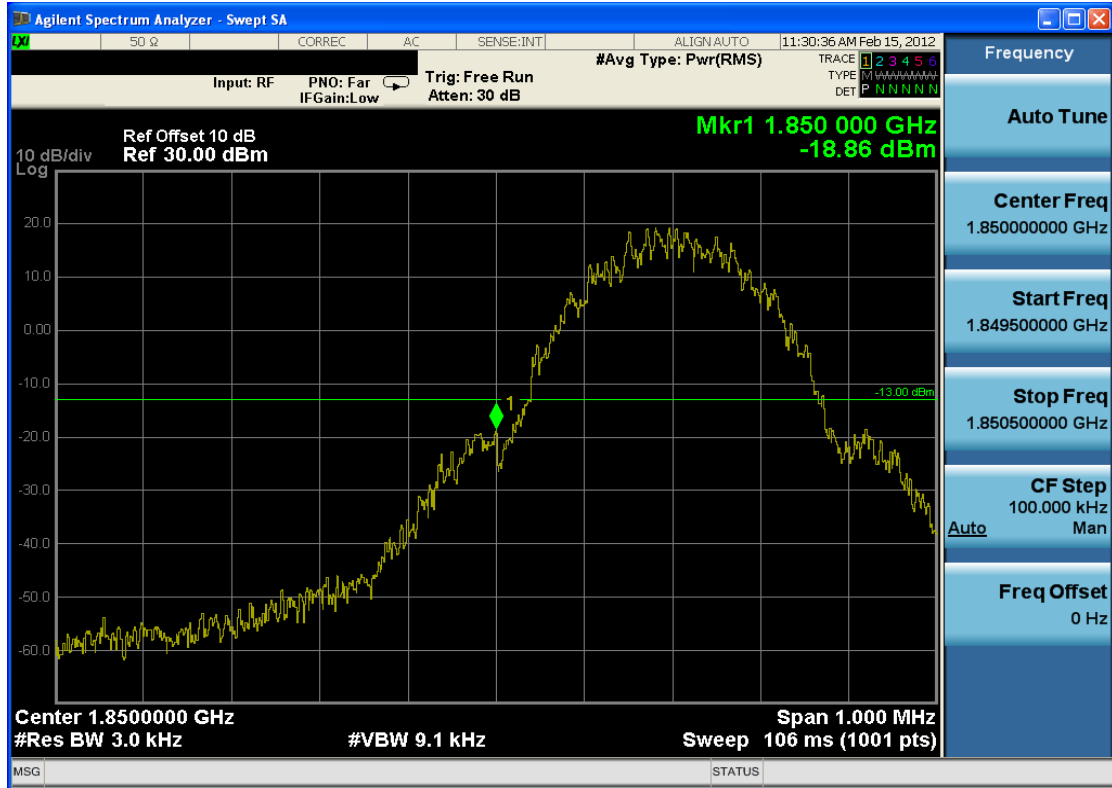


Plot 7-13. Band Edge Plot (PCS GSM Mode – Ch. 512)

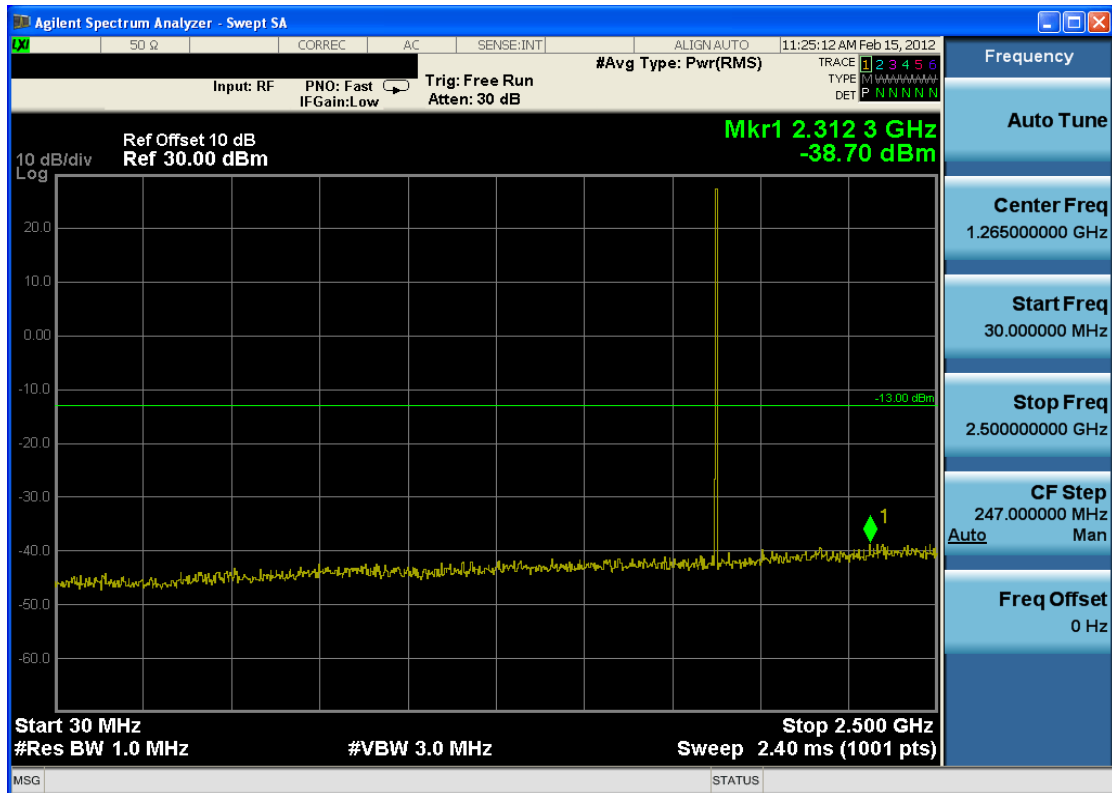


Plot 7-14. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 37 of 48

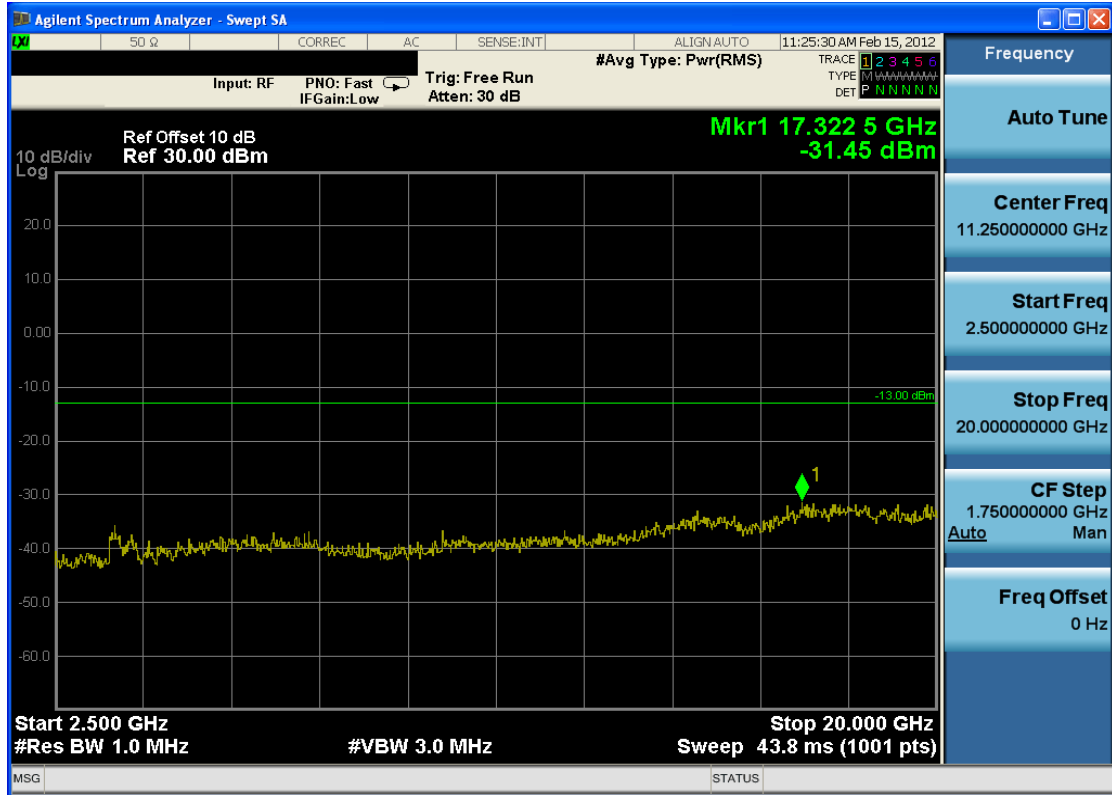


Plot 7-15. Conducted Spurious Plot (PCS GSM Mode – Ch. 661)

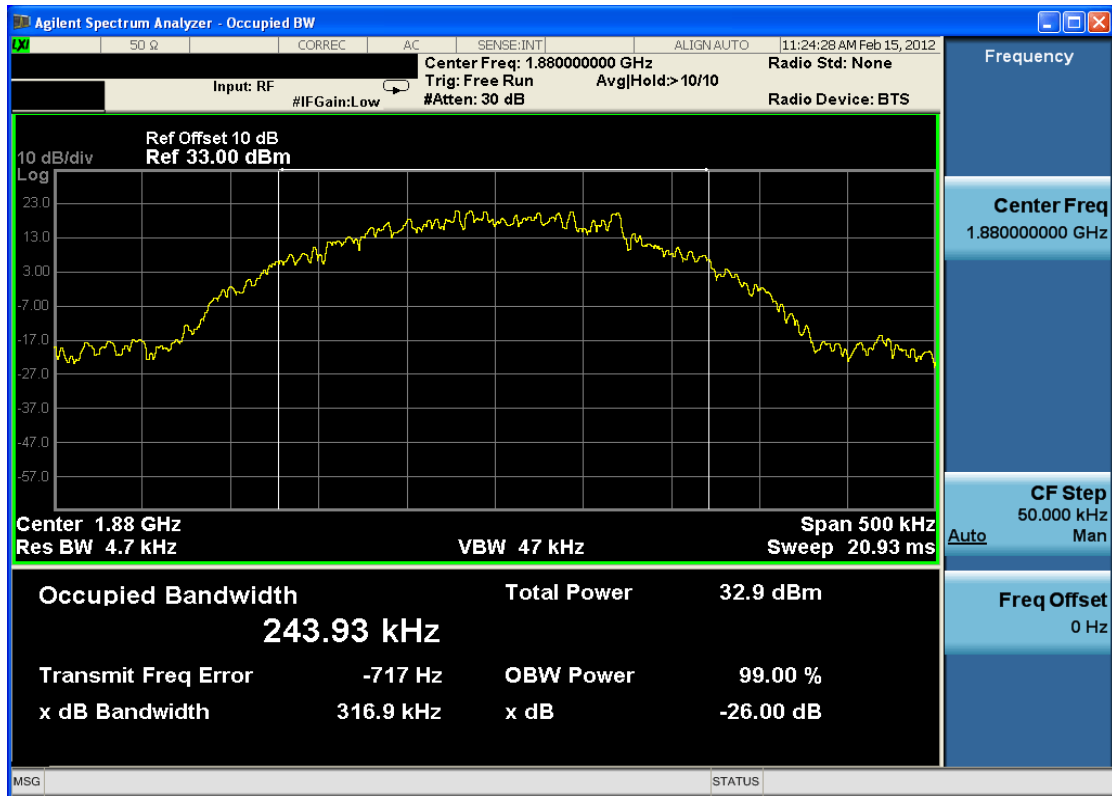


Plot 7-16. Occupied Bandwidth Plot (PCS GSM Mode – Ch. 661)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 38 of 48

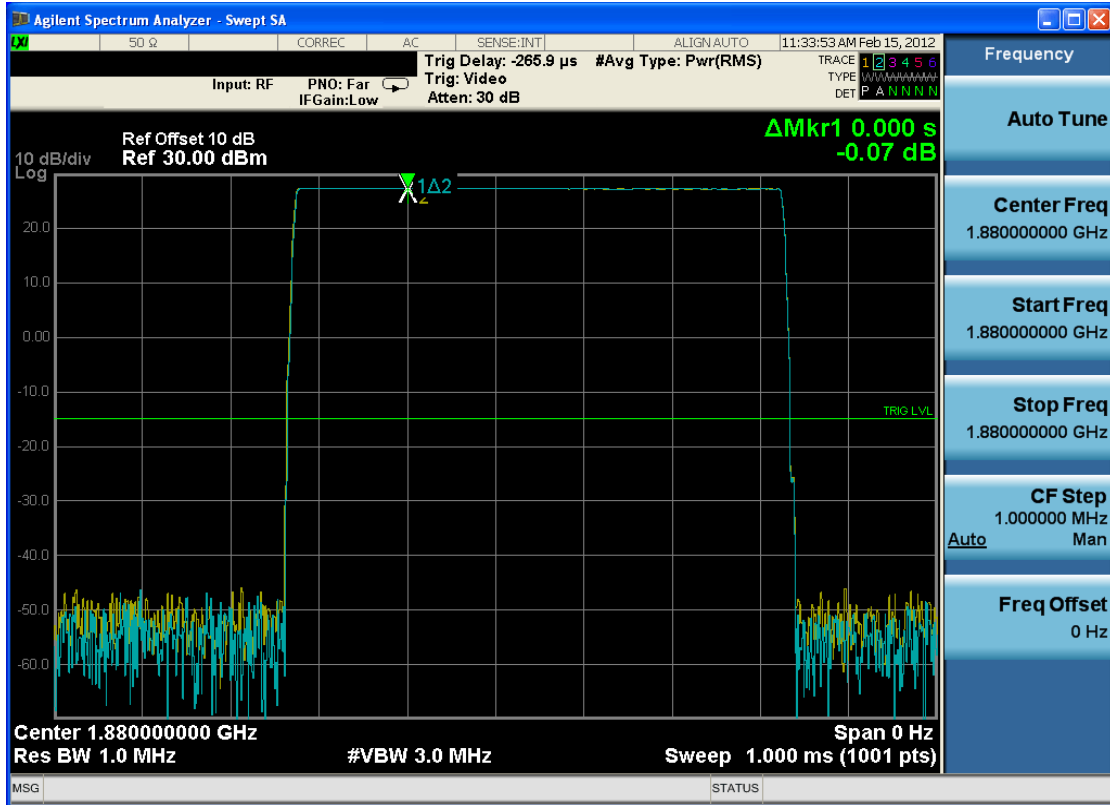


Plot 7-17. Peak-Average Ratio Plot (PCS GSM Mode – Ch. 661)

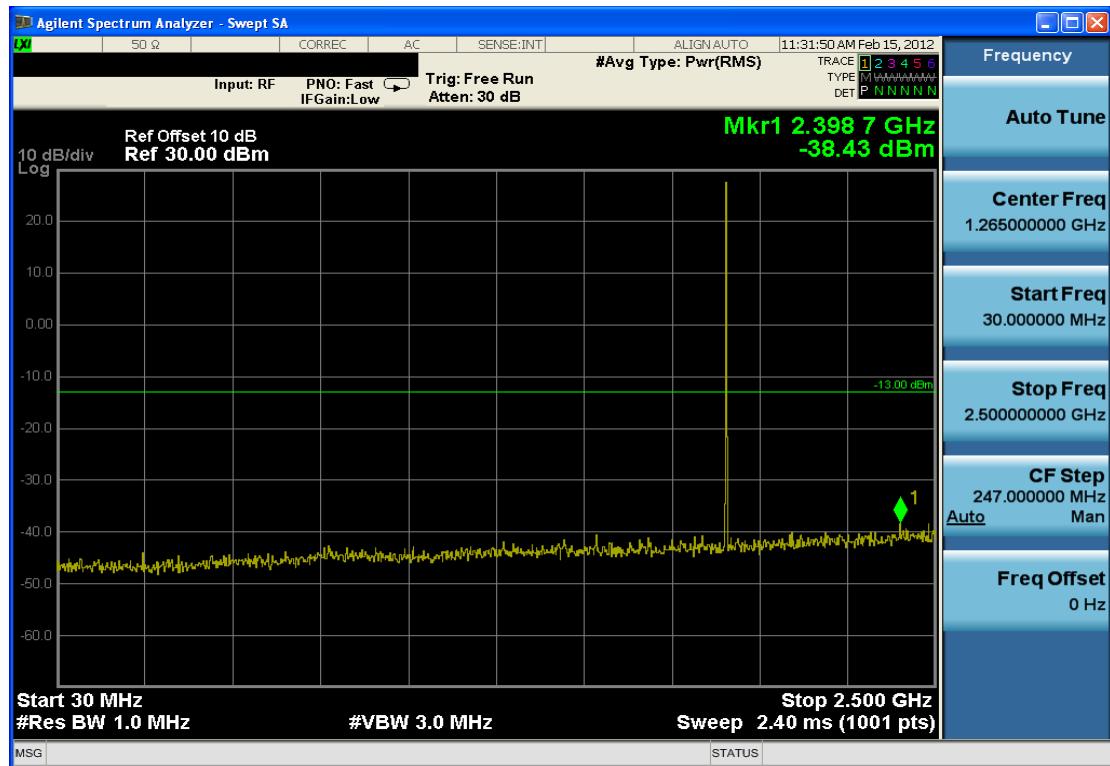


Plot 7-18. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 39 of 48

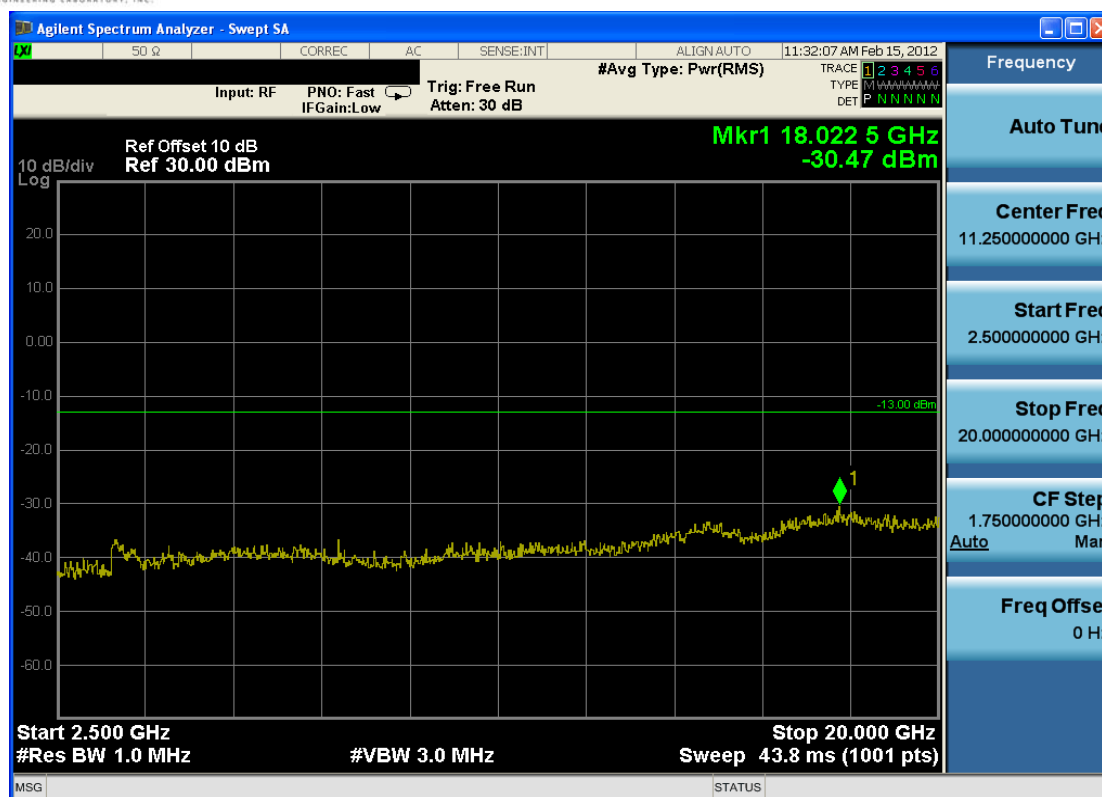


Plot 7-19. Conducted Spurious Plot (PCS GSM Mode – Ch. 810)

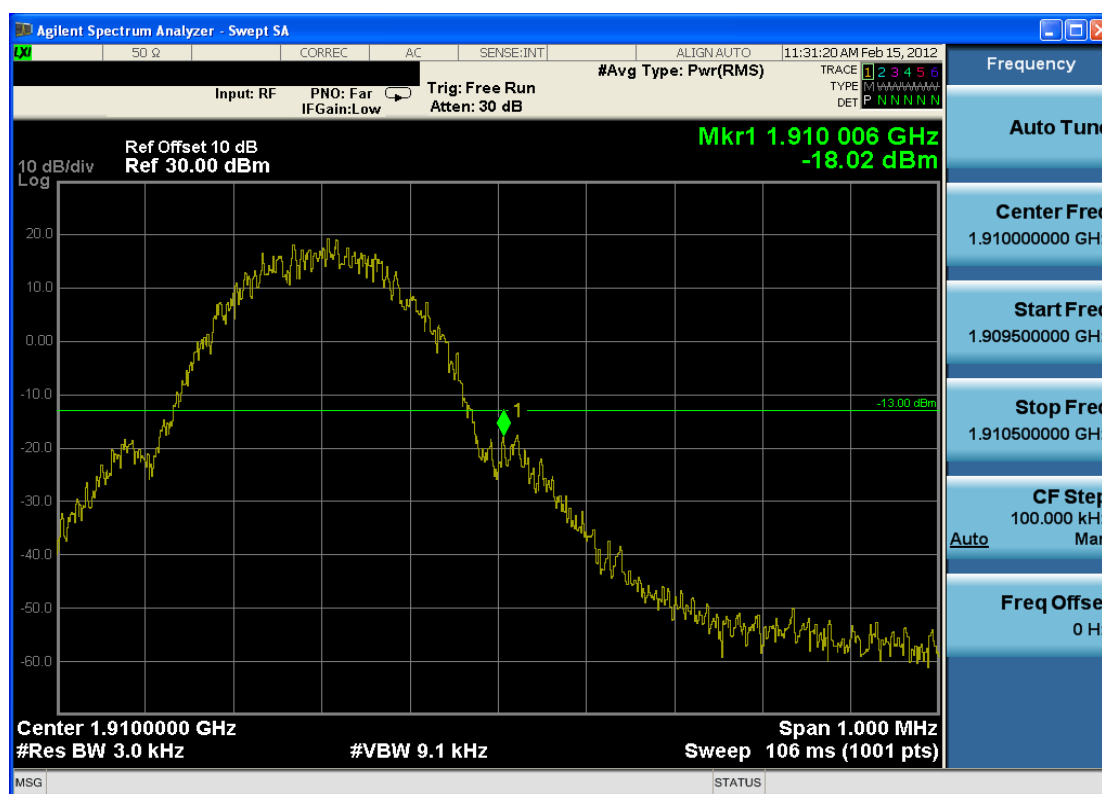


Plot 7-20. Band Edge Plot (PCS GSM Mode – Ch. 810)

FCC ID: A3LSWDSC05D	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 40 of 48

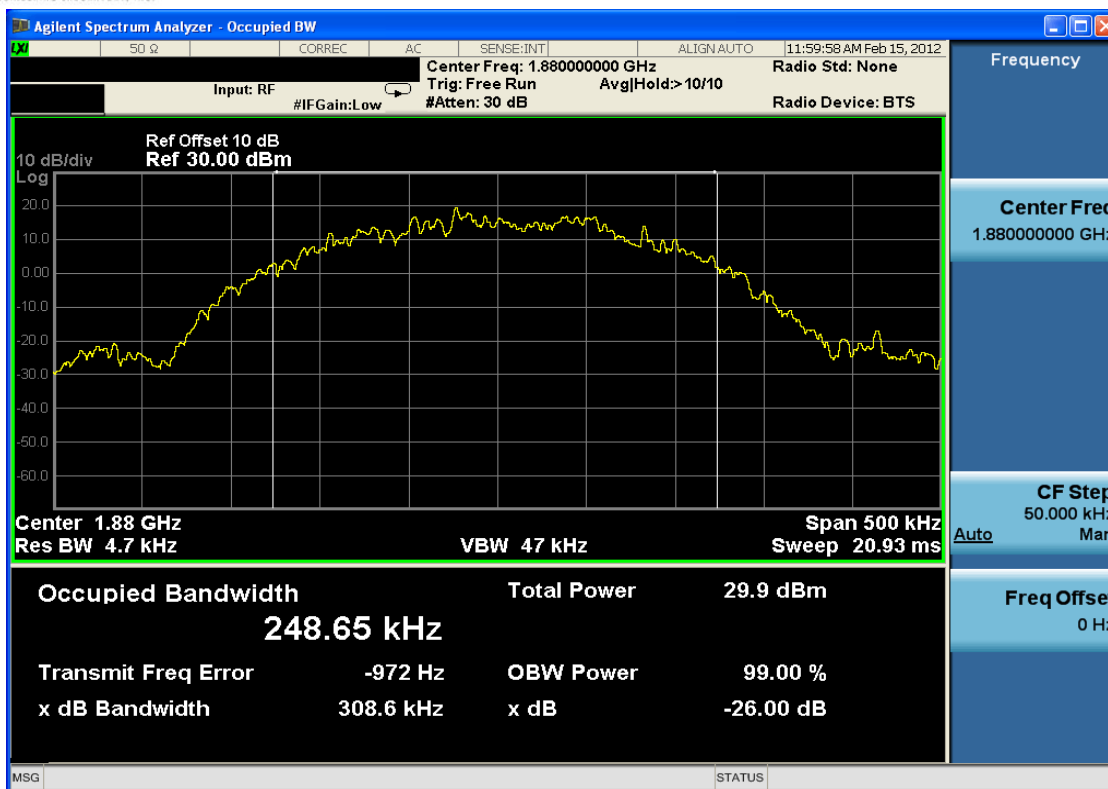


Plot 7-21. Occupied Bandwidth Plot (EDGE1900 Mode – Ch. 661)

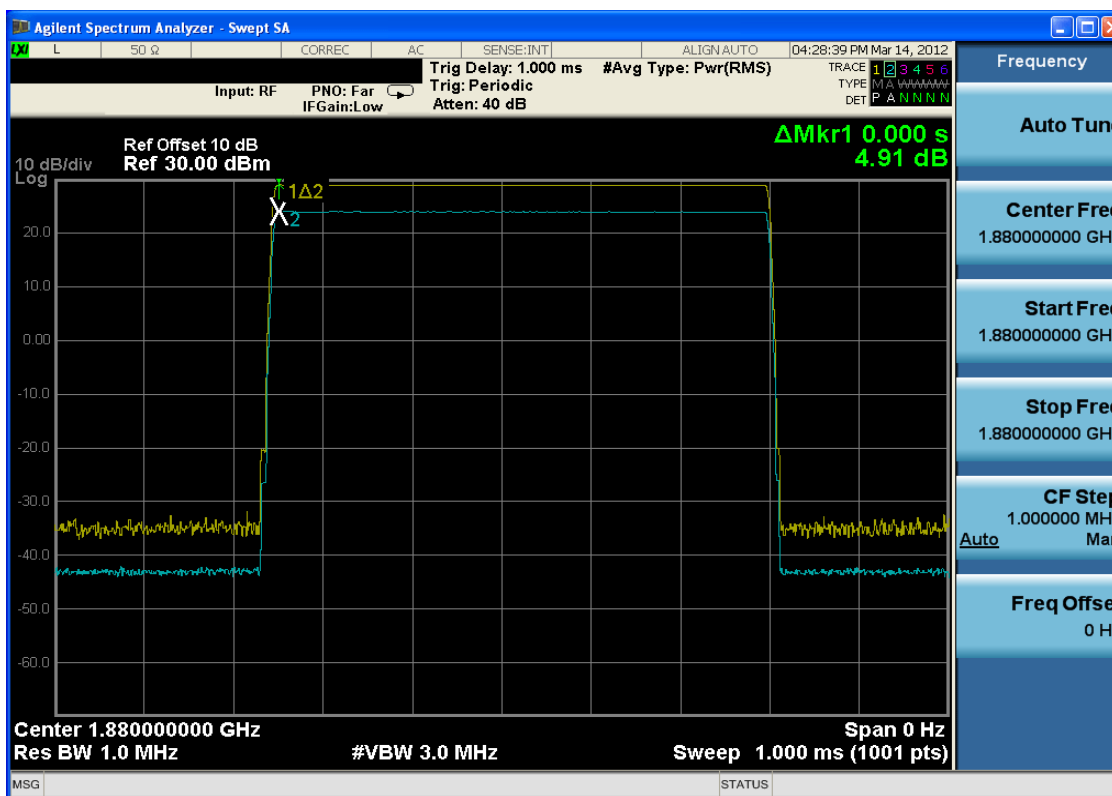


Plot 7-22. Peak-Average Ratio Plot (EDGE1900 Mode – Ch. 661)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 41 of 48

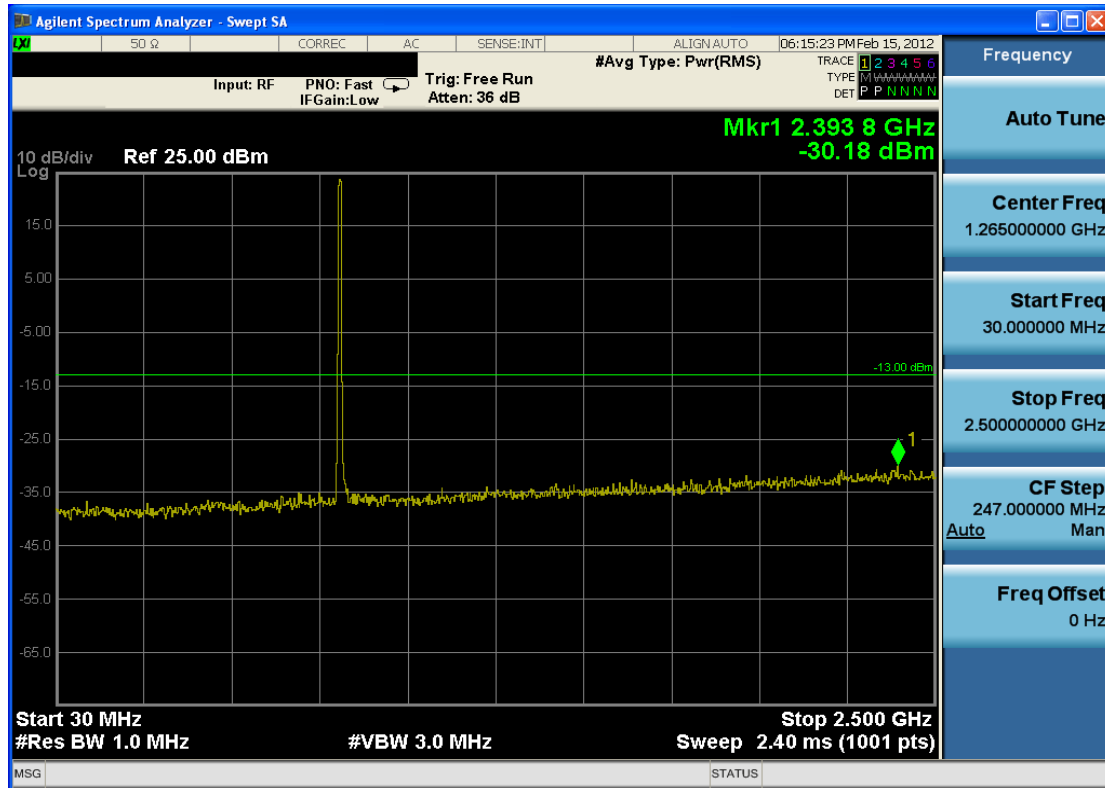


Plot 7-23. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

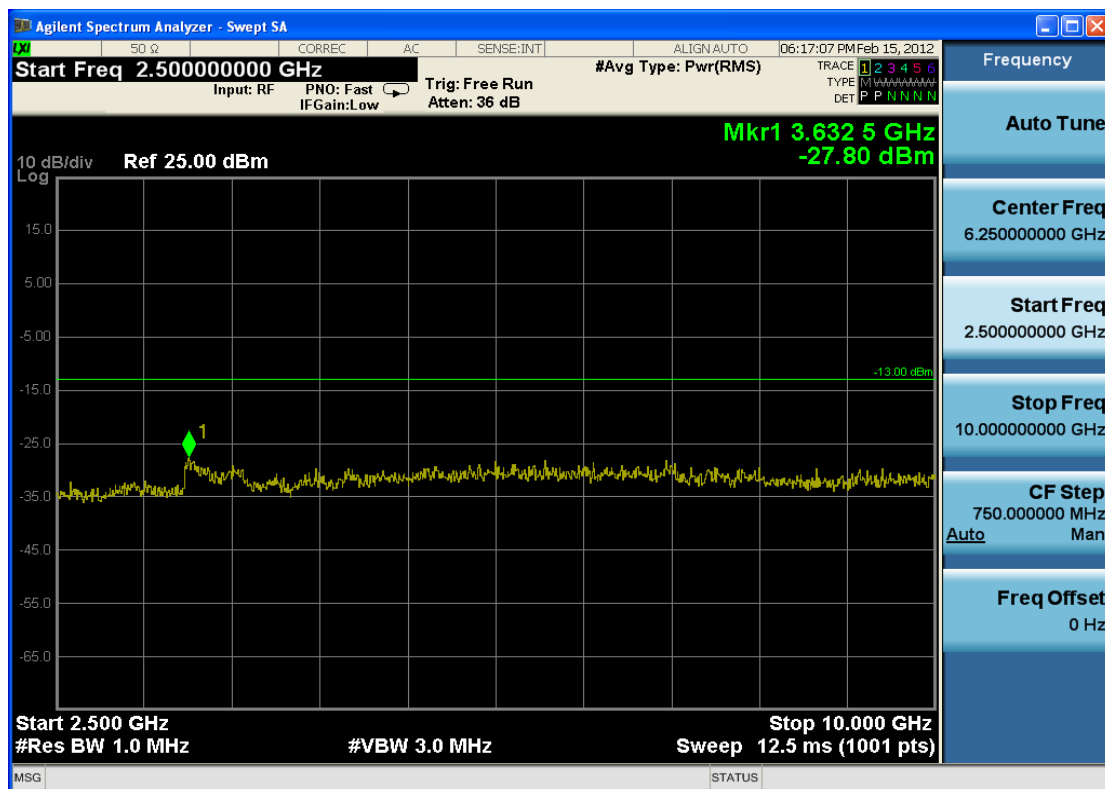


Plot 7-24. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A3LSWDSC05D	 FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset	Page 42 of 48

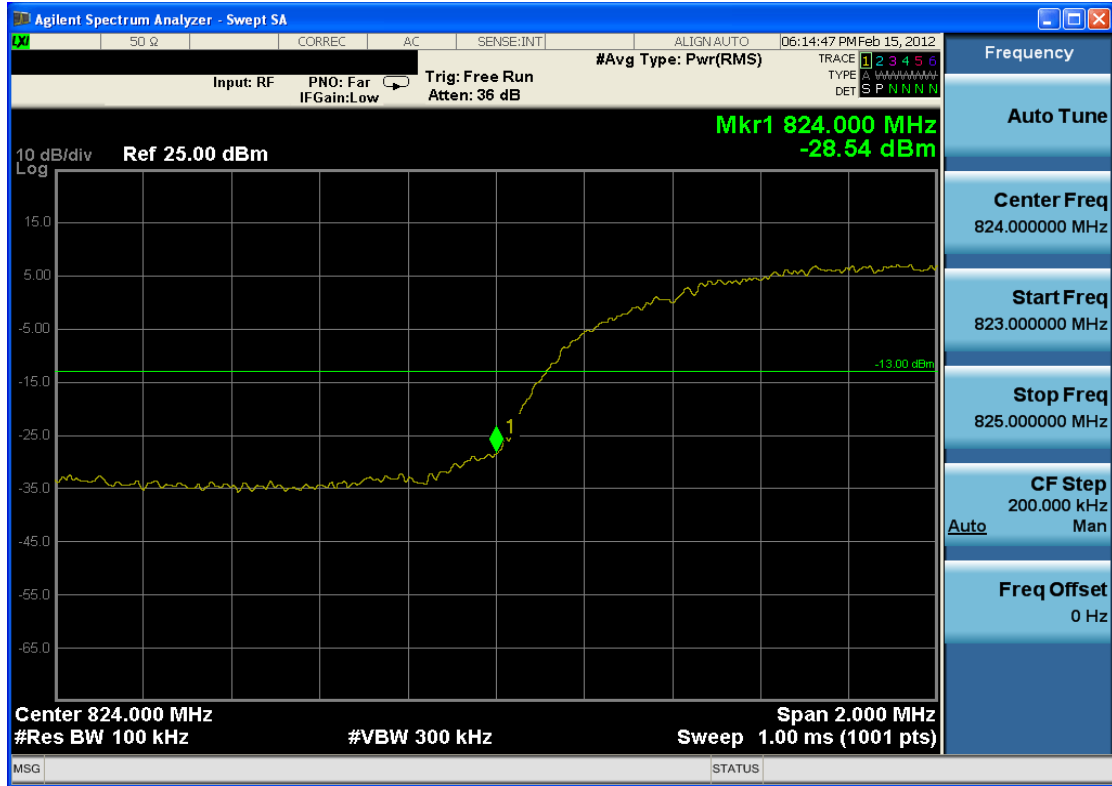


Plot 7-25. Band Edge Plot (Cellular WCDMA Mode – Ch. 4132)

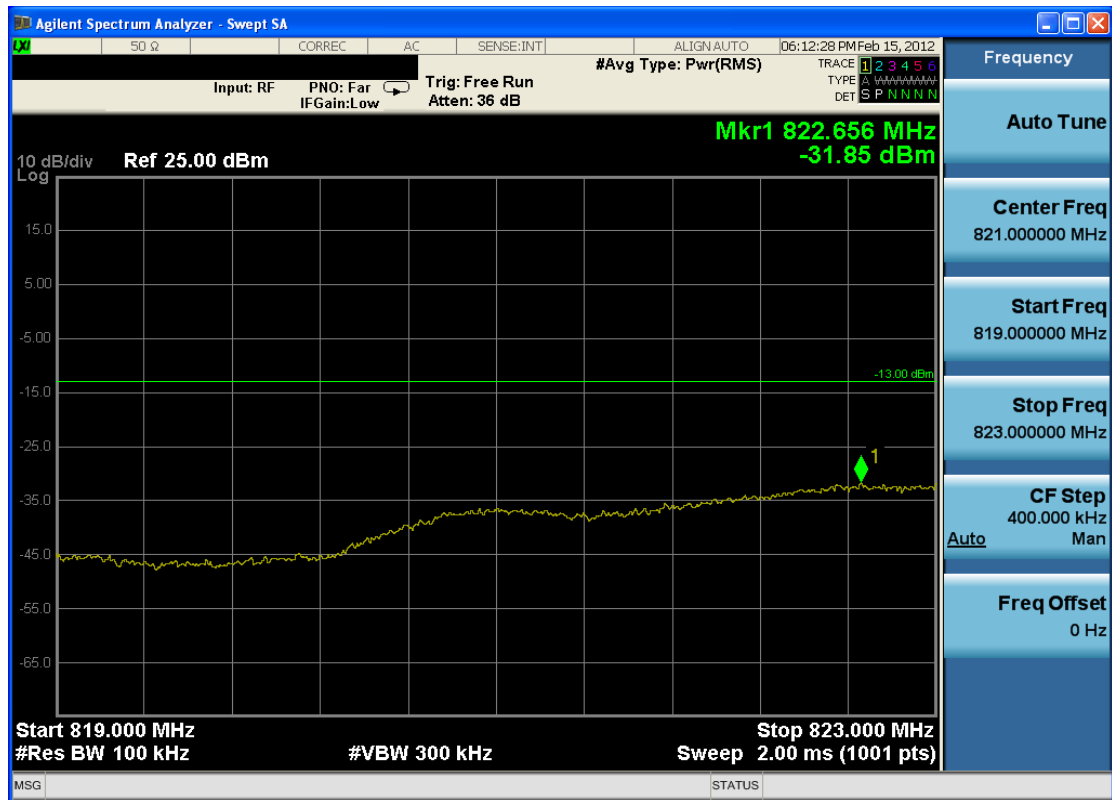


Plot 7-26. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4132)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 43 of 48

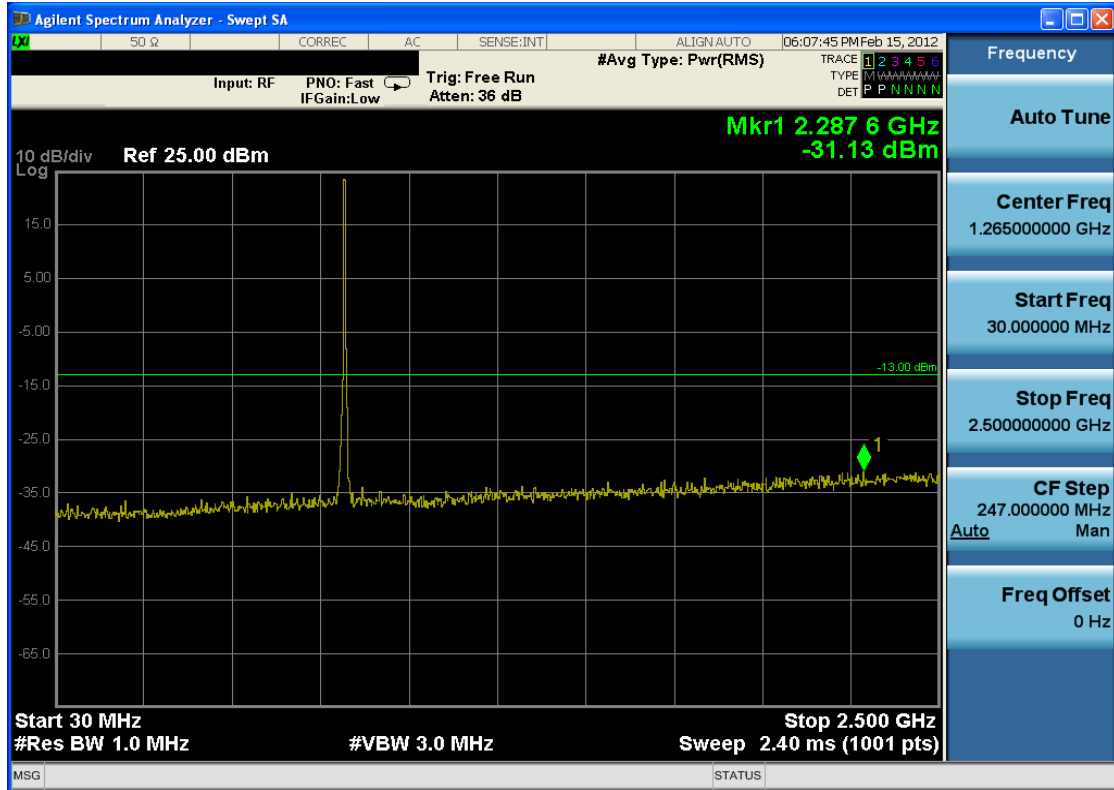


Plot 7-27. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

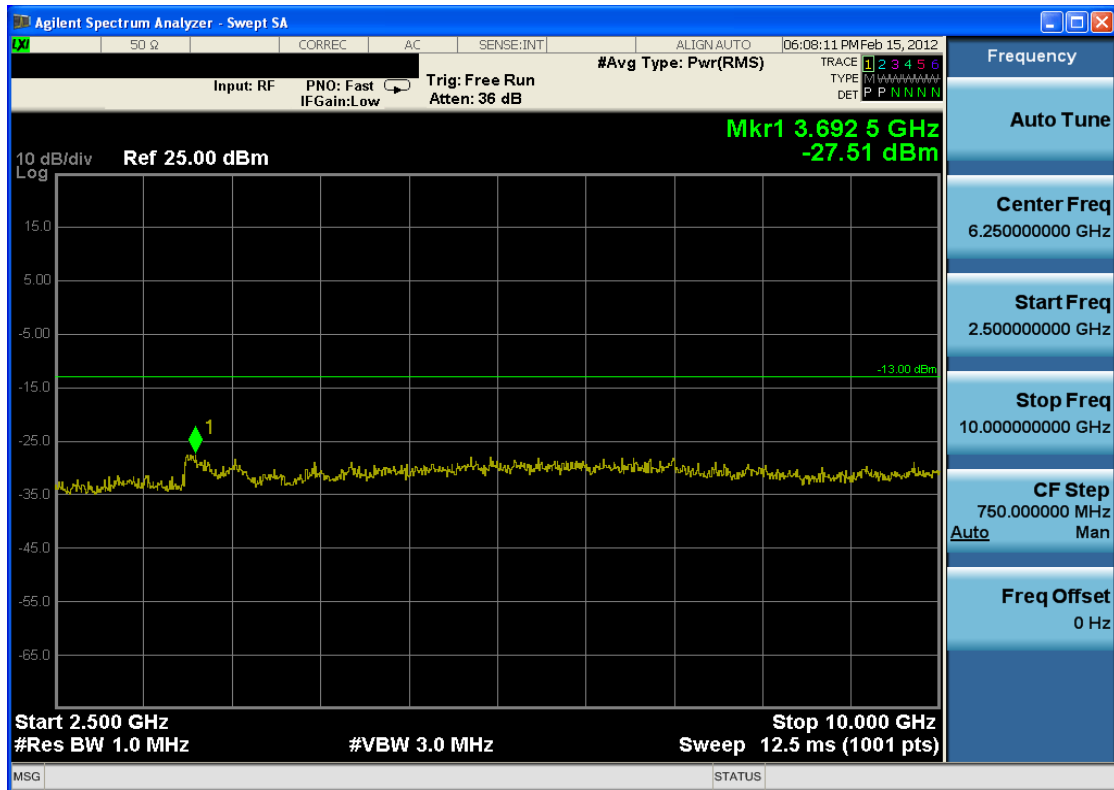


Plot 7-28. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4183)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 44 of 48

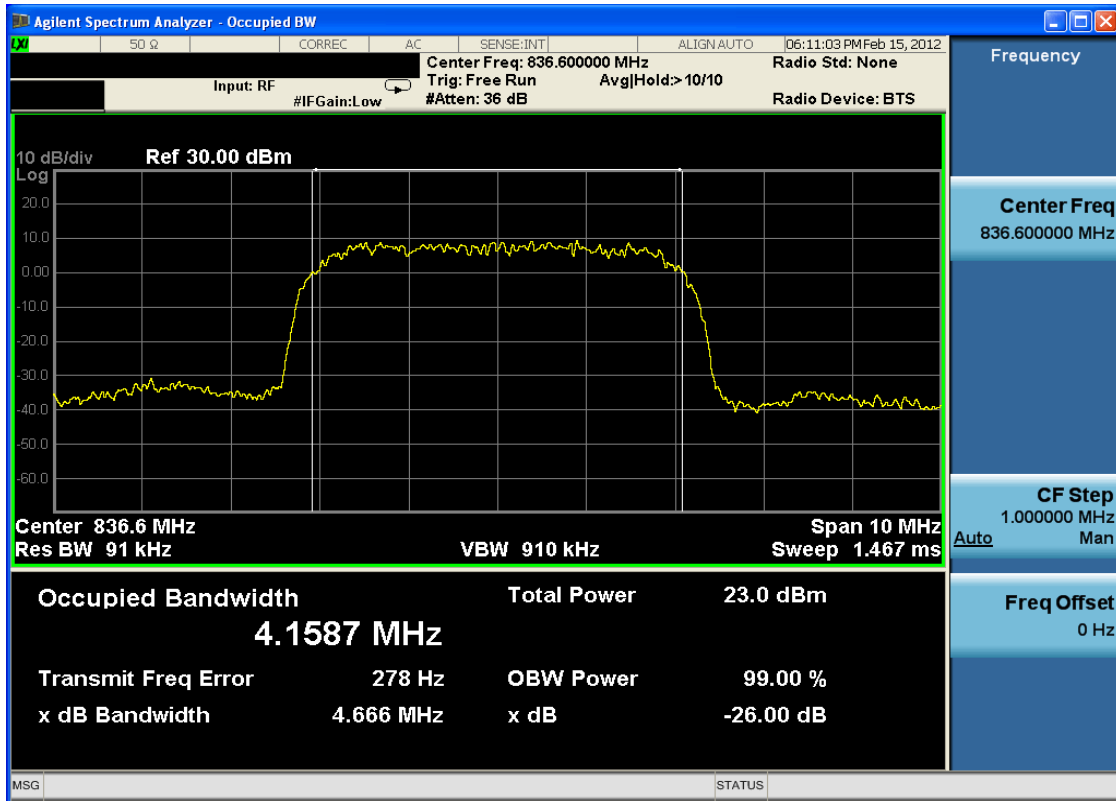


Plot 7-29. Occupied Bandwidth Plot (Cellular WCDMA Mode – Ch. 4183)

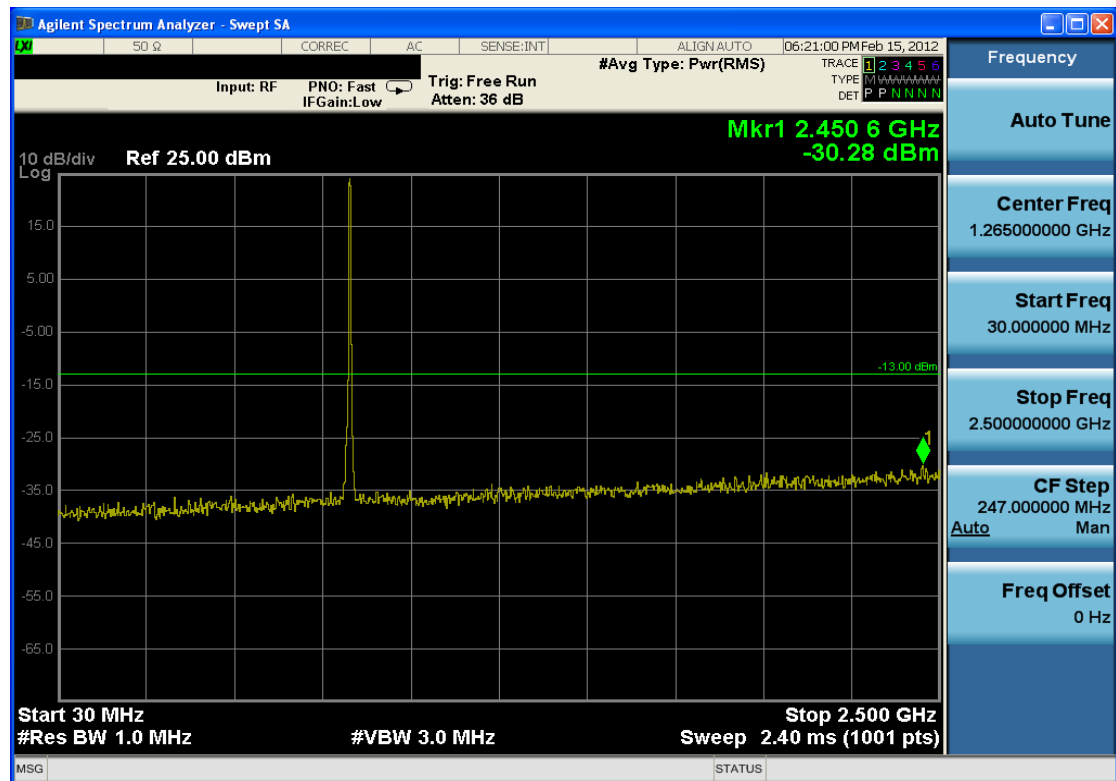


Plot 7-30. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 45 of 48

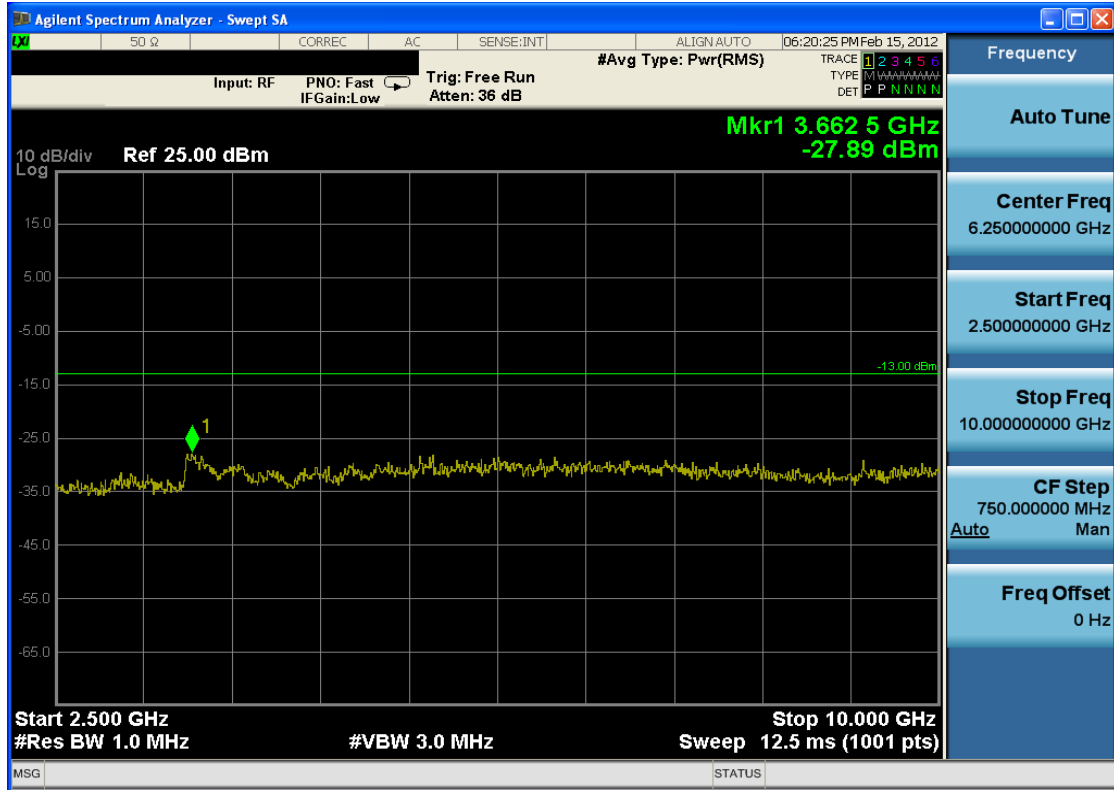


Plot 7-31. Conducted Spurious Plot (Cellular WCDMA Mode – Ch. 4233)

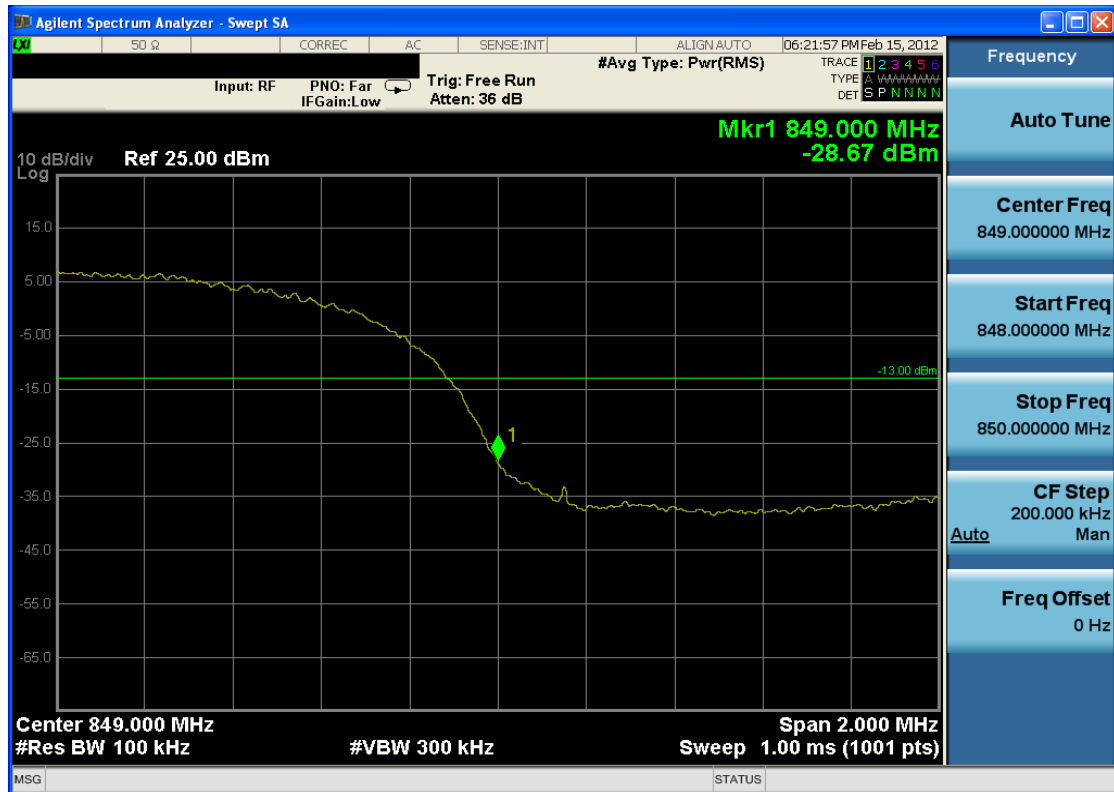

Plot 7-32. Band Edge Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 46 of 48

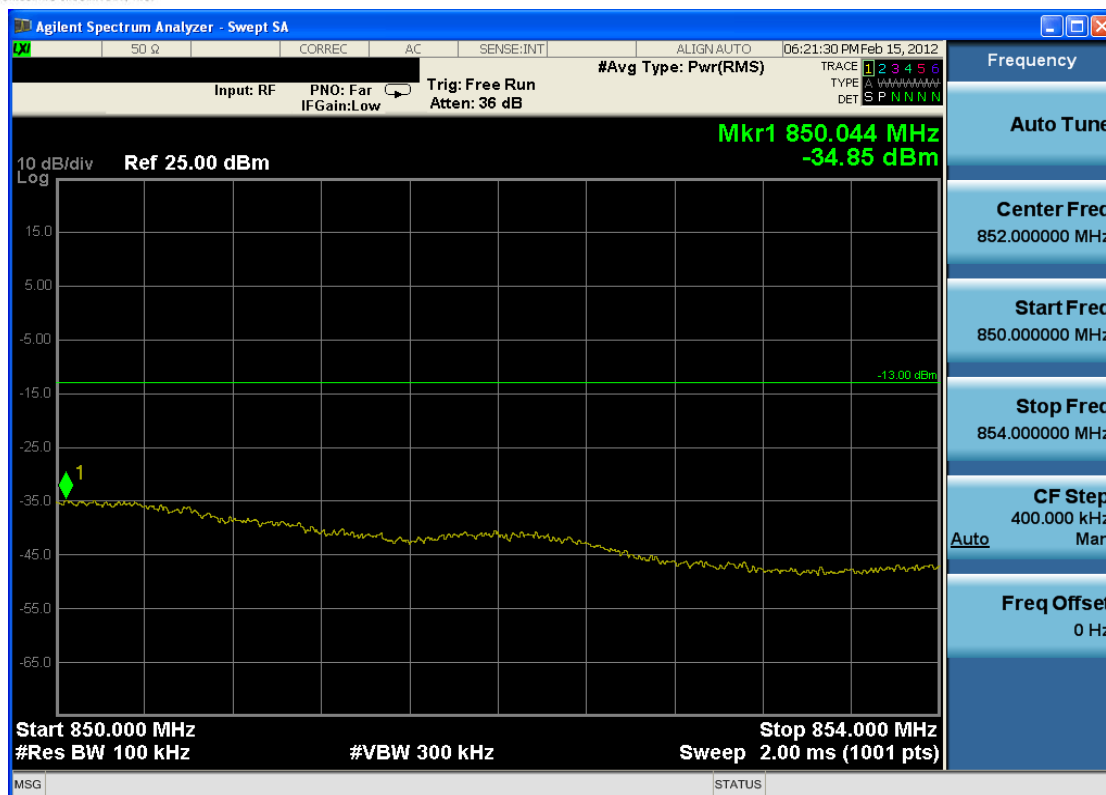

Plot 7-33. 4MHz Span Plot (Cellular WCDMA Mode – Ch. 4233)

FCC ID: A3LSWDSC05D	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 47 of 48

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSWDSC05D** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules and RSS-132 and RSS-133 of the Industry Canada rules.

FCC ID: A3LSWDSC05D		FCC Pt. 22/24 GSM/EDGE/WCDMA MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1202090175.A3L	Test Dates: Feb. 15 - Mar. 14, 2012	EUT Type: Portable Handset		Page 48 of 48