

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-21O-RWD-036

Reception No. : 2110004558

Applicant : Samsung Electronics Co Ltd

Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States

Manufacturer : Samsung Electronics Co Ltd

Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do 16677, Korea

Type of Equipment : Wi-Fi/BT Transceiver

FCC ID. : A3LWCB731M

Model Name : WCB731M

Multiple Model Name : WCB730M, WCB737M, WCB736M

Serial number : N/A

Total page of Report : 105 pages (including this page)

Date of Incoming : October 07, 2021


Date of issue : October 25, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Youngyong Kim/ Assistant Manager
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

Page

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY	7
2.6 TEST FACILITY	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	13
4. EUT MODIFICATIONS	13
5. SYSTEM TEST CONFIGURATION.....	14
5.1 JUSTIFICATION	14
5.2 PERIPHERAL EQUIPMENT	14
5.3 MODE OF OPERATION DURING THE TEST	14
5.4 CONFIGURATION OF TEST SYSTEM	17
5.5 ANTENNA REQUIREMENT	17
6. PRELIMINARY TEST.....	17
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	17
6.2 GENERAL RADIATED EMISSIONS TESTS	17
7. MINIMUM 20 dB BANDWIDTH.....	18
7.1 OPERATING ENVIRONMENT	18
7.2 TEST SET-UP	18
7.3 TEST DATE	18
7.4 TEST DATA FOR 1 MBPS	19
7.5 TEST DATA FOR 2 MBPS	21
7.6 TEST DATA FOR 3 MBPS	23
8. HOPPING FREQUENCY SEPARATION	25
8.1 OPERATING ENVIRONMENT	25
8.2 TEST SET-UP	25

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

8.3 TEST DATE	25
8.4 TEST DATA FOR 1 MBPS	26
8.5 TEST DATA FOR 2 MBPS	27
8.6 TEST DATA FOR 3 MBPS	28
9. NUMBER OF HOPPING CHANNELS	29
9.1 OPERATING ENVIRONMENT	29
9.2 TEST SET-UP	29
9.3 TEST DATE	29
9.4 TEST DATA FOR 1 MBPS	30
9.5 TEST DATA FOR 2 MBPS	33
9.6 TEST DATA FOR 3 MBPS	36
10. TIME OF OCCUPANCY	39
10.1 OPERATING ENVIRONMENT	39
10.2 TEST SET-UP	39
10.3 TEST DATE.....	39
10.4 TEST DATA FOR 1 MBPS	40
10.5 TEST DATA FOR 2 MBPS	42
10.6 TEST DATA FOR 3 MBPS	44
11. MAXIMUM PEAK OUTPUT POWER.....	46
11.1 OPERATING ENVIRONMENT	46
11.2 TEST SET-UP	46
11.3 TEST DATE.....	46
11.4 TEST DATA FOR 1 MBPS	47
11.5 TEST DATA FOR 2 MBPS	49
11.6 TEST DATA FOR 3 MBPS	51
12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND	53
12.1 OPERATING ENVIRONMENT	53
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	53
12.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	53
12.4 TEST DATE.....	53
12.5 TEST DATA FOR CONDUCTED EMISSION	54
12.5.1 Test data for 1 Mbps.....	54
12.5.2 Test data for 2 Mbps.....	60
12.5.3 Test data for 3 Mbps.....	66
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION	72

12.6.1 Radiated Emission which fall in the Restricted Band	72
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz.....	75
13. RADIATED EMISSION TEST	78
13.1 OPERATING ENVIRONMENT	78
13.2 TEST SET-UP	78
13.3 TEST DATE.....	78
13.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	79
13.4.1 Test data for the Basic model (WCB731M)	79
13.4.2 Test data for the Multiple model (WCB730M)	81
13.4.3 Test data for the Multiple model (WCB737M)	83
13.4.4 Test data for the Multiple model (WCB736M)	85
13.5 TEST DATA FOR BELOW 30 MHz.....	87
13.6 TEST DATA FOR ABOVE 1 GHz	87
14. CONDUCTED EMISSION TEST	88
14.1 OPERATING ENVIRONMENT	88
14.2 TEST SET-UP	88
14.3 TEST DATE.....	88
14.4 TEST DATA FOR THE BASIC MODEL (WCB731M)	89
14.4.1 Test data for Bluetooth.....	89
14.4.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz).....	91
14.5 TEST DATA FOR THE MULTIPLE MODEL (WCB730M).....	93
14.5.1 Test data for Bluetooth.....	93
14.5.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz).....	95
14.6 TEST DATA FOR THE MULTIPLE MODEL (WCB737M).....	97
14.6.1 Test data for Bluetooth.....	97
14.6.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz).....	99
14.7 TEST DATA FOR THE MULTIPLE MODEL (WCB736M).....	101
14.7.1 Test data for Bluetooth.....	101
14.7.2 Test data for Intermodulation Mode(Bluetooth + WLAN 2.4 GHz + WLAN 5 GHz).....	103
15. LIST OF TEST EQUIPMENT	105

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-21O-RWD-036	October 25, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronics Co Ltd
 Address : 19 Chapin Rd., Building D, Pine Brook, New Jersey, 07058, United States
 Contact Person : Jenni Chun / General Manager
 Telephone No. : 973-808-6375
 FCC ID : A3LWCB731M
 Model Name : WCB731M
 Brand Name : 
 Serial Number : N/A
 Date : October 25, 2021

EQUIPMENT CLASS	DSS – PART 15 SPREAD SPECTRUM TRANSMITTER
E.U.T. DESCRIPTION	Modular Transmitter, Wi-Fi/BT Transceiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The Samsung Electronics Co Ltd, Model WCB731M (referred to as the EUT in this report) is a Wi-Fi/BT Transceiver. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Wi-Fi/BT Transceiver	
Temperature Range	-20 °C ~ 50 °C	
OPERATING FREQUENCY	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	Bluetooth	2 402 MHz ~ 2 480 MHz
	WLAN 2.4 GHz	2 412 MHz ~ 2 472 MHz (802.11b/g/n(HT20))
		2 422 MHz ~ 2 462 MHz (802.11n(HT40))
	WLAN 5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
		5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
		5 210 MHz (802.11ac(VHT80))
	WLAN 5 250 MHz ~ 5 350 MHz Band	5 260 MHz ~ 5 320 MHz (802.11a/n(HT20)/ac(VHT20))
		5 270 MHz ~ 5 310 MHz (802.11n(HT40)/ac(VHT40))
		5 290 MHz (802.11ac(VHT80))
	WLAN 5 470 MHz ~ 5 725 MHz Band	5 500 MHz ~ 5 720 MHz (802.11a/n(HT20)/ac(VHT20))
		5 510 MHz ~ 5 710 MHz (802.11n(HT40)/ac(VHT40))
		5 530 MHz ~ 5 690 MHz (802.11ac(VHT80))
	WLAN 5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
		5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
		5 775 MHz (802.11ac(VHT80))
MODULATION TYPE	Bluetooth LE	GFSK for 1 Mbps / 2 Mbps
	Bluetooth	GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8-DPSK for 3Mbps
	WLAN 2.4 GHz	802.11b: DSSS Modulation(DBPSK/DQPSK/CCK)
		802.11g/n(HT20)/n(HT40): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	WLAN 5 GHz	802.11a/n(HT20)/n(HT40)/ac(VHT80): OFDM Modulation(BPSK/QPSK/16QAM/64QAM)

RF OUTPUT POWER	Bluetooth LE	1 Mbps	11.26 dBm
		2 Mbps	11.25 dBm
	Bluetooth	1 Mbps	11.26 dBm
		2 Mbps	10.89 dBm
		3 Mbps	11.19 dBm
	WLAN 2.4 GHz	Antenna 0	17.30 dBm(802.11b) 11.15 dBm(802.11g) 10.75 dBm(802.11n_HT20) 9.49 dBm(802.11n_HT40)
		Antenna 1	17.32 dBm(802.11b) 14.60 dBm(802.11g) 14.31 dBm(802.11n_HT20) 13.54 dBm(802.11n_HT40)
		Multiple Antenna	16.22 dBm(802.11g) 15.90 dBm(802.11n_HT20) 14.98 dBm(802.11n_HT40)
	WLAN 5 150 MHz ~ 5 250 MHz Band	Antenna 0	8.73 dBm(802.11a) 8.77 dBm(802.11n_HT20) 10.33 dBm(802.11n_HT40) 8.88 dBm(802.11ac_VHT80)
		Antenna 1	9.02 dBm(802.11a) 8.88 dBm(802.11n_HT20) 10.46 dBm(802.11n_HT40) 9.22 dBm(802.11ac_VHT80)
		Multiple Antenna	11.79 dBm(802.11a) 11.69 dBm(802.11n_HT20) 13.27 dBm(802.11n_HT40) 12.06 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 250 MHz ~ 5 350 MHz Band	Antenna 0	9.82 dBm(802.11a) 9.67 dBm(802.11n_HT20) 9.69 dBm(802.11n_HT40) 10.53 dBm(802.11ac_VHT80)
		Antenna 1	9.12 dBm(802.11a) 9.05 dBm(802.11n_HT20) 8.95 dBm(802.11n_HT40) 10.35 dBm(802.11ac_VHT80)
		Multiple Antenna	12.40 dBm(802.11a) 12.27 dBm(802.11n_HT20) 12.35 dBm(802.11n_HT40) 13.45 dBm(802.11ac_VHT80)
	WLAN 5 470 MHz ~ 5 725 MHz Band	Antenna 0	9.83 dBm(802.11a) 9.80 dBm(802.11n_HT20) 10.16 dBm(802.11n_HT40) 10.28 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	8.38 dBm(802.11a) 8.23 dBm(802.11n_HT20) 9.65 dBm(802.11n_HT40) 10.80 dBm(802.11ac_VHT80)
		Antenna 1	10.68 dBm(802.11a) 11.18 dBm(802.11n_HT20) 11.77 dBm(802.11n_HT40) 10.50 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	11.29 dBm(802.11a) 11.07 dBm(802.11n_HT20) 12.29 dBm(802.11n_HT40) 14.30 dBm(802.11ac_VHT80)

RF OUTPUT POWER	WLAN 5 470 MHz ~ 5 725 MHz Band	Multiple Antenna	13.00 dBm(802.11a) 13.47 dBm(802.11n_HT20) 13.89 dBm(802.11n_HT40) 13.40 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	13.08 dBm(802.11a) 12.89 dBm(802.11n_HT20) 14.18 dBm(802.11n_HT40) 15.90 dBm(802.11ac_VHT80)
	WLAN 5 725 MHz ~ 5 850 MHz Band	Antenna 0	8.85 dBm(802.11a) 8.93 dBm(802.11n_HT20) 7.67 dBm(802.11n_HT40) 7.83 dBm(802.11ac_VHT80)
		Antenna 0_Straddle	0.54 dBm(802.11a) 0.90 dBm(802.11n_HT20) -2.66 dBm(802.11n_HT40) -4.53 dBm(802.11ac_VHT80)
		Antenna 1	10.67 dBm(802.11a) 10.78 dBm(802.11n_HT20) 10.94 dBm(802.11n_HT40) 10.77 dBm(802.11ac_VHT80)
		Antenna 1_Straddle	3.53 dBm(802.11a) 3.78 dBm(802.11n_HT20) 0.13 dBm(802.11n_HT40) -0.95 dBm(802.11ac_VHT80)
		Multiple Antenna	12.86 dBm(802.11a) 12.77 dBm(802.11n_HT20) 12.62 dBm(802.11n_HT40) 12.55 dBm(802.11ac_VHT80)
		Multiple Antenna _Straddle	5.30 dBm(802.11a) 5.58 dBm(802.11n_HT20) 1.97 dBm(802.11n_HT40) 0.63 dBm(802.11ac_VHT80)

ANTENNA TYPE	Chip Antenna		
ANTENNA GAIN	Bluetooth LE	-0.44 dBi	
	Bluetooth	-0.44 dBi	
	WLAN 2.4 GHz	Antenna 0	1.54 dBi
		Antenna 1	1.35 dBi
		Multiple Antenna	4.46 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	1.00 dBi
		Antenna 1	1.25 dBi
		Multiple Antenna	4.14 dBi
	5 250 MHz ~ 5 350 MHz Band	Antenna 0	1.53 dBi
		Antenna 1	1.42 dBi
		Multiple Antenna	4.49 dBi
	5 470 MHz ~ 5 725 MHz Band	Antenna 0	1.51 dBi
		Antenna 1	1.50 dBi
		Multiple Antenna	4.52 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	0.86 dBi
		Antenna 1	1.51 dBi
		Multiple Antenna	4.21 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)		40 MHz	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
WCB731M	Basic Model (2 MIC, IRB at the Top)	☒
WCB730M	This model is identical to the basic model except for the removal of MIC.	☒
WCB737M	This model is identical to the basic model except for the IRB at the Bottom	☒
WCB736M	This model is identical to the basic model except for IRB at the Bottom and the removal of MIC	☒

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Samsung Electronics Co Ltd	HDWB-2285 V1.0	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
WCB731M	Samsung Electronics Co Ltd	Wi-Fi/BT Transceiver (EUT)	
HP Probook	HP	Notebook PC	EUT
PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 441MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
39	2 441
78	2 480


-. Duty Cycle


Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth [1 Mbps]	2.88	2.12	57.60	2.40
Bluetooth [2 Mbps]	2.88	2.12	57.60	2.40
Bluetooth [3 Mbps]	2.88	2.12	57.60	2.40

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

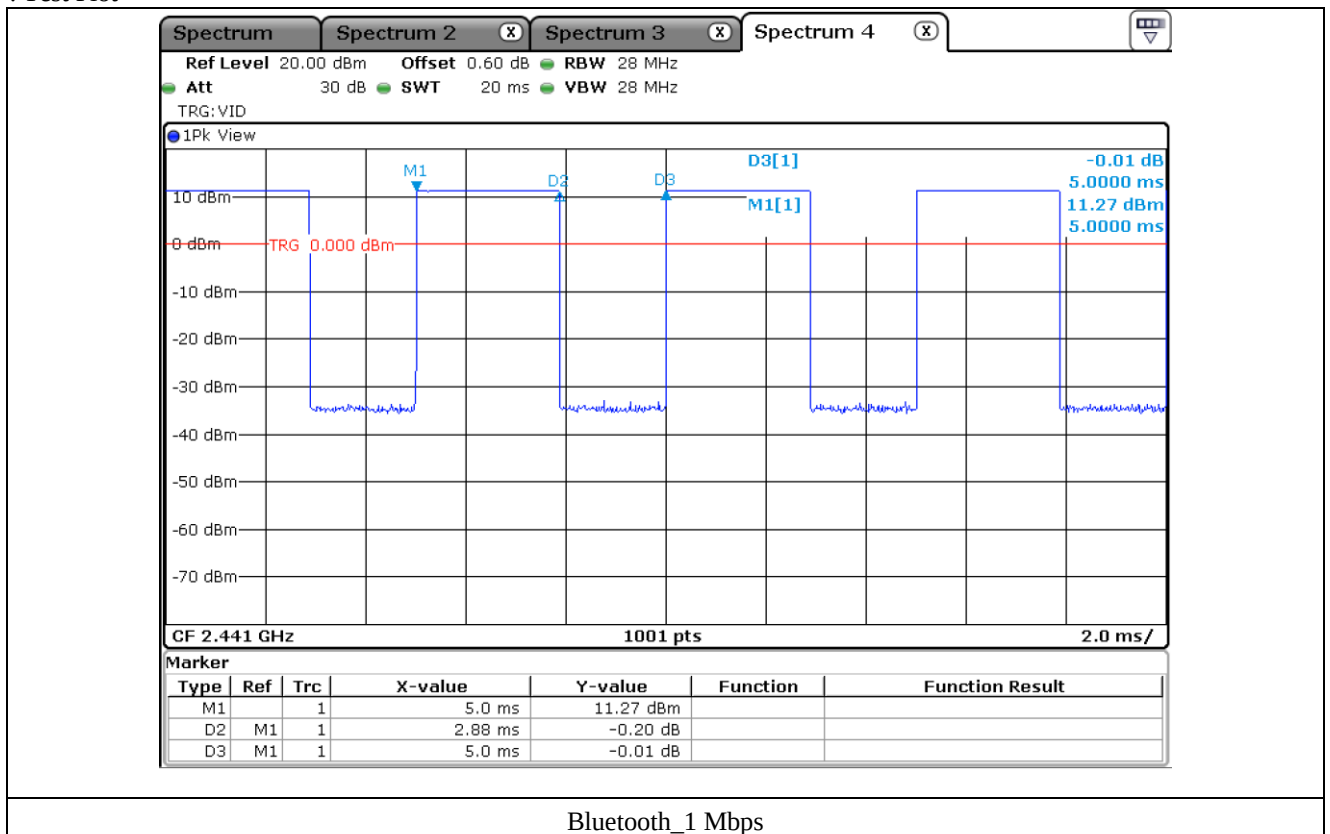

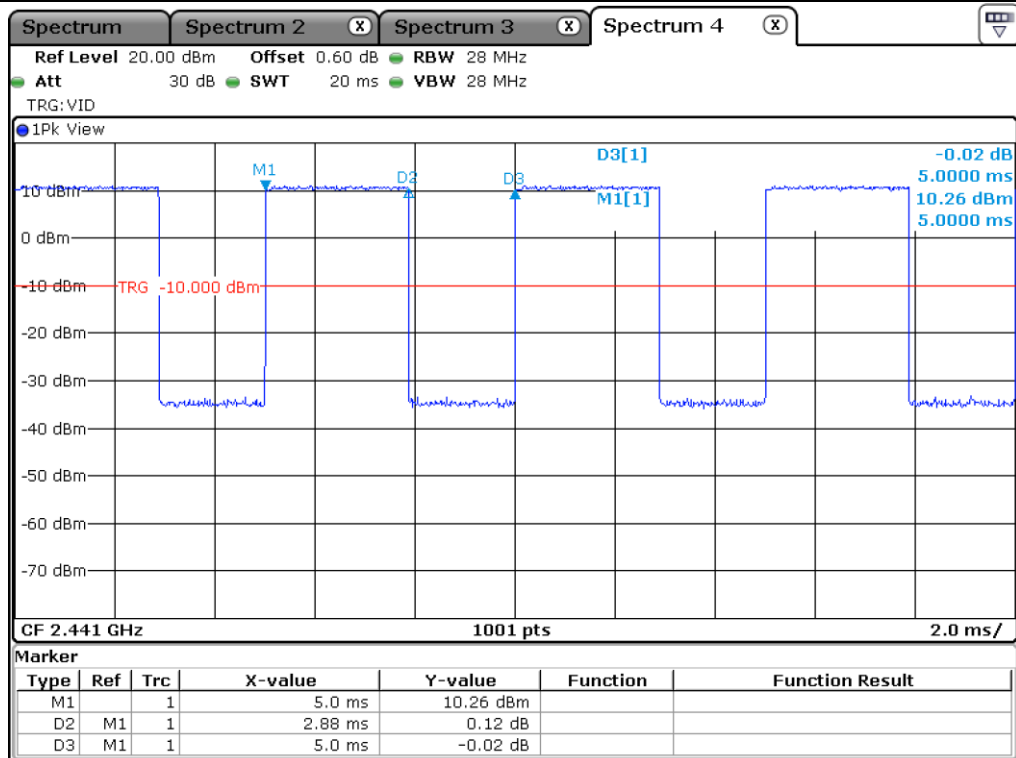

Bluetooth_2 Mbps

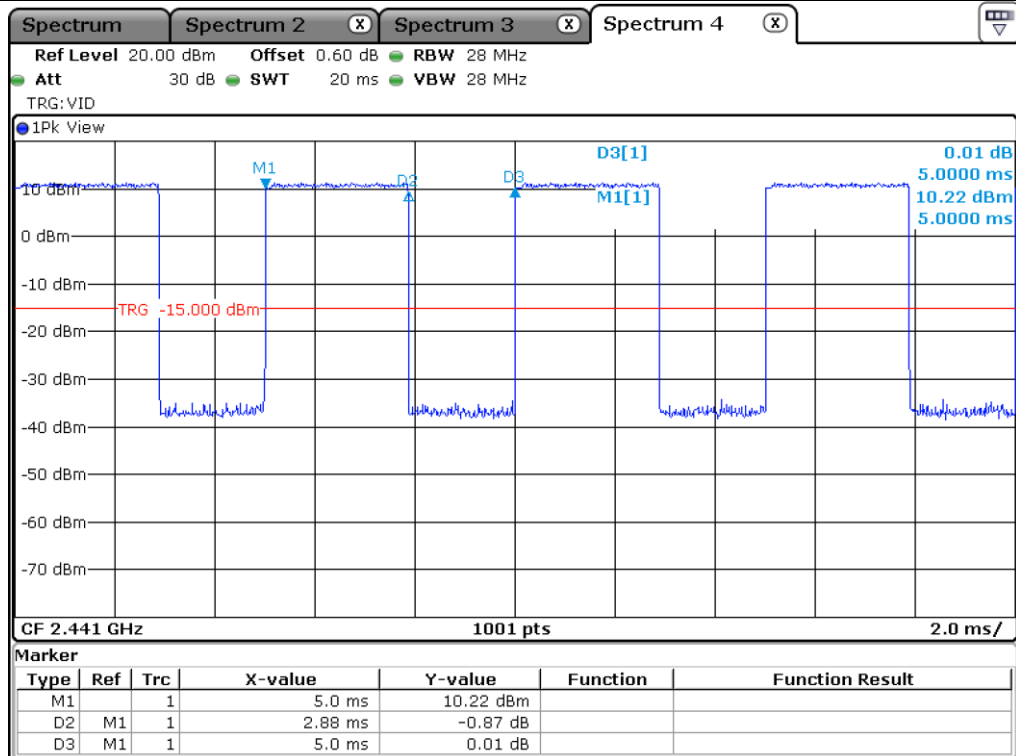

Bluetooth_3 Mbps

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 20 dB BANDWIDTH

7.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 20 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

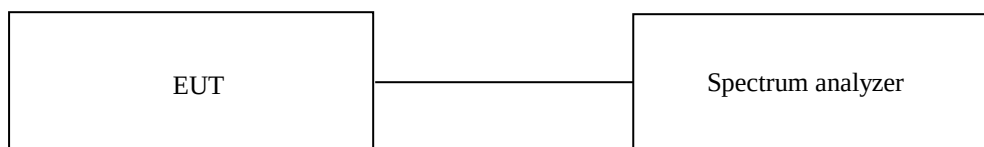


7.3 Test Date


October 07, 2021 ~ October 20, 2021

7.4 Test data for 1 Mbps


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	944.10
Middle	2 441.00	944.10
High	2 480.00	944.10

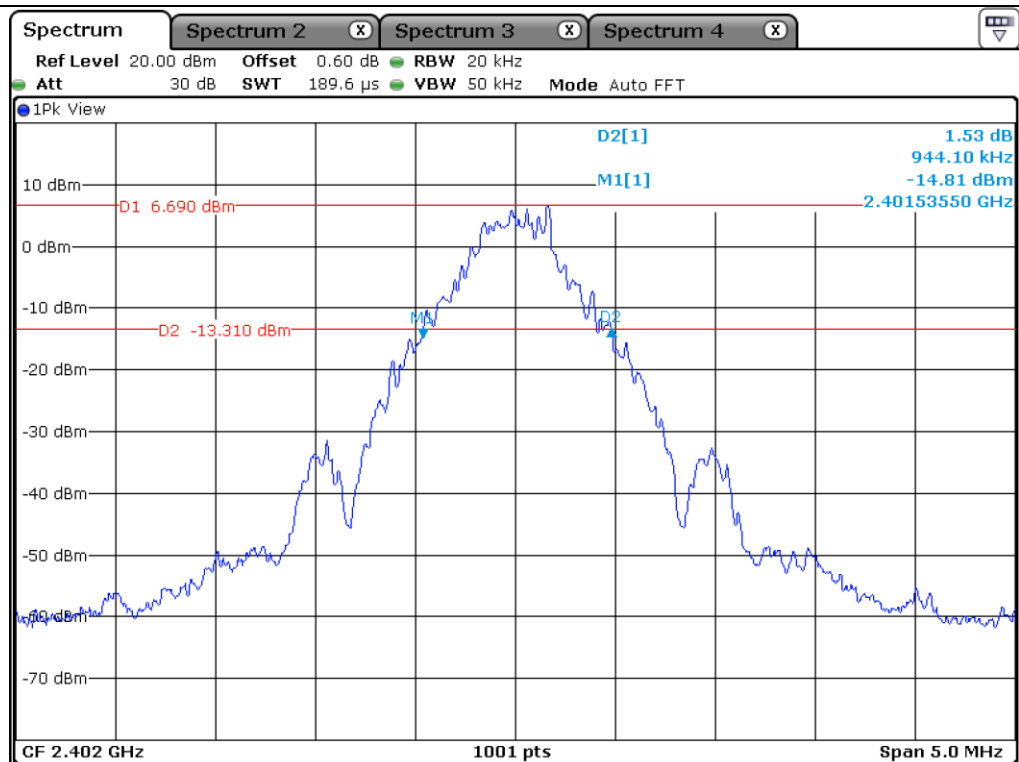

Low Channel

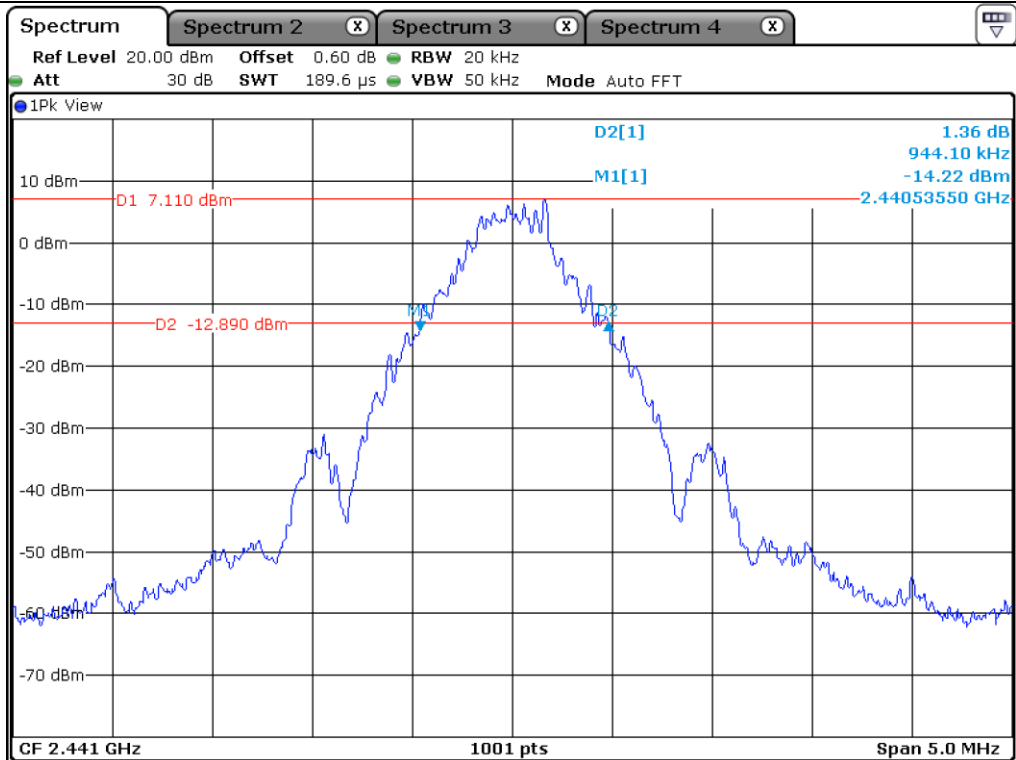

Middle Channel

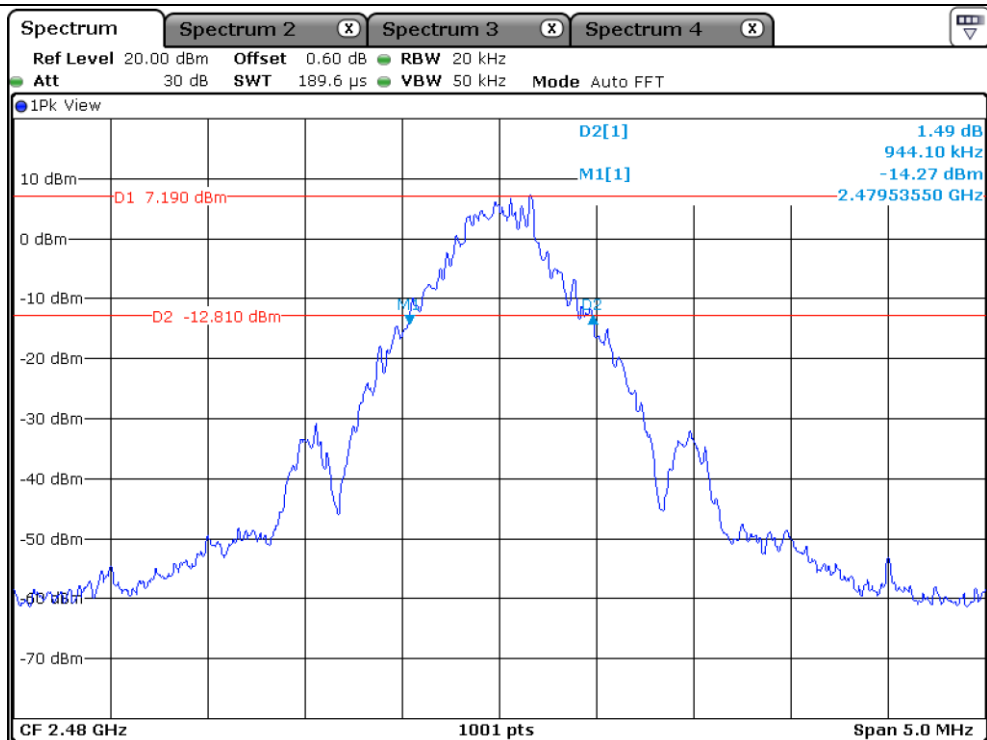

High Channel


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 248.80
Middle	2 441.00	1 253.70
High	2 480.00	1 253.70



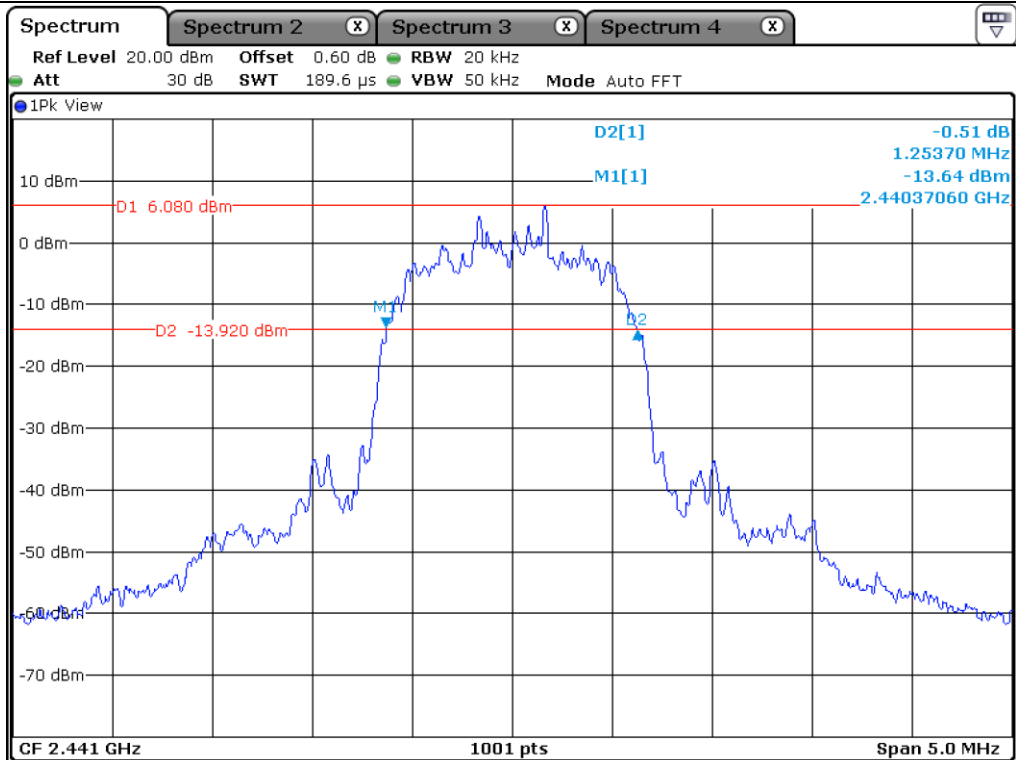

Middle Channel

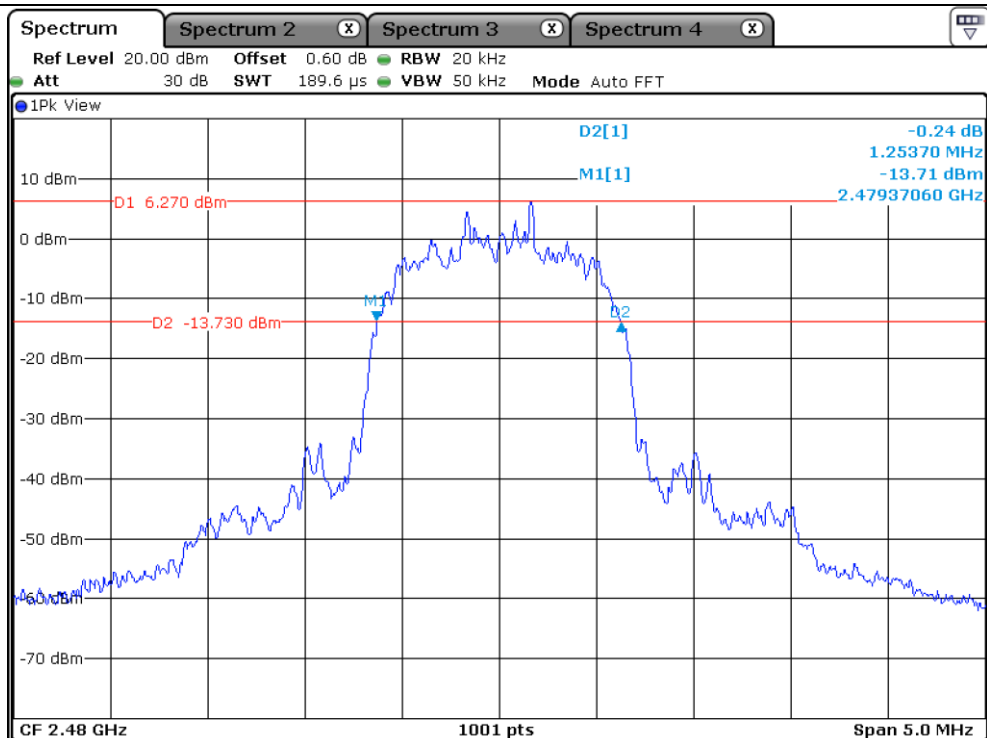

High Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)


7.6 Test data for 3 Mbps

CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402.00	1 253.70
Middle	2 441.00	1 253.70
High	2 480.00	1 253.70

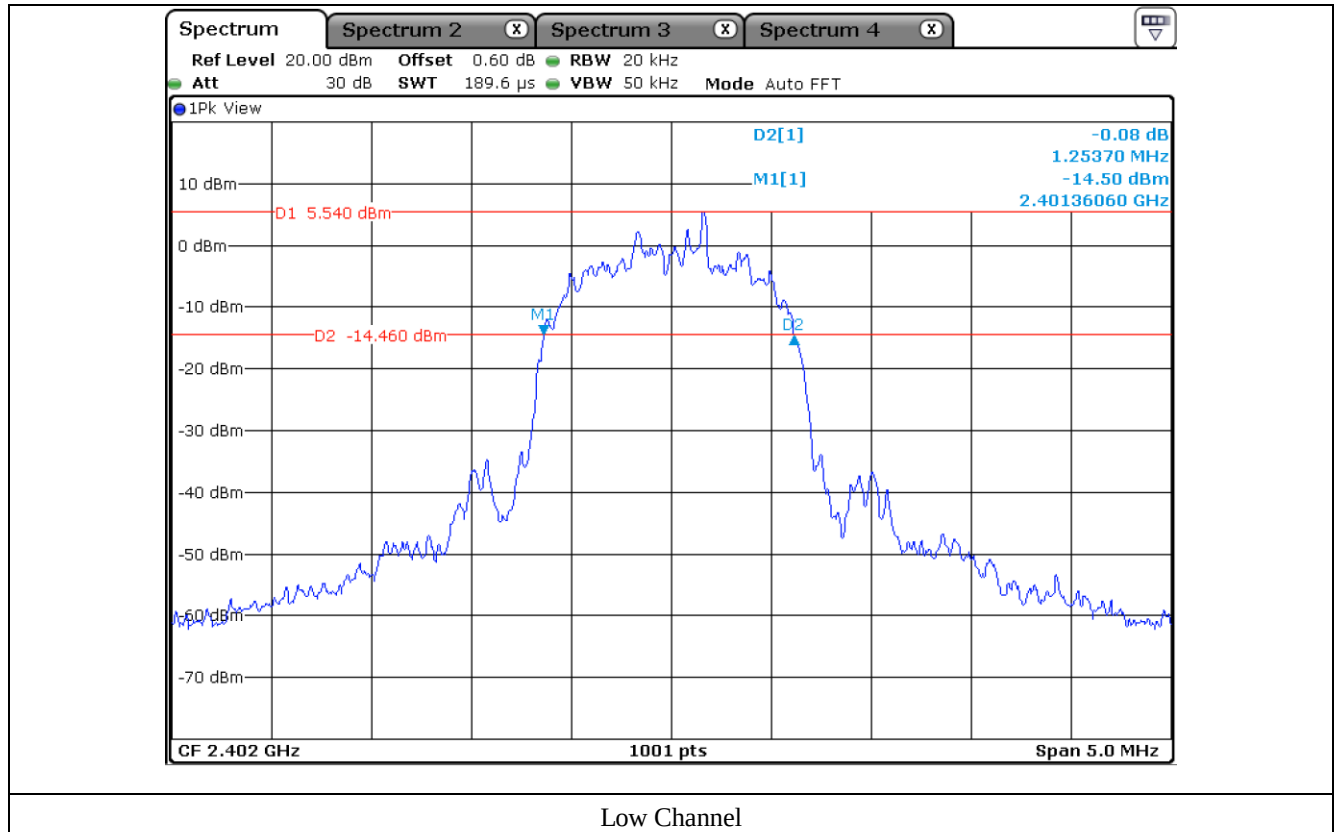

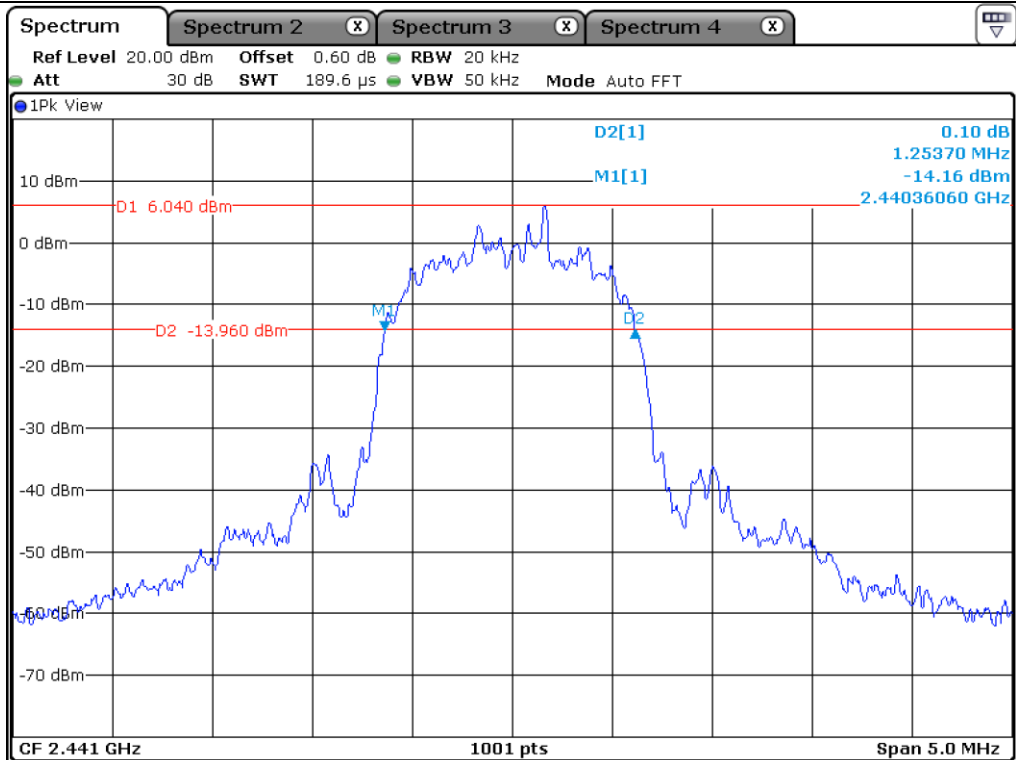

Middle Channel

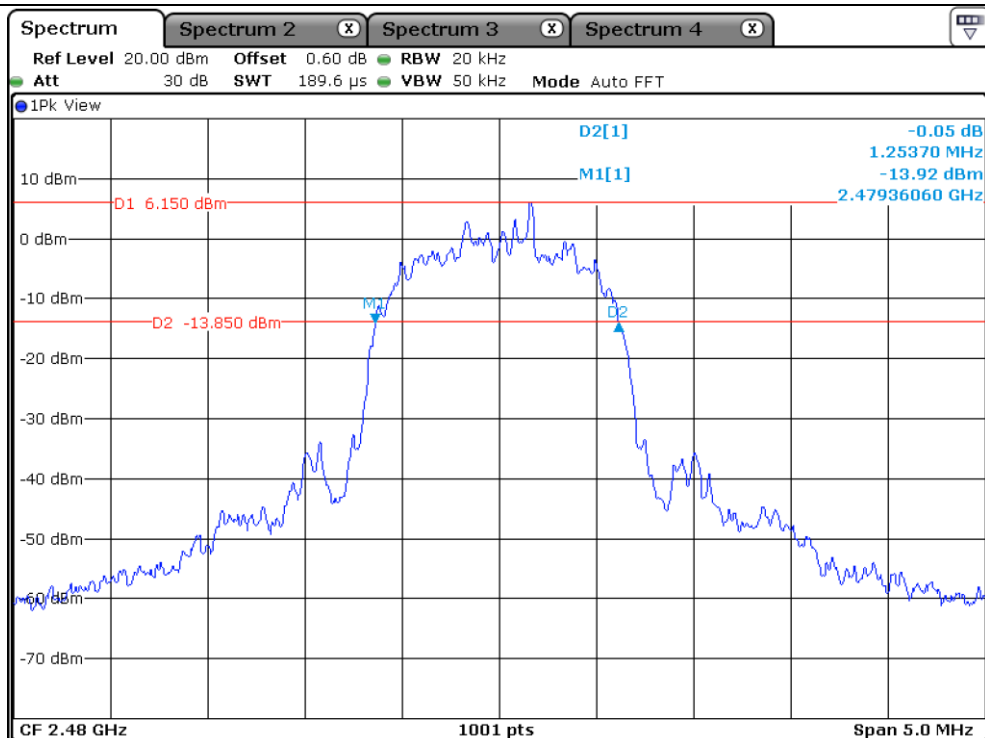

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)


8. HOPPING FREQUENCY SEPARATION

8.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

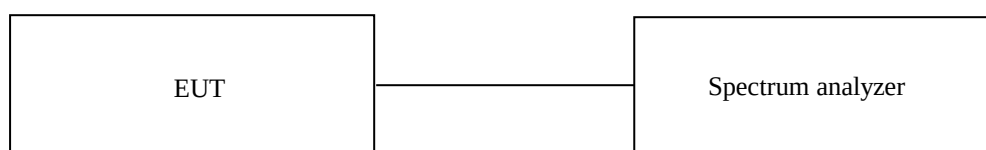


8.3 Test Date

October 07, 2021 ~ October 20, 2021


8.4 Test data for 1 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 004.00	629.40	Separated by a minimum of 629.40 kHz

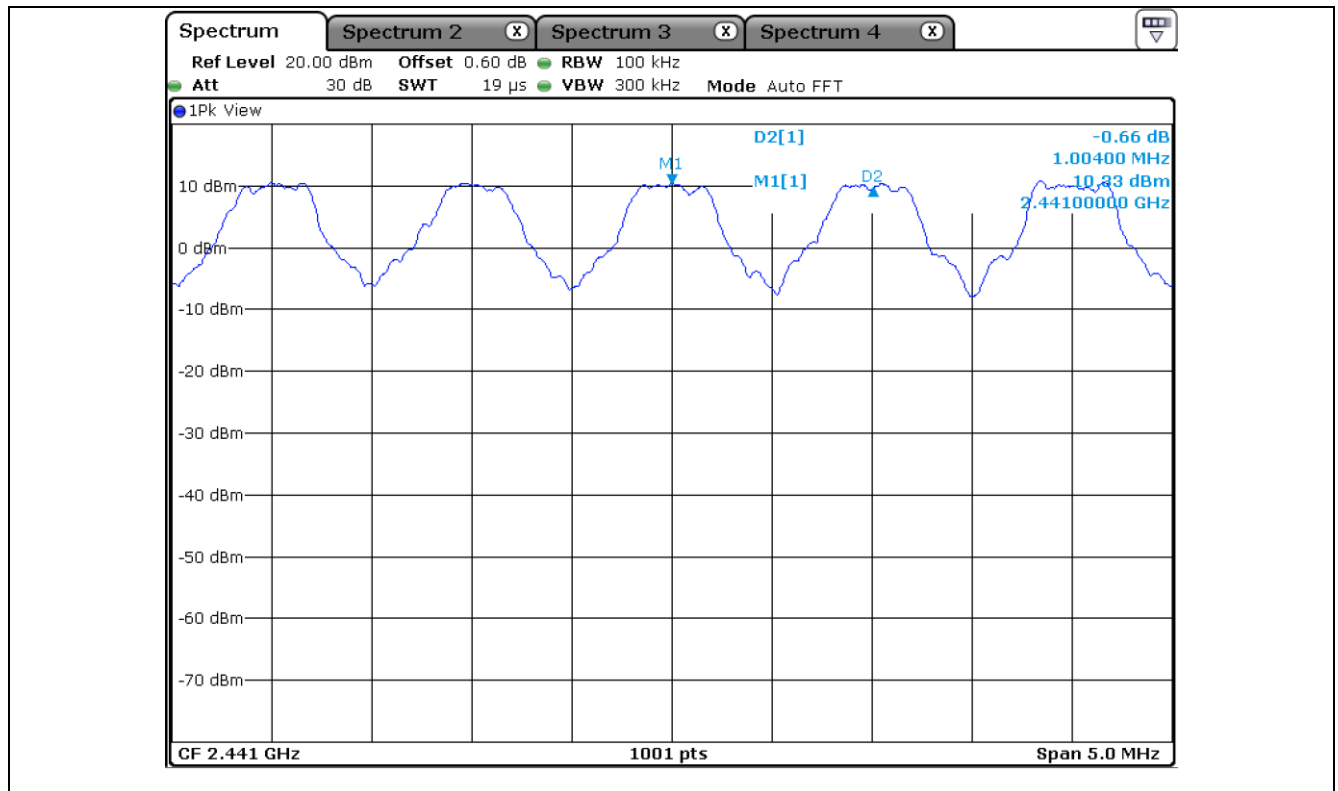


-. Test Result : Pass

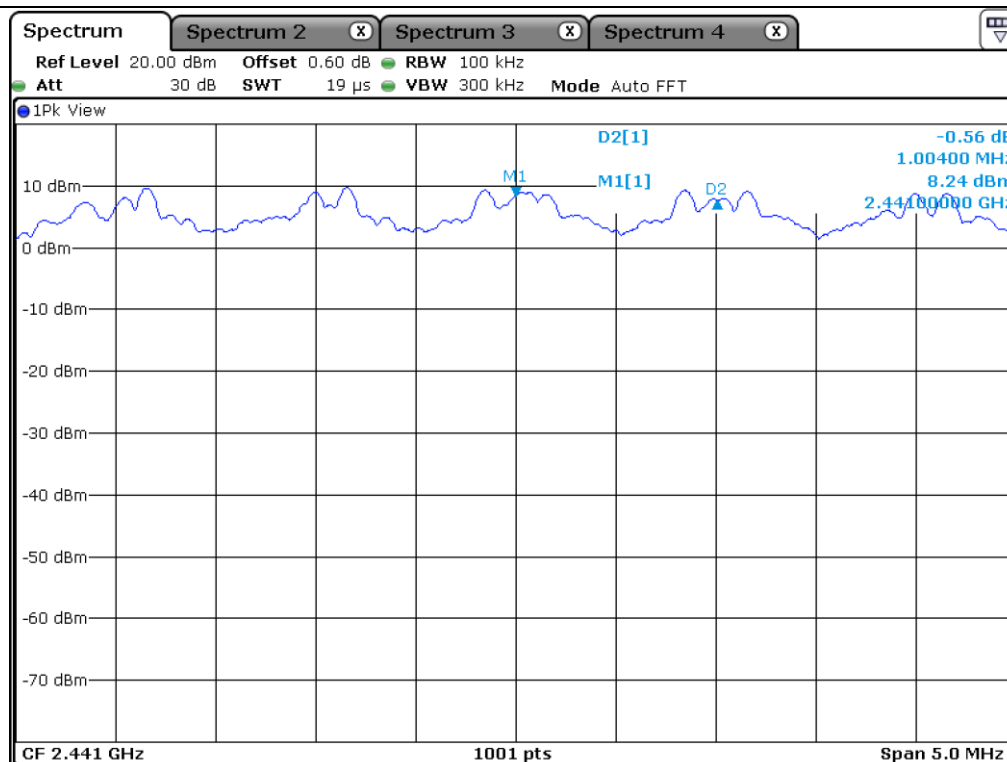

8.6 Test data for 3 Mbps

-. Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
1 004.00	835.80	Separated by a minimum of 835.80 kHz

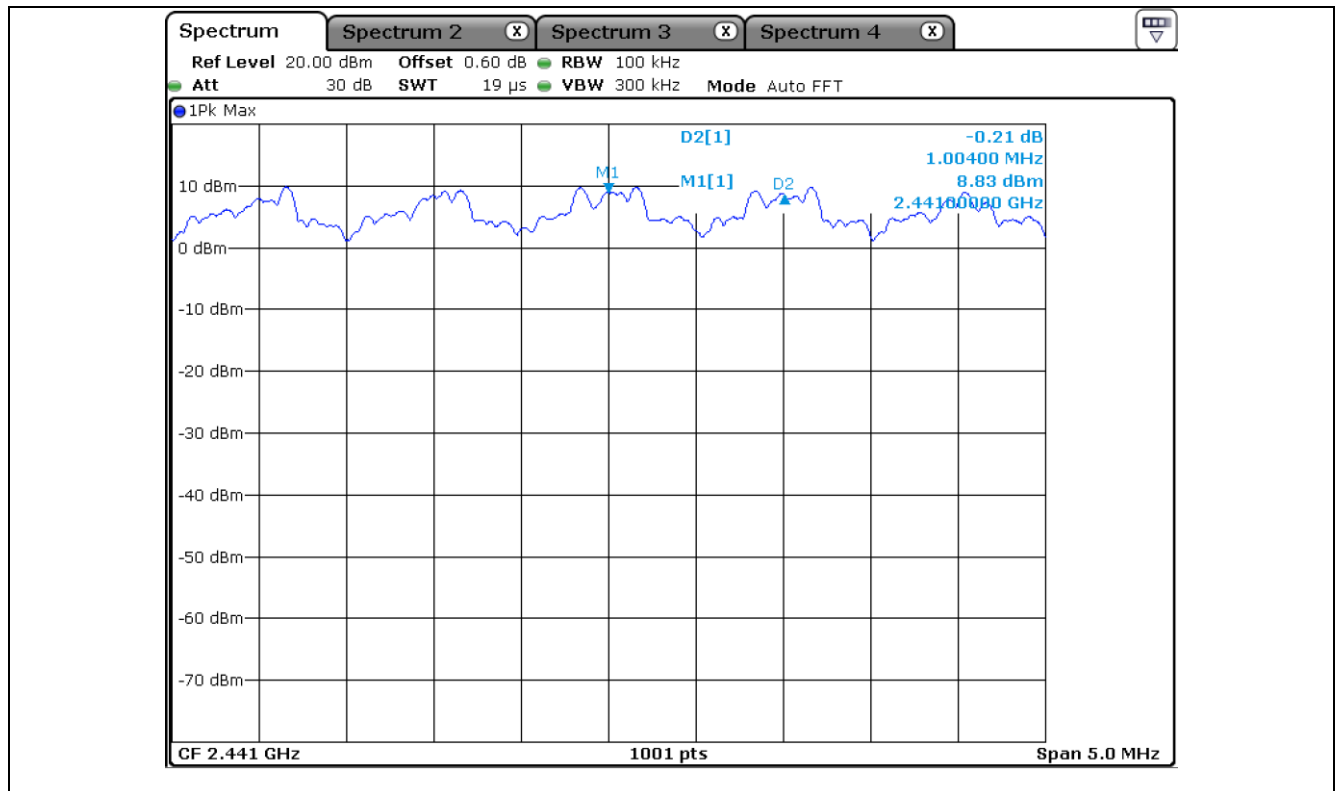


9. NUMBER OF HOPPING CHANNELS

9.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

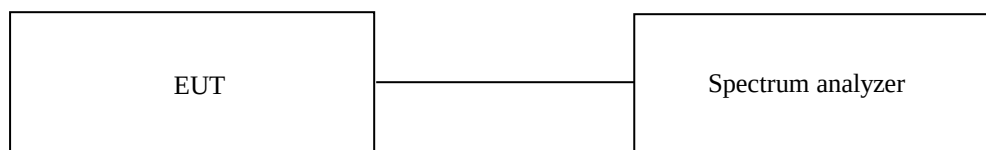


9.3 Test Date


October 07, 2021 ~ October 20, 2021

9.4 Test data for 1 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

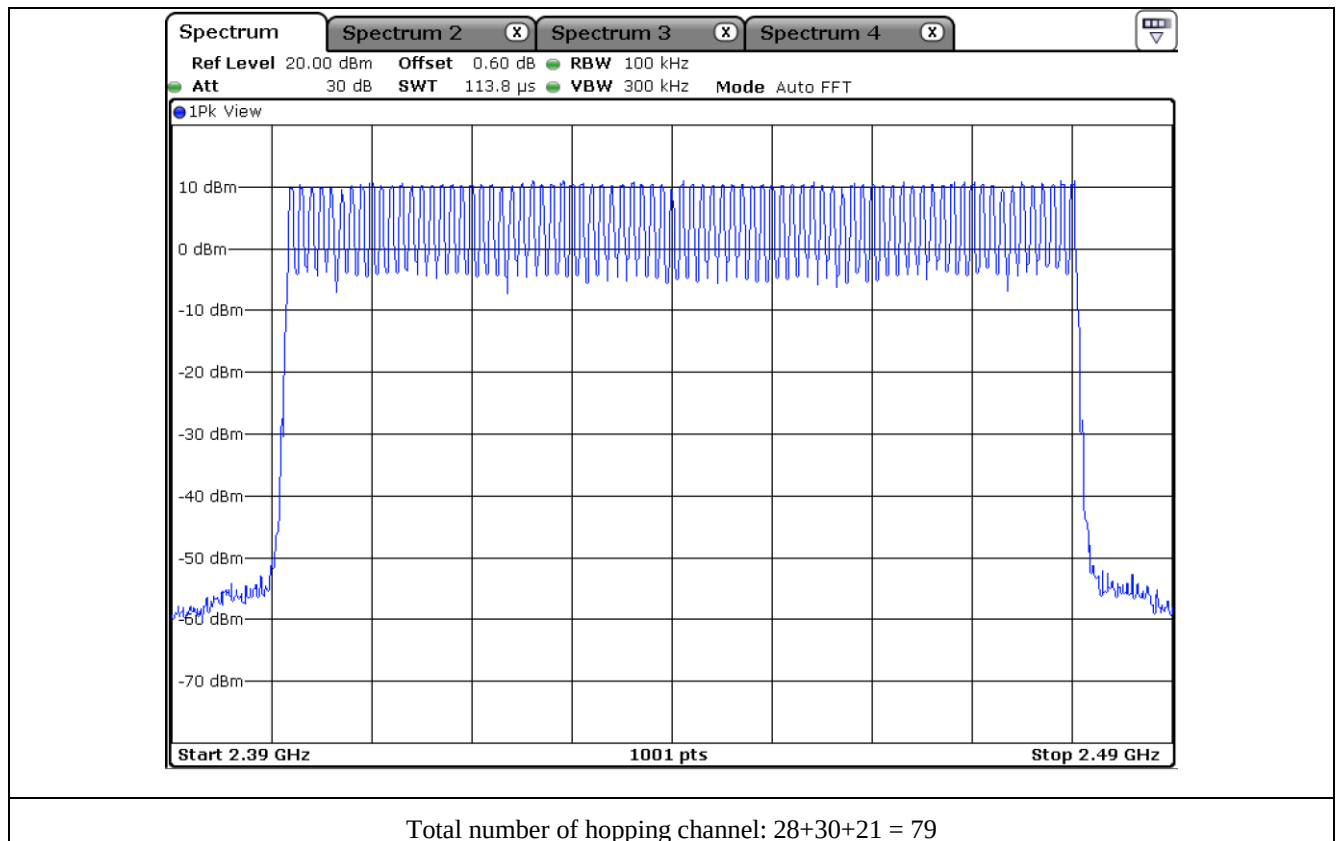


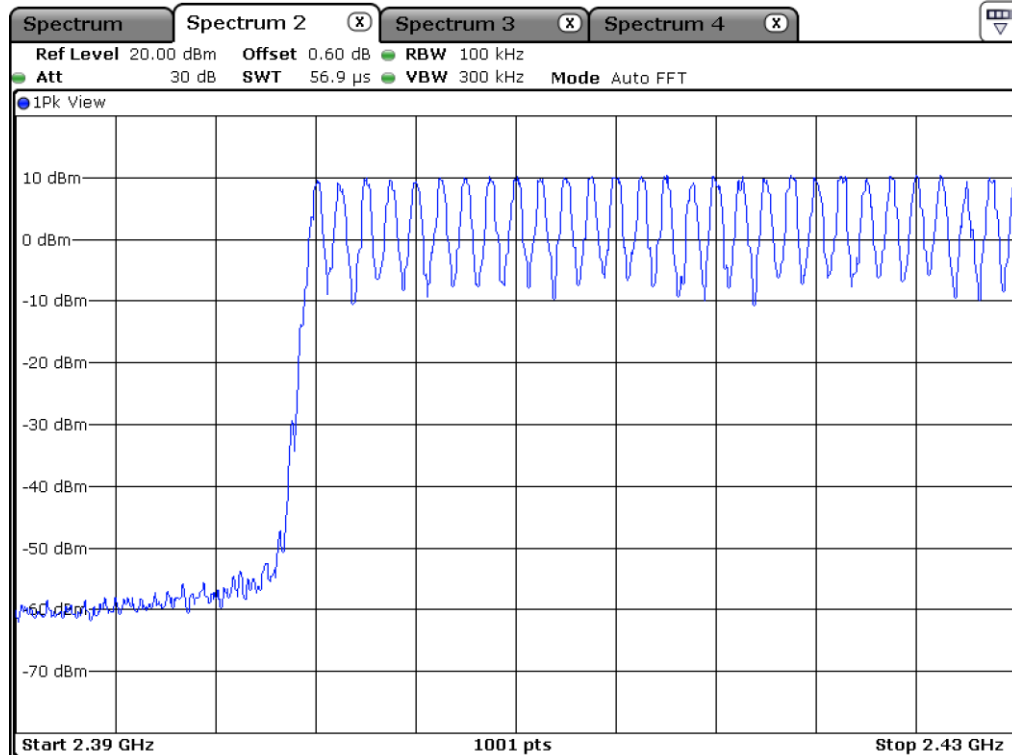

Number of hopping channel: 28

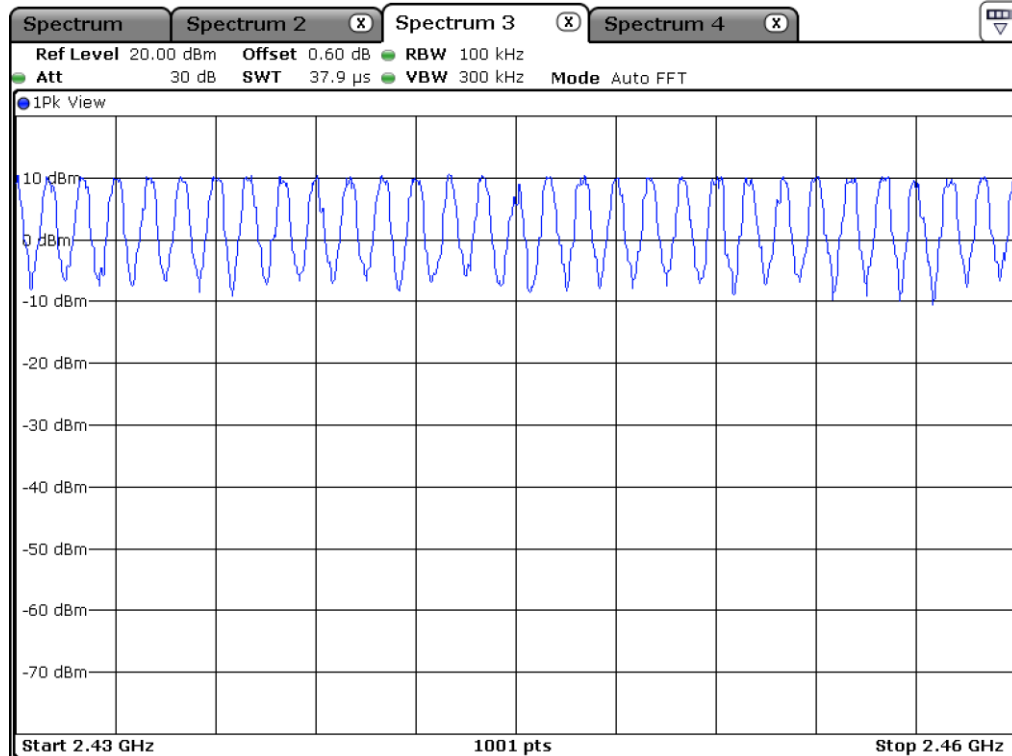


Number of hopping channel: 30

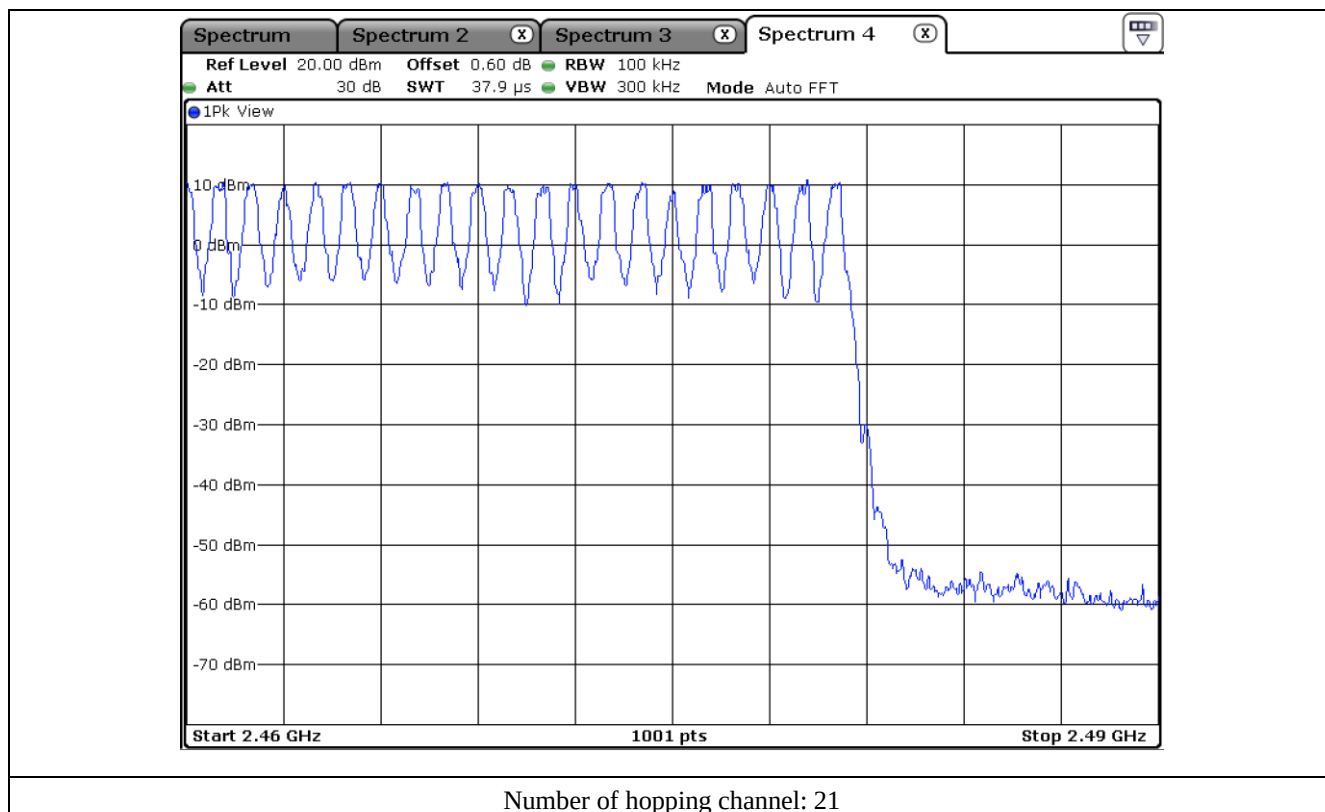


9.5 Test data for 2 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

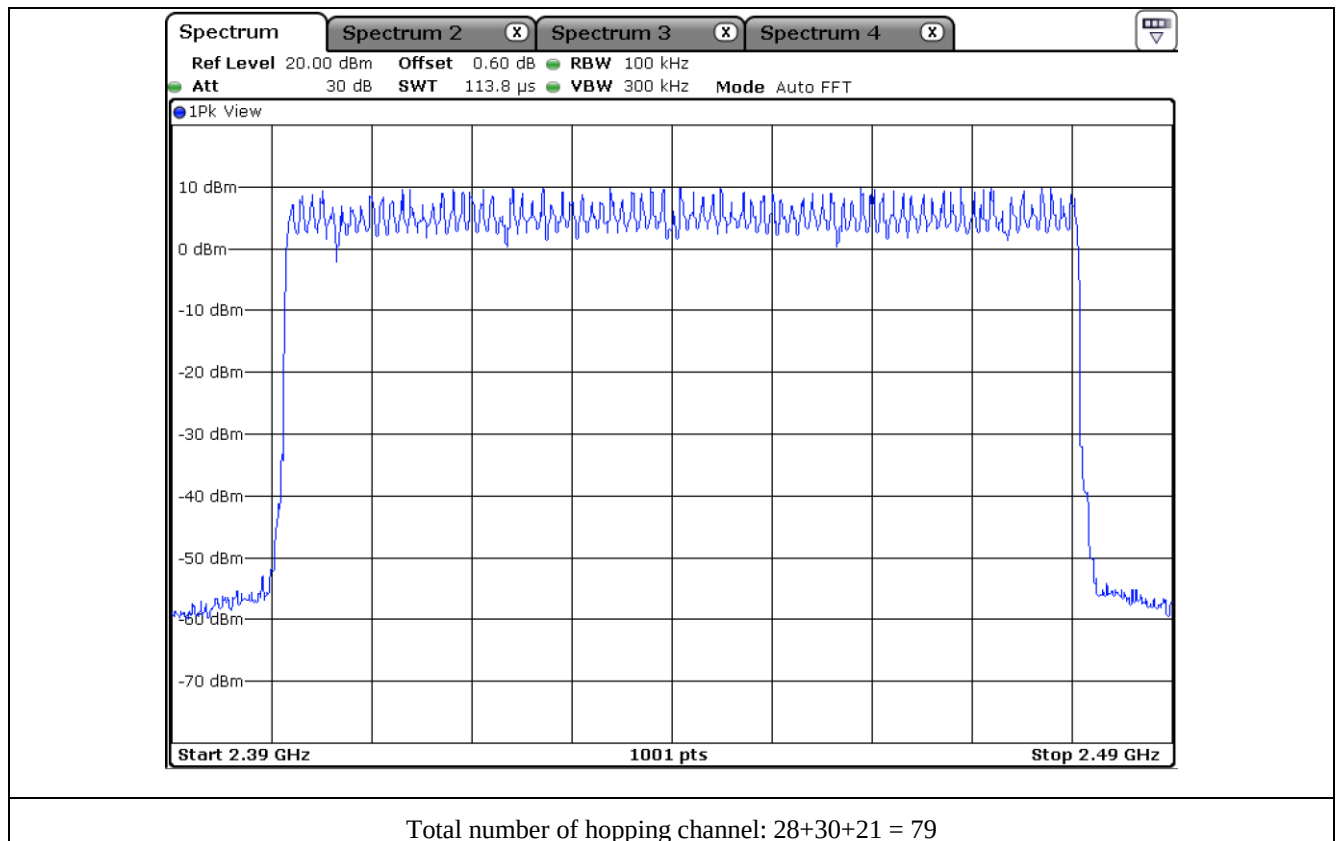


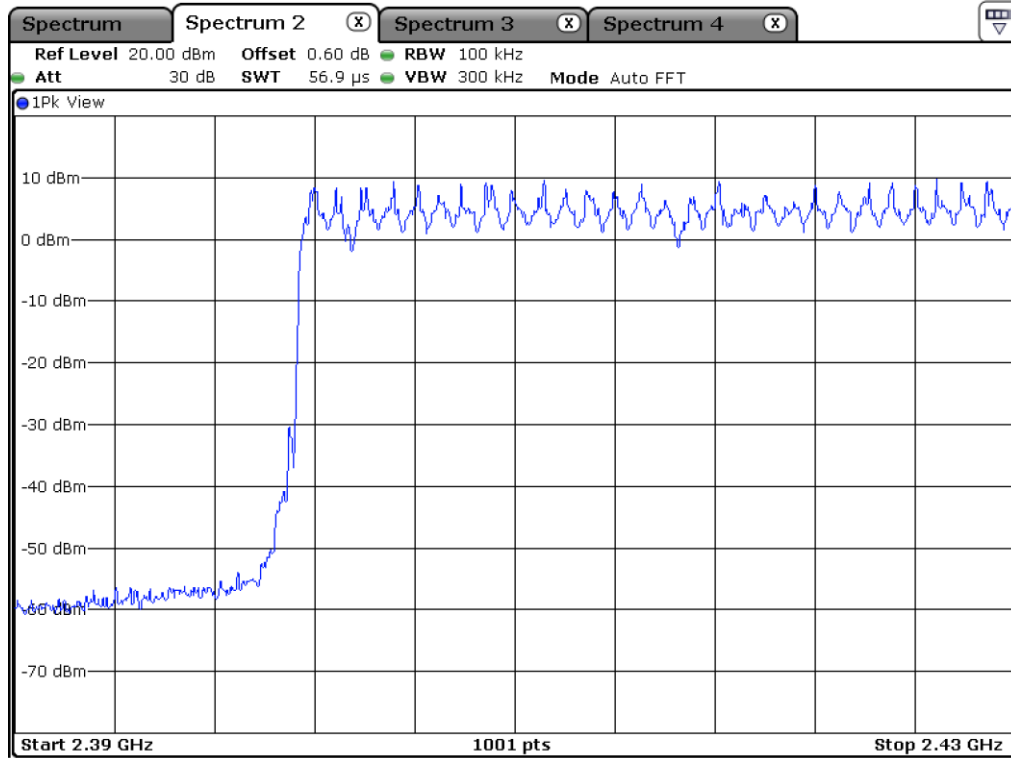

Number of hopping channel: 28

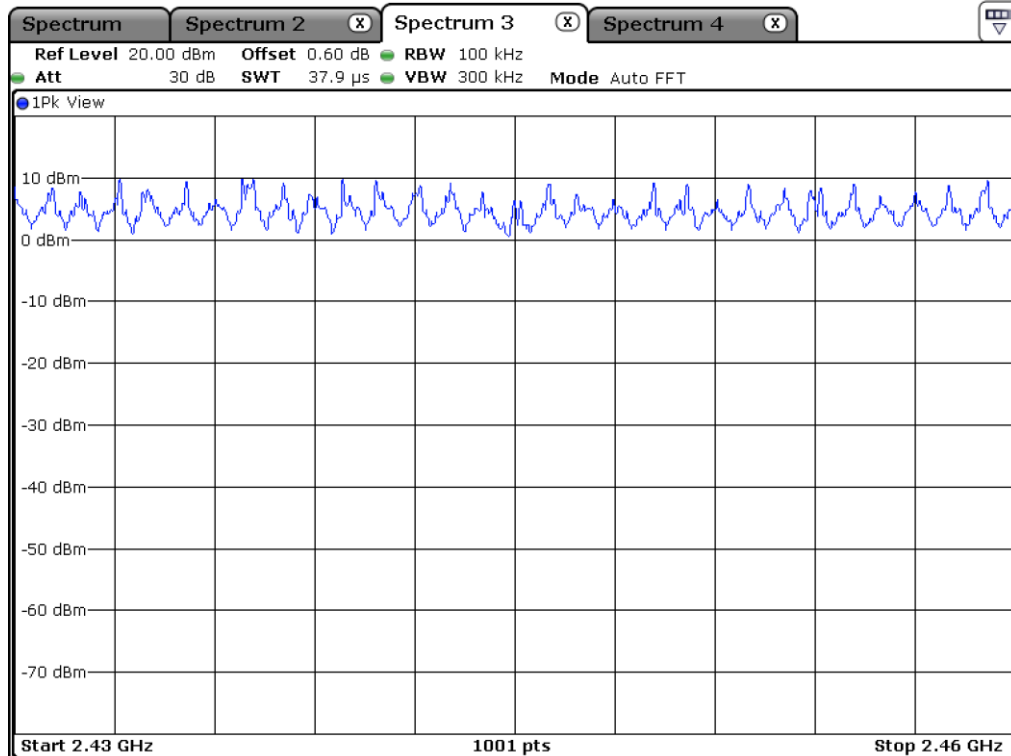


Number of hopping channel: 30

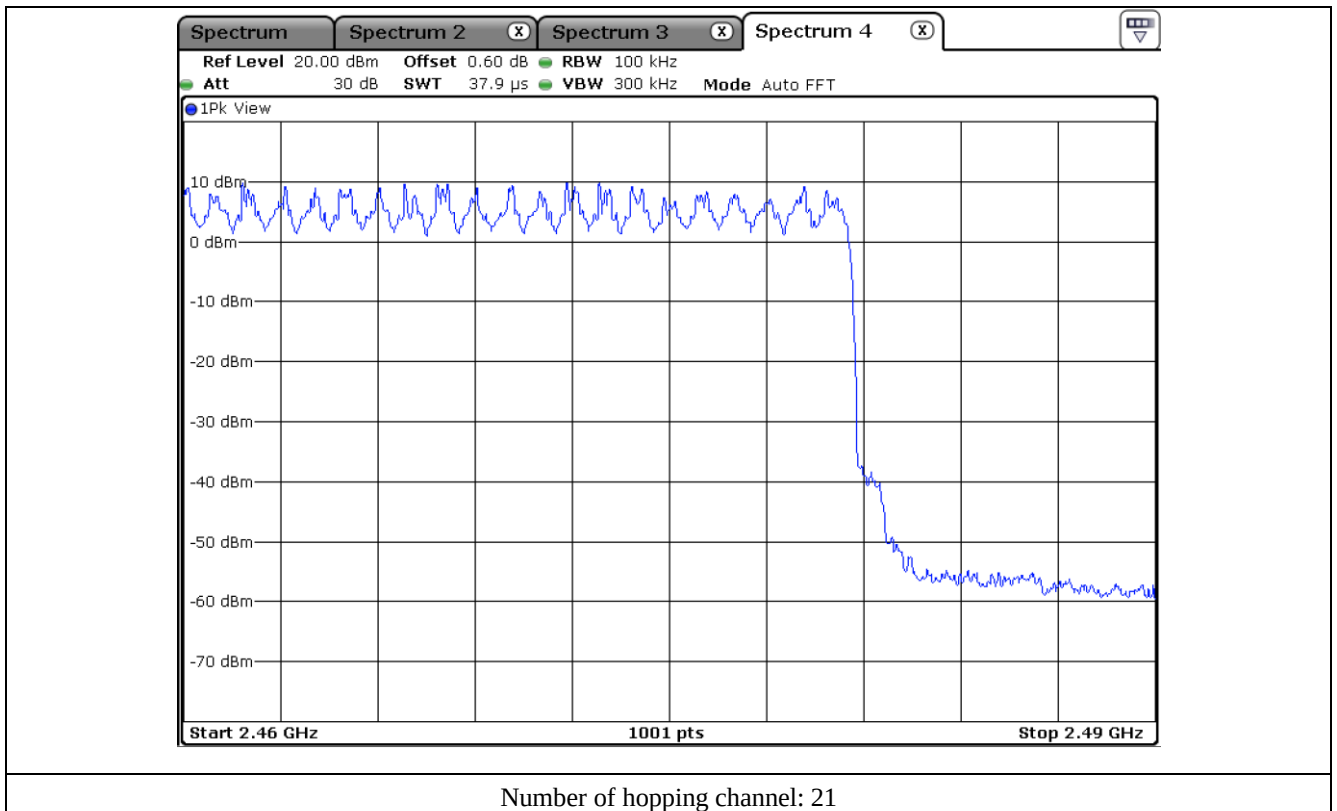


9.6 Test data for 3 Mbps


-. Test Result : Pass

Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64

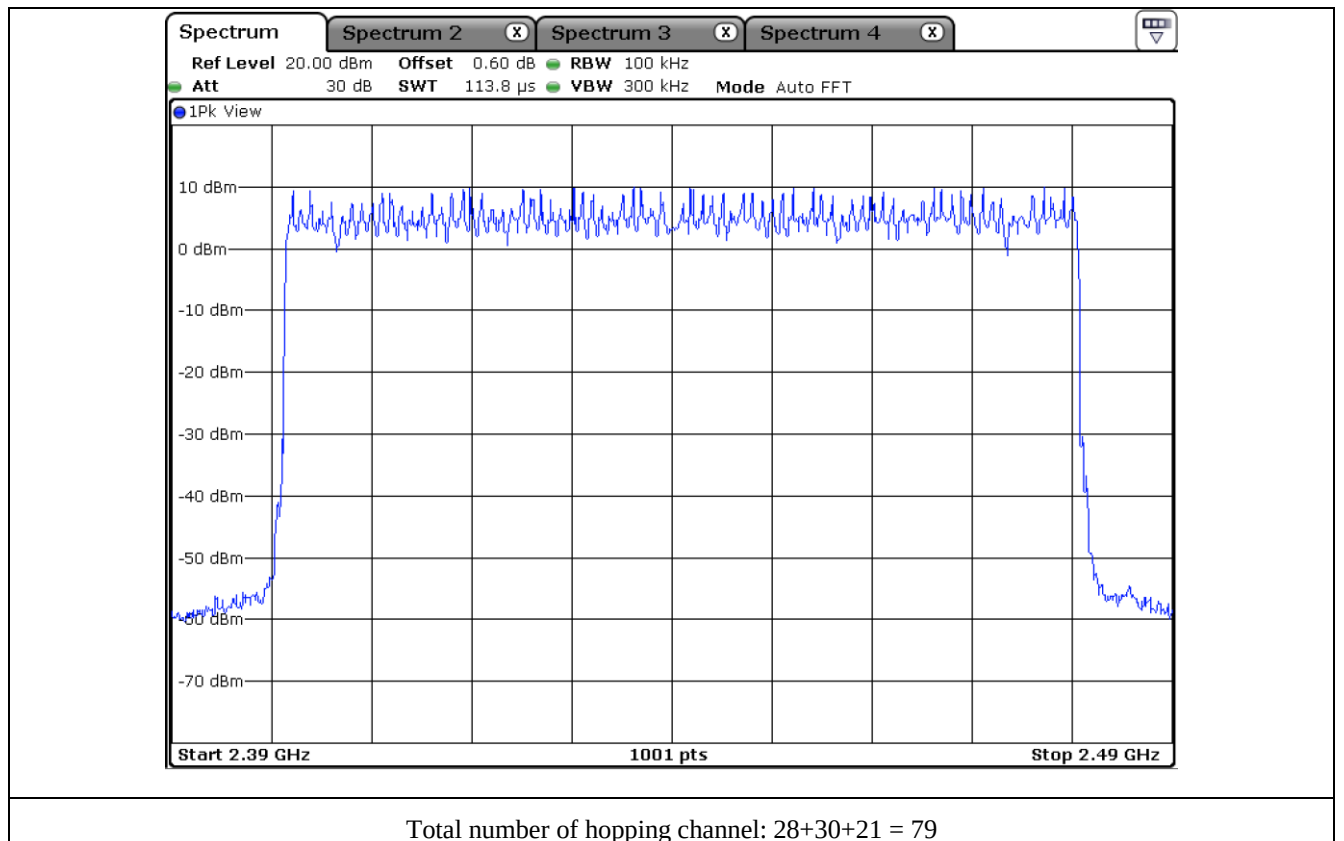


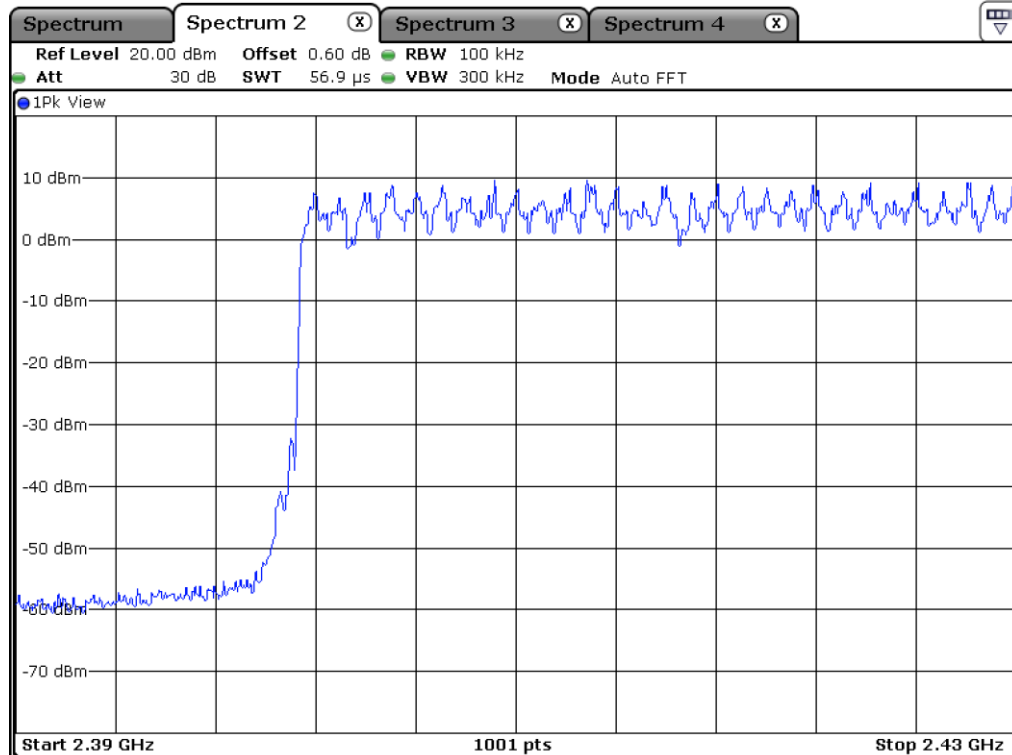

Number of hopping channel: 28

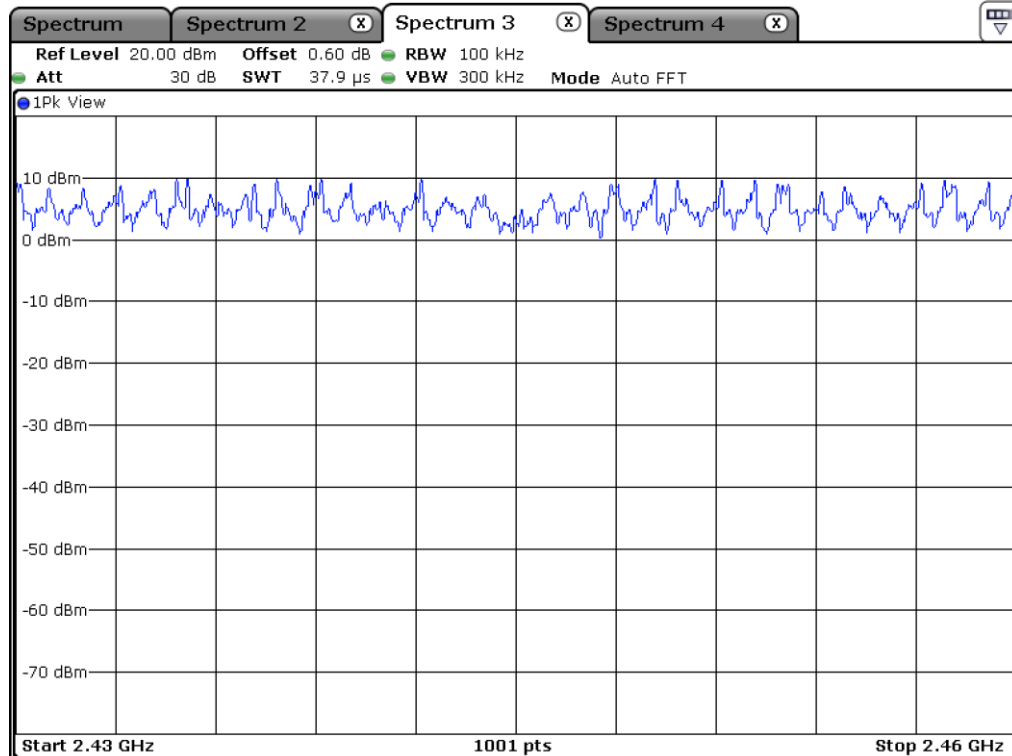

Number of hopping channel: 30

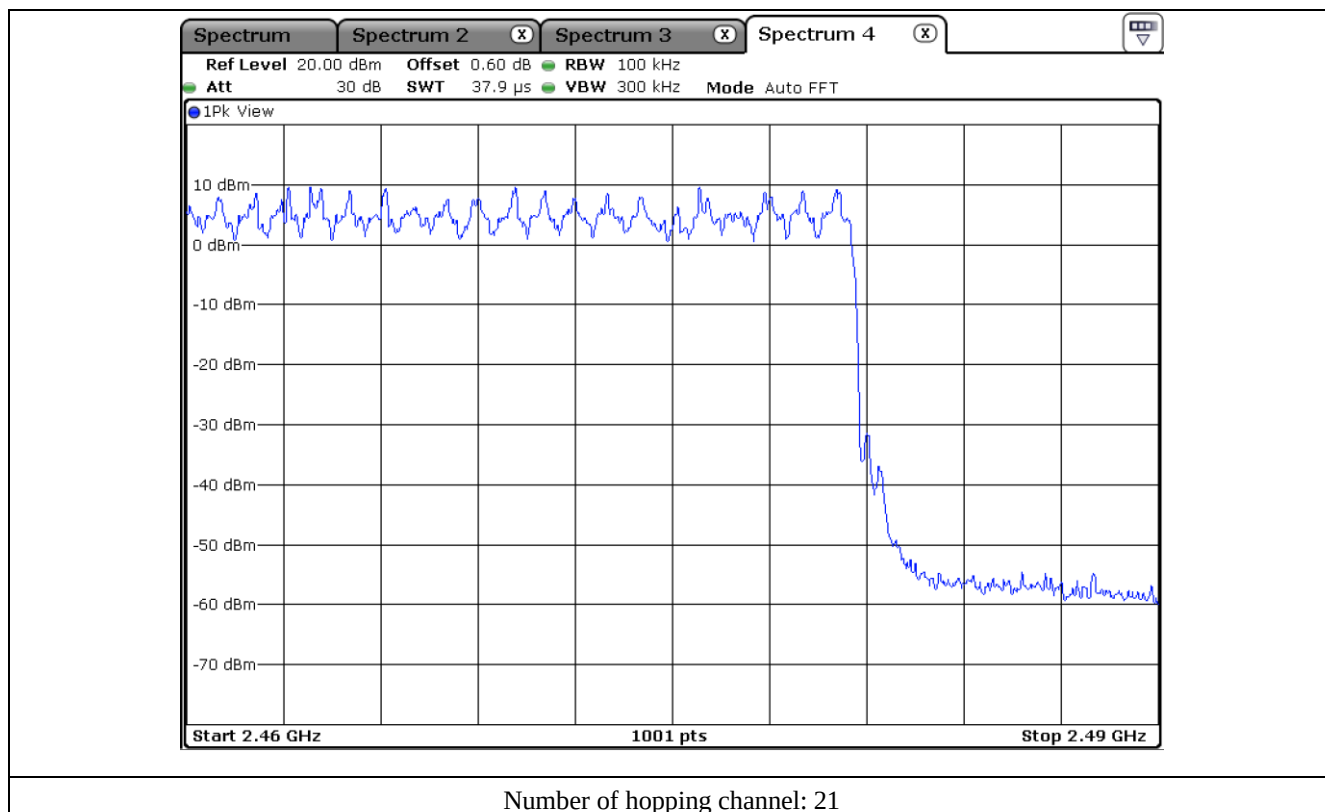

10. TIME OF OCCUPANCY

10.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.



10.3 Test Date

October 07, 2021 ~ October 20, 2021

10.4 Test data for 1 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.37	10.13	31.60	118.44	400.00	PASS
DH3	1.63	5.06	31.60	260.63	400.00	
DH5	2.88	3.38	31.60	307.61	400.00	

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

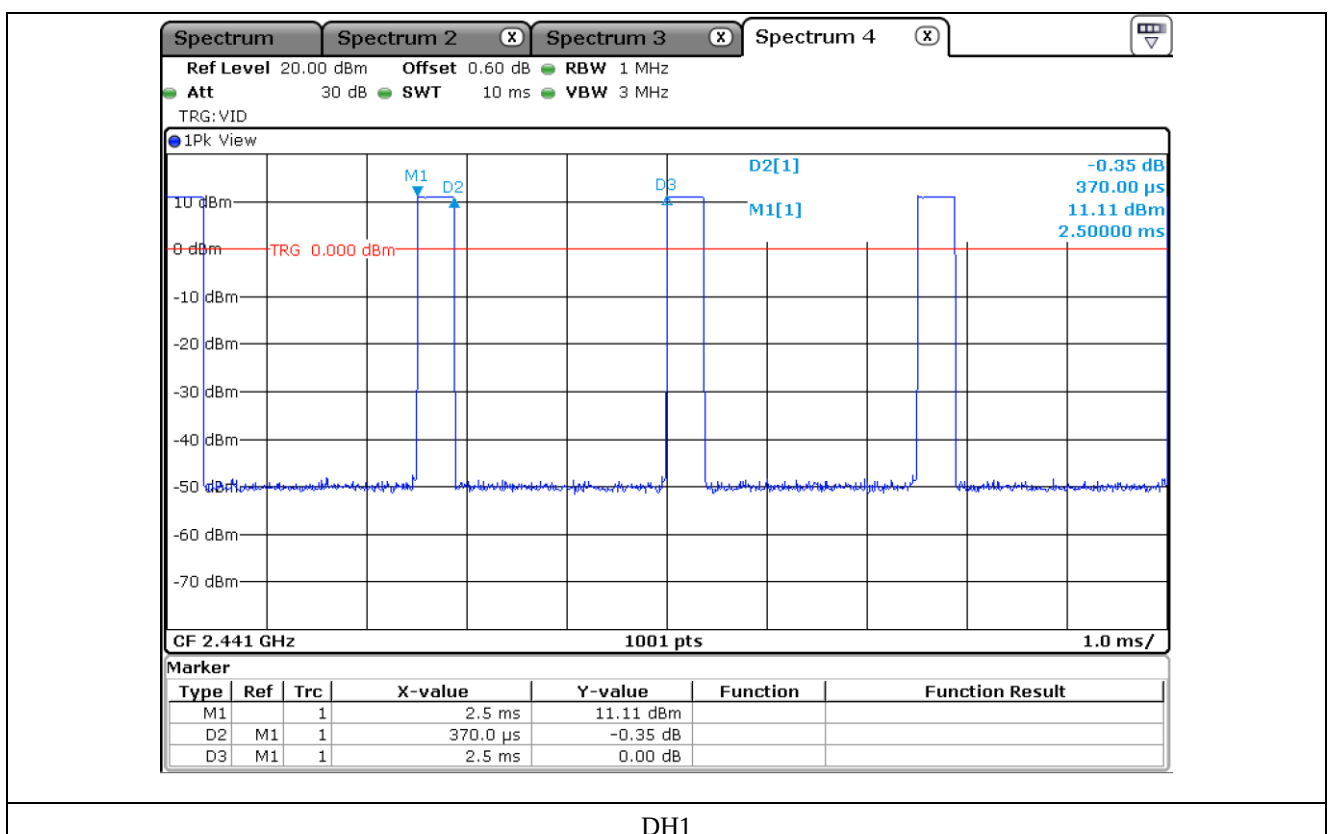

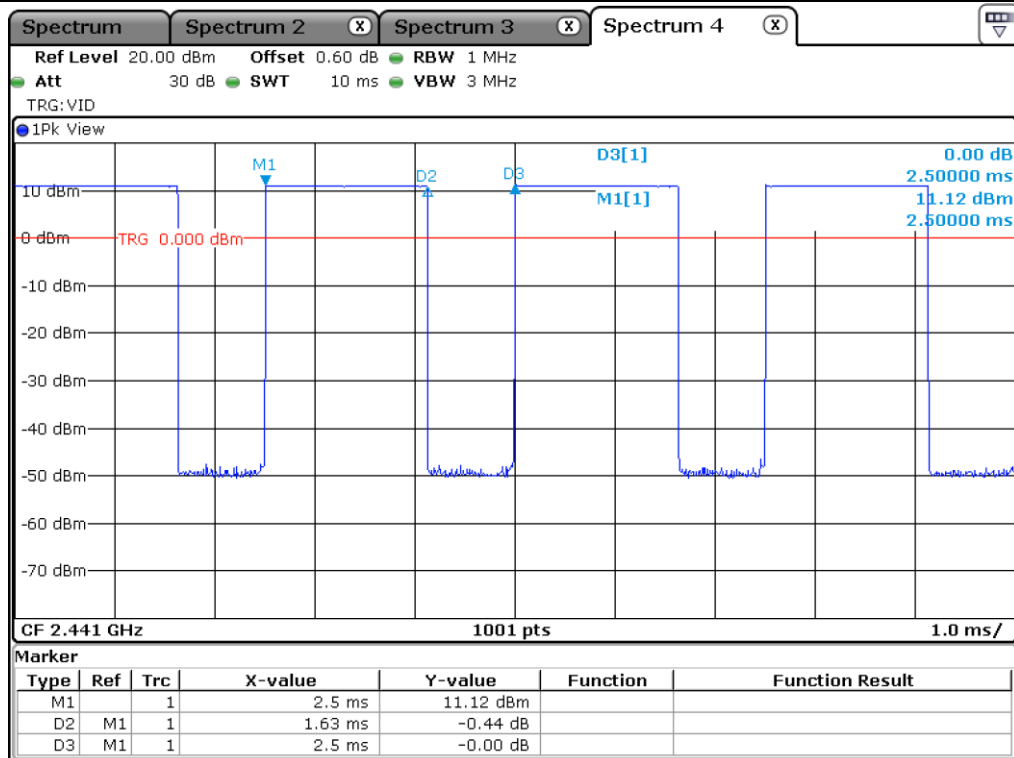

DH3

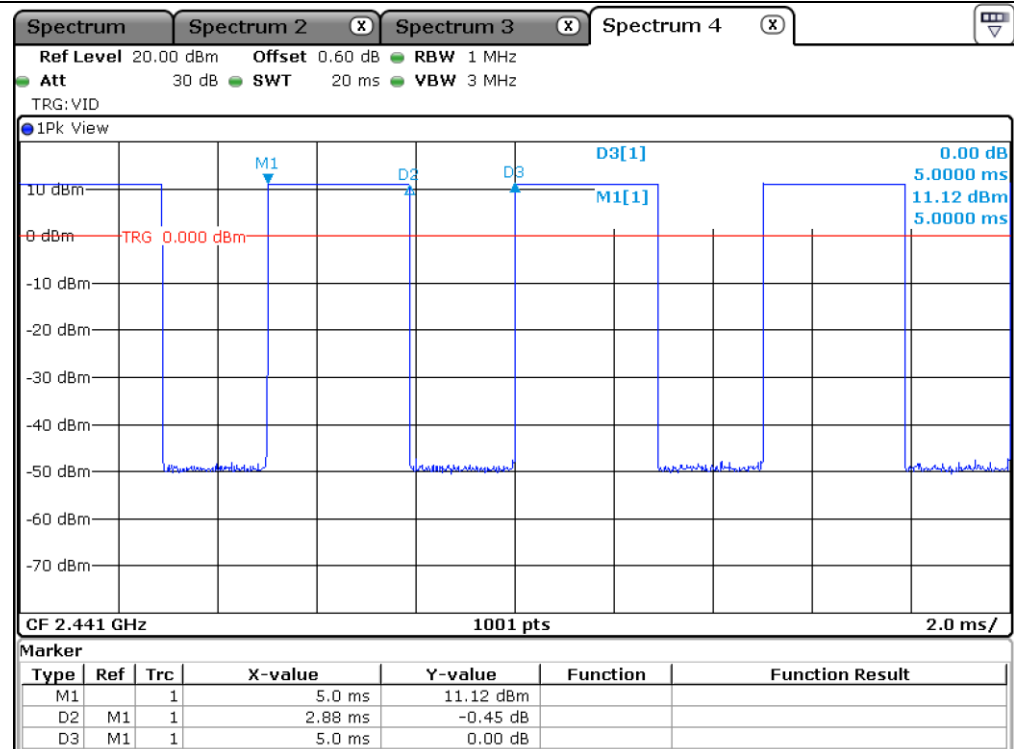

DH5

10.5 Test data for 2 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\,600/2/79$) for DH1, and 5.06 times ($= 1\,600/4/79$) for DH3, and 3.38 times ($= 1\,600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.38	10.13	31.60	121.64	400.00	PASS
DH3	1.63	5.06	31.60	260.63	400.00	
DH5	2.88	3.38	31.60	307.61	400.00	

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

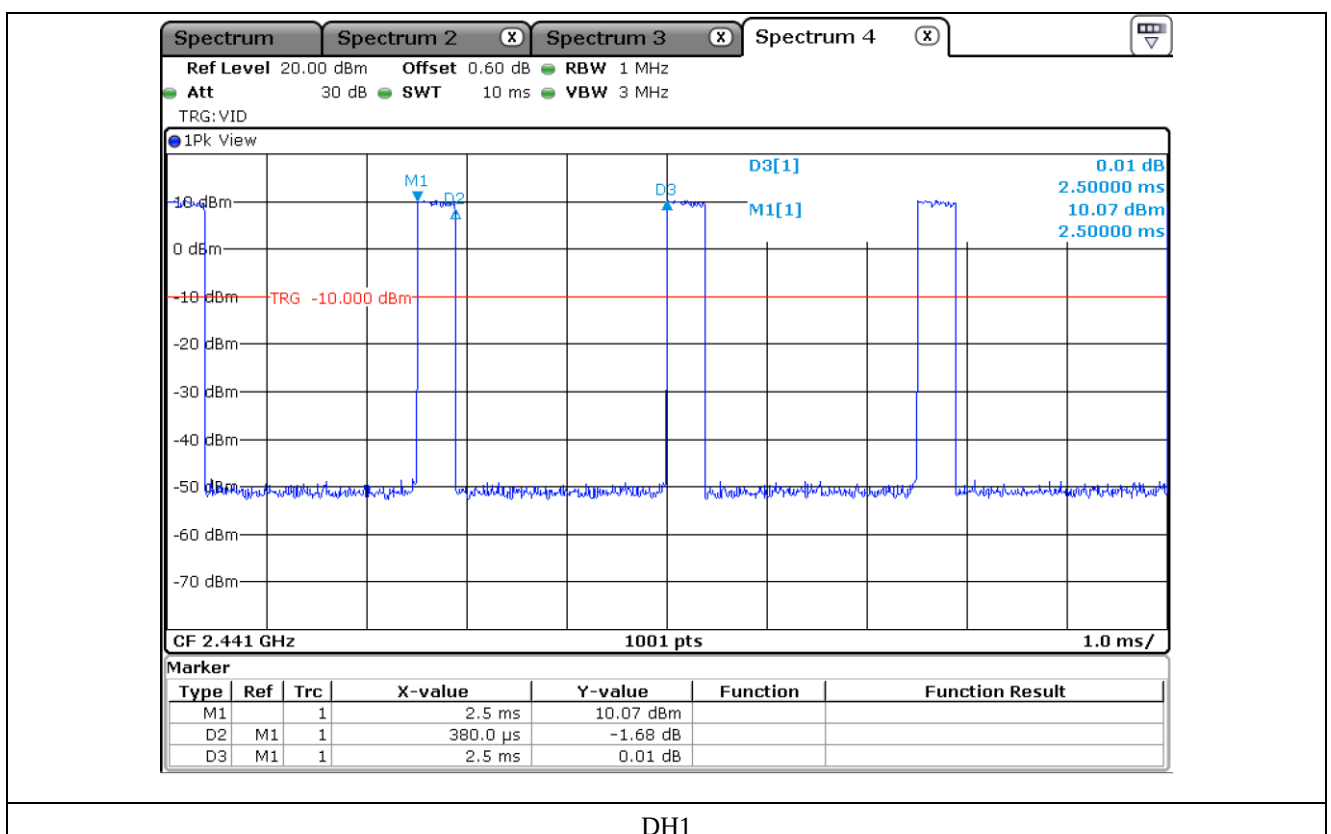

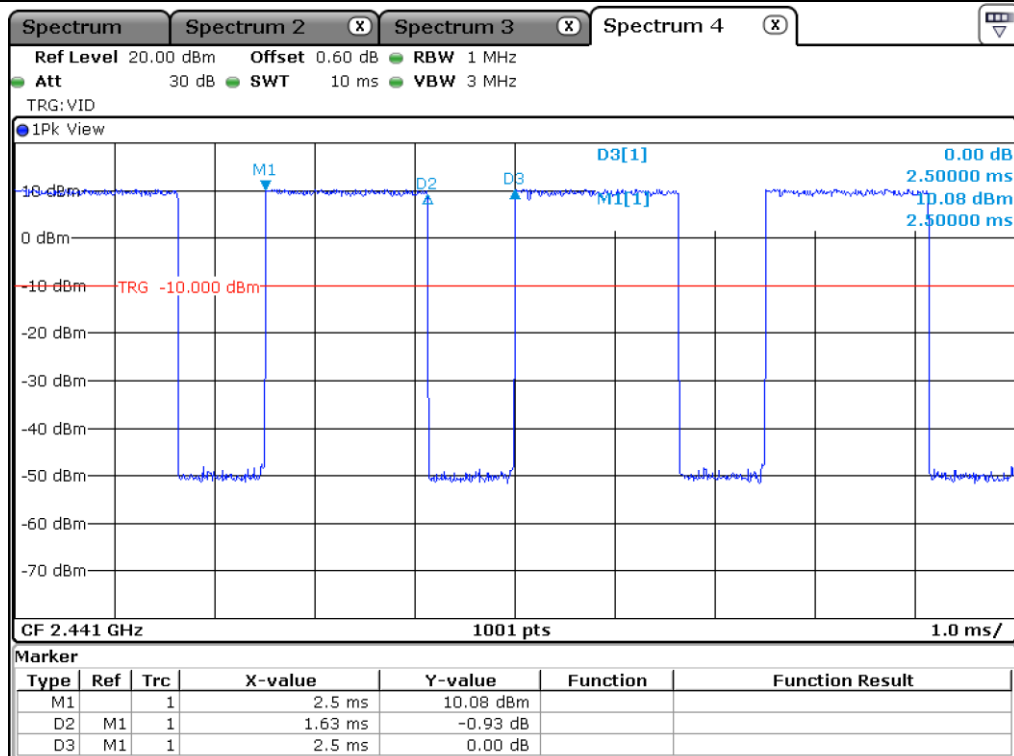

DH3

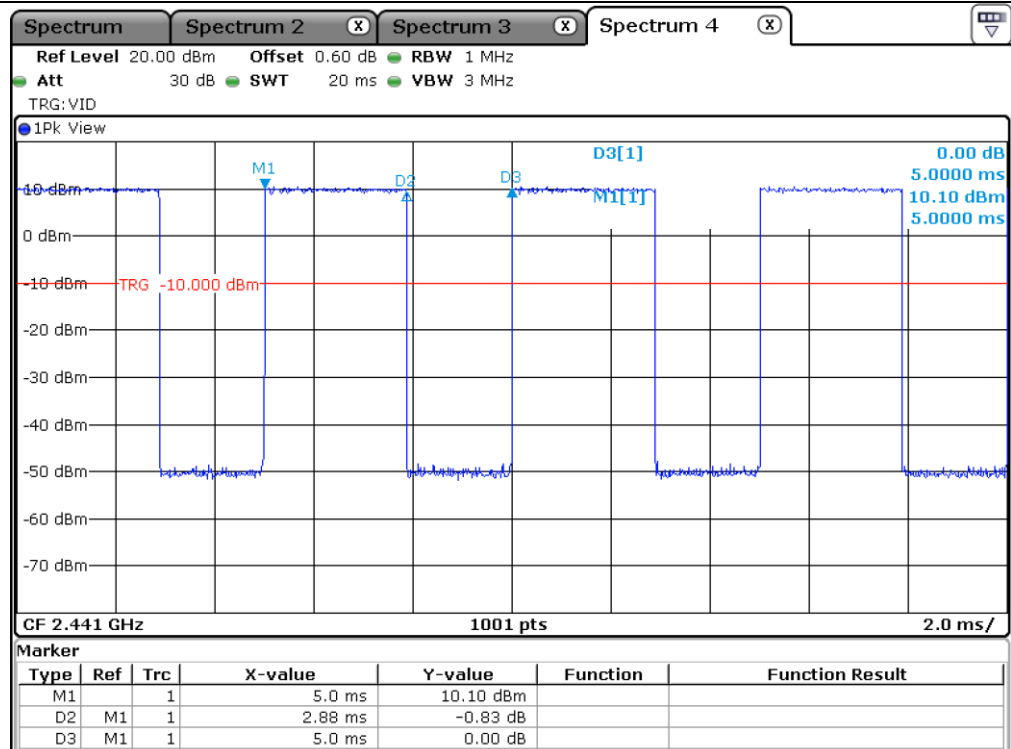

DH5

10.6 Test data for 3 Mbps

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.


For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second ($= 1\ 600/2/79$) for DH1, and 5.06 times ($= 1\ 600/4/79$) for DH3, and 3.38 times ($= 1\ 600/6/79$) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.38	10.13	31.60	121.64	400.00	PASS
DH3	1.63	5.06	31.60	260.63	400.00	
DH5	2.88	3.38	31.60	307.61	400.00	

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time

Remark: See next page for an overview sweep performed with peak detector.

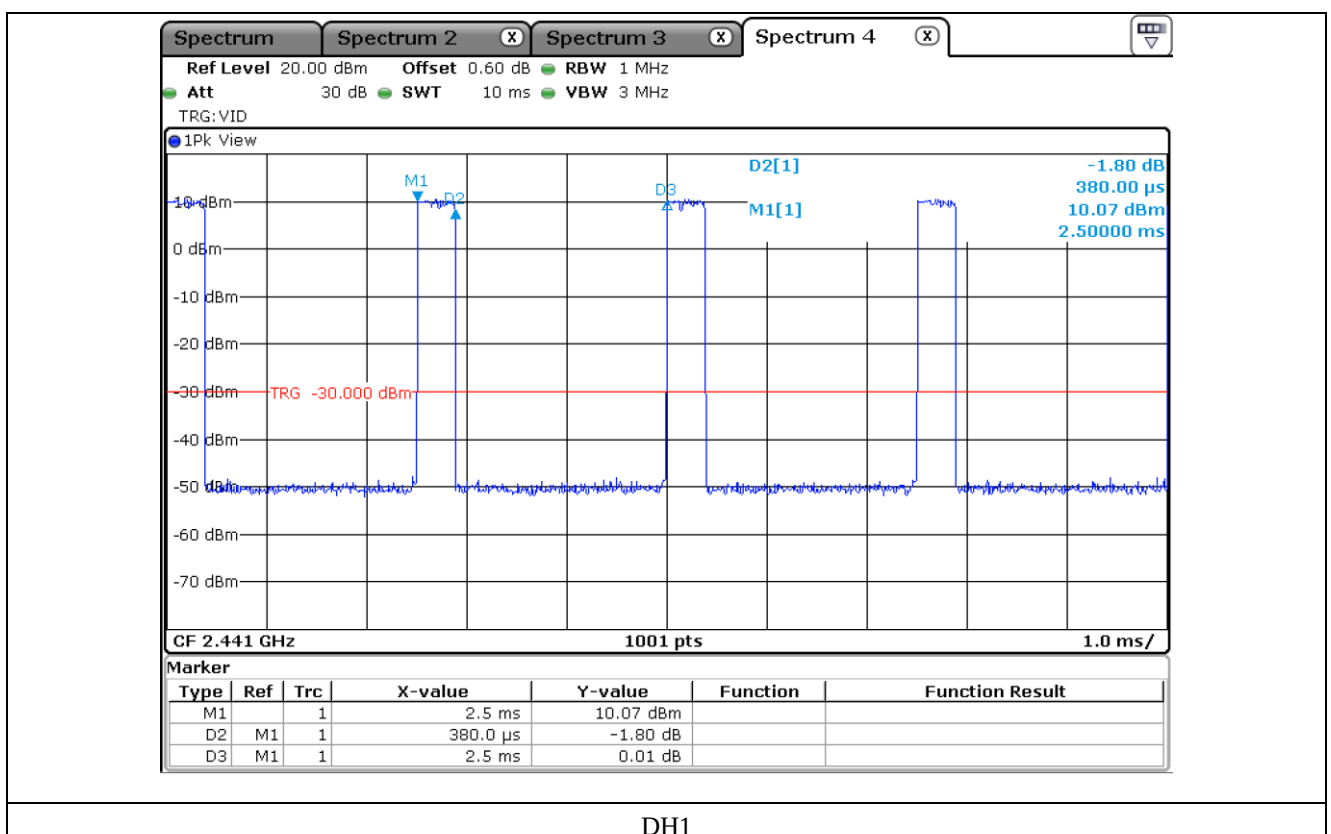

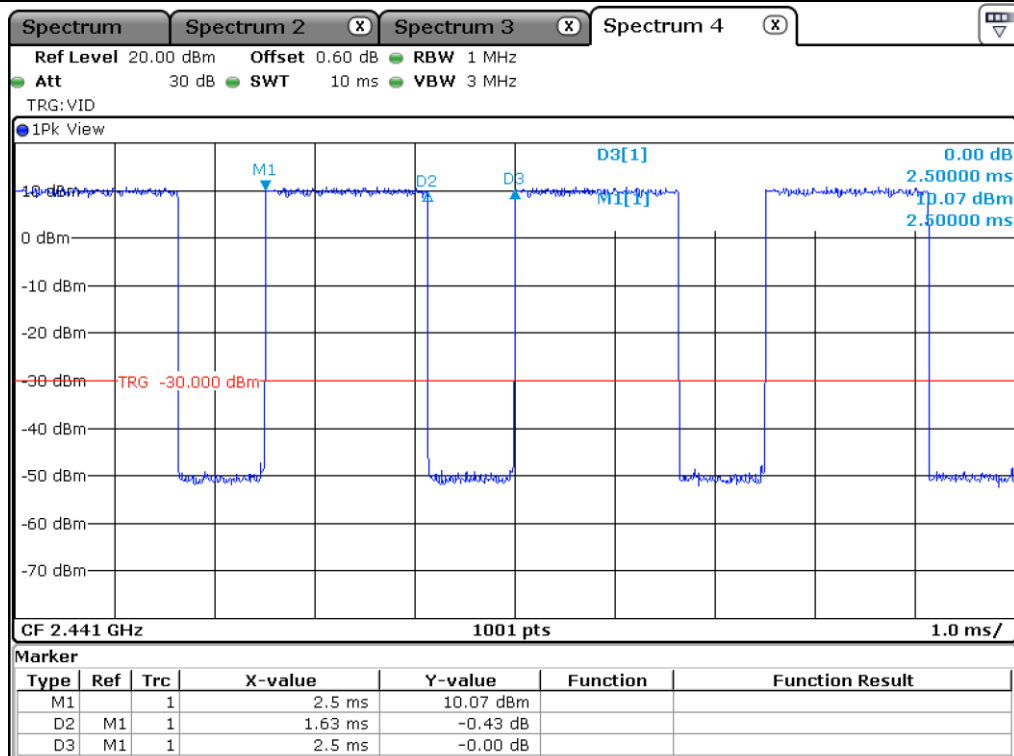

DH3

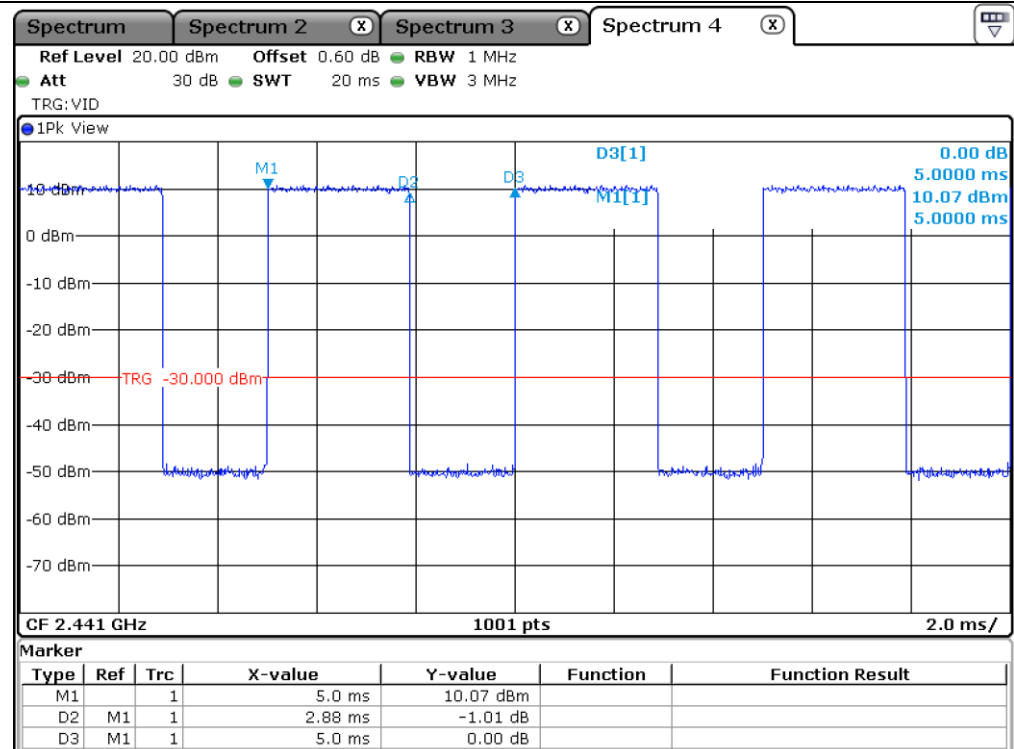

DH5

11. MAXIMUM PEAK OUTPUT POWER


11.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

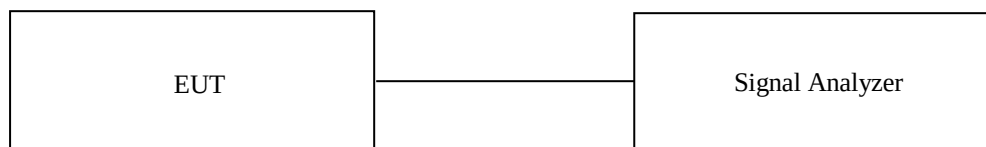

11.3 Test Date


October 07, 2021 ~ October 20, 2021


11.4 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.69	21.00	10.31
MIDDLE	2 441.00	11.17	21.00	9.83
HIGH	2 480.00	11.26	21.00	9.74

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

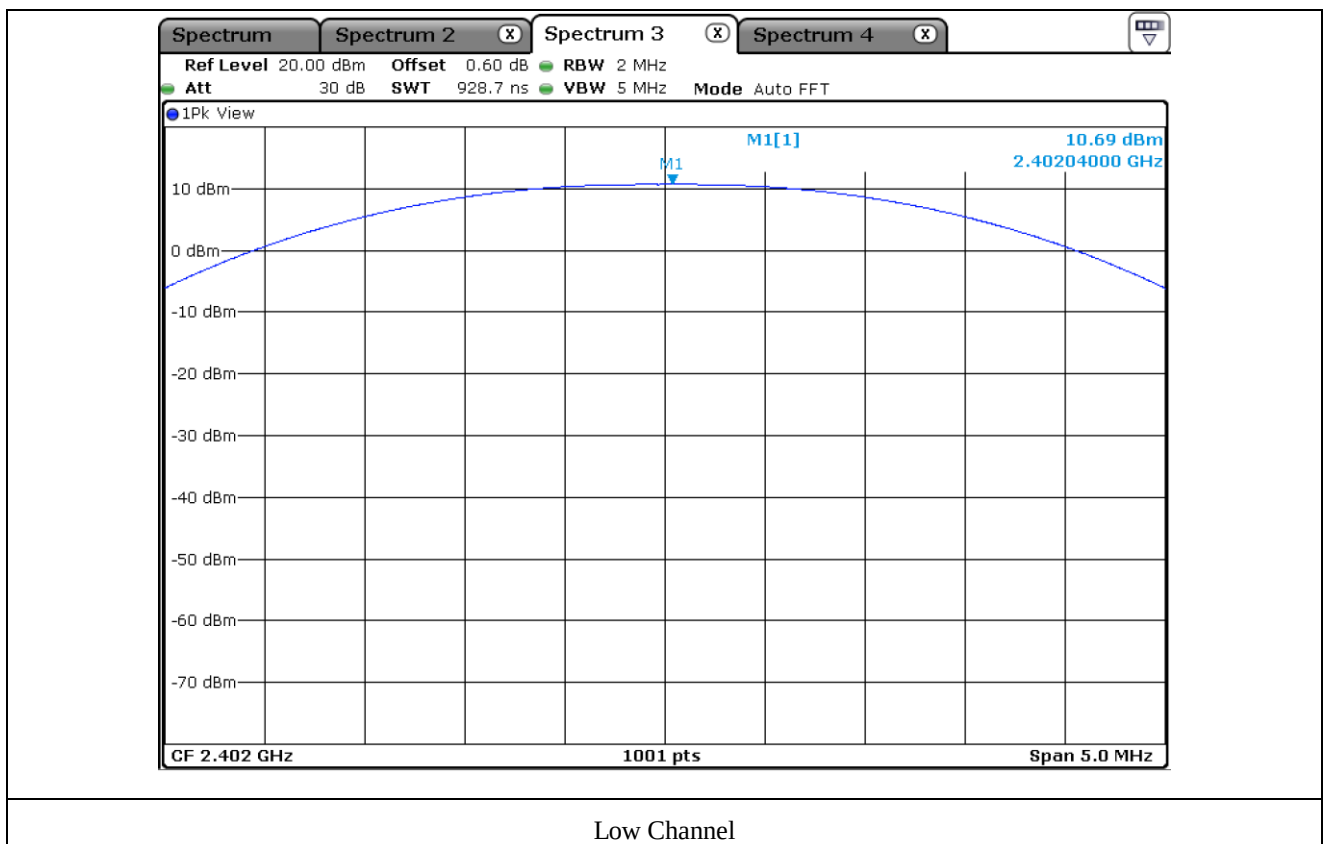

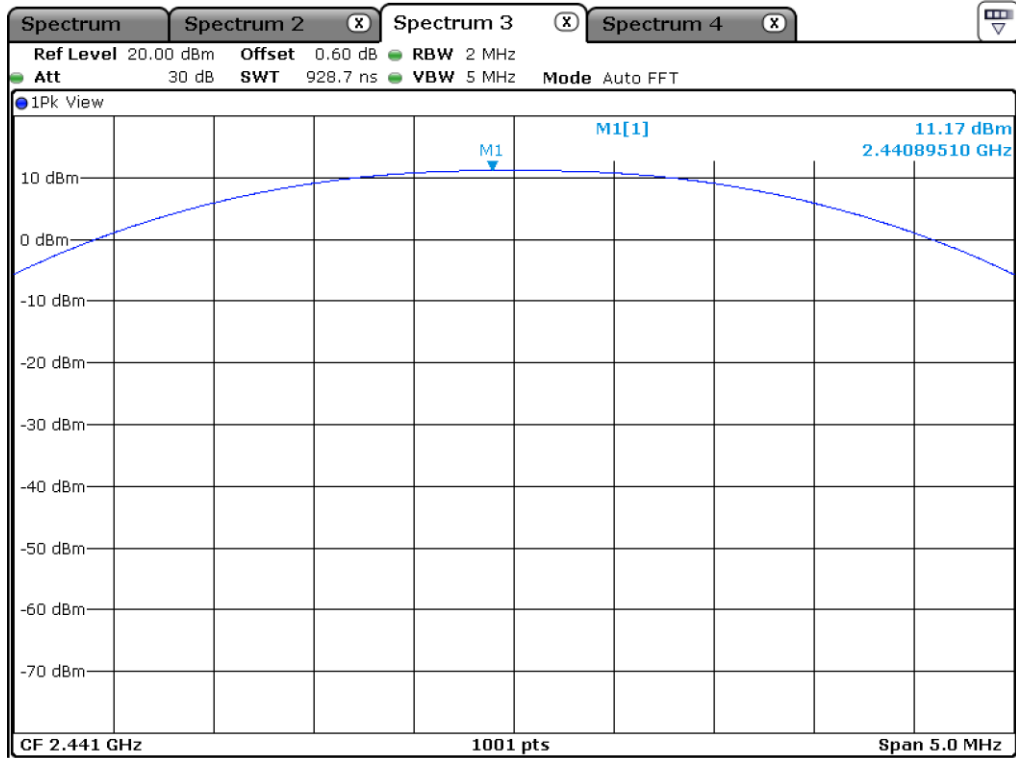

Middle Channel

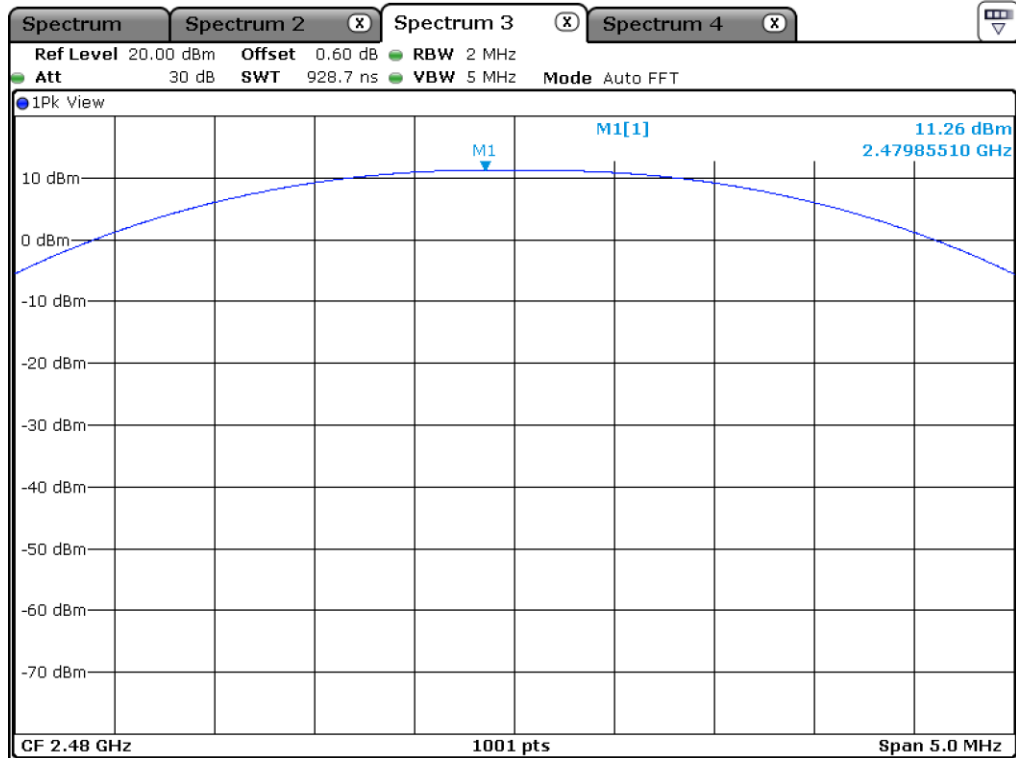


High Channel


11.5 Test data for 2 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	10.35	21.00	10.65
MIDDLE	2 441.00	10.79	21.00	10.21
HIGH	2 480.00	10.89	21.00	10.11

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

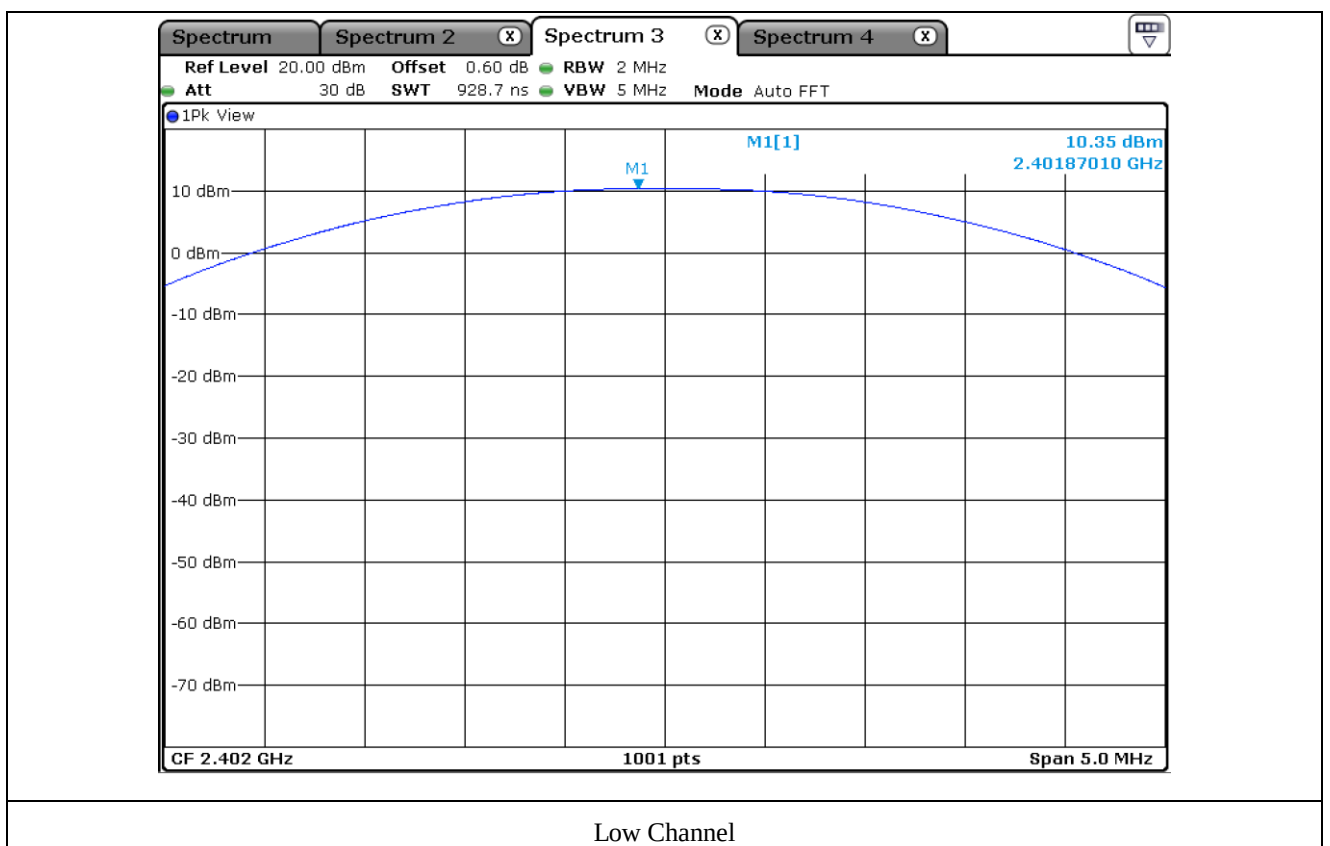

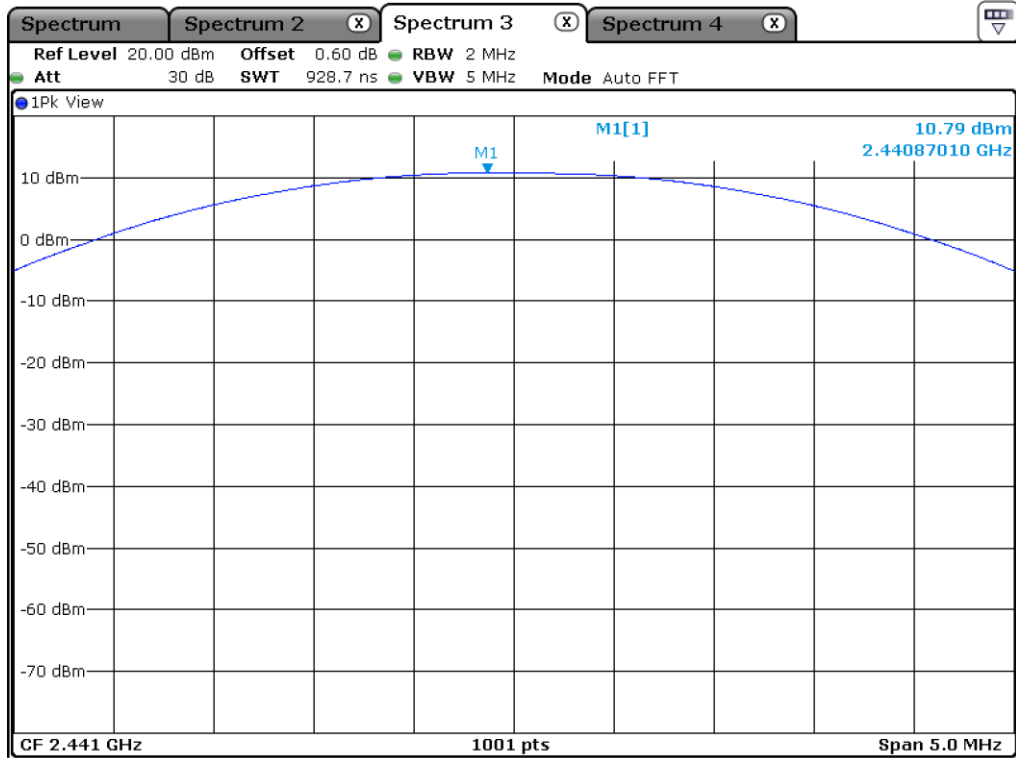

Middle Channel

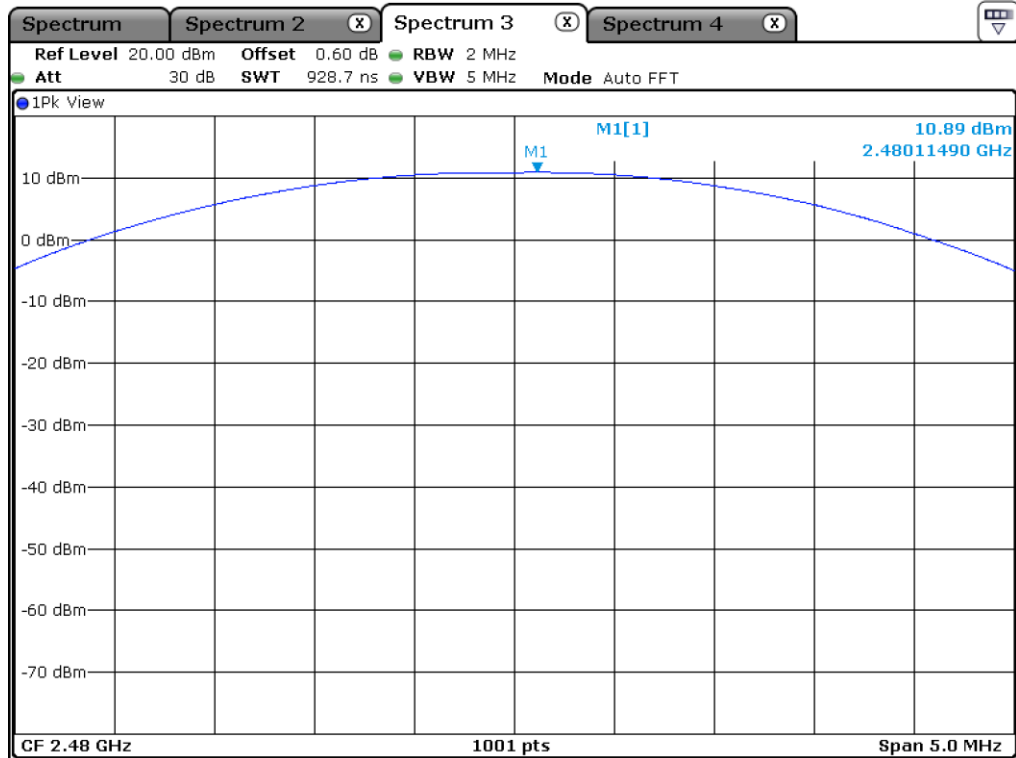

High Channel