

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (1) / (75) Pages

1. Applicant

- Name : Samsung Electronics Co Ltd
- Address : 19 Chapin Rd, Building D. Pine Brook, New Jersey, United States
- Date of Receipt : 2024-09-24

2. Manufacturer

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea

3. Factory

- Name #1: CHEMTRONICS CO.,LTD.
- Address #1: 35, Buk-ri, Namsa-myeon, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
- Name #2: Chengdu Xuguang Technology Co., Ltd.
- Address #2: No.86 2nd Section, Park Road, Longquanyi District, Chengdu City, Sichuan Province, P.R.China
- Name #3: CHEMTROVINA COMPANY LIMITED
- Address #3: Nhon Trach 2 - Loc Khang IZ, Hiep Phuoc Town, Nhon Trach District, Dong Nai Province, Vietnam
- Name #4: SJIT CO., LTD.
- Address #4: 54-11, Dongtanhana 1gil, Hwaseong-si, Gyeonggi-Do, Korea
- Name #5: SJIT VINA Co., Ltd
- Address #5: Lot X2, Ho Nai Industrial Zone, Ho Nai 3 Commune, Trang Bom District, Dong Nai Province, Vietnam
- Name #6: XUGUANG TECHNOLOGY (VIETNAM) COMPANY LIMITED
- Address #6: Factory No. 4, Lot CN1, An Duong Industrial Park, Hong Phong Commune, An Duong District, Hai Phong City, Vietnam

4. Use of Report : For FCC Conformance

5. Test Sample / Model: Wi-Fi/BT Transceiver / WCF734M

6. Date of Test : 2024-09-27 to 2024-10-28

7. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247

8. Testing Environment: refer to 10 page



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (2) / (75) Pages

9. Test Results : Compliance

10. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si,
Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Su-jun Hwang: (Signature)	Won-Jae Hwang: (Signature)

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2024-10-29

CTK Co., Ltd.

REPORT REVISION HISTORY

Date	Revision	Page No
2024-10-29	Issued (CTK-2024-02775)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

1. General Product Description	5
1.1 Applicant Information	5
1.2 Product Information.....	5
1.3 Peripheral Devices	6
1.4 Model Differences	6
2. Accreditations	7
2.1 Laboratory Accreditations and Listings	7
2.2 Calibration Details of Equipment Used for Measurement	7
3. Test Specifications	8
3.1 Standards.....	8
3.2 Mode of operation during the test.....	9
3.3 Device Modifications	9
3.4 Maximum Measurement Uncertainty	9
3.5 Test Software.....	10
3.6 Testing Environment	10
4. Technical Characteristic Test.....	11
4.1 6dB Bandwidth.....	11
4.2 OUTPUT POWER	23
4.3 Transmitter Power Spectral Density.....	31
4.4 Conducted Spurious emission	39
4.5 Radiated Emission	50
4.6 AC Conducted Emissions	71
APPENDIX A – Test Equipment Used For Tests	74

1. General Product Description

1.1 Applicant Information

Company	Samsung Electronics Co., Ltd.
Contact Point	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea
Contact Person	Name : Minhyung Cho E-mail : mh719.cho@samsung.com Tel : +82-31-277-2688 Fax : -

1.2 Product Information

FCC ID	A3LWCF734M
Product Description	Wi-Fi/BT Transceiver
Model name	WCF734M
Variant Model name	-
Operating Frequency	2 412 MHz – 2 472 MHz (20 MHz_BW)
RF Output Power	802.11b : 19.53 dBm (89.74 mW) 802.11g : 18.63 dBm (72.95 mW) 802.11n_HT20 : 21.60 dBm (144.54 mW)
Antenna Specification	Antenna type : Metal Antenna Peak Gain : 0.86 dBi (ANT L), 0.46 dBi (ANT R)
Antenna Configurations	802.11b : SISO(ANT L, ANT R) 802.11g : SISO(ANT L, ANT R) 802.11n : SISO(ANT L, ANT R), MIMO(ANT L+ANT R)
Number of channels	13 (802.11b/g/n_HT20)
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Data Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: up to 300 Mbps
Power Source	DC 5 V
Hardware Rev	WCF734M
Software Rev	FC *0.*

RF Power setting in Test SW

Mode	Frequency	Power Setting Value		
		ANT R	ANT L	ANT R+ANT L
802.11b	2 412 MHz	15.5	15.5	
	2 467 MHz	15.5	15.5	
	2 472 MHz	14.5	14.5	
802.11g	2 412 MHz	15.5	15	
	2 417 MHz	17	17	
	2 442 MHz	17	17	
	2 467 MHz	11.5	13.5	
	2 472 MHz	10.5	12	
802.11n_HT20	2 412 MHz			14
	2 417 MHz			17
	2 442 MHz			17
	2 467 MHz			10
	2 472 MHz			8.5

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R5S
AC/DC Adapter	HP	HSTNN-LA40	-
Note Computer	Samsung Electronics Co., Ltd.	NT550XEZ	5RNV9FCW400658Y
AC/DC Adapter	SOLUM VINA COMPANY LIMITED	EP-TA845 001	-
Note Computer	Samsung Electronics Co., Ltd.	NT550XEZ	5RNV9FCW400963T
AC/DC Adapter	SOLUM VINA COMPANY LIMITED	EP-TA845 001	-

1.4 Model Differences

Not applicable

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious emission	C	
15.247(d)	Unwanted Emission(Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emissions	C	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The sample was tested according to the following specification: FCC Part 15.247			
<u>Note 4:</u> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
 The results are only attached worst cases.

Test Frequency & Bandwidth

802.11b

Bandwidth	Lowest channel	Middle channel	Highest channel
20 MHz	2 412 MHz	2 442 MHz	2 472 MHz

Other

Bandwidth	Lowest channel 1	Lowest channel 2	Middle channel	Highest channel 1	Highest channel 2
20 MHz	2 412 MHz	2 417 MHz	2 442 MHz	2 467 MHz	2 472 MHz

Test mode & Worst case

Test mode	Modulation	Data rate (Worst case)	Duty Cycle	Duty Cycle Factor
802.11b	DSSS	11 Mbps	96.83 %	0.14 dB
802.11g	OFDM	6 Mbps	97.89 %	0.09 dB
802.11n_HT20	OFDM	MCS 0	97.74 %	0.10 dB

3.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Power Spectral Density	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$)
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	3.82 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f > 1$ GHz)	4.50 dB (C.L.: Approx. 95 %, $k = 2$)
Line Conducted Emission	2.00 dB (C.L.: Approx. 95 %, $k = 2$)

3.5 Test Software automation program

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.10, ES10 Ver. 10.001
Line Conducted Test	EMC32 Ver. 10.50.00

Test program

Conducted Test, Radiated Test, Line Conducted Test	QATool_Dbg(0.0.1.85), WCN Combo Tool(2.1952.00)
--	---

3.6 Testing Environment

Test Item	Test Date	Temperature (℃)	Relative Humidity (%)
6 dB Bandwidth	2024-10-07	22	51
Maximum Output Power	2024-10-07	22	51
Conducted Spurious emission	2024-10-07	22	51
Unwanted Emission(Conducted)	2024-10-07	22	51
Transmitter Power Spectral Density	2024-10-07	22	51
Radiated Emissions (f > 1GHz)	2024-09-27 ~ 2024-10-28	22 ~ 25	43 ~ 54
Radiated Emissions (f < 1GHz)	2024-10-03, 2024-10-17	21	47 ~ 48
AC Conducted Emissions	2024-10-17	22	49

4. Technical Characteristic Test

4.1 6dB Bandwidth

Test Procedures

KDB 558074 - Section 8.2
ANSI C63.10-2013 - Section 11.8.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 - Section 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- | | |
|--|----------------------------|
| a) RBW = 100 kHz | b) VBW $\geq 3 \times$ RBW |
| c) Detector = peak | d) Trace mode = Max hold |
| e) Sweep = auto couple | |
| f) Allow trace to fully stabilize | |
| g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. | |

Minimum Standard :

6 dB Bandwidth > 500kHz

Test Data :

ANT L

Mode	6 dB Bandwidth and 99 % Bandwidth (MHz)					
	802.11b		802.11g		802.11n_HT20	
Frequency	6 dB	99 %	6 dB	99 %	6 dB	99 %
2 412 MHz	8.33	13.32	15.17	16.82	15.74	17.53
2 417 MHz	-	-	15.16	17.00	15.72	17.71
2 442 MHz	8.33	13.37	15.17	17.11	15.74	17.79
2 467 MHz	-	-	15.16	16.77	15.76	17.51
2 472 MHz	8.33	13.32	15.16	16.75	16.31	17.49

ANT R




Mode	6 dB Bandwidth and 99 % Bandwidth (MHz)					
	802.11b		802.11g		802.11n_HT20	
Frequency	6 dB	99 %	6 dB	99 %	6 dB	99 %
2 412 MHz	8.34	13.37	15.17	16.92	15.16	17.76
2 417 MHz	-	-	15.17	17.22	15.17	18.34
2 442 MHz	8.34	13.38	15.17	17.19	15.16	18.31
2 467 MHz	-	-	15.16	16.75	15.17	17.66
2 472 MHz	8.34	13.32	15.17	16.73	15.17	17.66

See next pages for actual measured spectrum plots.






CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (13) / (75) Pages

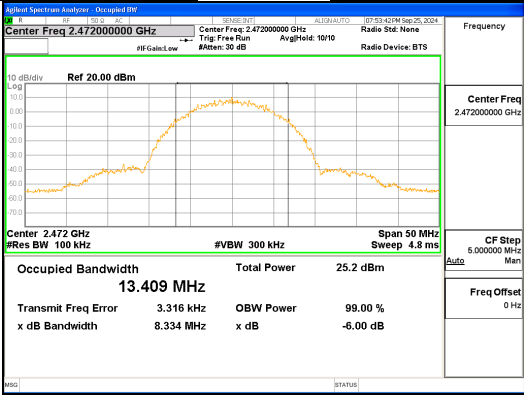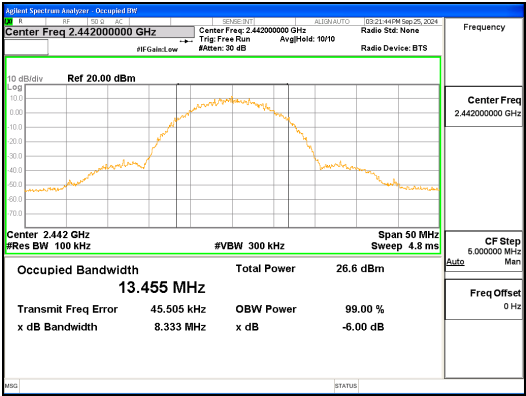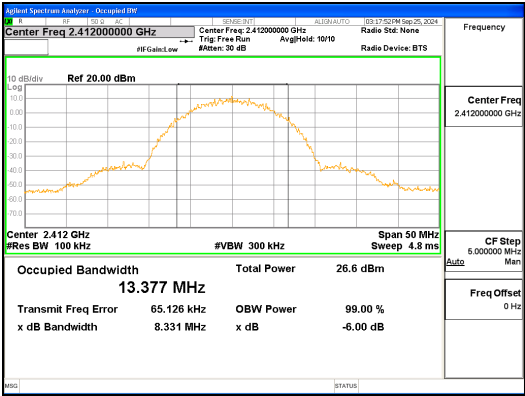

ANT L, 802.11b, 6dB Bandwidth



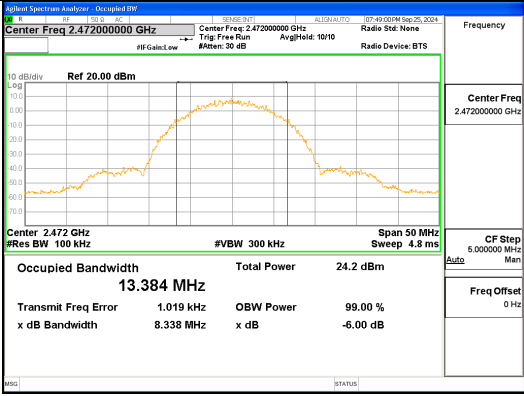
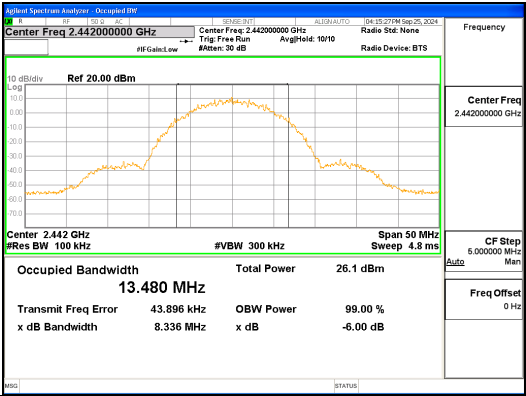
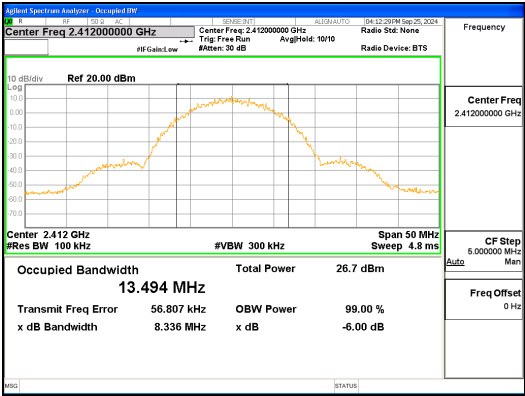


ANT R, 802.11b, 6dB Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (14) / (75) Pages

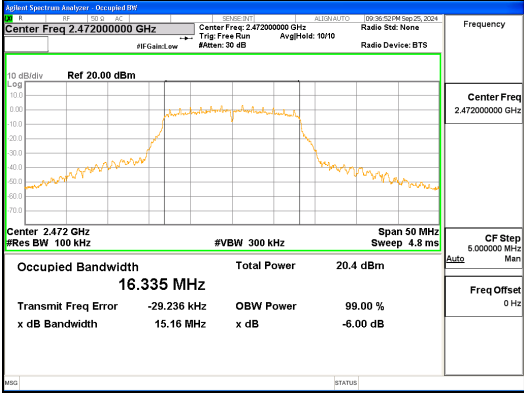
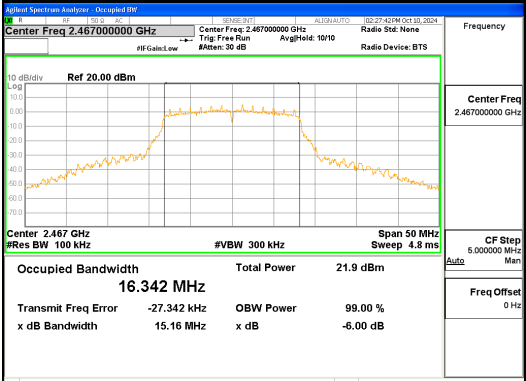
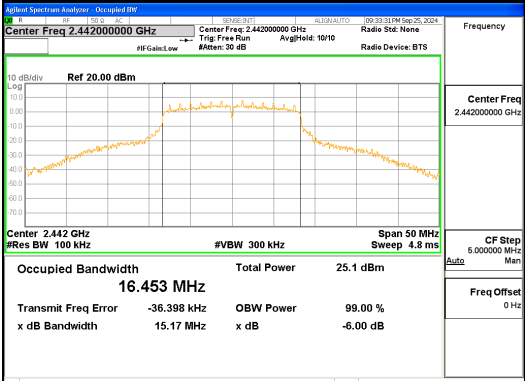
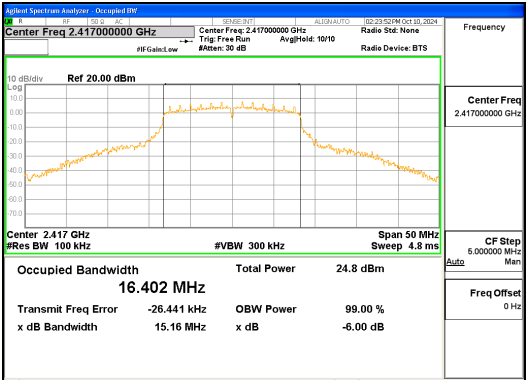
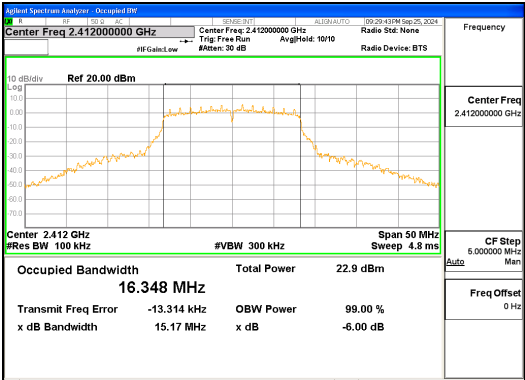


ANT L, 802.11g, 6dB Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (15) / (75) Pages

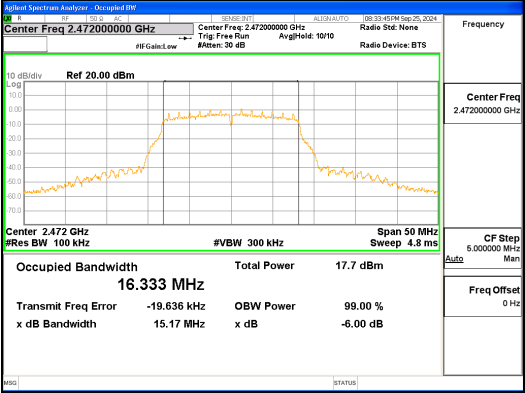
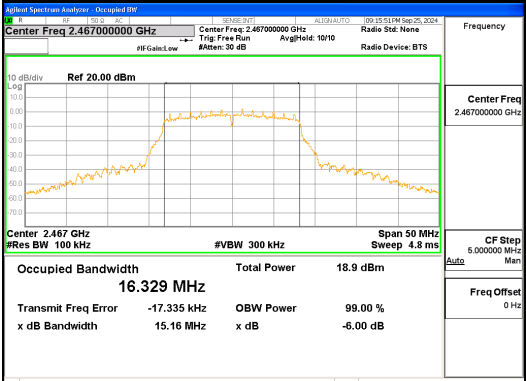
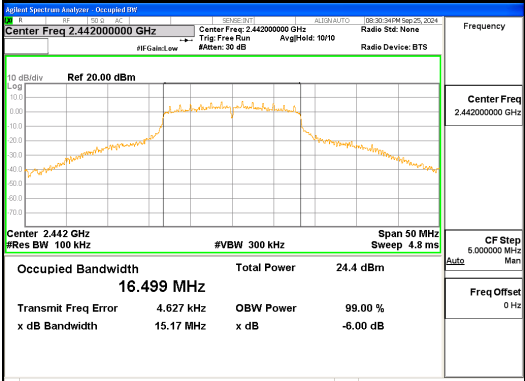
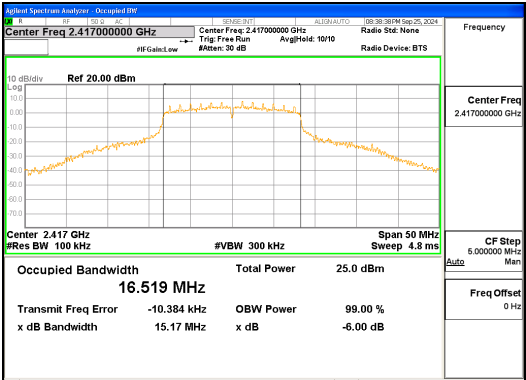
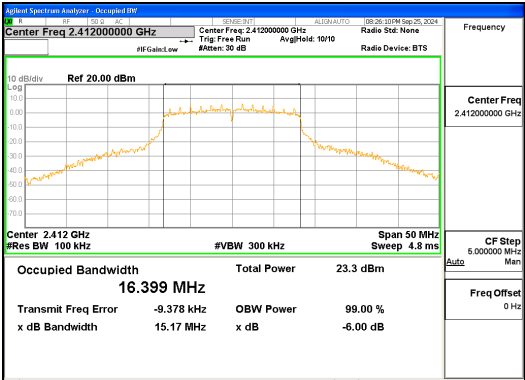


ANT R, 802.11g, 6dB Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (16) / (75) Pages

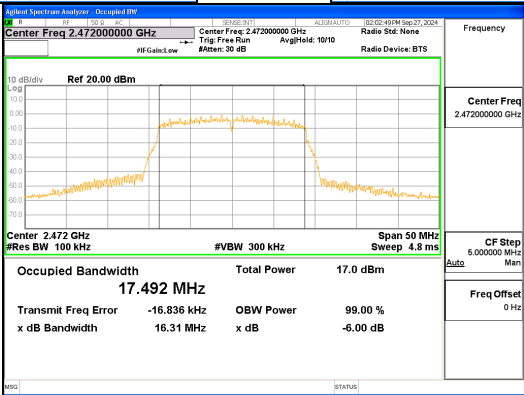
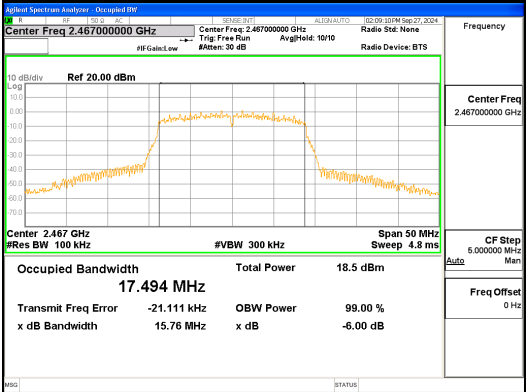
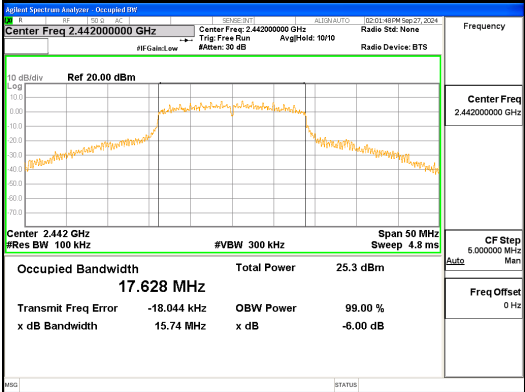
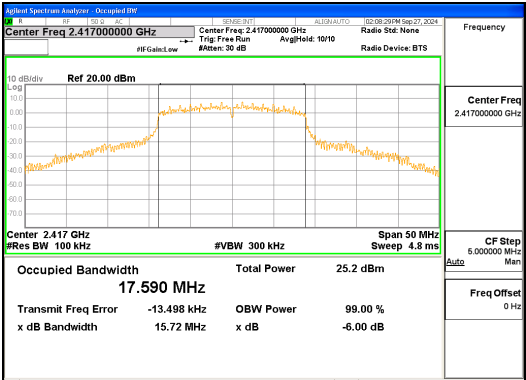
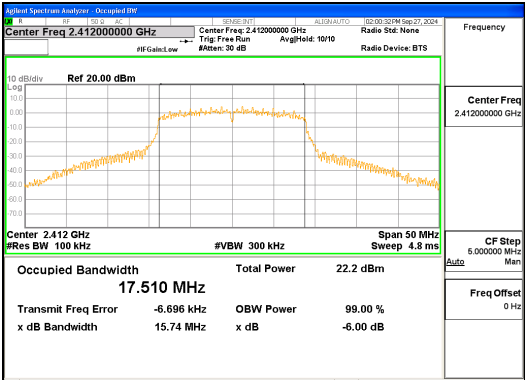


ANT L, 802.11n_HT20, 6dB Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (17) / (75) Pages

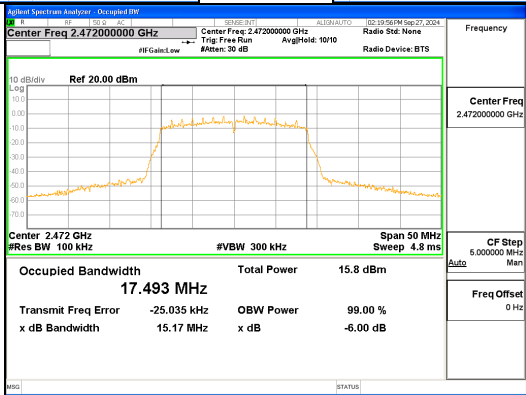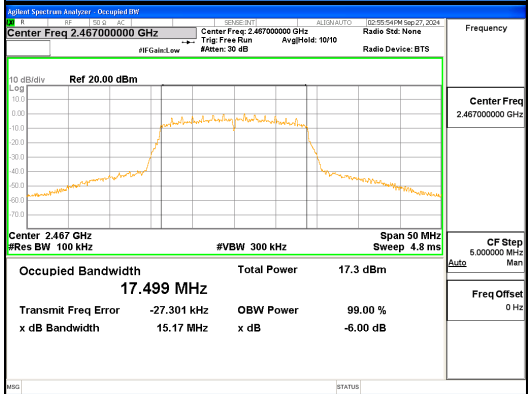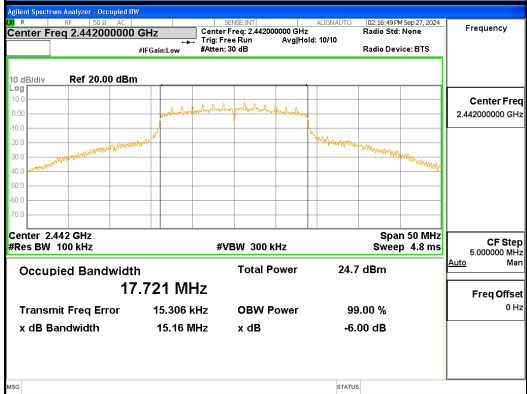
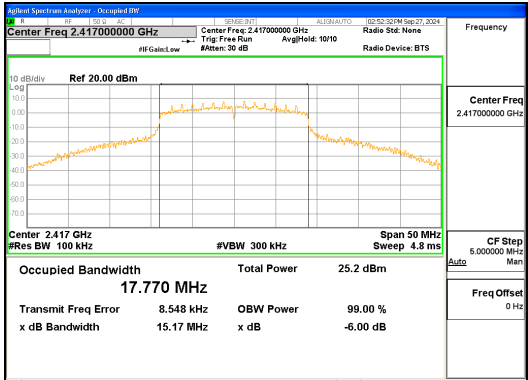
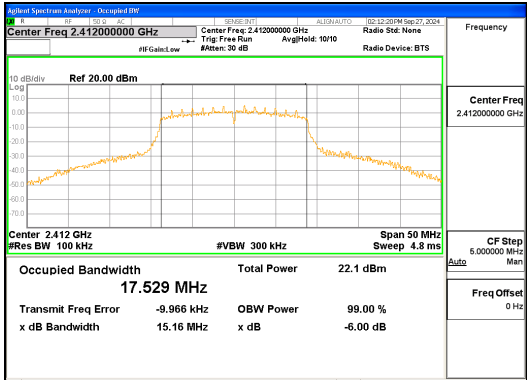


ANT R, 802.11n_HT20, 6dB Bandwidth






CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (18) / (75) Pages

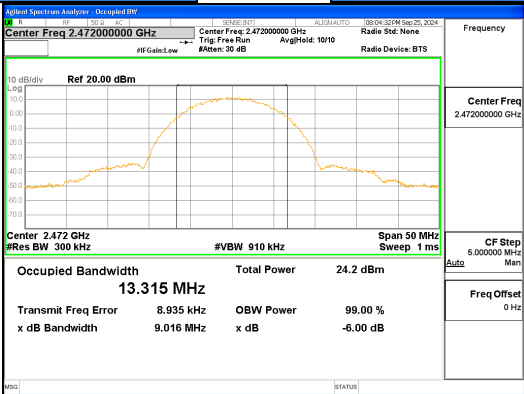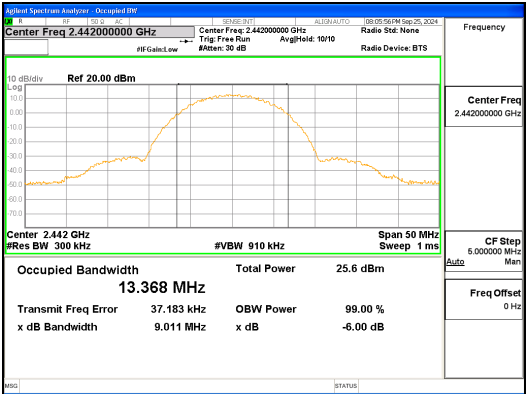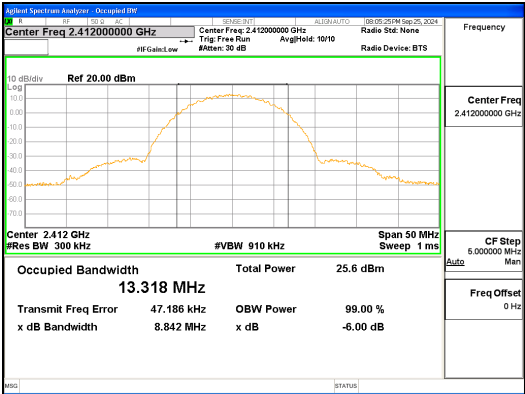

ANT L, 802.11b, 99% Bandwidth



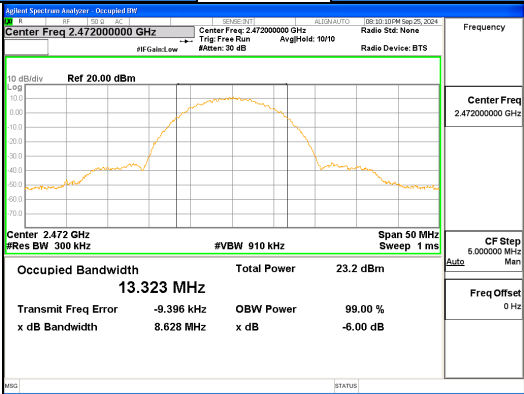
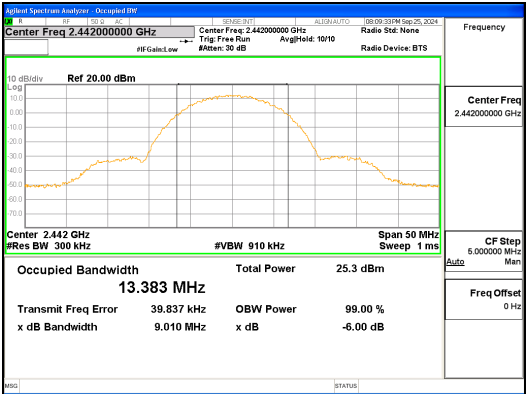
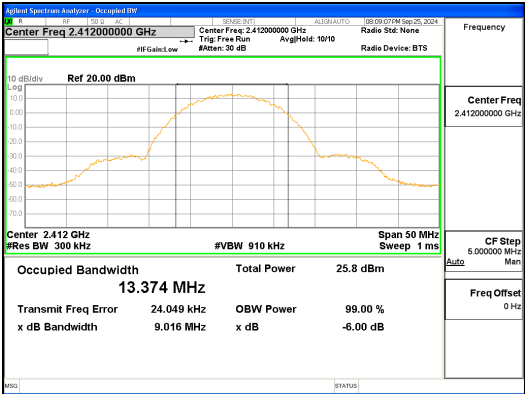


ANT R, 802.11b, 99% Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (19) / (75) Pages

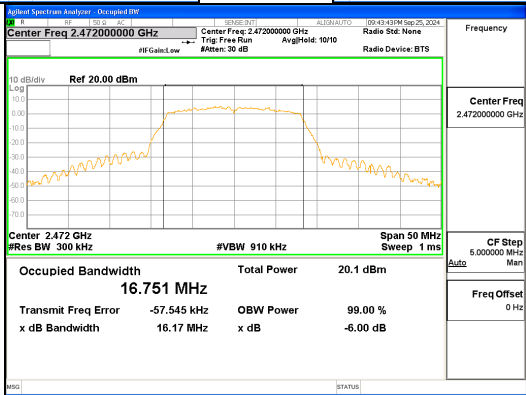
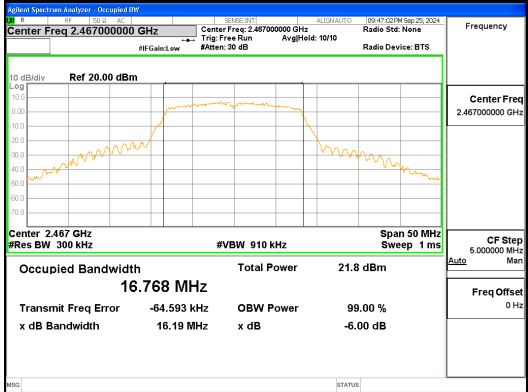
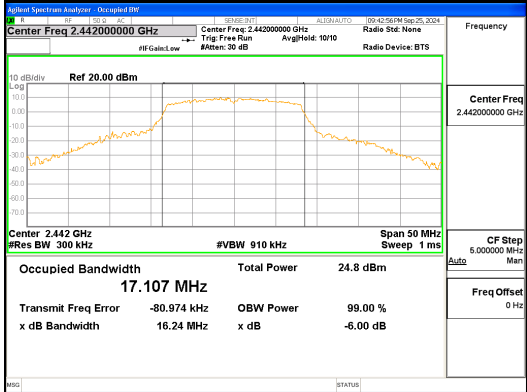
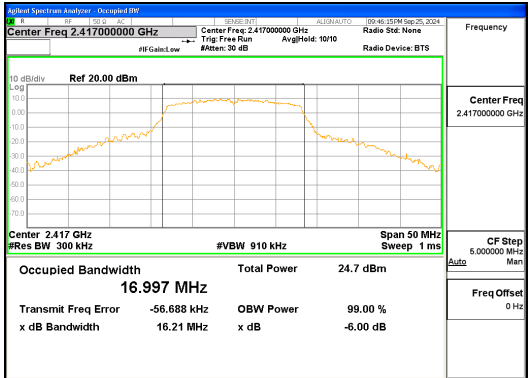
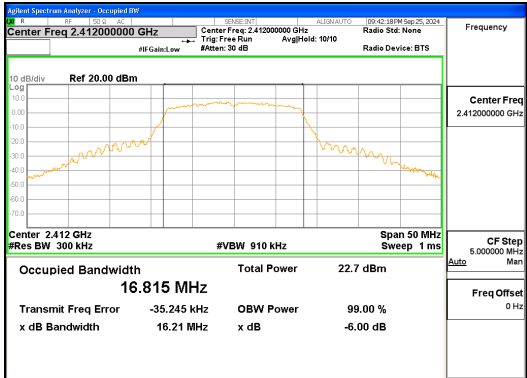


ANT L, 802.11g, 99% Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (20) / (75) Pages

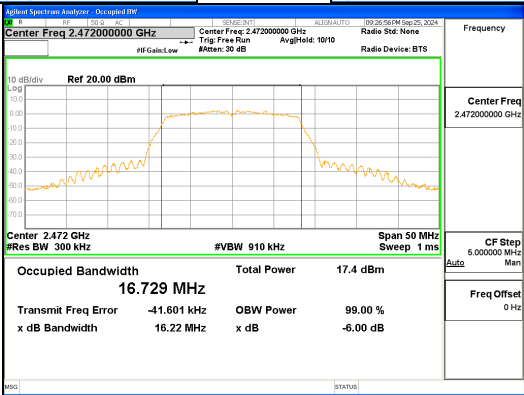
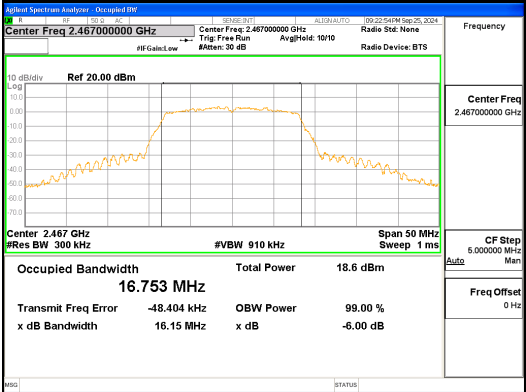
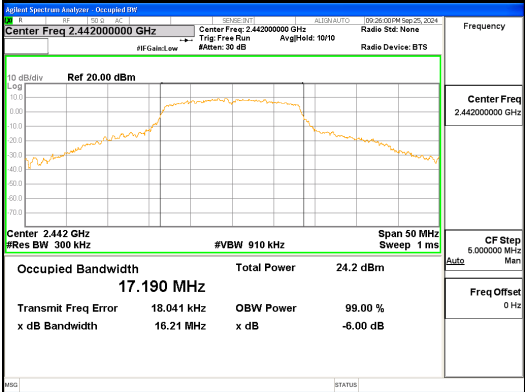
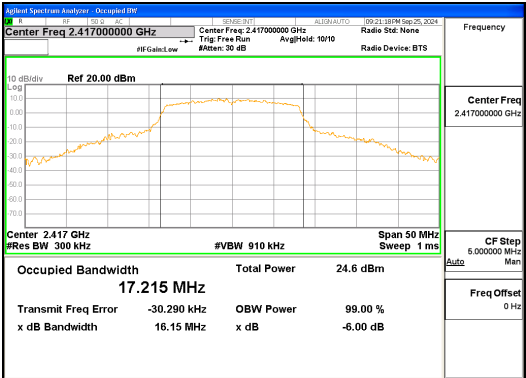
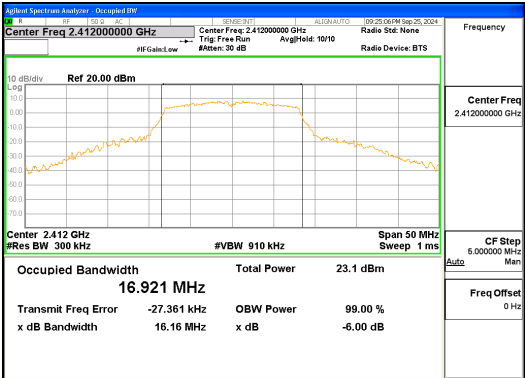


ANT R, 802.11g, 99% Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (21) / (75) Pages

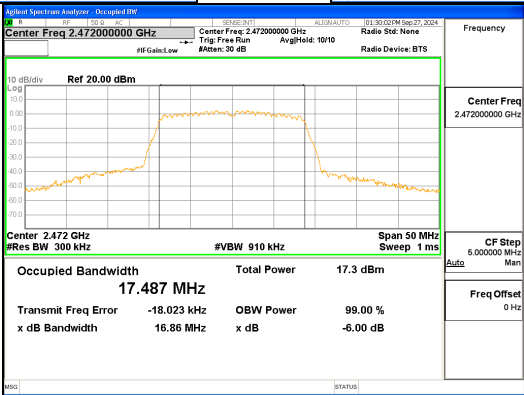
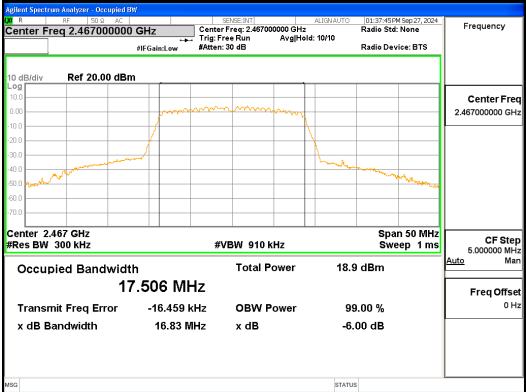
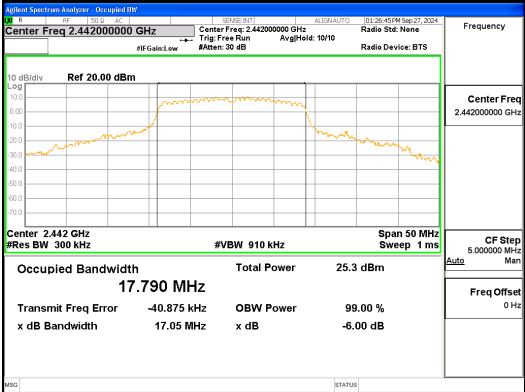
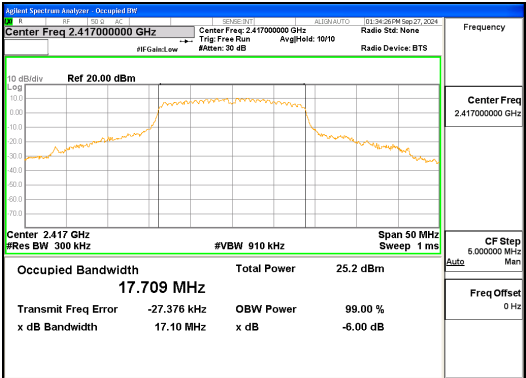
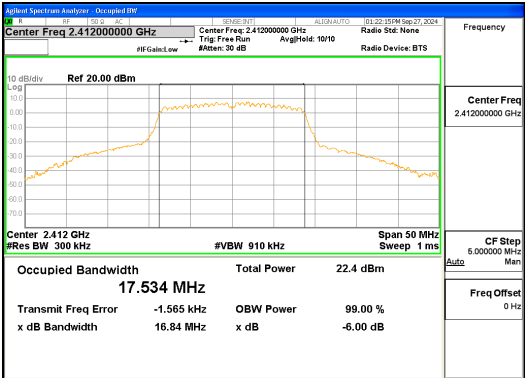


ANT L, 802.11n_HT20, 99% Bandwidth



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (22) / (75) Pages

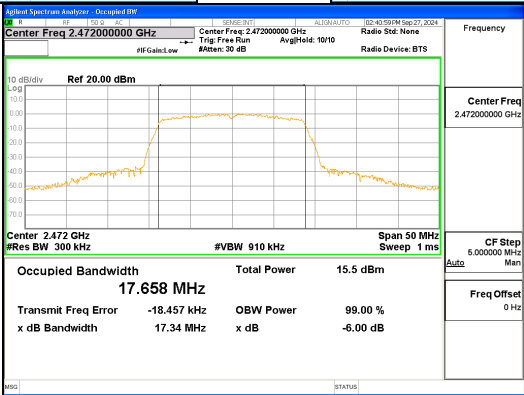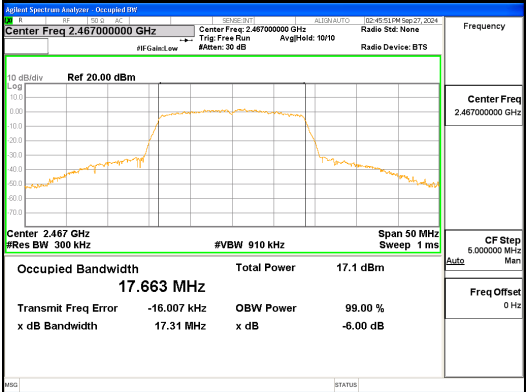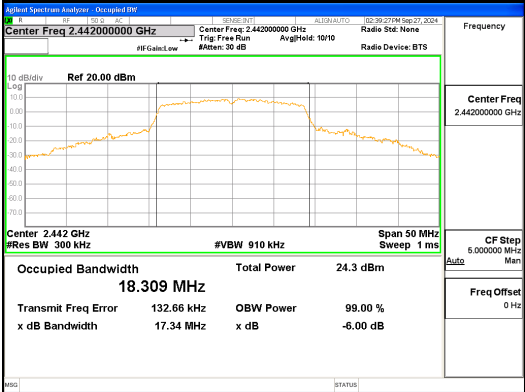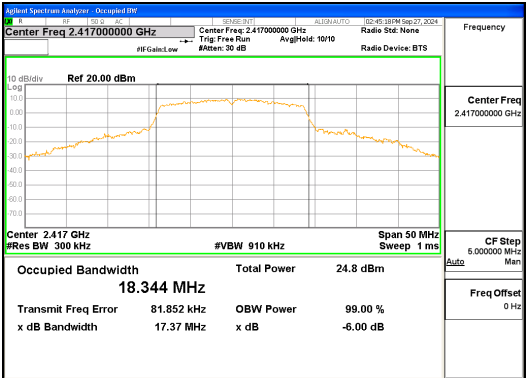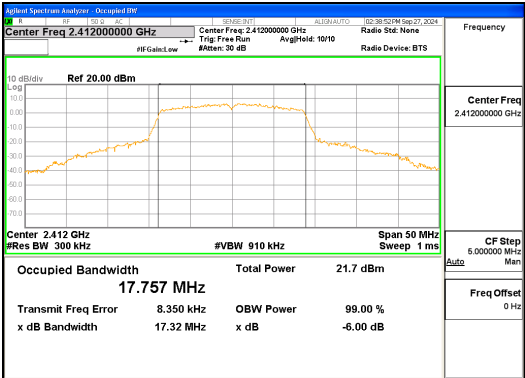

ANT R, 802.11n_HT20, 99% Bandwidth

4.2 OUTPUT POWER

Test Procedures


<802.11b/g/n mode>

KDB 558074 - Section 8.3.2.2 (Average Power)

ANSI C63.10-2013 - Section 11.9.2.2

KDB 662911 D01, D02 (Multiple Transmitter Output)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) span $\geq 1.5 \times \text{OBW}$
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times \text{RBW}$
- d) Sweep time = auto
- e) Detector = RMS
- f) average at least 100
- g) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor
802.11b	0.14 dB
802.11g	0.09 dB
802.11n_HT20	0.10 dB

Limit

Operating Mode	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	ANT L	0.86	30.00
SISO	802.11b/g/n	ANT R	0.46	30.00
MIMO (2Tx)	802.11n	ANT L + ANT R	3.67	30.00

Note :

Per KDB 662911, the MIMO directional gain is calculated using the following formula, Where G_N is the gain of the nth antenna and N_{ANT} , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Test Data :

ANT L (SISO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11b	2 412	19.11	0.14	19.25	30.00	10.75
	2 442	19.39	0.14	19.53	30.00	10.47
	2 472	17.81	0.14	17.95	30.00	12.05
802.11g	2 412	16.44	0.09	16.53	30.00	13.47
	2 417	18.44	0.09	18.53	30.00	11.47
	2 442	18.54	0.09	18.63	30.00	11.37
	2 467	15.50	0.09	15.59	30.00	14.41
	2 472	13.93	0.09	14.02	30.00	15.98
802.11n _HT20	2 412	15.30	0.10	15.40	30.00	14.60
	2 417	18.44	0.10	18.54	30.00	11.46
	2 442	18.39	0.10	18.49	30.00	11.51
	2 467	11.79	0.10	11.89	30.00	18.11
	2 472	10.25	0.10	10.35	30.00	19.65




ANT R (SISO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11b	2 412	19.33	0.14	19.47	30.00	10.53
	2 442	18.69	0.14	18.83	30.00	11.17
	2 472	16.77	0.14	16.91	30.00	13.09
802.11g	2 412	16.82	0.09	16.91	30.00	13.09
	2 417	18.42	0.09	18.51	30.00	11.49
	2 442	18.00	0.09	18.09	30.00	11.91
	2 467	12.43	0.09	12.52	30.00	17.48
	2 472	11.24	0.09	11.33	30.00	18.67
802.11n _HT20	2 412	15.50	0.10	15.60	30.00	14.40
	2 417	18.54	0.10	18.64	30.00	11.36
	2 442	17.96	0.10	18.06	30.00	11.94
	2 467	10.68	0.10	10.78	30.00	19.22
	2 472	9.22	0.10	9.32	30.00	20.68




ANT L + ANT R (MIMO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n _HT20	2 412	18.41	0.10	18.51	30.00	11.49
	2 417	21.50	0.10	21.60	30.00	8.40
	2 442	21.19	0.10	21.29	30.00	8.71
	2 467	14.28	0.10	14.38	30.00	15.62
	2 472	12.78	0.10	12.88	30.00	17.12

See next pages for actual measured spectrum plots.

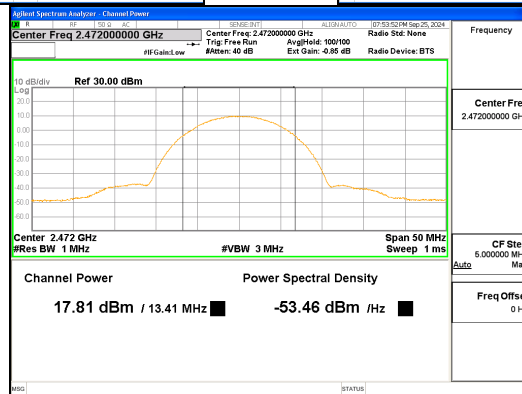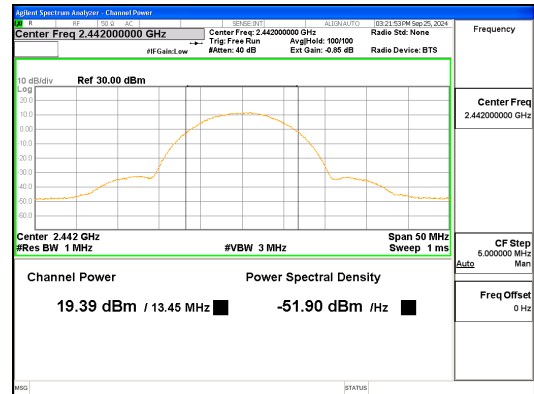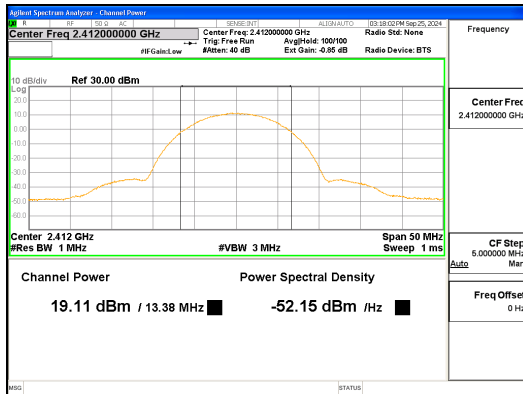

ANT L, 802.11b



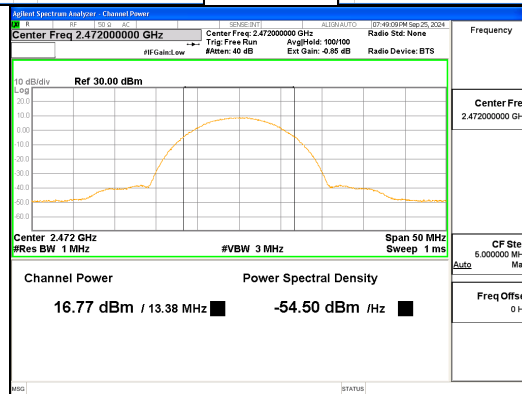
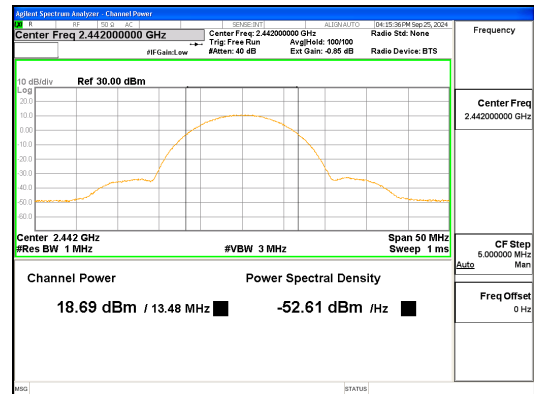
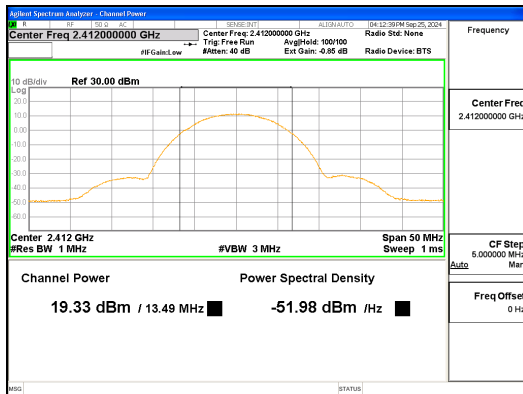


ANT R, 802.11b



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (27) / (75) Pages

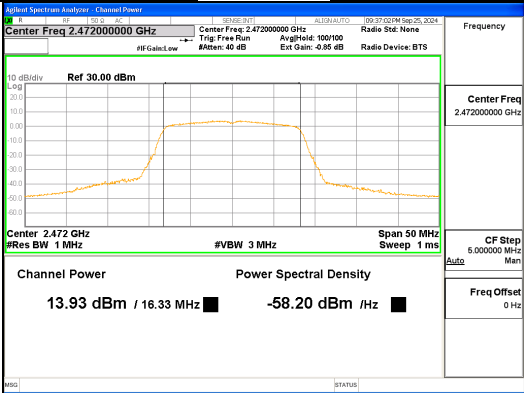
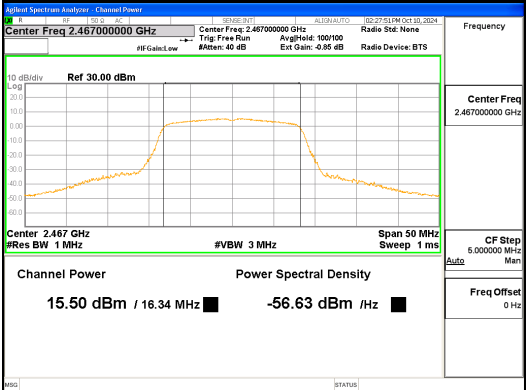
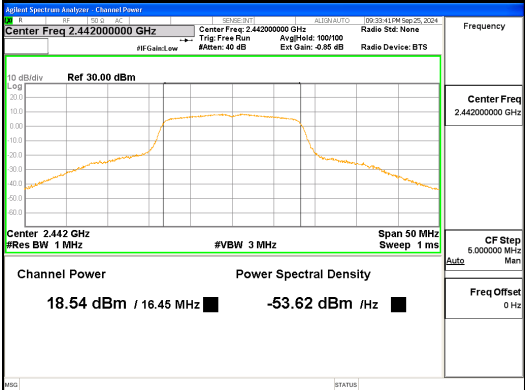
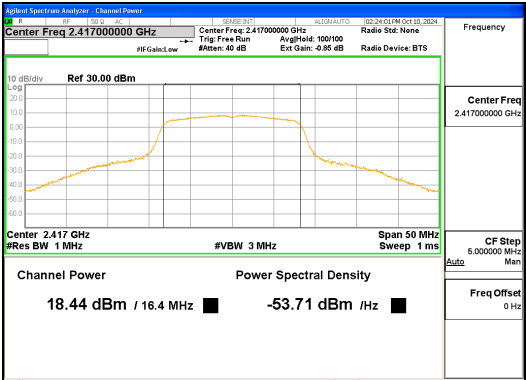
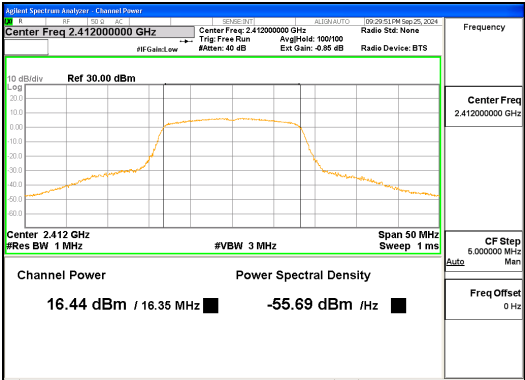


ANT L, 802.11g



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (28) / (75) Pages

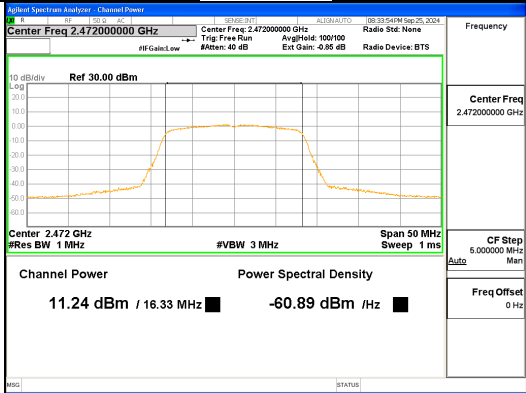
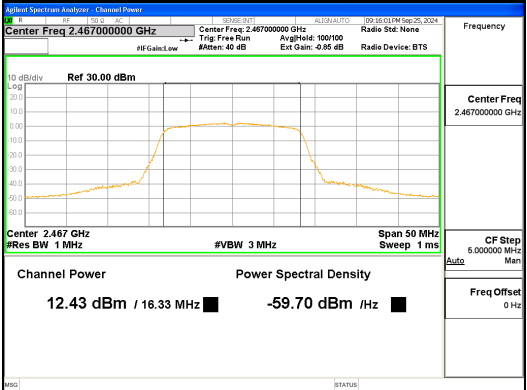
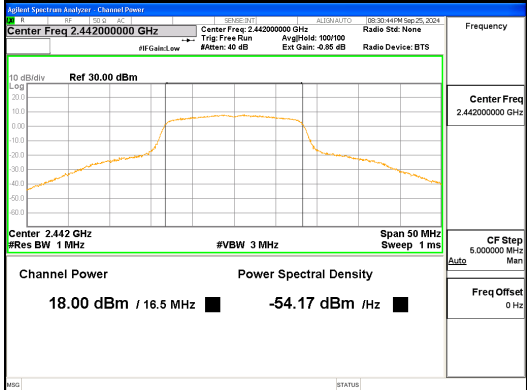
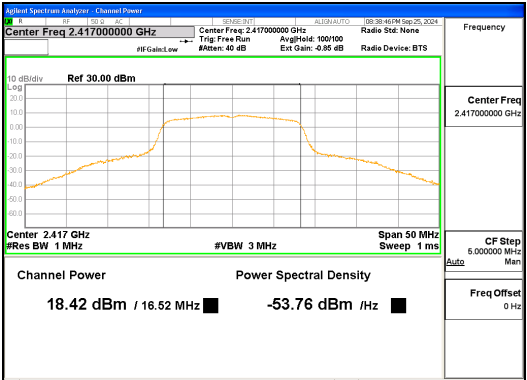
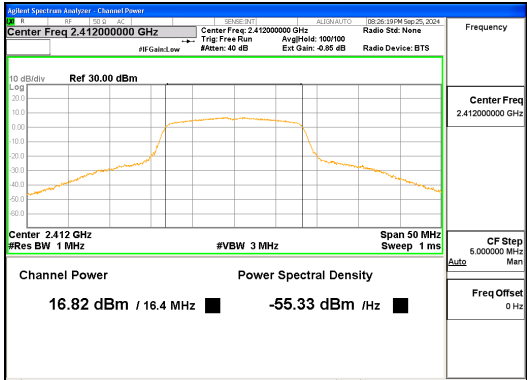


ANT R, 802.11g



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (29) / (75) Pages

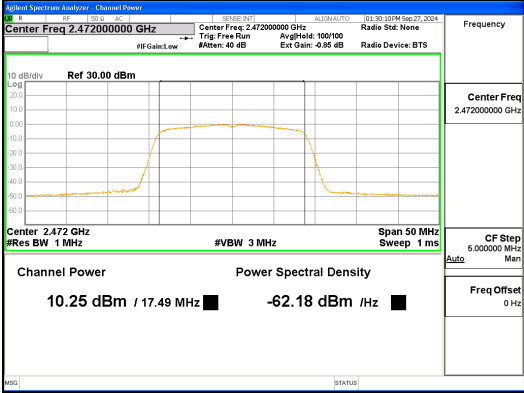
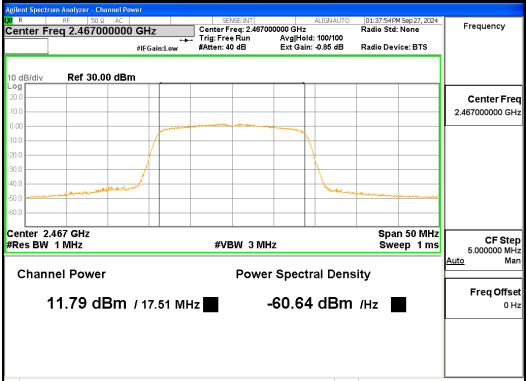
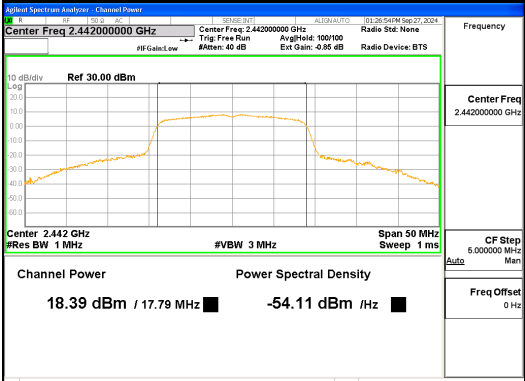
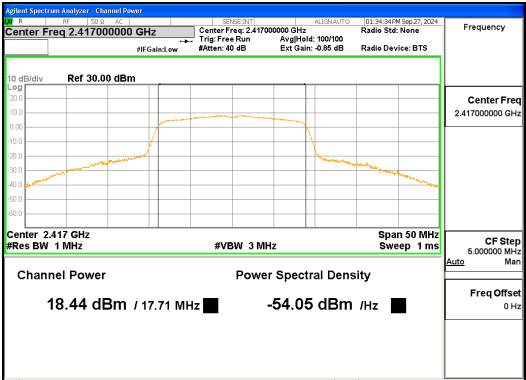
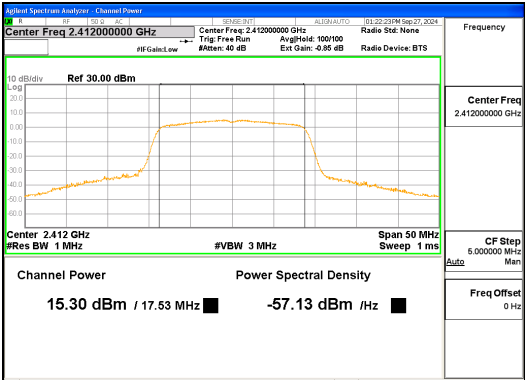


ANT L, 802.11n_HT20



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2024-02775
Page (30) / (75) Pages

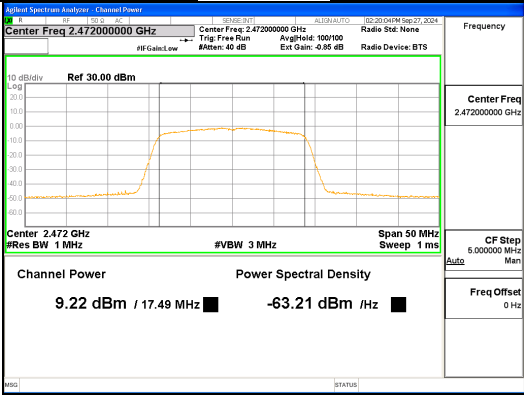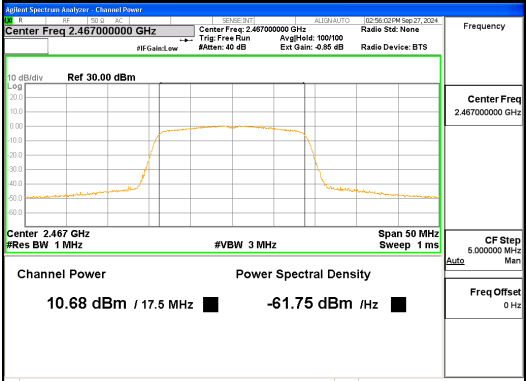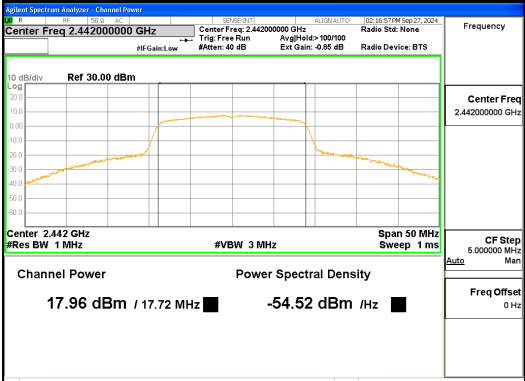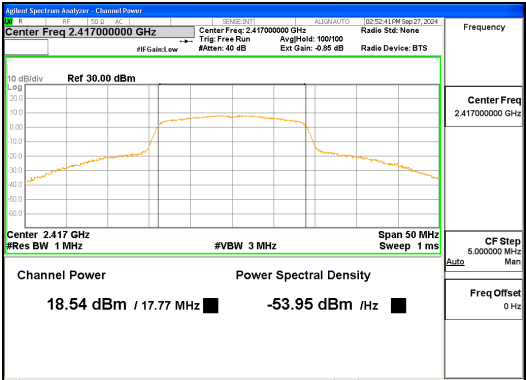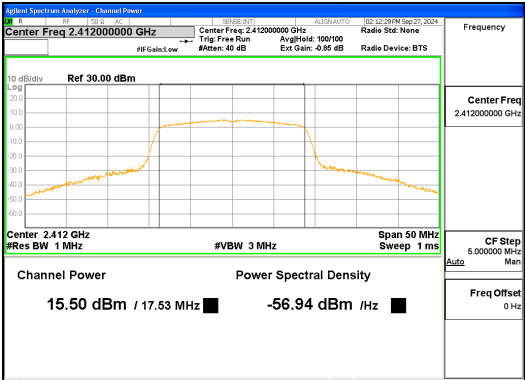

ANT R, 802.11n_HT20