

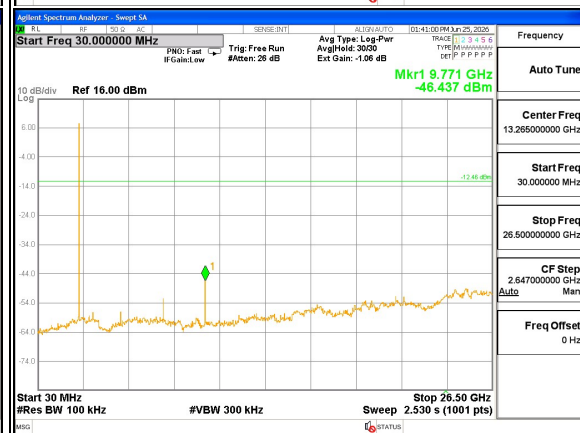


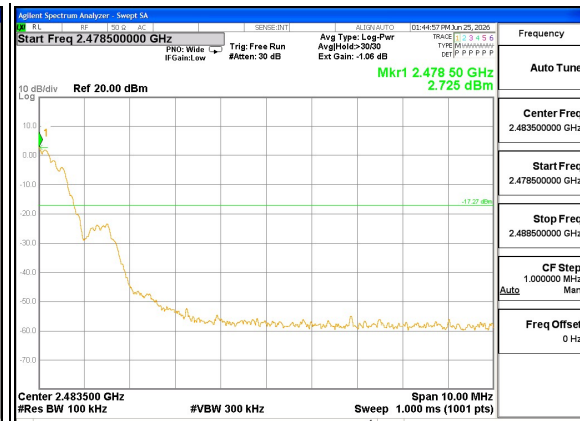

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (21) / (37) Pages

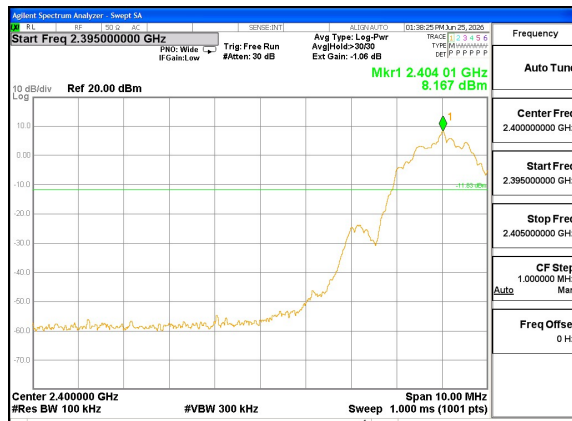

Bluetooth LE 2 Mbps

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (22) / (37) Pages

4.5 Radiated Emission

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

KDB 558074 - Section 8.5, 8.6
ANSI C63.10-2020 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1 m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4 m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz to 1 GHz

- a) RBW = 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
b) VBW $\geq$ RBW
c) Detector = CISPR Quasi-peak
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz to 26.5 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = peak
d) Sweep time = auto
e) Trace mode = max hold

- Average (duty cycle ≥ 98 %)

Frequency Range = 1 GHz to 26.5 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = RMS
d) Sweep time = auto
e) Averaging type = power (i.e., RMS)
f) Trace mode = average (at least 100 traces)

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (23) / (37) Pages

- Average (duty cycle < 98 %, duty cycle variations are less than ± 2 %)

Frequency Range = 1 GHz to 26.5 GHz (2.4 GHz 10th harmonic)

a) RBW = 1 MHz

b) VBW $\geq 3 \times$ RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

If power averaging (RMS) mode, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

Test Mode	Duty Cycle Factor
Bluetooth LE 1 Mbps	2.01 dB
Bluetooth LE 2 Mbps	4.78 dB

Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands (FCC)

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions.

The provisions in Section 15.35 apply to these measurements.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (24) / (37) Pages

FCC Part 15 § 15.209(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 3 :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 3. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 3. General Field Strength Limits for Licence-Exempt Transmitters (FCC)

Frequency [MHz]	Magnetic Field Strength [uA/m]	Field Strength [uV/m]	Field Strength [dBuV/m]	Deasurement Distance [meters]
0.009-0.490	6.37/F (F in kHz)	2400/F(kHz)	48.5-13.8	300
0.490-1.705	63.7/F (F in kHz)	24000/F(kHz)	33.8-23	30
1.705-30	0.08	30	29.5	30
30-88	-	100**	40	3
88-216	-	150**	43.5	3
216-960	-	200**	46	3
Above 960	-	500	54	3


** Except as provided in 15.209(g). Fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3 m (AV) and 74 dBuV/m@3 m (PK)
- 3) For measurement above 1 GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

Test Setup :


1) For field strength of emissions from 9 kHz to 30 MHz

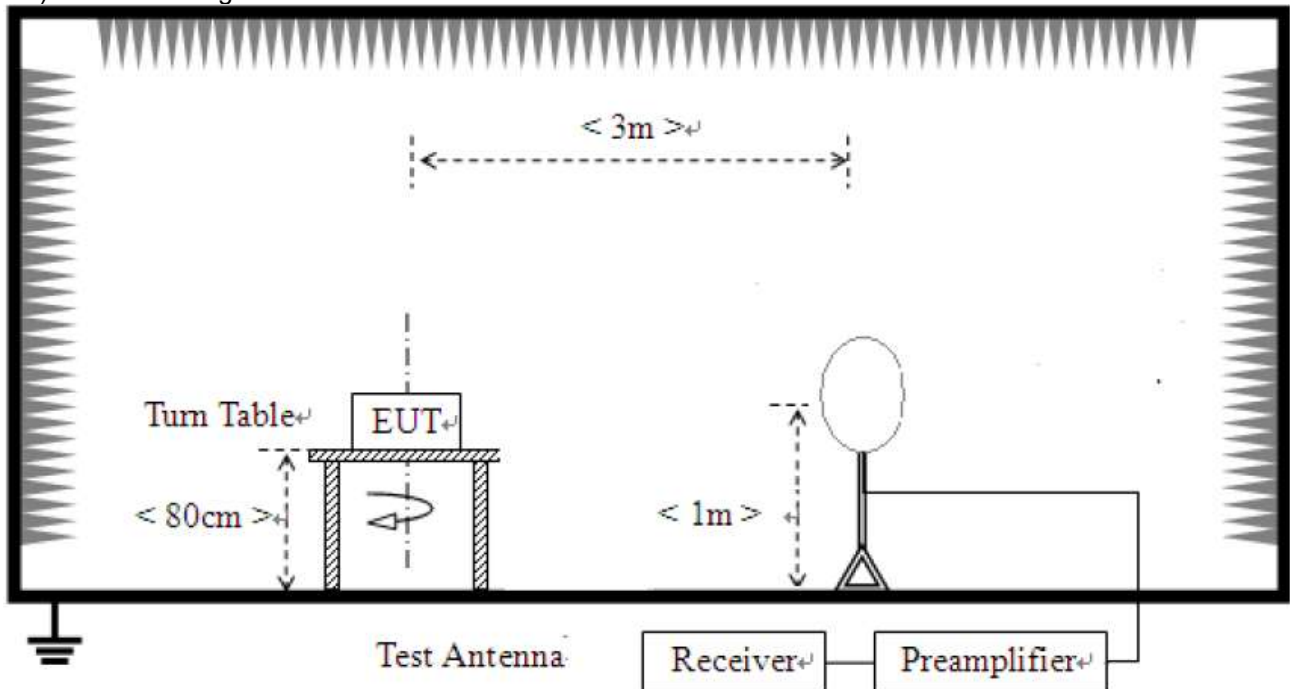

2) For field strength of emissions from 30 MHz to 1 GHz

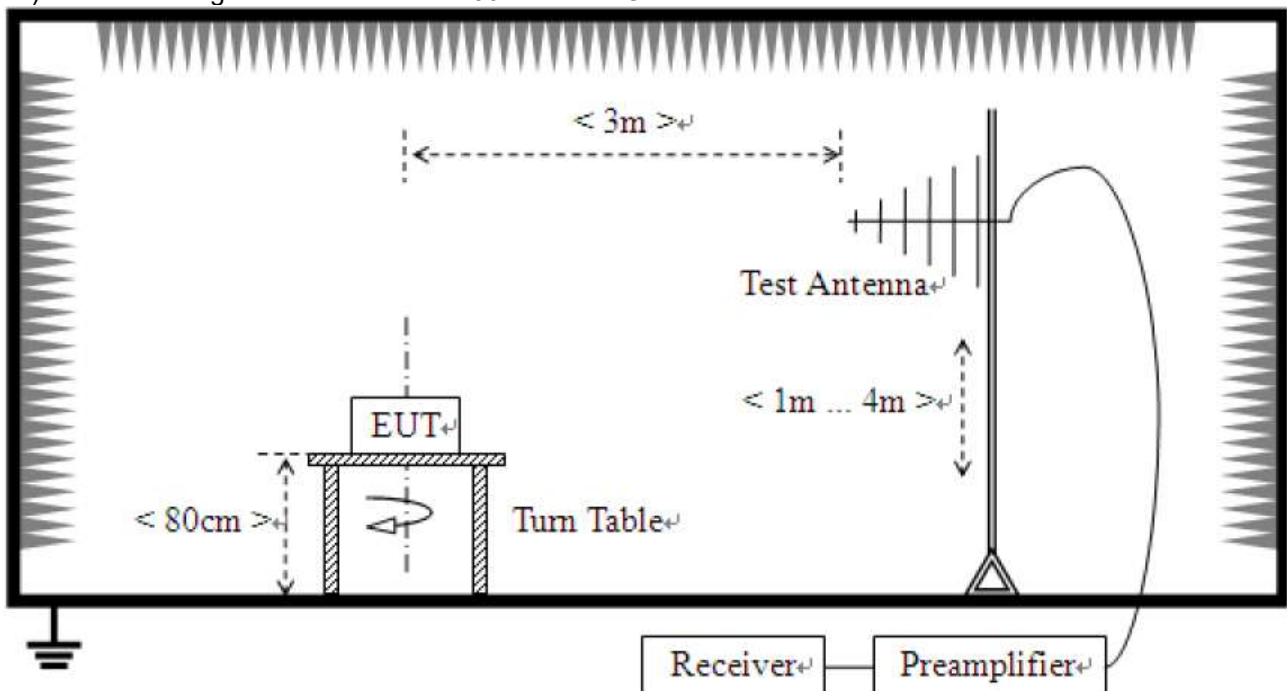

3) For field strength of emissions above 1 GHz

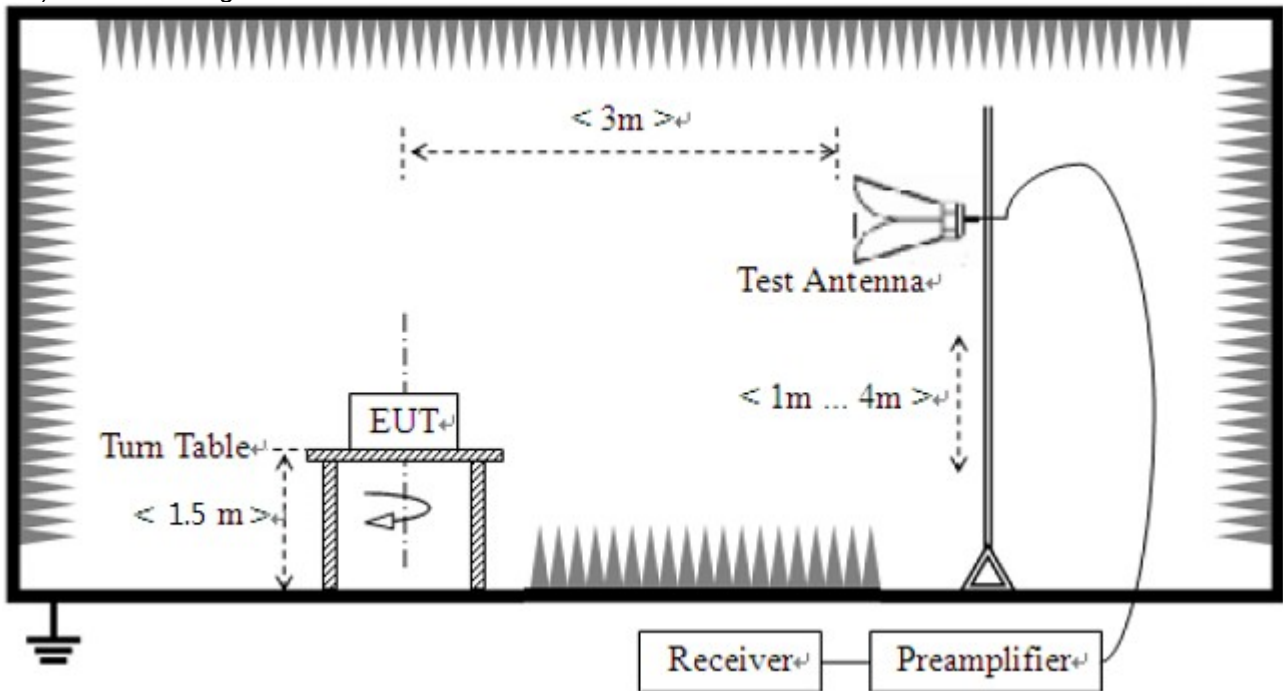



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (27) / (37) Pages

Test Results :


1) 9 kHz to 30 MHz

Test mode : Transmitter (Worst Case)

The requirements are:

☒ Complies

Test Data

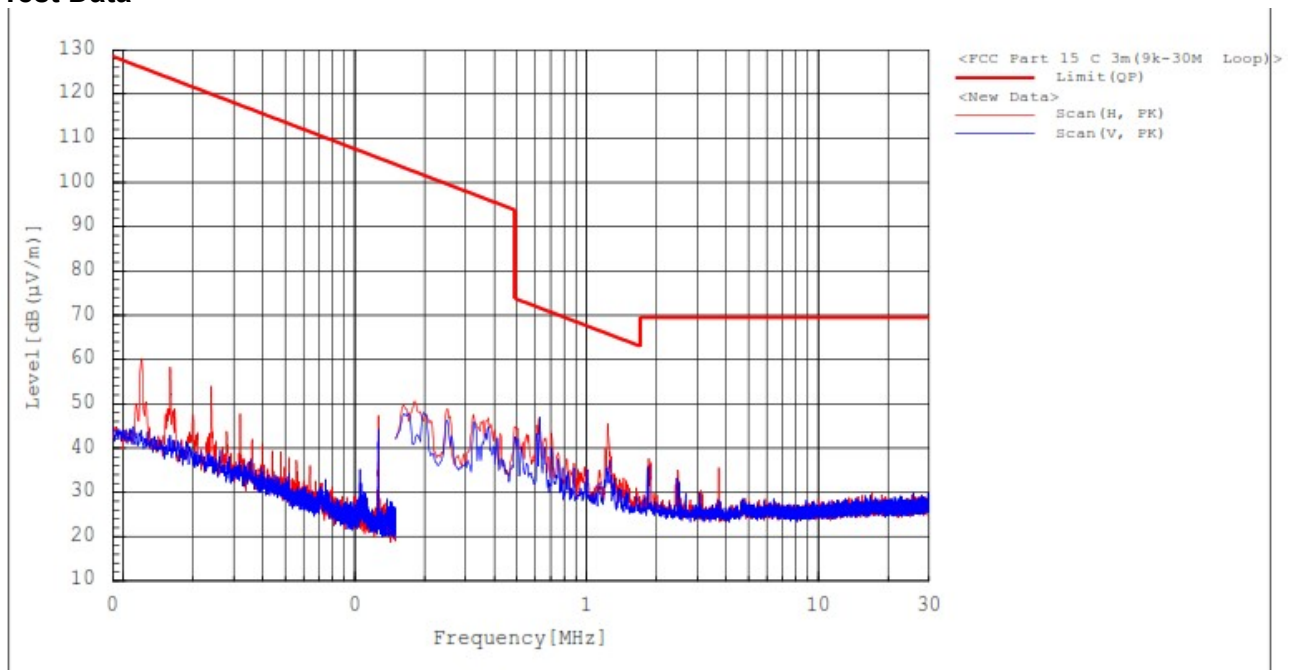

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.
2. Result = Reading + c.f (Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
5. This data is the Peak (PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (28) / (37) Pages


2) 30 MHz to 1 GHz

Test mode : Transmitter (Worst Case)

The requirements are:

☒ Complies

Test Data

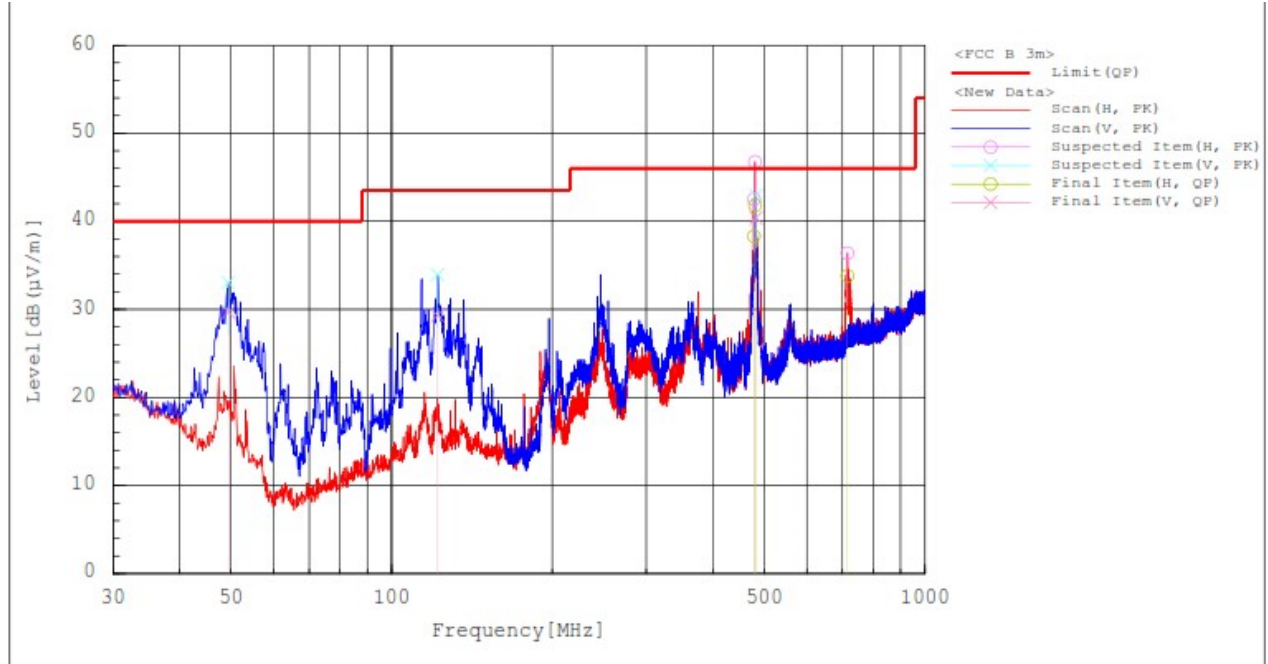

Final Result

No.	Frequency [MHz]	Fol	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	49.400	V	44.9	-15.2	29.7	40.0	10.3	100.0	220.2
2	121.956	V	42.4	-13.1	29.3	43.5	14.2	100.0	165.5
3	477.655	H	42.6	-4.3	38.3	46.0	7.7	100.0	292.0
4	479.983	H	46.1	-4.3	41.8	46.0	4.2	100.0	292.0
5	482.408	V	44.6	-4.2	40.4	46.0	5.6	200.1	359.6
6	715.887	H	34.0	-0.2	33.8	46.0	12.2	100.0	172.7

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.
2. Result = Reading + c.f (Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (29) / (37) Pages


3) Above 1 GHz

Test Mode : Transmitter (Worst Case)

The requirements are:

☒ Complies

Test Data :

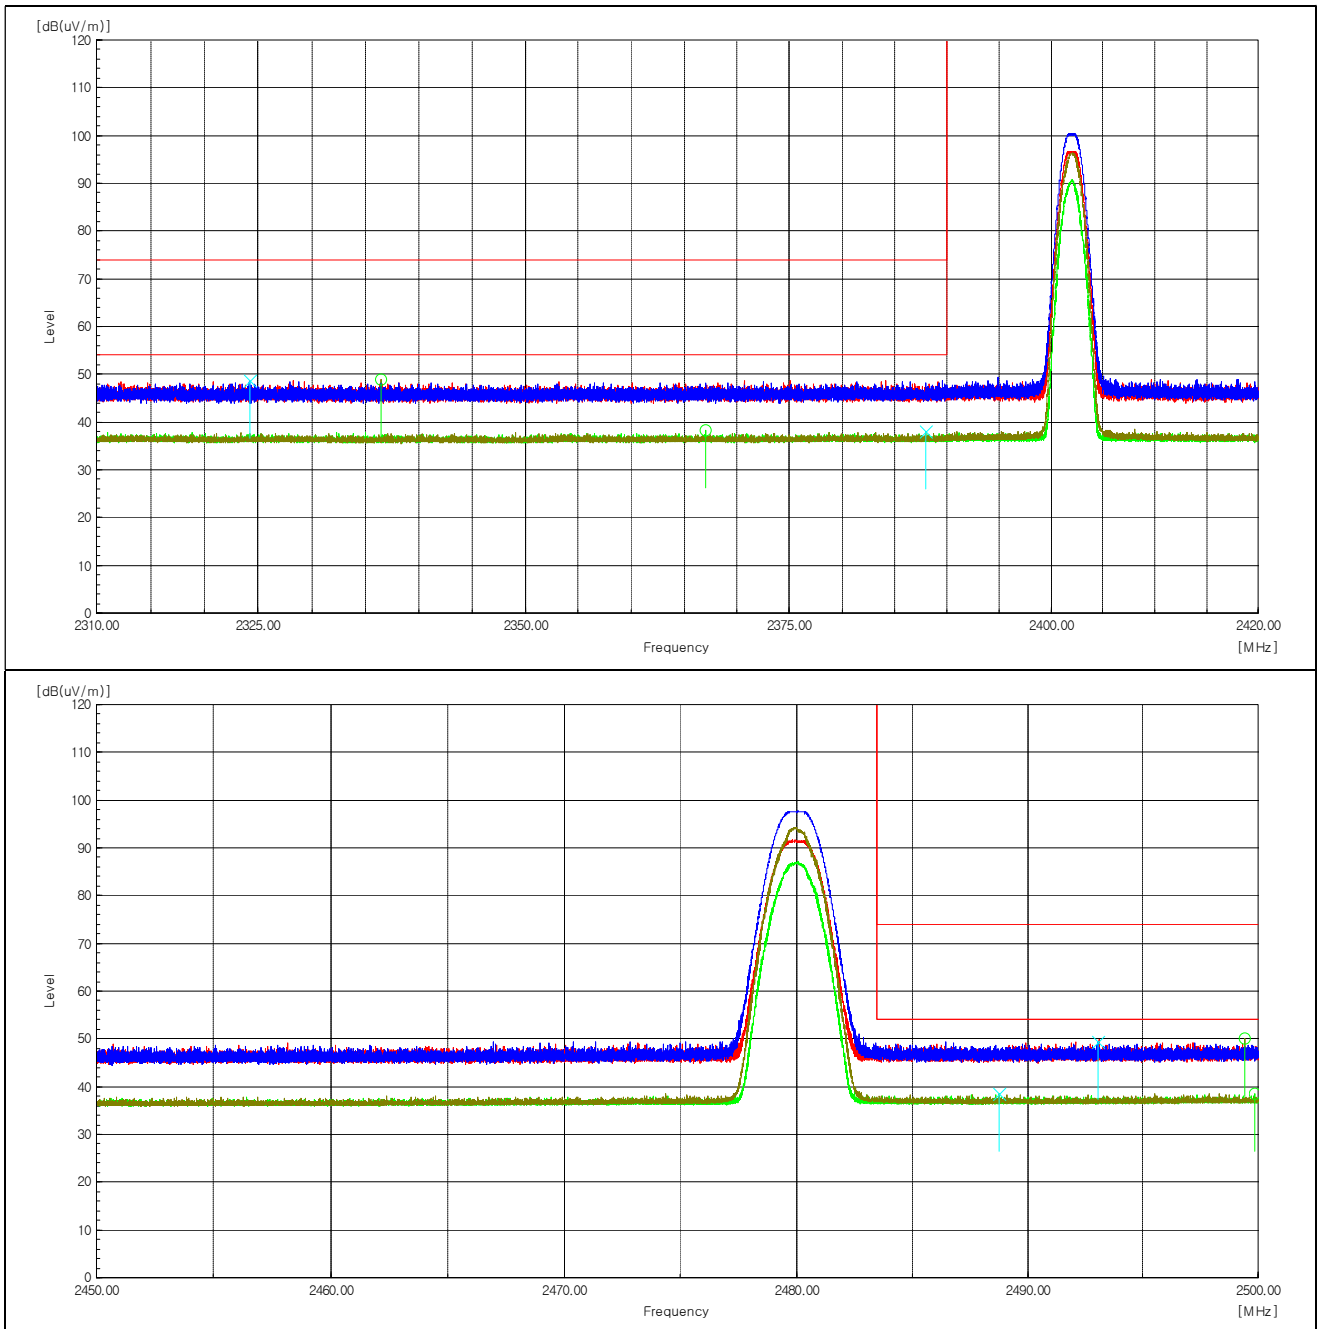




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (30) / (37) Pages

Test Mode : Transmitter (Worst Case)

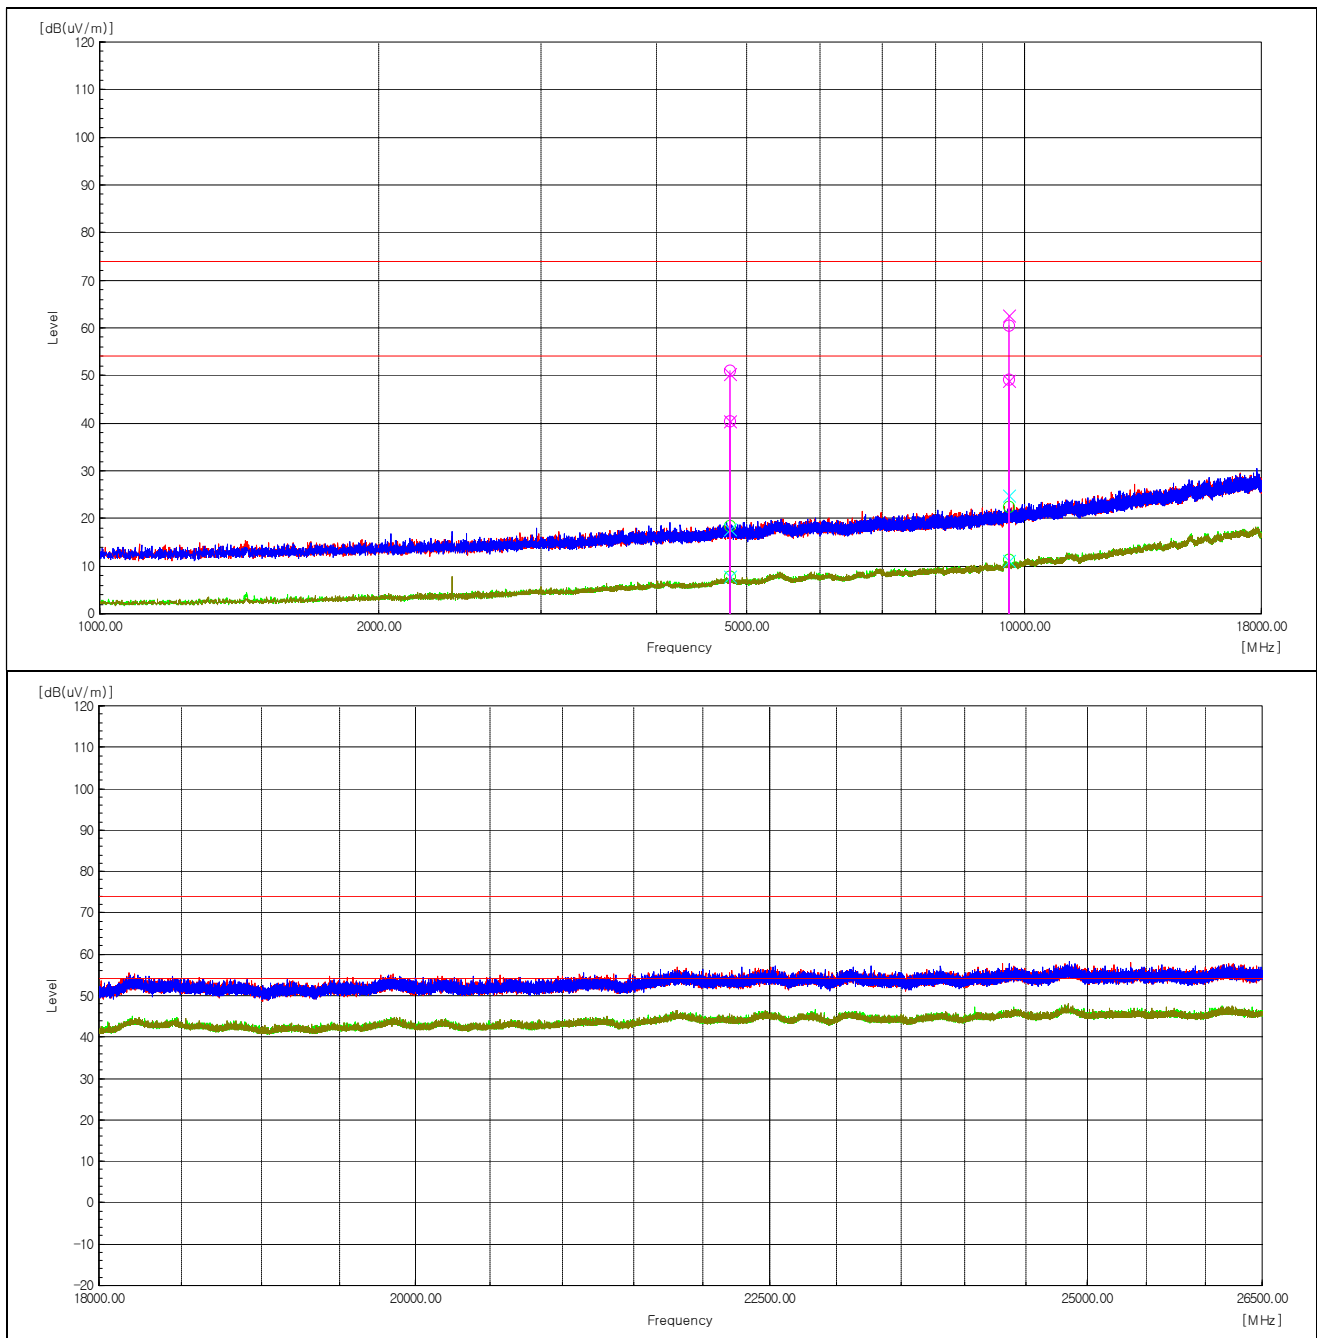

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (31) / (37) Pages

Test Mode : Transmitter (Bluetooth LE 1 Mbps)

The requirements are:

☒ Complies

2 402 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 336.5	H	53.7	-4.8	-----	48.9	-----	74.0	-----	25.1	-----	Peak
2 367.1	H	42.9	-4.7	2.01	-----	40.2	-----	54.0	-----	13.8	Average
2 324.2	V	53.5	-4.8	-----	48.7	-----	74.0	-----	25.3	-----	Peak
2 388.0	V	42.6	-4.6	2.01	-----	40.0	-----	54.0	-----	14.0	Average
4 804.1	H	47.7	3.3	-----	51.0	-----	74.0	-----	23.0	-----	Peak
4 804.1	H	37.0	3.3	2.01	-----	42.3	-----	54.0	-----	11.7	Average
4 804.1	V	47.0	3.3	-----	50.3	-----	74.0	-----	23.7	-----	Peak
4 804.1	V	37.1	3.3	2.01	-----	42.4	-----	54.0	-----	11.6	Average
9 609.1	H	49.5	10.9	-----	60.4	-----	74.0	-----	13.6	-----	Peak
9 607.8	H	38.2	11.0	2.01	-----	51.2	-----	54.0	-----	2.8	Average
9 607.8	V	51.6	11.0	-----	62.6	-----	74.0	-----	11.4	-----	Peak
9 607.8	V	38.0	11.0	2.01	-----	51.0	-----	54.0	-----	3.0	Average

2 440 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 880.2	H	46.6	3.6	-----	50.2	-----	74.0	-----	23.8	-----	Peak
4 879.6	H	36.6	3.6	2.01	-----	42.2	-----	54.0	-----	11.8	Average
4 879.6	V	47.4	3.6	-----	51.0	-----	74.0	-----	23.0	-----	Peak
4 879.6	V	37.4	3.6	2.01	-----	43.0	-----	54.0	-----	11.0	Average
9 758.1	H	48.8	11.0	-----	59.8	-----	74.0	-----	14.2	-----	Peak
9 760.8	H	38.0	11.0	2.01	-----	51.0	-----	54.0	-----	3.0	Average
9 760.1	V	49.0	11.0	-----	60.0	-----	74.0	-----	14.0	-----	Peak
9 760.8	V	38.3	11.0	2.01	-----	51.3	-----	54.0	-----	2.7	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (32) / (37) Pages

2 480 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 499.4	H	54.2	-4.0	-----	50.2	-----	74.0	-----	23.8	-----	Peak
2 499.8	H	42.6	-4.0	2.01	-----	40.6	-----	54.0	-----	13.4	Average
2 493.0	V	53.4	-4.1	-----	49.3	-----	74.0	-----	24.7	-----	Peak
2 488.8	V	42.7	-4.1	2.01	-----	40.6	-----	54.0	-----	13.4	Average
9 919.9	H	48.7	11.7	-----	60.4	-----	74.0	-----	13.6	-----	Peak
9 919.9	H	37.8	11.7	2.01	-----	51.5	-----	54.0	-----	2.5	Average
9 918.6	V	48.9	11.7	-----	60.6	-----	74.0	-----	13.4	-----	Peak
9 919.2	V	38.1	11.7	2.01	-----	51.8	-----	54.0	-----	2.2	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (33) / (37) Pages

Test Mode : Transmitter (Bluetooth LE 2 Mbps)

The requirements are:

☒ Complies

2 404 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 354.2	H	53.6	-4.7	-----	48.9	-----	74.0	-----	25.1	-----	Peak
2 322.5	H	42.6	-4.8	4.76	-----	42.6	-----	54.0	-----	11.4	Average
2 364.2	V	53.7	-4.7	-----	49.0	-----	74.0	-----	25.0	-----	Peak
2 345.4	V	42.7	-4.8	4.76	-----	42.7	-----	54.0	-----	11.3	Average

2 442 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

There were no emissions above the noise floor.

2 478 MHz

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
2 488.1	H	53.9	-4.2	-----	49.7	-----	74.0	-----	24.3	-----	Peak
2 497.0	H	42.9	-4.0	4.76	-----	43.7	-----	54.0	-----	10.3	Average
2 498.8	V	54.1	-4.0	-----	50.1	-----	74.0	-----	23.9	-----	Peak
2 498.0	V	42.3	-4.0	4.76	-----	43.1	-----	54.0	-----	10.9	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (34) / (37) Pages

4.6 AC Conducted Emissions

Frequency Range of measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2020 - Section 6.2

The EUT was placed on a non-metallic table 0.8 m above the metallic, grounded floor and 0.4 m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8 m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit :

- 15.207(a)

Frequency [MHz]	Conducted Limit [dBuV]	
	Quasi-peak	Average**
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results :

The requirements are:

☒ Complies



CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (35) / (37) Pages

Test Data

[LINE]

Full Spectrum

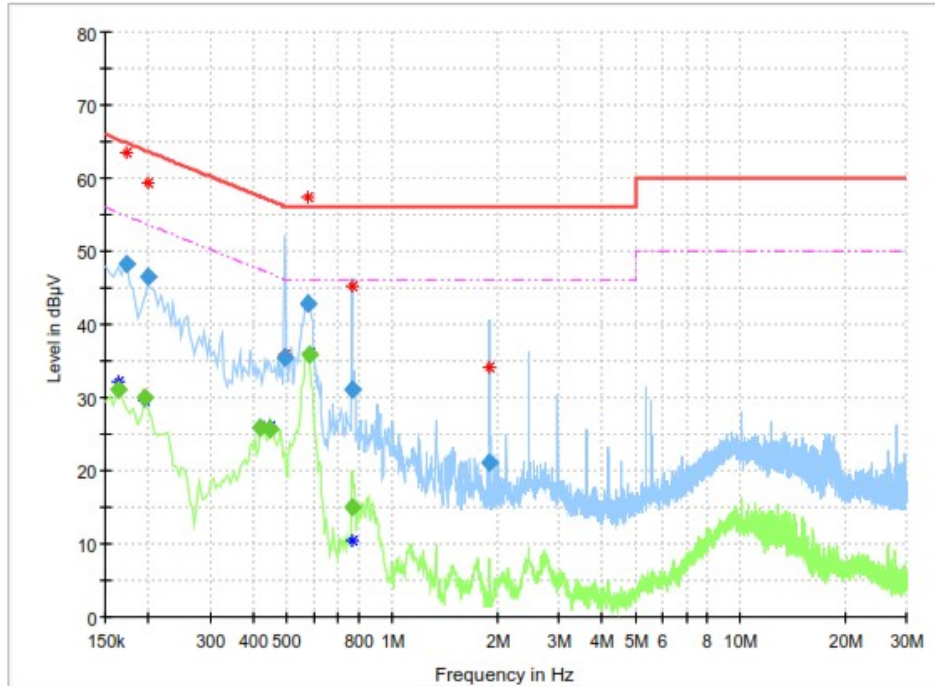

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.163500	---	30.99	55.28	24.30	15000.0	9.000	L1	ON	10.2
0.172500	48.28	---	64.84	16.56	15000.0	9.000	L1	ON	10.3
0.195000	---	30.02	53.82	23.80	15000.0	9.000	L1	ON	10.4
0.199500	46.47	---	63.63	17.16	15000.0	9.000	L1	ON	10.4
0.420000	---	25.84	47.45	21.61	15000.0	9.000	L1	ON	10.3
0.447000	---	25.73	46.93	21.21	15000.0	9.000	L1	ON	10.3
0.492000	35.54	---	56.13	20.60	15000.0	9.000	L1	ON	10.3
0.573000	42.88	---	56.00	13.12	15000.0	9.000	L1	ON	10.3
0.577500	---	35.90	46.00	10.10	15000.0	9.000	L1	ON	10.3
0.766500	31.13	---	56.00	24.87	15000.0	9.000	L1	ON	10.1
0.766500	---	14.92	46.00	31.08	15000.0	9.000	L1	ON	10.1
1.905000	21.14	---	56.00	34.86	15000.0	9.000	L1	ON	9.9




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (36) / (37) Pages

[NEUTRAL]

Full Spectrum

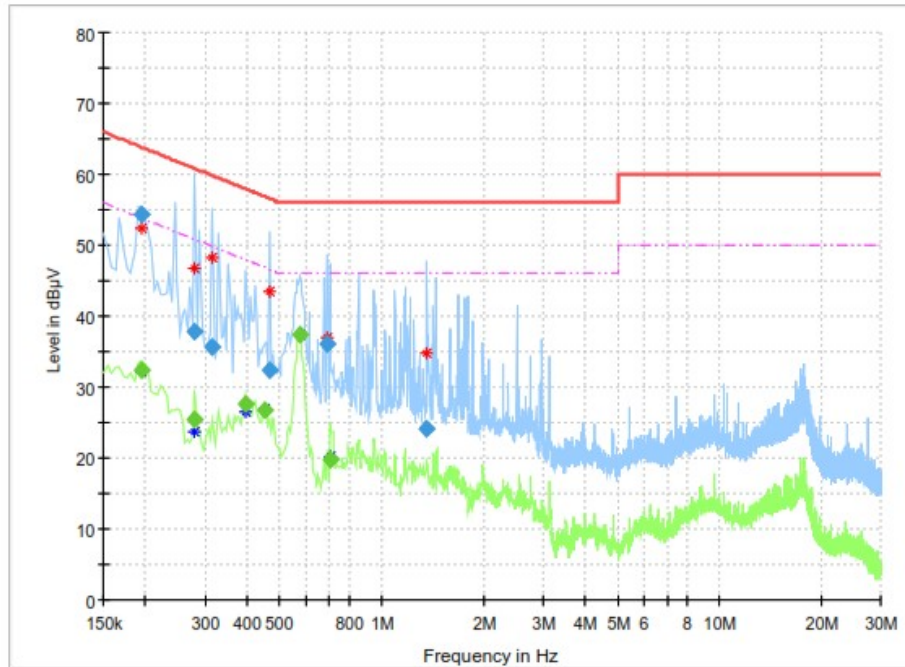

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.195000	---	32.37	53.82	21.45	15000.0	9.000	N	ON	10.0
0.195000	54.32	---	63.82	9.50	15000.0	9.000	N	ON	10.0
0.280500	---	25.50	50.80	25.30	15000.0	9.000	N	ON	9.9
0.280500	37.79	---	60.80	23.01	15000.0	9.000	N	ON	9.9
0.316500	35.65	---	59.80	24.15	15000.0	9.000	N	ON	10.0
0.397500	---	27.66	47.91	20.24	15000.0	9.000	N	ON	10.1
0.451500	---	26.77	46.85	20.08	15000.0	9.000	N	ON	10.1
0.465000	32.48	---	56.60	24.13	15000.0	9.000	N	ON	10.1
0.573000	---	37.34	46.00	8.66	15000.0	9.000	N	ON	10.1
0.690000	36.09	---	56.00	19.91	15000.0	9.000	N	ON	10.0
0.703500	---	19.69	46.00	26.31	15000.0	9.000	N	ON	10.0
1.360500	24.12	---	56.00	31.88	15000.0	9.000	N	ON	9.8

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-01749
Page (37) / (37) Pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50510324	2025-11-25	2026-11-25
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2026-03-12	2027-03-12
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2026-04-27	2027-04-27
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2026-03-25	2028-03-25
5	Bilog Antenna	TESEQ	CBL6111D	60654	2025-08-21	2027-08-21
6	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2025-07-28	2026-07-28
7	ATTENUATOR	PASTERNAK	PE7AP006-06	L20210504000023	2025-07-28	2026-07-28
8	ATTENUATOR	NONE	6dB	190557	2025-09-18	2026-09-18
9	Preamplifier	Agilent	8449B	3008A00620	2026-03-11	2027-03-11
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2026-03-13	2027-03-13
11	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2025-09-30	2026-09-30
12	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2025-09-30	2026-09-30
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2025-11-25	2026-11-25
14	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2026-01-13	2027-01-13
15	DC Power Supply	Agilent	E3632A	MY50370042	2025-07-04	2026-07-04
16	LISN	Rohde & Schwarz	ENV216	102698	2026-04-27	2027-04-27
17	EMI TEST RECEIVER	Rohde & Schwarz	ESR3	102826	2026-04-27	2027-04-27

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (conducted)	Junkosha Inc.	MWX221	2008S240	2026-05-18
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2026-04-16
3	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2026-04-16
4	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2026-04-16
5	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21
6	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2025-02-21
7	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2025-02-21
8	RF Cable (18GHz-26.5GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2025-02-21
9	RF Cable (18GHz-26.5GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2371/2	2025-02-21
10	RF Cable (18GHz-26.5GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2025-02-21

-END-