





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (134) / (156) Pages

Test Mode : Transmitter, 802.11b, ANT0, Worst Case(2 462 MHz)

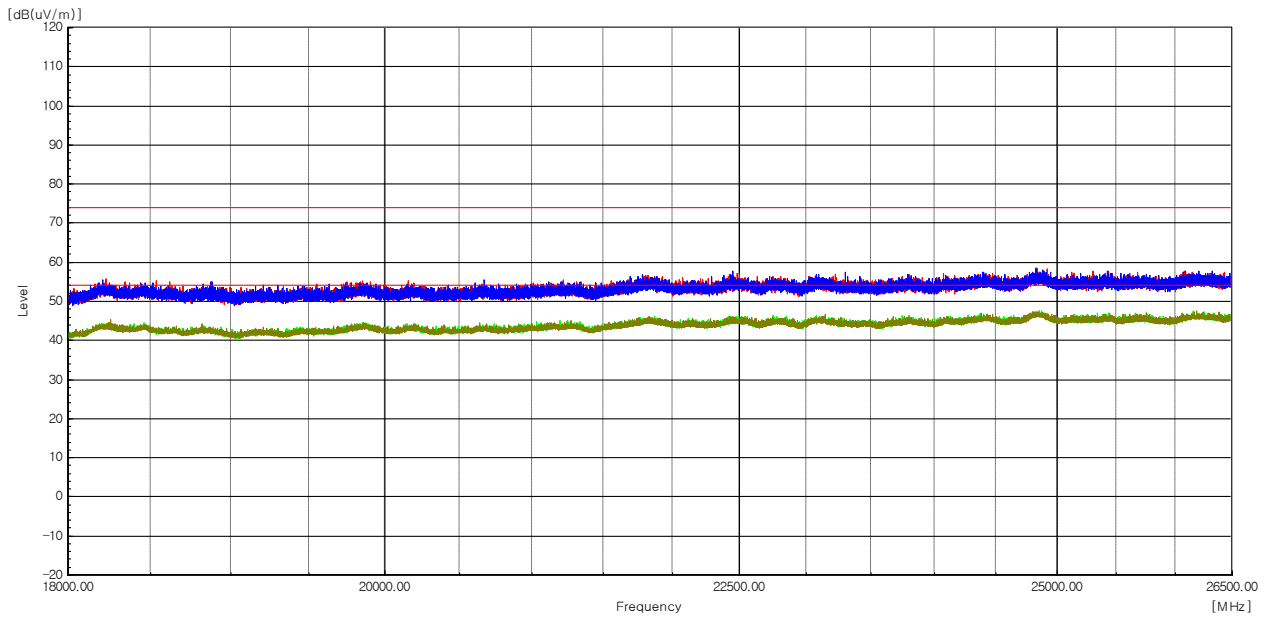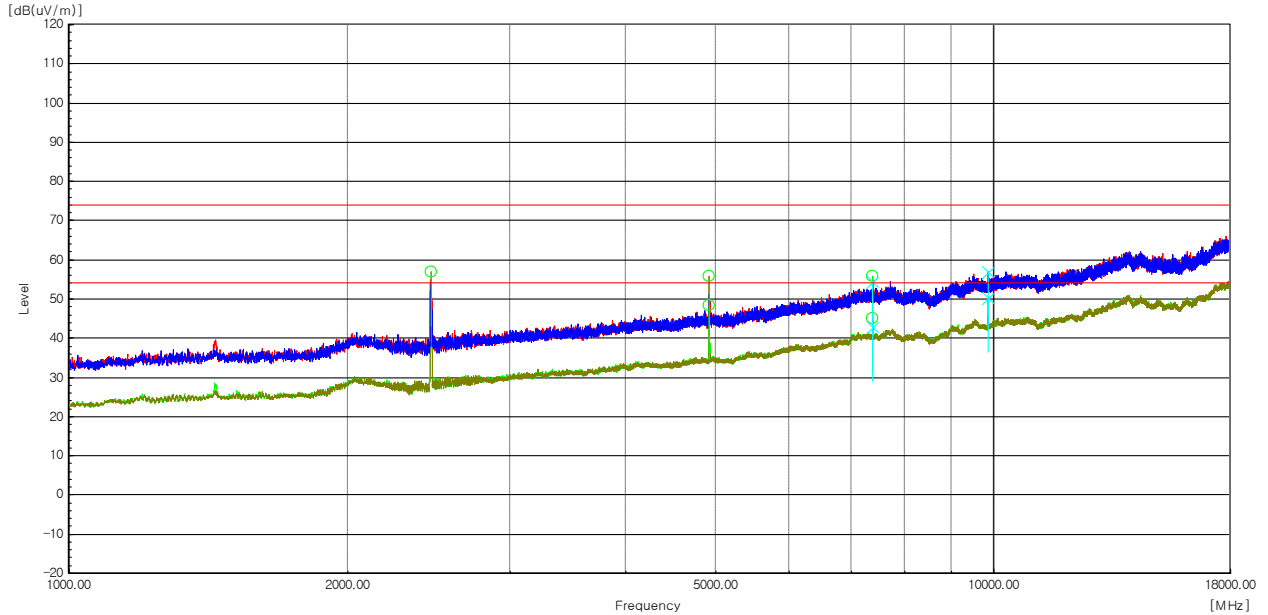



CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (135) / (156) Pages

Test Mode : Transmitter (Simultaneous transmissions DTS + 2.4 GHz + 6 GHz)

The requirements are:

☒ Complies

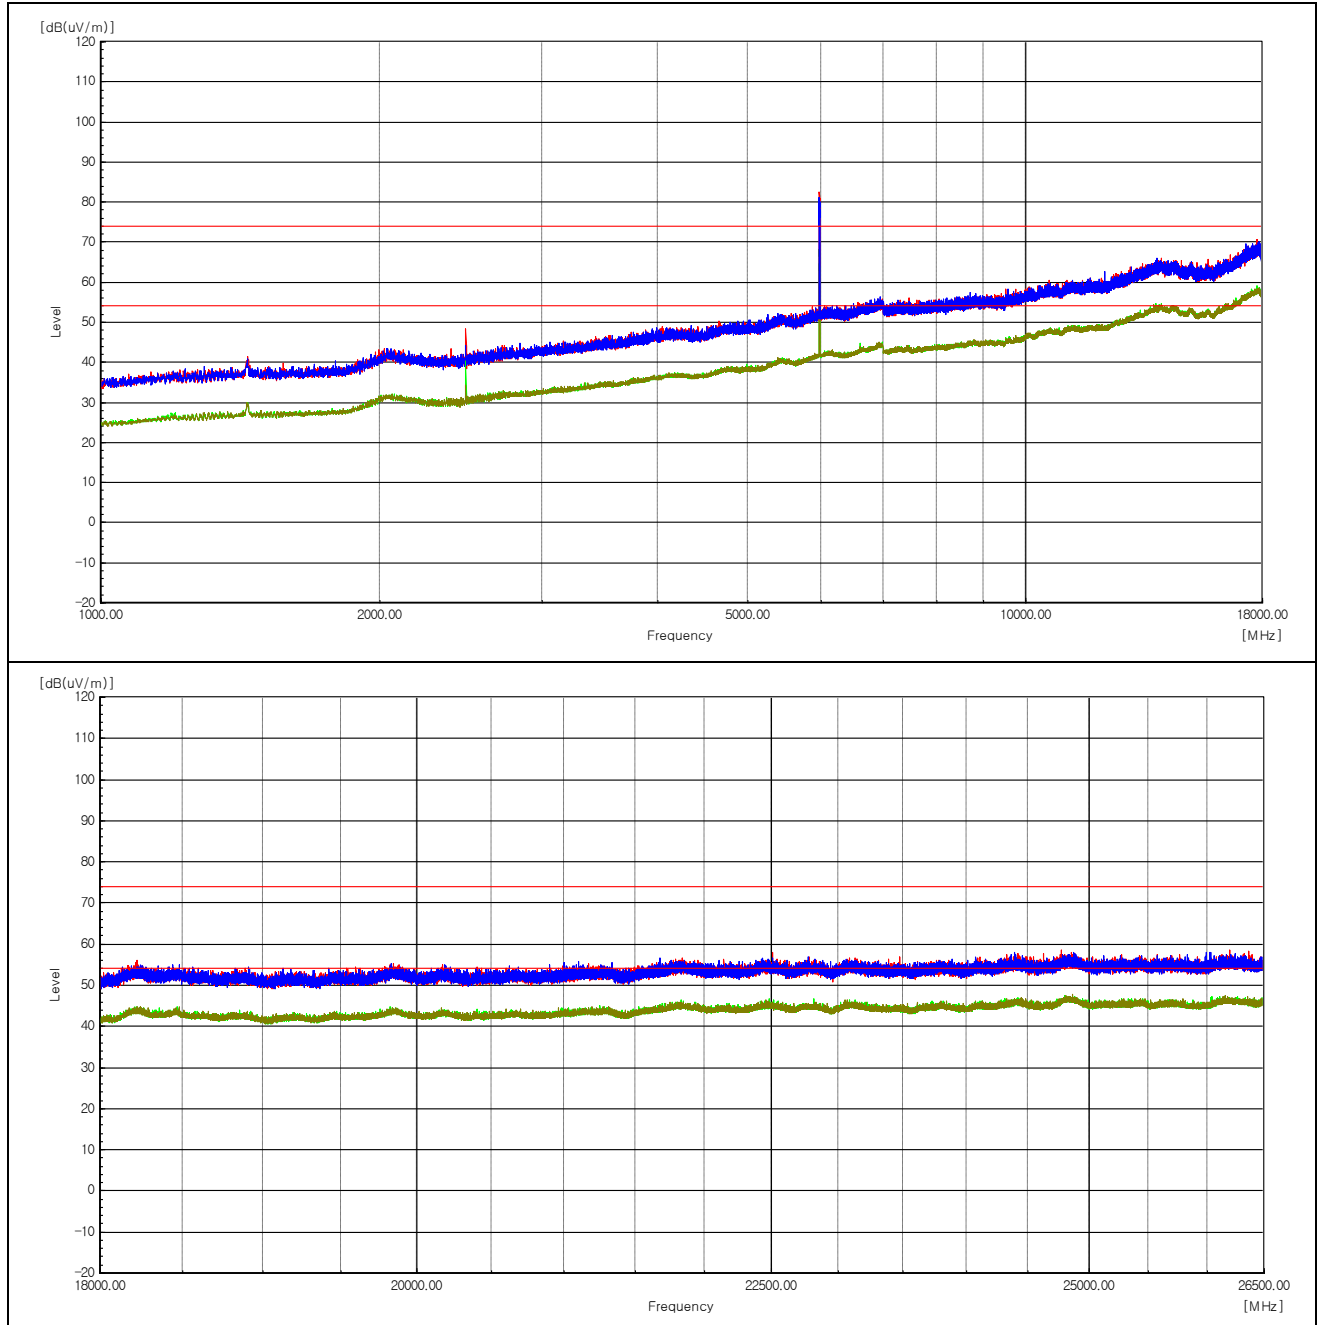

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (136) / (156) Pages

Test Mode : Transmitter (802.11b, ANT0)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 386.31	H	62.5	-4.6	-----	57.90	-----	74.00	-----	16.10	-----	Peak
2 386.91	H	51.5	-4.6	0.00	-----	46.90	-----	54.00	-----	7.10	Average
7 235.97	V	39.5	9.1	0.00	-----	48.60	-----	54.00	-----	5.40	Average
7 236.92	H	36.8	9.1	0.00	-----	45.90	-----	54.00	-----	8.10	Average
7 237.21	H	46.1	9.1	-----	55.20	-----	74.00	-----	18.80	-----	Peak
7 237.21	V	48.4	9.1	-----	57.50	-----	74.00	-----	16.50	-----	Peak

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
4 883.64	H	53.2	3.5	-----	56.70	-----	74.00	-----	17.30	-----	Peak
4 883.64	H	43.9	3.5	0.00	-----	47.40	-----	54.00	-----	6.60	Average
7 324.93	V	38.3	9.1	0.00	-----	47.40	-----	54.00	-----	6.60	Average
7 325.61	H	46.9	9.1	-----	56.00	-----	74.00	-----	18.00	-----	Peak
7 326.97	H	37.1	9.1	0.00	-----	46.20	-----	54.00	-----	7.80	Average
7 327.65	V	46.9	9.1	-----	56.00	-----	74.00	-----	18.00	-----	Peak

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 488.15	H	60.2	-4.2	-----	56.00	-----	74.00	-----	18.00	-----	Peak
2 488.68	H	49.3	-4.1	0.00	-----	45.20	-----	54.00	-----	8.80	Average
4 923.76	H	52.1	3.6	-----	55.70	-----	74.00	-----	18.30	-----	Peak
4 923.76	H	44.7	3.6	0.00	-----	48.30	-----	54.00	-----	5.70	Average
7 384.10	H	46.7	9.2	-----	55.90	-----	74.00	-----	18.10	-----	Peak
7 384.78	H	35.9	9.2	0.00	-----	45.10	-----	54.00	-----	8.90	Average
9 847.83	V	39.2	11.1	0.00	-----	50.30	-----	54.00	-----	3.70	Average
9 848.51	V	45.9	11.1	-----	57.00	-----	74.00	-----	17.00	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.52	H	55.1	-4.2	0.00	-----	50.90	-----	54.00	-----	3.10	Average
2 483.62	H	63.5	-4.2	-----	59.30	-----	74.00	-----	14.70	-----	Peak
2 484.22	V	49.3	-4.2	0.00	-----	45.10	-----	54.00	-----	8.90	Average
2 484.33	H	55.9	-4.2	0.00	-----	51.70	-----	54.00	-----	2.30	Average
2 485.87	H	61.2	-4.2	-----	57.00	-----	74.00	-----	17.00	-----	Peak
4 933.96	H	51.4	3.7	-----	55.10	-----	74.00	-----	18.90	-----	Peak
4 933.96	H	44.0	3.7	0.00	-----	47.70	-----	54.00	-----	6.30	Average
7 399.74	H	35.7	9.2	0.00	-----	44.90	-----	54.00	-----	9.10	Average
7 402.46	H	46.5	9.2	-----	55.70	-----	74.00	-----	18.30	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (137) / (156) Pages

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 485.38	H	61.2	-4.2	-----	57.00	-----	74.00	-----	17.00	-----	Peak
2 485.52	V	51.3	-4.2	0.00	-----	47.10	-----	54.00	-----	6.90	Average
2 485.69	H	55.8	-4.2	0.00	-----	51.60	-----	54.00	-----	2.40	Average
4 944.16	H	50.7	3.8	-----	54.50	-----	74.00	-----	19.50	-----	Peak
4 944.16	H	41.8	3.8	0.00	-----	45.60	-----	54.00	-----	8.40	Average
4 944.16	V	48.5	3.8	-----	52.30	-----	74.00	-----	21.70	-----	Peak

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (138) / (156) Pages

Test Mode : Transmitter (802.11b, ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 385.68	H	49.6	-4.6	0.00	-----	45.00	-----	54.00	-----	9.00	Average
2 386.74	H	61.9	-4.6	-----	57.30	-----	74.00	-----	16.70	-----	Peak
7 233.81	V	48.7	9.1	-----	57.80	-----	74.00	-----	16.20	-----	Peak
7 235.17	V	40.3	9.1	0.00	-----	49.40	-----	54.00	-----	4.60	Average
7 235.85	H	49.8	9.1	-----	58.90	-----	74.00	-----	15.10	-----	Peak
7 237.21	H	39.5	9.1	0.00	-----	48.60	-----	54.00	-----	5.40	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 324.25	V	48.5	9.1	-----	57.60	-----	74.00	-----	16.40	-----	Peak
7 324.93	V	37.5	9.1	0.00	-----	46.60	-----	54.00	-----	7.40	Average
7 326.97	H	38.4	9.1	0.00	-----	47.50	-----	54.00	-----	6.50	Average
7 327.65	H	47.4	9.1	-----	56.50	-----	74.00	-----	17.50	-----	Peak

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 488.69	H	50.5	-4.1	0.00	-----	46.40	-----	54.00	-----	7.60	Average
2 489.52	H	60.1	-4.1	-----	56.00	-----	74.00	-----	18.00	-----	Peak
7 385.46	V	46.9	9.2	-----	56.10	-----	74.00	-----	17.90	-----	Peak
7 386.81	V	37.1	9.2	0.00	-----	46.30	-----	54.00	-----	7.70	Average
9 847.83	V	46.1	11.1	-----	57.20	-----	74.00	-----	16.80	-----	Peak
9 847.83	V	37.1	11.1	0.00	-----	48.20	-----	54.00	-----	5.80	Average

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 484.55	V	62.7	-4.2	-----	58.50	-----	74.00	-----	15.50	-----	Peak
2 484.96	H	65.8	-4.2	-----	61.60	-----	74.00	-----	12.40	-----	Peak
2 484.97	V	53.7	-4.2	0.00	-----	49.50	-----	54.00	-----	4.50	Average
2 485.03	H	56.0	-4.2	0.00	-----	51.80	-----	54.00	-----	2.20	Average
7 399.74	H	37.0	9.2	0.00	-----	46.20	-----	54.00	-----	7.80	Average
7 399.74	V	36.7	9.2	0.00	-----	45.90	-----	54.00	-----	8.10	Average
7 401.78	H	47.0	9.2	-----	56.20	-----	74.00	-----	17.80	-----	Peak
7 402.46	V	46.2	9.2	-----	55.40	-----	74.00	-----	18.60	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (139) / (156) Pages

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 485.49	H	56.1	-4.2	0.00	-----	51.90	-----	54.00	-----	2.10	Average
2 485.51	V	51.6	-4.2	0.00	-----	47.40	-----	54.00	-----	6.60	Average
2 485.59	V	58.8	-4.2	-----	54.60	-----	74.00	-----	19.40	-----	Peak
2 485.62	H	61.6	-4.2	-----	57.40	-----	74.00	-----	16.60	-----	Peak

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (140) / (156) Pages

Test Mode : Transmitter (802.11g, ANT0)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 377.47	H	69.2	-4.6	-----	64.60	-----	74.00	-----	9.40	-----	Peak
2 381.12	V	64.6	-4.6	-----	60.00	-----	74.00	-----	14.00	-----	Peak
2 383.16	V	63.7	-4.6	-----	59.10	-----	74.00	-----	14.90	-----	Peak
2 384.94	H	67.5	-4.6	-----	62.90	-----	74.00	-----	11.10	-----	Peak
2 389.79	V	44.5	-4.6	0.12	-----	40.02	-----	54.00	-----	13.98	Average
2 389.88	H	47.8	-4.6	0.12	-----	43.32	-----	54.00	-----	10.68	Average
7 239.93	V	47.1	9.1	-----	56.20	-----	74.00	-----	17.80	-----	Peak
7 240.61	V	34.7	9.1	0.12	-----	43.92	-----	54.00	-----	10.08	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	H	69.4	-4.2	-----	65.20	-----	74.00	-----	8.80	-----	Peak
2 483.51	V	45.1	-4.2	0.12	-----	41.02	-----	54.00	-----	12.98	Average
2 483.52	H	50.4	-4.2	0.12	-----	46.32	-----	54.00	-----	7.68	Average
2 483.54	V	65.2	-4.2	-----	61.00	-----	74.00	-----	13.00	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.50	V	45.8	-4.2	0.12	-----	41.72	-----	54.00	-----	12.28	Average
2 483.51	H	50.7	-4.2	0.12	-----	46.62	-----	54.00	-----	7.38	Average
2 483.76	H	70.8	-4.2	-----	66.60	-----	74.00	-----	7.40	-----	Peak
2 484.20	V	64.9	-4.2	-----	60.70	-----	74.00	-----	13.30	-----	Peak

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 484.06	H	69.6	-4.2	-----	65.40	-----	74.00	-----	8.60	-----	Peak
2 484.16	V	46.8	-4.2	0.12	-----	42.72	-----	54.00	-----	11.28	Average
2 484.28	H	51.9	-4.2	0.12	-----	47.82	-----	54.00	-----	6.18	Average
2 484.68	V	63.8	-4.2	-----	59.60	-----	74.00	-----	14.40	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (141) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (142) / (156) Pages

Test Mode : Transmitter (802.11g, ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 385.01	H	74.5	-4.6	-----	69.90	-----	74.00	-----	4.10	-----	Peak
2 386.32	V	71.5	-4.6	-----	66.90	-----	74.00	-----	7.10	-----	Peak
2 386.86	H	74.6	-4.6	-----	70.00	-----	74.00	-----	4.00	-----	Peak
2 389.30	V	71.6	-4.6	-----	67.00	-----	74.00	-----	7.00	-----	Peak
2 389.75	V	47.5	-4.6	0.12	-----	43.02	-----	54.00	-----	10.98	Average
2 389.89	H	49.7	-4.6	0.12	-----	45.22	-----	54.00	-----	8.78	Average
7 235.85	V	45.2	9.1	-----	54.30	-----	74.00	-----	19.70	-----	Peak
7 235.85	V	32.3	9.1	0.12	-----	41.52	-----	54.00	-----	12.48	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.52	V	66.6	-4.2	-----	62.40	-----	74.00	-----	11.60	-----	Peak
2 483.53	V	48.5	-4.2	0.12	-----	44.42	-----	54.00	-----	9.58	Average
2 483.64	H	52.5	-4.2	0.12	-----	48.42	-----	54.00	-----	5.58	Average
2 483.69	H	71.2	-4.2	-----	67.00	-----	74.00	-----	7.00	-----	Peak
2 485.27	H	68.5	-4.2	-----	64.30	-----	74.00	-----	9.70	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.52	V	48.7	-4.2	0.12	-----	44.62	-----	54.00	-----	9.38	Average
2 483.57	H	70.6	-4.2	-----	66.40	-----	74.00	-----	7.60	-----	Peak
2 483.59	H	54.9	-4.2	0.12	-----	50.82	-----	54.00	-----	3.18	Average
2 483.96	V	63.8	-4.2	-----	59.60	-----	74.00	-----	14.40	-----	Peak
2 484.95	V	63.3	-4.2	-----	59.10	-----	74.00	-----	14.90	-----	Peak
2 484.98	H	70.2	-4.2	-----	66.00	-----	74.00	-----	8.00	-----	Peak

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 484.20	H	55.7	-4.2	0.12	-----	51.62	-----	54.00	-----	2.38	Average
2 484.23	V	48.9	-4.2	0.12	-----	44.82	-----	54.00	-----	9.18	Average
2 484.27	H	69.4	-4.2	-----	65.20	-----	74.00	-----	8.80	-----	Peak
2 484.85	V	62.0	-4.2	-----	57.80	-----	74.00	-----	16.20	-----	Peak
2 488.22	H	67.4	-4.2	-----	63.20	-----	74.00	-----	10.80	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (143) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (144) / (156) Pages

Test Mode : Transmitter (802.11n_HT20_ANT0+ ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 383.92	H	72.0	-4.6	-----	67.40	-----	74.00	-----	6.60	-----	Peak
2 389.69	H	73.6	-4.6	-----	69.00	-----	74.00	-----	5.00	-----	Peak
2 389.75	V	64.0	-4.6	-----	59.40	-----	74.00	-----	14.60	-----	Peak
2 389.89	H	53.5	-4.6	0.13	-----	49.03	-----	54.00	-----	4.97	Average
2 389.92	V	48.0	-4.6	0.13	-----	43.53	-----	54.00	-----	10.47	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.52	H	55.4	-4.2	0.13	-----	51.33	-----	54.00	-----	2.67	Average
2 483.55	V	49.3	-4.2	0.13	-----	45.23	-----	54.00	-----	8.77	Average
2 483.67	V	65.9	-4.2	-----	61.70	-----	74.00	-----	12.30	-----	Peak
2 484.16	H	72.9	-4.2	-----	68.70	-----	74.00	-----	5.30	-----	Peak
2 484.91	H	73.2	-4.2	-----	69.00	-----	74.00	-----	5.00	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 484.64	H	69.6	-4.2	-----	65.40	-----	74.00	-----	8.60	-----	Peak
2 484.86	H	55.1	-4.2	0.13	-----	51.03	-----	54.00	-----	2.97	Average
2 484.89	V	62.9	-4.2	-----	58.70	-----	74.00	-----	15.30	-----	Peak
2 484.97	V	45.7	-4.2	0.13	-----	41.63	-----	54.00	-----	12.37	Average

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.53	H	55.7	-4.2	0.13	-----	51.63	-----	54.00	-----	2.37	Average
2 483.54	H	67.0	-4.2	-----	62.80	-----	74.00	-----	11.20	-----	Peak
2 483.57	V	63.8	-4.2	-----	59.60	-----	74.00	-----	14.40	-----	Peak
2 483.63	V	48.0	-4.2	0.13	-----	43.93	-----	54.00	-----	10.07	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (145) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (146) / (156) Pages

Test Mode : Transmitter (802.11ax_HE20_26T_ANT0+ ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 368.54	V	64.6	-4.7	-----	59.90	-----	74.00	-----	14.10	-----	Peak
2 369.34	H	66.3	-4.7	-----	61.60	-----	74.00	-----	12.40	-----	Peak
2 370.74	V	51.2	-4.7	0.81	-----	47.31	-----	54.00	-----	6.69	Average
2 373.26	H	52.7	-4.6	0.81	-----	48.91	-----	54.00	-----	5.09	Average
4 840.79	H	51.2	3.5	-----	54.70	-----	74.00	-----	19.30	-----	Peak
4 840.79	H	34.8	3.5	0.81	-----	39.11	-----	54.00	-----	14.89	Average
7 260.33	H	46.3	9.1	-----	55.40	-----	74.00	-----	18.60	-----	Peak
7 262.37	V	50.2	9.1	-----	59.30	-----	74.00	-----	14.70	-----	Peak

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
7 350.77	V	48.0	9.1	-----	57.10	-----	74.00	-----	16.90	-----	Peak
7 350.77	V	33.2	9.1	0.81	-----	43.11	-----	54.00	-----	10.89	Average
7 351.45	H	33.2	9.1	0.81	-----	43.11	-----	54.00	-----	10.89	Average
7 352.13	H	50.3	9.1	-----	59.40	-----	74.00	-----	14.60	-----	Peak

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	V	50.5	-4.2	0.81	-----	47.11	-----	54.00	-----	6.89	Average
2 483.51	H	53.0	-4.2	0.81	-----	49.61	-----	54.00	-----	4.39	Average
2 483.52	H	69.9	-4.2	-----	65.70	-----	74.00	-----	8.30	-----	Peak
2 484.76	V	64.1	-4.2	-----	59.90	-----	74.00	-----	14.10	-----	Peak
7 410.62	V	45.9	9.2	-----	55.10	-----	74.00	-----	18.90	-----	Peak
7 411.98	H	45.9	9.2	-----	55.10	-----	74.00	-----	18.90	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.59	H	49.2	-4.2	0.81	-----	45.81	-----	54.00	-----	8.19	Average
2 483.59	V	46.3	-4.2	0.81	-----	42.91	-----	54.00	-----	11.09	Average
2 484.16	H	64.5	-4.2	-----	60.30	-----	74.00	-----	13.70	-----	Peak
2 486.40	V	61.2	-4.2	-----	57.00	-----	74.00	-----	17.00	-----	Peak
2 486.80	H	63.9	-4.2	-----	59.70	-----	74.00	-----	14.30	-----	Peak

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.55	V	69.5	-4.2	-----	65.30	-----	74.00	-----	8.70	-----	Peak
2 483.57	H	55.1	-4.2	0.81	-----	51.71	-----	54.00	-----	2.29	Average
2 483.59	H	75.8	-4.2	-----	71.60	-----	74.00	-----	2.40	-----	Peak
2 483.74	V	47.9	-4.2	0.81	-----	44.51	-----	54.00	-----	9.49	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (147) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (148) / (156) Pages

Test Mode : Transmitter (802.11ax_HE20_52T_ANT0+ ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 381.13	H	65.0	-4.6	-----	60.40	-----	74.00	-----	13.60	-----	Peak
2 388.21	V	64.1	-4.6	-----	59.50	-----	74.00	-----	14.50	-----	Peak
2 388.69	H	50.7	-4.6	0.89	-----	46.99	-----	54.00	-----	7.01	Average
2 389.70	V	49.7	-4.6	0.89	-----	45.99	-----	54.00	-----	8.01	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.50	H	50.2	-4.2	0.89	-----	46.89	-----	54.00	-----	7.11	Average
2 483.70	H	67.8	-4.2	-----	63.60	-----	74.00	-----	10.40	-----	Peak
2 496.27	H	74.1	-4.1	-----	70.00	-----	74.00	-----	4.00	-----	Peak
2 496.28	H	49.8	-4.1	0.89	-----	46.59	-----	54.00	-----	7.41	Average
2 498.11	V	45.3	-4.0	0.89	-----	42.19	-----	54.00	-----	11.81	Average
2 498.12	H	73.5	-4.0	-----	69.50	-----	74.00	-----	4.50	-----	Peak
2 499.28	V	68.3	-4.0	-----	64.30	-----	74.00	-----	9.70	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	V	48.1	-4.2	0.89	-----	44.79	-----	54.00	-----	9.21	Average
2 483.51	H	55.1	-4.2	0.89	-----	51.79	-----	54.00	-----	2.21	Average
2 483.51	V	67.8	-4.2	-----	63.60	-----	74.00	-----	10.40	-----	Peak
2 483.64	H	72.8	-4.2	-----	68.60	-----	74.00	-----	5.40	-----	Peak

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	V	48.8	-4.2	0.89	-----	45.49	-----	54.00	-----	8.51	Average
2 483.51	H	55.2	-4.2	0.89	-----	51.89	-----	54.00	-----	2.11	Average
2 483.54	H	74.6	-4.2	-----	70.40	-----	74.00	-----	3.60	-----	Peak
2 483.56	V	70.3	-4.2	-----	66.10	-----	74.00	-----	7.90	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (149) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (150) / (156) Pages

Test Mode : Transmitter (802.11ax_HE20_106T_ANT0+ ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 386.37	V	71.6	-4.6	-----	67.00	-----	74.00	-----	7.00	-----	Peak
2 386.58	H	73.5	-4.6	-----	68.90	-----	74.00	-----	5.10	-----	Peak
2 389.71	H	49.4	-4.6	0.96	-----	45.76	-----	54.00	-----	8.24	Average
2 389.95	V	49.2	-4.6	0.96	-----	45.56	-----	54.00	-----	8.44	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.50	H	51.3	-4.2	0.96	-----	48.06	-----	54.00	-----	5.94	Average
2 483.51	V	46.6	-4.2	0.96	-----	43.36	-----	54.00	-----	10.64	Average
2 483.73	H	75.1	-4.2	-----	70.90	-----	74.00	-----	3.10	-----	Peak
2 483.97	H	75.1	-4.2	-----	70.90	-----	74.00	-----	3.10	-----	Peak
2 485.44	V	69.9	-4.2	-----	65.70	-----	74.00	-----	8.30	-----	Peak
2 485.64	H	73.9	-4.2	-----	69.70	-----	74.00	-----	4.30	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.50	H	50.6	-4.2	0.96	-----	47.36	-----	54.00	-----	6.64	Average
2 483.50	V	44.6	-4.2	0.96	-----	41.36	-----	54.00	-----	12.64	Average
2 483.71	H	69.8	-4.2	-----	65.60	-----	74.00	-----	8.40	-----	Peak
2 483.88	V	62.5	-4.2	-----	58.30	-----	74.00	-----	15.70	-----	Peak

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.52	H	55.2	-4.2	0.96	-----	51.96	-----	54.00	-----	2.04	Average
2 483.52	V	48.2	-4.2	0.96	-----	44.96	-----	54.00	-----	9.04	Average
2 483.57	H	74.1	-4.2	-----	69.90	-----	74.00	-----	4.10	-----	Peak
2 483.57	V	68.9	-4.2	-----	64.70	-----	74.00	-----	9.30	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (151) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (152) / (156) Pages

Test Mode : Transmitter (802.11ax_HE20_242T_ANT0+ ANT1)

The requirements are:

☒ Complies

Ch.1(2 412 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 386.80	H	73.4	-4.6	-----	68.80	-----	74.00	-----	5.20	-----	Peak
2 387.95	V	70.5	-4.6	-----	65.90	-----	74.00	-----	8.10	-----	Peak
2 388.69	H	73.7	-4.6	-----	69.10	-----	74.00	-----	4.90	-----	Peak
2 389.97	V	47.2	-4.6	1.15	-----	43.75	-----	54.00	-----	10.25	Average
2 390.00	H	52.3	-4.6	1.15	-----	48.85	-----	54.00	-----	5.15	Average

Ch.7(2 442 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	-------------------	-------------------	-------------------	-------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.11(2 462 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	V	47.2	-4.2	1.15	-----	44.15	-----	54.00	-----	9.85	Average
2 483.51	H	53.4	-4.2	1.15	-----	50.35	-----	54.00	-----	3.65	Average
2 483.71	V	65.8	-4.2	-----	61.60	-----	74.00	-----	12.40	-----	Peak
2 484.74	H	75.0	-4.2	-----	70.80	-----	74.00	-----	3.20	-----	Peak
2 485.25	H	76.0	-4.2	-----	71.80	-----	74.00	-----	2.20	-----	Peak

Ch.12(2 467 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.51	H	54.8	-4.2	1.15	-----	51.75	-----	54.00	-----	2.25	Average
2 483.59	V	63.7	-4.2	-----	59.50	-----	74.00	-----	14.50	-----	Peak
2 483.76	H	71.7	-4.2	-----	67.50	-----	74.00	-----	6.50	-----	Peak
2 484.03	V	48.3	-4.2	1.15	-----	45.25	-----	54.00	-----	8.75	Average

Ch.13(2 472 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.50	H	55.0	-4.2	1.15	-----	51.95	-----	54.00	-----	2.05	Average
2 483.51	V	47.8	-4.2	1.15	-----	44.75	-----	54.00	-----	9.25	Average
2 483.80	V	64.1	-4.2	-----	59.90	-----	74.00	-----	14.10	-----	Peak
2 484.11	H	71.6	-4.2	-----	67.40	-----	74.00	-----	6.60	-----	Peak
2 485.21	H	72.0	-4.2	-----	67.80	-----	74.00	-----	6.20	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (153) / (156) Pages

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (154) / (156) Pages

4.6 AC Conducted Emissions

Frequency Range of measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2020 - Section 6.2

The EUT was placed on a non-metallic table 0.8 m above the metallic, grounded floor and 0.4 m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8 m. Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit :

- 15.207(a)& RSS-Gen 8.8

Frequency [MHz]	Conducted Limit [dBuV]	
	Quasi-peak	Average**
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results :

The requirements are:

☒ Complies




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (155) / (156) Pages

Test Data

Transmitter(Simultaneous transmissions DTS + 2.4 GHz + 6 GHz)(Worst Case)

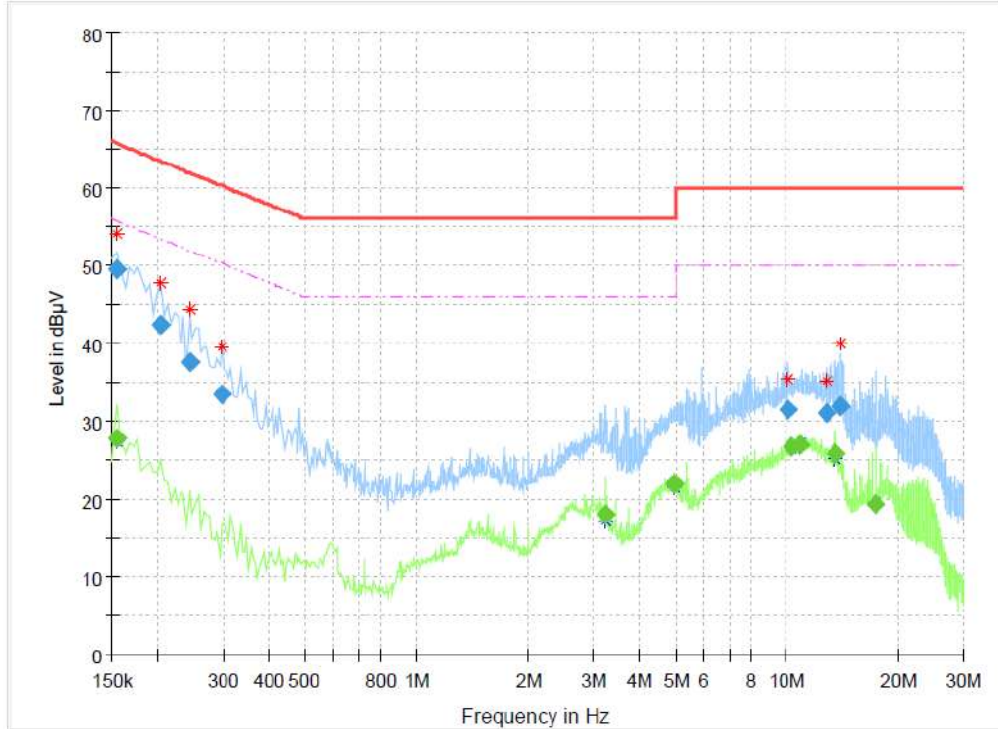

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	---	27.76	55.75	28.00	15000.0	9.000	N	ON	9.8
0.154500	49.66	---	65.75	16.10	15000.0	9.000	L1	ON	9.8
0.204000	42.48	---	63.45	20.97	15000.0	9.000	L1	ON	9.9
0.244500	37.67	---	61.94	24.27	15000.0	9.000	N	ON	9.7
0.298500	33.55	---	60.28	26.74	15000.0	9.000	N	ON	9.8
3.250500	---	17.99	46.00	28.01	15000.0	9.000	L1	ON	9.8
4.951500	---	22.05	46.00	23.95	15000.0	9.000	L1	ON	9.9
10.135500	31.58	---	60.00	28.42	15000.0	9.000	L1	ON	10.0
10.342500	---	26.65	50.00	23.35	15000.0	9.000	L1	ON	10.0
10.869000	---	26.97	50.00	23.03	15000.0	9.000	L1	ON	10.0
12.849000	31.14	---	60.00	28.86	15000.0	9.000	L1	ON	10.1
13.609500	---	25.92	50.00	24.08	15000.0	9.000	L1	ON	10.1
13.987500	31.87	---	60.00	28.13	15000.0	9.000	L1	ON	10.1
17.430000	---	19.32	50.00	30.68	15000.0	9.000	N	ON	10.3

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00062
Page (156) / (156) Pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY52090670	2025-09-18	2026-09-18
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2025-03-21	2026-03-21
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2025-04-28	2026-04-28
4	BILOG ANTENNA	TESEQ	CBL6111D	60654	2025-08-21	2027-08-21
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
6	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2025-07-28	2026-07-28
7	6dB Attenuator	NONE	6dB	190557	2025-09-18	2026-09-18
8	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2025-07-28	2026-07-28
9	Spectrum Analyzer	R&S	FSV40	101574	2025-01-10	2026-01-10
10	PRE AMPLIFIER	HP	8449B	3008A00620	2025-03-11	2026-03-11
11	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2025-03-13	2026-03-13
12	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2025-09-30	2026-09-30
13	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2025-09-30	2026-09-30
14	Band Reject Filter	Micro Tronics	BRM50702	G233	2025-11-25	2026-11-25
15	EMI TEST RECEIVER	Rohde & Schwarz	ESR3	102826	2025-04-28	2026-04-28
16	LISN	Rohde & Schwarz	ENV216	102698	2025-04-28	2026-04-28

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable(conducted)	Junkosha Inc.	MWX221	2008S240	2025-10-29
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2025-03-05
3	RF Cable (9kHz-1GHz Radiated)	Canare Corporation	L-5D2W	N/A	2025-03-05
4	RF Cable (9kHz-1GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2025-03-05
5	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21
6	RF Cable (1GHz-18GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2025-02-21
7	RF Cable (1GHz-18GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2025-02-21
8	RF Cable (18GHz-40GHz Radiated)	Sensorview Co., LTD	9A40	TPC2204060009	2025-02-21
9	RF Cable (18GHz-40GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2025-02-21

-END-