




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (494) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

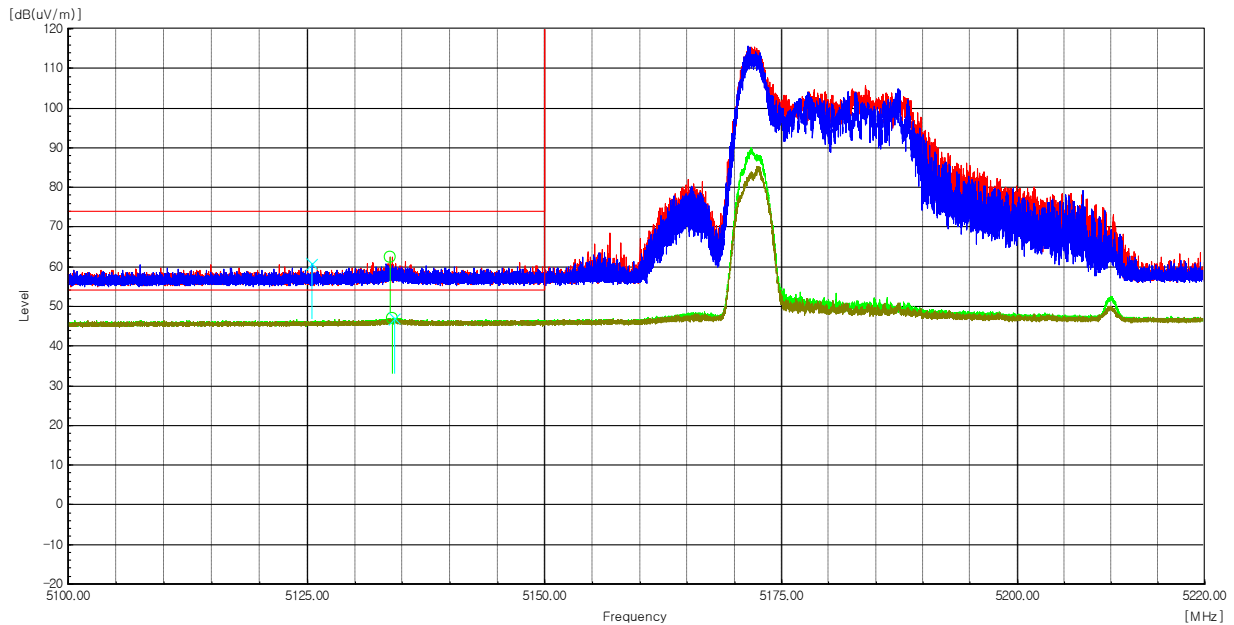

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 133.69	H	58.7	3.8	-----	62.50	-----	74.00	-----	11.50	-----	Peak
5 133.98	H	43.2	3.8	0.22	-----	47.22	-----	54.00	-----	6.78	Average
5 125.46	V	56.9	3.8	-----	60.70	-----	74.00	-----	13.30	-----	Peak
5 134.13	V	43.1	3.8	0.22	-----	47.12	-----	54.00	-----	6.88	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (495) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

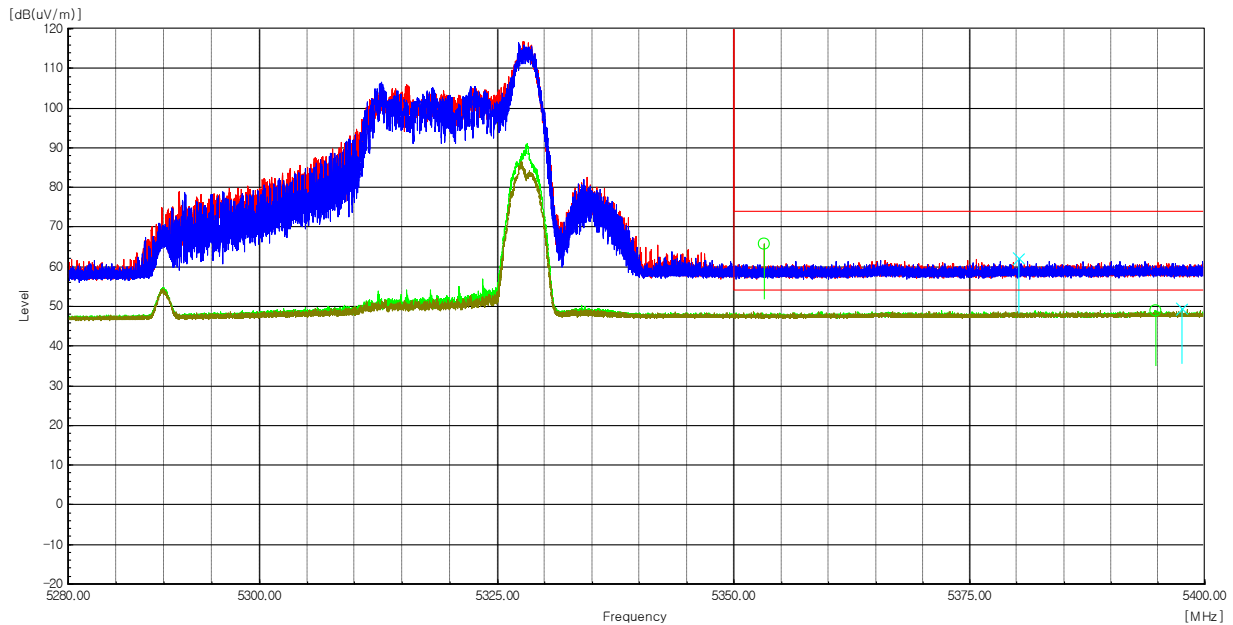

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 353.13	H	61.4	4.3	-----	65.70	-----	74.00	-----	8.30	-----	Peak
5 394.73	H	44.4	4.6	0.22	-----	49.22	-----	54.00	-----	4.78	Average
5 380.23	V	57.8	4.5	-----	62.30	-----	74.00	-----	11.70	-----	Peak
5 397.52	V	44.8	4.6	0.22	-----	49.62	-----	54.00	-----	4.38	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (496) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

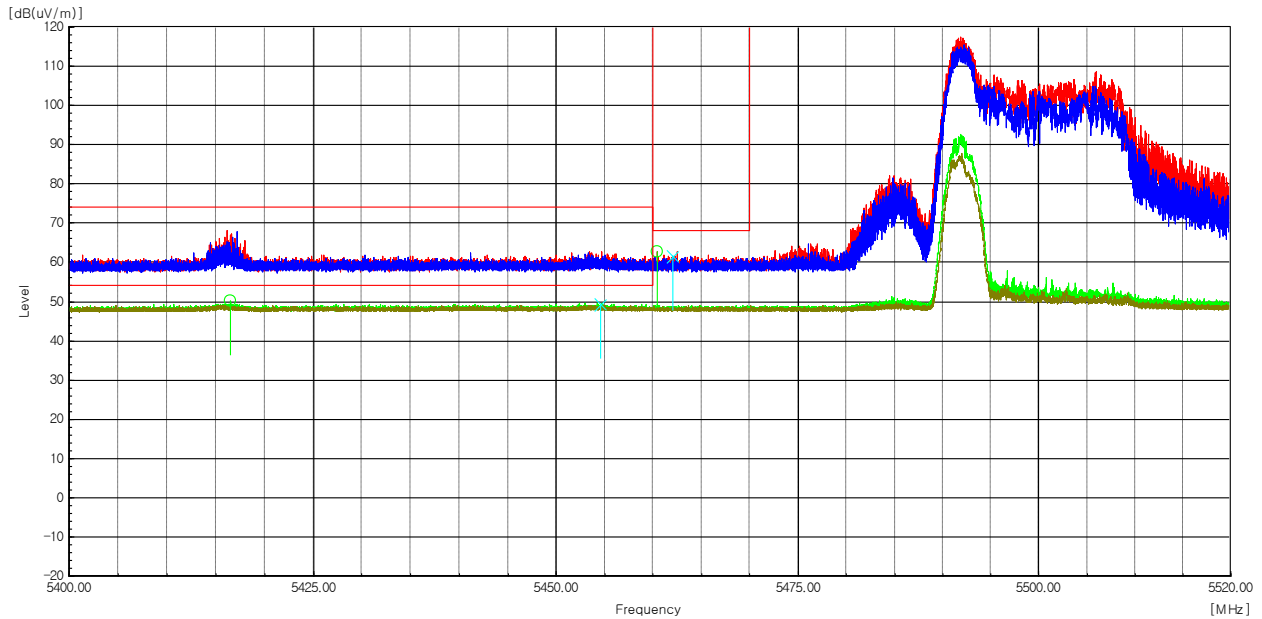

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 460.43	H	57.7	4.9	-----	62.60	-----	68.20	-----	5.60	-----	Peak
5 462.06	V	56.8	4.9	-----	61.70	-----	68.20	-----	6.50	-----	Peak
5 416.55	H	45.3	4.7	0.22	-----	50.22	-----	54.00	-----	3.78	Average
5 454.54	V	44.3	4.9	0.22	-----	49.42	-----	54.00	-----	4.58	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (497) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

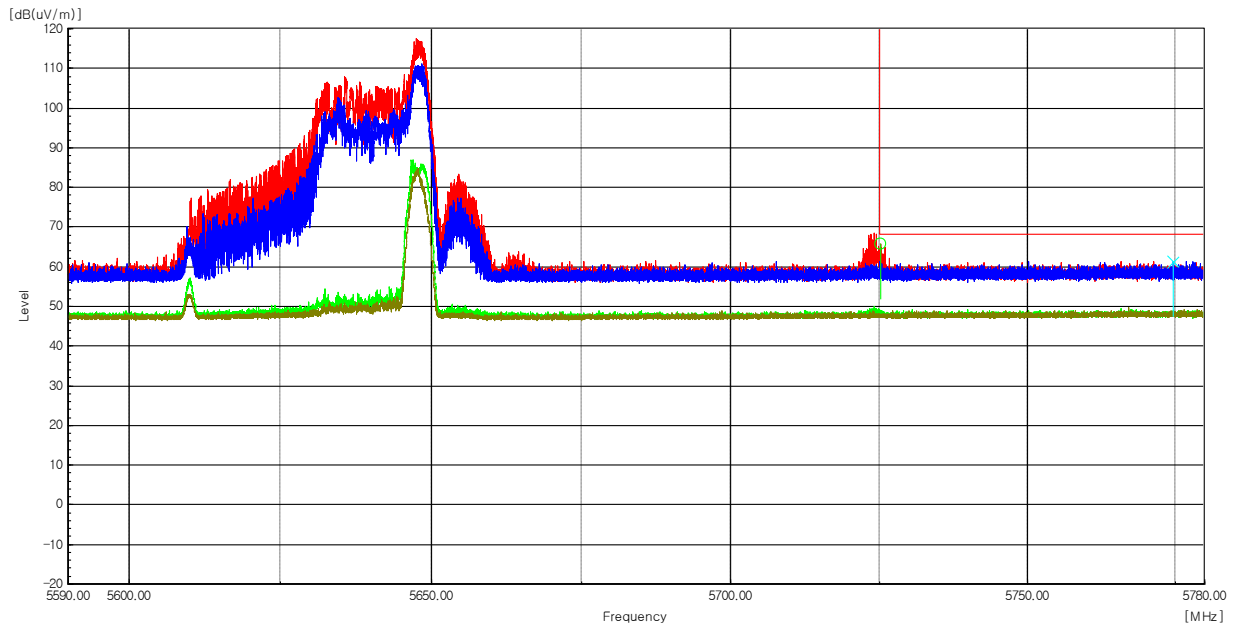

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 725.11	H	60.3	5.4	-----	65.70	-----	68.20	-----	2.50	-----	Peak
5 774.66	V	55.8	5.6	-----	61.40	-----	68.20	-----	6.80	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (498) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_Low
Channel :	155

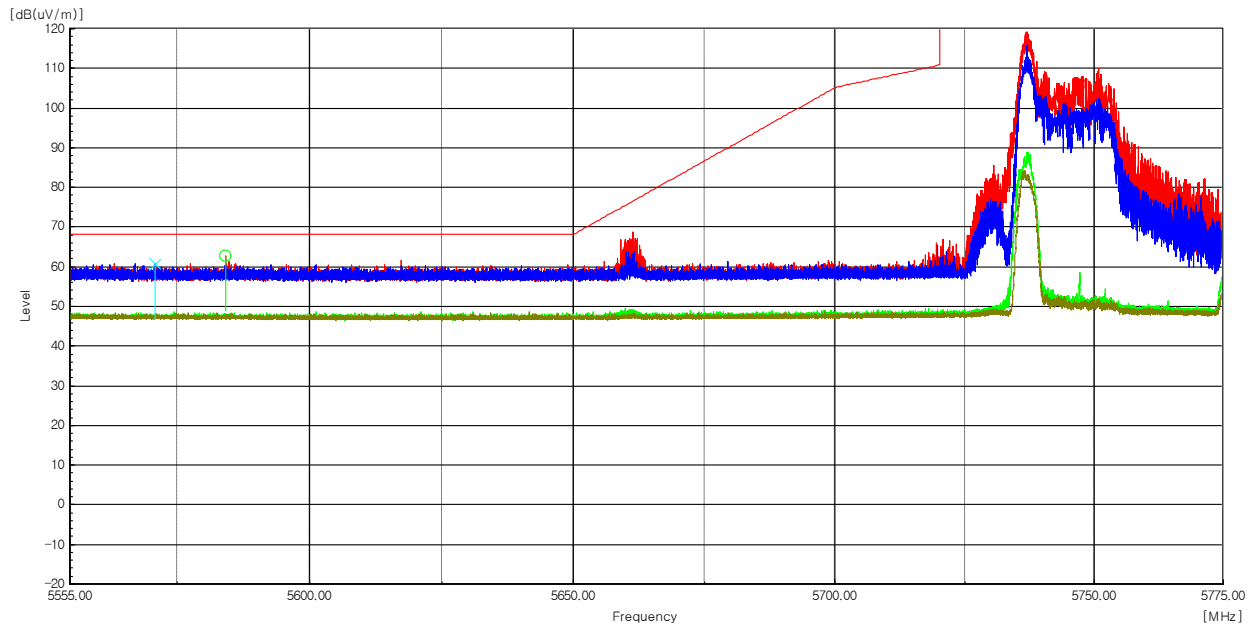

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 584.09	H	57.4	5.2	-----	62.60	-----	68.20	-----	5.60	-----	Peak
5 570.85	V	55.6	5.2	-----	60.80	-----	68.20	-----	7.40	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (499) / (534) Pages

Worst Case Mode :	802.11ax_HE80_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_High
Channel :	155

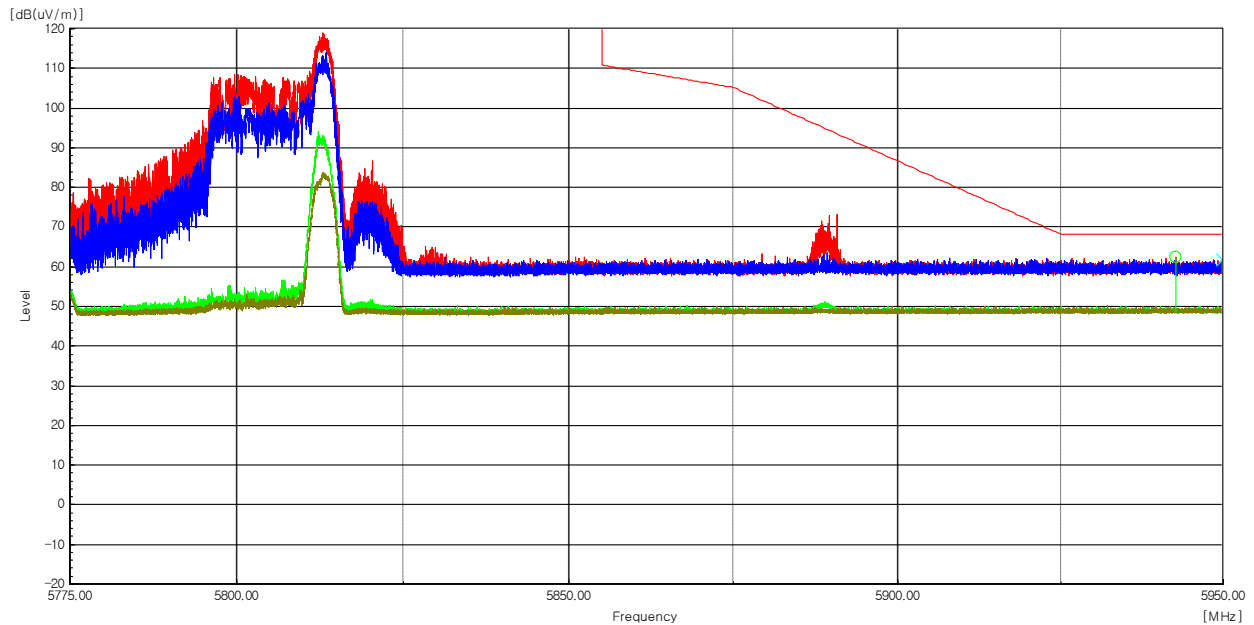

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 942.64	H	55.9	6.4	-----	62.30	-----	68.20	-----	5.90	-----	Peak
5 949.78	V	55.5	6.4	-----	61.90	-----	68.20	-----	6.30	-----	Peak

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00063
Page (500) / (534) Pages

Test Mode : Transmitter (802.11ax_HE80_52T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

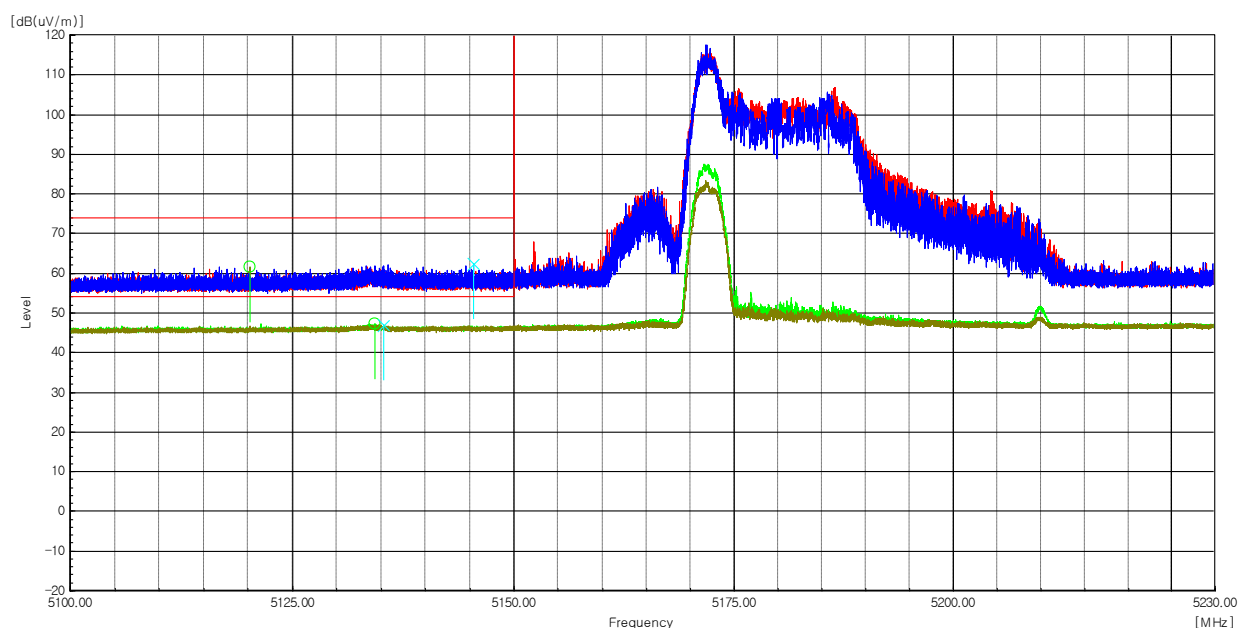

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 120.13	H	57.9	3.8	-----	61.70	-----	74.00	-----	12.30	-----	Peak
5 134.27	H	43.5	3.8	0.23	-----	47.53	-----	54.00	-----	6.47	Average
5 145.39	V	58.7	3.8	-----	62.50	-----	74.00	-----	11.50	-----	Peak
5 135.28	V	43.2	3.8	0.23	-----	47.23	-----	54.00	-----	6.77	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (501) / (534) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

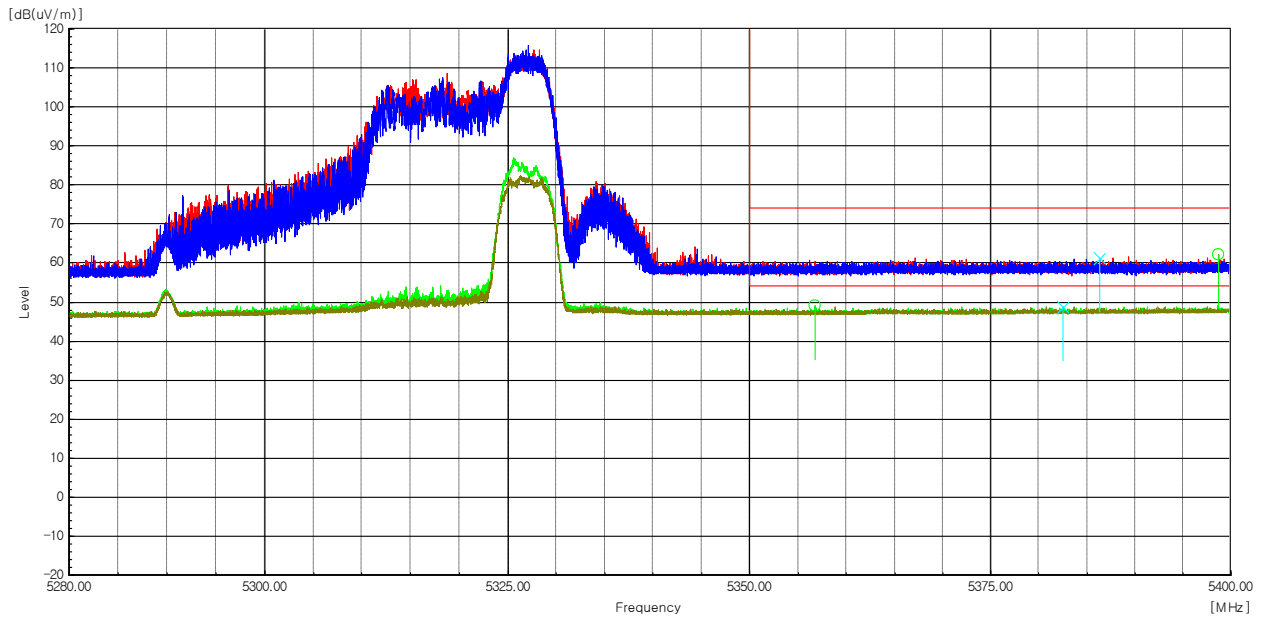

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 398.68	H	57.6	4.6	----	62.20	----	74.00	----	11.80	----	Peak
5 356.74	H	44.6	4.3	0.23	----	49.13	----	54.00	----	4.87	Average
5 386.31	V	56.8	4.5	----	61.30	----	74.00	----	12.70	----	Peak
5 382.47	V	44.4	4.5	0.23	----	49.13	----	54.00	----	4.87	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (502) / (534) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

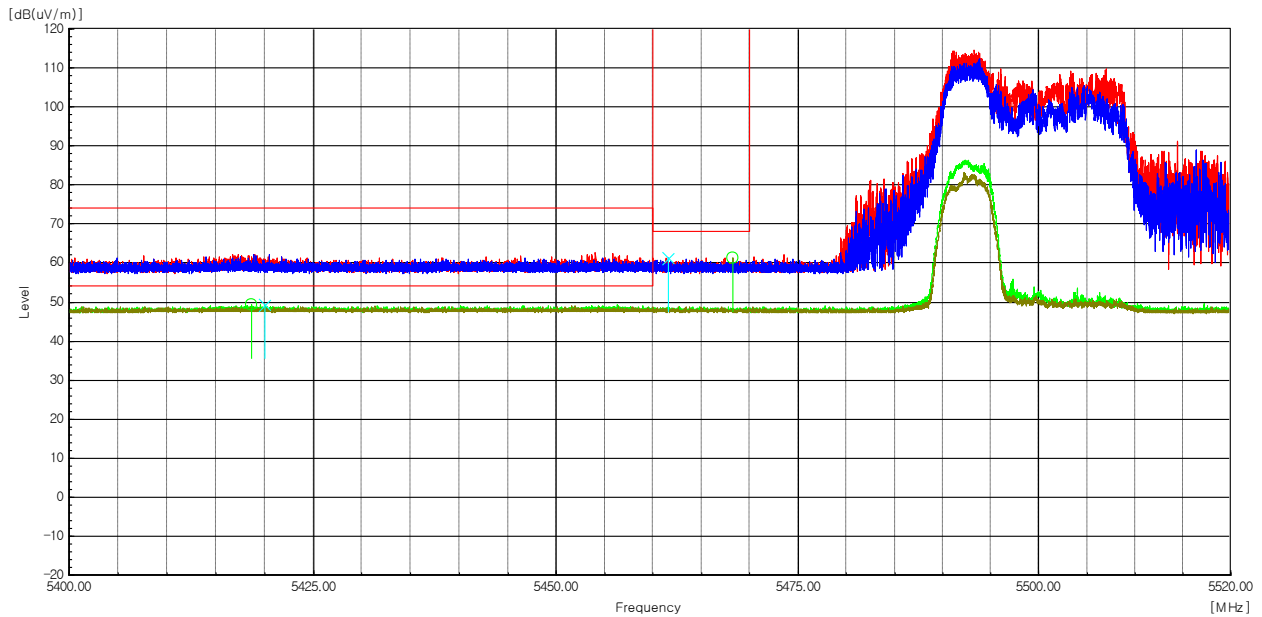

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 468.21	H	56.5	4.9	-----	61.40	-----	68.20	-----	6.80	-----	Peak
5 461.60	V	56.4	4.9	-----	61.30	-----	68.20	-----	6.90	-----	Peak
5 418.63	H	44.6	4.7	0.23	-----	49.53	-----	54.00	-----	4.47	Average
5 419.98	V	44.6	4.7	0.23	-----	49.53	-----	54.00	-----	4.47	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (503) / (534) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

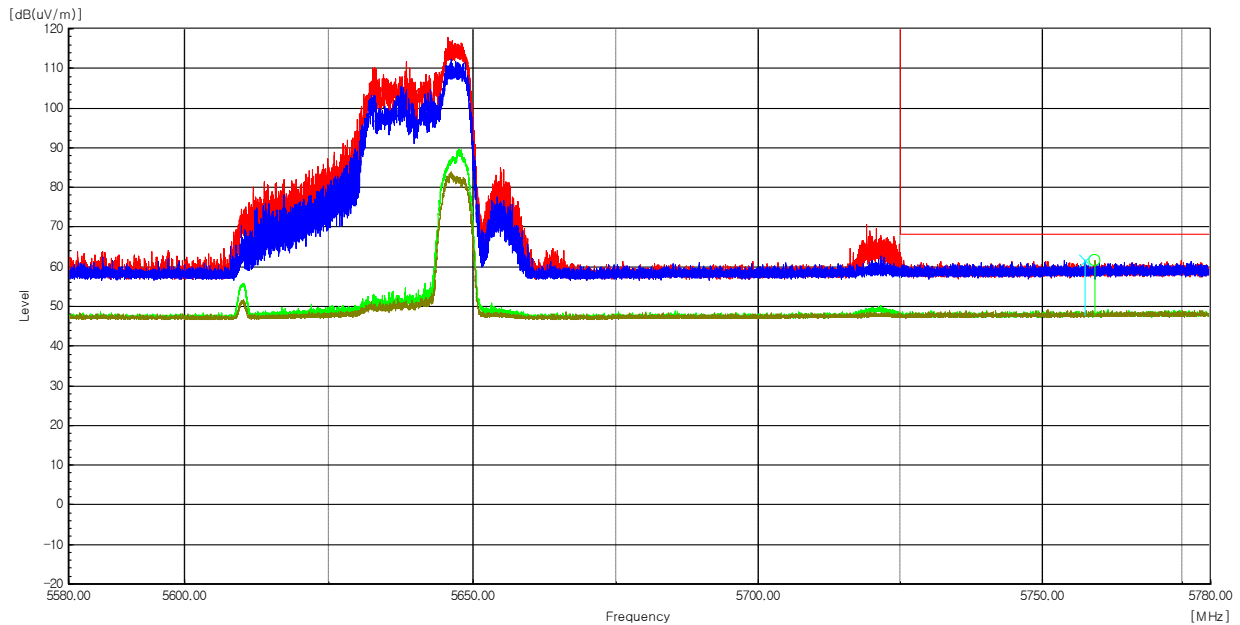

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 757.73	V	56.1	5.5	-----	61.60	-----	68.20	-----	6.60	-----	Peak
5 759.30	H	56.2	5.5	-----	61.70	-----	68.20	-----	6.50	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (504) / (534) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_Low
Channel :	155

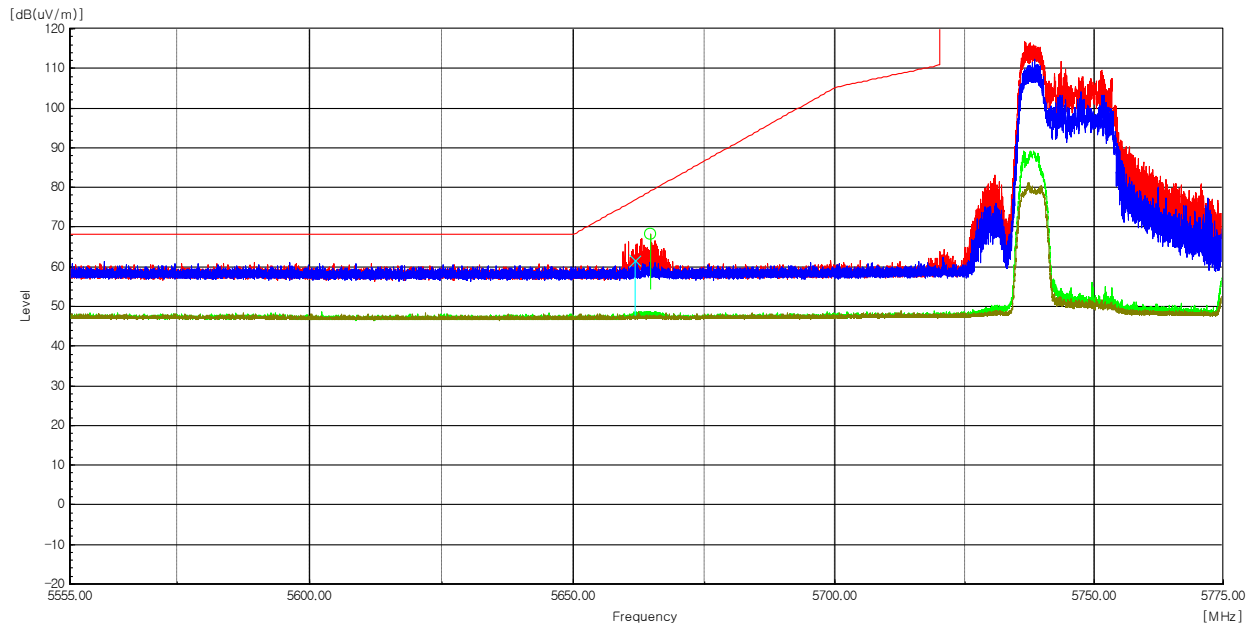

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 664.64	H	63.1	5.2	-----	68.30	-----	79.00	-----	10.70	-----	Peak
5 661.65	V	56.4	5.2	-----	61.60	-----	76.80	-----	15.20	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (505) / (534) Pages

Worst Case Mode :	802.11ax_HE80_52T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_High
Channel :	155

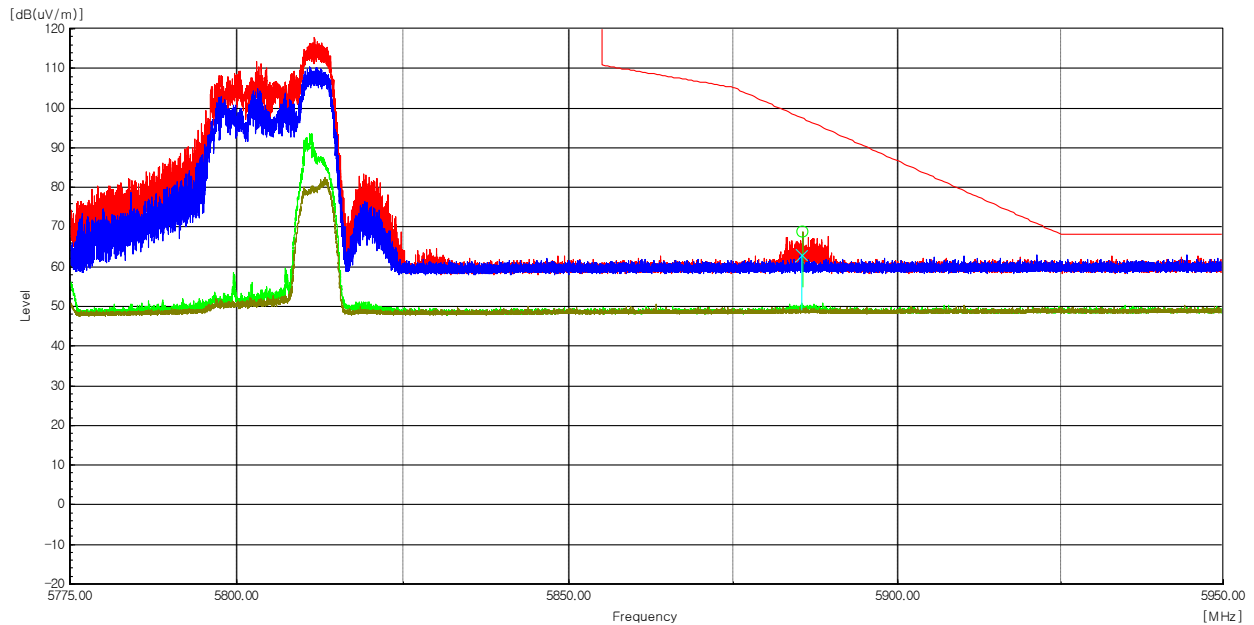

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 885.45	V	56.8	6.1	-----	62.90	-----	97.50	-----	34.60	-----	Peak
5 885.60	H	62.5	6.1	-----	68.60	-----	97.40	-----	28.80	-----	Peak

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00063
Page (506) / (534) Pages

Test Mode : Transmitter (802.11ax_HE80_106T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

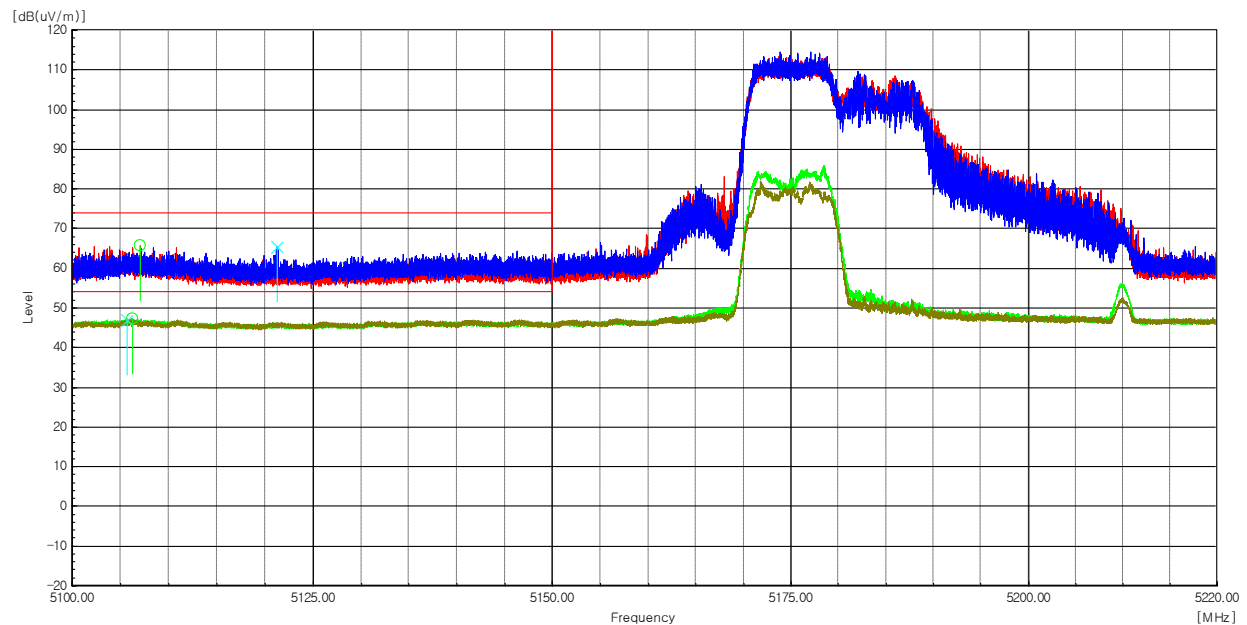

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 107.08	H	61.9	3.8	-----	65.70	-----	74.00	-----	8.30	-----	Peak
5 106.23	H	43.4	3.8	0.25	-----	47.45	-----	54.00	-----	6.55	Average
5 121.23	V	61.5	3.8	-----	65.30	-----	74.00	-----	8.70	-----	Peak
5 105.71	V	43.3	3.8	0.25	-----	47.35	-----	54.00	-----	6.65	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (507) / (534) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

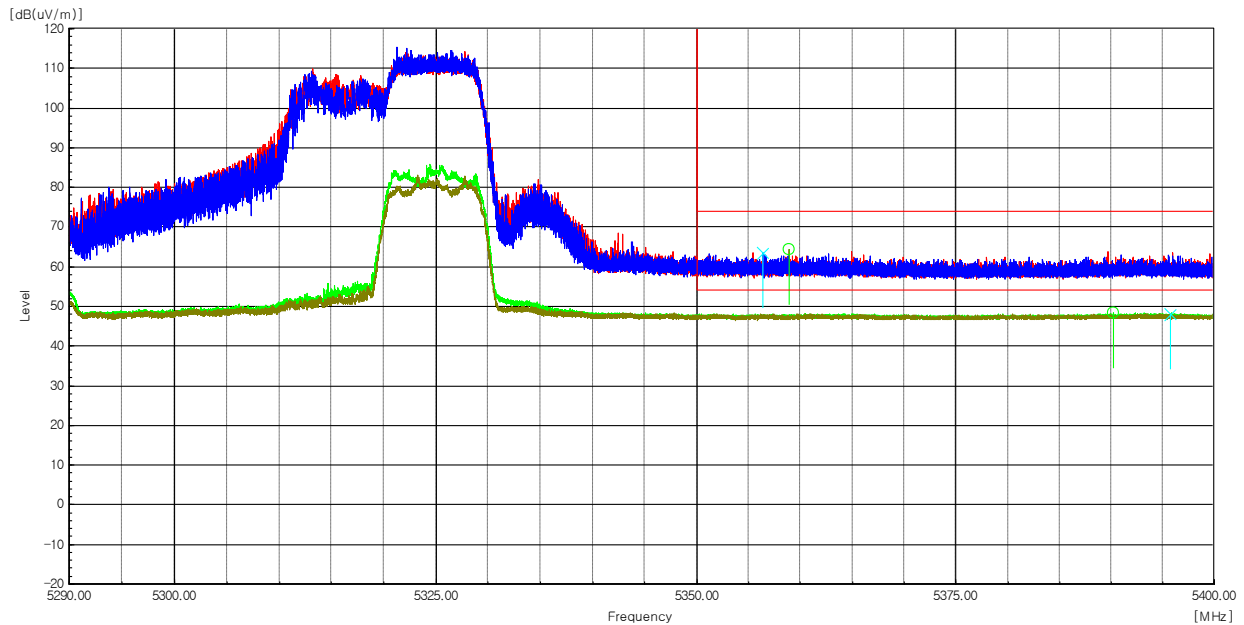

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 358.90	H	59.9	4.3	-----	64.20	-----	74.00	-----	9.80	-----	Peak
5 356.37	V	59.2	4.3	-----	63.50	-----	74.00	-----	10.50	-----	Peak
5 390.21	H	43.8	4.5	0.25	-----	48.55	-----	54.00	-----	5.45	Average
5 395.71	V	43.5	4.6	0.25	-----	48.35	-----	54.00	-----	5.65	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (508) / (534) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

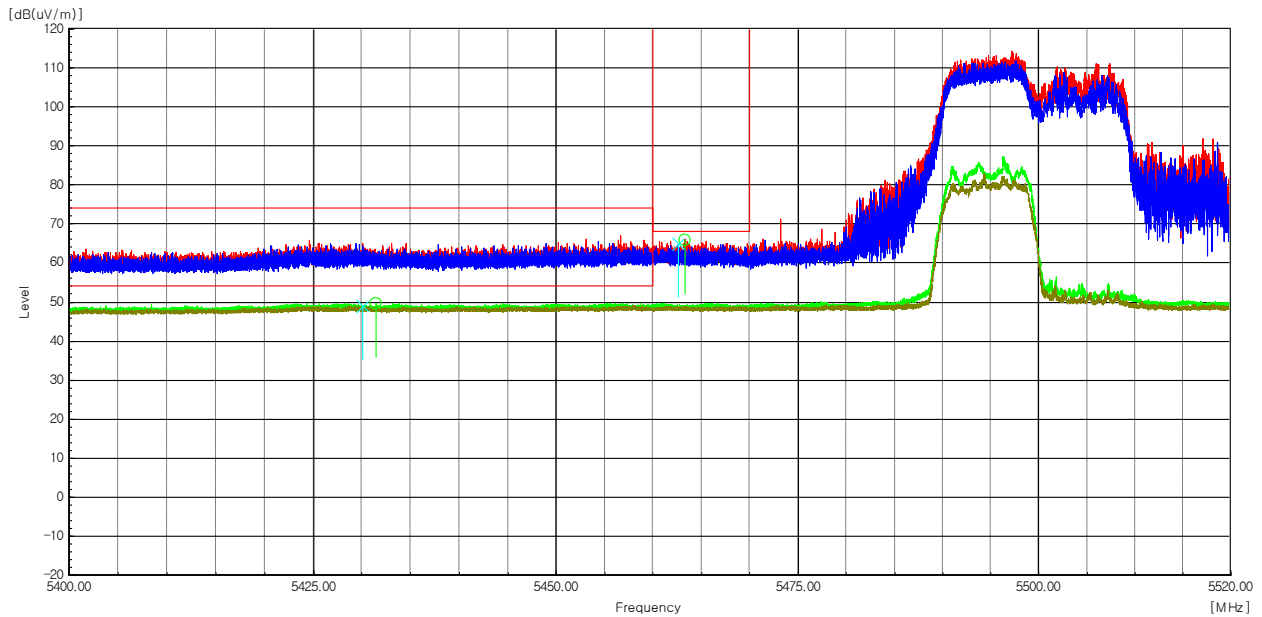

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 463.34	H	61.0	4.9	-----	65.90	-----	68.20	-----	2.30	-----	Peak
5 462.64	V	60.1	4.9	-----	65.00	-----	68.20	-----	3.20	-----	Peak
5 431.49	H	44.9	4.8	0.25	-----	49.95	-----	54.00	-----	4.05	Average
5 430.06	V	44.2	4.8	0.25	-----	49.25	-----	54.00	-----	4.75	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (509) / (534) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

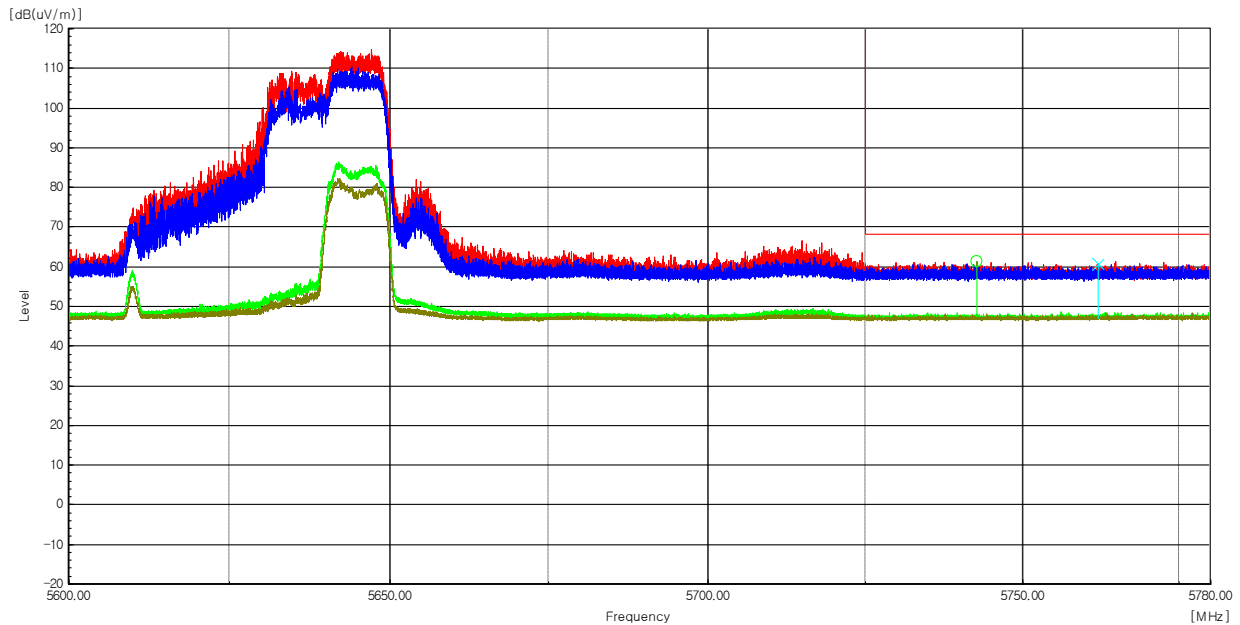

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 742.63	H	55.9	5.5	-----	61.40	-----	68.20	-----	6.80	-----	Peak
5 761.96	V	55.2	5.6	-----	60.80	-----	68.20	-----	7.40	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (510) / (534) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_Low
Channel :	155

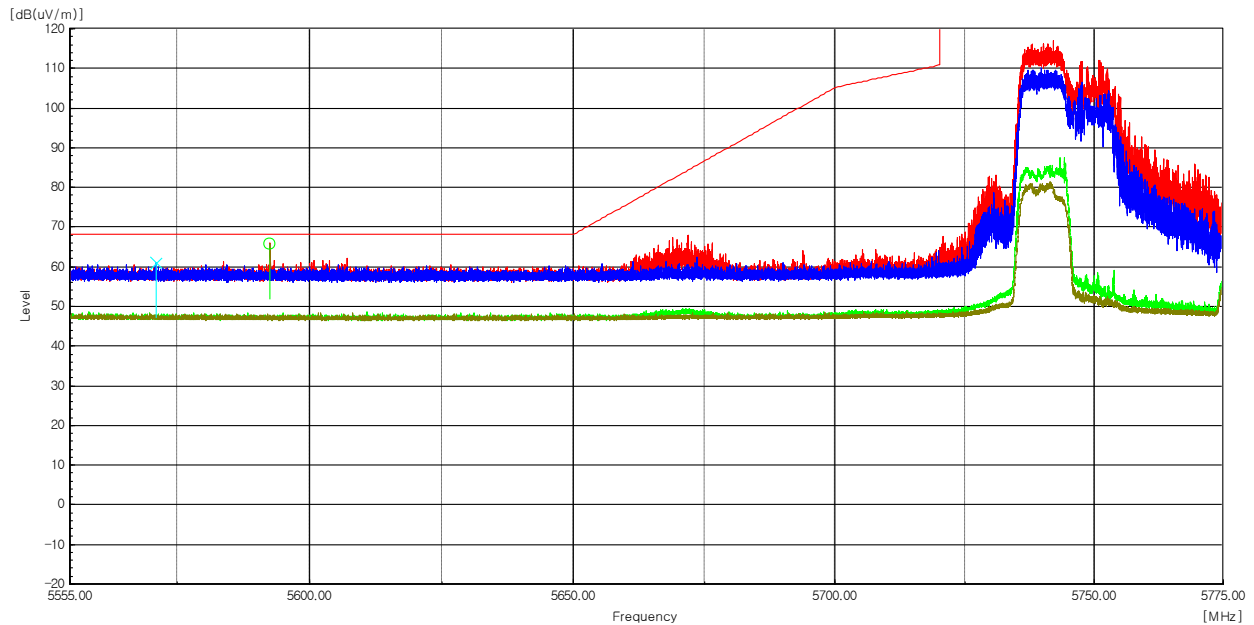

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 592.59	H	60.6	5.2	-----	65.80	-----	68.20	-----	2.40	-----	Peak
5 571.05	V	55.8	5.2	-----	61.00	-----	68.20	-----	7.20	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (511) / (534) Pages

Worst Case Mode :	802.11ax_HE80_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_High
Channel :	155

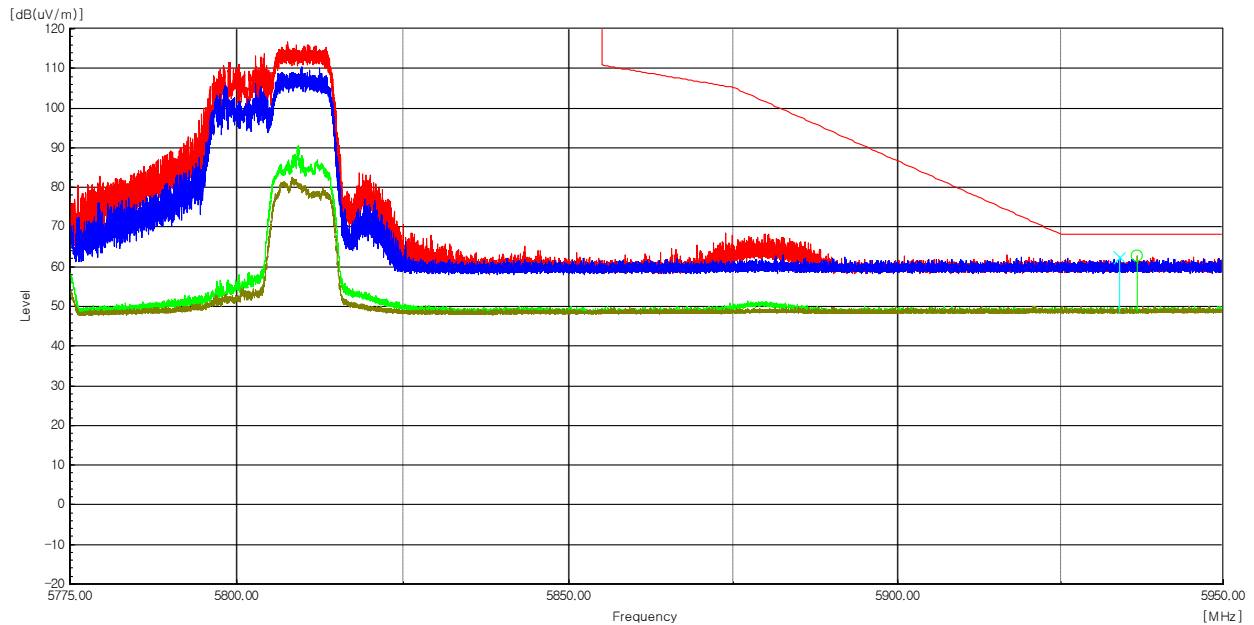

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 934.12	V	56.0	6.3	-----	62.30	-----	68.20	-----	5.90	-----	Peak
5 936.77	H	56.5	6.3	-----	62.80	-----	68.20	-----	5.40	-----	Peak



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00063
Page (512) / (534) Pages

Test Mode : Transmitter (802.11ax_HE80_242T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

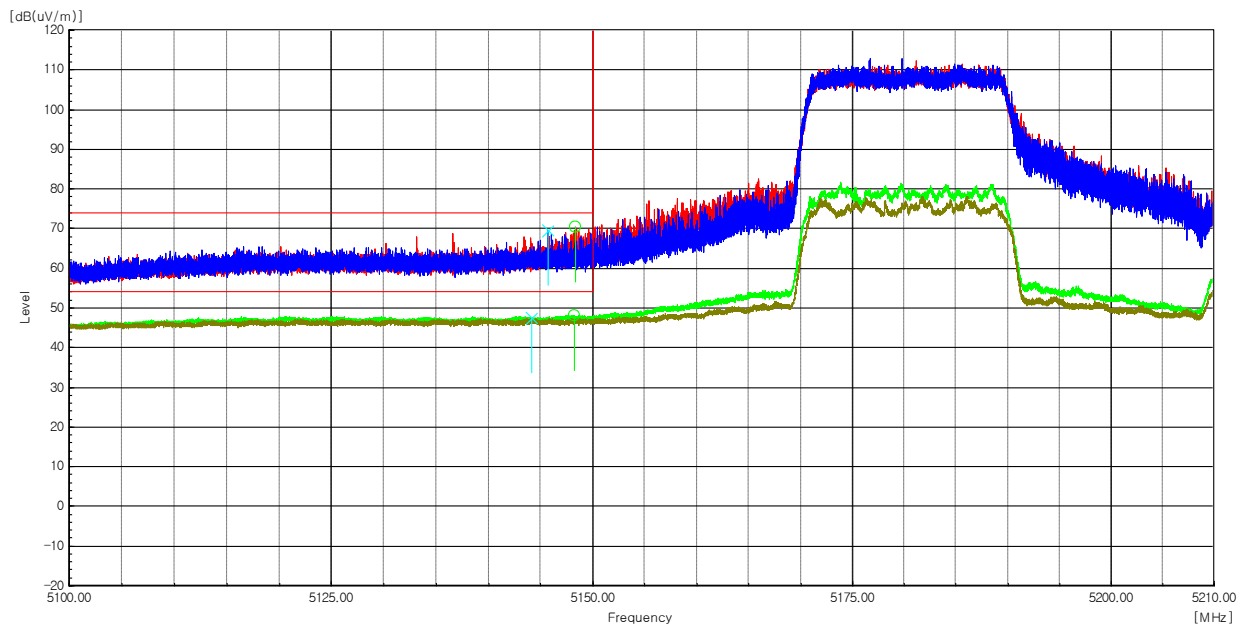

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 148.30	H	66.6	3.8	-----	70.40	-----	74.00	-----	3.60	-----	Peak
5 148.27	H	44.4	3.8	0.28	-----	48.48	-----	54.00	-----	5.52	Average
5 145.71	V	65.8	3.8	-----	69.60	-----	74.00	-----	4.40	-----	Peak
5 144.11	V	43.7	3.8	0.28	-----	47.78	-----	54.00	-----	6.22	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (513) / (534) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

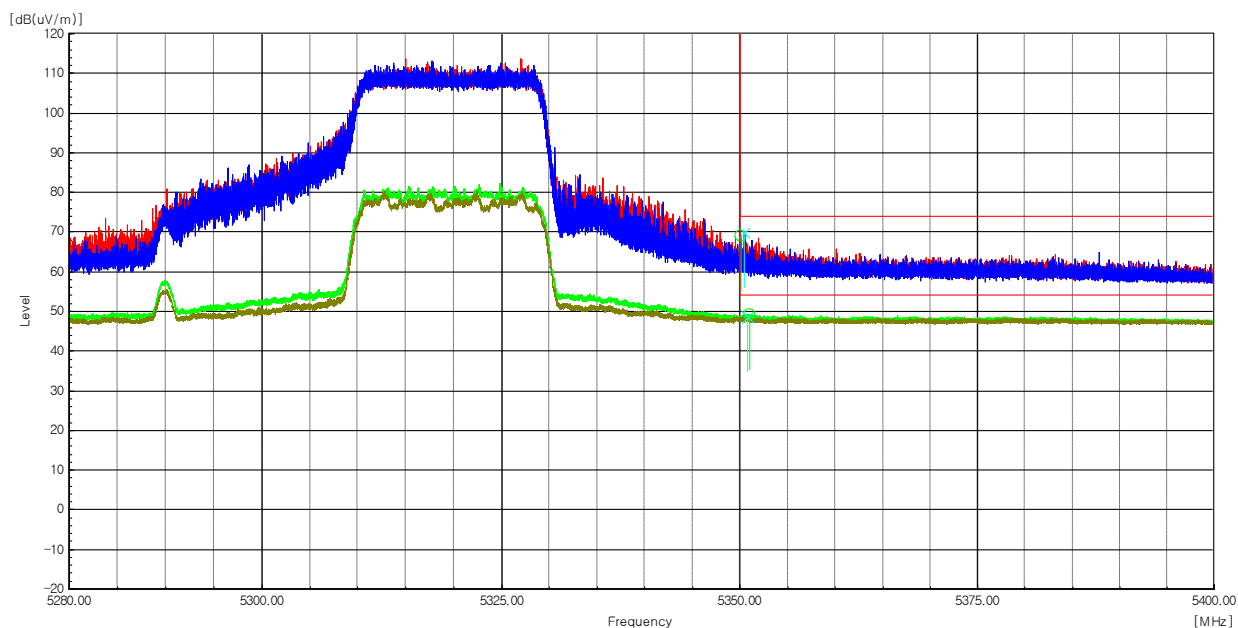

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 350.05	H	64.7	4.3	-----	69.00	-----	74.00	-----	5.00	-----	Peak
5 350.98	H	44.9	4.3	0.28	-----	49.48	-----	54.00	-----	4.52	Average
5 350.44	V	65.5	4.3	-----	69.80	-----	74.00	-----	4.20	-----	Peak
5 350.80	V	44.3	4.3	0.28	-----	48.88	-----	54.00	-----	5.12	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (514) / (534) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

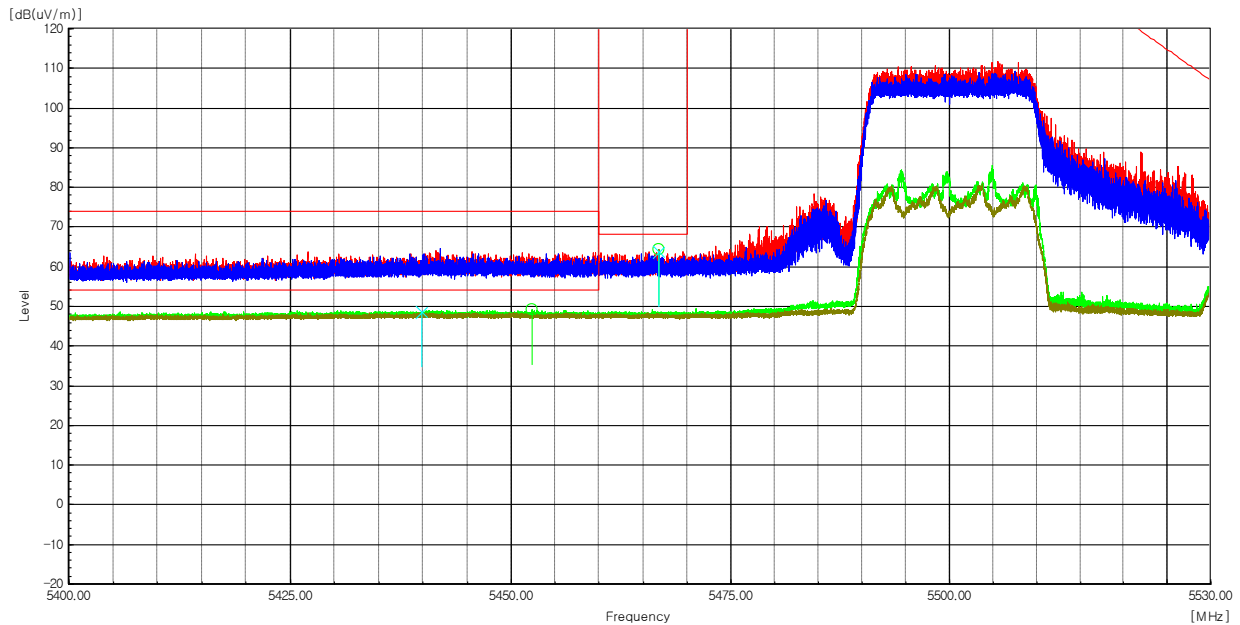

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 466.80	H	59.6	4.9	-----	64.50	-----	68.20	-----	3.70	-----	Peak
5 466.85	V	58.9	4.9	-----	63.80	-----	68.20	-----	4.40	-----	Peak
5 452.36	H	44.4	4.9	0.28	-----	49.58	-----	54.00	-----	4.42	Average
5 439.84	V	43.7	4.9	0.28	-----	48.88	-----	54.00	-----	5.12	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (515) / (534) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

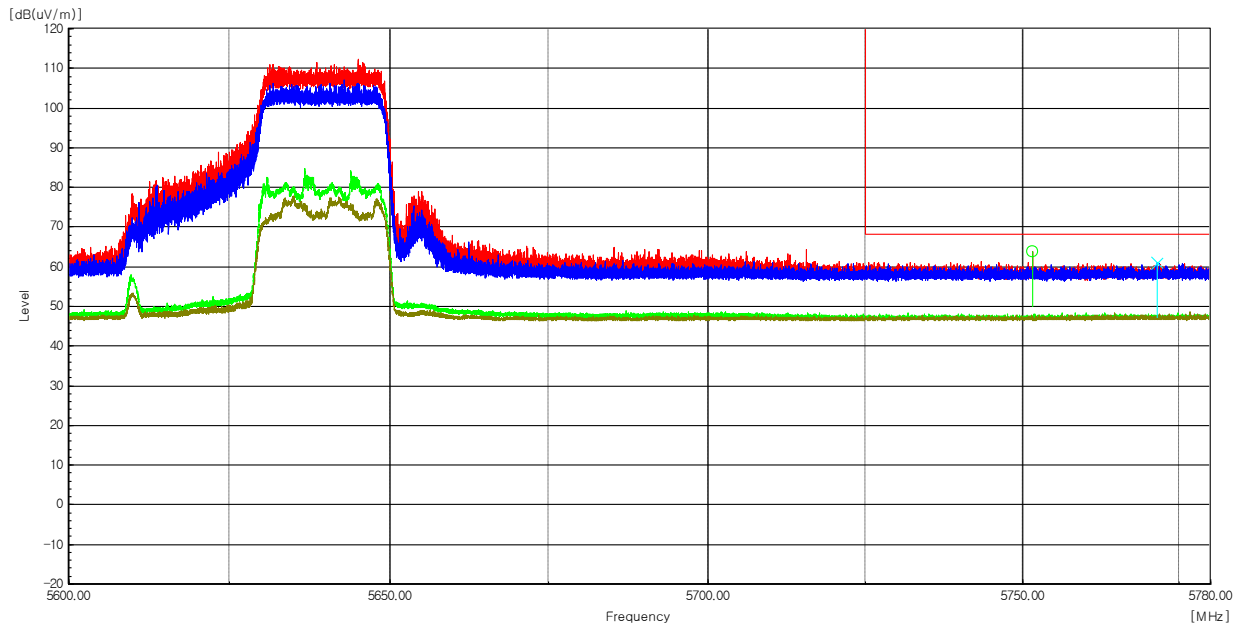

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 751.54	H	58.2	5.5	-----	63.70	-----	68.20	-----	4.50	-----	Peak
5 771.41	V	55.4	5.6	-----	61.00	-----	68.20	-----	7.20	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (516) / (534) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_Low
Channel :	155

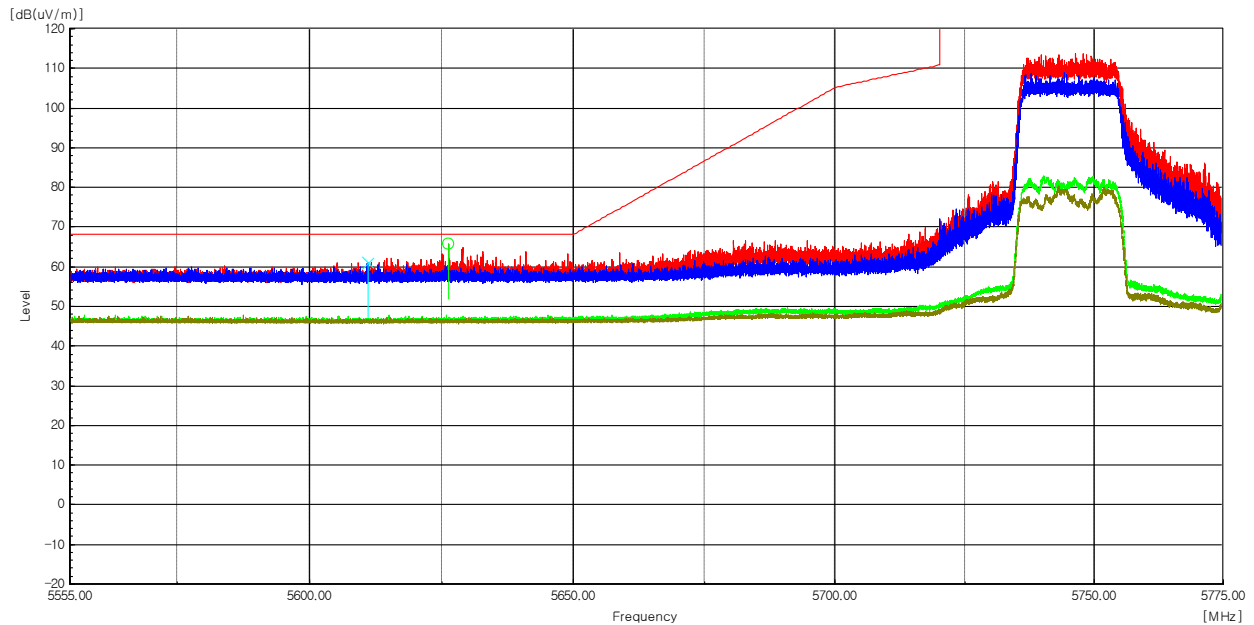

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 626.23	H	60.5	5.2	-----	65.70	-----	68.20	-----	2.50	-----	Peak
5 610.95	V	55.9	5.2	-----	61.10	-----	68.20	-----	7.10	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (517) / (534) Pages

Worst Case Mode :	802.11ax_HE80_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_High
Channel :	155

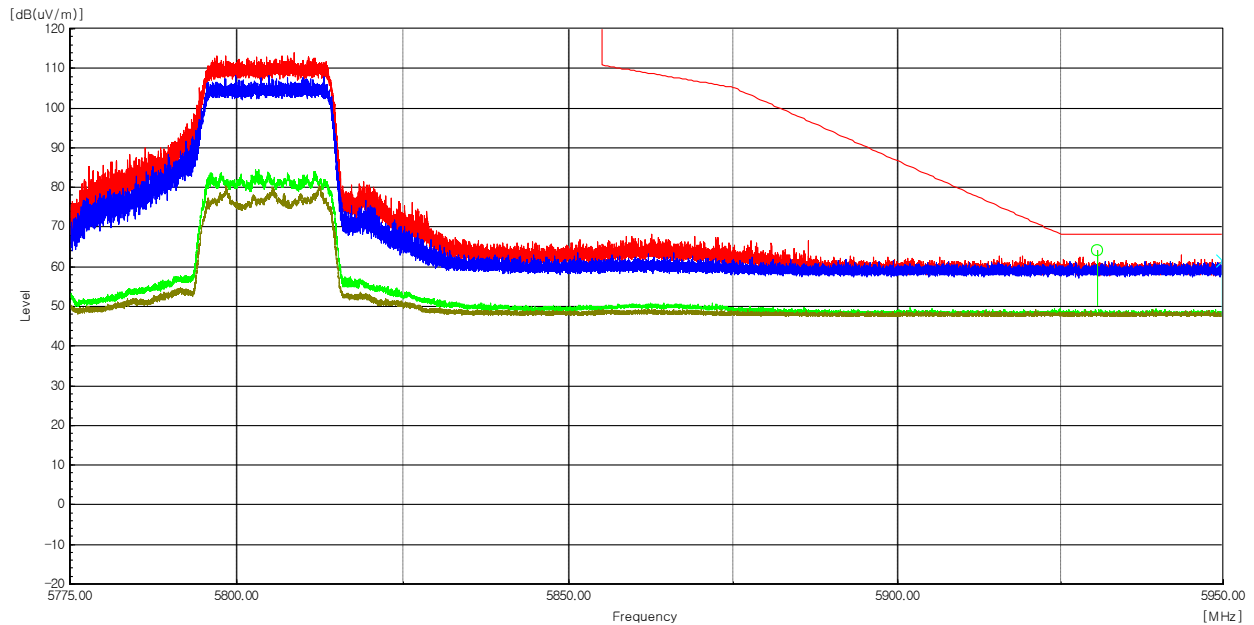

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 930.70	H	57.9	6.3	-----	64.20	-----	68.20	-----	4.00	-----	Peak
5 949.80	V	55.2	6.4	-----	61.60	-----	68.20	-----	6.60	-----	Peak

Radiated Restricted Band Edge Plot



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00063
Page (518) / (534) Pages

Test Mode : Transmitter (802.11ax_HE80_484T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 210 MHz
Channel :	42

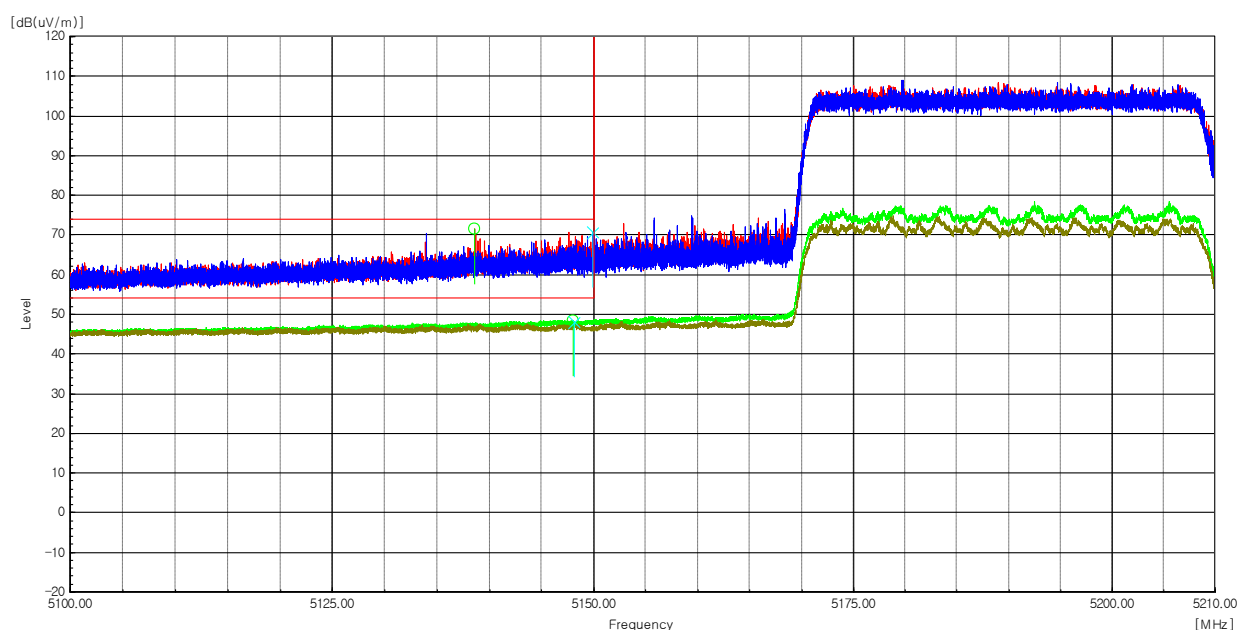

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 138.58	H	67.7	3.8	----	71.50	----	74.00	----	2.50	----	Peak
5 148.00	H	44.7	3.8	0.29	----	48.79	----	54.00	----	5.21	Average
5 149.92	V	67.0	3.8	----	70.80	----	74.00	----	3.20	----	Peak
5 148.18	V	44.2	3.8	0.29	----	48.29	----	54.00	----	5.71	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (519) / (534) Pages

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 290 MHz
Channel :	58

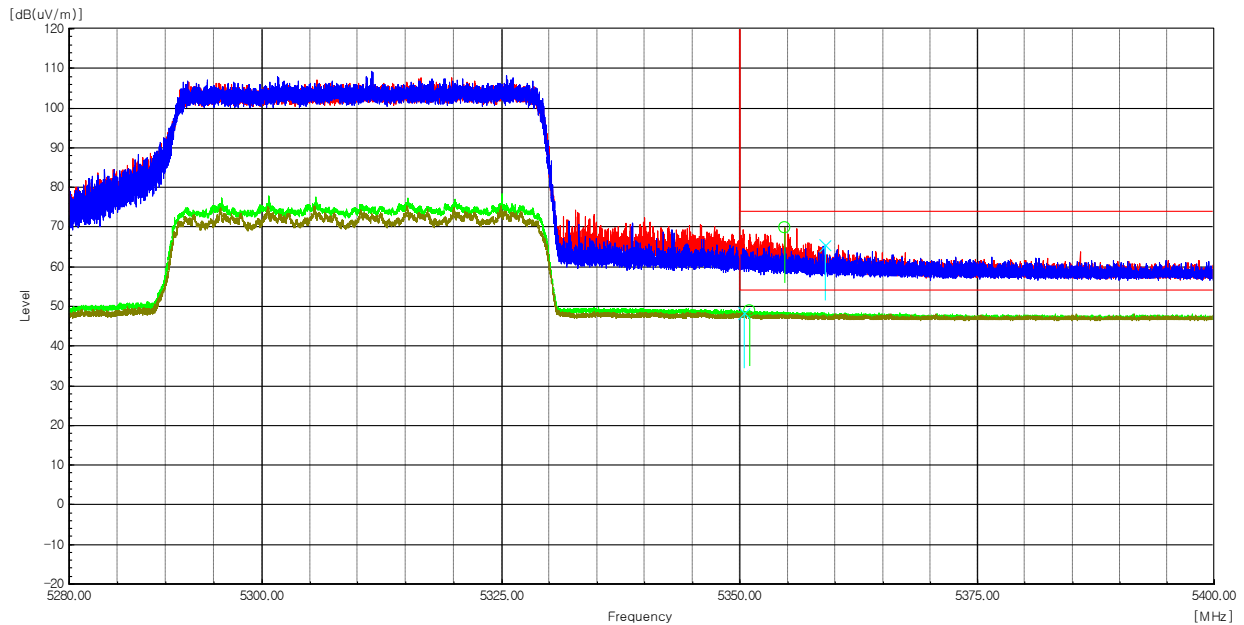

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 354.68	H	65.5	4.3	-----	69.80	-----	74.00	-----	4.20	-----	Peak
5 351.00	H	44.7	4.3	0.29	-----	49.29	-----	54.00	-----	4.71	Average
5 358.88	V	61.2	4.3	-----	65.50	-----	74.00	-----	8.50	-----	Peak
5 350.46	V	44.0	4.3	0.29	-----	48.59	-----	54.00	-----	5.41	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (520) / (534) Pages

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 530 MHz
Channel :	106

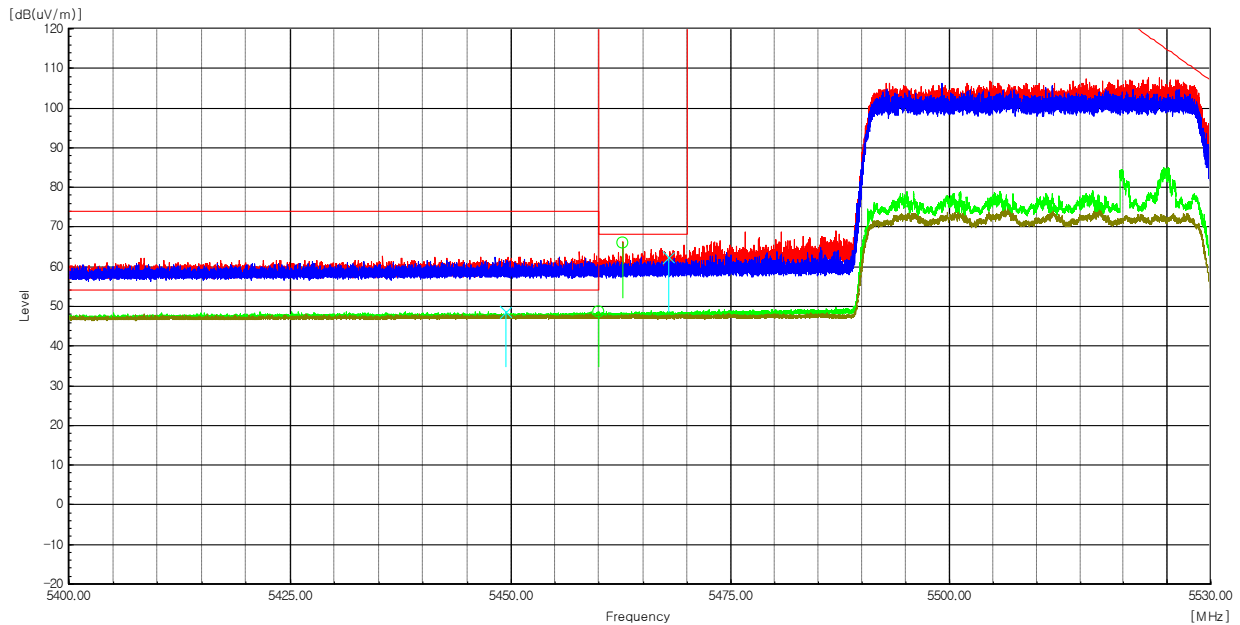

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 462.72	H	61.0	4.9	-----	65.90	-----	68.20	-----	2.30	-----	Peak
5 467.88	V	57.6	4.9	-----	62.50	-----	68.20	-----	5.70	-----	Peak
5 459.92	H	43.8	4.9	0.29	-----	48.99	-----	54.00	-----	5.01	Average
5 449.45	V	43.6	4.9	0.29	-----	48.79	-----	54.00	-----	5.21	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (521) / (534) Pages

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 610 MHz
Channel :	122

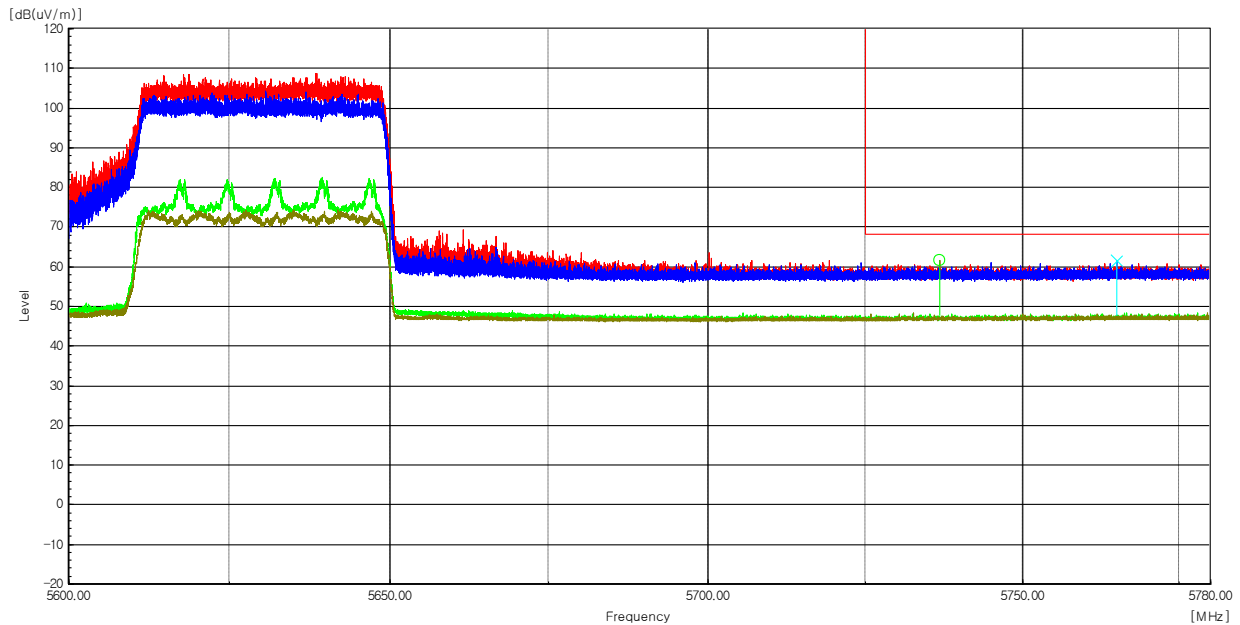

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 736.77	H	56.0	5.5	-----	61.50	-----	68.20	-----	6.70	-----	Peak
5 764.97	V	56.1	5.6	-----	61.70	-----	68.20	-----	6.50	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (522) / (534) Pages

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_Low
Channel :	155

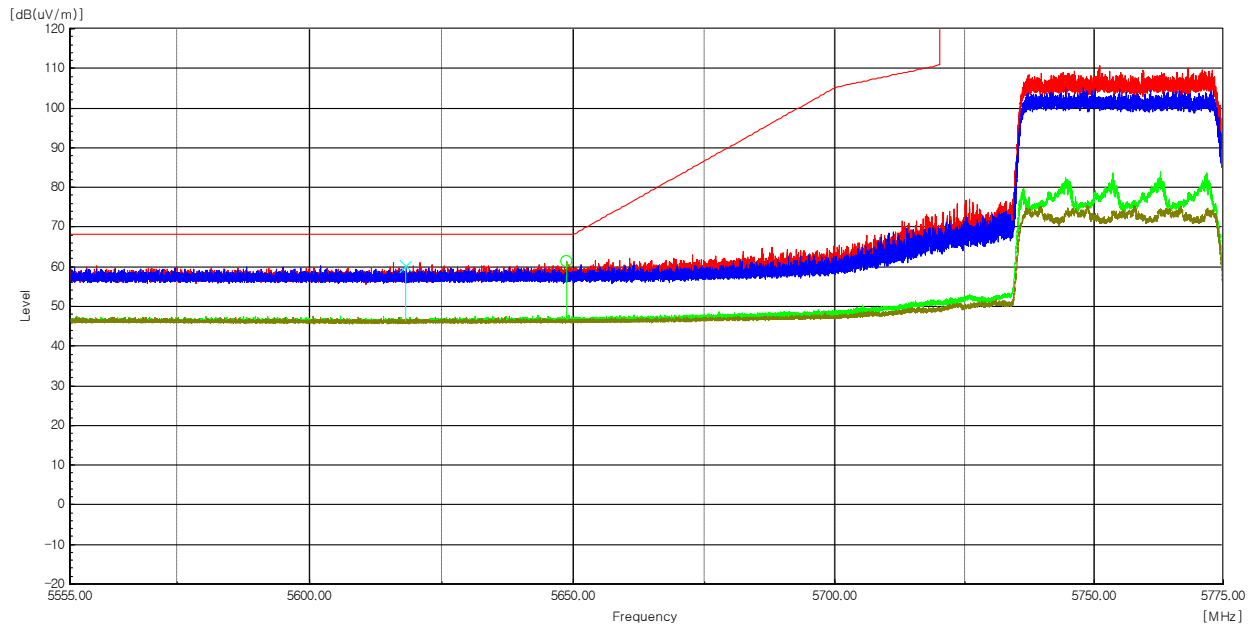

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 648.77	H	56.0	5.2	-----	61.20	-----	68.20	-----	7.00	-----	Peak
5 618.22	V	55.1	5.2	-----	60.30	-----	68.20	-----	7.90	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (523) / (534) Pages

Worst Case Mode :	802.11ax_HE80_484T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 775 MHz_High
Channel :	155

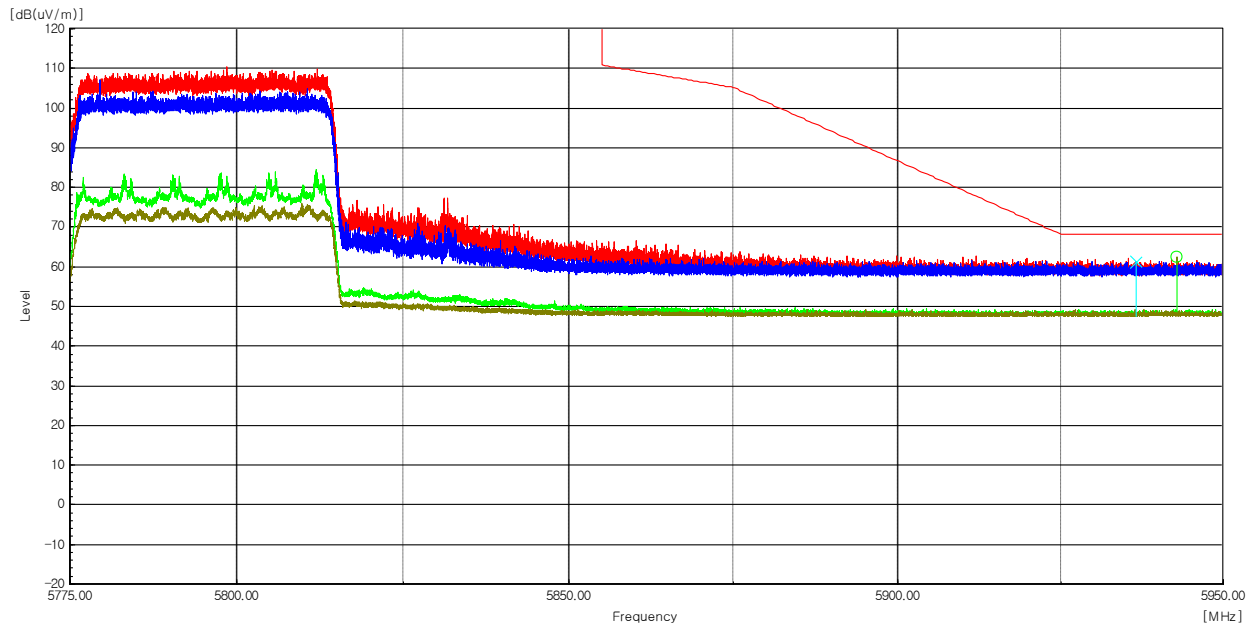

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 936.66	V	55.0	6.3	-----	61.30	-----	68.20	-----	6.90	-----	Peak
5 942.87	H	55.9	6.4	-----	62.30	-----	68.20	-----	5.90	-----	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (524) / (534) Pages

Test Mode : Transmitter (802.11ax_HE80_996T)

The requirements are:

☒ Complies

Ch.42(5 210 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 428.84	H	49.0	12.5	-----	61.50	-----	74.00	-----	12.50	-----	Peak
10 434.72	H	39.0	12.5	0.29	-----	51.79	-----	54.00	-----	2.21	Average
10 407.27	V	52.9	12.5	-----	65.40	-----	74.00	-----	8.60	-----	Peak
10 434.34	V	38.6	12.5	0.29	-----	51.39	-----	54.00	-----	2.61	Average

Ch.58(5 290 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 576.62	H	48.0	13.1	-----	61.10	-----	74.00	-----	12.90	-----	Peak
10 580.84	H	37.5	13.1	0.29	-----	50.89	-----	54.00	-----	3.11	Average
10 567.53	V	49.9	13.0	-----	62.90	-----	74.00	-----	11.10	-----	Peak
10 585.71	V	37.9	13.1	0.29	-----	51.29	-----	54.00	-----	2.71	Average

Ch.106(5 530 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 099.97	H	48.2	13.4	-----	61.60	-----	74.00	-----	12.40	-----	Peak
11 037.63	H	37.4	13.4	0.29	-----	51.09	-----	54.00	-----	2.91	Average
11 067.65	V	49.4	13.4	-----	62.80	-----	74.00	-----	11.20	-----	Peak
11 049.15	V	37.4	13.4	0.29	-----	51.09	-----	54.00	-----	2.91	Average

Ch.122(5 610 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 209.80	H	47.4	13.9	-----	61.30	-----	74.00	-----	12.70	-----	Peak
11 176.26	H	37.4	13.7	0.29	-----	51.39	-----	54.00	-----	2.61	Average
11 210.24	V	49.9	13.9	-----	63.80	-----	74.00	-----	10.20	-----	Peak
11 192.13	V	37.0	13.8	0.29	-----	51.09	-----	54.00	-----	2.91	Average

Ch.138(5 690 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 415.18	H	47.1	13.7	-----	60.80	-----	74.00	-----	13.20	-----	Peak
11 400.20	H	37.5	13.7	0.29	-----	51.49	-----	54.00	-----	2.51	Average
11 389.71	V	49.3	13.7	-----	63.00	-----	74.00	-----	11.00	-----	Peak
11 375.43	V	37.0	13.6	0.29	-----	50.89	-----	54.00	-----	3.11	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (525) / (534) Pages

Ch.155(5 775 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 531.28	H	47.3	13.9	-----	61.20	-----	74.00	-----	12.80	-----	Peak
11 547.28	H	37.0	13.9	0.29	-----	51.19	-----	54.00	-----	2.81	Average
11 521.94	V	50.6	13.8	-----	64.40	-----	74.00	-----	9.60	-----	Peak
11 522.13	V	37.3	13.8	0.29	-----	51.39	-----	54.00	-----	2.61	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.