



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


REPORT No.:
CTK-2026-00063
Page (419) / (534) Pages

Test Mode : Transmitter (802.11ax_HE20_106T)

The requirements are:

☒ Complies

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

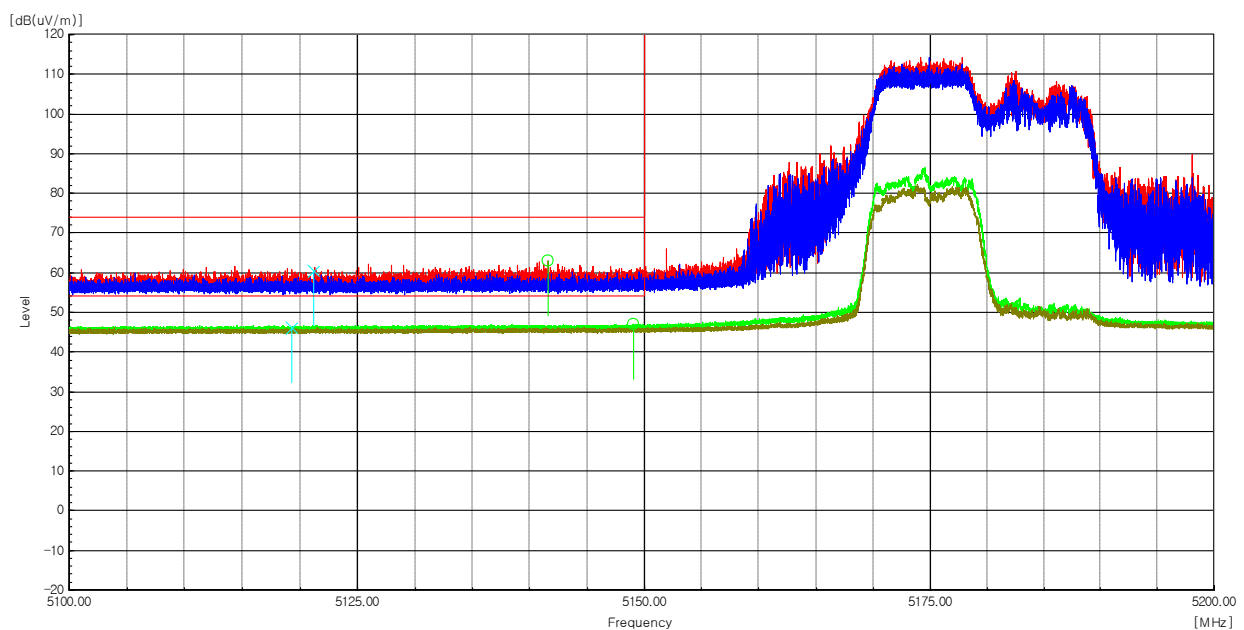

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 141.57	H	59.2	3.8	-----	63.00	-----	74.00	-----	11.00	-----	Peak
5 149.07	H	43.3	3.8	0.25	-----	47.35	-----	54.00	-----	6.65	Average
5 121.15	V	56.8	3.8	-----	60.60	-----	74.00	-----	13.40	-----	Peak
5 119.28	V	42.5	3.8	0.25	-----	46.55	-----	54.00	-----	7.45	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (420) / (534) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

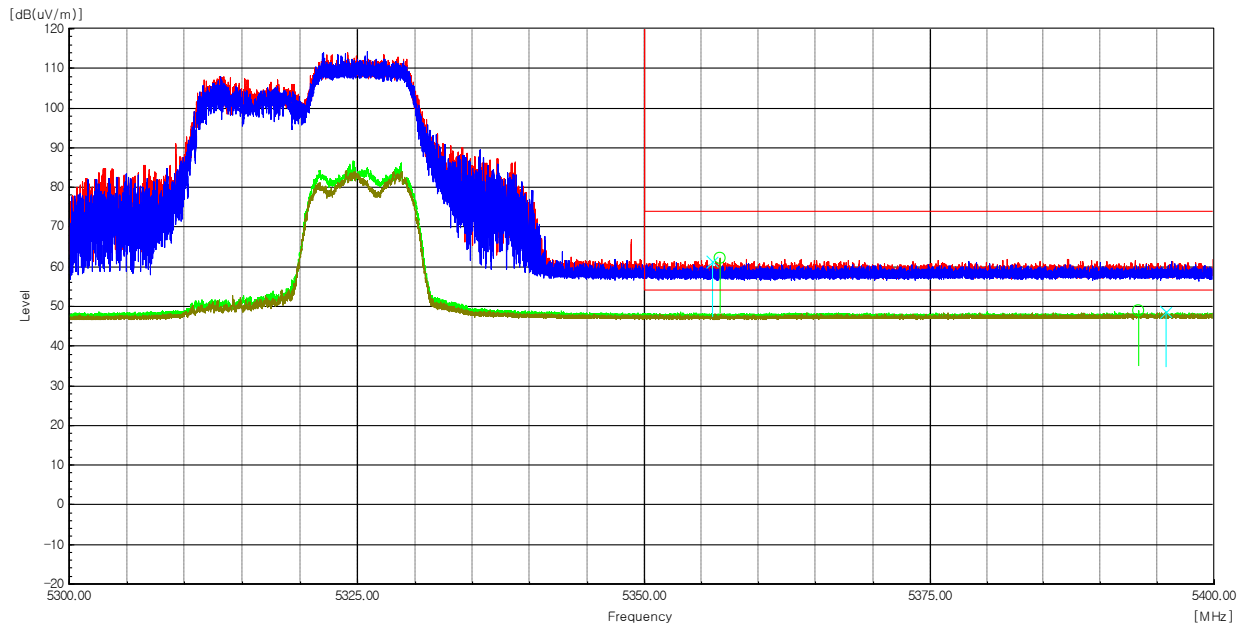

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 356.58	H	58.0	4.3	-----	62.30	-----	74.00	-----	11.70	-----	Peak
5 393.30	H	44.4	4.6	0.25	-----	49.25	-----	54.00	-----	4.75	Average
5 355.92	V	56.9	4.3	-----	61.20	-----	74.00	-----	12.80	-----	Peak
5 395.70	V	44.0	4.6	0.25	-----	48.85	-----	54.00	-----	5.15	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (421) / (534) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

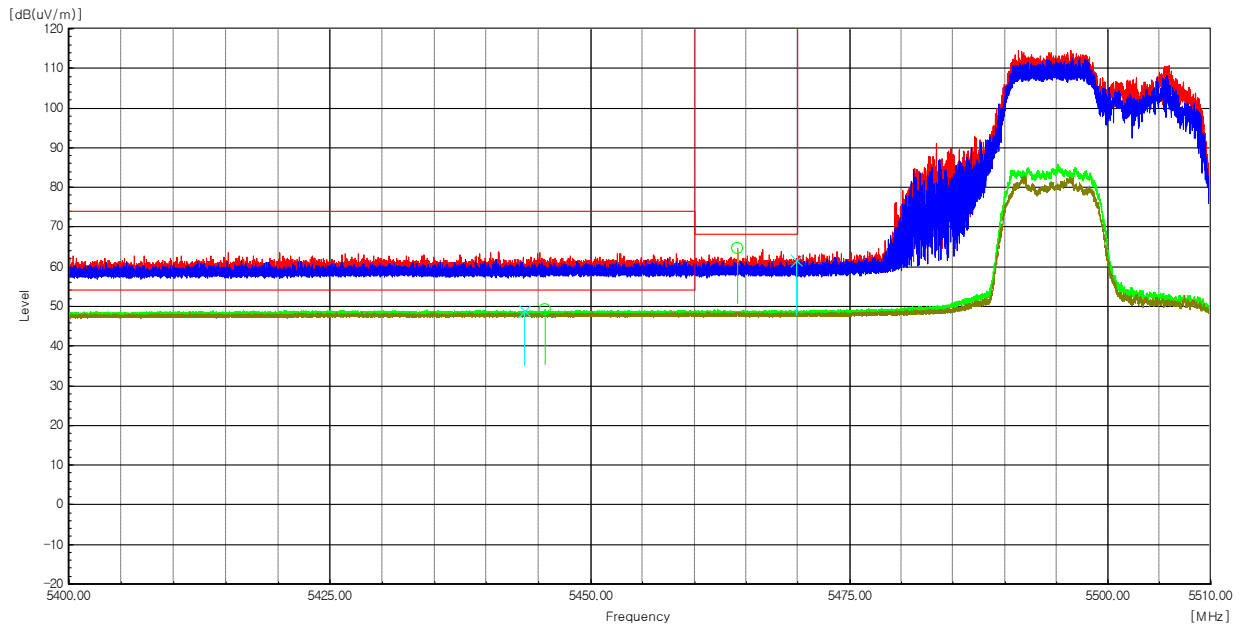

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 464.19	H	59.7	4.9	-----	64.60	-----	68.20	-----	3.60	-----	Peak
5 469.87	V	56.7	4.9	-----	61.60	-----	68.20	-----	6.60	-----	Peak
5 445.66	H	44.2	4.9	0.25	-----	49.35	-----	54.00	-----	4.65	Average
5 443.59	V	44.1	4.9	0.25	-----	49.25	-----	54.00	-----	4.75	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (422) / (534) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

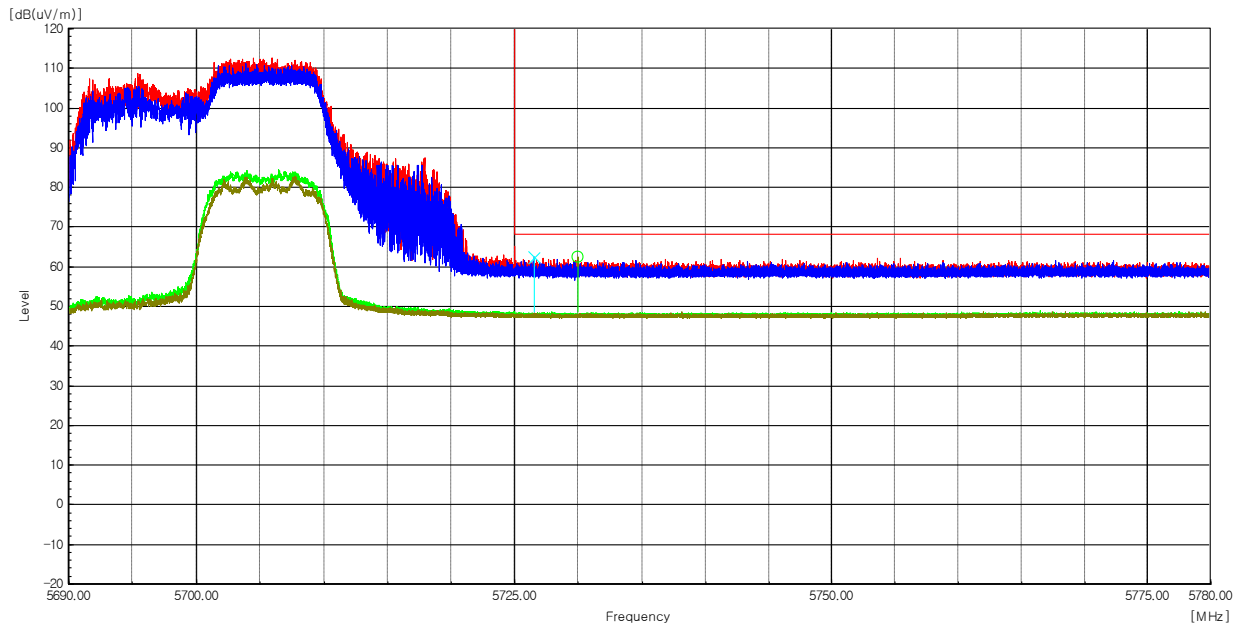

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 729.97	H	57.1	5.4	-----	62.50	-----	68.20	-----	5.70	-----	Peak
5 726.50	V	57.0	5.4	-----	62.40	-----	68.20	-----	5.80	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (423) / (534) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

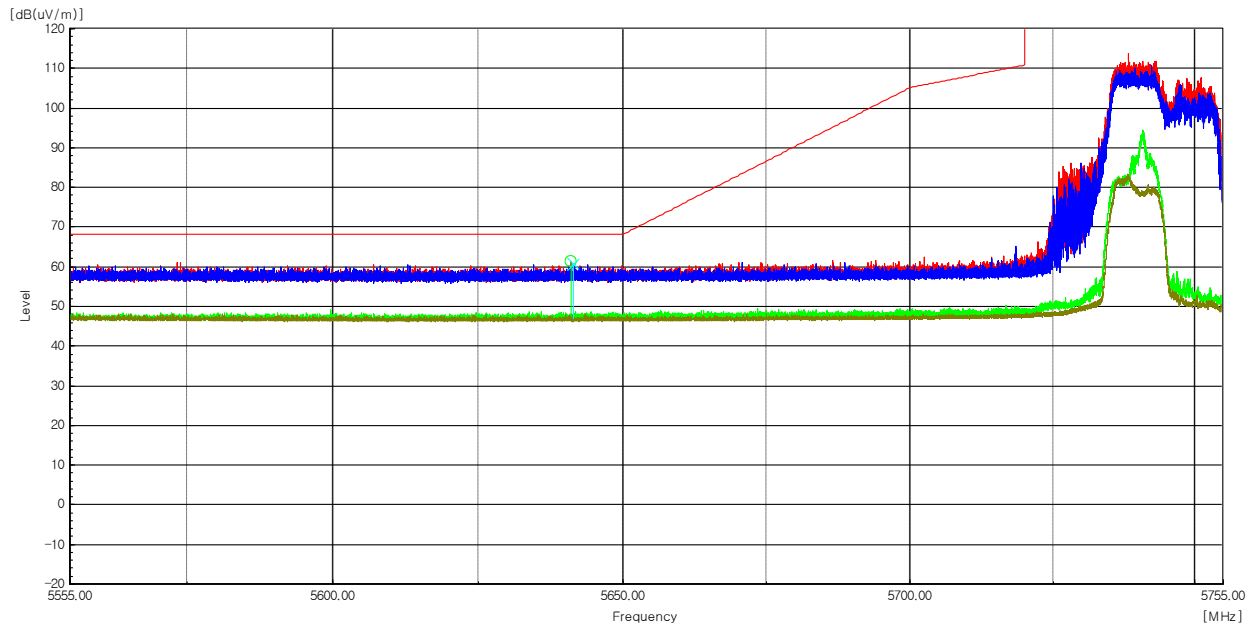

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 641.06	H	56.0	5.2	-----	61.20	-----	68.20	-----	7.00	-----	Peak
5 641.40	V	55.6	5.2	-----	60.80	-----	68.20	-----	7.40	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (424) / (534) Pages

Worst Case Mode :	802.11ax_HE20_106T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

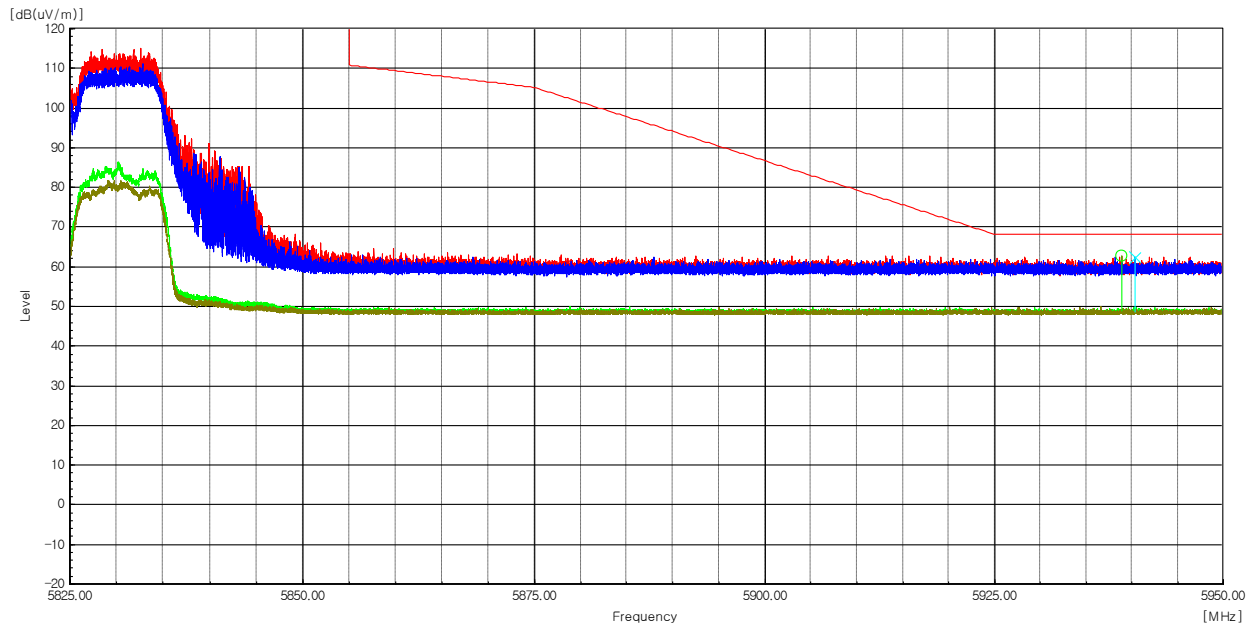

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 938.88	H	56.2	6.4	-----	62.60	-----	68.20	-----	5.60	-----	Peak
5 940.29	V	56.0	6.4	-----	62.40	-----	68.20	-----	5.80	-----	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (425) / (534) Pages

Test Mode : Transmitter (802.11ax_HE20_242T)

The requirements are:

☒ Complies

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 355.55	H	51.9	12.6	-----	64.50	-----	74.00	-----	9.50	-----	Peak
10 360.23	H	36.4	12.6	0.28	-----	49.28	-----	54.00	-----	4.72	Average
10 355.75	V	56.1	12.6	-----	68.70	-----	74.00	-----	5.30	-----	Peak
10 358.50	V	39.1	12.6	0.28	-----	51.98	-----	54.00	-----	2.02	Average

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 403.49	H	50.0	12.5	-----	62.50	-----	74.00	-----	11.50	-----	Peak
10 401.57	H	36.7	12.5	0.28	-----	49.48	-----	54.00	-----	4.52	Average
10 397.86	V	56.0	12.5	-----	68.50	-----	74.00	-----	5.50	-----	Peak
10 401.25	V	37.9	12.5	0.28	-----	50.68	-----	54.00	-----	3.32	Average

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 476.52	H	48.2	12.6	-----	60.80	-----	74.00	-----	13.20	-----	Peak
10 486.70	H	36.7	12.6	0.28	-----	49.58	-----	54.00	-----	4.42	Average
10 484.01	V	53.0	12.6	-----	65.60	-----	74.00	-----	8.40	-----	Peak
10 480.55	V	37.2	12.6	0.28	-----	50.08	-----	54.00	-----	3.92	Average

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 523.43	H	49.2	12.7	-----	61.90	-----	74.00	-----	12.10	-----	Peak
10 530.28	H	36.2	12.8	0.28	-----	49.28	-----	54.00	-----	4.72	Average
10 517.67	V	51.4	12.7	-----	64.10	-----	74.00	-----	9.90	-----	Peak
10 519.34	V	36.6	12.7	0.28	-----	49.58	-----	54.00	-----	4.42	Average

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 605.16	H	48.2	13.2	-----	61.40	-----	74.00	-----	12.60	-----	Peak
10 597.80	H	36.1	13.2	0.28	-----	49.58	-----	54.00	-----	4.42	Average
10 597.04	V	51.0	13.2	-----	64.20	-----	74.00	-----	9.80	-----	Peak
10 600.94	V	36.8	13.2	0.28	-----	50.28	-----	54.00	-----	3.72	Average

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 640.81	H	48.0	13.3	-----	61.30	-----	74.00	-----	12.70	-----	Peak
10 641.20	H	35.6	13.3	0.28	-----	49.18	-----	54.00	-----	4.82	Average
10 645.10	V	50.4	13.3	-----	63.70	-----	74.00	-----	10.30	-----	Peak
10 640.56	V	37.2	13.3	0.28	-----	50.78	-----	54.00	-----	3.22	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (426) / (534) Pages

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 403.40	H	49.4	13.7	-----	63.10	-----	74.00	-----	10.90	-----	Peak
11 385.36	H	36.5	13.6	0.28	-----	50.38	-----	54.00	-----	3.62	Average
11 403.85	V	52.6	13.7	-----	66.30	-----	74.00	-----	7.70	-----	Peak
11 393.04	V	37.8	13.7	0.28	-----	51.78	-----	54.00	-----	2.22	Average

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 196.23	H	48.0	13.9	-----	61.90	-----	74.00	-----	12.10	-----	Peak
11 188.42	H	35.9	13.8	0.28	-----	49.98	-----	54.00	-----	4.02	Average
11 199.81	V	50.9	13.9	-----	64.80	-----	74.00	-----	9.20	-----	Peak
11 199.88	V	37.7	13.9	0.28	-----	51.88	-----	54.00	-----	2.12	Average

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 393.36	H	48.6	13.7	-----	62.30	-----	74.00	-----	11.70	-----	Peak
11 399.37	H	36.0	13.7	0.28	-----	49.98	-----	54.00	-----	4.02	Average
11 403.92	V	52.1	13.7	-----	65.80	-----	74.00	-----	8.20	-----	Peak
11 399.69	V	37.6	13.7	0.28	-----	51.58	-----	54.00	-----	2.42	Average

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 429.71	H	47.5	13.8	-----	61.30	-----	74.00	-----	12.70	-----	Peak
11 455.63	H	36.0	13.8	0.28	-----	50.08	-----	54.00	-----	3.92	Average
11 437.77	V	53.8	13.8	-----	67.60	-----	74.00	-----	6.40	-----	Peak
11 439.76	V	37.2	13.8	0.28	-----	51.28	-----	54.00	-----	2.72	Average

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 487.18	H	48.6	13.8	-----	62.40	-----	74.00	-----	11.60	-----	Peak
11 504.14	H	35.7	13.8	0.28	-----	49.78	-----	54.00	-----	4.22	Average
11 485.07	V	52.1	13.8	-----	65.90	-----	74.00	-----	8.10	-----	Peak
11 497.17	V	37.9	13.8	0.28	-----	51.98	-----	54.00	-----	2.02	Average

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 573.84	H	49.9	13.9	-----	63.80	-----	74.00	-----	10.20	-----	Peak
11 585.55	H	35.3	13.8	0.28	-----	49.38	-----	54.00	-----	4.62	Average
11 570.64	V	51.9	13.9	-----	65.80	-----	74.00	-----	8.20	-----	Peak
11 569.17	V	37.4	13.9	0.28	-----	51.58	-----	54.00	-----	2.42	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (427) / (534) Pages

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 652.76	H	48.7	13.8	-----	62.50	-----	74.00	-----	11.50	-----	Peak
11 652.18	H	35.1	13.8	0.28	-----	49.18	-----	54.00	-----	4.82	Average
11 644.76	V	50.5	13.8	-----	64.30	-----	74.00	-----	9.70	-----	Peak
11 652.69	V	36.5	13.8	0.28	-----	50.58	-----	54.00	-----	3.42	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (428) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

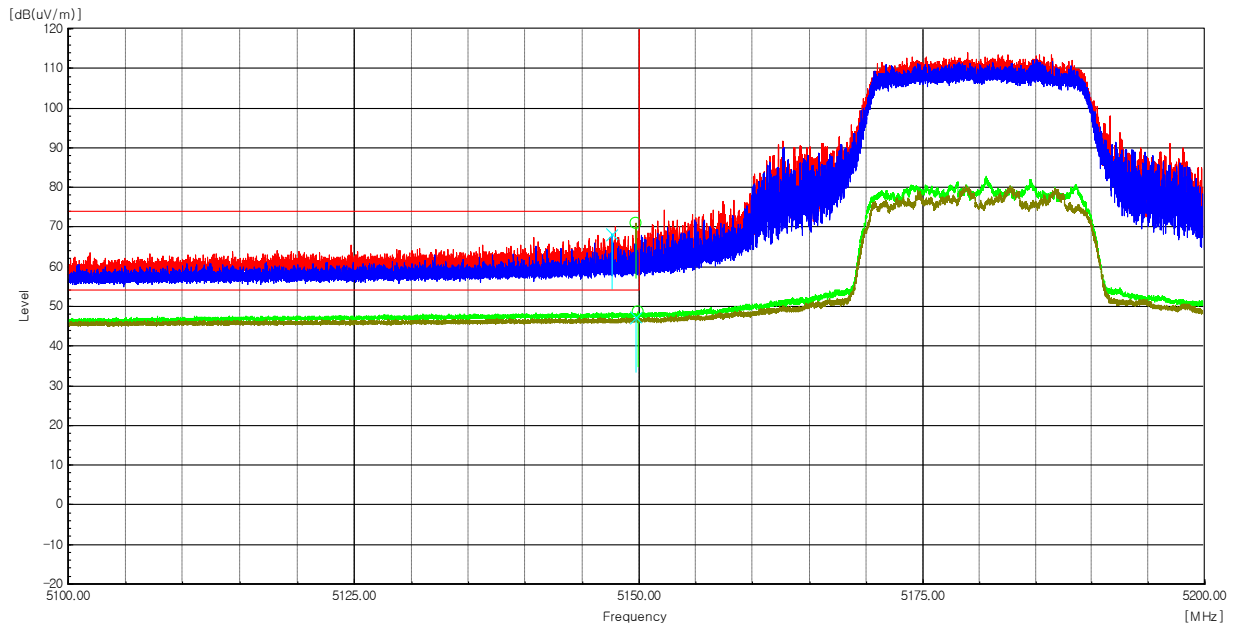

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 149.71	H	67.0	3.8	-----	70.80	-----	74.00	-----	3.20	-----	Peak
5 149.89	H	44.7	3.8	0.28	-----	48.78	-----	54.00	-----	5.22	Average
5 147.59	V	64.3	3.8	-----	68.10	-----	74.00	-----	5.90	-----	Peak
5 149.69	V	43.5	3.8	0.28	-----	47.58	-----	54.00	-----	6.42	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (429) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

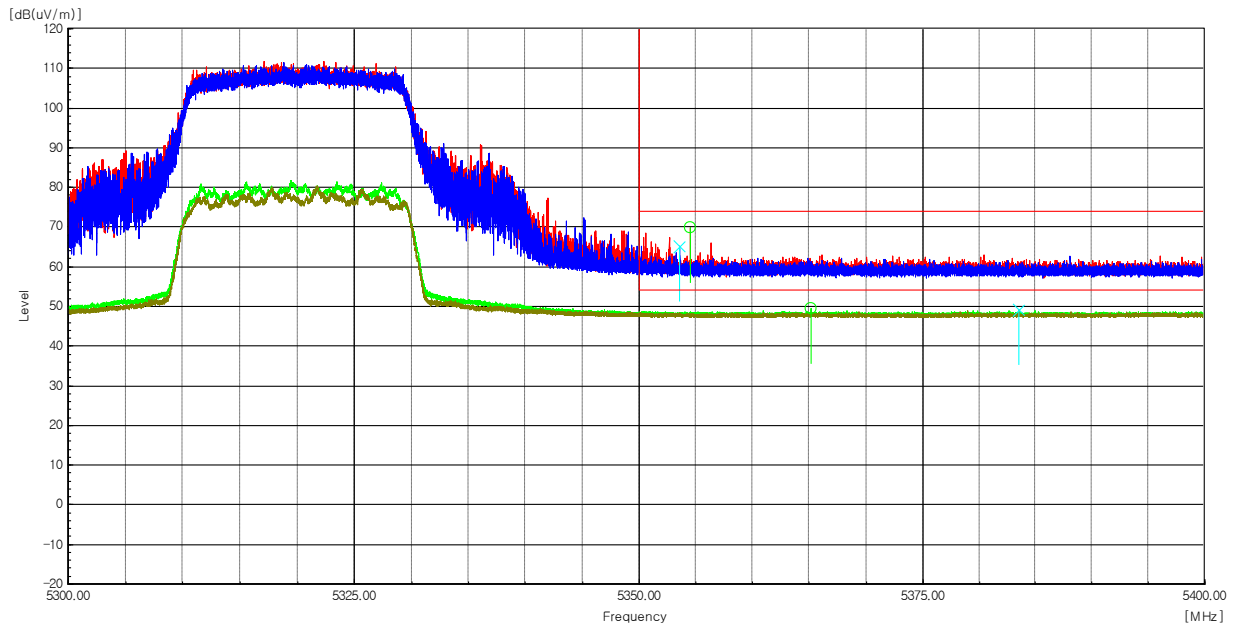

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 354.47	H	65.6	4.3	-----	69.90	-----	74.00	-----	4.10	-----	Peak
5 365.11	H	45.2	4.4	0.28	-----	49.88	-----	54.00	-----	4.12	Average
5 353.57	V	60.8	4.3	-----	65.10	-----	74.00	-----	8.90	-----	Peak
5 383.53	V	44.6	4.5	0.28	-----	49.38	-----	54.00	-----	4.62	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (430) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

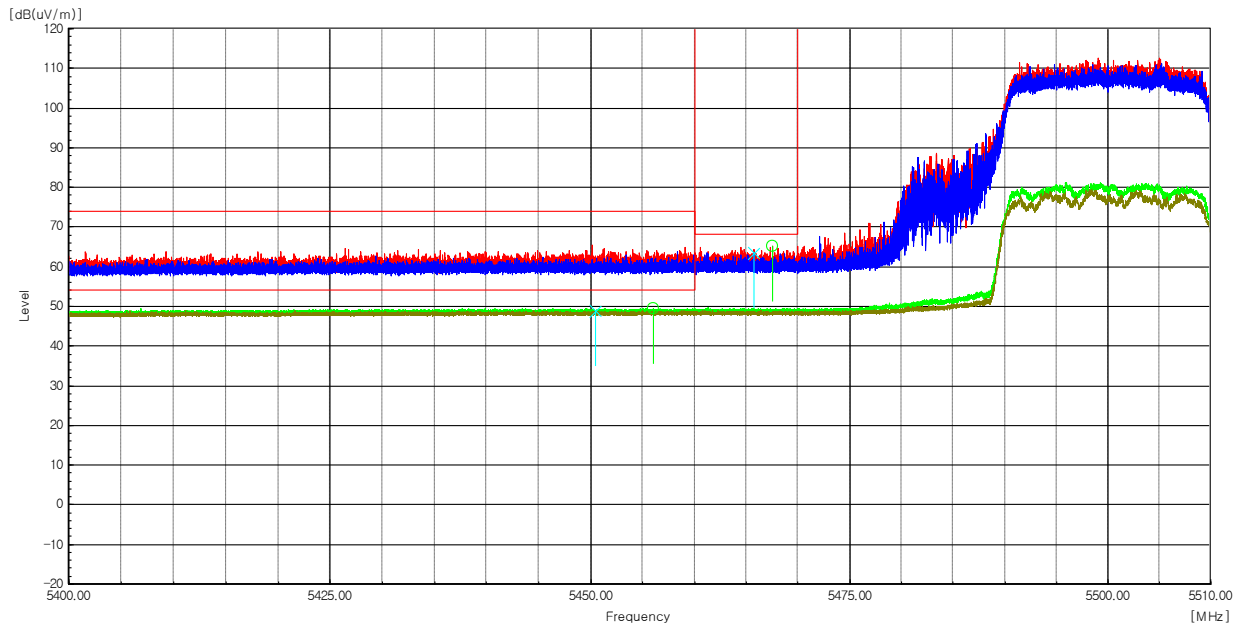

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 467.50	H	60.3	4.9	-----	65.20	-----	68.20	-----	3.00	-----	Peak
5 465.76	V	58.6	4.9	-----	63.50	-----	68.20	-----	4.70	-----	Peak
5 456.05	H	44.7	4.9	0.28	-----	49.88	-----	54.00	-----	4.12	Average
5 450.44	V	44.1	4.9	0.28	-----	49.28	-----	54.00	-----	4.72	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (431) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

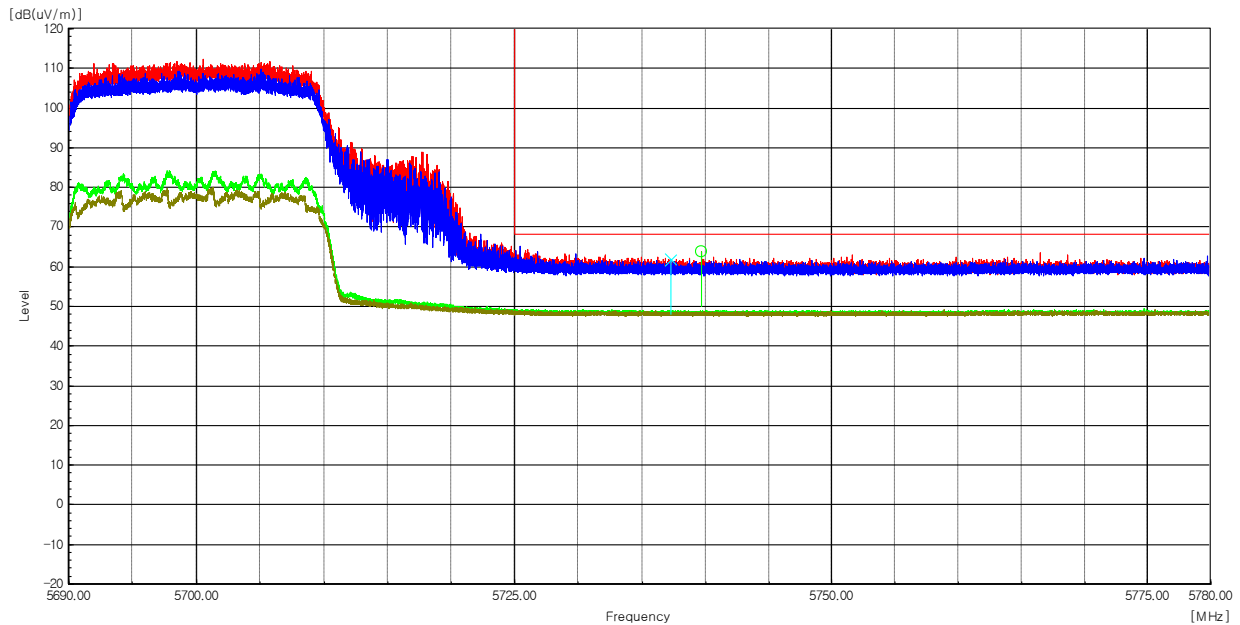

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 739.70	H	58.2	5.5	-----	63.70	-----	68.20	-----	4.50	-----	Peak
5 737.24	V	56.3	5.5	-----	61.80	-----	68.20	-----	6.40	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (432) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

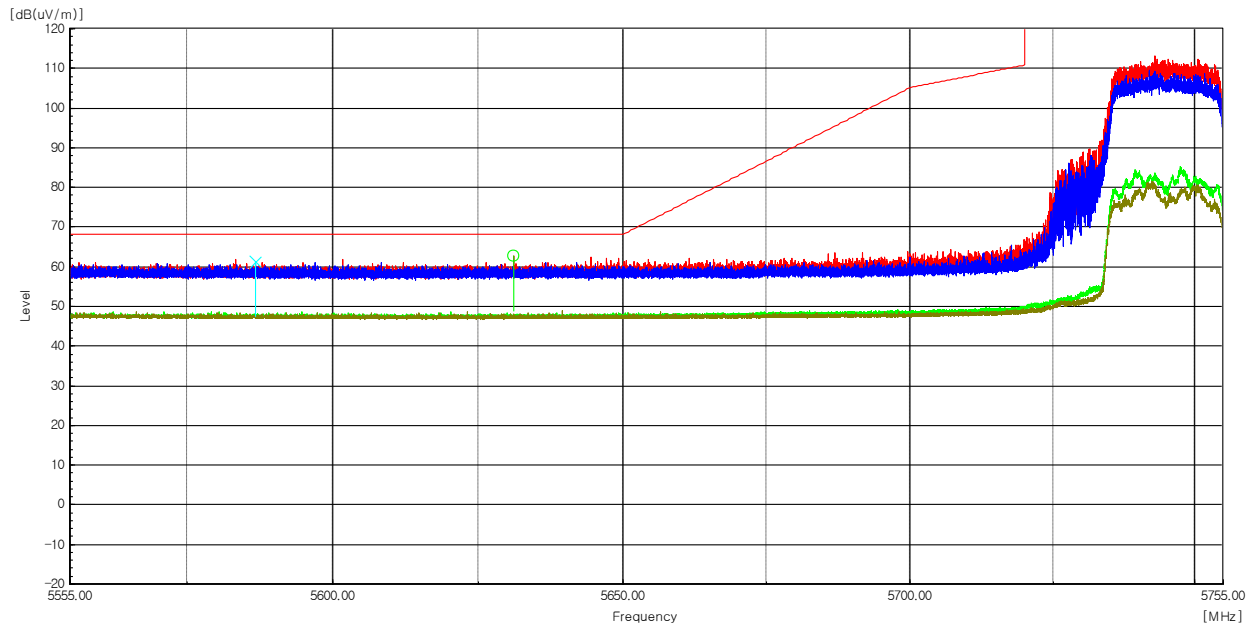

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 586.74	V	56.0	5.2	-----	61.20	-----	68.20	-----	7.00	-----	Peak
5 631.15	H	57.4	5.2	-----	62.60	-----	68.20	-----	5.60	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (433) / (534) Pages

Worst Case Mode :	802.11ax_HE20_242T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

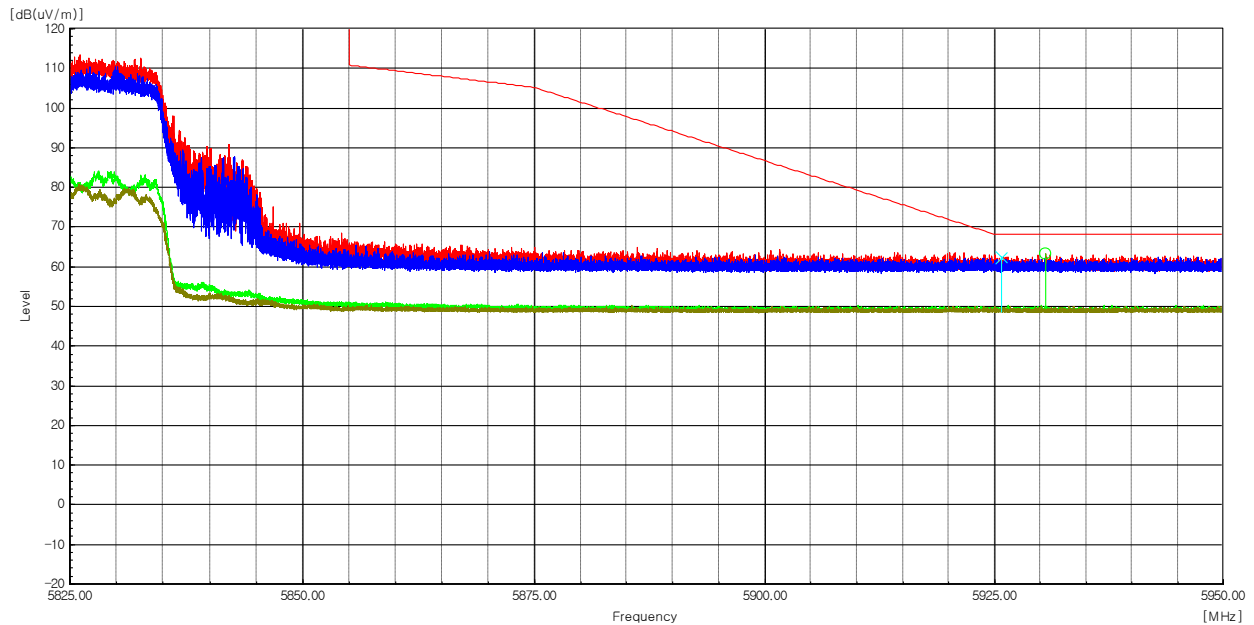

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 930.56	H	56.9	6.3	-----	63.20	-----	68.20	-----	5.00	-----	Peak
5 925.77	V	56.2	6.3	-----	62.50	-----	68.20	-----	5.70	-----	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (434) / (534) Pages

Test Mode : Transmitter (802.11n_HT40)

The requirements are:

☒ Complies

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 379.68	H	48.9	12.5	-----	61.40	-----	74.00	-----	12.60	-----	Peak
10 387.54	H	39.1	12.5	0.29	-----	51.89	-----	54.00	-----	2.11	Average
10 377.28	V	49.8	12.5	-----	62.30	-----	74.00	-----	11.70	-----	Peak
10 379.86	V	38.3	12.5	0.29	-----	51.09	-----	54.00	-----	2.91	Average

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 462.43	H	49.8	12.5	-----	62.30	-----	74.00	-----	11.70	-----	Peak
10 460.09	H	39.1	12.5	0.29	-----	51.89	-----	54.00	-----	2.11	Average
10 457.33	V	48.6	12.5	-----	61.10	-----	74.00	-----	12.90	-----	Peak
10 459.97	V	37.7	12.5	0.29	-----	50.49	-----	54.00	-----	3.51	Average

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 534.73	H	48.0	12.8	-----	60.80	-----	74.00	-----	13.20	-----	Peak
10 534.91	H	38.7	12.8	0.29	-----	51.79	-----	54.00	-----	2.21	Average
10 537.13	V	48.4	12.8	-----	61.20	-----	74.00	-----	12.80	-----	Peak
10 539.59	V	38.3	12.9	0.29	-----	51.49	-----	54.00	-----	2.51	Average

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 619.33	H	46.3	13.2	-----	59.50	-----	74.00	-----	14.50	-----	Peak
10 622.45	H	36.5	13.2	0.29	-----	49.99	-----	54.00	-----	4.01	Average
10 619.39	V	48.9	13.2	-----	62.10	-----	74.00	-----	11.90	-----	Peak
10 614.95	V	36.8	13.2	0.29	-----	50.29	-----	54.00	-----	3.71	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 029.33	H	45.6	13.4	-----	59.00	-----	74.00	-----	15.00	-----	Peak
11 050.81	H	35.2	13.4	0.29	-----	48.89	-----	54.00	-----	5.11	Average
11 029.63	V	47.6	13.4	-----	61.00	-----	74.00	-----	13.00	-----	Peak
11 025.31	V	36.8	13.4	0.29	-----	50.49	-----	54.00	-----	3.51	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 176.94	H	47.9	13.7	-----	61.60	-----	74.00	-----	12.40	-----	Peak
11 180.24	H	35.5	13.8	0.29	-----	49.59	-----	54.00	-----	4.41	Average
11 179.64	V	49.9	13.8	-----	63.70	-----	74.00	-----	10.30	-----	Peak
11 179.94	V	37.5	13.8	0.29	-----	51.59	-----	54.00	-----	2.41	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (435) / (534) Pages

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 337.14	H	47.1	13.6	-----	60.70	-----	74.00	-----	13.30	-----	Peak
11 342.00	H	36.0	13.6	0.29	-----	49.89	-----	54.00	-----	4.11	Average
11 339.42	V	48.6	13.6	-----	62.20	-----	74.00	-----	11.80	-----	Peak
11 340.56	V	38.1	13.6	0.29	-----	51.99	-----	54.00	-----	2.01	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 419.53	H	47.3	13.7	-----	61.00	-----	74.00	-----	13.00	-----	Peak
11 407.17	H	36.9	13.7	0.29	-----	50.89	-----	54.00	-----	3.11	Average
11 419.83	V	50.5	13.7	-----	64.20	-----	74.00	-----	9.80	-----	Peak
11 419.95	V	38.0	13.7	0.29	-----	51.99	-----	54.00	-----	2.01	Average

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 512.41	H	49.0	13.8	-----	62.80	-----	74.00	-----	11.20	-----	Peak
11 511.45	H	35.8	13.8	0.29	-----	49.89	-----	54.00	-----	4.11	Average
11 508.09	V	48.9	13.8	-----	62.70	-----	74.00	-----	11.30	-----	Peak
11 505.45	V	37.8	13.8	0.29	-----	51.89	-----	54.00	-----	2.11	Average

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 564.85	H	45.1	13.9	-----	59.00	-----	74.00	-----	15.00	-----	Peak
11 579.61	H	34.7	13.8	0.29	-----	48.79	-----	54.00	-----	5.21	Average
11 587.71	V	47.0	13.8	-----	60.80	-----	74.00	-----	13.20	-----	Peak
11 584.89	V	35.7	13.8	0.29	-----	49.79	-----	54.00	-----	4.21	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (436) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

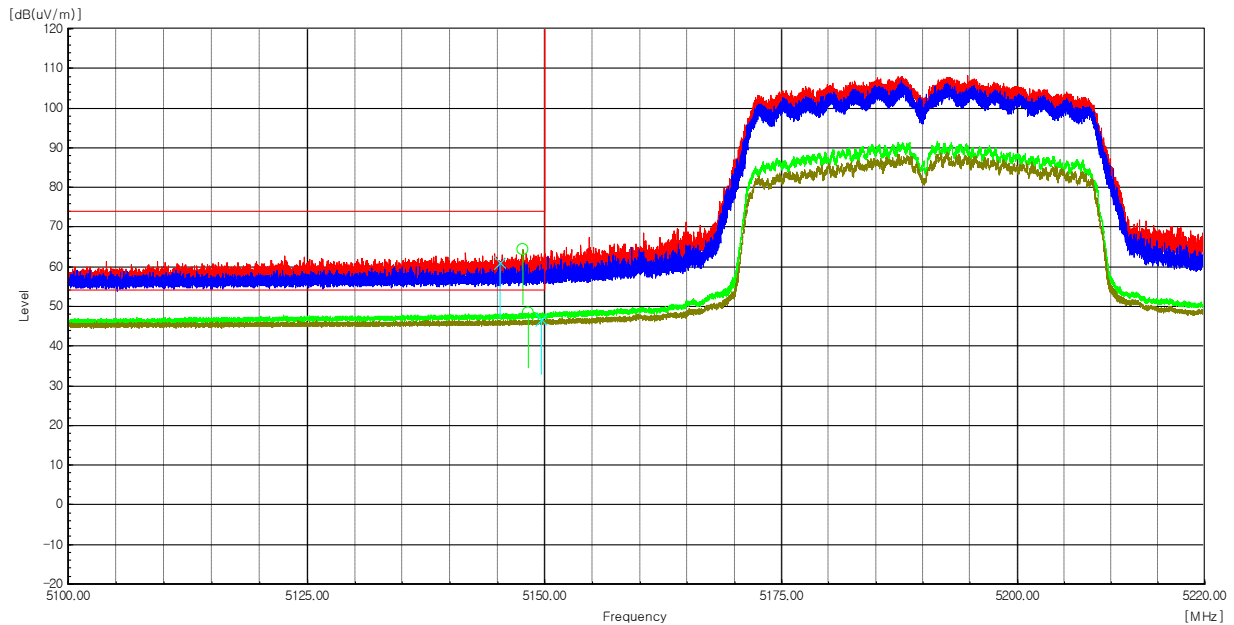

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 147.72	H	60.5	3.8	-----	64.30	-----	74.00	-----	9.70	-----	Peak
5 148.27	H	44.7	3.8	0.29	-----	48.79	-----	54.00	-----	5.21	Average
5 145.26	V	57.2	3.8	-----	61.00	-----	74.00	-----	13.00	-----	Peak
5 149.56	V	42.8	3.8	0.29	-----	46.89	-----	54.00	-----	7.11	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (437) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

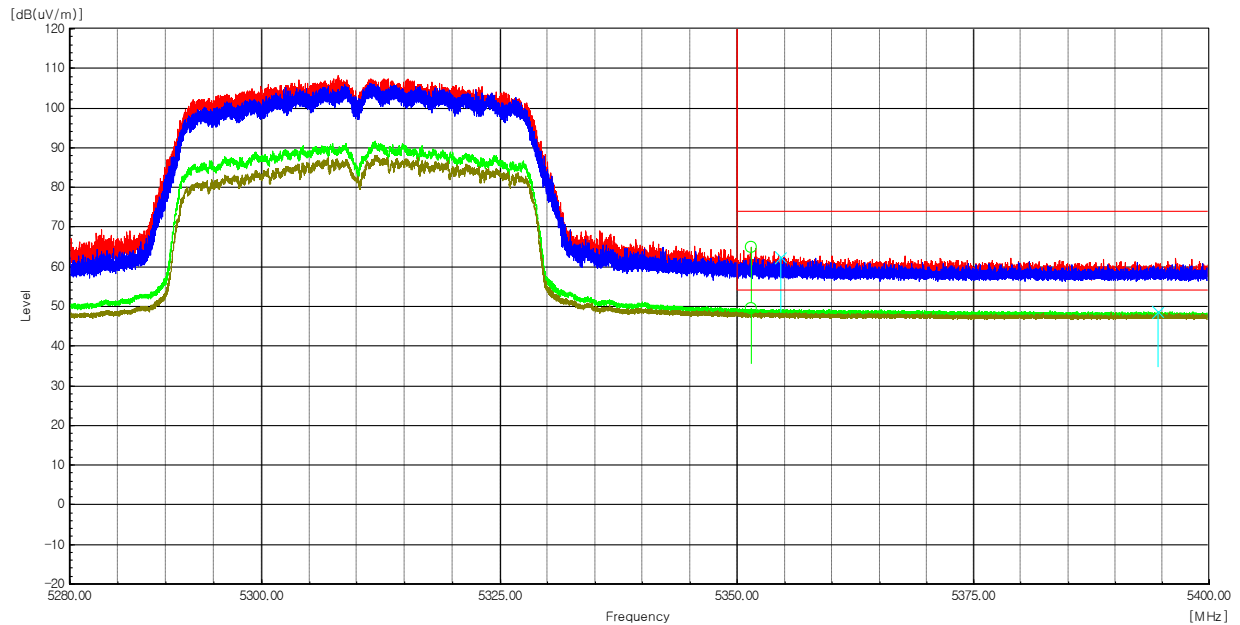

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 351.43	H	60.7	4.3	-----	65.00	-----	74.00	-----	9.00	-----	Peak
5 351.48	H	45.1	4.3	0.29	-----	49.69	-----	54.00	-----	4.31	Average
5 354.60	V	58.1	4.3	-----	62.40	-----	74.00	-----	11.60	-----	Peak
5 394.52	V	44.0	4.6	0.29	-----	48.89	-----	54.00	-----	5.11	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (438) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

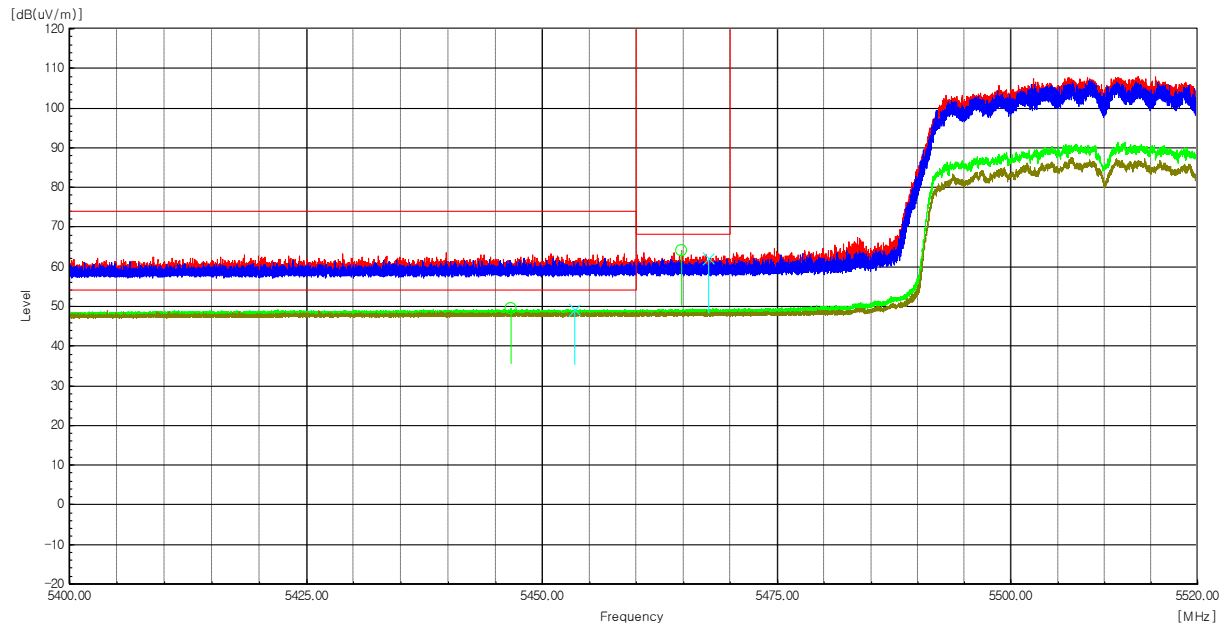

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 464.73	H	59.0	4.9	-----	63.90	-----	68.20	-----	4.30	-----	Peak
5 467.66	V	57.3	4.9	-----	62.20	-----	68.20	-----	6.00	-----	Peak
5 446.61	H	44.4	4.9	0.29	-----	49.59	-----	54.00	-----	4.41	Average
5 453.42	V	44.2	4.9	0.29	-----	49.39	-----	54.00	-----	4.61	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (439) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

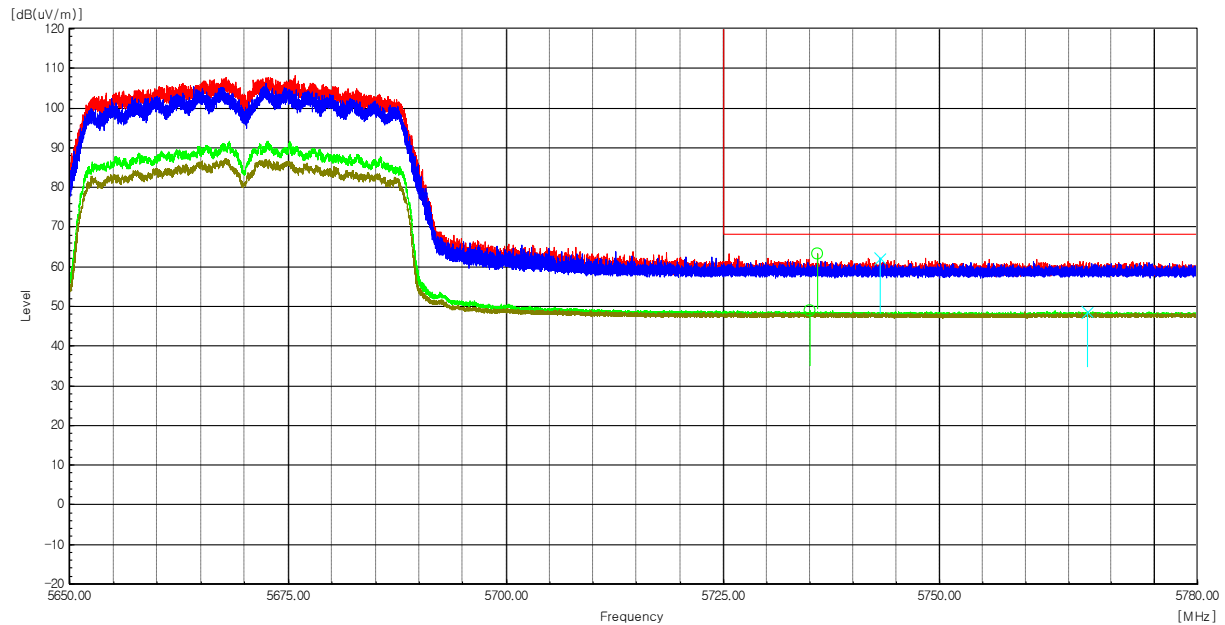

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 735.82	H	57.7	5.5	-----	63.20	-----	68.20	-----	5.00	-----	Peak
5 735.00	H	43.4	5.5	0.29	-----	49.19	-----	54.00	-----	4.81	Average
5 743.08	V	56.6	5.5	-----	62.10	-----	68.20	-----	6.10	-----	Peak
5 767.15	V	42.9	5.6	0.29	-----	48.79	-----	54.00	-----	5.21	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (440) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

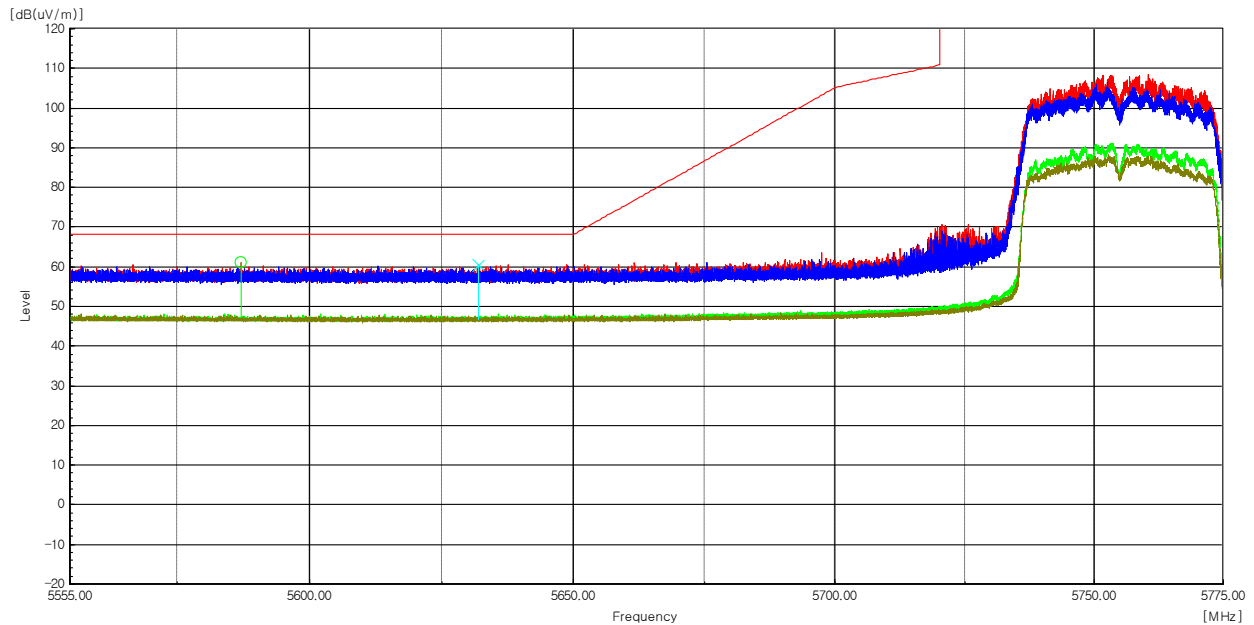

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 587.02	H	55.7	5.2	-----	60.90	-----	68.20	-----	7.30	-----	Peak
5 631.99	V	55.2	5.2	-----	60.40	-----	68.20	-----	7.80	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (441) / (534) Pages

Worst Case Mode :	802.11n_HT40
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

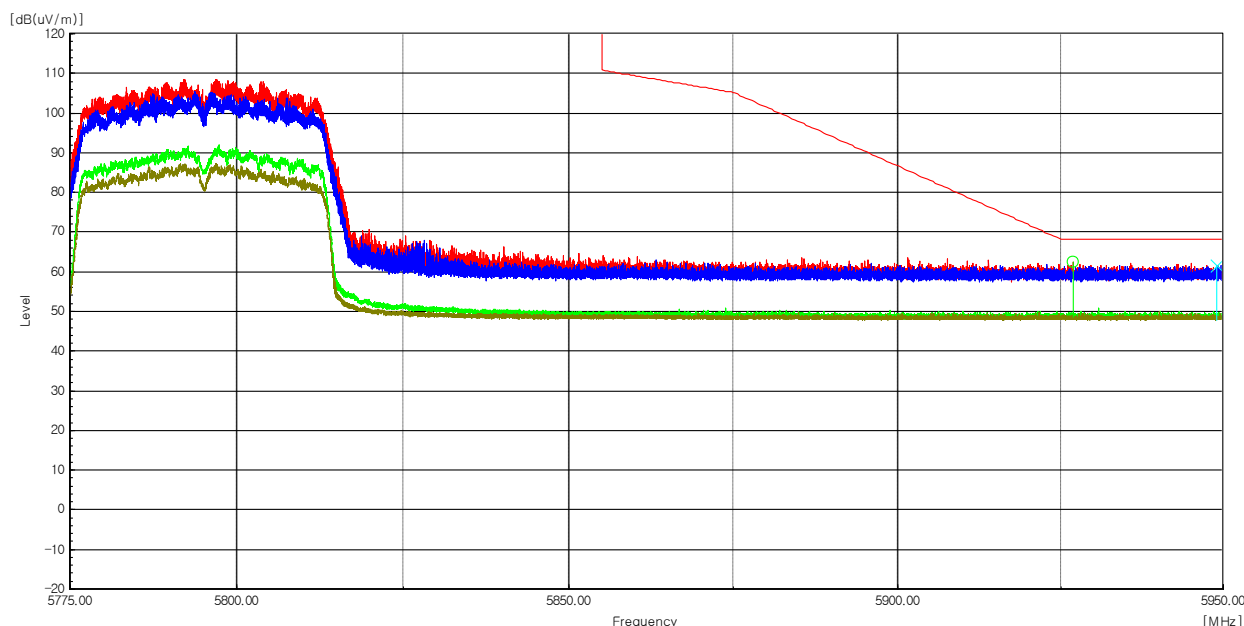

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 926.86	H	56.1	6.3	-----	62.40	-----	68.20	-----	5.80	-----	Peak
5 949.03	V	55.1	6.4	-----	61.50	-----	68.20	-----	6.70	-----	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (442) / (534) Pages

Test Mode : Transmitter (802.11ac_VHT40)

The requirements are:

☒ Complies

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 379.50	H	48.5	12.5	-----	61.00	-----	74.00	-----	13.00	-----	Peak
10 373.86	H	38.3	12.5	0.51	-----	51.31	-----	54.00	-----	2.69	Average
10 379.26	V	50.0	12.5	-----	62.50	-----	74.00	-----	11.50	-----	Peak
10 378.30	V	38.1	12.5	0.51	-----	51.11	-----	54.00	-----	2.89	Average

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 458.83	H	48.6	12.5	-----	61.10	-----	74.00	-----	12.90	-----	Peak
10 459.37	H	38.9	12.5	0.51	-----	51.91	-----	54.00	-----	2.09	Average
10 463.21	V	48.1	12.5	-----	60.60	-----	74.00	-----	13.40	-----	Peak
10 463.93	V	36.7	12.5	0.51	-----	49.71	-----	54.00	-----	4.29	Average

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 535.69	H	48.4	12.8	-----	61.20	-----	74.00	-----	12.80	-----	Peak
10 529.81	H	38.6	12.8	0.51	-----	51.91	-----	54.00	-----	2.09	Average
10 550.57	V	47.7	12.9	-----	60.60	-----	74.00	-----	13.40	-----	Peak
10 541.03	V	37.6	12.9	0.51	-----	51.01	-----	54.00	-----	2.99	Average

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 632.71	H	44.9	13.3	-----	58.20	-----	74.00	-----	15.80	-----	Peak
10 603.73	H	35.5	13.2	0.51	-----	49.21	-----	54.00	-----	4.79	Average
10 619.51	V	45.6	13.2	-----	58.80	-----	74.00	-----	15.20	-----	Peak
10 623.59	V	36.1	13.2	0.51	-----	49.81	-----	54.00	-----	4.19	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 029.21	H	45.1	13.4	-----	58.50	-----	74.00	-----	15.50	-----	Peak
11 028.19	H	34.9	13.4	0.51	-----	48.81	-----	54.00	-----	5.19	Average
11 019.43	V	45.8	13.4	-----	59.20	-----	74.00	-----	14.80	-----	Peak
11 025.79	V	35.8	13.4	0.51	-----	49.71	-----	54.00	-----	4.29	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 183.06	H	46.0	13.8	-----	59.80	-----	74.00	-----	14.20	-----	Peak
11 184.26	H	34.9	13.8	0.51	-----	49.21	-----	54.00	-----	4.79	Average
11 179.76	V	49.6	13.8	-----	63.40	-----	74.00	-----	10.60	-----	Peak
11 179.76	V	36.4	13.8	0.51	-----	50.71	-----	54.00	-----	3.29	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (443) / (534) Pages

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 359.28	H	45.6	13.6	-----	59.20	-----	74.00	-----	14.80	-----	Peak
11 397.57	H	35.2	13.7	0.51	-----	49.41	-----	54.00	-----	4.59	Average
11 338.40	V	46.2	13.6	-----	59.80	-----	74.00	-----	14.20	-----	Peak
11 354.60	V	35.7	13.6	0.51	-----	49.81	-----	54.00	-----	4.19	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 405.91	H	46.2	13.7	-----	59.90	-----	74.00	-----	14.10	-----	Peak
11 409.99	H	35.9	13.7	0.51	-----	50.11	-----	54.00	-----	3.89	Average
11 418.63	V	47.6	13.7	-----	61.30	-----	74.00	-----	12.70	-----	Peak
11 417.61	V	36.3	13.7	0.51	-----	50.51	-----	54.00	-----	3.49	Average

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 500.95	H	46.5	13.8	-----	60.30	-----	74.00	-----	13.70	-----	Peak
11 505.93	H	36.4	13.8	0.51	-----	50.71	-----	54.00	-----	3.29	Average
11 517.45	V	48.8	13.8	-----	62.60	-----	74.00	-----	11.40	-----	Peak
11 506.71	V	37.6	13.8	0.51	-----	51.91	-----	54.00	-----	2.09	Average

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 591.13	H	44.8	13.8	-----	58.60	-----	74.00	-----	15.40	-----	Peak
11 551.71	H	34.4	13.9	0.51	-----	48.81	-----	54.00	-----	5.19	Average
11 590.53	V	46.1	13.8	-----	59.90	-----	74.00	-----	14.10	-----	Peak
11 560.41	V	35.0	13.9	0.51	-----	49.41	-----	54.00	-----	4.59	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (444) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

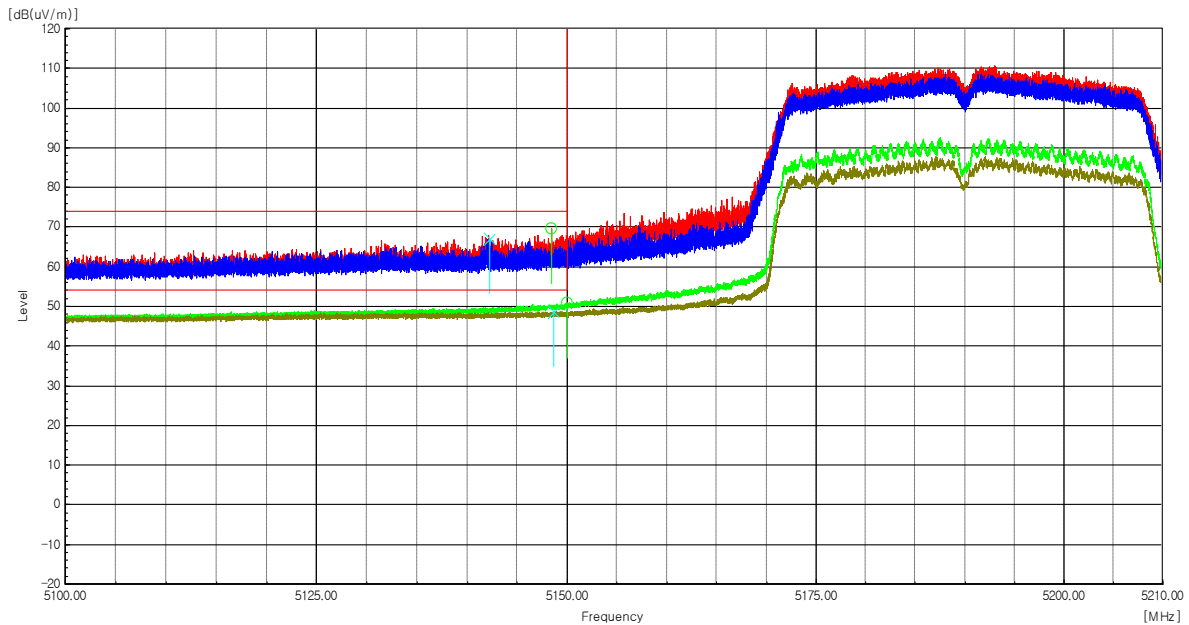

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 148.46	H	65.8	3.8	-----	69.60	-----	74.00	-----	4.40	-----	Peak
5 150.00	H	46.9	3.8	0.51	-----	51.21	-----	54.00	-----	2.79	Average
5 142.20	V	63.4	3.8	-----	67.20	-----	74.00	-----	6.80	-----	Peak
5 148.64	V	44.8	3.8	0.51	-----	49.11	-----	54.00	-----	4.89	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (445) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

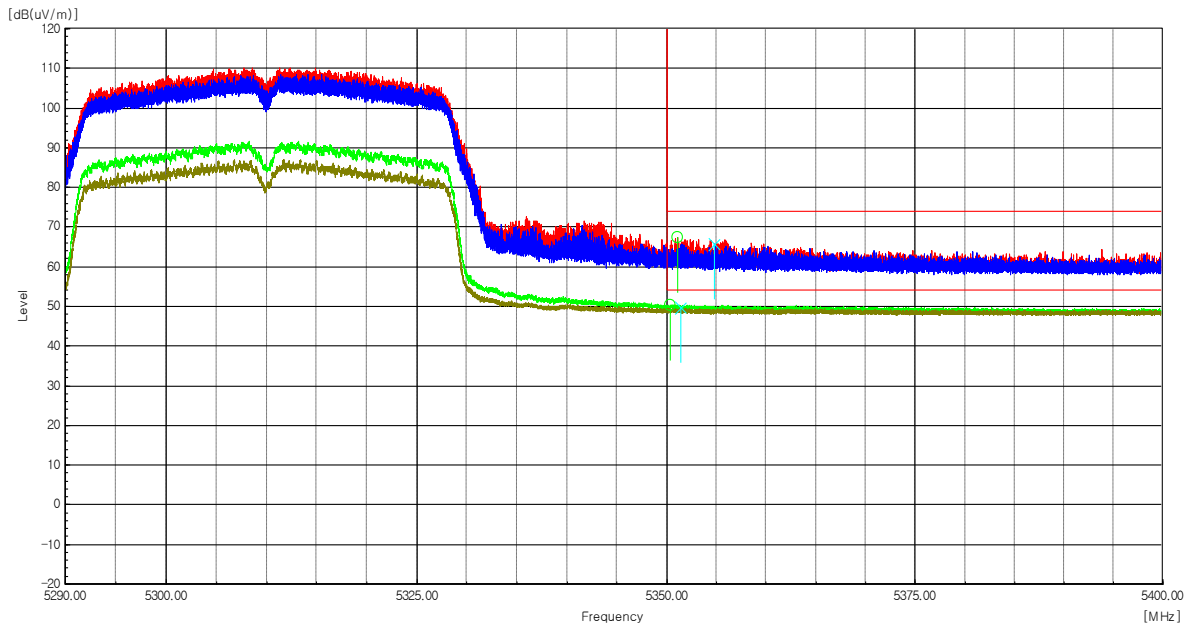

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 351.05	H	63.1	4.3	-----	67.40	-----	74.00	-----	6.60	-----	Peak
5 350.35	H	46.1	4.3	0.51	-----	50.91	-----	54.00	-----	3.09	Average
5 354.76	V	61.5	4.3	-----	65.80	-----	74.00	-----	8.20	-----	Peak
5 351.36	V	45.5	4.3	0.51	-----	50.31	-----	54.00	-----	3.69	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (446) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

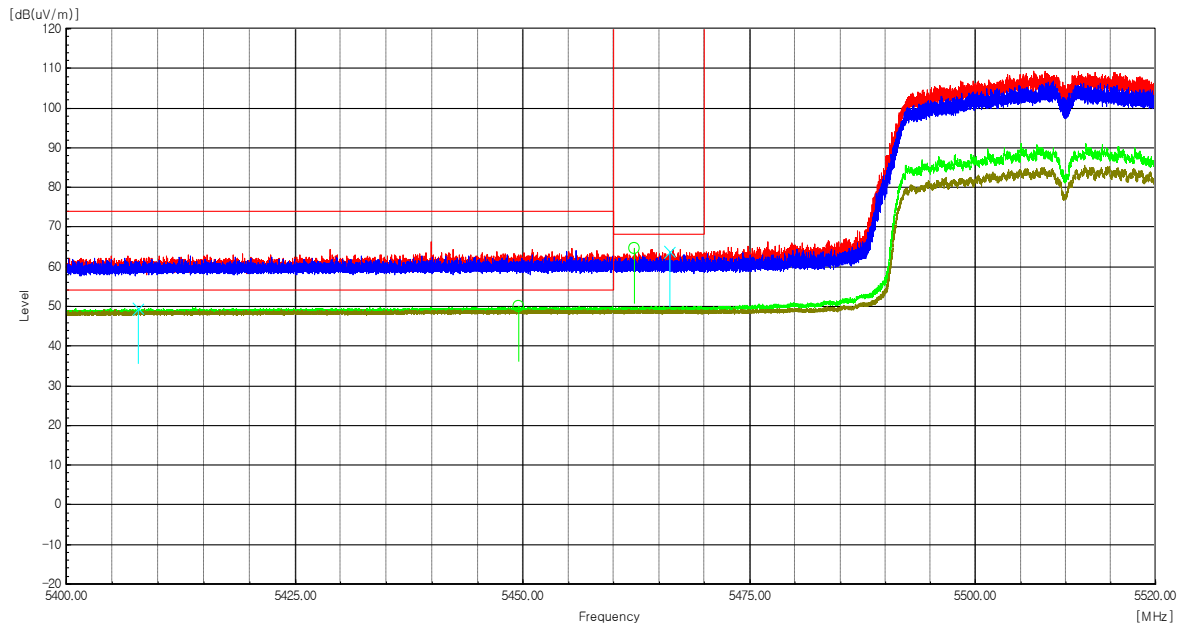

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 462.21	H	59.8	4.9	-----	64.70	-----	68.20	-----	3.50	-----	Peak
5 466.14	V	59.0	4.9	-----	63.90	-----	68.20	-----	4.30	-----	Peak
5 449.53	H	45.0	4.9	0.51	-----	50.41	-----	54.00	-----	3.59	Average
5 407.83	V	44.6	4.7	0.51	-----	49.81	-----	54.00	-----	4.19	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (447) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

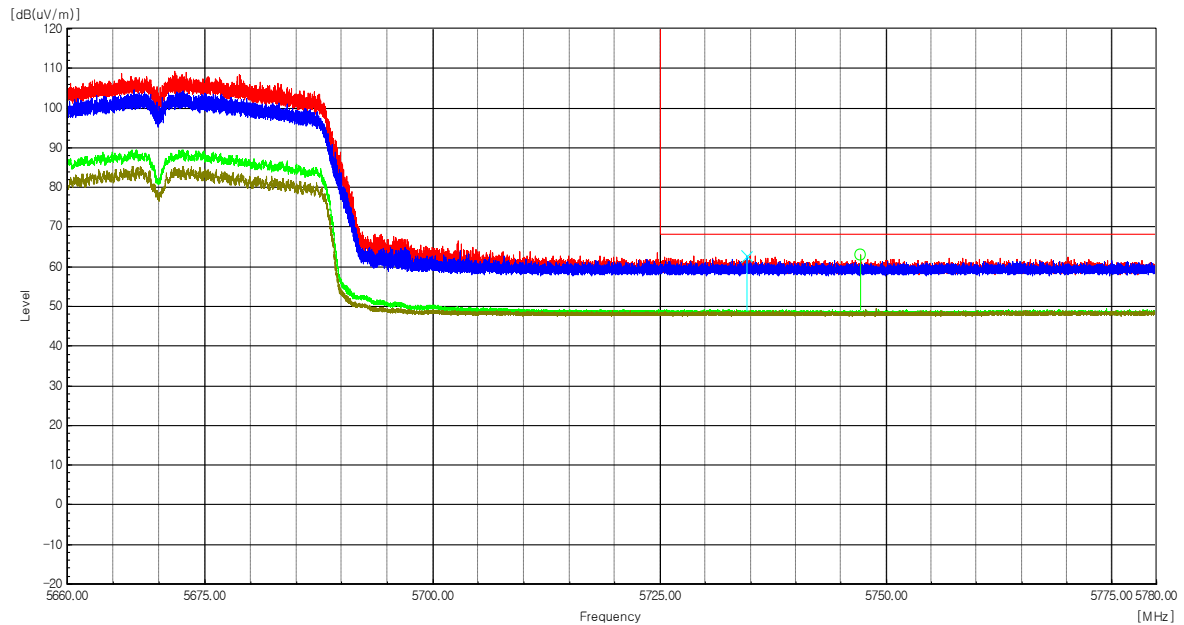

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 734.54	V	57.1	5.5	-----	62.60	-----	68.20	-----	5.60	-----	Peak
5 747.12	H	57.3	5.5	-----	62.80	-----	68.20	-----	5.40	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (448) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

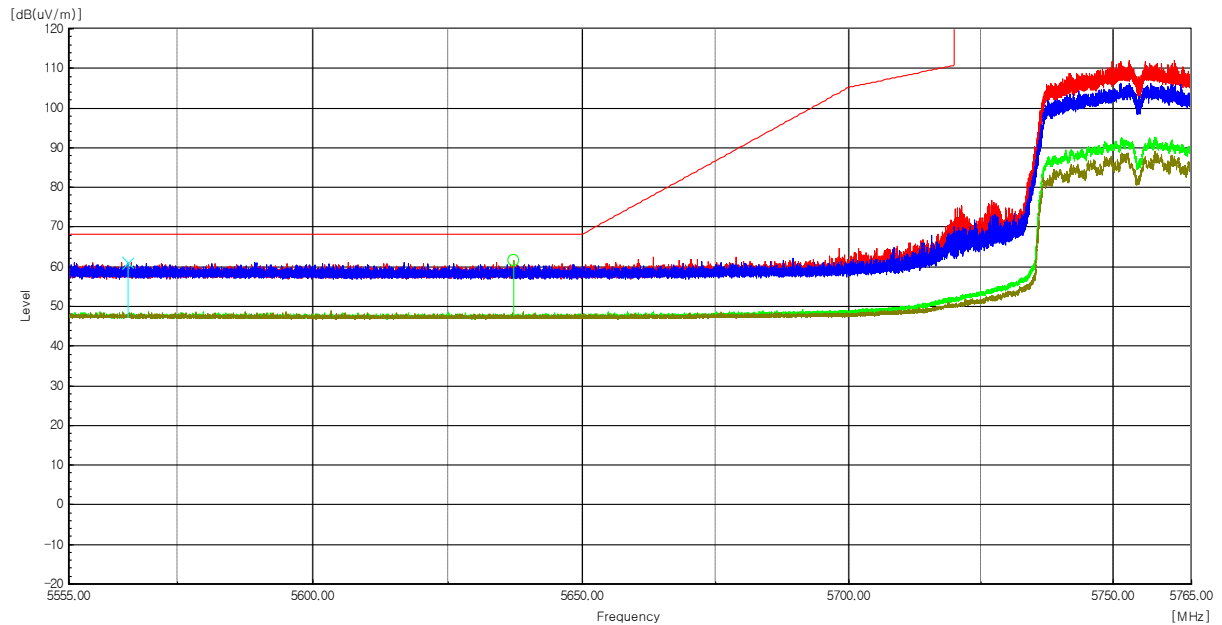

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 637.27	H	56.3	5.2	-----	61.50	-----	68.20	-----	6.70	-----	Peak
5 565.77	V	55.9	5.2	-----	61.10	-----	68.20	-----	7.10	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (449) / (534) Pages

Worst Case Mode :	802.11ac_VHT40
Worst Case Transfer Rate :	MNSS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

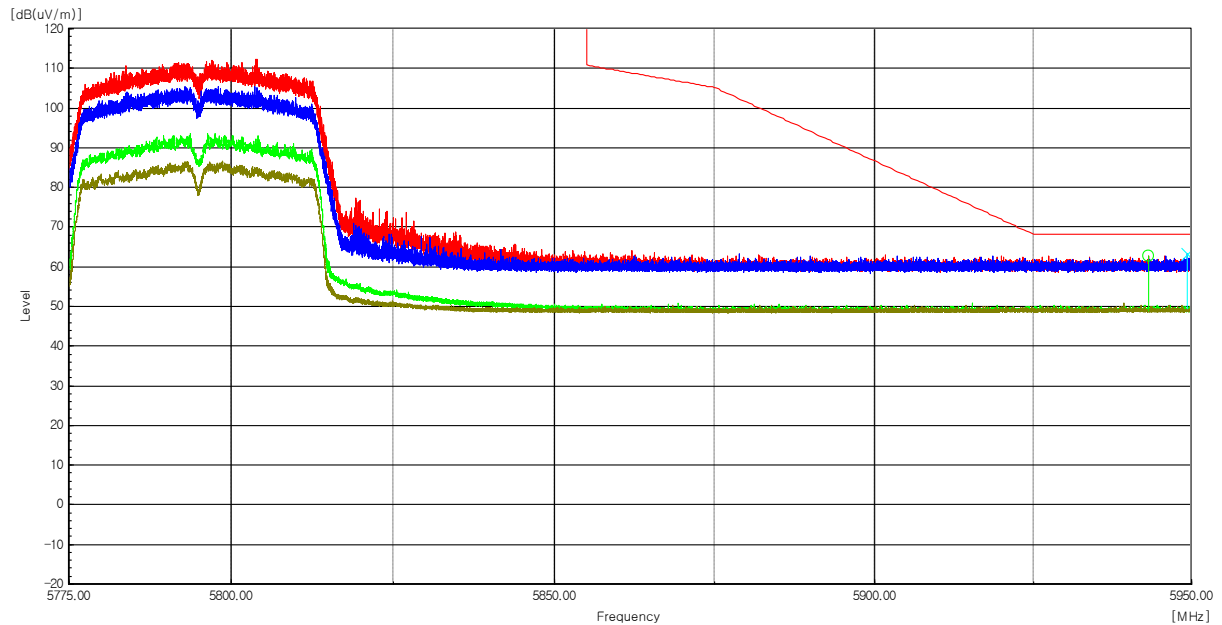

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 943.25	H	56.3	6.4	-----	62.70	-----	68.20	-----	5.50	-----	Peak
5 949.40	V	56.8	6.4	-----	63.20	-----	68.20	-----	5.00	-----	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (450) / (534) Pages

Test Mode : Transmitter (802.11ax_HE40_26T)

The requirements are:

☒ Complies

Ch.38(5 190 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 377.52	H	49.7	12.5	-----	62.20	-----	74.00	-----	11.80	-----	Peak
10 377.46	H	38.4	12.5	0.22	-----	51.12	-----	54.00	-----	2.88	Average
10 376.86	V	52.1	12.5	-----	64.60	-----	74.00	-----	9.40	-----	Peak
10 377.46	V	38.7	12.5	0.22	-----	51.42	-----	54.00	-----	2.58	Average

Ch.46(5 230 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 457.33	H	50.2	12.5	-----	62.70	-----	74.00	-----	11.30	-----	Peak
10 457.45	H	38.2	12.5	0.22	-----	50.92	-----	54.00	-----	3.08	Average
10 457.15	V	48.9	12.5	-----	61.40	-----	74.00	-----	12.60	-----	Peak
10 457.15	V	35.8	12.5	0.22	-----	48.52	-----	54.00	-----	5.48	Average

Ch.54(5 270 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 537.55	H	48.7	12.8	-----	61.50	-----	74.00	-----	12.50	-----	Peak
10 537.55	H	36.7	12.8	0.22	-----	49.72	-----	54.00	-----	4.28	Average
10 537.31	V	47.8	12.8	-----	60.60	-----	74.00	-----	13.40	-----	Peak
10 537.31	V	35.7	12.8	0.22	-----	48.72	-----	54.00	-----	5.28	Average

Ch.62(5 310 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
10 617.53	H	46.1	13.2	-----	59.30	-----	74.00	-----	14.70	-----	Peak
10 617.29	H	35.4	13.2	0.22	-----	48.82	-----	54.00	-----	5.18	Average
10 617.59	V	46.8	13.2	-----	60.00	-----	74.00	-----	14.00	-----	Peak
10 616.99	V	35.1	13.2	0.22	-----	48.52	-----	54.00	-----	5.48	Average

Ch.102(5 510 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 016.73	H	47.9	13.4	-----	61.30	-----	74.00	-----	12.70	-----	Peak
11 017.69	H	34.6	13.4	0.22	-----	48.22	-----	54.00	-----	5.78	Average
11 017.51	V	48.4	13.4	-----	61.80	-----	74.00	-----	12.20	-----	Peak
11 017.75	V	35.4	13.4	0.22	-----	49.02	-----	54.00	-----	4.98	Average

Ch.118(5 590 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 177.48	H	48.6	13.7	-----	62.30	-----	74.00	-----	11.70	-----	Peak
11 176.88	H	36.1	13.7	0.22	-----	50.02	-----	54.00	-----	3.98	Average
11 176.94	V	49.8	13.7	-----	63.50	-----	74.00	-----	10.50	-----	Peak
11 177.60	V	36.7	13.7	0.22	-----	50.62	-----	54.00	-----	3.38	Average

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (451) / (534) Pages

Ch.134(5 670 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 337.92	H	45.9	13.6	-----	59.50	-----	74.00	-----	14.50	-----	Peak
11 337.32	H	34.4	13.6	0.22	-----	48.22	-----	54.00	-----	5.78	Average
11 337.80	V	51.5	13.6	-----	65.10	-----	74.00	-----	8.90	-----	Peak
11 337.20	V	36.3	13.6	0.22	-----	50.12	-----	54.00	-----	3.88	Average

Ch.142(5 710 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 417.49	H	47.0	13.7	-----	60.70	-----	74.00	-----	13.30	-----	Peak
11 417.67	H	35.5	13.7	0.22	-----	49.42	-----	54.00	-----	4.58	Average
11 418.50	V	50.2	13.7	-----	63.90	-----	74.00	-----	10.10	-----	Peak
11 417.13	V	36.2	13.7	0.22	-----	50.12	-----	54.00	-----	3.88	Average

Ch.151(5 755 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 507.91	H	48.3	13.8	-----	62.10	-----	74.00	-----	11.90	-----	Peak
11 507.13	H	35.6	13.8	0.22	-----	49.62	-----	54.00	-----	4.38	Average
11 507.31	V	51.3	13.8	-----	65.10	-----	74.00	-----	8.90	-----	Peak
11 507.31	V	37.5	13.8	0.22	-----	51.52	-----	54.00	-----	2.48	Average

Ch.159(5 795 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
11 587.17	H	45.5	13.8	-----	59.30	-----	74.00	-----	14.70	-----	Peak
11 587.29	H	34.1	13.8	0.22	-----	48.12	-----	54.00	-----	5.88	Average
11 587.89	V	48.3	13.8	-----	62.10	-----	74.00	-----	11.90	-----	Peak
11 587.35	V	35.7	13.8	0.22	-----	49.72	-----	54.00	-----	4.28	Average

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (452) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 190 MHz
Channel :	38

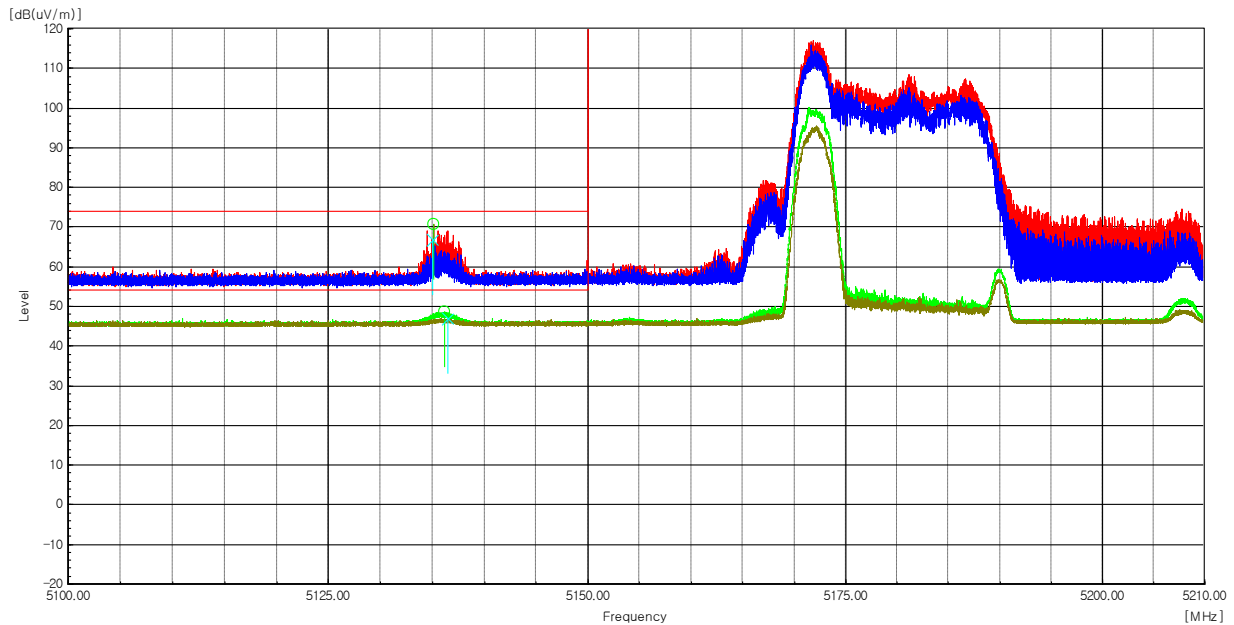

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 135.11	H	67.0	3.8	-----	70.80	-----	74.00	-----	3.20	-----	Peak
5 136.21	H	44.8	3.8	0.22	-----	48.82	-----	54.00	-----	5.18	Average
5 135.03	V	63.0	3.8	-----	66.80	-----	74.00	-----	7.20	-----	Peak
5 136.46	V	43.1	3.8	0.22	-----	47.12	-----	54.00	-----	6.88	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (453) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 310 MHz
Channel :	62

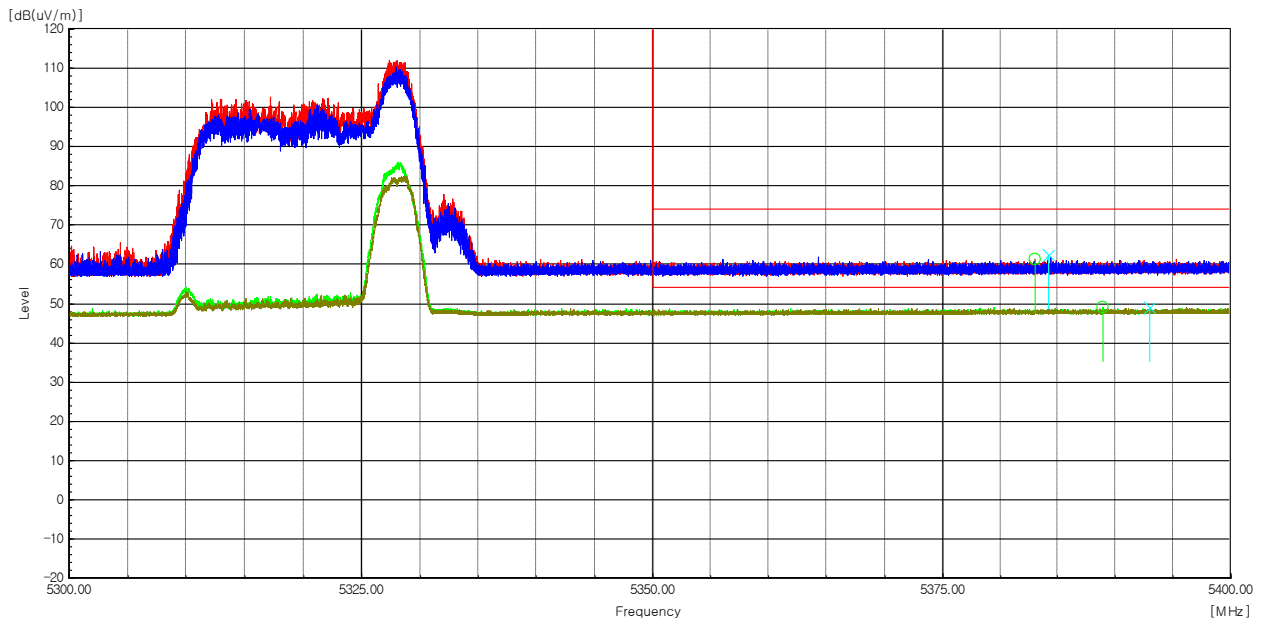

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 383.05	H	56.8	4.5	-----	61.30	-----	74.00	-----	12.70	-----	Peak
5 388.87	H	44.5	4.5	0.22	-----	49.22	-----	54.00	-----	4.78	Average
5 384.14	V	57.9	4.5	-----	62.40	-----	74.00	-----	11.60	-----	Peak
5 392.96	V	44.4	4.6	0.22	-----	49.22	-----	54.00	-----	4.78	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (454) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 510 MHz
Channel :	102

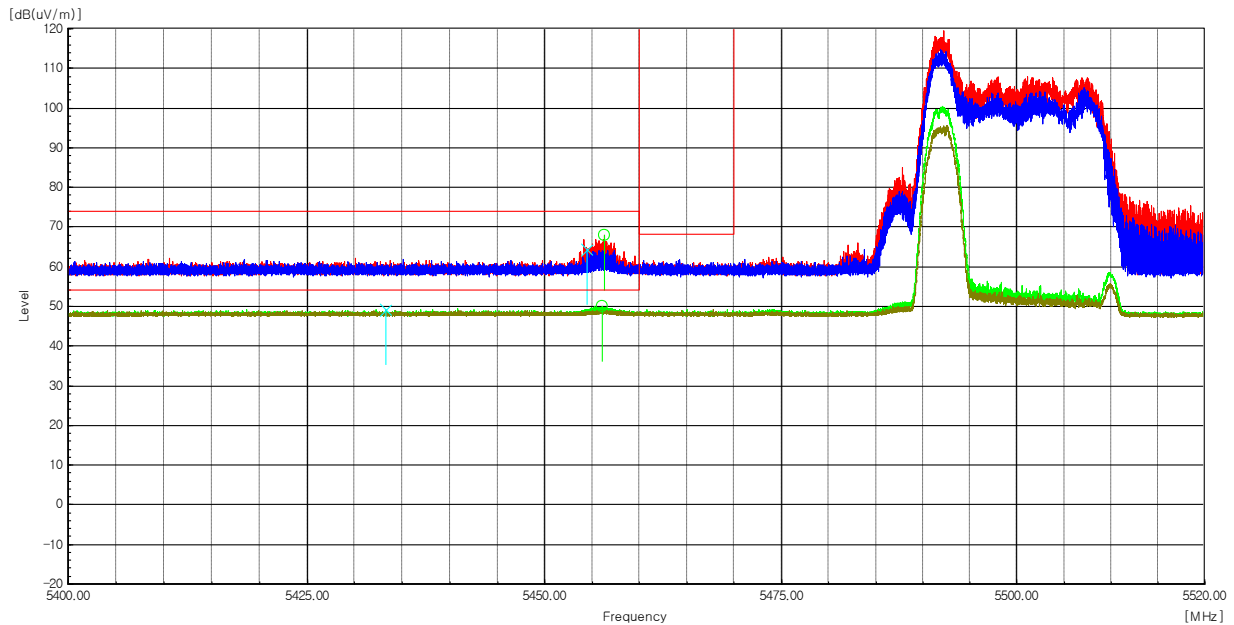

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 456.24	H	63.1	4.9	-----	68.00	-----	74.00	-----	6.00	-----	Peak
5 456.09	H	45.0	4.9	0.22	-----	50.12	-----	54.00	-----	3.88	Average
5 454.46	V	59.6	4.9	-----	64.50	-----	74.00	-----	9.50	-----	Peak
5 433.22	V	44.4	4.8	0.22	-----	49.42	-----	54.00	-----	4.58	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (455) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 670 MHz
Channel :	134

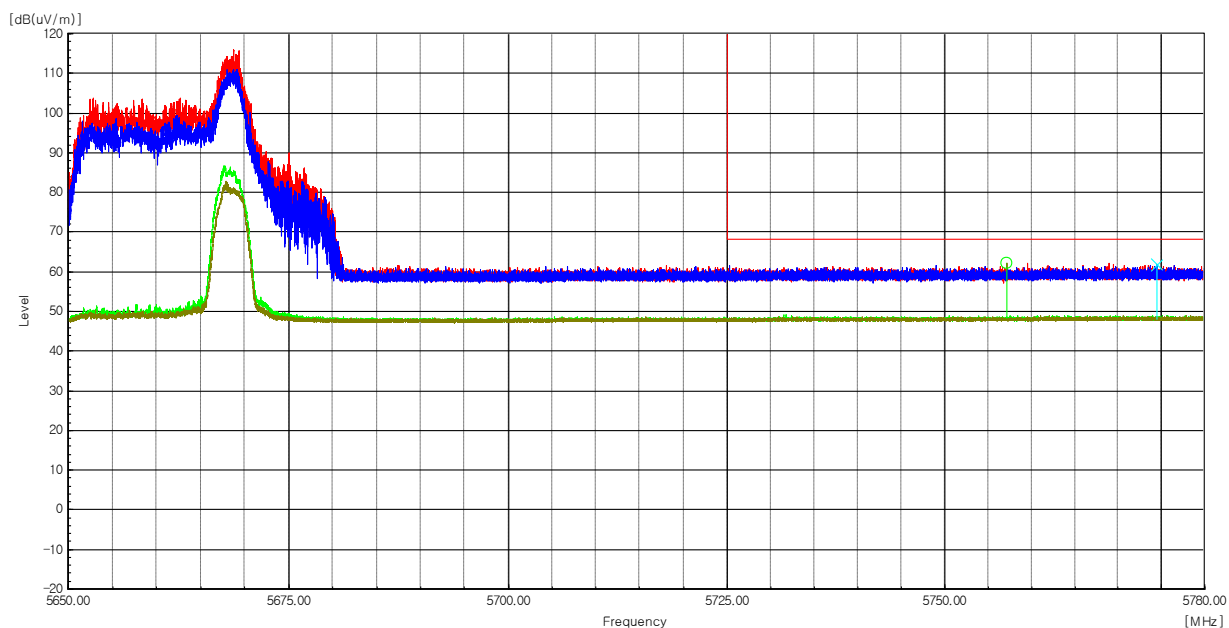

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 757.13	H	56.7	5.5	-----	62.20	-----	68.20	-----	6.00	-----	Peak
5 774.45	V	56.3	5.6	-----	61.90	-----	68.20	-----	6.30	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (456) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 755 MHz
Channel :	151

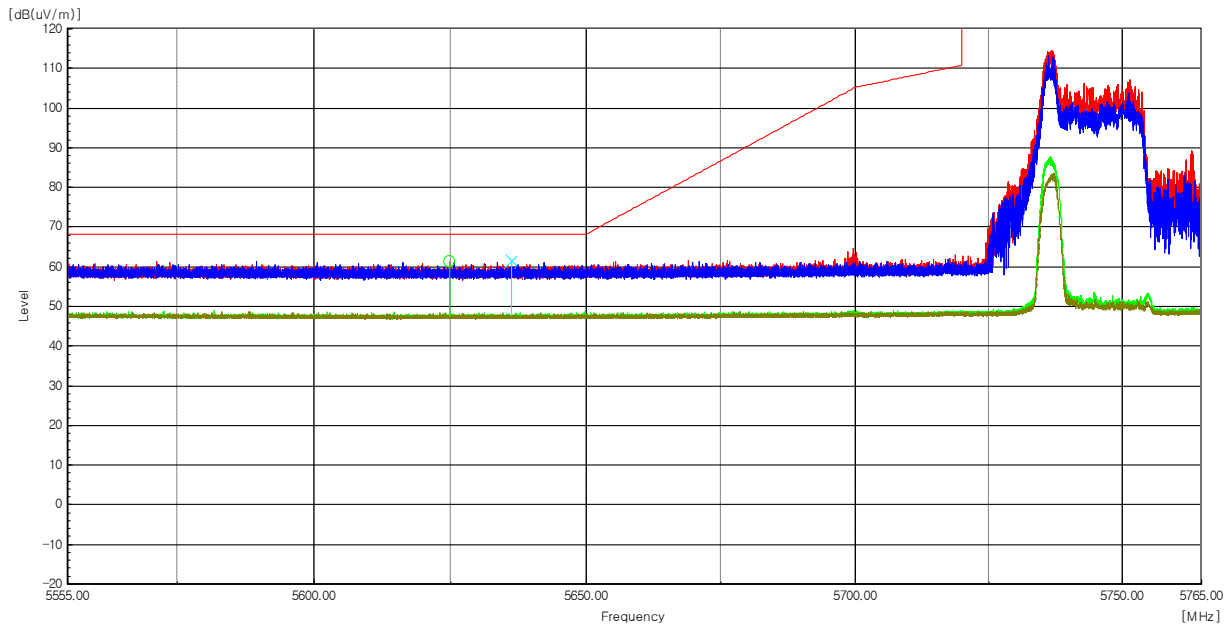

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 624.80	H	56.2	5.2	-----	61.40	-----	68.20	-----	6.80	-----	Peak
5 636.22	V	56.4	5.2	-----	61.60	-----	68.20	-----	6.60	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-00063
Page (457) / (534) Pages

Worst Case Mode :	802.11ax_HE40_26T
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 795 MHz
Channel :	159

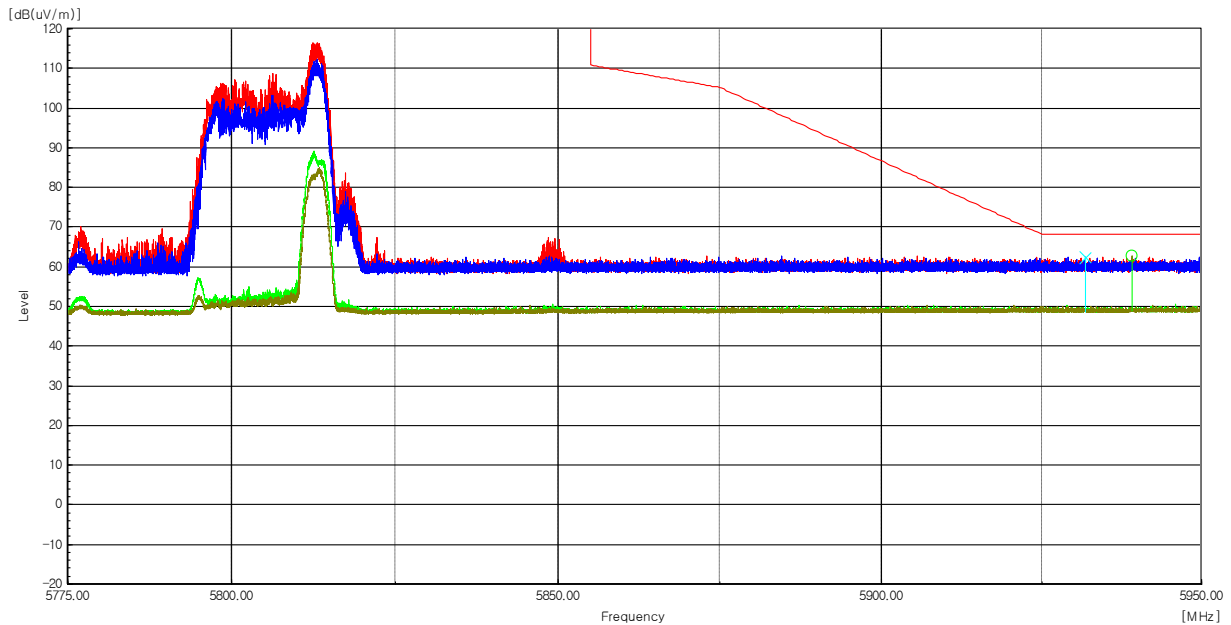

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
5 939.19	H	56.2	6.4	-----	62.60	-----	68.20	-----	5.60	-----	Peak
5 931.85	V	56.1	6.3	-----	62.40	-----	68.20	-----	5.80	-----	Peak

Radiated Restricted Band Edge Plot