

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	124
A.2.3 Emissions in Non-restricted Frequency Bands.....	140
A.3 DTS/OCCUPIED BANDWIDTH.....	141
A.3.1 DTS/Occupied Bandwidth Result.....	141
A.3.2 Measurement Plots	143
A.4 MAXIMUM PEAK OUTPUT POWER	151
A.4.1 Peak Output Power	151
A.4.2 Average Output Power (Reporting only).....	156
A.5 EMISSION LIMITATIONS	164
A.6 POWER SPECTRAL DENSITY	207
A.6.1 Power Spectral Density Result	207
A.6.2 Measurement Plots	210

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/10/16	Temp./Hum.	24°C/61%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Bruce Tseng

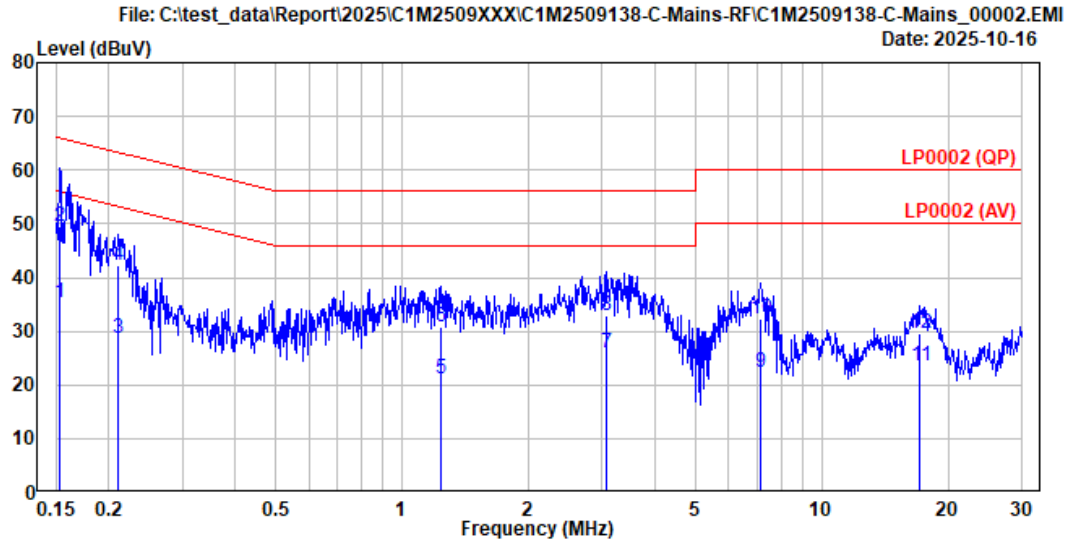

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : LP0002 (QP)
Environment : 24°C/61%
EUT Model : WCH941M
Test Mode : Operating
Data No. : 2
Phase : Neutral
Test Rating : 3.3Vdc
Engineer : Bruce


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	0.17	0.05	9.86	25.27	35.35	55.88	20.53	Average
2	0.152	0.17	0.05	9.86	39.52	49.60	65.88	16.28	QP
3	0.211	0.17	0.05	9.87	18.73	28.82	53.18	24.36	Average
4	0.211	0.17	0.05	9.87	32.31	42.40	63.18	20.78	QP
5	1.235	0.20	0.07	9.87	11.06	21.20	46.00	24.80	Average
6	1.235	0.20	0.07	9.87	20.65	30.79	56.00	25.21	QP
7	3.060	0.25	0.10	9.87	15.62	25.84	46.00	20.16	Average
8	3.060	0.25	0.10	9.87	22.71	32.93	56.00	23.07	QP
9	7.140	0.29	0.14	9.89	12.11	22.43	50.00	27.57	Average
10	7.140	0.29	0.14	9.89	22.12	32.44	60.00	27.56	QP
11	17.166	0.49	0.21	9.93	12.88	23.51	50.00	26.49	Average
12	17.166	0.49	0.21	9.93	18.97	29.60	60.00	30.40	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/10/16	Temp./Hum.	24°C/61%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Bruce Tseng

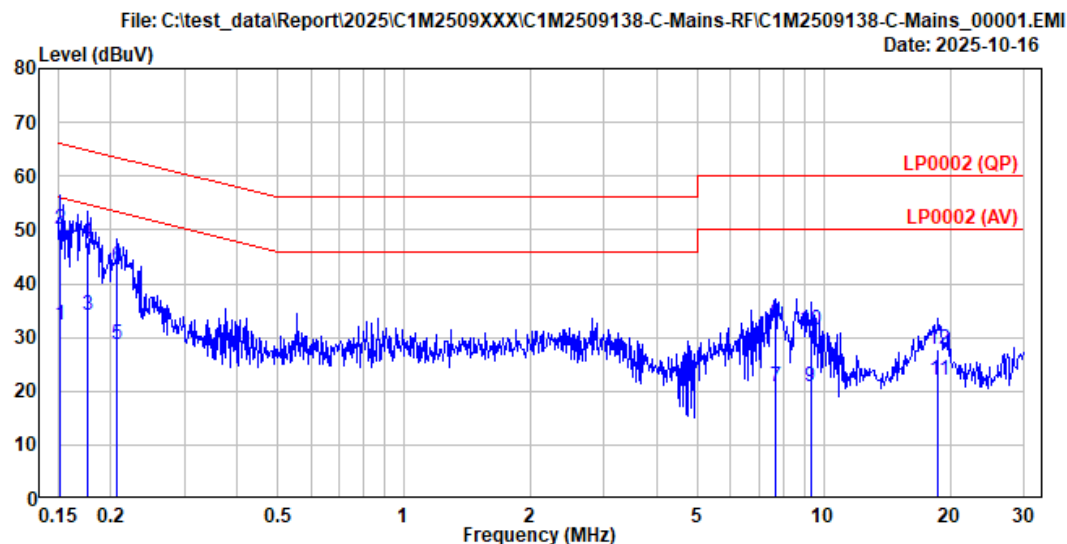

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : LP0002 (QP)
Environment : 24°C/61%
EUT Model : WCH941M
Test Mode : Operating

Data No. : 1
Phase : Line
Test Rating : 3.3Vdc
Engineer : Bruce

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	0.14	0.05	9.86	22.22	32.27	55.92	23.65	Average
2	0.152	0.14	0.05	9.86	39.99	50.04	65.92	15.88	QP
3	0.176	0.14	0.05	9.87	23.97	34.03	54.68	20.65	Average
4	0.176	0.14	0.05	9.87	37.50	47.56	64.68	17.12	QP
5	0.207	0.14	0.05	9.87	18.76	28.82	53.31	24.49	Average
6	0.207	0.14	0.05	9.87	33.20	43.26	63.31	20.05	QP
7	7.694	0.25	0.15	9.89	10.69	20.98	50.00	29.02	Average
8	7.694	0.25	0.15	9.89	22.33	32.62	60.00	27.38	QP
9	9.299	0.25	0.16	9.89	10.50	20.80	50.00	29.20	Average
10	9.299	0.25	0.16	9.89	21.16	31.46	60.00	28.54	QP
11	18.778	0.38	0.22	9.94	11.60	22.14	50.00	27.86	Average
12	18.778	0.38	0.22	9.94	17.26	27.80	60.00	32.20	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/09/18~10/16	Temp./Hum.	23~25°C/46~56%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

A.2.1.2 Frequency Below 1GHz.

SISO

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	22.99	1.43	26.47	28.45	26.40	40.00	13.60	Peak
200.000	15.18	3.67	25.79	41.05	34.11	43.50	9.39	Peak
277.000	18.87	4.46	25.64	40.20	37.90	46.00	8.10	Peak
706.000	24.57	7.67	27.40	29.34	34.19	46.00	11.81	Peak
898.000	26.38	8.81	27.00	31.45	39.64	46.00	6.36	Peak
968.000	26.89	9.21	26.79	34.04	43.34	54.00	10.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	22.77	1.44	26.47	29.27	27.01	40.00	12.99	Peak
207.500	15.72	3.75	25.77	38.04	31.75	43.50	11.75	Peak
345.000	20.28	5.35	25.99	33.80	33.44	46.00	12.56	Peak
485.000	22.90	6.82	26.99	34.86	37.59	46.00	8.41	Peak
898.000	26.38	8.81	27.00	32.84	41.02	46.00	4.98	Peak
972.000	26.92	9.23	26.78	29.37	38.74	54.00	15.26	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****MIMO**

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.000	22.33	1.45	26.47	27.68	25.00	40.00	15.00	Peak
199.000	15.18	3.66	25.79	41.57	34.62	43.50	8.88	Peak
276.500	18.86	4.46	25.64	38.31	35.99	46.00	10.01	Peak
710.500	24.57	7.70	27.39	32.09	36.97	46.00	9.03	Peak
950.500	26.77	9.11	26.84	34.01	43.04	46.00	2.96	Peak
976.000	26.95	9.25	26.77	33.47	42.91	54.00	11.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.000	22.33	1.45	26.47	31.02	28.34	40.00	11.66	Peak
207.500	15.72	3.75	25.77	37.23	30.93	43.50	12.57	Peak
346.500	20.31	5.37	26.01	35.47	35.15	46.00	10.85	Peak
484.000	22.88	6.81	26.98	34.94	37.65	46.00	8.35	Peak
830.500	25.24	8.36	27.14	37.24	43.70	46.00	2.30	Peak
982.000	26.99	9.28	26.75	29.09	38.61	54.00	15.39	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
34.000	21.88	1.47	26.46	27.40	24.28	40.00	15.72	Peak
200.000	15.18	3.67	25.79	40.95	34.01	43.50	9.49	Peak
277.000	18.87	4.46	25.64	39.20	36.90	46.00	9.10	Peak
685.500	24.52	7.57	27.41	34.72	39.40	46.00	6.60	Peak
896.000	26.34	8.79	27.01	33.12	41.24	46.00	4.76	Peak
999.000	27.11	9.37	26.70	33.77	43.55	54.00	10.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	22.77	1.44	26.47	29.95	27.69	40.00	12.31	Peak
137.500	17.30	3.05	26.05	34.30	28.61	43.50	14.89	Peak
345.000	20.28	5.35	25.99	34.86	34.50	46.00	11.50	Peak
483.000	22.86	6.80	26.98	34.51	37.20	46.00	8.80	Peak
897.500	26.37	8.80	27.00	34.74	42.91	46.00	3.09	Peak
994.500	27.09	9.35	26.72	28.21	37.93	54.00	16.07	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

● Wireless LAN Mode


SISO

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

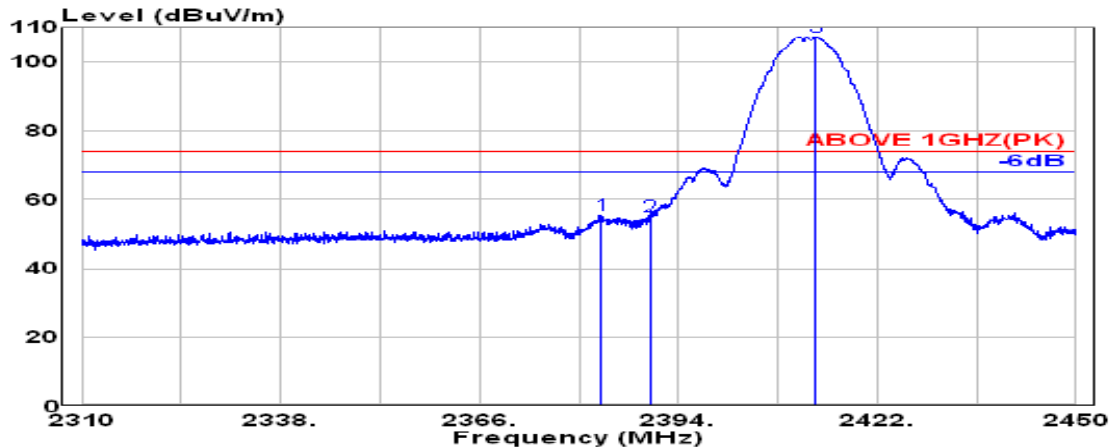

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.100	28.20	5.69	39.92	61.63	55.60	74.00	18.40	Peak
2390.000	28.20	5.70	39.92	61.04	55.03	74.00	18.97	Peak
@ 2413.250	28.23	5.73	39.92	113.37	107.41	---	---	Peak

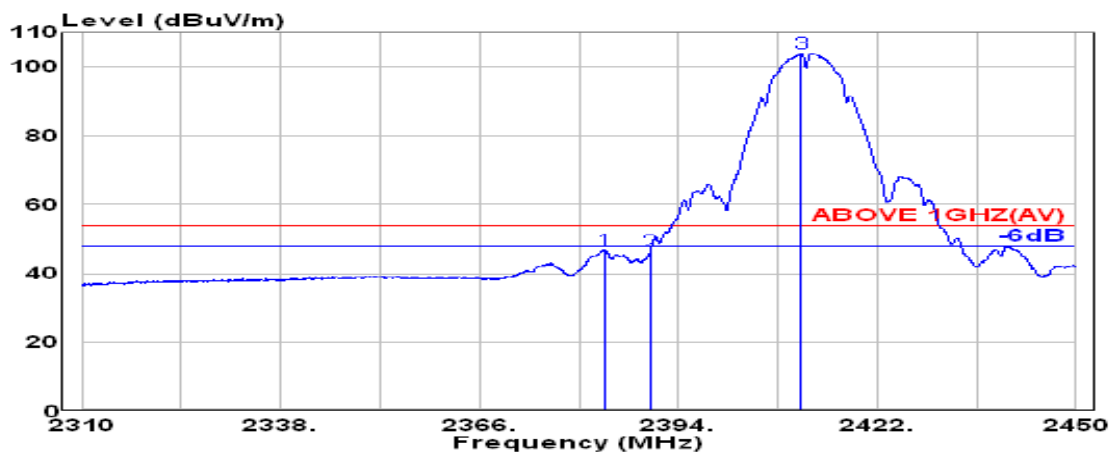

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.550	28.20	5.69	39.92	52.87	46.85	54.00	7.15	Average
2390.000	28.20	5.70	39.92	52.42	46.40	54.00	7.60	Average
@ 2411.200	28.22	5.73	39.92	110.15	104.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

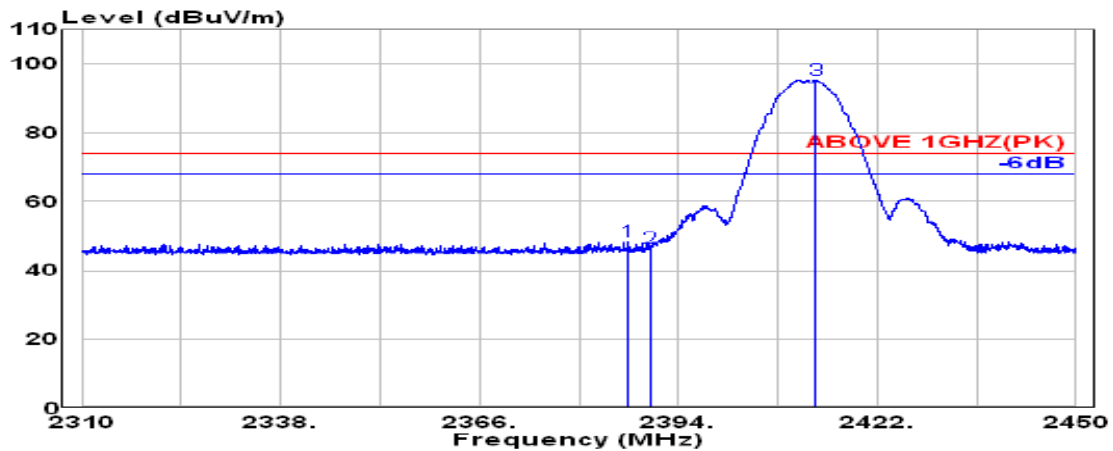

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.800	28.20	5.70	39.92	54.59	48.57	74.00	25.43	Peak
2390.000	28.20	5.70	39.92	52.55	46.53	74.00	27.47	Peak
@ 2413.350	28.23	5.73	39.92	101.44	95.49	---	---	Peak

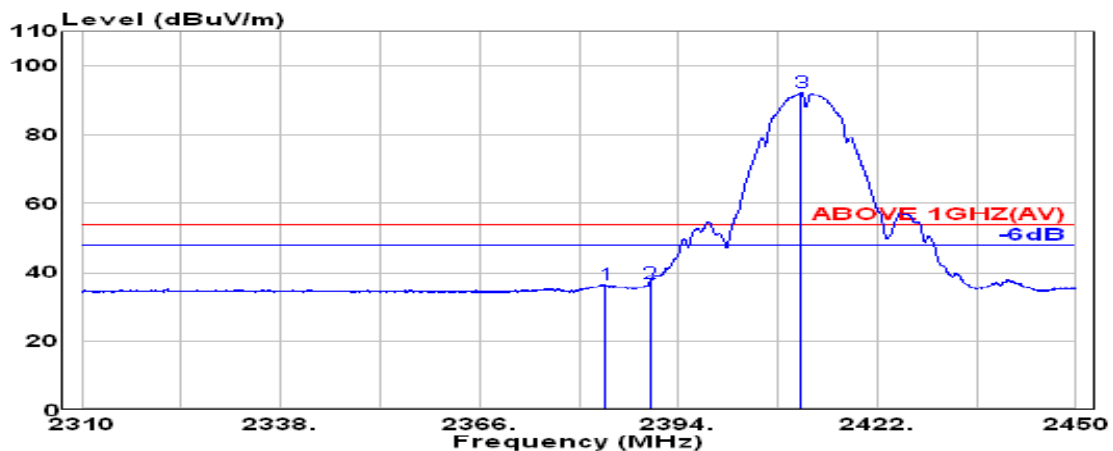

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2383.650	28.20	5.69	39.92	42.75	36.73	54.00	17.27	Average
2390.000	28.20	5.70	39.92	43.05	37.03	54.00	16.97	Average
@ 2411.200	28.22	5.73	39.92	98.38	92.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

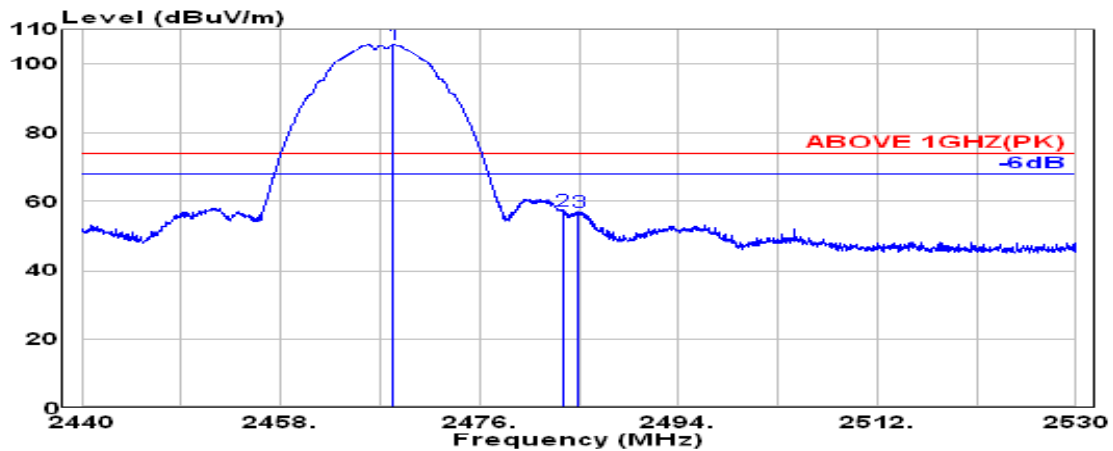

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.150	28.37	5.81	39.92	111.38	105.65	---	---	Peak
	2483.500	28.43	5.83	39.92	63.12	57.46	74.00	16.54	Peak
	2484.900	28.44	5.83	39.92	62.91	57.26	74.00	16.74	Peak

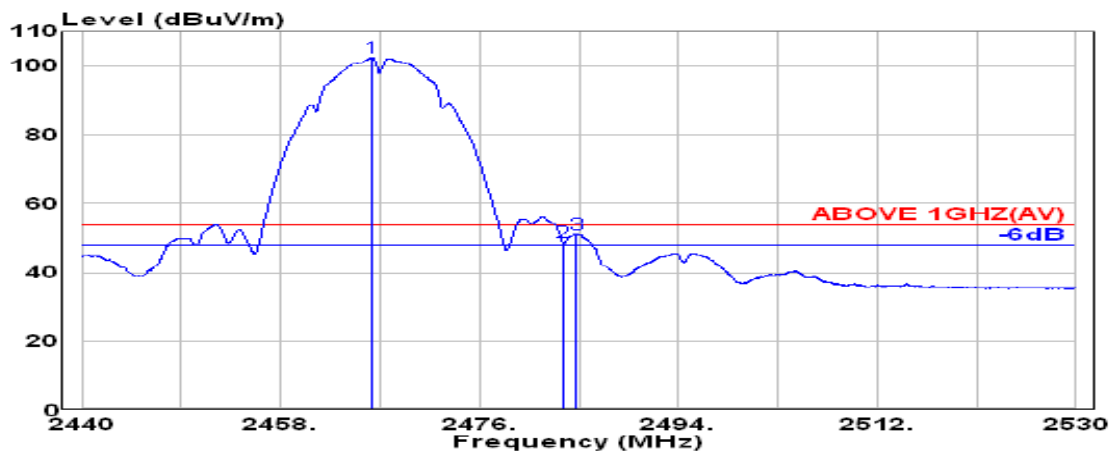

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.200	28.37	5.81	39.92	108.10	102.35	---	---	Average
	2483.500	28.43	5.83	39.92	54.39	48.73	54.00	5.27	Average
	2484.750	28.44	5.83	39.92	56.83	51.18	54.00	2.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

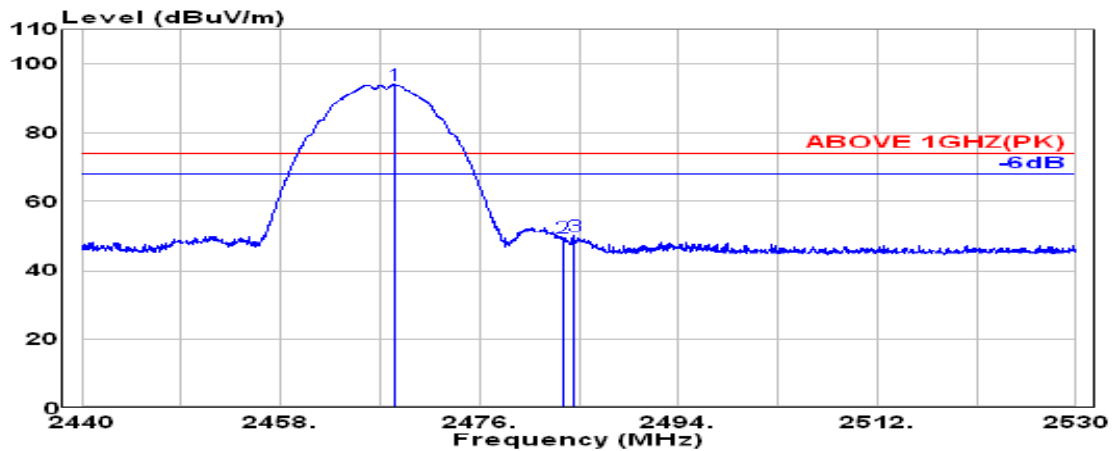

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.37	5.81	39.92	99.67	93.93	---	---	Peak
2483.500	28.43	5.83	39.92	55.15	49.50	74.00	24.50	Peak
2484.600	28.44	5.83	39.92	55.78	50.13	74.00	23.87	Peak

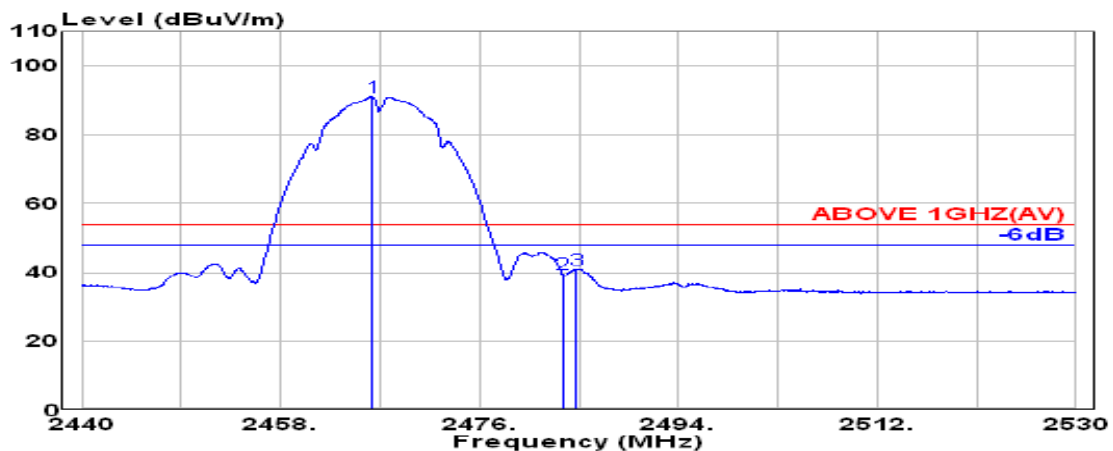


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.250	28.37	5.81	39.92	96.80	91.06	---	---	Average
2483.500	28.43	5.83	39.92	45.16	39.50	54.00	14.50	Average
2484.750	28.44	5.83	39.92	46.70	41.05	54.00	12.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

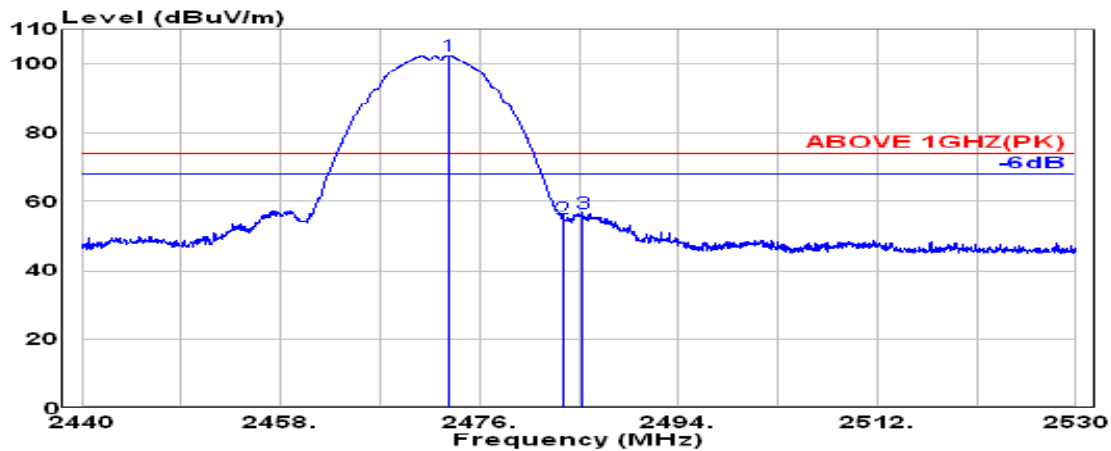

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.150	28.39	5.81	39.92	108.18	102.47	---	---	Peak
2483.500	28.43	5.83	39.92	60.77	55.11	74.00	18.89	Peak
2485.300	28.44	5.83	39.92	62.45	56.80	74.00	17.20	Peak

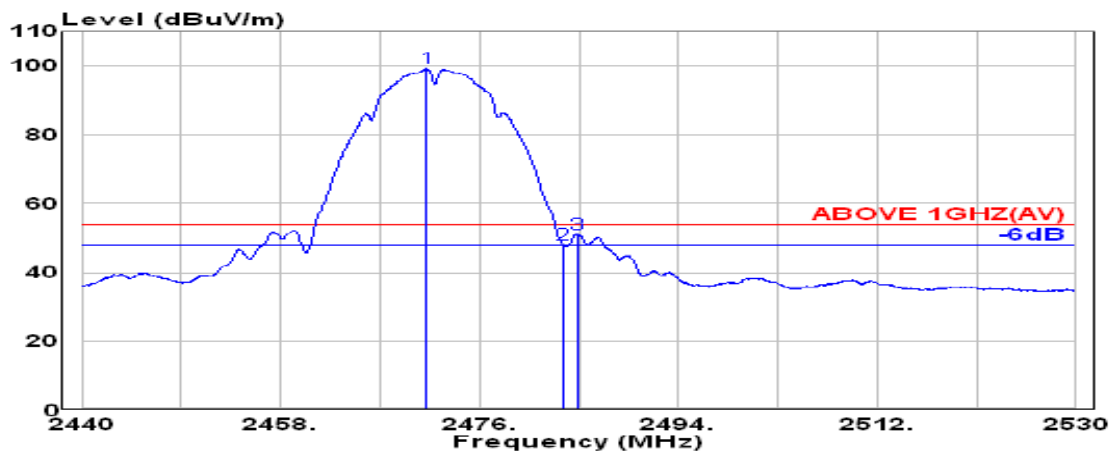

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.200	28.39	5.81	39.92	104.94	99.21	---	---	Average
2483.500	28.43	5.83	39.92	54.00	48.34	54.00	5.66	Average
2484.850	28.44	5.83	39.92	56.90	51.25	54.00	2.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472 MHz
------	---------	-----------	-------------

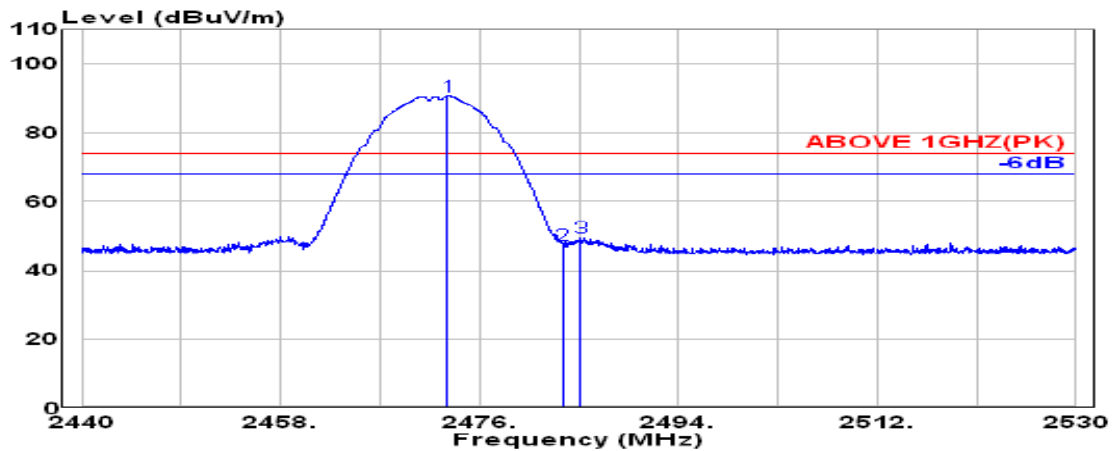

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2473.050	28.39	5.81	39.92	96.45	90.74	---	---	Peak
	2483.500	28.43	5.83	39.92	53.11	47.45	74.00	26.55	Peak
	2485.150	28.44	5.83	39.92	55.32	49.68	74.00	24.32	Peak

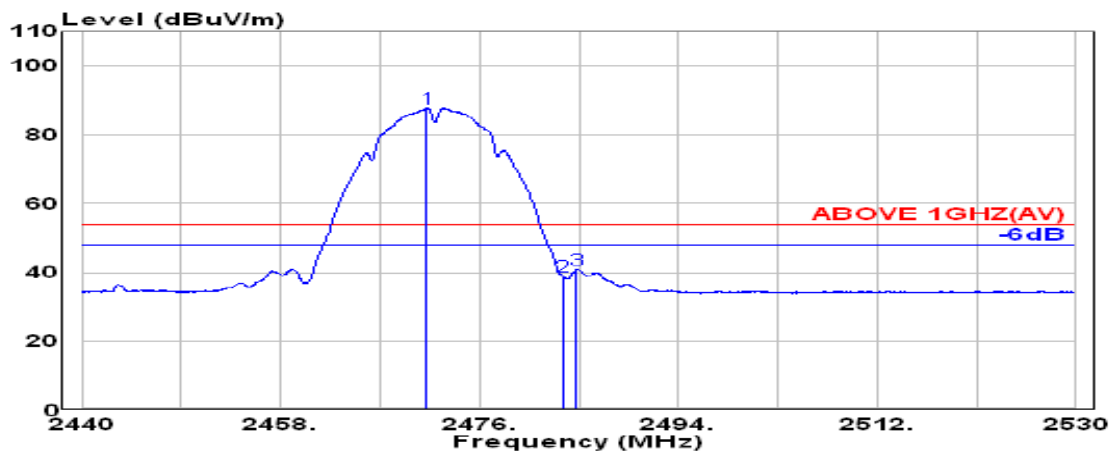

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2471.200	28.39	5.81	39.92	93.42	87.70	---	---	Average
	2483.500	28.43	5.83	39.92	44.64	38.98	54.00	15.02	Average
	2484.800	28.44	5.83	39.92	46.60	40.95	54.00	13.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

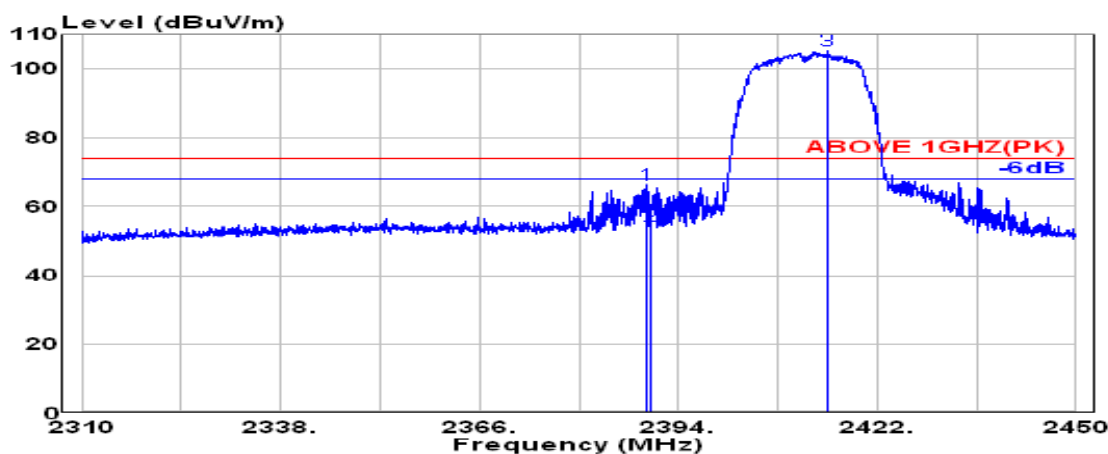

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.450	28.20	5.70	39.92	72.55	66.54	74.00	7.46	Peak
2390.000	28.20	5.70	39.92	60.44	54.42	74.00	19.58	Peak
@ 2414.900	28.23	5.74	39.92	111.40	105.45	---	---	Peak

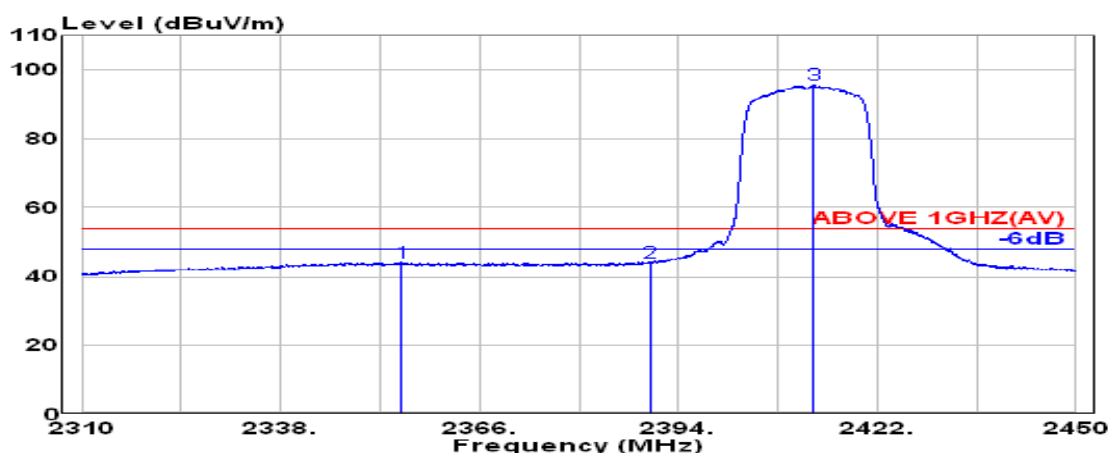

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2354.950	28.20	5.65	39.92	50.24	44.18	54.00	9.82	Average
2390.000	28.20	5.70	39.92	50.15	44.14	54.00	9.86	Average
@ 2412.950	28.23	5.73	39.92	101.80	95.84	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

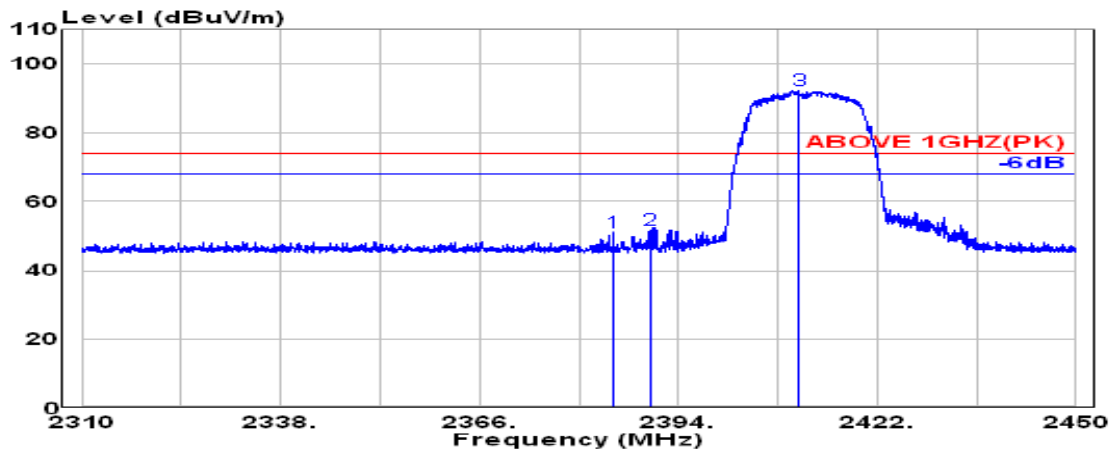

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.750	28.20	5.70	39.92	57.28	51.25	74.00	22.75	Peak
2390.000	28.20	5.70	39.92	57.82	51.80	74.00	22.20	Peak
@ 2410.900	28.22	5.73	39.92	98.39	92.42	---	---	Peak

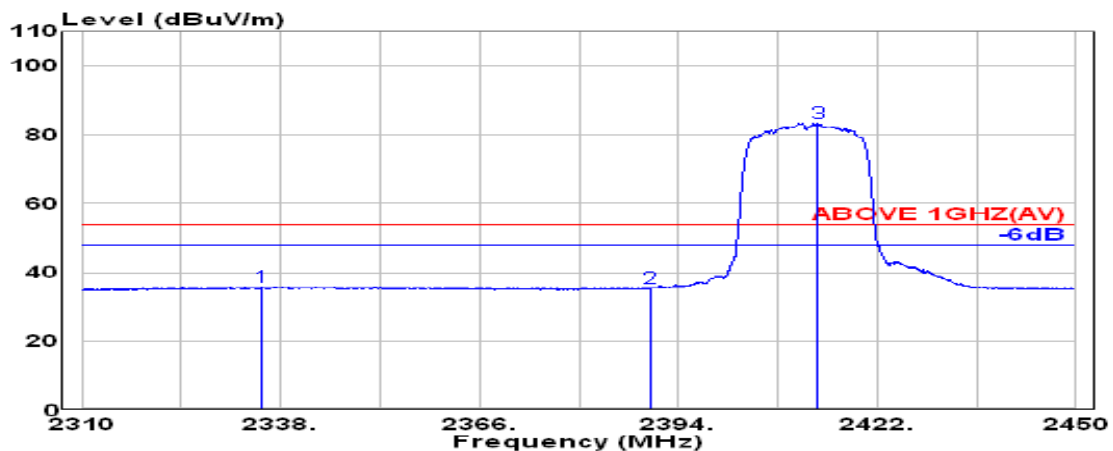


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.300	28.14	5.63	39.92	42.11	35.96	54.00	18.04	Average
2390.000	28.20	5.70	39.92	41.58	35.56	54.00	18.44	Average
@ 2413.600	28.23	5.73	39.92	89.40	83.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

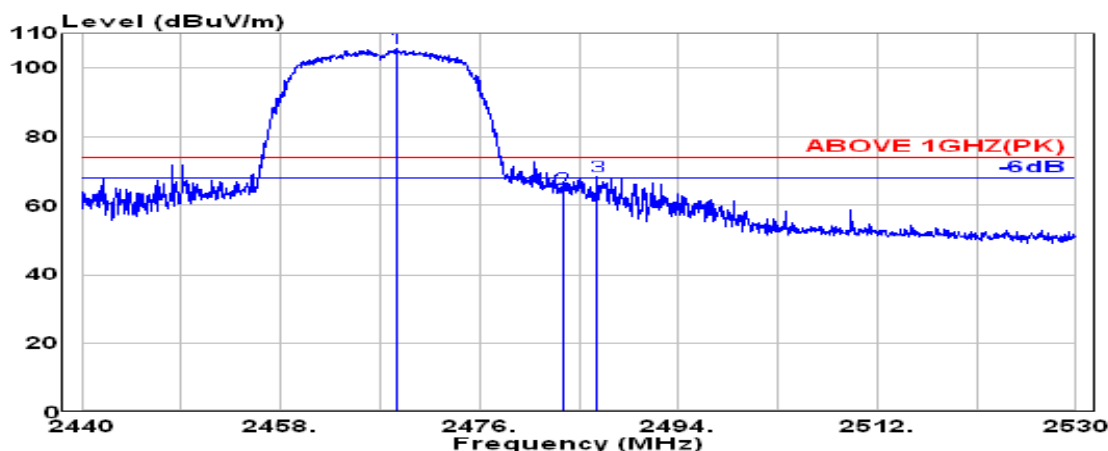

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.500	28.37	5.81	39.92	111.29	105.56	---	---	Peak
2483.500	28.43	5.83	39.92	70.45	64.79	74.00	9.21	Peak
2486.600	28.45	5.83	39.92	73.98	68.34	74.00	5.66	Peak

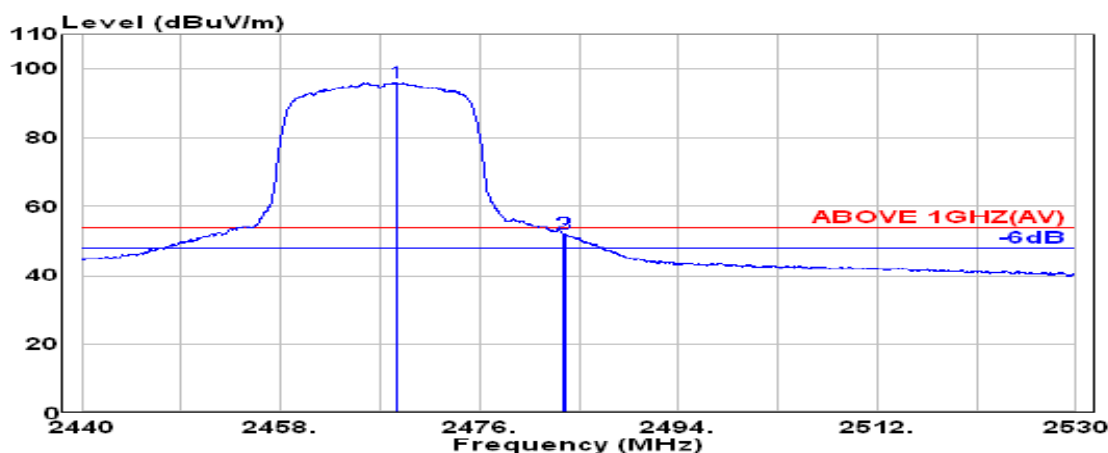

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.450	28.37	5.81	39.92	101.85	96.11	---	---	Average
2483.500	28.43	5.83	39.92	57.94	52.28	54.00	1.72	Average
2483.750	28.44	5.83	39.92	57.83	52.17	54.00	1.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467 MHz
------	---------	-----------	-------------

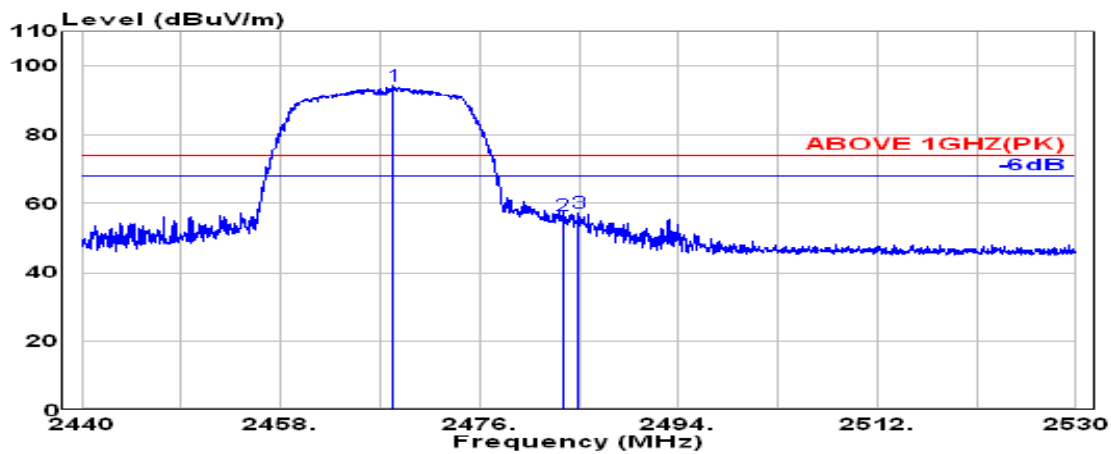

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.200	28.37	5.81	39.92	99.99	94.25	---	---	Peak
2483.500	28.43	5.83	39.92	62.37	56.71	74.00	17.29	Peak
2484.950	28.44	5.83	39.92	63.29	57.64	74.00	16.36	Peak

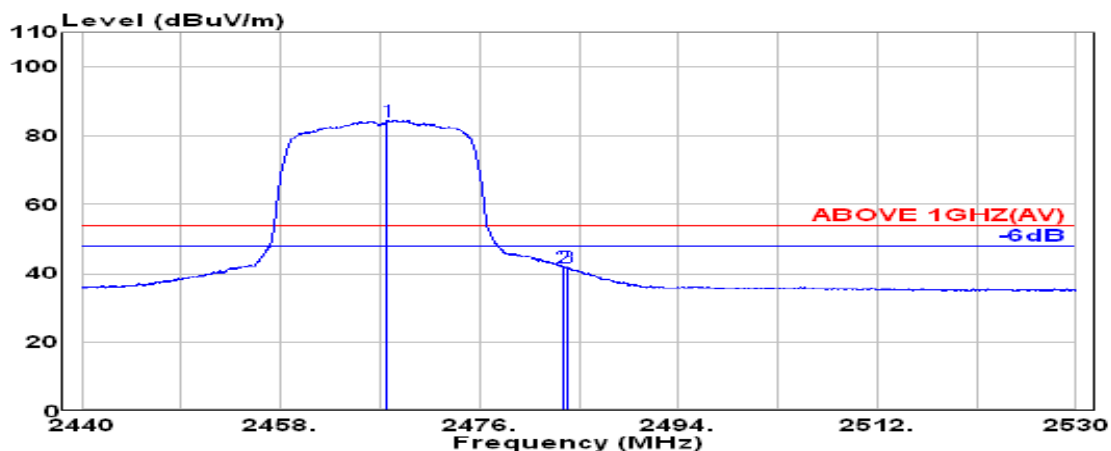


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.600	28.37	5.81	39.92	90.27	84.53	---	---	Average
2483.500	28.43	5.83	39.92	47.55	41.90	54.00	12.10	Average
2483.950	28.44	5.83	39.92	47.49	41.84	54.00	12.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

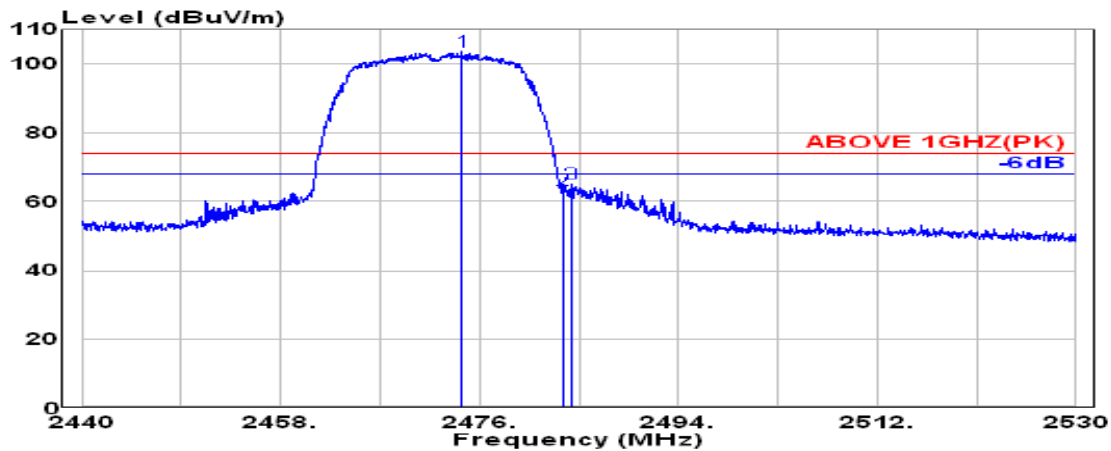

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.350	28.40	5.82	39.92	109.36	103.65	---	---	Peak
2483.500	28.43	5.83	39.92	69.25	63.59	74.00	10.41	Peak
2484.300	28.44	5.83	39.92	70.88	65.23	74.00	8.77	Peak

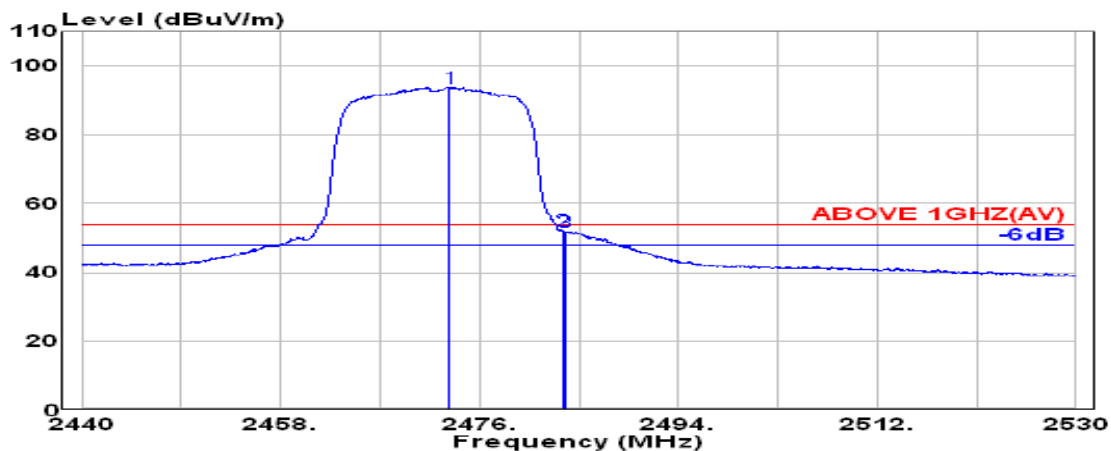

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.300	28.39	5.81	39.92	99.47	93.76	---	---	Average
2483.500	28.43	5.83	39.92	57.94	52.29	54.00	1.71	Average
2483.750	28.44	5.83	39.92	57.67	52.02	54.00	1.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472 MHz
------	---------	-----------	-------------

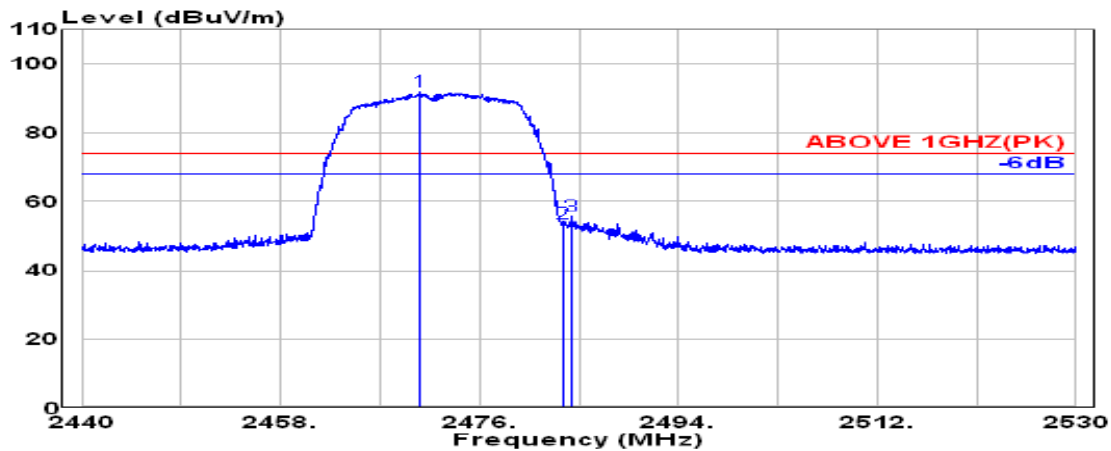

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.550	28.38	5.81	39.92	97.64	91.92	---	---	Peak
2483.500	28.43	5.83	39.92	59.54	53.88	74.00	20.12	Peak
2484.250	28.44	5.83	39.92	61.36	55.71	74.00	18.29	Peak

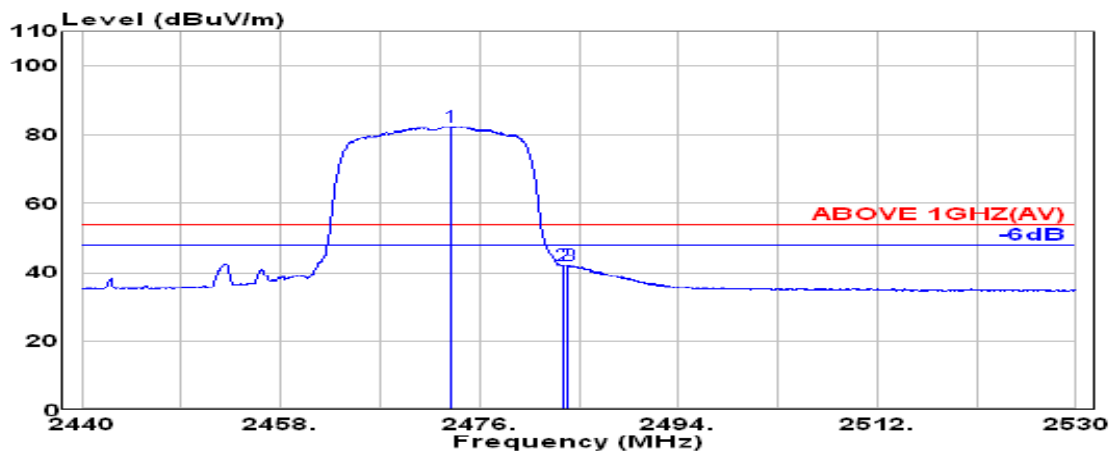

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.350	28.39	5.81	39.92	88.25	82.54	---	---	Average
2483.500	28.43	5.83	39.92	47.91	42.25	54.00	11.75	Average
2484.000	28.44	5.83	39.92	47.88	42.22	54.00	11.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

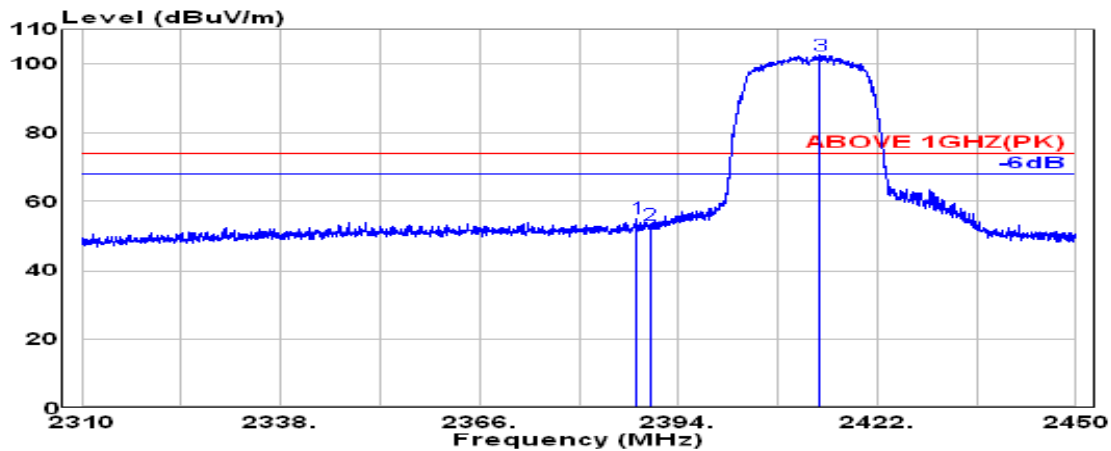

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.050	28.20	5.70	39.92	61.06	55.04	74.00	18.96	Peak
2390.000	28.20	5.70	39.92	59.65	53.63	74.00	20.37	Peak
@ 2413.950	28.23	5.74	39.92	108.60	102.65	---	---	Peak

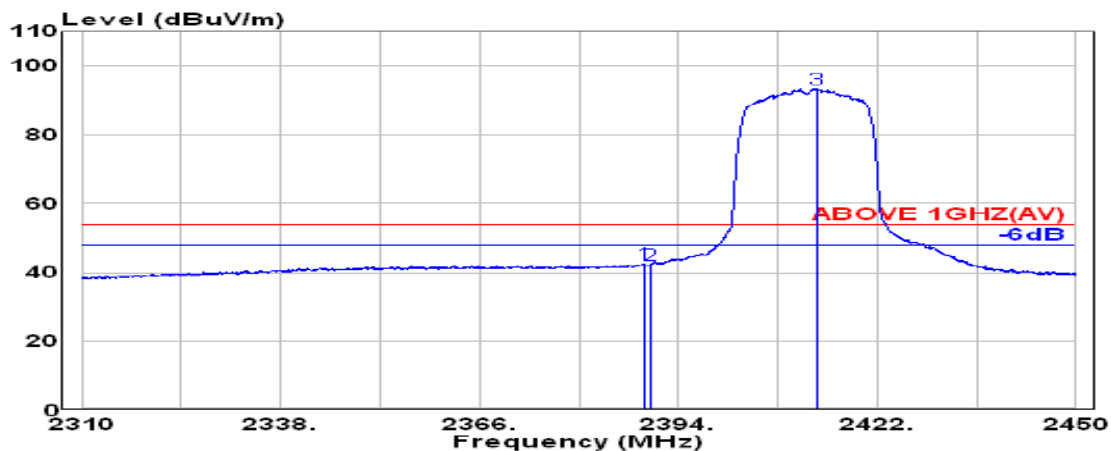

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.20	5.70	39.92	48.48	42.47	54.00	11.53	Average
2390.000	28.20	5.70	39.92	48.26	42.25	54.00	11.75	Average
@ 2413.400	28.23	5.73	39.92	99.36	93.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

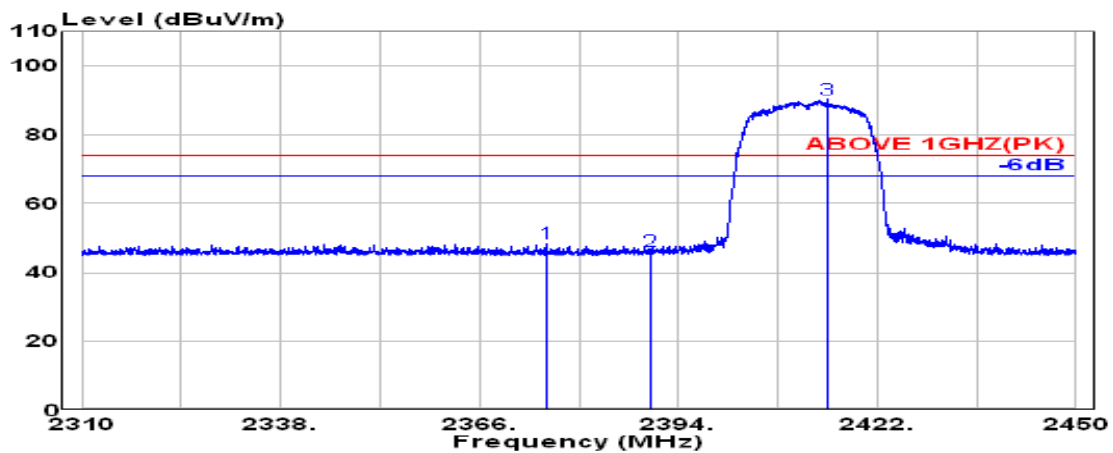

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2375.350	28.20	5.68	39.92	54.52	48.49	74.00	25.51	Peak
2390.000	28.20	5.70	39.92	52.24	46.22	74.00	27.78	Peak
@ 2414.950	28.23	5.74	39.92	96.24	90.29	---	---	Peak

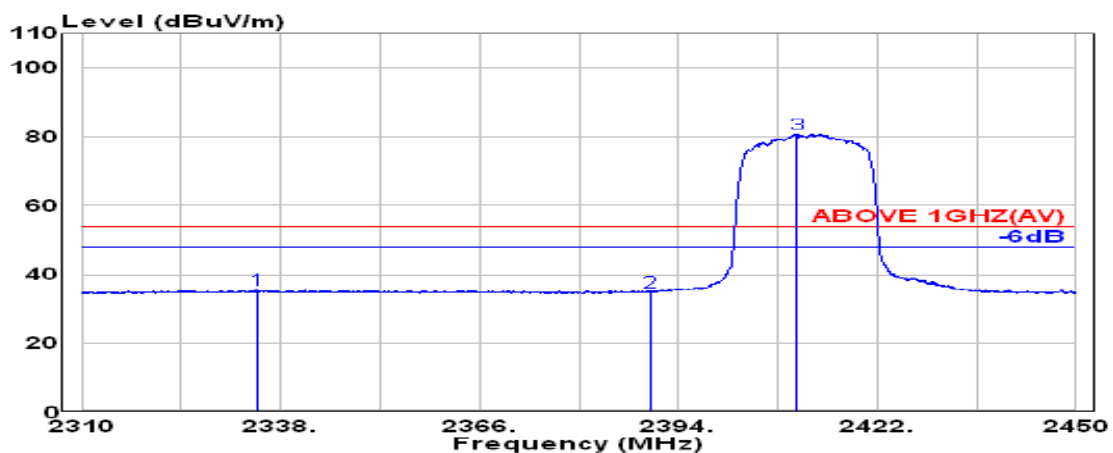


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2334.700	28.14	5.63	39.92	41.61	35.46	54.00	18.54	Average
2390.000	28.20	5.70	39.92	41.06	35.05	54.00	18.95	Average
@ 2410.650	28.22	5.73	39.92	86.83	80.87	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

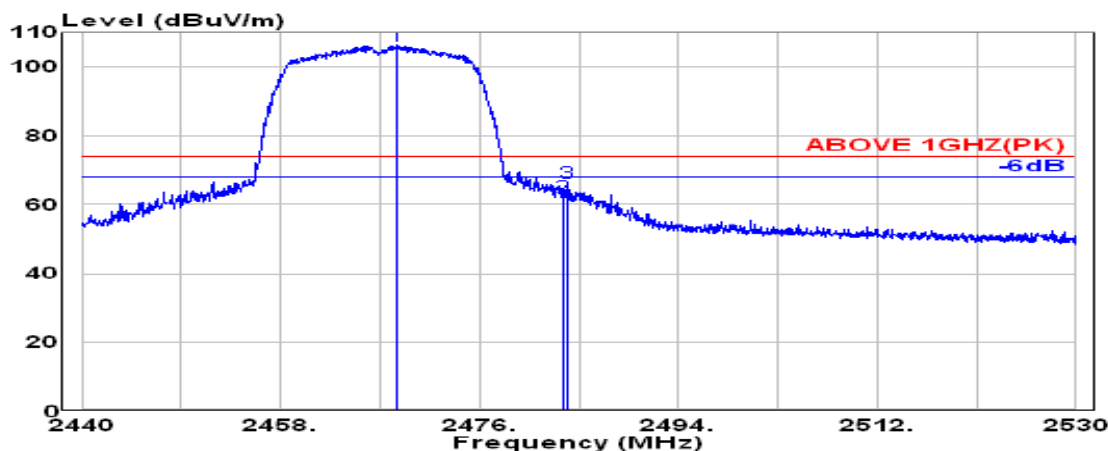

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.450	28.37	5.81	39.92	112.12	106.39	---	---	Peak
2483.500	28.43	5.83	39.92	68.02	62.36	74.00	11.64	Peak
2483.950	28.44	5.83	39.92	72.14	66.49	74.00	7.51	Peak

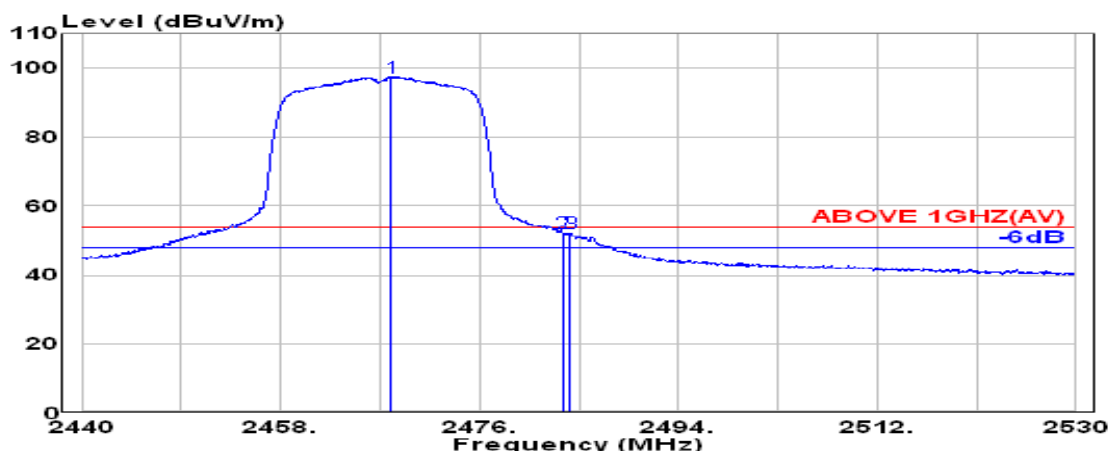


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.950	28.37	5.81	39.92	103.21	97.47	---	---	Average
2483.500	28.43	5.83	39.92	57.93	52.27	54.00	1.73	Average
2484.150	28.44	5.83	39.92	57.86	52.20	54.00	1.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

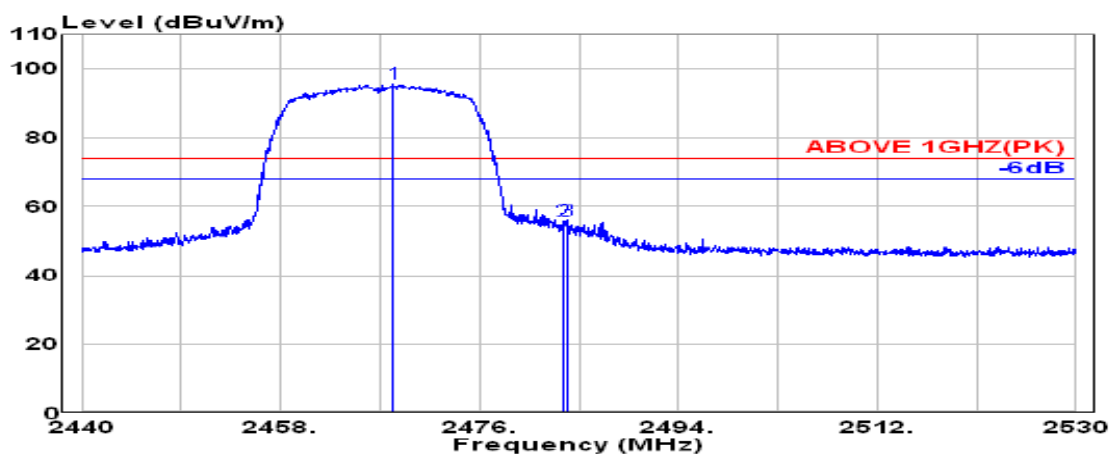

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.150	28.37	5.81	39.92	101.31	95.57	---	---	Peak
	2483.500	28.43	5.83	39.92	61.54	55.88	74.00	18.12	Peak
	2483.900	28.44	5.83	39.92	61.77	56.11	74.00	17.89	Peak

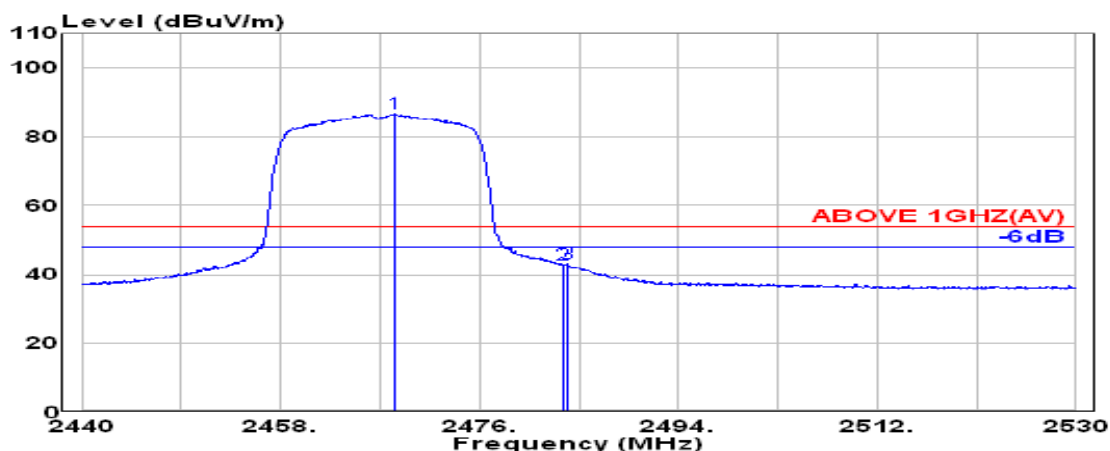

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2468.300	28.37	5.81	39.92	92.40	86.66	---	---	Average
	2483.500	28.43	5.83	39.92	48.62	42.96	54.00	11.04	Average
	2483.900	28.44	5.83	39.92	48.88	43.22	54.00	10.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

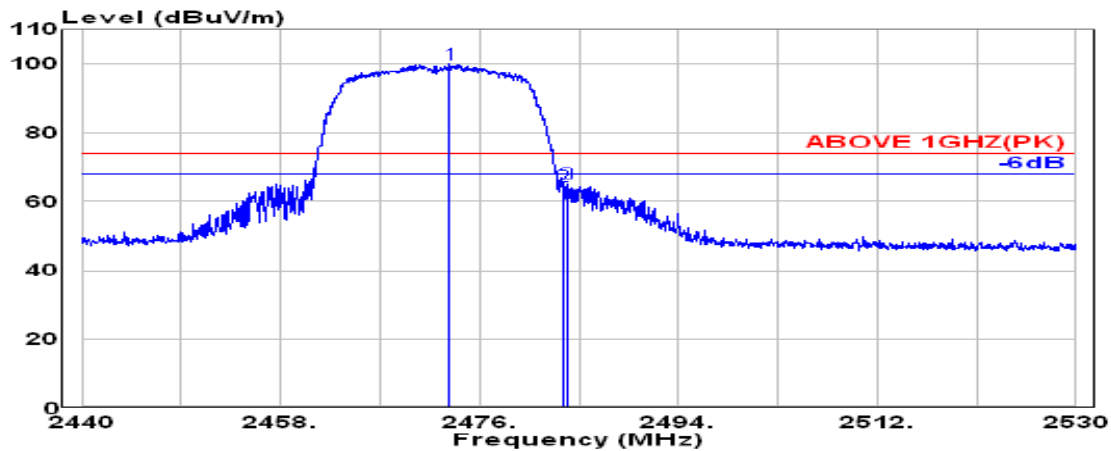

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.300	28.39	5.81	39.92	105.65	99.94	---	---	Peak
2483.500	28.43	5.83	39.92	70.13	64.47	74.00	9.53	Peak
2483.950	28.44	5.83	39.92	70.81	65.16	74.00	8.84	Peak

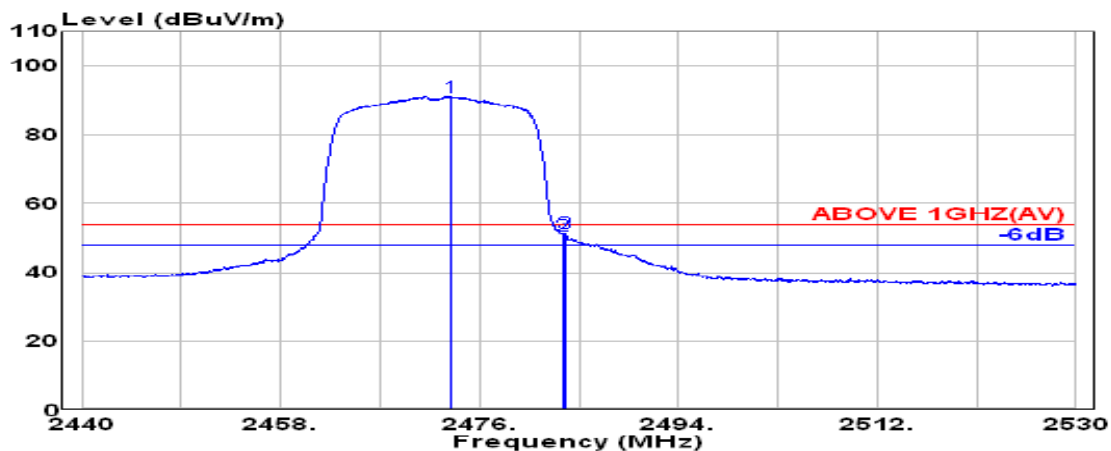

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.350	28.39	5.81	39.92	96.78	91.07	---	---	Average
2483.500	28.43	5.83	39.92	56.67	51.01	54.00	2.99	Average
2483.700	28.44	5.83	39.92	57.14	51.48	54.00	2.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

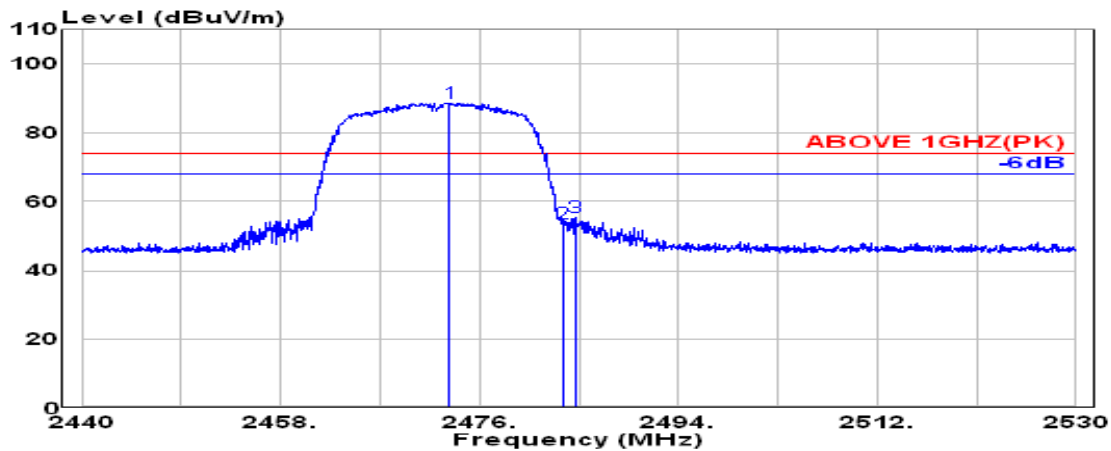

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.300	28.39	5.81	39.92	94.62	88.90	---	---	Peak
2483.500	28.43	5.83	39.92	59.50	53.85	74.00	20.15	Peak
2484.700	28.44	5.83	39.92	61.12	55.47	74.00	18.53	Peak

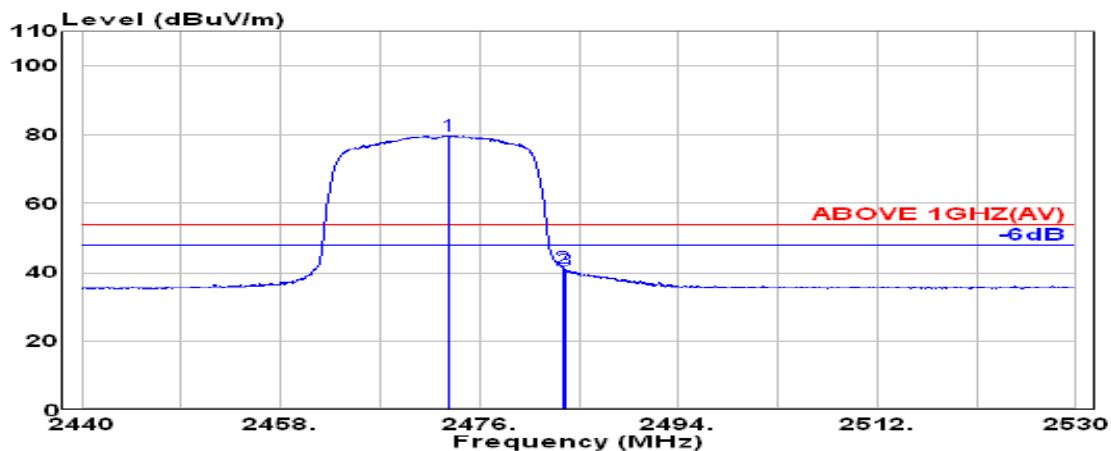

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.150	28.39	5.81	39.92	85.60	79.89	---	---	Average
2483.500	28.43	5.83	39.92	47.15	41.49	54.00	12.51	Average
2483.700	28.44	5.83	39.92	46.47	40.82	54.00	13.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

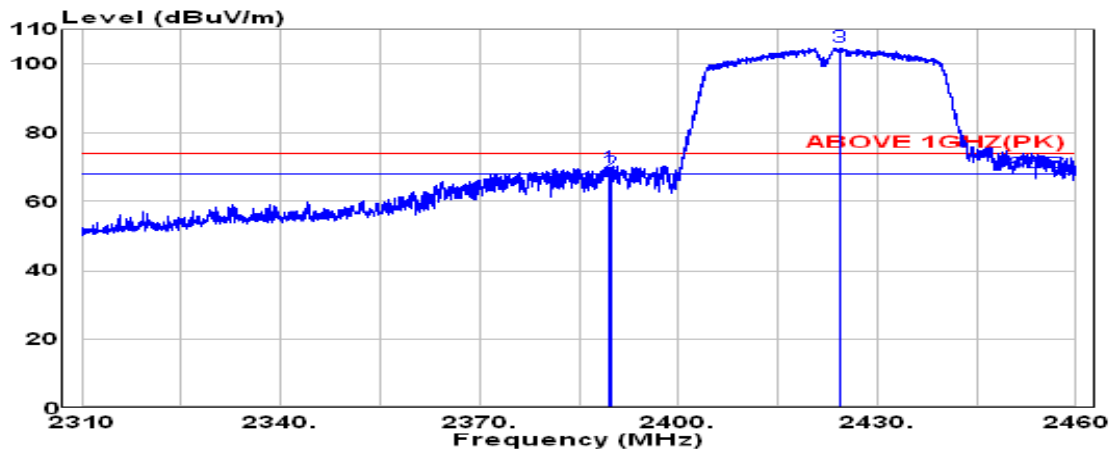

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	76.28	70.26	74.00	3.74	Peak
2389.800	28.20	5.70	39.92	74.77	68.76	74.00	5.24	Peak
@ 2424.300	28.25	5.75	39.92	110.76	104.84	---	---	Peak

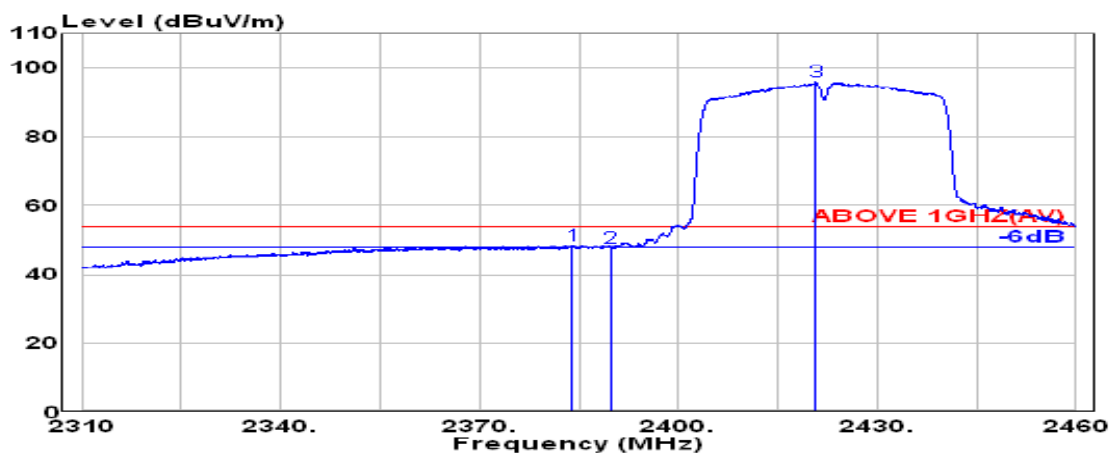

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2384.000	28.20	5.69	39.92	54.64	48.62	54.00	5.38	Average
2389.800	28.20	5.70	39.92	53.91	47.89	54.00	6.11	Average
@ 2420.750	28.24	5.74	39.92	101.91	95.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

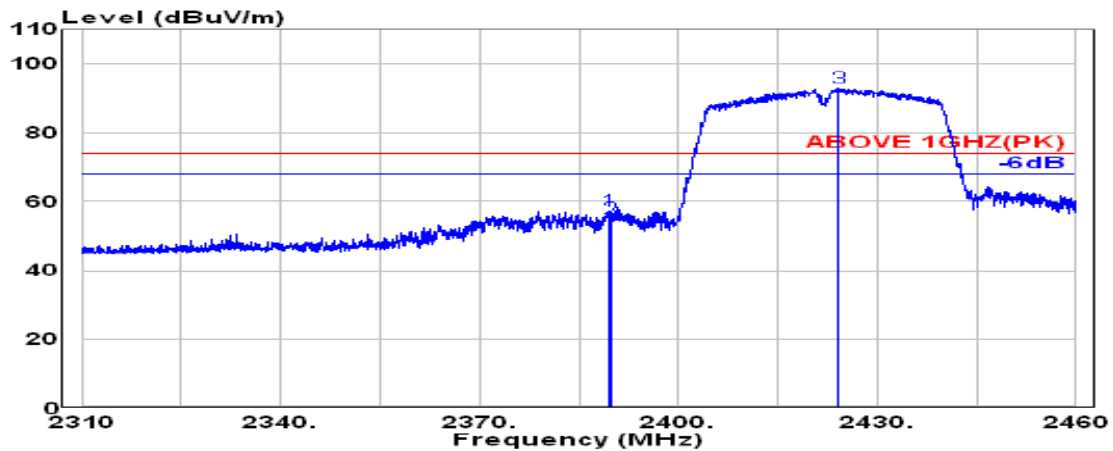

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.400	28.20	5.70	39.92	63.53	57.52	74.00	16.48	Peak
2389.800	28.20	5.70	39.92	61.32	55.31	74.00	18.69	Peak
@ 2424.100	28.25	5.75	39.92	99.11	93.19	---	---	Peak

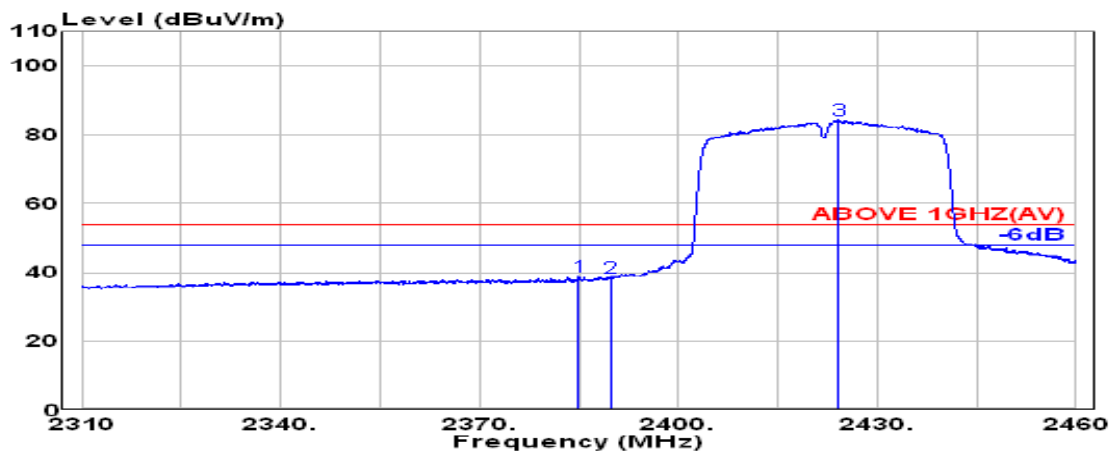


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.900	28.20	5.70	39.92	44.77	38.75	54.00	15.25	Average
2389.800	28.20	5.70	39.92	44.56	38.54	54.00	15.46	Average
@ 2424.100	28.25	5.75	39.92	90.20	84.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

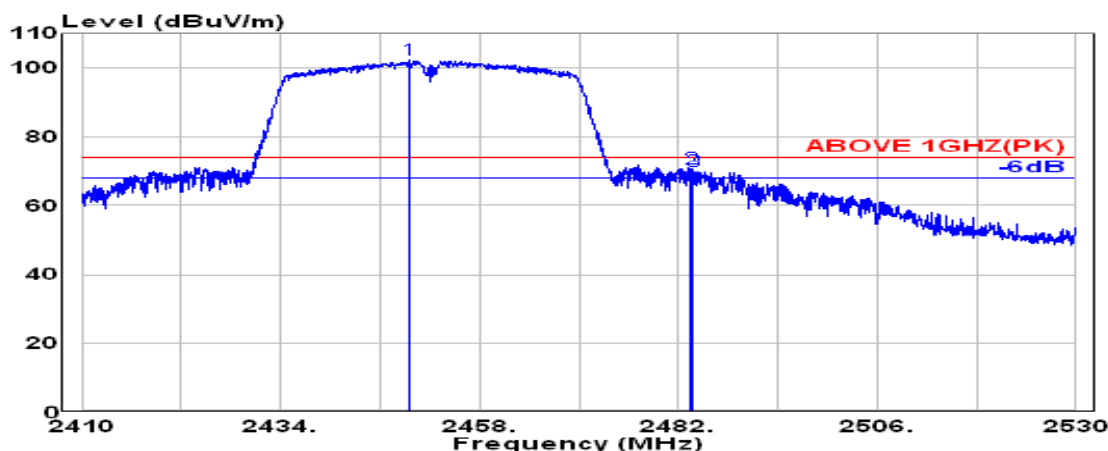

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.450	28.30	5.78	39.92	108.05	102.21	---	---	Peak
2483.500	28.43	5.83	39.92	76.32	70.66	74.00	3.34	Peak
2483.700	28.44	5.83	39.92	75.91	70.26	74.00	3.74	Peak

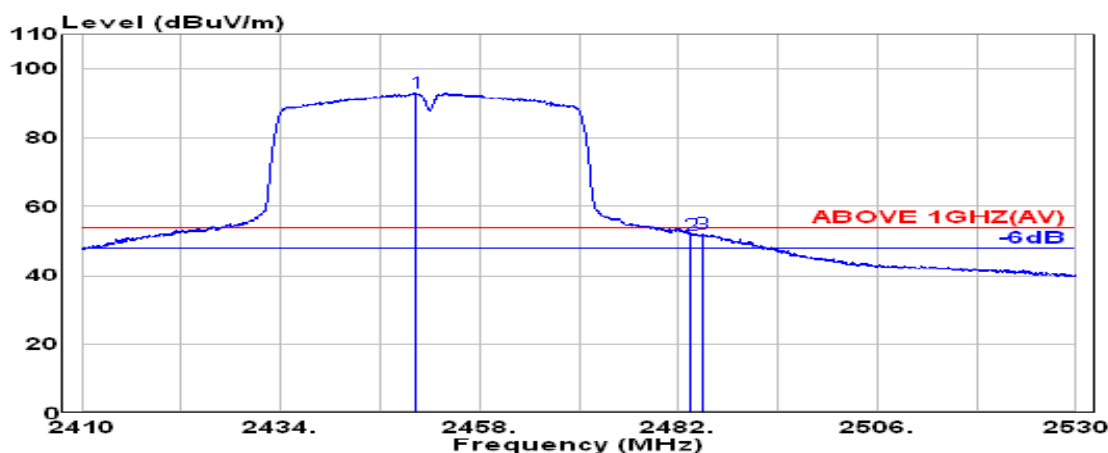


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2450.400	28.30	5.78	39.92	98.99	93.16	---	---	Average
2483.500	28.43	5.83	39.92	57.61	51.96	54.00	2.04	Average
2484.900	28.44	5.83	39.92	57.95	52.30	54.00	1.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

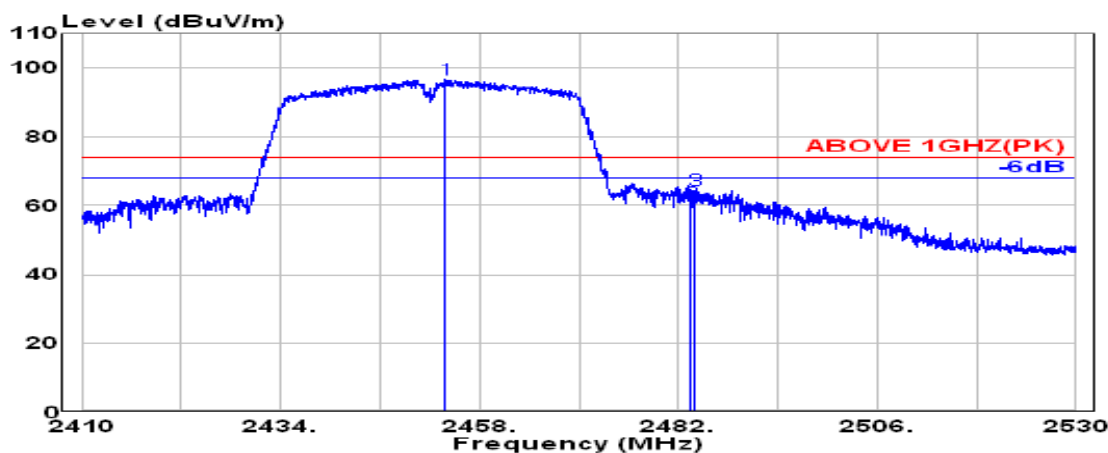

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.850	28.32	5.79	39.92	102.49	96.68	---	---	Peak
2483.500	28.43	5.83	39.92	66.47	60.81	74.00	13.19	Peak
2484.050	28.44	5.83	39.92	70.25	64.60	74.00	9.40	Peak

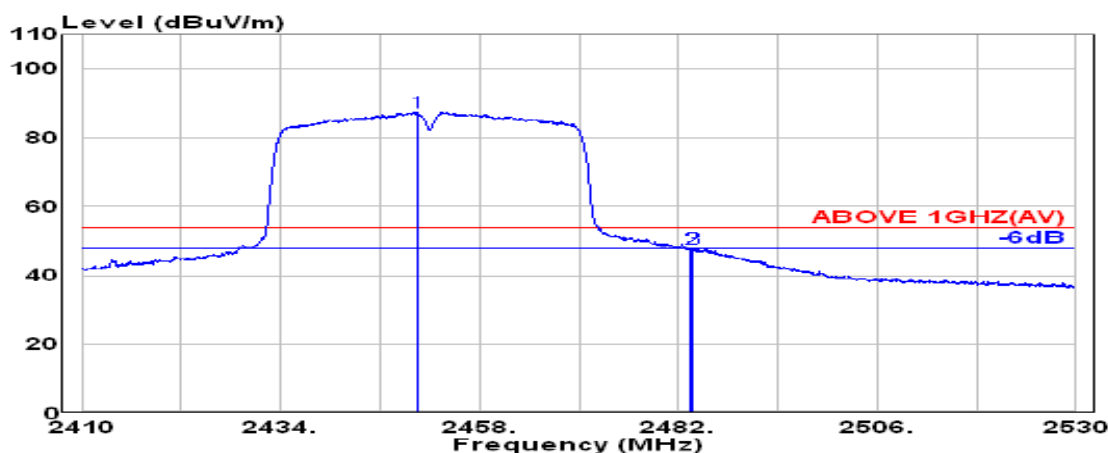

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2450.450	28.30	5.78	39.92	93.33	87.50	---	---	Average
2483.500	28.43	5.83	39.92	53.43	47.78	54.00	6.22	Average
2483.750	28.44	5.83	39.92	53.60	47.94	54.00	6.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

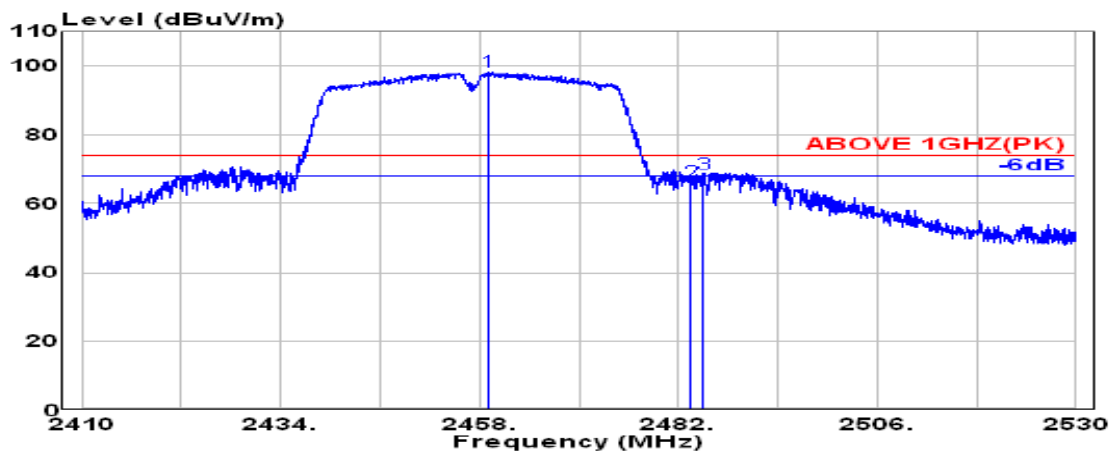

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2459.050	28.34	5.80	39.92	104.08	98.29	---	---	Peak
	2483.500	28.43	5.83	39.92	72.02	66.36	74.00	7.64	Peak
	2484.950	28.44	5.83	39.92	74.60	68.95	74.00	5.05	Peak

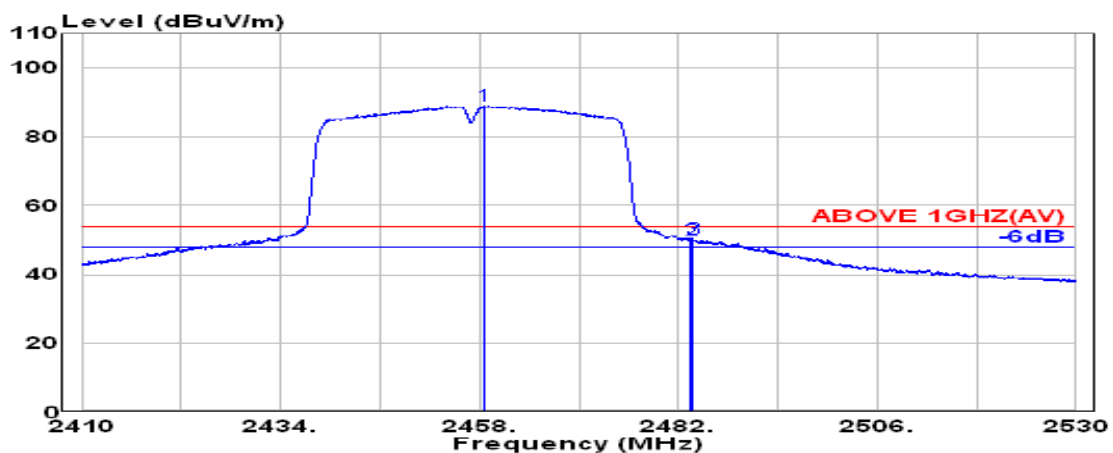


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2458.450	28.33	5.80	39.92	94.82	89.03	---	---	Average
	2483.500	28.43	5.83	39.92	55.75	50.09	54.00	3.91	Average
	2483.750	28.44	5.83	39.92	56.07	50.42	54.00	3.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

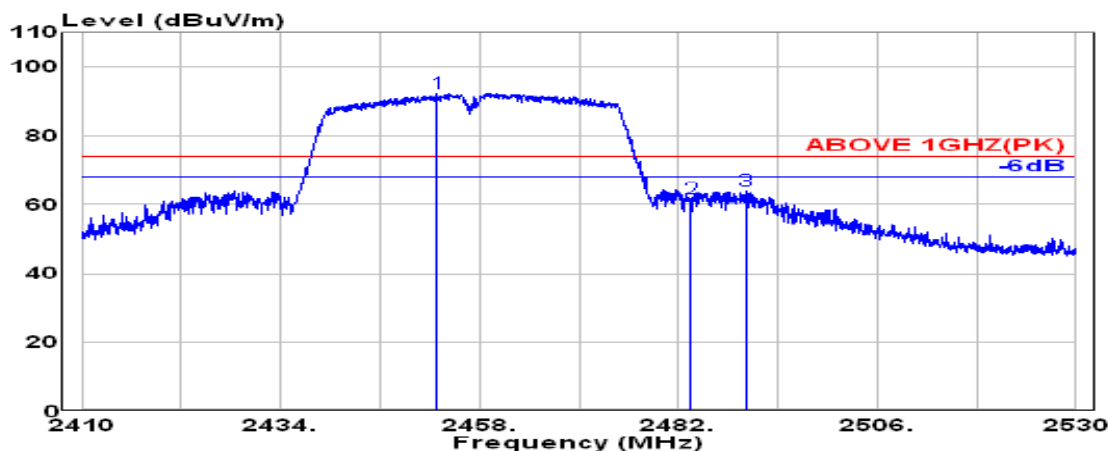

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2452.900	28.31	5.79	39.92	98.38	92.56	---	---	Peak
2483.500	28.43	5.83	39.92	67.62	61.97	74.00	12.03	Peak
2490.100	28.46	5.84	39.92	69.62	64.00	74.00	10.00	Peak

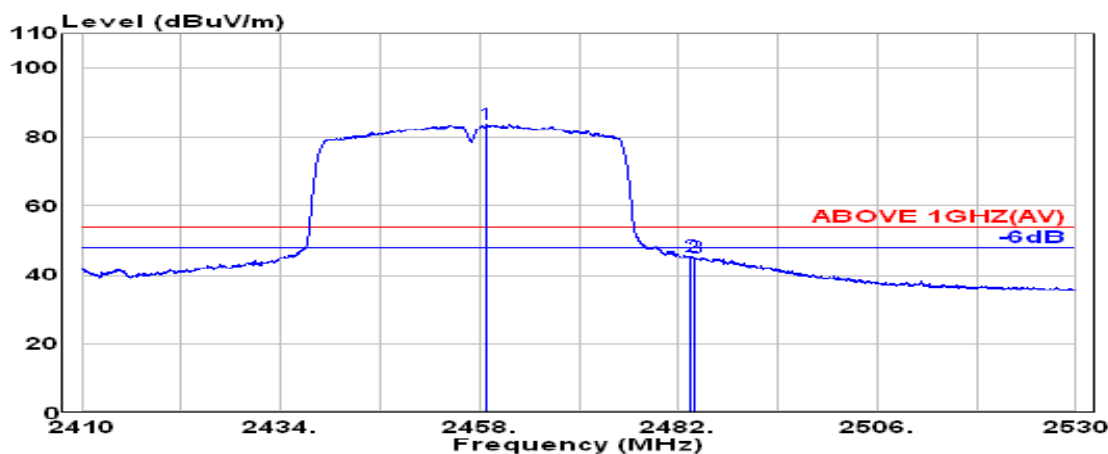

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.800	28.34	5.80	39.92	89.51	83.72	---	---	Average
2483.500	28.43	5.83	39.92	51.07	45.42	54.00	8.58	Average
2484.050	28.44	5.83	39.92	50.87	45.21	54.00	8.79	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

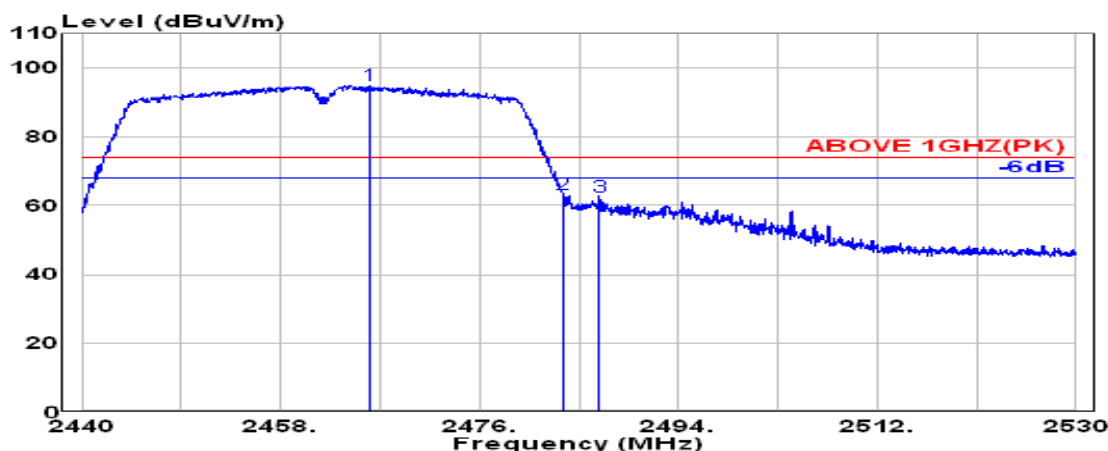

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.050	28.36	5.81	39.92	100.92	95.17	---	---	Peak
2483.500	28.43	5.83	39.92	69.17	63.51	74.00	10.49	Peak
2486.800	28.45	5.83	39.92	68.57	62.93	74.00	11.07	Peak

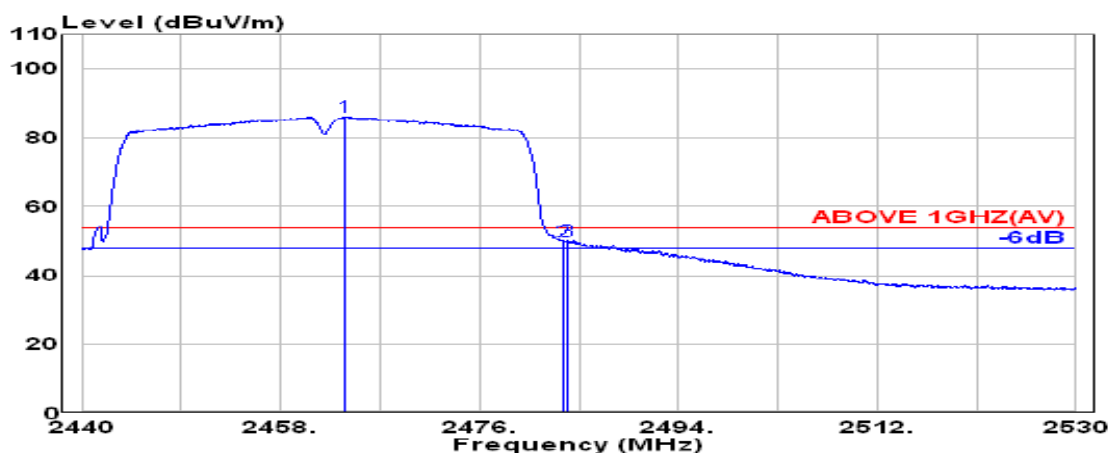

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.800	28.36	5.80	39.92	92.00	86.24	---	---	Average
2483.500	28.43	5.83	39.92	55.62	49.96	54.00	4.04	Average
2483.950	28.44	5.83	39.92	55.79	50.14	54.00	3.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

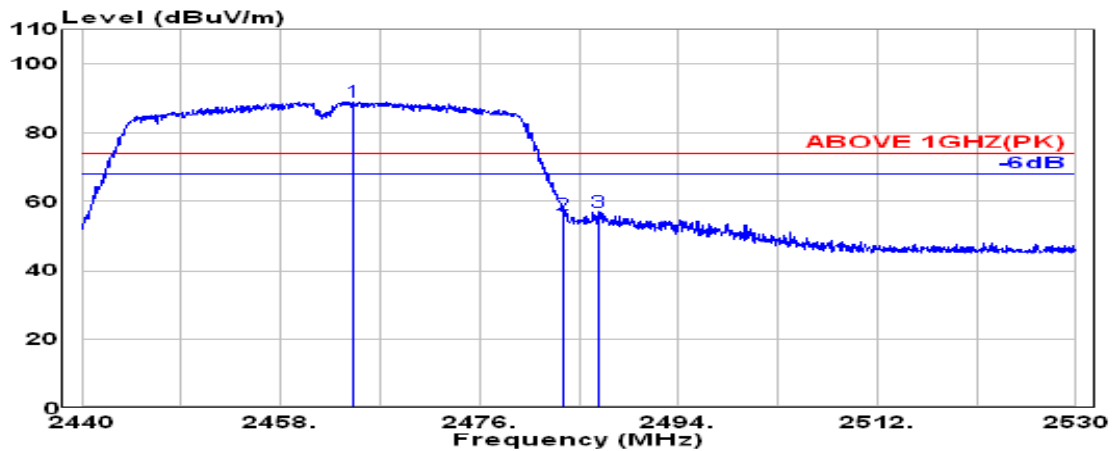

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2464.550	28.36	5.80	39.92	94.98	89.22	---	---	Peak
	2483.500	28.43	5.83	39.92	62.23	56.58	74.00	17.42	Peak
	2486.700	28.45	5.83	39.92	62.75	57.11	74.00	16.89	Peak

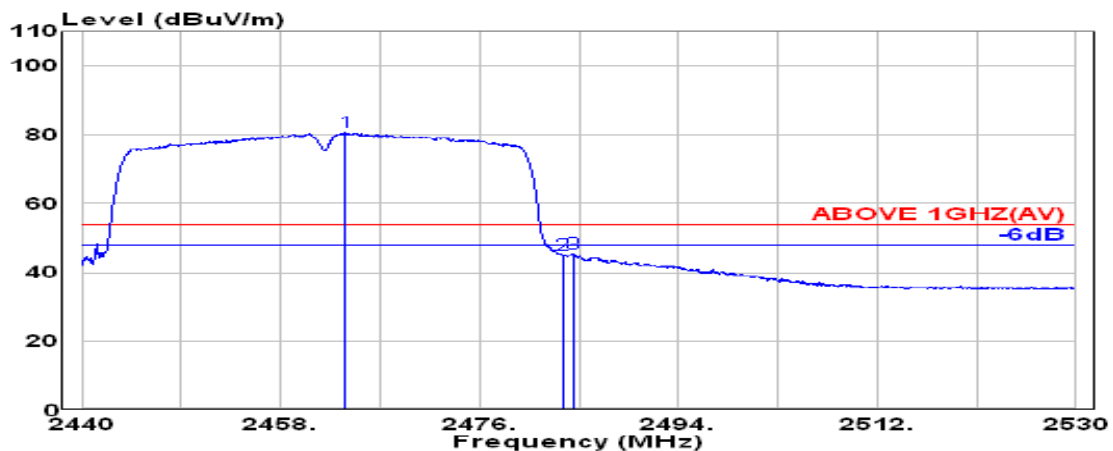

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2463.850	28.36	5.80	39.92	86.44	80.68	---	---	Average
	2483.500	28.43	5.83	39.92	50.88	45.22	54.00	8.78	Average
	2484.450	28.44	5.83	39.92	51.32	45.66	54.00	8.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

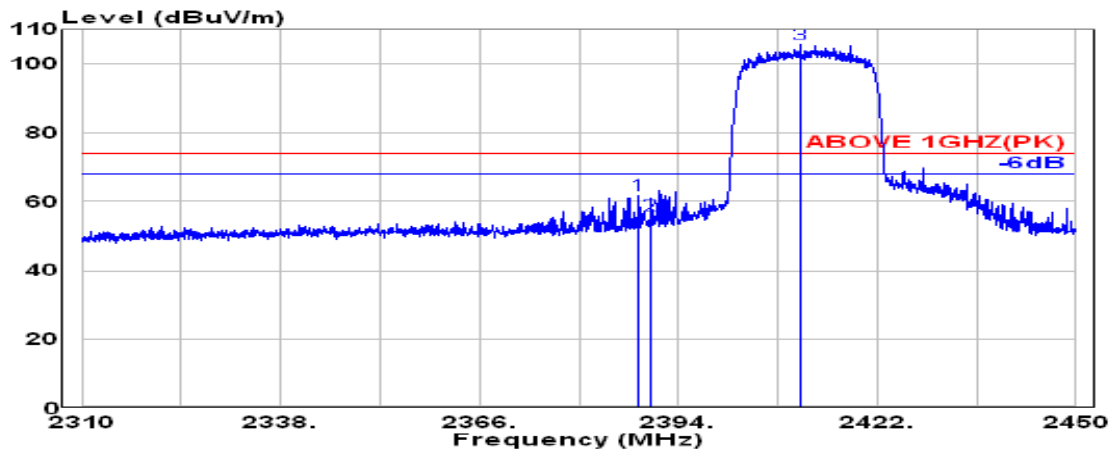

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.300	28.20	5.70	39.92	67.89	61.87	74.00	12.13	Peak
2390.000	28.20	5.70	39.92	62.26	56.24	74.00	17.76	Peak
@ 2411.100	28.22	5.73	39.92	111.67	105.71	---	---	Peak

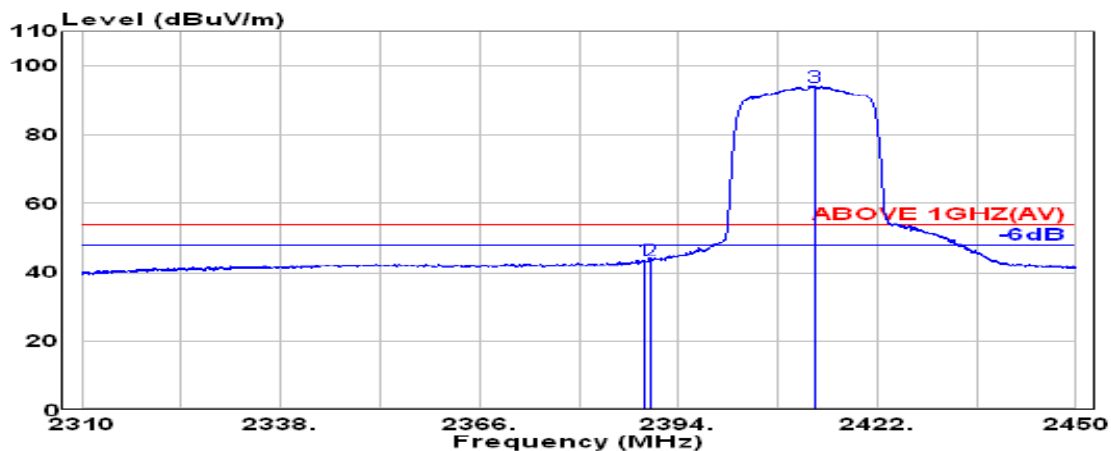

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.100	28.20	5.70	39.92	49.64	43.62	54.00	10.38	Average
2390.000	28.20	5.70	39.92	49.63	43.61	54.00	10.39	Average
@ 2413.150	28.23	5.73	39.92	100.00	94.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

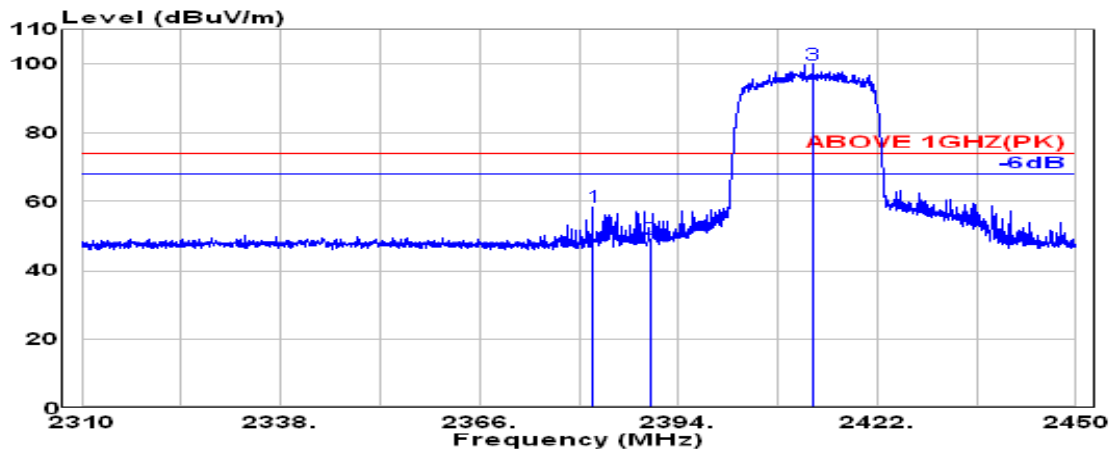

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2381.900	28.20	5.69	39.92	64.42	58.39	74.00	15.61	Peak
2390.000	28.20	5.70	39.92	55.27	49.25	74.00	24.75	Peak
@ 2412.850	28.23	5.73	39.92	106.15	100.19	---	---	Peak

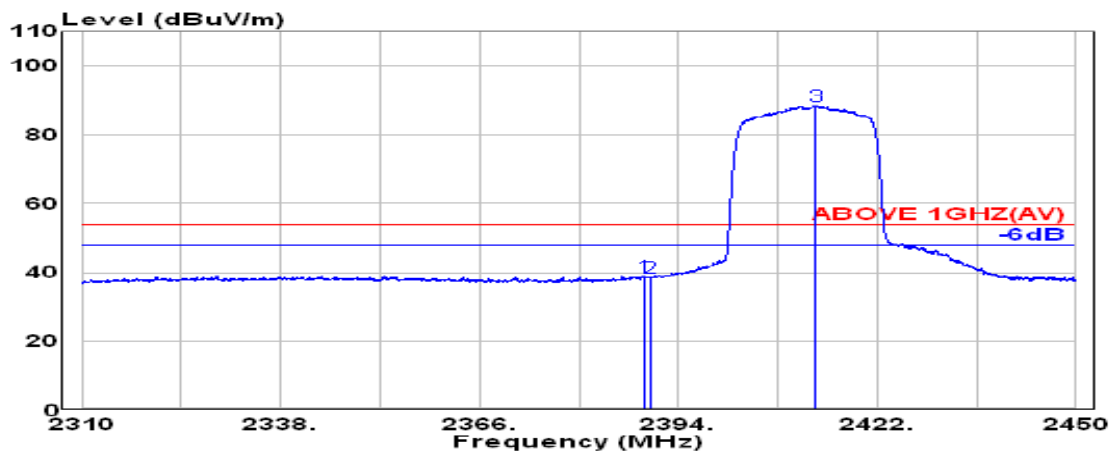

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.20	5.70	39.92	44.99	38.97	54.00	15.03	Average
2390.000	28.20	5.70	39.92	44.67	38.66	54.00	15.34	Average
@ 2413.350	28.23	5.73	39.92	94.35	88.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

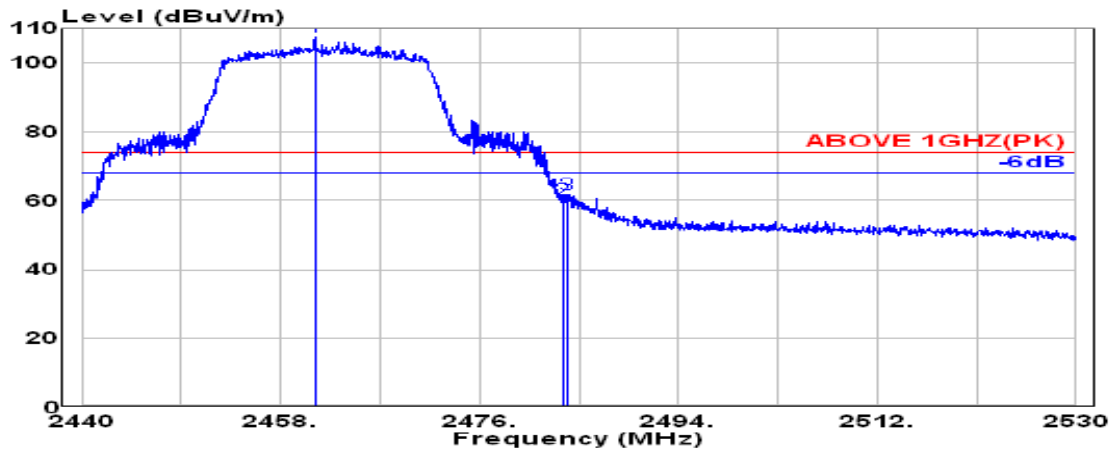

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.100	28.34	5.80	39.92	113.59	107.81	---	---	Peak
2483.500	28.43	5.83	39.92	66.04	60.39	74.00	13.61	Peak
2483.950	28.44	5.83	39.92	67.60	61.95	74.00	12.05	Peak

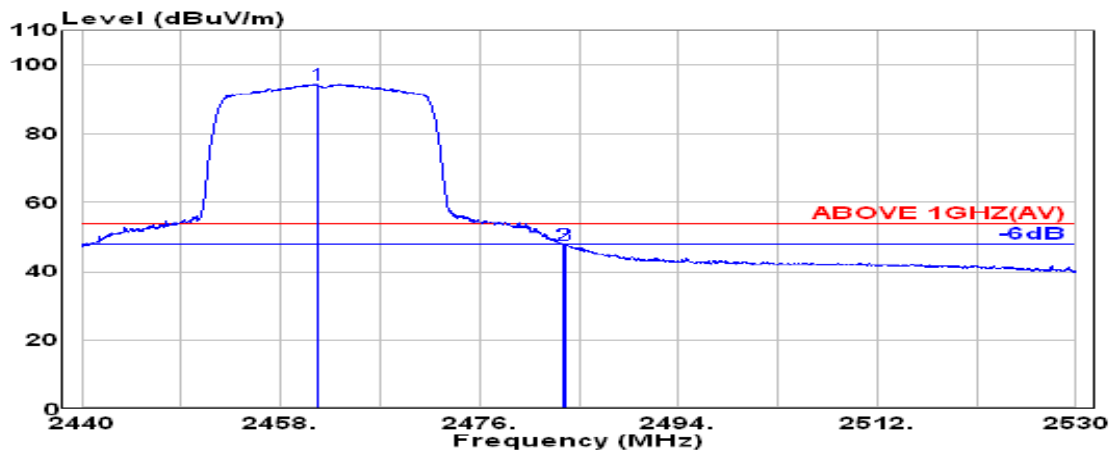


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.300	28.35	5.80	39.92	100.21	94.43	---	---	Average
2483.500	28.43	5.83	39.92	53.60	47.95	54.00	6.05	Average
2483.700	28.44	5.83	39.92	53.42	47.76	54.00	6.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

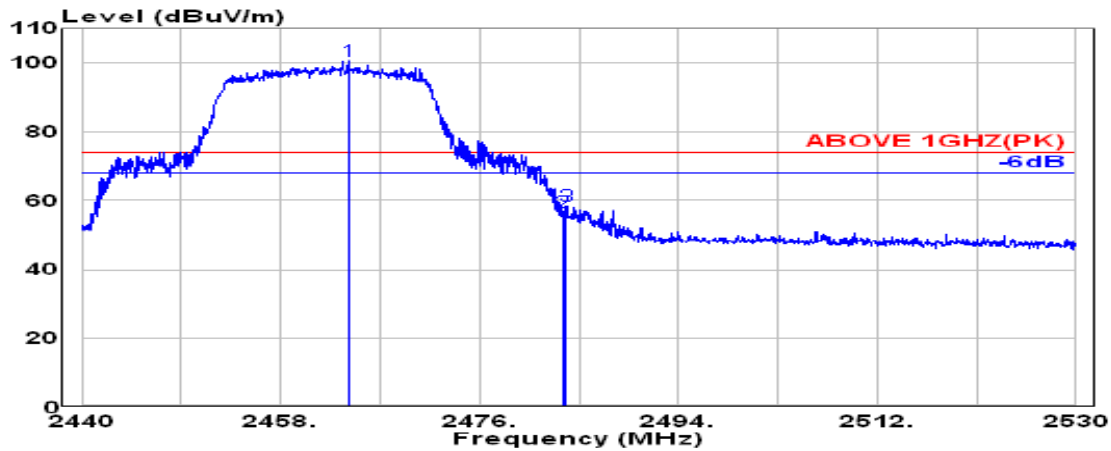

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.150	28.36	5.80	39.92	106.50	100.74	---	---	Peak
2483.500	28.43	5.83	39.92	62.61	56.95	74.00	17.05	Peak
2483.850	28.44	5.83	39.92	64.28	58.62	74.00	15.38	Peak

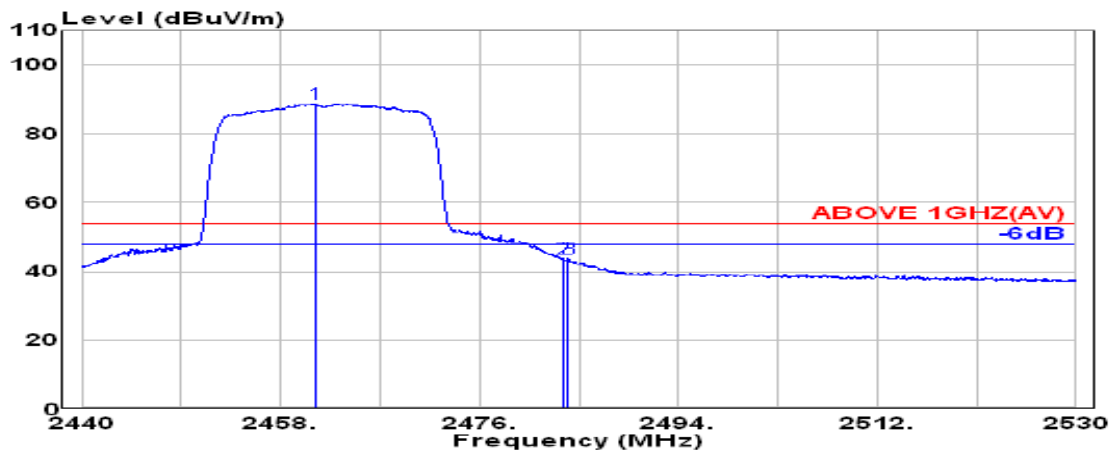

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.150	28.34	5.80	39.92	94.54	88.76	---	---	Average
2483.500	28.43	5.83	39.92	49.55	43.89	54.00	10.11	Average
2484.050	28.44	5.83	39.92	49.44	43.78	54.00	10.22	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

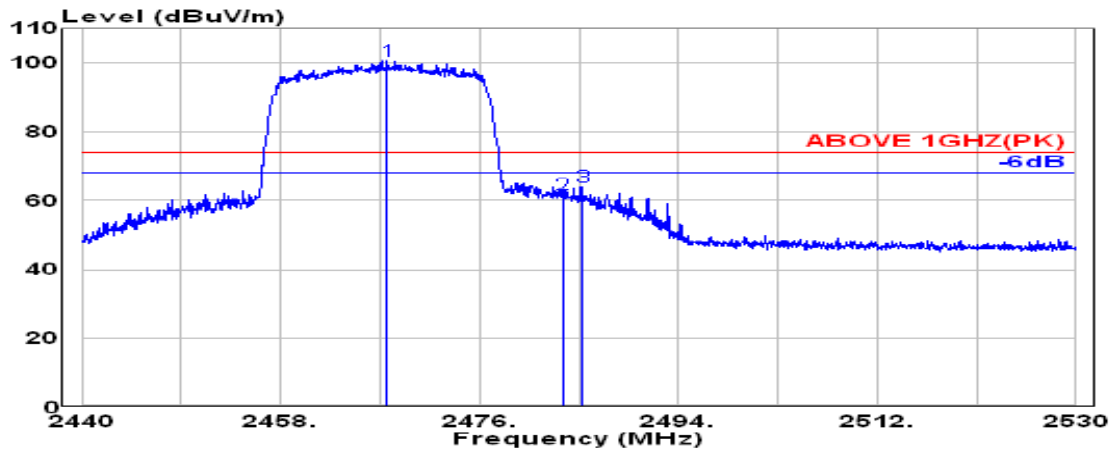

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.600	28.37	5.81	39.92	106.54	100.80	---	---	Peak
2483.500	28.43	5.83	39.92	67.59	61.93	74.00	12.07	Peak
2485.300	28.44	5.83	39.92	69.91	64.26	74.00	9.74	Peak

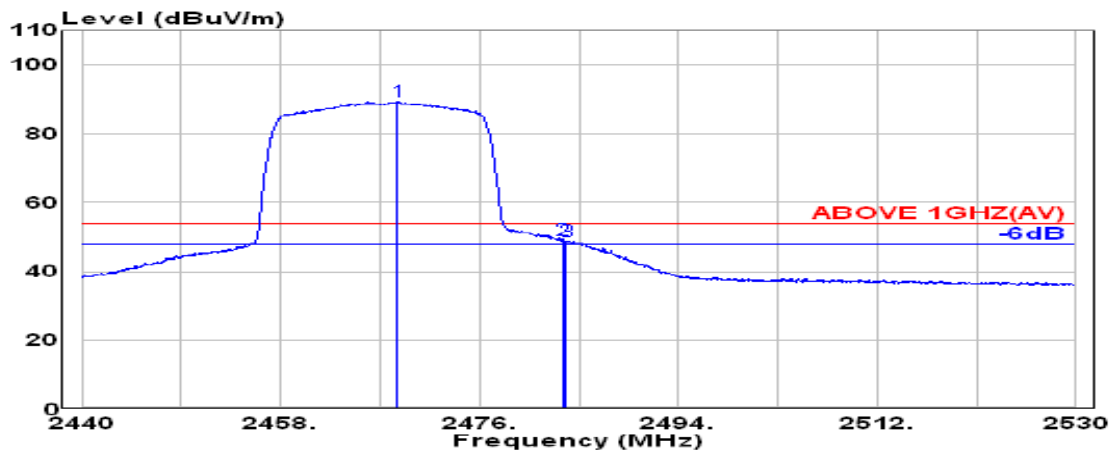

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.600	28.37	5.81	39.92	95.08	89.34	---	---	Average
2483.500	28.43	5.83	39.92	54.88	49.22	54.00	4.78	Average
2483.800	28.44	5.83	39.92	54.68	49.03	54.00	4.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

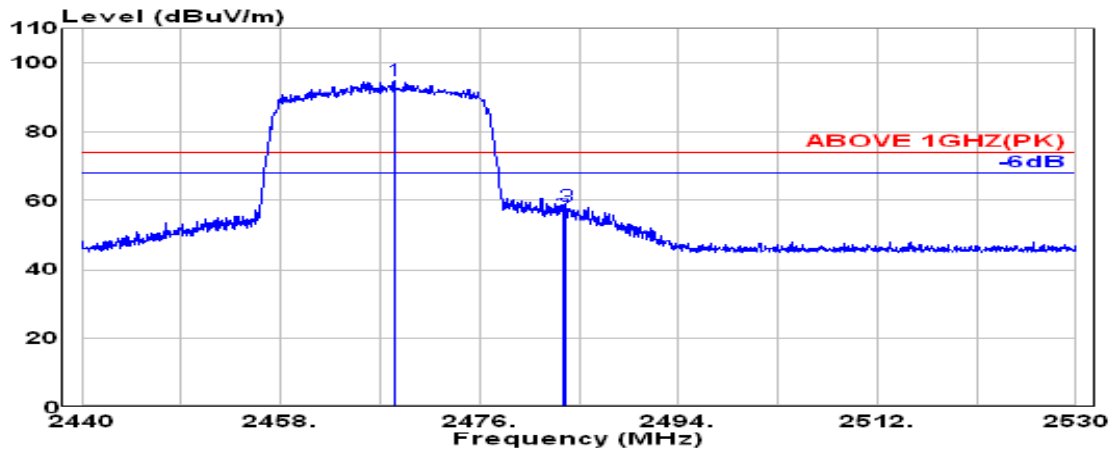

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.250	28.37	5.81	39.92	100.77	95.03	---	---	Peak
2483.500	28.43	5.83	39.92	62.00	56.34	74.00	17.66	Peak
2483.850	28.44	5.83	39.92	64.06	58.40	74.00	15.60	Peak

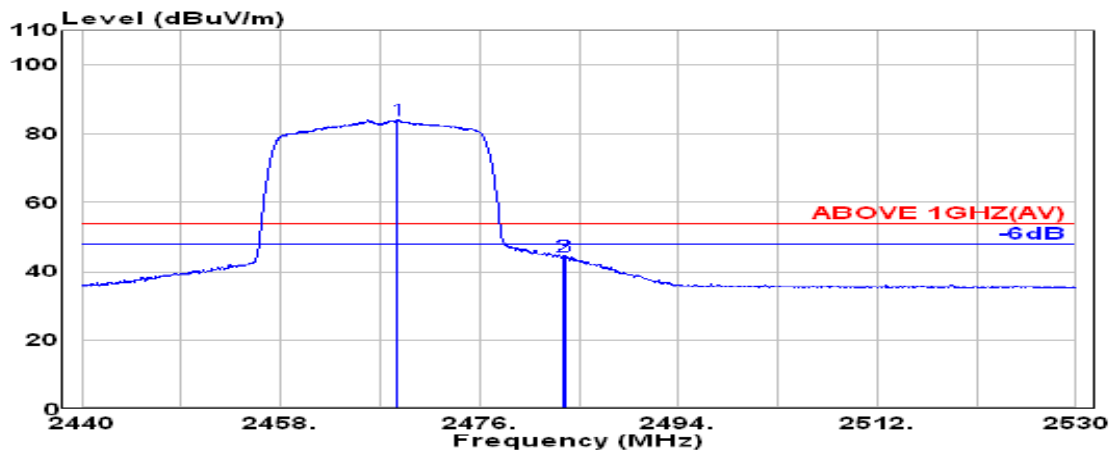

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.550	28.37	5.81	39.92	89.82	84.09	---	---	Average
2483.500	28.43	5.83	39.92	50.10	44.44	54.00	9.56	Average
2483.700	28.44	5.83	39.92	50.20	44.55	54.00	9.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

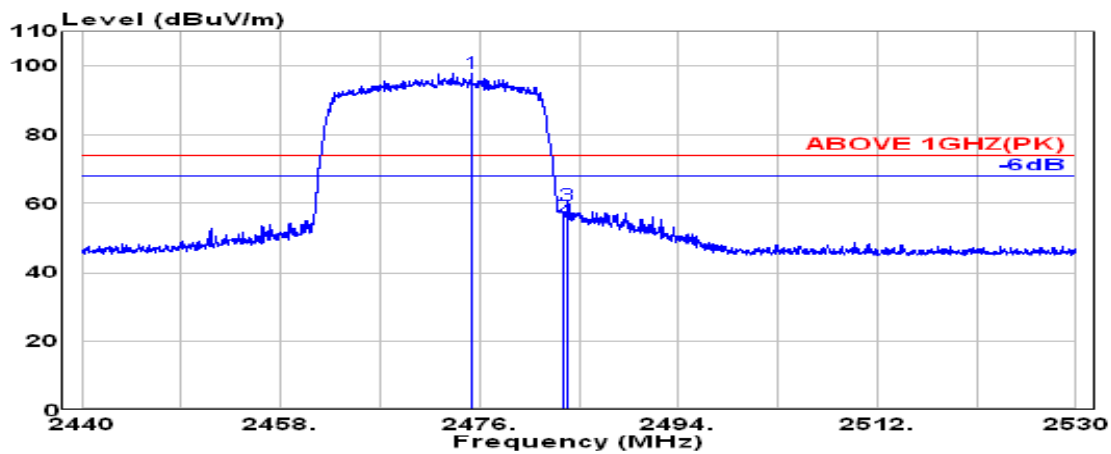

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.250	28.40	5.82	39.92	103.89	98.19	---	---	Peak
2483.500	28.43	5.83	39.92	62.13	56.47	74.00	17.53	Peak
2483.950	28.44	5.83	39.92	65.55	59.90	74.00	14.10	Peak

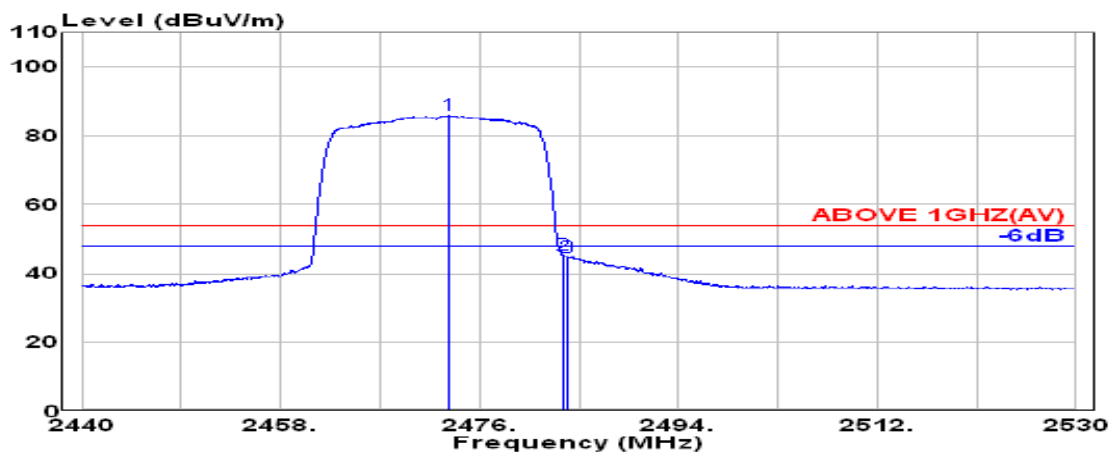

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.200	28.39	5.81	39.92	91.76	86.05	---	---	Average
2483.500	28.43	5.83	39.92	51.17	45.51	54.00	8.49	Average
2483.900	28.44	5.83	39.92	50.68	45.02	54.00	8.98	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------



Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.650	28.39	5.81	39.92	98.48	92.77	---	---	Peak
2483.500	28.43	5.83	39.92	59.23	53.57	74.00	20.43	Peak
2483.950	28.44	5.83	39.92	60.11	54.45	74.00	19.55	Peak

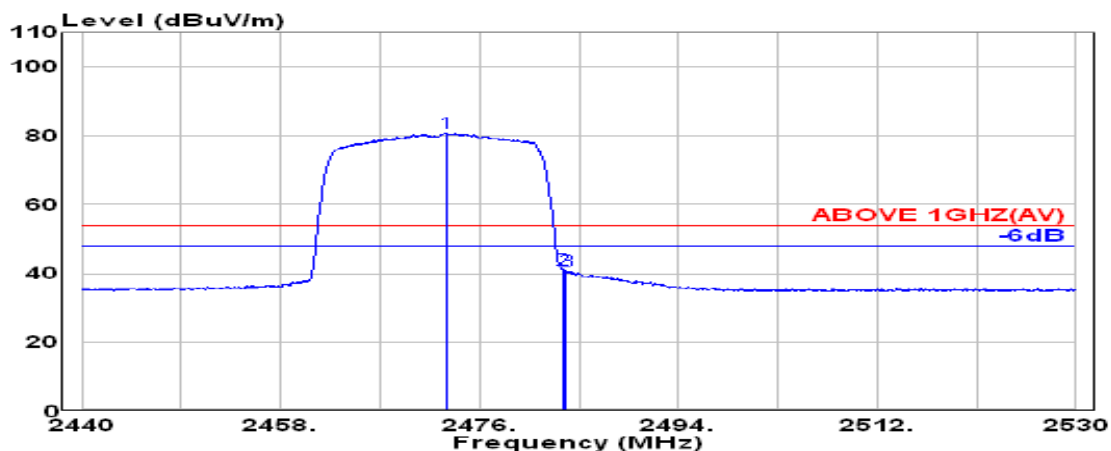

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.000	28.39	5.81	39.92	86.52	80.81	---	---	Average
2483.500	28.43	5.83	39.92	46.87	41.21	54.00	12.79	Average
2483.800	28.44	5.83	39.92	46.41	40.75	54.00	13.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

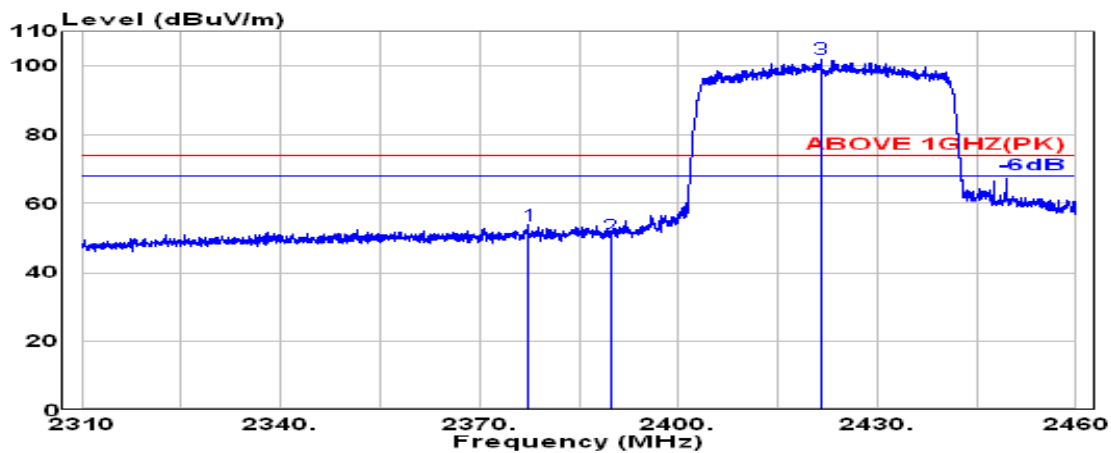

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.350	28.20	5.69	39.92	59.80	53.77	74.00	20.23	Peak
2389.800	28.20	5.70	39.92	56.92	50.91	74.00	23.09	Peak
@ 2421.450	28.24	5.75	39.92	107.99	102.06	---	---	Peak

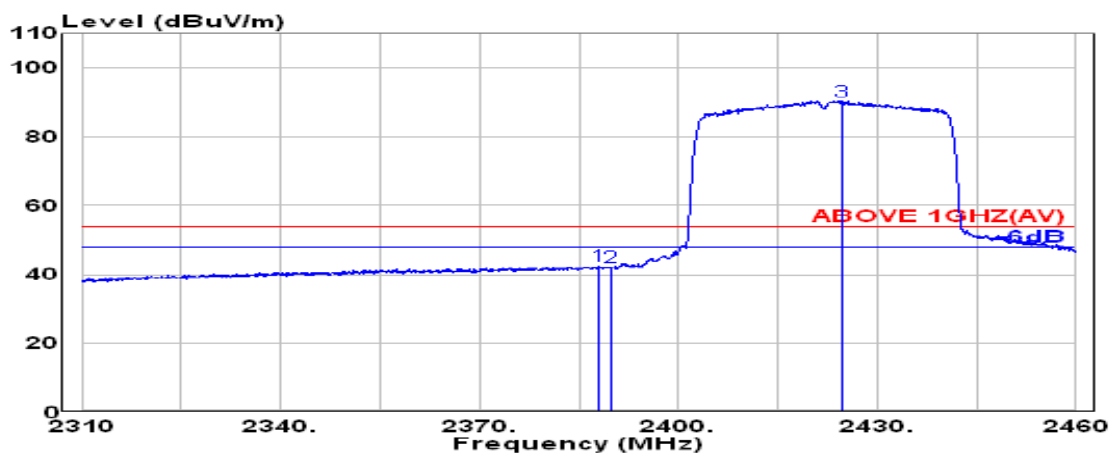

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.20	5.70	39.92	48.56	42.55	54.00	11.45	Average
2389.800	28.20	5.70	39.92	48.31	42.29	54.00	11.71	Average
@ 2424.600	28.25	5.75	39.92	96.41	90.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

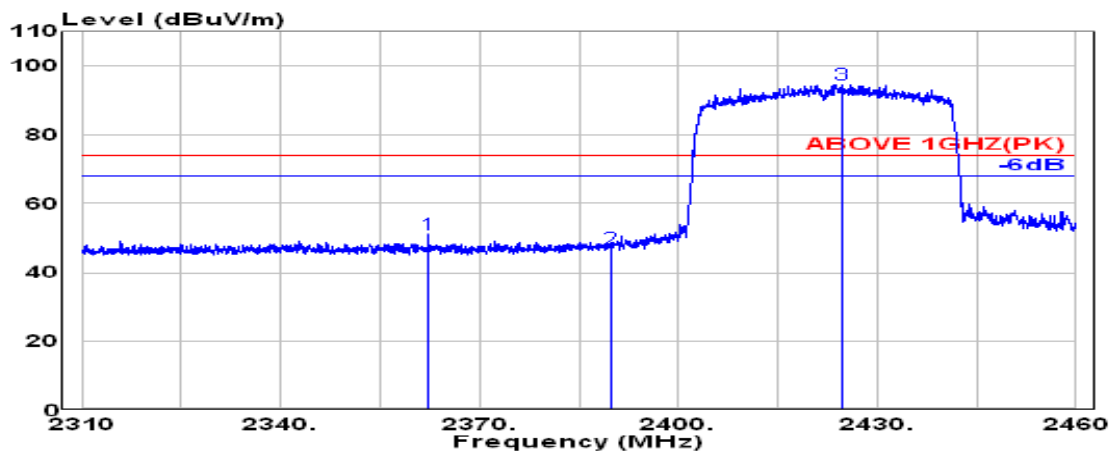

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2362.200	28.20	5.66	39.92	57.11	51.06	74.00	22.94	Peak
2389.800	28.20	5.70	39.92	53.10	47.09	74.00	26.91	Peak
@ 2424.550	28.25	5.75	39.92	100.57	94.65	---	---	Peak

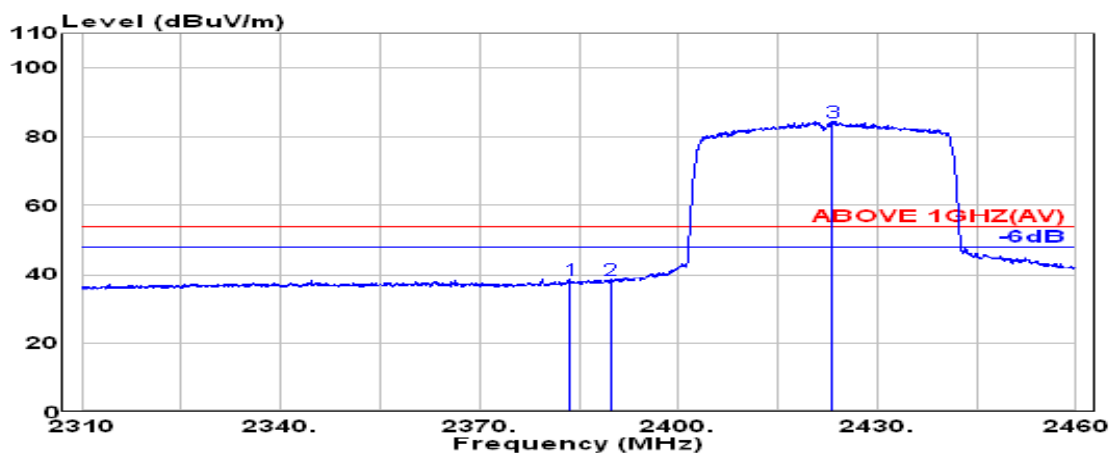


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.600	28.20	5.69	39.92	44.48	38.45	54.00	15.55	Average
2389.800	28.20	5.70	39.92	44.42	38.41	54.00	15.59	Average
@ 2423.150	28.25	5.75	39.92	90.45	84.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

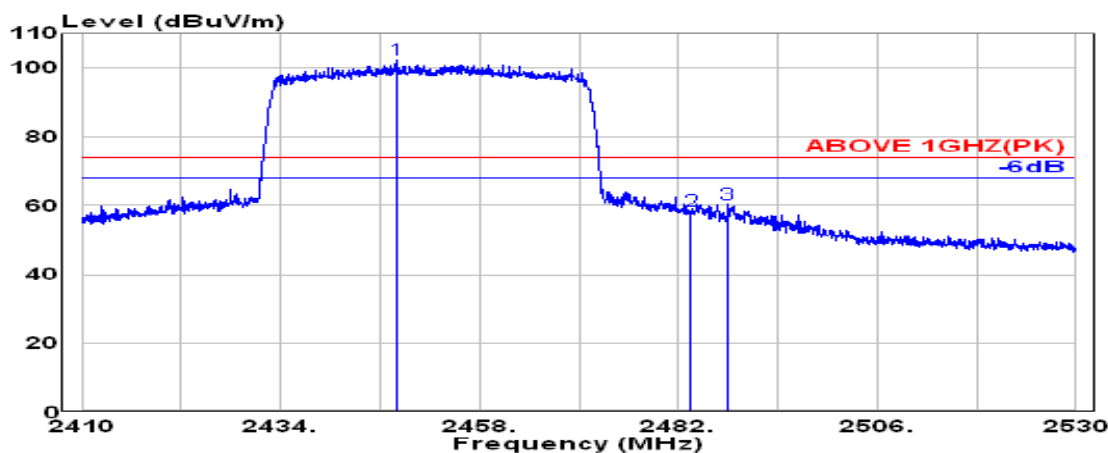

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2447.900	28.30	5.78	39.92	108.35	102.51	---	---	Peak
2483.500	28.43	5.83	39.92	64.15	58.49	74.00	15.51	Peak
2487.900	28.45	5.83	39.92	66.24	60.61	74.00	13.39	Peak

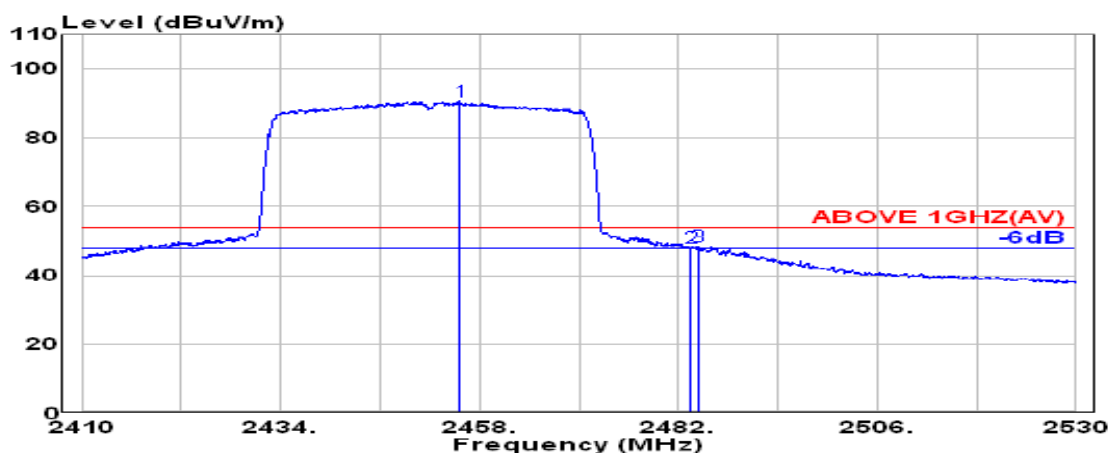

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.550	28.32	5.79	39.92	96.61	90.80	---	---	Average
2483.500	28.43	5.83	39.92	53.85	48.19	54.00	5.81	Average
2484.350	28.44	5.83	39.92	54.30	48.65	54.00	5.35	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

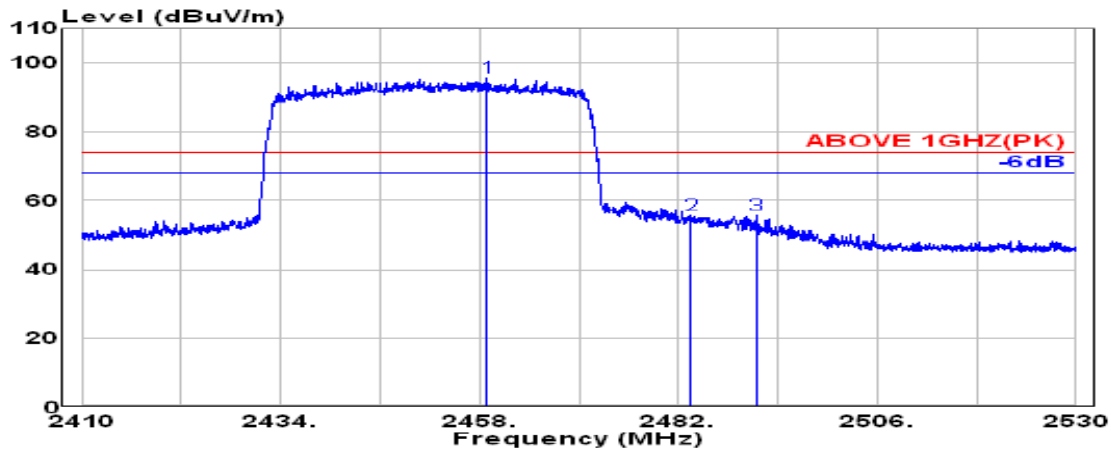

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.850	28.34	5.80	39.92	101.60	95.81	---	---	Peak
2483.500	28.43	5.83	39.92	61.39	55.73	74.00	18.27	Peak
2491.400	28.47	5.84	39.92	61.36	55.75	74.00	18.25	Peak

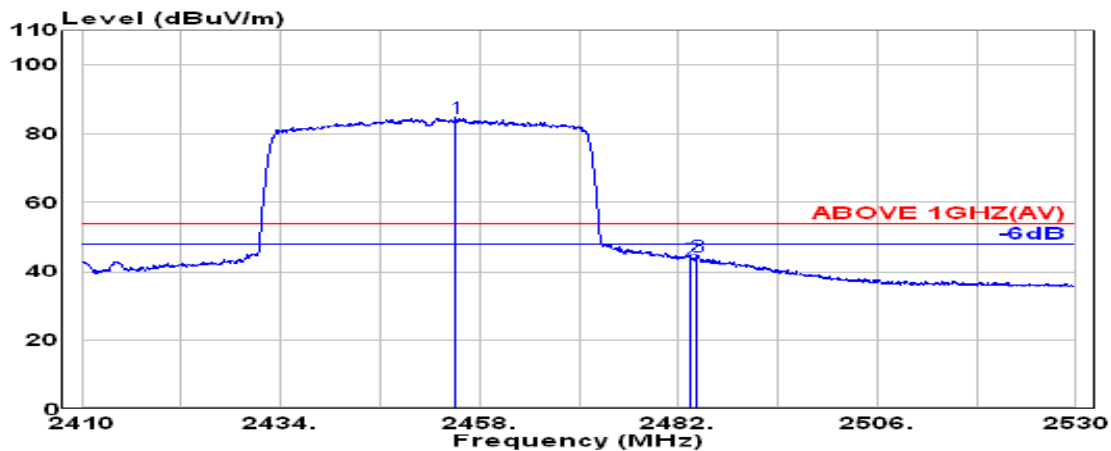


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2455.050	28.32	5.79	39.92	90.52	84.71	---	---	Average
2483.500	28.43	5.83	39.92	49.52	43.86	54.00	10.14	Average
2484.250	28.44	5.83	39.92	50.11	44.46	54.00	9.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

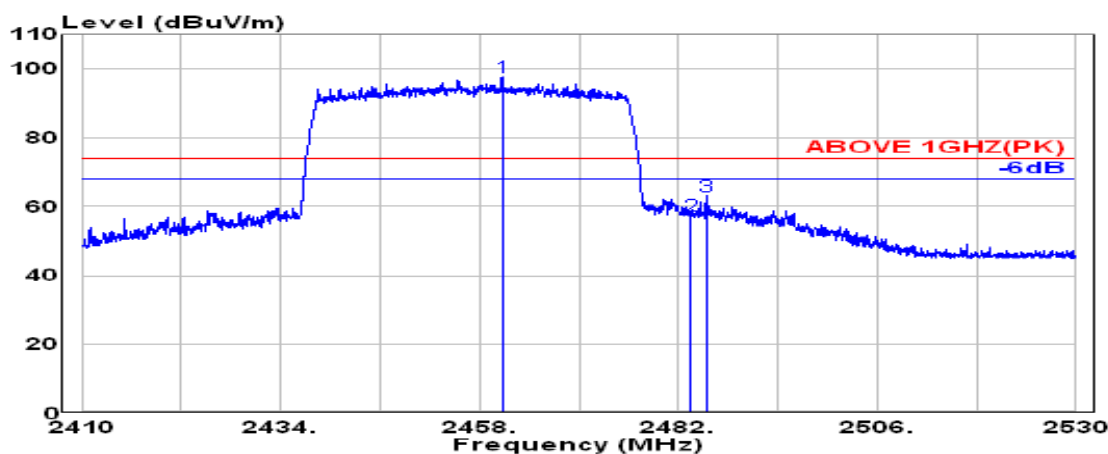

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2460.700	28.34	5.80	39.92	103.52	97.74	---	---	Peak
	2483.500	28.43	5.83	39.92	63.17	57.52	74.00	16.48	Peak
	2485.350	28.44	5.83	39.92	68.67	63.03	74.00	10.97	Peak

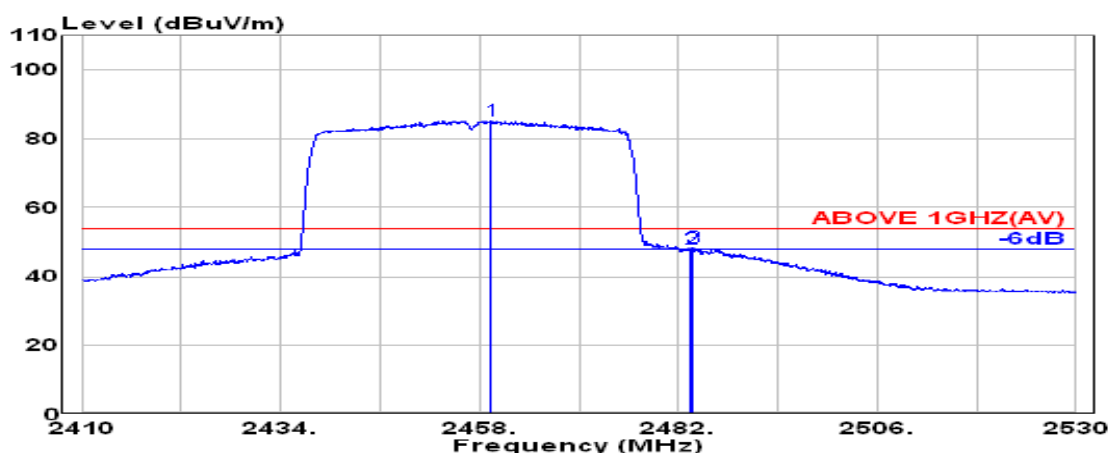

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2459.350	28.34	5.80	39.92	91.18	85.40	---	---	Average
	2483.500	28.43	5.83	39.92	53.78	48.12	54.00	5.88	Average
	2483.750	28.44	5.83	39.92	54.07	48.41	54.00	5.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

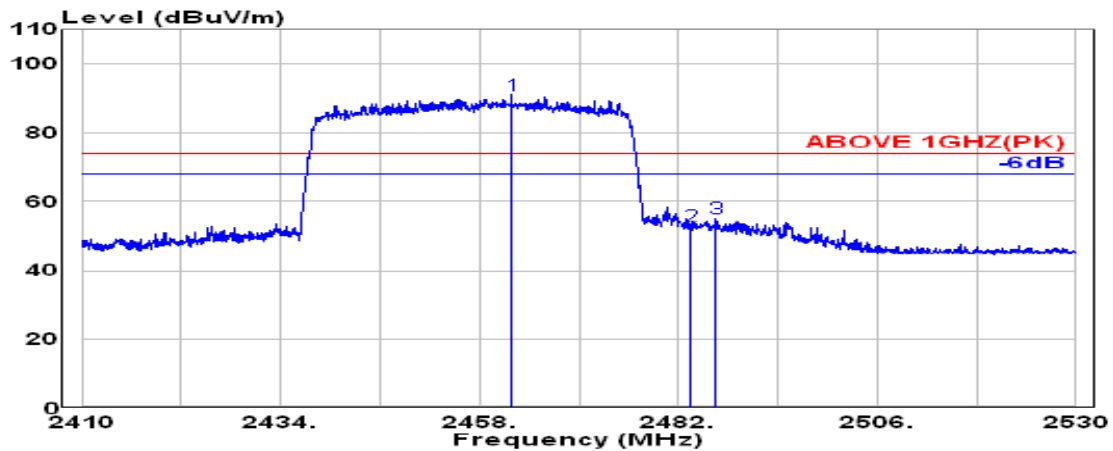

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2461.900	28.35	5.80	39.92	96.91	91.13	---	---	Peak
	2483.500	28.43	5.83	39.92	58.90	53.25	74.00	20.75	Peak
	2486.550	28.45	5.83	39.92	60.87	55.23	74.00	18.77	Peak

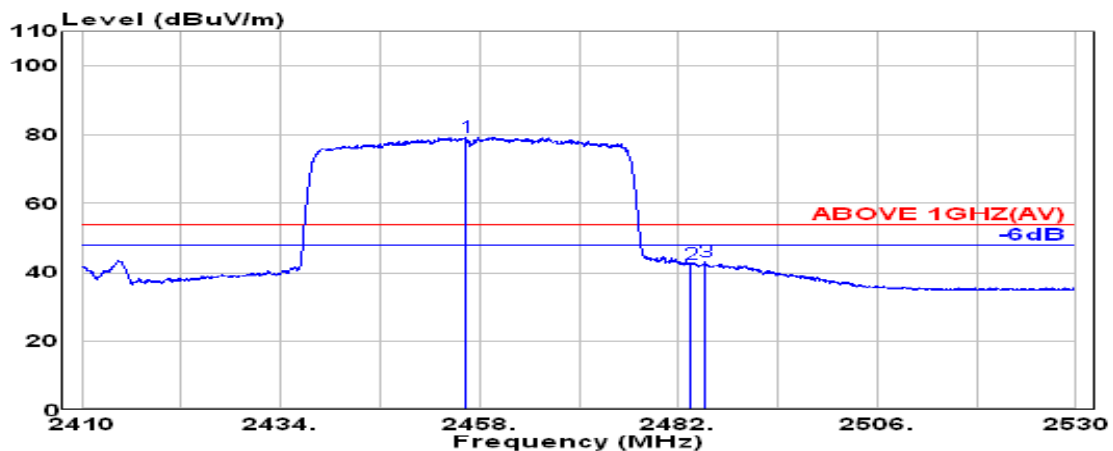

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2456.400	28.33	5.79	39.92	85.29	79.49	---	---	Average
	2483.500	28.43	5.83	39.92	48.20	42.54	54.00	11.46	Average
	2485.200	28.44	5.83	39.92	48.76	43.11	54.00	10.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

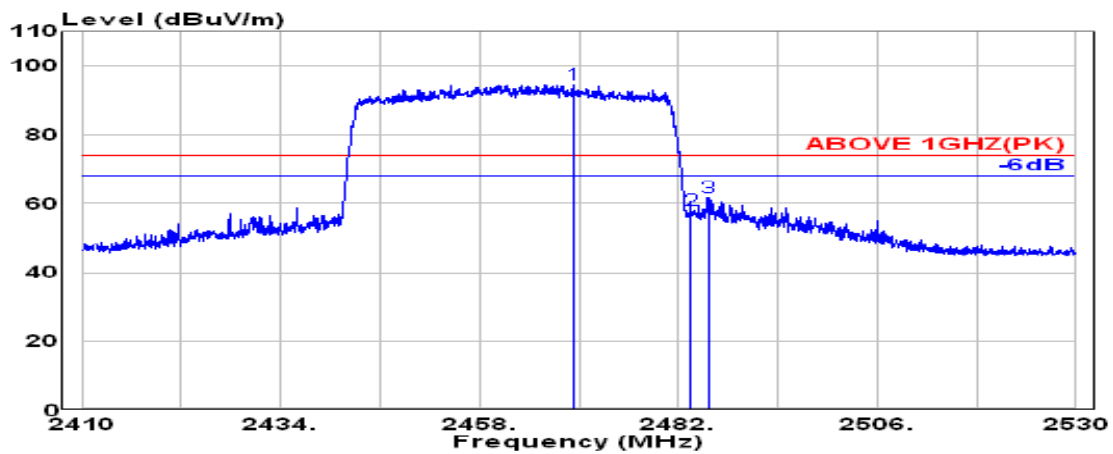

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.350	28.38	5.81	39.92	100.39	94.66	---	---	Peak
2483.500	28.43	5.83	39.92	63.94	58.29	74.00	15.71	Peak
2485.650	28.44	5.83	39.92	67.51	61.87	74.00	12.13	Peak

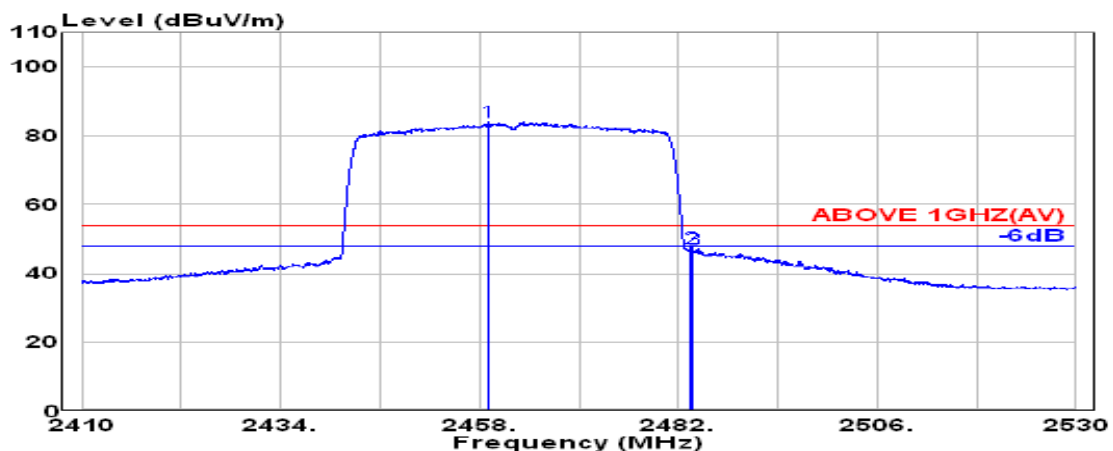

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.050	28.34	5.80	39.92	89.85	84.06	---	---	Average
2483.500	28.43	5.83	39.92	53.26	47.60	54.00	6.40	Average
2483.700	28.44	5.83	39.92	52.81	47.15	54.00	6.85	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

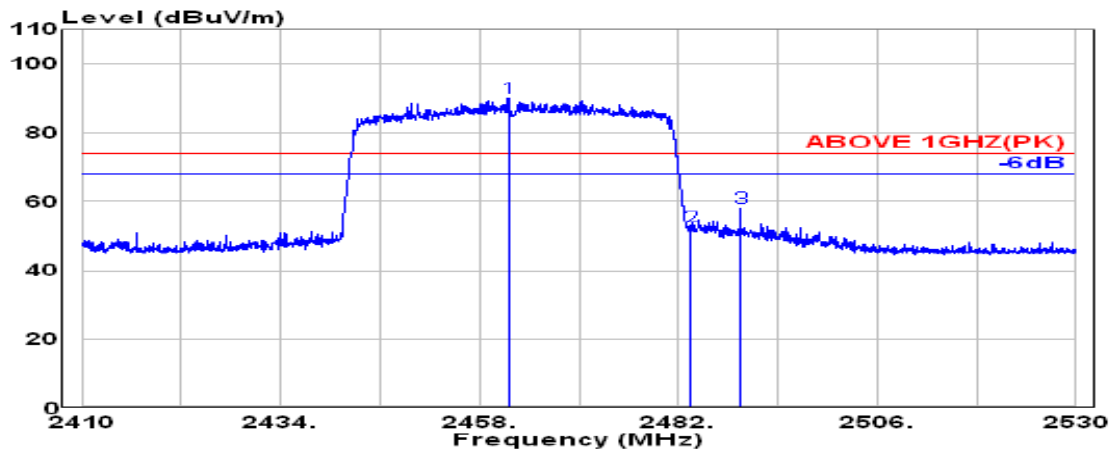

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2461.500	28.35	5.80	39.92	95.73	89.95	---	---	Peak
	2483.500	28.43	5.83	39.92	58.62	52.96	74.00	21.04	Peak
	2489.450	28.46	5.84	39.92	63.90	58.28	74.00	15.72	Peak

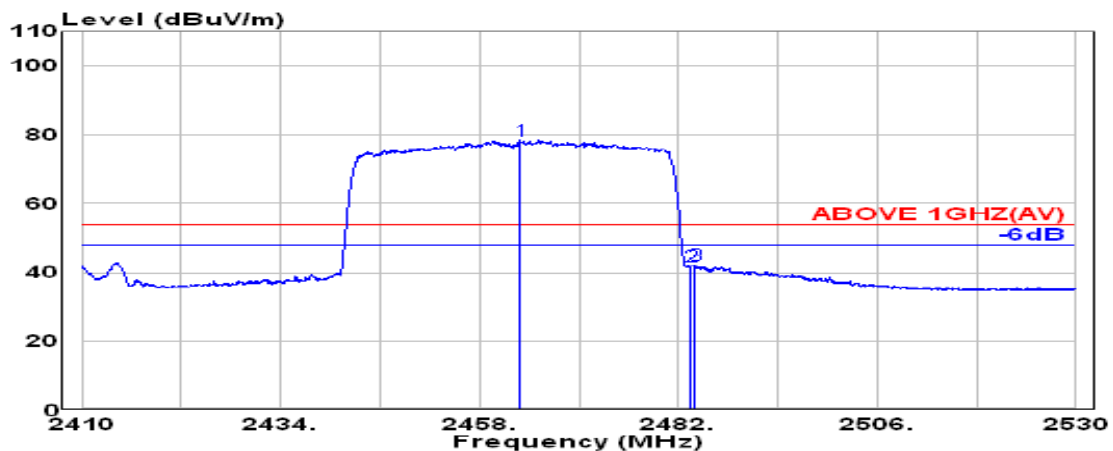

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2462.850	28.35	5.80	39.92	84.26	78.50	---	---	Average
	2483.500	28.43	5.83	39.92	47.56	41.90	54.00	12.10	Average
	2483.950	28.44	5.83	39.92	47.96	42.30	54.00	11.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

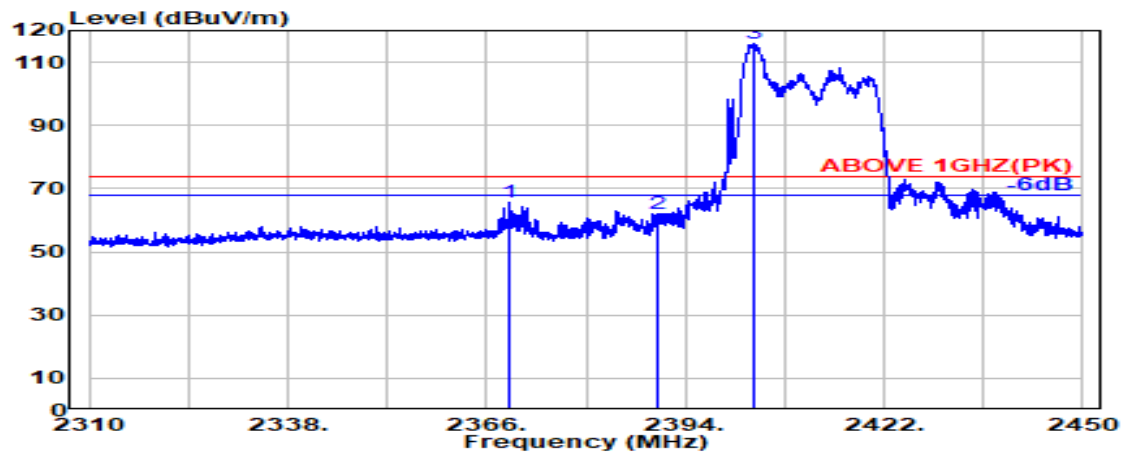

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2369.300	28.20	5.67	39.92	71.67	65.62	74.00	8.38	Peak
2390.000	28.20	5.70	39.92	67.91	61.89	74.00	12.11	Peak
@ 2403.600	28.21	5.72	39.92	121.73	115.74	---	---	Peak

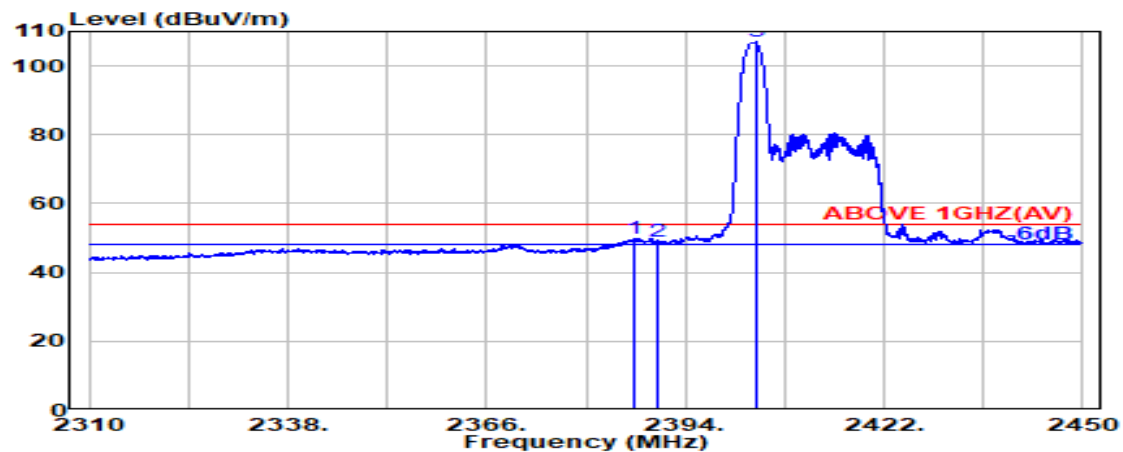

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.850	28.20	5.70	39.92	55.90	49.88	54.00	4.12	Average
2390.000	28.20	5.70	39.92	54.80	48.78	54.00	5.22	Average
@ 2404.050	28.21	5.72	39.92	113.16	107.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

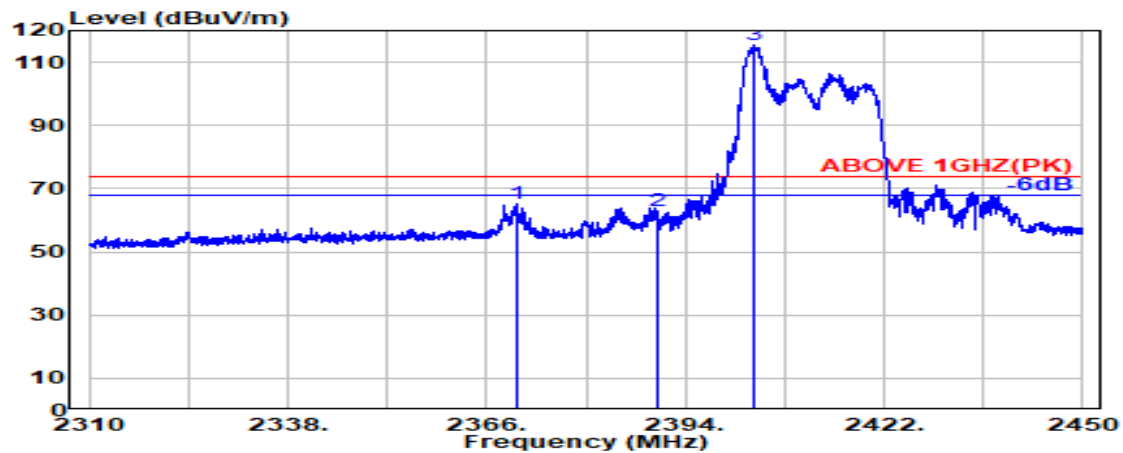

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.200	28.20	5.68	39.92	71.37	65.33	74.00	8.67	Peak
2390.000	28.20	5.70	39.92	68.85	62.84	74.00	11.16	Peak
@ 2403.750	28.21	5.72	39.92	121.49	115.50	---	---	Peak

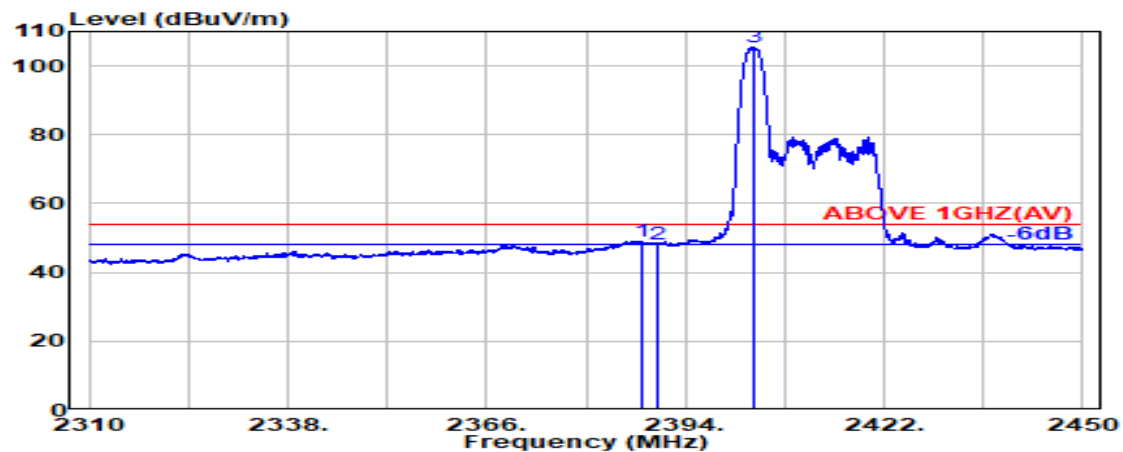

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.800	28.20	5.70	39.92	55.07	49.06	54.00	4.94	Average
2390.000	28.20	5.70	39.92	54.17	48.15	54.00	5.85	Average
@ 2403.600	28.21	5.72	39.92	111.47	105.48	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

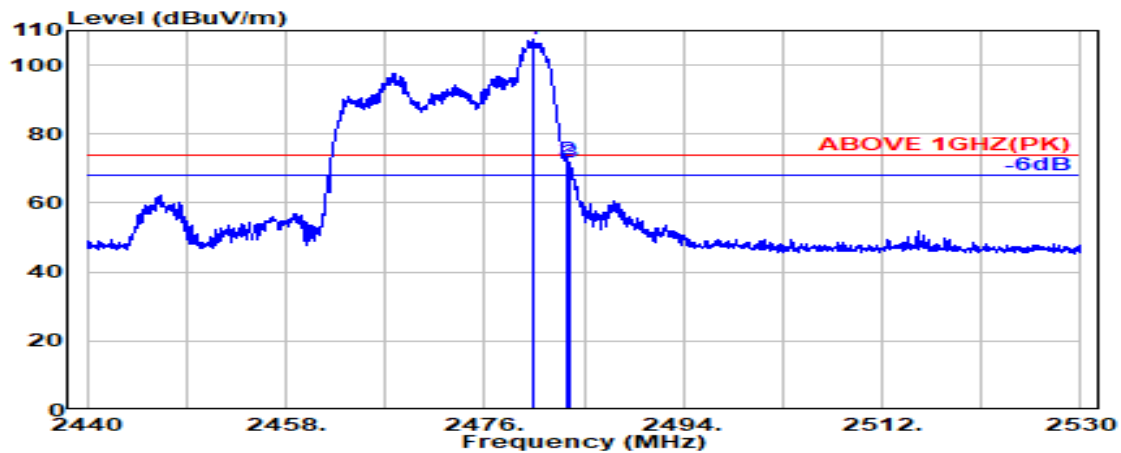

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.350	28.42	5.82	39.92	112.98	107.31	---	---	Peak
2483.500	28.43	5.83	39.92	78.14	72.48	74.00	1.52	Peak
2483.800	28.44	5.83	39.92	77.30	71.65	74.00	2.35	Peak

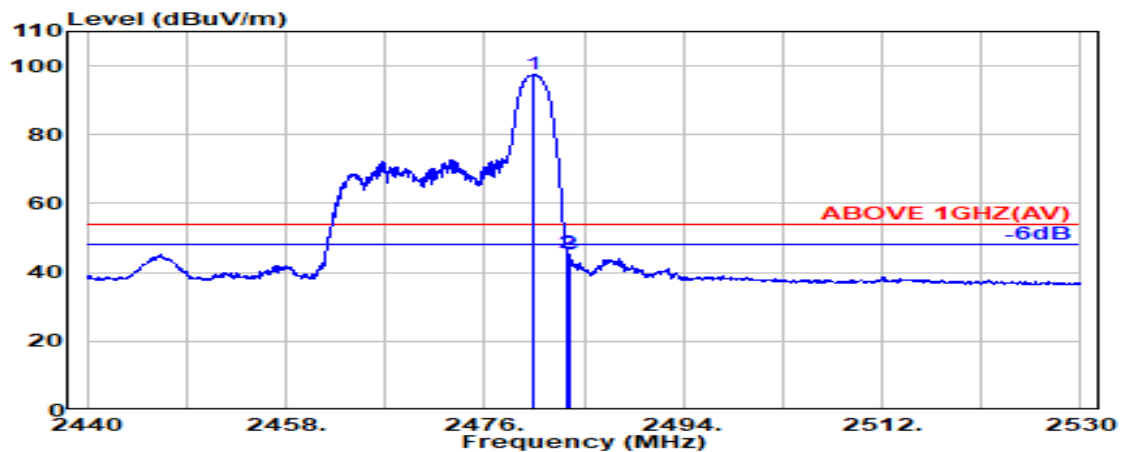

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	103.05	97.37	---	---	Average
2483.500	28.43	5.83	39.92	51.29	45.64	54.00	8.36	Average
2483.700	28.44	5.83	39.92	50.91	45.25	54.00	8.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

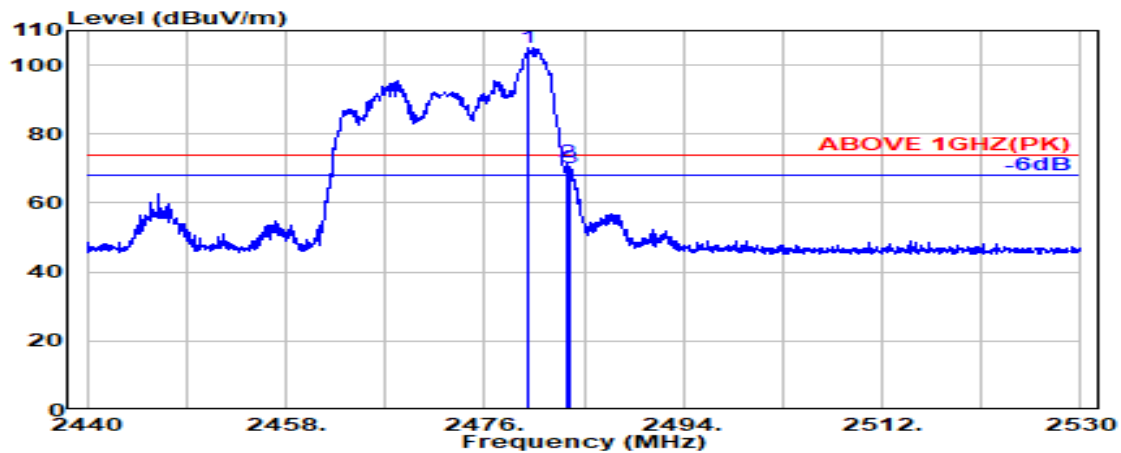

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.42	5.82	39.92	110.79	105.12	---	---	Peak
2483.500	28.43	5.83	39.92	77.32	71.66	74.00	2.34	Peak
2483.800	28.44	5.83	39.92	75.96	70.31	74.00	3.69	Peak

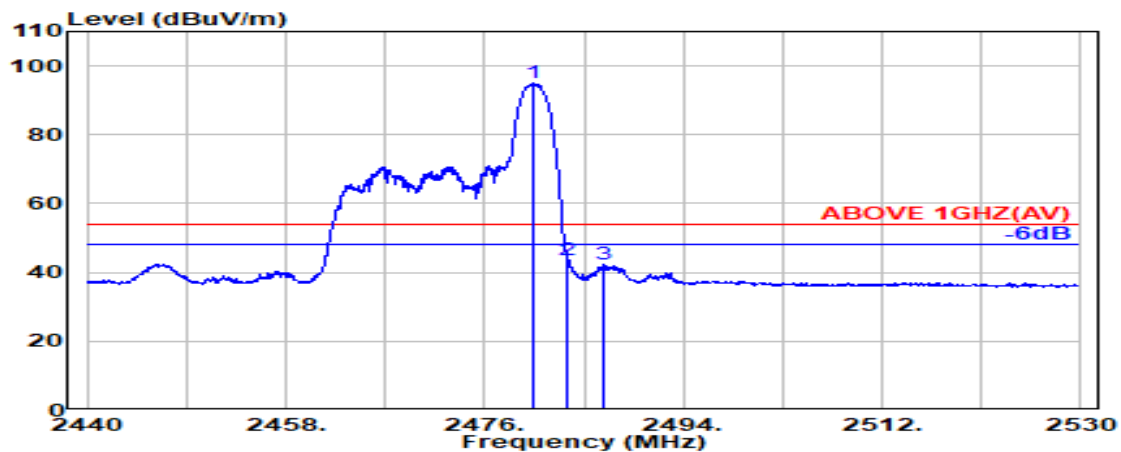

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.450	28.42	5.82	39.92	100.53	94.86	---	---	Average
2483.500	28.43	5.83	39.92	49.13	43.48	54.00	10.52	Average
2486.850	28.45	5.83	39.92	47.78	42.14	54.00	11.86	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

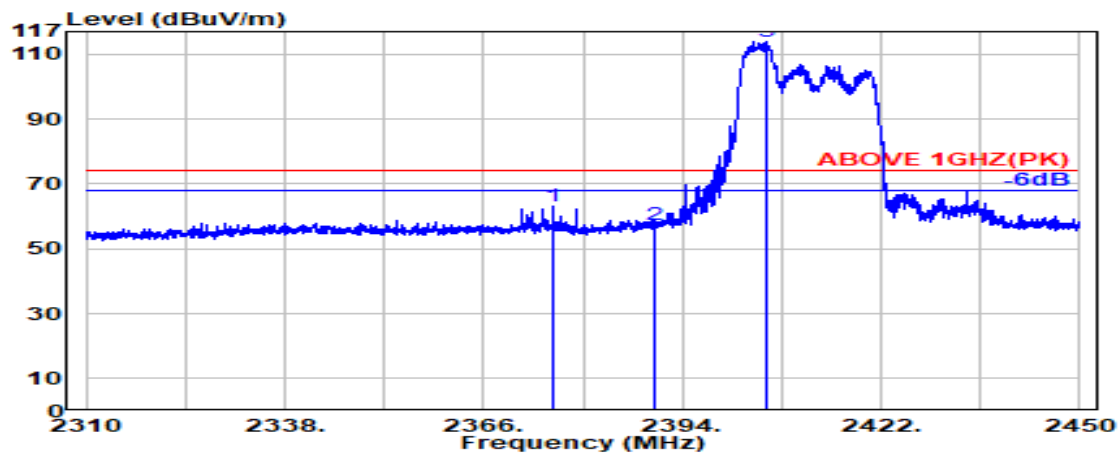

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2375.700	28.20	5.68	39.92	69.34	63.31	74.00	10.69	Peak
2390.000	28.20	5.70	39.92	63.29	57.28	74.00	16.72	Peak
@ 2405.750	28.21	5.72	39.92	119.77	113.79	---	---	Peak

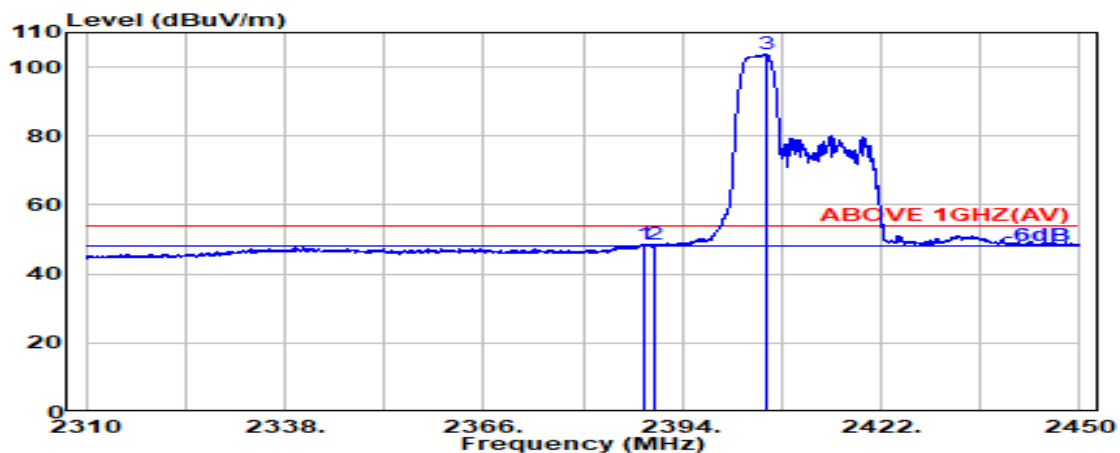

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.800	28.20	5.70	39.92	54.68	48.66	54.00	5.34	Average
2390.000	28.20	5.70	39.92	54.49	48.47	54.00	5.53	Average
@ 2405.750	28.21	5.72	39.92	109.80	103.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

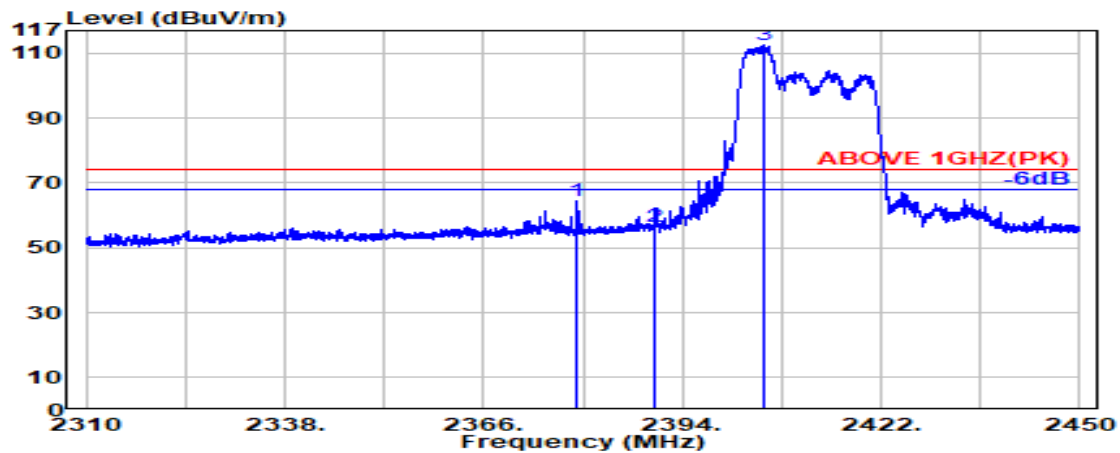

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2379.200	28.20	5.69	39.92	70.39	64.36	74.00	9.64	Peak
2390.000	28.20	5.70	39.92	62.57	56.56	74.00	17.44	Peak
@ 2405.650	28.21	5.72	39.92	118.70	112.72	---	---	Peak

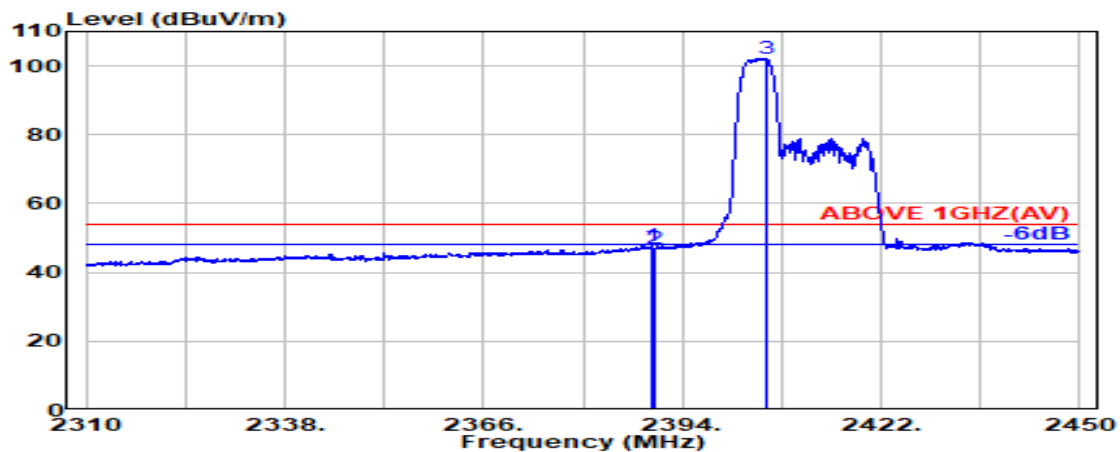

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.92	53.80	47.79	54.00	6.21	Average
2390.000	28.20	5.70	39.92	52.77	46.75	54.00	7.25	Average
@ 2405.950	28.21	5.72	39.92	108.29	102.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

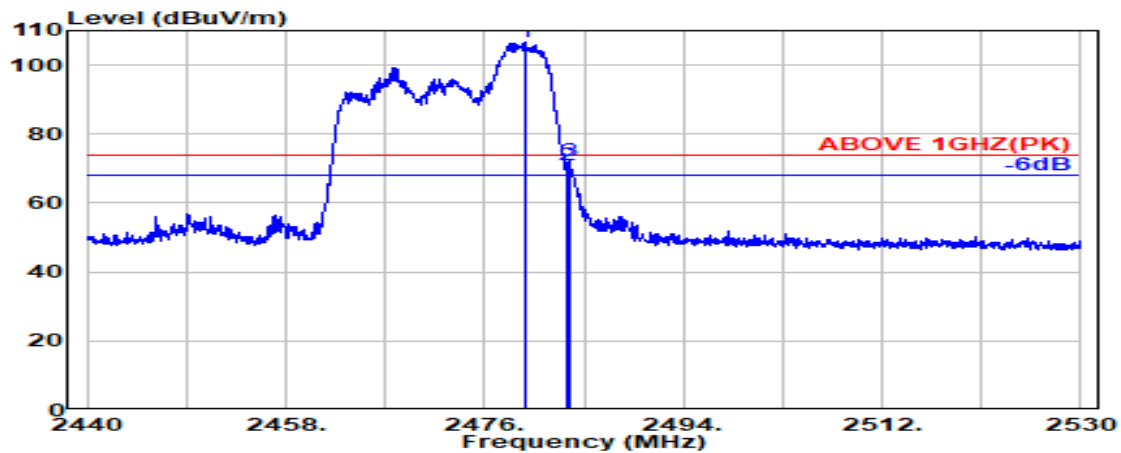

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.42	5.82	39.92	112.42	106.74	---	---	Peak
2483.500	28.43	5.83	39.92	76.65	70.99	74.00	3.01	Peak
2483.700	28.44	5.83	39.92	77.96	72.30	74.00	1.70	Peak

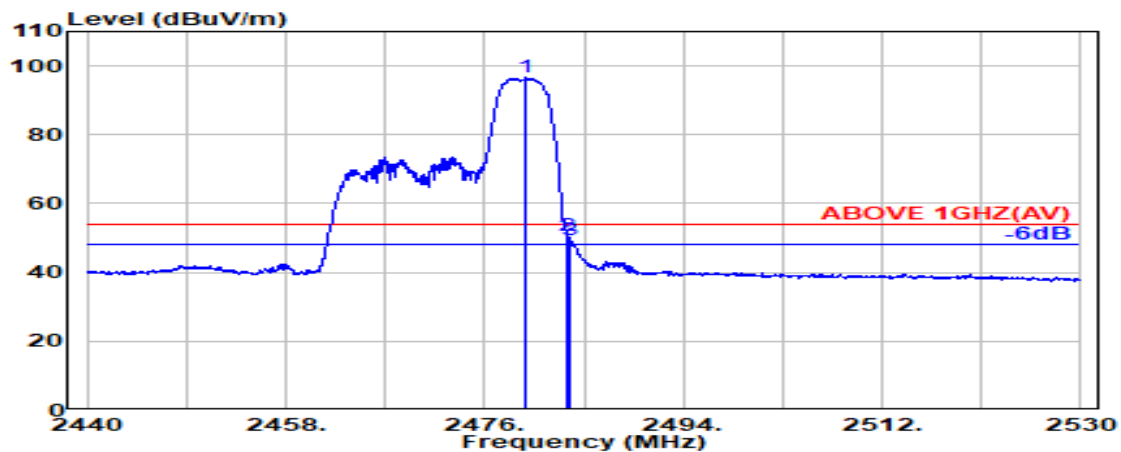

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.42	5.82	39.92	102.28	96.60	---	---	Average
2483.500	28.43	5.83	39.92	56.39	50.74	54.00	3.26	Average
2483.700	28.44	5.83	39.92	54.96	49.31	54.00	4.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

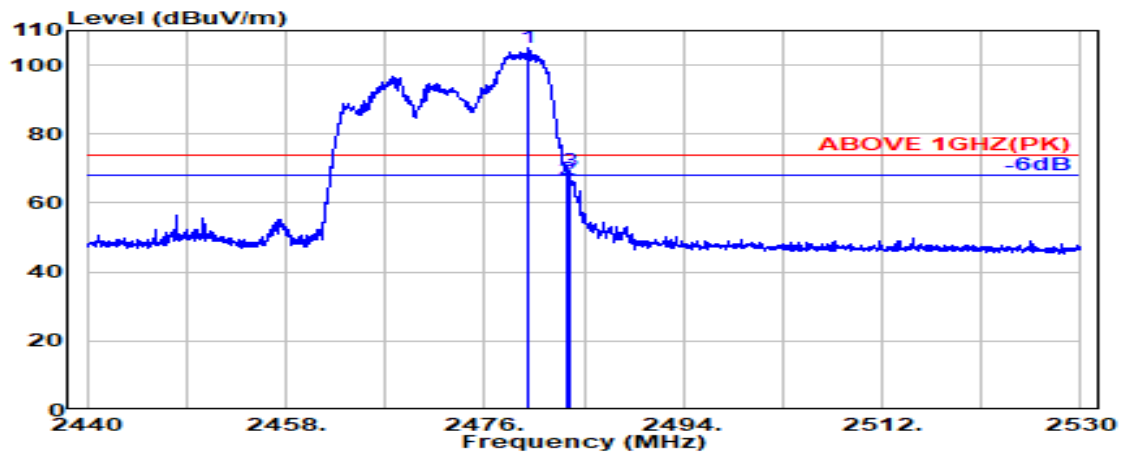

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.850	28.42	5.82	39.92	110.76	105.09	---	---	Peak
2483.500	28.43	5.83	39.92	72.34	66.69	74.00	7.31	Peak
2483.700	28.44	5.83	39.92	74.81	69.15	74.00	4.85	Peak

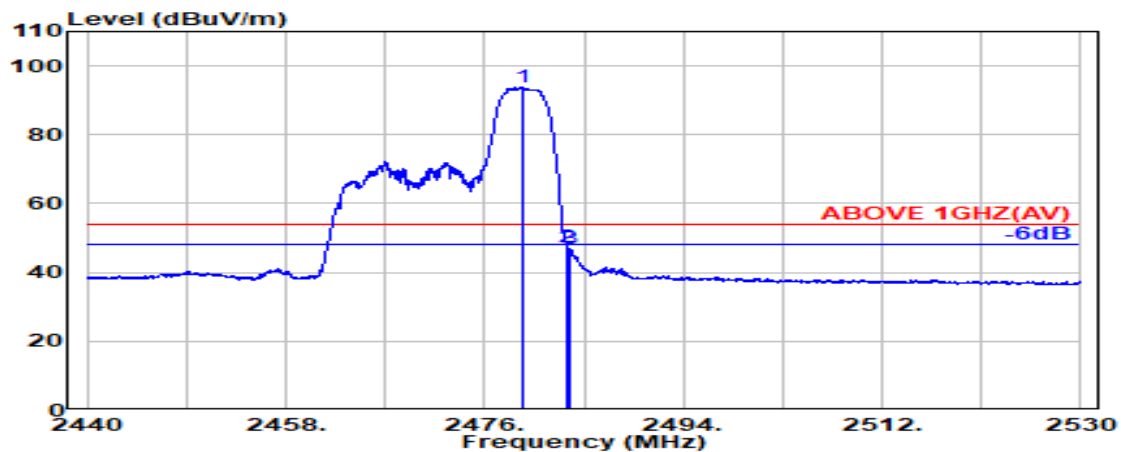

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.500	28.42	5.82	39.92	99.43	93.76	---	---	Average
2483.500	28.43	5.83	39.92	53.11	47.45	54.00	6.55	Average
2483.700	28.44	5.83	39.92	52.59	46.93	54.00	7.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

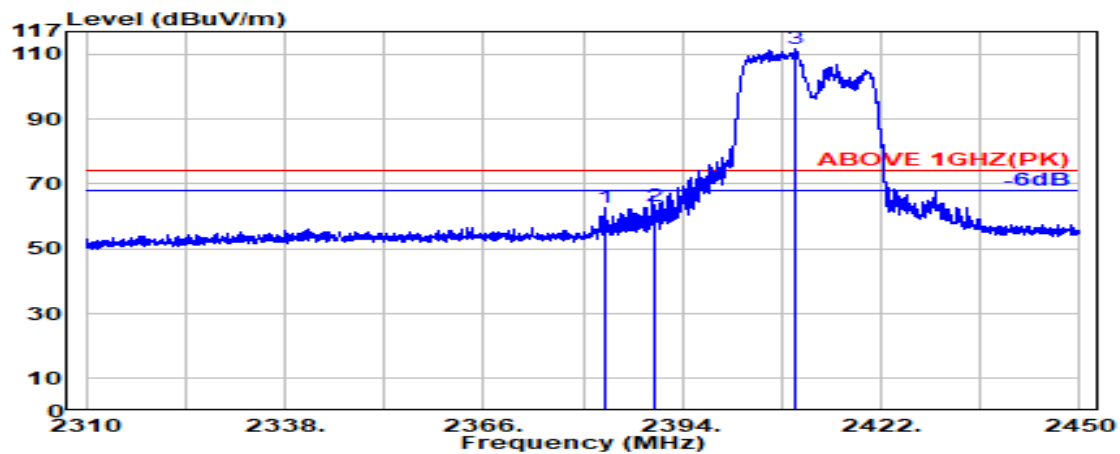

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.200	28.20	5.69	39.92	68.86	62.83	74.00	11.17	Peak
2390.000	28.20	5.70	39.92	69.04	63.02	74.00	10.98	Peak
@ 2409.800	28.22	5.73	39.92	117.75	111.79	---	---	Peak

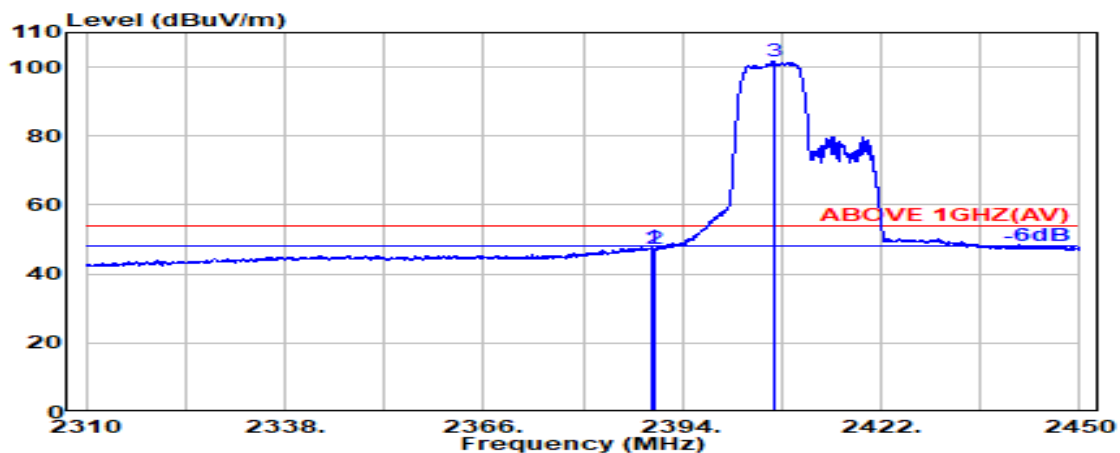

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	53.83	47.82	54.00	6.18	Average
2390.000	28.20	5.70	39.92	53.53	47.51	54.00	6.49	Average
@ 2406.800	28.21	5.73	39.92	107.78	101.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

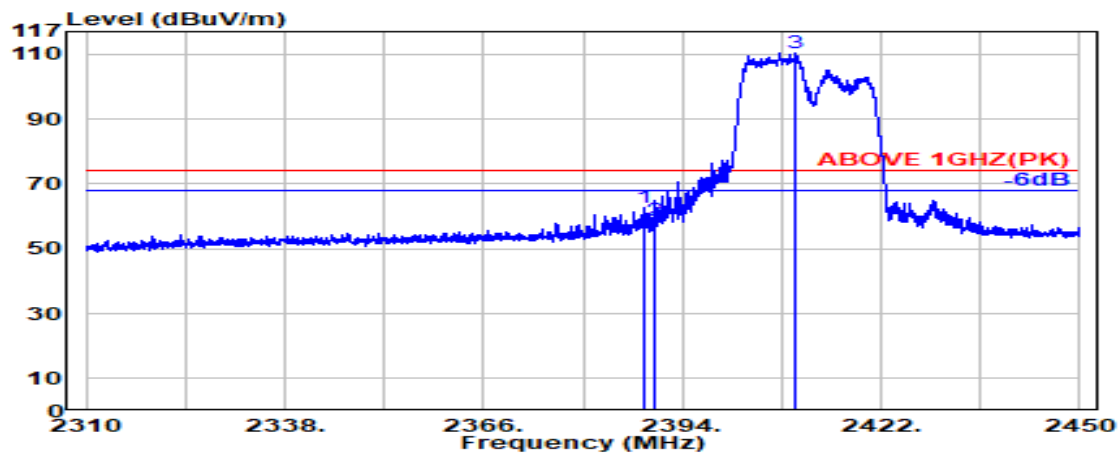

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	68.89	62.87	74.00	11.13	Peak
2390.000	28.20	5.70	39.92	64.81	58.80	74.00	15.20	Peak
@ 2410.000	28.22	5.73	39.92	116.54	110.57	---	---	Peak

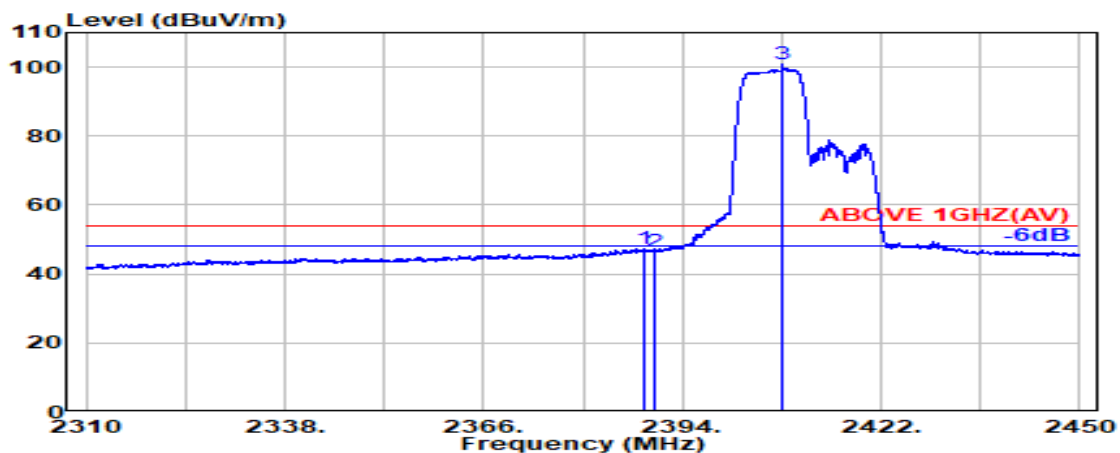

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	53.34	47.32	54.00	6.68	Average
2390.000	28.20	5.70	39.92	52.48	46.46	54.00	7.54	Average
@ 2408.150	28.22	5.73	39.92	106.76	100.78	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

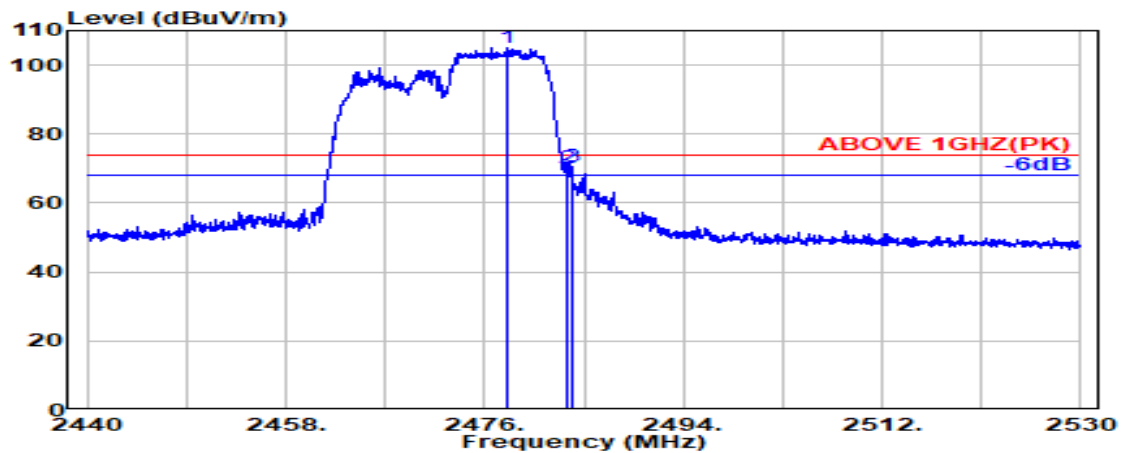

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.050	28.41	5.82	39.92	110.78	105.09	---	---	Peak
2483.500	28.43	5.83	39.92	75.83	70.17	74.00	3.83	Peak
2483.950	28.44	5.83	39.92	76.06	70.41	74.00	3.59	Peak

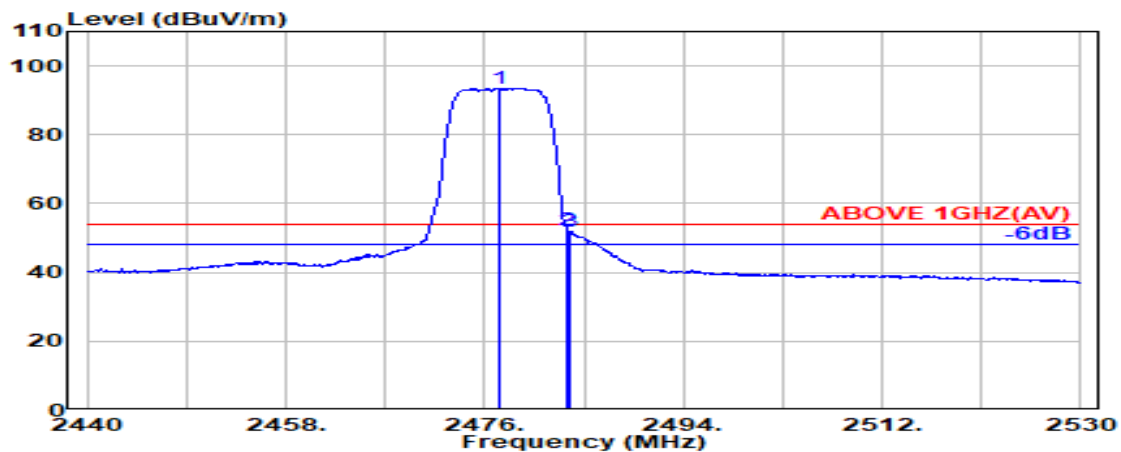

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.250	28.41	5.82	39.92	99.24	93.55	---	---	Average
2483.500	28.43	5.83	39.92	57.88	52.22	54.00	1.78	Average
2483.700	28.44	5.83	39.92	57.58	51.93	54.00	2.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

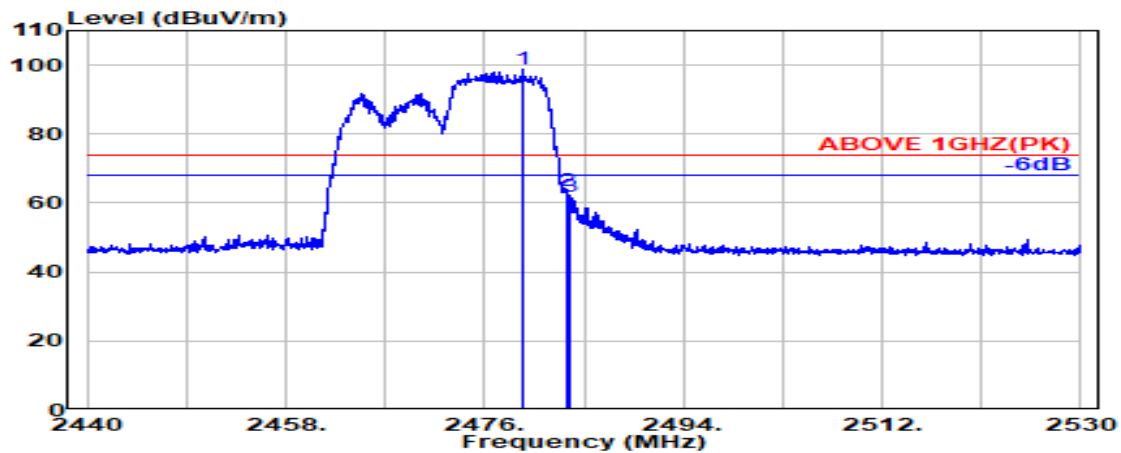

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.450	28.42	5.82	39.92	104.31	98.63	---	---	Peak
2483.500	28.43	5.83	39.92	69.06	63.40	74.00	10.60	Peak
2483.750	28.44	5.83	39.92	67.54	61.88	74.00	12.12	Peak

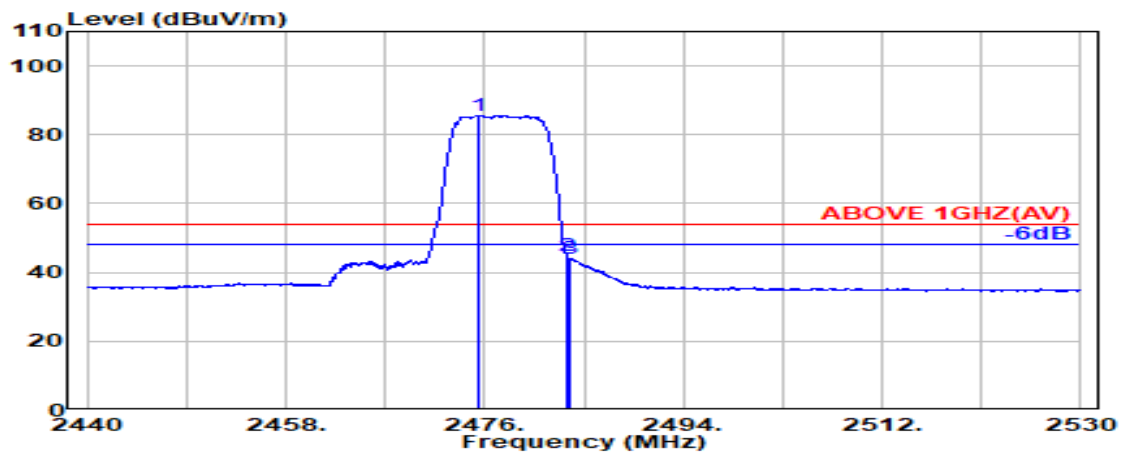

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2475.450	28.40	5.82	39.92	91.38	85.68	---	---	Average
2483.500	28.43	5.83	39.92	50.28	44.62	54.00	9.38	Average
2483.700	28.44	5.83	39.92	49.75	44.10	54.00	9.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

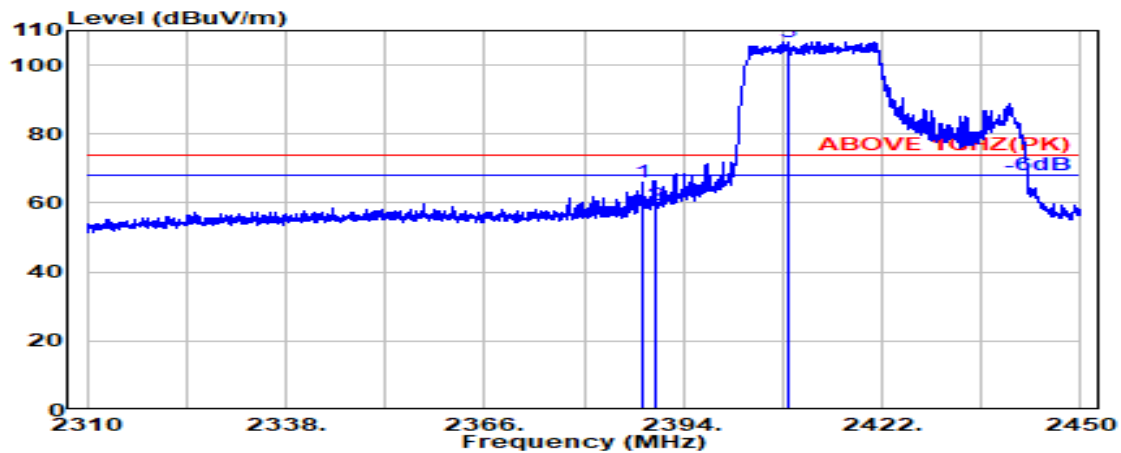

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.20	5.70	39.92	71.86	65.84	74.00	8.16	Peak
2390.000	28.20	5.70	39.92	65.49	59.47	74.00	14.53	Peak
@ 2408.850	28.22	5.73	39.92	112.81	106.84	---	---	Peak

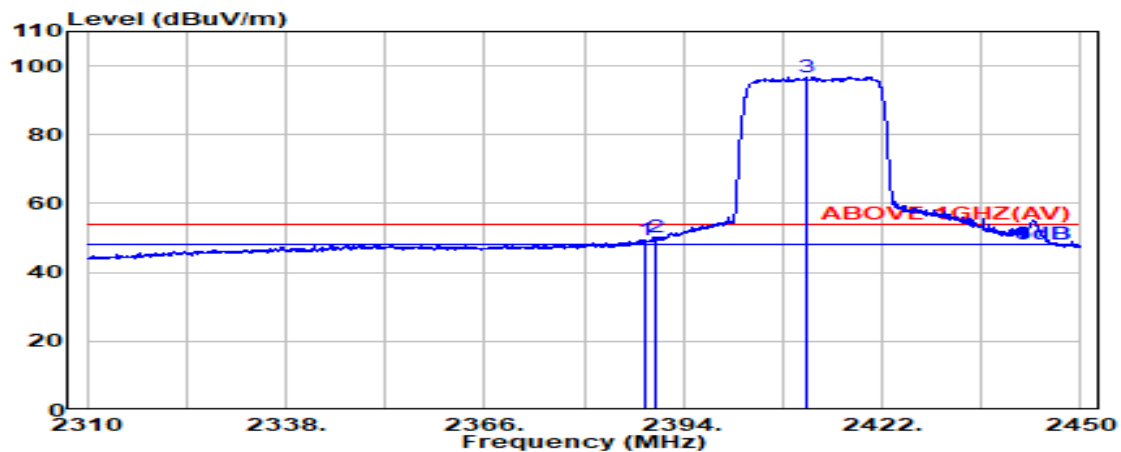

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.20	5.70	39.92	55.52	49.50	54.00	4.50	Average
2390.000	28.20	5.70	39.92	56.07	50.05	54.00	3.95	Average
@ 2411.450	28.22	5.73	39.92	102.76	96.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

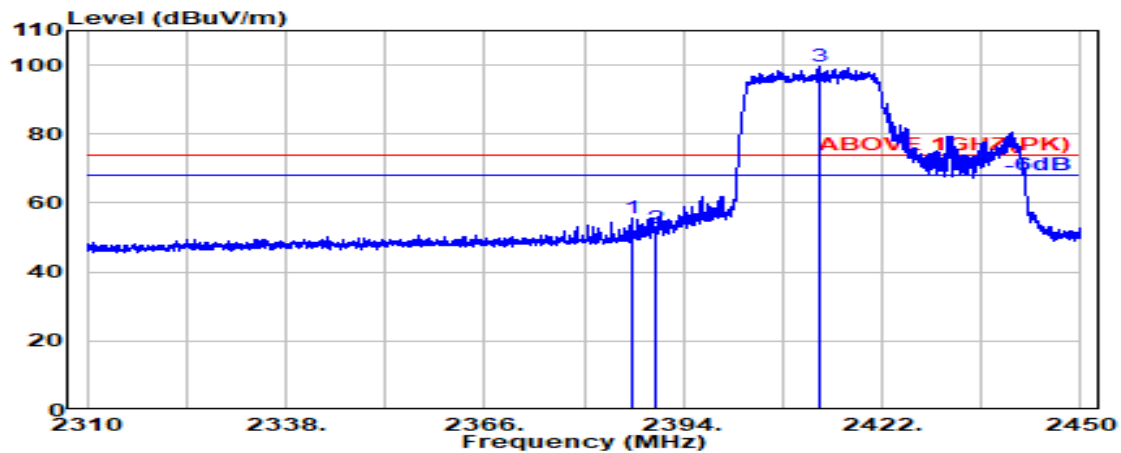

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.750	28.20	5.70	39.92	61.57	55.55	74.00	18.45	Peak
2390.000	28.20	5.70	39.92	58.69	52.68	74.00	21.32	Peak
@ 2413.300	28.23	5.73	39.92	105.43	99.47	---	---	Peak

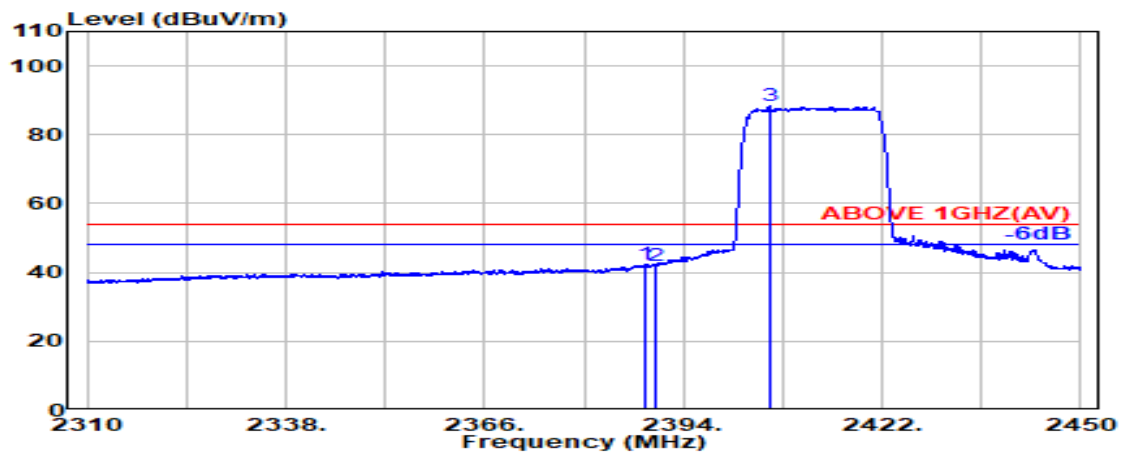

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.600	28.20	5.70	39.92	48.27	42.25	54.00	11.75	Average
2390.000	28.20	5.70	39.92	47.92	41.90	54.00	12.10	Average
@ 2406.100	28.21	5.72	39.92	94.31	88.33	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

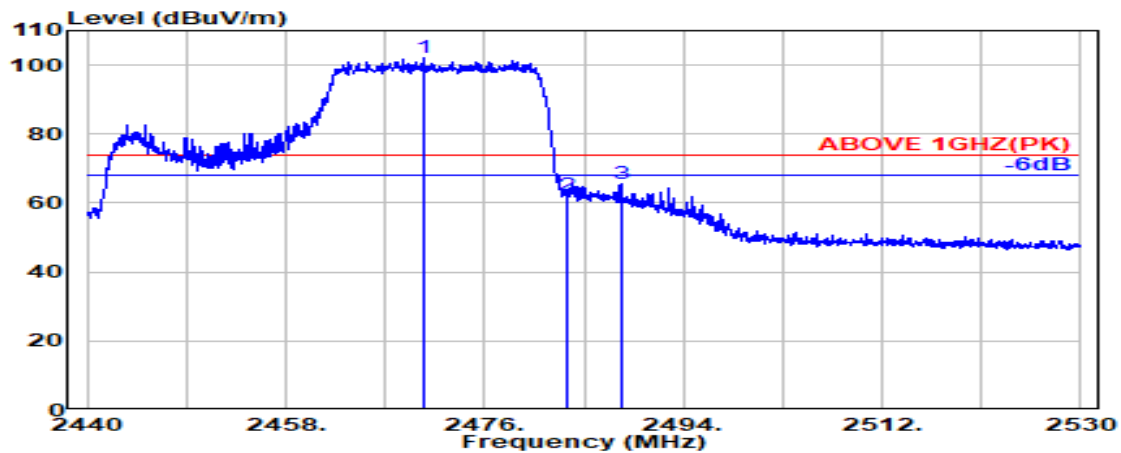

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	28.38	5.81	39.92	107.75	102.02	---	---	Peak
2483.500	28.43	5.83	39.92	68.11	62.45	74.00	11.55	Peak
2488.350	28.45	5.83	39.92	71.37	65.74	74.00	8.26	Peak

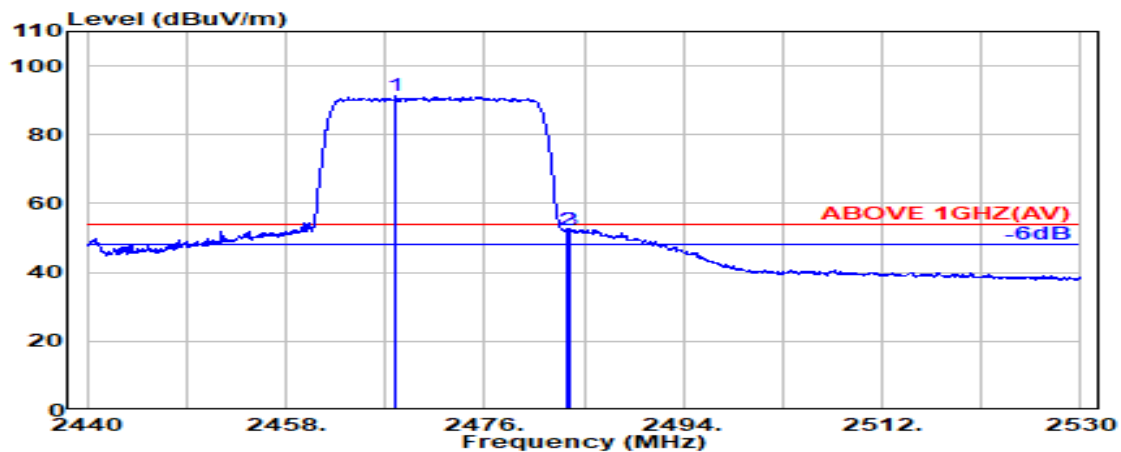

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.950	28.37	5.81	39.92	96.89	91.15	---	---	Average
2483.500	28.43	5.83	39.92	58.12	52.46	54.00	1.54	Average
2483.750	28.44	5.83	39.92	58.10	52.45	54.00	1.55	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

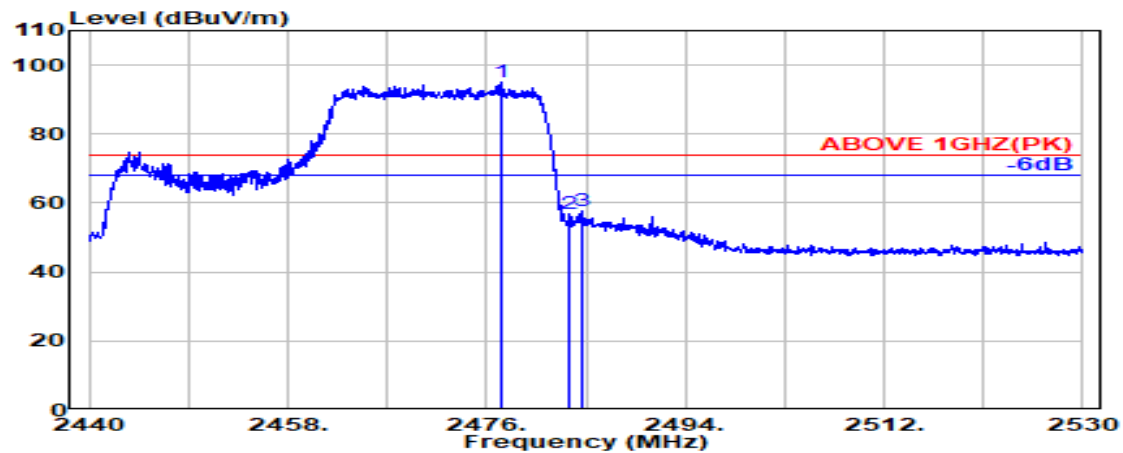

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.250	28.41	5.82	39.92	100.58	94.89	---	---	Peak
2483.500	28.43	5.83	39.92	62.40	56.74	74.00	17.26	Peak
2484.550	28.44	5.83	39.92	63.24	57.59	74.00	16.41	Peak

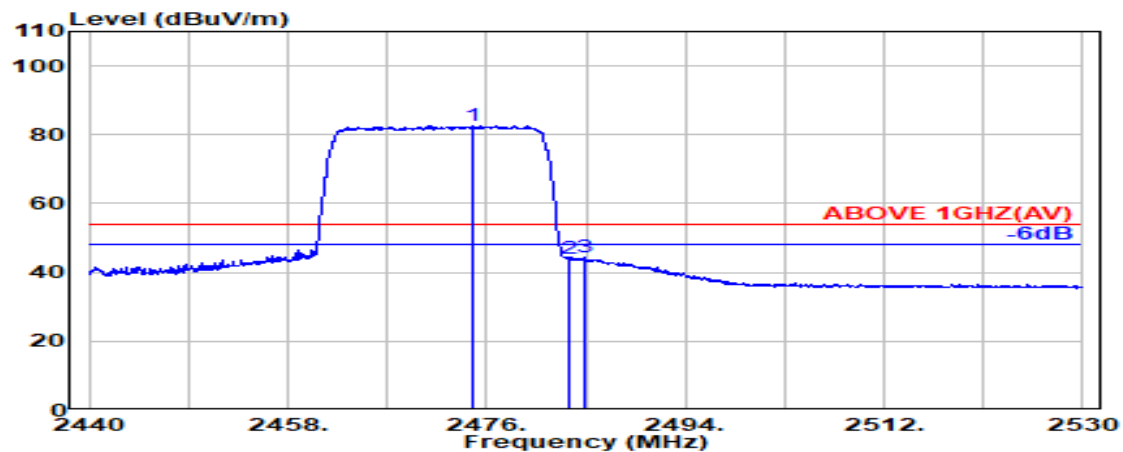

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.700	28.40	5.82	39.92	88.27	82.57	---	---	Average
2483.500	28.43	5.83	39.92	49.78	44.13	54.00	9.87	Average
2484.800	28.44	5.83	39.92	50.05	44.40	54.00	9.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


MIMO

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

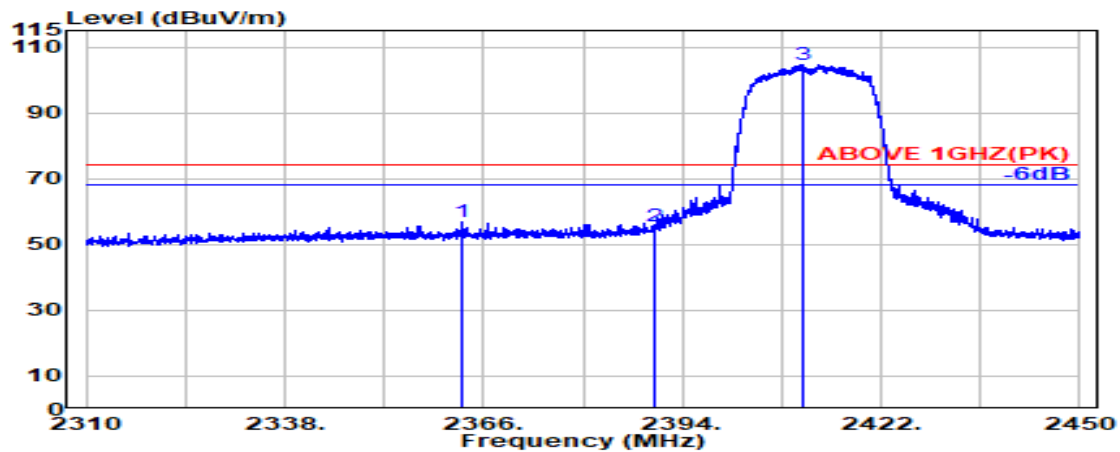

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2362.950	28.20	5.67	39.92	62.76	56.71	74.00	17.29	Peak
2390.000	28.20	5.70	39.92	61.77	55.75	74.00	18.25	Peak
@ 2411.050	28.22	5.73	39.92	110.73	104.76	---	---	Peak

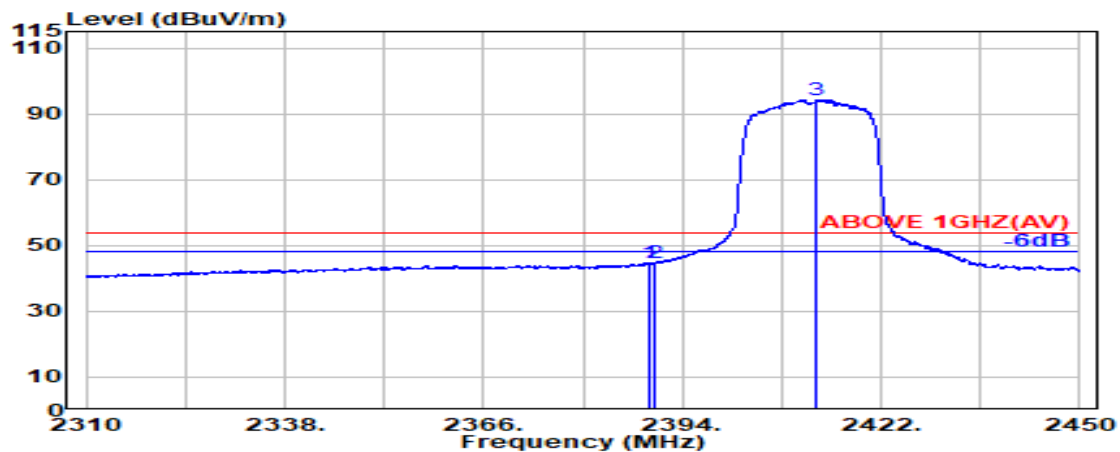

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	50.69	44.68	54.00	9.32	Average
2390.000	28.20	5.70	39.92	50.76	44.74	54.00	9.26	Average
@ 2412.850	28.23	5.73	39.92	100.26	94.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

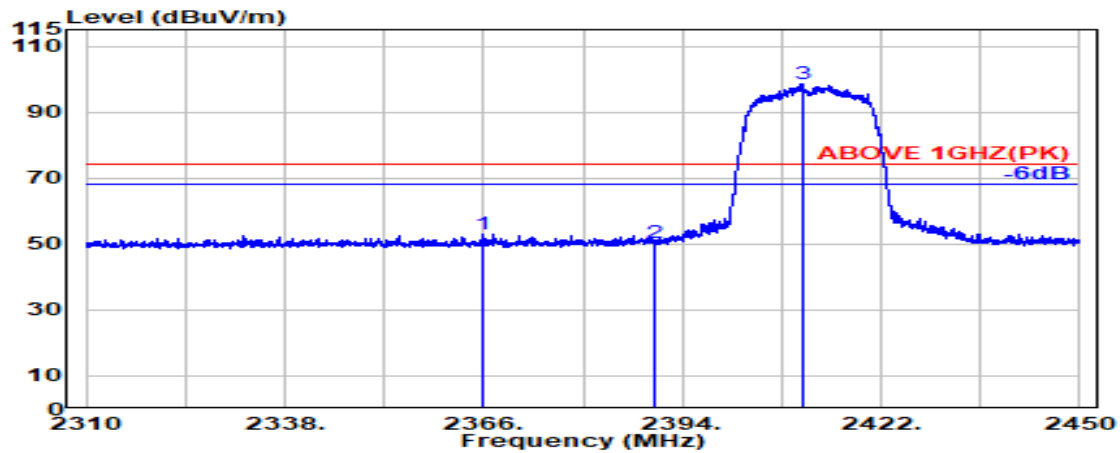

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2365.950	28.20	5.67	39.92	58.96	52.91	74.00	21.09	Peak
2390.000	28.20	5.70	39.92	56.34	50.32	74.00	23.68	Peak
@ 2410.950	28.22	5.73	39.92	104.53	98.56	---	---	Peak

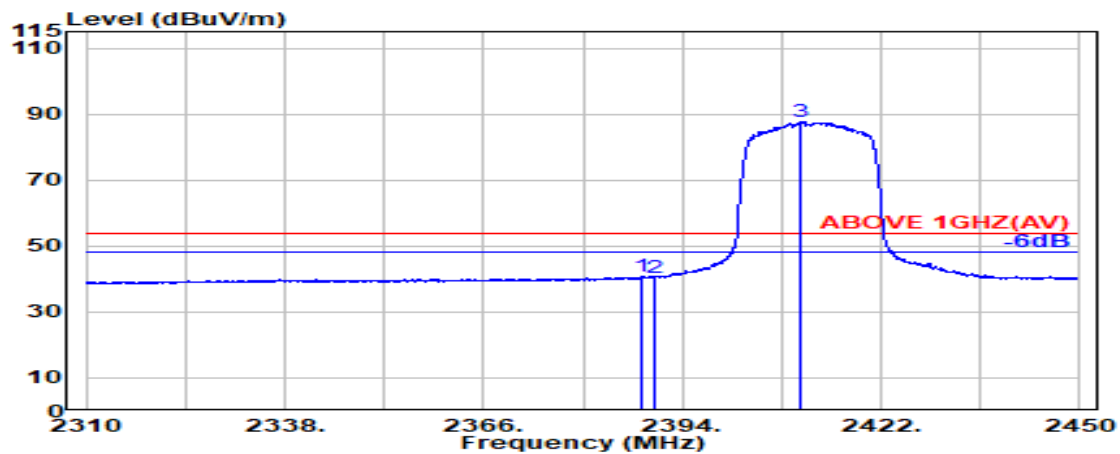

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.200	28.20	5.70	39.92	46.84	40.82	54.00	13.18	Average
2390.000	28.20	5.70	39.92	46.54	40.52	54.00	13.48	Average
@ 2410.600	28.22	5.73	39.92	93.62	87.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

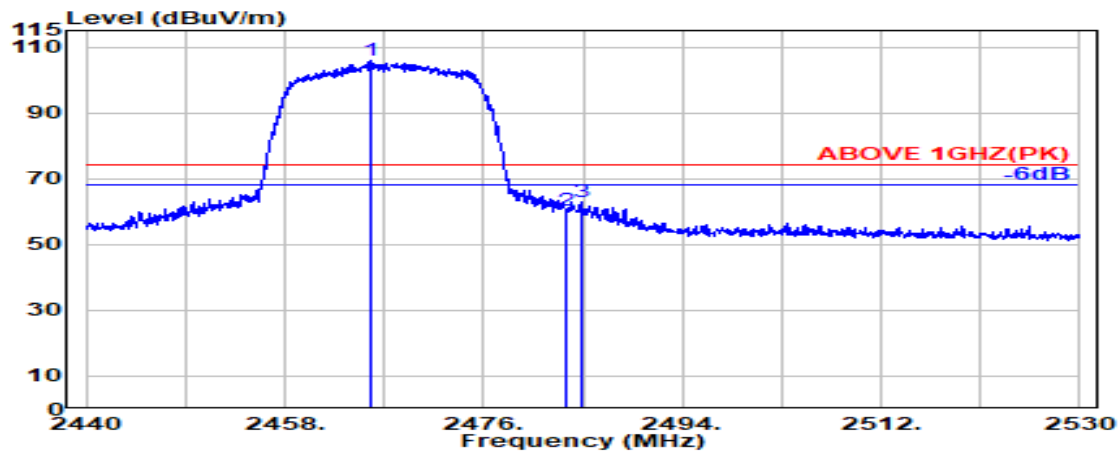

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.700	28.36	5.80	39.92	111.46	105.71	---	---	Peak
2483.500	28.43	5.83	39.92	65.98	60.32	74.00	13.68	Peak
2484.900	28.44	5.83	39.92	68.67	63.02	74.00	10.98	Peak

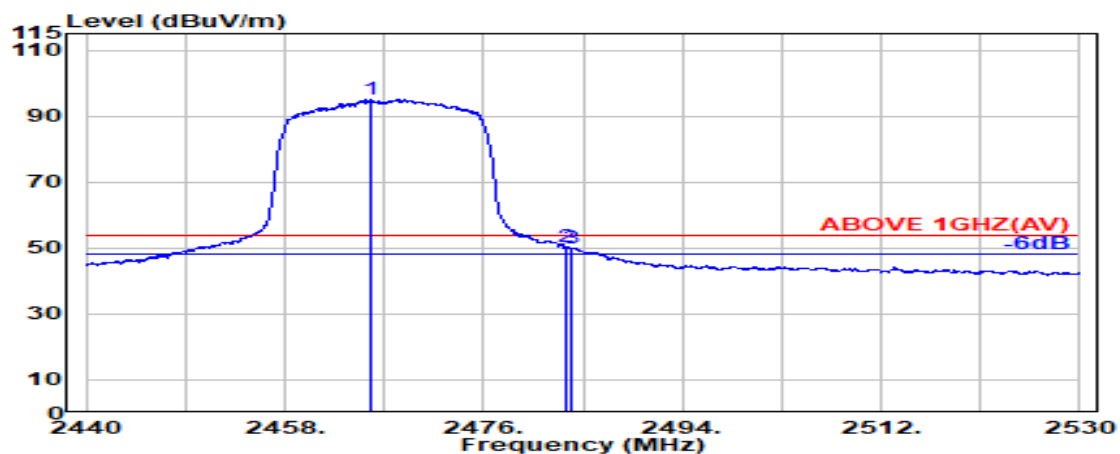

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.850	28.36	5.81	39.92	100.81	95.06	---	---	Average
2483.500	28.43	5.83	39.92	55.81	50.15	54.00	3.85	Average
2483.850	28.44	5.83	39.92	55.70	50.05	54.00	3.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467 MHz
------	--------------	-----------	-------------

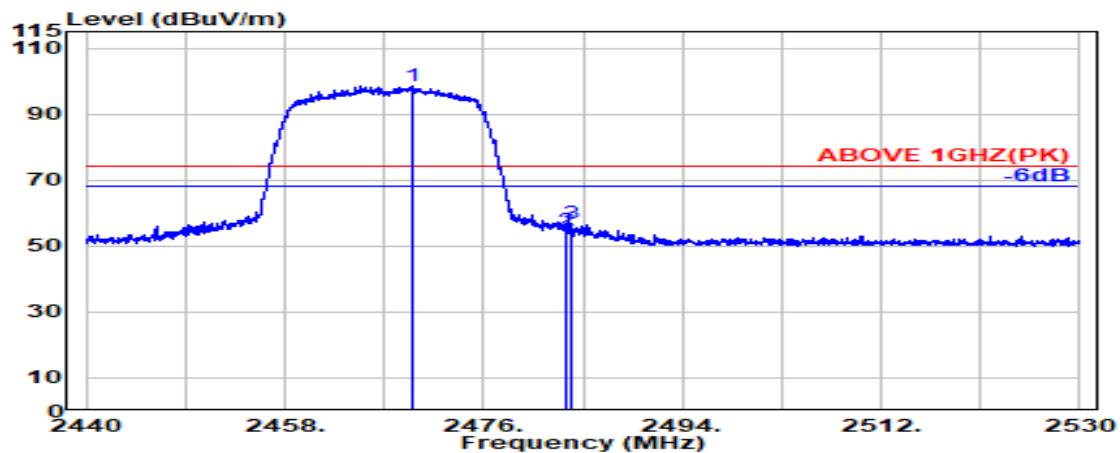

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.650	28.38	5.81	39.92	104.43	98.70	---	---	Peak
2483.500	28.43	5.83	39.92	60.22	54.57	74.00	19.43	Peak
2483.950	28.44	5.83	39.92	62.50	56.84	74.00	17.16	Peak

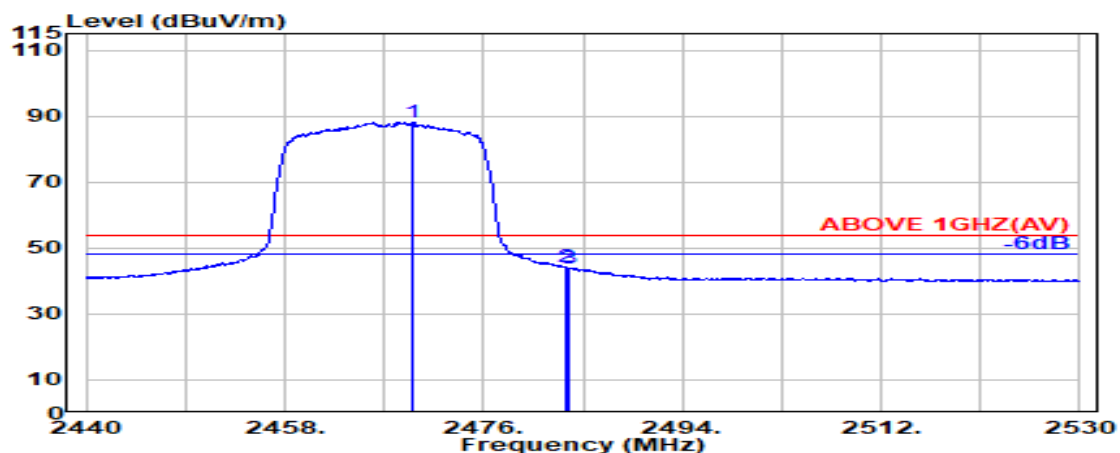

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.650	28.38	5.81	39.92	93.89	88.16	---	---	Average
2483.500	28.43	5.83	39.92	50.02	44.37	54.00	9.63	Average
2483.700	28.44	5.83	39.92	49.65	43.99	54.00	10.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

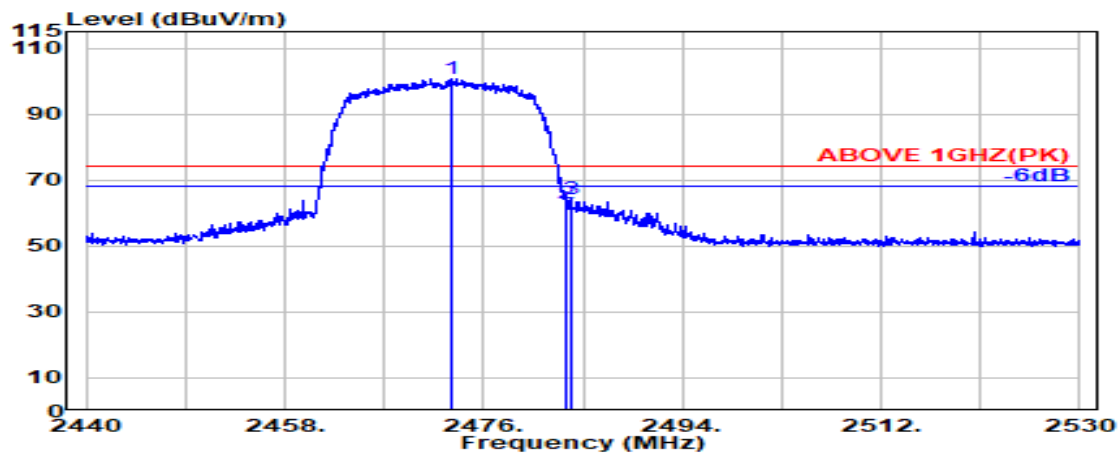

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.150	28.39	5.81	39.92	106.35	100.64	---	---	Peak
2483.500	28.43	5.83	39.92	68.76	63.10	74.00	10.90	Peak
2484.000	28.44	5.83	39.92	69.98	64.33	74.00	9.67	Peak

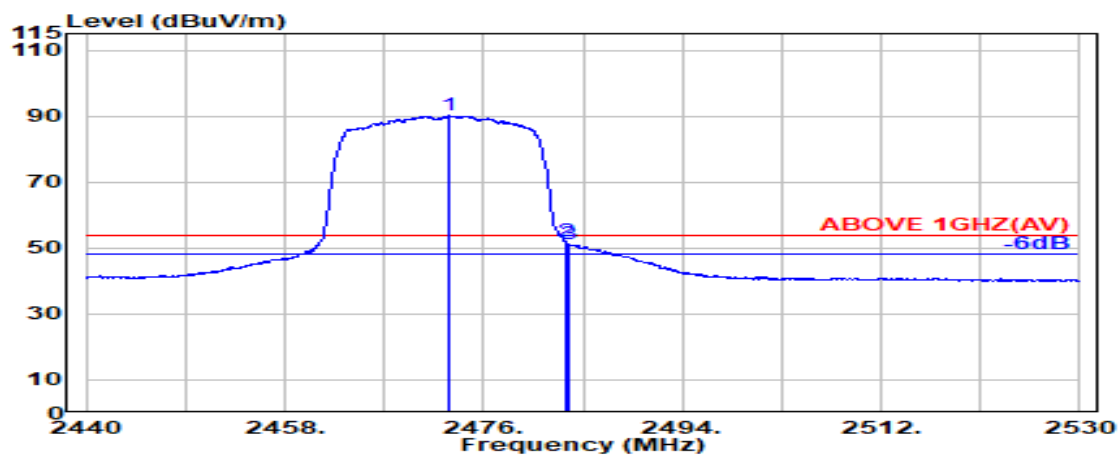

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.800	28.39	5.81	39.92	95.85	90.13	---	---	Average
2483.500	28.43	5.83	39.92	57.56	51.90	54.00	2.10	Average
2483.700	28.44	5.83	39.92	56.91	51.26	54.00	2.74	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472 MHz
------	--------------	-----------	-------------

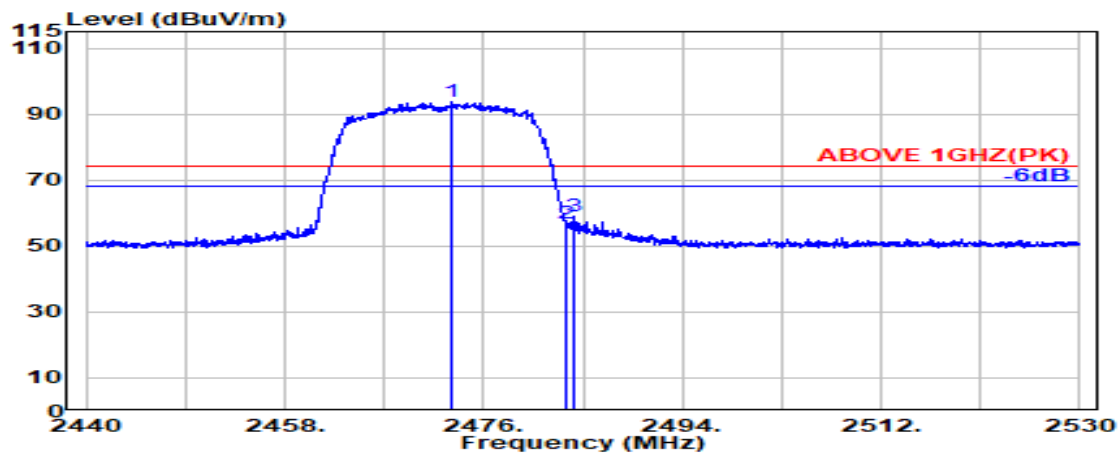

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.050	28.39	5.81	39.92	99.53	93.81	---	---	Peak
2483.500	28.43	5.83	39.92	62.40	56.75	74.00	17.25	Peak
2484.100	28.44	5.83	39.92	64.46	58.81	74.00	15.19	Peak

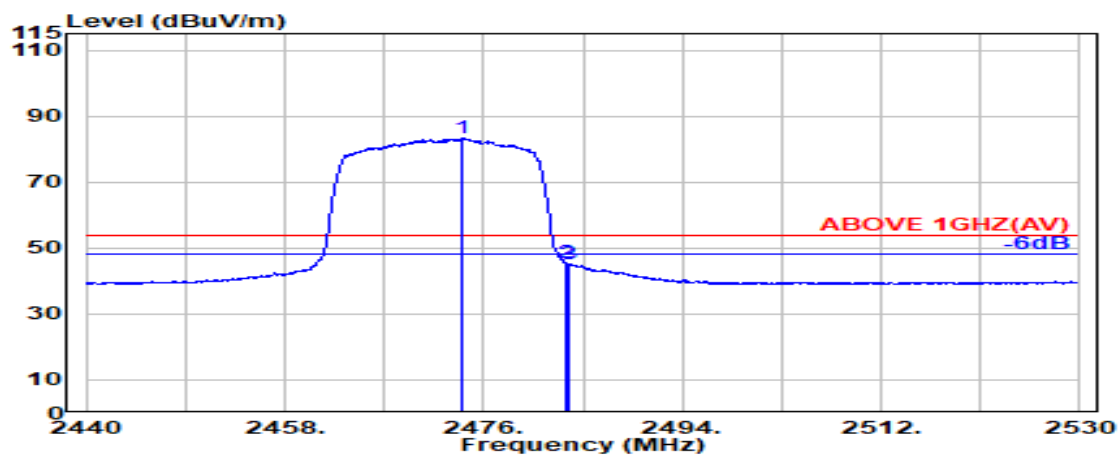

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.150	28.40	5.82	39.92	88.89	83.18	---	---	Average
2483.500	28.43	5.83	39.92	51.05	45.39	54.00	8.61	Average
2483.700	28.44	5.83	39.92	50.78	45.13	54.00	8.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

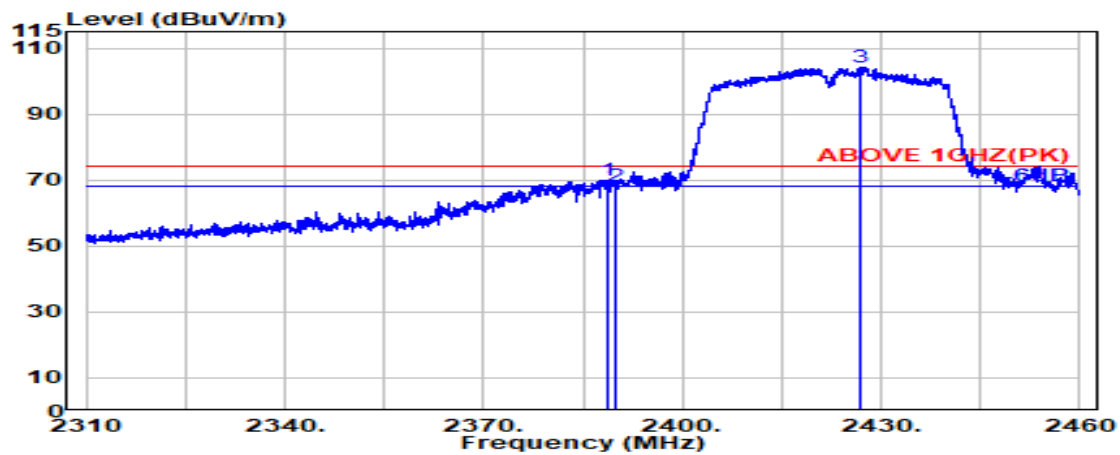

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.700	28.20	5.70	39.92	76.00	69.98	74.00	4.02	Peak
2389.800	28.20	5.70	39.92	74.01	68.00	74.00	6.00	Peak
@ 2427.000	28.25	5.75	39.92	109.99	104.08	---	---	Peak

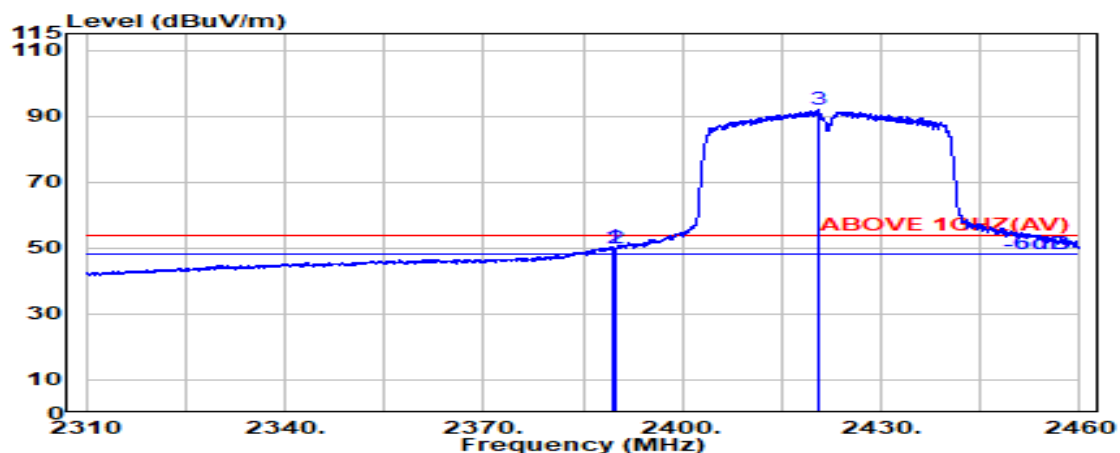

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.500	28.20	5.70	39.92	56.20	50.19	54.00	3.81	Average
2389.800	28.20	5.70	39.92	55.78	49.77	54.00	4.24	Average
@ 2420.700	28.24	5.74	39.92	97.86	91.93	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

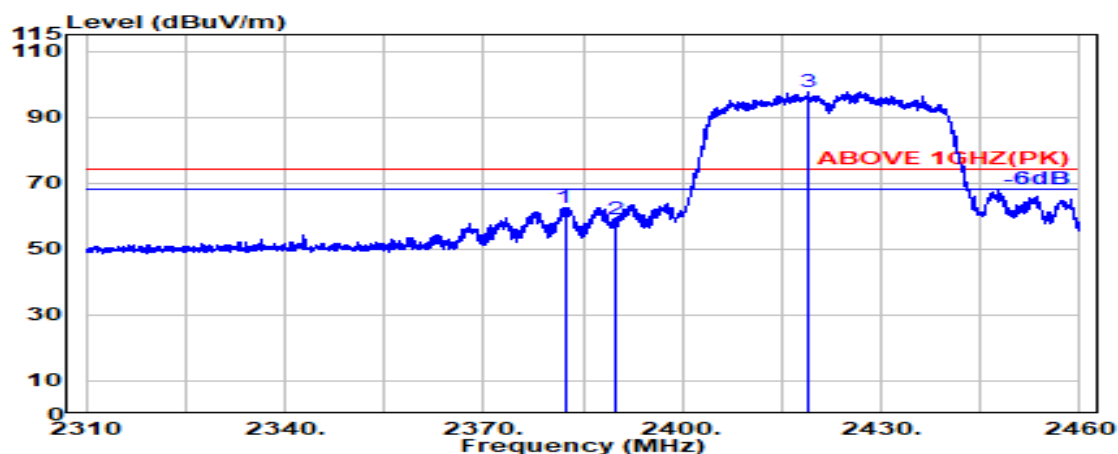

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.250	28.20	5.69	39.92	68.51	62.48	74.00	11.52	Peak
2389.800	28.20	5.70	39.92	65.17	59.15	74.00	14.85	Peak
@ 2418.950	28.24	5.74	39.92	103.57	97.63	---	---	Peak

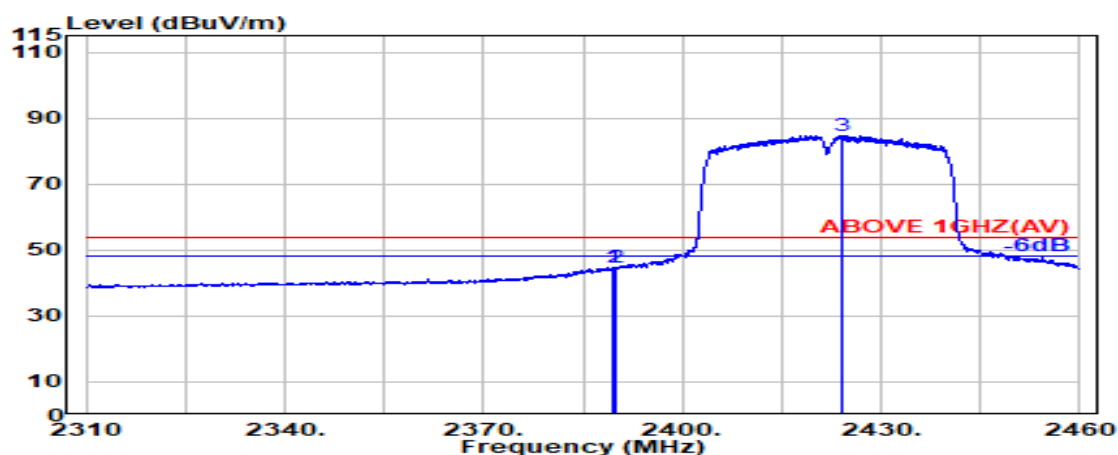


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	50.72	44.70	54.00	9.30	Average
2389.800	28.20	5.70	39.92	50.55	44.53	54.00	9.47	Average
@ 2424.100	28.25	5.75	39.92	90.59	84.67	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2447 MHz
------	--------------	-----------	-------------

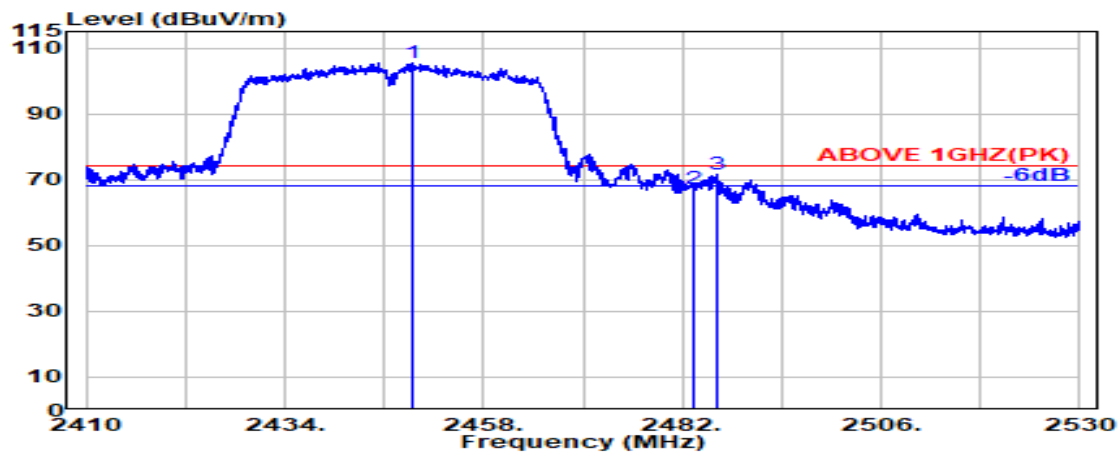

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.450	28.30	5.78	39.92	111.33	105.50	---	---	Peak
2483.500	28.43	5.83	39.92	72.84	67.18	74.00	6.82	Peak
2486.050	28.44	5.83	39.92	77.13	71.48	74.00	2.52	Peak

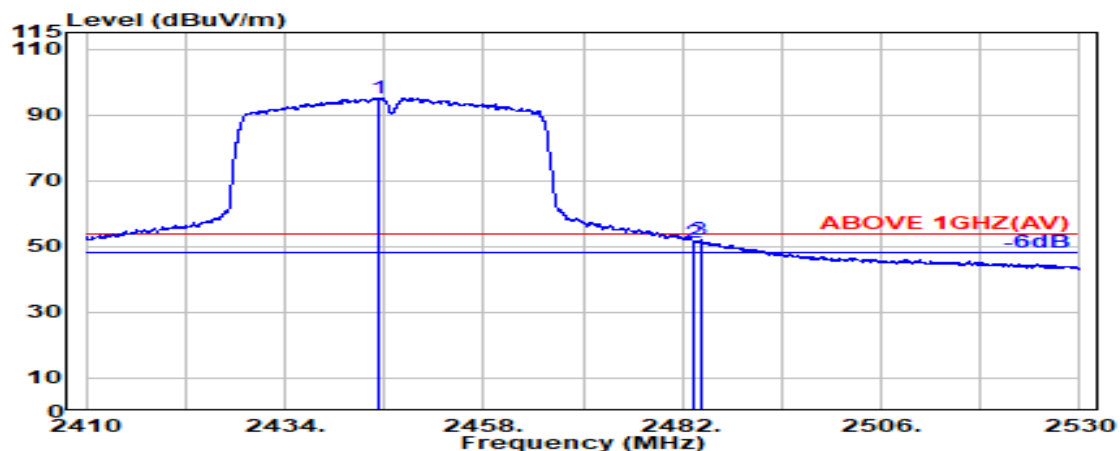

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2445.300	28.29	5.78	39.92	101.09	95.24	---	---	Average
2483.500	28.43	5.83	39.92	56.87	51.21	54.00	2.79	Average
2484.150	28.44	5.83	39.92	57.64	51.99	54.00	2.01	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447 MHz
------	--------------	-----------	-------------

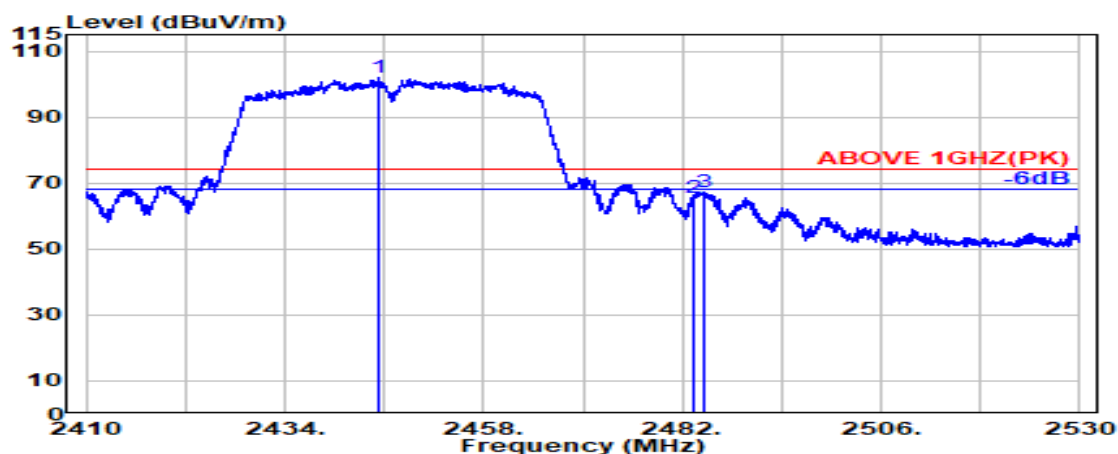

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.450	28.29	5.78	39.92	107.83	101.98	---	---	Peak
2483.500	28.43	5.83	39.92	71.17	65.52	74.00	8.48	Peak
2484.500	28.44	5.83	39.92	72.80	67.15	74.00	6.85	Peak

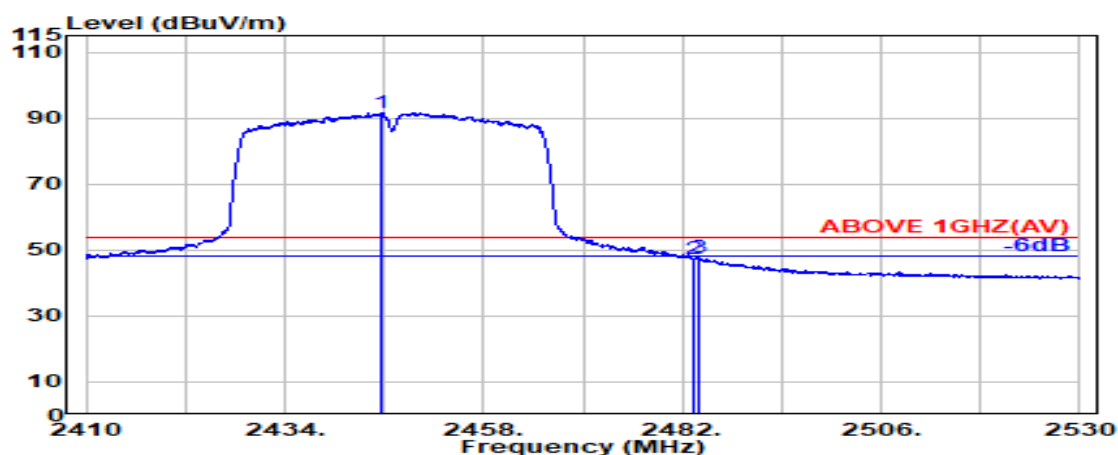


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2445.550	28.29	5.78	39.92	97.62	91.77	---	---	Average
2483.500	28.43	5.83	39.92	52.88	47.22	54.00	6.78	Average
2484.050	28.44	5.83	39.92	53.40	47.75	54.00	6.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

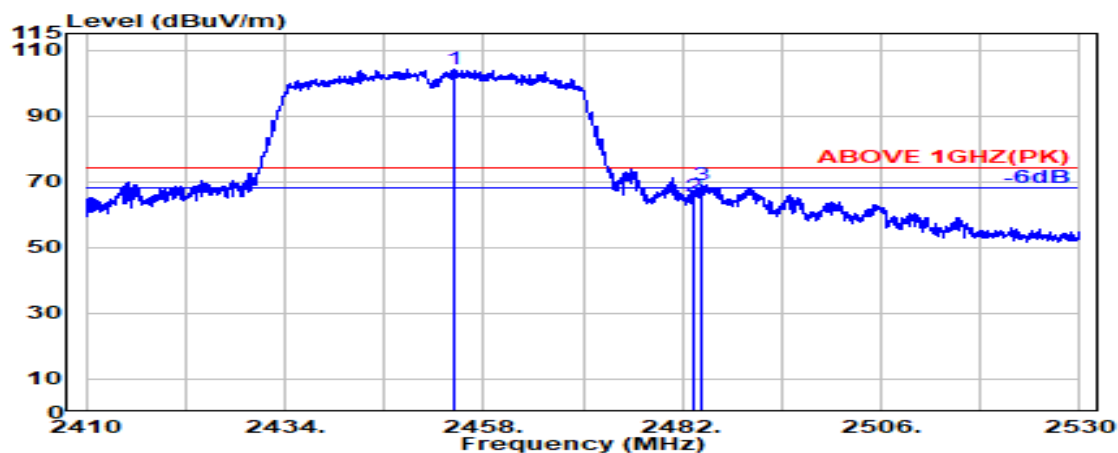

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2454.450	28.32	5.79	39.92	110.04	104.23	---	---	Peak
2483.500	28.43	5.83	39.92	71.32	65.66	74.00	8.34	Peak
2484.350	28.44	5.83	39.92	74.70	69.04	74.00	4.96	Peak

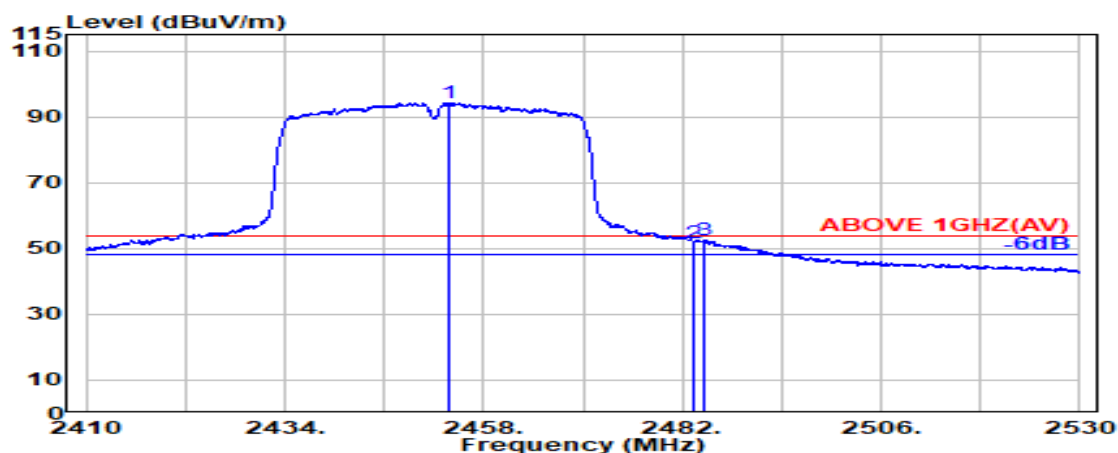

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.950	28.32	5.79	39.92	100.00	94.19	---	---	Average
2483.500	28.43	5.83	39.92	57.36	51.71	54.00	2.29	Average
2484.750	28.44	5.83	39.92	58.14	52.49	54.00	1.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452 MHz
------	--------------	-----------	-------------

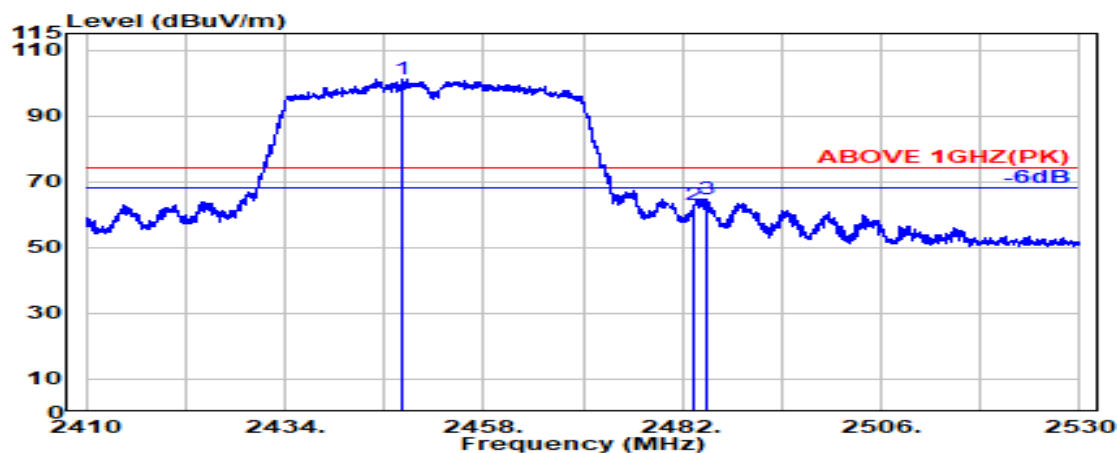

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2448.300	28.30	5.78	39.92	107.13	101.29	---	---	Peak
2483.500	28.43	5.83	39.92	68.57	62.91	74.00	11.09	Peak
2485.050	28.44	5.83	39.92	70.49	64.84	74.00	9.16	Peak

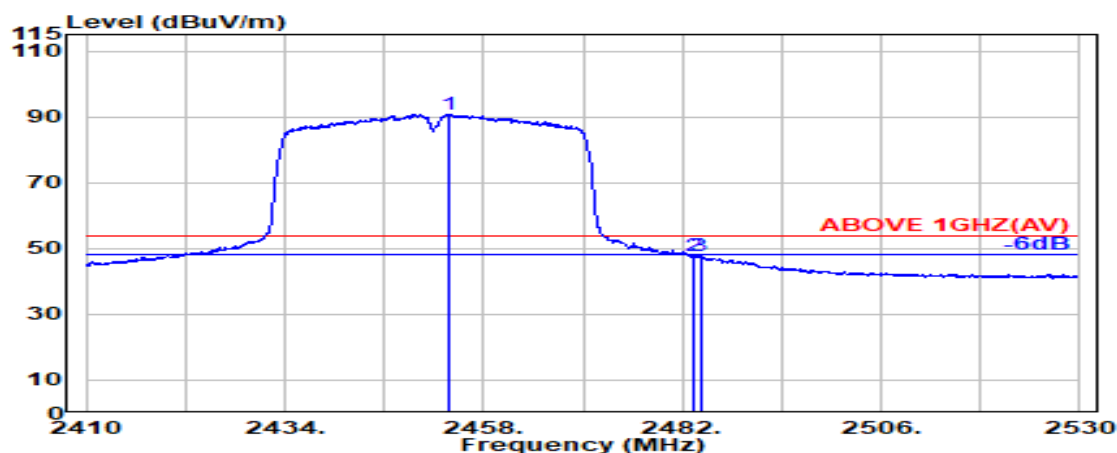

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.800	28.32	5.79	39.92	96.64	90.83	---	---	Average
2483.500	28.43	5.83	39.92	53.30	47.64	54.00	6.36	Average
2484.150	28.44	5.83	39.92	53.51	47.86	54.00	6.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

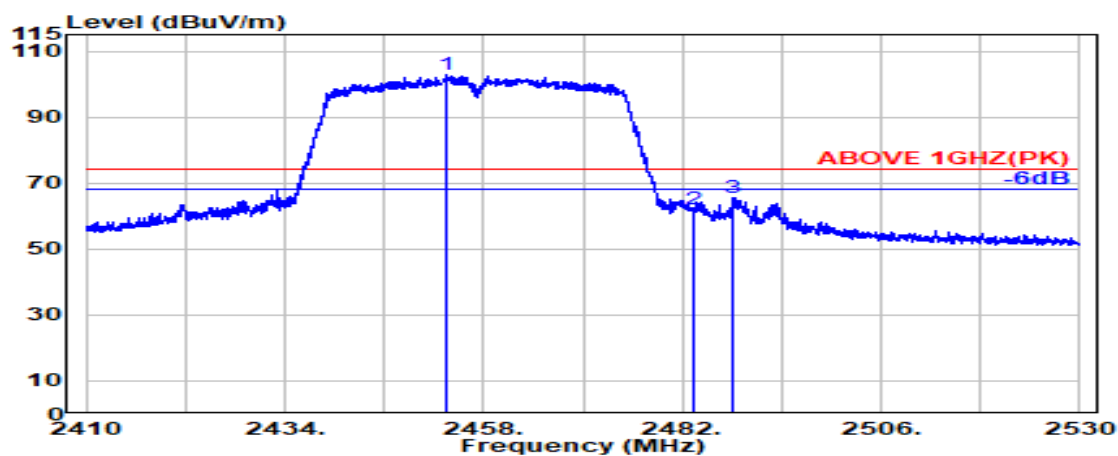

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.600	28.31	5.79	39.92	108.53	102.71	---	---	Peak
2483.500	28.43	5.83	39.92	67.75	62.10	74.00	11.90	Peak
2488.200	28.45	5.83	39.92	71.23	65.60	74.00	8.40	Peak

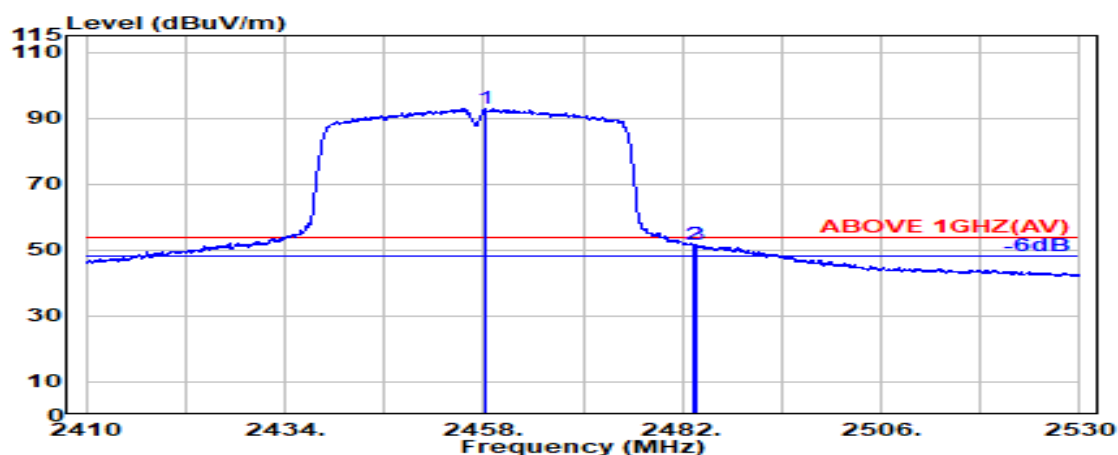

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.150	28.33	5.79	39.92	98.60	92.80	---	---	Average
2483.500	28.43	5.83	39.92	57.36	51.71	54.00	2.29	Average
2483.800	28.44	5.83	39.92	57.29	51.63	54.00	2.37	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457 MHz
------	--------------	-----------	-------------

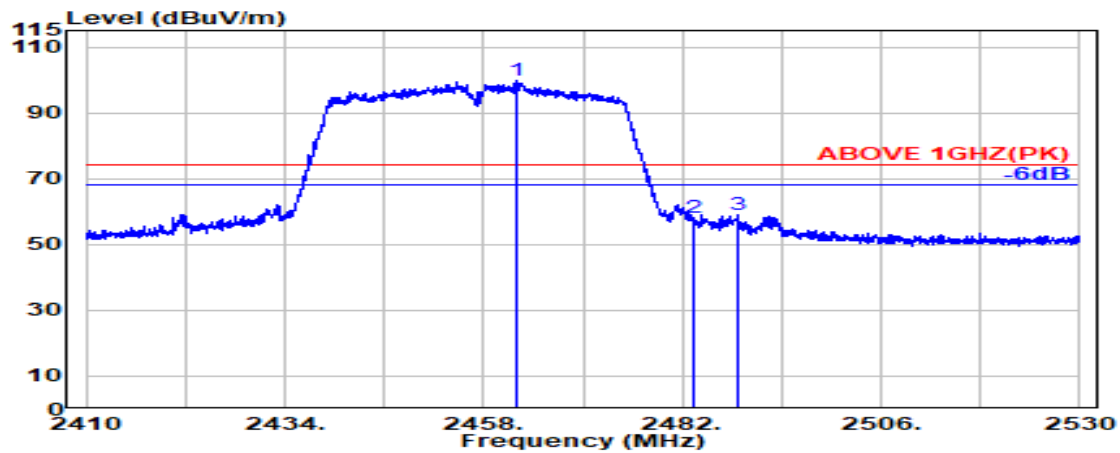

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.050	28.35	5.80	39.92	105.63	99.86	---	---	Peak
2483.500	28.43	5.83	39.92	64.01	58.35	74.00	15.65	Peak
2488.700	28.46	5.84	39.92	64.80	59.17	74.00	14.83	Peak

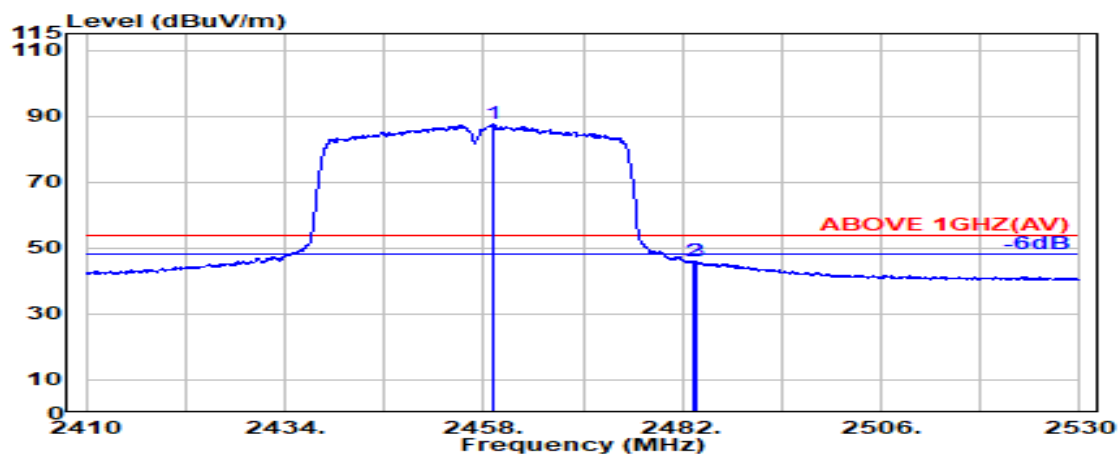


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.250	28.34	5.80	39.92	93.48	87.69	---	---	Average
2483.500	28.43	5.83	39.92	51.51	45.85	54.00	8.15	Average
2483.700	28.44	5.83	39.92	51.45	45.79	54.00	8.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

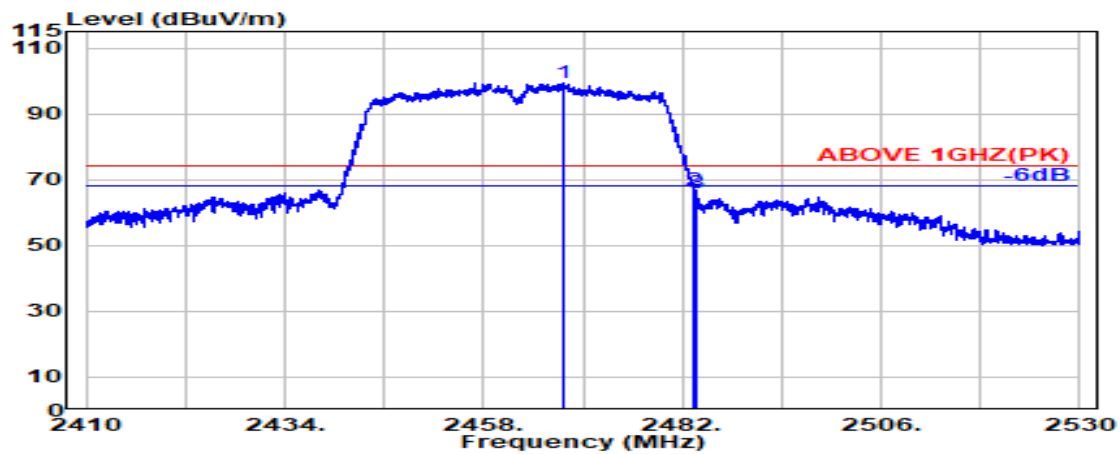

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.550	28.37	5.81	39.92	105.00	99.26	---	---	Peak
2483.500	28.43	5.83	39.92	72.60	66.94	74.00	7.06	Peak
2483.800	28.44	5.83	39.92	71.53	65.87	74.00	8.13	Peak

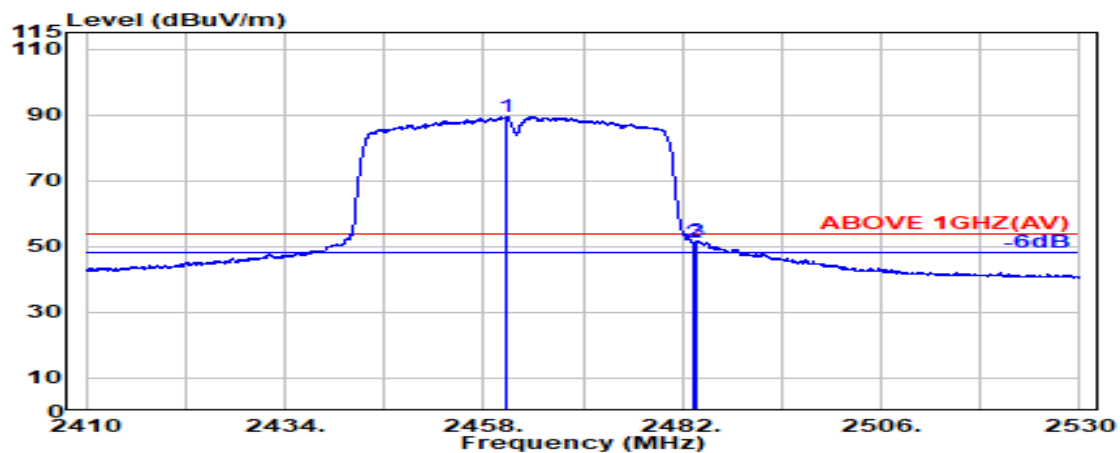

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.850	28.34	5.80	39.92	95.32	89.55	---	---	Average
2483.500	28.43	5.83	39.92	56.92	51.26	54.00	2.74	Average
2483.800	28.44	5.83	39.92	57.34	51.69	54.00	2.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

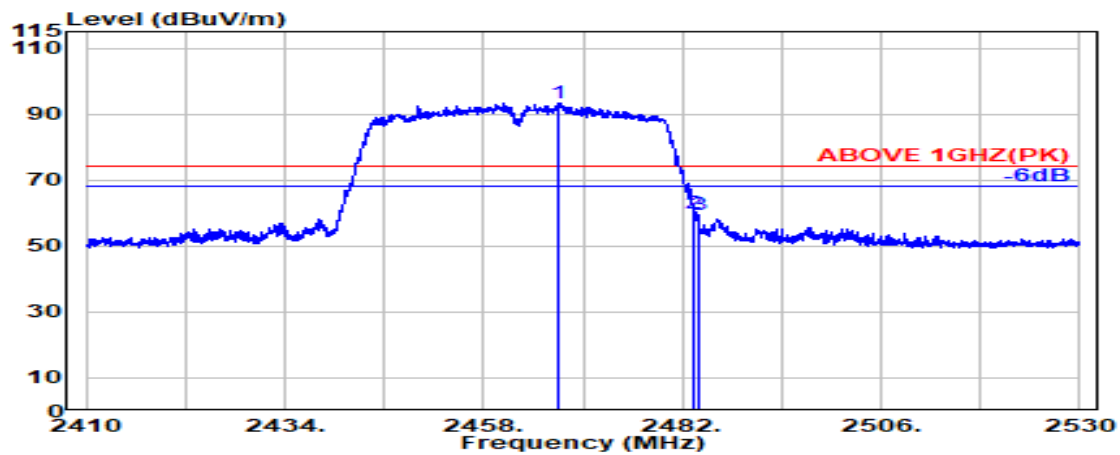

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2466.900	28.37	5.81	39.92	99.00	93.25	---	---	Peak
	2483.500	28.43	5.83	39.92	65.34	59.68	74.00	14.32	Peak
	2483.900	28.44	5.83	39.92	64.98	59.32	74.00	14.68	Peak



Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@	2463.950	28.36	5.80	39.92	88.74	82.98	---	---	Average
	2483.500	28.43	5.83	39.92	51.34	45.68	54.00	8.32	Average
	2483.700	28.44	5.83	39.92	50.71	45.06	54.00	8.94	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

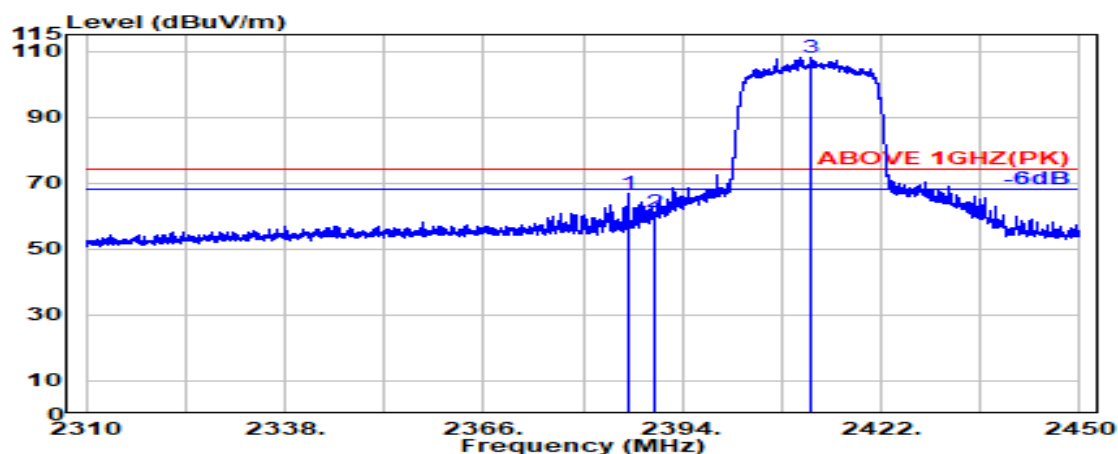

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.500	28.20	5.70	39.92	72.89	66.87	74.00	7.13	Peak
2390.000	28.20	5.70	39.92	67.01	60.99	74.00	13.01	Peak
@ 2412.100	28.22	5.73	39.92	113.83	107.87	---	---	Peak

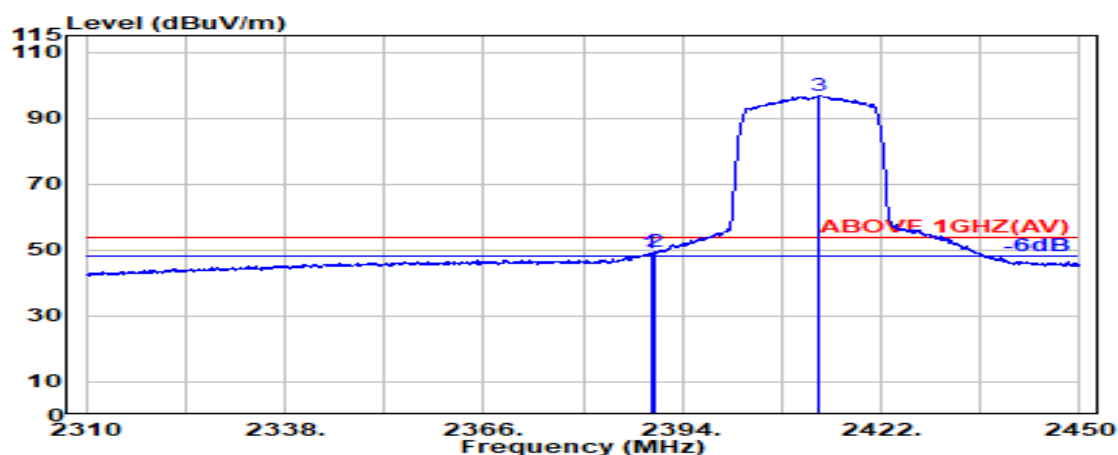

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.550	28.20	5.70	39.92	55.00	48.98	54.00	5.02	Average
2390.000	28.20	5.70	39.92	55.39	49.37	54.00	4.63	Average
@ 2413.250	28.23	5.73	39.92	102.81	96.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
------	---------------	-----------	-------------

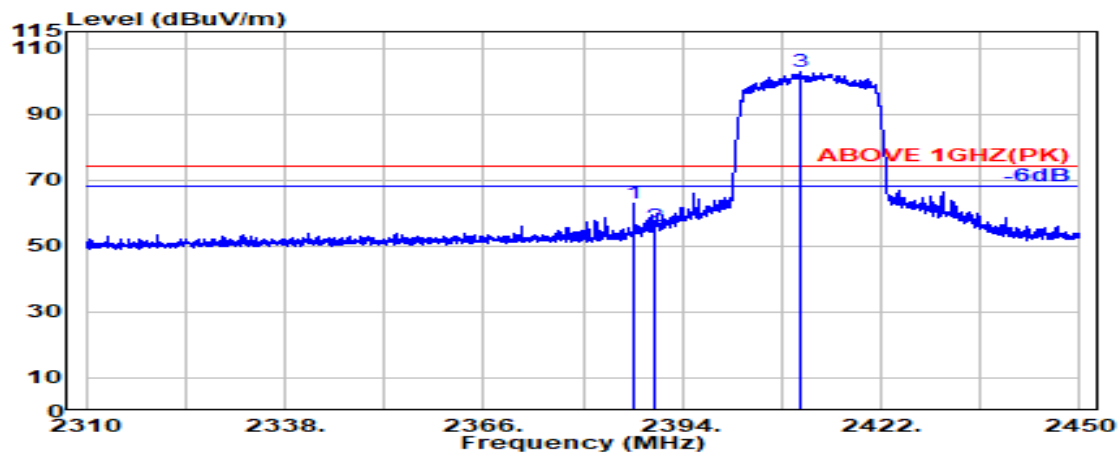

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2387.200	28.20	5.70	39.92	68.91	62.89	74.00	11.11	Peak
2390.000	28.20	5.70	39.92	61.84	55.83	74.00	18.17	Peak
@ 2410.700	28.22	5.73	39.92	108.65	102.68	---	---	Peak

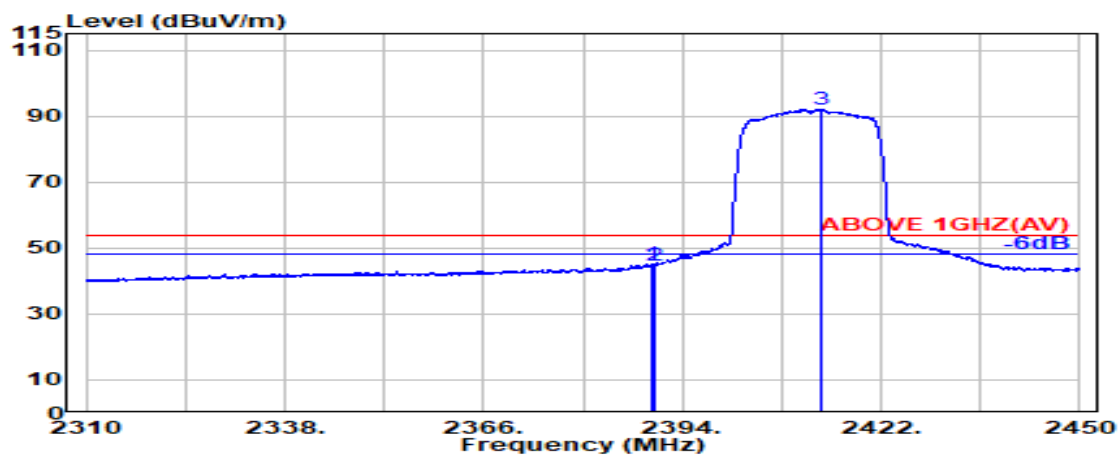

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	51.17	45.16	54.00	8.84	Average
2390.000	28.20	5.70	39.92	50.86	44.85	54.00	9.15	Average
@ 2413.700	28.23	5.74	39.92	98.16	92.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

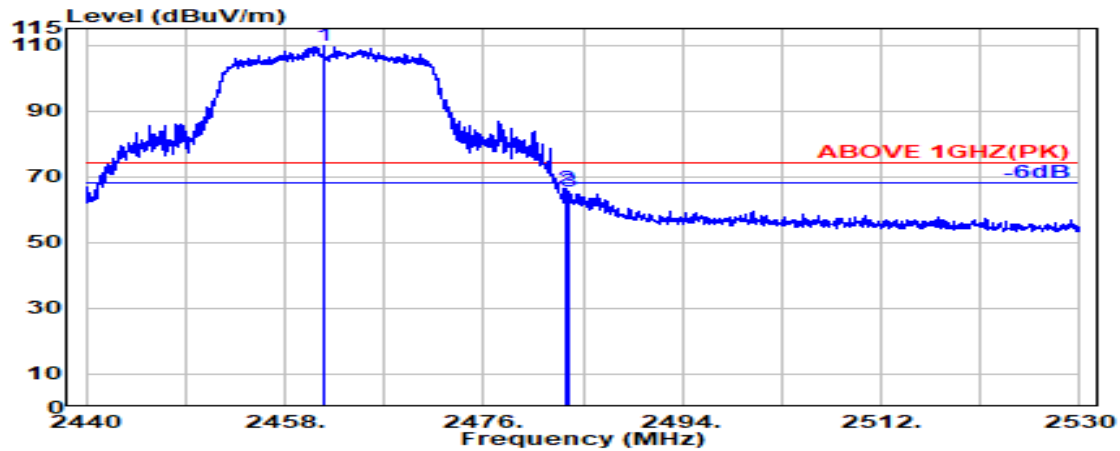

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.550	28.35	5.80	39.92	115.65	109.88	---	---	Peak
2483.500	28.43	5.83	39.92	72.03	66.37	74.00	7.63	Peak
2483.700	28.44	5.83	39.92	71.31	65.65	74.00	8.35	Peak

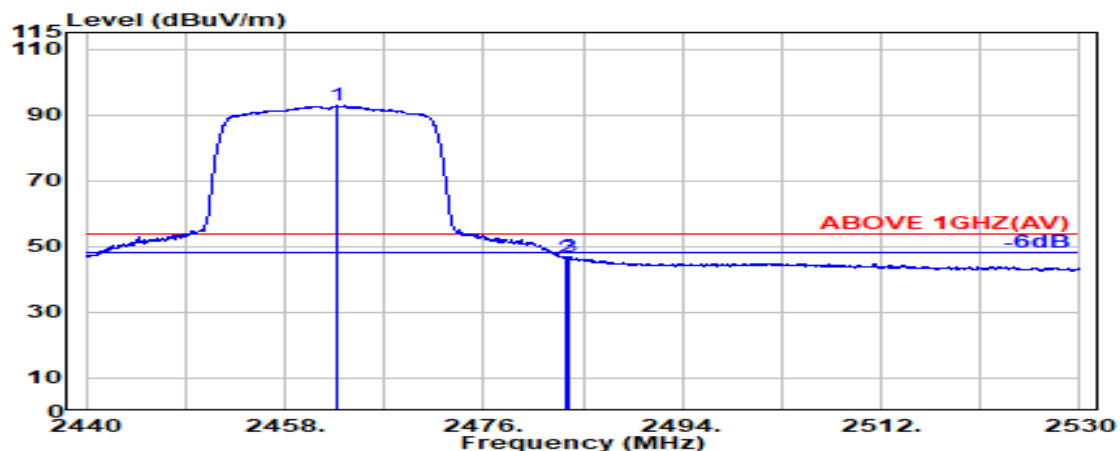

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.750	28.35	5.80	39.92	98.46	92.69	---	---	Average
2483.500	28.43	5.83	39.92	52.19	46.54	54.00	7.46	Average
2483.700	28.44	5.83	39.92	52.60	46.94	54.00	7.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

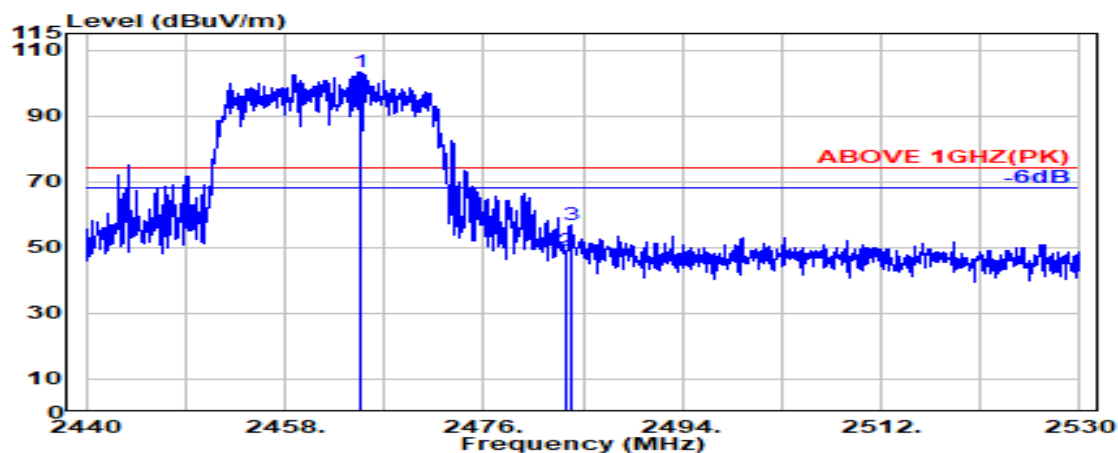

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.950	28.36	5.80	39.92	109.24	103.48	---	---	Peak
2483.500	28.43	5.83	39.92	54.56	48.90	74.00	25.10	Peak
2483.850	28.44	5.83	39.92	62.32	56.67	74.00	17.33	Peak

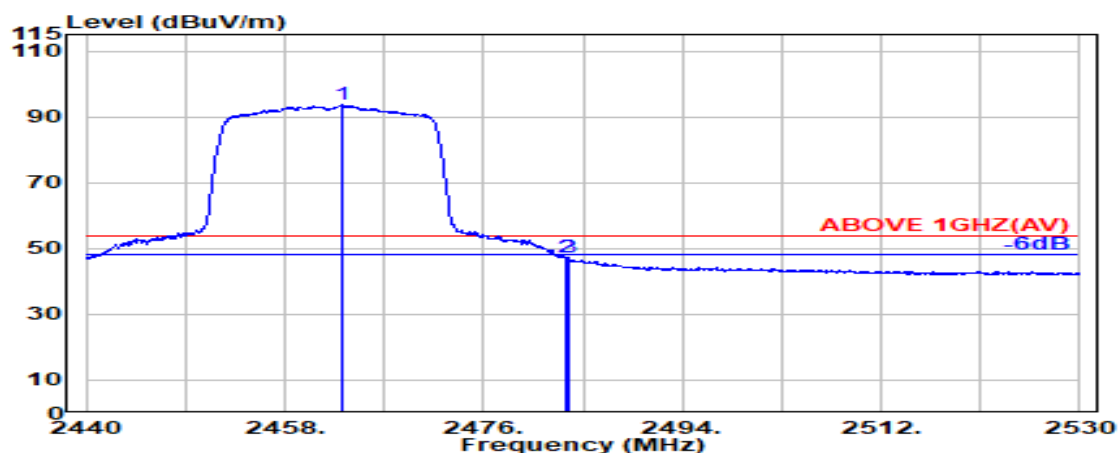

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.150	28.35	5.80	39.92	99.29	93.53	---	---	Average
2483.500	28.43	5.83	39.92	52.95	47.29	54.00	6.71	Average
2483.700	28.44	5.83	39.92	52.99	47.33	54.00	6.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

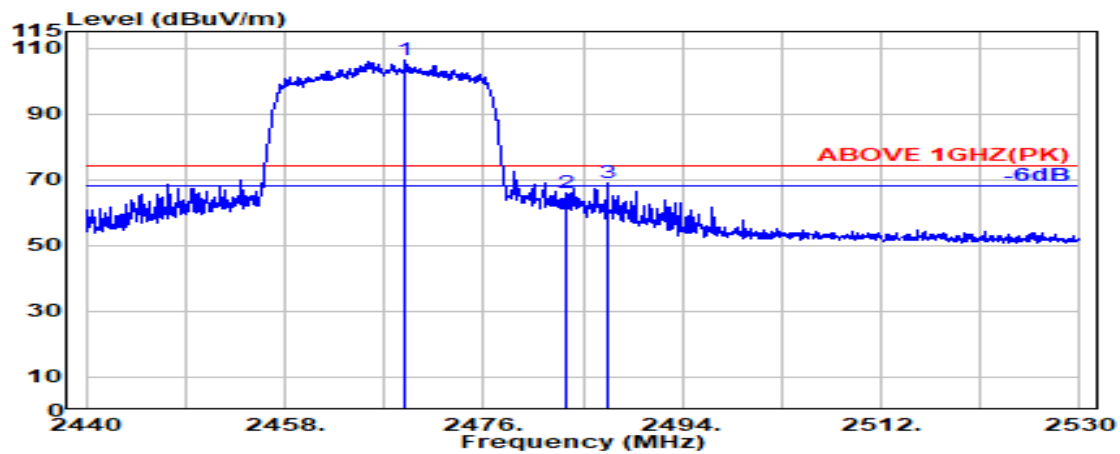

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.900	28.38	5.81	39.92	112.07	106.33	---	---	Peak
2483.500	28.43	5.83	39.92	71.46	65.81	74.00	8.19	Peak
2487.200	28.45	5.83	39.92	74.46	68.82	74.00	5.18	Peak

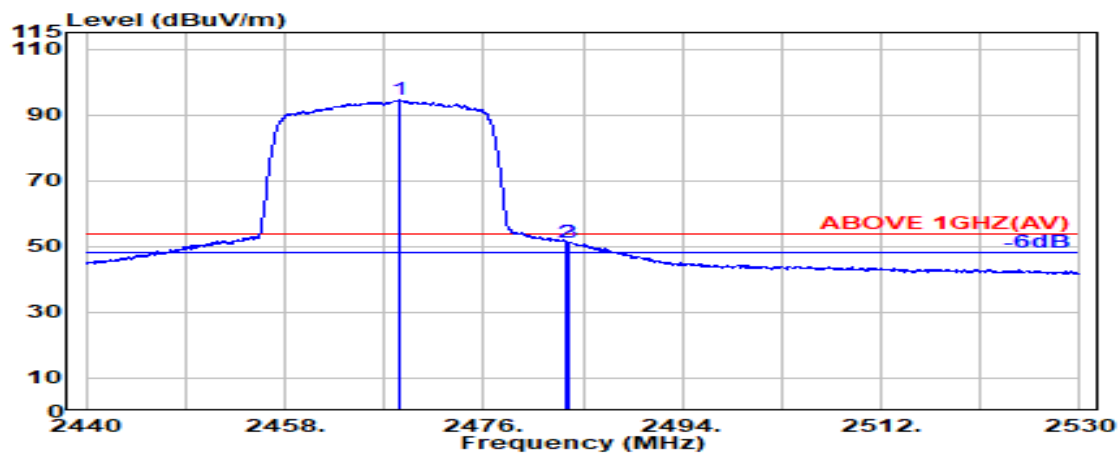

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.350	28.37	5.81	39.92	100.27	94.53	---	---	Average
2483.500	28.43	5.83	39.92	56.72	51.06	54.00	2.94	Average
2483.800	28.44	5.83	39.92	57.06	51.41	54.00	2.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2467 MHz
------	---------------	-----------	-------------

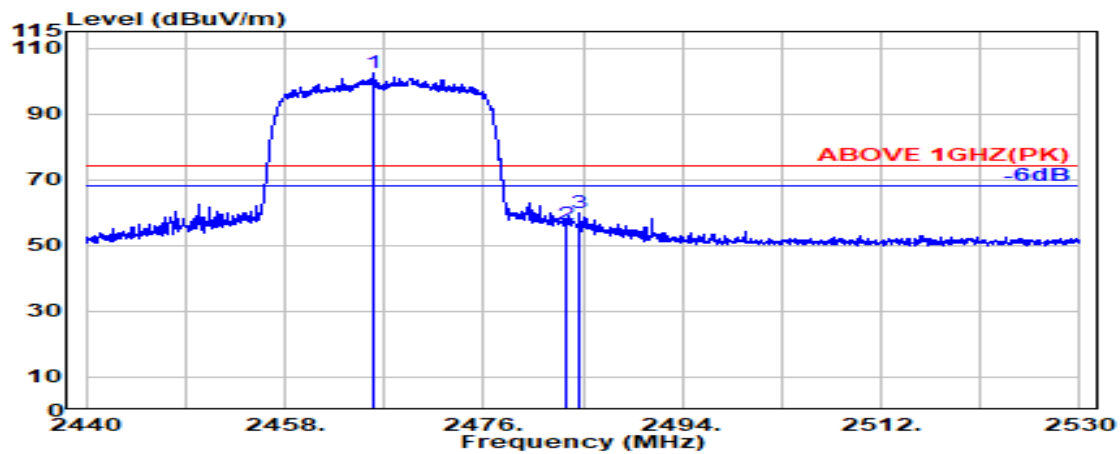

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.36	5.81	39.92	108.13	102.38	---	---	Peak
2483.500	28.43	5.83	39.92	62.16	56.50	74.00	17.50	Peak
2484.700	28.44	5.83	39.92	65.58	59.93	74.00	14.07	Peak

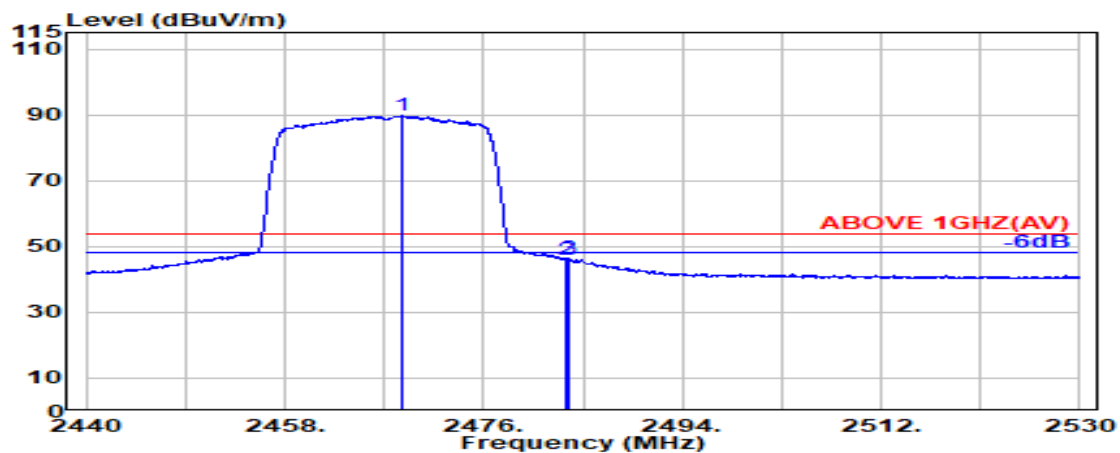

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.700	28.38	5.81	39.92	95.39	89.65	---	---	Average
2483.500	28.43	5.83	39.92	51.62	45.97	54.00	8.03	Average
2483.750	28.44	5.83	39.92	51.87	46.22	54.00	7.78	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

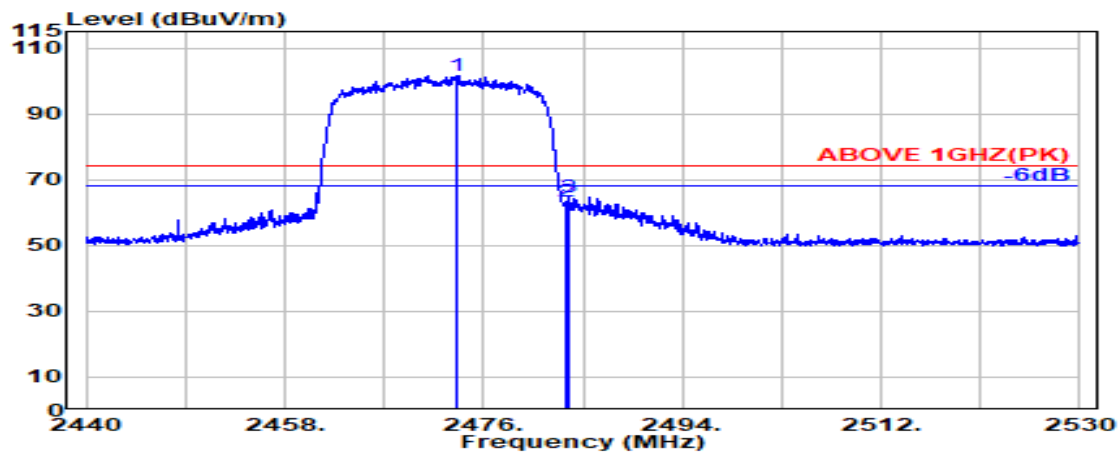

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.500	28.39	5.82	39.92	107.13	101.42	---	---	Peak
2483.500	28.43	5.83	39.92	68.92	63.26	74.00	10.74	Peak
2483.700	28.44	5.83	39.92	70.49	64.83	74.00	9.17	Peak

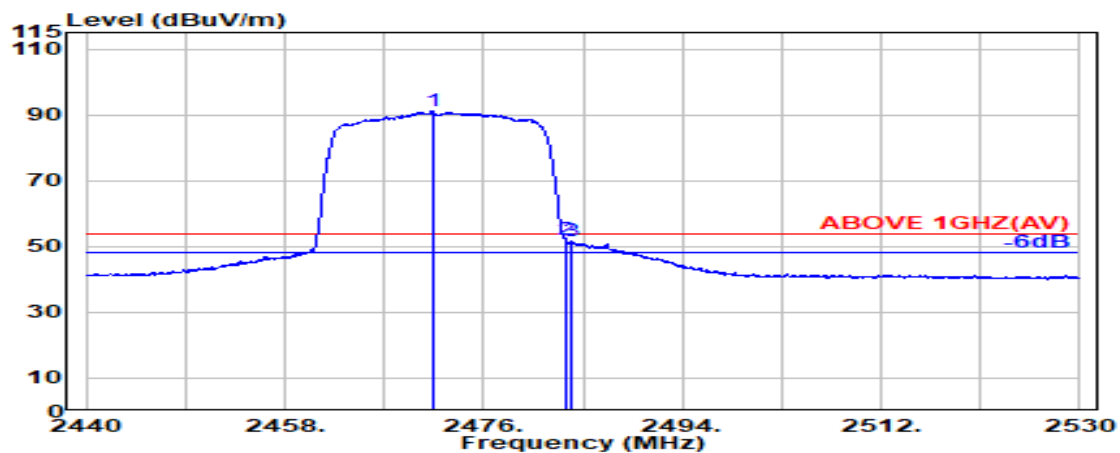

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.350	28.39	5.81	39.92	96.81	91.09	---	---	Average
2483.500	28.43	5.83	39.92	57.62	51.96	54.00	2.04	Average
2484.000	28.44	5.83	39.92	57.22	51.56	54.00	2.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
------	---------------	-----------	-------------

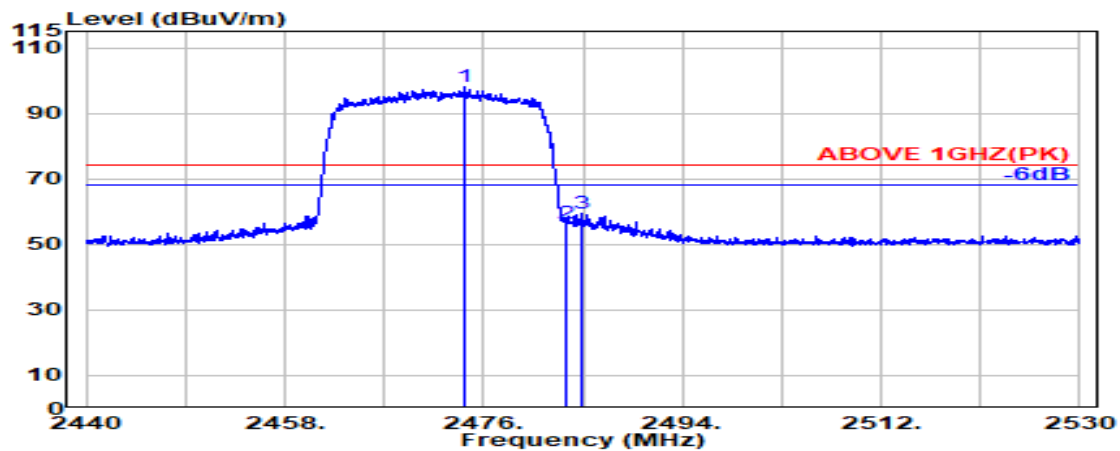

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.350	28.40	5.82	39.92	103.70	97.99	---	---	Peak
2483.500	28.43	5.83	39.92	61.92	56.27	74.00	17.73	Peak
2484.800	28.44	5.83	39.92	65.11	59.46	74.00	14.54	Peak

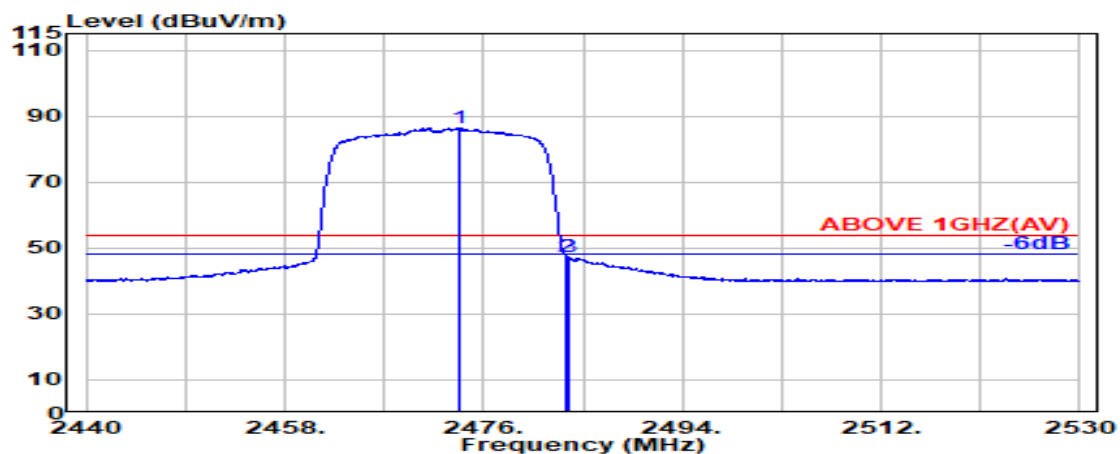

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.700	28.40	5.82	39.92	92.21	86.50	---	---	Average
2483.500	28.43	5.83	39.92	52.87	47.22	54.00	6.78	Average
2483.700	28.44	5.83	39.92	52.84	47.18	54.00	6.82	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

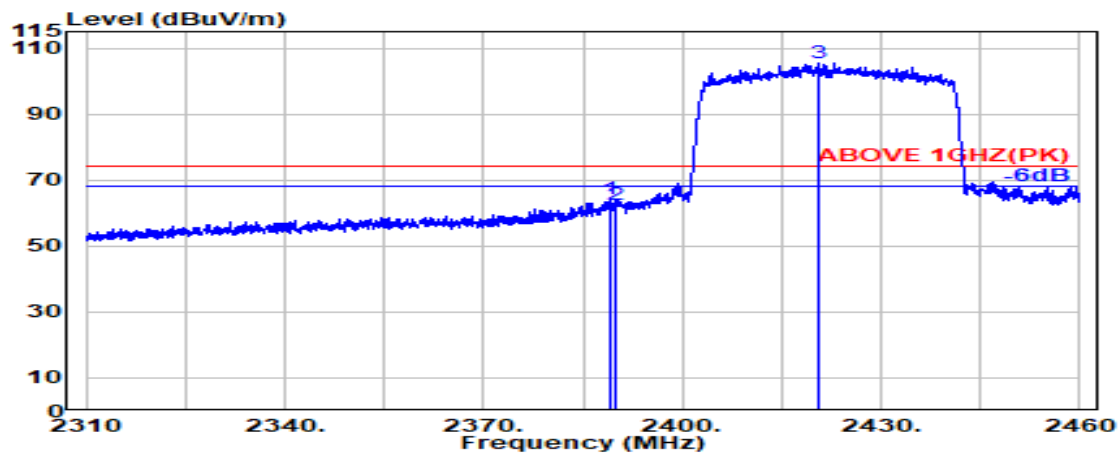

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	70.32	64.30	74.00	9.70	Peak
2389.800	28.20	5.70	39.92	68.48	62.47	74.00	11.53	Peak
@ 2420.500	28.24	5.74	39.92	111.34	105.40	---	---	Peak

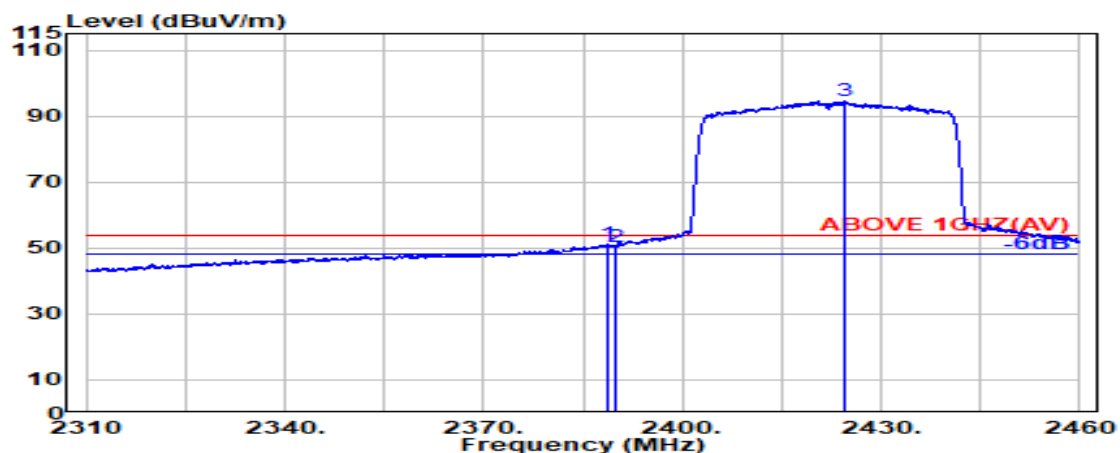

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.600	28.20	5.70	39.92	57.02	51.00	54.00	3.00	Average
2389.800	28.20	5.70	39.92	56.45	50.43	54.00	3.57	Average
@ 2424.500	28.25	5.75	39.92	100.55	94.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

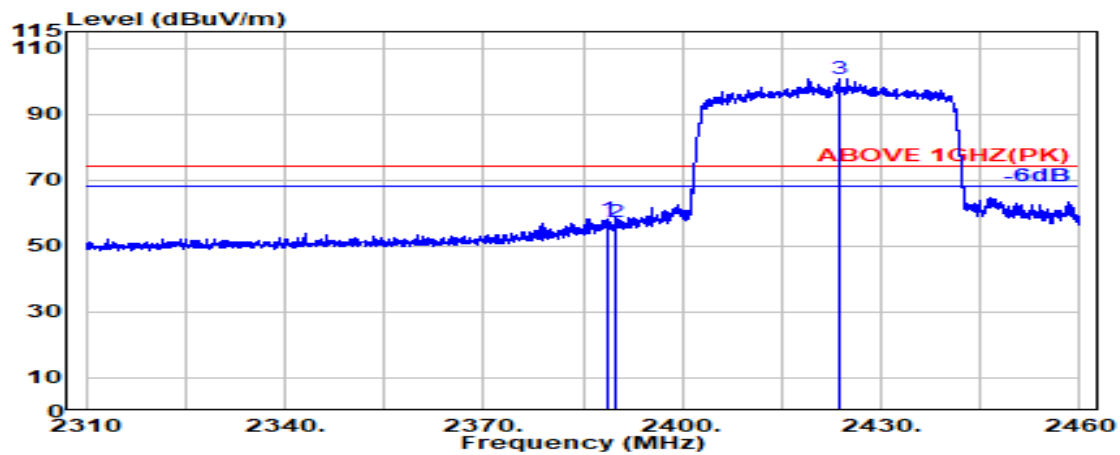

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.20	5.70	39.92	64.22	58.20	74.00	15.80	Peak
2389.800	28.20	5.70	39.92	63.18	57.16	74.00	16.84	Peak
@ 2423.650	28.25	5.75	39.92	106.63	100.70	---	---	Peak

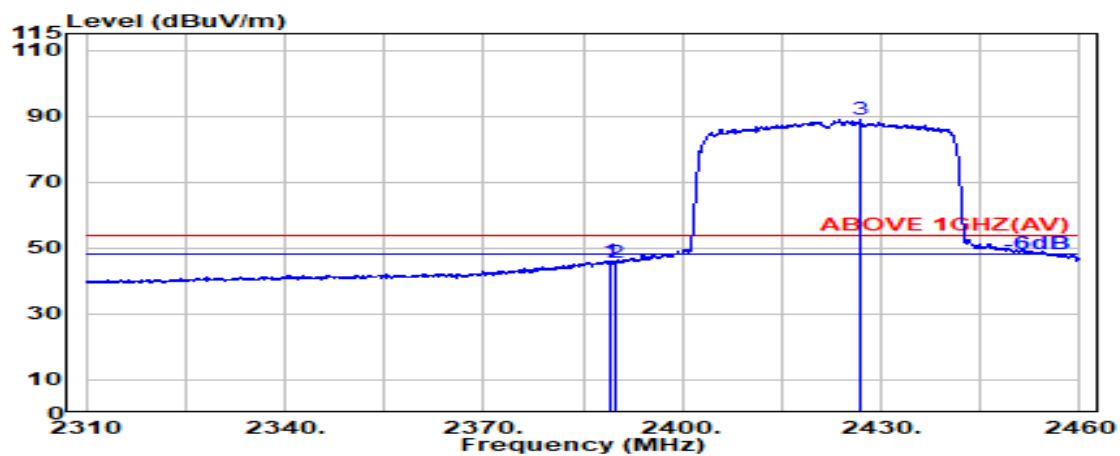

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.300	28.20	5.70	39.92	52.13	46.12	54.00	7.88	Average
2389.800	28.20	5.70	39.92	51.60	45.58	54.00	8.42	Average
@ 2426.850	28.25	5.75	39.92	95.07	89.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

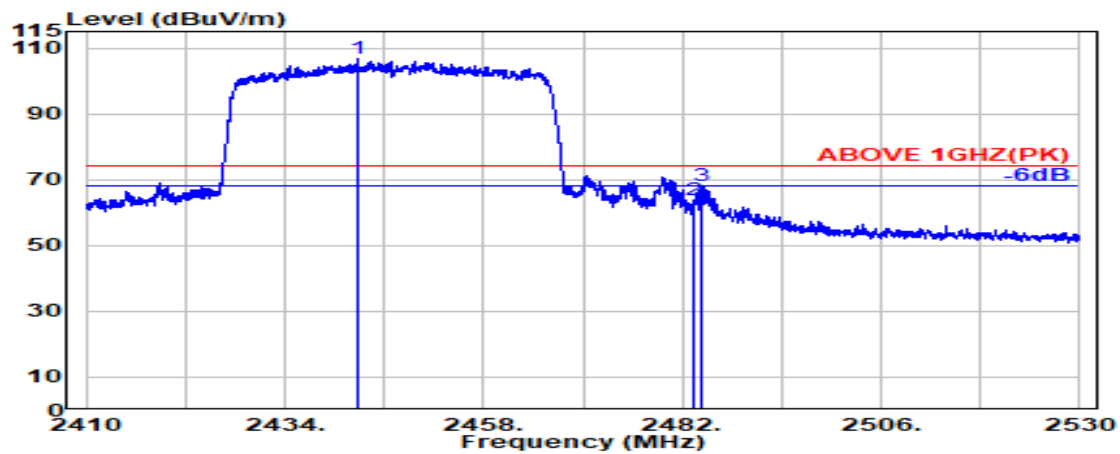

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2442.850	28.29	5.77	39.92	112.52	106.66	---	---	Peak
2483.500	28.43	5.83	39.92	69.33	63.68	74.00	10.32	Peak
@ 2484.350	28.44	5.83	39.92	73.64	67.99	74.00	6.01	Peak

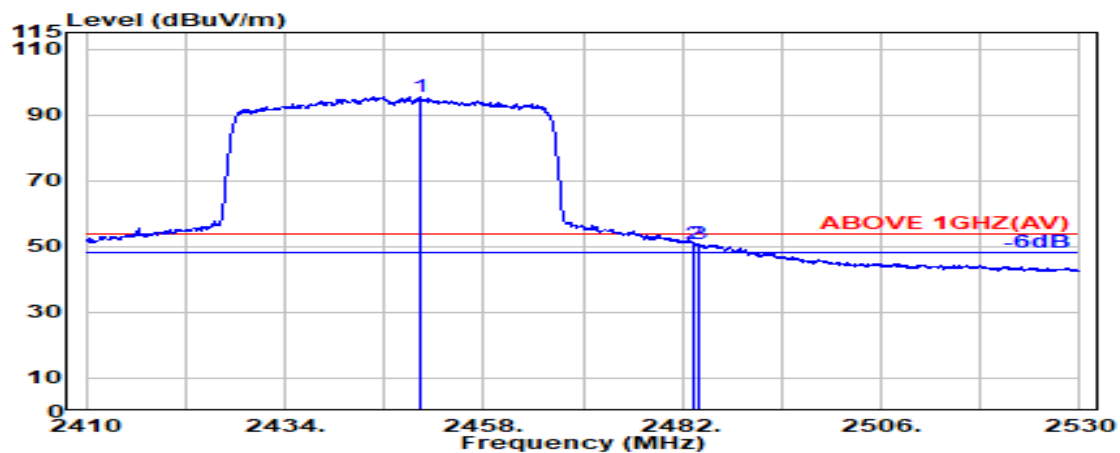

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2450.300	28.30	5.78	39.92	101.37	95.54	---	---	Average
2483.500	28.43	5.83	39.92	56.25	50.59	54.00	3.41	Average
@ 2483.900	28.44	5.83	39.92	56.52	50.87	54.00	3.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2447MHz
------	---------------	-----------	------------

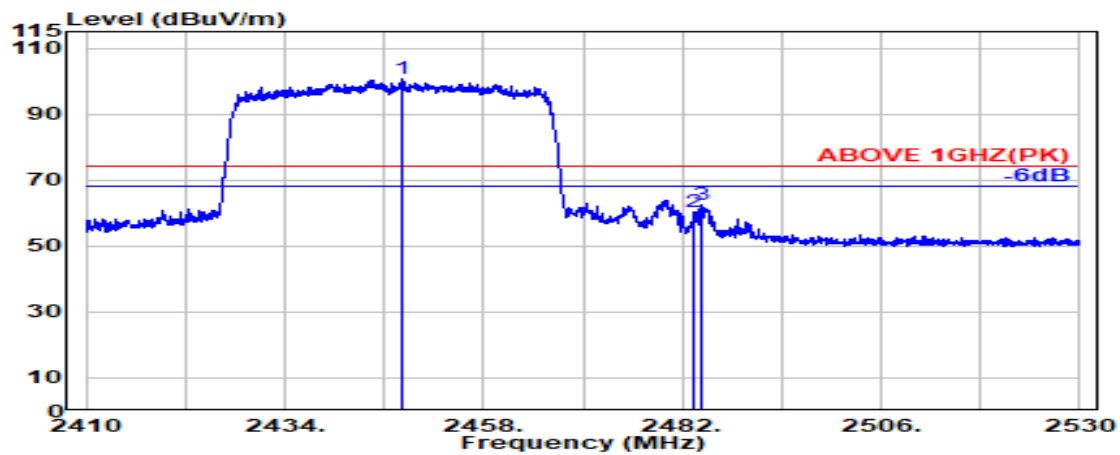

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2448.300	28.30	5.78	39.92	106.53	100.69	---	---	Peak
2483.500	28.43	5.83	39.92	65.95	60.29	74.00	13.71	Peak
@ 2484.400	28.44	5.83	39.92	68.31	62.66	74.00	11.34	Peak

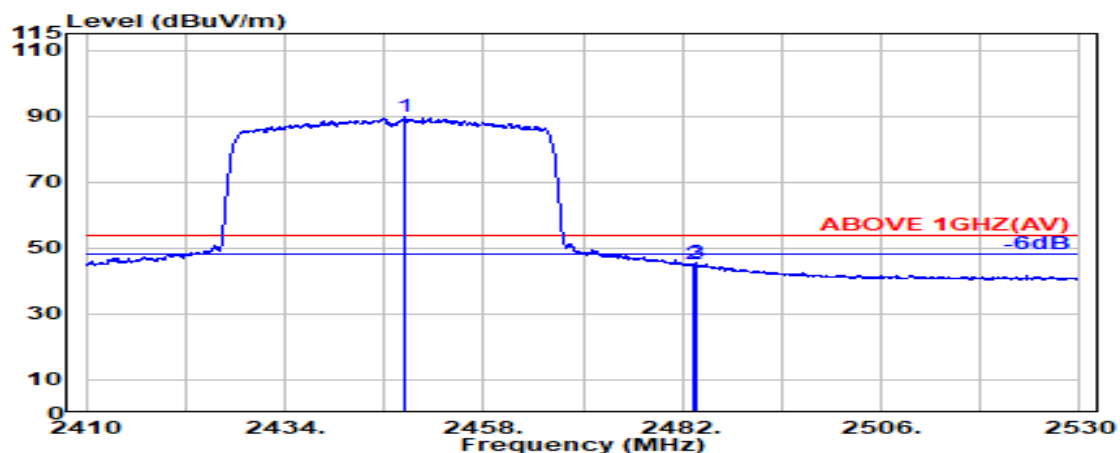

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2448.450	28.30	5.78	39.92	95.57	89.73	---	---	Average
2483.500	28.43	5.83	39.92	51.00	45.35	54.00	8.65	Average
@ 2483.700	28.44	5.83	39.92	51.04	45.39	54.00	8.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

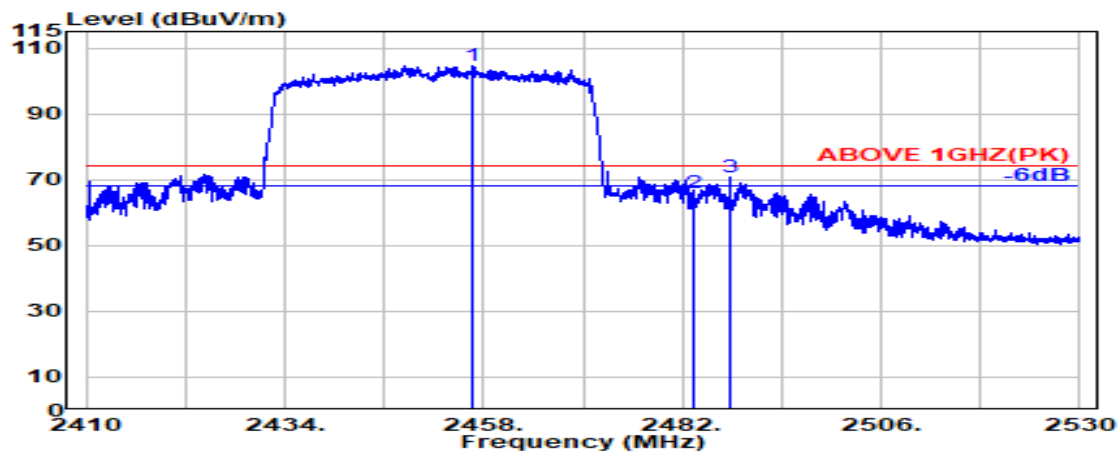

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.750	28.33	5.79	39.92	110.47	104.67	---	---	Peak
2483.500	28.43	5.83	39.92	71.52	65.86	74.00	8.14	Peak
2487.750	28.45	5.83	39.92	76.24	70.61	74.00	3.39	Peak

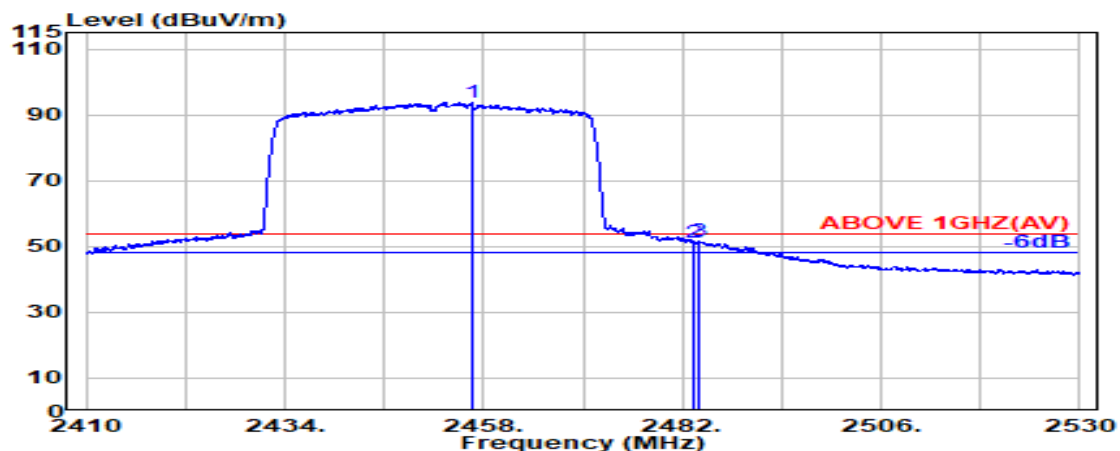

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.500	28.33	5.79	39.92	99.55	93.75	---	---	Average
2483.500	28.43	5.83	39.92	56.92	51.26	54.00	2.74	Average
2484.050	28.44	5.83	39.92	57.32	51.67	54.00	2.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

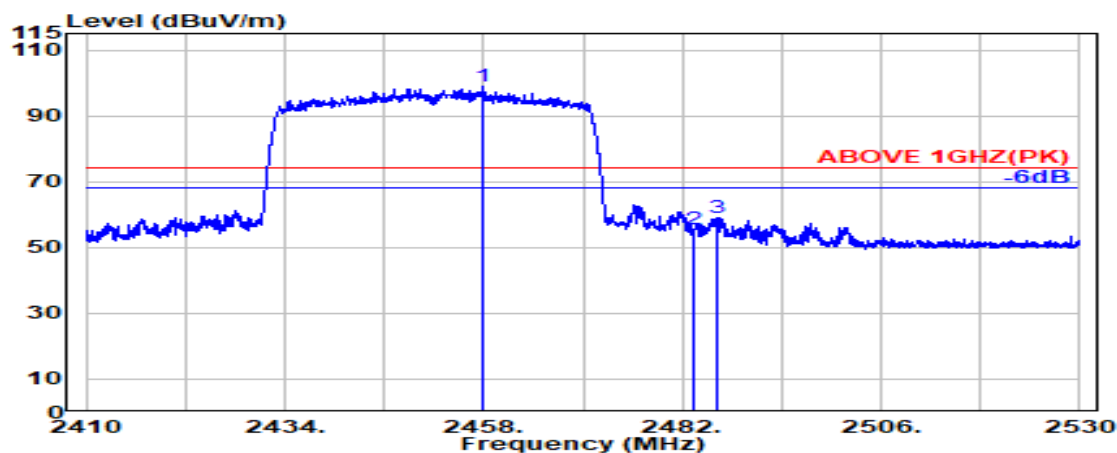

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2457.950	28.33	5.79	39.92	104.80	99.01	---	---	Peak
2483.500	28.43	5.83	39.92	61.11	55.45	74.00	18.55	Peak
2486.050	28.44	5.83	39.92	64.86	59.22	74.00	14.78	Peak

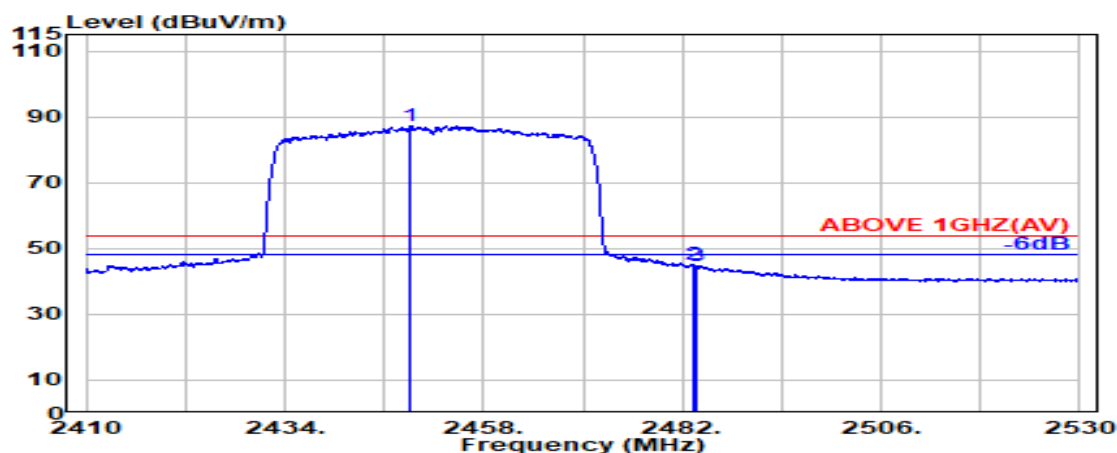

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2449.250	28.30	5.78	39.92	93.22	87.38	---	---	Average
2483.500	28.43	5.83	39.92	50.57	44.92	54.00	9.08	Average
2483.750	28.44	5.83	39.92	50.40	44.74	54.00	9.26	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

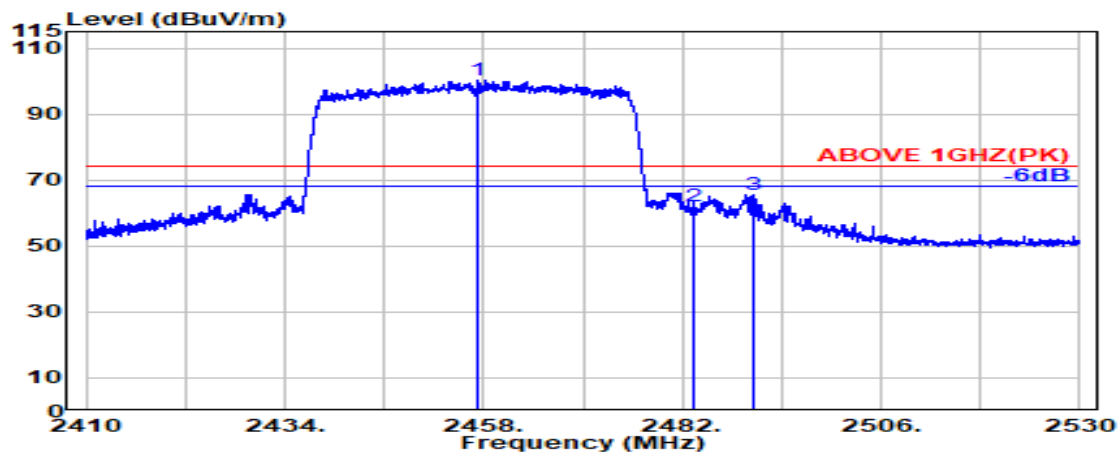

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2457.400	28.33	5.79	39.92	106.11	100.31	---	---	Peak
	2483.500	28.43	5.83	39.92	67.60	61.94	74.00	12.06	Peak
	2490.500	28.46	5.84	39.92	71.17	65.55	74.00	8.45	Peak

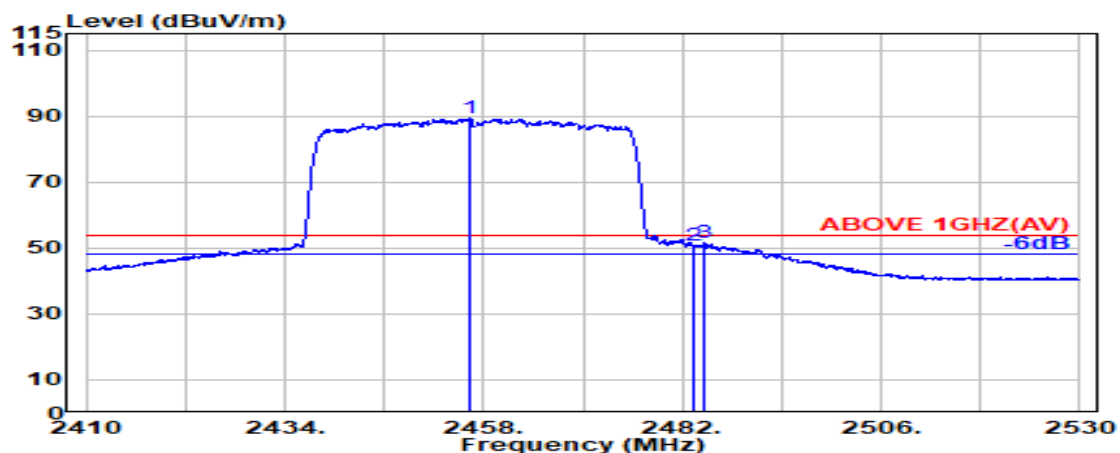

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2456.250	28.33	5.79	39.92	95.03	89.22	---	---	Average
	2483.500	28.43	5.83	39.92	56.25	50.59	54.00	3.41	Average
	2484.600	28.44	5.83	39.92	57.38	51.73	54.00	2.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

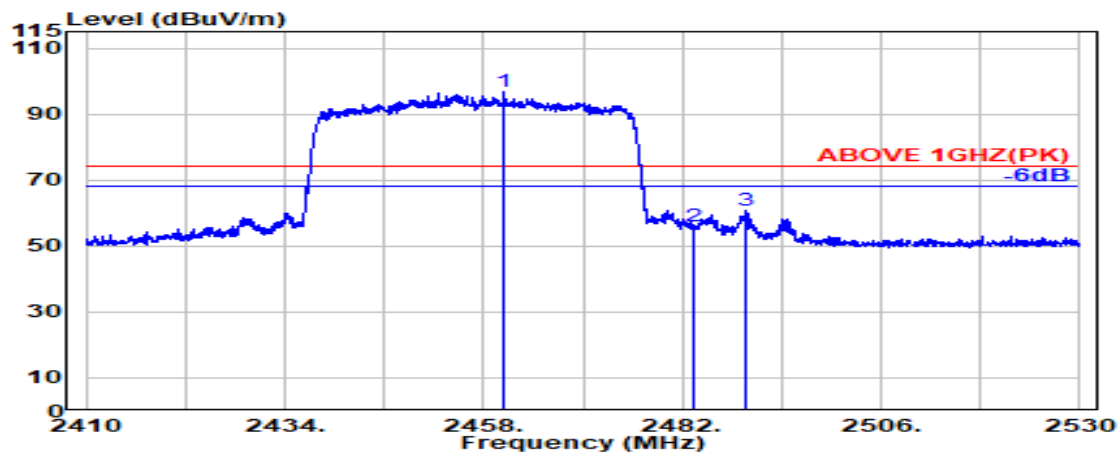

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.500	28.34	5.80	39.92	102.55	96.77	---	---	Peak
2483.500	28.43	5.83	39.92	61.84	56.18	74.00	17.82	Peak
2489.750	28.46	5.84	39.92	66.38	60.76	74.00	13.24	Peak

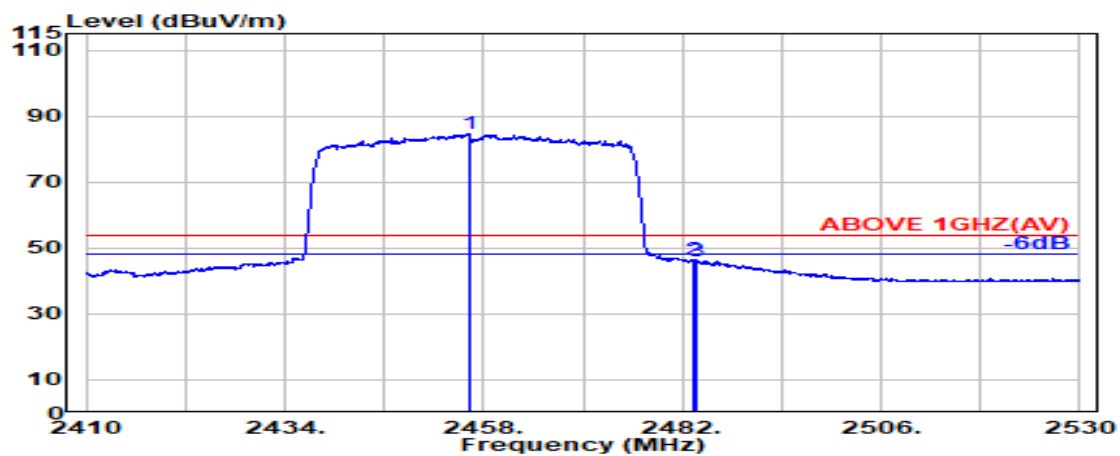


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.250	28.33	5.79	39.92	90.35	84.55	---	---	Average
2483.500	28.43	5.83	39.92	52.17	46.51	54.00	7.49	Average
2483.700	28.44	5.83	39.92	51.84	46.18	54.00	7.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

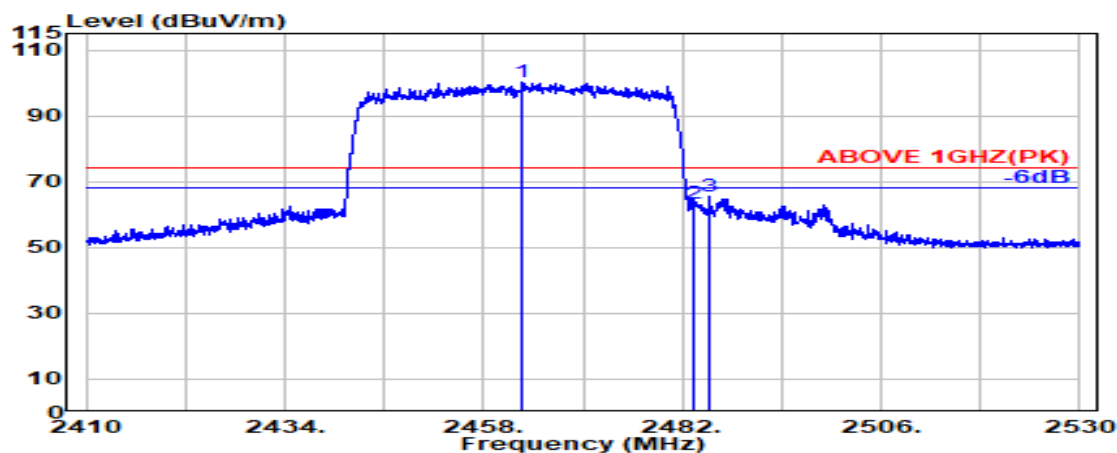

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.750	28.35	5.80	39.92	105.83	100.06	---	---	Peak
2483.500	28.43	5.83	39.92	69.22	63.56	74.00	10.44	Peak
2485.250	28.44	5.83	39.92	70.99	65.34	74.00	8.66	Peak

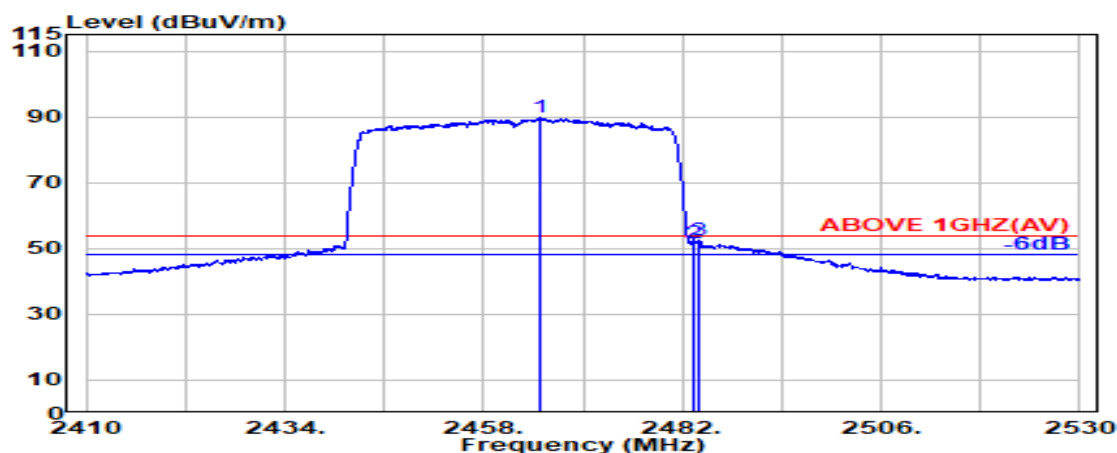

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.850	28.36	5.80	39.92	95.51	89.75	---	---	Average
2483.500	28.43	5.83	39.92	57.43	51.77	54.00	2.23	Average
2483.900	28.44	5.83	39.92	58.08	52.43	54.00	1.57	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

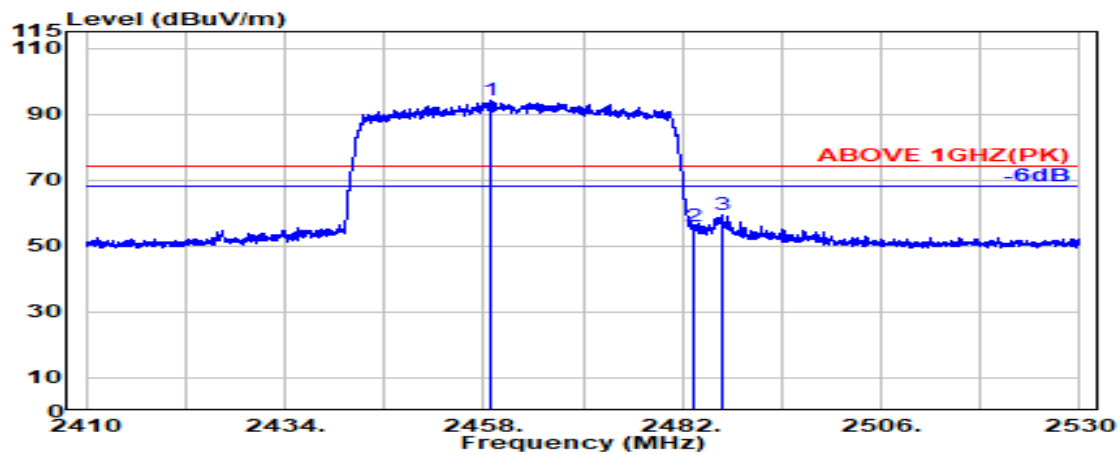

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.750	28.34	5.80	39.92	99.81	94.02	---	---	Peak
2483.500	28.43	5.83	39.92	61.43	55.77	74.00	18.23	Peak
2486.850	28.45	5.83	39.92	65.02	59.38	74.00	14.62	Peak

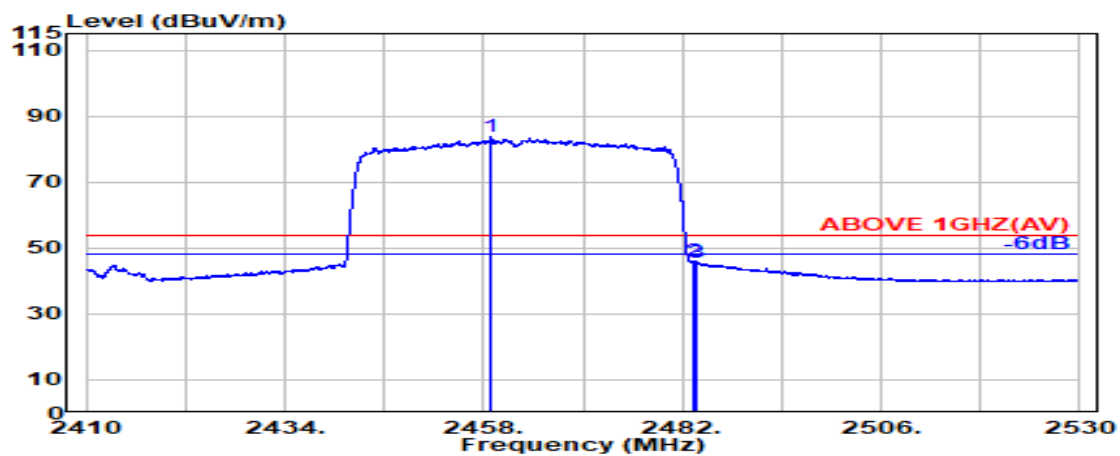

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.950	28.34	5.80	39.92	89.33	83.54	---	---	Average
2483.500	28.43	5.83	39.92	51.73	46.08	54.00	7.92	Average
2483.700	28.44	5.83	39.92	51.39	45.73	54.00	8.27	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

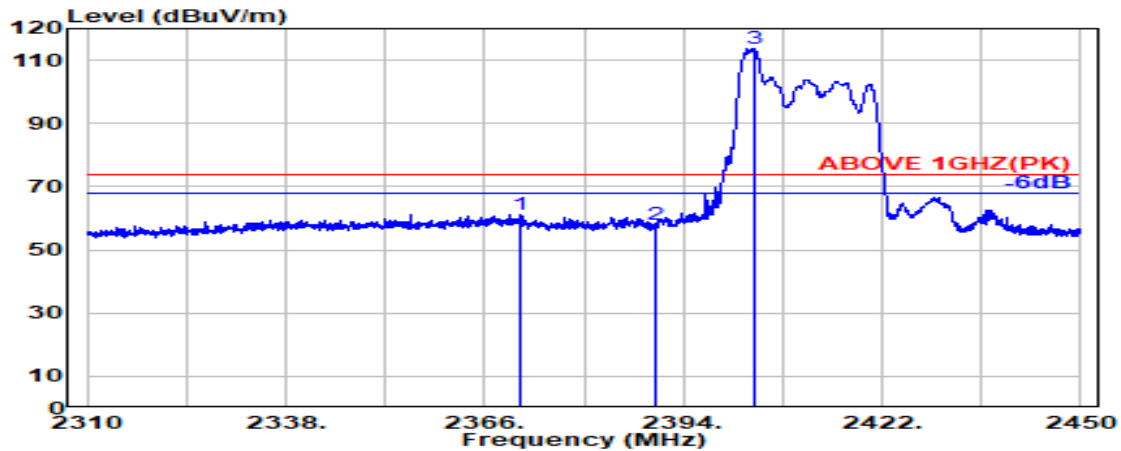

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2370.900	28.20	5.68	39.92	67.33	61.29	74.00	12.71	Peak
2390.000	28.20	5.70	39.92	64.04	58.03	74.00	15.97	Peak
@ 2404.000	28.21	5.72	39.92	119.72	113.73	---	---	Peak

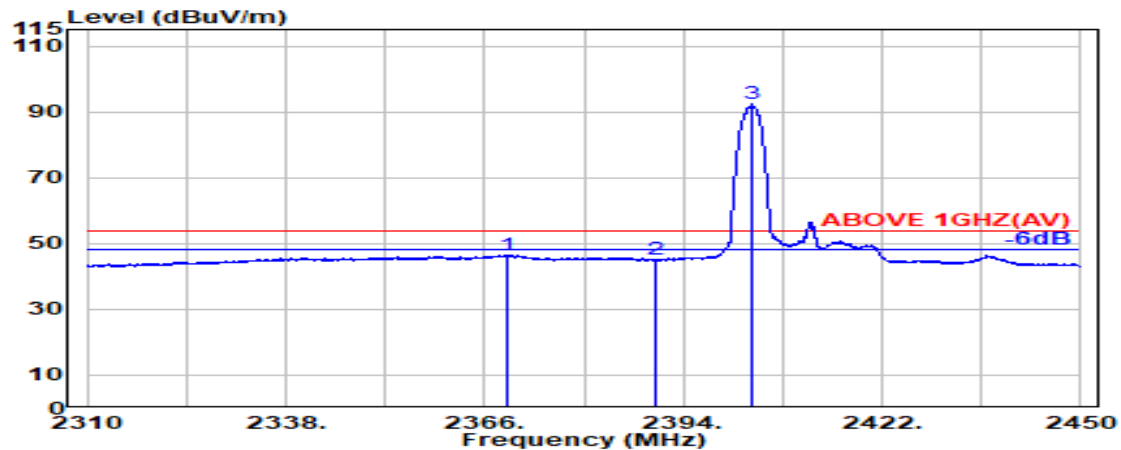

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2369.200	28.20	5.67	39.92	52.65	46.60	54.00	7.40	Average
2390.000	28.20	5.70	39.92	50.99	44.98	54.00	9.02	Average
@ 2403.750	28.21	5.72	39.92	98.39	92.40	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	26/0		

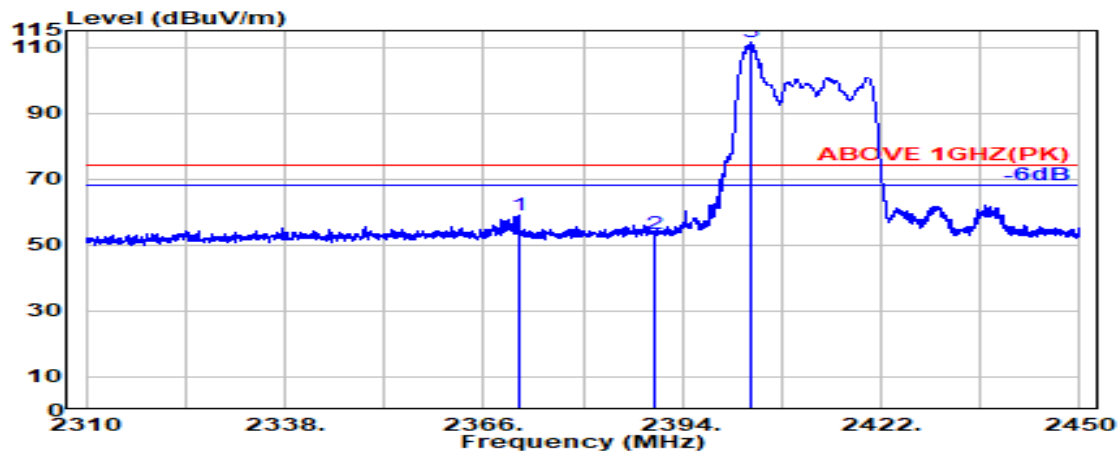

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2370.950	28.20	5.68	39.92	65.17	59.13	74.00	14.87	Peak
2390.000	28.20	5.70	39.92	59.22	53.20	74.00	20.80	Peak
@ 2403.650	28.21	5.72	39.92	117.44	111.45	---	---	Peak

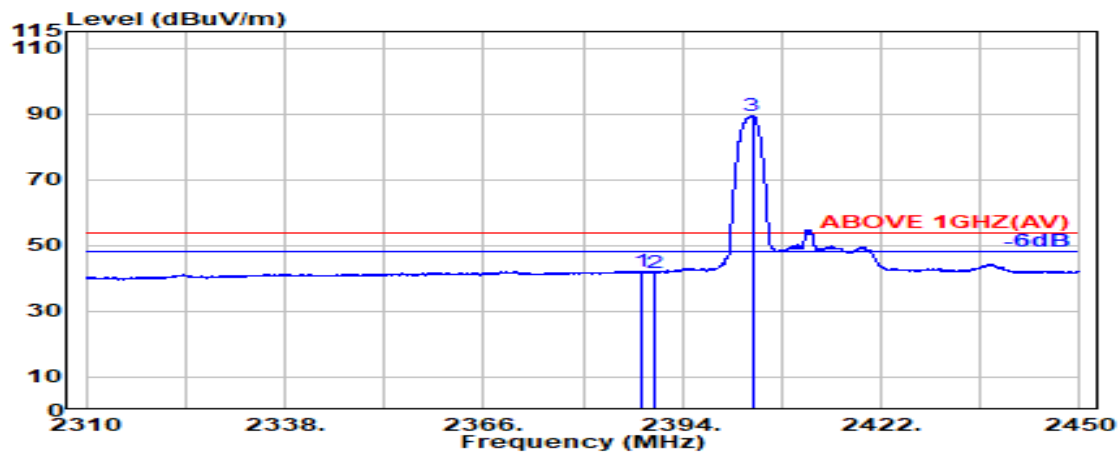

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.400	28.20	5.70	39.92	48.30	42.28	54.00	11.72	Average
2390.000	28.20	5.70	39.92	47.53	41.51	54.00	12.49	Average
@ 2403.850	28.21	5.72	39.92	95.57	89.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

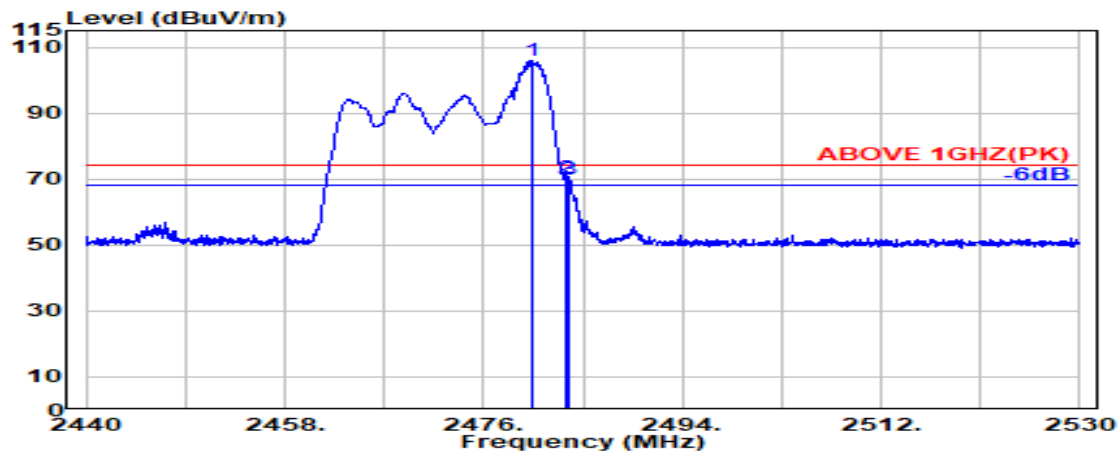

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.400	28.42	5.82	39.92	111.52	105.85	---	---	Peak
2483.500	28.43	5.83	39.92	75.75	70.10	74.00	3.90	Peak
2483.700	28.44	5.83	39.92	75.41	69.75	74.00	4.25	Peak

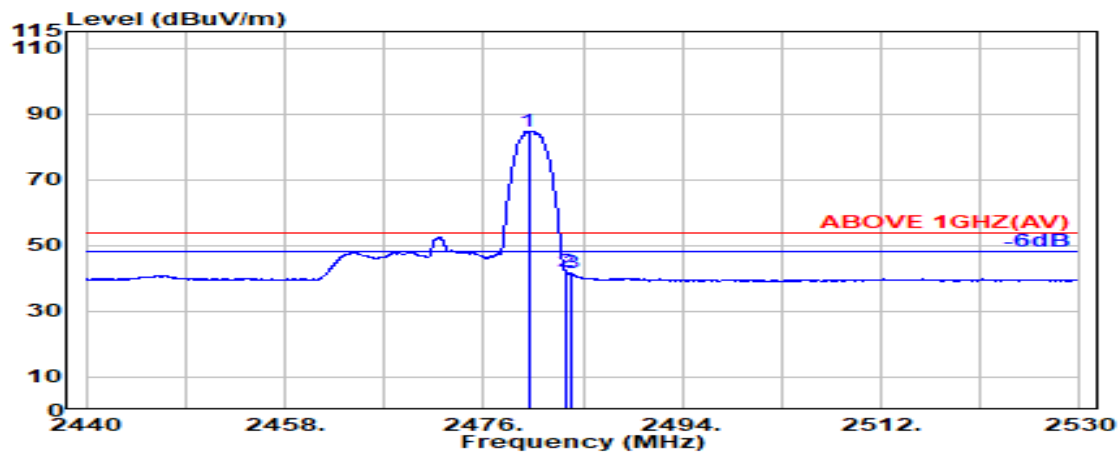

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.92	90.45	84.77	---	---	Average
2483.500	28.43	5.83	39.92	47.64	41.99	54.00	12.01	Average
2483.850	28.44	5.83	39.92	47.20	41.54	54.00	12.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	26/8		

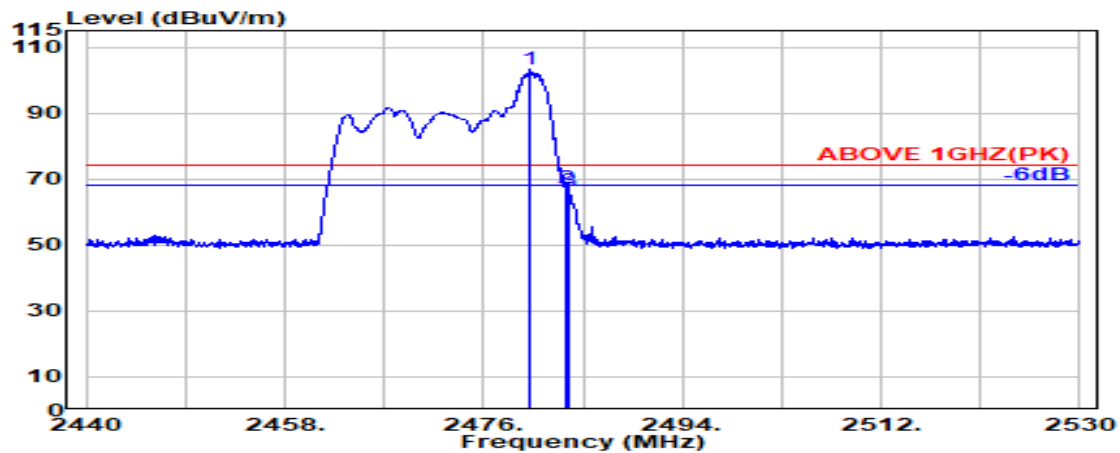

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.42	5.82	39.92	109.01	103.34	---	---	Peak
2483.500	28.43	5.83	39.92	72.85	67.19	74.00	6.81	Peak
2483.800	28.44	5.83	39.92	72.07	66.42	74.00	7.58	Peak

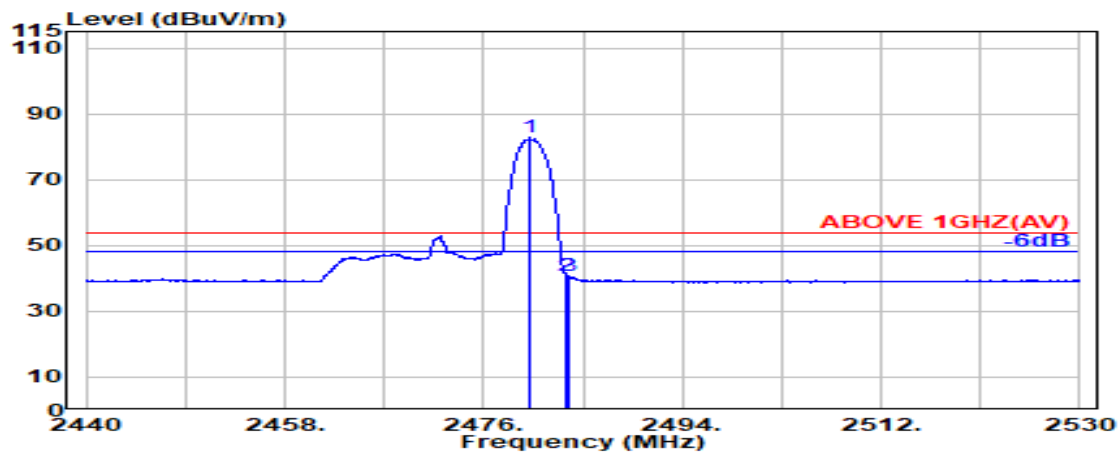

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.150	28.42	5.82	39.92	88.39	82.71	---	---	Average
2483.500	28.43	5.83	39.92	46.55	40.89	54.00	13.11	Average
2483.700	28.44	5.83	39.92	46.54	40.88	54.00	13.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

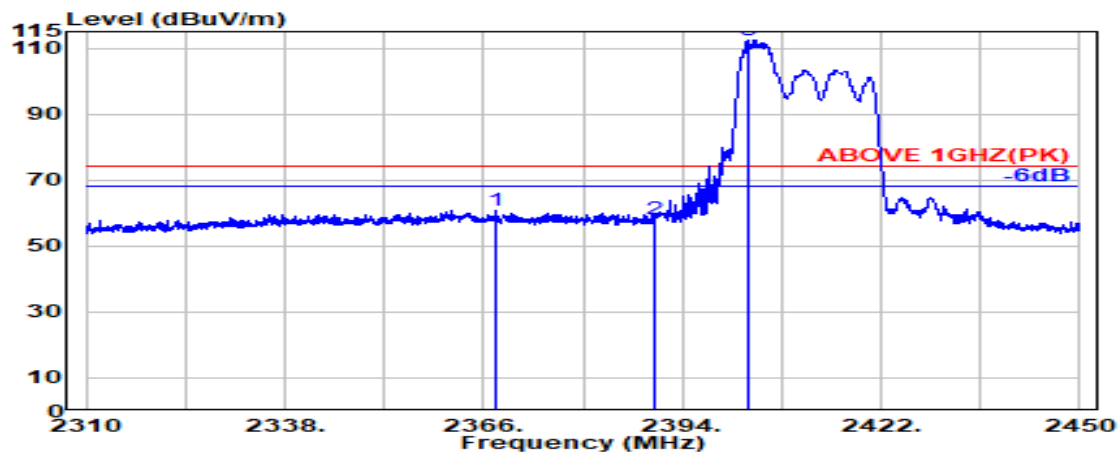

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.850	28.20	5.67	39.92	66.81	60.77	74.00	13.24	Peak
2390.000	28.20	5.70	39.92	64.18	58.17	74.00	15.83	Peak
@ 2403.200	28.21	5.72	39.92	118.47	112.48	---	---	Peak

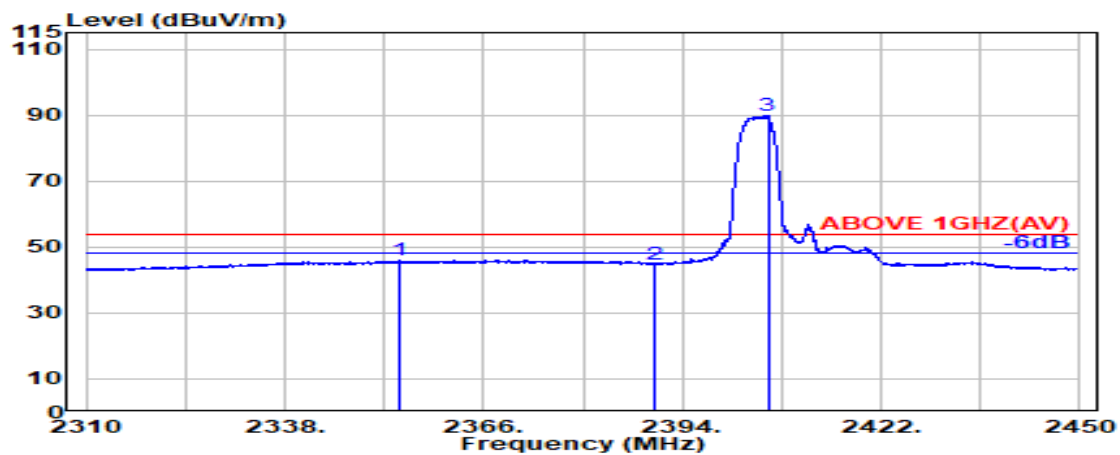

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.000	28.20	5.65	39.92	51.96	45.89	54.00	8.11	Average
2390.000	28.20	5.70	39.92	50.93	44.91	54.00	9.09	Average
@ 2406.050	28.21	5.72	39.92	95.92	89.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412 MHz
RU Configuration	52/37		

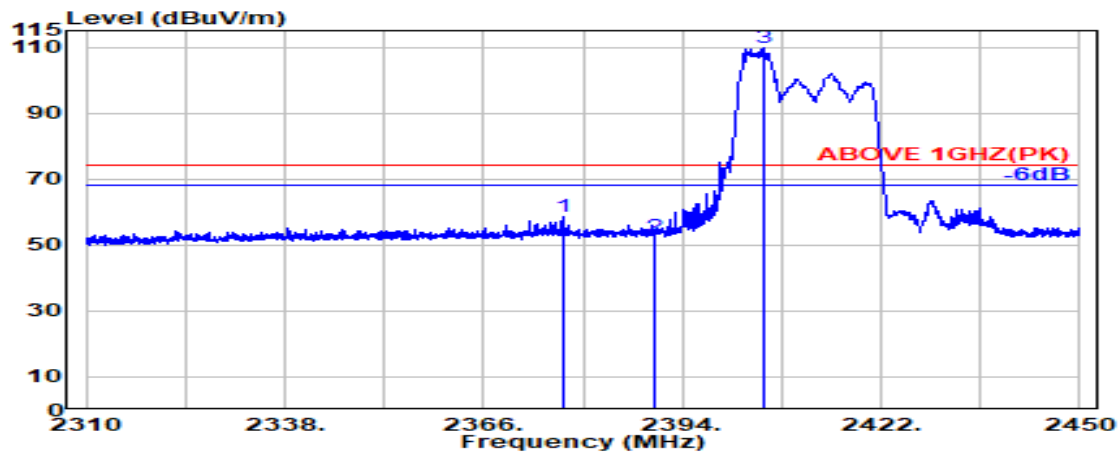

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2377.300	28.20	5.69	39.92	64.47	58.44	74.00	15.56	Peak
2390.000	28.20	5.70	39.92	58.55	52.54	74.00	21.46	Peak
@ 2405.350	28.21	5.72	39.92	115.67	109.68	---	---	Peak

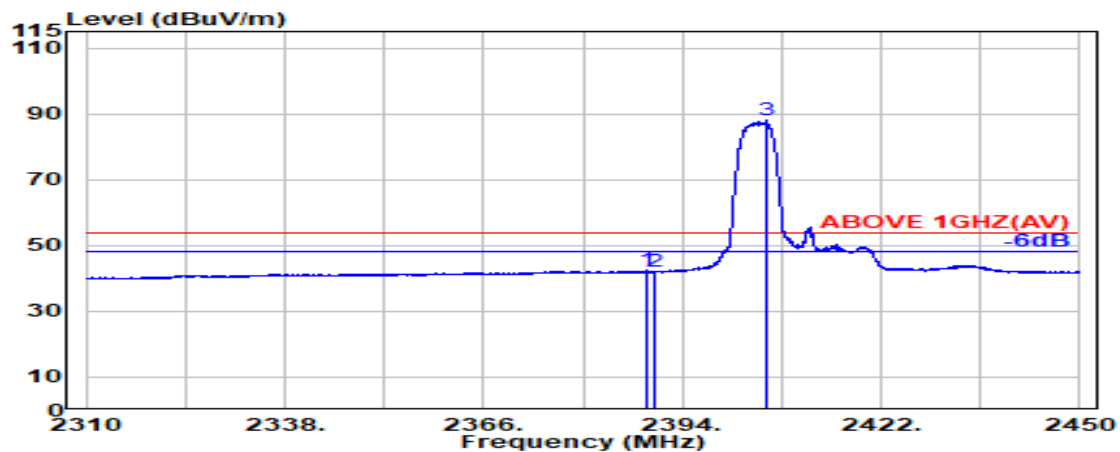

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.850	28.20	5.70	39.92	48.33	42.31	54.00	11.69	Average
2390.000	28.20	5.70	39.92	48.08	42.07	54.00	11.93	Average
@ 2405.900	28.21	5.72	39.92	93.97	87.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

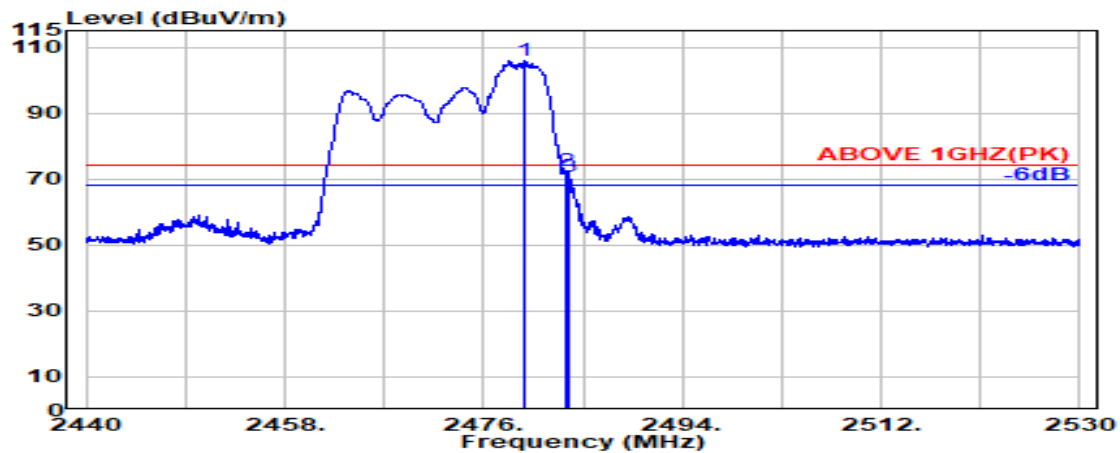

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.650	28.42	5.82	39.92	111.61	105.93	---	---	Peak
2483.500	28.43	5.83	39.92	78.07	72.41	74.00	1.59	Peak
2483.800	28.44	5.83	39.92	76.34	70.68	74.00	3.32	Peak

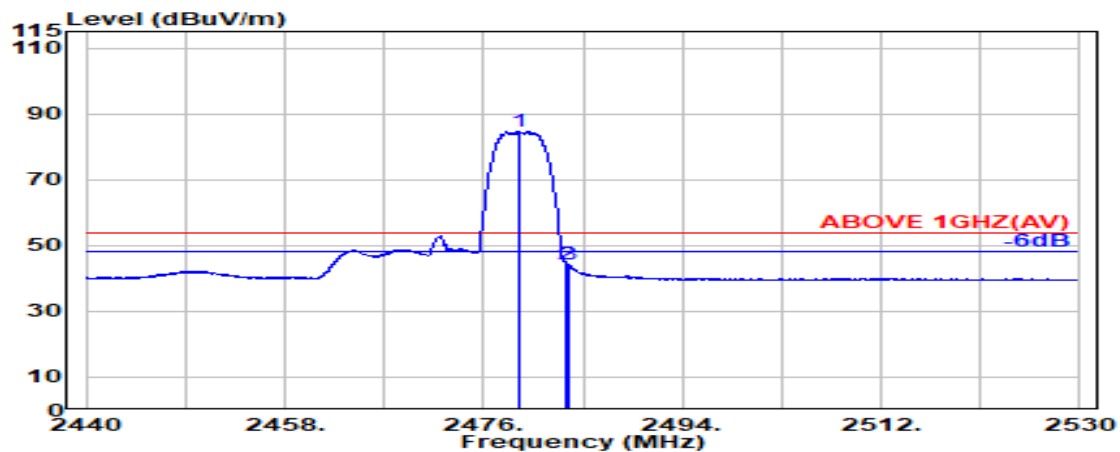

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.300	28.42	5.82	39.92	90.34	84.66	---	---	Average
2483.500	28.43	5.83	39.92	49.79	44.14	54.00	9.86	Average
2483.800	28.44	5.83	39.92	49.85	44.19	54.00	9.81	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472 MHz
RU Configuration	52/40		

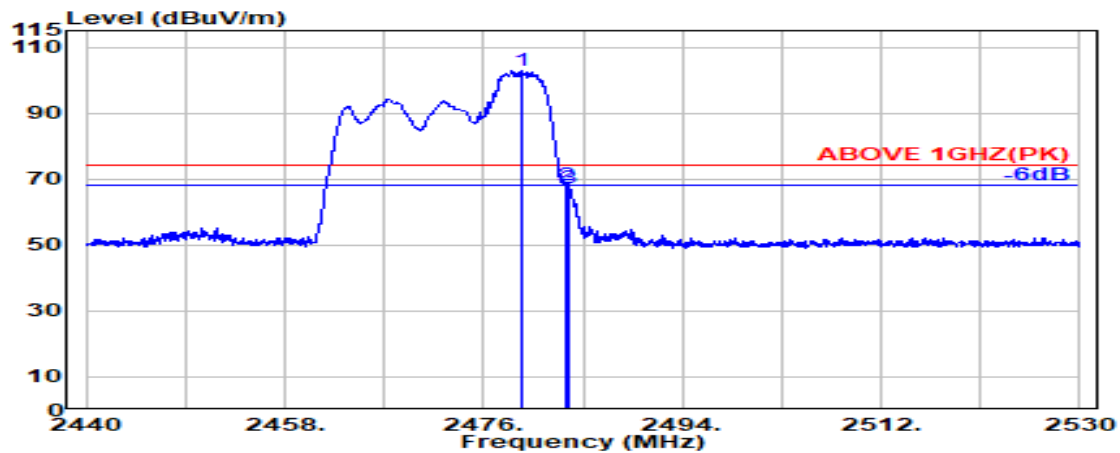

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.400	28.42	5.82	39.92	108.52	102.85	---	---	Peak
2483.500	28.43	5.83	39.92	73.59	67.93	74.00	6.07	Peak
2483.700	28.44	5.83	39.92	73.11	67.46	74.00	6.54	Peak

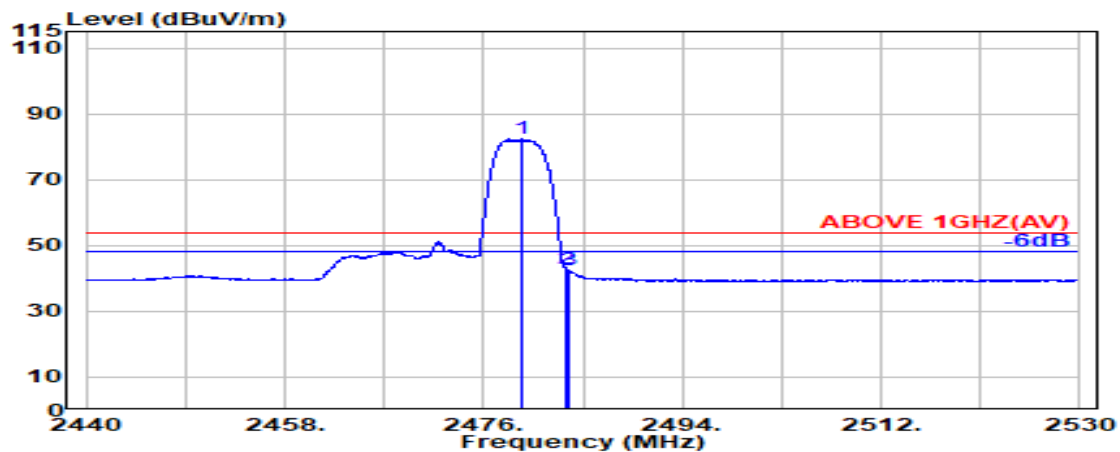

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.42	5.82	39.92	88.07	82.39	---	---	Average
2483.500	28.43	5.83	39.92	48.54	42.88	54.00	11.12	Average
2483.700	28.44	5.83	39.92	48.34	42.69	54.00	11.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

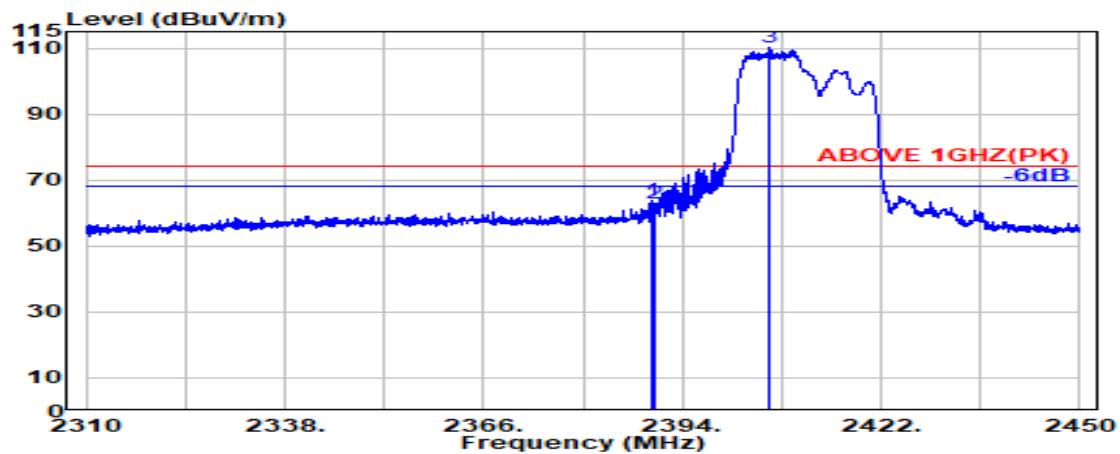

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.70	39.92	69.69	63.67	74.00	10.33	Peak
2390.000	28.20	5.70	39.92	68.97	62.95	74.00	11.05	Peak
@ 2406.100	28.21	5.72	39.92	116.00	110.02	---	---	Peak

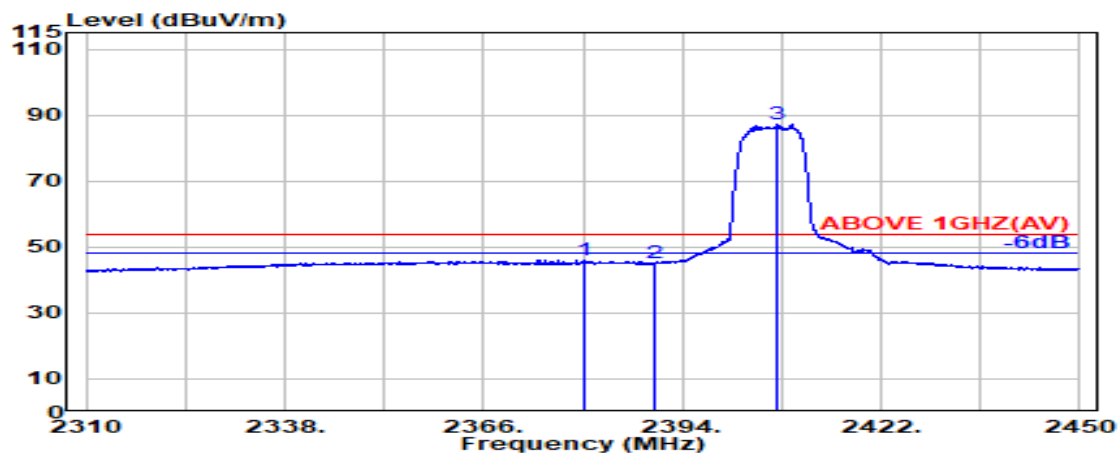

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.050	28.20	5.69	39.92	52.22	46.19	54.00	7.81	Average
2390.000	28.20	5.70	39.92	51.28	45.26	54.00	8.74	Average
@ 2407.500	28.22	5.73	39.92	93.15	87.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2412MHz
RU Configuration	106/53		

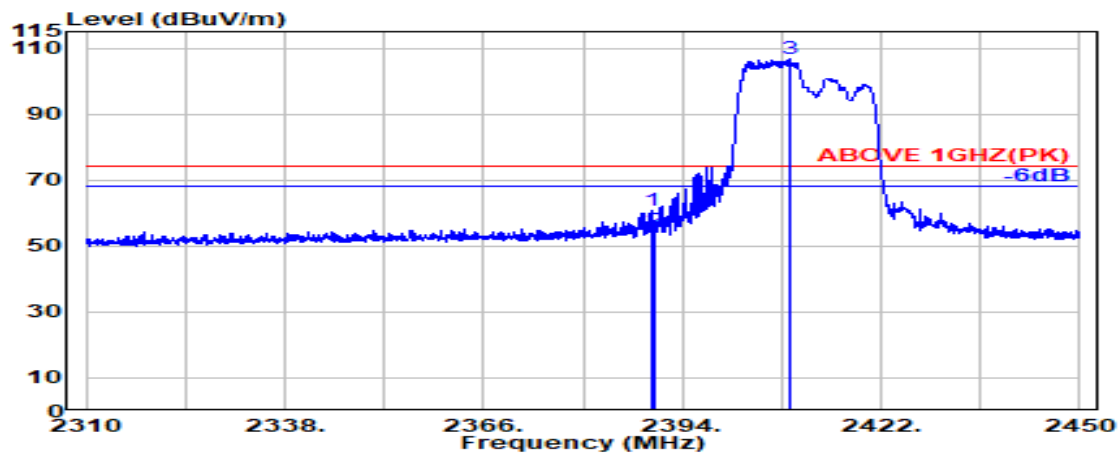

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.600	28.20	5.70	39.92	66.88	60.86	74.00	13.14	Peak
2390.000	28.20	5.70	39.92	60.87	54.85	74.00	19.15	Peak
@ 2409.100	28.22	5.73	39.92	112.85	106.88	---	---	Peak

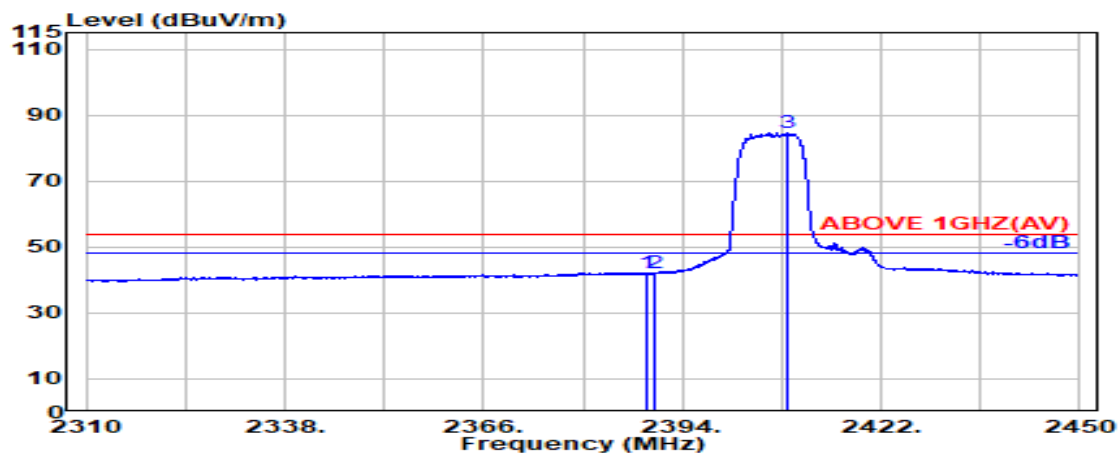

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.100	28.20	5.70	39.92	48.30	42.28	54.00	11.72	Average
2390.000	28.20	5.70	39.92	48.14	42.13	54.00	11.87	Average
@ 2408.650	28.22	5.73	39.92	90.69	84.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

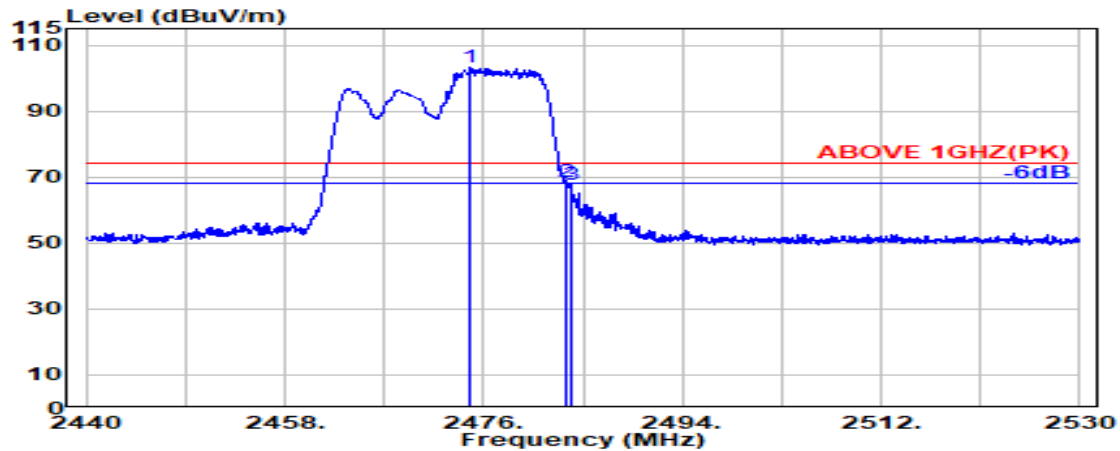

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.850	28.40	5.82	39.92	108.81	103.11	---	---	Peak
2483.500	28.43	5.83	39.92	74.04	68.38	74.00	5.62	Peak
2483.950	28.44	5.83	39.92	73.27	67.62	74.00	6.38	Peak

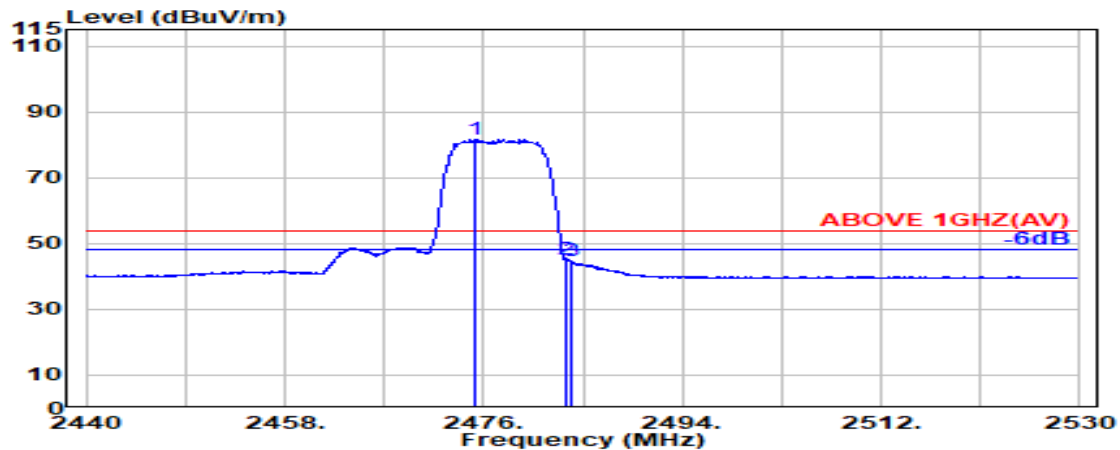

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.150	28.40	5.82	39.92	87.50	81.80	---	---	Average
2483.500	28.43	5.83	39.92	50.80	45.14	54.00	8.86	Average
2483.900	28.44	5.83	39.92	50.55	44.89	54.00	9.11	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2472MHz
RU Configuration	106/54		

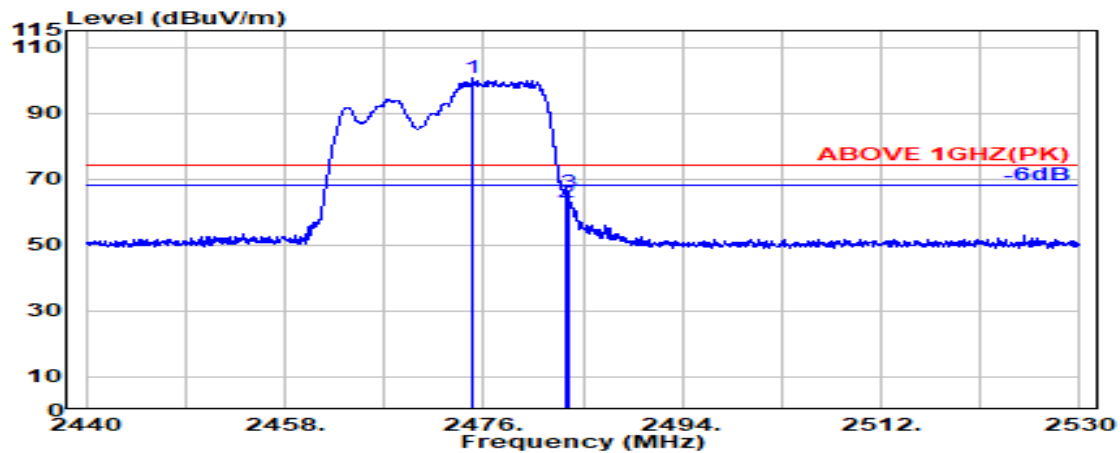

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.000	28.40	5.82	39.92	106.42	100.72	---	---	Peak
2483.500	28.43	5.83	39.92	68.58	62.92	74.00	11.08	Peak
2483.700	28.44	5.83	39.92	71.77	66.11	74.00	7.89	Peak

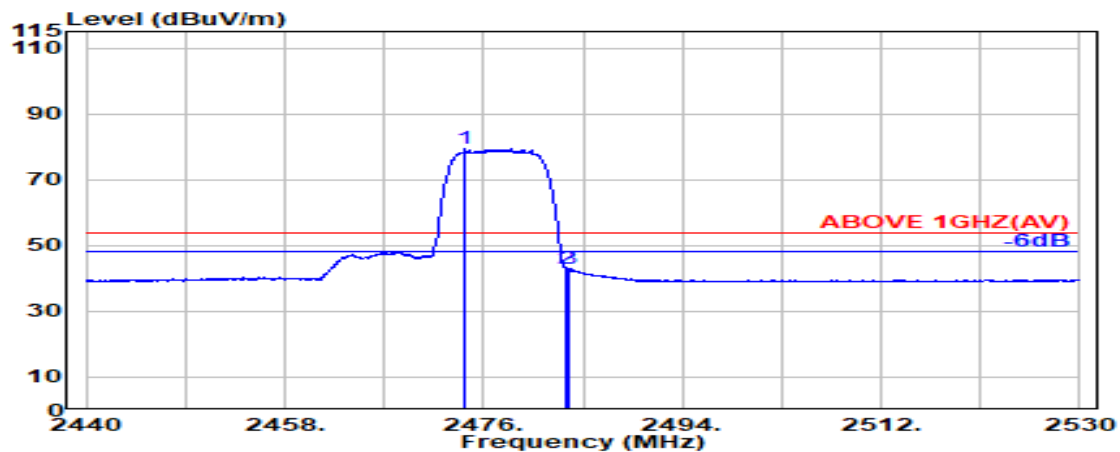

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.300	28.40	5.82	39.92	85.02	79.31	---	---	Average
2483.500	28.43	5.83	39.92	48.70	43.04	54.00	10.96	Average
2483.800	28.44	5.83	39.92	48.51	42.85	54.00	11.15	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

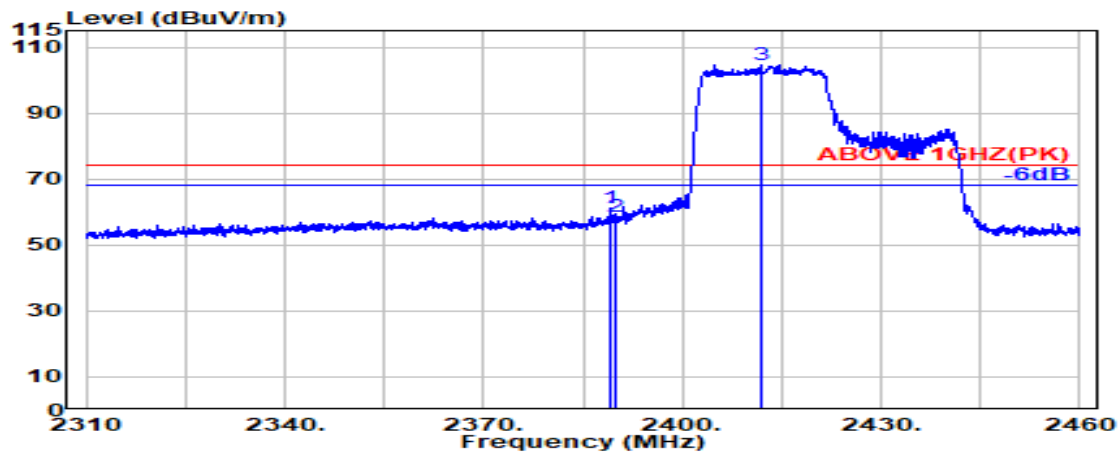

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.20	5.70	39.92	67.07	61.05	74.00	12.95	Peak
2390.000	28.20	5.70	39.92	64.61	58.59	74.00	15.41	Peak
@ 2411.750	28.22	5.73	39.92	110.65	104.69	---	---	Peak

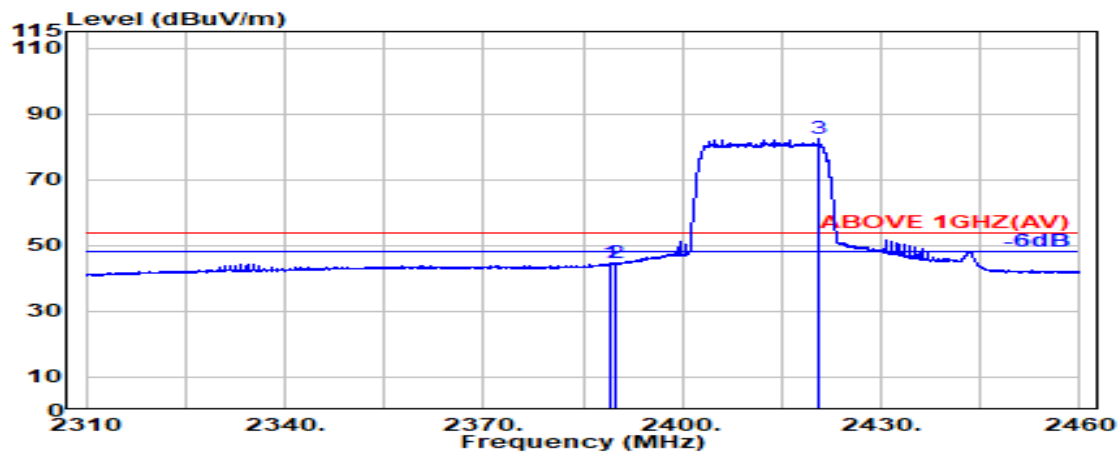

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.20	5.70	39.92	50.58	44.56	54.00	9.44	Average
2390.000	28.20	5.70	39.92	50.50	44.48	54.00	9.52	Average
@ 2420.550	28.24	5.74	39.92	88.56	82.63	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2422MHz
RU Configuration	242/61		

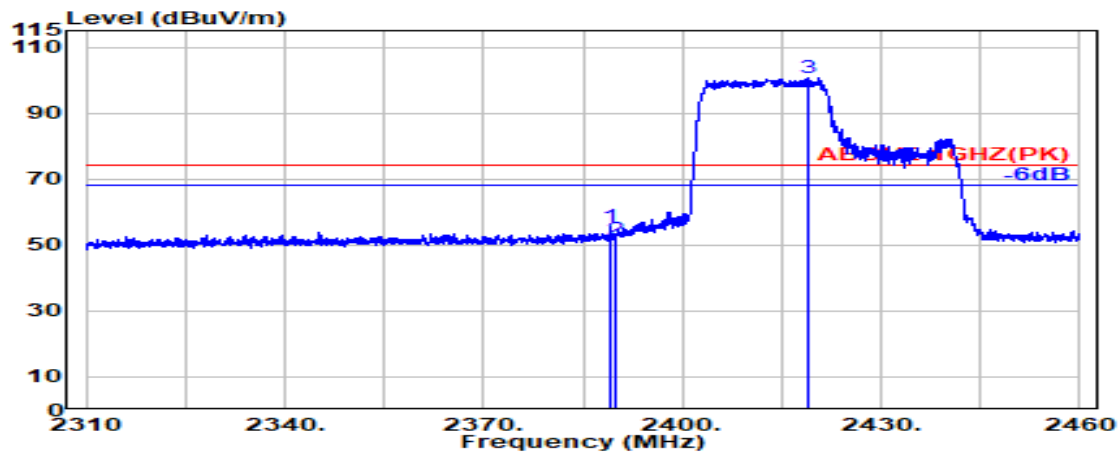

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.150	28.20	5.70	39.92	61.63	55.61	74.00	18.39	Peak
2390.000	28.20	5.70	39.92	57.80	51.79	74.00	22.21	Peak
@ 2419.150	28.24	5.74	39.92	106.57	100.63	---	---	Peak

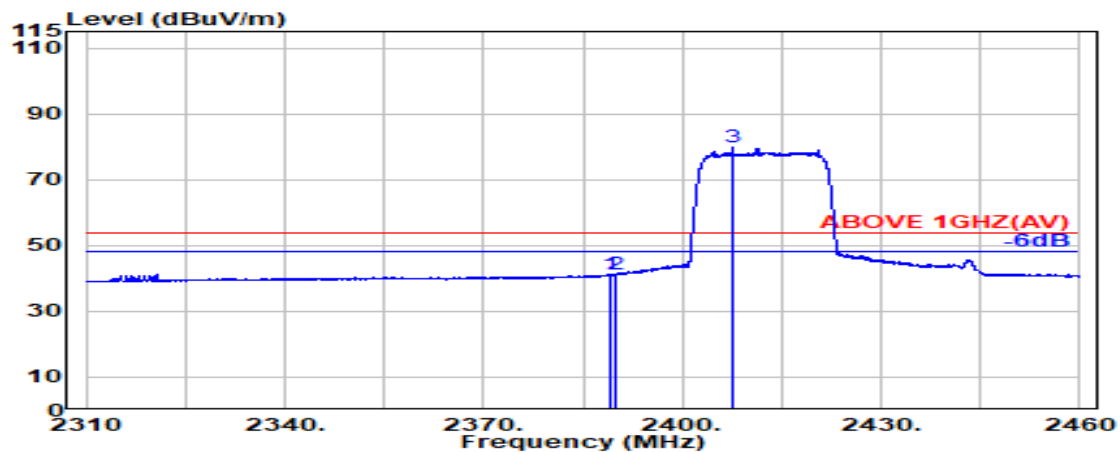

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.000	28.20	5.70	39.92	47.38	41.36	54.00	12.64	Average
2390.000	28.20	5.70	39.92	47.23	41.22	54.00	12.78	Average
@ 2407.450	28.22	5.73	39.92	85.67	79.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

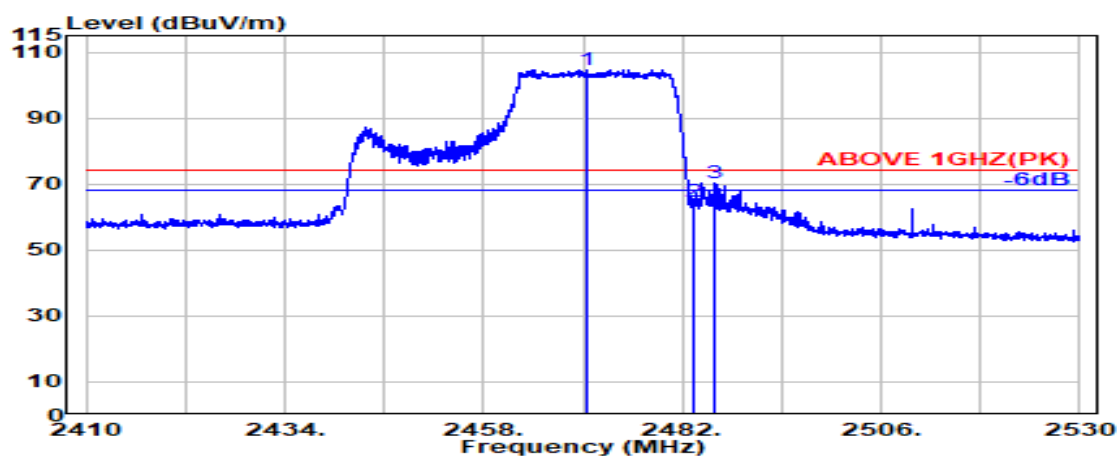

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.400	28.38	5.81	39.92	110.41	104.69	---	---	Peak
2483.500	28.43	5.83	39.92	70.23	64.58	74.00	9.42	Peak
2485.800	28.44	5.83	39.92	76.02	70.38	74.00	3.62	Peak

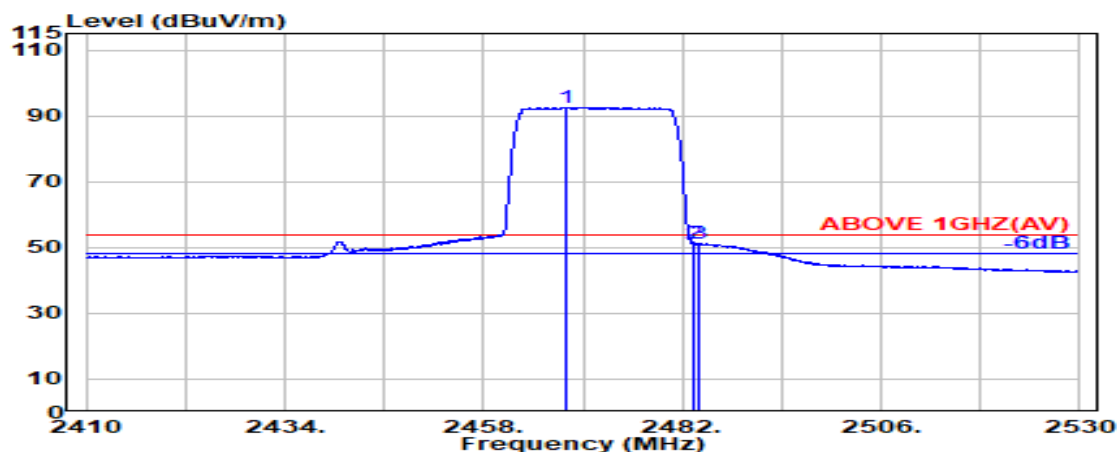

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.900	28.37	5.81	39.92	98.33	92.59	---	---	Average
2483.500	28.43	5.83	39.92	56.66	51.00	54.00	3.00	Average
2483.850	28.44	5.83	39.92	56.74	51.08	54.00	2.92	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462MHz
RU Configuration	242/62		

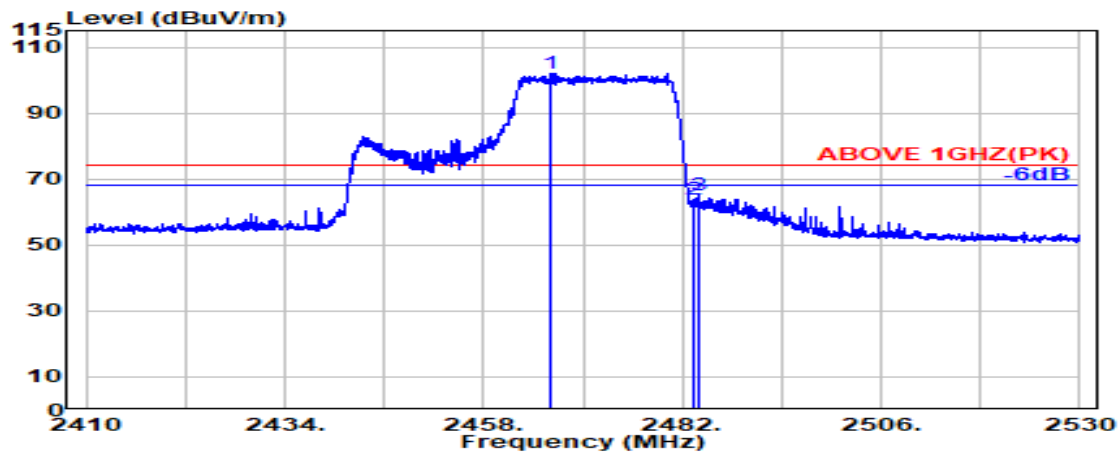

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.37	5.81	39.92	107.94	102.19	---	---	Peak
2483.500	28.43	5.83	39.92	69.27	63.61	74.00	10.39	Peak
2484.000	28.44	5.83	39.92	70.72	65.06	74.00	8.94	Peak

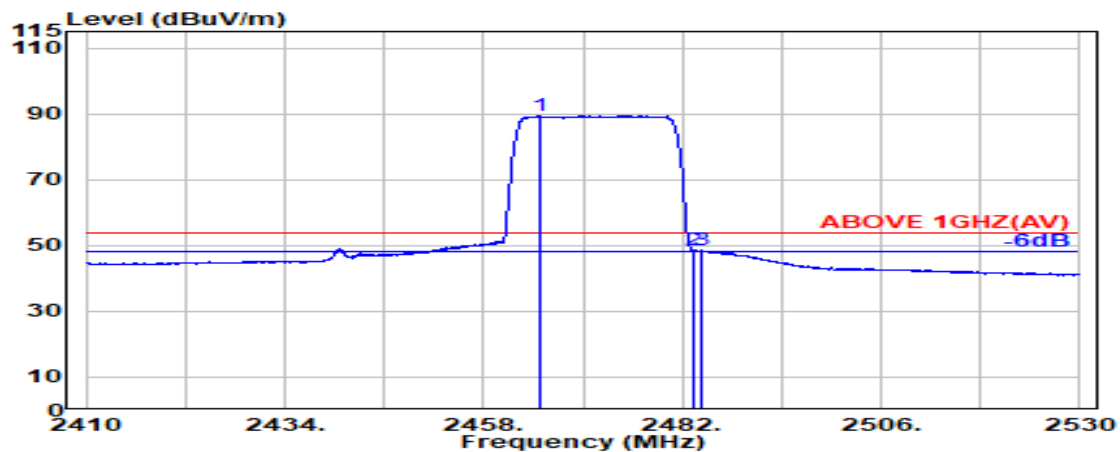


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.800	28.36	5.80	39.92	95.22	89.47	---	---	Average
2483.500	28.43	5.83	39.92	54.06	48.40	54.00	5.60	Average
2484.450	28.44	5.83	39.92	54.23	48.58	54.00	5.42	Average

Remark: The “@” means fundamental frequency, it is ignored in this section


● BLE Mode

Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

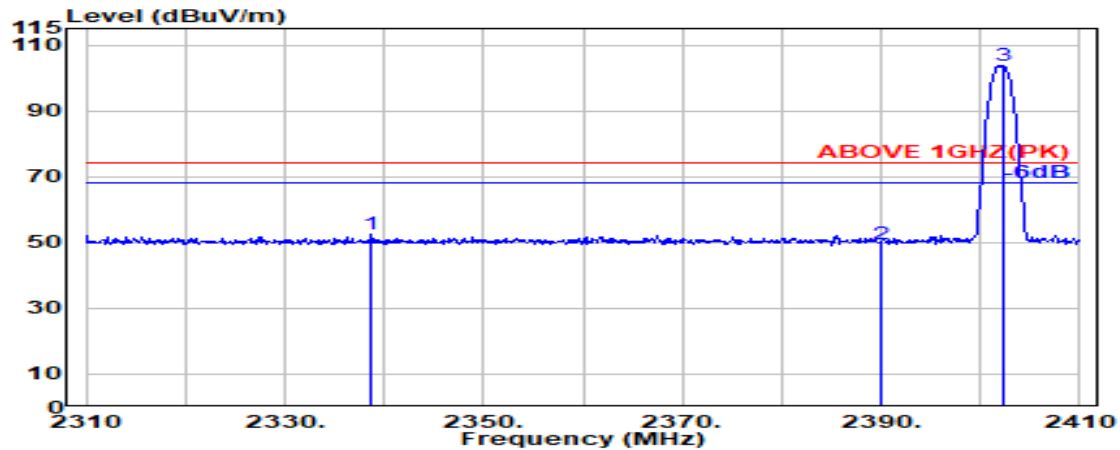

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2338.700	28.16	5.63	39.92	58.54	52.41	74.00	21.59	Peak
2390.000	28.20	5.70	39.92	55.70	49.69	74.00	24.31	Peak
@ 2402.300	28.20	5.72	39.92	109.54	103.54	---	---	Peak

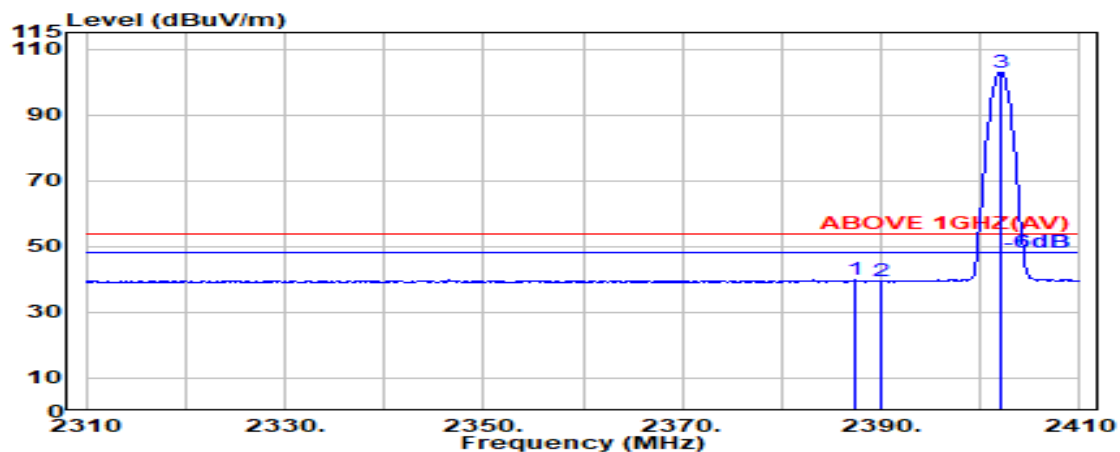

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.400	28.20	5.70	39.92	45.83	39.81	54.00	14.19	Average
2390.000	28.20	5.70	39.92	45.35	39.34	54.00	14.66	Average
@ 2402.000	28.20	5.72	39.92	109.06	103.06	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (1Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

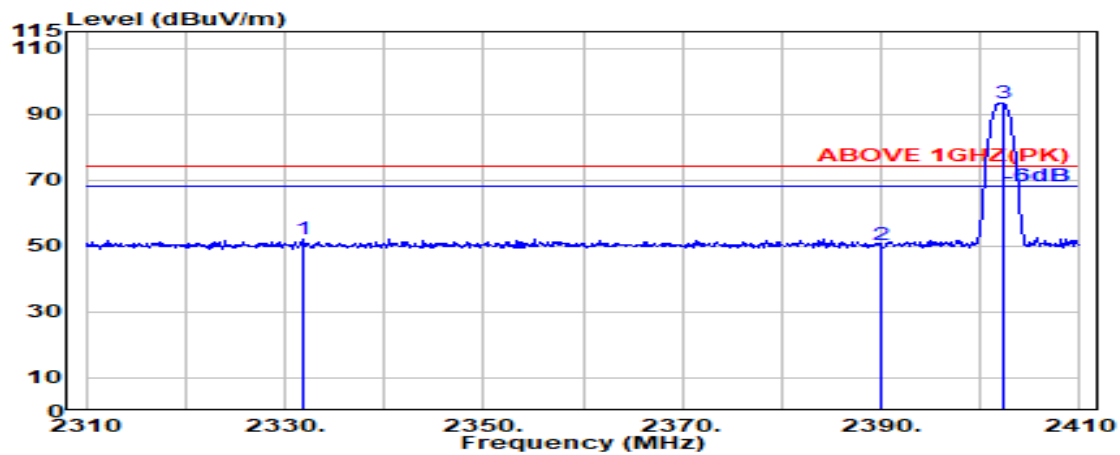

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2331.800	28.13	5.62	39.92	58.09	51.93	74.00	22.07	Peak
2390.000	28.20	5.70	39.92	56.48	50.47	74.00	23.53	Peak
@ 2402.300	28.20	5.72	39.92	99.19	93.20	---	---	Peak

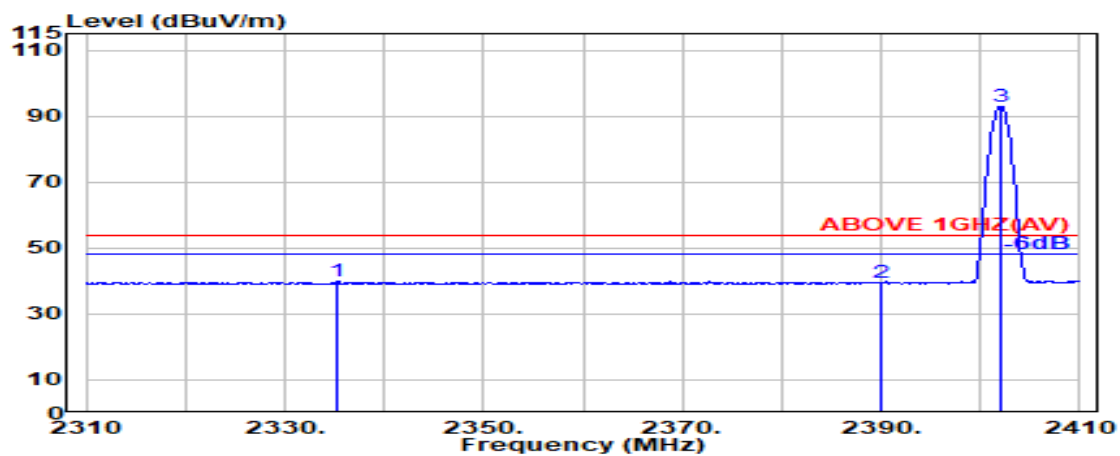

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2335.300	28.14	5.63	39.92	45.94	39.80	54.00	14.20	Average
2390.000	28.20	5.70	39.92	45.45	39.43	54.00	14.57	Average
@ 2402.000	28.20	5.72	39.92	99.03	93.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (1Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

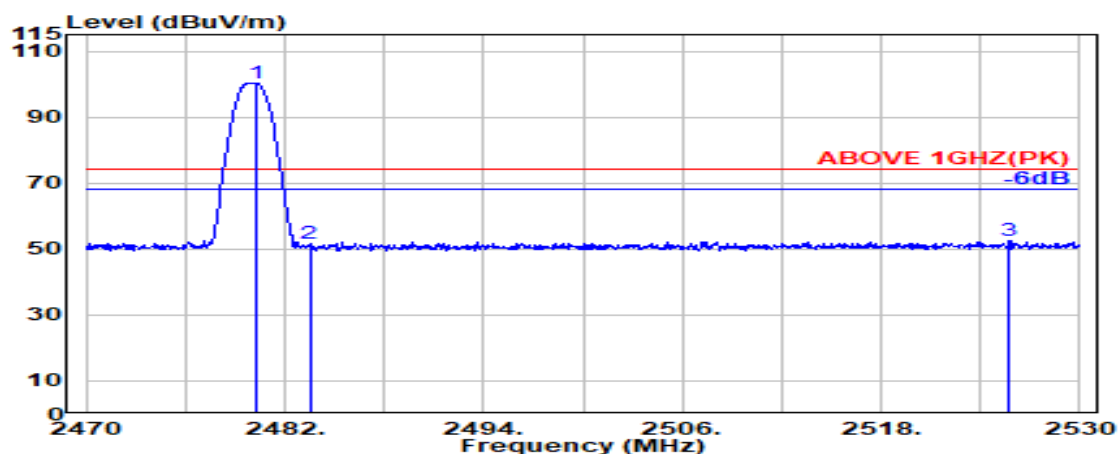

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.300	28.42	5.82	39.92	105.93	100.25	---	---	Peak
2483.500	28.43	5.83	39.92	57.27	51.62	74.00	22.38	Peak
2525.750	28.60	5.88	39.92	58.12	52.68	74.00	21.32	Peak

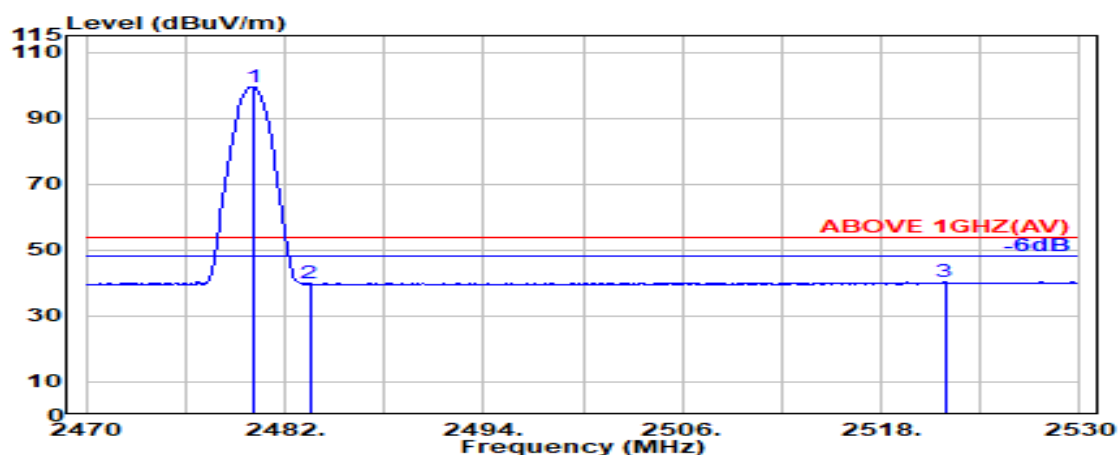

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.92	105.22	99.54	---	---	Average
2483.500	28.43	5.83	39.92	45.43	39.77	54.00	14.23	Average
2521.850	28.59	5.87	39.92	45.81	40.35	54.00	13.65	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (1Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

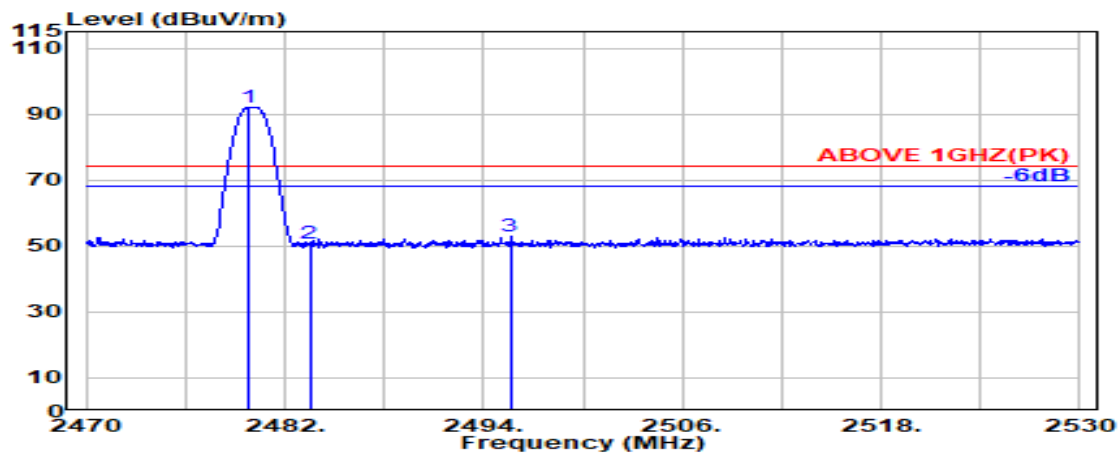

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.800	28.42	5.82	39.92	97.81	92.13	---	---	Peak
2483.500	28.43	5.83	39.92	56.28	50.63	74.00	23.37	Peak
2495.600	28.48	5.84	39.92	58.46	52.87	74.00	21.13	Peak

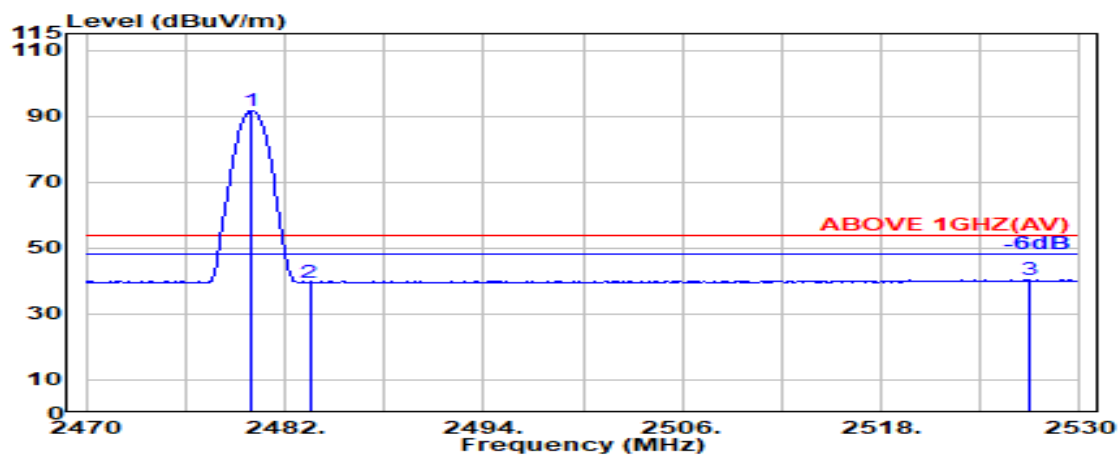

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.42	5.82	39.92	97.37	91.69	---	---	Average
2483.500	28.43	5.83	39.92	45.24	39.58	54.00	14.42	Average
2526.900	28.61	5.88	39.92	45.71	40.27	54.00	13.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

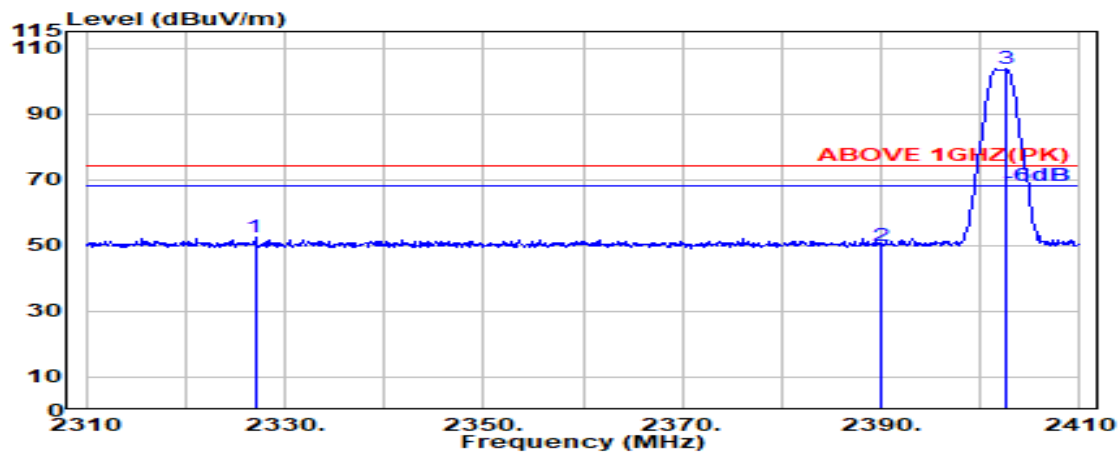

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2327.000	28.11	5.62	39.92	58.49	52.30	74.00	21.70	Peak
2390.000	28.20	5.70	39.92	56.09	50.08	74.00	23.92	Peak
@ 2402.600	28.21	5.72	39.92	109.54	103.55	---	---	Peak

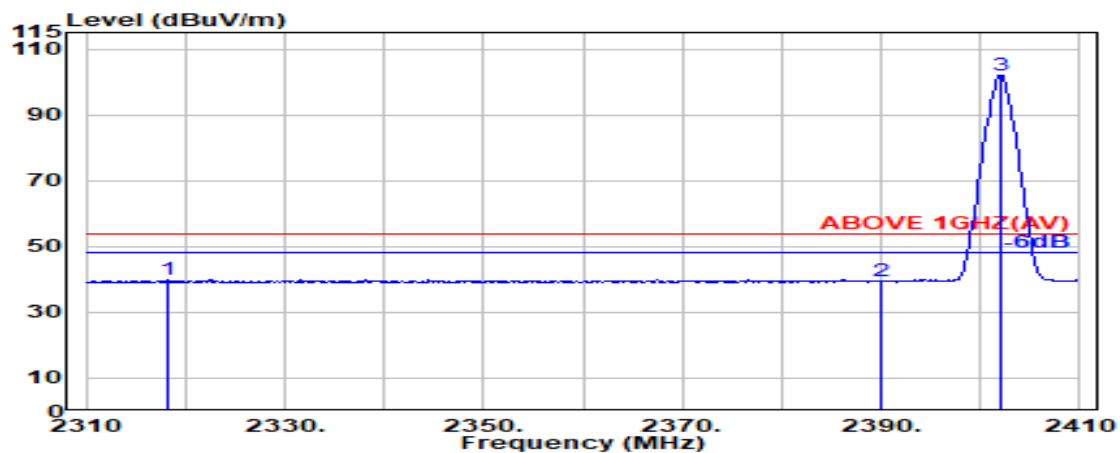

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2318.300	28.07	5.60	39.92	46.22	39.98	54.00	14.02	Average
2390.000	28.20	5.70	39.92	45.64	39.63	54.00	14.37	Average
@ 2402.100	28.20	5.72	39.92	107.98	101.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2402MHz
------	-------------	-----------	------------

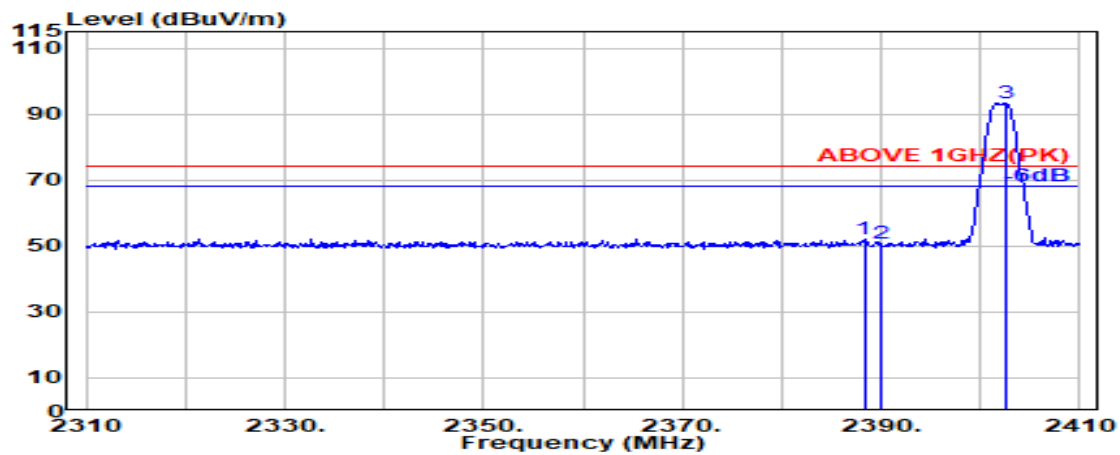

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.300	28.20	5.70	39.92	58.05	52.03	74.00	21.97	Peak
2390.000	28.20	5.70	39.92	56.58	50.56	74.00	23.44	Peak
@ 2402.600	28.21	5.72	39.92	99.23	93.24	---	---	Peak

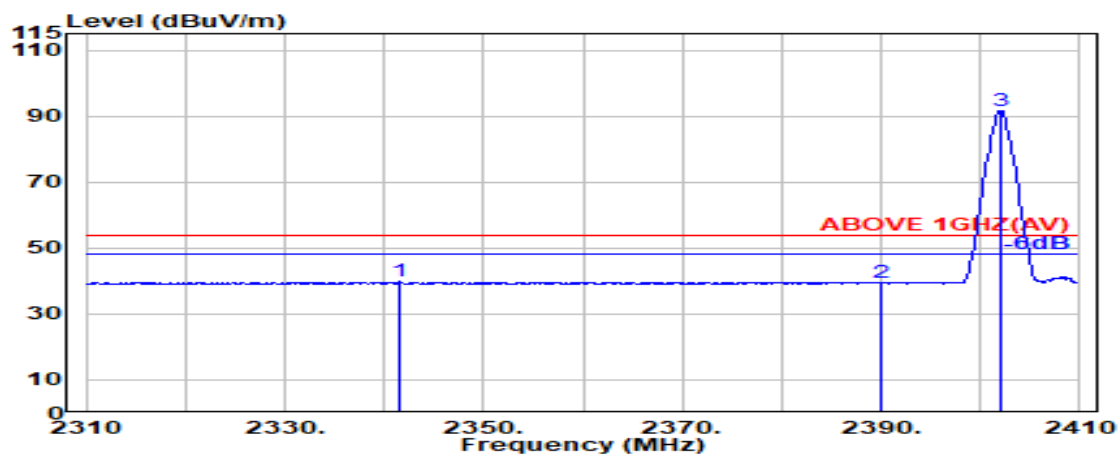

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2341.600	28.17	5.64	39.92	45.82	39.71	54.00	14.29	Average
2390.000	28.20	5.70	39.92	45.43	39.42	54.00	14.58	Average
@ 2402.000	28.20	5.72	39.92	97.74	91.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

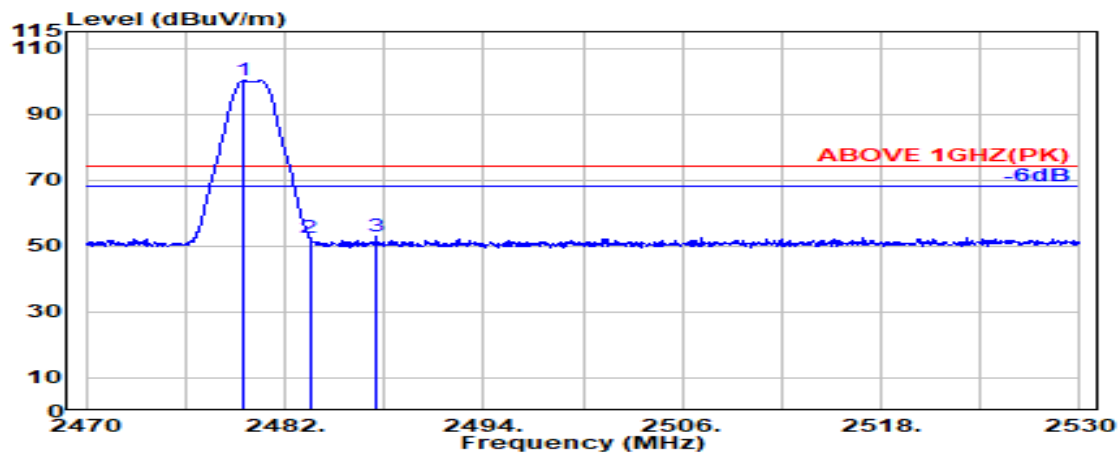

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.42	5.82	39.92	105.91	100.23	---	---	Peak
2483.500	28.43	5.83	39.92	58.10	52.44	74.00	21.56	Peak
2487.550	28.45	5.83	39.92	58.55	52.91	74.00	21.09	Peak

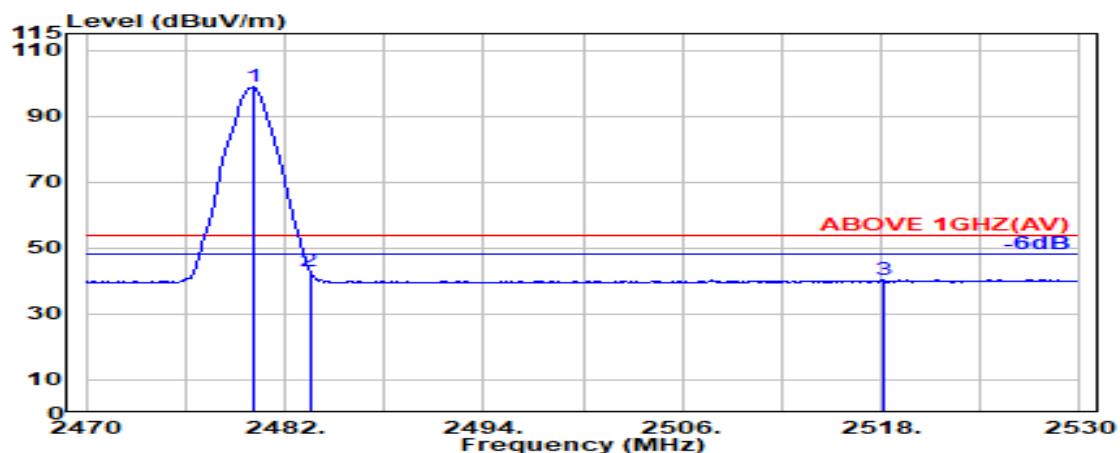

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.050	28.42	5.82	39.92	104.46	98.78	---	---	Average
2483.500	28.43	5.83	39.92	48.69	43.03	54.00	10.97	Average
2518.100	28.57	5.87	39.92	45.81	40.33	54.00	13.67	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	BLE (2Mbps)	Frequency	TX 2480 MHz
------	-------------	-----------	-------------

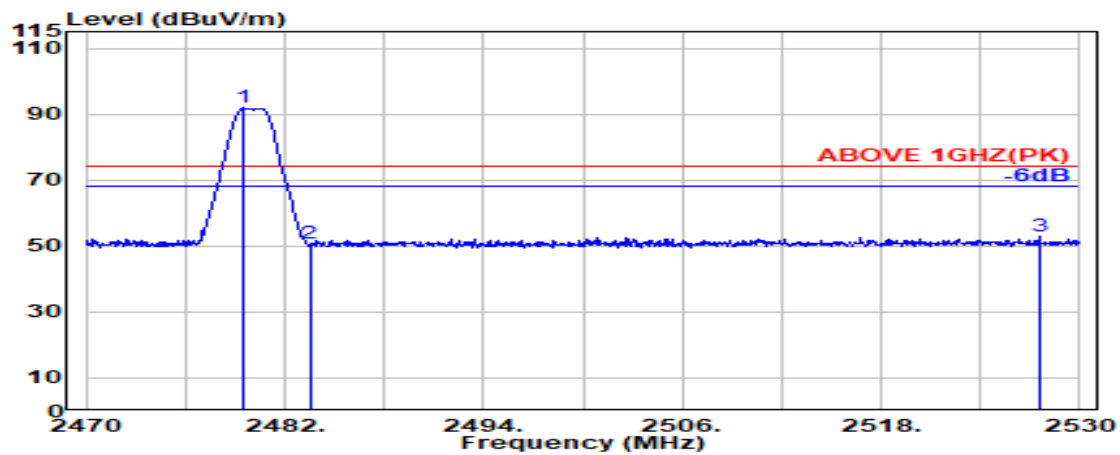

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.550	28.42	5.82	39.92	97.57	91.90	---	---	Peak
2483.500	28.43	5.83	39.92	56.55	50.90	74.00	23.10	Peak
2527.600	28.61	5.88	39.92	58.54	53.11	74.00	20.89	Peak

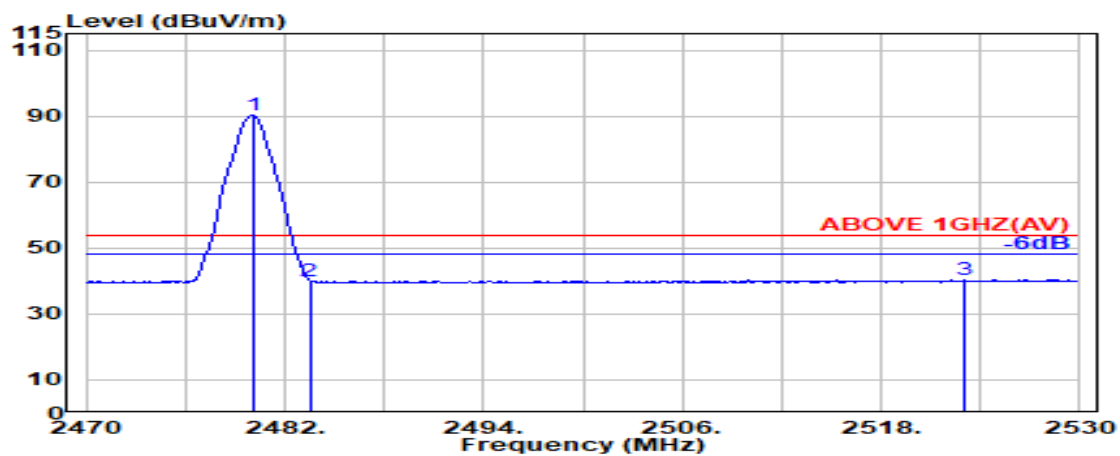

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.100	28.42	5.82	39.92	95.95	90.28	---	---	Average
2483.500	28.43	5.83	39.92	45.76	40.11	54.00	13.89	Average
2523.050	28.59	5.88	39.92	45.74	40.29	54.00	13.71	Average

Remark: The “@” means fundamental frequency, it is ignored in this section

A.2.2 Emissions outside the frequency band

The emissions (up to 25GHz) not reported for there is no emission be found.

The 802.11ax and be were assessed with full RU mode.

● Wireless LAN Mode

SISO

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	51.39	53.05	74.00	20.95	Peak
7235.000	36.34	10.27	39.44	43.06	50.23	54.00	3.77	Average
7235.000	36.34	10.27	39.44	49.92	57.09	74.00	16.91	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	51.56	53.22	54.00	0.78	Peak
7238.000	36.35	10.27	39.44	45.05	52.23	54.00	1.77	Peak

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	48.85	50.82	54.00	3.18	Average
4884.000	33.04	8.08	39.15	52.85	54.82	74.00	19.18	Peak
7327.000	36.55	10.32	39.47	45.75	53.15	74.00	20.85	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	51.10	53.07	54.00	0.93	Peak
7326.000	36.55	10.32	39.47	44.29	51.69	54.00	2.31	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

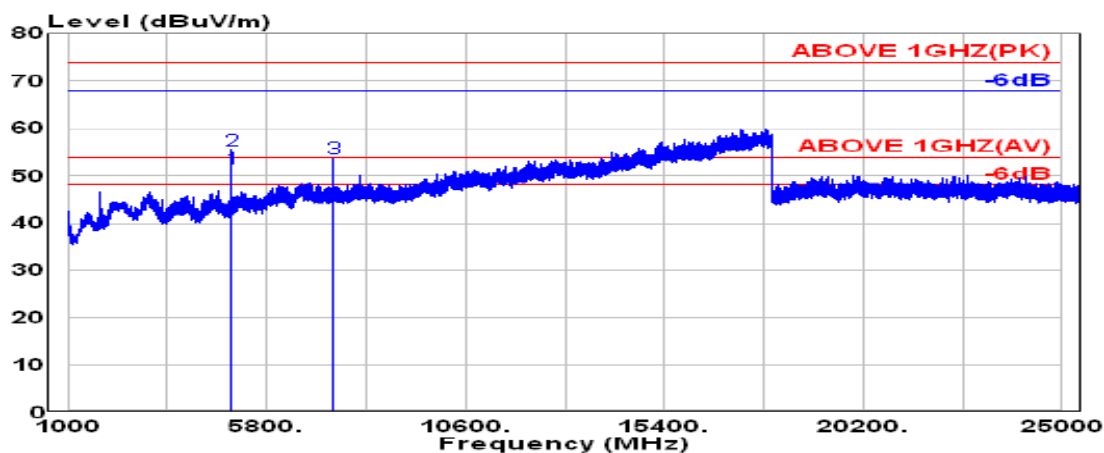

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
4945.000	33.19	8.12	39.12	49.24	51.43	54.00	2.57	Average
4945.000	33.19	8.12	39.12	53.24	55.43	74.00	18.57	Peak
7415.000	36.40	10.37	39.50	46.49	53.76	74.00	20.24	Peak

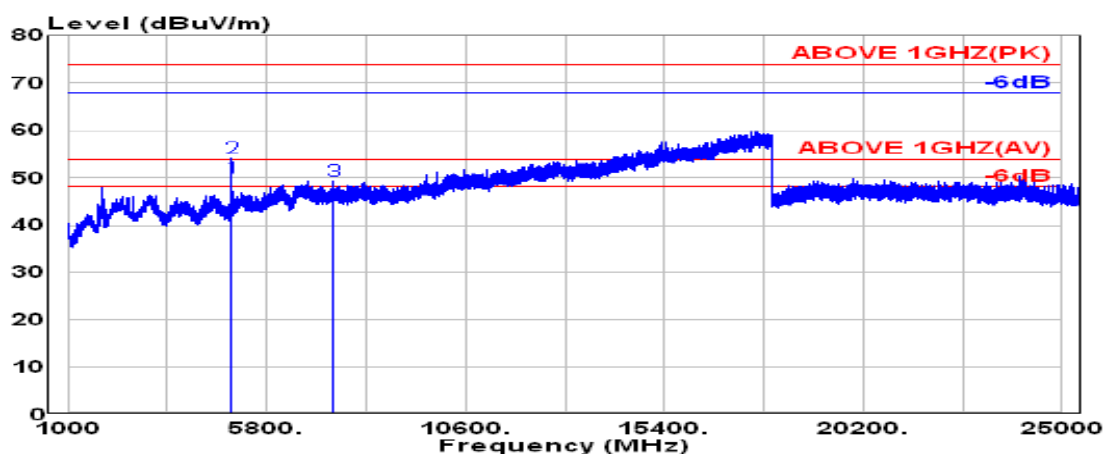

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
4945.000	33.19	8.12	39.12	47.85	50.04	54.00	3.96	Average
4945.000	33.19	8.12	39.12	51.85	54.04	74.00	19.96	Peak
7413.000	36.40	10.37	39.49	42.03	49.30	74.00	24.70	Peak

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	43.23	44.89	54.00	9.11	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	44.36	46.02	54.00	7.98	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.31	44.28	54.00	9.72	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.69	45.66	54.00	8.34	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	45.10	47.29	54.00	6.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	44.92	47.11	54.00	6.89	Peak

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	42.42	44.08	54.00	9.92	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	42.48	44.15	54.00	9.85	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.07	45.04	54.00	8.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.69	43.66	54.00	10.34	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	44.59	46.78	54.00	7.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	44.32	46.51	54.00	7.49	Peak

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	41.59	43.35	54.00	10.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	43.50	45.26	54.00	8.74	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.68	44.65	54.00	9.35	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.60	43.57	54.00	10.43	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	44.09	46.21	54.00	7.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	41.25	43.38	54.00	10.62	Peak

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	45.55	47.21	54.00	6.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	44.96	46.63	54.00	7.37	Peak

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.61	45.58	54.00	8.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	42.64	44.61	54.00	9.39	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4948.000	33.20	8.12	39.12	49.68	51.88	54.00	2.12	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	48.40	50.59	54.00	3.41	Peak

Mode	802.11ax-HE40	Frequency	TX 2422 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.26	42.02	54.00	11.98	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	40.57	42.34	54.00	11.66	Peak

Mode	802.11ax-HE40	Frequency	TX 2442 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.54	42.51	54.00	11.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	41.82	43.79	54.00	10.21	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE40	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	45.69	47.82	54.00	6.18	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	41.04	43.16	54.00	10.84	Peak

MIMO

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4827.000	32.81	8.04	39.17	46.28	47.96	54.00	6.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4830.000	32.82	8.04	39.17	46.08	47.77	54.00	6.23	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4885.000	33.04	8.08	39.15	48.92	50.90	54.00	3.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4885.000	33.04	8.08	39.15	45.63	47.60	54.00	6.40	Peak

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4950.000	33.20	8.13	39.12	50.61	52.81	54.00	1.19	Peak
7419.000	36.40	10.37	39.50	43.65	50.92	54.00	3.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4945.000	33.19	8.12	39.12	47.18	49.37	54.00	4.63	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11n-HT40	Frequency	TX 2422 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4850.000	32.90	8.06	39.16	47.16	48.96	54.00	5.04	Peak
7267.000	36.43	10.29	39.45	44.52	51.79	54.00	2.21	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4847.000	32.89	8.05	39.16	45.59	47.37	54.00	6.63	Peak

Mode	802.11n-HT40	Frequency	TX 2442 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	44.94	46.91	54.00	7.09	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	43.64	45.61	54.00	8.39	Peak

Mode	802.11n-HT40	Frequency	TX 2462 MHz
------	--------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4927.000	33.15	8.11	39.13	48.20	50.33	54.00	3.67	Peak
7402.000	36.40	10.36	39.49	43.63	50.90	54.00	3.10	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	44.72	46.84	54.00	7.16	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	47.30	48.96	54.00	5.04	Peak
7238.000	36.35	10.27	39.44	44.76	51.94	54.00	2.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4824.000	32.80	8.04	39.17	43.01	44.67	54.00	9.33	Peak
7230.000	36.32	10.27	39.44	43.52	50.67	54.00	3.33	Peak

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	Frequency	TX 2442MHz
------	---------------	-----------	------------

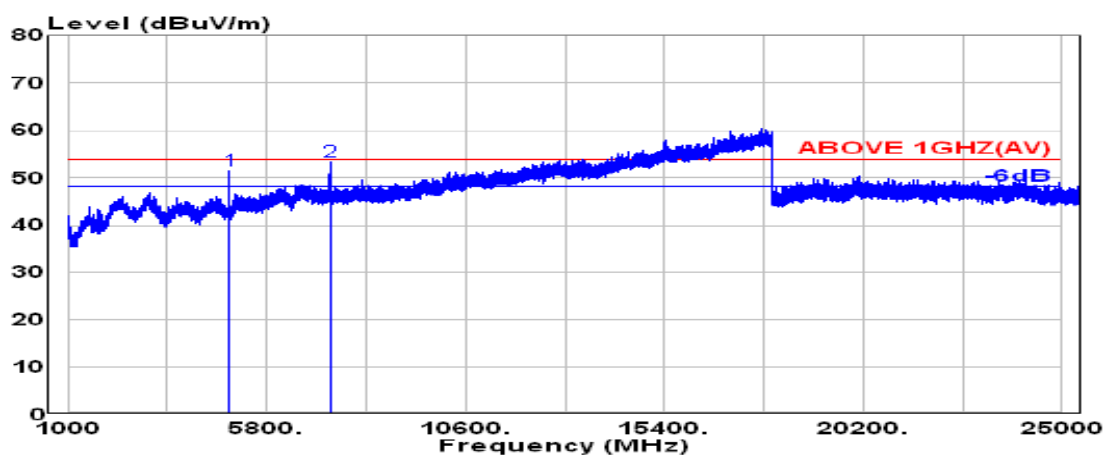

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4891.000	33.06	8.08	39.14	49.48	51.49	54.00	2.51	Peak
7334.000	36.57	10.33	39.47	46.11	53.53	54.00	0.47	Peak

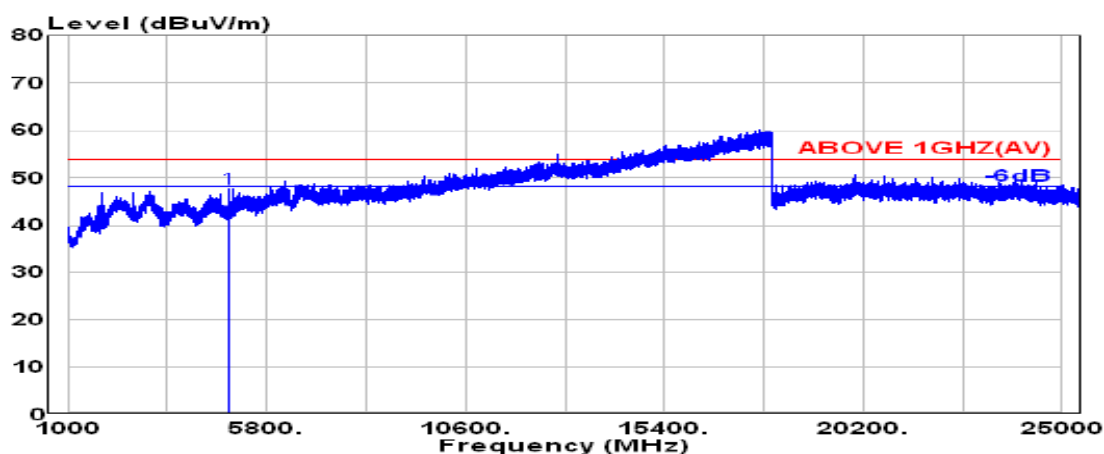

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4885.000	33.04	8.08	39.15	45.73	47.71	54.00	6.29	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4944.000	33.19	8.12	39.12	50.72	52.91	54.00	1.09	Peak
7419.000	36.40	10.37	39.50	45.15	52.43	54.00	1.57	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4951.000	33.20	8.13	39.12	48.00	50.21	54.00	3.79	Peak
7418.000	36.40	10.37	39.50	43.40	50.67	54.00	3.33	Peak

Mode	802.11ax-HE40	Frequency	TX 2422 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4848.000	32.89	8.05	39.16	46.47	48.25	54.00	5.75	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4844.000	32.88	8.05	39.16	42.21	43.98	54.00	10.02	Peak

Mode	802.11ax-HE40	Frequency	TX 2442 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	44.40	46.37	54.00	7.63	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.04	8.08	39.15	40.94	42.91	54.00	11.09	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax:** +886 2 26099303

Mode	802.11ax-HE40	Frequency	TX 2462 MHz
------	---------------	-----------	-------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	42.22	44.35	54.00	9.65	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4924.000	33.15	8.11	39.13	40.67	42.80	54.00	11.20	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

● **BLE Mode**

Mode	BLE (1 Mbps)	Frequency	TX 2402MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	40.62	42.18	74.00	31.82	Peak
7207.000	36.23	10.26	39.43	40.09	47.14	54.00	6.86	Average
7207.000	36.23	10.26	39.43	47.19	54.24	74.00	19.76	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	32.72	8.02	39.18	40.82	42.38	54.00	11.62	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	BLE (1 Mbps)	Frequency	TX 2440MHz
------	--------------	-----------	------------

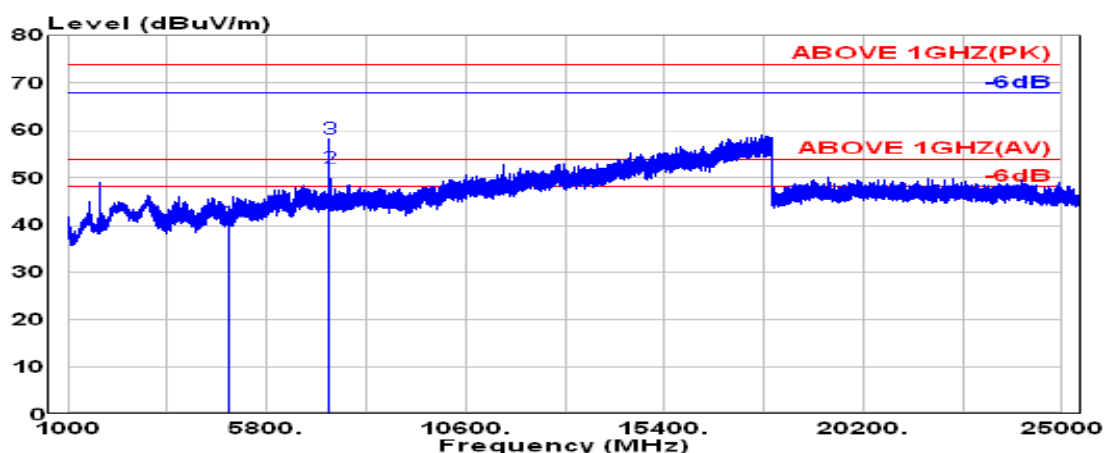

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	38.64	40.59	74.00	33.41	Peak
7320.000	36.54	10.32	39.47	44.79	52.18	54.00	1.82	Average
7320.000	36.54	10.32	39.47	50.78	58.17	74.00	15.83	Peak

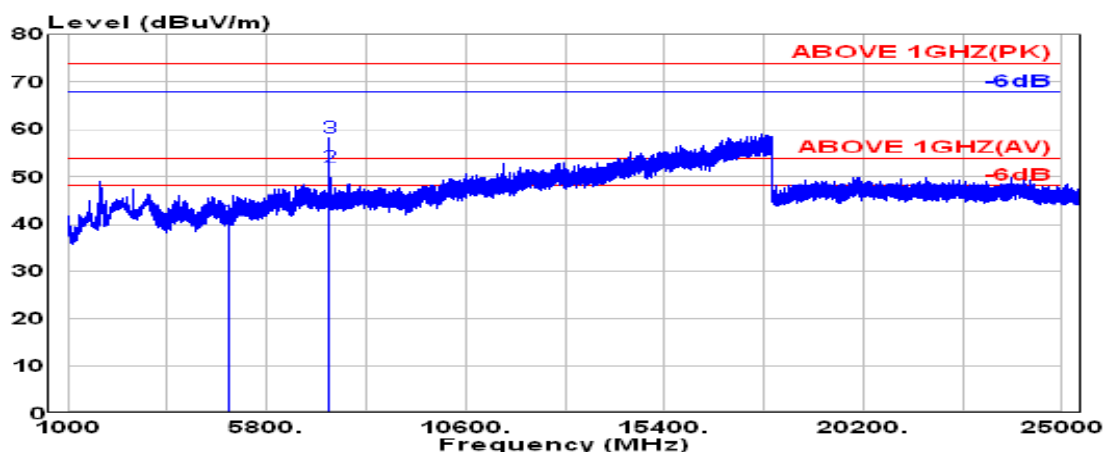

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
4880.000	33.02	8.08	39.15	38.64	40.59	74.00	33.41	Peak
7320.000	36.54	10.32	39.47	44.79	52.18	54.00	1.82	Average
7320.000	36.54	10.32	39.47	50.78	58.17	74.00	15.83	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	BLE (1 Mbps)	Frequency	TX 2480MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.10	9.09	33.23	42.46	52.42	54.00	1.58	Average
4961.000	34.10	9.09	33.23	46.51	56.47	74.00	17.53	Peak
7441.000	35.78	11.17	33.56	39.03	52.42	54.00	1.58	Average
7441.000	35.78	11.17	33.56	46.13	59.52	74.00	14.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	34.10	9.09	33.23	37.16	47.12	74.00	26.88	Peak
7440.000	35.78	11.17	33.56	39.60	52.99	74.00	21.01	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 DTS/OCCUPIED BANDWIDTH

Test Date	2025/10/15~11/05	Temp./Hum.	23~25°C/54~64%
Cable Loss	1.00dB, 1.27dB	Tested By	Sean Wang
Test Voltage	DC 5V (Through jig via Notebook PC)		

A.3.1 DTS/Occupied Bandwidth Result

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		Ant1	Ant2	Ant1	Ant2	
802.11b	2412	8.068	8.068	12.490	12.461	>500kHz
	2442	8.058	8.058	12.568	12.489	
	2462	8.073	8.073	12.552	12.514	
	2472	8.064	8.064	12.712	12.528	
	2472	8.073	8.064	12.459	12.397	
802.11g	2412	15.12	15.12	16.365	16.340	
	2442	16.30	16.30	16.845	16.587	
	2462	16.32	16.32	16.864	16.716	
	2472	15.11	15.11	16.417	16.367	
	2472	15.11	15.11	16.350	16.316	
802.11n-HT20	2412	15.12	17.506	17.491	17.516	
	2442	16.67	17.719	17.856	17.760	
	2462	17.05	17.802	17.848	17.792	
	2472	15.10	17.498	17.484	17.490	
802.11n-HT40	2422	35.07	35.15	35.903	35.966	
	2442	35.12	35.12	35.929	35.849	
	2452	32.66	35.12	35.934	35.888	
	2462	35.12	35.12	35.946	35.820	
	2462	35.12	35.12	35.997	35.863	
802.11ax-HE20	2412	18.47	18.23	18.738	18.753	
	2442	18.55	18.29	18.920	18.948	
	2462	17.85	17.41	18.957	18.914	
	2472	17.53	18.17	18.784	18.803	
	2472	15.21	16.81	18.789	18.809	
802.11ax-HE40	2422	35.88	37.83	37.595	37.575	
	2442	37.08	38.01	37.596	37.639	
	2452	37.53	37.53	37.691	37.572	
	2452	36.10	37.82	37.631	37.590	
	2462	35.83	37.13	37.527	37.564	
	2462	36.08	37.88	37.598	37.511	

Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	Centre Frequency (MHz)	DTS (6dB) Bandwidth (MHz)		Occupied (99%) Bandwidth (MHz)		Limit
		BT1	BT2	BT1	BT2	
BLE (1Mbps)	2402	0.6613	0.7138	1.0368	1.0310	>500kHz
	2440	0.6668	0.7139	1.0400	1.0319	
	2480	0.6621	0.7136	1.0370	1.0305	
BLE (2Mbps)	2402	1.173	1.173	2.0705	2.0546	
	2440	1.173	1.173	2.0648	2.0516	
	2480	1.173	1.173	2.0700	2.0517	
BLE (PHY Coded S2)	2402	0.6594	0.6642	1.0237	1.0376	
	2440	0.6642	0.6603	1.0251	1.0372	
	2480	0.6575	0.6605	1.0268	1.0396	
BLE (PHY Coded S8)	2402	0.6858	0.6605	1.0557	1.0306	
	2440	0.6811	0.6616	1.0494	1.0384	
	2480	0.6846	0.6556	1.0575	1.0376	


Note: We only presented the middle channel plots for each test mode.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.3.2 Measurement Plots

● DTS (6dB) Bandwidth

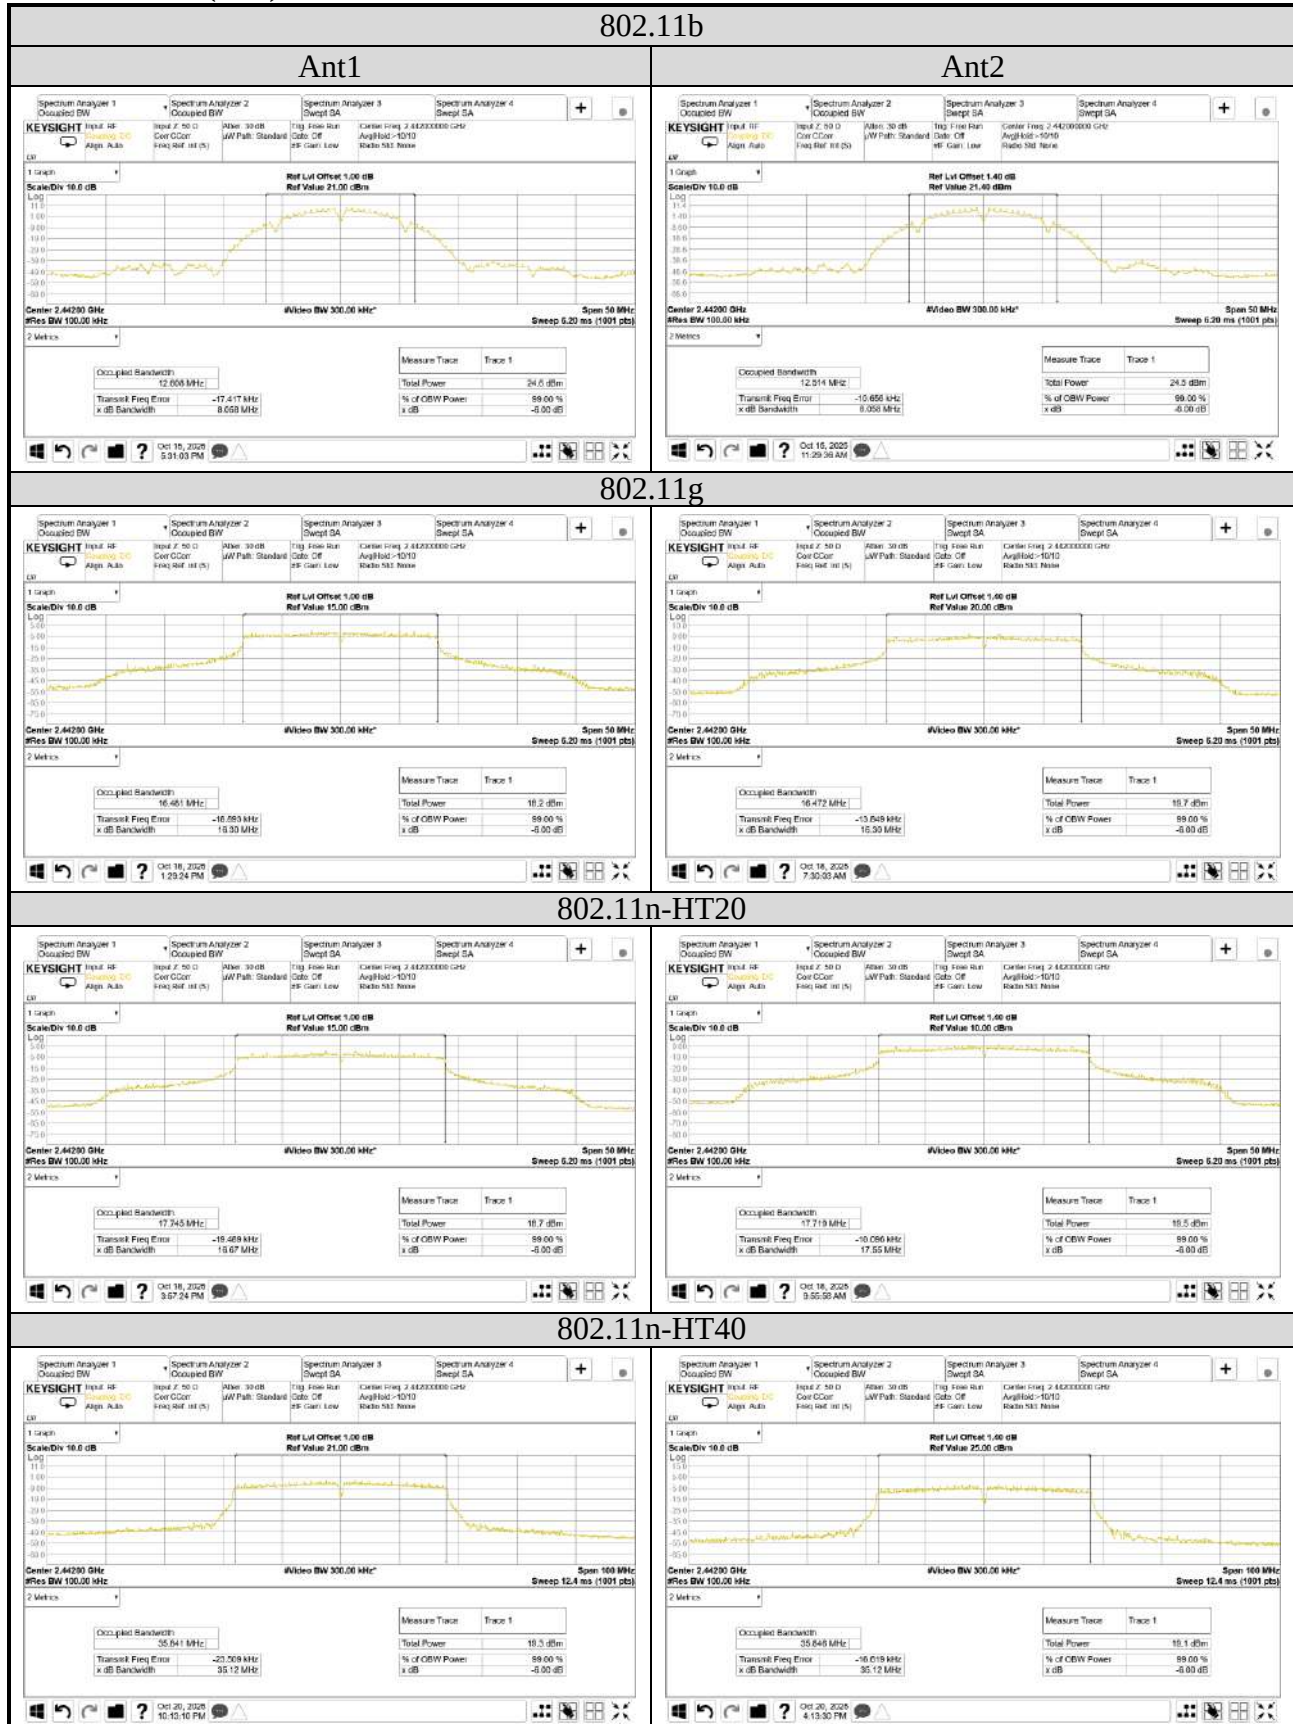


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

802.11ax-HE20

Ant1

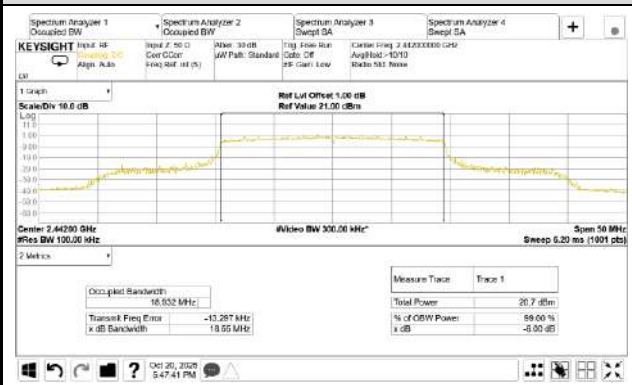

Ant2

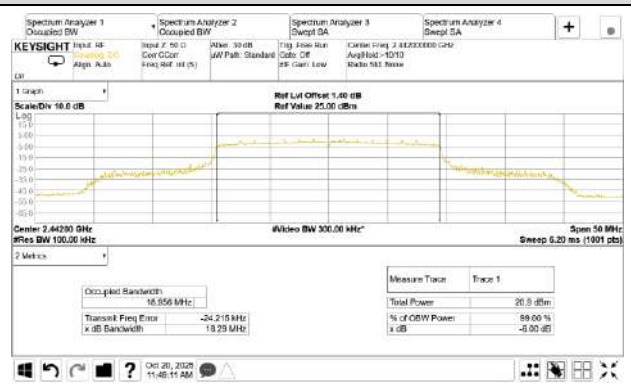

802.11ax-HE40



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

● Occupied (99%) Bandwidth




Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

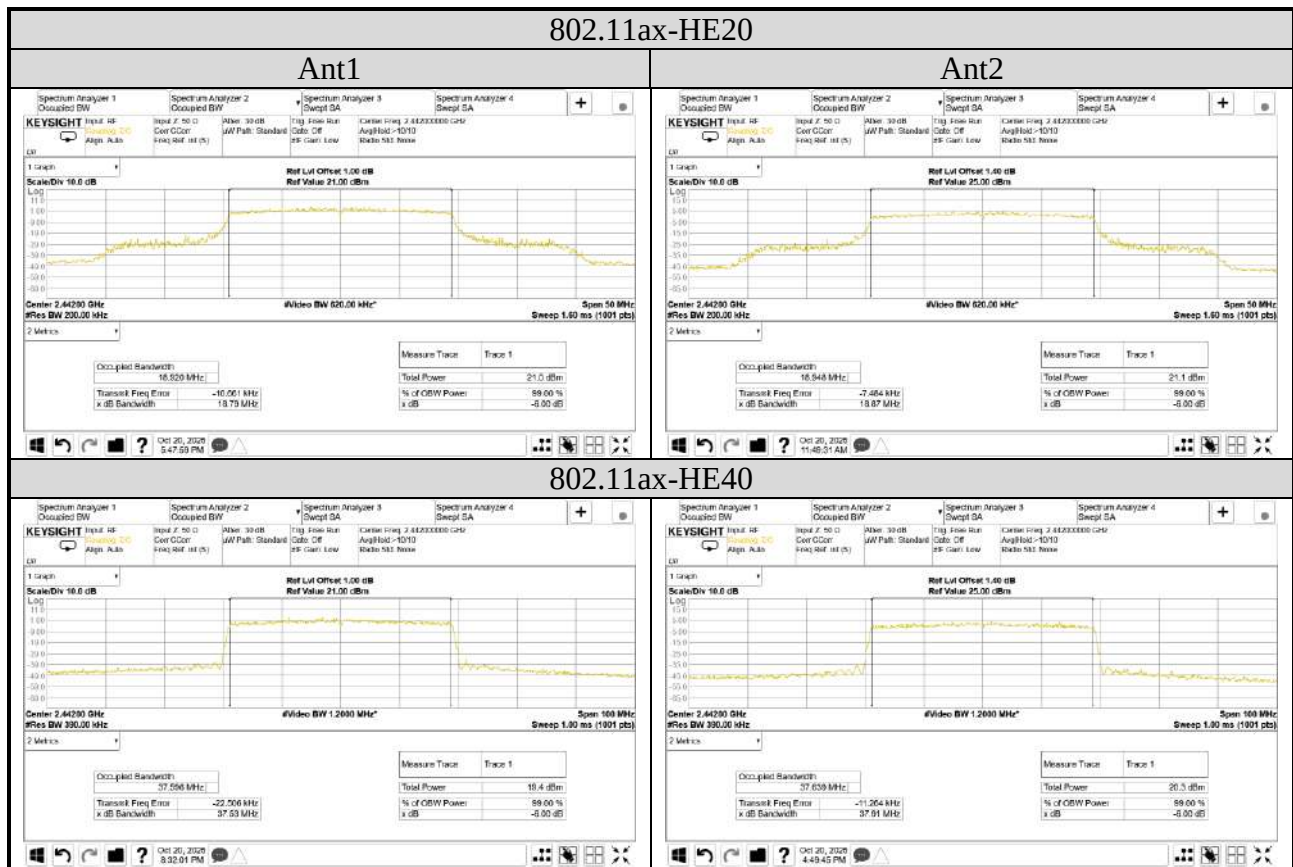

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

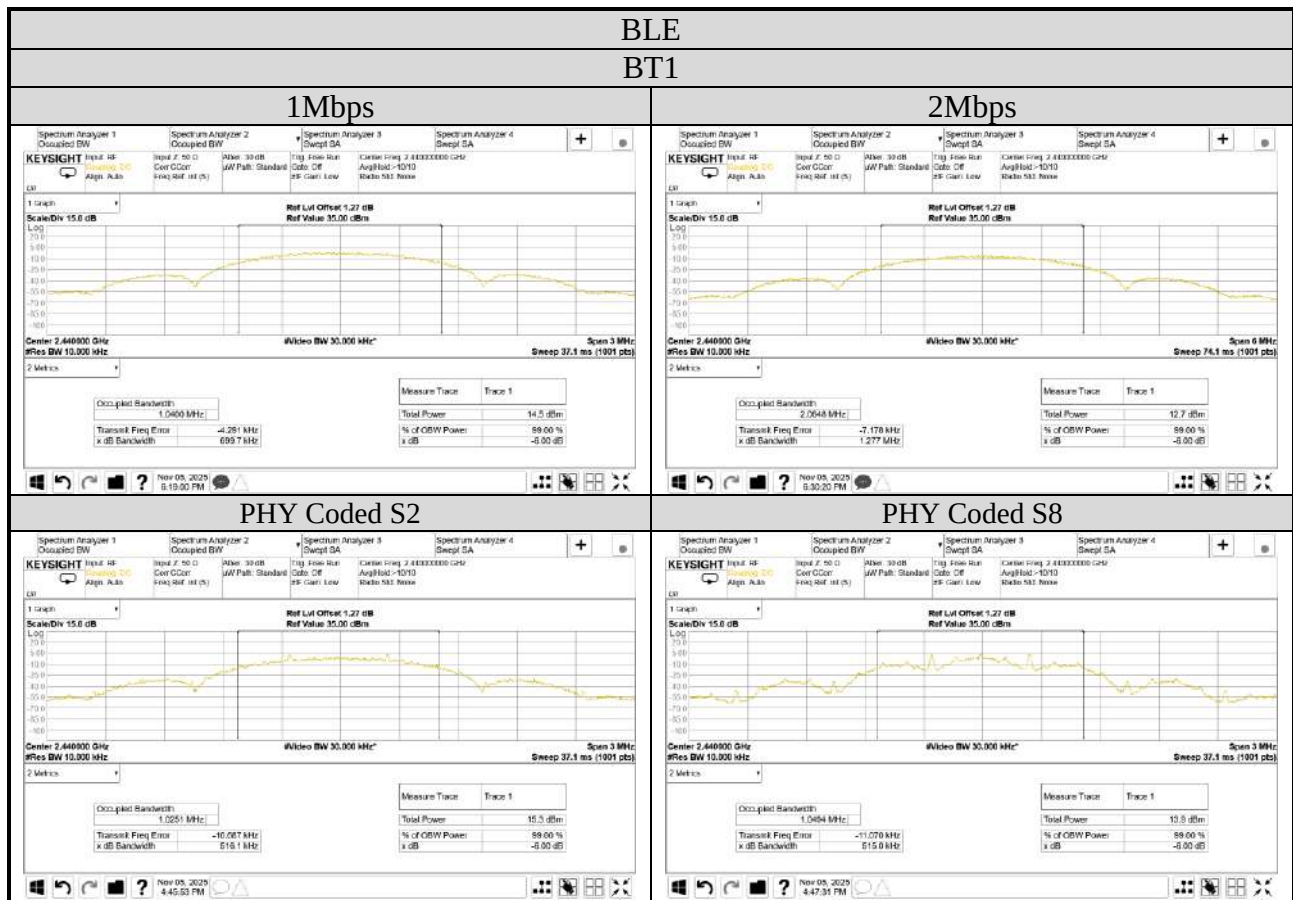

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4 MAXIMUM PEAK OUTPUT POWER

Test Date	2025/11/04	Temp./Hum.	23°C/68%
Cable Loss	BLE: 1.27dB	Tested By	Sean Wang
Test Voltage	DC 5V (Through jig via Notebook PC)		

A.4.1 Peak Output Power

SISO

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P ^{Note 2}		Limit
		Ant1	Ant2	(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11b	2412	22.24	22.70	22.70	0.186	-2.73	0.66	23.36	0.217	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	21.27	21.66	21.66	0.147	-2.73	0.66	22.32	0.171	
	2442	21.44	21.72	21.72	0.149	-2.73	0.66	22.38	0.173	
	2462	21.40	20.17	21.40	0.138	-2.73	0.66	20.83	0.121	
	2467	20.86	19.77	20.86	0.122	-2.73	0.66	20.43	0.110	
	2472	16.90	17.26	17.26	0.053	-2.73	0.66	17.92	0.062	
802.11g	2412	24.84	24.26	24.84	0.305	-2.73	0.66	24.92	0.310	
	2442	22.23	22.84	22.84	0.192	-2.73	0.66	23.50	0.224	
	2462	22.42	21.42	22.42	0.175	-2.73	0.66	22.08	0.161	
	2467	23.97	23.34	23.97	0.249	-2.73	0.66	24.00	0.251	
	2472	21.72	20.7	21.72	0.149	-2.73	0.66	21.36	0.137	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

SISO

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Ant1	Ant2	(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11n-HT20	2412	23.21	22.90	23.21	0.209	-2.73	0.66	23.56	0.227	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2442	21.50	21.98	21.98	0.158	-2.73	0.66	22.64	0.184	
	2462	21.73	20.34	21.73	0.149	-2.73	0.66	21.00	0.126	
	2467	23.00	22.35	23.00	0.200	-2.73	0.66	23.01	0.200	
	2472	20.84	21.73	21.73	0.149	-2.73	0.66	22.39	0.173	
802.11n-HT40	2422	25.28	25.11	25.28	0.337	-2.73	0.66	25.77	0.378	
	2442	25.25	25.44	25.44	0.350	-2.73	0.66	26.10	0.407	
	2447	25.23	25.59	25.59	0.362	-2.73	0.66	26.25	0.422	
	2452	24.28	23.16	24.28	0.268	-2.73	0.66	23.82	0.241	
	2457	21.11	20.22	21.11	0.129	-2.73	0.66	20.88	0.122	
802.11ax-HE20	2462	19.79	20.02	20.02	0.100	-2.73	0.66	20.68	0.117	
	2412	24.62	24.32	24.62	0.290	-2.73	0.66	24.98	0.315	
	2442	23.03	23.30	23.30	0.214	-2.73	0.66	23.96	0.249	
	2462	23.04	22.33	23.04	0.201	-2.73	0.66	22.99	0.199	
	2467	19.40	19.62	19.62	0.092	-2.73	0.66	20.28	0.107	
802.11ax-HE40	2472	16.95	17.11	17.11	0.051	-2.73	0.66	17.77	0.060	
	2422	23.22	23.49	23.49	0.223	-2.73	0.66	24.15	0.260	
	2442	23.03	23.26	23.26	0.212	-2.73	0.66	23.92	0.247	
	2447	23.12	23.37	23.37	0.217	-2.73	0.66	24.03	0.253	
	2452	18.72	19.15	19.15	0.082	-2.73	0.66	19.81	0.096	
	2457	16.35	16.75	16.75	0.047	-2.73	0.66	17.41	0.055	
	2462	15.22	15.59	15.59	0.036	-2.73	0.66	16.25	0.042	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

Mode	Centre Frequency (MHz)	RU Configuration	Peak Output Power(dBm)		Max Peak Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
			Ant1	Ant2	(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11ax-HE20	2412	26/0	26.22	26.61	26.61	0.458	-2.73	0.66	27.27	0.533	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	26.44	26.73	26.73	0.471	-2.73	0.66	27.39	0.548	
		106/53	26.34	26.58	26.58	0.455	-2.73	0.66	27.24	0.530	
	2472	26/8	15.06	15.18	15.18	0.033	-2.73	0.66	15.84	0.038	
		52/40	17.49	17.94	17.94	0.062	-2.73	0.66	18.60	0.072	
		106/54	19.85	20.04	20.04	0.101	-2.73	0.66	20.70	0.117	
802.11ax-HE40	2422	242/61	24.14	24.53	24.53	0.284	-2.73	0.66	25.19	0.330	
	2462	242/62	18.53	19.14	19.14	0.082	-2.73	0.66	19.80	0.095	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		BT1	BT2	BT1	BT2	BT1	BT2	
BLE (1Mbps)	2402	11.59	11.57	-2.18	-4.84	9.41	6.73	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2440	11.23	11.54	-2.18	-4.84	9.05	6.70	
	2480	11.41	11.56	-2.18	-4.84	9.23	6.72	
BLE (2Mbps)	2402	11.51	11.74	-2.18	-4.84	9.33	6.90	
	2440	11.04	11.57	-2.18	-4.84	8.86	6.73	
	2480	11.37	11.52	-2.18	-4.84	9.19	6.68	
BLE (PHY Coded S2)	2402	11.47	11.61	-2.18	-4.84	9.29	6.77	
	2440	10.95	11.41	-2.18	-4.84	8.77	6.57	
	2480	11.28	11.42	-2.18	-4.84	9.10	6.58	
BLE (PHY Coded S8)	2402	11.45	11.82	-2.18	-4.84	9.27	6.98	
	2440	10.93	11.36	-2.18	-4.84	8.75	6.52	
	2480	11.49	11.34	-2.18	-4.84	9.31	6.50	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

MIMO

Mode	Centre Frequency (MHz)	Peak Output Power (dBm)		Total Peak Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Ant1	Ant2	(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	23.21	22.90	26.07	0.404	-0.71	25.36	0.343	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2442	21.50	21.98	24.76	0.299	-0.71	24.05	0.254	
	2462	21.73	20.34	24.10	0.257	-0.71	23.39	0.218	
	2467	23.00	22.35	25.70	0.371	-0.71	24.99	0.315	
	2472	20.84	21.73	24.32	0.270	-0.71	23.61	0.230	
802.11n-HT40	2422	25.28	25.11	28.21	0.662	-0.71	27.50	0.562	
	2442	25.25	25.44	28.36	0.685	-0.71	27.65	0.582	
	2447	25.23	25.59	28.42	0.696	-0.71	27.71	0.591	
	2452	24.28	23.16	26.77	0.475	-0.71	26.06	0.403	
	2457	22.89	21.78	25.38	0.345	-0.71	24.67	0.293	
	2462	19.60	20.05	22.84	0.192	-0.71	22.13	0.163	
802.11ax-HE20	2412	24.62	24.32	27.48	0.560	-0.71	26.77	0.476	
	2442	23.03	23.30	26.18	0.415	-0.71	25.47	0.352	
	2462	23.04	22.33	25.71	0.372	-0.71	25.00	0.316	
	2467	20.95	20.56	23.77	0.238	-0.71	23.06	0.202	
	2472	18.73	18.85	21.80	0.151	-0.71	21.09	0.129	
802.11ax-HE40	2422	23.22	23.49	26.37	0.433	-0.71	25.66	0.368	
	2442	23.03	23.26	26.16	0.413	-0.71	25.45	0.350	
	2447	23.12	23.37	26.26	0.422	-0.71	25.55	0.359	
	2452	20.55	19.51	23.07	0.203	-0.71	22.36	0.172	
	2457	18.85	19.18	22.03	0.160	-0.71	21.32	0.135	
	2462	17.34	17.71	20.54	0.113	-0.71	19.83	0.096	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{0.66/10} + 10^{-2.73/10})/2] = -0.71$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

MIMO

Mode	Centre Frequency (MHz)	RU Configuration	Peak OutputPower (dBm)		Total Peak OutputPower ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
			Ant1	Ant2	(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	26.22	26.61	29.43	0.877	-0.71	28.72	0.745	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	26.44	26.73	29.60	0.912	-0.71	28.89	0.774	
		106/53	26.34	26.58	29.47	0.886	-0.71	28.76	0.752	
	2472	26/8	16.99	17.17	20.09	0.102	-0.71	19.38	0.087	
		52/40	20.11	20.47	23.30	0.214	-0.71	22.59	0.182	
		106/54	20.18	20.73	23.47	0.223	-0.71	22.76	0.189	
802.11ax-HE40	2422	242/61	24.14	24.53	27.35	0.543	-0.71	26.64	0.461	
	2462	242/62	24.02	24.47	27.26	0.532	-0.71	26.55	0.452	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{0.66/10} + 10^{-2.73/10})/2] = -0.71$ dBi

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Peak Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.4.2 Average Output Power (Reporting only)

SISO

Mode	Centre Frequency (MHz)	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Ant1	Ant2		(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11b	2412	19.41	20.00	0.214	20.21	0.105	-2.73	0.66	20.66	0.116	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2417	18.35	19.13	0.214	19.34	0.086	-2.73	0.66	19.79	0.095	
	2442	18.67	19.14	0.214	19.35	0.086	-2.73	0.66	19.80	0.095	
	2462	18.55	17.31	0.214	18.76	0.075	-2.73	0.66	17.97	0.063	
	2467	18.06	16.68	0.214	18.27	0.067	-2.73	0.66	17.34	0.054	
	2472	14.15	14.26	0.214	14.47	0.028	-2.73	0.66	14.92	0.031	
802.11g	2412	13.76	14.18	1.169	15.35	0.034	-2.73	0.66	14.84	0.030	
	2442	13.48	13.70	1.169	14.87	0.031	-2.73	0.66	14.36	0.027	
	2462	13.49	12.46	1.169	14.66	0.029	-2.73	0.66	13.12	0.021	
	2467	13.90	13.17	1.169	15.07	0.032	-2.73	0.66	13.83	0.024	
	2472	11.56	10.72	1.169	12.73	0.019	-2.73	0.66	11.38	0.014	

Mode	Centre Frequency (MHz)	Average Output Power(dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. ^{Note 2}		Limit
		Ant1	Ant2		(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11n-HT20	2412	12.56	12.70	1.244	13.94	0.025	-2.73	0.66	13.36	0.022	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2442	12.31	12.77	1.244	14.01	0.025	-2.73	0.66	13.43	0.022	
	2462	12.38	11.63	1.244	13.62	0.023	-2.73	0.66	12.29	0.017	
	2467	12.80	11.88	1.244	14.04	0.025	-2.73	0.66	12.54	0.018	
	2472	7.90	8.21	1.244	9.45	0.009	-2.73	0.66	8.87	0.008	
802.11n-HT40	2422	12.81	13.22	2.111	15.33	0.034	-2.73	0.66	13.88	0.024	
	2442	12.80	13.11	2.111	15.22	0.033	-2.73	0.66	13.77	0.024	
	2447	12.90	13.14	2.111	15.25	0.034	-2.73	0.66	13.80	0.024	
	2452	11.99	10.62	2.111	14.10	0.026	-2.73	0.66	11.28	0.013	
	2457	9.11	8.40	2.111	11.22	0.013	-2.73	0.66	9.06	0.008	
	2462	6.04	6.58	2.111	8.69	0.007	-2.73	0.66	7.24	0.005	
802.11ax-HE20	2412	10.51	10.74	2.549	13.29	0.021	-2.73	0.66	11.40	0.014	
	2442	10.36	10.81	2.549	13.36	0.022	-2.73	0.66	11.47	0.014	
	2462	10.58	9.49	2.549	13.13	0.021	-2.73	0.66	10.15	0.010	
	2467	5.38	5.75	2.549	8.30	0.007	-2.73	0.66	6.41	0.004	
	2472	2.01	2.45	2.549	5.00	0.003	-2.73	0.66	3.11	0.002	
802.11ax-HE40	2422	9.55	9.82	4.841	14.66	0.029	-2.73	0.66	10.48	0.011	
	2442	9.58	9.92	4.841	14.76	0.030	-2.73	0.66	10.58	0.011	
	2447	9.51	9.89	4.841	14.73	0.030	-2.73	0.66	10.55	0.011	
	2452	4.77	5.10	4.841	9.94	0.010	-2.73	0.66	5.76	0.004	
	2457	2.38	2.77	4.841	7.61	0.006	-2.73	0.66	3.43	0.002	
	2462	1.04	1.32	4.841	6.16	0.004	-2.73	0.66	1.98	0.002	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

SISO

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Max Average Output Power		Antenna Gain (dBi)		E.I.R.P. No.102		Limit
			Ant1	Ant2		(dBm)	(W)	Ant1	Ant2	(dBm)	(W)	
802.11ax-HE20	2412	26/0	12.46	13.27	3.391	16.66	0.046	-2.730	0.66	17.32	0.054	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	11.55	12.05	3.575	15.44	0.035	-2.730	0.66	16.29	0.043	
		106/53	11.37	11.90	3.904	15.29	0.034	-2.730	0.66	16.46	0.044	
	2472	26/8	1.90	2.55	3.391	5.94	0.004	-2.730	0.66	6.60	0.005	
		52/40	3.23	3.95	3.575	7.34	0.005	-2.730	0.66	8.19	0.007	
		106/54	4.95	5.54	3.904	8.93	0.008	-2.730	0.66	10.10	0.010	
802.11ax-HE40	2422	242/61	9.68	10.16	4.225	14.39	0.027	-2.730	0.66	15.05	0.032	
	2462	242/62	4.05	4.47	4.225	8.70	0.007	-2.730	0.66	9.36	0.009	

Note: 1. The results have been included cable loss.

2. E.I.R.P.= The Max. of Peak Output Power (BT1 or BT2)(dBm)+ Antenna Gain (dBi).

3. Max Average Output Power (dBm) = Max of each average output power (dBm)+ Duty Cycle Factor (dB) when duty cycle is less than 98%.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

MIMO

Mode	Centre Frequency (MHz)	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/α)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
		Ant1	Ant2		(dBm)	(W)		(dBm)	(W)	
802.11n-HT20	2412	12.56	12.70	1.244	16.88	0.049	-0.71	16.17	0.041	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
	2442	12.31	12.77	1.244	16.80	0.048	-0.71	16.09	0.041	
	2462	12.38	11.63	1.244	16.28	0.042	-0.71	15.57	0.036	
	2467	12.80	11.88	1.244	16.62	0.046	-0.71	15.91	0.039	
	2472	7.90	8.21	1.244	12.31	0.017	-0.71	11.60	0.014	
802.11n-HT40	2422	12.81	13.22	2.111	18.14	0.065	-0.71	17.43	0.055	
	2427	12.80	13.11	2.111	18.08	0.064	-0.71	17.37	0.055	
	2442	12.90	13.14	2.111	18.14	0.065	-0.71	17.43	0.055	
	2452	11.99	10.62	2.111	16.48	0.044	-0.71	15.77	0.038	
	2457	10.52	9.55	2.111	15.18	0.033	-0.71	14.47	0.028	
802.11ax-HE20	2462	7.49	7.95	2.111	12.85	0.019	-0.71	12.14	0.016	
	2412	10.51	10.74	2.549	16.19	0.042	-0.71	15.48	0.035	
	2442	10.36	10.81	2.549	16.15	0.041	-0.71	15.44	0.035	
	2462	10.58	9.49	2.549	15.63	0.037	-0.71	14.92	0.031	
	2467	6.96	6.15	2.549	12.13	0.016	-0.71	11.42	0.014	
802.11ax-HE40	2472	3.69	3.97	2.549	9.39	0.009	-0.71	8.68	0.007	
	2422	9.55	9.82	4.841	17.54	0.057	-0.71	16.83	0.048	
	2442	9.58	9.92	4.841	17.60	0.058	-0.71	16.89	0.049	
	2447	9.51	9.89	4.841	17.56	0.057	-0.71	16.85	0.048	
	2452	7.26	6.24	4.841	14.63	0.029	-0.71	13.92	0.025	
	2457	4.70	5.21	4.841	12.81	0.019	-0.71	12.10	0.016	
	2462	3.43	3.66	4.841	11.40	0.014	-0.71	10.69	0.012	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{\text{ANT}}] \text{ dBi}$$

$$\text{Directional gain} = 10 \log[(10^{0.66/10} + 10^{-2.73/10})/2] = -0.71 \text{ dBi}$$

The MIMO is uncorrelated and supported SDM(Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P.= The Total Average Output Power (dBm)+ Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

MIMO

Mode	Centre Frequency (MHz)	RU Configuration	Average Output Power (dBm)		Duty cycle factor (dB) 10log (1/x)	Total Average Output Power ^{Note 2}		Directional Gain ^{Note 3} (dBi)	E.I.R.P ^{Note 4}		Limit
			Ant1	Ant2		(dBm)	(W)		(dBm)	(W)	
802.11ax-HE20	2412	26/0	12.46	13.27	3.391	19.29	0.085	-0.71	18.58	0.072	<30dBm (Maximum Peak Output Power) <36dBm (E.I.R.P)
		52/37	11.55	12.05	3.575	18.39	0.069	-0.71	17.68	0.059	
		106/53	11.37	11.90	3.904	18.56	0.072	-0.71	17.85	0.061	
	2472	26/8	3.69	4.38	3.391	10.45	0.011	-0.71	9.74	0.009	
		52/40	6.05	6.49	3.575	12.86	0.019	-0.71	12.15	0.016	
		106/54	5.91	6.56	3.904	13.16	0.021	-0.71	12.45	0.018	
802.11ax-HE40	2422	242/61	9.68	10.16	4.225	17.16	0.052	-0.71	16.45	0.044	
	2462	242/62	8.92	9.37	4.225	16.39	0.044	-0.71	15.68	0.037	

Note: 1. The results have been included cable loss.

2. According to KDB 662911 D01 E)1), Total peak power = sum to individual output power

3. According to KDB 662911 D01 d) ii), transmit signals are completely uncorrelated, then

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi

Directional gain = $10 \log[(10^{0.66/10} + 10^{-2.73/10})/2] = -0.71$ dBi


The MIMO is uncorrelated and supported SDM (Spatial Division Multiplexing) mode only. This radio device doesn't support beamforming and Cyclic Delay Diversity (CDD).

4. E.I.R.P. = The Total Average Output Power (dBm) + Directional Gain (dBi).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303


● Measurement Plots (Peak Output Power of BLE Mode)

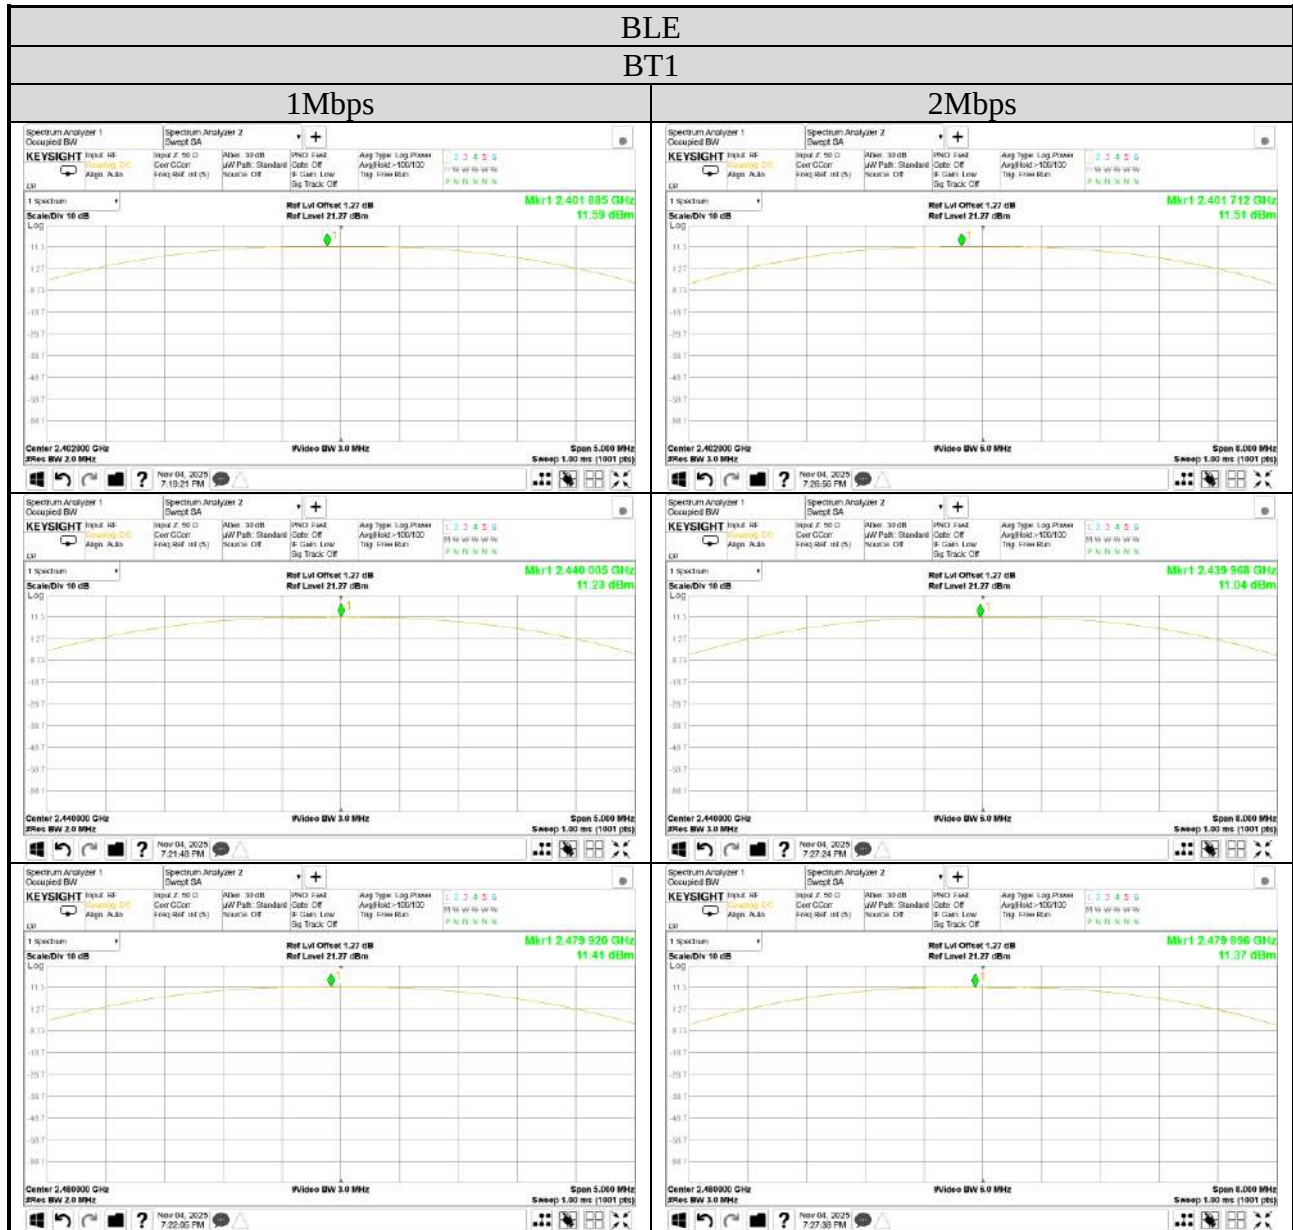


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

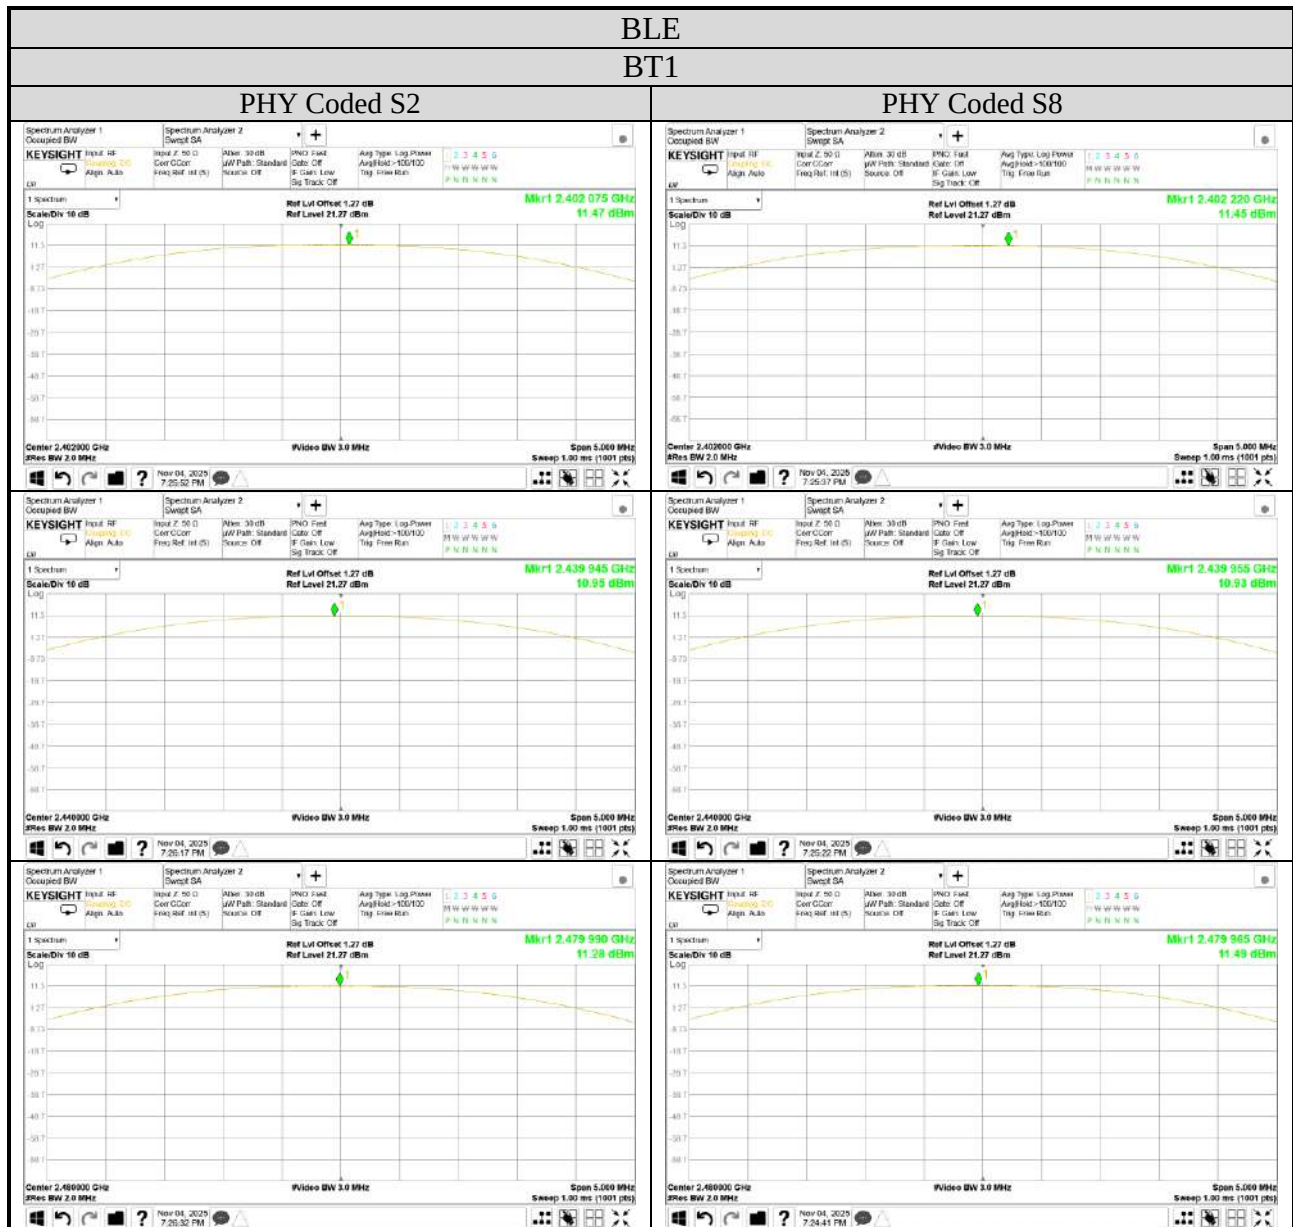

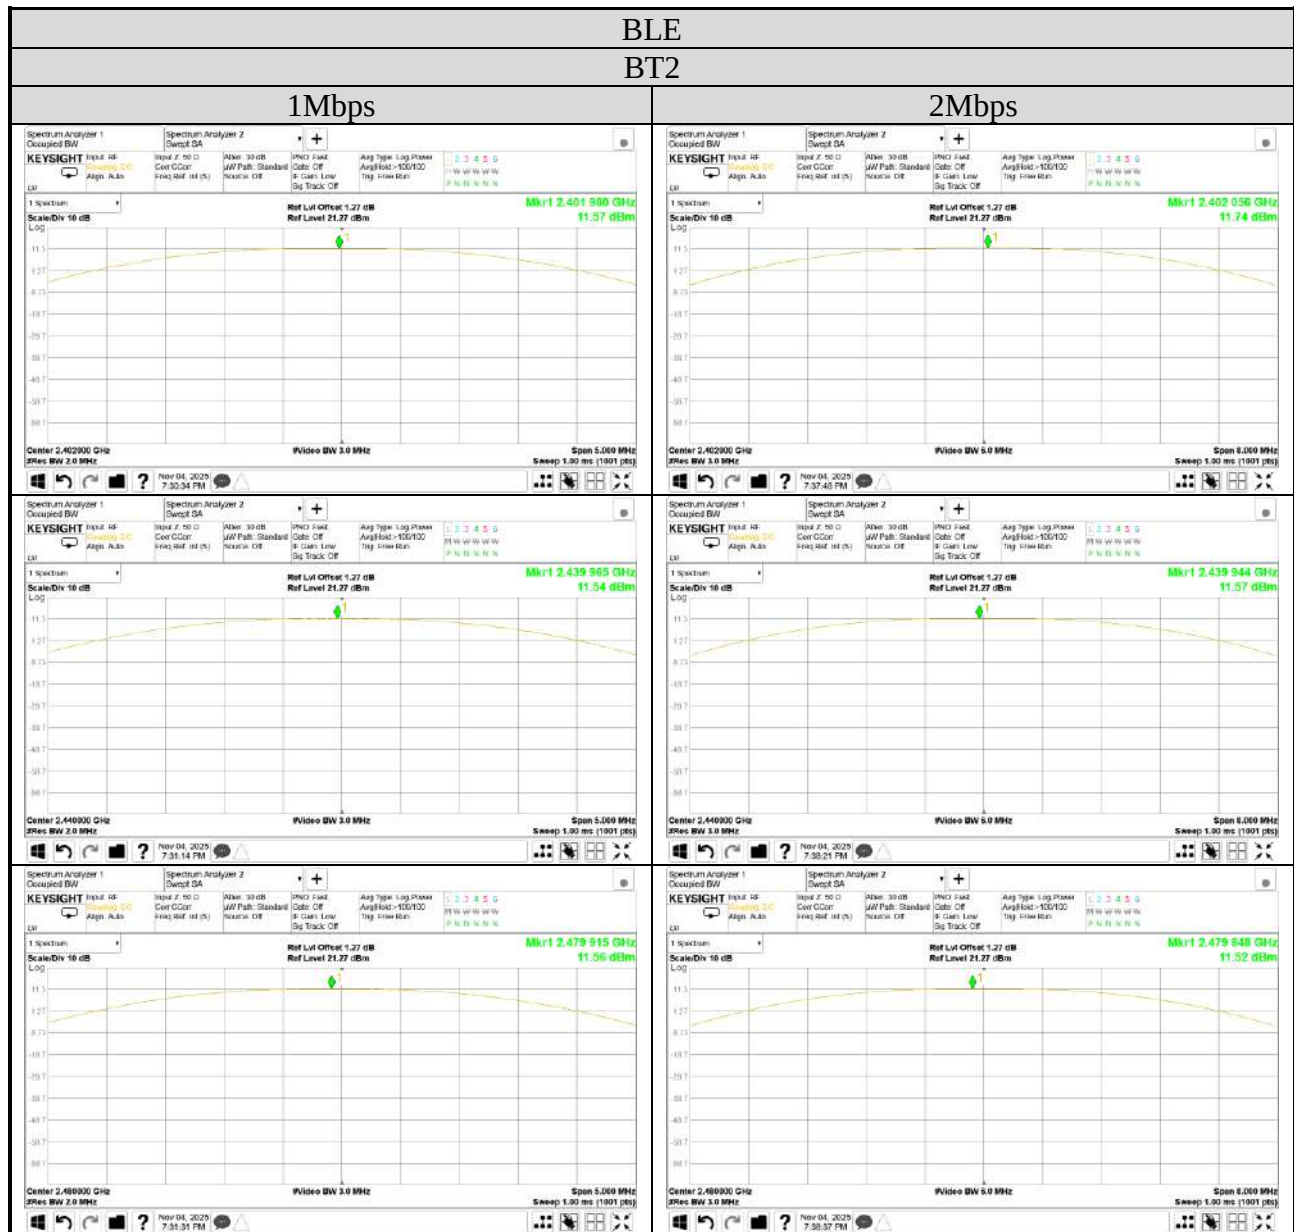

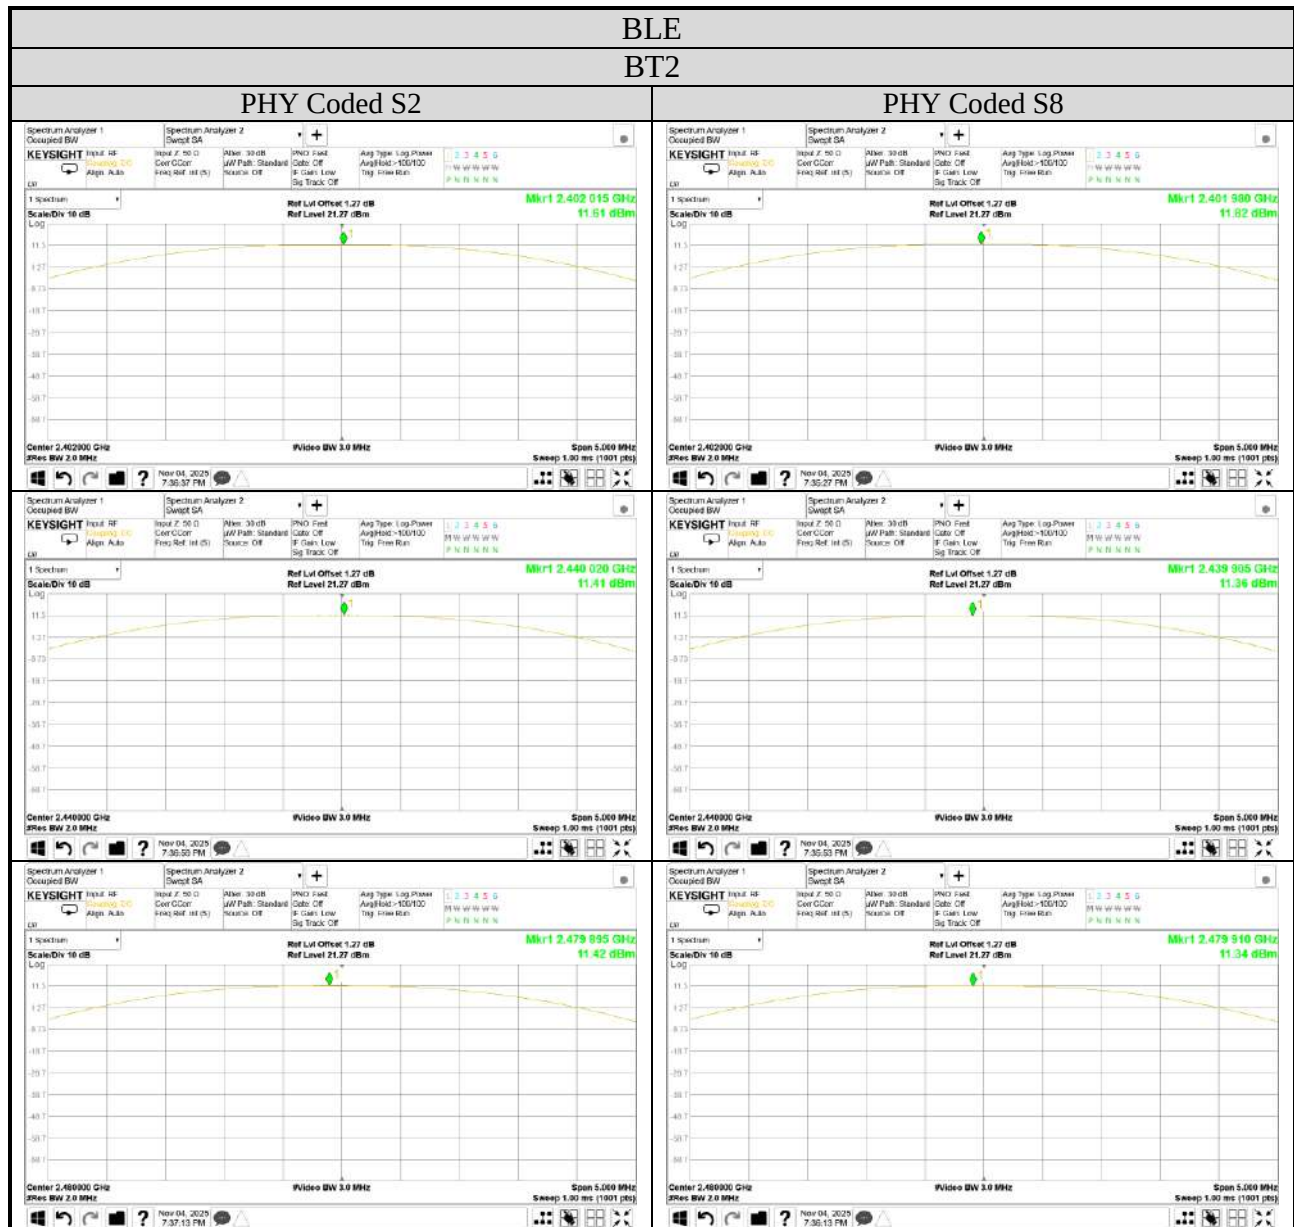


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


A.5 EMISSION LIMITATIONS

Test Date	2025/10/15~11/05	Temp./Hum.	22~25°C/54~66%
Cable Loss	1.00dB, 1.27dB, 1.40dB	Tested By	Sean Wang
Test Voltage	DC 5V (Through jig via Notebook PC)		

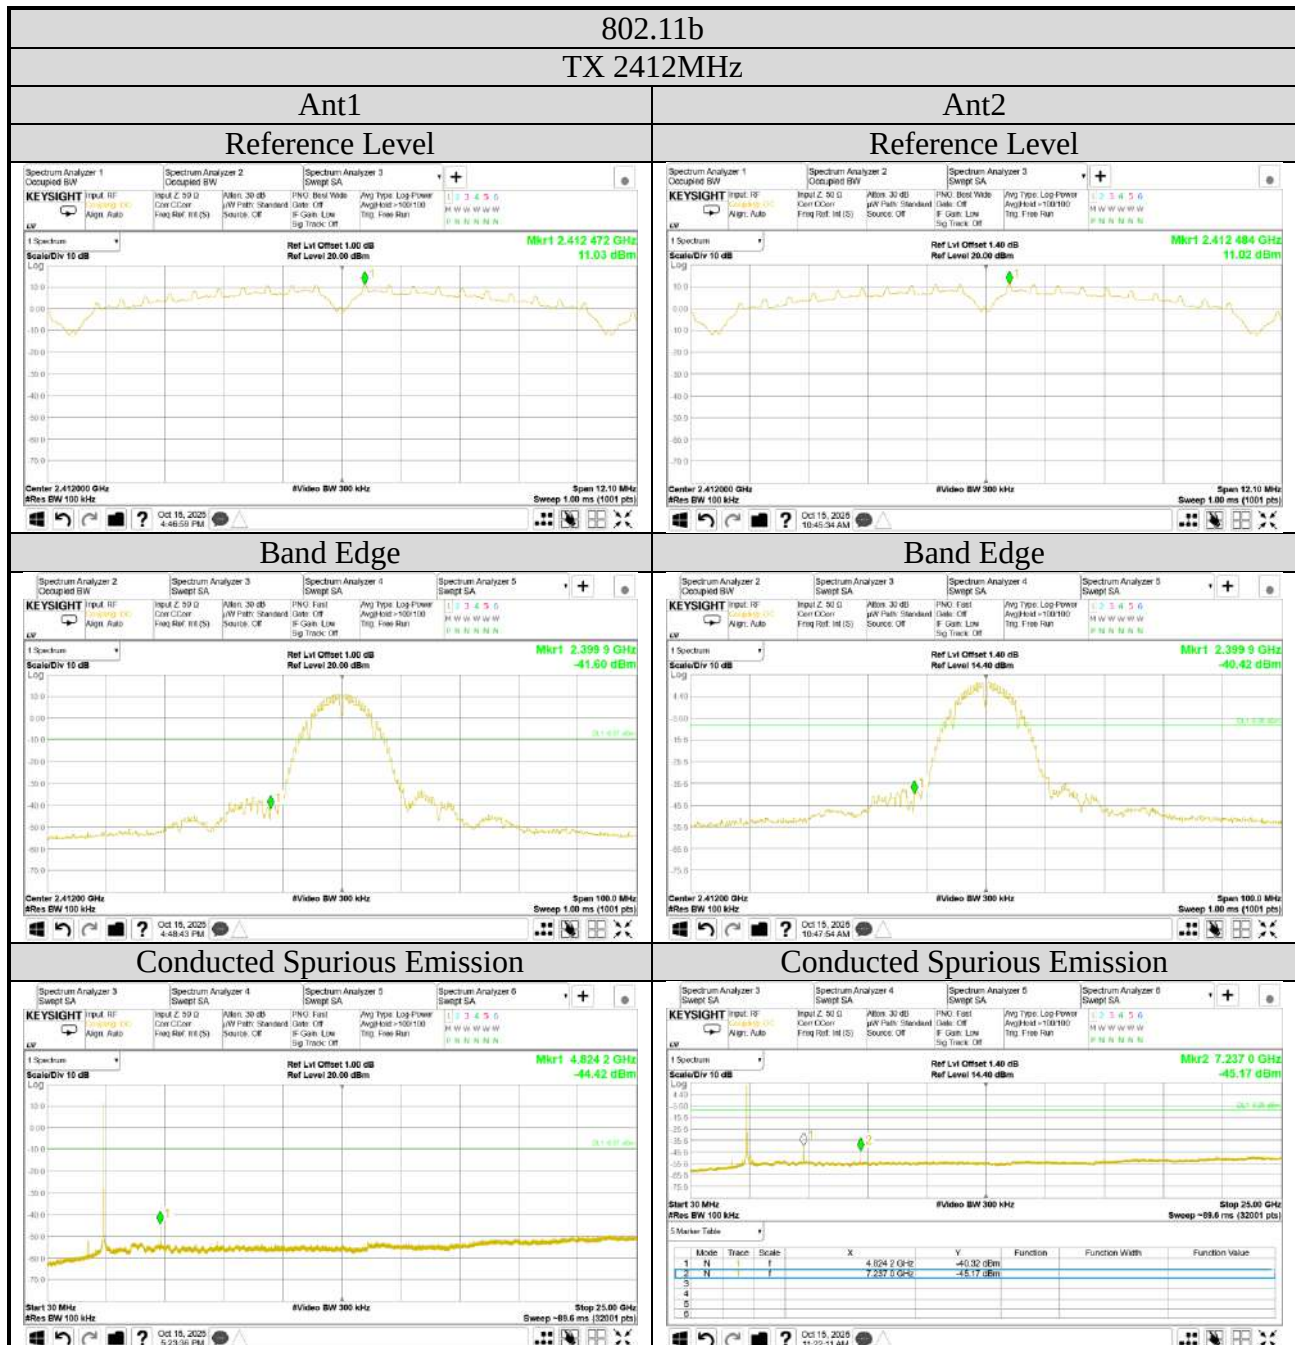


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

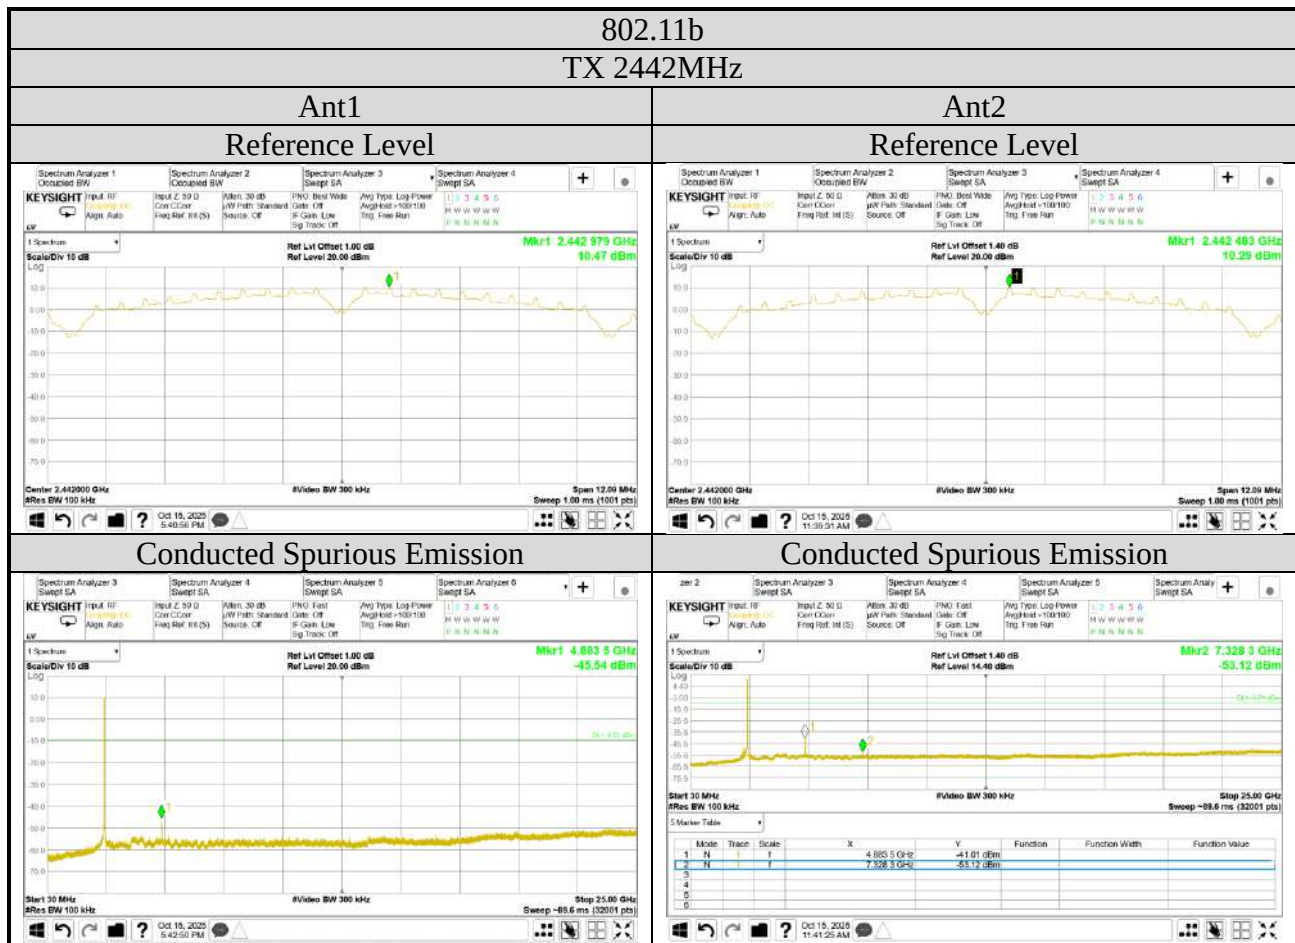


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

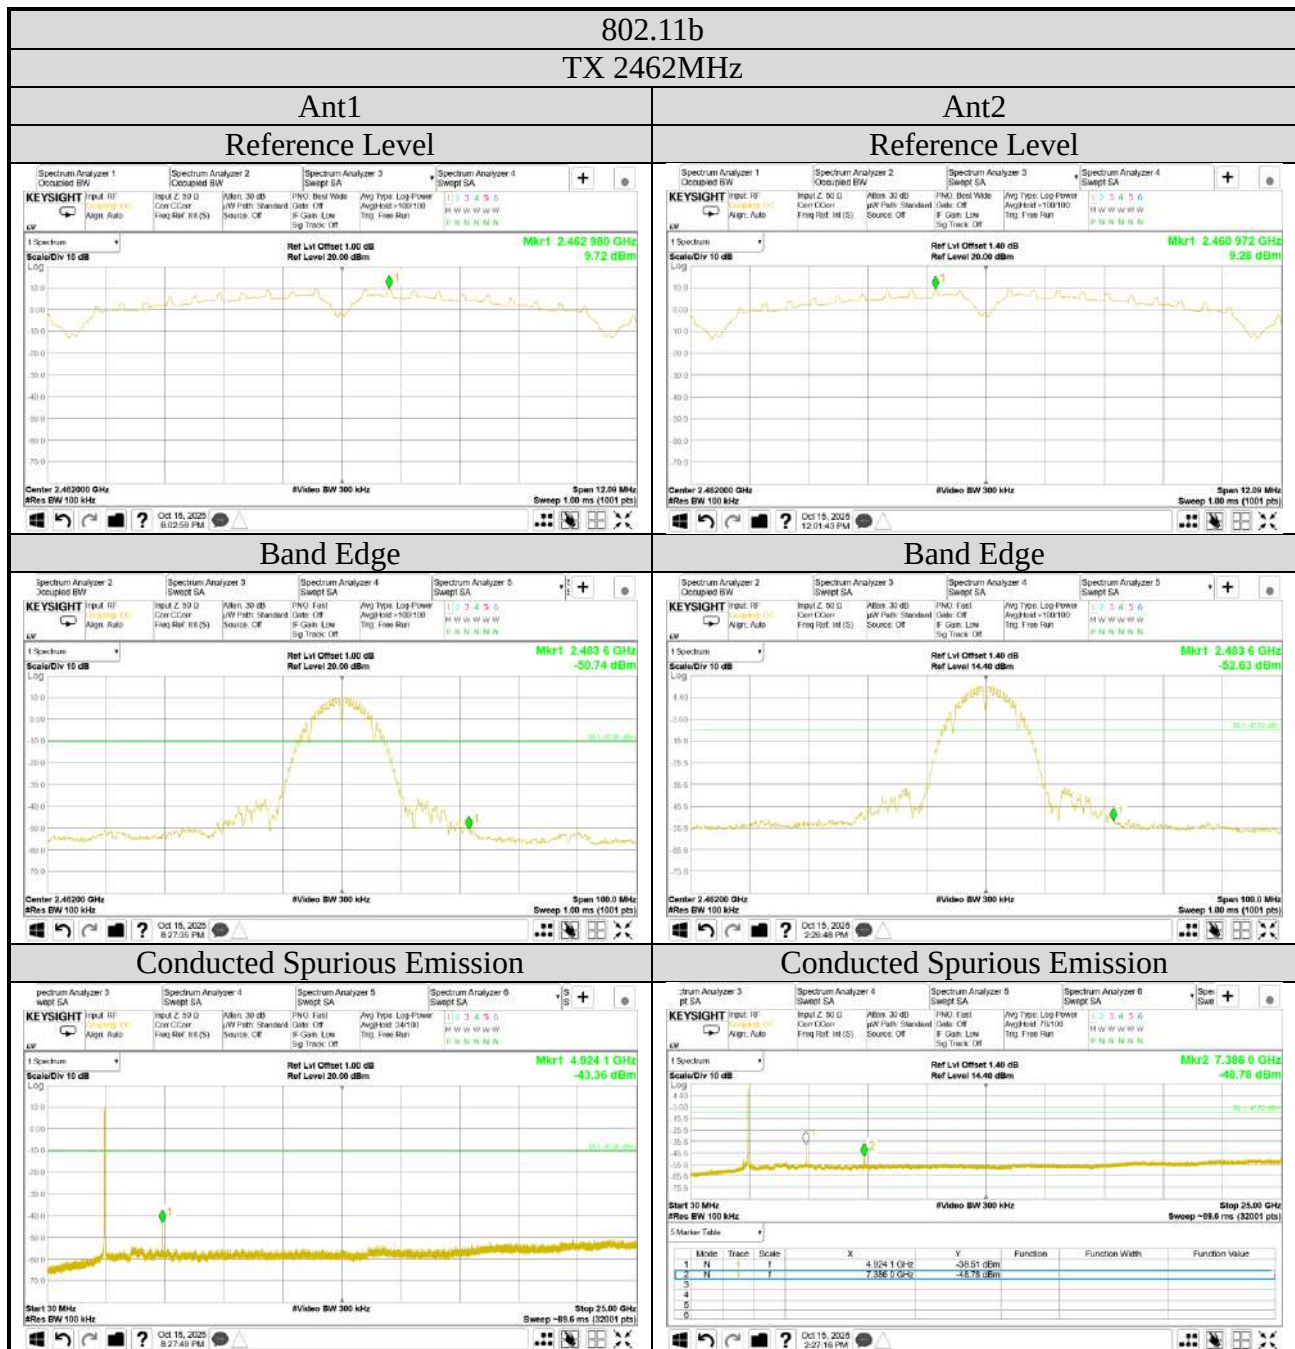


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

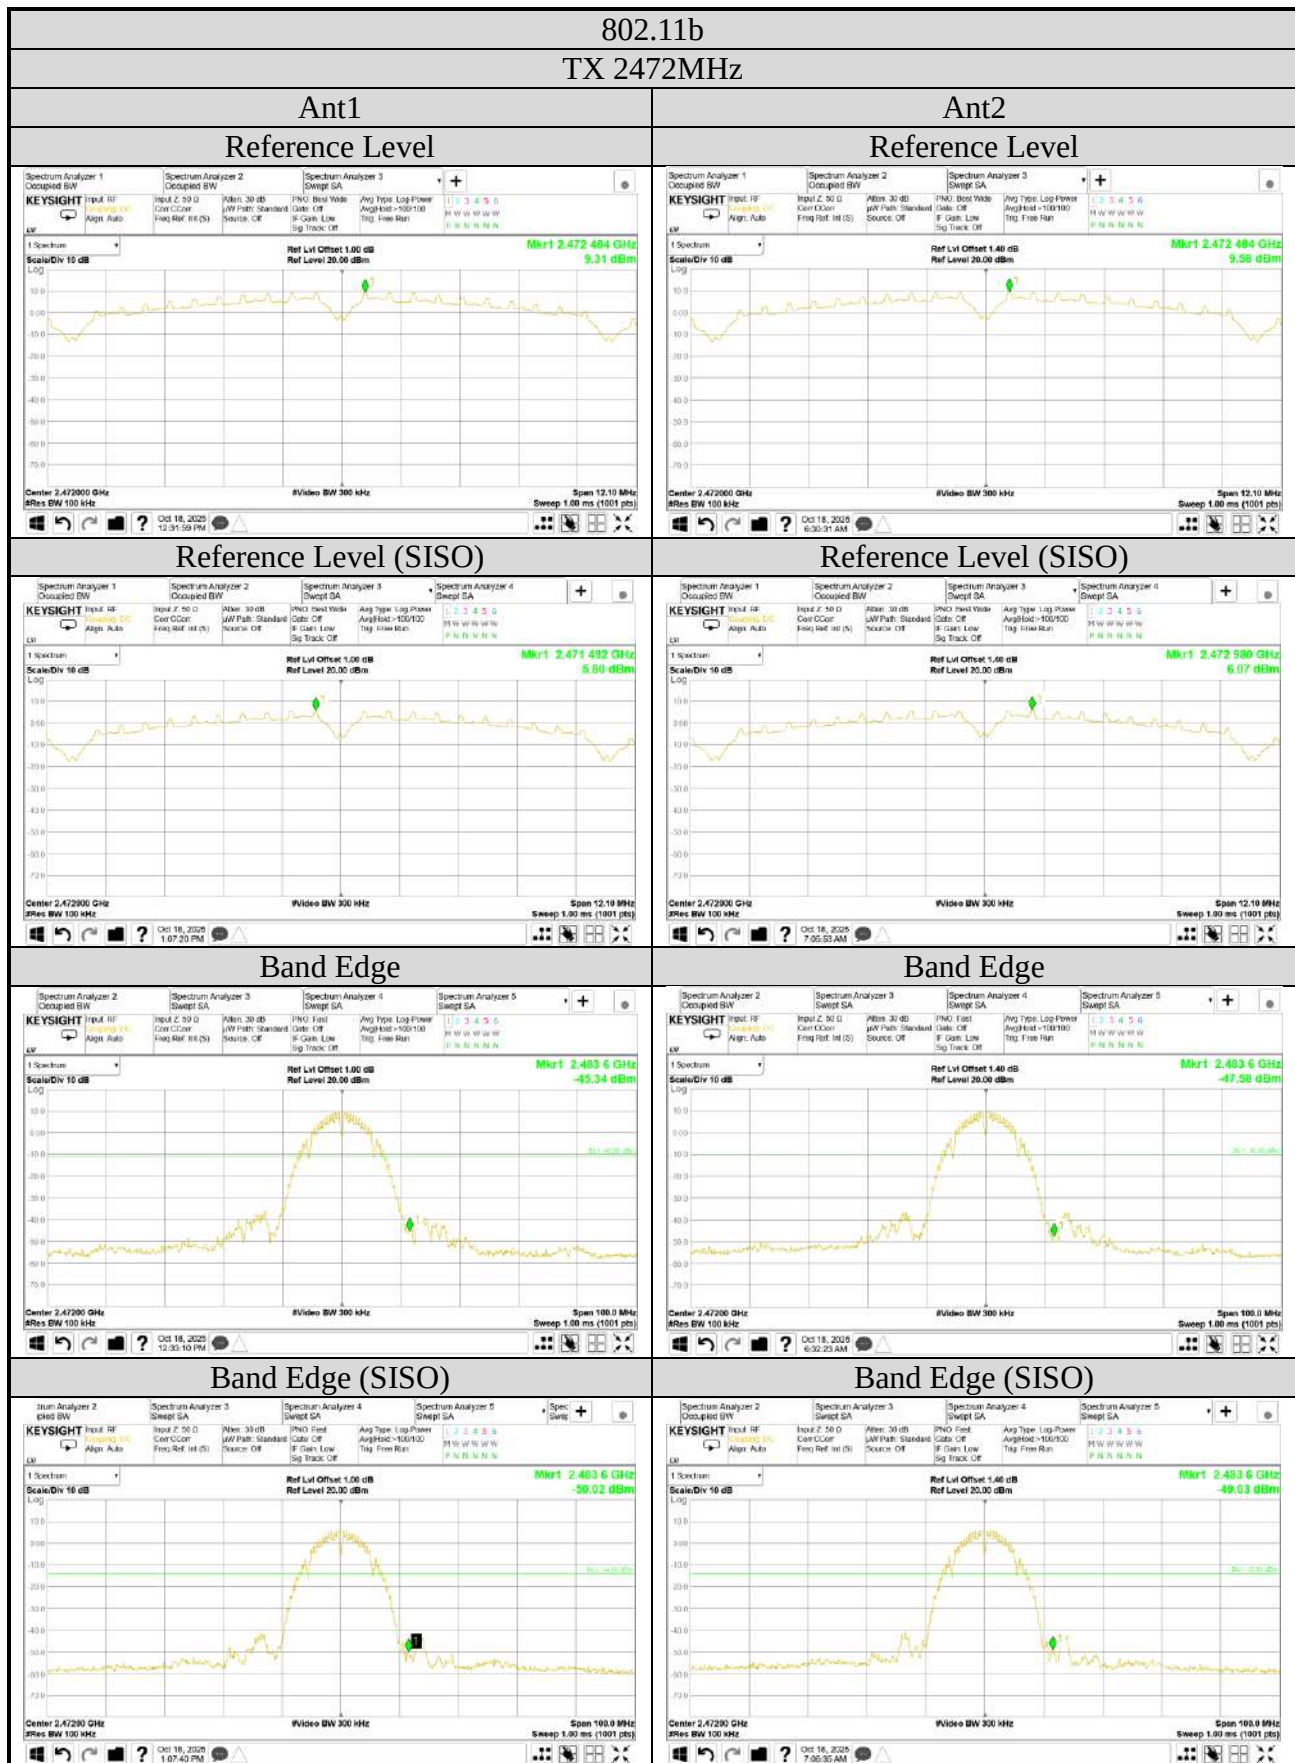


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

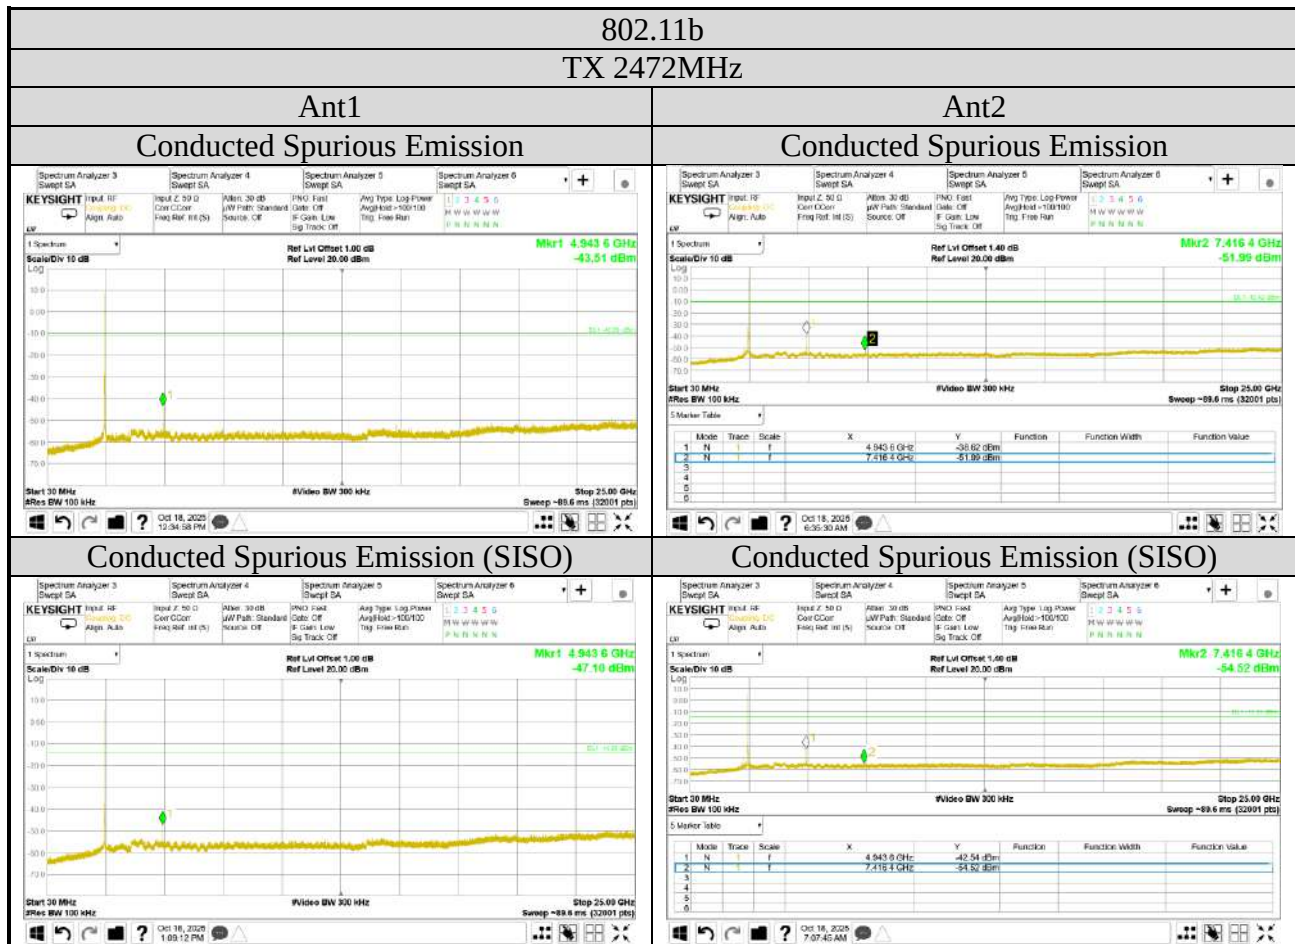

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

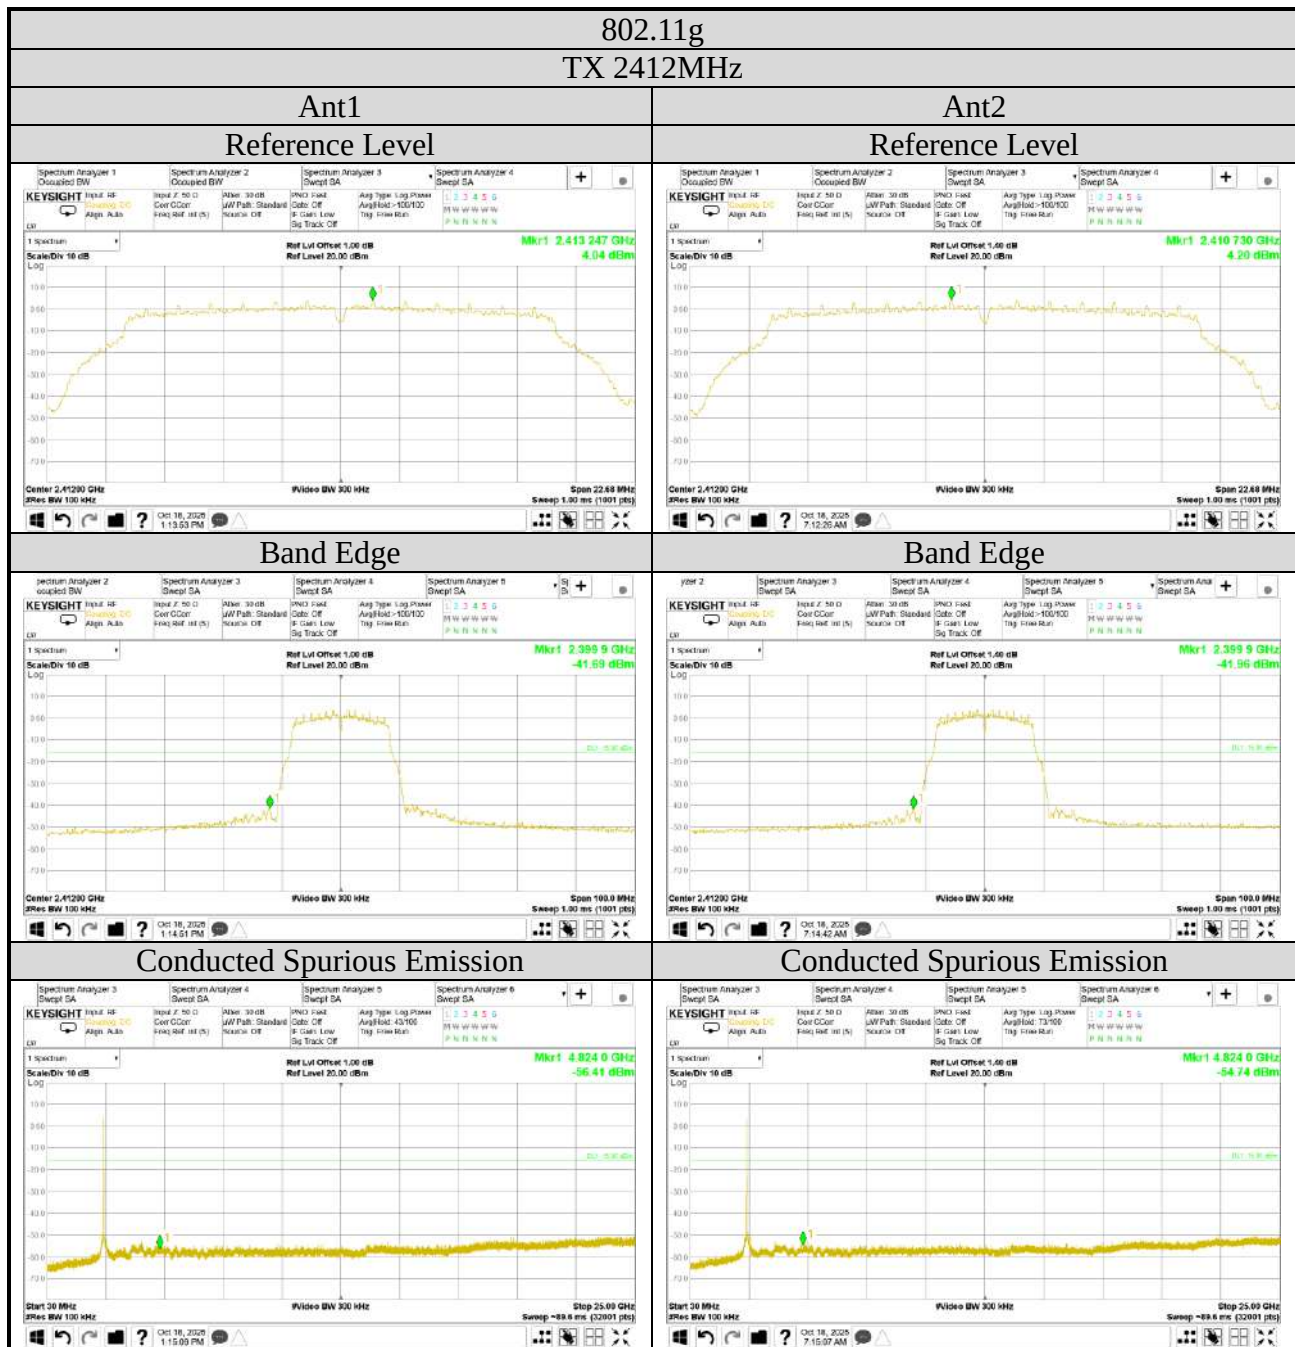

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

