

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	252
A.2.3 Emissions in Non-restricted Frequency Bands.....	318
A.3 MAXIMUM OUTPUT POWER AND EMISSION/OCCUPIED BANDWIDTH.....	319
A.3.1 Average Output Power and Emission/Occupied Bandwidth.....	319
A.3.2 Measurement Plots	339
A.4 POWER SPECTRAL DENSITY	372
A.4.1 Power Spectral Density Result	372
A.4.2 Measurement Plots	385
A.5 FREQUENCY STABILITY	400
A.5.1 Frequency stability Result	400
A.6 BAND EDGE	401

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2025/10/16	Temp./Hum.	25°C/61%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Bruce Tseng

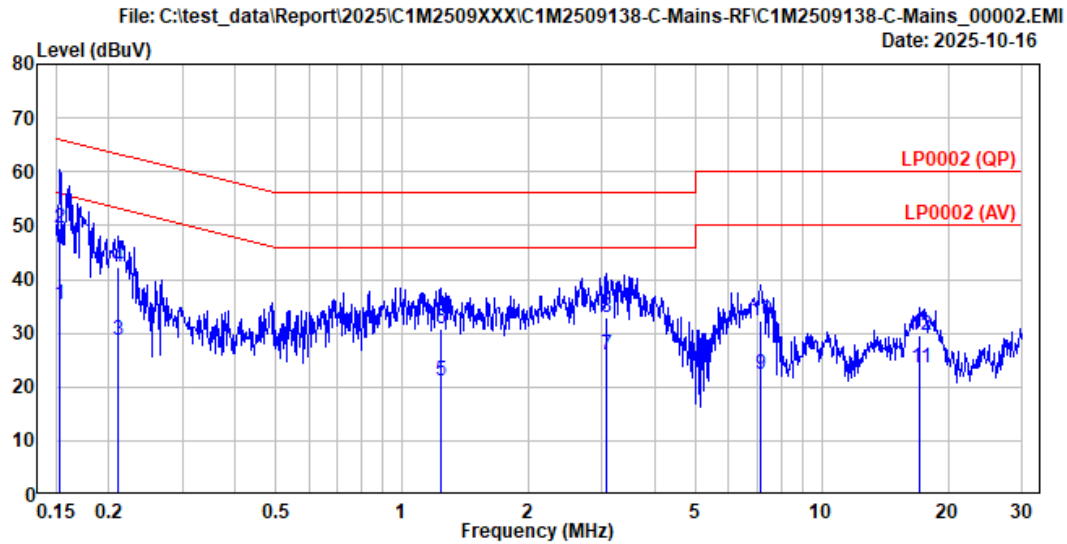

Site No. : No.7 Shielded Room
Instrument 1 : Receiver ESR(114)
Instrument 2 : ESH2-Z5 (366)(A)|CE-07|ESH3-Z2 (495)
Limit : LP0002 (QP)
Environment : 24°C/61%
EUT Model : WCH941M
Test Mode : Operating

Data No. : 2
Phase : Neutral
Test Rating : 3.3Vdc
Engineer : Bruce


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	0.17	0.05	9.86	25.27	35.35	55.88	20.53	Average
2	0.152	0.17	0.05	9.86	39.52	49.60	65.88	16.28	QP
3	0.211	0.17	0.05	9.87	18.73	28.82	53.18	24.36	Average
4	0.211	0.17	0.05	9.87	32.31	42.40	63.18	20.78	QP
5	1.235	0.20	0.07	9.87	11.06	21.20	46.00	24.80	Average
6	1.235	0.20	0.07	9.87	20.65	30.79	56.00	25.21	QP
7	3.060	0.25	0.10	9.87	15.62	25.84	46.00	20.16	Average
8	3.060	0.25	0.10	9.87	22.71	32.93	56.00	23.07	QP
9	7.140	0.29	0.14	9.89	12.11	22.43	50.00	27.57	Average
10	7.140	0.29	0.14	9.89	22.12	32.44	60.00	27.56	QP
11	17.166	0.49	0.21	9.93	12.88	23.51	50.00	26.49	Average
12	17.166	0.49	0.21	9.93	18.97	29.60	60.00	30.40	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2025/10/16	Temp./Hum.	25°C/61%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Bruce Tseng

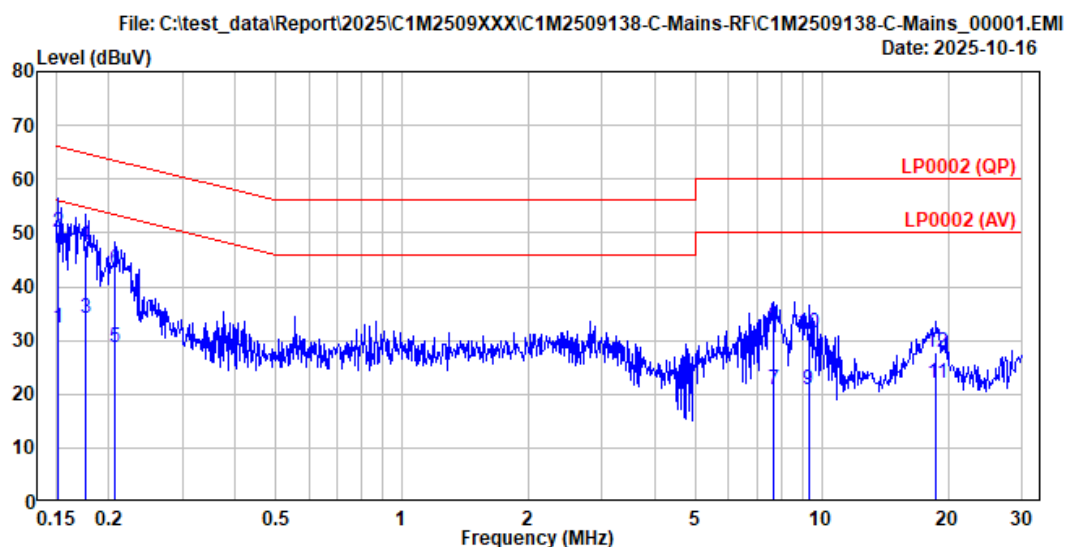

Site No.	: No.7 Shielded Room	Data No.	: 1
Instrument 1	: Receiver ESR(114)		
Instrument 2	: ESH2-Z5 (366)(A) CE-07 ESH3-Z2 (495)		
Limit	: LP0002 (QP)	Phase	: Line
Environment	: 24°C/61%	Test Rating	: 3.3Vdc
EUT Model	: WCH941M	Engineer	: Bruce
Test Mode	: Operating		

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	0.14	0.05	9.86	22.22	32.27	55.92	23.65	Average
2	0.152	0.14	0.05	9.86	39.99	50.04	65.92	15.88	QP
3	0.176	0.14	0.05	9.87	23.97	34.03	54.68	20.65	Average
4	0.176	0.14	0.05	9.87	37.50	47.56	64.68	17.12	QP
5	0.207	0.14	0.05	9.87	18.76	28.82	53.31	24.49	Average
6	0.207	0.14	0.05	9.87	33.20	43.26	63.31	20.05	QP
7	7.694	0.25	0.15	9.89	10.69	20.98	50.00	29.02	Average
8	7.694	0.25	0.15	9.89	22.33	32.62	60.00	27.38	QP
9	9.299	0.25	0.16	9.89	10.50	20.80	50.00	29.20	Average
10	9.299	0.25	0.16	9.89	21.16	31.46	60.00	28.54	QP
11	18.778	0.38	0.22	9.94	11.60	22.14	50.00	27.86	Average
12	18.778	0.38	0.22	9.94	17.26	27.80	60.00	32.20	QP

Remarks: 1. Emission Level(dBμV)= AMN Factor(dB) + Cable Loss(dB) + Pulse Att.(dB) + Reading(dBμV).

A.2 RADIATED EMISSION

Test Date	2025/10/02~16	Temp./Hum.	23~27°C/46~58%
Test Voltage	DC 5V (Through jig via Notebook PC)	Tested By	Kuper Hsu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

SISO

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.500	22.99	1.43	26.47	28.35	26.31	40.00	13.69	Peak
199.500	15.18	3.67	25.79	40.51	33.56	43.50	9.94	Peak
277.000	18.87	4.46	25.64	40.65	38.35	46.00	7.65	Peak
683.500	24.52	7.56	27.41	28.56	33.24	46.00	12.76	Peak
896.000	26.34	8.79	27.01	30.19	38.32	46.00	7.68	Peak
961.000	26.84	9.17	26.81	35.39	44.58	54.00	9.42	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	22.77	1.44	26.47	30.28	28.02	40.00	11.98	Peak
207.000	15.69	3.75	25.77	34.97	28.63	43.50	14.87	Peak
346.000	20.30	5.36	26.00	32.94	32.61	46.00	13.39	Peak
483.000	22.86	6.80	26.98	35.76	38.46	46.00	7.54	Peak
897.000	26.36	8.80	27.01	30.66	38.81	46.00	7.19	Peak
983.000	27.00	9.29	26.75	29.22	38.76	54.00	15.24	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303****MIMO**

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
32.000	22.77	1.44	26.47	27.45	25.19	40.00	14.81	Peak
200.000	15.18	3.67	25.79	42.48	35.54	43.50	7.96	Peak
239.000	17.78	4.08	25.71	41.64	37.79	46.00	8.21	Peak
690.000	24.53	7.59	27.41	29.81	34.52	46.00	11.48	Peak
907.500	26.48	8.86	26.98	31.30	39.67	46.00	6.33	Peak
999.000	27.11	9.37	26.70	32.07	41.85	54.00	12.15	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
33.000	22.33	1.45	26.47	30.80	28.12	40.00	11.88	Peak
207.000	15.69	3.75	25.77	34.91	28.57	43.50	14.93	Peak
415.500	21.70	6.21	26.52	33.04	34.43	46.00	11.57	Peak
483.000	22.86	6.80	26.98	35.26	37.95	46.00	8.05	Peak
905.500	26.47	8.85	26.98	29.47	37.81	46.00	8.19	Peak
981.500	26.99	9.28	26.75	30.75	40.26	54.00	13.74	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge (SISO)

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

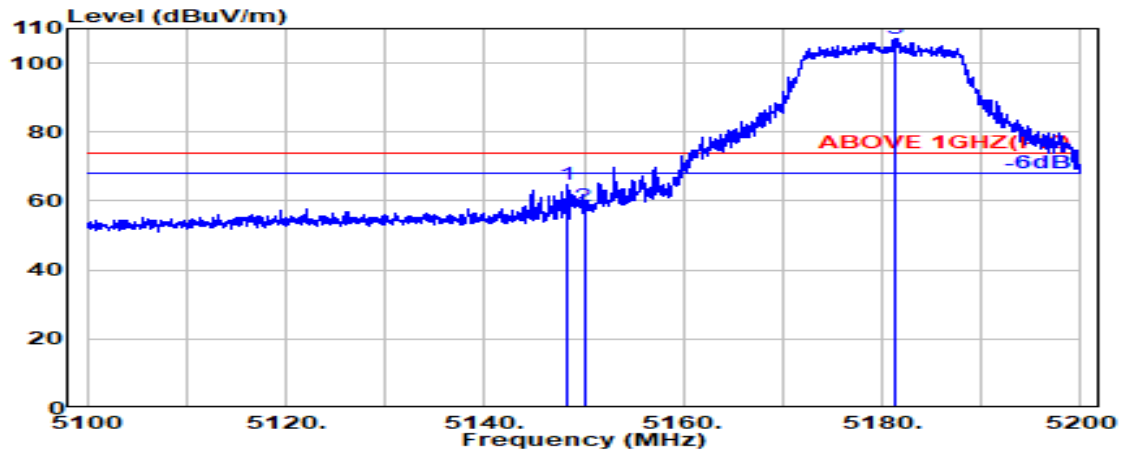

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.400	33.60	8.33	39.09	61.97	64.80	74.00	9.20	Peak
5150.000	33.60	8.33	39.09	55.82	58.65	74.00	15.35	Peak
@ 5181.400	33.60	8.36	39.09	104.12	106.99	---	---	Peak

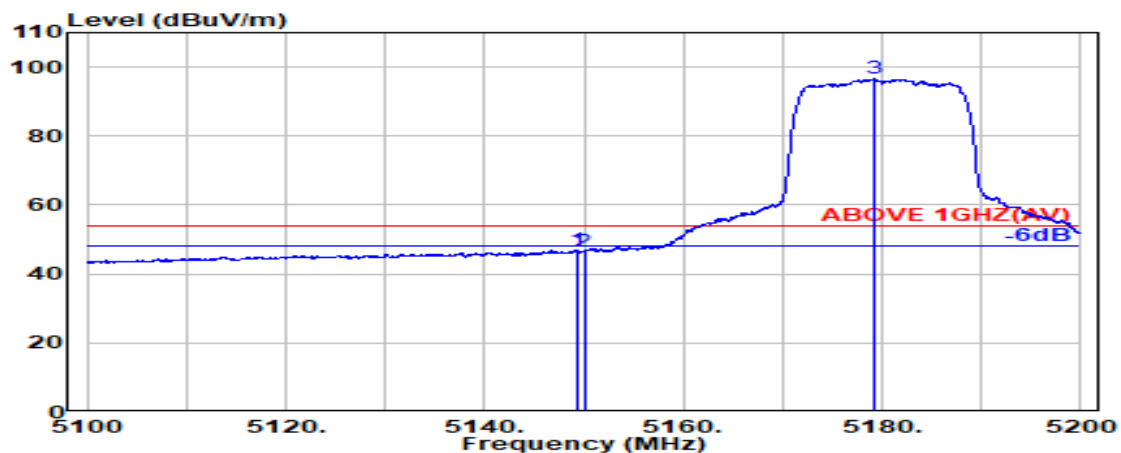

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.250	33.60	8.33	39.09	43.94	46.77	54.00	7.23	Average
5150.000	33.60	8.33	39.09	43.66	46.50	54.00	7.50	Average
@ 5179.300	33.60	8.36	39.09	93.65	96.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

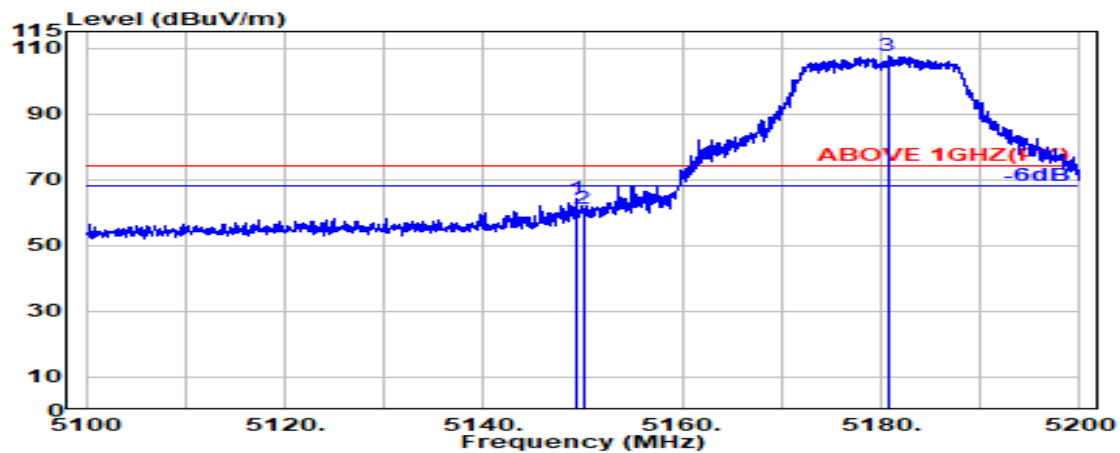

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.33	39.09	61.36	64.19	74.00	9.81	Peak
5150.000	33.60	8.33	39.09	58.14	60.97	74.00	13.03	Peak
@ 5180.650	33.60	8.36	39.09	104.90	107.78	---	---	Peak

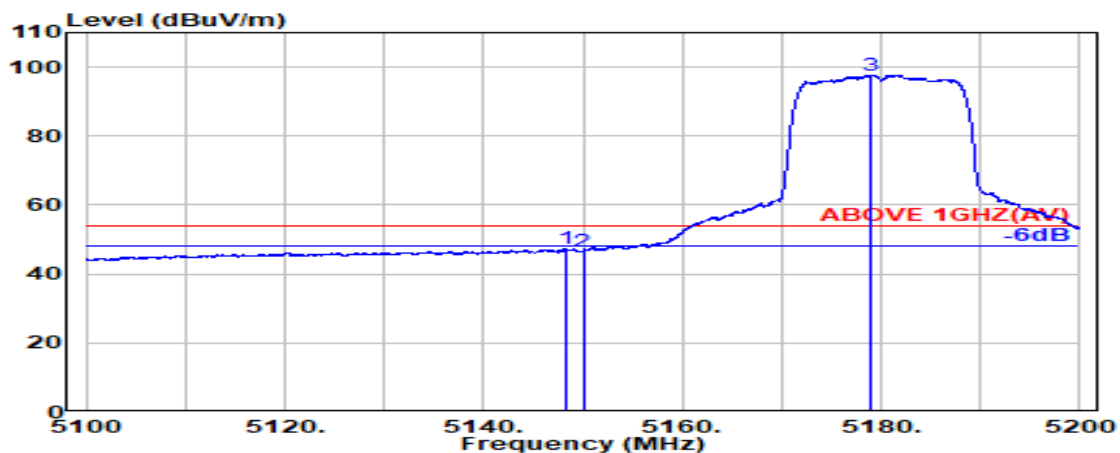

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.200	33.60	8.33	39.09	44.41	47.24	54.00	6.76	Average
5150.000	33.60	8.33	39.09	43.73	46.57	54.00	7.43	Average
@ 5179.000	33.60	8.36	39.09	94.87	97.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

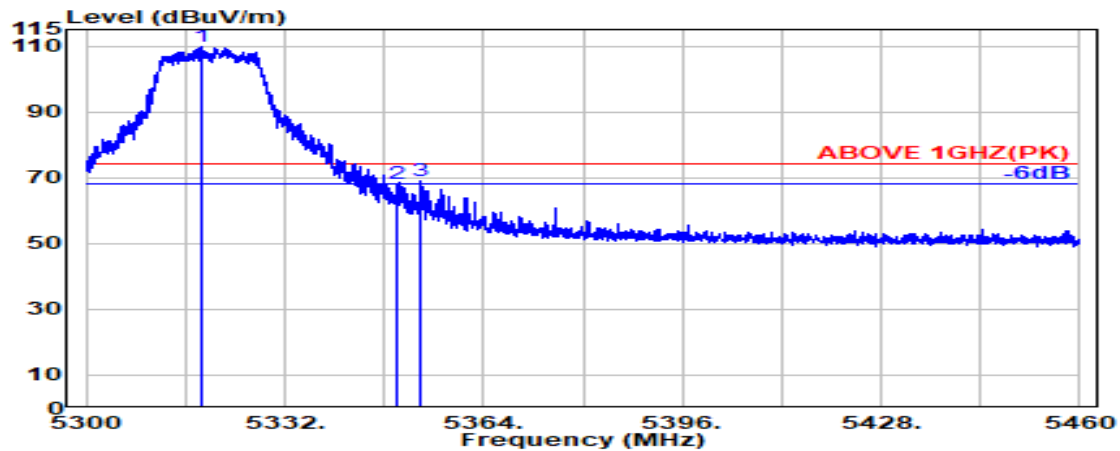

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	33.64	8.51	39.08	106.76	109.82	---	---	Peak
5350.000	33.70	8.54	39.08	64.83	67.99	74.00	6.01	Peak
5354.000	33.72	8.55	39.08	65.61	68.81	74.00	5.19	Peak

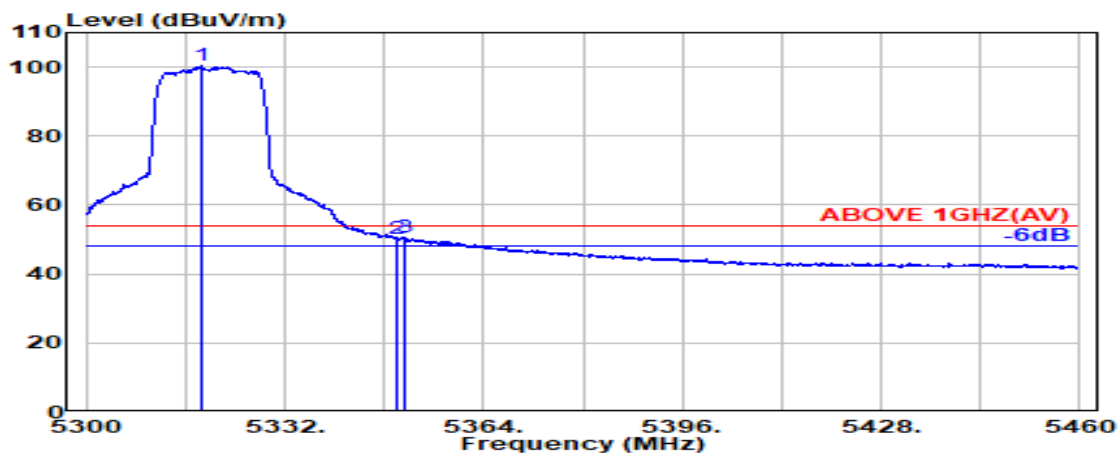

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.550	33.64	8.51	39.08	97.25	100.31	---	---	Average
5350.000	33.70	8.54	39.08	46.95	50.11	54.00	3.89	Average
5351.250	33.71	8.54	39.08	47.47	50.64	54.00	3.36	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

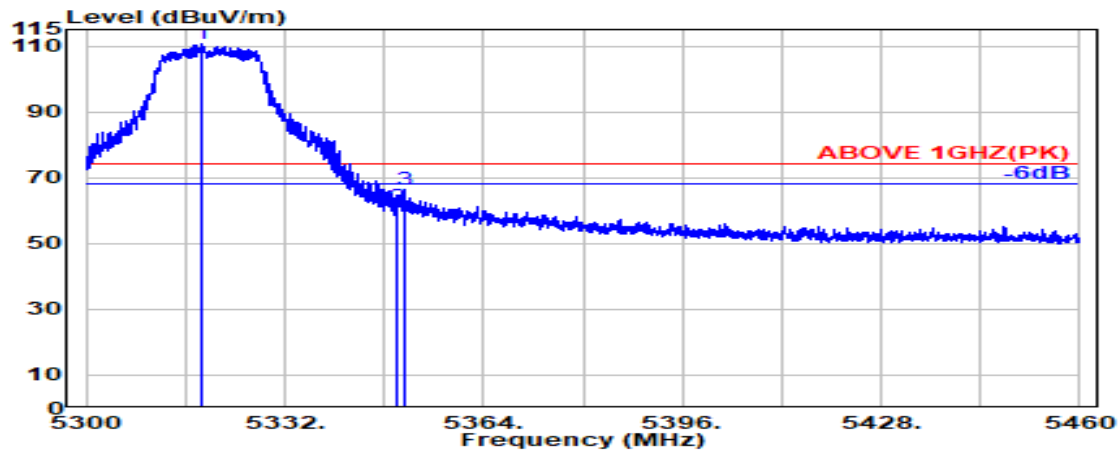

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.800	33.64	8.51	39.08	107.41	110.48	---	---	Peak
5350.000	33.70	8.54	39.08	57.96	61.12	74.00	12.88	Peak
5351.250	33.71	8.54	39.08	63.12	66.30	74.00	7.70	Peak

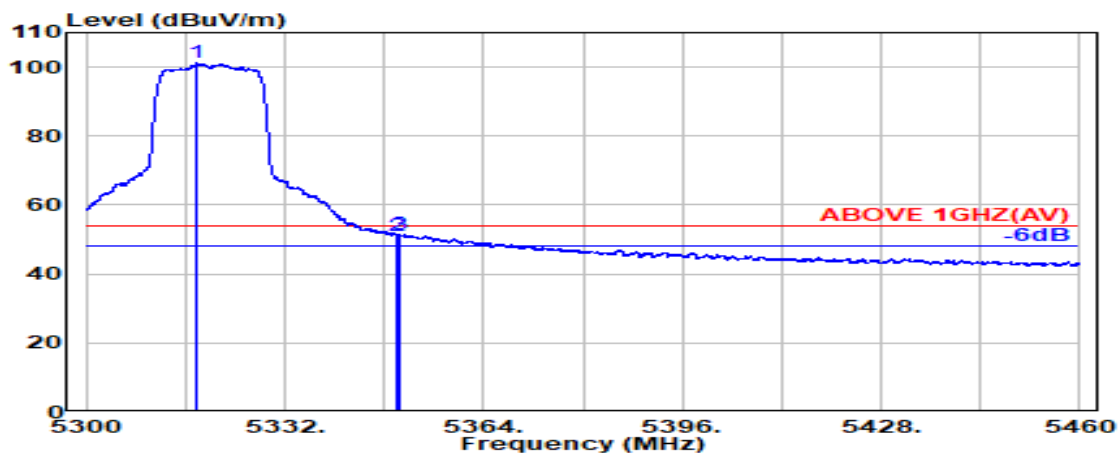


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.950	33.64	8.51	39.08	98.04	101.10	---	---	Average
5350.000	33.70	8.54	39.08	47.92	51.09	54.00	2.91	Average
5350.300	33.70	8.54	39.08	48.37	51.53	54.00	2.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

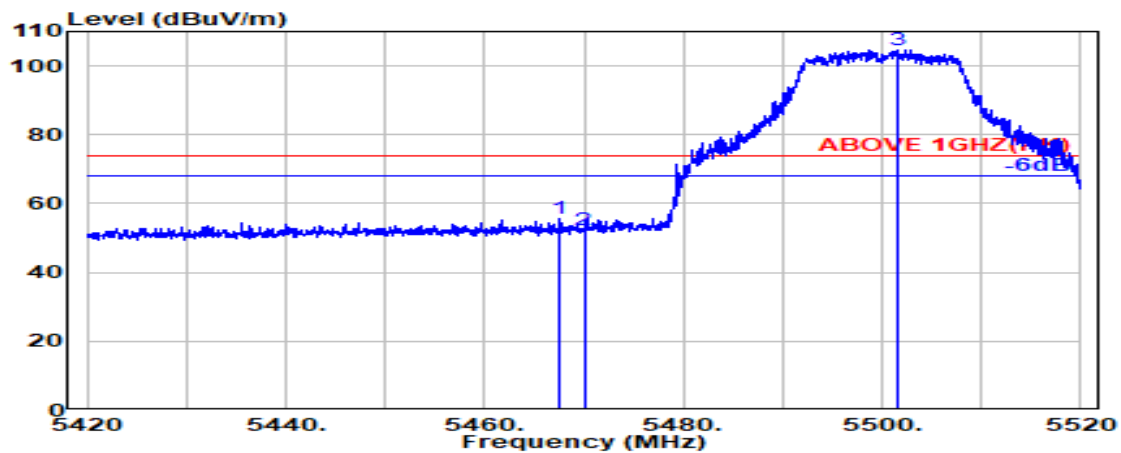

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.550	34.10	8.67	39.07	51.82	55.51	74.00	18.49	Peak
5470.000	34.10	8.67	39.07	48.64	52.33	74.00	21.67	Peak
@ 5501.500	34.10	8.70	39.07	100.98	104.71	---	---	Peak

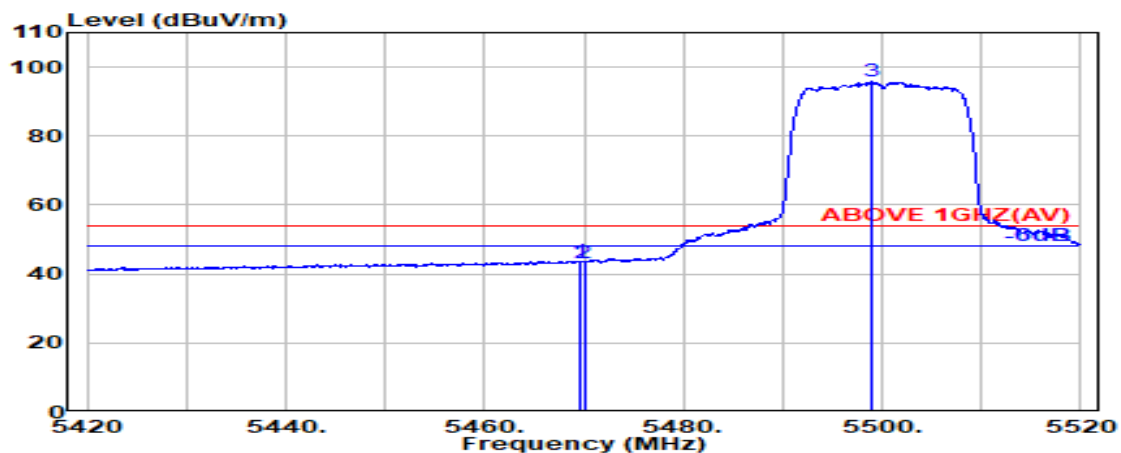


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.650	34.10	8.67	39.07	40.04	43.74	54.00	10.26	Average
5470.000	34.10	8.67	39.07	39.65	43.34	54.00	10.66	Average
@ 5498.900	34.10	8.70	39.07	91.95	95.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

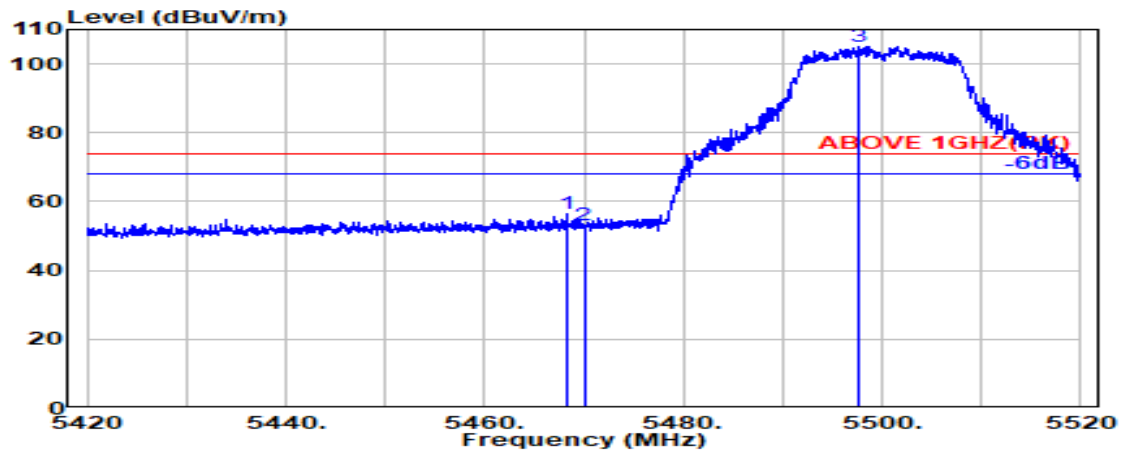

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.10	8.67	39.07	52.58	56.27	74.00	17.73	Peak
5470.000	34.10	8.67	39.07	49.26	52.96	74.00	21.04	Peak
@ 5497.600	34.10	8.70	39.07	101.41	105.14	---	---	Peak

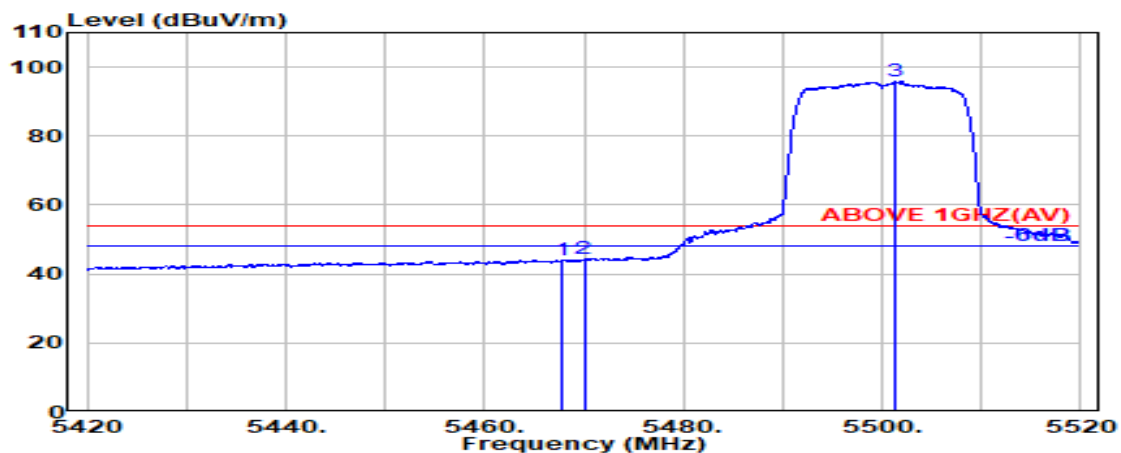


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.750	34.10	8.67	39.07	40.51	44.20	54.00	9.80	Average
5470.000	34.10	8.67	39.07	40.58	44.28	54.00	9.72	Average
@ 5501.350	34.10	8.70	39.07	91.99	95.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

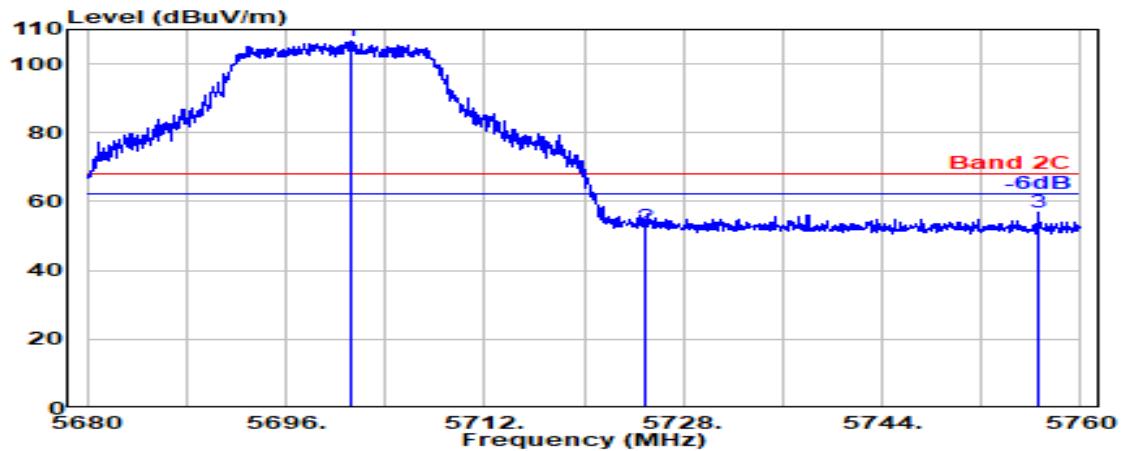

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.300	33.41	8.90	39.13	103.48	106.66	---	---	Peak
5725.000	33.60	8.92	39.14	49.46	52.85	68.20	15.35	Peak
5756.600	33.81	8.96	39.15	53.30	56.92	68.20	11.28	Peak

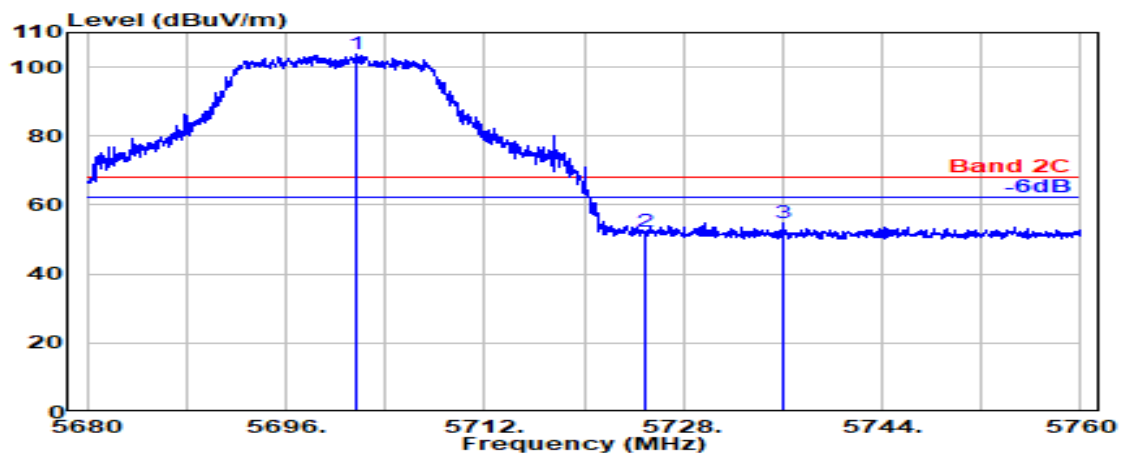


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.600	33.41	8.90	39.13	100.64	103.82	---	---	Peak
5725.000	33.60	8.92	39.14	49.09	52.48	68.20	15.72	Peak
5736.000	33.69	8.94	39.14	51.33	54.81	68.20	13.39	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

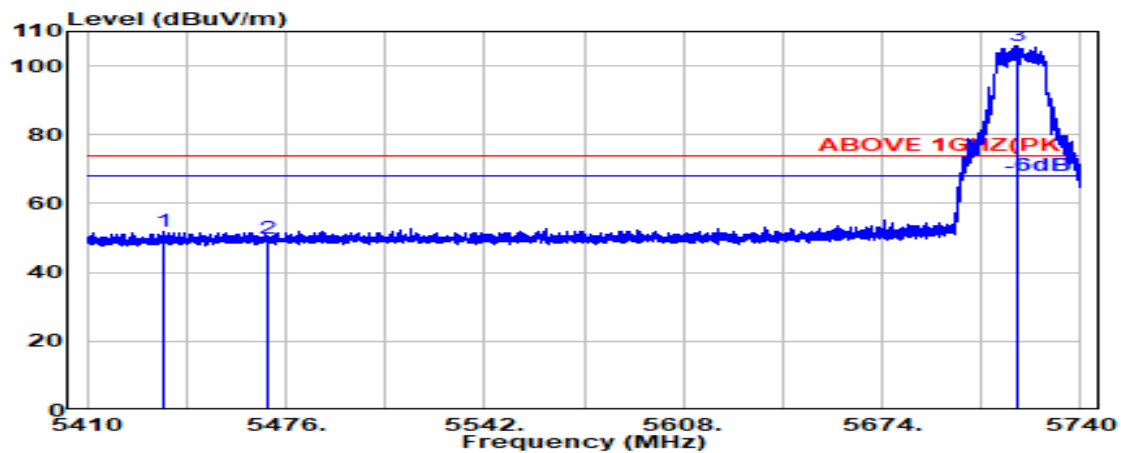

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.300	34.07	8.63	39.07	48.43	52.06	74.00	21.94	Peak
5470.000	34.10	8.67	39.07	46.19	49.89	74.00	24.11	Peak
@ 5718.800	33.55	8.92	39.14	102.51	105.85	---	---	Peak

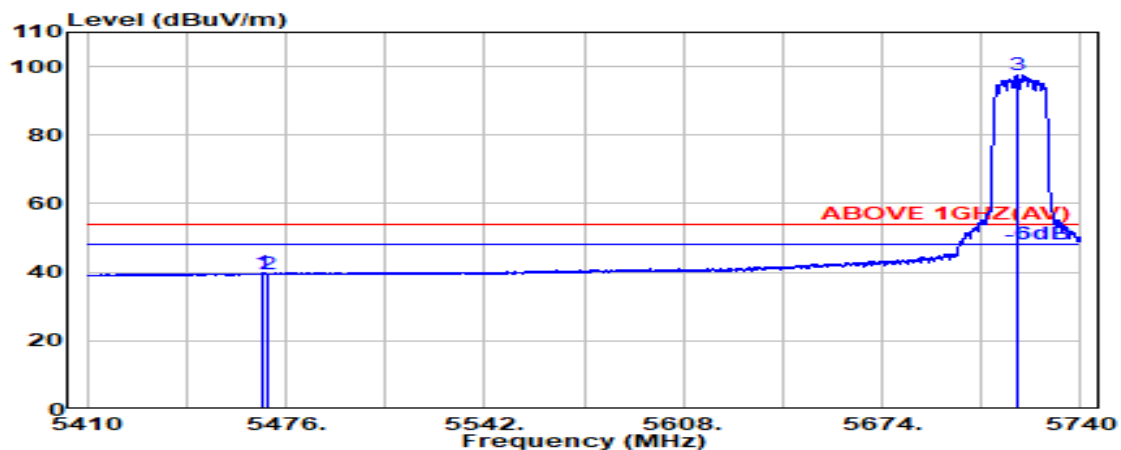


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.10	8.67	39.07	36.22	39.91	54.00	14.09	Average
5470.000	34.10	8.67	39.07	35.67	39.37	54.00	14.63	Average
@ 5718.850	33.55	8.92	39.14	94.12	97.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

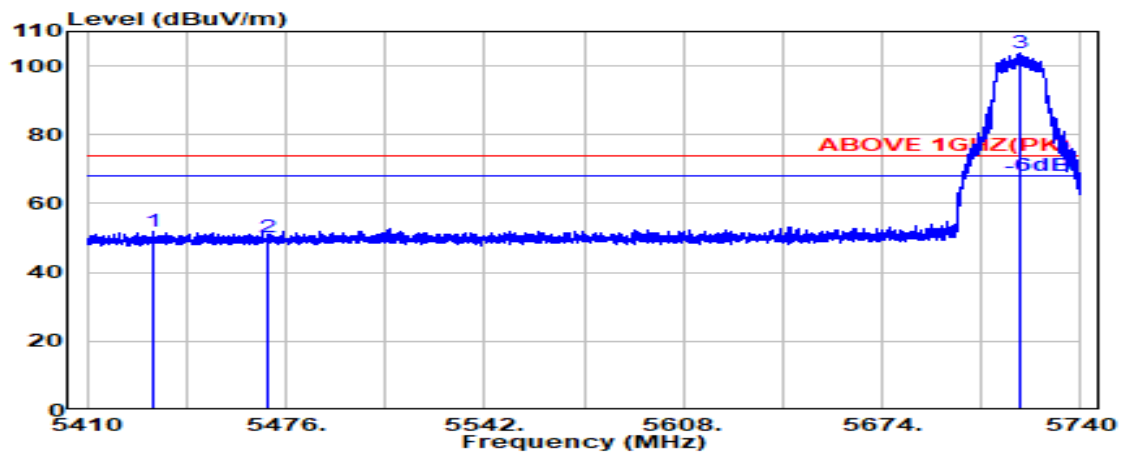

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.150	34.06	8.63	39.07	48.11	51.73	74.00	22.27	Peak
5470.000	34.10	8.67	39.07	46.54	50.24	74.00	23.76	Peak
@ 5719.950	33.56	8.92	39.14	100.40	103.74	---	---	Peak

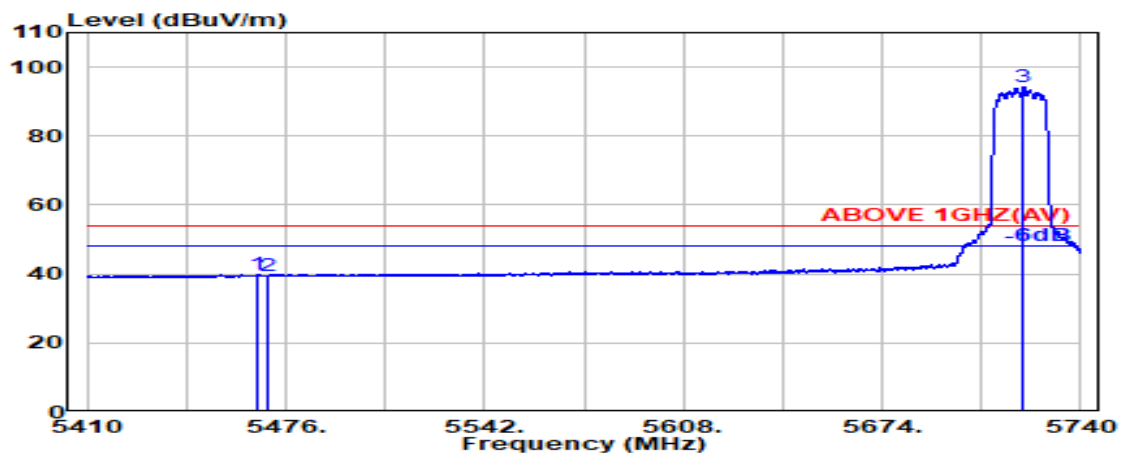


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.150	34.10	8.66	39.07	36.15	39.84	54.00	14.16	Average
5470.000	34.10	8.67	39.07	35.81	39.50	54.00	14.50	Average
@ 5721.050	33.57	8.92	39.14	90.69	94.04	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

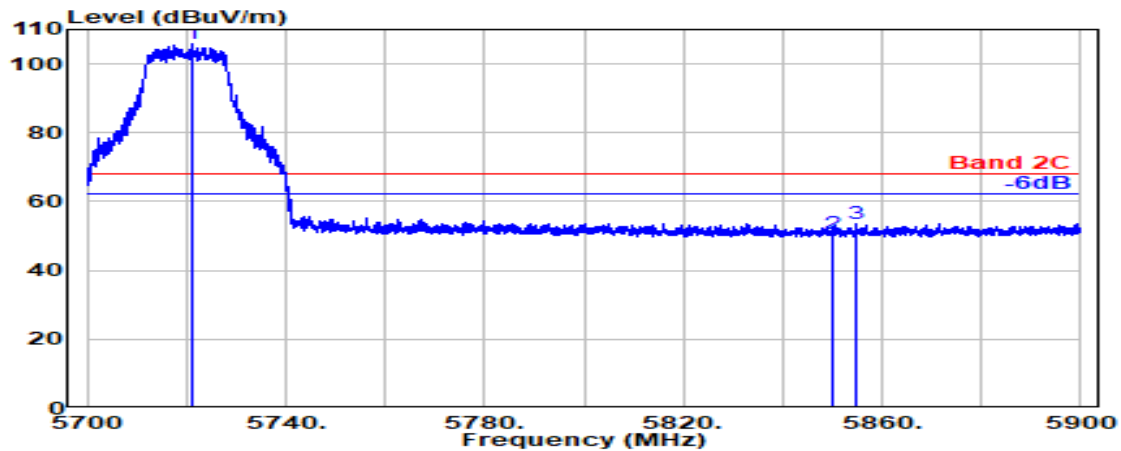

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.200	33.57	8.92	39.14	102.54	105.89	---	---	Peak
5850.000	33.90	9.05	39.18	46.79	50.56	68.20	17.64	Peak
5854.550	33.93	9.05	39.18	49.94	53.74	68.20	14.46	Peak

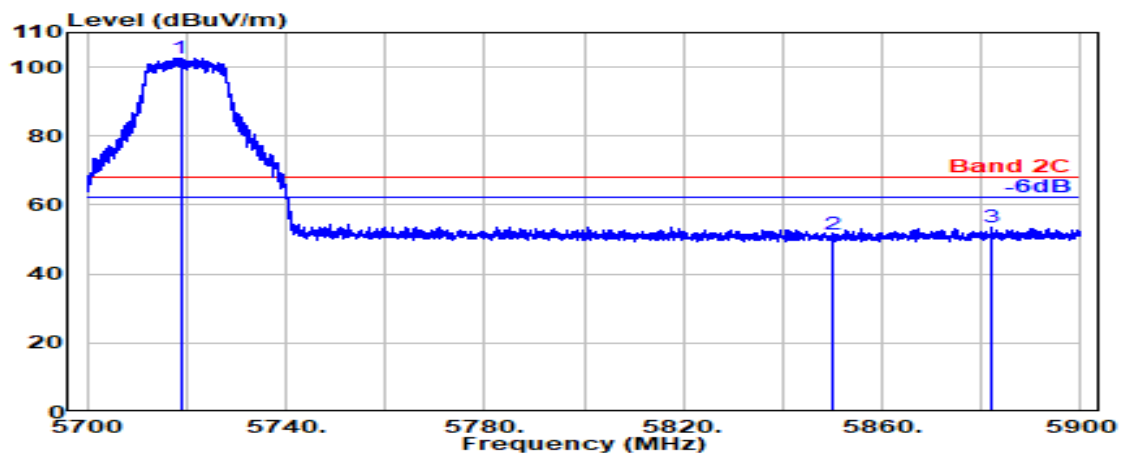

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.800	33.55	8.92	39.14	99.38	102.71	---	---	Peak
5850.000	33.90	9.05	39.18	47.54	51.31	68.20	16.89	Peak
5882.150	34.09	9.08	39.19	49.51	53.50	68.20	14.70	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

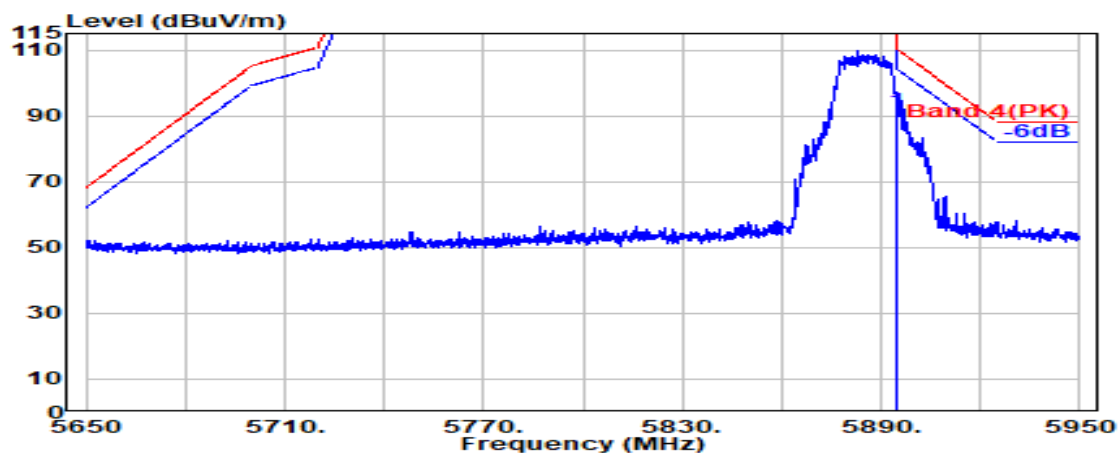

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	87.61	91.68	110.20	18.52	Peak

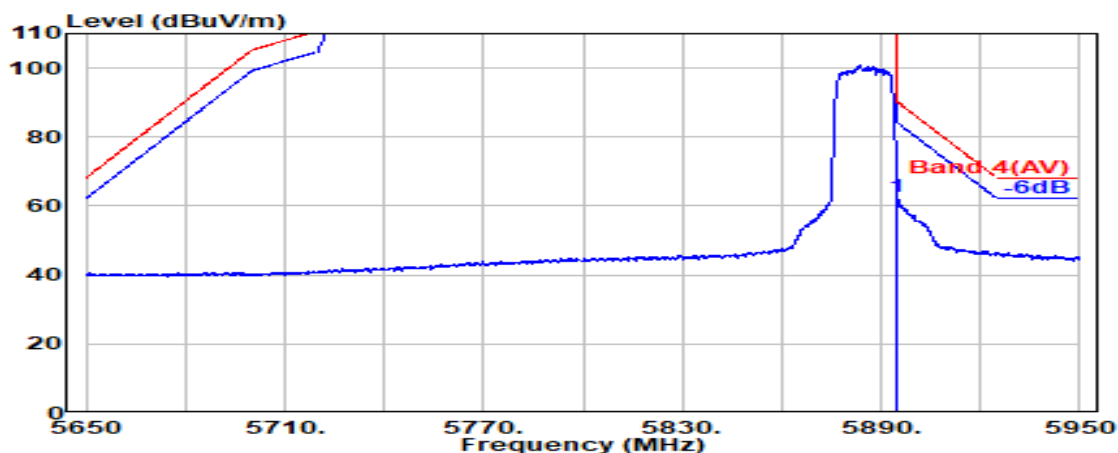

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	58.81	62.88	90.20	27.32	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

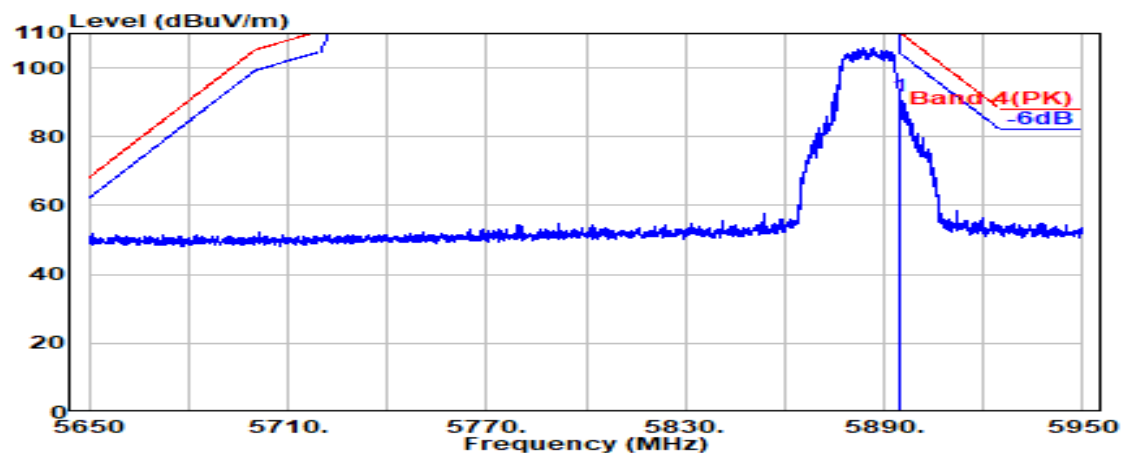

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	87.54	91.61	110.20	18.59	Peak

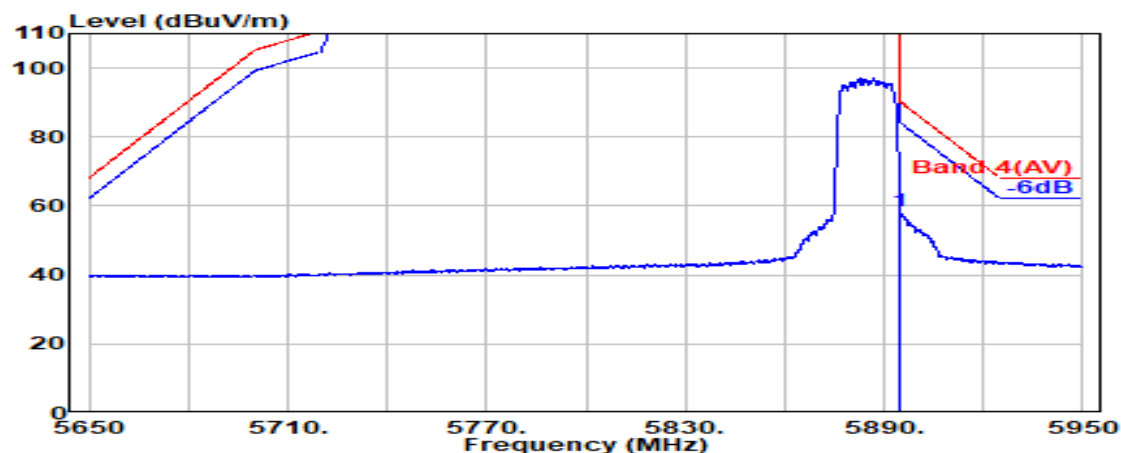

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	54.34	58.41	90.20	31.79	Average

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

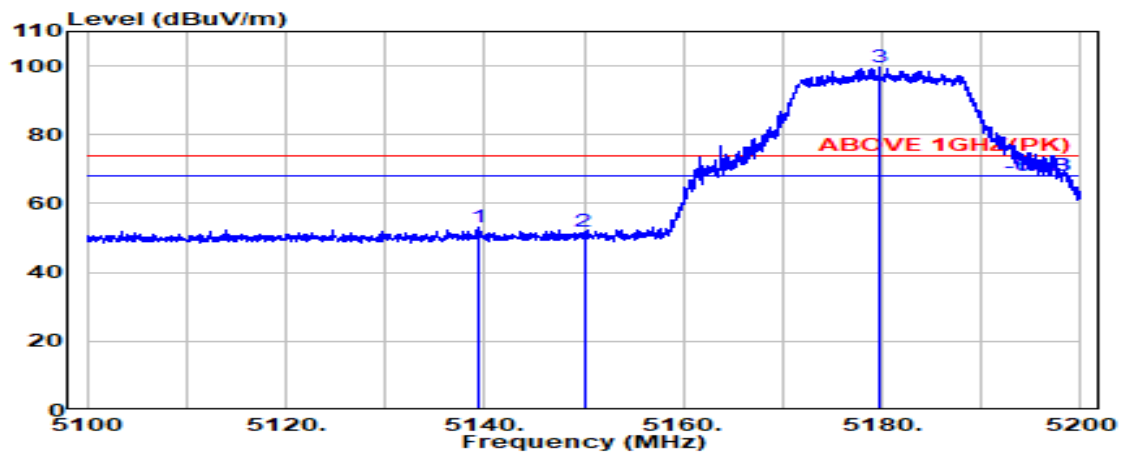

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.400	33.58	8.32	39.09	50.33	53.13	74.00	20.87	Peak
5150.000	33.60	8.33	39.09	48.89	51.73	74.00	22.27	Peak
@ 5179.700	33.60	8.36	39.09	96.88	99.75	---	---	Peak

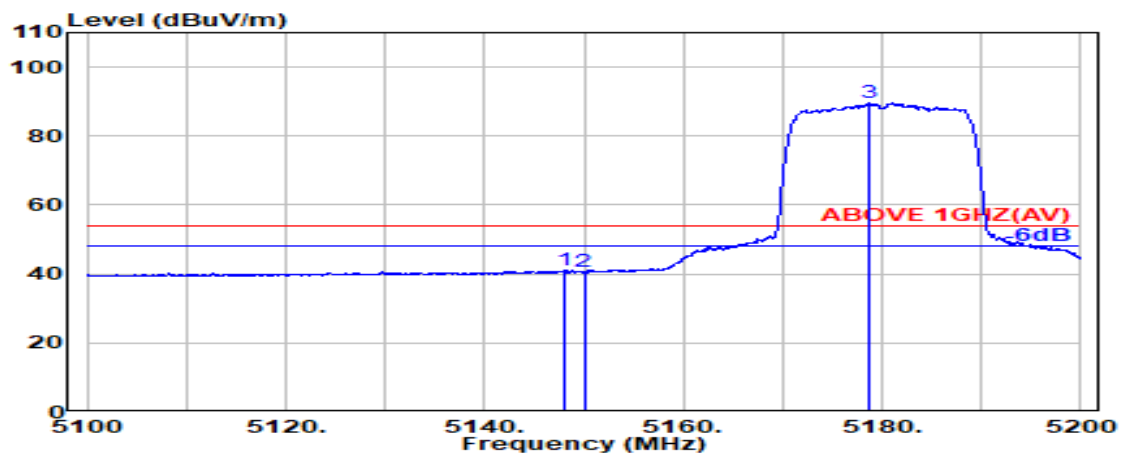


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.150	33.60	8.32	39.09	38.43	41.26	54.00	12.74	Average
5150.000	33.60	8.33	39.09	37.72	40.55	54.00	13.45	Average
@ 5178.650	33.60	8.36	39.09	86.74	89.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

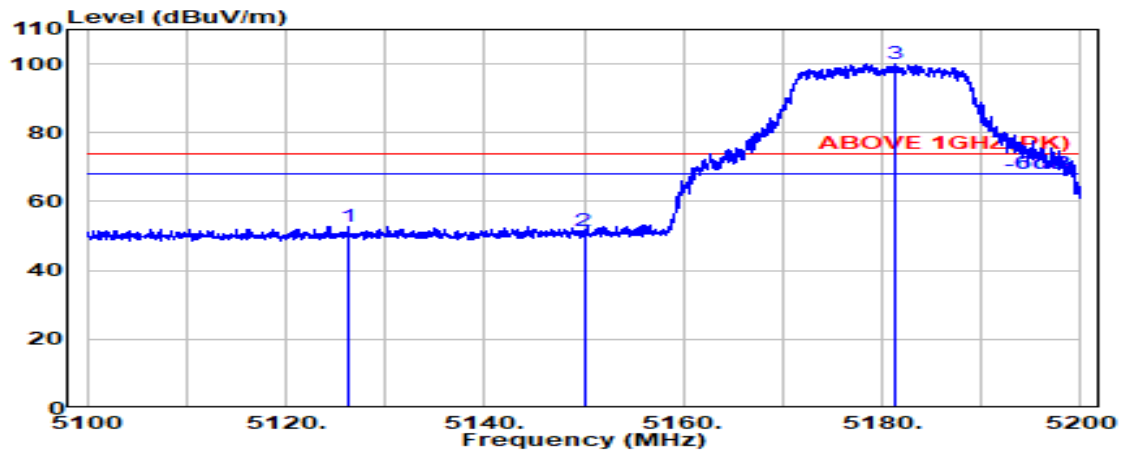

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.250	33.55	8.30	39.09	50.05	52.81	74.00	21.19	Peak
5150.000	33.60	8.33	39.09	48.44	51.28	74.00	22.72	Peak
@ 5181.400	33.60	8.36	39.09	97.21	100.08	---	---	Peak

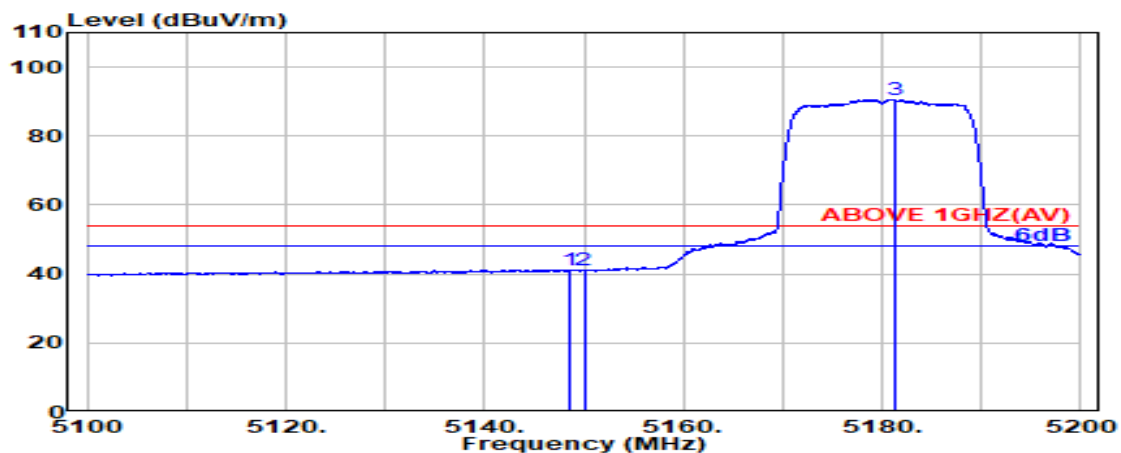

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.650	33.60	8.33	39.09	38.38	41.21	54.00	12.79	Average
5150.000	33.60	8.33	39.09	38.16	41.00	54.00	13.00	Average
@ 5181.250	33.60	8.36	39.09	87.74	90.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

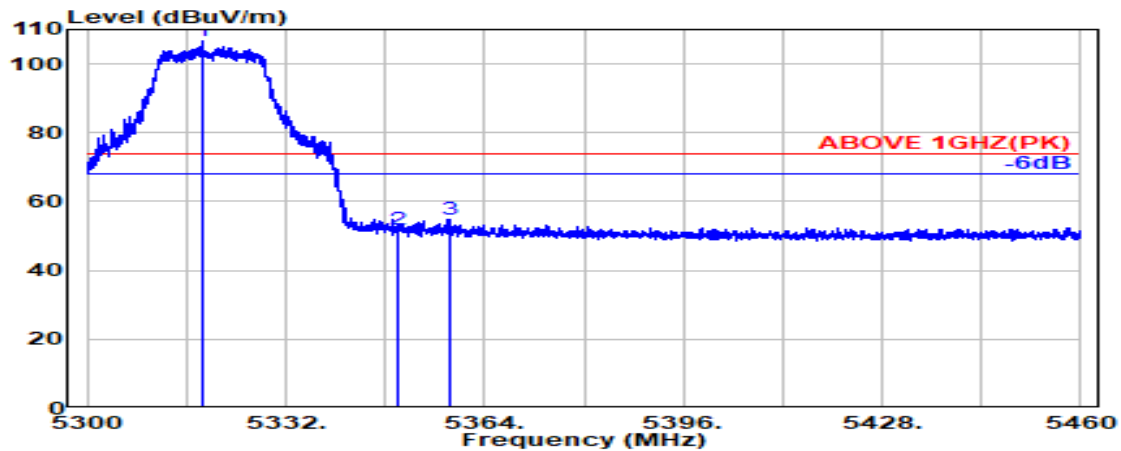

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.700	33.64	8.51	39.08	103.63	106.70	---	---	Peak
5350.000	33.70	8.54	39.08	48.83	51.99	74.00	22.01	Peak
5358.250	33.75	8.55	39.08	51.76	54.98	74.00	19.02	Peak

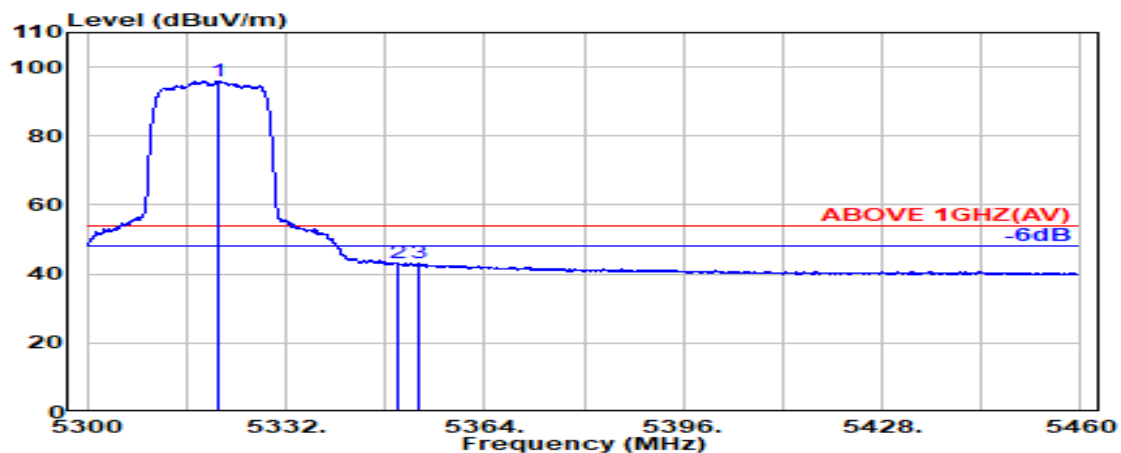

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.050	33.64	8.51	39.08	92.90	95.97	---	---	Average
5350.000	33.70	8.54	39.08	39.81	42.97	54.00	11.03	Average
5353.250	33.72	8.55	39.08	39.92	43.11	54.00	10.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

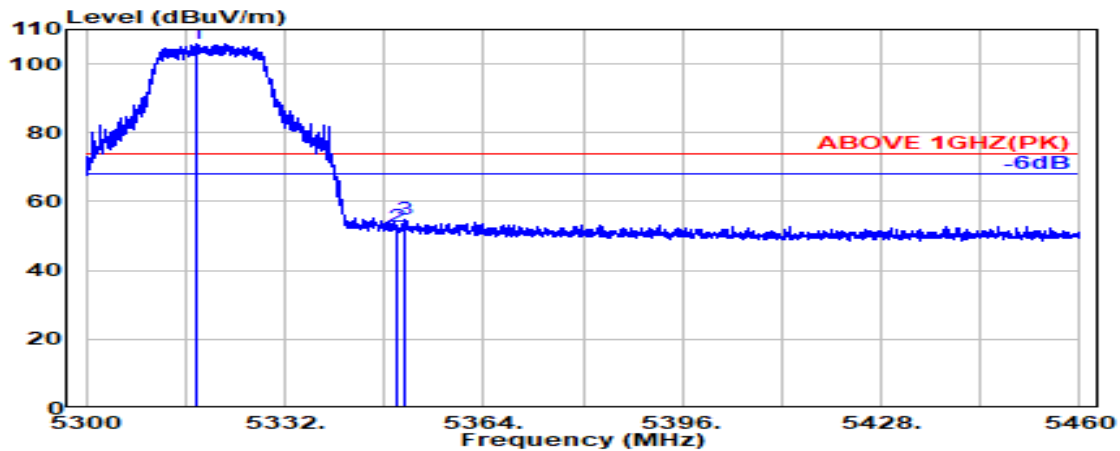

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.850	33.64	8.51	39.08	102.89	105.95	---	---	Peak
5350.000	33.70	8.54	39.08	49.51	52.67	74.00	21.33	Peak
5351.450	33.71	8.54	39.08	51.51	54.68	74.00	19.32	Peak

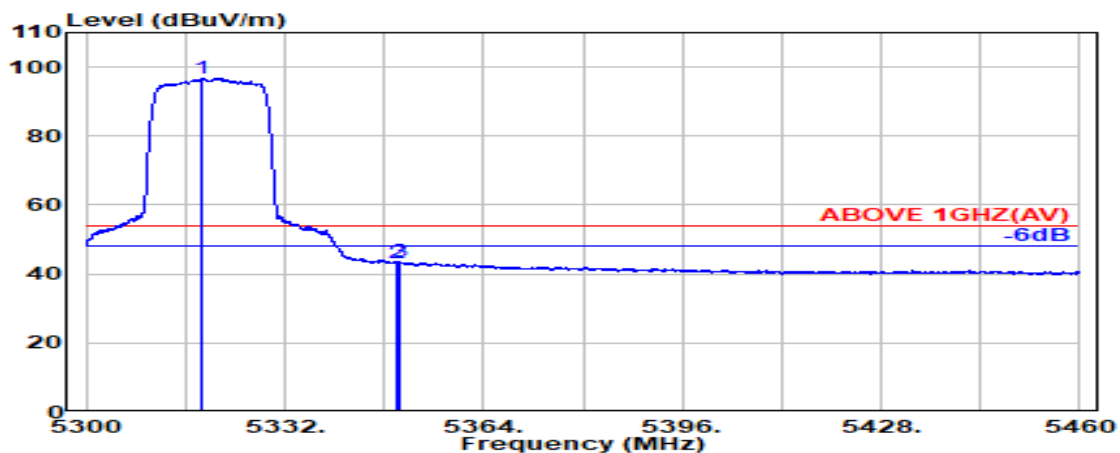


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.550	33.64	8.51	39.08	93.61	96.67	---	---	Average
5350.000	33.70	8.54	39.08	40.08	43.24	54.00	10.76	Average
5350.550	33.70	8.54	39.08	40.41	43.58	54.00	10.42	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

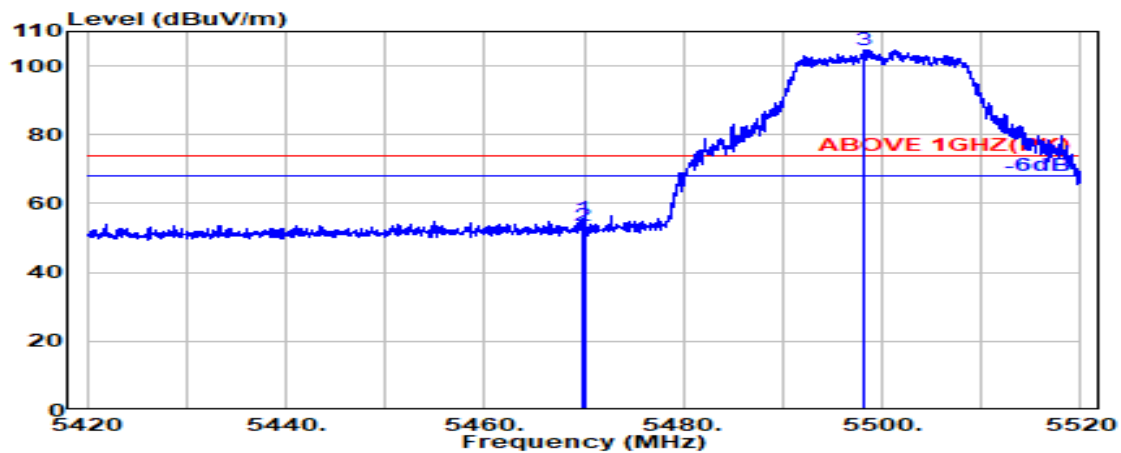

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.750	34.10	8.67	39.07	52.01	55.70	74.00	18.30	Peak
5470.000	34.10	8.67	39.07	49.76	53.45	74.00	20.55	Peak
@ 5498.250	34.10	8.70	39.07	101.08	104.80	---	---	Peak

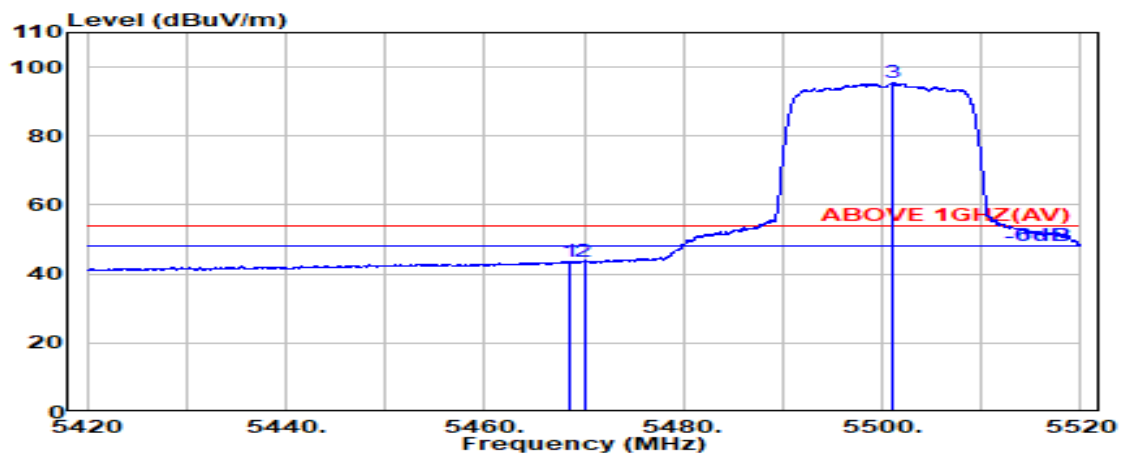


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.500	34.10	8.67	39.07	39.91	43.61	54.00	10.39	Average
5470.000	34.10	8.67	39.07	39.91	43.60	54.00	10.40	Average
@ 5501.150	34.10	8.70	39.07	91.70	95.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

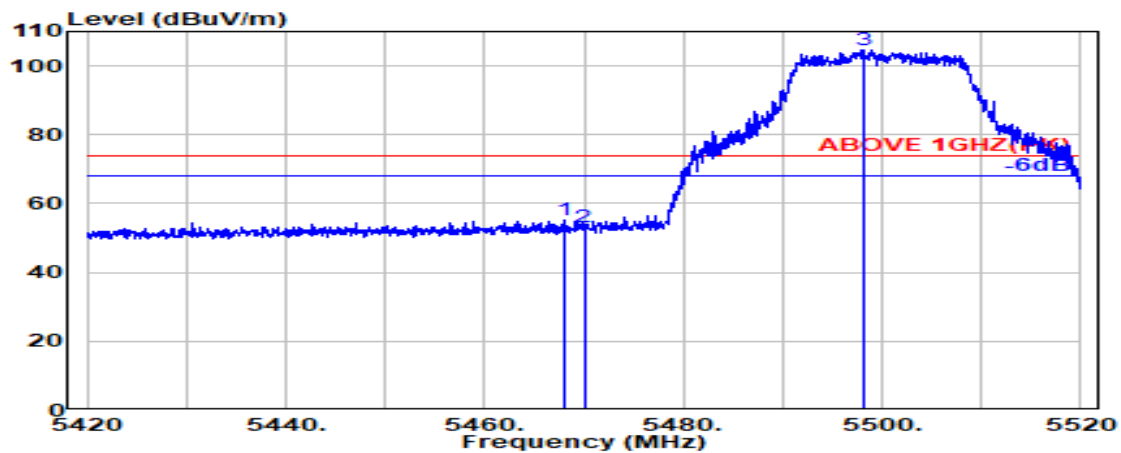

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.10	8.67	39.07	51.48	55.18	74.00	18.82	Peak
5470.000	34.10	8.67	39.07	49.56	53.25	74.00	20.75	Peak
@ 5498.050	34.10	8.70	39.07	101.01	104.74	---	---	Peak

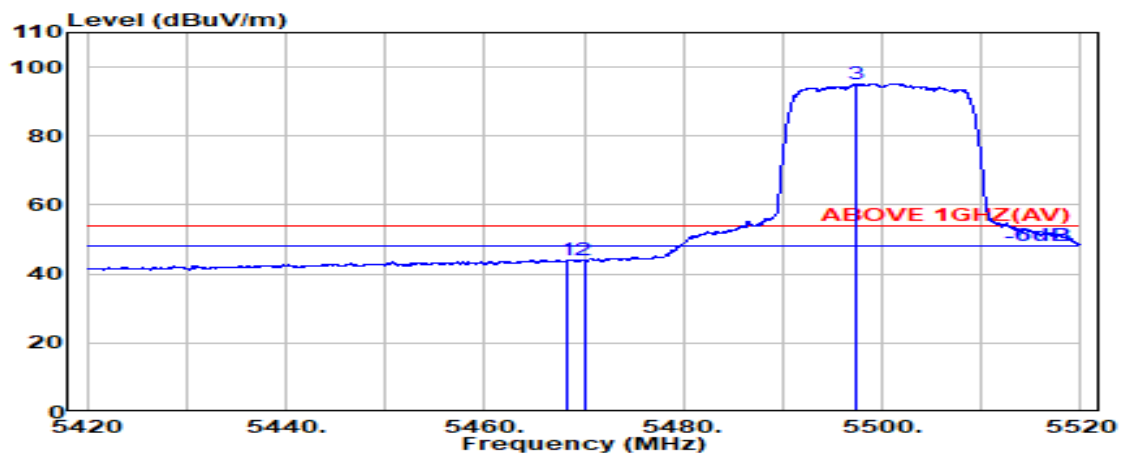


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.10	8.67	39.07	40.46	44.15	54.00	9.85	Average
5470.000	34.10	8.67	39.07	40.29	43.99	54.00	10.01	Average
@ 5497.400	34.10	8.70	39.07	91.53	95.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

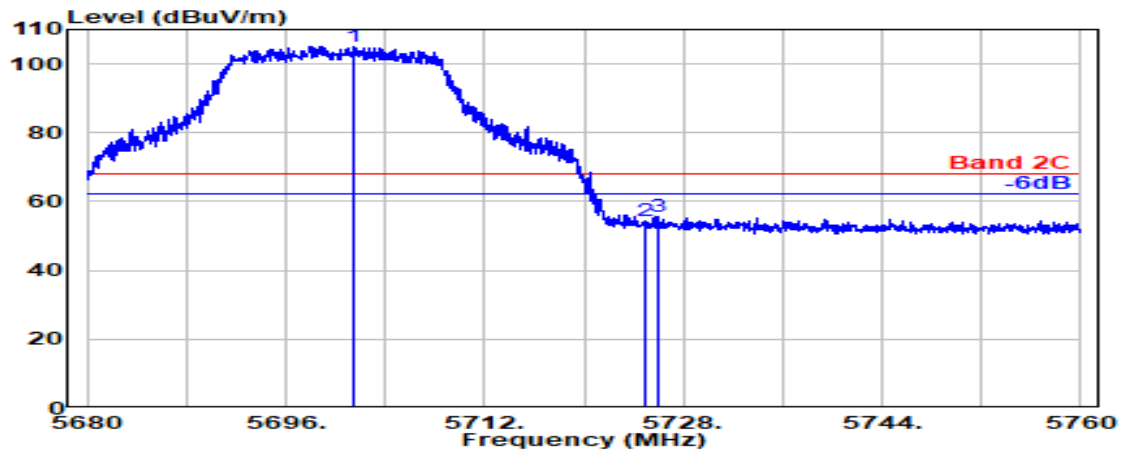

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.500	33.41	8.90	39.13	101.99	105.18	---	---	Peak
5725.000	33.60	8.92	39.14	51.16	54.54	68.20	13.66	Peak
5725.900	33.61	8.93	39.14	52.23	55.63	68.20	12.57	Peak

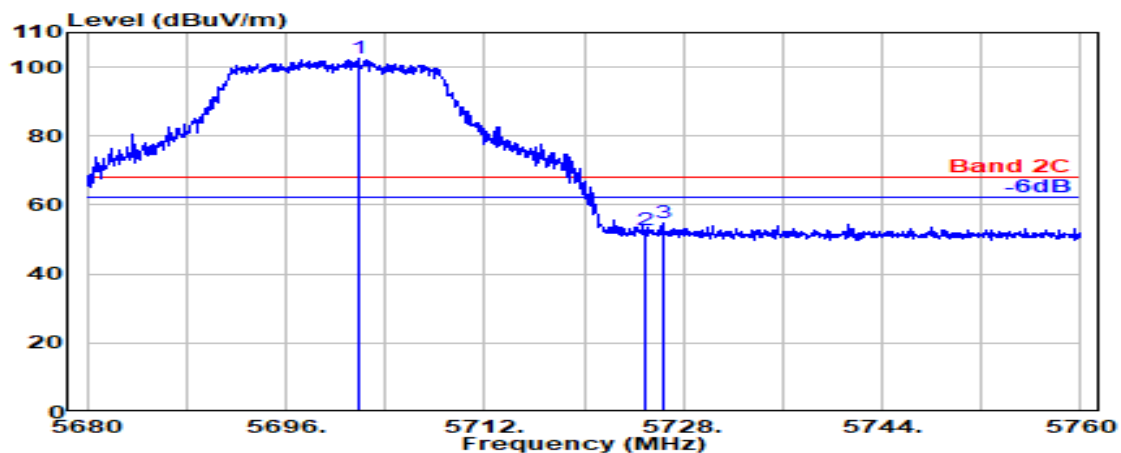

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5701.850	33.41	8.90	39.13	99.33	102.51	---	---	Peak
5725.000	33.60	8.92	39.14	49.26	52.65	68.20	15.55	Peak
5726.300	33.61	8.93	39.14	51.25	54.65	68.20	13.55	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

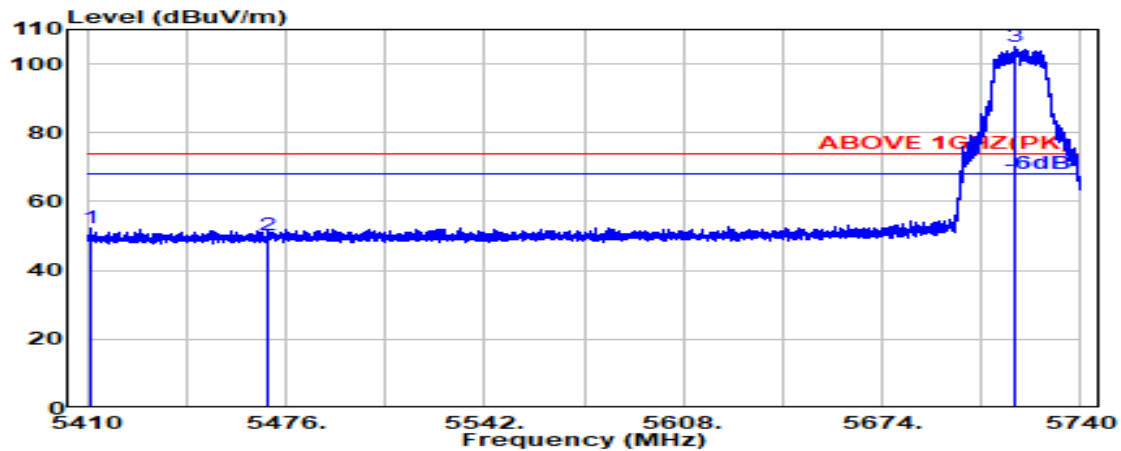

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5411.200	34.02	8.61	39.08	48.54	52.10	74.00	21.90	Peak
5470.000	34.10	8.67	39.07	46.44	50.14	74.00	23.86	Peak
@ 5718.300	33.55	8.92	39.14	101.50	104.83	---	---	Peak

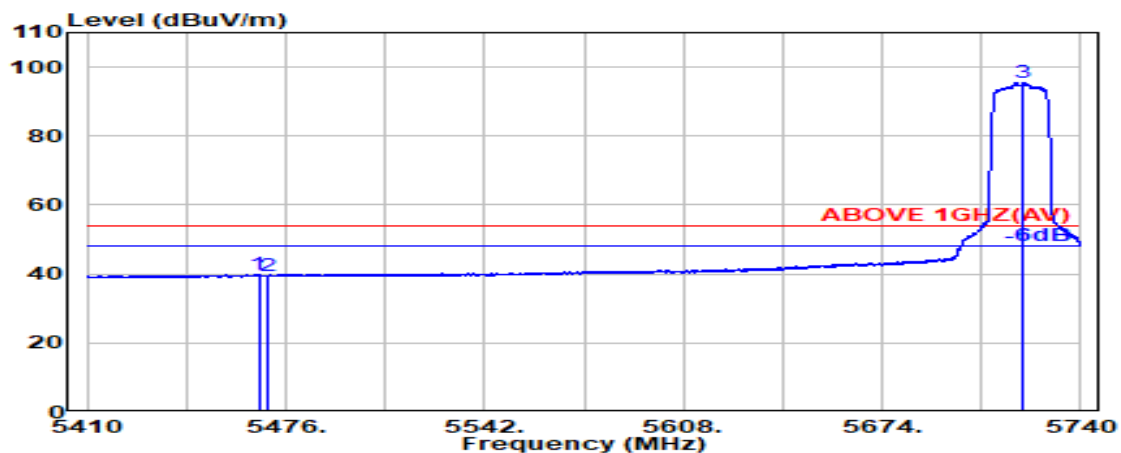

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.950	34.10	8.66	39.07	36.05	39.74	54.00	14.26	Average
5470.000	34.10	8.67	39.07	35.85	39.55	54.00	14.45	Average
@ 5721.050	33.57	8.92	39.14	92.18	95.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

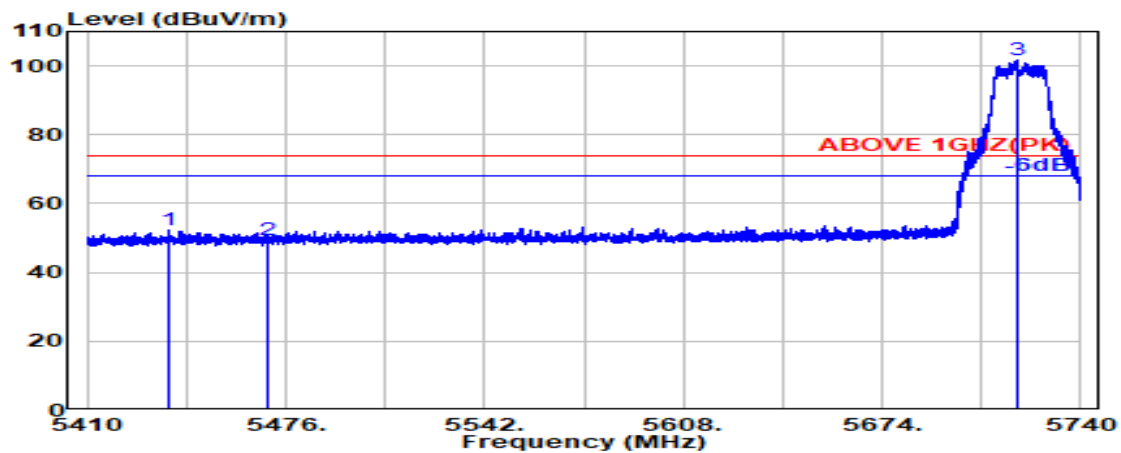

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.950	34.07	8.63	39.07	48.52	52.15	74.00	21.85	Peak
5470.000	34.10	8.67	39.07	45.52	49.22	74.00	24.78	Peak
@ 5718.650	33.55	8.92	39.14	98.21	101.54	---	---	Peak

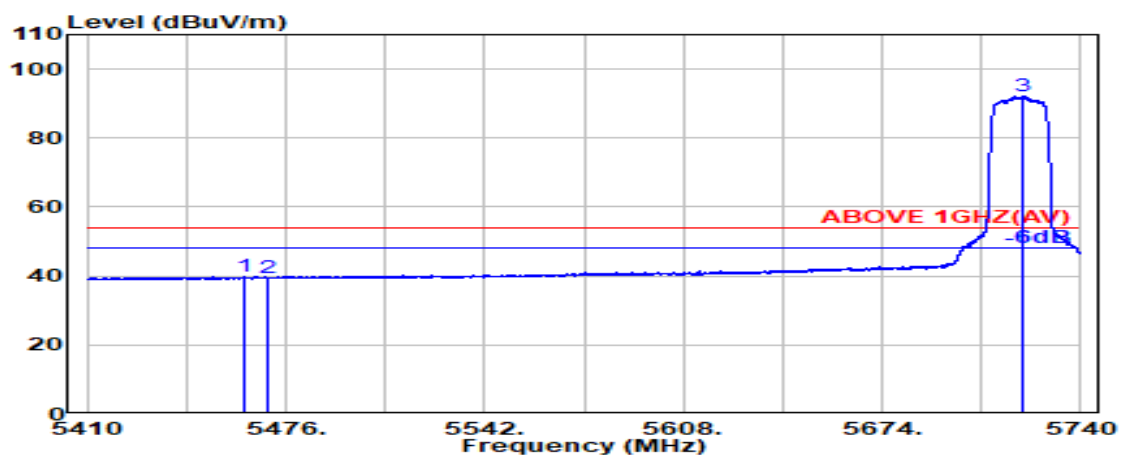

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.900	34.10	8.66	39.07	36.16	39.85	54.00	14.15	Average
5470.000	34.10	8.67	39.07	35.89	39.58	54.00	14.42	Average
@ 5721.000	33.57	8.92	39.14	88.85	92.20	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

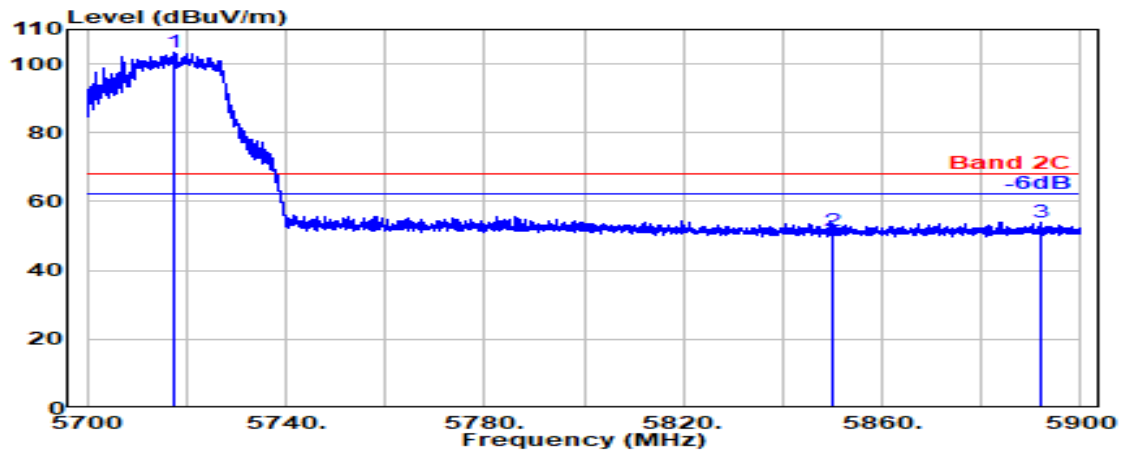

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5717.350	33.54	8.92	39.14	100.18	103.50	---	---	Peak
	5850.000	33.90	9.05	39.18	47.63	51.40	68.20	16.80	Peak
	5892.150	34.15	9.09	39.19	49.95	54.01	68.20	14.20	Peak

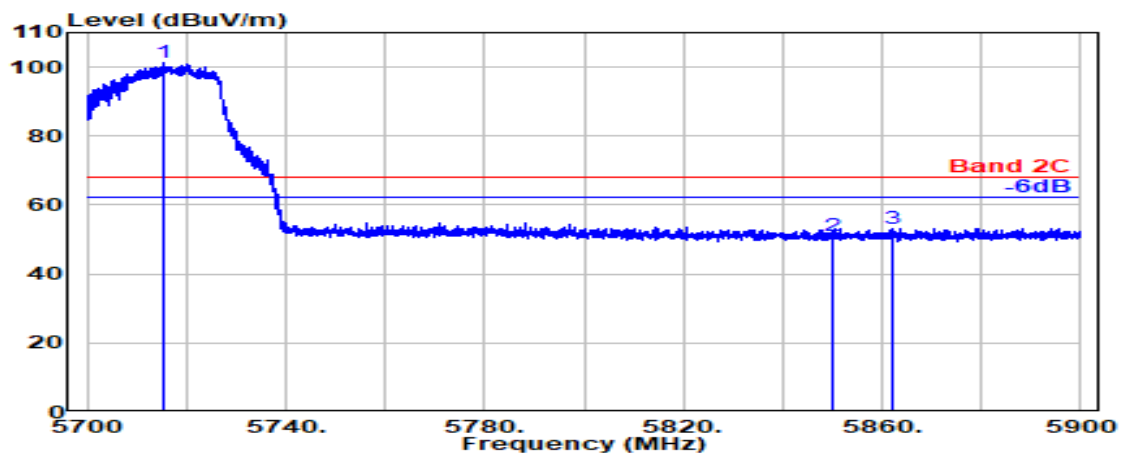

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5715.450	33.52	8.92	39.14	97.81	101.11	---	---	Peak
	5850.000	33.90	9.05	39.18	47.32	51.09	68.20	17.11	Peak
	5862.250	33.97	9.06	39.18	49.44	53.29	68.20	14.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

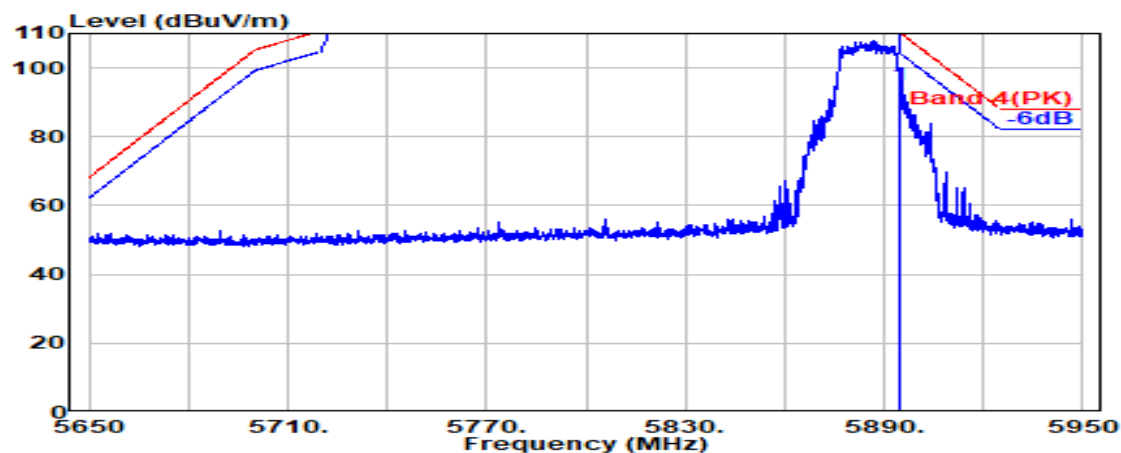

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	91.08	95.15	110.20	15.05	Peak

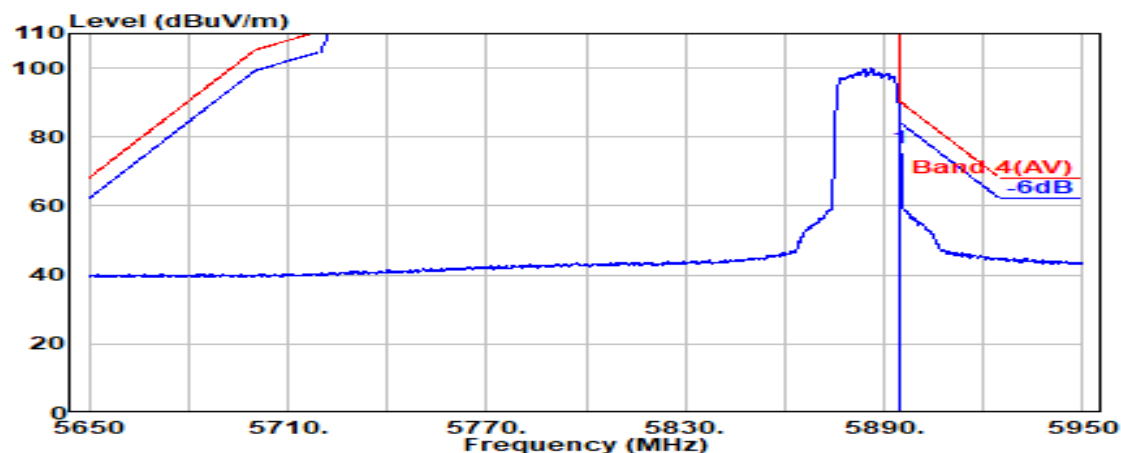

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	72.85	76.92	90.20	13.28	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

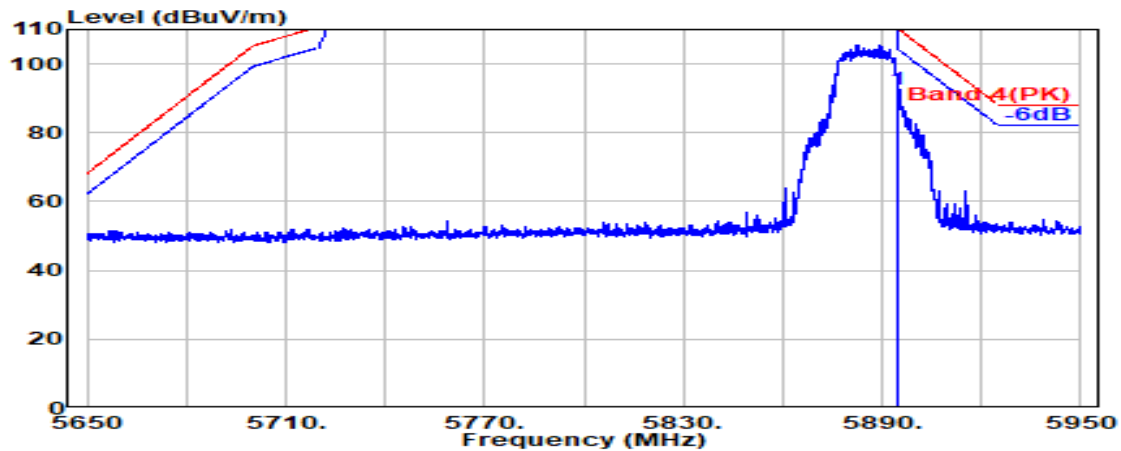

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	88.36	92.44	110.20	17.76	Peak

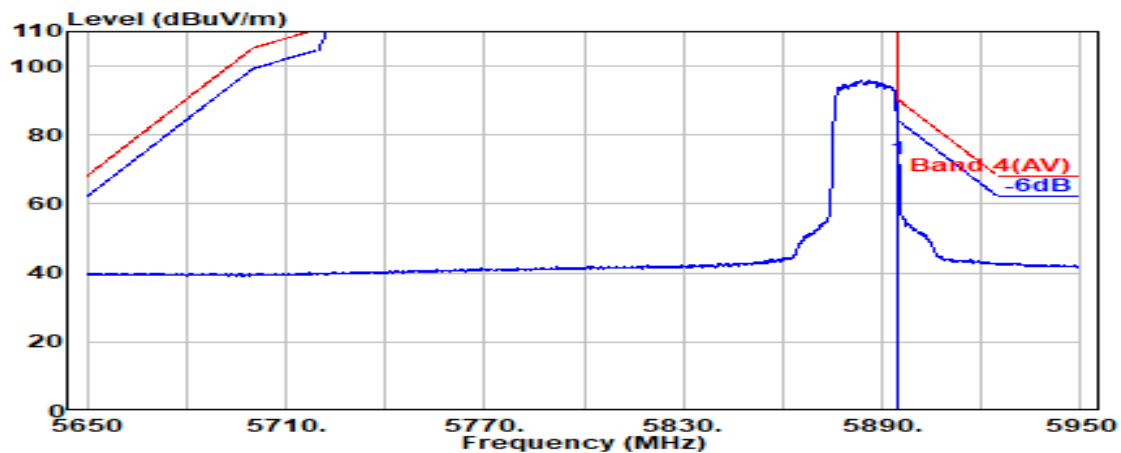


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	69.03	73.10	90.20	17.10	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

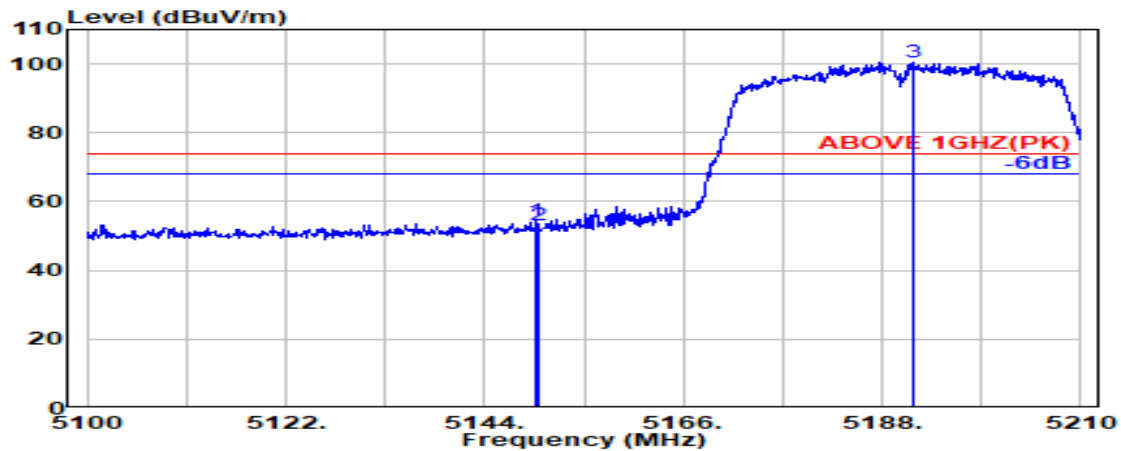

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.60	8.33	39.09	51.59	54.42	74.00	19.58	Peak
5150.000	33.60	8.33	39.09	50.17	53.01	74.00	20.99	Peak
@ 5191.400	33.60	8.37	39.09	97.53	100.42	---	---	Peak

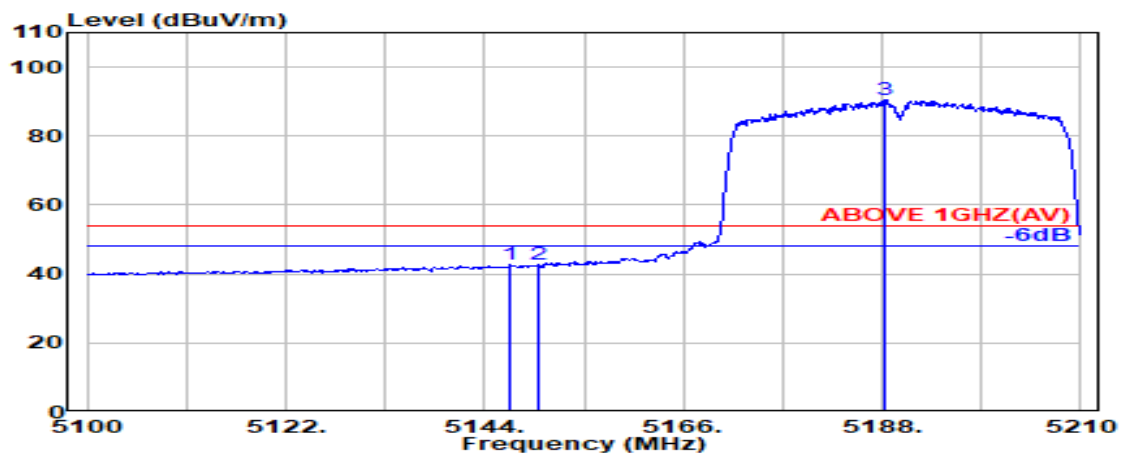


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.800	33.59	8.32	39.09	39.98	42.81	54.00	11.19	Average
5150.000	33.60	8.33	39.09	39.77	42.60	54.00	11.40	Average
@ 5188.400	33.60	8.37	39.09	87.73	90.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

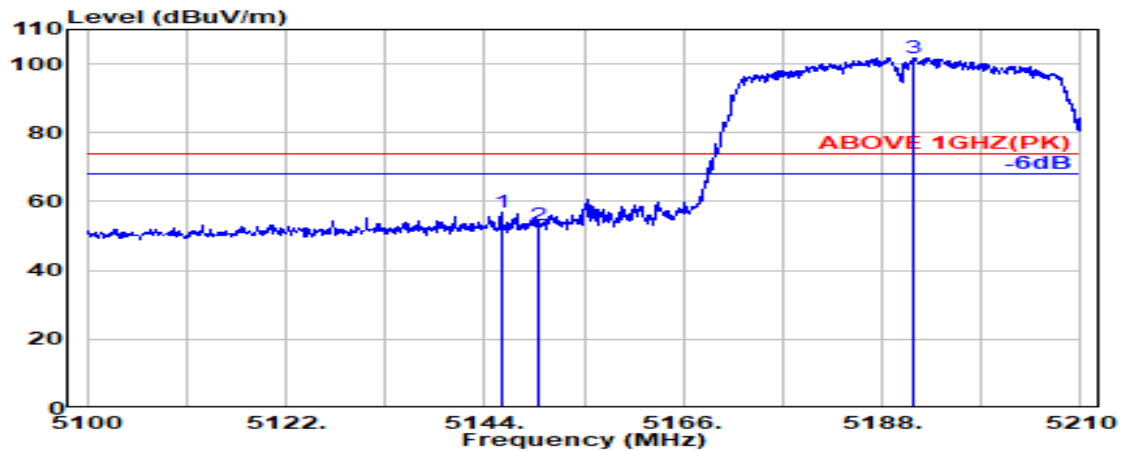

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.800	33.59	8.32	39.09	53.85	56.68	74.00	17.32	Peak
5150.000	33.60	8.33	39.09	50.32	53.16	74.00	20.84	Peak
@ 5191.400	33.60	8.37	39.09	98.95	101.84	---	---	Peak

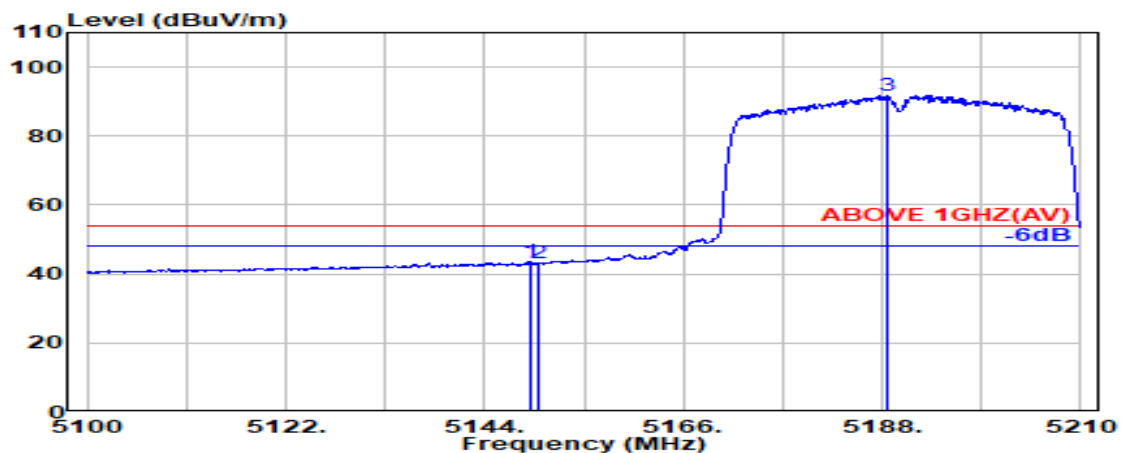

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.60	8.33	39.09	40.63	43.46	54.00	10.54	Average
5150.000	33.60	8.33	39.09	40.44	43.28	54.00	10.72	Average
@ 5188.500	33.60	8.37	39.09	88.96	91.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

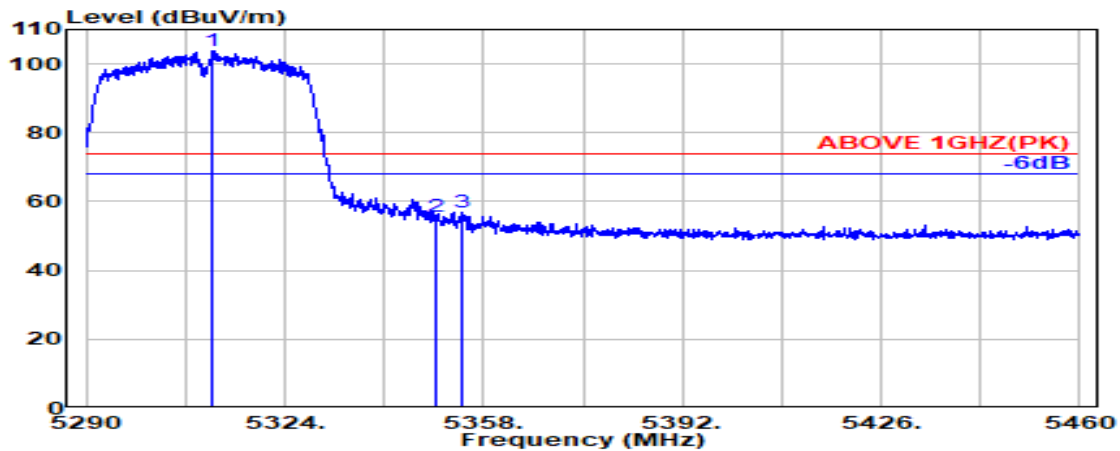

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.700	33.62	8.50	39.08	100.81	103.85	---	---	Peak
5350.000	33.70	8.54	39.08	52.50	55.67	74.00	18.33	Peak
5354.500	33.73	8.55	39.08	53.72	56.91	74.00	17.09	Peak

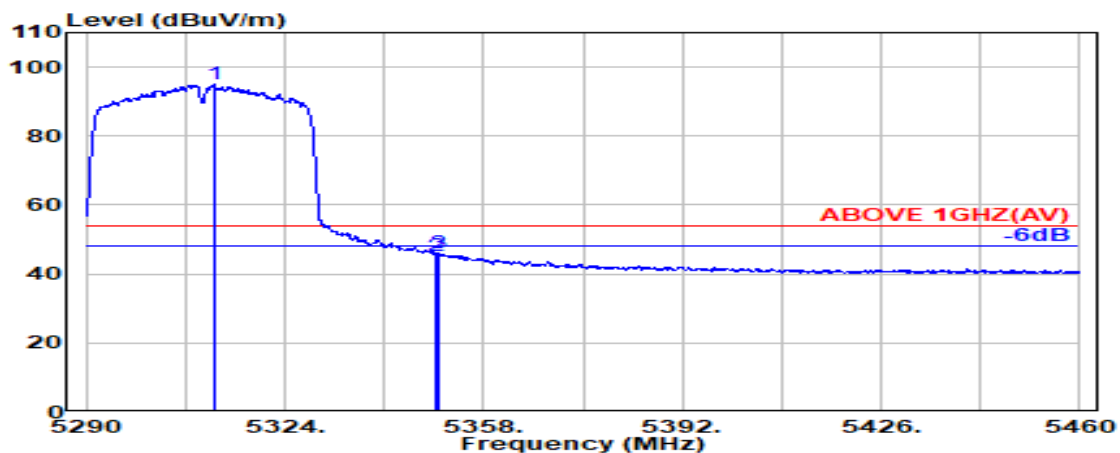

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.000	33.62	8.50	39.08	91.87	94.91	---	---	Average
5350.000	33.70	8.54	39.08	42.00	45.17	54.00	8.83	Average
5350.400	33.70	8.54	39.08	42.93	46.10	54.00	7.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

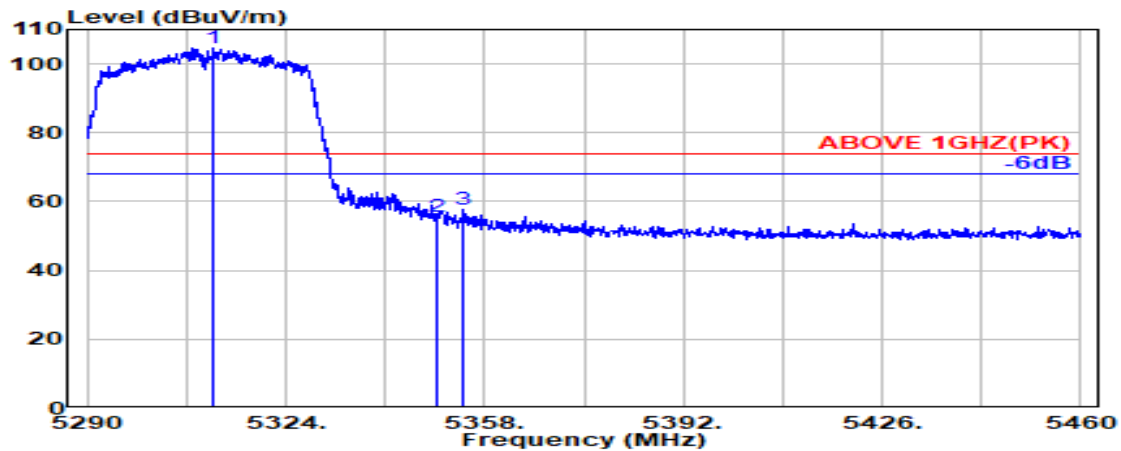

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5311.700	33.62	8.50	39.08	101.57	104.62	---	---	Peak
	5350.000	33.70	8.54	39.08	52.37	55.53	74.00	18.47	Peak
	5354.300	33.73	8.55	39.08	54.46	57.66	74.00	16.34	Peak

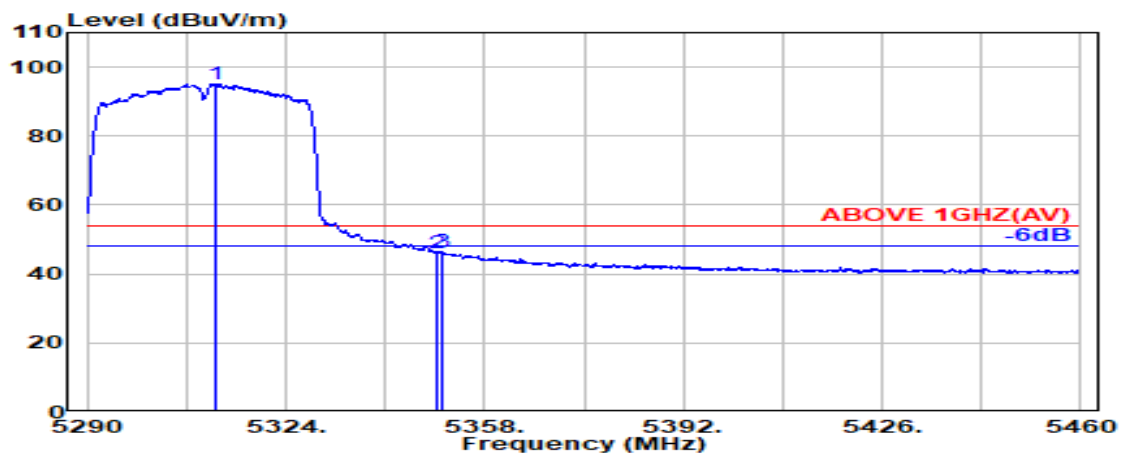

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5312.000	33.62	8.50	39.08	92.08	95.12	---	---	Average
	5350.000	33.70	8.54	39.08	42.87	46.03	54.00	7.97	Average
	5350.900	33.71	8.54	39.08	43.42	46.59	54.00	7.41	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

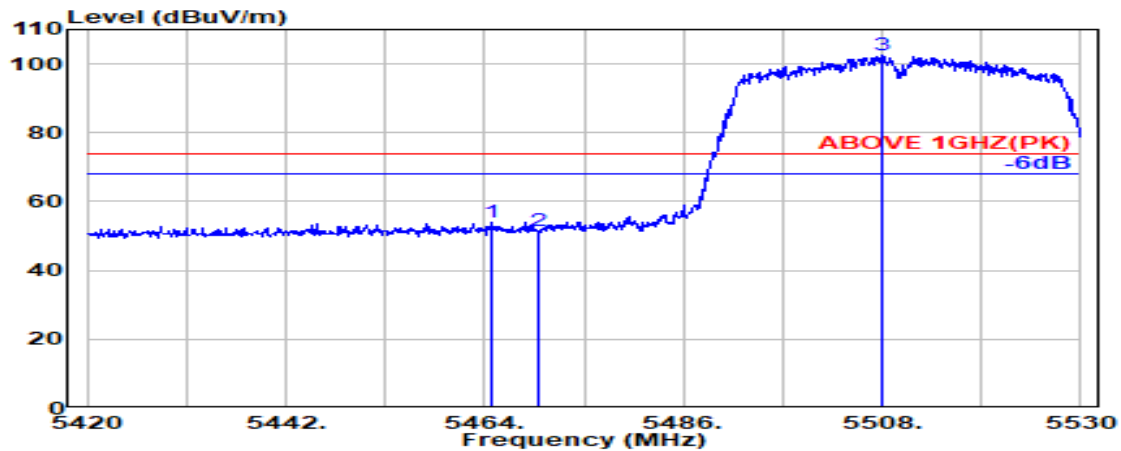

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.700	34.10	8.66	39.07	50.35	54.04	74.00	19.96	Peak
5470.000	34.10	8.67	39.07	47.87	51.57	74.00	22.43	Peak
@ 5508.100	34.08	8.71	39.07	98.86	102.58	---	---	Peak

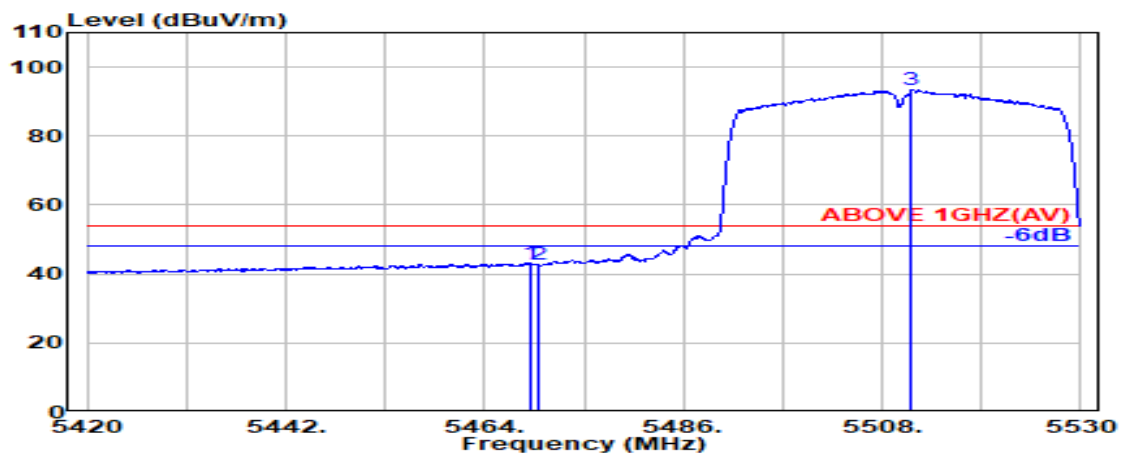


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.100	34.10	8.67	39.07	39.47	43.16	54.00	10.84	Average
5470.000	34.10	8.67	39.07	38.88	42.57	54.00	11.43	Average
@ 5511.300	34.08	8.71	39.07	89.59	93.30	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

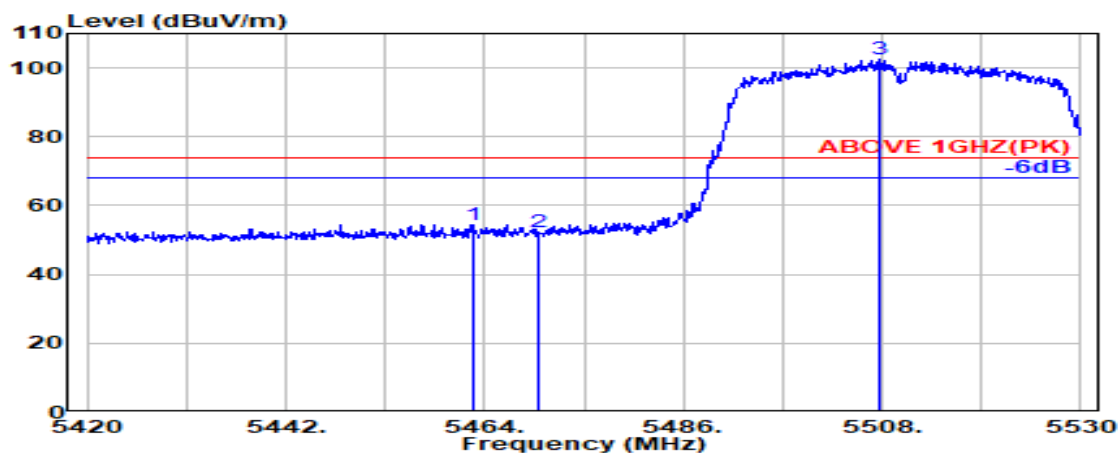

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.700	34.10	8.66	39.07	50.80	54.49	74.00	19.51	Peak
5470.000	34.10	8.67	39.07	48.50	52.20	74.00	21.80	Peak
@ 5507.800	34.08	8.71	39.07	98.68	102.40	---	---	Peak

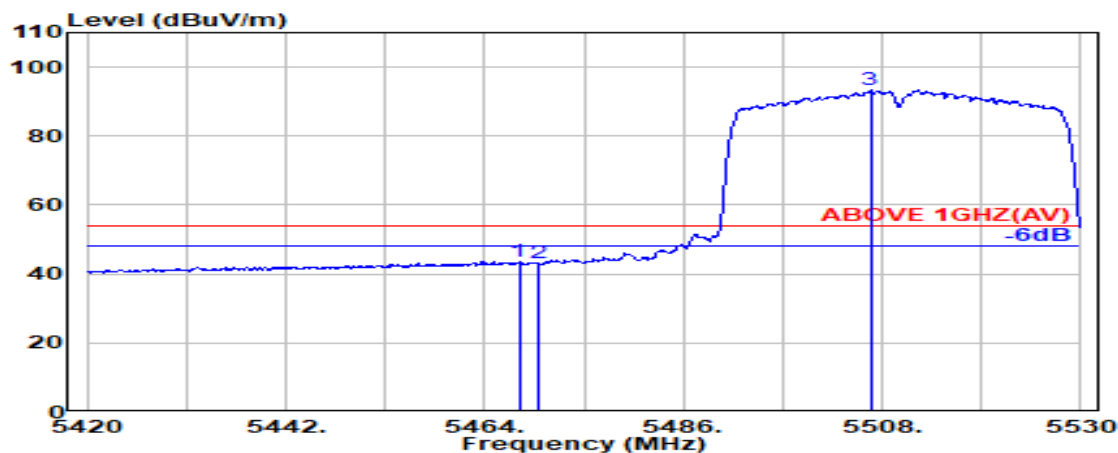


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.10	8.67	39.07	39.88	43.58	54.00	10.42	Average
5470.000	34.10	8.67	39.07	39.32	43.02	54.00	10.98	Average
@ 5506.700	34.09	8.71	39.07	89.49	93.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

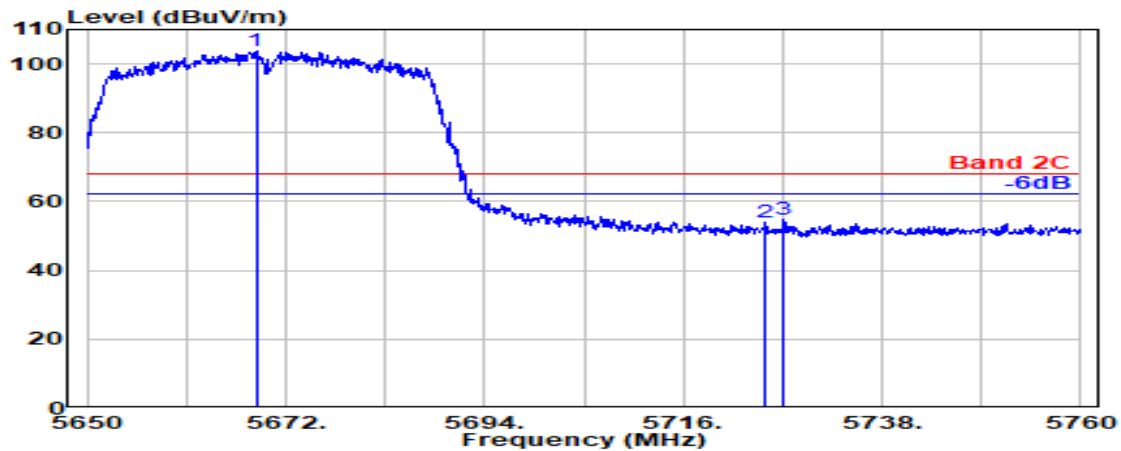

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5668.700	33.59	8.87	39.12	100.28	103.62	---	---	Peak
5725.000	33.60	8.92	39.14	50.59	53.98	68.20	14.22	Peak
5727.100	33.62	8.93	39.14	51.52	54.92	68.20	13.28	Peak

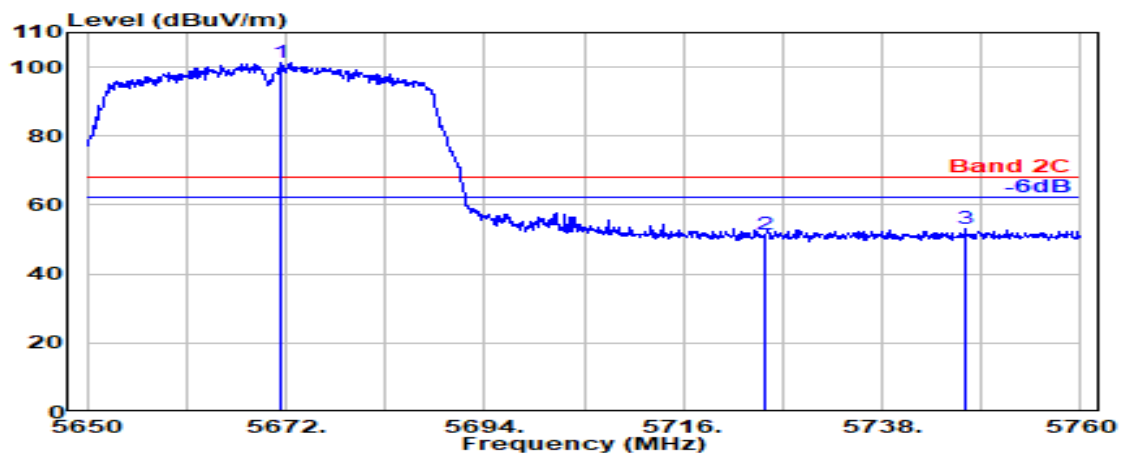


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.500	33.57	8.87	39.12	97.87	101.19	---	---	Peak
5725.000	33.60	8.92	39.14	48.15	51.53	68.20	16.67	Peak
5747.200	33.78	8.95	39.15	49.37	52.95	68.20	15.25	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

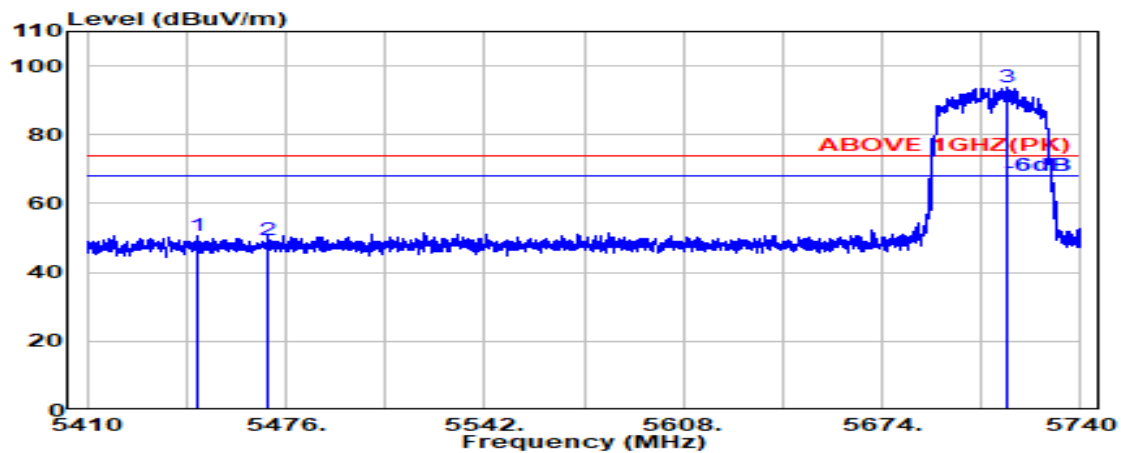

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.300	34.09	8.64	39.07	46.97	50.63	74.00	23.37	Peak
5470.000	34.10	8.67	39.07	45.53	49.22	74.00	24.78	Peak
@ 5715.400	33.52	8.92	39.14	90.30	93.61	---	---	Peak

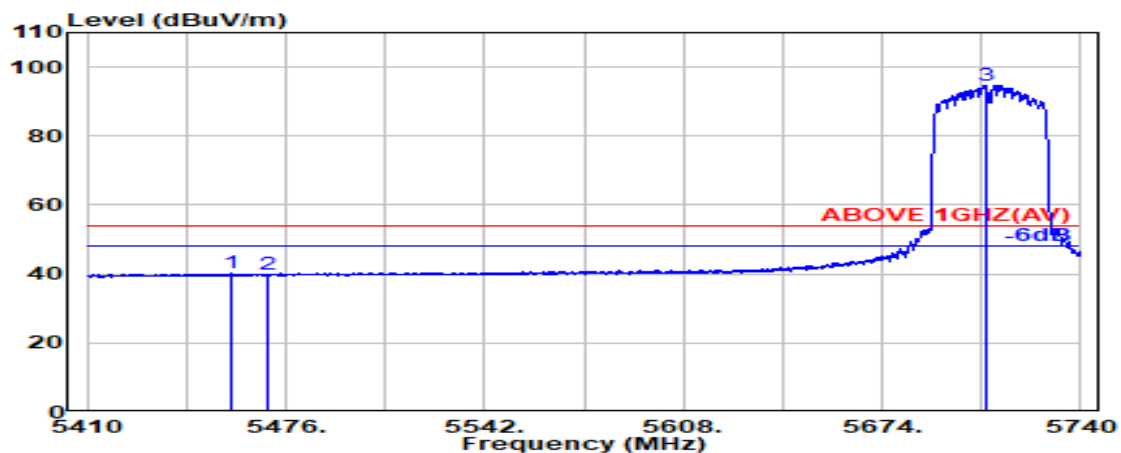


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.200	34.10	8.66	39.07	36.41	40.09	54.00	13.91	Average
5470.000	34.10	8.67	39.07	36.04	39.73	54.00	14.27	Average
@ 5708.700	33.47	8.91	39.13	91.50	94.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

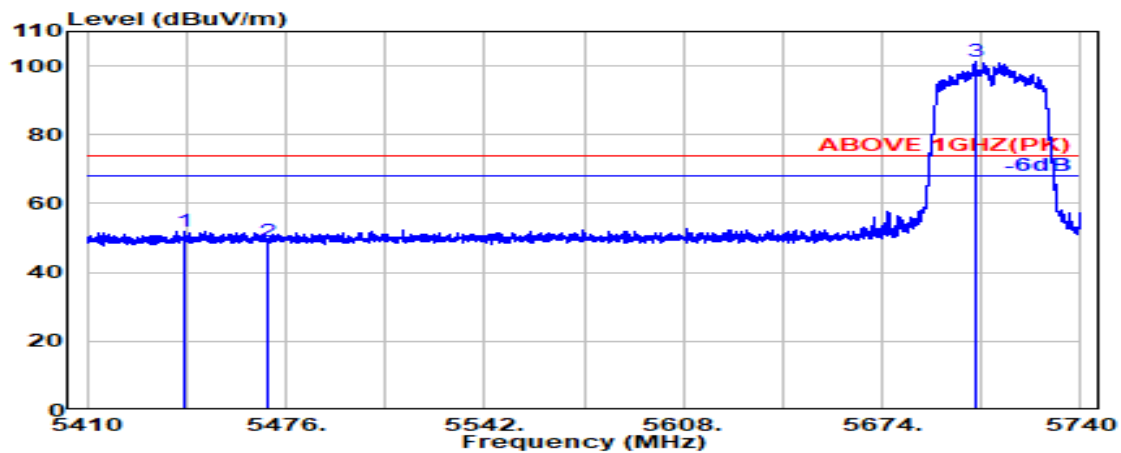

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.300	34.08	8.64	39.07	48.41	52.06	74.00	21.94	Peak
5470.000	34.10	8.67	39.07	45.31	49.01	74.00	24.99	Peak
@ 5705.400	33.44	8.91	39.13	97.88	101.10	---	---	Peak

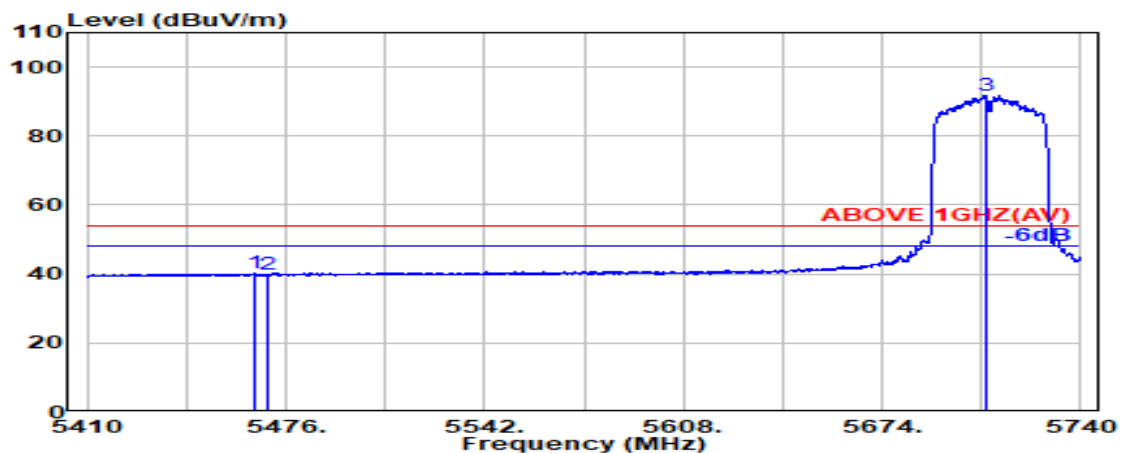

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.10	8.66	39.07	36.53	40.22	54.00	13.78	Average
5470.000	34.10	8.67	39.07	36.11	39.81	54.00	14.19	Average
@ 5708.200	33.47	8.91	39.13	88.56	91.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

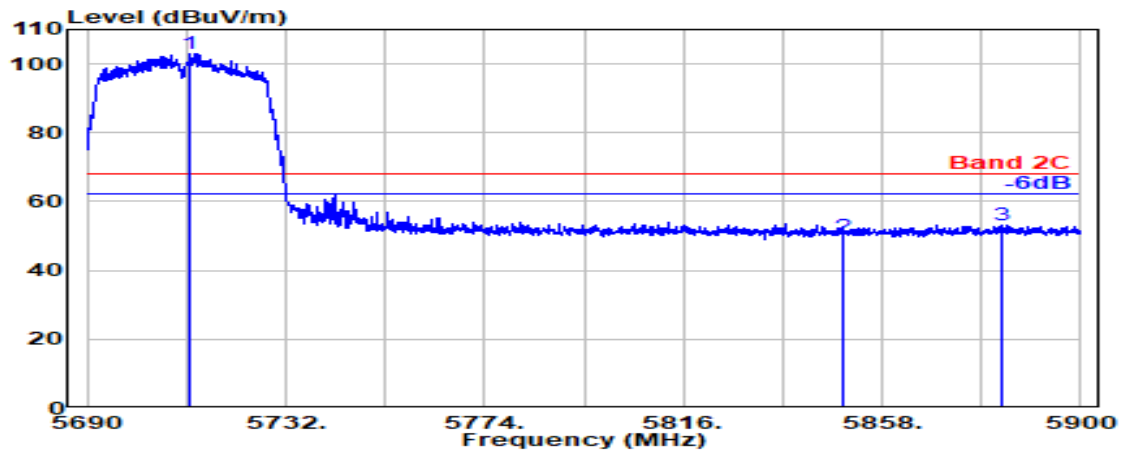

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.900	33.50	8.91	39.14	99.82	103.10	---	---	Peak
5850.000	33.90	9.05	39.18	46.13	49.90	68.20	18.30	Peak
5883.100	34.10	9.08	39.19	49.26	53.26	68.20	14.94	Peak

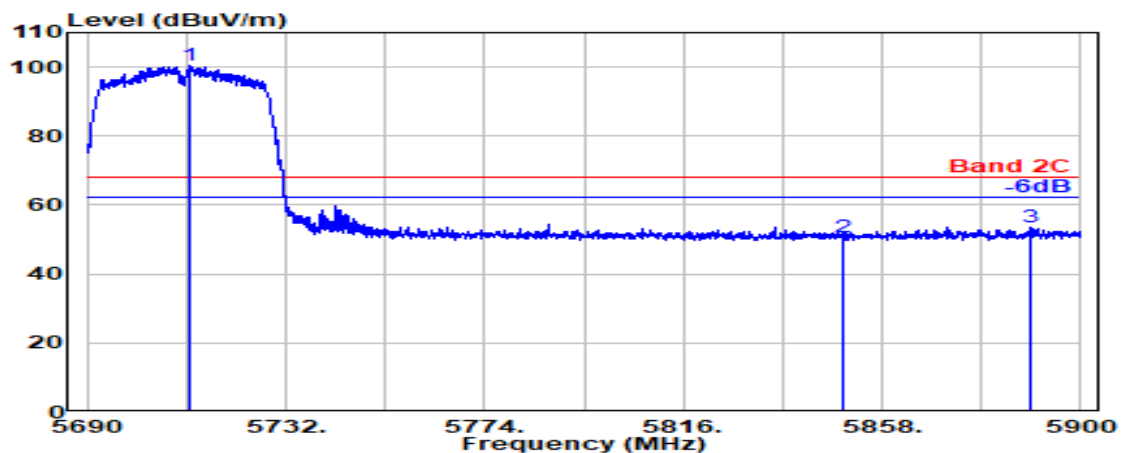

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.600	33.49	8.91	39.14	97.02	100.29	---	---	Peak
5850.000	33.90	9.05	39.18	47.02	50.79	68.20	17.41	Peak
5889.600	34.14	9.09	39.19	49.65	53.69	68.20	14.51	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

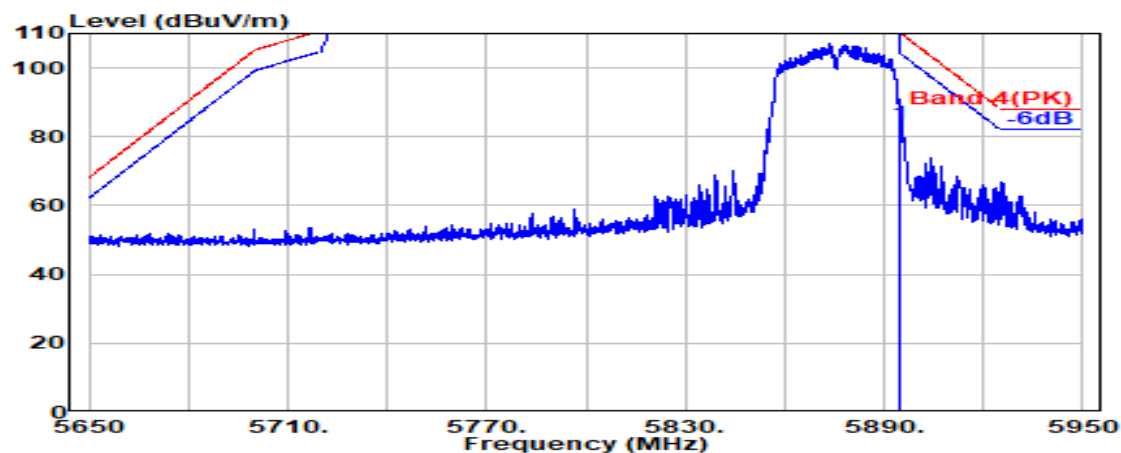

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.64	83.72	110.20	26.48	Peak

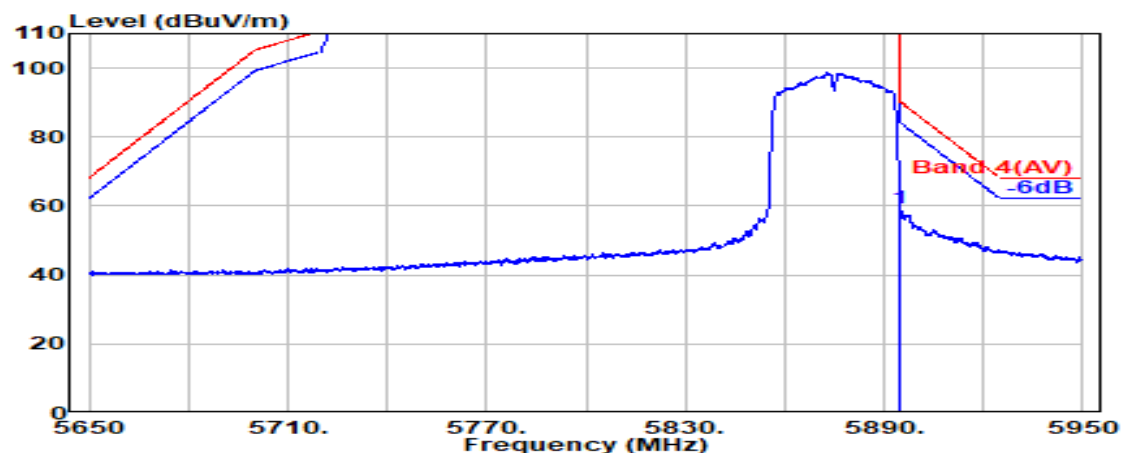

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	55.42	59.49	90.20	30.71	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

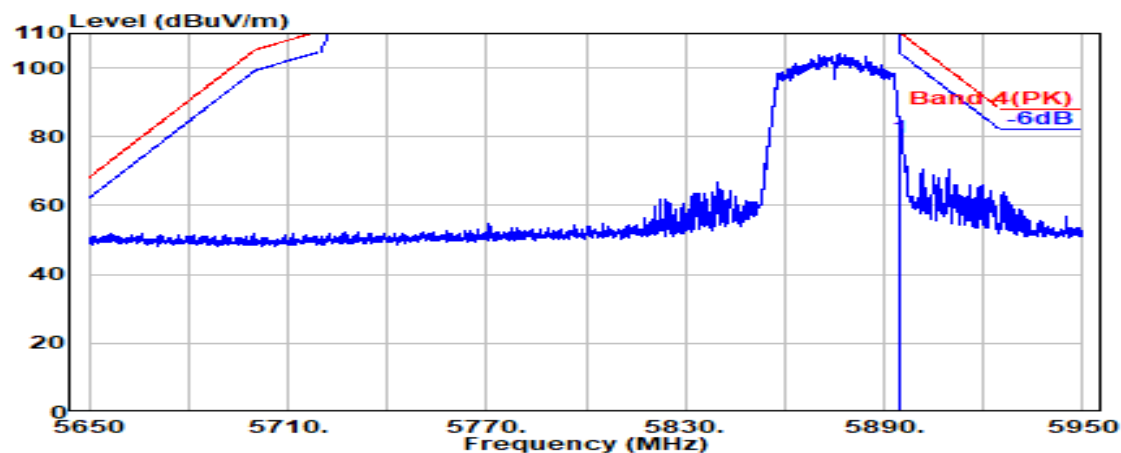

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	75.54	79.61	110.20	30.59	Peak

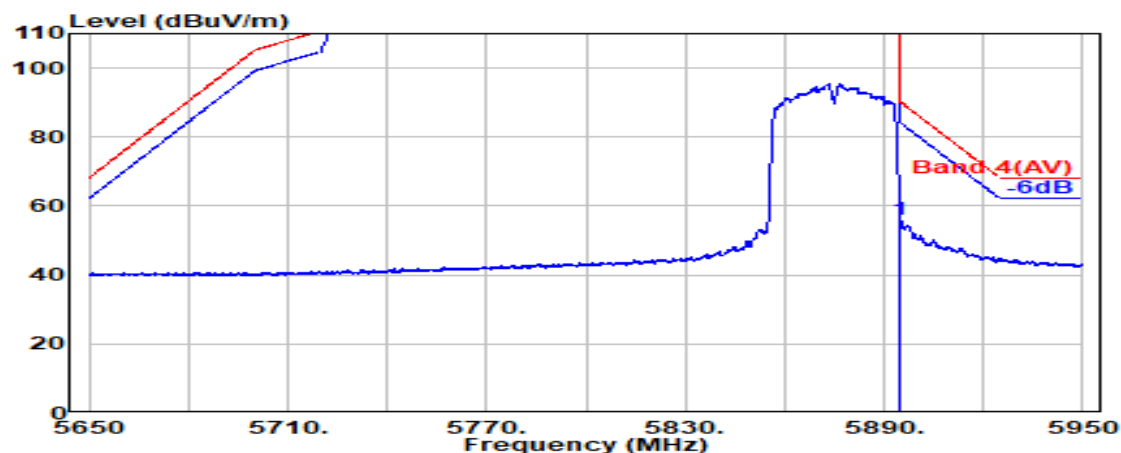


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	52.09	56.16	90.20	34.04	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

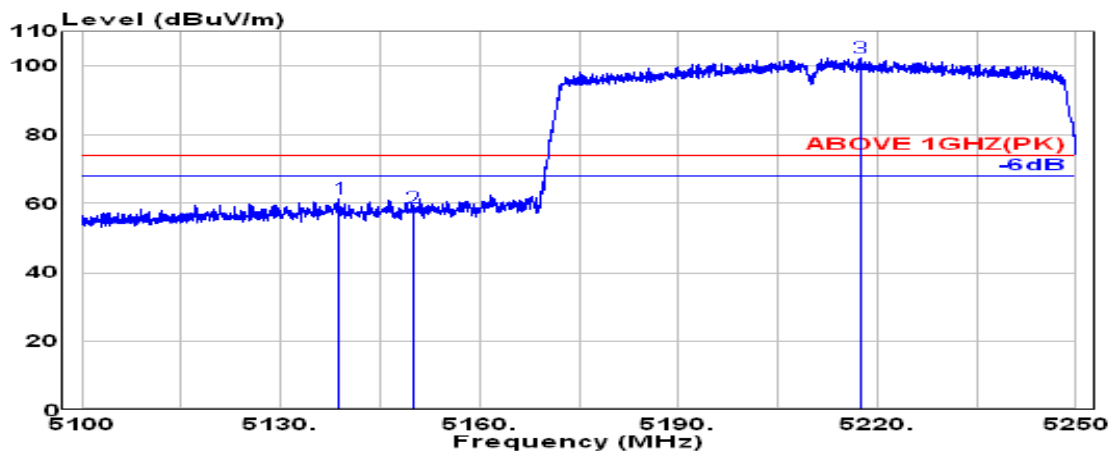

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.800	33.58	8.31	39.09	58.74	61.55	74.00	12.45	Peak
5150.000	33.60	8.33	39.09	56.12	58.95	74.00	15.05	Peak
@ 5217.500	33.64	8.40	39.09	99.42	102.37	---	---	Peak

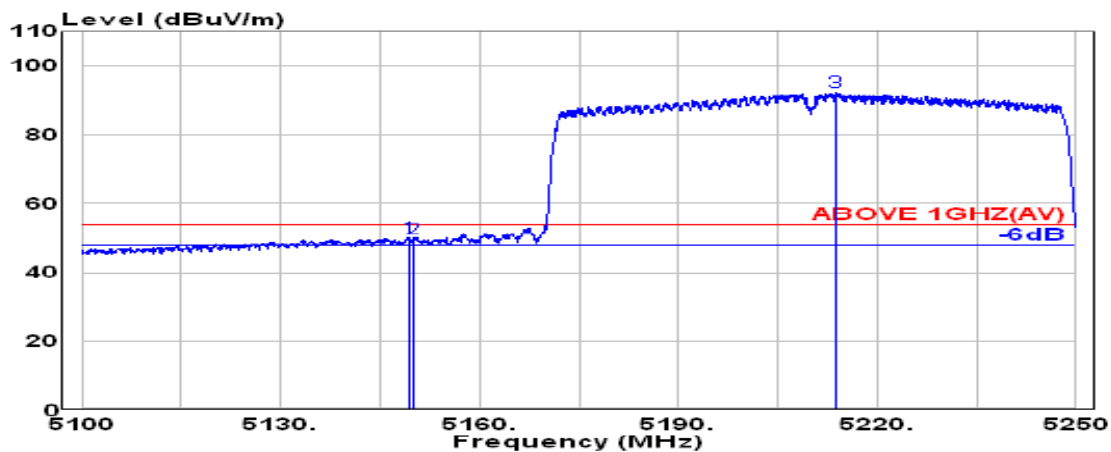

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	33.60	8.33	39.09	47.40	50.23	54.00	3.77	Average
5150.000	33.60	8.33	39.09	46.87	49.71	54.00	4.29	Average
@ 5213.650	33.63	8.40	39.09	89.33	92.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

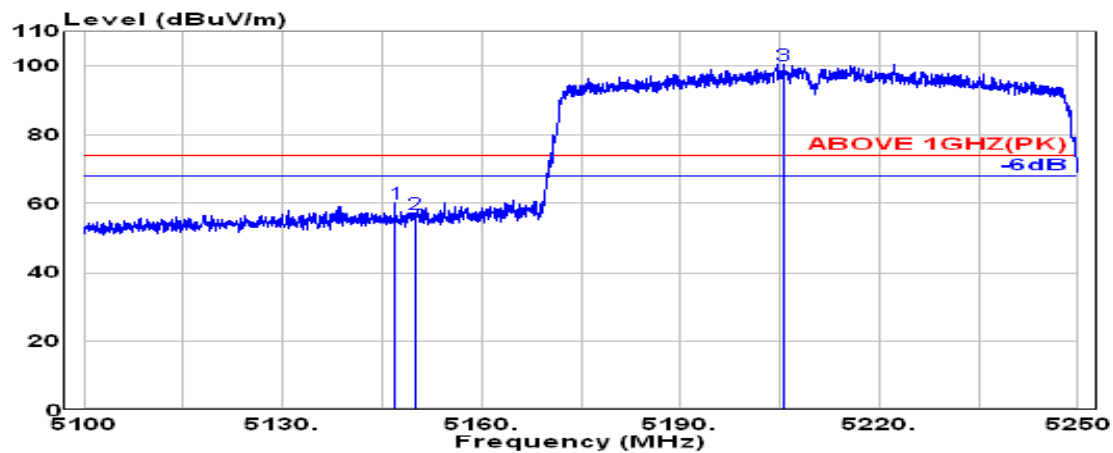

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.900	33.59	8.32	39.09	57.33	60.16	74.00	13.84	Peak
5150.000	33.60	8.33	39.09	54.20	57.04	74.00	16.96	Peak
@ 5205.500	33.61	8.39	39.09	97.40	100.31	---	---	Peak

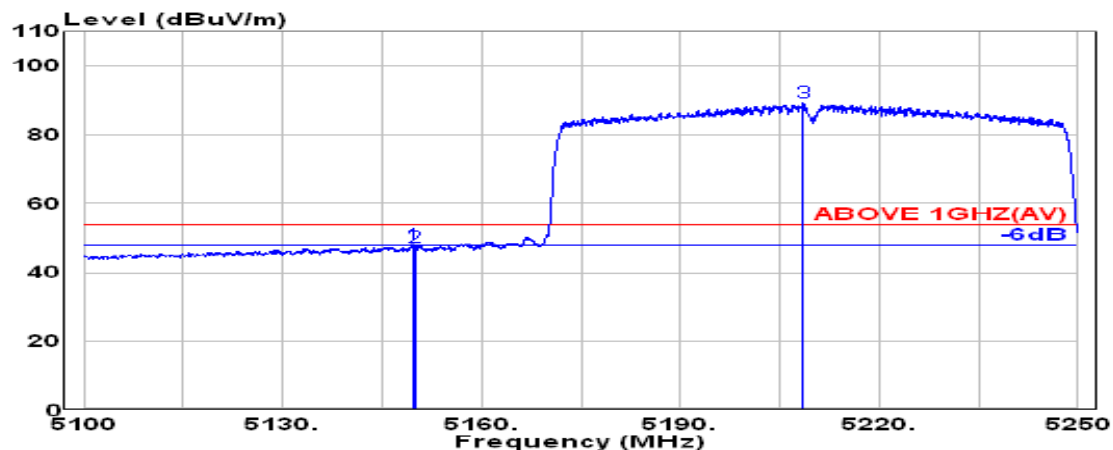

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.33	39.09	45.39	48.22	54.00	5.78	Average
5150.000	33.60	8.33	39.09	44.67	47.51	54.00	6.49	Average
@ 5208.450	33.62	8.39	39.09	86.35	89.27	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

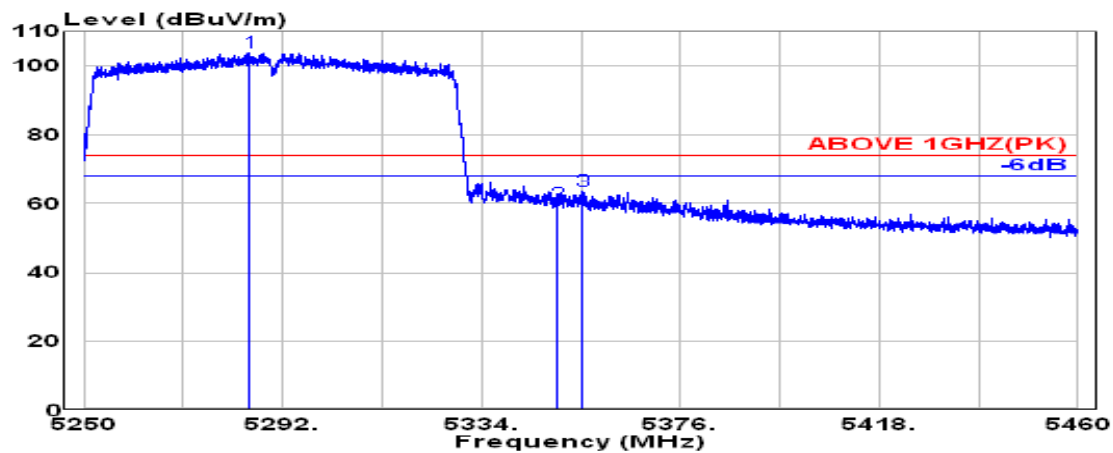

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5285.000	33.63	8.47	39.08	101.00	104.02	---	---	Peak
5350.000	33.70	8.54	39.08	56.94	60.10	74.00	13.90	Peak
5355.250	33.73	8.55	39.08	60.71	63.91	74.00	10.09	Peak



Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5286.800	33.63	8.48	39.08	90.48	93.50	---	---	Average
5350.000	33.70	8.54	39.08	48.51	51.68	54.00	2.32	Average
5350.600	33.70	8.54	39.08	49.34	52.50	54.00	1.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

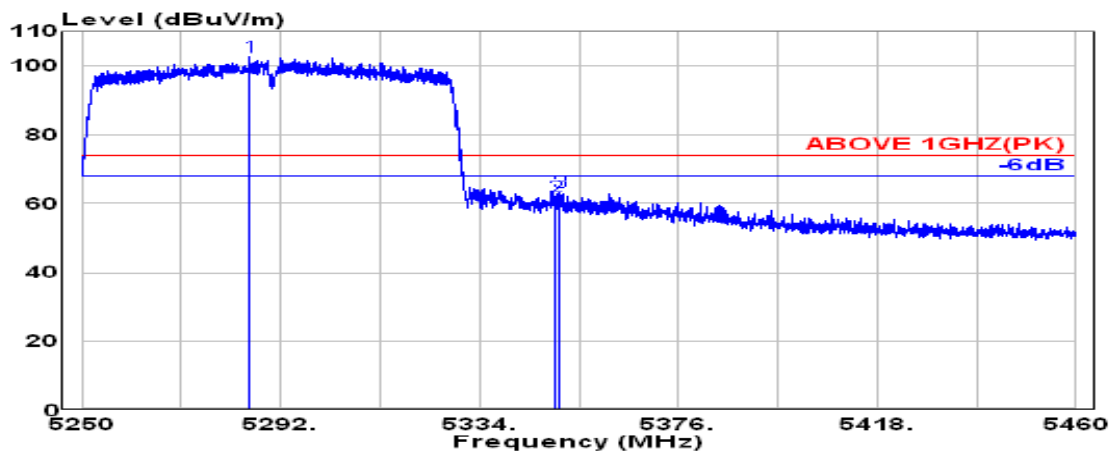

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5285.350	33.63	8.47	39.08	99.54	102.56	---	---	Peak
5350.000	33.70	8.54	39.08	59.00	62.17	74.00	11.83	Peak
5351.000	33.71	8.54	39.08	60.35	63.52	74.00	10.48	Peak

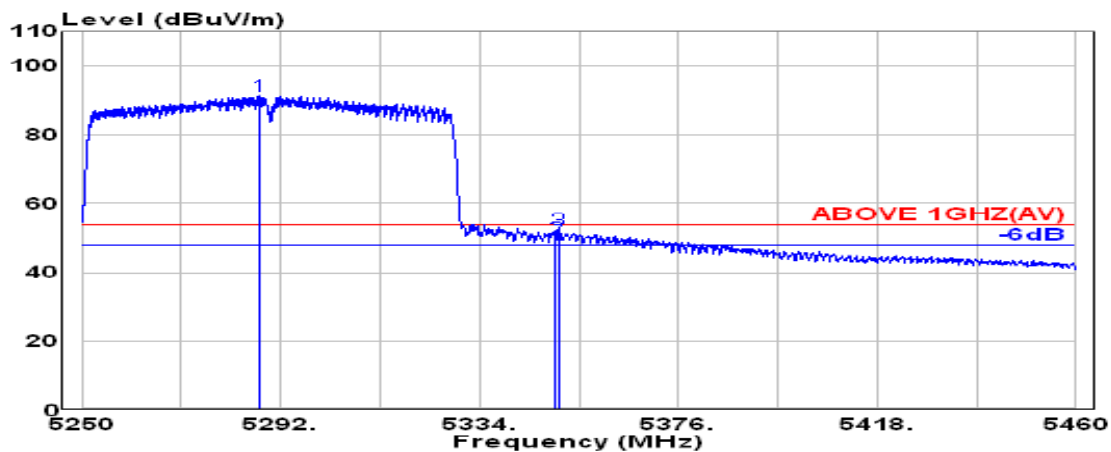

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.400	33.63	8.48	39.08	88.33	91.35	---	---	Average
5350.000	33.70	8.54	39.08	47.13	50.29	54.00	3.71	Average
5350.650	33.70	8.54	39.08	49.23	52.39	54.00	1.61	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

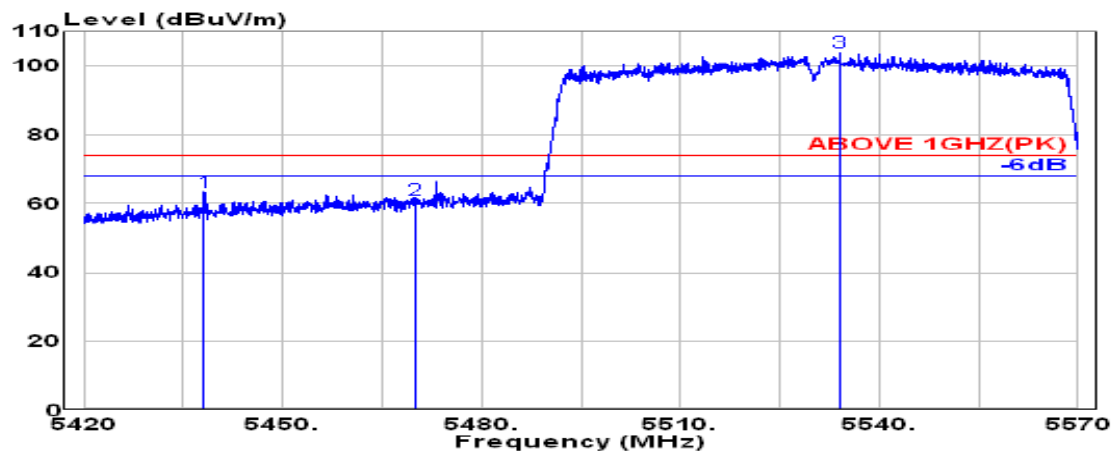

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.150	34.08	8.63	39.07	59.78	63.42	74.00	10.58	Peak
5470.000	34.10	8.67	39.07	57.53	61.22	74.00	12.78	Peak
@ 5534.050	34.03	8.73	39.08	100.39	104.07	---	---	Peak

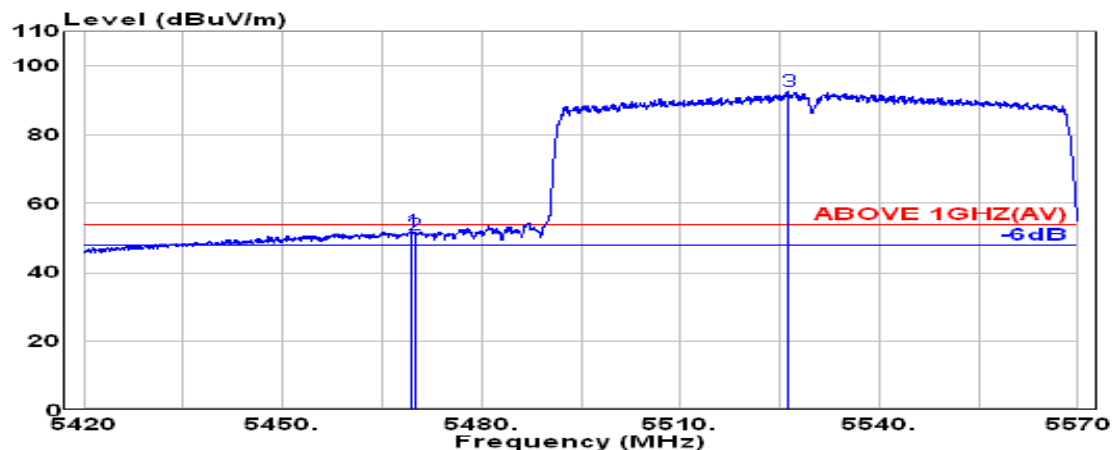

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.550	34.10	8.67	39.07	48.40	52.10	54.00	1.90	Average
5470.000	34.10	8.67	39.07	47.66	51.36	54.00	2.64	Average
@ 5526.350	34.05	8.73	39.08	89.10	92.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

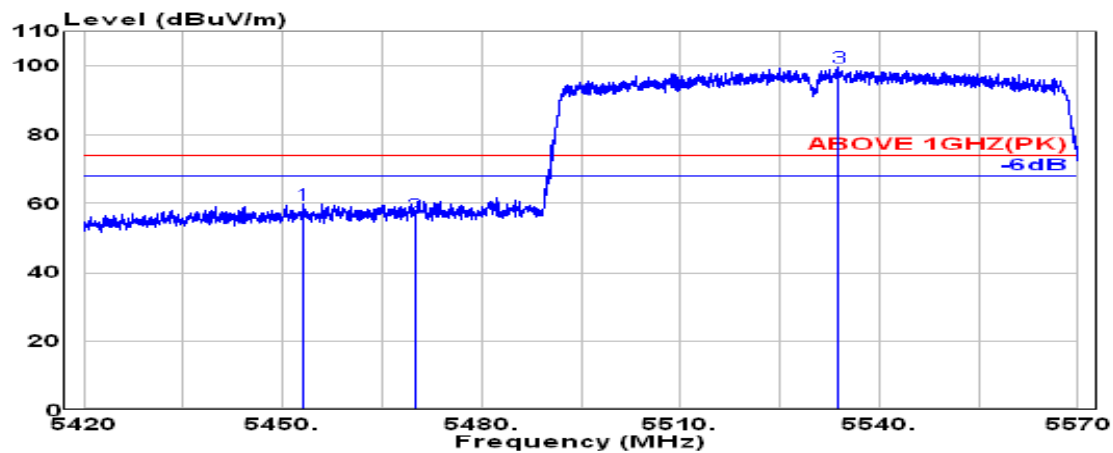

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.000	34.10	8.65	39.07	56.20	59.88	74.00	14.12	Peak
5470.000	34.10	8.67	39.07	53.06	56.75	74.00	17.25	Peak
@ 5533.850	34.03	8.73	39.08	95.87	99.56	---	---	Peak

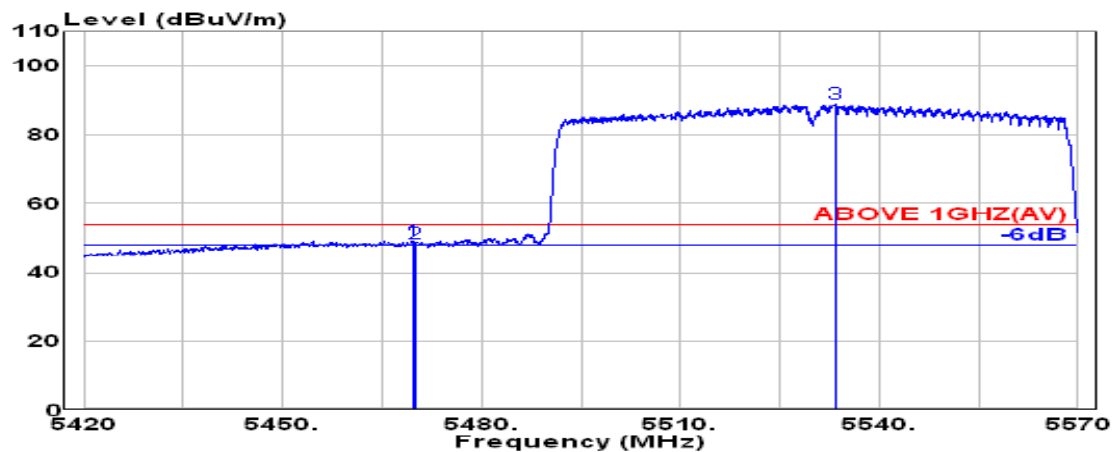

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.10	8.67	39.07	45.58	49.27	54.00	4.73	Average
5470.000	34.10	8.67	39.07	44.98	48.68	54.00	5.32	Average
@ 5533.300	34.03	8.73	39.08	85.29	88.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

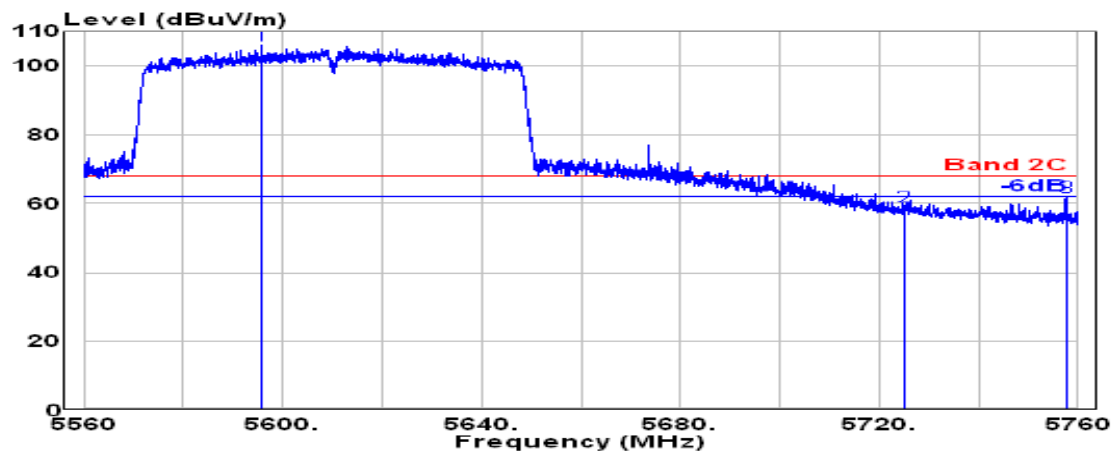

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.650	33.82	8.80	39.10	102.52	106.03	---	---	Peak
5725.000	33.60	8.92	39.14	55.83	59.22	68.20	8.98	Peak
5757.500	33.82	8.96	39.15	58.24	61.86	68.20	6.34	Peak

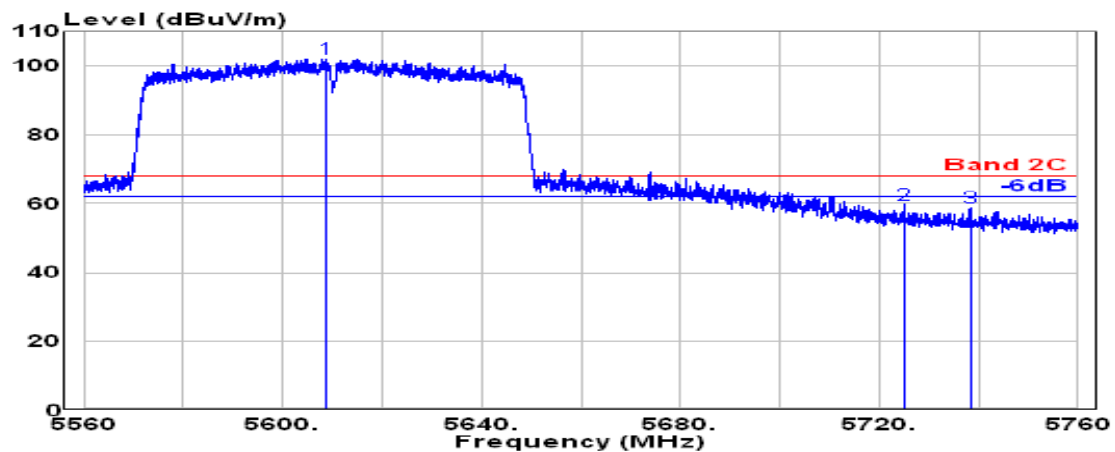

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5608.700	33.78	8.81	39.10	98.69	102.18	---	---	Peak
5725.000	33.60	8.92	39.14	56.48	59.87	68.20	8.33	Peak
5738.250	33.71	8.94	39.14	55.22	58.72	68.20	9.48	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

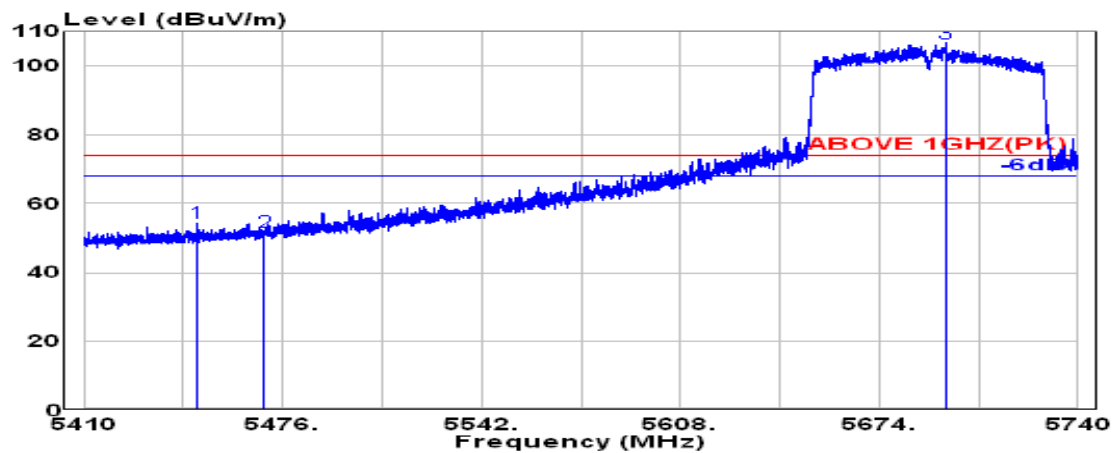

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.500	34.10	8.64	39.07	50.72	54.38	74.00	19.62	Peak
5470.000	34.10	8.67	39.07	48.00	51.70	74.00	22.30	Peak
@ 5695.900	33.42	8.90	39.13	103.48	106.67	---	---	Peak

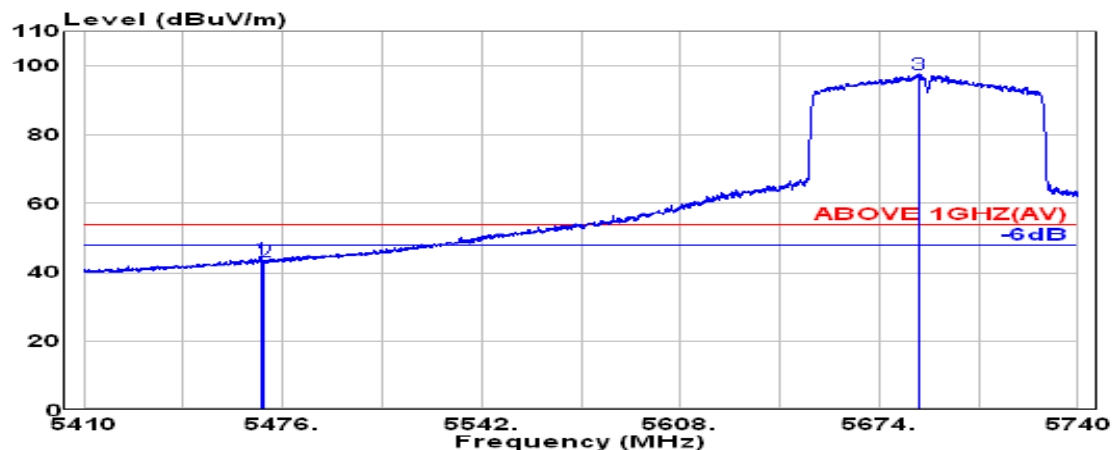

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.07	40.41	44.10	54.00	9.90	Average
5470.000	34.10	8.67	39.07	39.50	43.20	54.00	10.80	Average
@ 5687.100	33.48	8.89	39.13	94.42	97.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

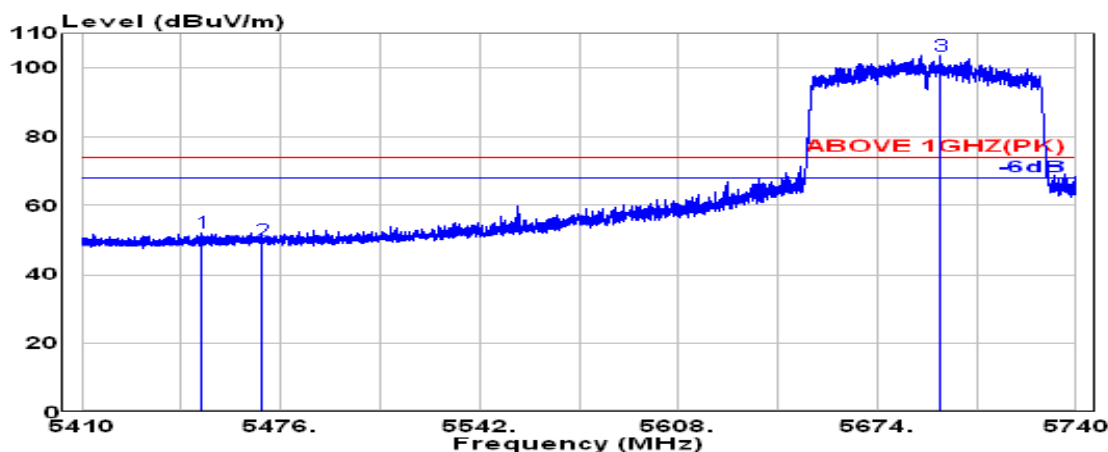

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.900	34.10	8.65	39.07	48.58	52.26	74.00	21.74	Peak
5470.000	34.10	8.67	39.07	46.65	50.35	74.00	23.65	Peak
@ 5694.900	33.43	8.90	39.13	100.53	103.72	---	---	Peak

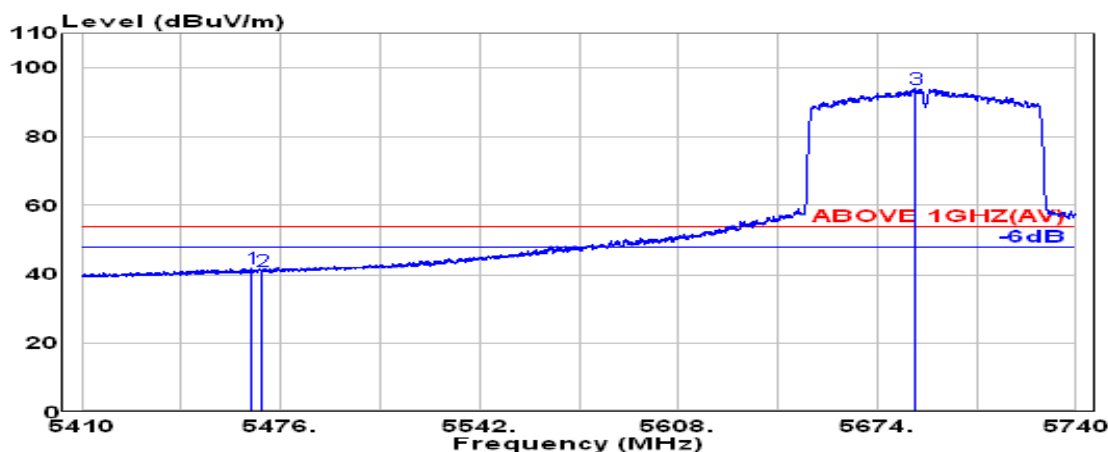


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.500	34.10	8.66	39.07	38.09	41.78	54.00	12.22	Average
5470.000	34.10	8.67	39.07	37.58	41.28	54.00	12.72	Average
@ 5686.750	33.48	8.89	39.13	90.68	93.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

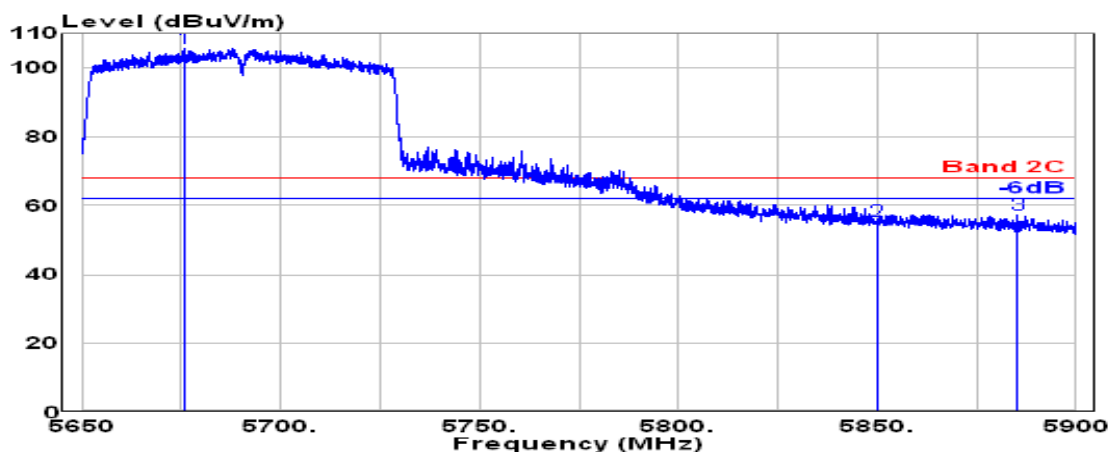

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5675.600	33.55	8.88	39.12	102.34	105.64	---	---	Peak
5850.000	33.90	9.05	39.18	51.67	55.44	68.20	12.76	Peak
5885.250	34.11	9.08	39.19	53.64	57.64	68.20	10.56	Peak

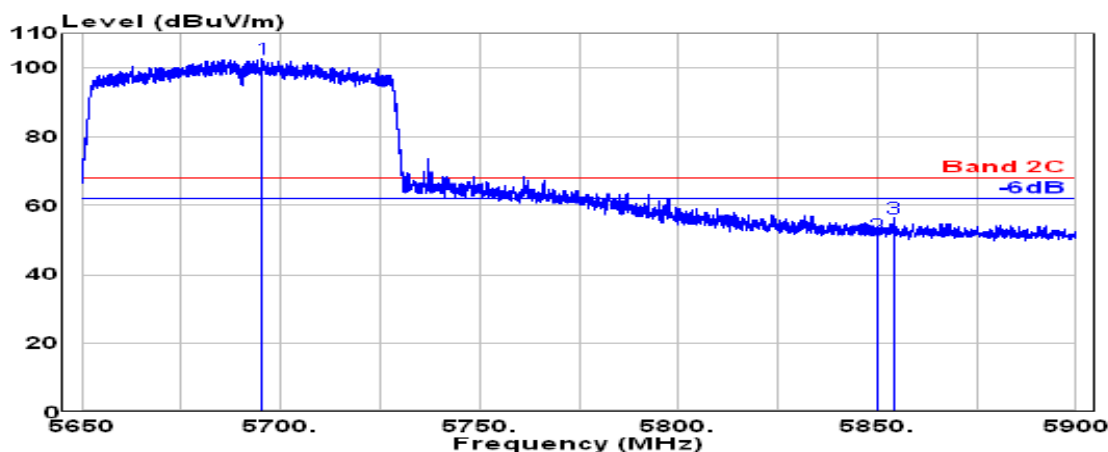

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5695.300	33.43	8.90	39.13	99.54	102.73	---	---	Peak
5850.000	33.90	9.05	39.18	47.83	51.60	68.20	16.60	Peak
5854.100	33.92	9.05	39.18	52.61	56.41	68.20	11.79	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

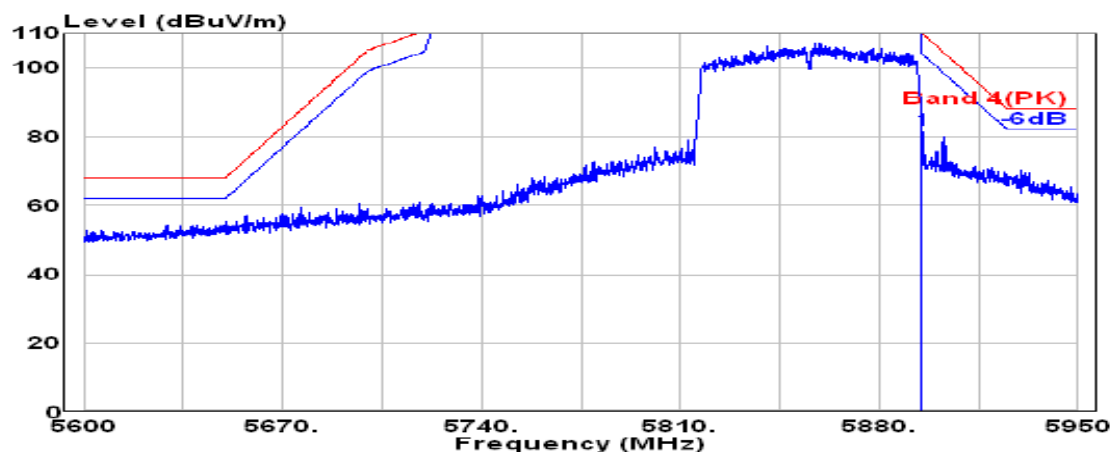

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	78.13	82.20	110.16	27.96	Peak

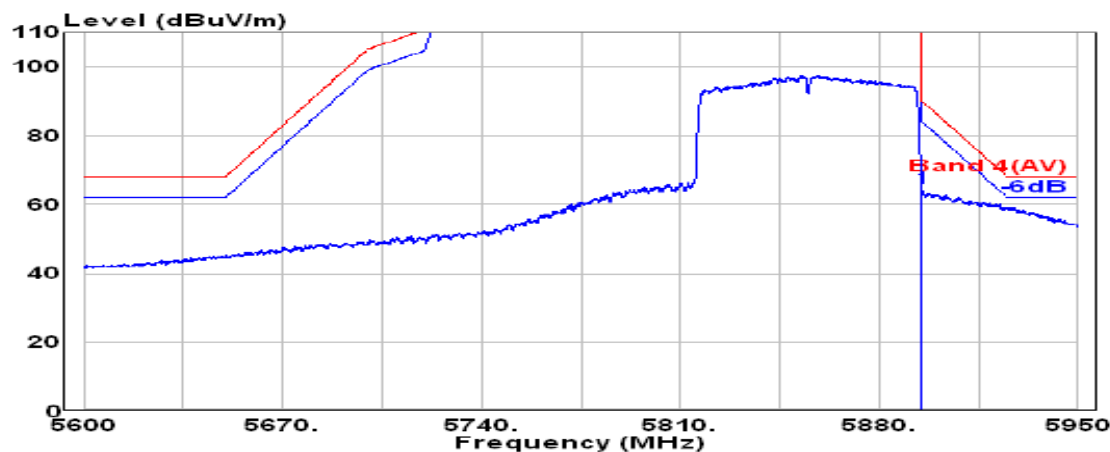


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	60.72	64.79	90.16	25.37	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

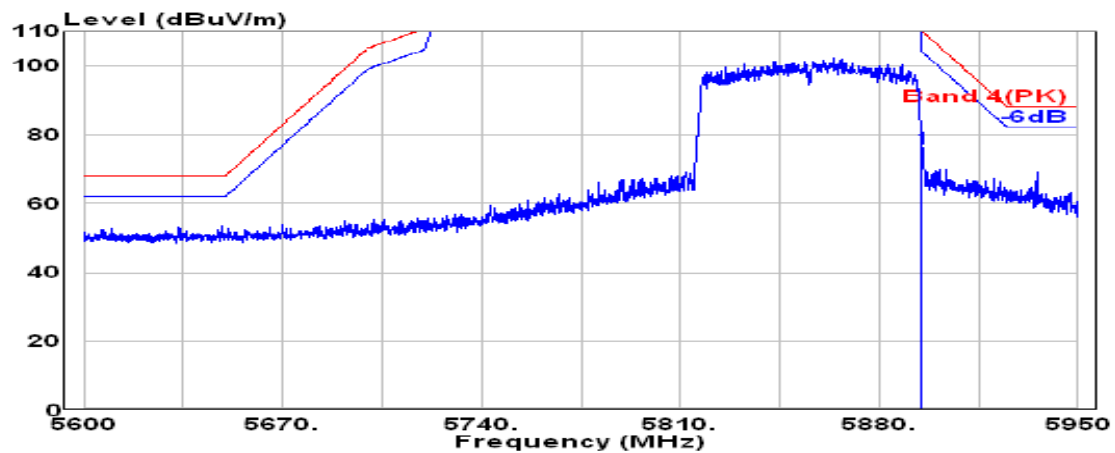

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	72.16	76.23	110.16	33.93	Peak

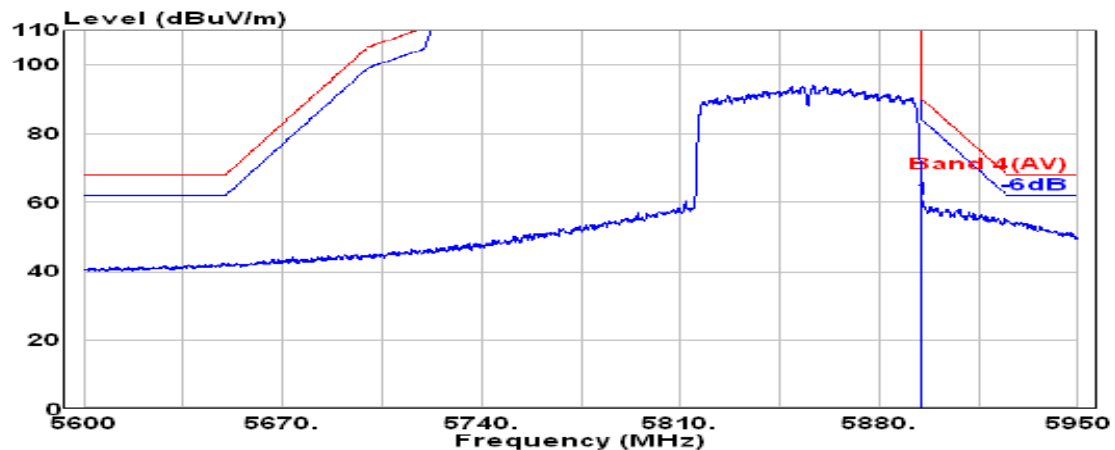


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	56.95	61.03	90.16	29.14	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

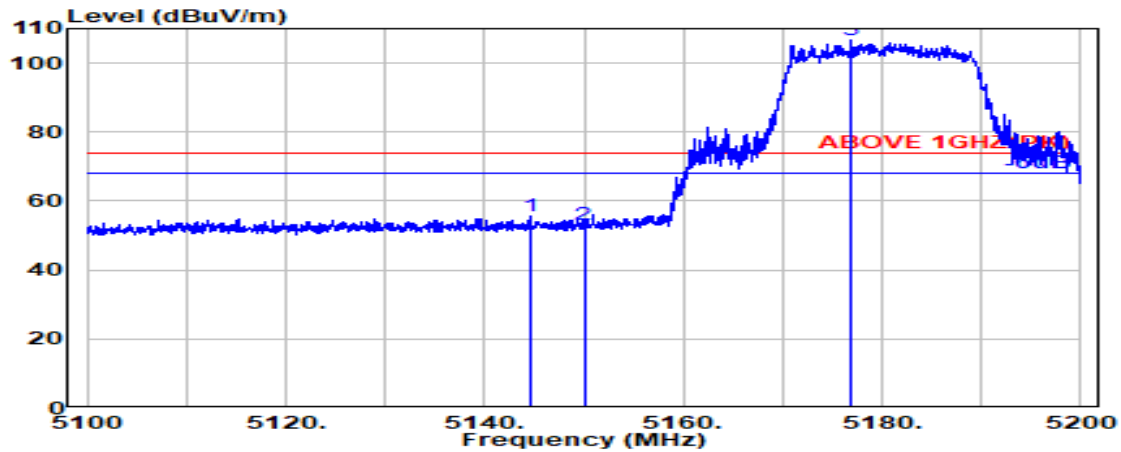

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.550	33.59	8.32	39.09	52.94	55.76	74.00	18.24	Peak
5150.000	33.60	8.33	39.09	50.25	53.08	74.00	20.92	Peak
@ 5176.800	33.60	8.36	39.09	103.80	106.67	---	---	Peak

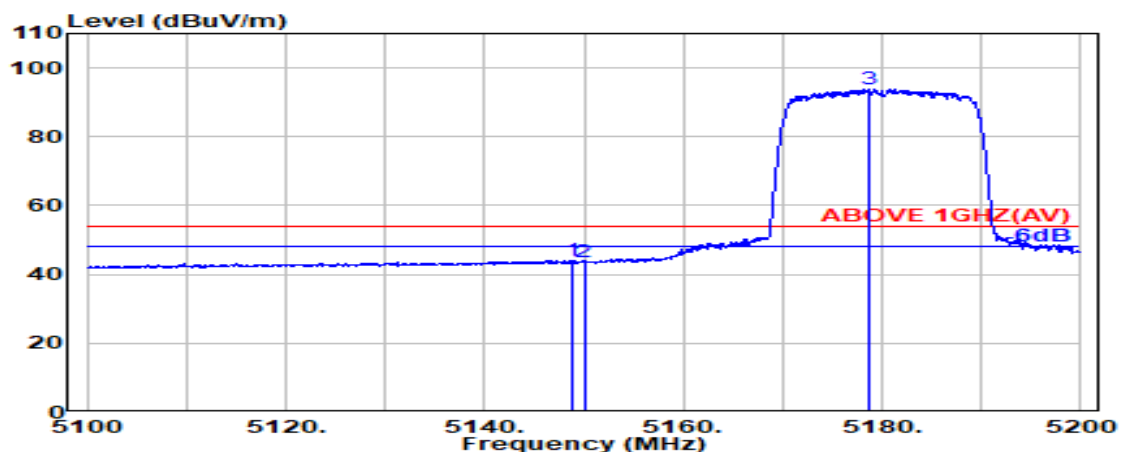


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	33.60	8.33	39.09	41.29	44.12	54.00	9.88	Average
5150.000	33.60	8.33	39.09	40.87	43.70	54.00	10.30	Average
@ 5178.800	33.60	8.36	39.09	91.10	93.97	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

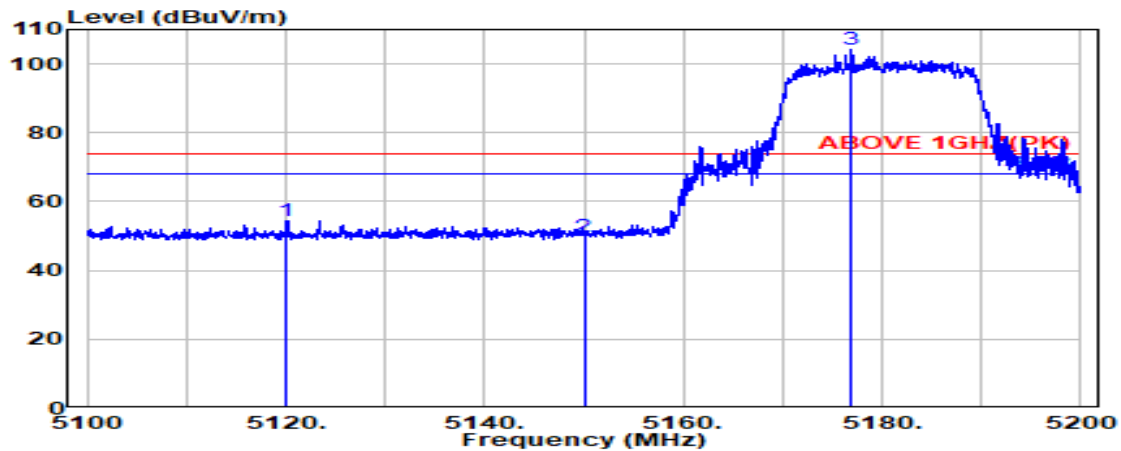

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.100	33.54	8.29	39.09	51.81	54.55	74.00	19.45	Peak
5150.000	33.60	8.33	39.09	46.79	49.62	74.00	24.38	Peak
@ 5176.950	33.60	8.36	39.09	101.23	104.10	---	---	Peak

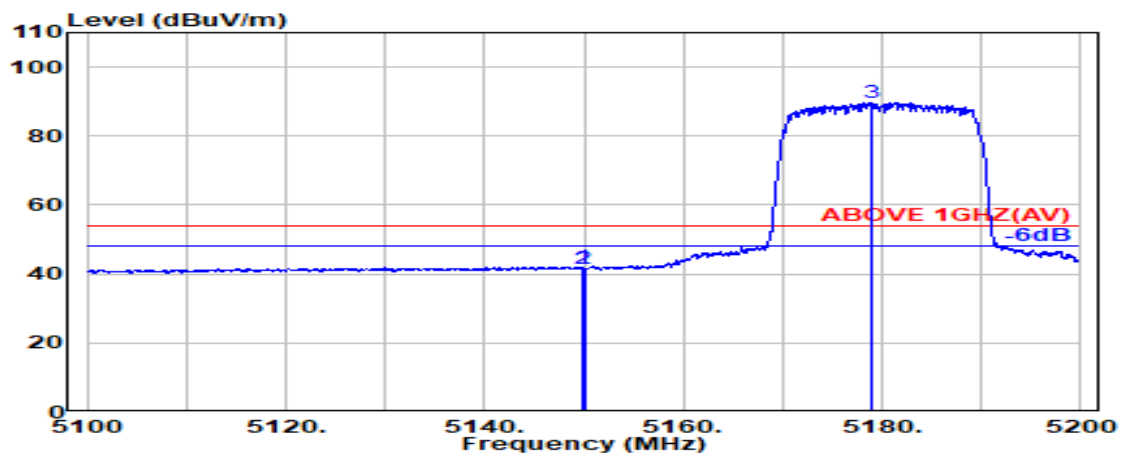

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.60	8.33	39.09	39.27	42.10	54.00	11.90	Average
5150.000	33.60	8.33	39.09	38.75	41.59	54.00	12.41	Average
@ 5178.900	33.60	8.36	39.09	86.95	89.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

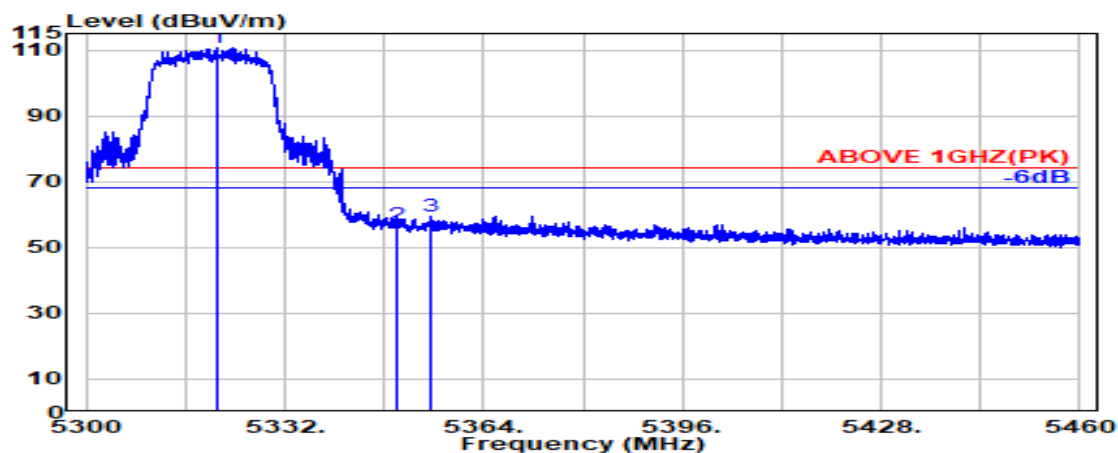

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.250	33.64	8.51	39.08	107.69	110.76	---	---	Peak
5350.000	33.70	8.54	39.08	53.63	56.79	74.00	17.21	Peak
5355.400	33.73	8.55	39.08	56.37	59.57	74.00	14.43	Peak

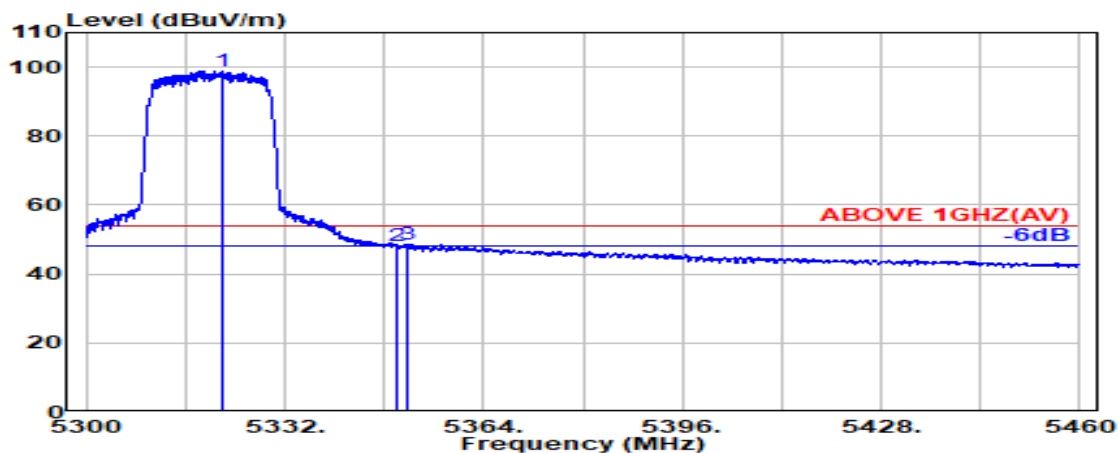


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.050	33.64	8.51	39.08	95.72	98.80	---	---	Average
5350.000	33.70	8.54	39.08	45.09	48.26	54.00	5.74	Average
5351.750	33.71	8.54	39.08	45.50	48.67	54.00	5.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

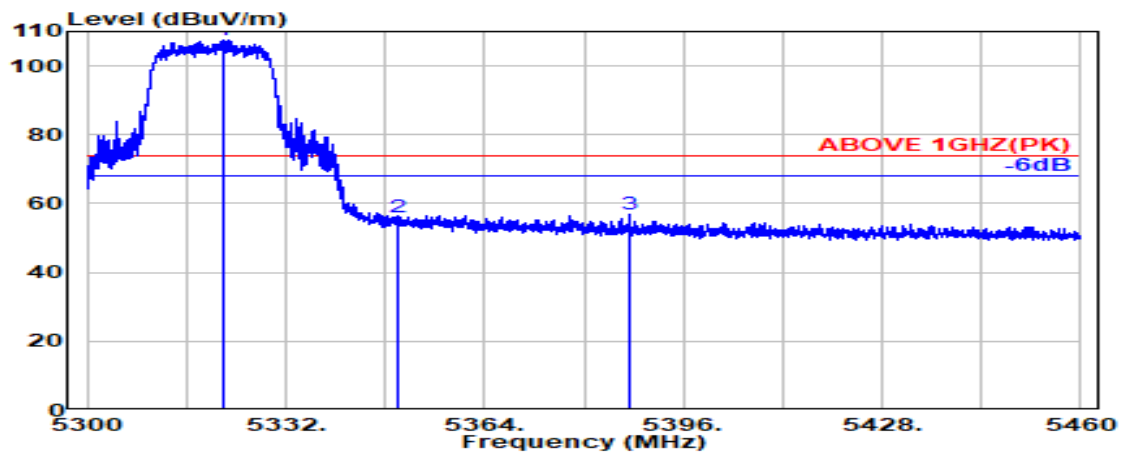

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.800	33.64	8.51	39.08	104.37	107.44	---	---	Peak
5350.000	33.70	8.54	39.08	52.93	56.09	74.00	17.91	Peak
5387.300	33.92	8.58	39.08	53.52	56.95	74.00	17.05	Peak

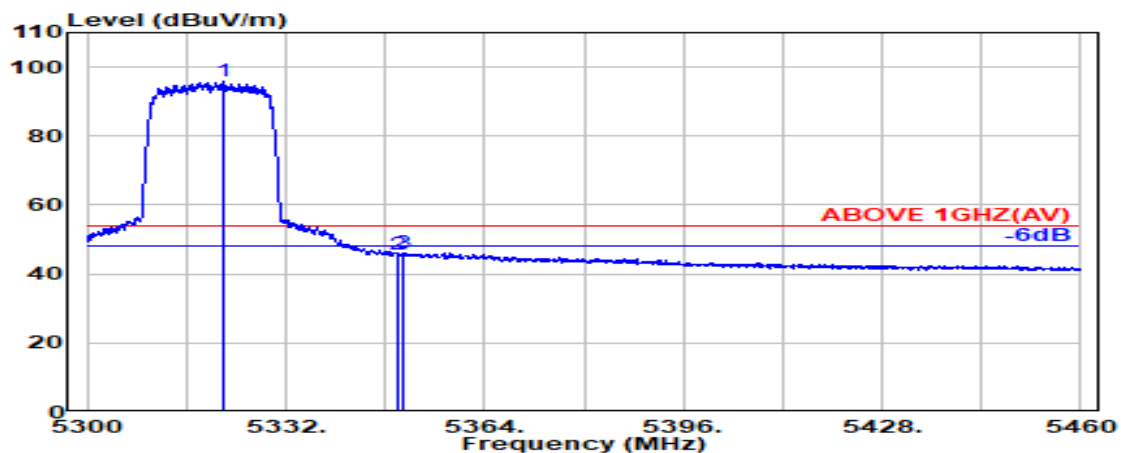


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.850	33.64	8.51	39.08	92.69	95.76	---	---	Average
5350.000	33.70	8.54	39.08	42.52	45.68	54.00	8.32	Average
5351.050	33.71	8.54	39.08	42.86	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

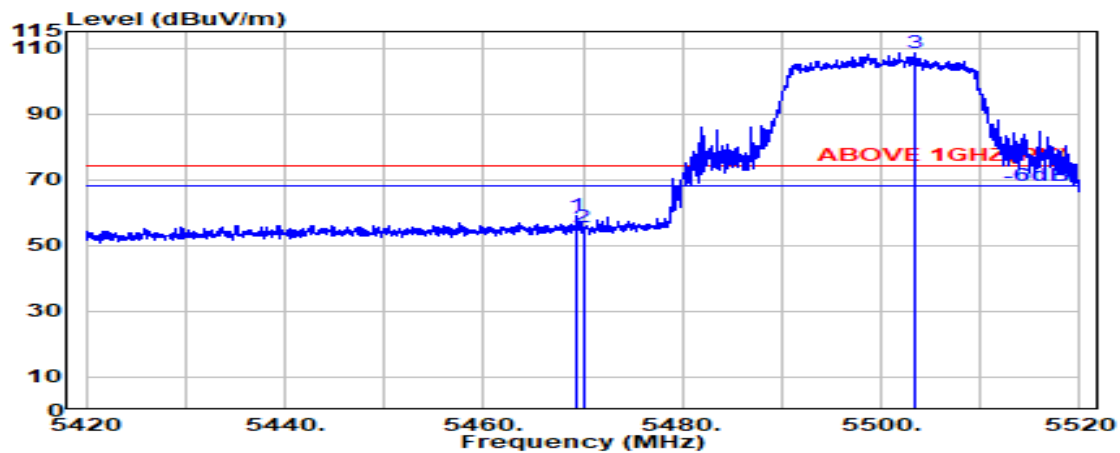

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.300	34.10	8.67	39.07	55.26	58.96	74.00	15.04	Peak
5470.000	34.10	8.67	39.07	51.81	55.50	74.00	18.50	Peak
@ 5503.450	34.09	8.70	39.07	104.82	108.54	---	---	Peak

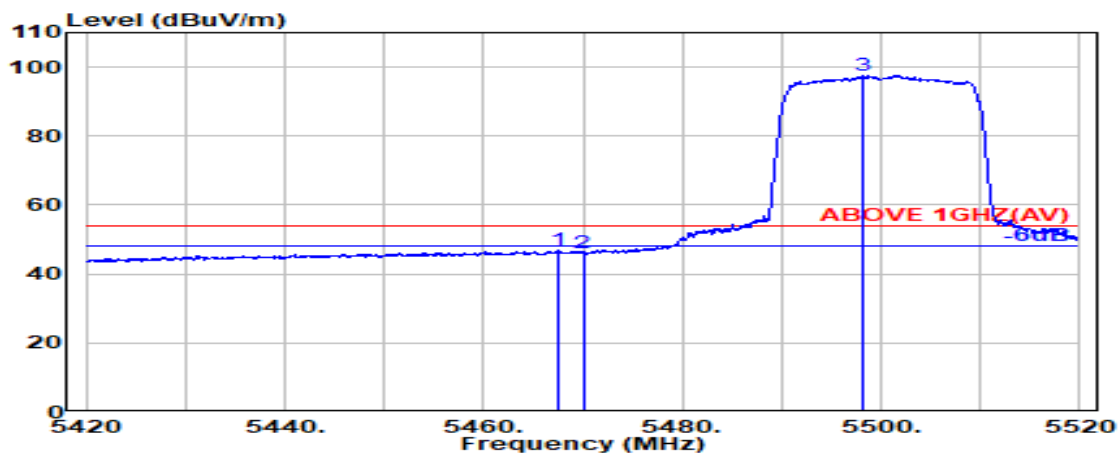


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.550	34.10	8.67	39.07	43.17	46.86	54.00	7.14	Average
5470.000	34.10	8.67	39.07	42.55	46.25	54.00	7.75	Average
@ 5498.150	34.10	8.70	39.07	93.77	97.50	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

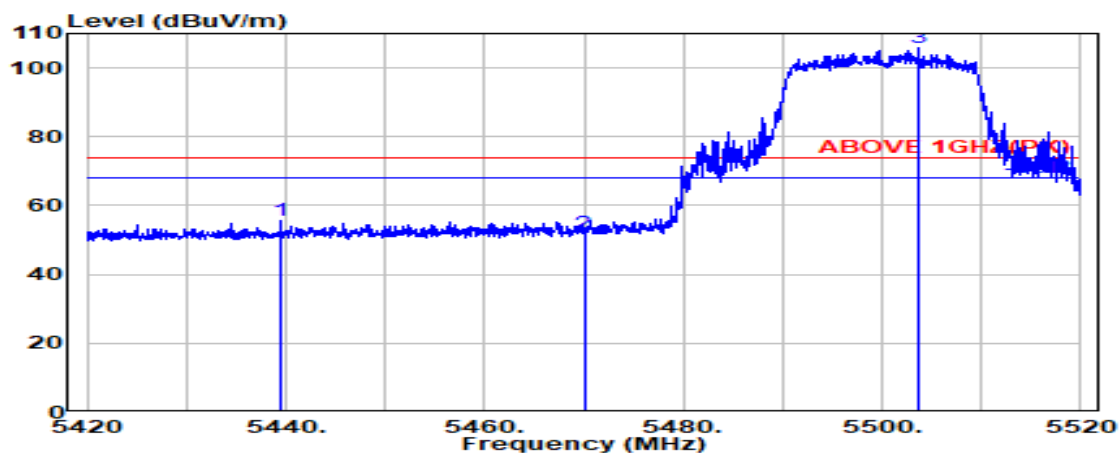

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5439.500	34.08	8.64	39.07	51.82	55.46	74.00	18.54	Peak
5470.000	34.10	8.67	39.07	48.08	51.77	74.00	22.23	Peak
@ 5503.650	34.09	8.70	39.07	102.19	105.92	---	---	Peak

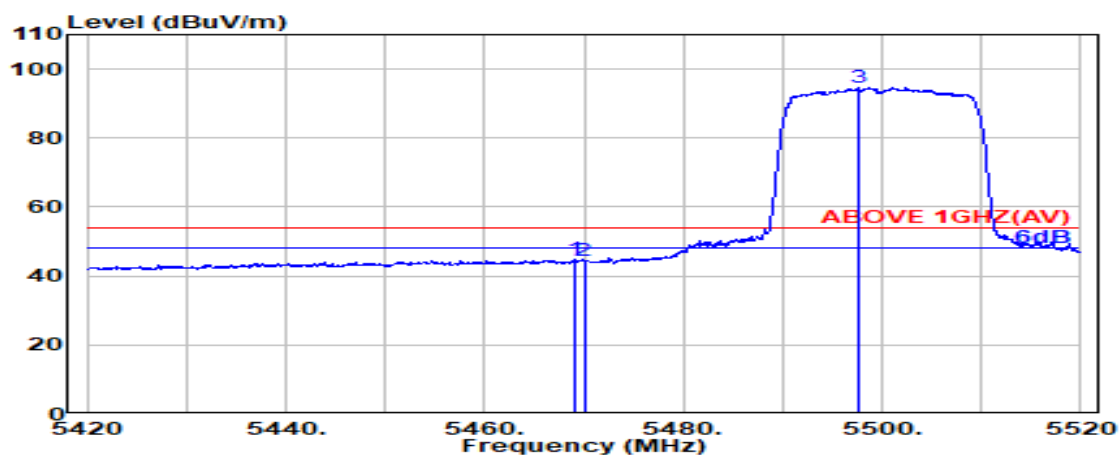

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.000	34.10	8.67	39.07	40.97	44.66	54.00	9.34	Average
5470.000	34.10	8.67	39.07	40.73	44.43	54.00	9.57	Average
@ 5497.550	34.10	8.70	39.07	90.80	94.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

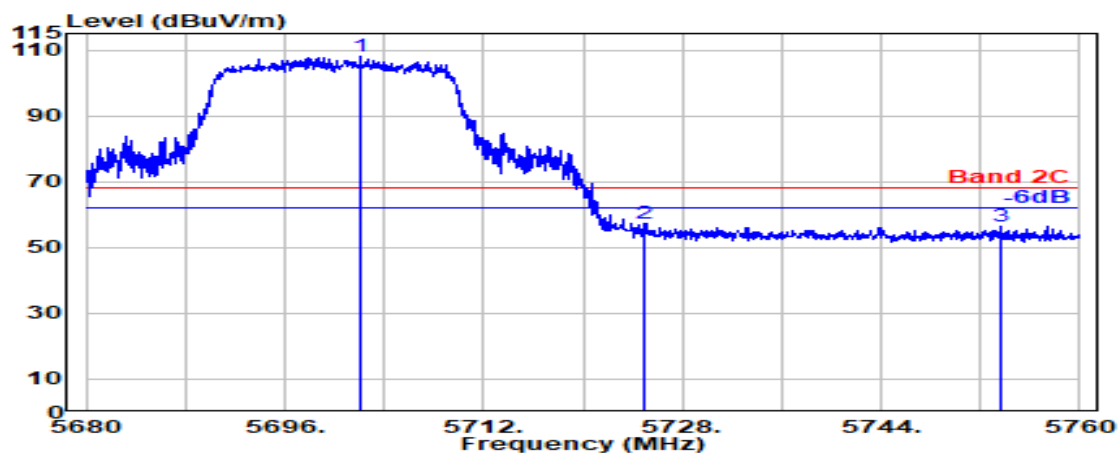

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.100	33.42	8.90	39.13	104.70	107.89	---	---	Peak
5725.000	33.60	8.92	39.14	53.93	57.32	68.20	10.88	Peak
5753.650	33.81	8.95	39.15	52.60	56.22	68.20	11.98	Peak

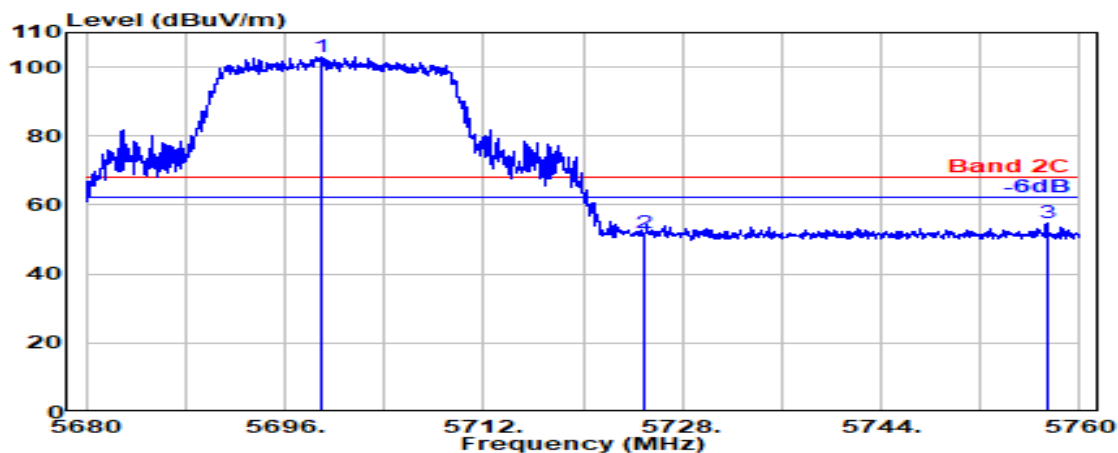


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.850	33.41	8.90	39.13	99.95	103.13	---	---	Peak
5725.000	33.60	8.92	39.14	48.48	51.86	68.20	16.34	Peak
5757.350	33.81	8.96	39.15	50.98	54.60	68.20	13.60	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

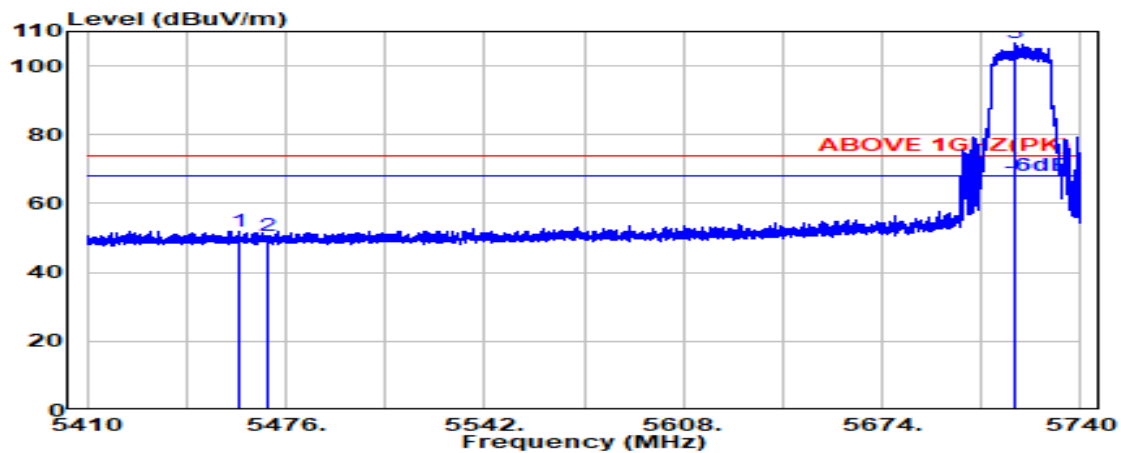

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.800	34.10	8.66	39.07	48.32	52.01	74.00	21.99	Peak
5470.000	34.10	8.67	39.07	46.75	50.44	74.00	23.56	Peak
@ 5718.050	33.54	8.92	39.14	103.22	106.55	---	---	Peak

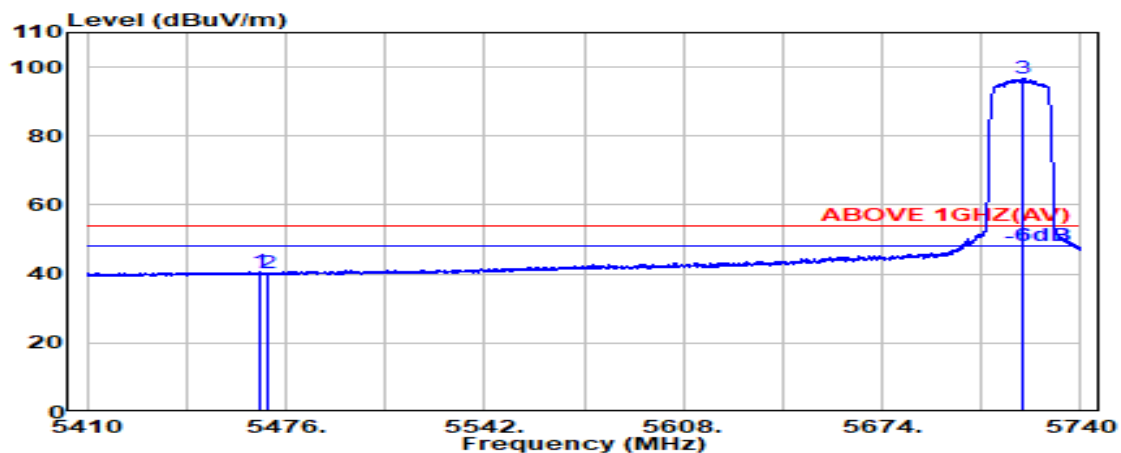


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.10	8.66	39.07	36.86	40.55	54.00	13.45	Average
5470.000	34.10	8.67	39.07	36.53	40.22	54.00	13.78	Average
@ 5721.050	33.57	8.92	39.14	93.30	96.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

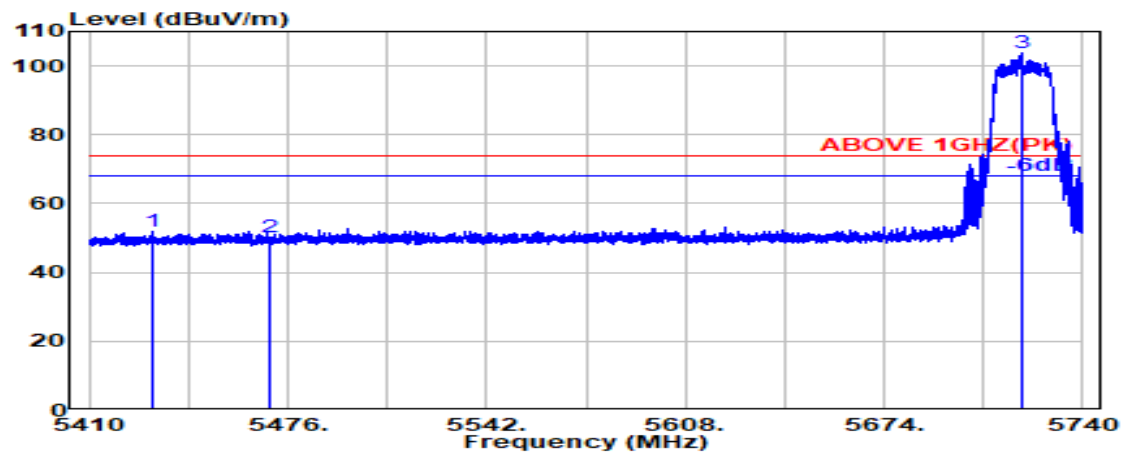

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5430.750	34.06	8.63	39.07	48.25	51.87	74.00	22.13	Peak
5470.000	34.10	8.67	39.07	46.61	50.30	74.00	23.70	Peak
@ 5719.700	33.56	8.92	39.14	100.49	103.83	---	---	Peak

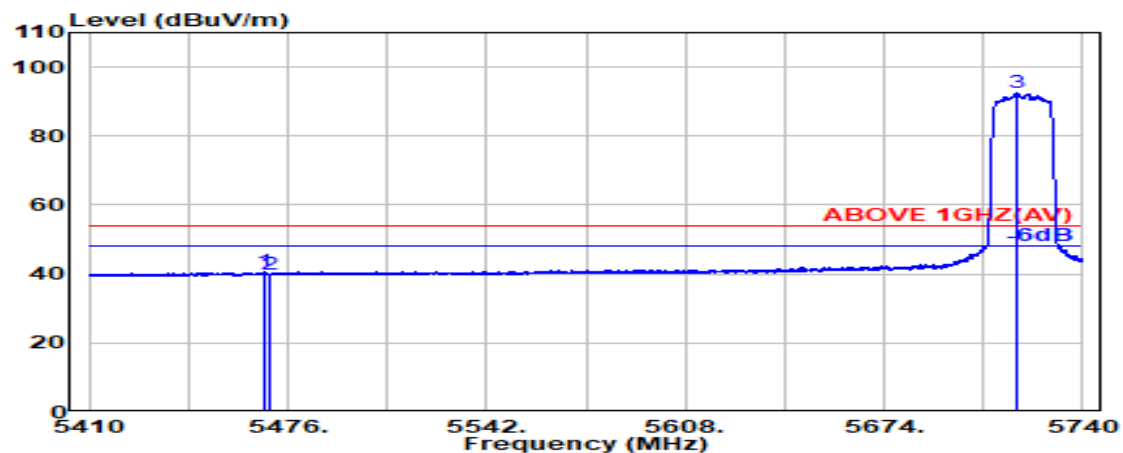

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.900	34.10	8.67	39.07	36.89	40.58	54.00	13.42	Average
5470.000	34.10	8.67	39.07	36.15	39.85	54.00	14.15	Average
@ 5718.350	33.55	8.92	39.14	89.10	92.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720 MHz

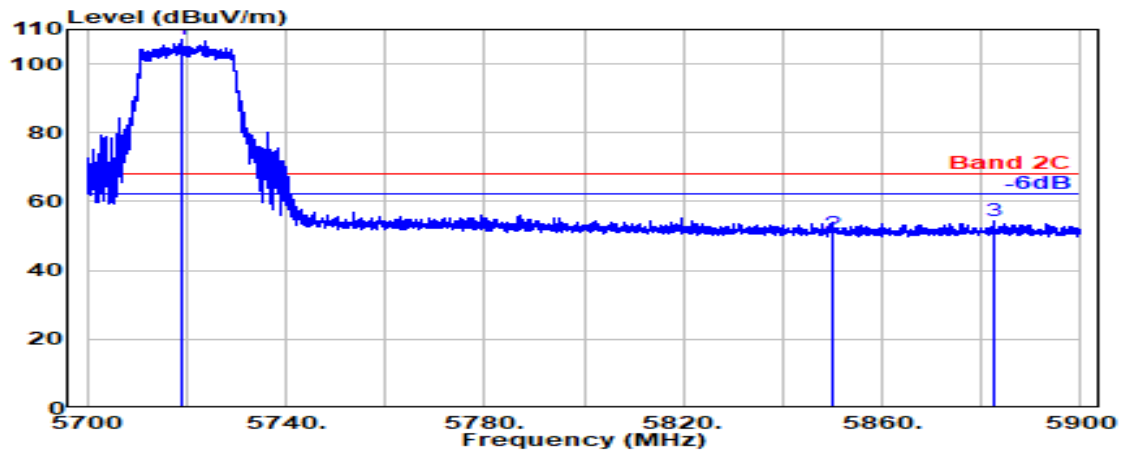

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5718.900	33.55	8.92	39.14	103.74	107.08	---	---	Peak
5850.000	33.90	9.05	39.18	46.97	50.74	68.20	17.46	Peak
5882.600	34.10	9.08	39.19	50.22	54.21	68.20	13.99	Peak

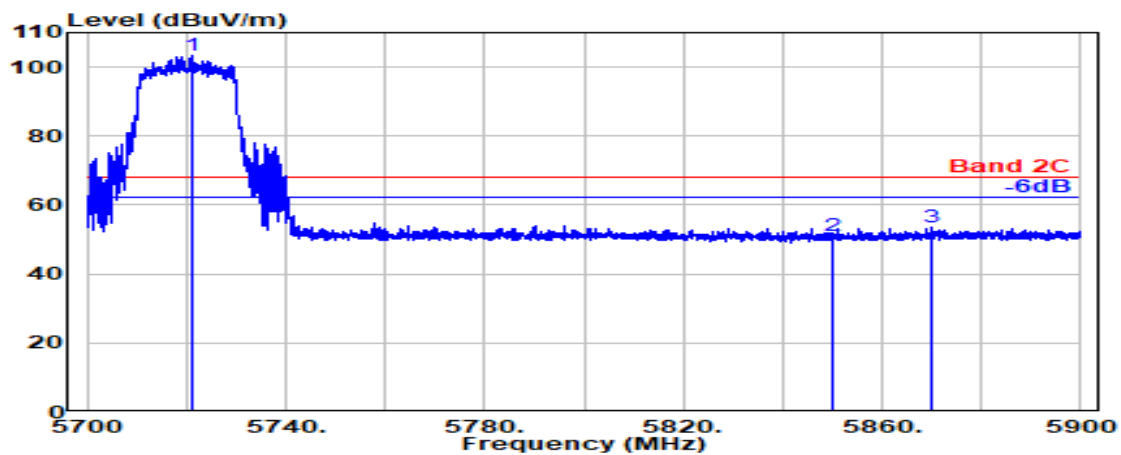

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.050	33.57	8.92	39.14	99.81	103.17	---	---	Peak
5850.000	33.90	9.05	39.18	47.26	51.03	68.20	17.17	Peak
5869.800	34.02	9.07	39.18	49.78	53.69	68.20	14.51	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

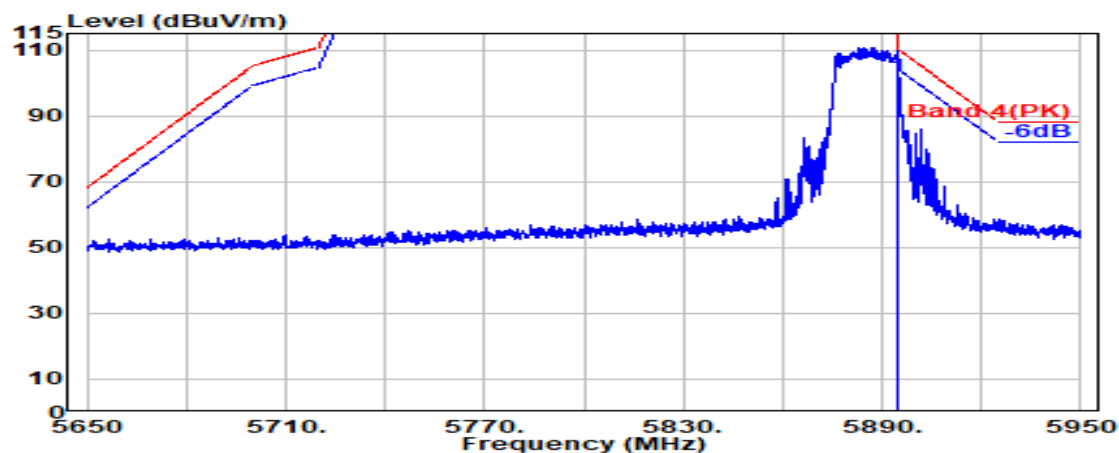

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	98.08	102.15	110.20	8.05	Peak

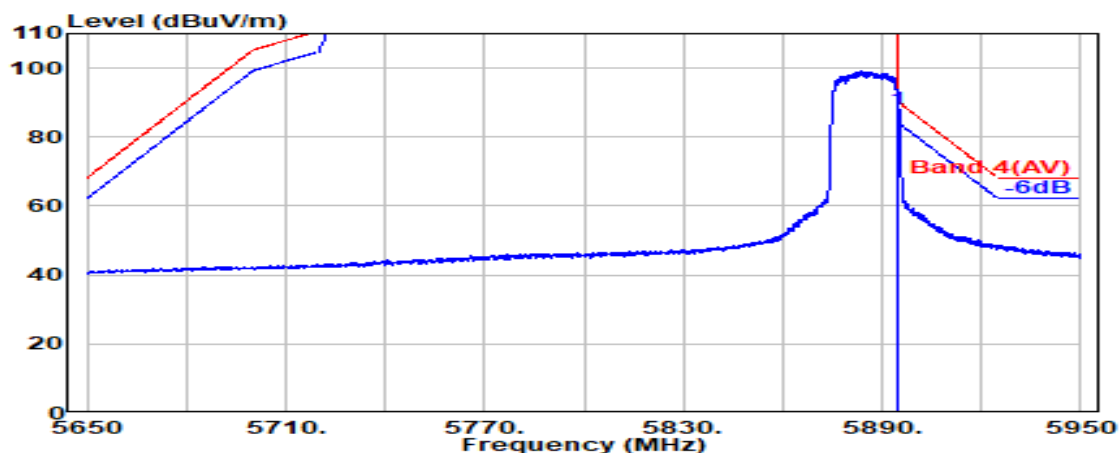

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	83.98	88.05	90.20	2.15	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

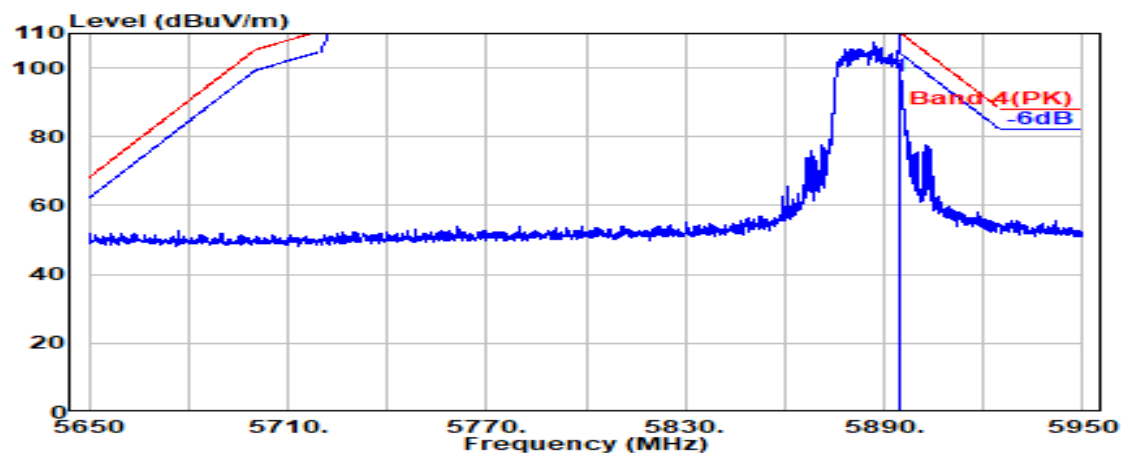

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	93.63	97.70	110.20	12.50	Peak

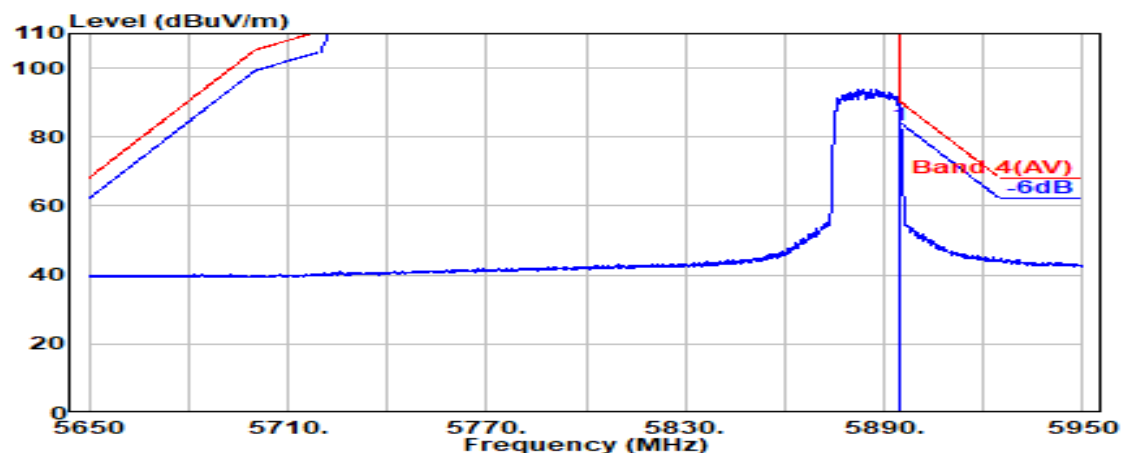


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.35	83.42	90.20	6.78	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

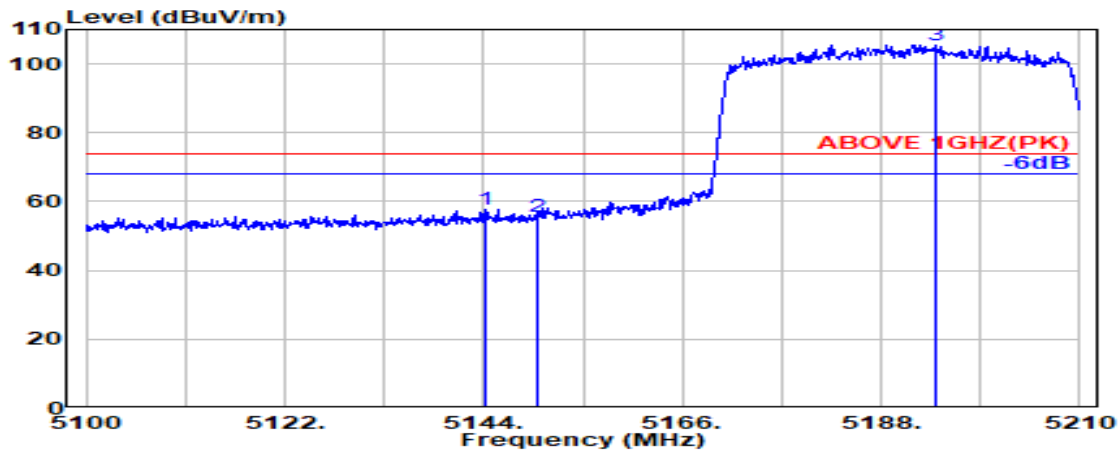

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.100	33.59	8.32	39.09	54.80	57.61	74.00	16.39	Peak
5150.000	33.60	8.33	39.09	52.61	55.44	74.00	18.56	Peak
@ 5194.000	33.60	8.38	39.09	102.65	105.54	---	---	Peak

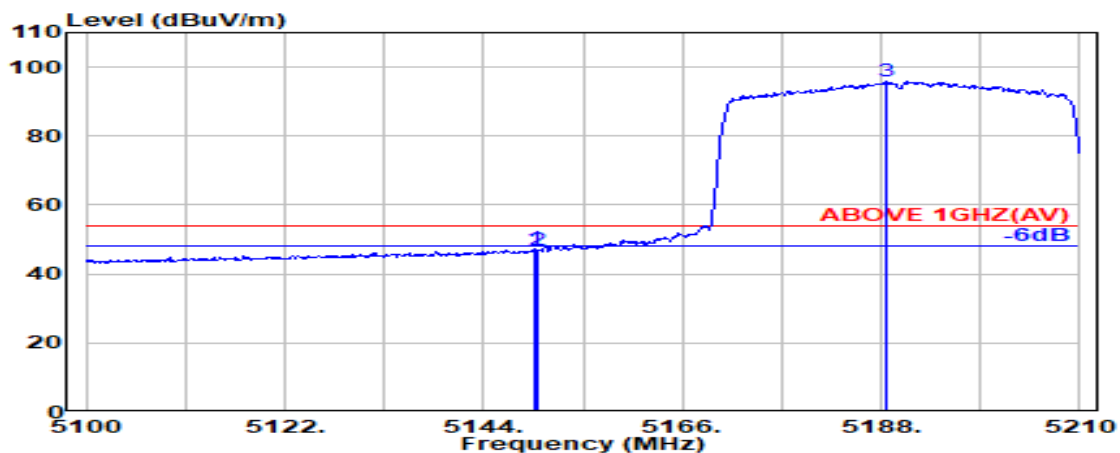

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.33	39.09	44.30	47.14	54.00	6.86	Average
5150.000	33.60	8.33	39.09	43.93	46.76	54.00	7.24	Average
@ 5188.600	33.60	8.37	39.09	93.19	96.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

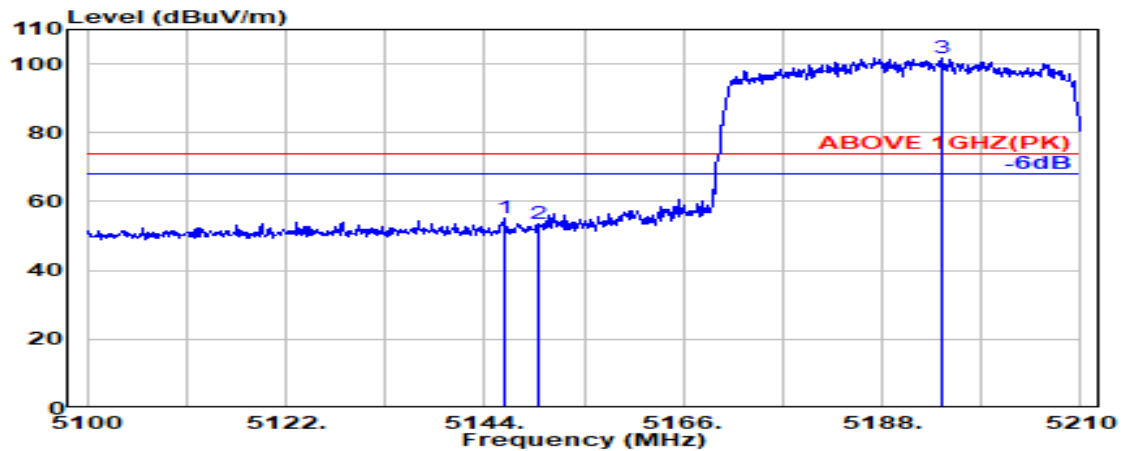

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.300	33.59	8.32	39.09	52.45	55.28	74.00	18.72	Peak
5150.000	33.60	8.33	39.09	50.59	53.43	74.00	20.57	Peak
@ 5194.500	33.60	8.38	39.09	98.81	101.70	---	---	Peak

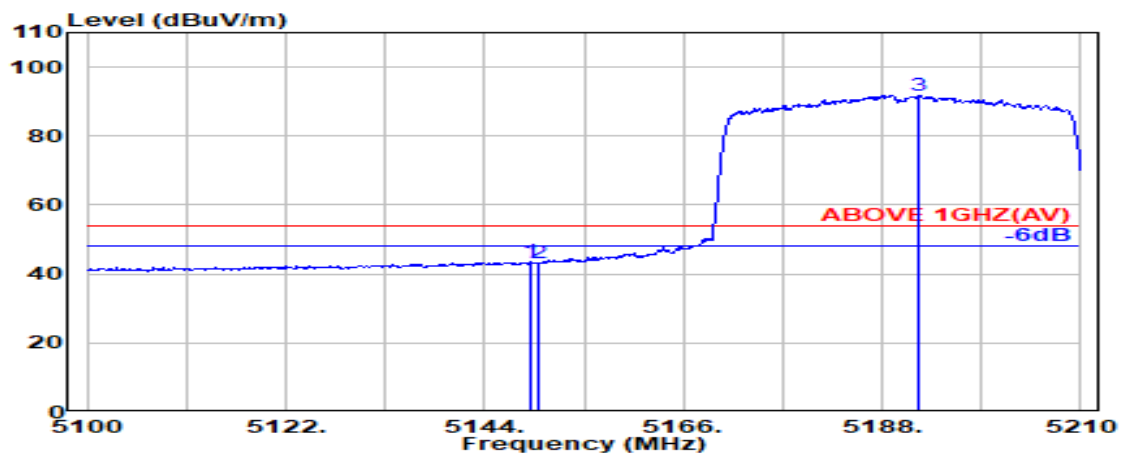

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	33.60	8.33	39.09	40.68	43.52	54.00	10.48	Average
5150.000	33.60	8.33	39.09	40.45	43.28	54.00	10.72	Average
@ 5192.100	33.60	8.37	39.09	88.91	91.80	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

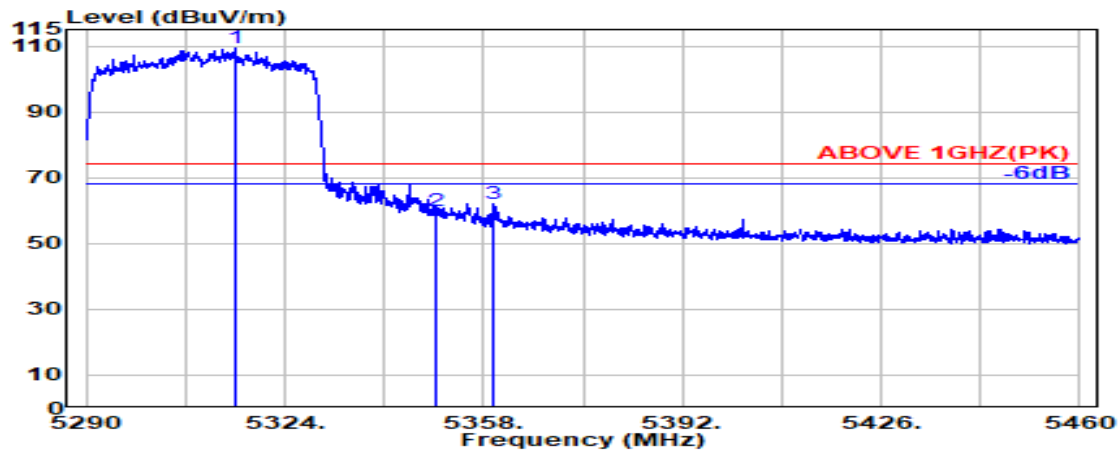

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.600	33.63	8.51	39.08	106.39	109.45	---	---	Peak
5350.000	33.70	8.54	39.08	56.69	59.85	74.00	14.15	Peak
5359.600	33.76	8.55	39.08	58.99	62.22	74.00	11.78	Peak

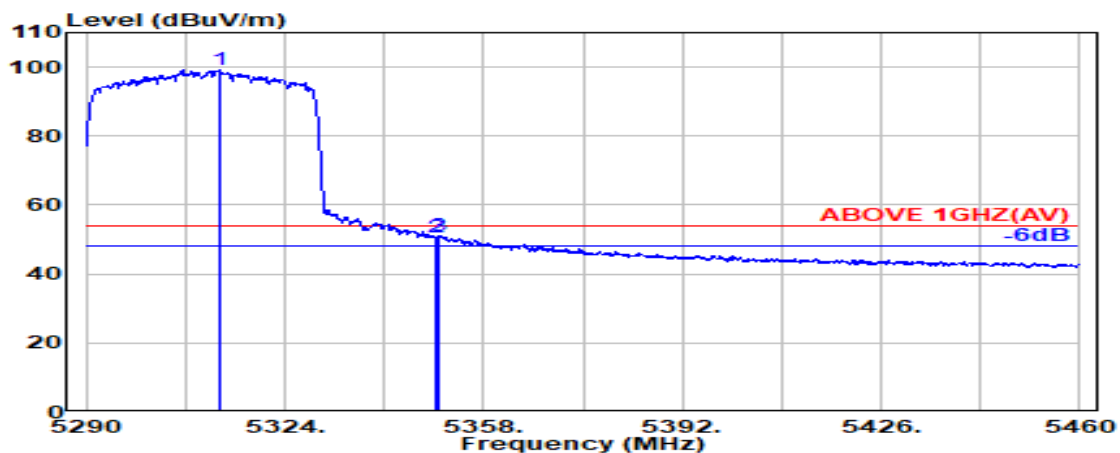

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.700	33.63	8.50	39.08	96.21	99.26	---	---	Average
5350.000	33.70	8.54	39.08	47.59	50.76	54.00	3.24	Average
5350.200	33.70	8.54	39.08	47.87	51.03	54.00	2.97	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

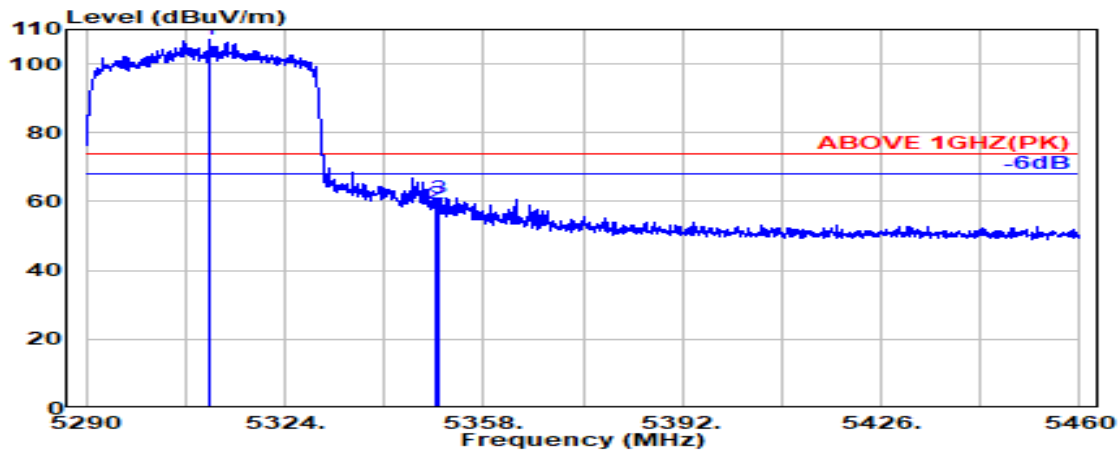

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5311.200	33.62	8.50	39.08	103.99	107.03	---	---	Peak
5350.000	33.70	8.54	39.08	56.06	59.22	74.00	14.78	Peak
5350.500	33.70	8.54	39.08	57.91	61.07	74.00	12.93	Peak

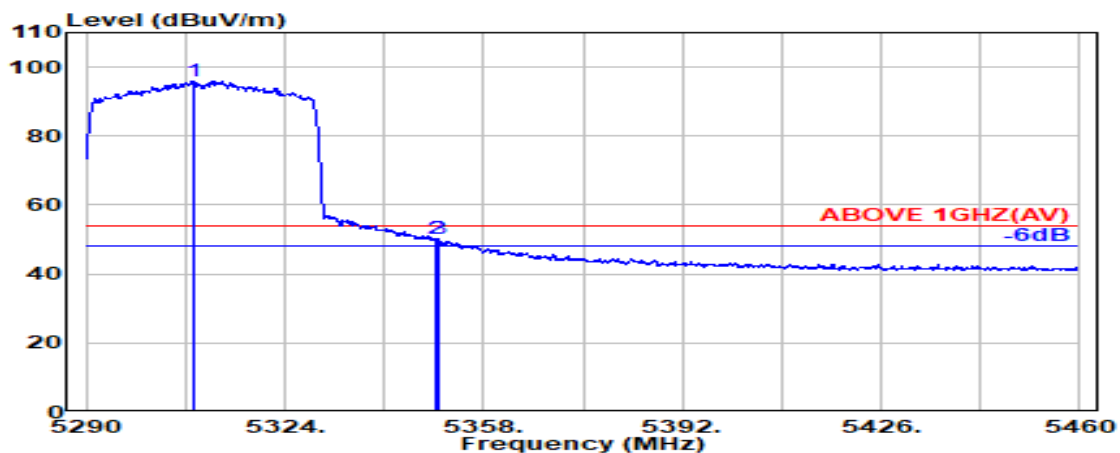

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.400	33.62	8.50	39.08	92.90	95.93	---	---	Average
5350.000	33.70	8.54	39.08	47.12	50.28	54.00	3.72	Average
5350.300	33.70	8.54	39.08	46.96	50.13	54.00	3.87	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

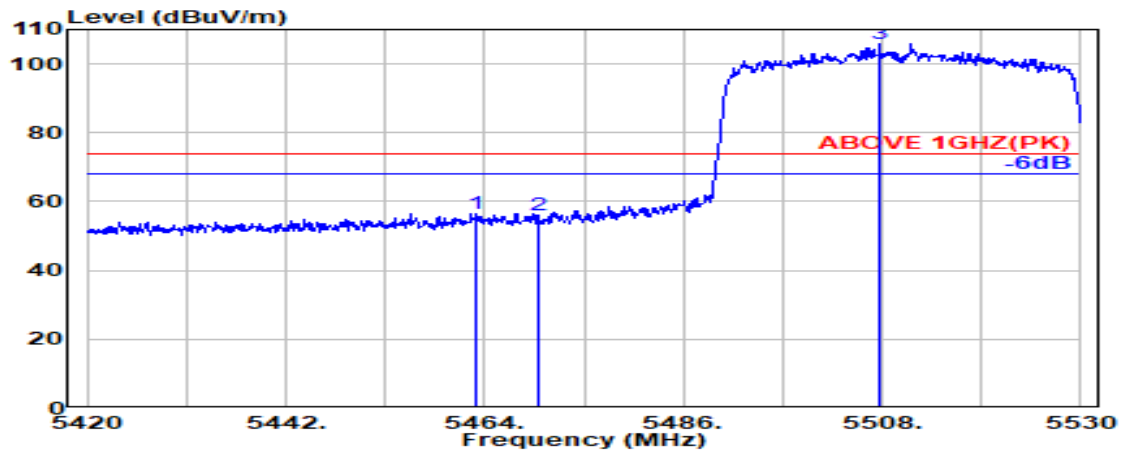

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.10	8.66	39.07	52.95	56.64	74.00	17.36	Peak
5470.000	34.10	8.67	39.07	52.20	55.89	74.00	18.11	Peak
@ 5507.700	34.08	8.71	39.07	102.16	105.88	---	---	Peak

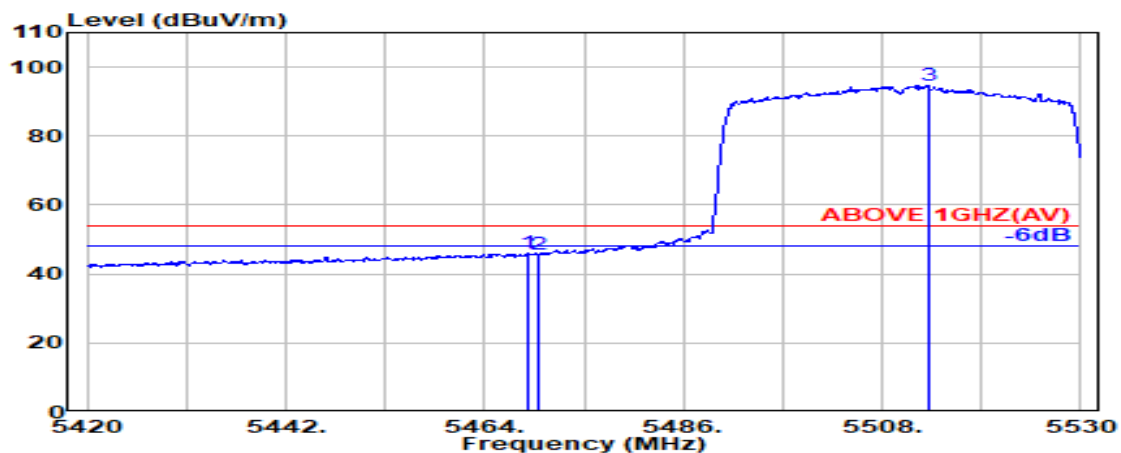


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.07	42.32	46.02	54.00	7.98	Average
5470.000	34.10	8.67	39.07	41.88	45.58	54.00	8.42	Average
@ 5513.100	34.07	8.71	39.07	91.08	94.79	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

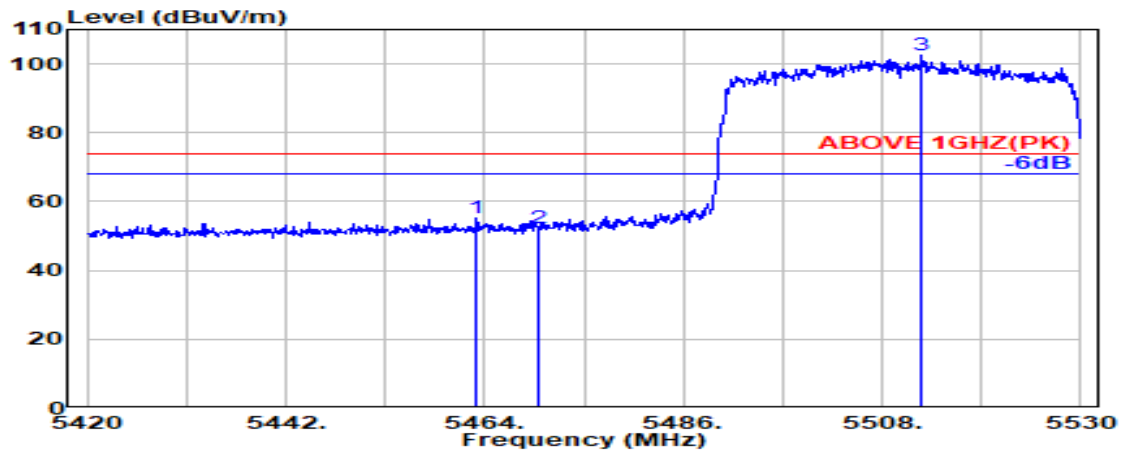

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.10	8.66	39.07	51.57	55.25	74.00	18.75	Peak
5470.000	34.10	8.67	39.07	48.58	52.28	74.00	21.72	Peak
@ 5512.400	34.08	8.71	39.07	98.87	102.58	---	---	Peak

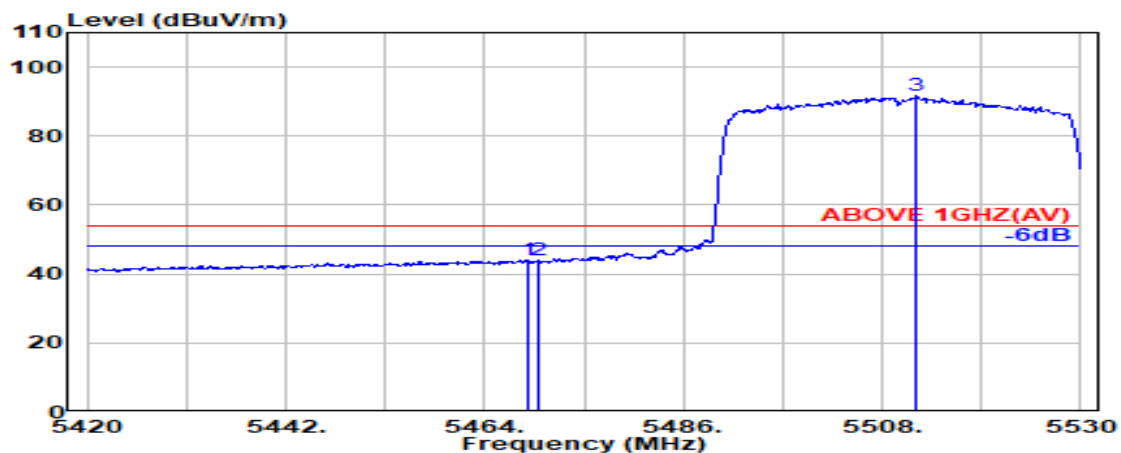


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.07	40.16	43.86	54.00	10.14	Average
5470.000	34.10	8.67	39.07	40.14	43.84	54.00	10.16	Average
@ 5511.800	34.08	8.71	39.07	87.86	91.57	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

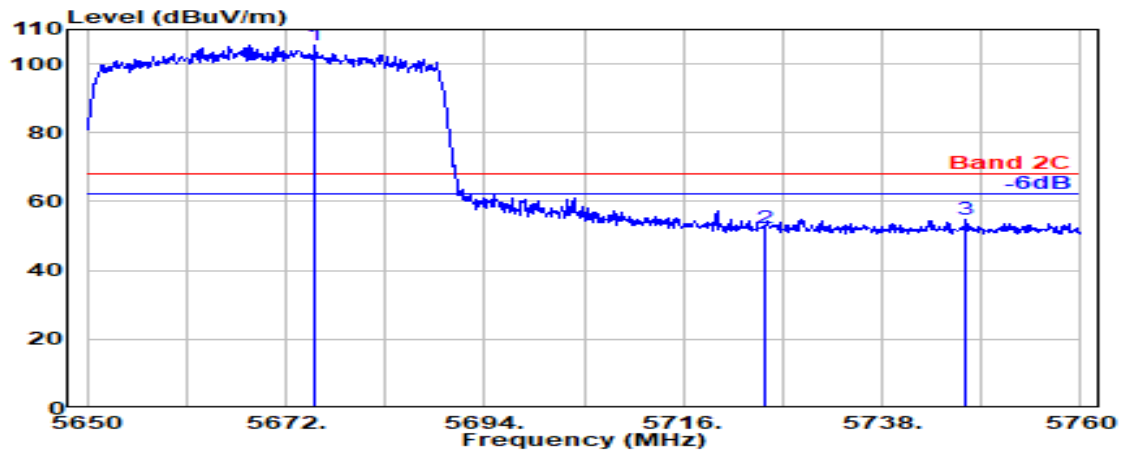

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.200	33.55	8.88	39.12	102.06	105.36	---	---	Peak
5725.000	33.60	8.92	39.14	48.94	52.33	68.20	15.87	Peak
5747.300	33.78	8.95	39.15	51.15	54.73	68.20	13.47	Peak

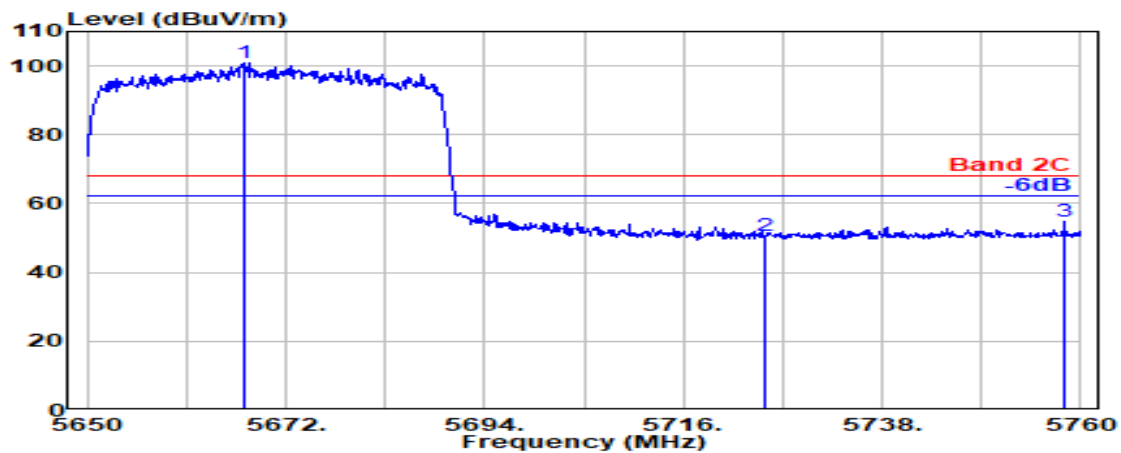

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.500	33.59	8.87	39.12	97.54	100.88	---	---	Peak
5725.000	33.60	8.92	39.14	47.42	50.81	68.20	17.39	Peak
5758.200	33.82	8.96	39.15	51.15	54.78	68.20	13.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

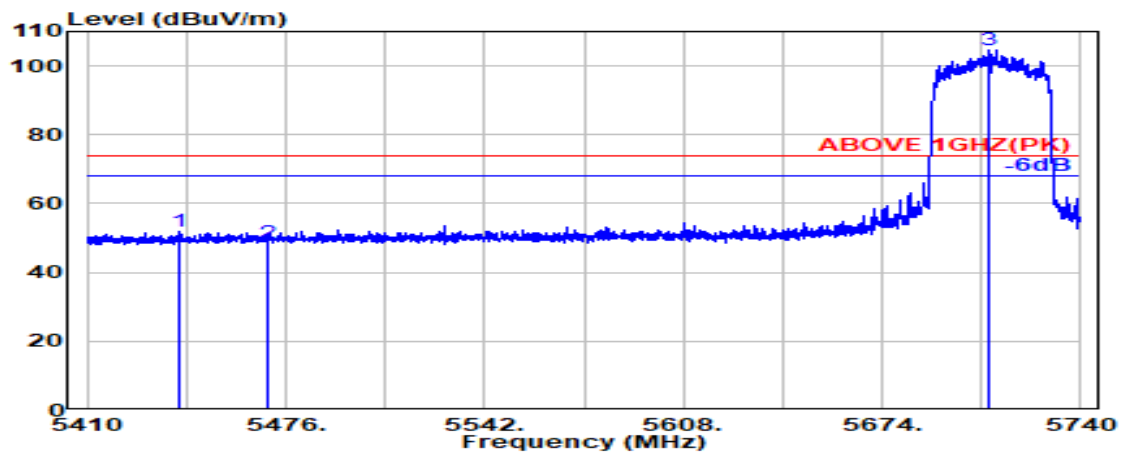

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.000	34.08	8.64	39.07	48.27	51.91	74.00	22.09	Peak
5470.000	34.10	8.67	39.07	44.97	48.66	74.00	25.34	Peak
@ 5709.400	33.48	8.91	39.13	101.37	104.62	---	---	Peak

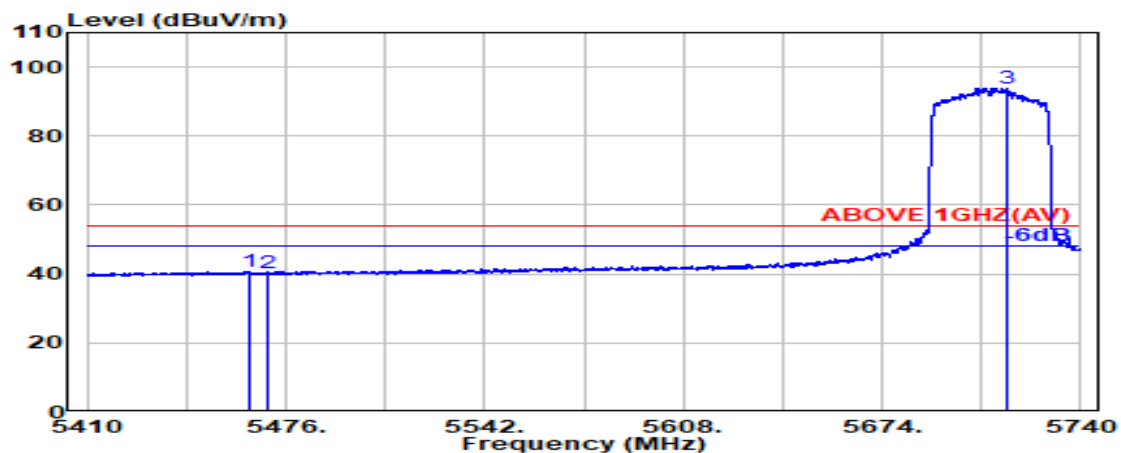


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.600	34.10	8.66	39.07	36.85	40.54	54.00	13.46	Average
5470.000	34.10	8.67	39.07	36.40	40.10	54.00	13.90	Average
@ 5715.200	33.52	8.92	39.14	90.66	93.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

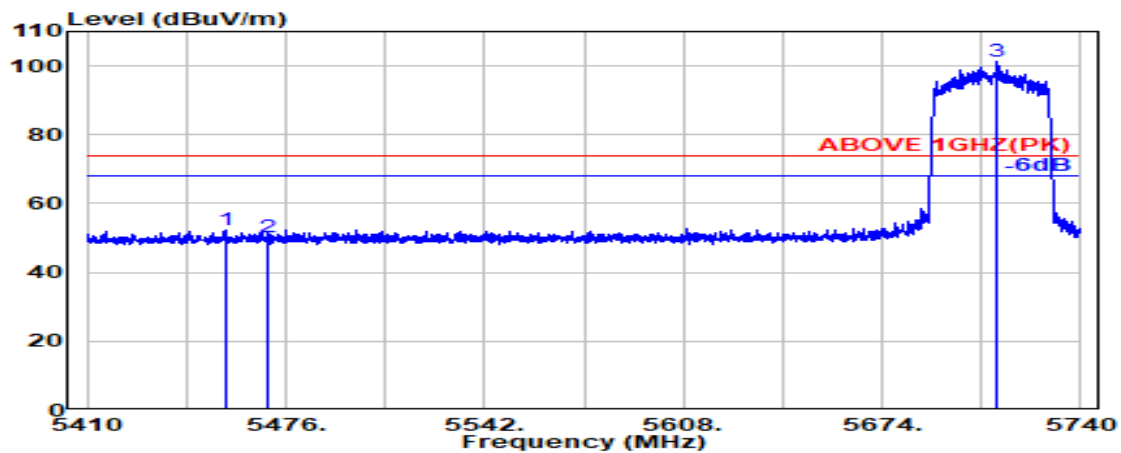

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.000	34.10	8.65	39.07	48.48	52.16	74.00	21.84	Peak
5470.000	34.10	8.67	39.07	46.47	50.17	74.00	23.83	Peak
@ 5712.400	33.50	8.91	39.14	98.06	101.34	---	---	Peak

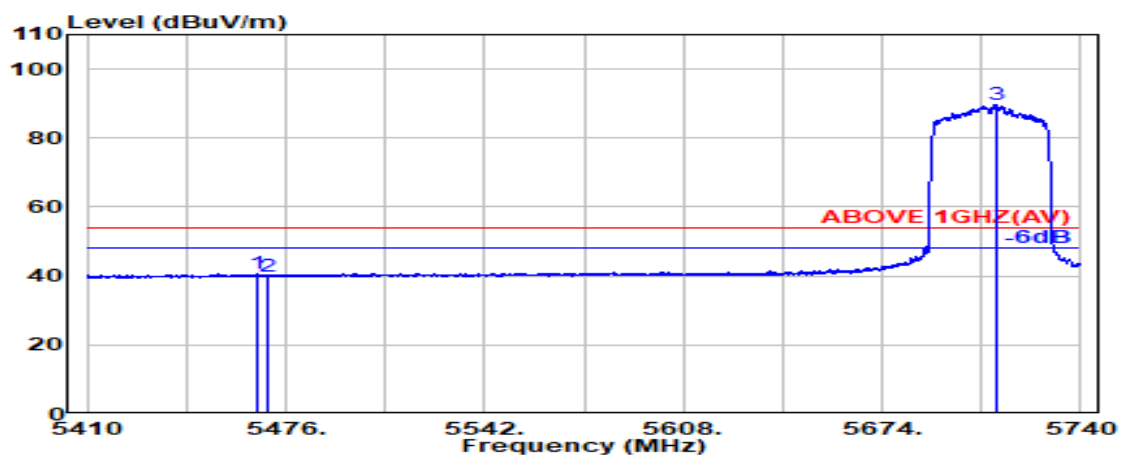

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.10	8.66	39.07	36.84	40.54	54.00	13.46	Average
5470.000	34.10	8.67	39.07	36.25	39.94	54.00	14.06	Average
@ 5711.900	33.50	8.91	39.14	86.27	89.54	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710 MHz

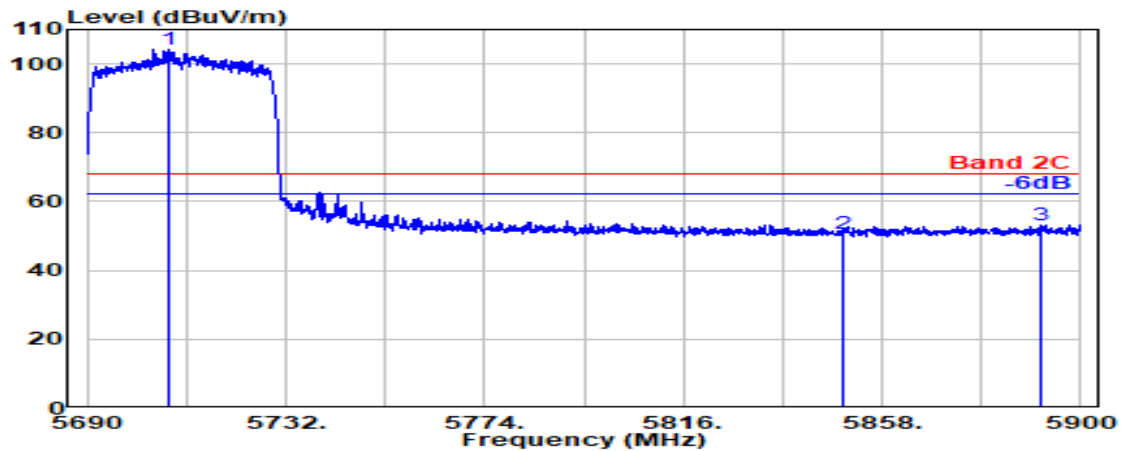

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.400	33.46	8.91	39.13	100.82	104.05	---	---	Peak
5850.000	33.90	9.05	39.18	46.93	50.70	68.20	17.50	Peak
5891.300	34.15	9.09	39.19	49.15	53.20	68.20	15.00	Peak

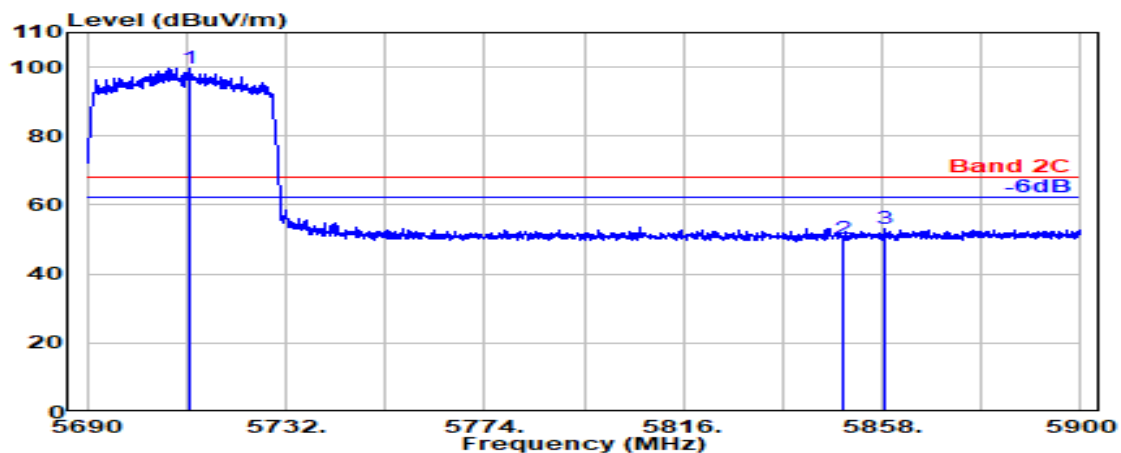

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5711.900	33.50	8.91	39.14	96.43	99.70	---	---	Peak
5850.000	33.90	9.05	39.18	46.27	50.04	68.20	18.16	Peak
5858.300	33.95	9.05	39.18	49.22	53.05	68.20	15.15	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

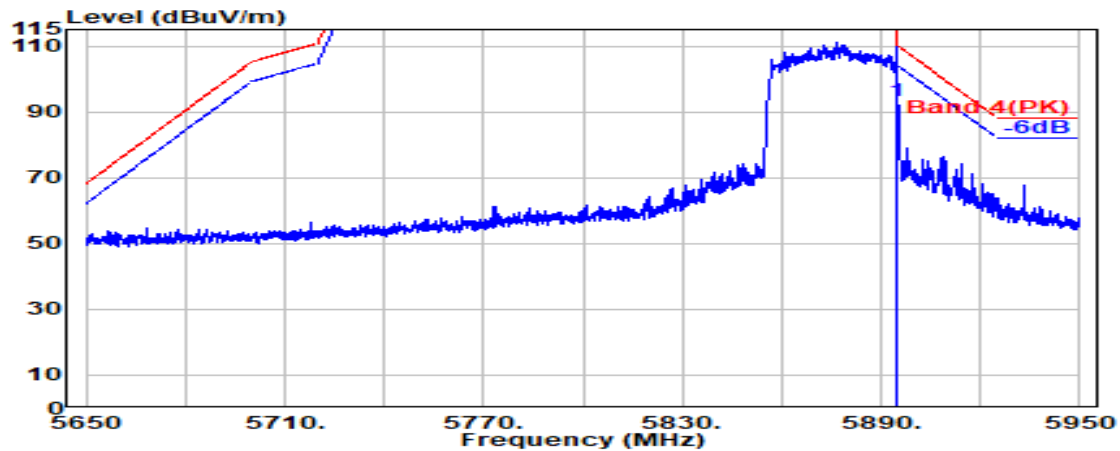

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	89.24	93.31	110.20	16.89	Peak

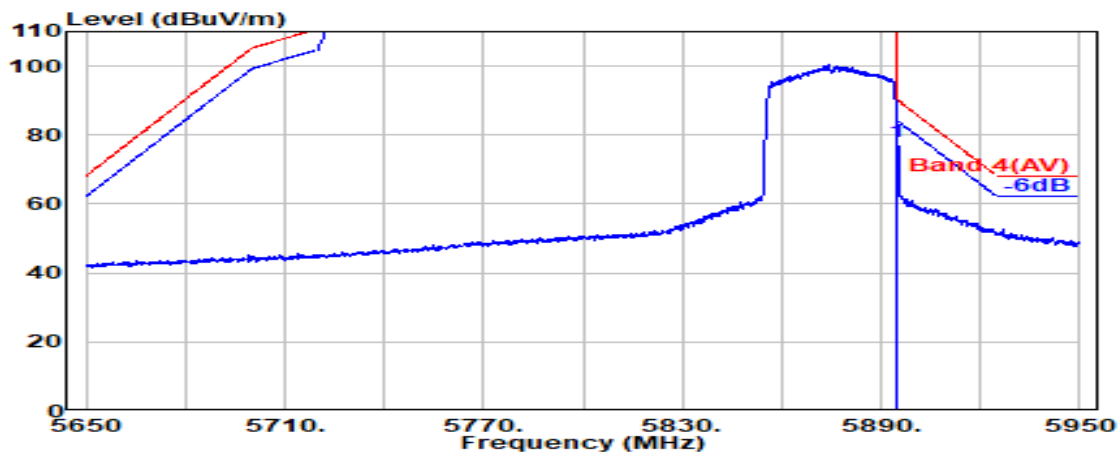

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	73.86	77.93	90.20	12.27	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

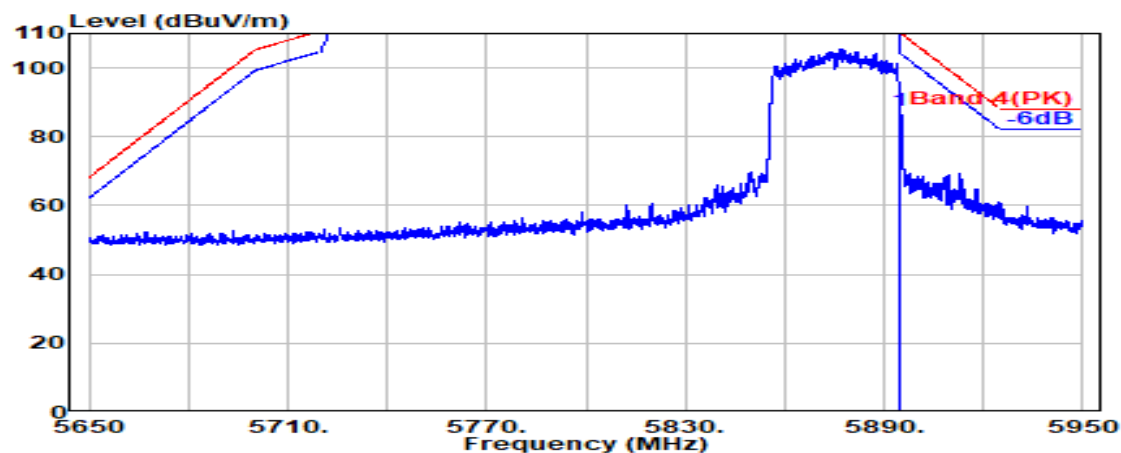

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	83.44	87.51	110.20	22.69	Peak

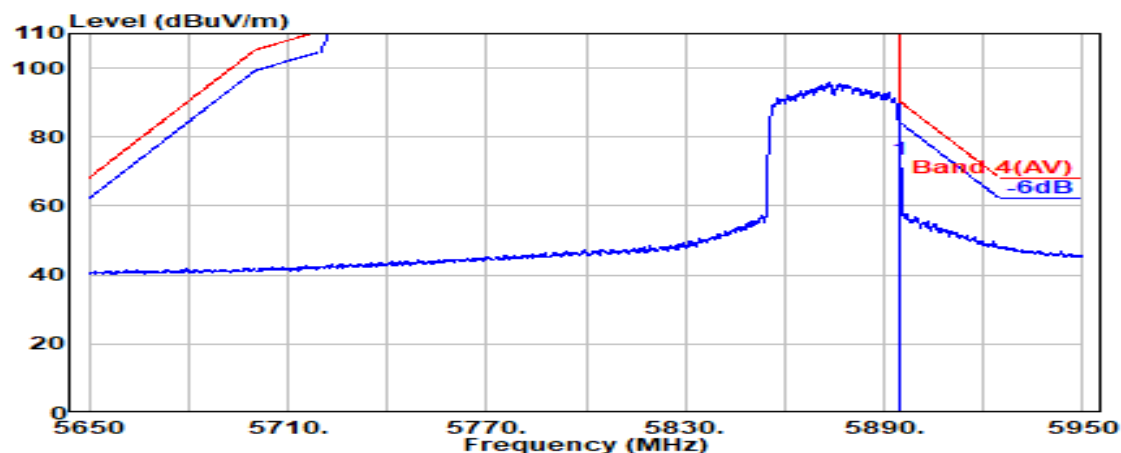

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	69.27	73.34	90.20	16.86	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

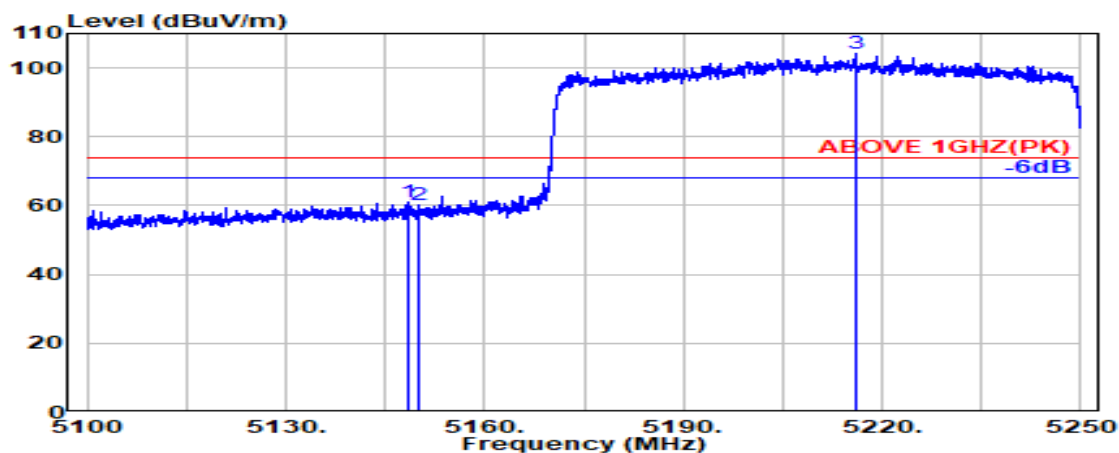

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.300	33.60	8.33	39.09	58.24	61.08	74.00	12.92	Peak
5150.000	33.60	8.33	39.09	57.23	60.07	74.00	13.93	Peak
@ 5215.950	33.63	8.40	39.09	101.22	104.16	---	---	Peak

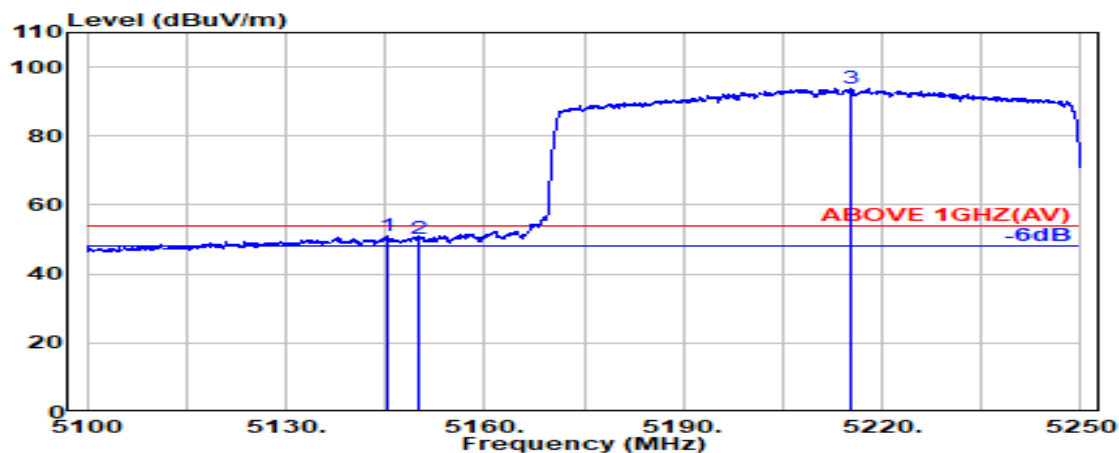


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.200	33.59	8.32	39.09	48.07	50.89	54.00	3.11	Average
5150.000	33.60	8.33	39.09	47.56	50.40	54.00	3.60	Average
@ 5215.200	33.63	8.40	39.09	90.92	93.86	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

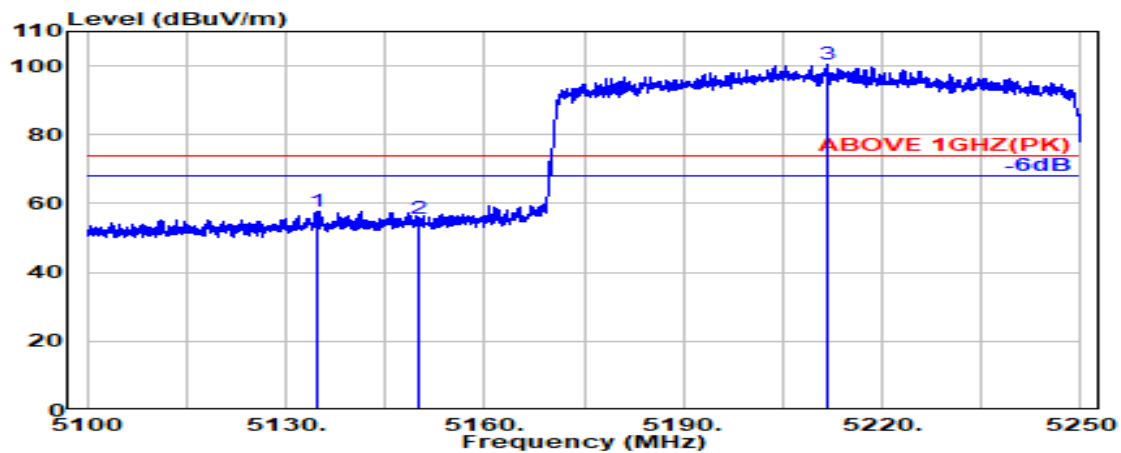

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.700	33.57	8.31	39.09	54.92	57.70	74.00	16.30	Peak
5150.000	33.60	8.33	39.09	52.78	55.62	74.00	18.38	Peak
@ 5211.850	33.62	8.39	39.09	97.39	100.32	---	---	Peak

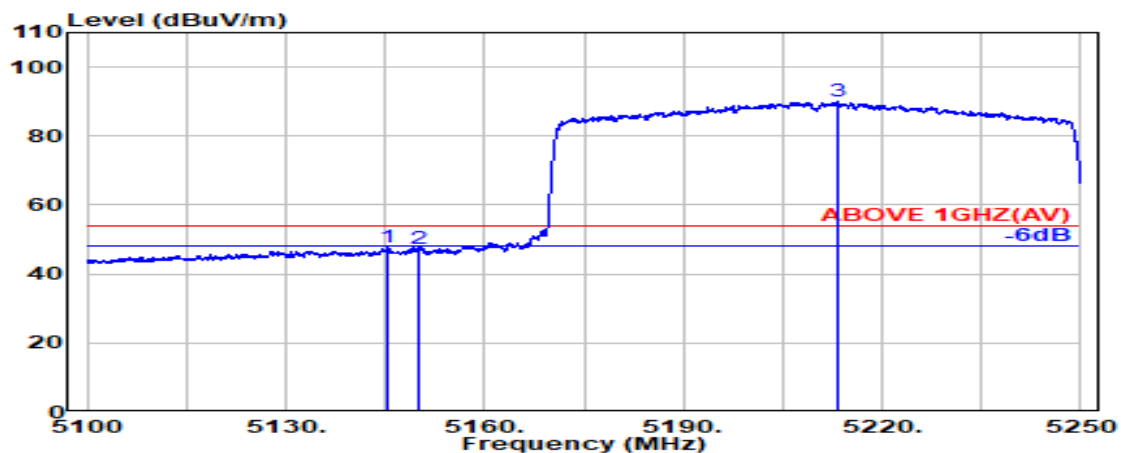

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.500	33.59	8.32	39.09	44.80	47.62	54.00	6.38	Average
5150.000	33.60	8.33	39.09	44.51	47.35	54.00	6.65	Average
@ 5213.250	33.63	8.40	39.09	87.23	90.16	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

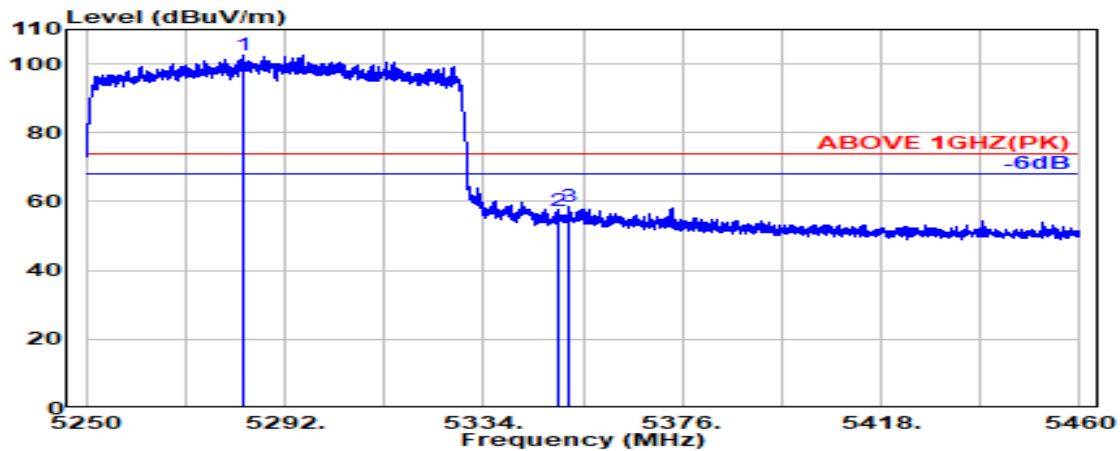

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5283.350	33.63	8.47	39.08	99.66	102.68	---	---	Peak
5350.000	33.70	8.54	39.08	54.14	57.30	74.00	16.70	Peak
5352.000	33.71	8.54	39.08	55.26	58.44	74.00	15.56	Peak

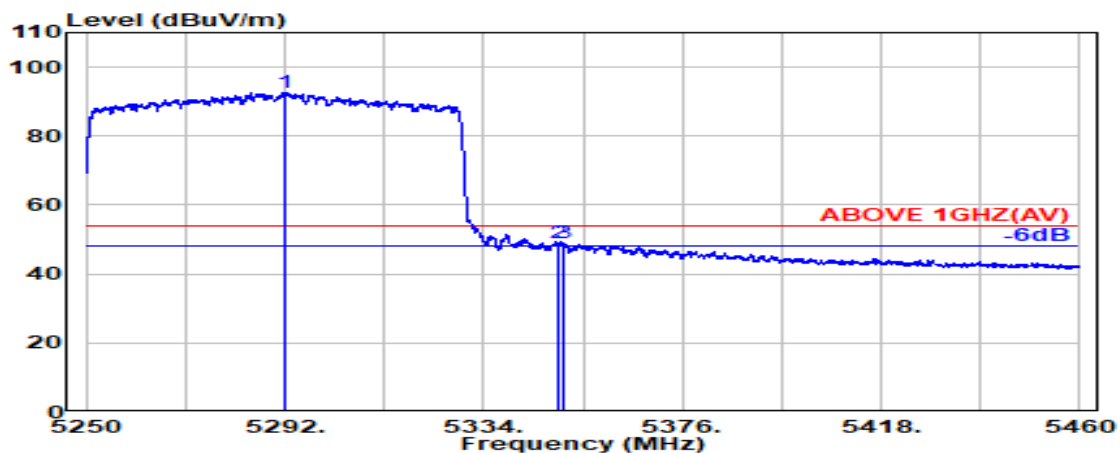


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.800	33.62	8.48	39.08	89.72	92.74	---	---	Average
5350.000	33.70	8.54	39.08	45.68	48.84	54.00	5.16	Average
5351.050	33.71	8.54	39.08	45.92	49.09	54.00	4.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

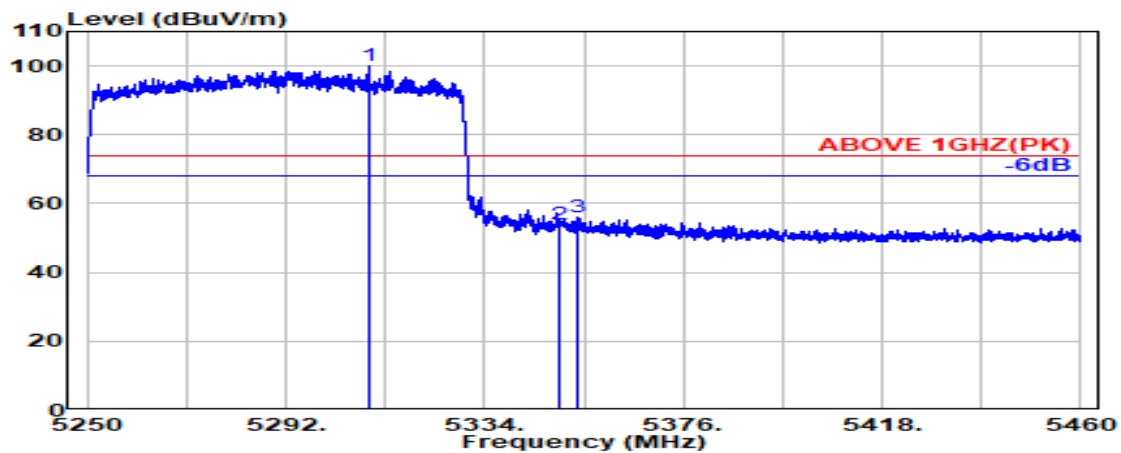

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5309.400	33.62	8.50	39.08	96.88	99.92	---	---	Peak
5350.000	33.70	8.54	39.08	50.64	53.81	74.00	20.19	Peak
5353.750	33.72	8.55	39.08	52.72	55.91	74.00	18.09	Peak

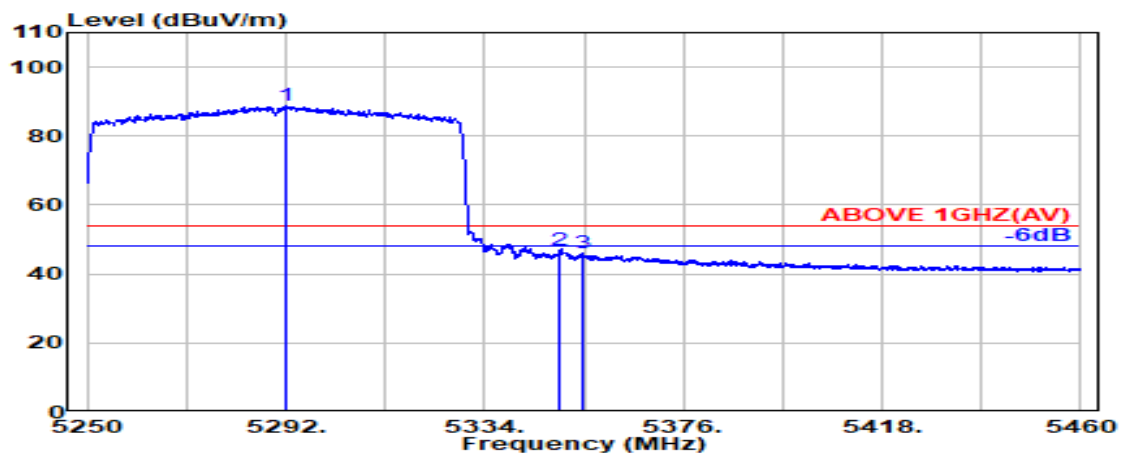

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.000	33.62	8.48	39.08	85.62	88.64	---	---	Average
5350.000	33.70	8.54	39.08	43.91	47.07	54.00	6.93	Average
5354.650	33.73	8.55	39.08	43.04	46.24	54.00	7.76	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

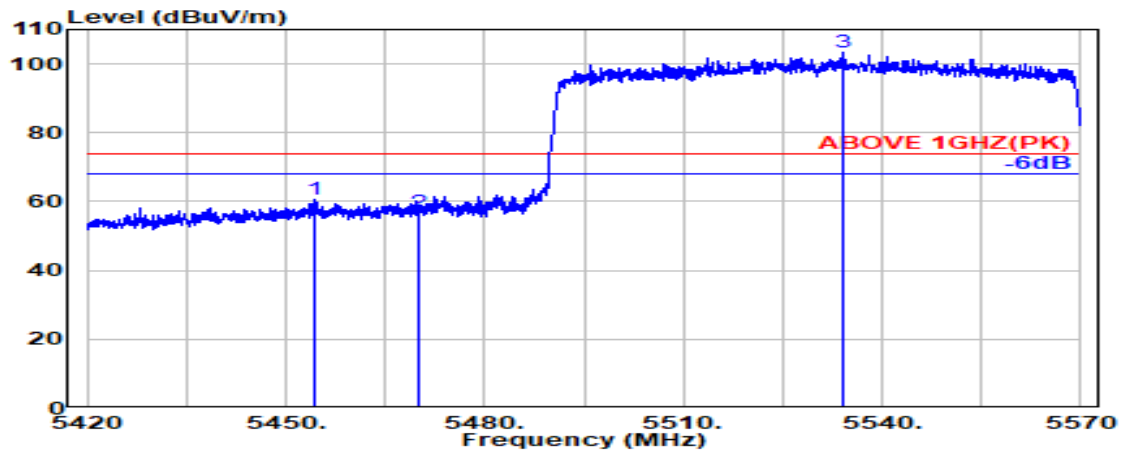

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.500	34.10	8.65	39.07	57.06	60.74	74.00	13.26	Peak
5470.000	34.10	8.67	39.07	53.06	56.75	74.00	17.25	Peak
@ 5534.100	34.03	8.73	39.08	99.65	103.34	---	---	Peak

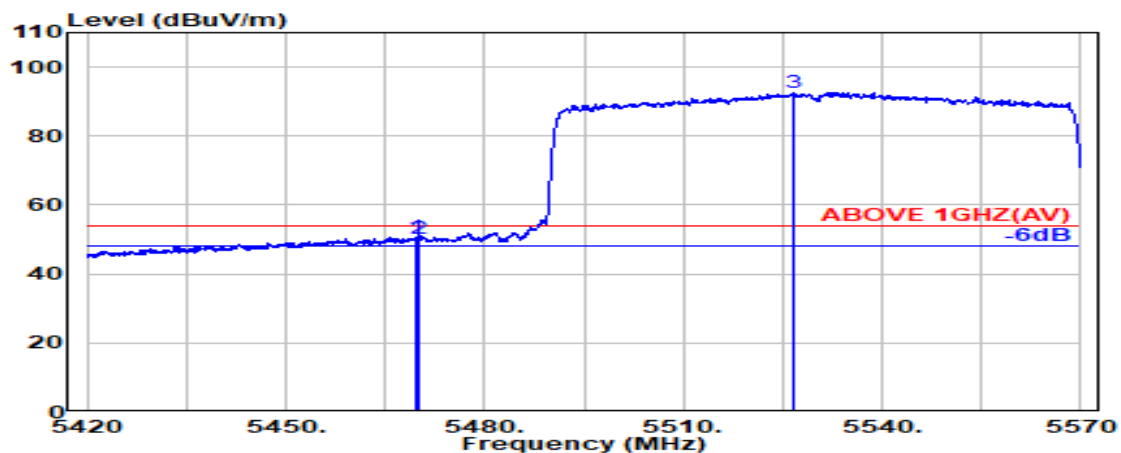


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.750	34.10	8.67	39.07	47.09	50.79	54.00	3.21	Average
5470.000	34.10	8.67	39.07	46.69	50.39	54.00	3.61	Average
@ 5526.600	34.05	8.73	39.08	89.04	92.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

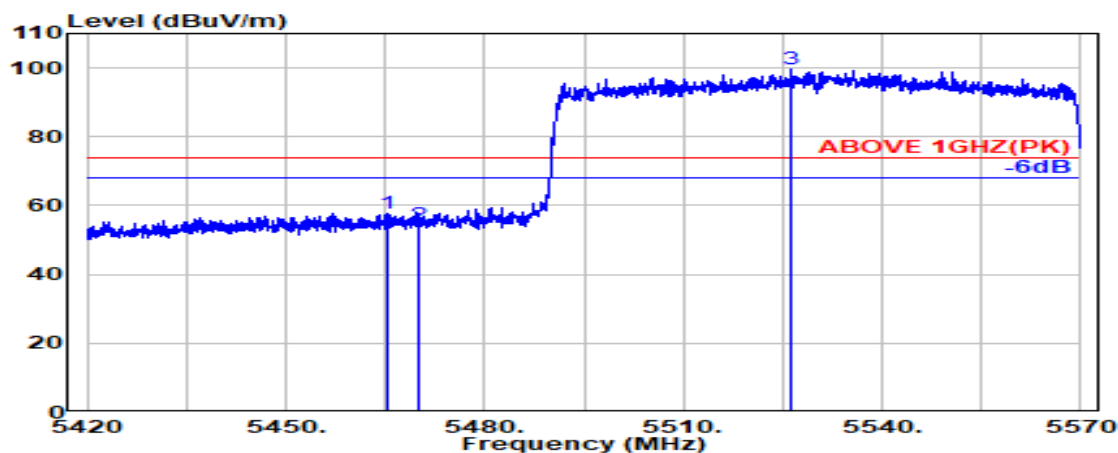

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.10	8.66	39.07	53.91	57.60	74.00	16.40	Peak
5470.000	34.10	8.67	39.07	50.72	54.41	74.00	19.59	Peak
@ 5526.250	34.05	8.73	39.08	96.09	99.79	---	---	Peak

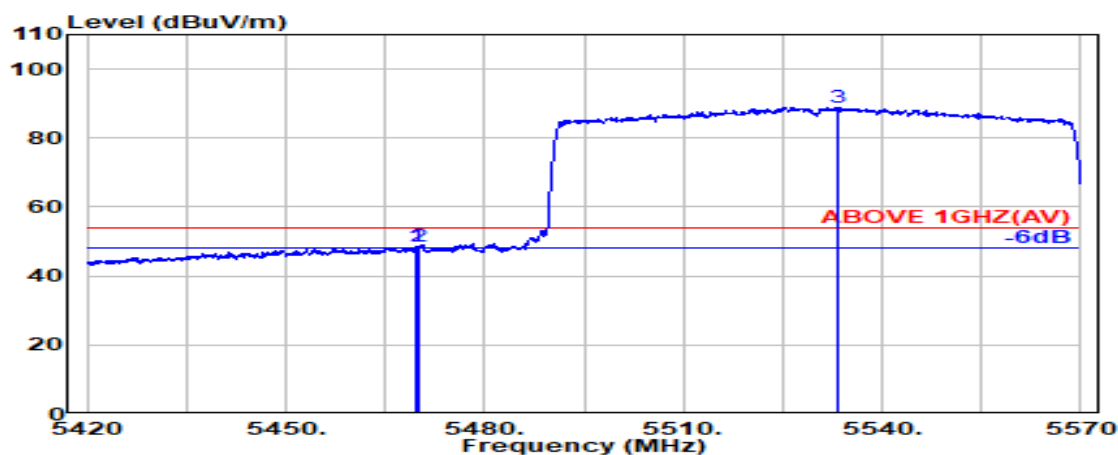

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.07	44.81	48.51	54.00	5.49	Average
5470.000	34.10	8.67	39.07	44.84	48.53	54.00	5.47	Average
@ 5533.350	34.03	8.73	39.08	85.20	88.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

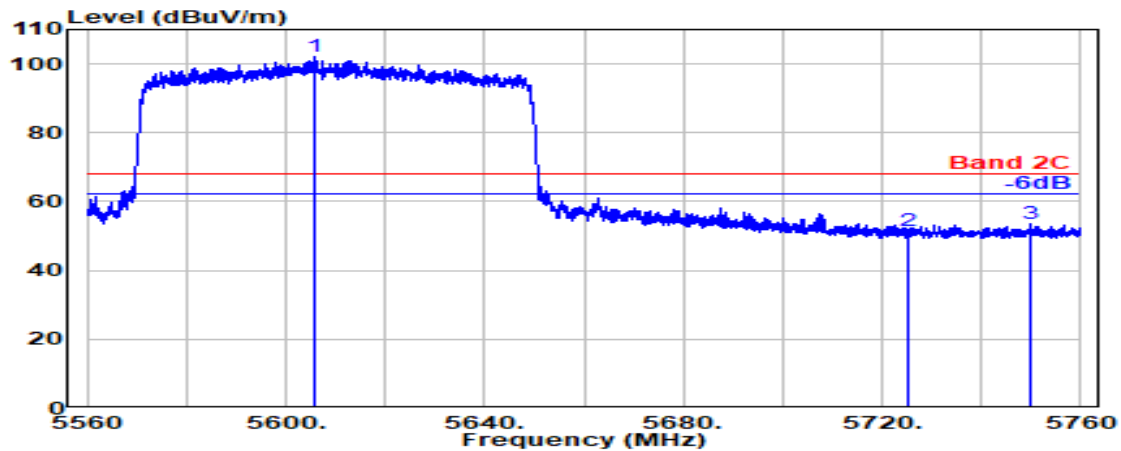

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.900	33.79	8.81	39.10	98.66	102.15	---	---	Peak
5725.000	33.60	8.92	39.14	47.90	51.29	68.20	16.91	Peak
5750.050	33.80	8.95	39.15	49.80	53.41	68.20	14.79	Peak

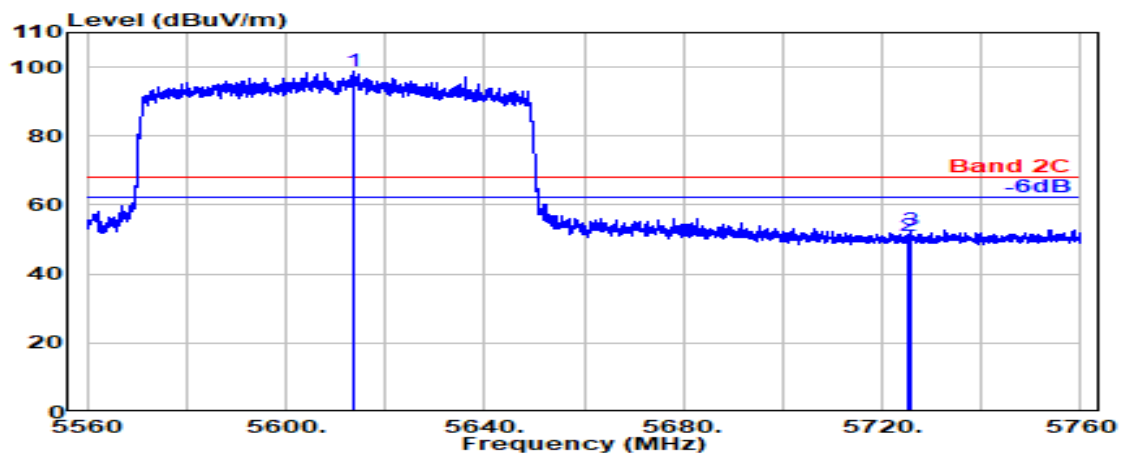

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5613.400	33.77	8.81	39.11	95.23	98.71	---	---	Peak
5725.000	33.60	8.92	39.14	47.87	51.25	68.20	16.95	Peak
5725.800	33.61	8.93	39.14	49.52	52.92	68.20	15.28	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

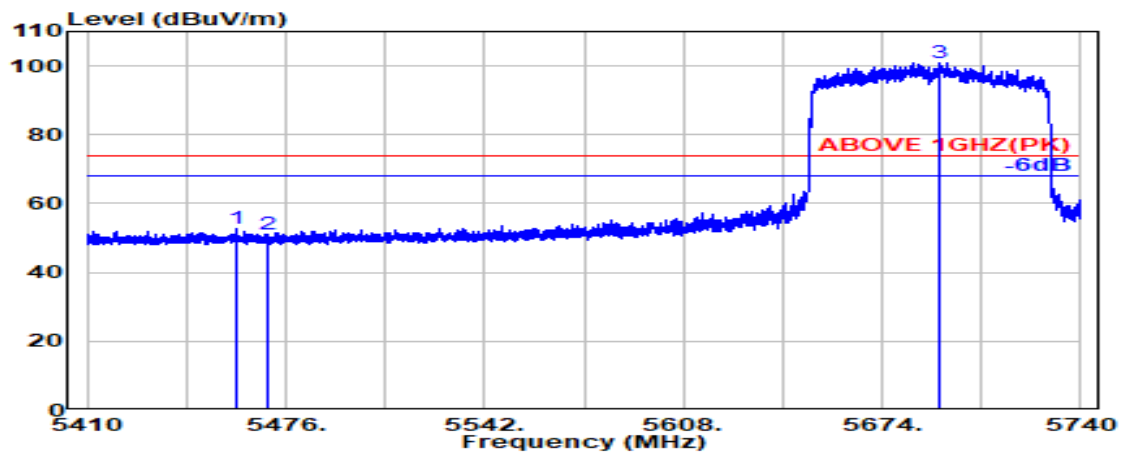

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.800	34.10	8.66	39.07	49.18	52.87	74.00	21.13	Peak
5470.000	34.10	8.67	39.07	47.44	51.14	74.00	22.86	Peak
@ 5693.400	33.44	8.89	39.13	97.64	100.84	---	---	Peak

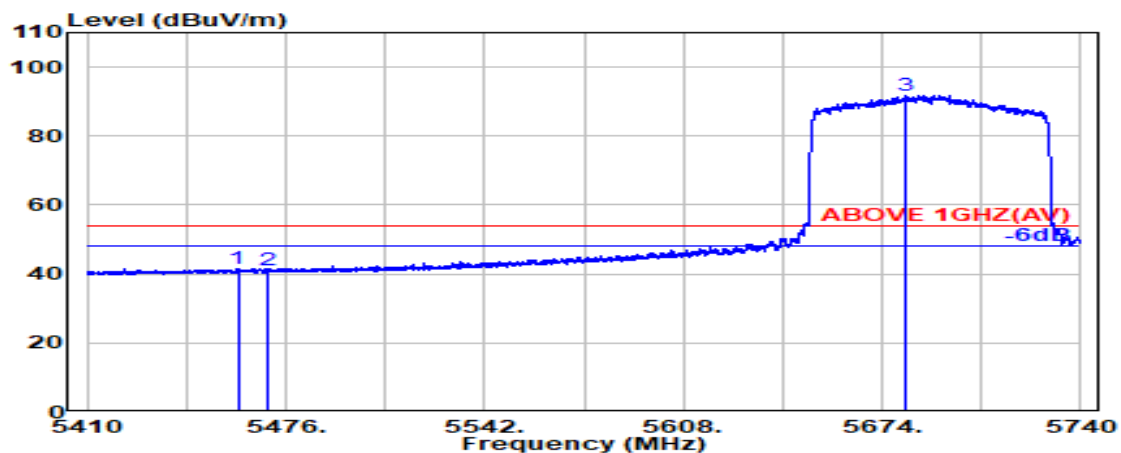


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.050	34.10	8.66	39.07	37.99	41.68	54.00	12.32	Average
5470.000	34.10	8.67	39.07	37.47	41.17	54.00	12.83	Average
@ 5681.950	33.51	8.88	39.13	88.43	91.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

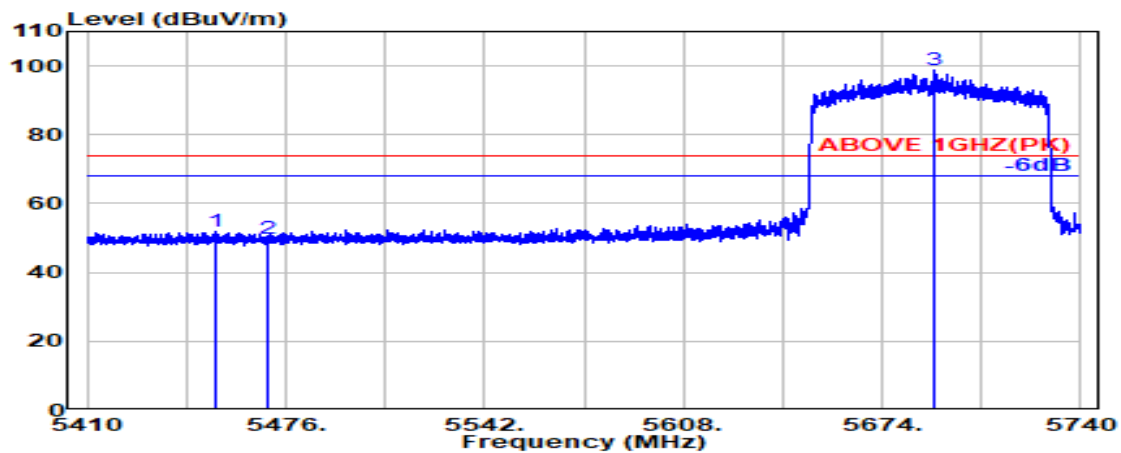

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.700	34.10	8.65	39.07	48.01	51.68	74.00	22.32	Peak
5470.000	34.10	8.67	39.07	46.22	49.91	74.00	24.09	Peak
@ 5691.650	33.45	8.89	39.13	95.76	98.97	---	---	Peak

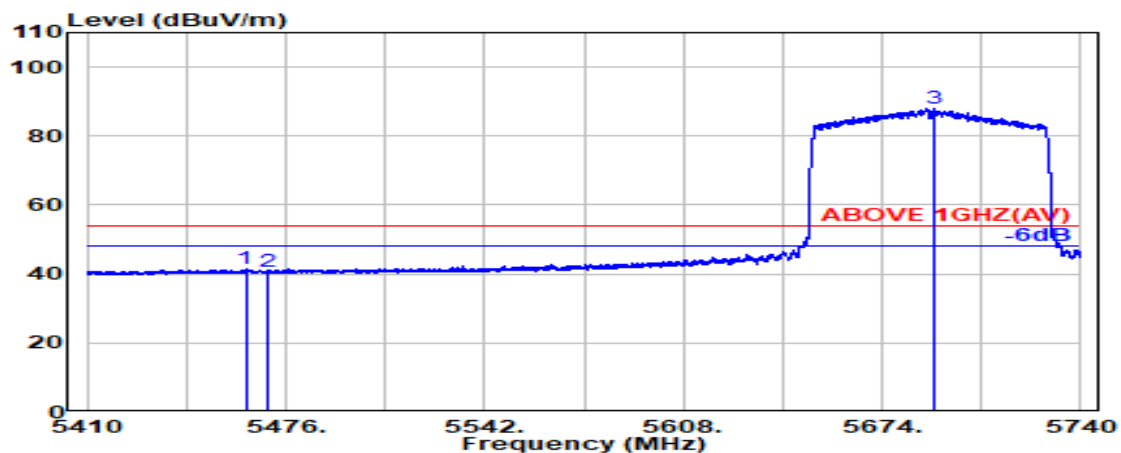

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.650	34.10	8.66	39.07	37.85	41.54	54.00	12.46	Average
5470.000	34.10	8.67	39.07	37.07	40.77	54.00	13.23	Average
@ 5691.200	33.45	8.89	39.13	84.61	87.82	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690 MHz

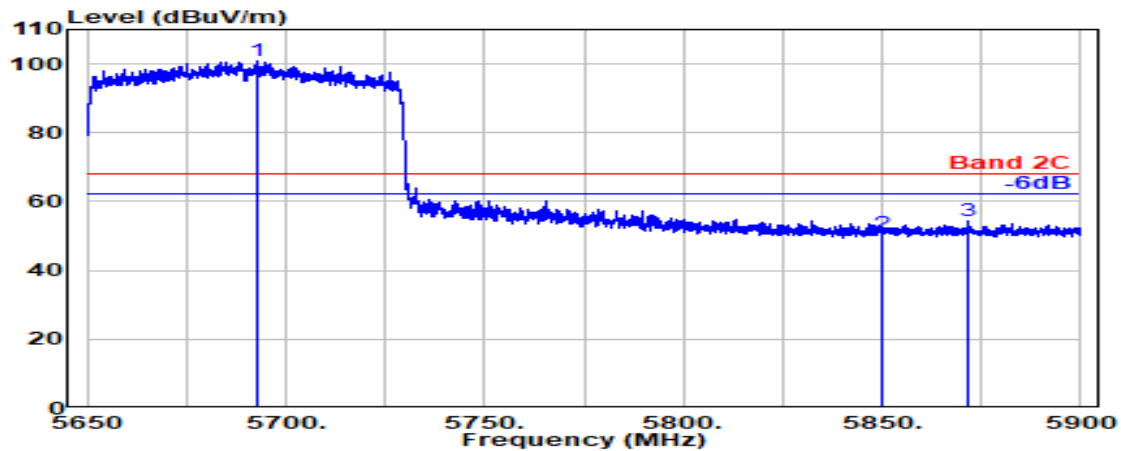

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5692.650	33.44	8.89	39.13	97.55	100.76	---	---	Peak
5850.000	33.90	9.05	39.18	47.03	50.80	68.20	17.40	Peak
5871.450	34.03	9.07	39.18	50.27	54.18	68.20	14.02	Peak

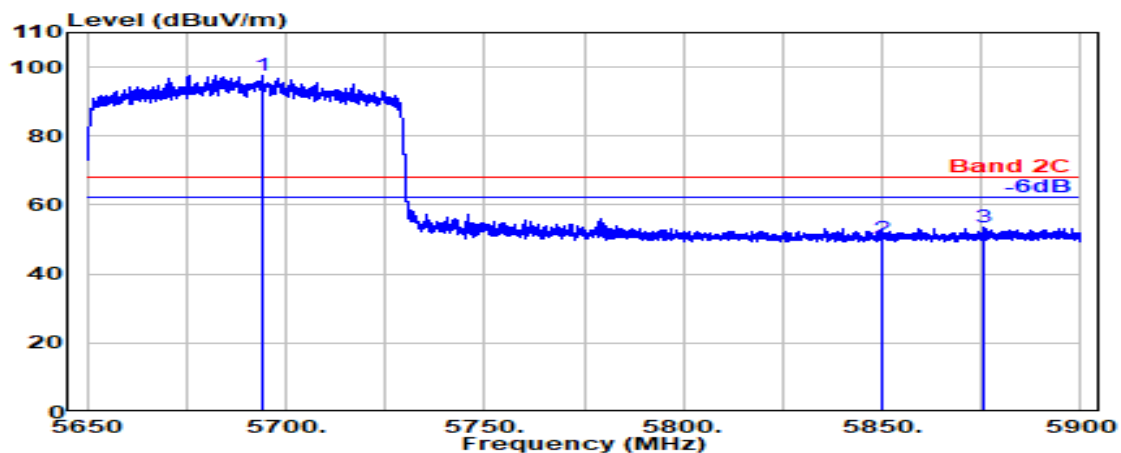

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5694.000	33.44	8.89	39.13	94.50	97.70	---	---	Peak
5850.000	33.90	9.05	39.18	46.51	50.28	68.20	17.92	Peak
5875.700	34.05	9.07	39.18	49.40	53.34	68.20	14.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

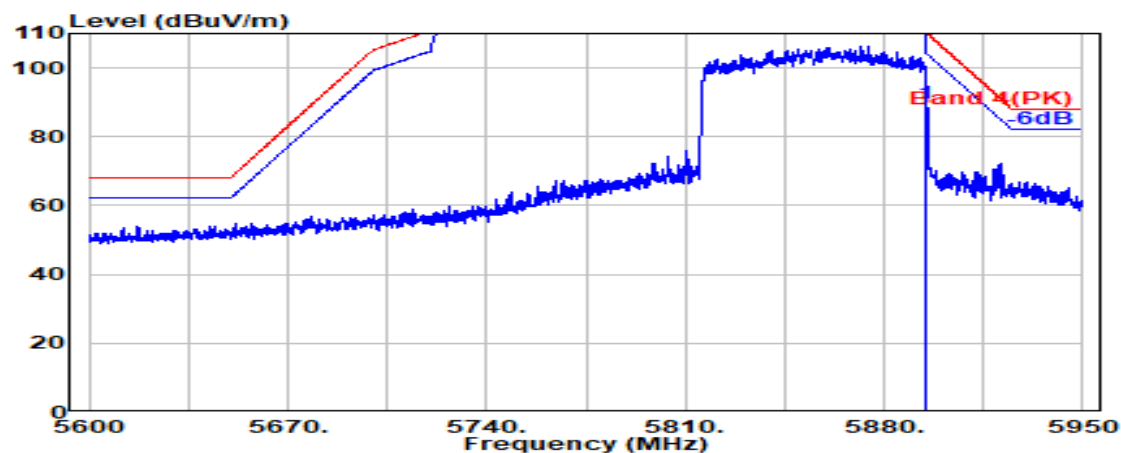

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	85.41	89.48	110.16	20.68	Peak

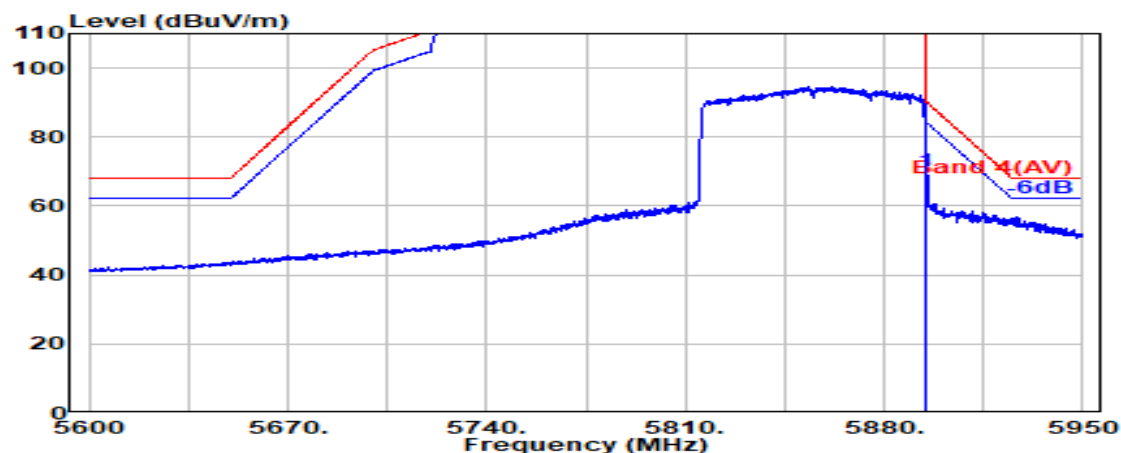


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	66.06	70.13	90.16	20.03	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

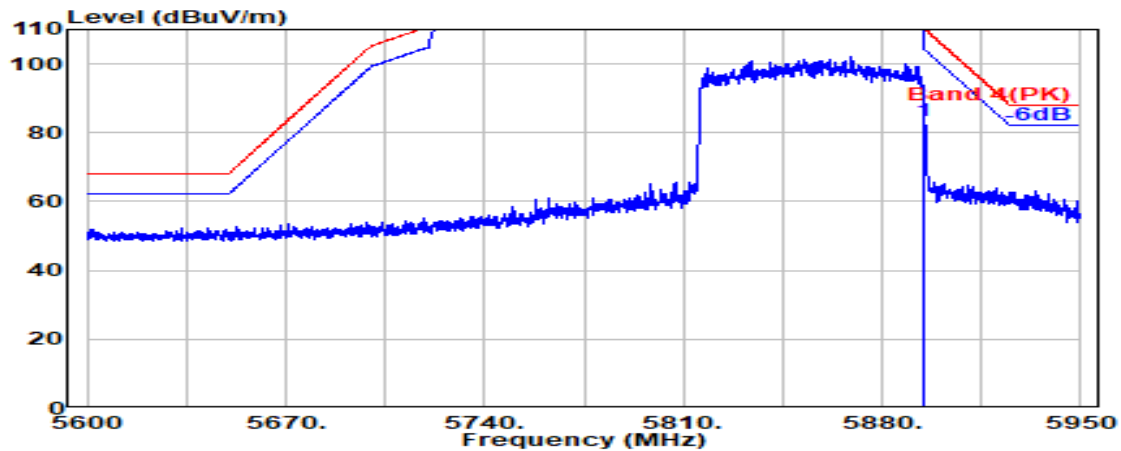

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	79.50	83.58	110.16	26.59	Peak

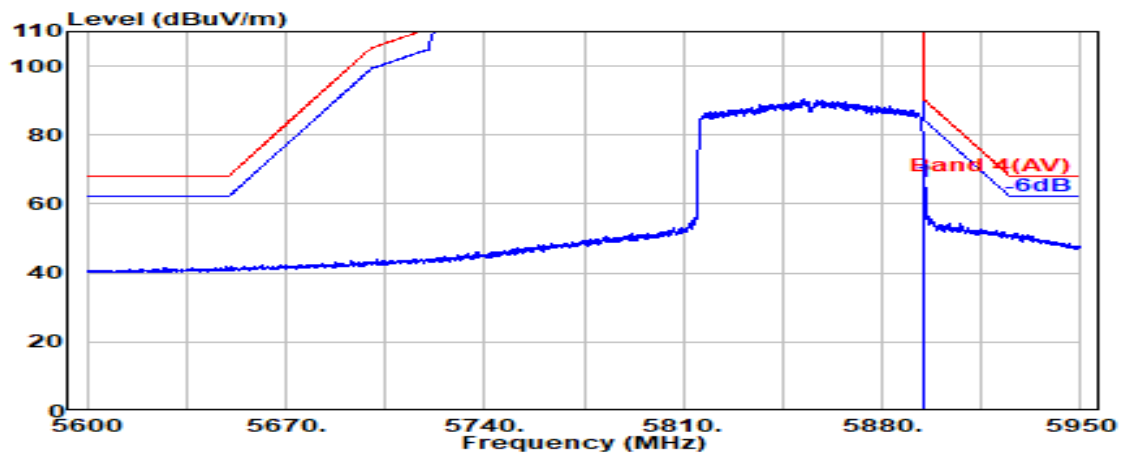

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	62.32	66.39	90.16	23.77	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

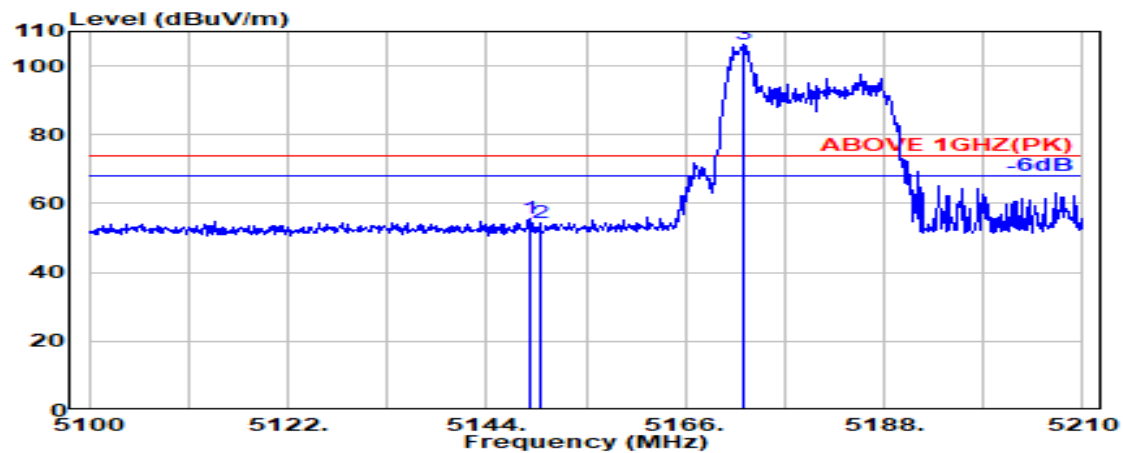

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.700	33.60	8.33	39.09	52.67	55.50	74.00	18.50	Peak
5150.000	33.60	8.33	39.09	51.38	54.22	74.00	19.78	Peak
@ 5172.500	33.60	8.35	39.09	103.41	106.27	---	---	Peak

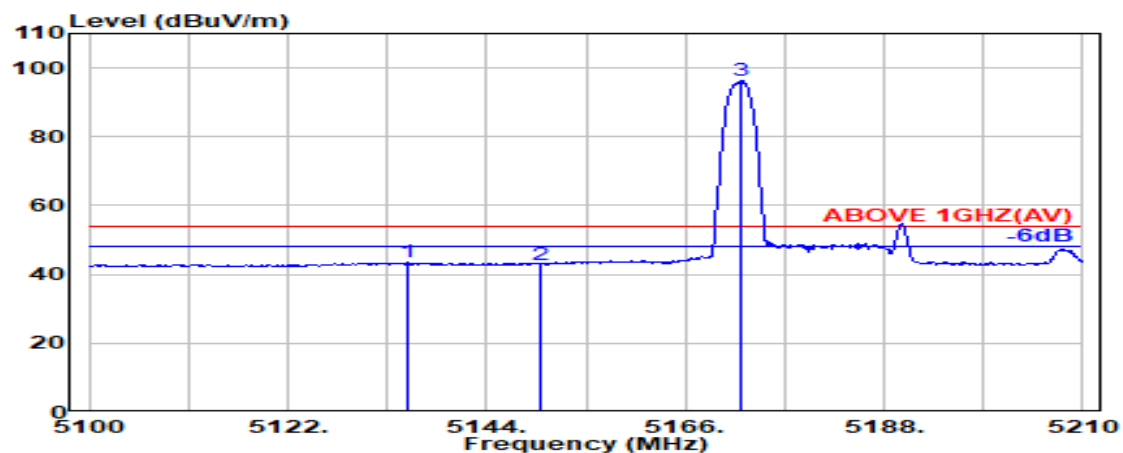

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.300	33.57	8.31	39.09	40.75	43.54	54.00	10.46	Average
5150.000	33.60	8.33	39.09	40.09	42.93	54.00	11.07	Average
@ 5172.200	33.60	8.35	39.09	93.32	96.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

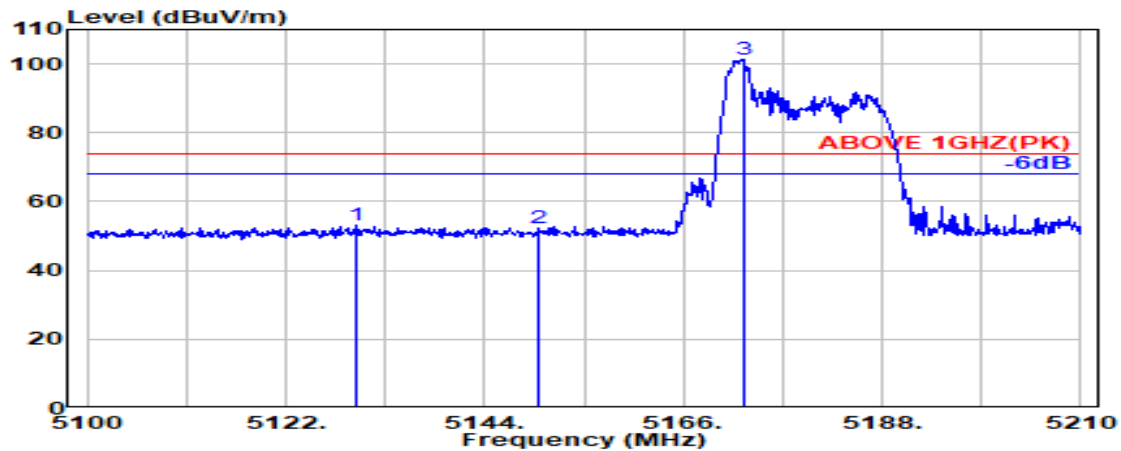

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.900	33.56	8.30	39.09	50.28	53.05	74.00	20.95	Peak
5150.000	33.60	8.33	39.09	49.58	52.42	74.00	21.58	Peak
@ 5172.600	33.60	8.35	39.09	98.42	101.28	---	---	Peak

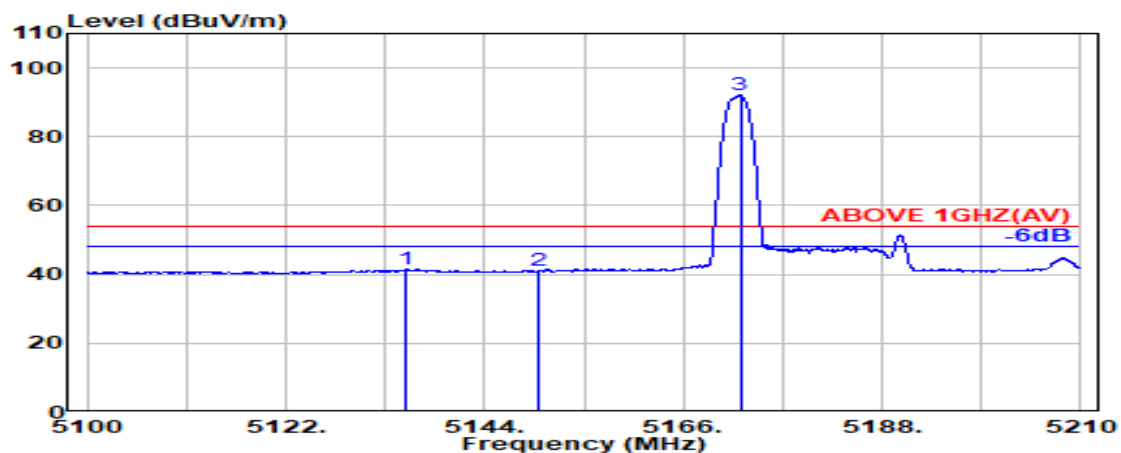

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.300	33.57	8.31	39.09	38.92	41.71	54.00	12.29	Average
5150.000	33.60	8.33	39.09	38.25	41.09	54.00	12.91	Average
@ 5172.300	33.60	8.35	39.09	89.19	92.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

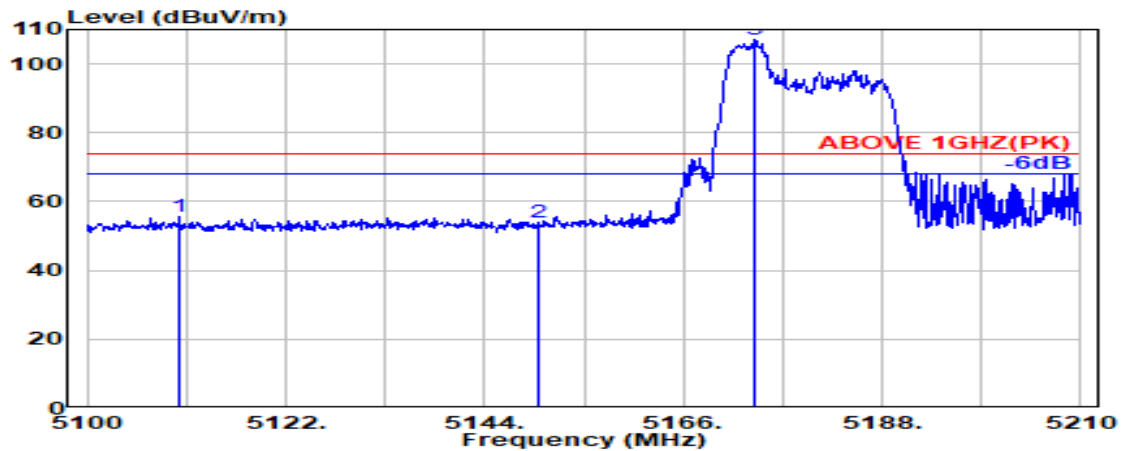

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.200	33.52	8.28	39.09	52.89	55.60	74.00	18.40	Peak
5150.000	33.60	8.33	39.09	51.28	54.11	74.00	19.89	Peak
@ 5173.800	33.60	8.35	39.09	104.26	107.12	---	---	Peak

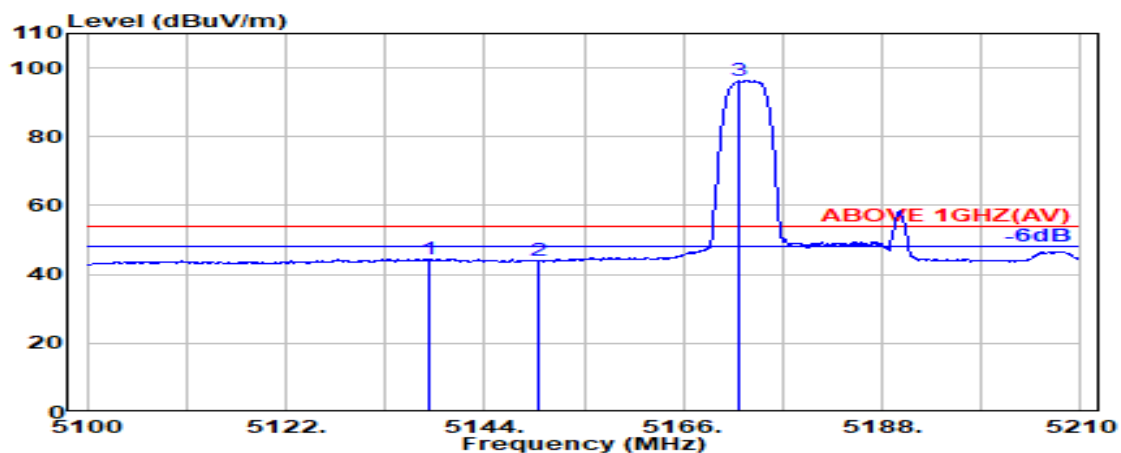

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5137.900	33.58	8.31	39.09	41.64	44.44	54.00	9.56	Average
5150.000	33.60	8.33	39.09	41.20	44.03	54.00	9.97	Average
@ 5172.100	33.60	8.35	39.09	93.45	96.31	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

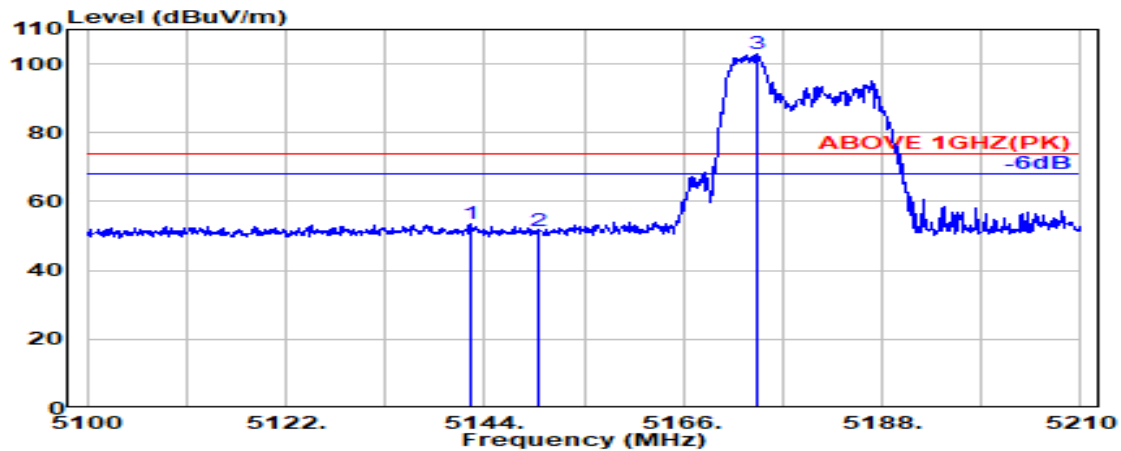

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.58	8.32	39.09	50.88	53.69	74.00	20.31	Peak
5150.000	33.60	8.33	39.09	48.65	51.48	74.00	22.52	Peak
@ 5174.300	33.60	8.35	39.09	100.24	103.10	---	---	Peak

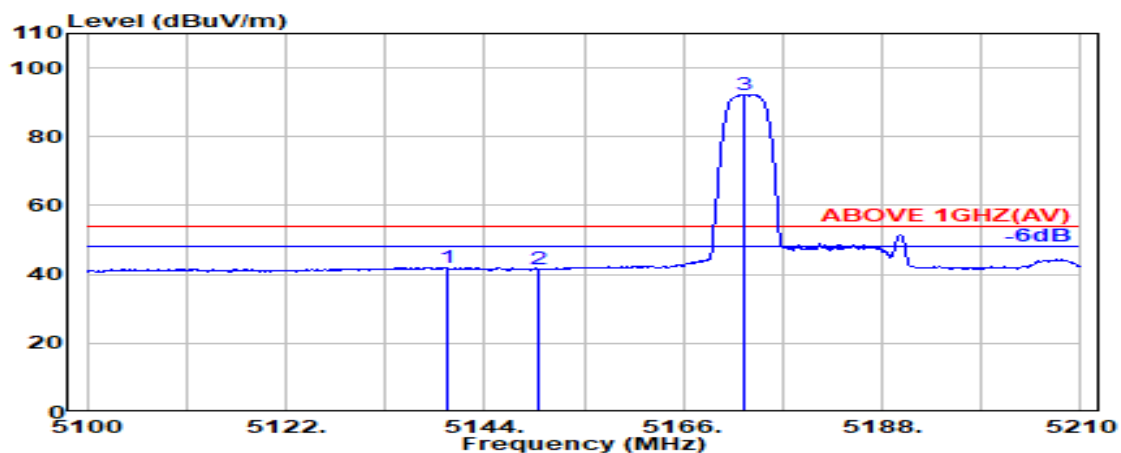

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.800	33.58	8.32	39.09	39.25	42.06	54.00	11.94	Average
5150.000	33.60	8.33	39.09	38.58	41.42	54.00	12.58	Average
@ 5172.600	33.60	8.35	39.09	89.48	92.35	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

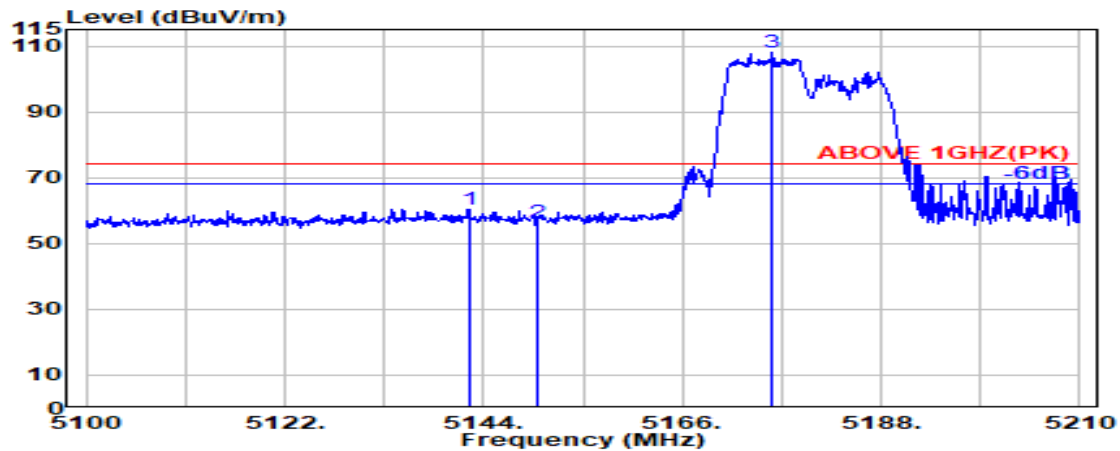

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.400	33.58	8.32	39.09	57.63	60.44	74.00	13.56	Peak
5150.000	33.60	8.33	39.09	53.76	56.59	74.00	17.41	Peak
@ 5176.000	33.60	8.36	39.09	104.99	107.86	---	---	Peak

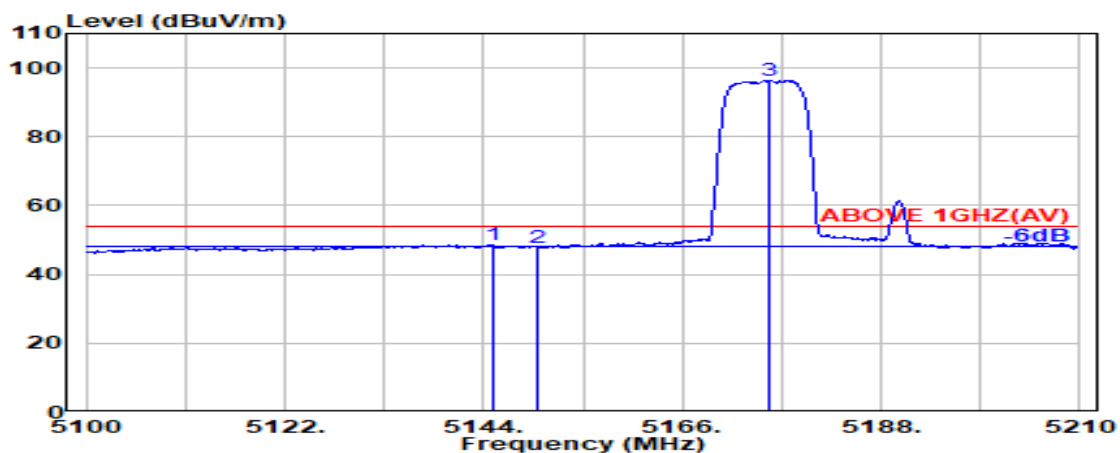

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.100	33.59	8.32	39.09	45.77	48.59	54.00	5.41	Average
5150.000	33.60	8.33	39.09	44.97	47.81	54.00	6.19	Average
@ 5175.700	33.60	8.36	39.09	93.51	96.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

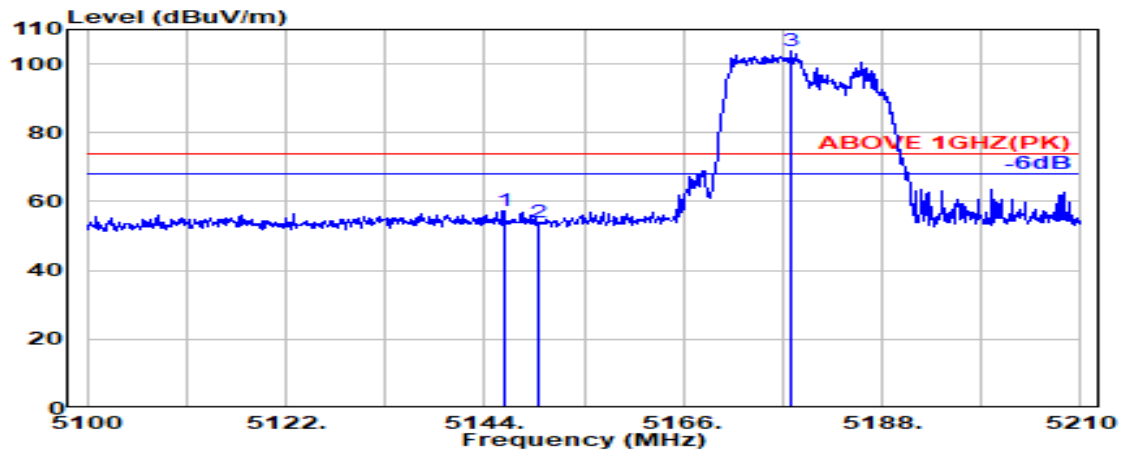

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.100	33.59	8.32	39.09	54.55	57.38	74.00	16.62	Peak
5150.000	33.60	8.33	39.09	51.25	54.09	74.00	19.91	Peak
@ 5177.900	33.60	8.36	39.09	100.72	103.59	---	---	Peak

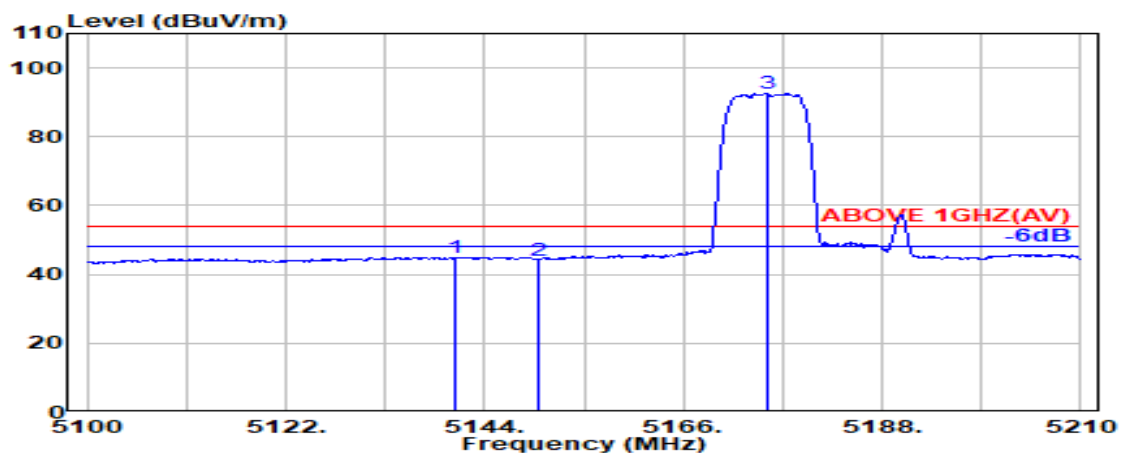

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.800	33.58	8.32	39.09	42.22	45.03	54.00	8.97	Average
5150.000	33.60	8.33	39.09	41.36	44.20	54.00	9.80	Average
@ 5175.400	33.60	8.35	39.09	89.82	92.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

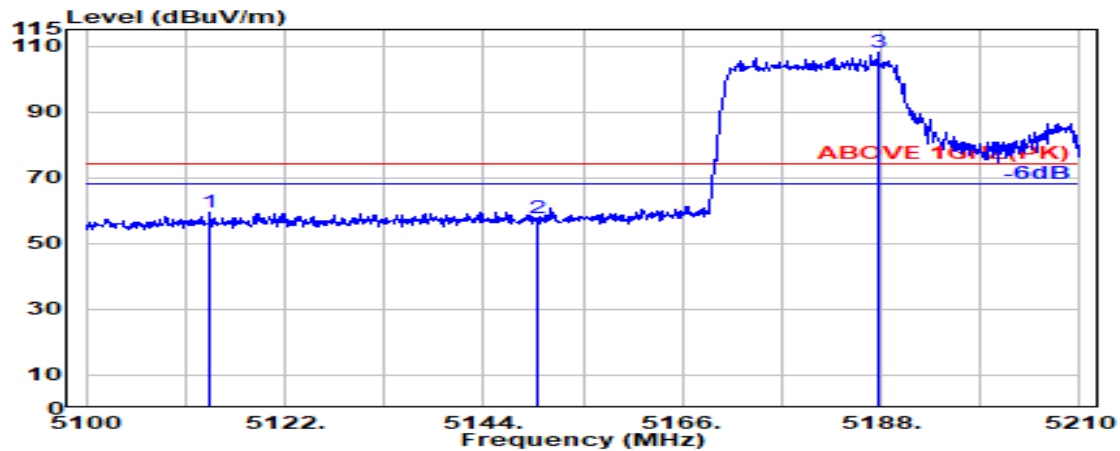

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.700	33.53	8.29	39.09	56.90	59.62	74.00	14.38	Peak
5150.000	33.60	8.33	39.09	55.05	57.89	74.00	16.11	Peak
@ 5187.600	33.60	8.37	39.09	104.98	107.86	---	---	Peak

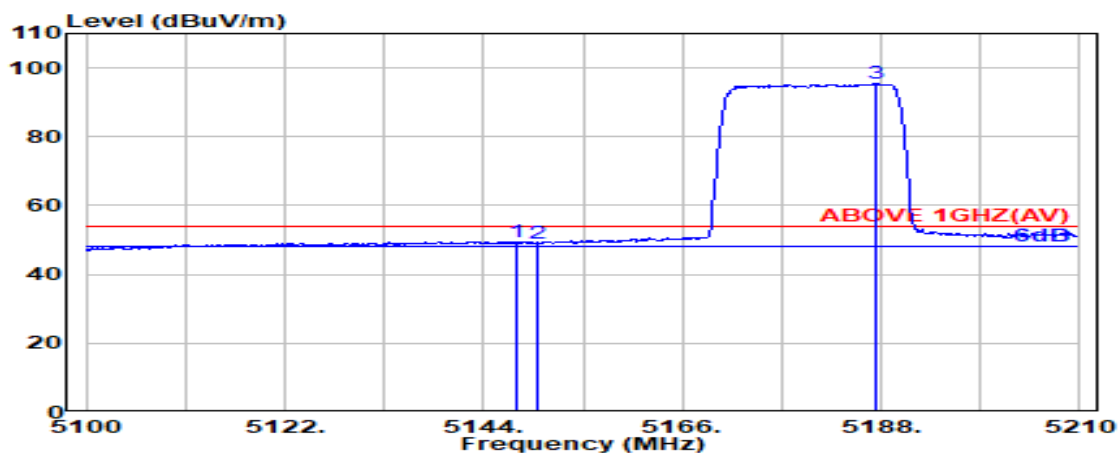

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.600	33.60	8.32	39.09	46.75	49.57	54.00	4.43	Average
5150.000	33.60	8.33	39.09	46.33	49.17	54.00	4.83	Average
@ 5187.500	33.60	8.37	39.09	92.59	95.47	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

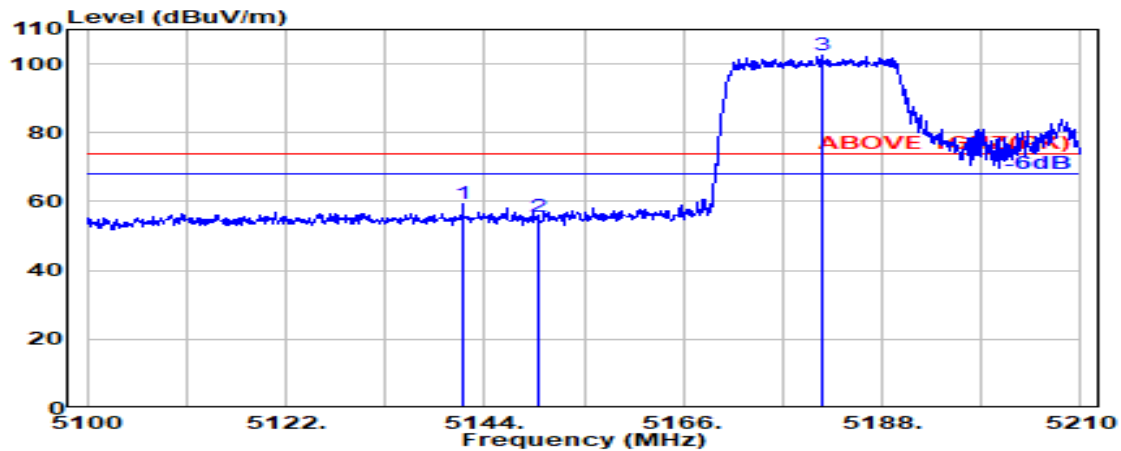

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.600	33.58	8.32	39.09	56.42	59.23	74.00	14.77	Peak
5150.000	33.60	8.33	39.09	52.89	55.73	74.00	18.27	Peak
@ 5181.400	33.60	8.36	39.09	99.75	102.62	---	---	Peak

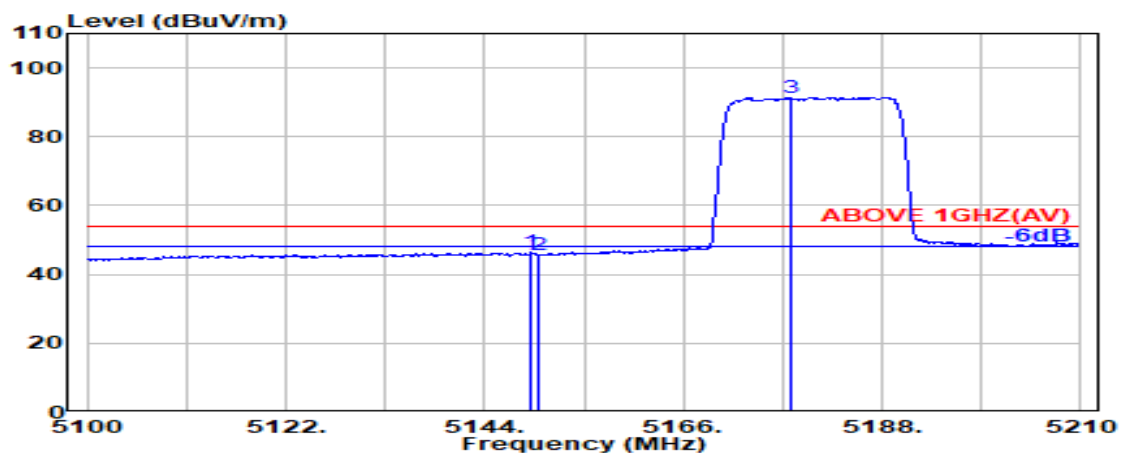

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5149.200	33.60	8.33	39.09	43.47	46.30	54.00	7.70	Average
5150.000	33.60	8.33	39.09	42.90	45.73	54.00	8.27	Average
5177.800	33.60	8.36	39.09	88.65	91.52	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

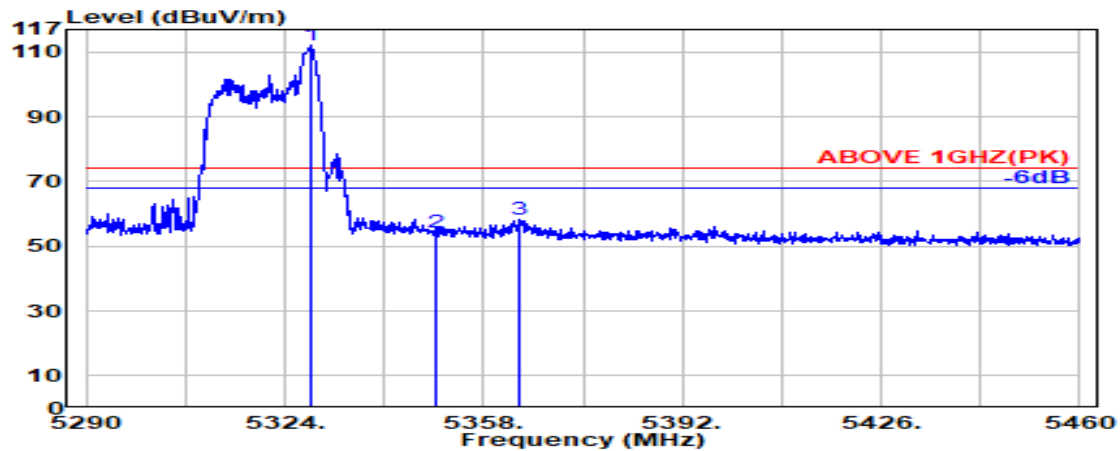

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.66	8.52	39.08	109.18	112.28	---	---	Peak
5350.000	33.70	8.54	39.08	51.35	54.52	74.00	19.48	Peak
5364.100	33.78	8.56	39.08	54.90	58.17	74.00	15.83	Peak

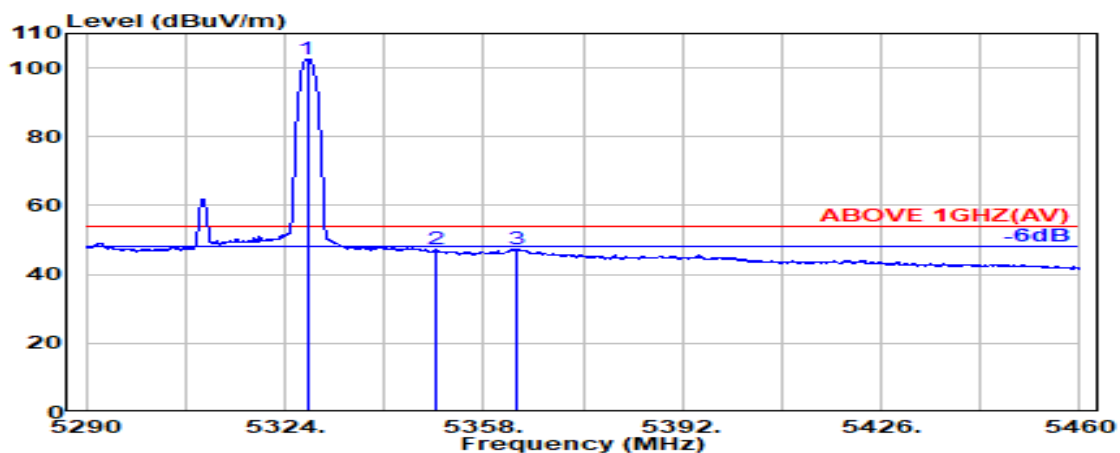

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.800	33.66	8.52	39.08	99.48	102.57	---	---	Average
5350.000	33.70	8.54	39.08	44.01	47.17	54.00	6.83	Average
5363.600	33.78	8.56	39.08	44.15	47.41	54.00	6.59	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

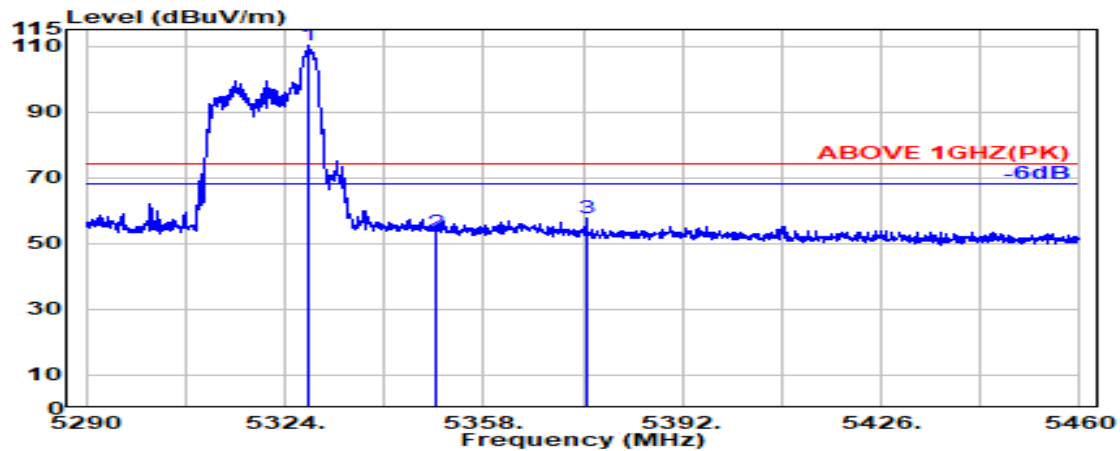

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.66	8.52	39.08	106.95	110.04	---	---	Peak
5350.000	33.70	8.54	39.08	50.28	53.44	74.00	20.56	Peak
5375.500	33.85	8.57	39.08	54.38	57.73	74.00	16.27	Peak

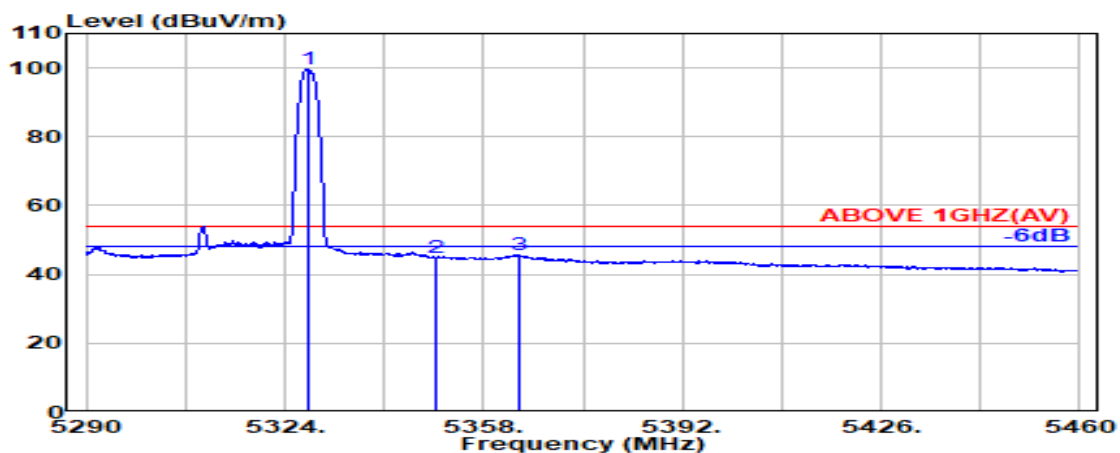

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.900	33.66	8.52	39.08	96.62	99.72	---	---	Average
5350.000	33.70	8.54	39.08	41.85	45.01	54.00	8.99	Average
5363.900	33.78	8.56	39.08	42.41	45.67	54.00	8.33	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

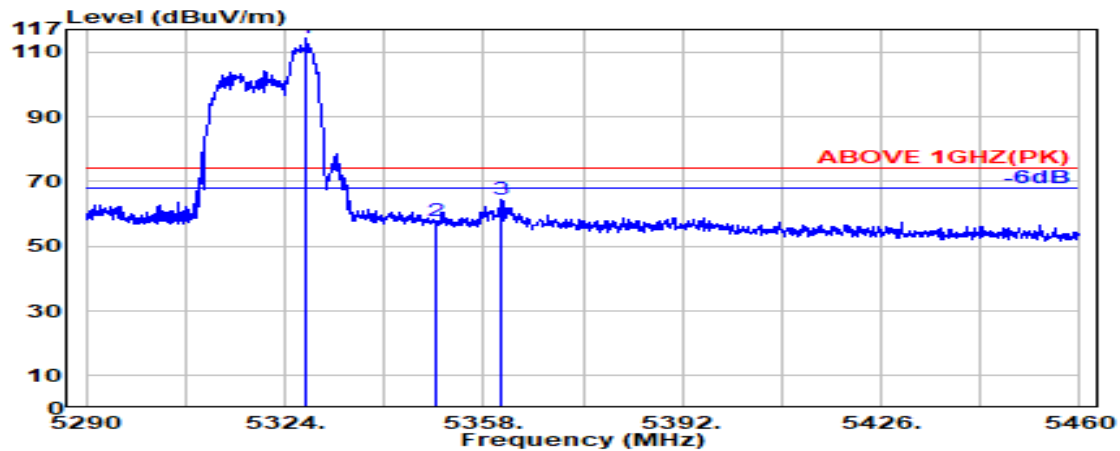

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.600	33.66	8.52	39.08	111.14	114.24	---	---	Peak
5350.000	33.70	8.54	39.08	54.57	57.73	74.00	16.27	Peak
5361.100	33.77	8.55	39.08	61.02	64.26	74.00	9.74	Peak

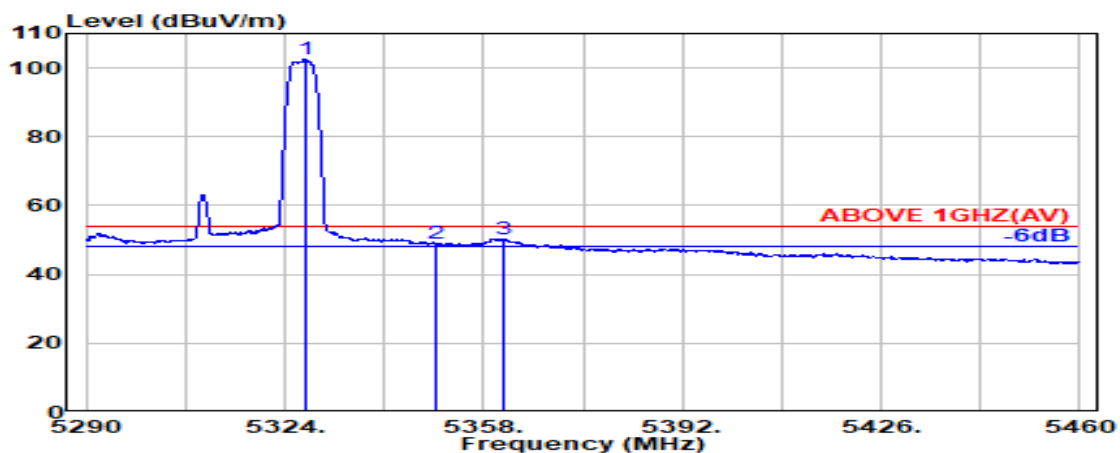

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.66	8.52	39.08	99.26	102.35	---	---	Average
5350.000	33.70	8.54	39.08	45.64	48.80	54.00	5.20	Average
5361.600	33.77	8.55	39.08	47.15	50.40	54.00	3.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

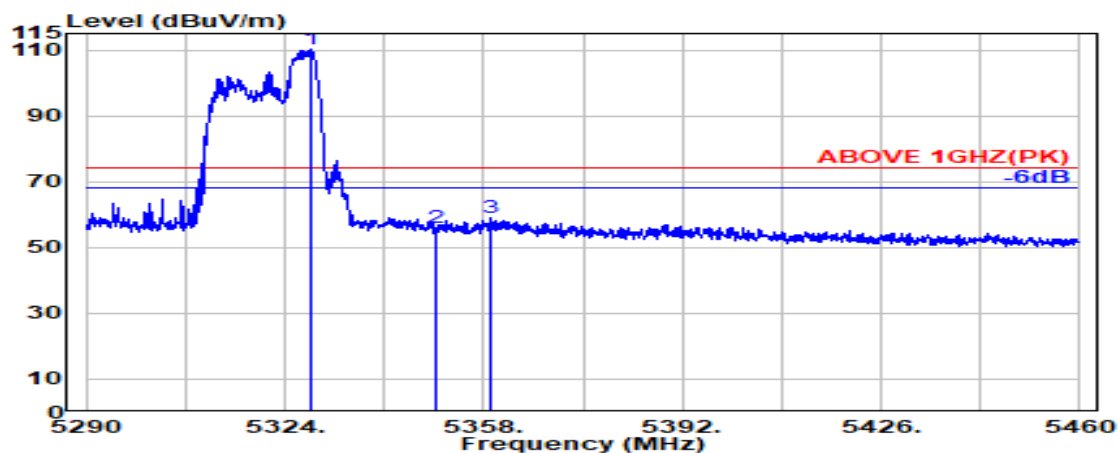

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.66	8.52	39.08	107.00	110.10	---	---	Peak
5350.000	33.70	8.54	39.08	52.68	55.84	74.00	18.16	Peak
5359.300	33.76	8.55	39.08	55.78	59.01	74.00	14.99	Peak

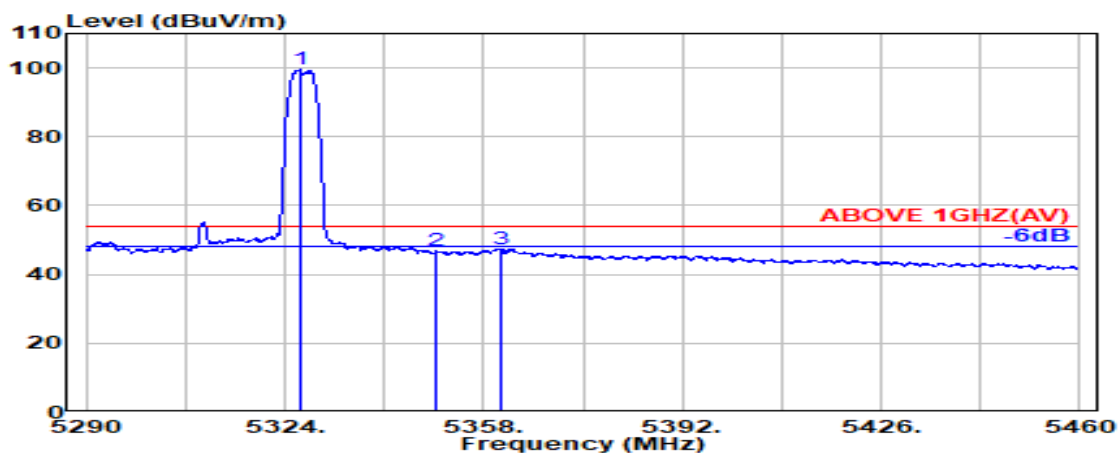

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.800	33.65	8.52	39.08	96.37	99.46	---	---	Average
5350.000	33.70	8.54	39.08	43.56	46.72	54.00	7.28	Average
5360.900	33.77	8.55	39.08	44.26	47.50	54.00	6.50	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

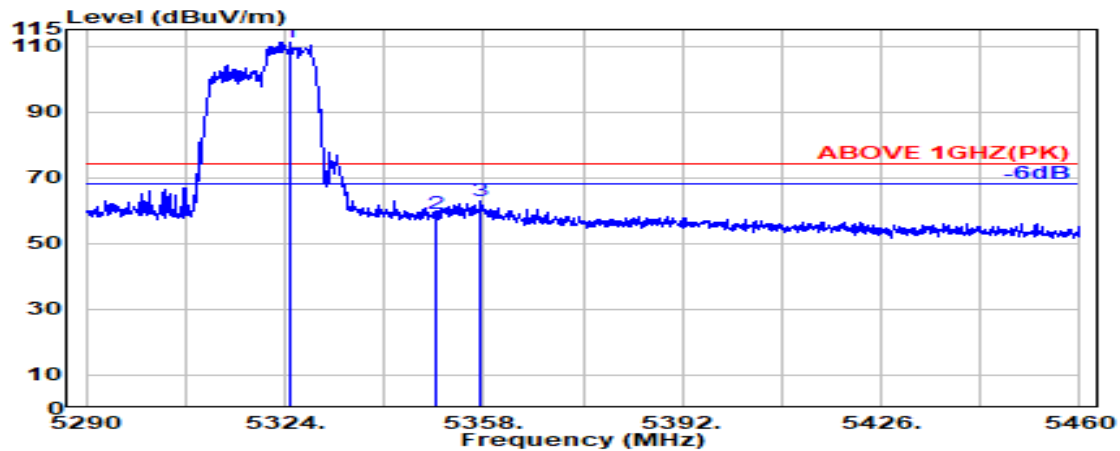

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.000	33.65	8.52	39.08	108.20	111.28	---	---	Peak
5350.000	33.70	8.54	39.08	55.98	59.15	74.00	14.85	Peak
5357.500	33.75	8.55	39.08	59.53	62.75	74.00	11.25	Peak

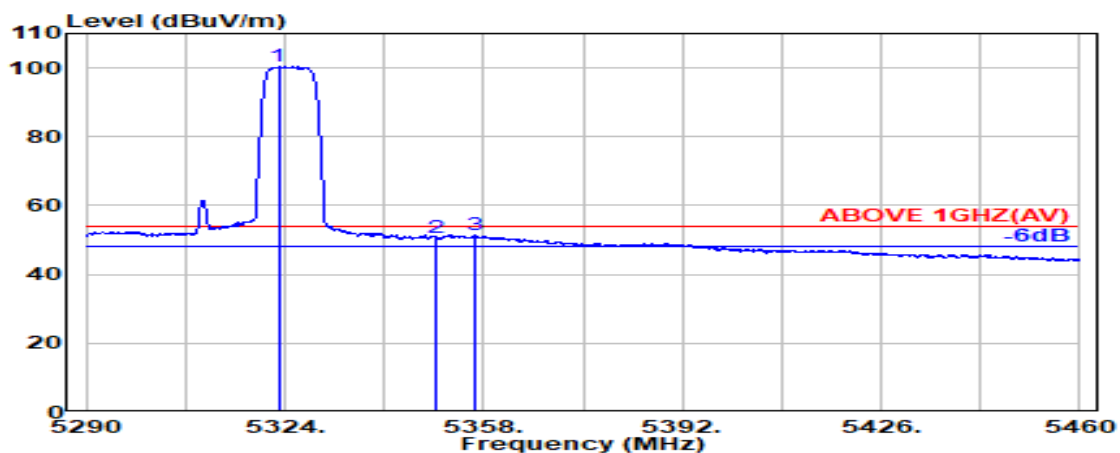

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	33.65	8.51	39.08	97.29	100.37	---	---	Average
5350.000	33.70	8.54	39.08	47.40	50.56	54.00	3.44	Average
5356.500	33.74	8.55	39.08	48.23	51.44	54.00	2.56	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

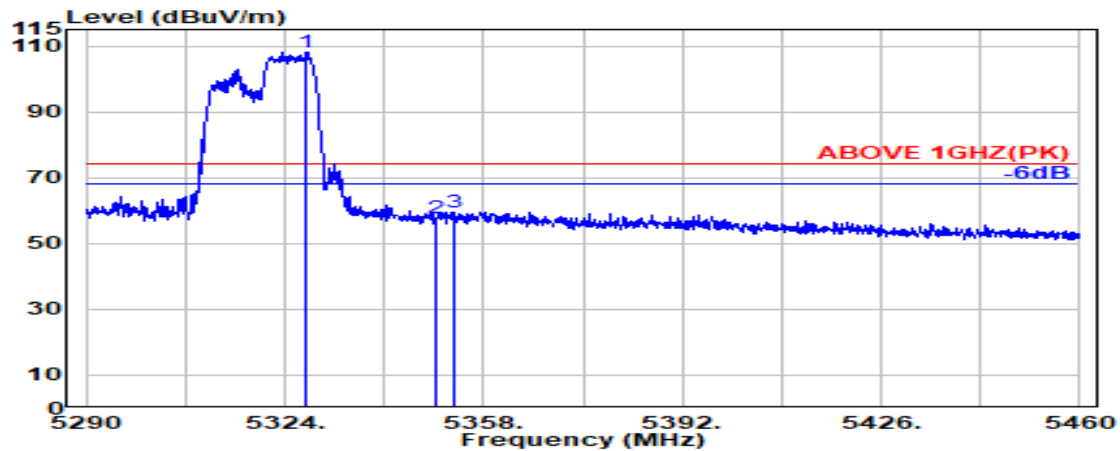

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.500	33.66	8.52	39.08	105.17	108.26	---	---	Peak
5350.000	33.70	8.54	39.08	54.42	57.59	74.00	16.41	Peak
5352.800	33.72	8.55	39.08	56.48	59.67	74.00	14.33	Peak

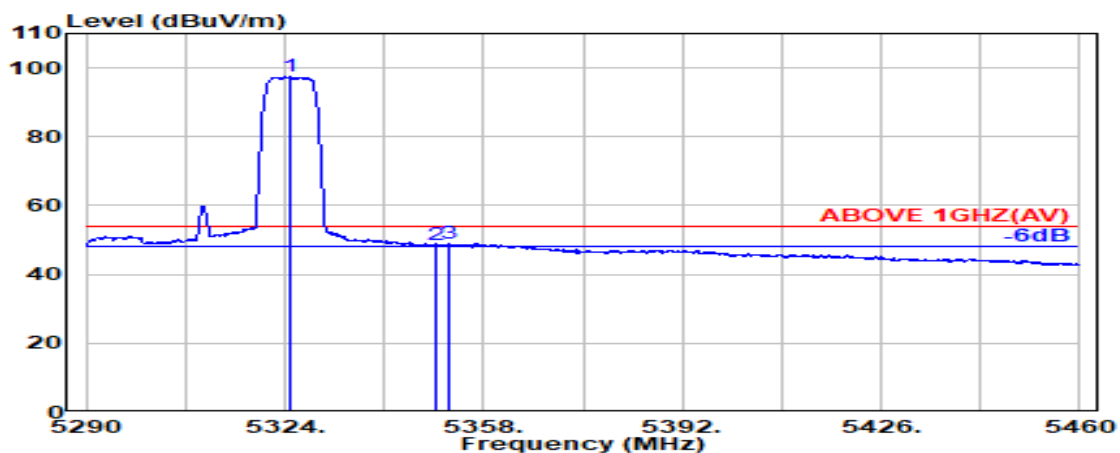

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.700	33.65	8.52	39.08	94.30	97.38	---	---	Average
5350.000	33.70	8.54	39.08	45.45	48.61	54.00	5.39	Average
5351.900	33.71	8.54	39.08	45.75	48.93	54.00	5.07	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

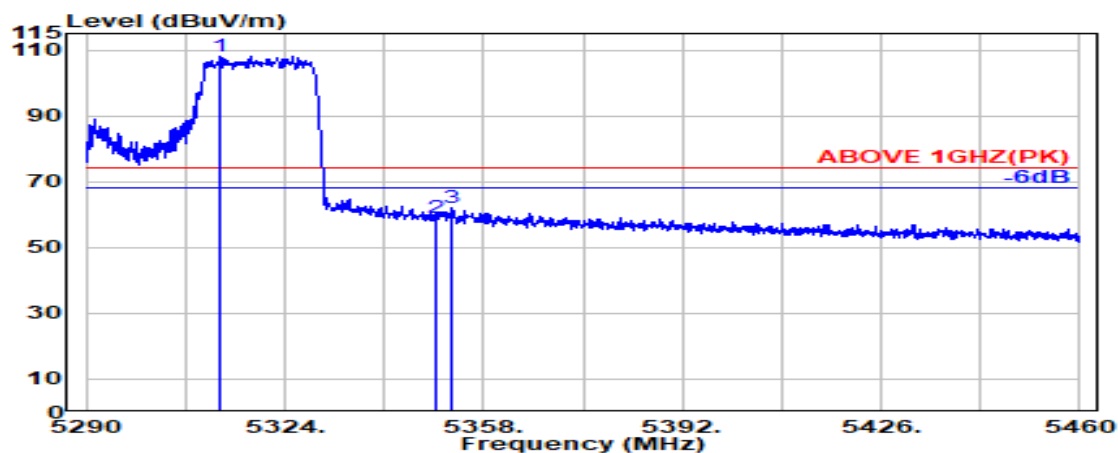

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5313.000	33.63	8.50	39.08	105.14	108.19	---	---	Peak
5350.000	33.70	8.54	39.08	55.68	58.84	74.00	15.16	Peak
@ 5352.700	33.72	8.55	39.08	58.87	62.06	74.00	11.94	Peak

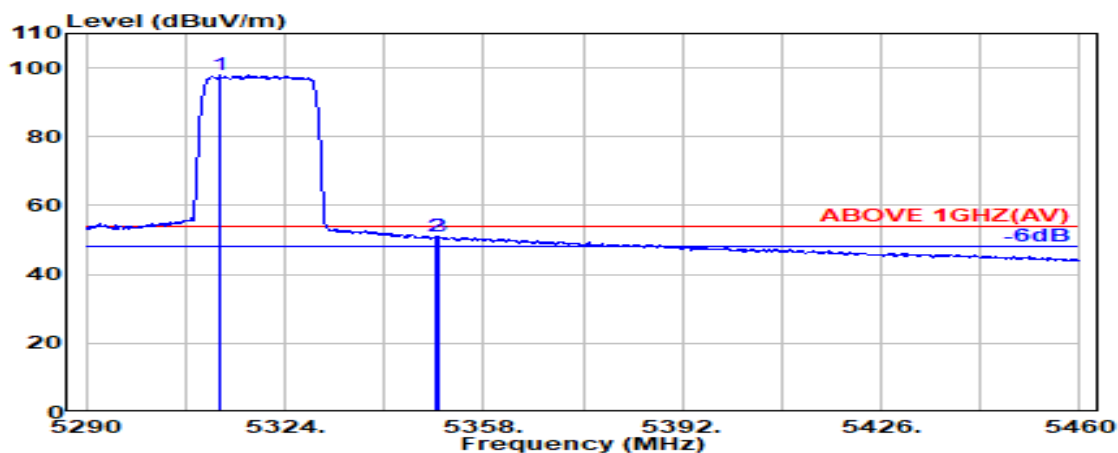

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5313.000	33.63	8.50	39.08	94.73	97.78	---	---	Average
5350.000	33.70	8.54	39.08	47.82	50.98	54.00	3.02	Average
@ 5350.400	33.70	8.54	39.08	47.77	50.94	54.00	3.06	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

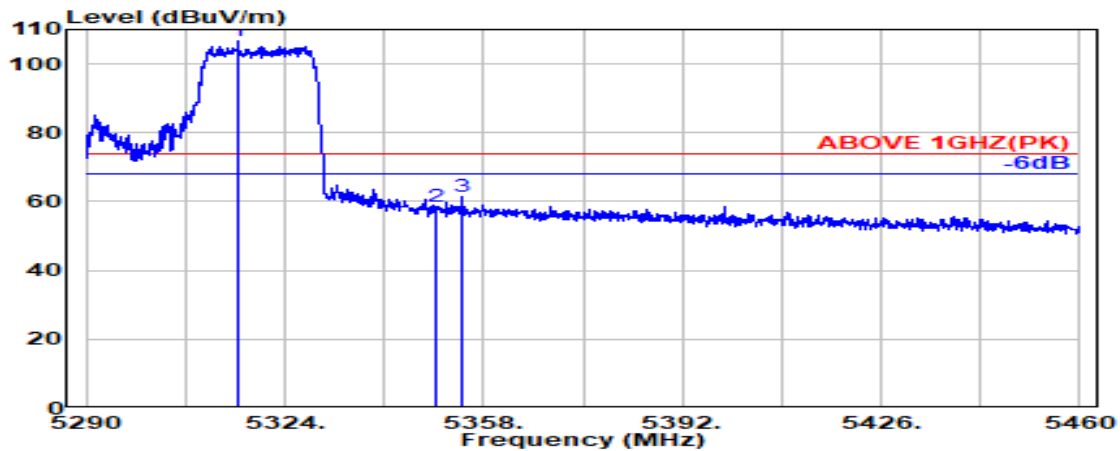

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	33.63	8.51	39.08	103.75	106.81	---	---	Peak
5350.000	33.70	8.54	39.08	55.39	58.55	74.00	15.45	Peak
5354.400	33.73	8.55	39.08	58.17	61.37	74.00	12.63	Peak

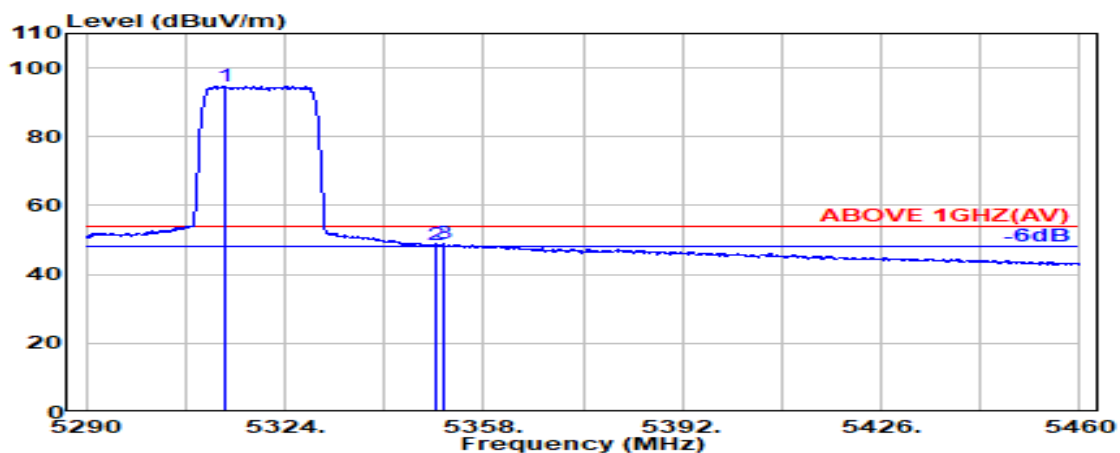

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.800	33.63	8.50	39.08	91.56	94.61	---	---	Average
5350.000	33.70	8.54	39.08	45.55	48.72	54.00	5.28	Average
5351.000	33.71	8.54	39.08	45.63	48.80	54.00	5.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

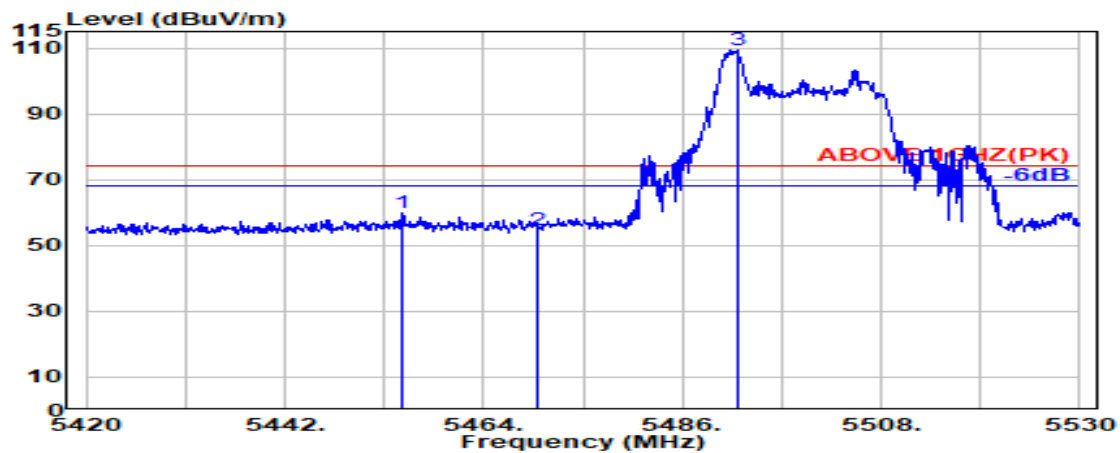

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.100	34.10	8.65	39.07	56.18	59.86	74.00	14.14	Peak
5470.000	34.10	8.67	39.07	51.06	54.76	74.00	19.24	Peak
@ 5492.100	34.10	8.69	39.07	105.64	109.36	---	---	Peak

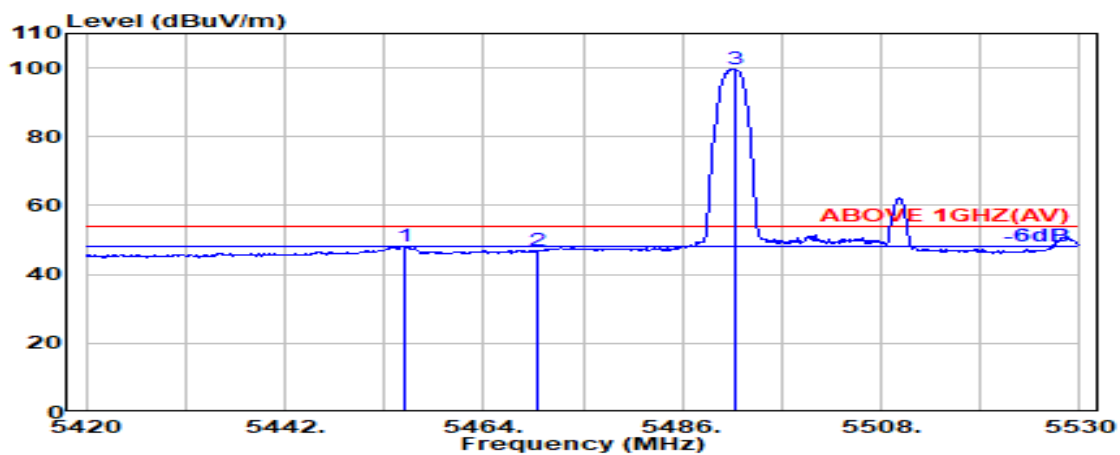

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.300	34.10	8.65	39.07	44.44	48.12	54.00	5.88	Average
5470.000	34.10	8.67	39.07	43.28	46.98	54.00	7.02	Average
@ 5491.800	34.10	8.69	39.07	96.00	99.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

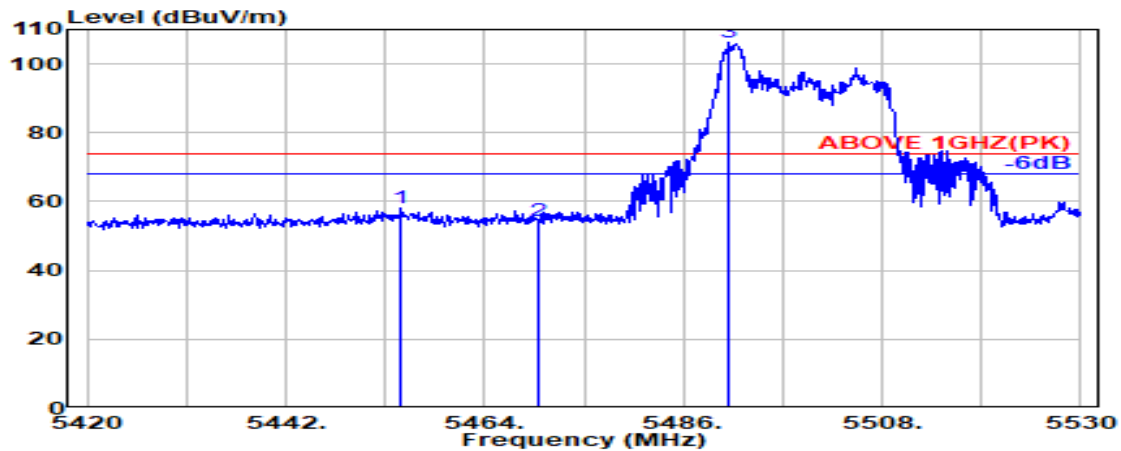

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.700	34.10	8.65	39.07	54.24	57.91	74.00	16.09	Peak
5470.000	34.10	8.67	39.07	50.71	54.41	74.00	19.59	Peak
@ 5491.000	34.10	8.69	39.07	102.66	106.38	---	---	Peak

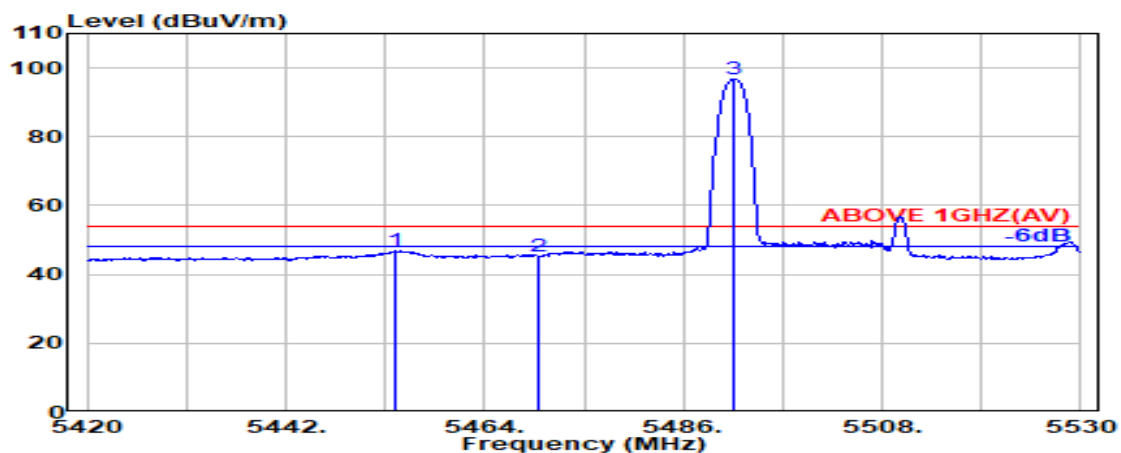

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.100	34.10	8.65	39.07	43.09	46.77	54.00	7.23	Average
5470.000	34.10	8.67	39.07	41.70	45.39	54.00	8.61	Average
@ 5491.700	34.10	8.69	39.07	93.14	96.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

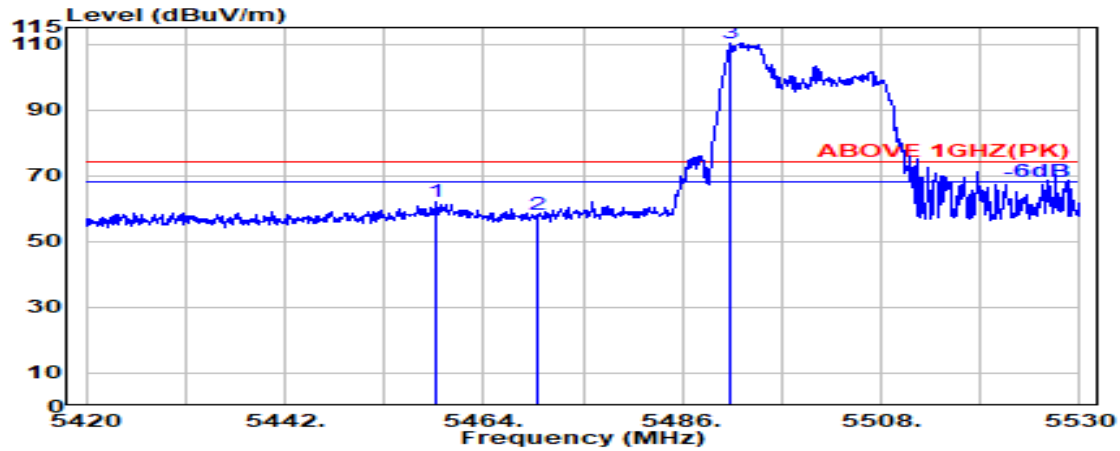

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.800	34.10	8.66	39.07	58.16	61.84	74.00	12.16	Peak
5470.000	34.10	8.67	39.07	54.36	58.06	74.00	15.94	Peak
@ 5491.300	34.10	8.69	39.07	106.60	110.32	---	---	Peak

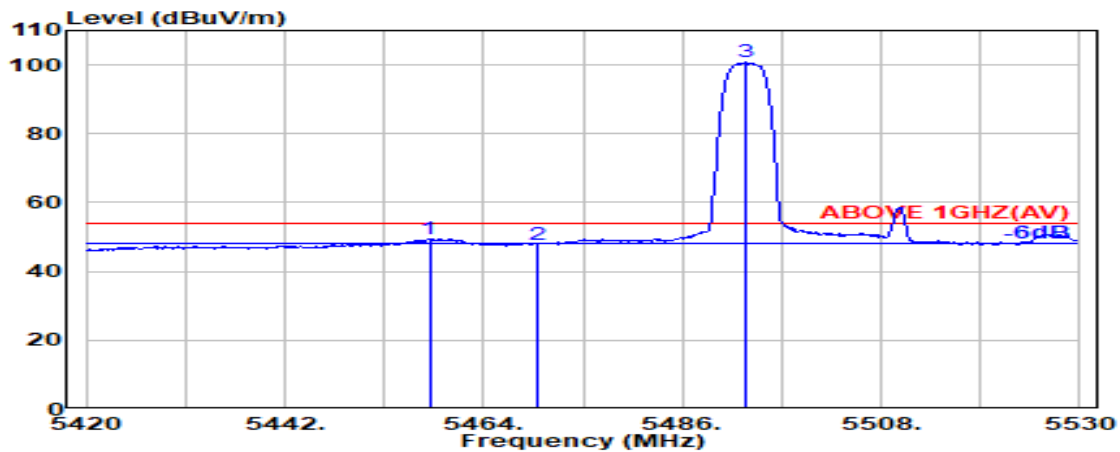

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.000	34.10	8.66	39.07	45.72	49.40	54.00	4.60	Average
5470.000	34.10	8.67	39.07	44.07	47.77	54.00	6.23	Average
@ 5492.900	34.10	8.69	39.07	97.20	100.92	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

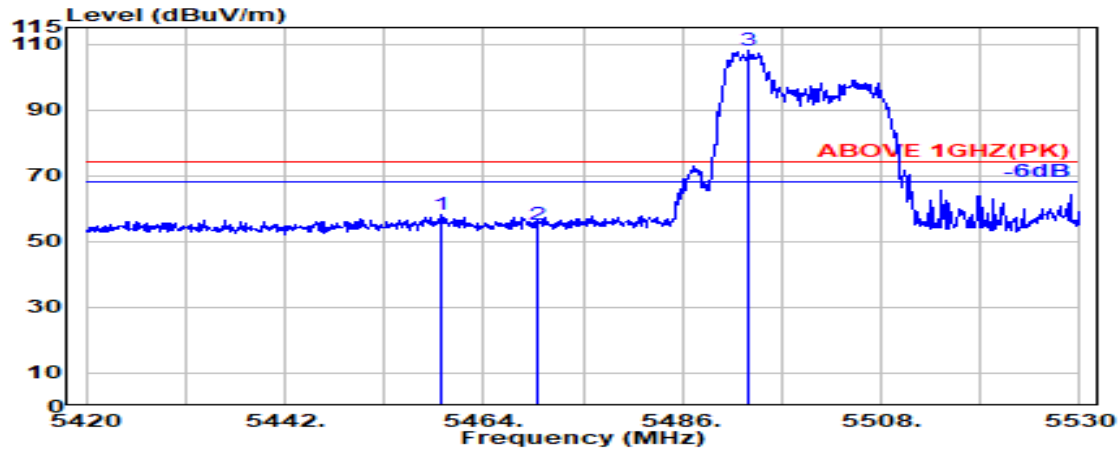

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.400	34.10	8.66	39.07	54.42	58.10	74.00	15.90	Peak
5470.000	34.10	8.67	39.07	51.57	55.26	74.00	18.74	Peak
@ 5493.300	34.10	8.69	39.07	104.22	107.94	---	---	Peak

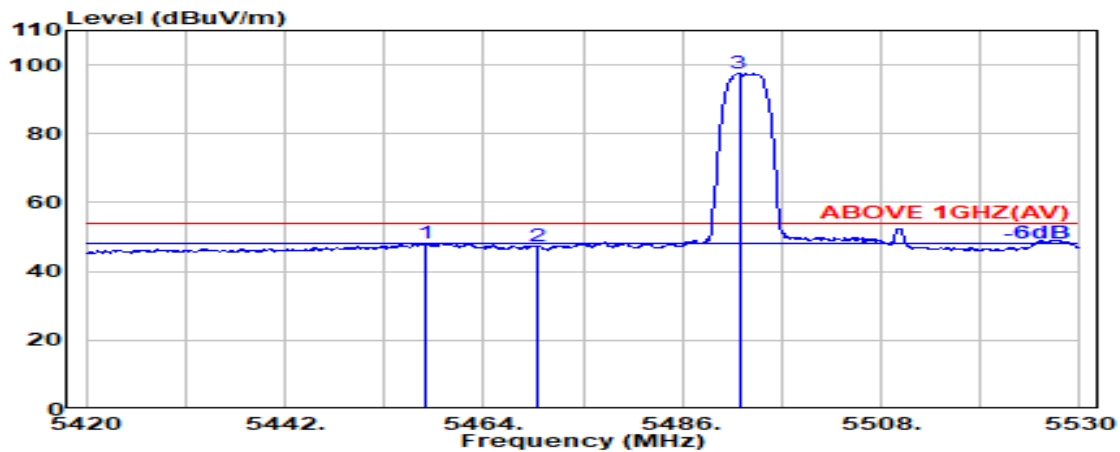

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.500	34.10	8.65	39.07	44.50	48.19	54.00	5.81	Average
5470.000	34.10	8.67	39.07	43.73	47.43	54.00	6.57	Average
@ 5492.300	34.10	8.69	39.07	93.77	97.49	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

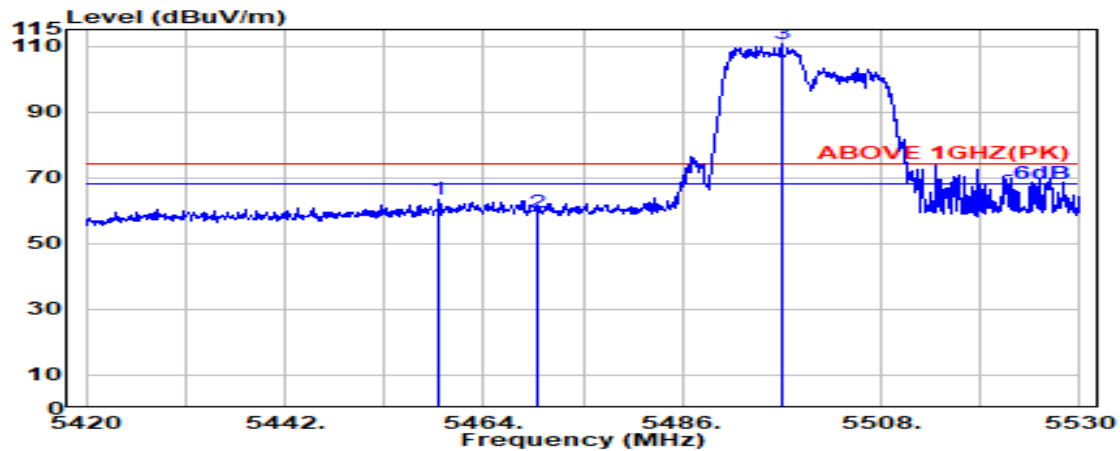

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.100	34.10	8.66	39.07	59.59	63.27	74.00	10.73	Peak
5470.000	34.10	8.67	39.07	55.94	59.64	74.00	14.36	Peak
@ 5497.000	34.10	8.70	39.07	107.12	110.85	---	---	Peak

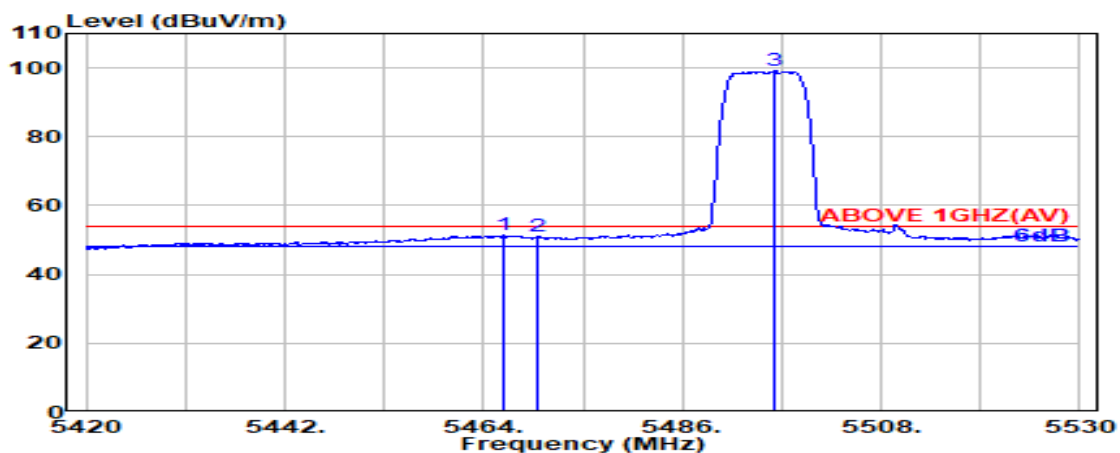

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.200	34.10	8.66	39.07	47.73	51.42	54.00	2.58	Average
5470.000	34.10	8.67	39.07	47.17	50.87	54.00	3.13	Average
@ 5496.200	34.10	8.69	39.07	95.35	99.08	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

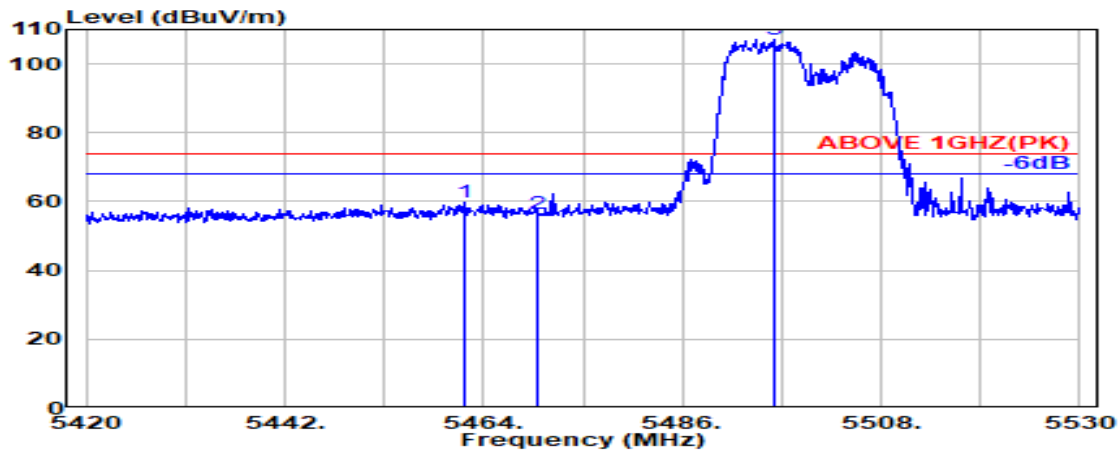

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.800	34.10	8.66	39.07	55.88	59.57	74.00	14.43	Peak
5470.000	34.10	8.67	39.07	52.60	56.29	74.00	17.71	Peak
@ 5496.200	34.10	8.69	39.07	103.36	107.09	---	---	Peak

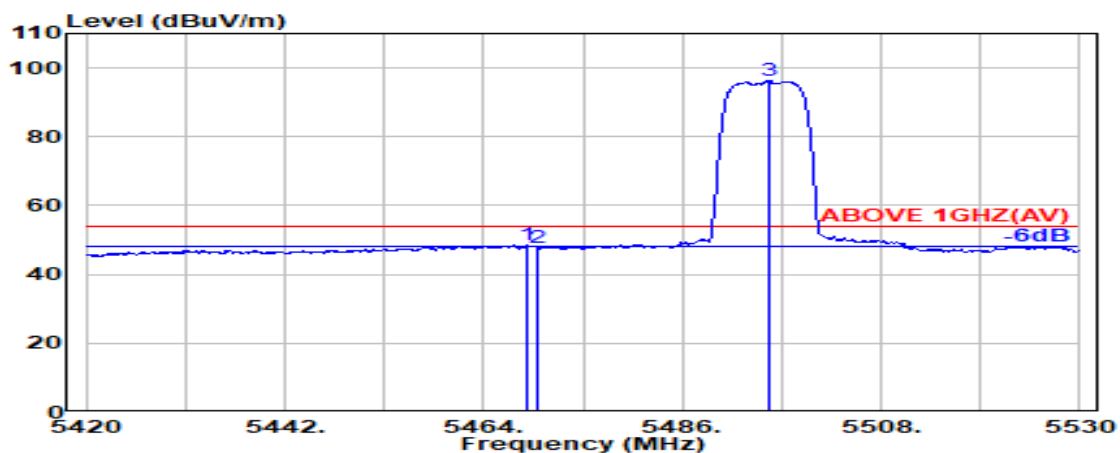

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.07	44.84	48.54	54.00	5.46	Average
5470.000	34.10	8.67	39.07	44.09	47.78	54.00	6.22	Average
@ 5495.700	34.10	8.69	39.07	92.56	96.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

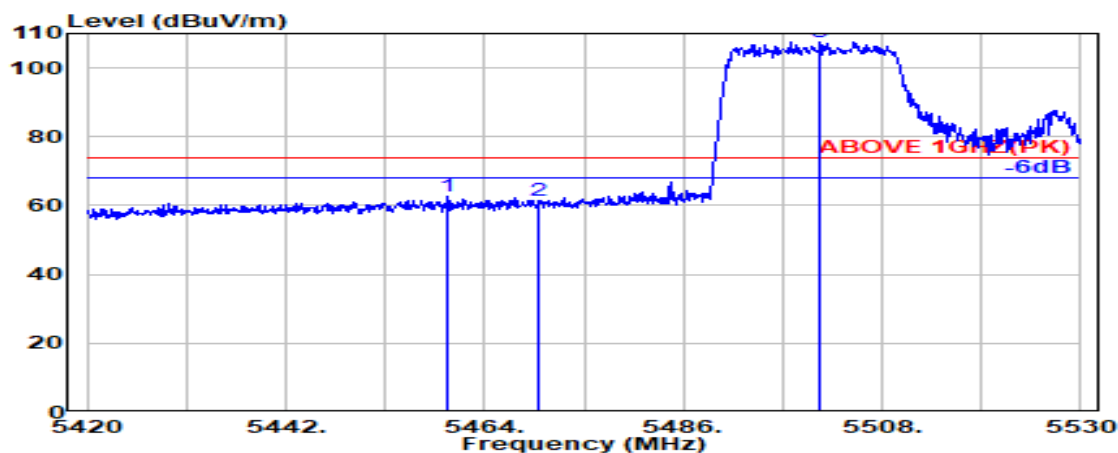

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.000	34.10	8.66	39.07	58.86	62.54	74.00	11.46	Peak
5470.000	34.10	8.67	39.07	57.60	61.30	74.00	12.70	Peak
@ 5501.200	34.10	8.70	39.07	103.88	107.61	---	---	Peak

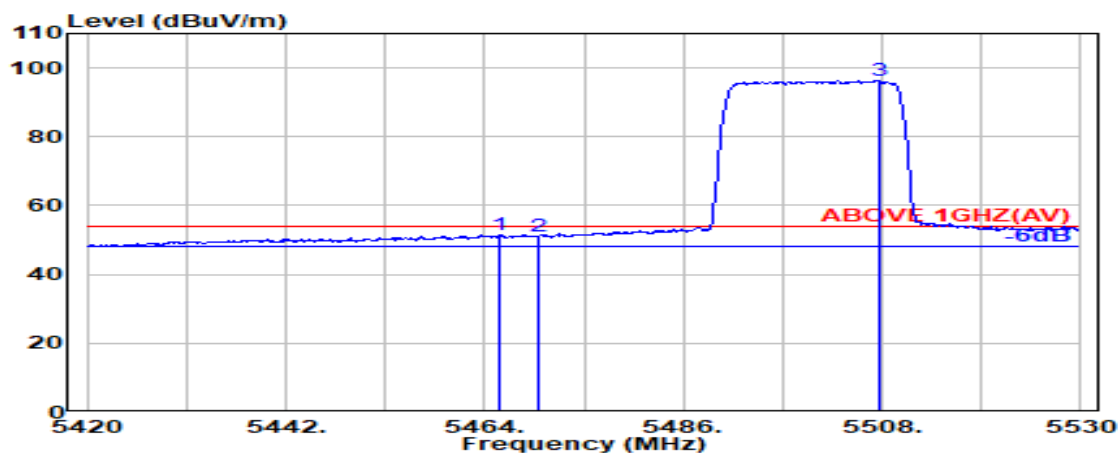


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.10	8.66	39.07	47.65	51.34	54.00	2.66	Average
5470.000	34.10	8.67	39.07	47.49	51.19	54.00	2.81	Average
@ 5507.600	34.08	8.71	39.07	92.56	96.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

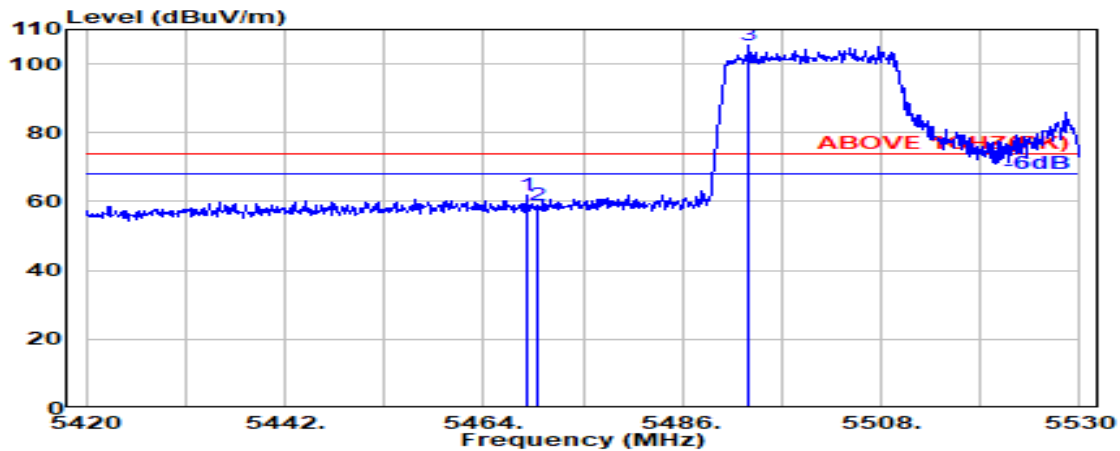

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.07	58.16	61.86	74.00	12.14	Peak
5470.000	34.10	8.67	39.07	55.29	58.99	74.00	15.01	Peak
@ 5493.300	34.10	8.69	39.07	101.88	105.60	---	---	Peak

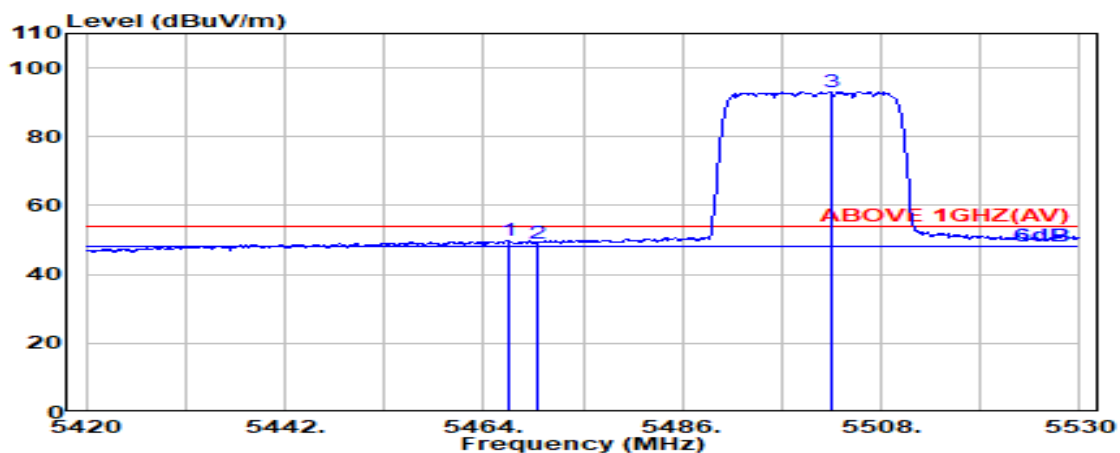


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.700	34.10	8.66	39.07	46.11	49.81	54.00	4.19	Average
5470.000	34.10	8.67	39.07	45.36	49.06	54.00	4.94	Average
@ 5502.500	34.09	8.70	39.07	89.26	92.98	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/17	Frequency	TX 5670MHz

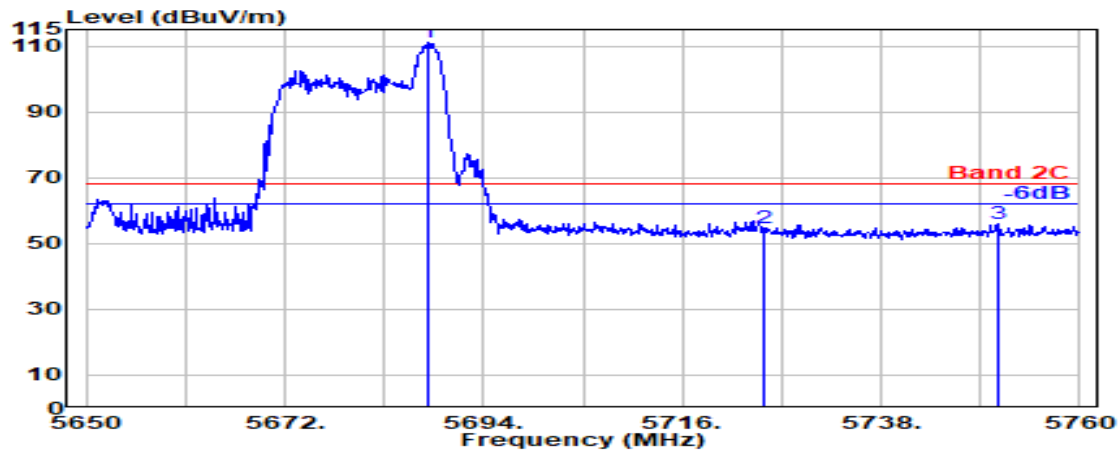

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.800	33.47	8.89	39.13	108.07	111.30	---	---	Peak
5725.000	33.60	8.92	39.14	51.48	54.87	68.20	13.33	Peak
5750.900	33.80	8.95	39.15	52.44	56.04	68.20	12.16	Peak

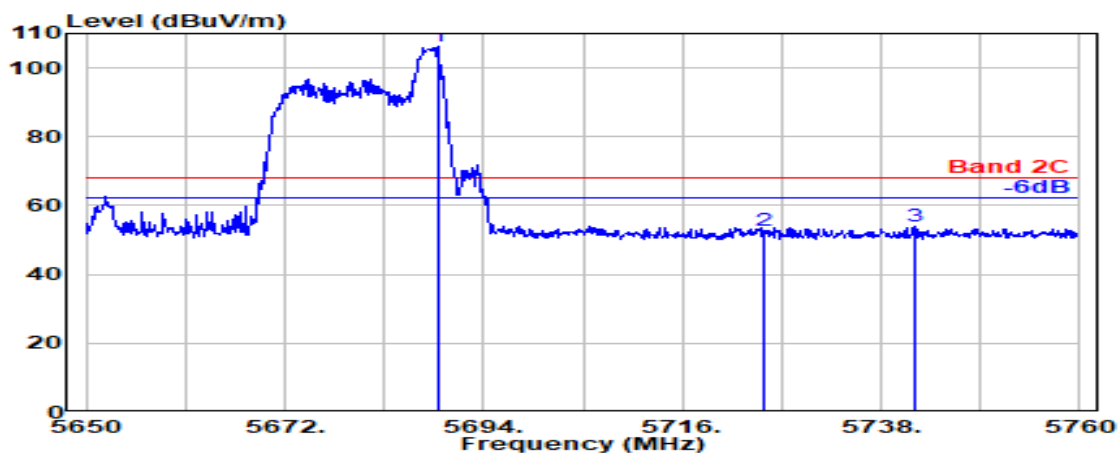

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.900	33.47	8.89	39.13	102.95	106.18	---	---	Peak
5725.000	33.60	8.92	39.14	49.24	52.63	68.20	15.57	Peak
5741.800	33.73	8.94	39.14	50.49	54.02	68.20	14.18	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/44	Frequency	TX 5670MHz

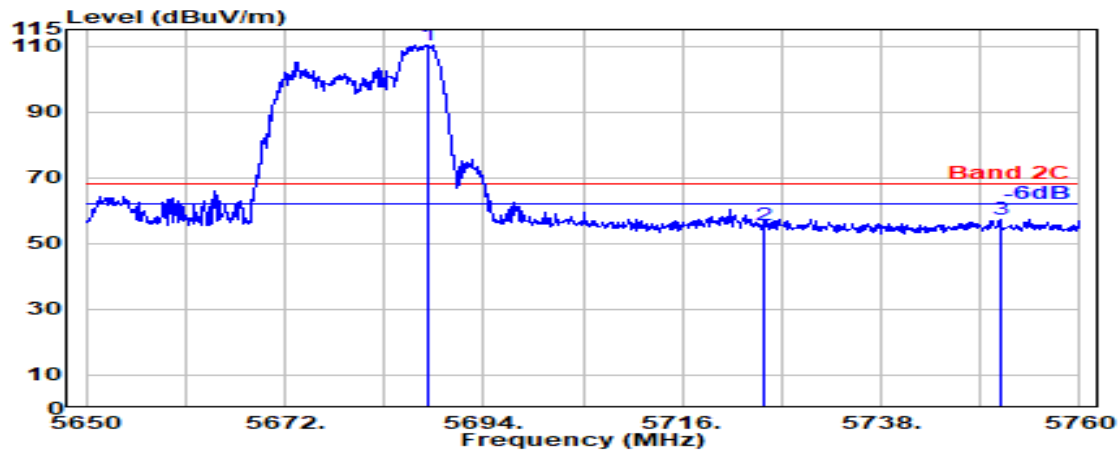

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.800	33.47	8.89	39.13	107.11	110.35	---	---	Peak
5725.000	33.60	8.92	39.14	52.30	55.69	68.20	12.51	Peak
5751.200	33.80	8.95	39.15	53.79	57.40	68.20	10.80	Peak

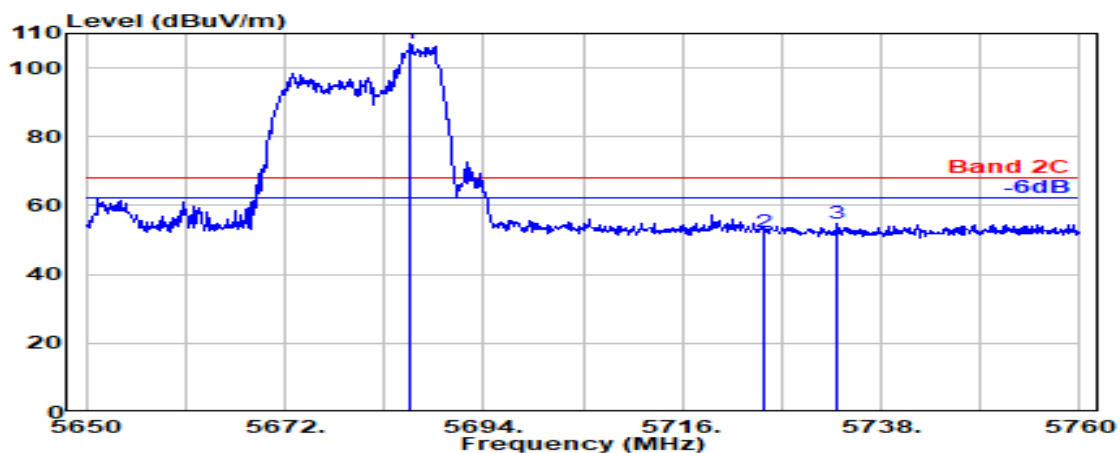

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5685.900	33.48	8.89	39.13	103.74	106.99	---	---	Peak
5725.000	33.60	8.92	39.14	48.93	52.31	68.20	15.89	Peak
5733.200	33.67	8.93	39.14	51.37	54.83	68.20	13.37	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/56	Frequency	TX 5670MHz

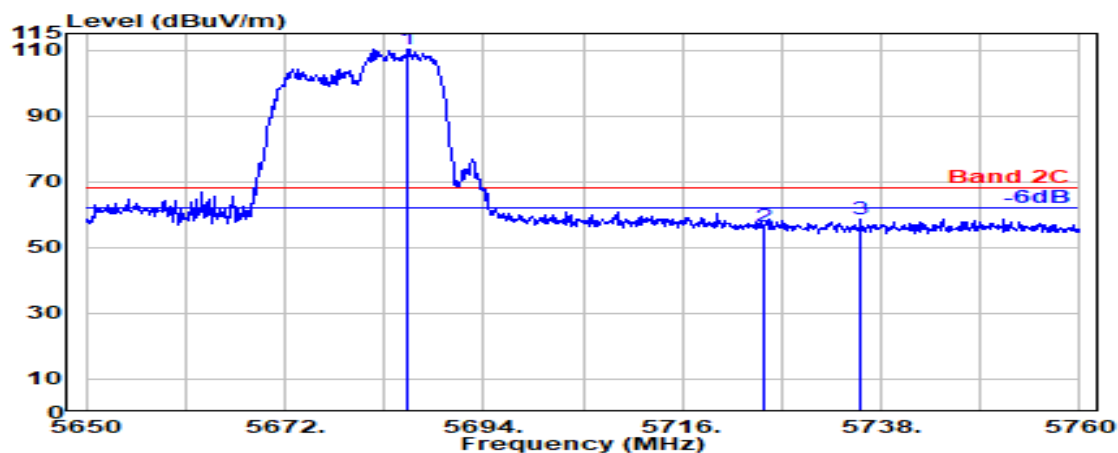

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5685.600	33.49	8.89	39.13	107.03	110.28	---	---	Peak
	5725.000	33.60	8.92	39.14	53.01	56.40	68.20	11.80	Peak
	5735.700	33.69	8.94	39.14	55.32	58.80	68.20	9.40	Peak

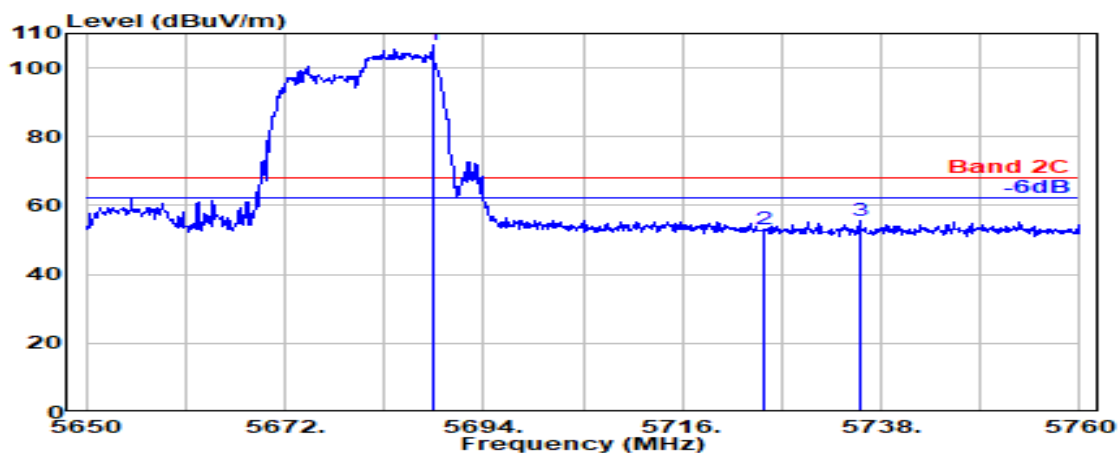

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5688.300	33.47	8.89	39.13	103.36	106.59	---	---	Peak
	5725.000	33.60	8.92	39.14	49.82	53.20	68.20	15.00	Peak
	5735.600	33.69	8.94	39.14	52.01	55.48	68.20	12.72	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/62	Frequency	TX 5670MHz

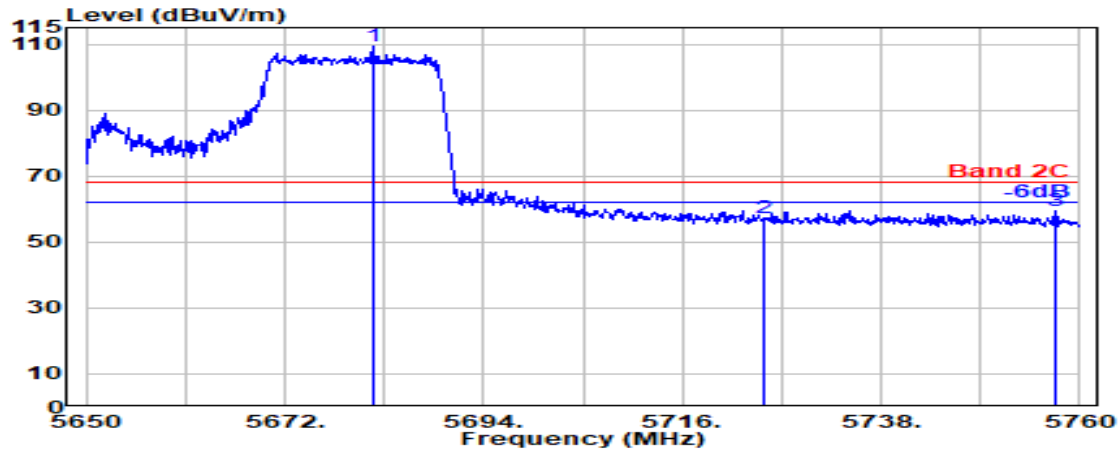

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5681.700	33.51	8.88	39.13	106.03	109.30	---	---	Peak
5725.000	33.60	8.92	39.14	53.83	57.22	68.20	10.98	Peak
5757.200	33.81	8.96	39.15	55.82	59.44	68.20	8.76	Peak

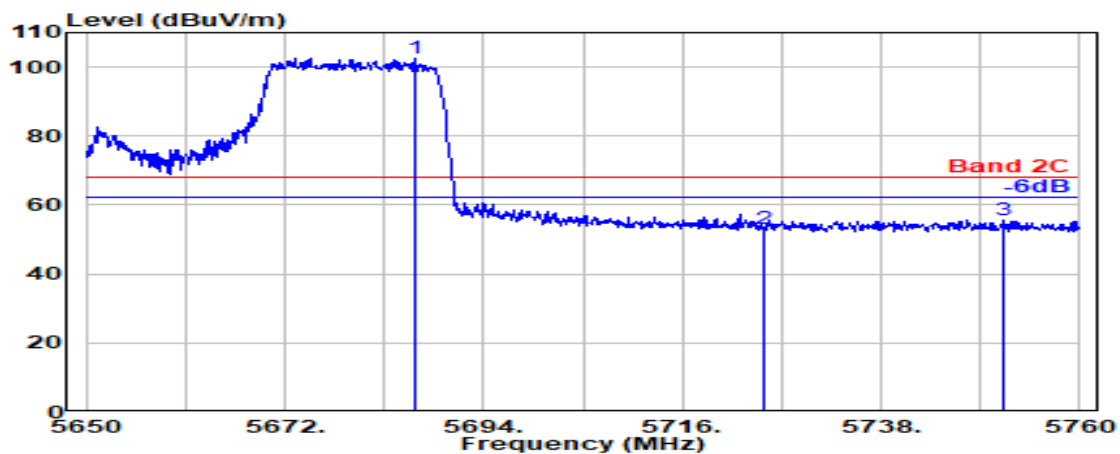

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5686.300	33.48	8.89	39.13	99.44	102.68	---	---	Peak
5725.000	33.60	8.92	39.14	49.86	53.25	68.20	14.95	Peak
5751.500	33.80	8.95	39.15	52.17	55.78	68.20	12.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	26/17	Frequency	TX 5875MHz

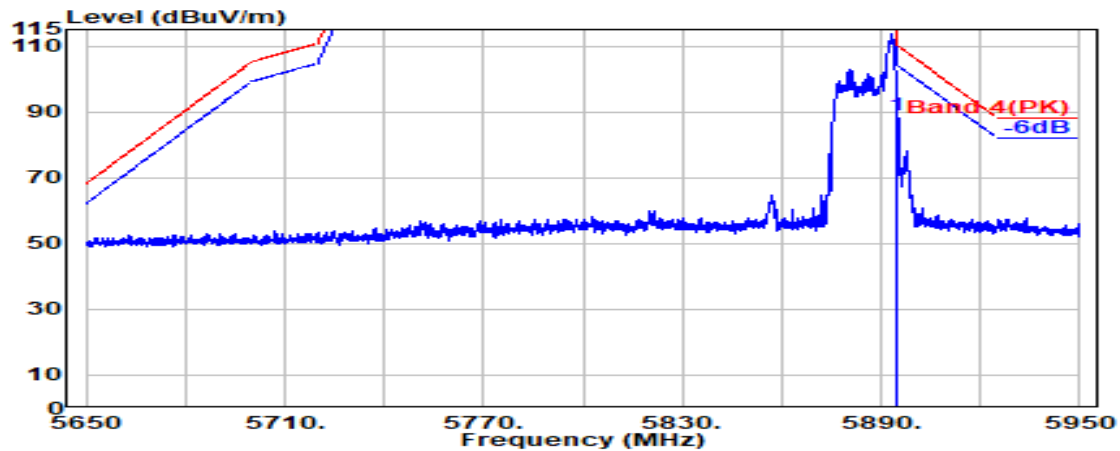

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	84.69	88.76	110.20	21.44	Peak

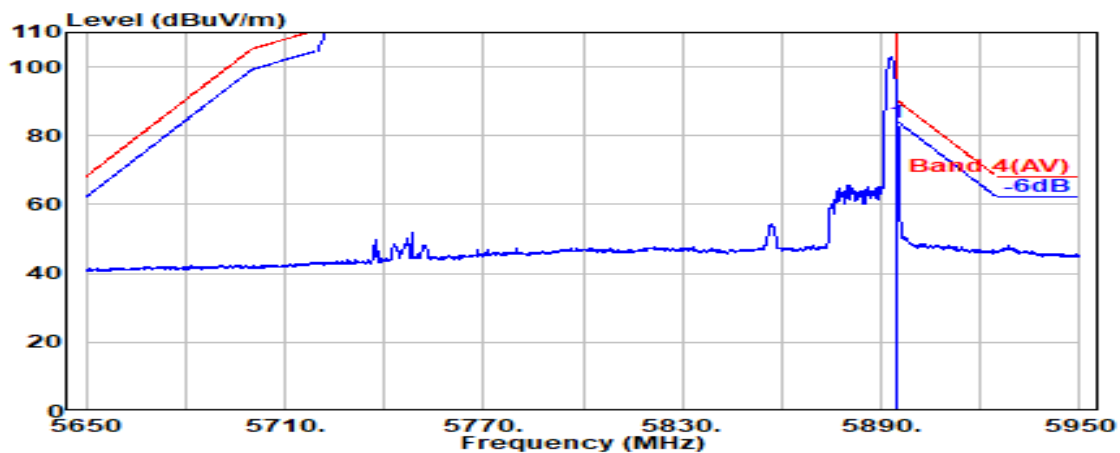

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.96	84.03	90.20	6.17	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	26/17	Frequency	TX 5875MHz

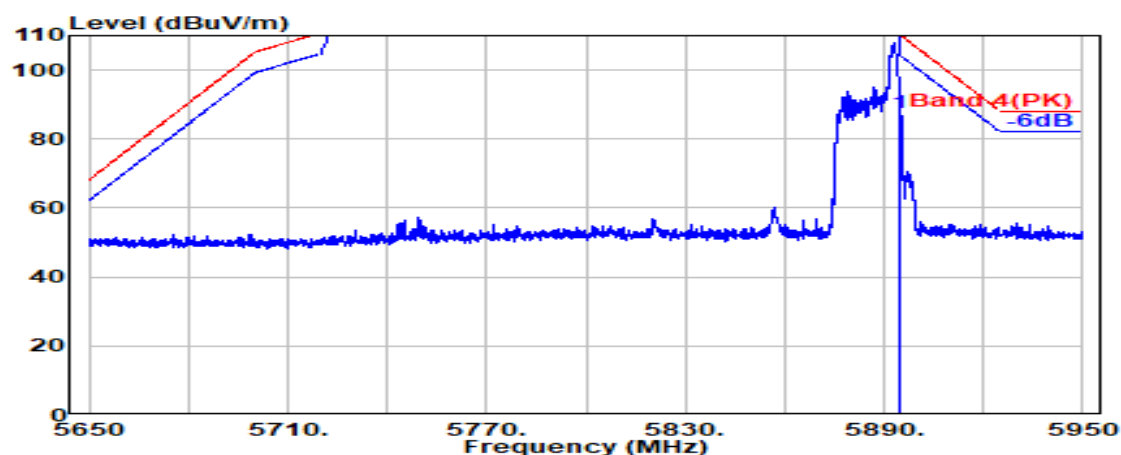

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	83.35	87.42	110.20	22.78	Peak

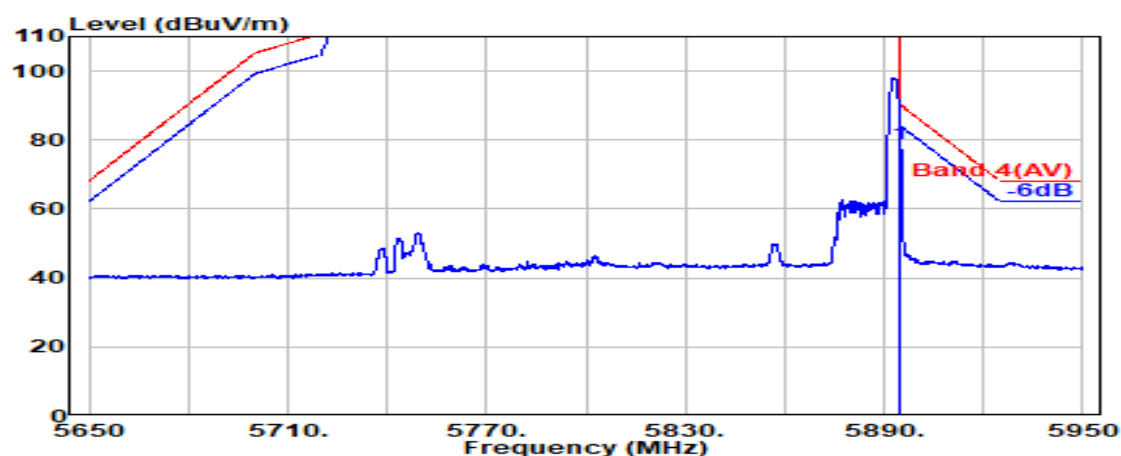

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	74.77	78.84	90.20	11.36	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	52/44	Frequency	TX 5875MHz

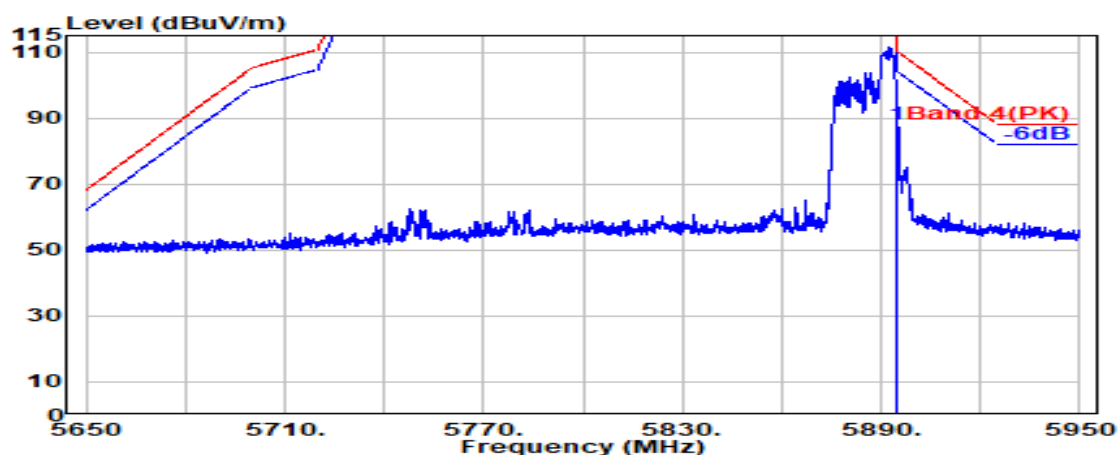

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	84.21	88.28	110.20	21.92	Peak

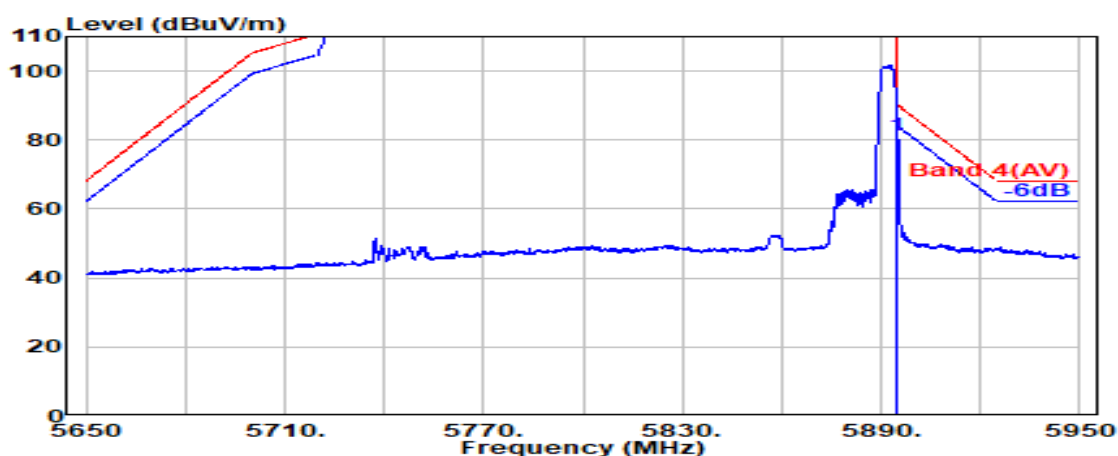

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	77.48	81.55	90.20	8.65	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	52/44	Frequency	TX 5875MHz

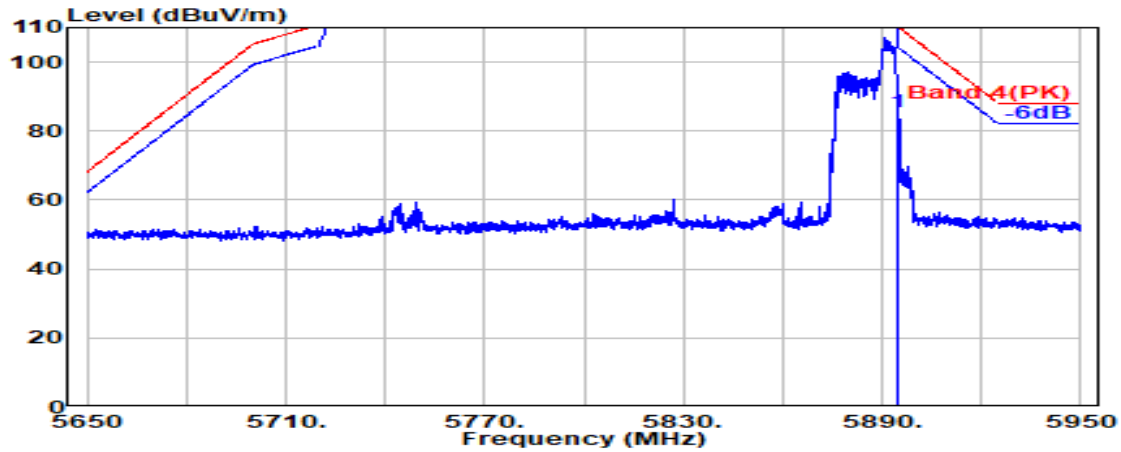

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	81.60	85.67	110.20	24.53	Peak

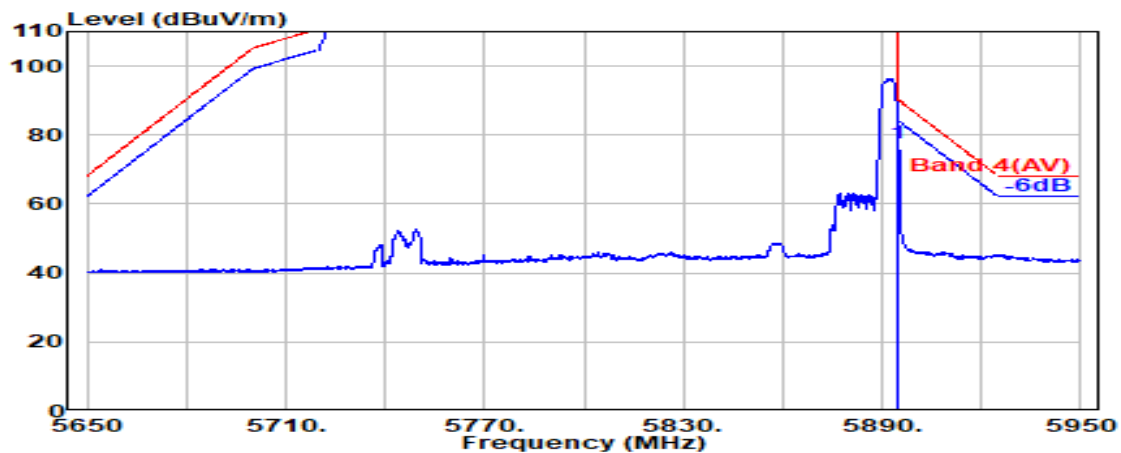


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	73.75	77.82	90.20	12.38	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	106/56	Frequency	TX 5875MHz

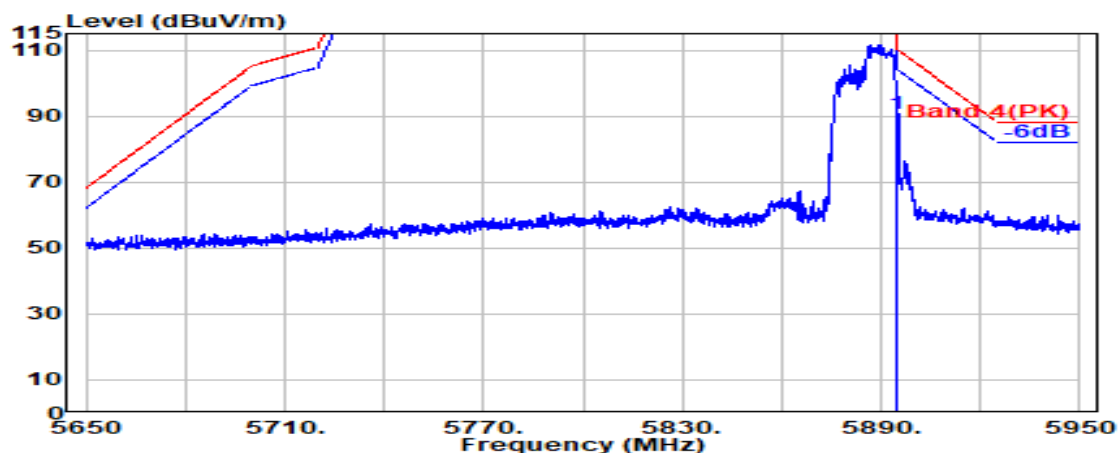

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	86.78	90.85	110.20	19.35	Peak

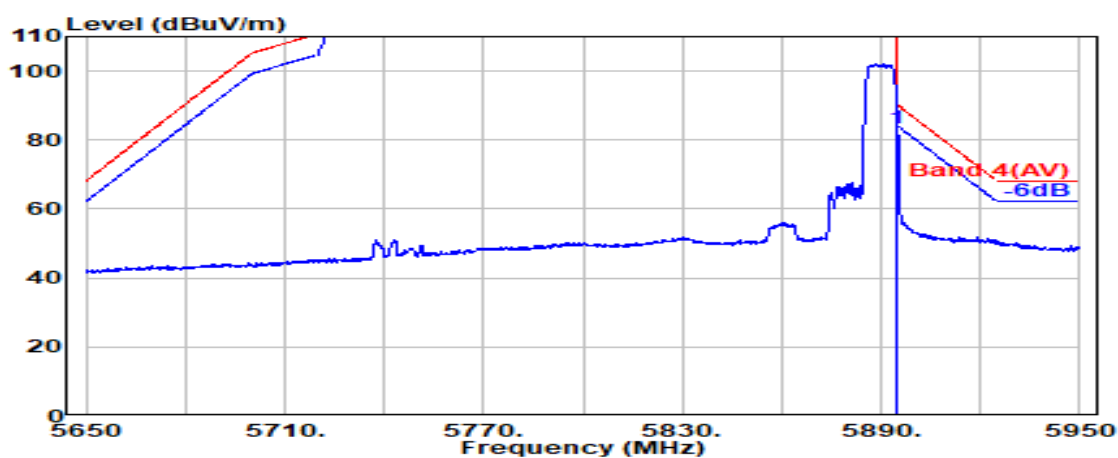

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.35	83.42	90.20	6.78	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	106/56	Frequency	TX 5875MHz

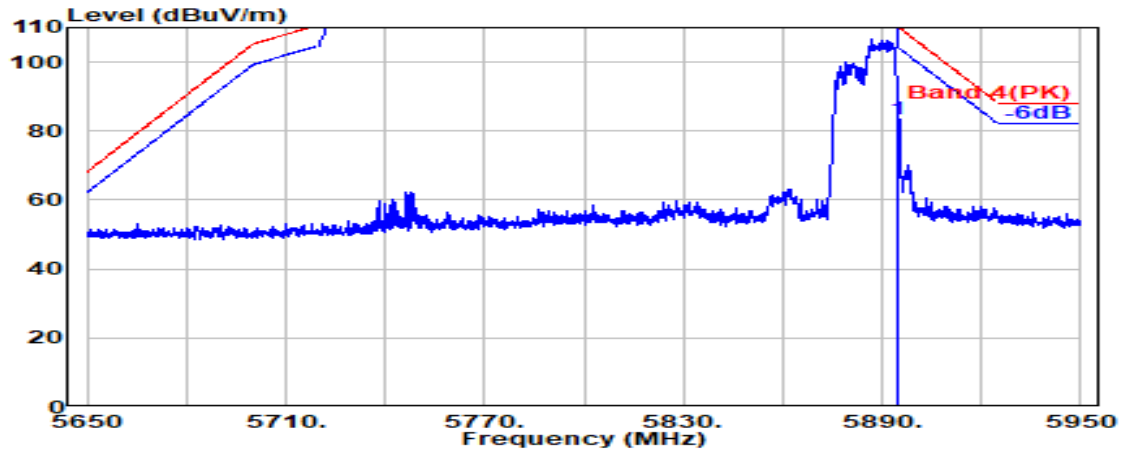

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.51	83.59	110.20	26.61	Peak

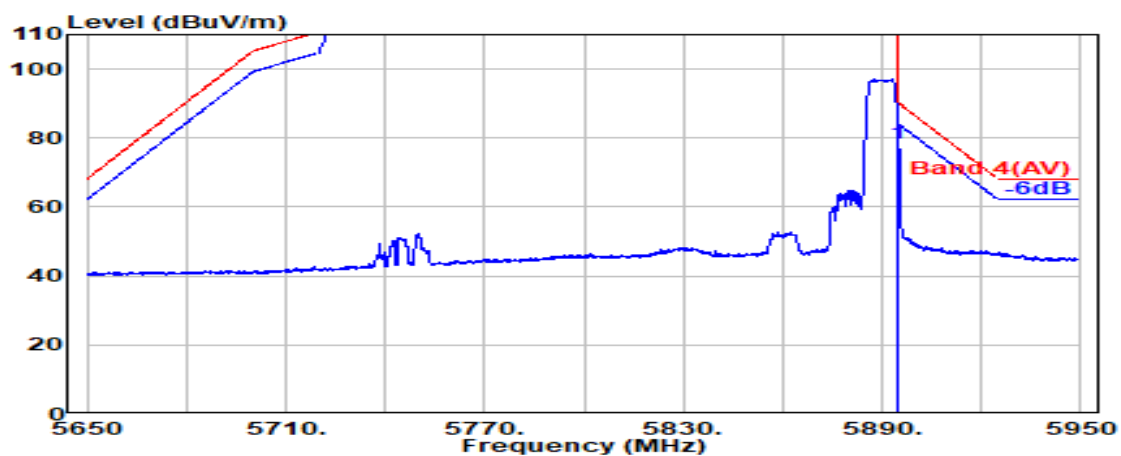

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	74.40	78.47	90.20	11.73	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	242/62	Frequency	TX 5875MHz

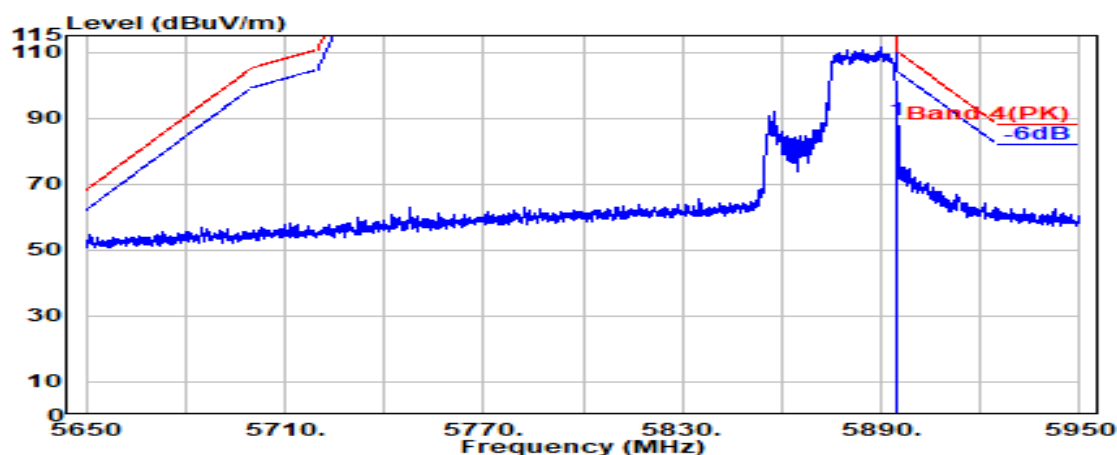

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	85.37	89.44	110.20	20.76	Peak

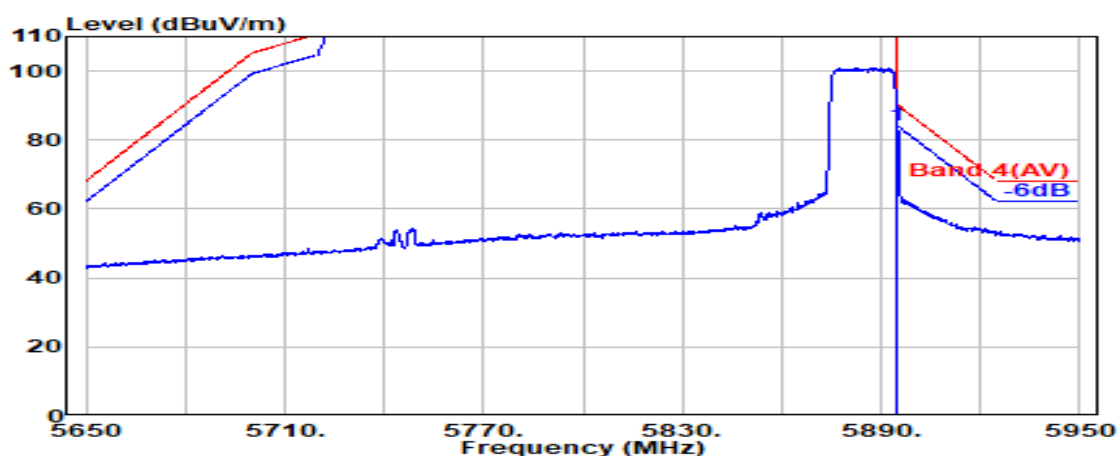

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	80.00	84.07	90.20	6.13	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
RU Configuration	242/62	Frequency	TX 5875MHz

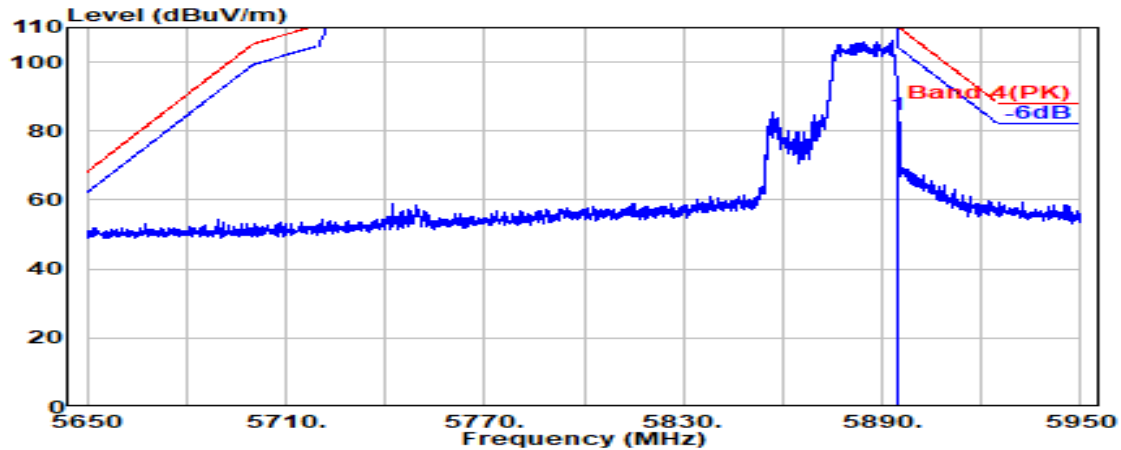

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	80.54	84.62	110.20	25.58	Peak

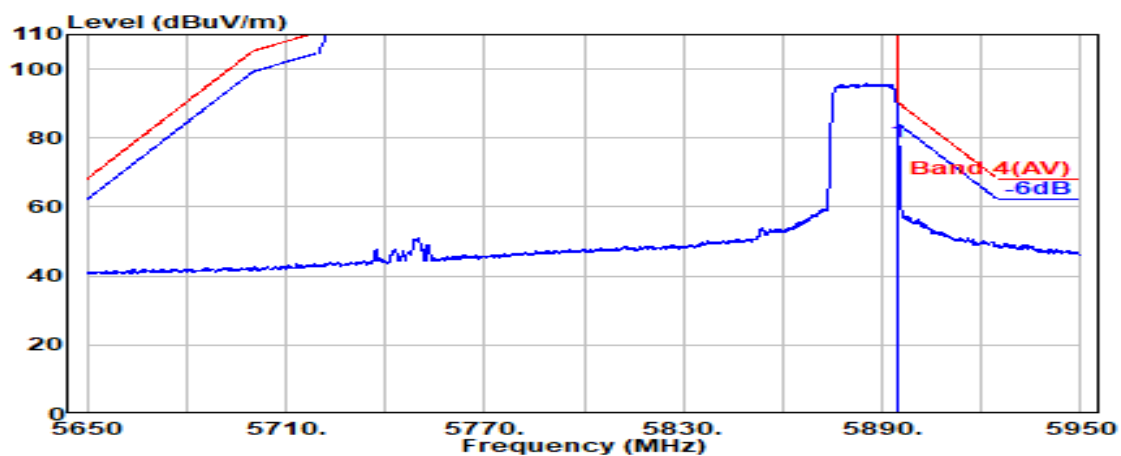

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	74.79	78.86	90.20	11.34	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

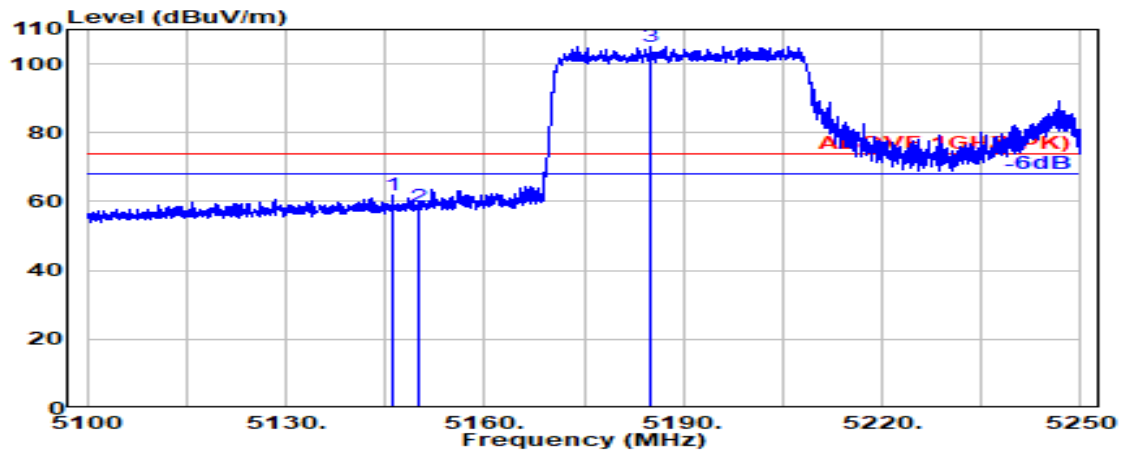

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.250	33.59	8.32	39.09	58.88	61.70	74.00	12.30	Peak
5150.000	33.60	8.33	39.09	55.81	58.65	74.00	15.35	Peak
@ 5185.050	33.60	8.37	39.09	102.25	105.13	---	---	Peak

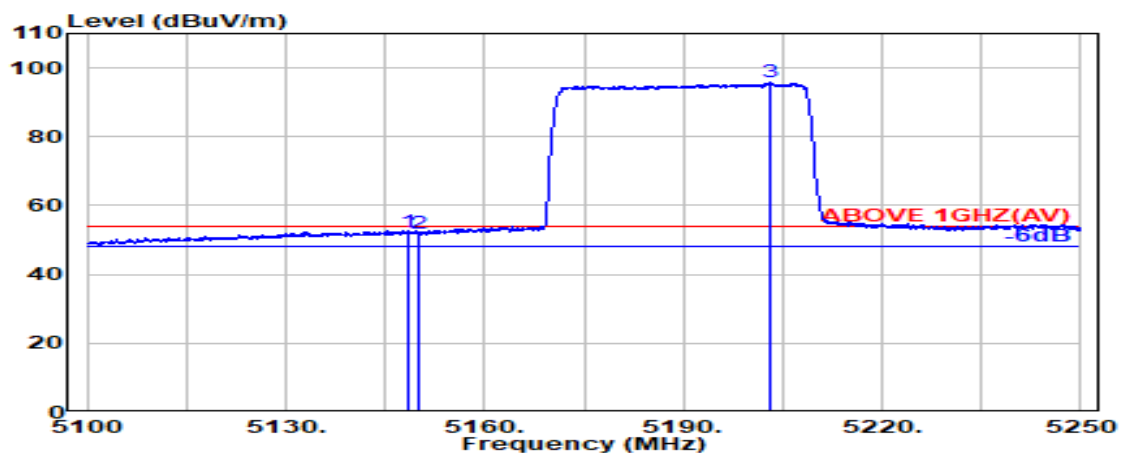

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.550	33.60	8.33	39.09	49.61	52.44	54.00	1.56	Average
5150.000	33.60	8.33	39.09	49.25	52.08	54.00	1.92	Average
@ 5203.150	33.61	8.38	39.09	92.81	95.72	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
RU Configuration	484/65	Frequency	TX 5210MHz

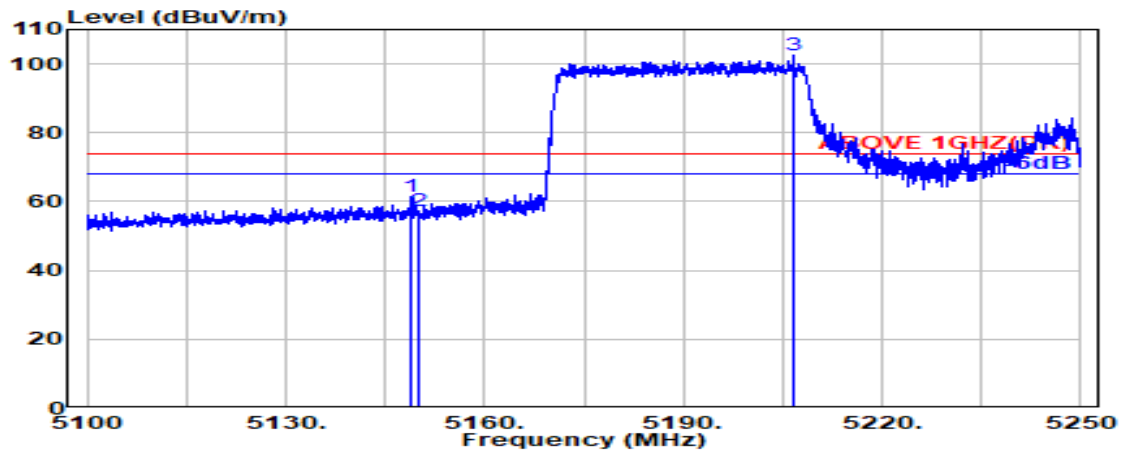

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.050	33.60	8.33	39.09	58.72	61.56	74.00	12.44	Peak
5150.000	33.60	8.33	39.09	54.42	57.25	74.00	16.75	Peak
@ 5206.700	33.61	8.39	39.09	99.46	102.37	---	---	Peak

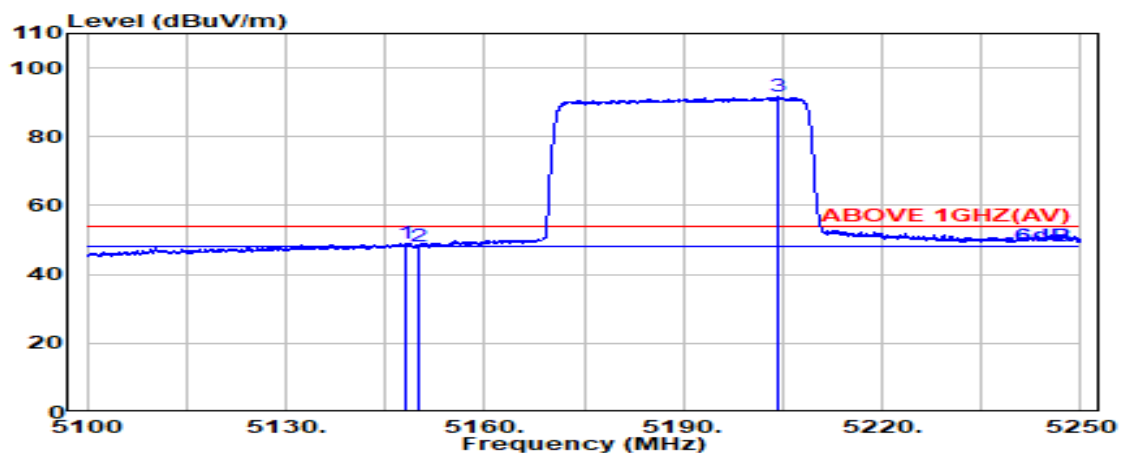

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.050	33.60	8.32	39.09	46.15	48.98	54.00	5.02	Average
5150.000	33.60	8.33	39.09	45.50	48.34	54.00	5.66	Average
@ 5204.250	33.61	8.39	39.09	88.70	91.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

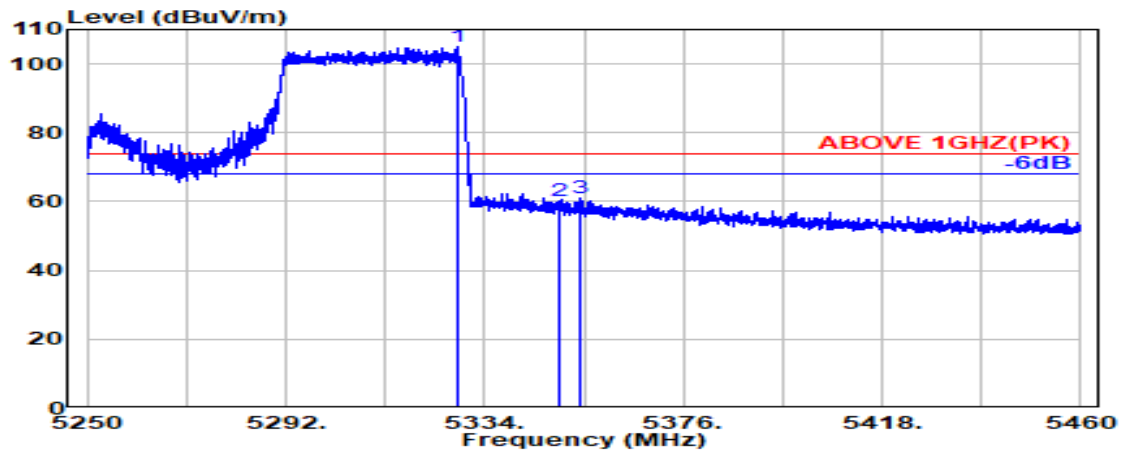

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.400	33.66	8.52	39.08	101.94	105.04	---	---	Peak
5350.000	33.70	8.54	39.08	57.19	60.35	74.00	13.65	Peak
5354.050	33.72	8.55	39.08	57.81	61.00	74.00	13.00	Peak

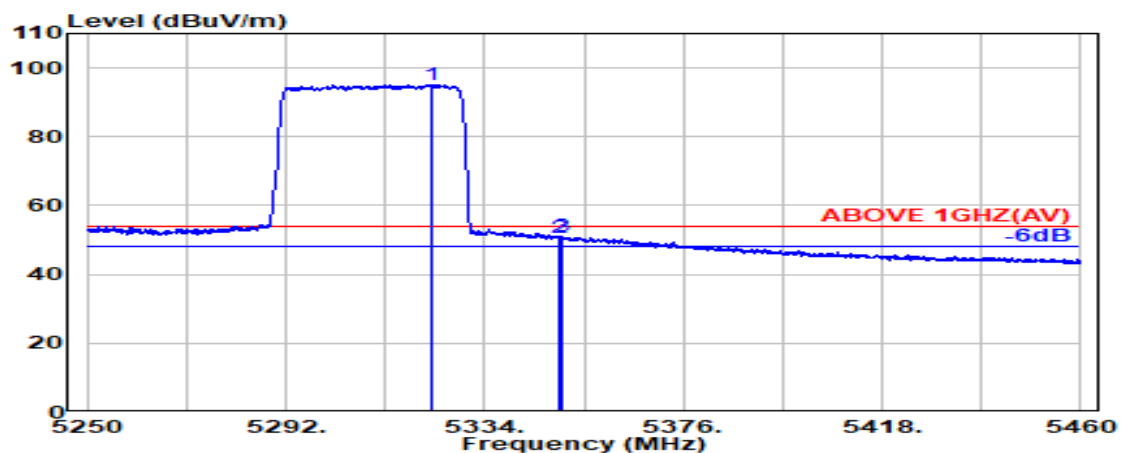

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.600	33.65	8.51	39.08	92.11	95.19	---	---	Average
5350.000	33.70	8.54	39.08	47.53	50.69	54.00	3.31	Average
5350.300	33.70	8.54	39.08	48.08	51.25	54.00	2.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
RU Configuration	484/66	Frequency	TX 5290MHz

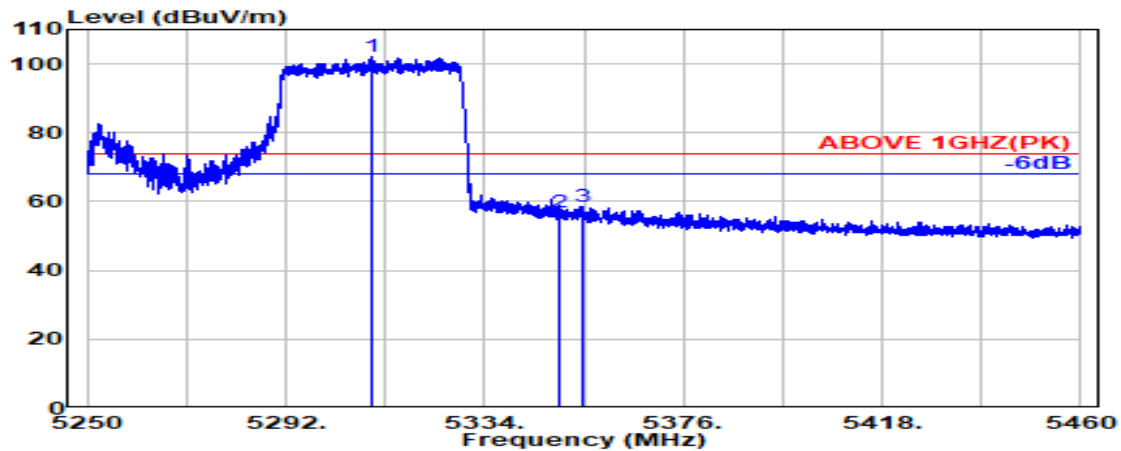

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5310.350	33.62	8.50	39.08	99.11	102.15	---	---	Peak
5350.000	33.70	8.54	39.08	53.59	56.75	74.00	17.25	Peak
5354.650	33.73	8.55	39.08	55.19	58.38	74.00	15.62	Peak

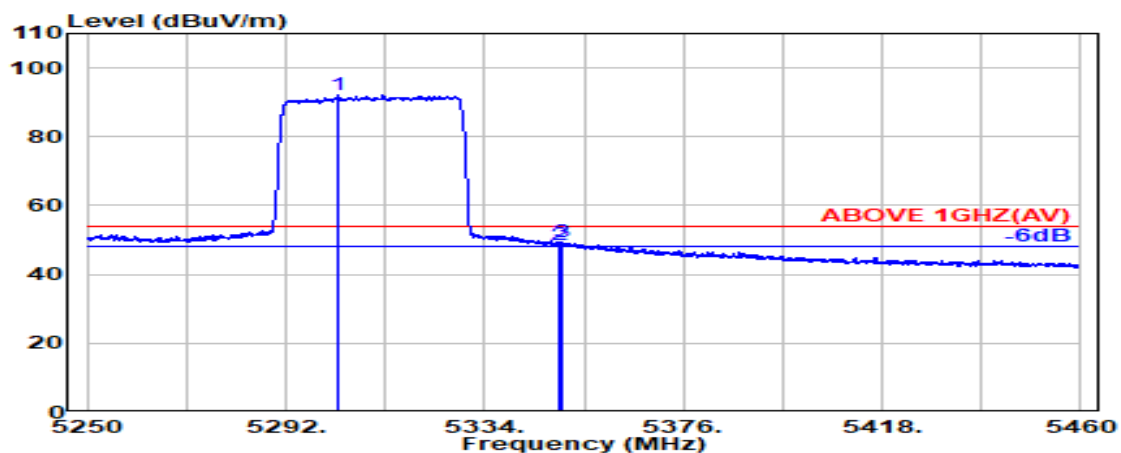

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.850	33.61	8.49	39.08	89.04	92.05	---	---	Average
5350.000	33.70	8.54	39.08	45.38	48.54	54.00	5.46	Average
5350.550	33.70	8.54	39.08	46.14	49.30	54.00	4.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

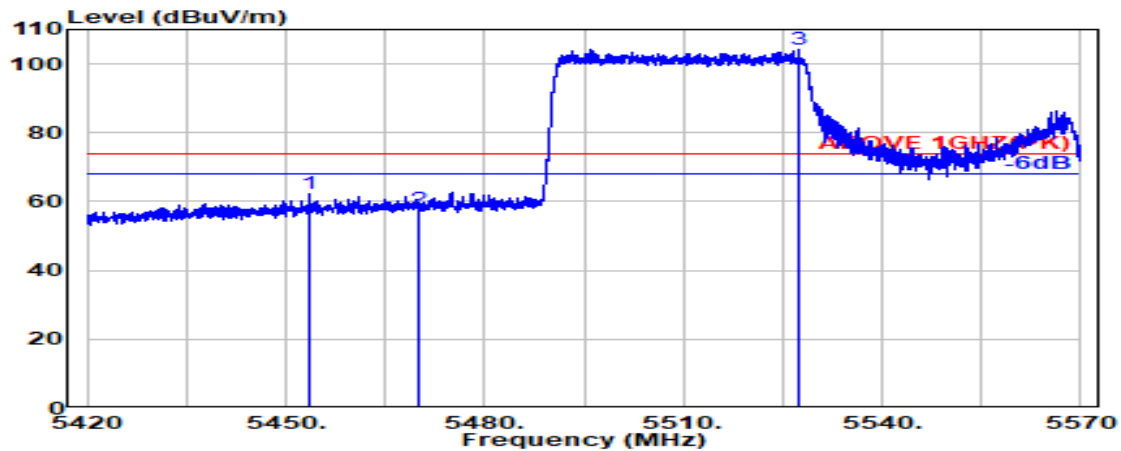

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.450	34.10	8.65	39.07	58.48	62.16	74.00	11.84	Peak
5470.000	34.10	8.67	39.07	54.16	57.86	74.00	16.14	Peak
@ 5527.550	34.04	8.73	39.08	100.65	104.34	---	---	Peak

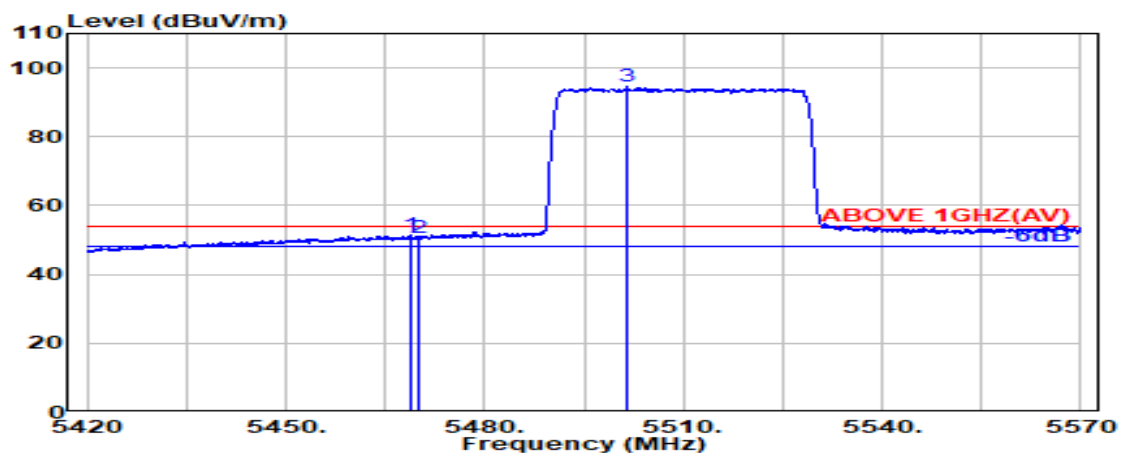

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.07	47.66	51.36	54.00	2.64	Average
5470.000	34.10	8.67	39.07	46.75	50.45	54.00	3.55	Average
@ 5501.600	34.10	8.70	39.07	90.80	94.53	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/65	Frequency	TX 5530MHz

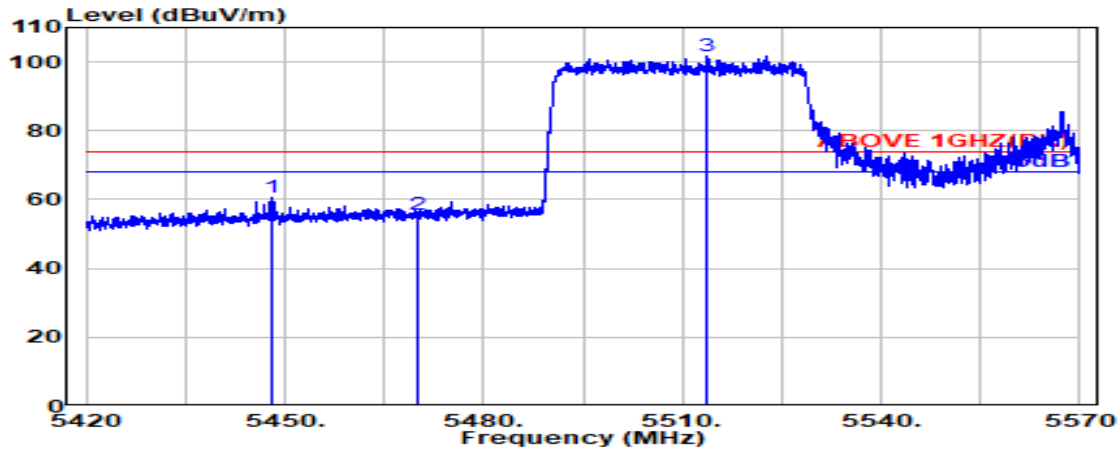

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.200	34.10	8.64	39.07	56.76	60.43	74.00	13.57	Peak
5470.000	34.10	8.67	39.07	51.72	55.42	74.00	18.58	Peak
@ 5513.850	34.07	8.71	39.07	98.19	101.90	---	---	Peak

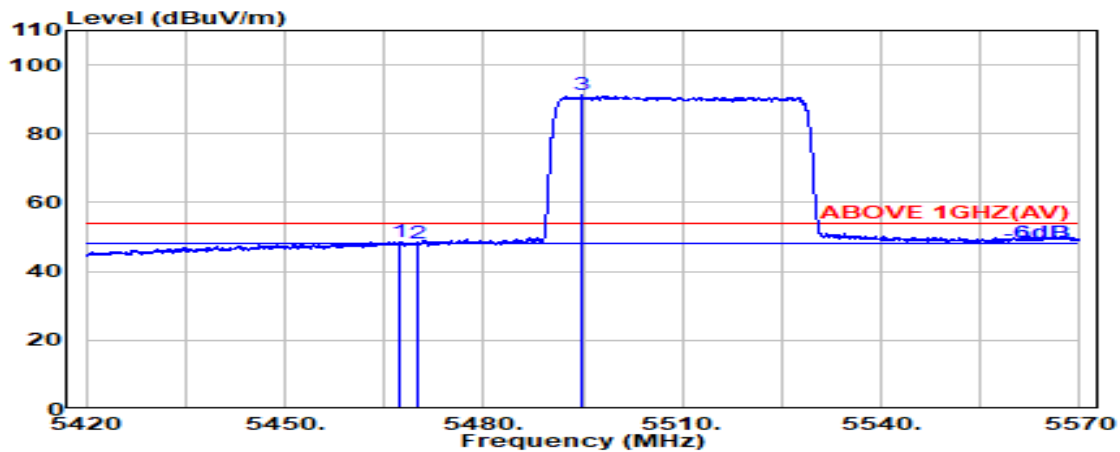

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.400	34.10	8.66	39.07	44.81	48.51	54.00	5.49	Average
5470.000	34.10	8.67	39.07	44.45	48.15	54.00	5.85	Average
@ 5494.850	34.10	8.69	39.07	87.50	91.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
RU Configuration	484/66	Frequency	TX 5610MHz

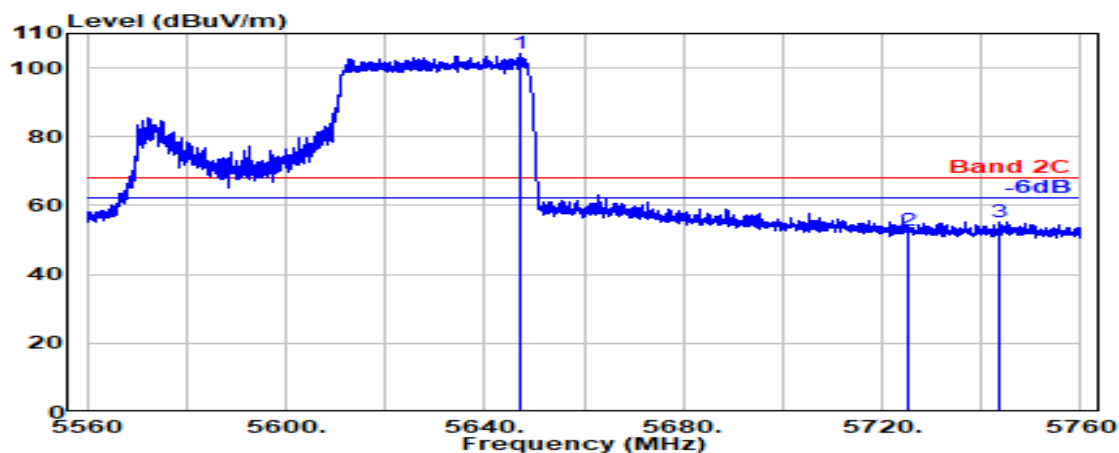

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5647.100	33.71	8.85	39.12	100.76	104.20	---	---	Peak
5725.000	33.60	8.92	39.14	49.38	52.76	68.20	15.44	Peak
5743.550	33.75	8.94	39.14	51.75	55.30	68.20	12.90	Peak

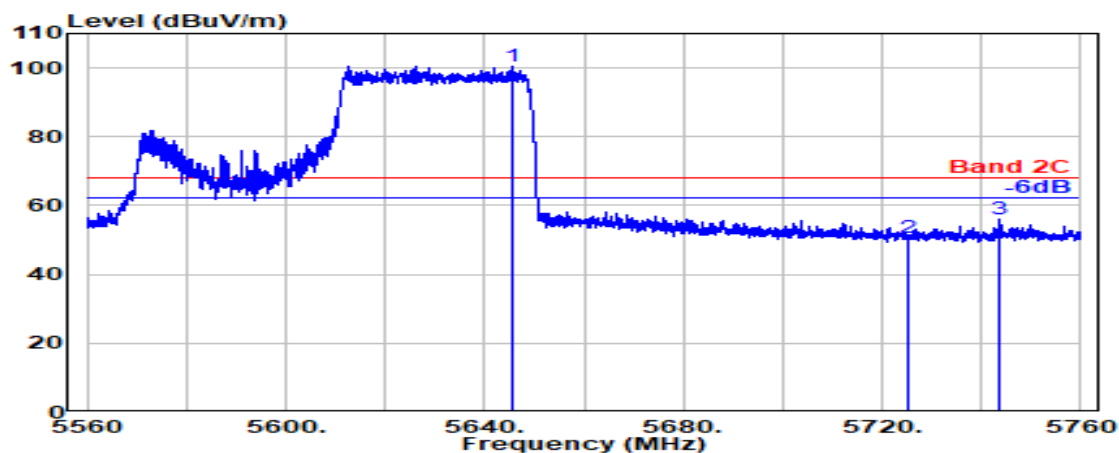

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5645.550	33.71	8.85	39.12	96.98	100.42	---	---	Peak
5725.000	33.60	8.92	39.14	47.30	50.69	68.20	17.51	Peak
5743.450	33.75	8.94	39.14	52.33	55.88	68.20	12.32	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
RU Configuration	484/66	Frequency	TX 5855MHz

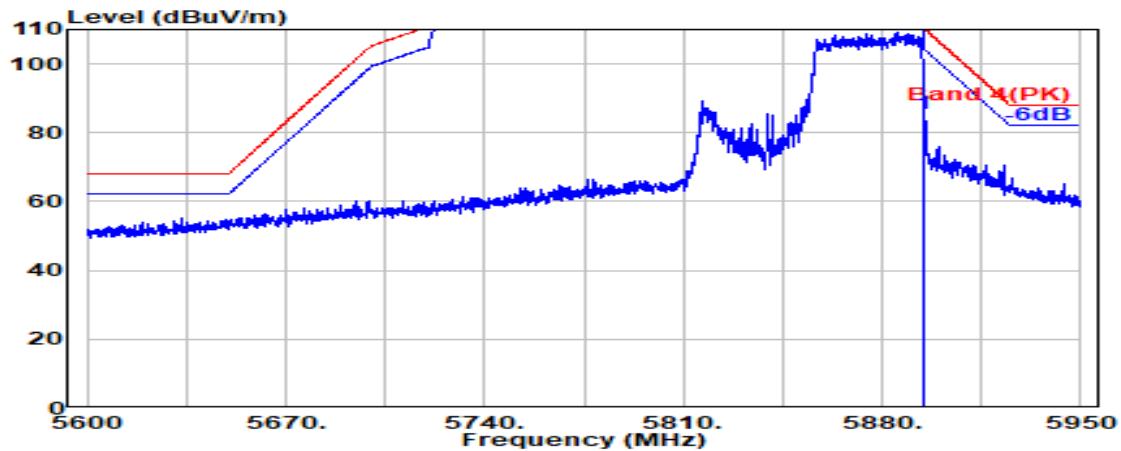

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	81.31	85.38	110.16	24.78	Peak

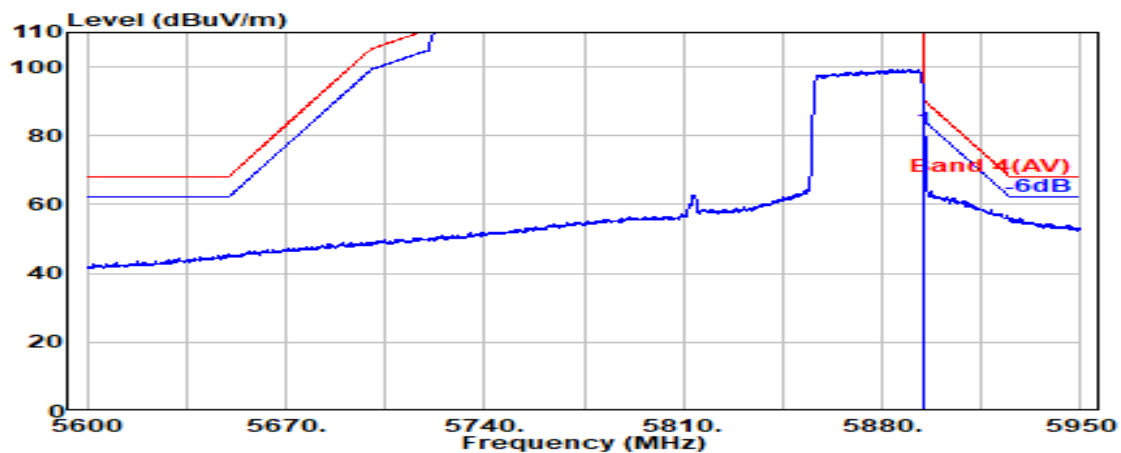

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	77.57	81.65	90.16	8.52	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
RU Configuration	484/66	Frequency	TX 5855MHz

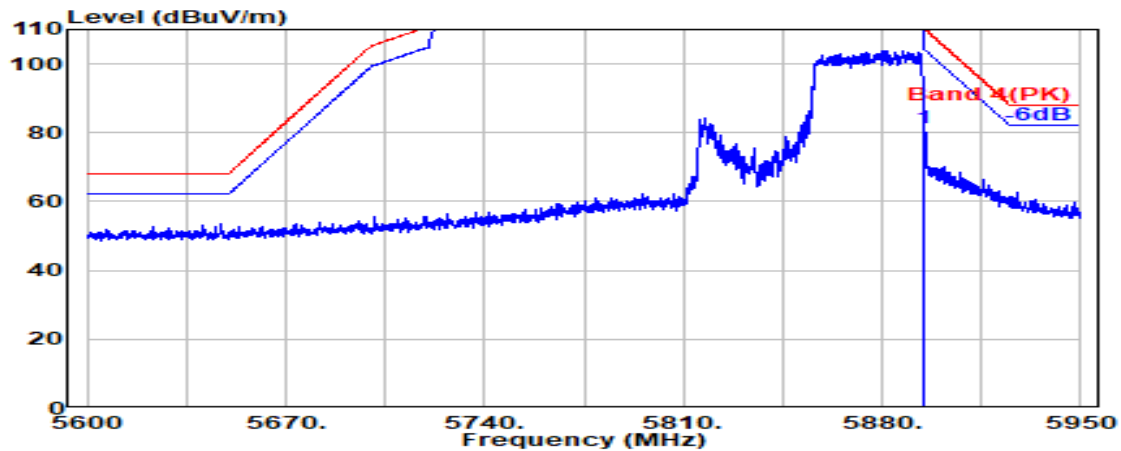

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	77.39	81.46	110.16	28.71	Peak

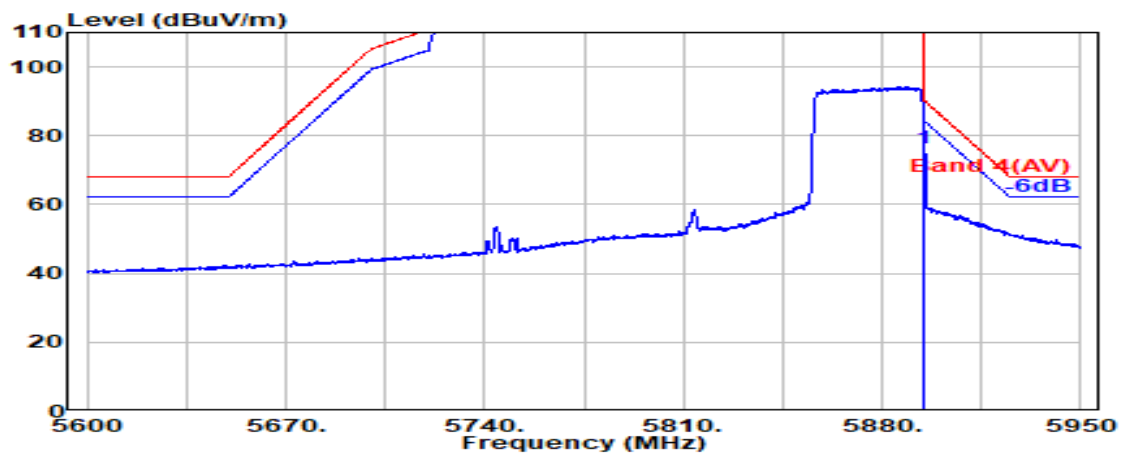

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	35.57	9.96	34.35	65.26	76.44	90.16	13.72	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Band Edge (MIMO)

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

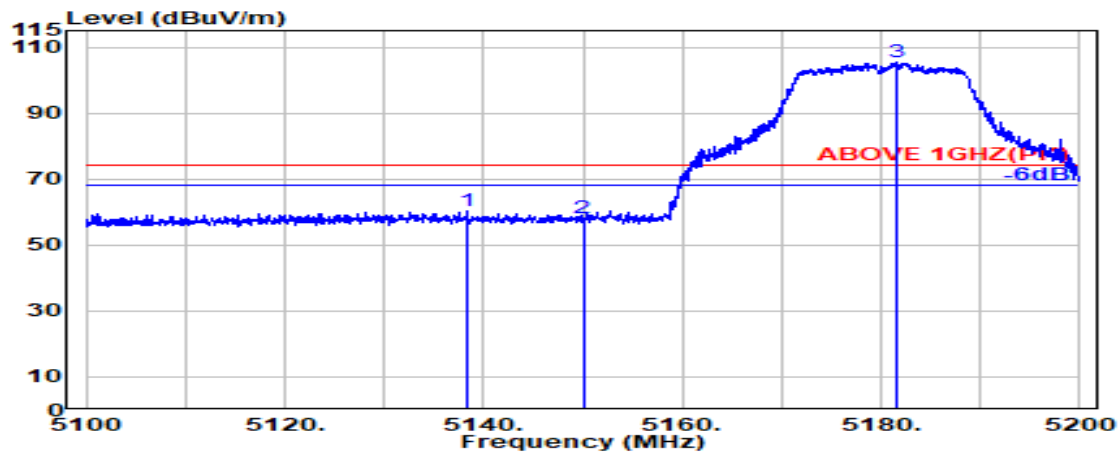

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.350	33.58	8.31	39.09	57.67	60.47	74.00	13.53	Peak
5150.000	33.60	8.33	39.09	55.50	58.34	74.00	15.66	Peak
@ 5181.450	33.60	8.36	39.09	102.50	105.37	---	---	Peak

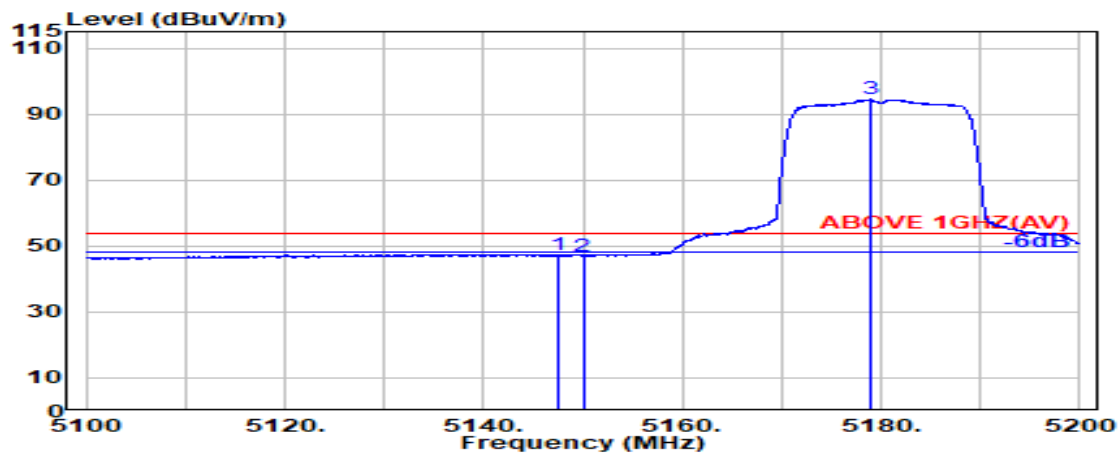


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.500	33.60	8.32	39.09	44.61	47.44	54.00	6.56	Average
5150.000	33.60	8.33	39.09	44.18	47.02	54.00	6.98	Average
@ 5178.900	33.60	8.36	39.09	91.66	94.53	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

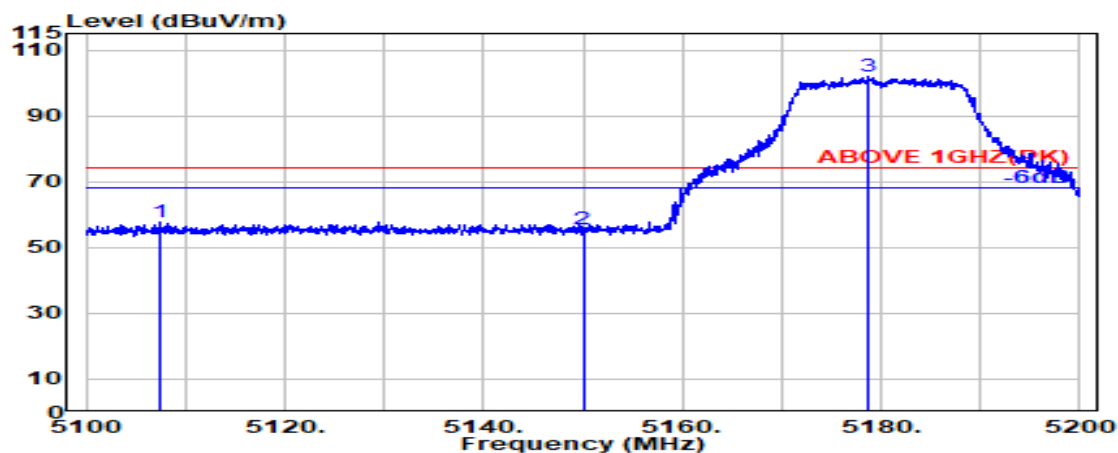

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.350	33.51	8.28	39.09	54.91	57.62	74.00	16.38	Peak
5150.000	33.60	8.33	39.09	52.86	55.69	74.00	18.31	Peak
@ 5178.700	33.60	8.36	39.09	99.01	101.88	---	---	Peak

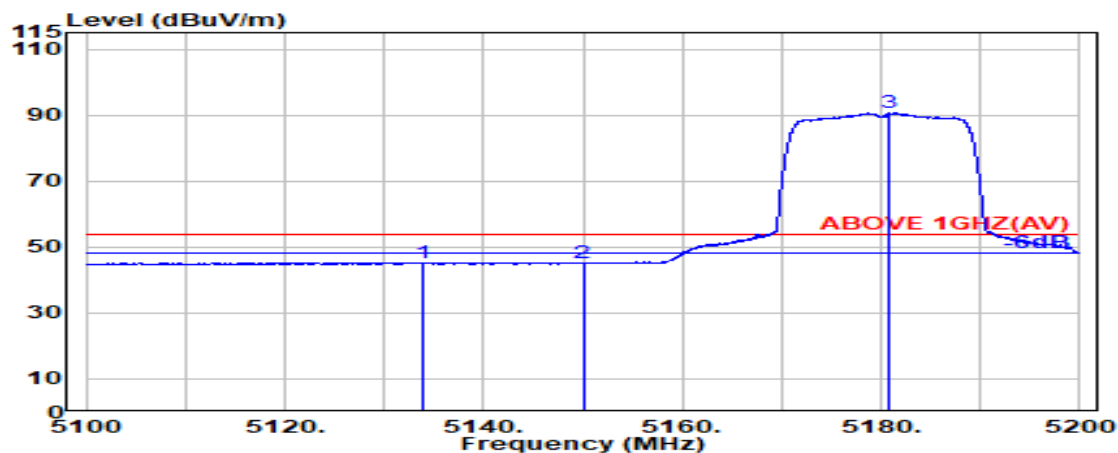

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.900	33.57	8.31	39.09	42.54	45.33	54.00	8.67	Average
5150.000	33.60	8.33	39.09	42.25	45.09	54.00	8.91	Average
@ 5180.850	33.60	8.36	39.09	87.71	90.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	UNII Band 2A
		Frequency	TX 5320MHz

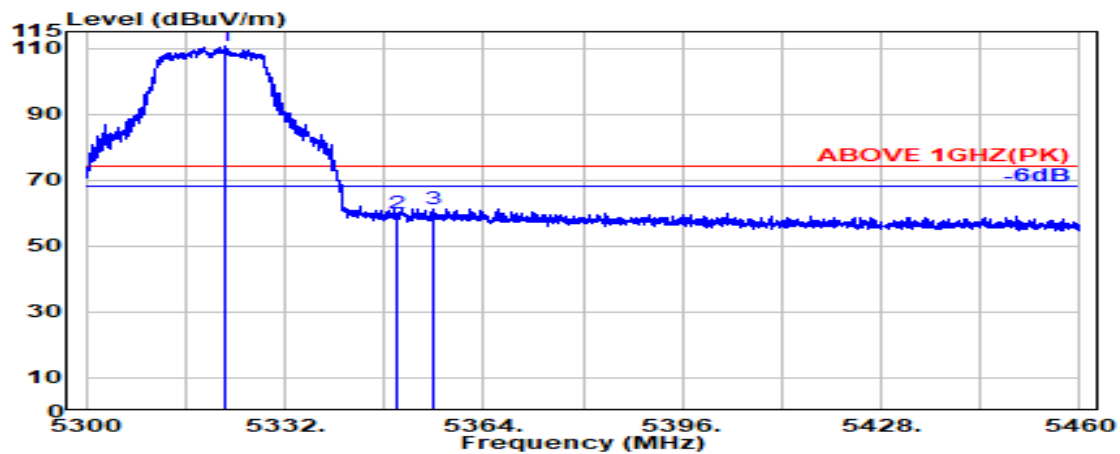

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5322.500	33.65	8.51	39.08	107.40	110.48	---	---	Peak
5350.000	33.70	8.54	39.08	56.57	59.73	74.00	14.27	Peak
5355.750	33.73	8.55	39.08	58.15	61.36	74.00	12.64	Peak

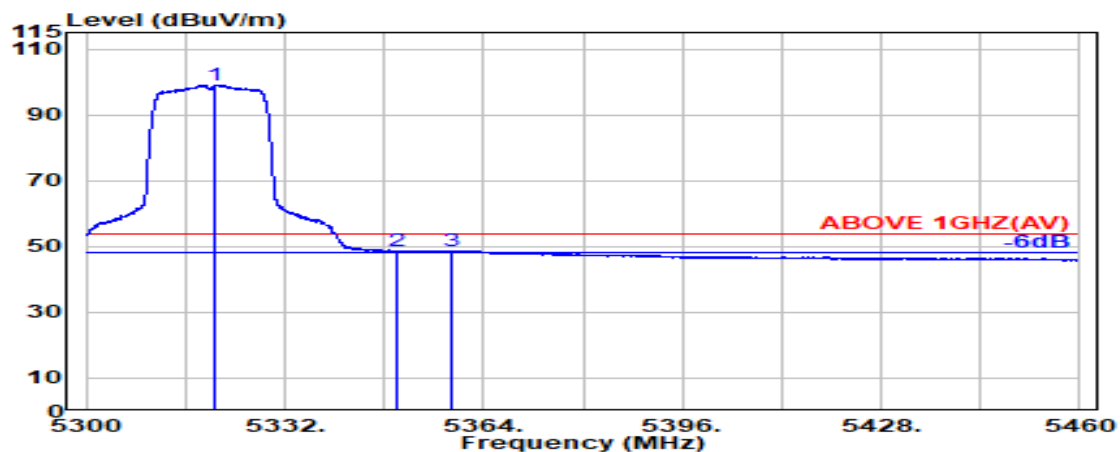

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5320.800	33.64	8.51	39.08	96.06	99.13	---	---	Average
5350.000	33.70	8.54	39.08	45.35	48.52	54.00	5.48	Average
5358.700	33.75	8.55	39.08	45.58	48.80	54.00	5.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	UNII Band 2A
		Frequency	TX 5320MHz

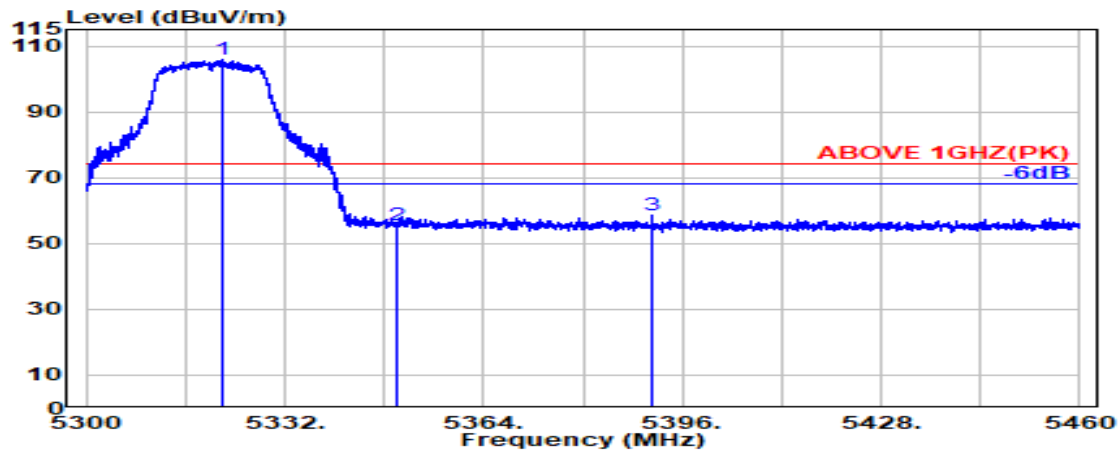

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.950	33.64	8.51	39.08	102.60	105.68	---	---	Peak
5350.000	33.70	8.54	39.08	52.58	55.74	74.00	18.26	Peak
5391.150	33.95	8.59	39.08	55.21	58.66	74.00	15.34	Peak

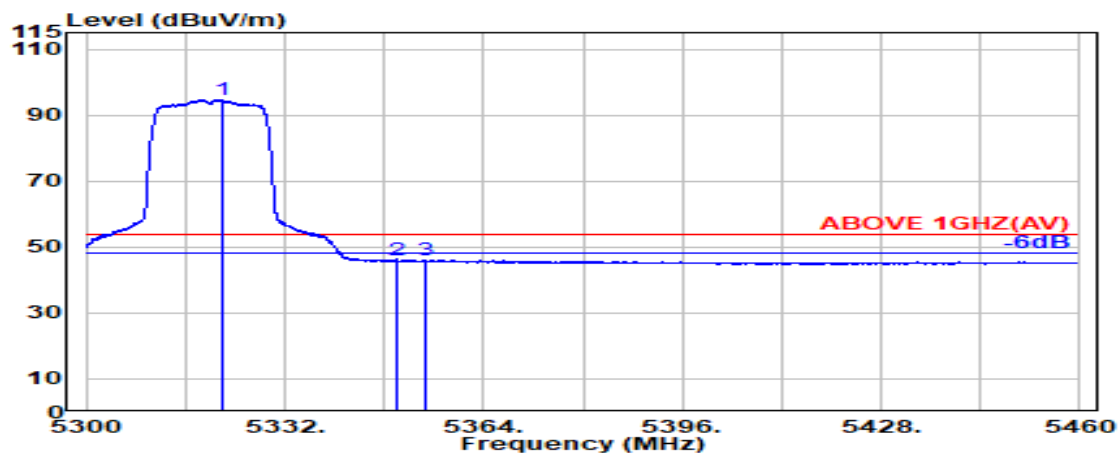


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.850	33.64	8.51	39.08	91.59	94.66	---	---	Average
5350.000	33.70	8.54	39.08	42.69	45.85	54.00	8.15	Average
5354.650	33.73	8.55	39.08	42.81	46.01	54.00	7.99	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

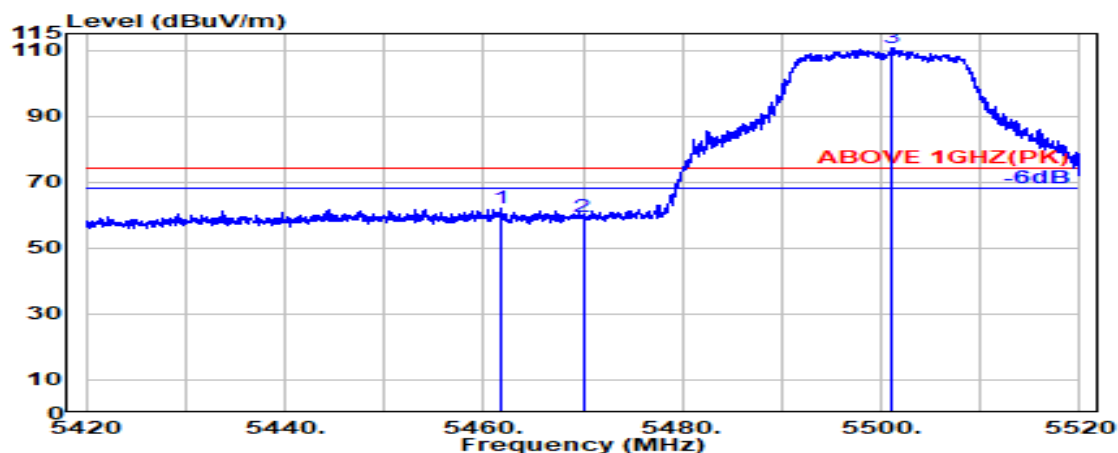

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.700	34.10	8.66	39.07	58.16	61.85	74.00	12.15	Peak
5470.000	34.10	8.67	39.07	55.57	59.27	74.00	14.73	Peak
@ 5501.050	34.10	8.70	39.07	107.12	110.84	---	---	Peak

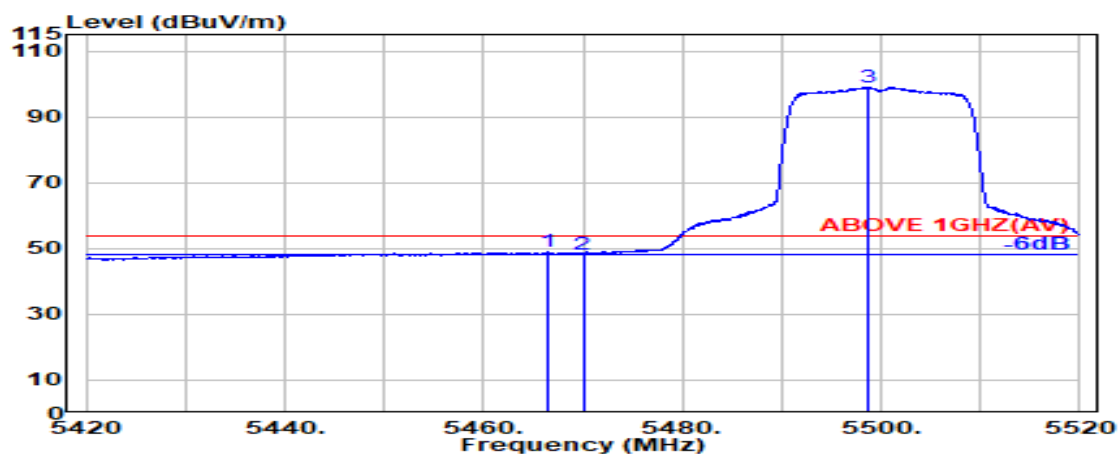


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.350	34.10	8.66	39.07	45.15	48.84	54.00	5.16	Average
5470.000	34.10	8.67	39.07	44.69	48.38	54.00	5.62	Average
@ 5498.800	34.10	8.70	39.07	95.28	99.01	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

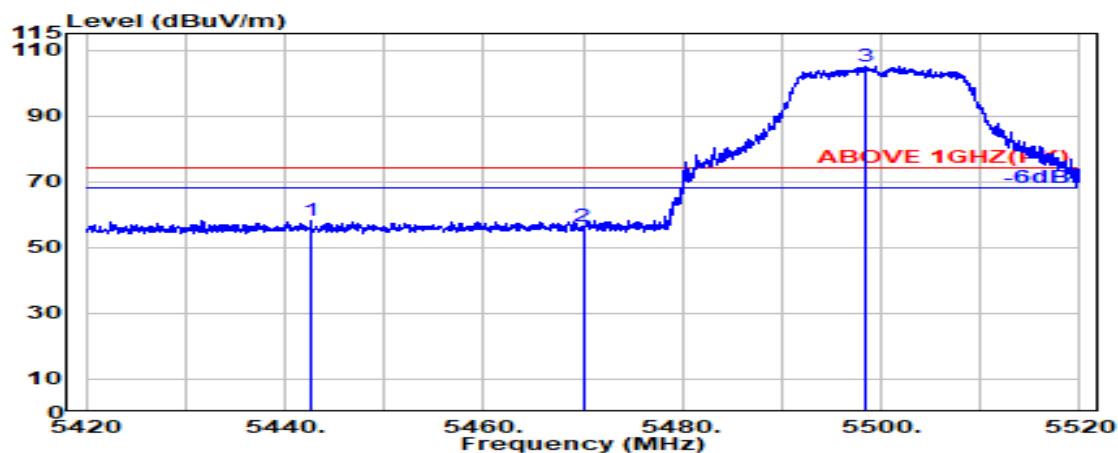

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.550	34.09	8.64	39.07	54.68	58.34	74.00	15.66	Peak
5470.000	34.10	8.67	39.07	52.70	56.39	74.00	17.61	Peak
@ 5498.450	34.10	8.70	39.07	101.39	105.11	---	---	Peak

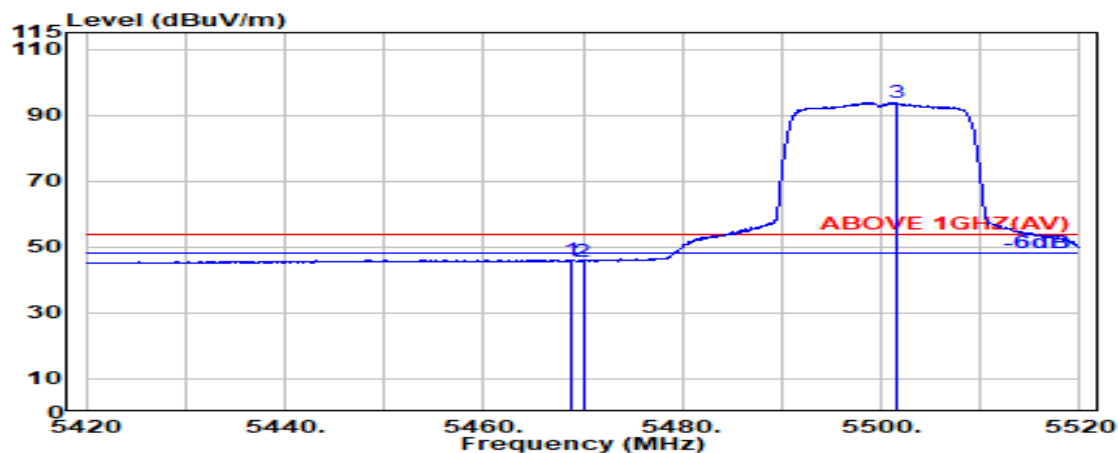

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.10	8.67	39.07	42.39	46.09	54.00	7.91	Average
5470.000	34.10	8.67	39.07	42.00	45.69	54.00	8.31	Average
@ 5501.450	34.10	8.70	39.07	90.13	93.86	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

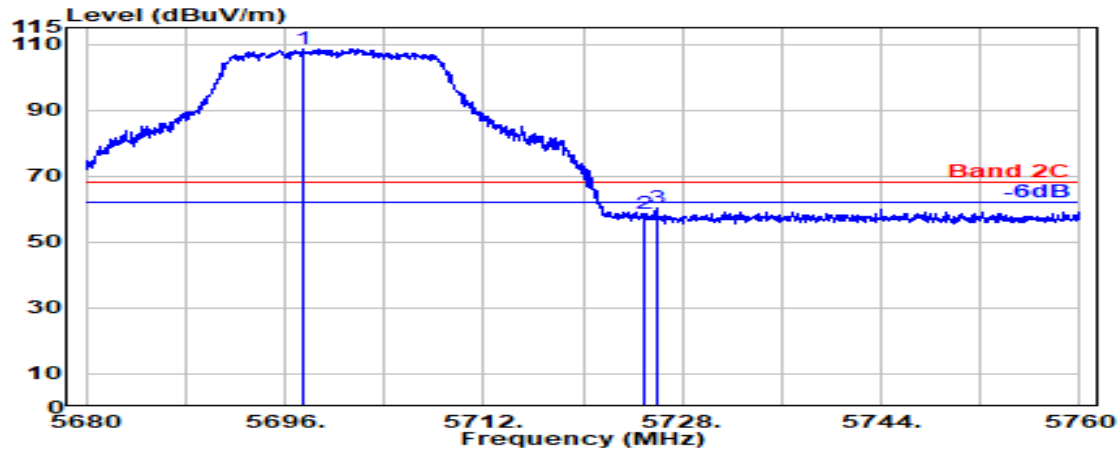

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.450	33.42	8.90	39.13	105.45	108.64	---	---	Peak
5725.000	33.60	8.92	39.14	55.02	58.40	68.20	9.80	Peak
5725.900	33.61	8.93	39.14	56.96	60.36	68.20	7.84	Peak

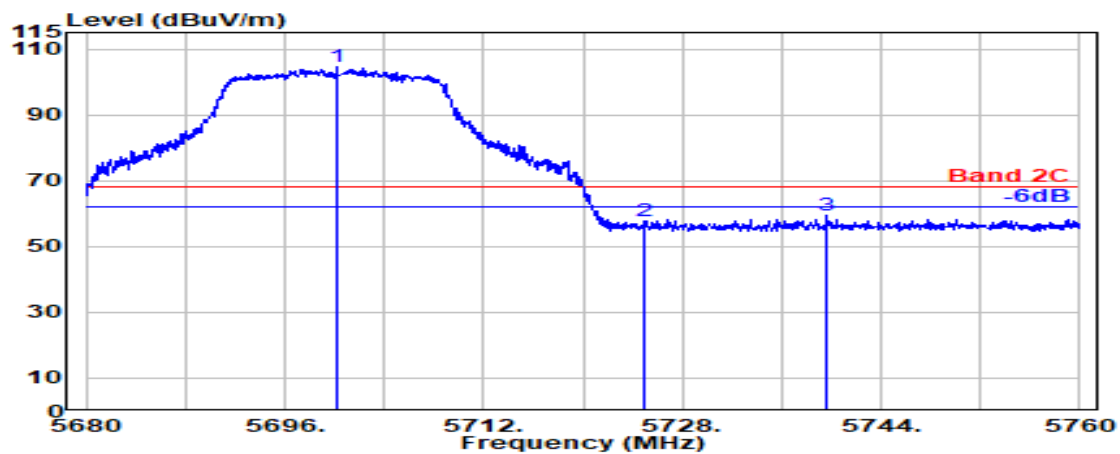

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.200	33.40	8.90	39.13	101.37	104.54	---	---	Peak
5725.000	33.60	8.92	39.14	54.49	57.87	68.20	10.33	Peak
5739.650	33.72	8.94	39.14	55.77	59.28	68.20	8.92	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

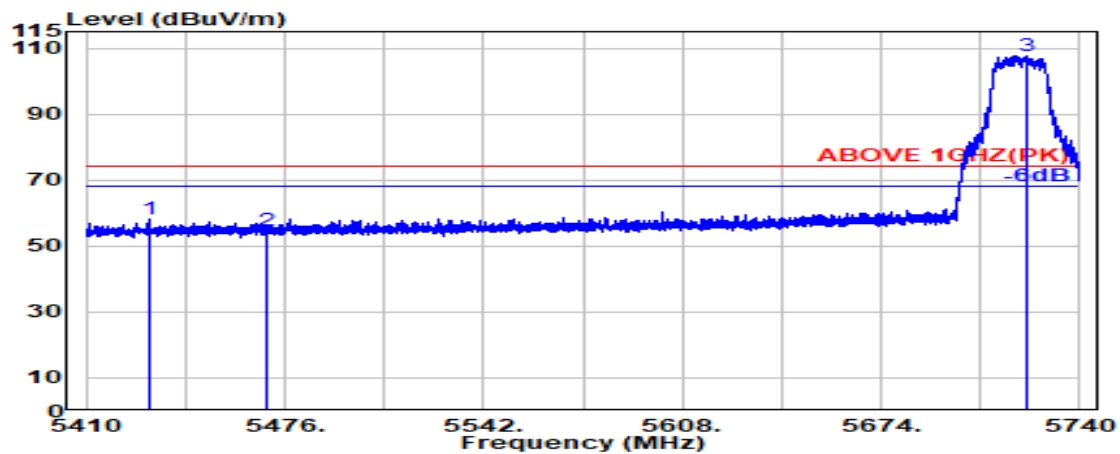

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5431.100	34.06	8.63	39.07	54.40	58.02	74.00	15.98	Peak
5470.000	34.10	8.67	39.07	51.09	54.79	74.00	19.21	Peak
@ 5722.100	33.58	8.92	39.14	104.38	107.75	---	---	Peak

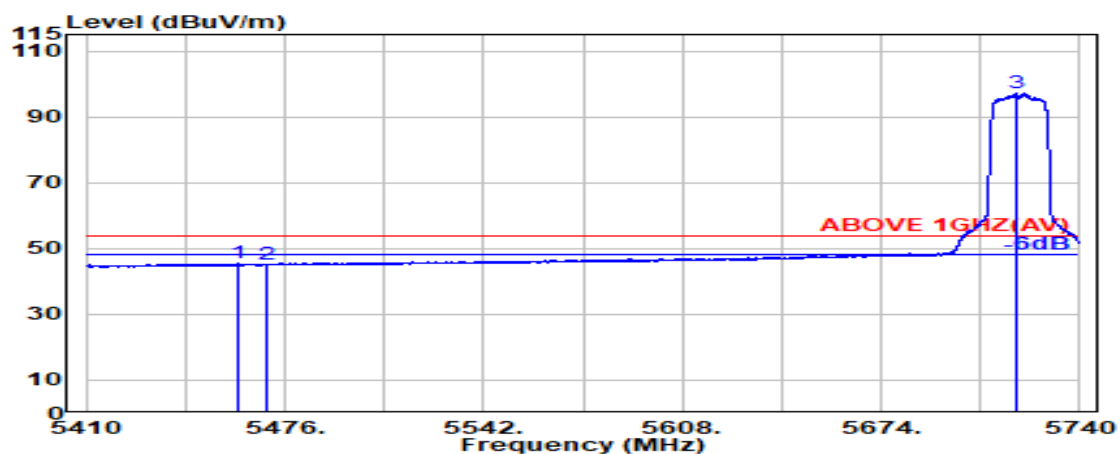

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.550	34.10	8.66	39.07	41.66	45.35	54.00	8.65	Average
5470.000	34.10	8.67	39.07	41.28	44.98	54.00	9.02	Average
@ 5718.950	33.55	8.92	39.14	93.73	97.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

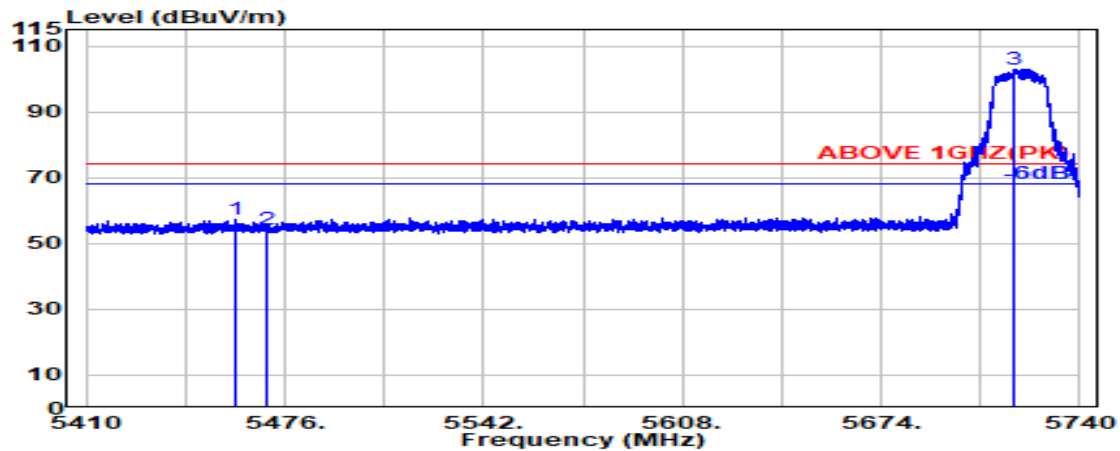

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.10	8.66	39.07	53.51	57.20	74.00	16.80	Peak
5470.000	34.10	8.67	39.07	50.44	54.14	74.00	19.86	Peak
@ 5717.800	33.54	8.92	39.14	99.47	102.80	---	---	Peak

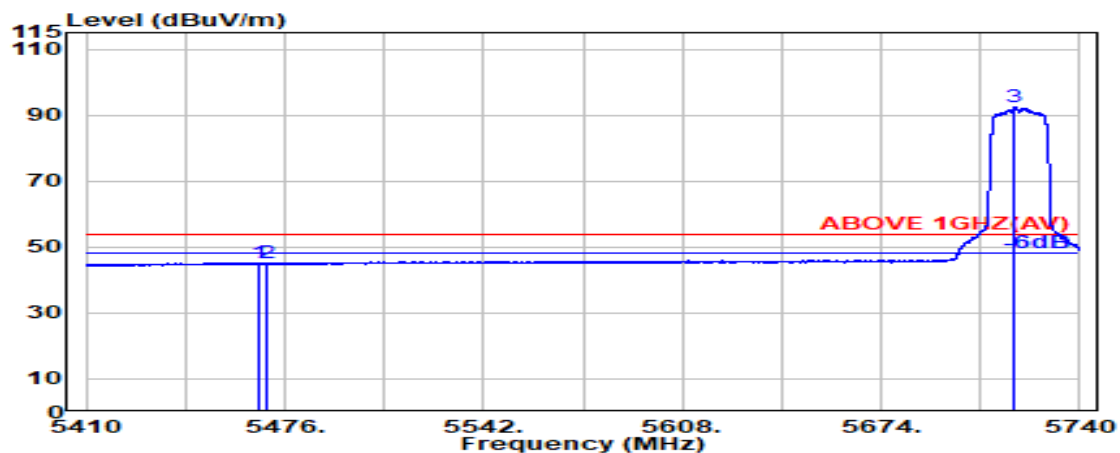

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.550	34.10	8.67	39.07	41.62	45.31	54.00	8.69	Average
5470.000	34.10	8.67	39.07	41.35	45.04	54.00	8.96	Average
@ 5718.300	33.55	8.92	39.14	88.93	92.26	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

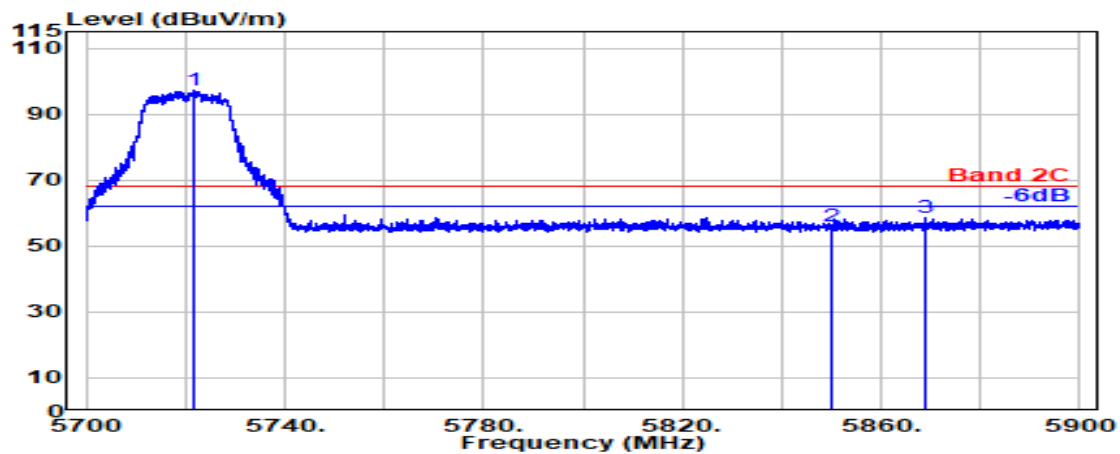

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5721.450	33.57	8.92	39.14	93.85	97.21	---	---	Peak
5850.000	33.90	9.05	39.18	52.14	55.91	68.20	12.29	Peak
5868.700	34.01	9.07	39.18	54.61	58.51	68.20	9.69	Peak

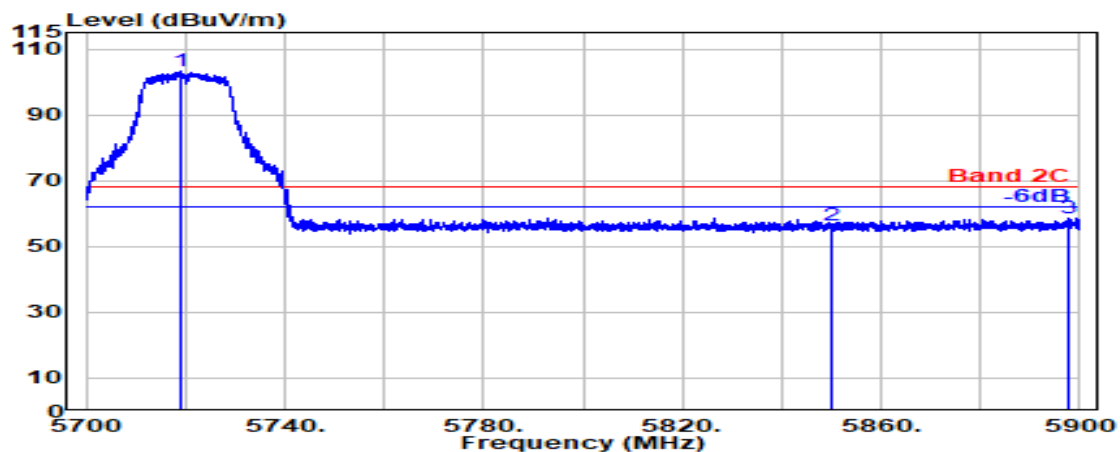

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5719.100	33.55	8.92	39.14	100.13	103.46	---	---	Peak
5850.000	33.90	9.05	39.18	52.54	56.31	68.20	11.89	Peak
5897.750	34.19	9.09	39.19	54.45	58.54	68.20	9.66	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

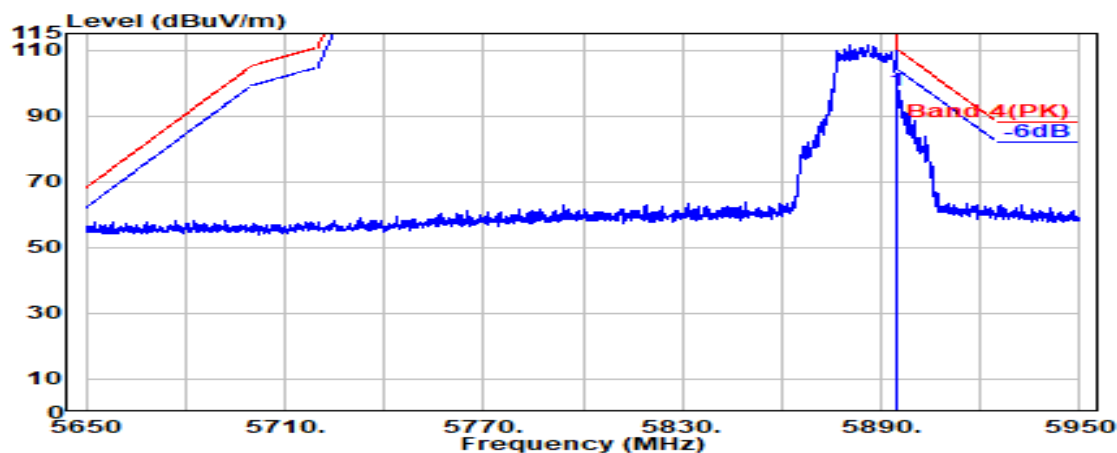

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	93.76	97.83	110.20	12.37	Peak

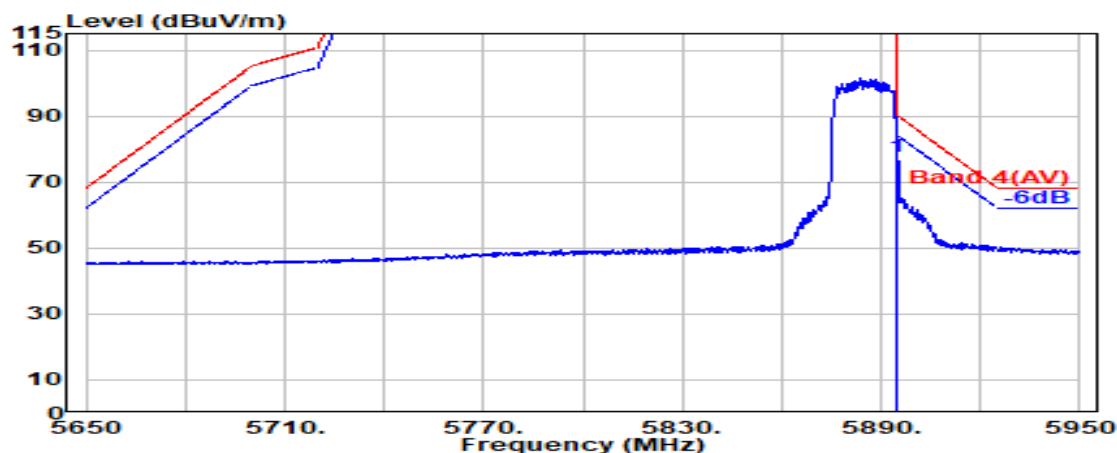


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	73.51	77.58	90.20	12.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

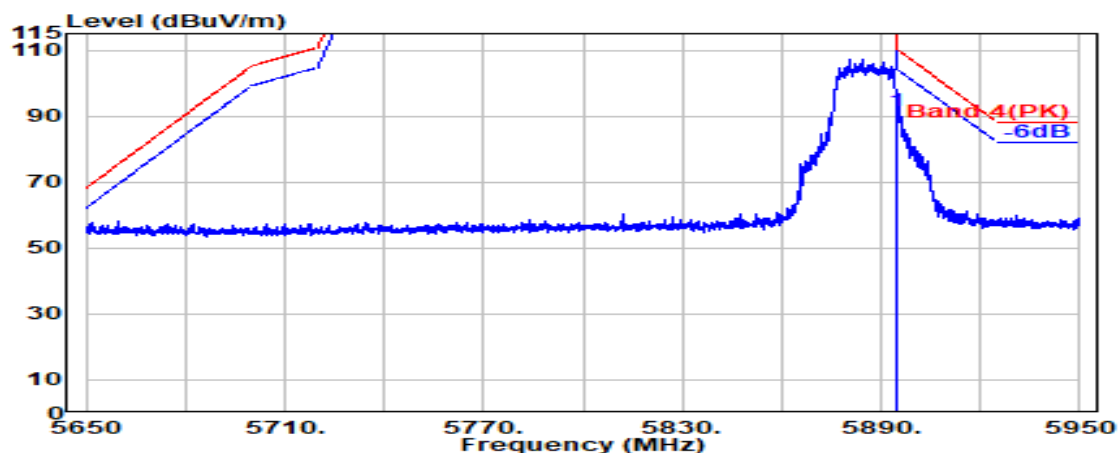

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	87.33	91.40	110.20	18.80	Peak

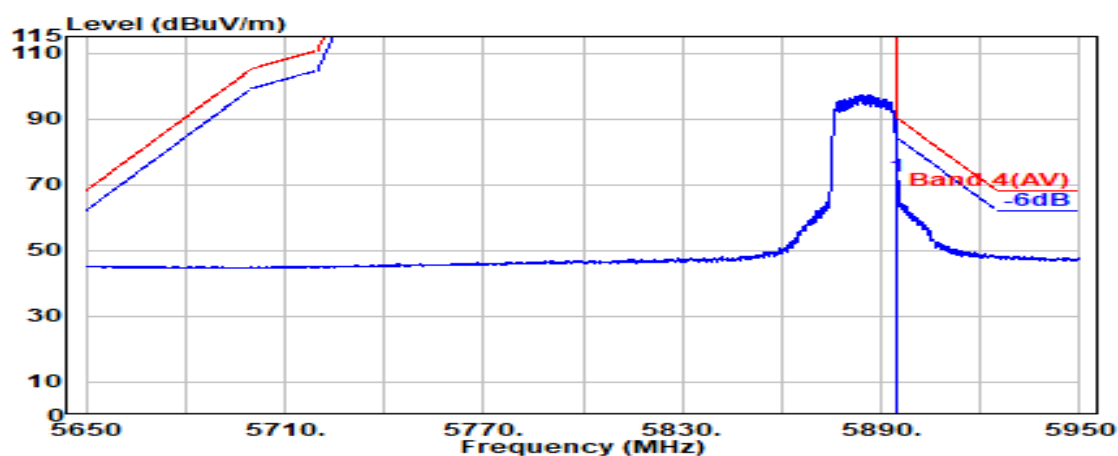

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	68.21	72.29	90.20	17.91	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

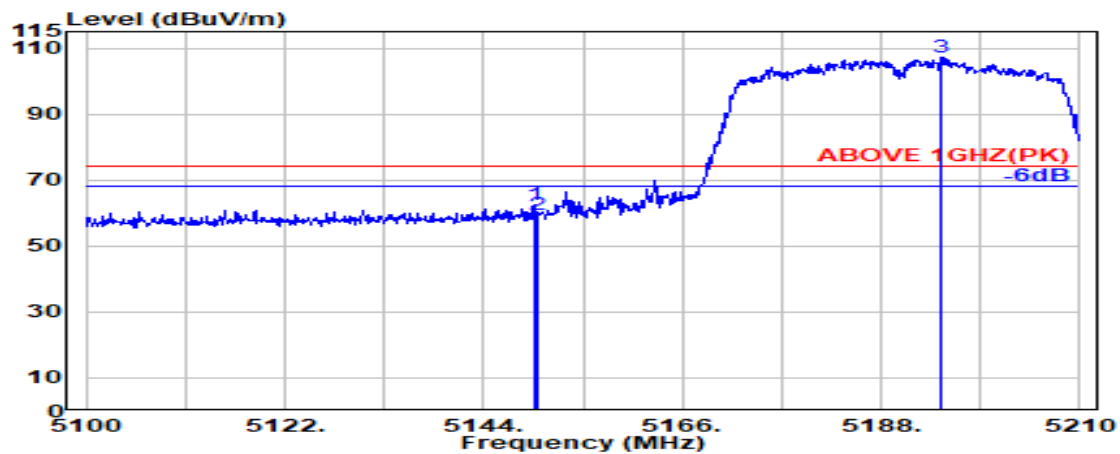

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	33.60	8.33	39.09	59.55	62.39	74.00	11.61	Peak
5150.000	33.60	8.33	39.09	56.57	59.41	74.00	14.59	Peak
@ 5194.600	33.60	8.38	39.09	104.50	107.39	---	---	Peak

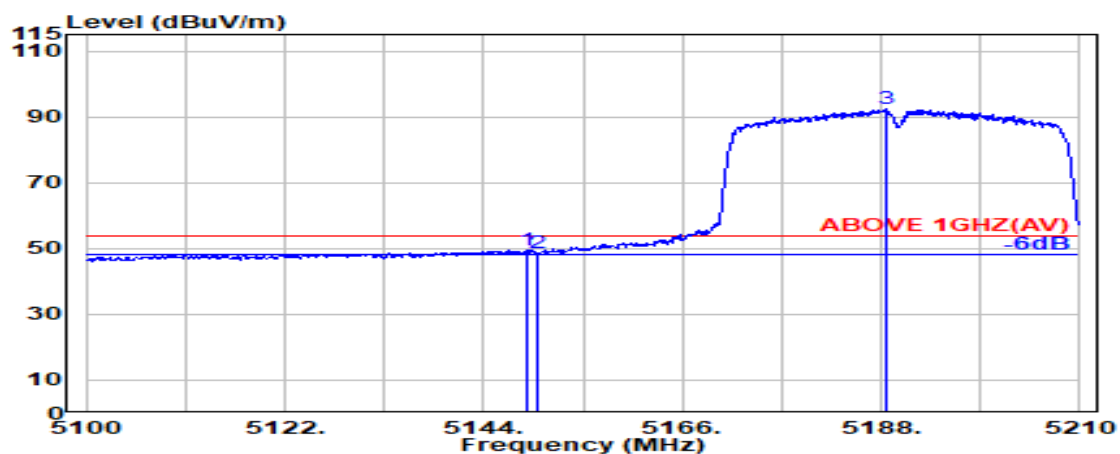

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.60	8.33	39.09	46.84	49.67	54.00	4.33	Average
5150.000	33.60	8.33	39.09	45.66	48.49	54.00	5.51	Average
@ 5188.700	33.60	8.37	39.09	89.34	92.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

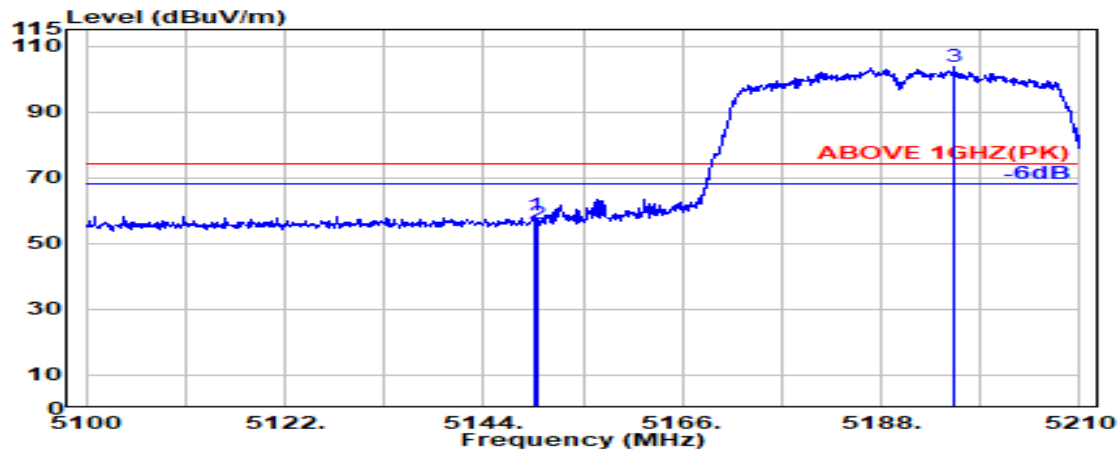

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.800	33.60	8.33	39.09	55.56	58.40	74.00	15.60	Peak
5150.000	33.60	8.33	39.09	52.97	55.80	74.00	18.20	Peak
@ 5196.100	33.60	8.38	39.09	100.75	103.64	---	---	Peak

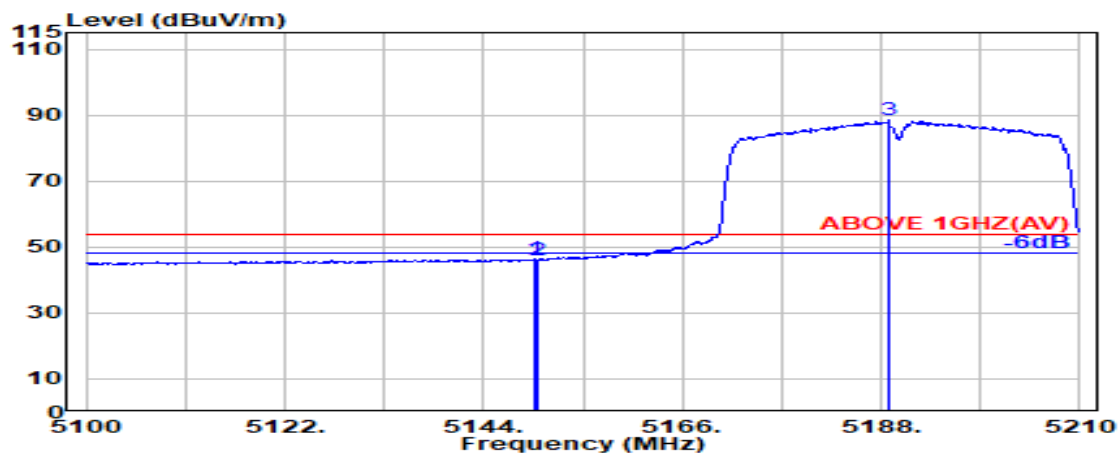

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.60	8.33	39.09	43.47	46.31	54.00	7.69	Average
5150.000	33.60	8.33	39.09	43.10	45.94	54.00	8.06	Average
@ 5188.900	33.60	8.37	39.09	85.53	88.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

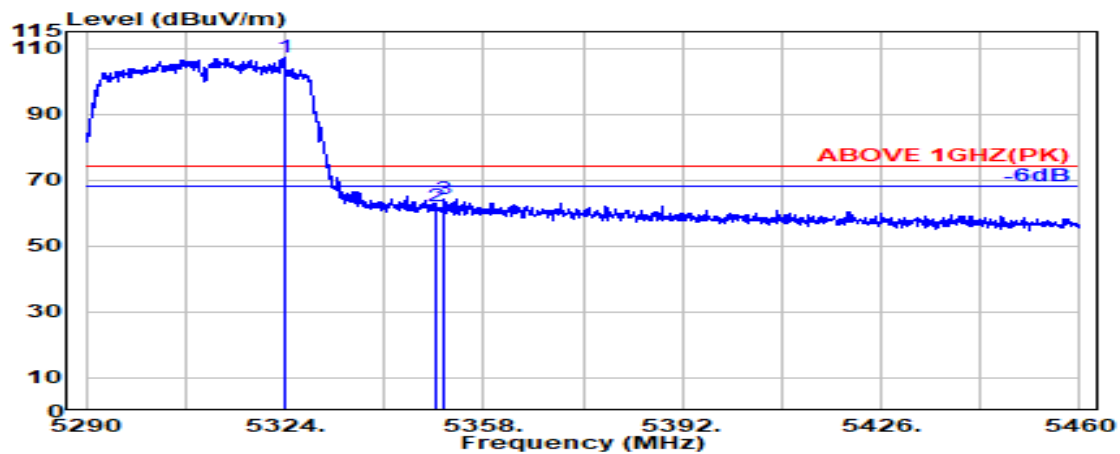

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.900	33.65	8.51	39.08	104.12	107.20	---	---	Peak
5350.000	33.70	8.54	39.08	58.73	61.89	74.00	12.11	Peak
5351.200	33.71	8.54	39.08	61.05	64.22	74.00	9.78	Peak

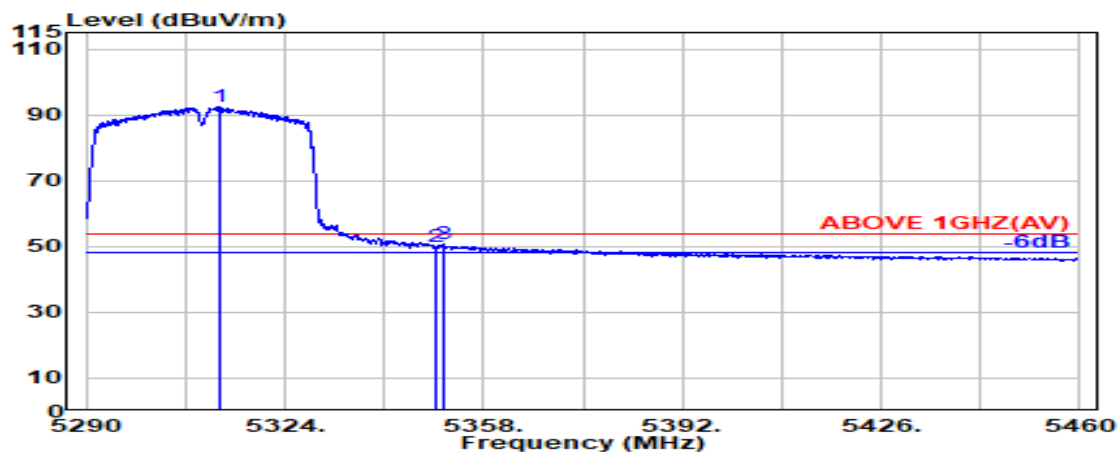

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.800	33.63	8.50	39.08	89.29	92.34	---	---	Average
5350.000	33.70	8.54	39.08	46.78	49.94	54.00	4.06	Average
5351.000	33.71	8.54	39.08	47.43	50.60	54.00	3.40	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

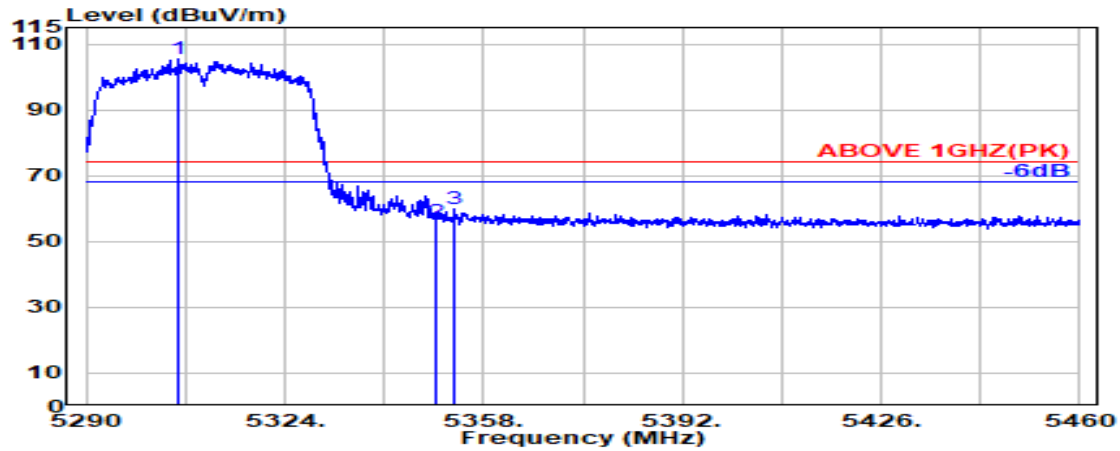

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5305.900	33.61	8.50	39.08	102.32	105.34	---	---	Peak
5350.000	33.70	8.54	39.08	52.84	56.00	74.00	18.00	Peak
5353.000	33.72	8.55	39.08	56.71	59.90	74.00	14.10	Peak

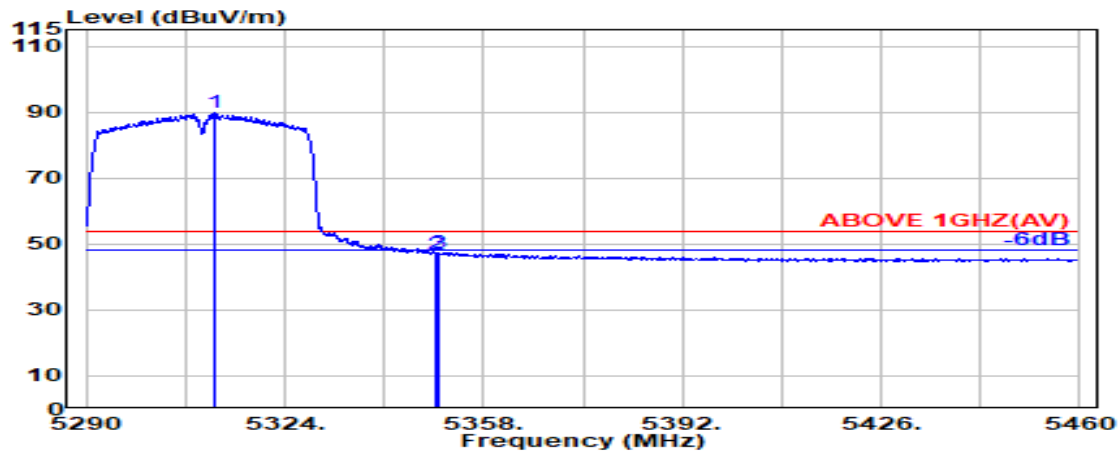

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5312.200	33.62	8.50	39.08	86.68	89.72	---	---	Average
5350.000	33.70	8.54	39.08	43.86	47.03	54.00	6.97	Average
5350.400	33.70	8.54	39.08	44.33	47.49	54.00	6.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

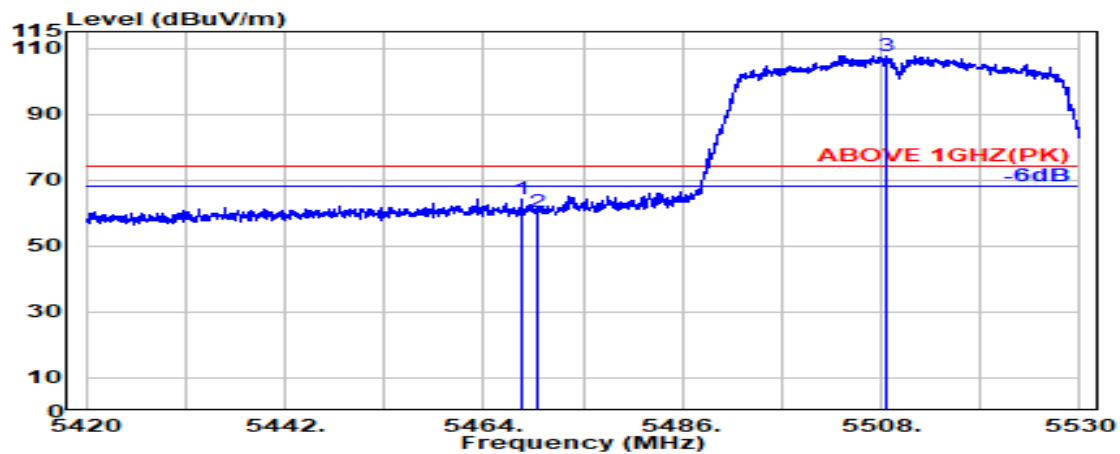

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.250	34.10	8.67	39.07	60.35	64.04	74.00	9.96	Peak
5470.000	34.10	8.67	39.07	56.70	60.40	74.00	13.60	Peak
@ 5508.700	34.08	8.71	39.07	104.10	107.82	---	---	Peak

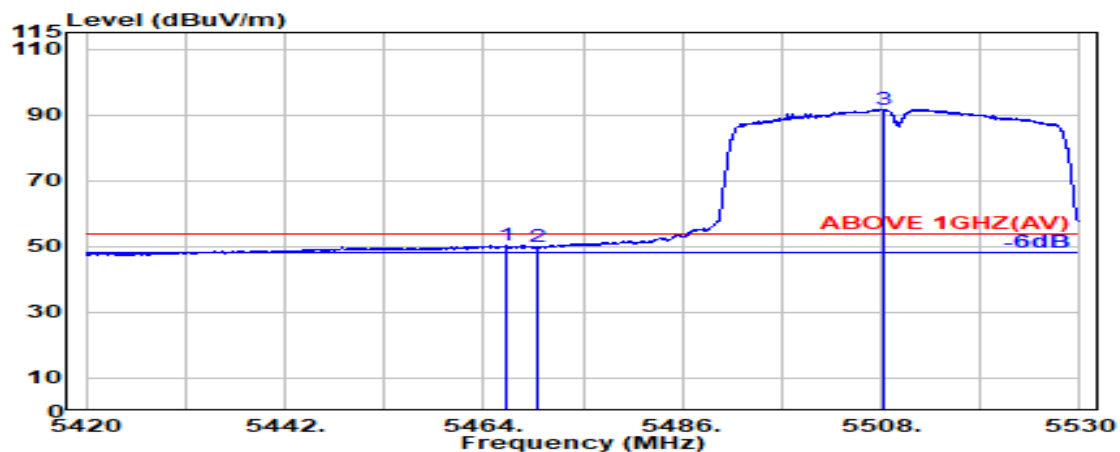

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.400	34.10	8.66	39.07	46.50	50.20	54.00	3.80	Average
5470.000	34.10	8.67	39.07	46.06	49.76	54.00	4.24	Average
@ 5508.250	34.08	8.71	39.07	88.03	91.75	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

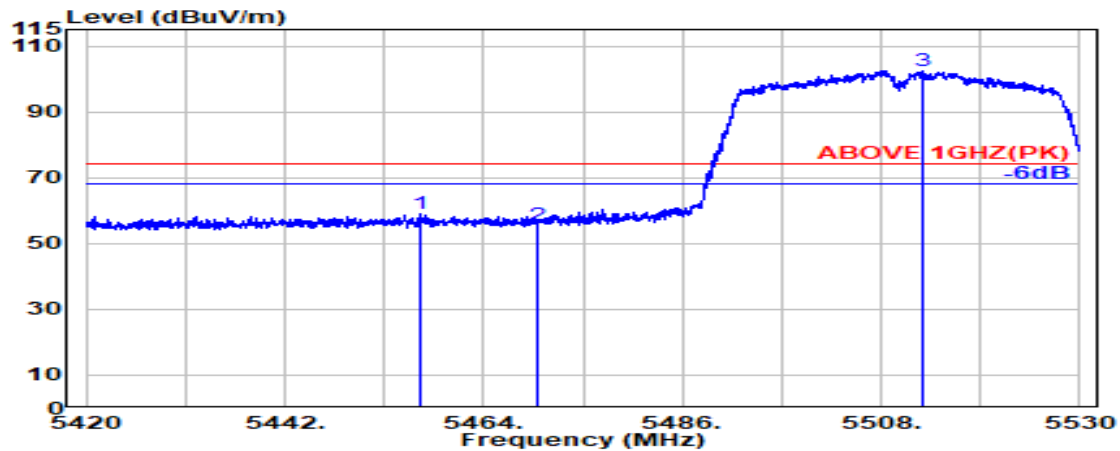

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.900	34.10	8.65	39.07	55.19	58.87	74.00	15.13	Peak
5470.000	34.10	8.67	39.07	51.80	55.49	74.00	18.51	Peak
@ 5512.650	34.07	8.71	39.07	98.88	102.59	---	---	Peak

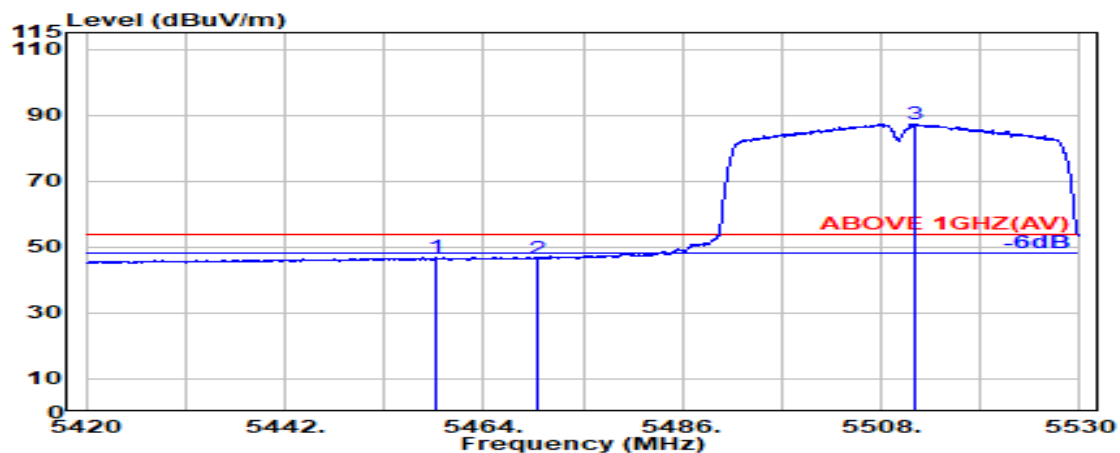

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.800	34.10	8.66	39.07	43.19	46.88	54.00	7.12	Average
5470.000	34.10	8.67	39.07	42.94	46.64	54.00	7.36	Average
@ 5511.850	34.08	8.71	39.07	83.47	87.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

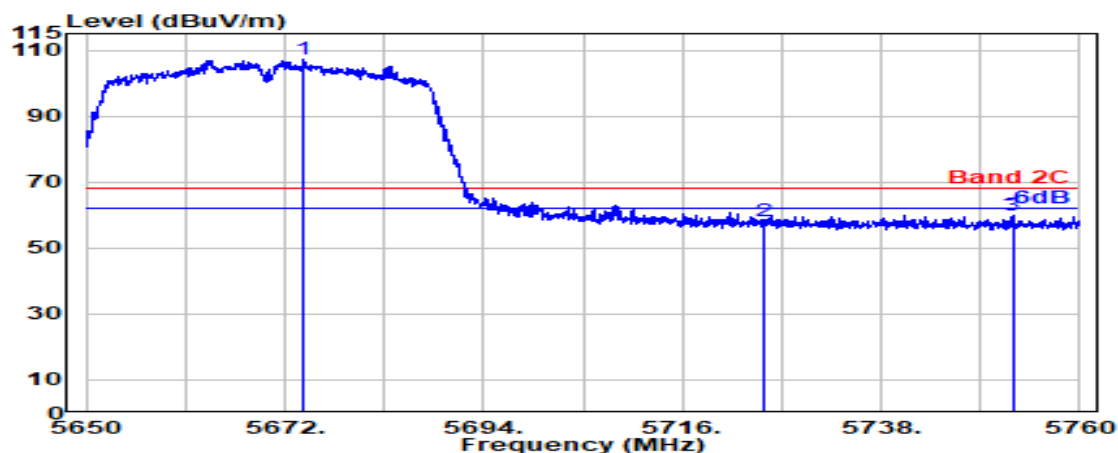

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5674.150	33.55	8.87	39.12	103.67	106.98	---	---	Peak
5725.000	33.60	8.92	39.14	54.85	58.23	68.20	9.97	Peak
5752.550	33.81	8.95	39.15	56.24	59.84	68.20	8.36	Peak

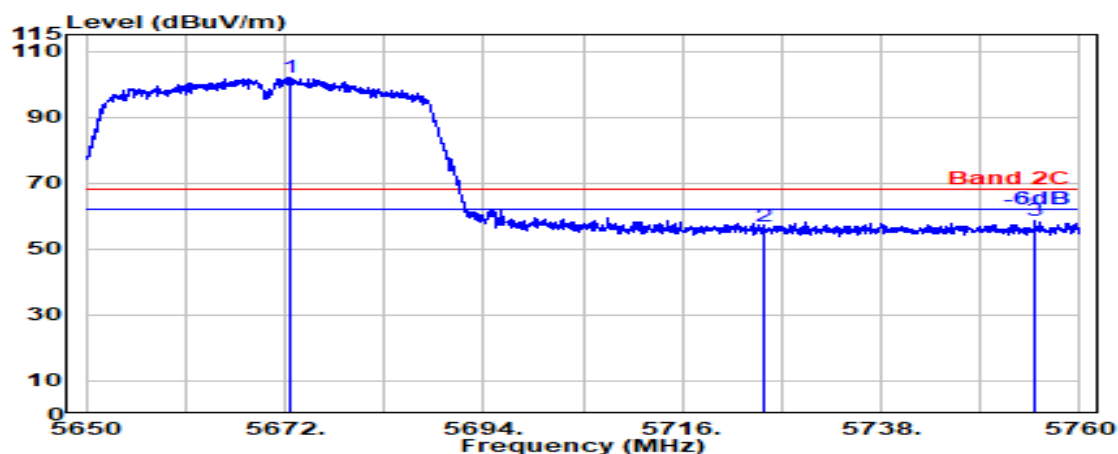


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5672.500	33.56	8.87	39.12	98.66	101.97	---	---	Peak
5725.000	33.60	8.92	39.14	53.53	56.92	68.20	11.28	Peak
5755.100	33.81	8.95	39.15	54.84	58.46	68.20	9.74	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

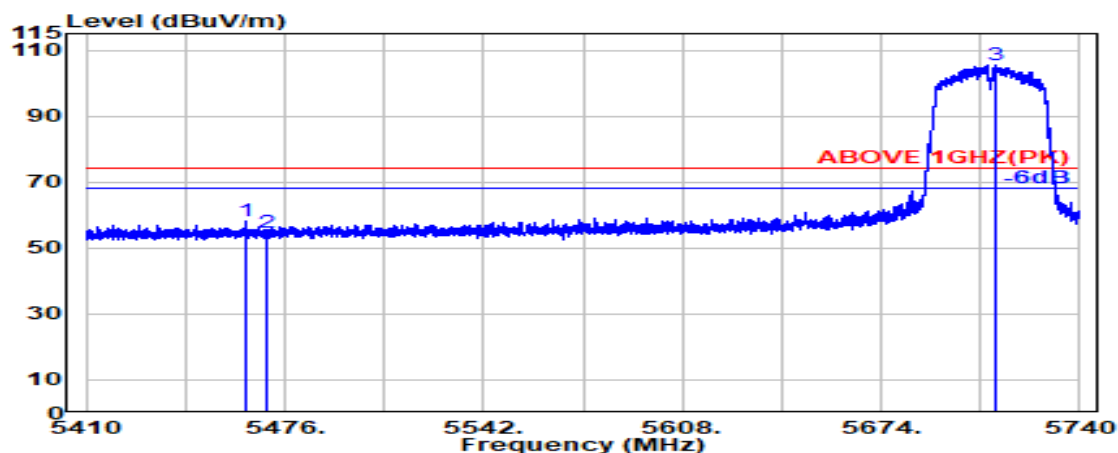

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.800	34.10	8.66	39.07	54.38	58.07	74.00	15.93	Peak
5470.000	34.10	8.67	39.07	51.13	54.82	74.00	19.18	Peak
@ 5712.400	33.50	8.91	39.14	102.36	105.64	---	---	Peak

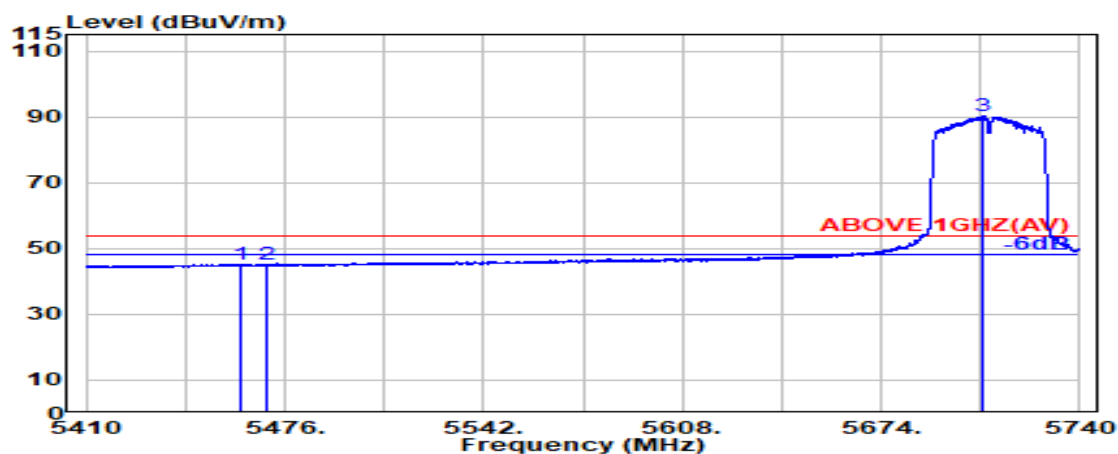

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.650	34.10	8.66	39.07	41.55	45.24	54.00	8.76	Average
5470.000	34.10	8.67	39.07	41.31	45.01	54.00	8.99	Average
@ 5708.100	33.47	8.91	39.13	86.97	90.21	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

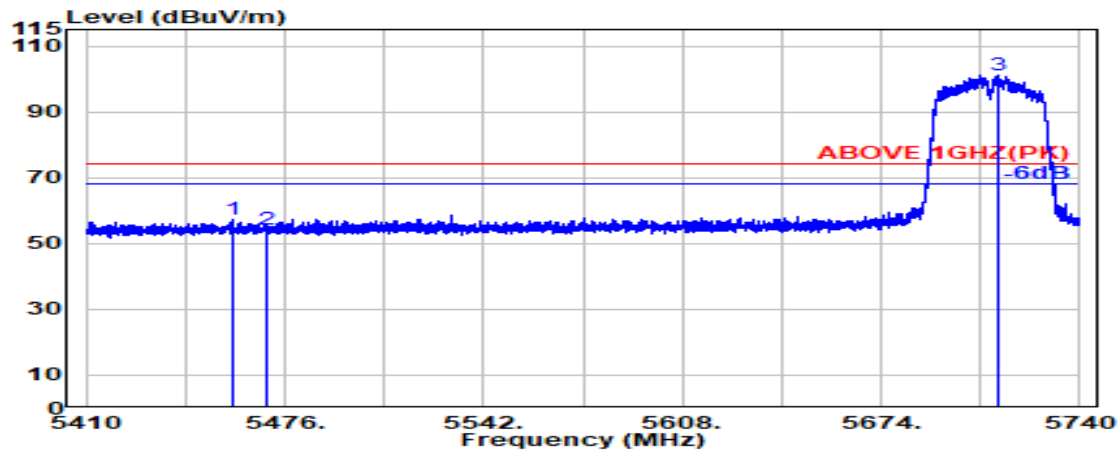

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.750	34.10	8.66	39.07	53.56	57.25	74.00	16.75	Peak
5470.000	34.10	8.67	39.07	50.40	54.10	74.00	19.90	Peak
@ 5712.950	33.50	8.91	39.14	97.85	101.13	---	---	Peak

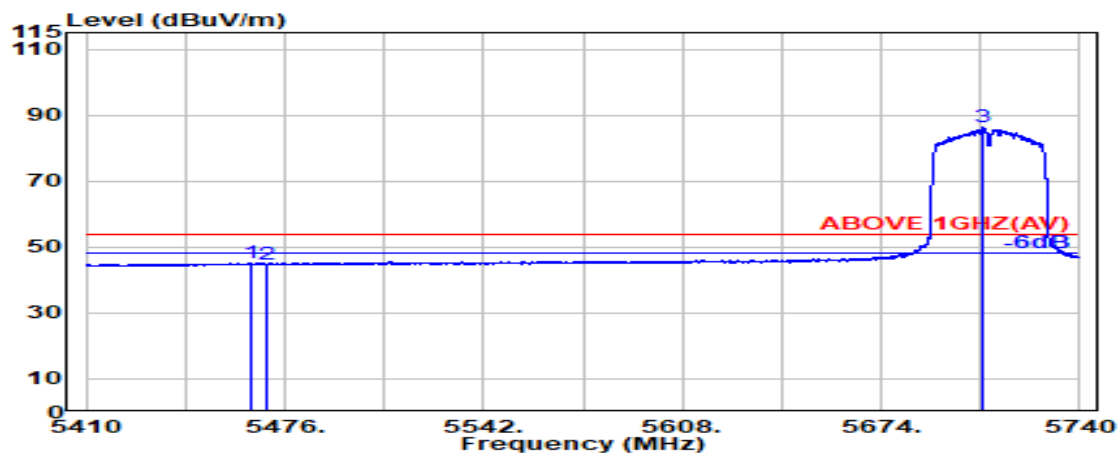

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.100	34.10	8.66	39.07	41.38	45.07	54.00	8.93	Average
5470.000	34.10	8.67	39.07	41.05	44.74	54.00	9.26	Average
@ 5707.400	33.46	8.91	39.13	83.15	86.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

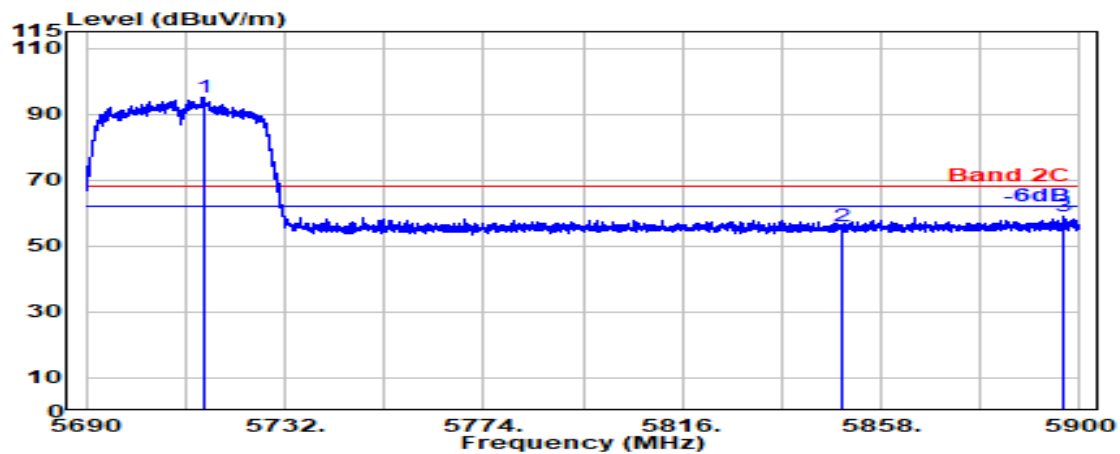

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.850	33.52	8.91	39.14	91.82	95.12	---	---	Peak
5850.000	33.90	9.05	39.18	52.18	55.95	68.20	12.25	Peak
5896.750	34.18	9.09	39.19	54.79	58.87	68.20	9.33	Peak

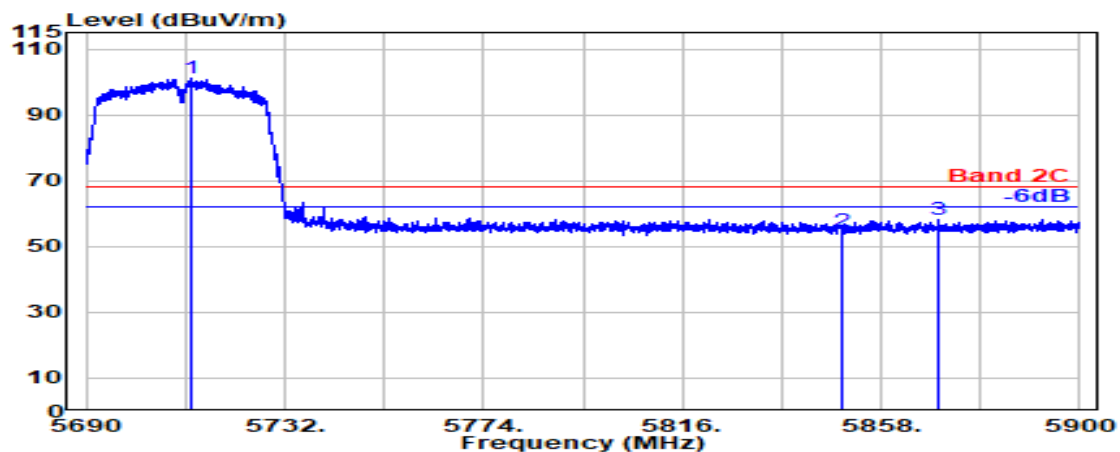


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5712.100	33.50	8.91	39.14	97.86	101.13	---	---	Peak
5850.000	33.90	9.05	39.18	50.76	54.53	68.20	13.67	Peak
5870.000	34.02	9.07	39.18	54.24	58.14	68.20	10.06	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

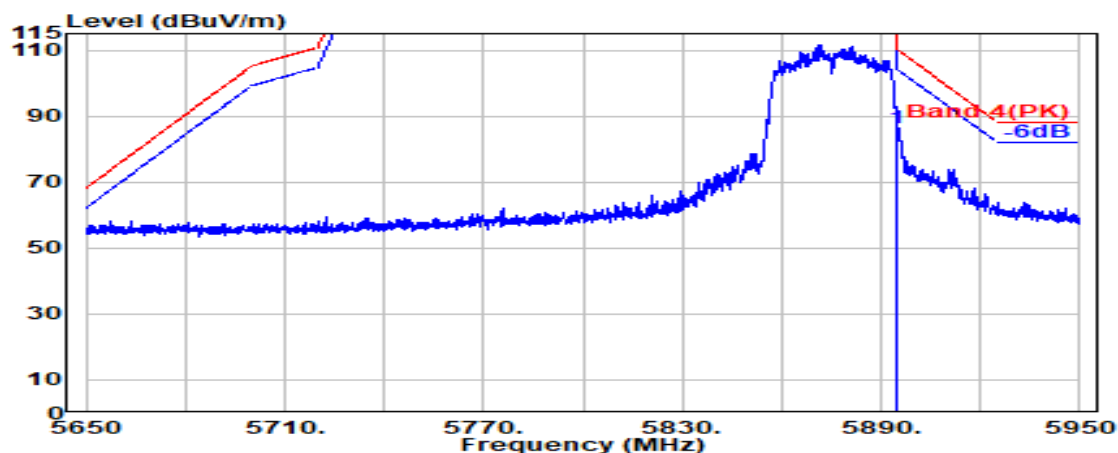

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	82.42	86.49	110.20	23.71	Peak

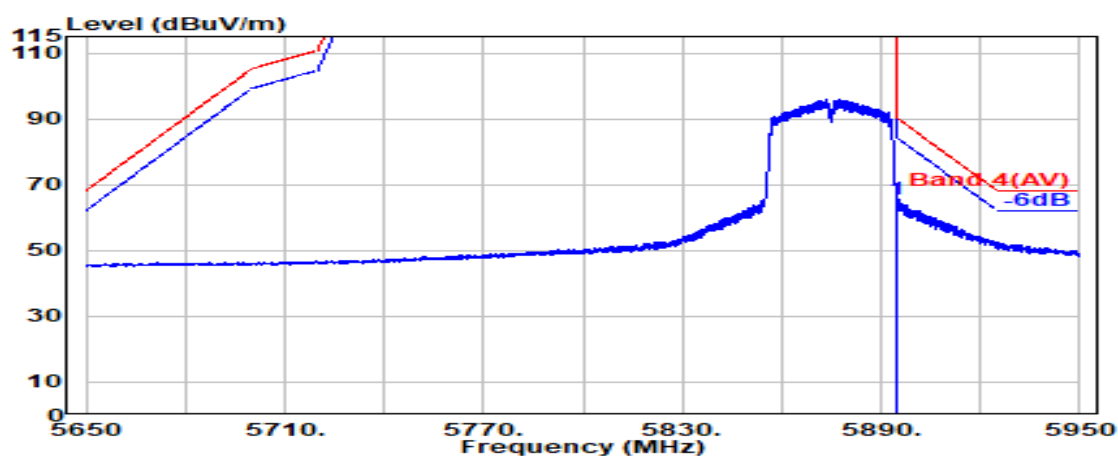

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	61.58	65.65	90.20	24.55	Average

Mode	802.11n-HT40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

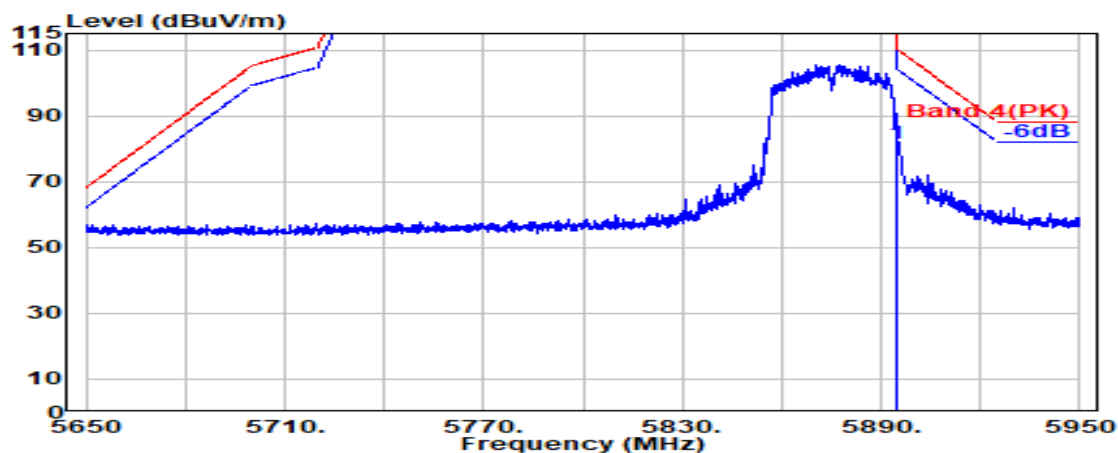

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	77.43	81.50	110.20	28.70	Peak

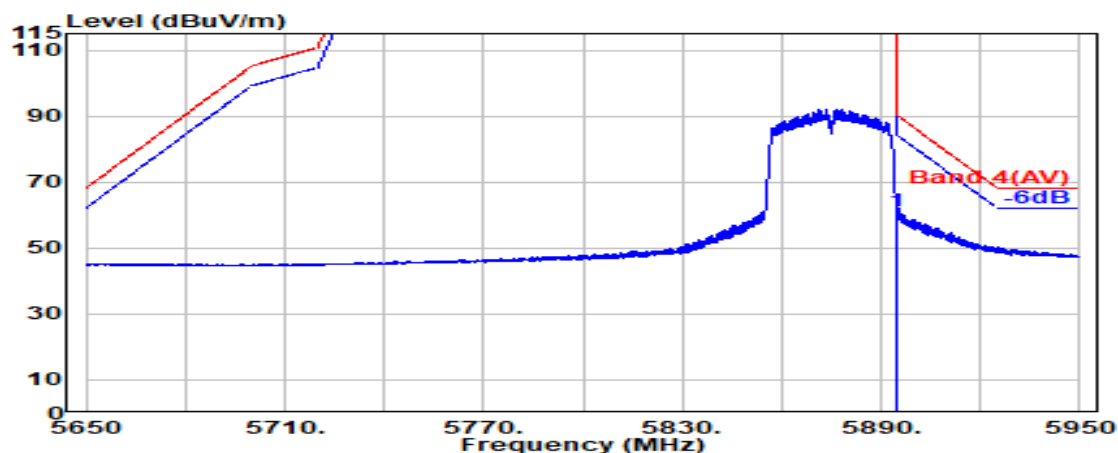


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	57.02	61.09	90.20	29.11	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

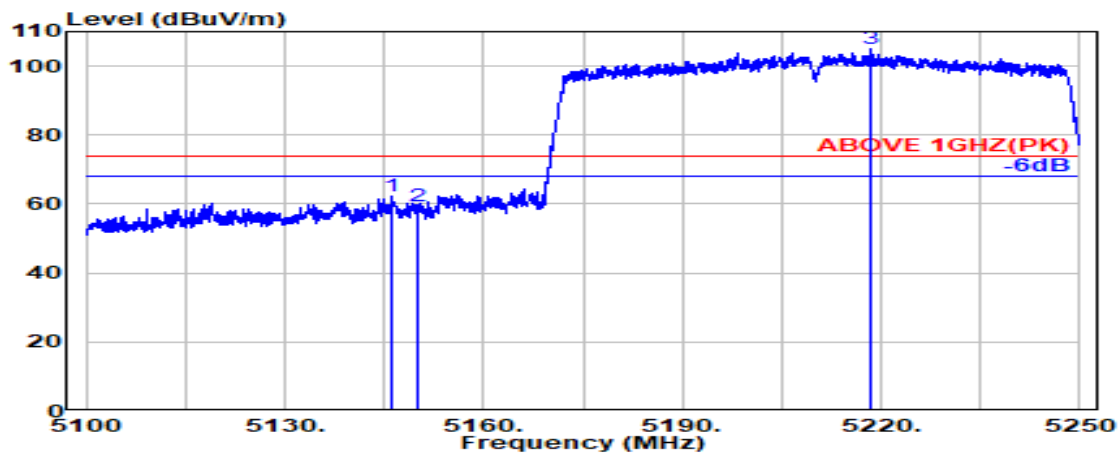

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5146.000	33.59	8.32	39.09	59.35	62.18	74.00	11.82	Peak
5150.000	33.60	8.33	39.09	56.48	59.31	74.00	14.69	Peak
@ 5218.450	33.64	8.40	39.09	101.99	104.94	---	---	Peak

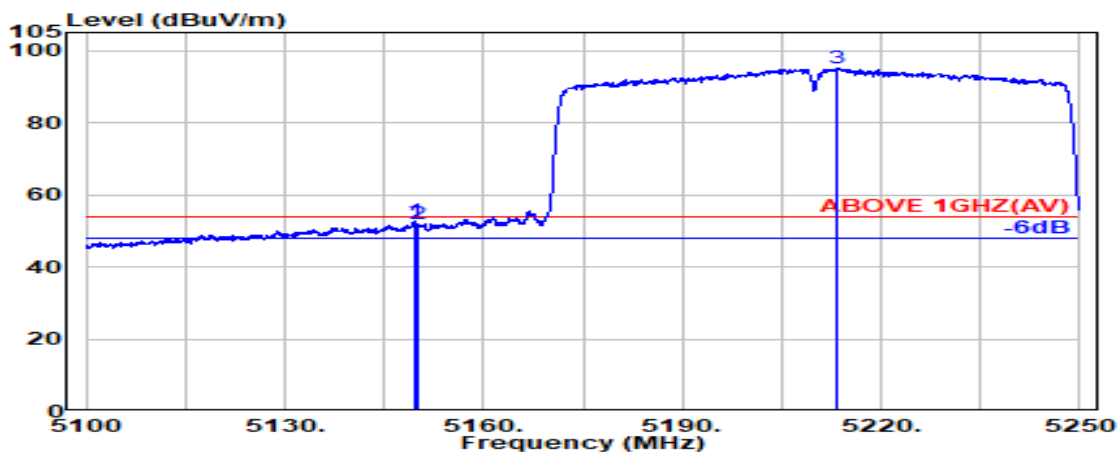


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.550	33.60	8.33	39.09	49.70	52.53	54.00	1.47	Average
5150.000	33.60	8.33	39.09	48.93	51.77	54.00	2.23	Average
@ 5213.200	33.63	8.40	39.09	92.29	95.23	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

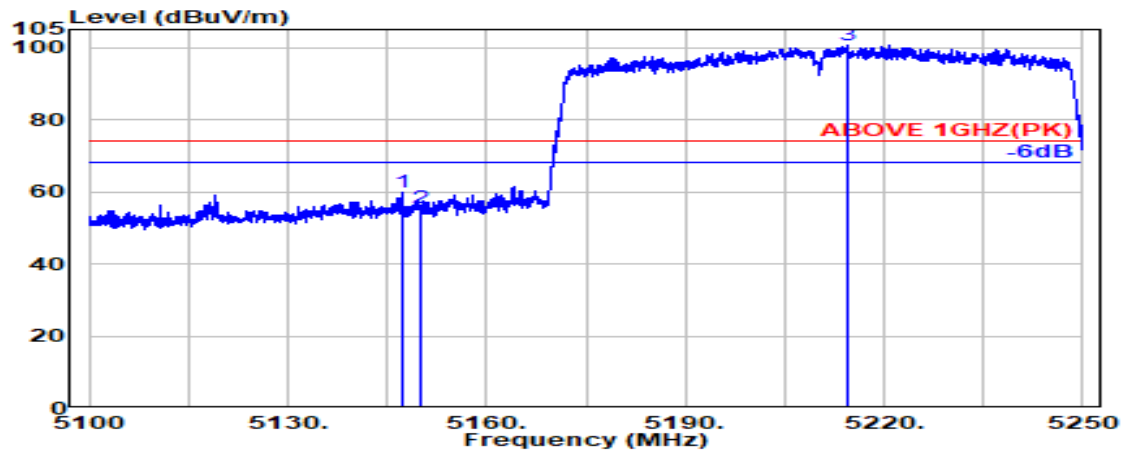

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.250	33.59	8.32	39.09	57.16	59.99	74.00	14.01	Peak
5150.000	33.60	8.33	39.09	52.47	55.30	74.00	18.70	Peak
@ 5214.500	33.63	8.40	39.09	97.68	100.61	---	---	Peak

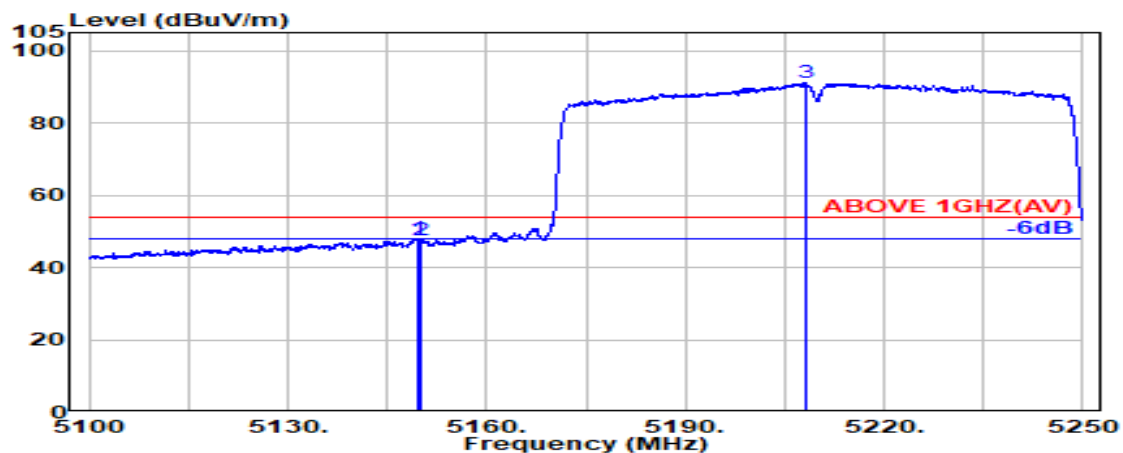

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.700	33.60	8.33	39.09	45.20	48.04	54.00	5.96	Average
5150.000	33.60	8.33	39.09	44.77	47.60	54.00	6.40	Average
@ 5208.050	33.62	8.39	39.09	88.15	91.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

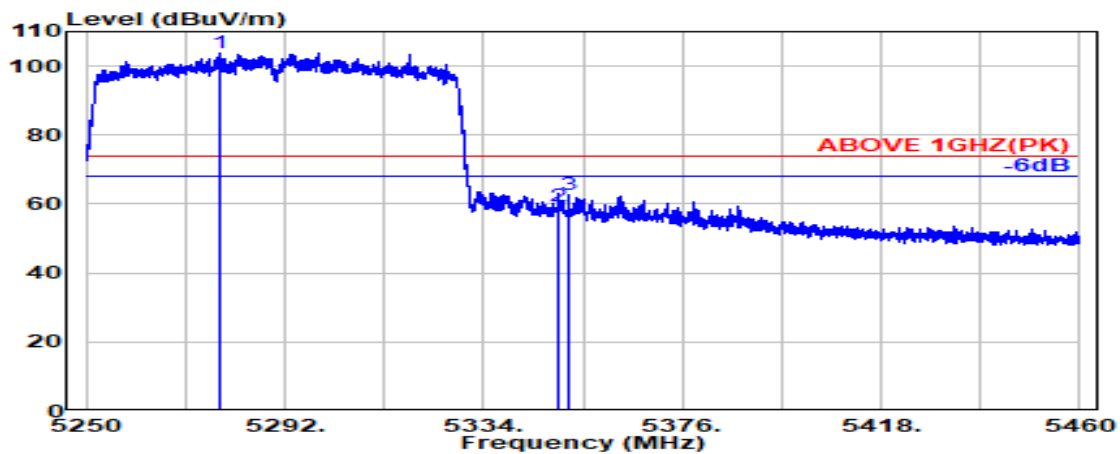

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5278.400	33.64	8.47	39.08	100.75	103.78	---	---	Peak
5350.000	33.70	8.54	39.08	56.11	59.27	74.00	14.73	Peak
5351.850	33.71	8.54	39.08	59.38	62.56	74.00	11.44	Peak

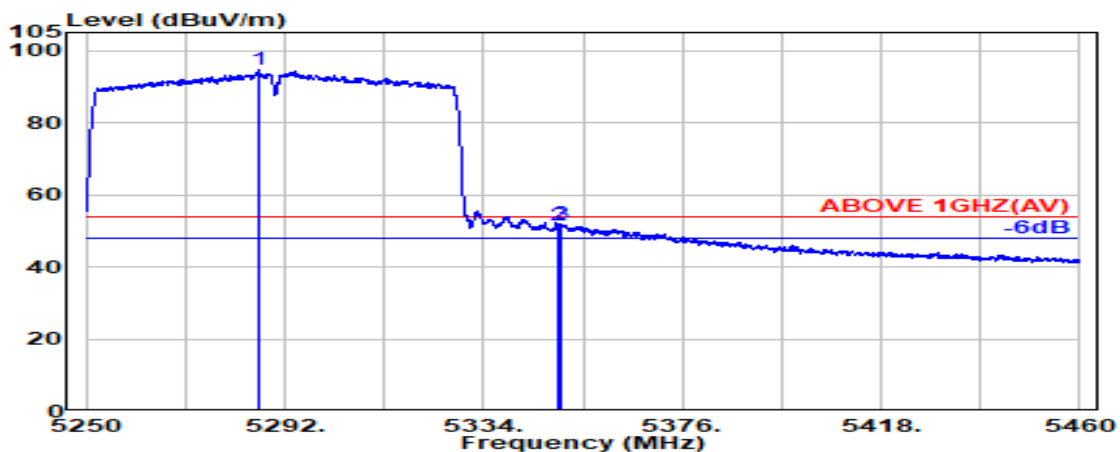

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5286.700	33.63	8.47	39.08	91.75	94.77	---	---	Average
5350.000	33.70	8.54	39.08	48.19	51.35	54.00	2.65	Average
5350.250	33.70	8.54	39.08	48.79	51.95	54.00	2.05	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

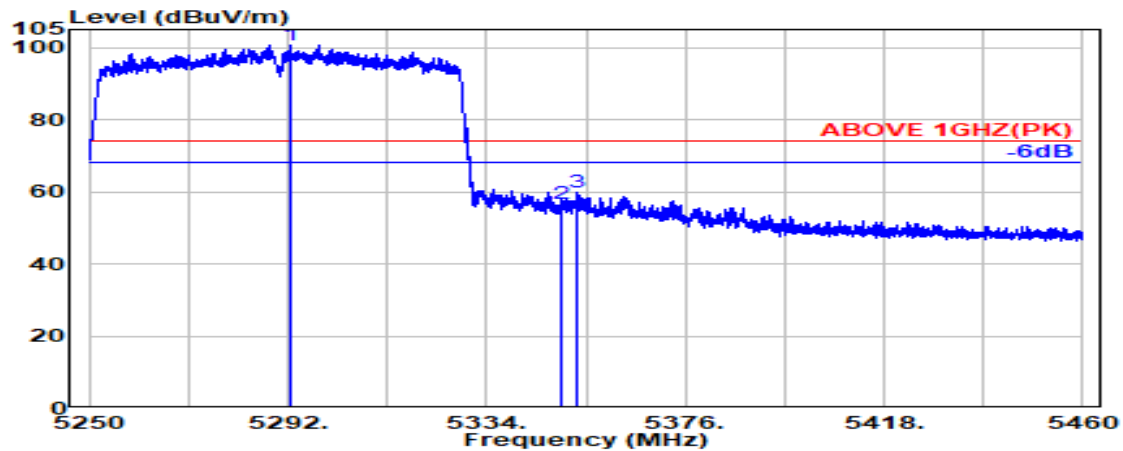

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5292.450	33.62	8.48	39.08	97.76	100.77	---	---	Peak
5350.000	33.70	8.54	39.08	53.42	56.58	74.00	17.42	Peak
5353.000	33.72	8.55	39.08	56.72	59.90	74.00	14.10	Peak

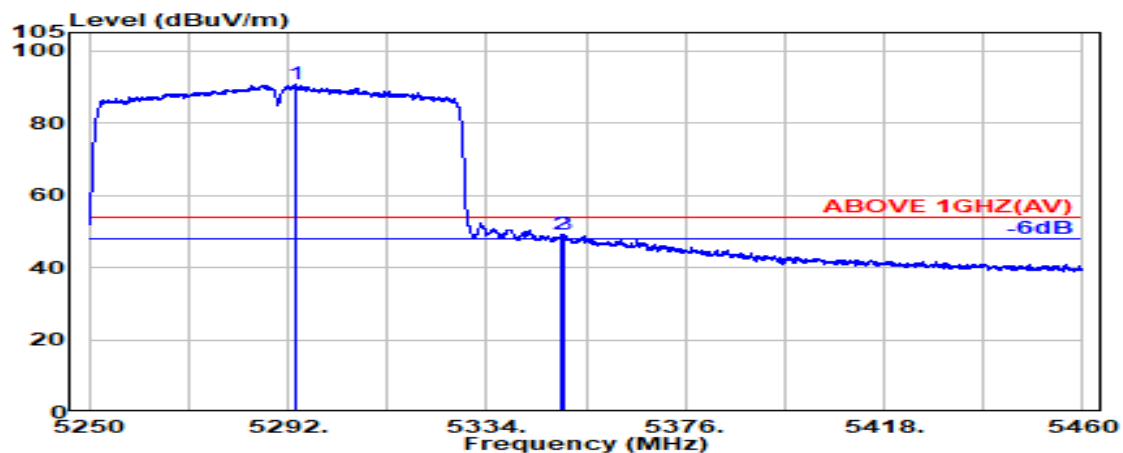

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5293.600	33.61	8.48	39.08	87.79	90.80	---	---	Average
5350.000	33.70	8.54	39.08	45.92	49.09	54.00	4.91	Average
5350.450	33.70	8.54	39.08	46.01	49.17	54.00	4.83	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

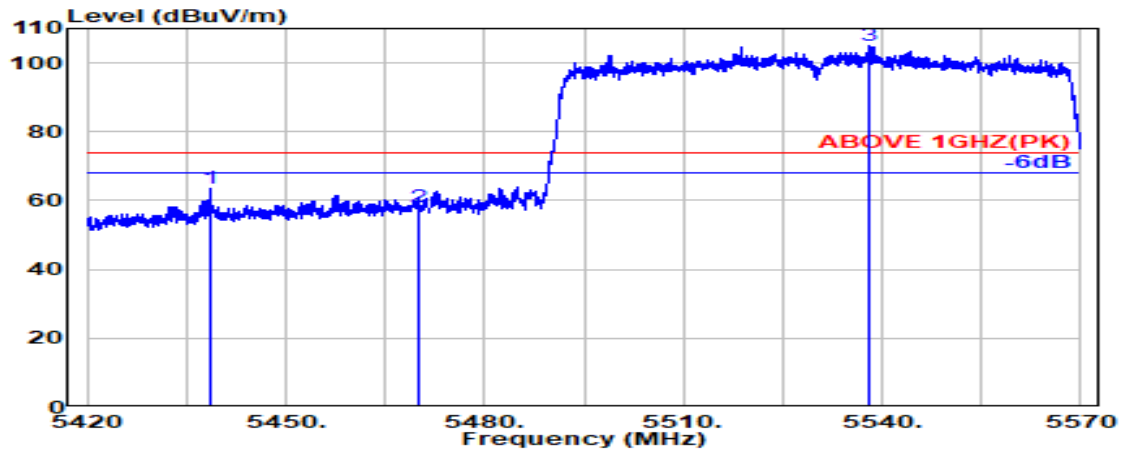

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.600	34.08	8.64	39.07	59.89	63.53	74.00	10.47	Peak
5470.000	34.10	8.67	39.07	54.61	58.31	74.00	15.69	Peak
@ 5538.200	34.02	8.74	39.08	101.44	105.12	---	---	Peak

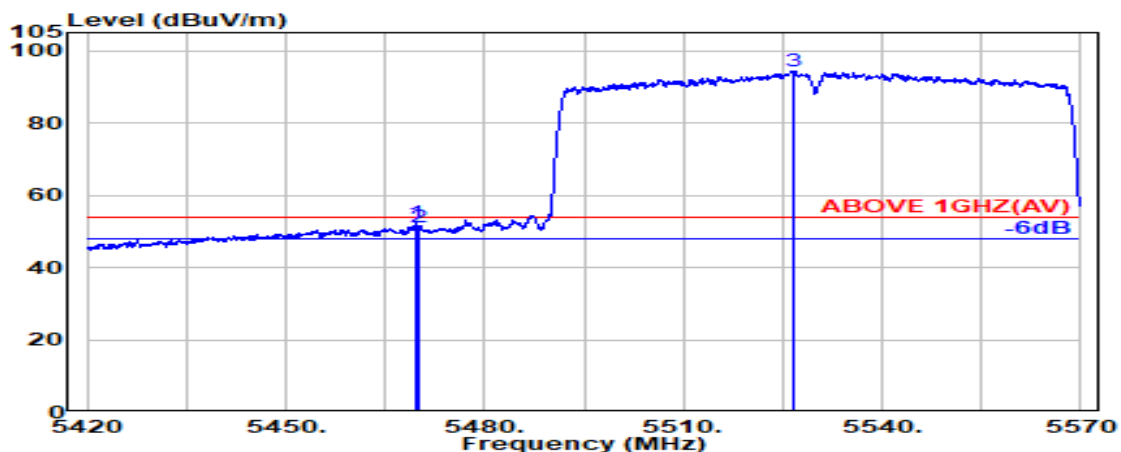

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.07	48.61	52.30	54.00	1.70	Average
5470.000	34.10	8.67	39.07	47.24	50.93	54.00	3.07	Average
@ 5526.600	34.05	8.73	39.08	90.72	94.41	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

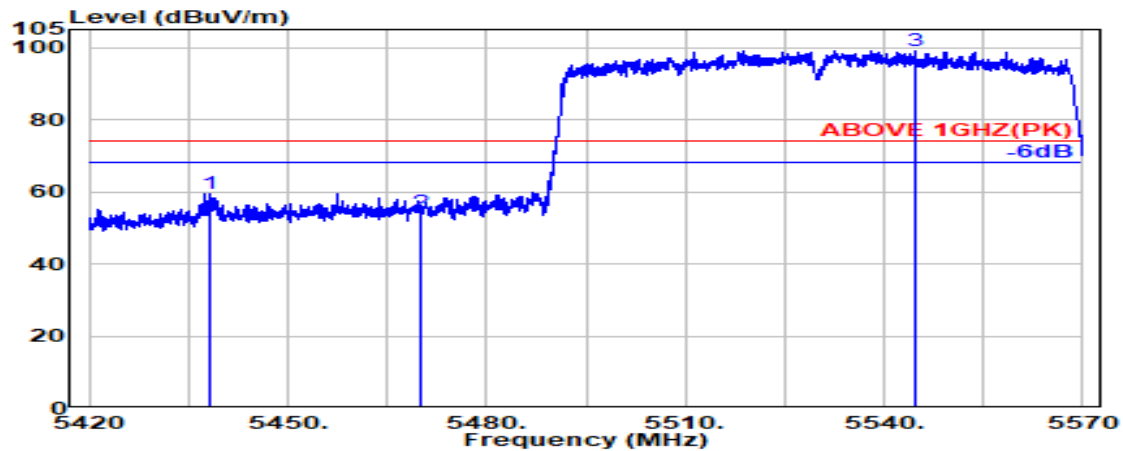

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.100	34.08	8.63	39.07	55.85	59.49	74.00	14.51	Peak
5470.000	34.10	8.67	39.07	50.58	54.28	74.00	19.72	Peak
@ 5544.700	34.01	8.74	39.08	95.37	99.04	---	---	Peak

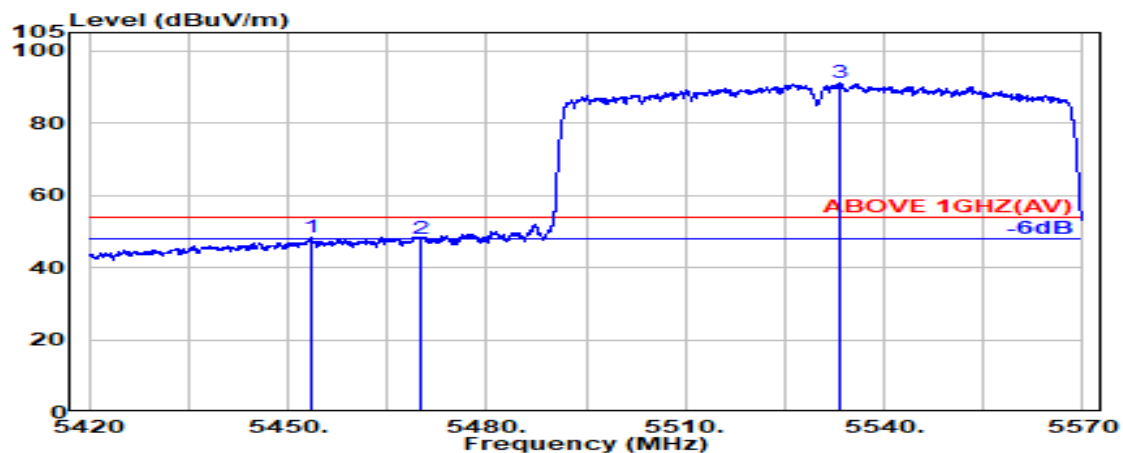

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.500	34.10	8.65	39.07	44.82	48.49	54.00	5.51	Average
5470.000	34.10	8.67	39.07	44.30	48.00	54.00	6.00	Average
@ 5533.250	34.03	8.73	39.08	87.25	90.94	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

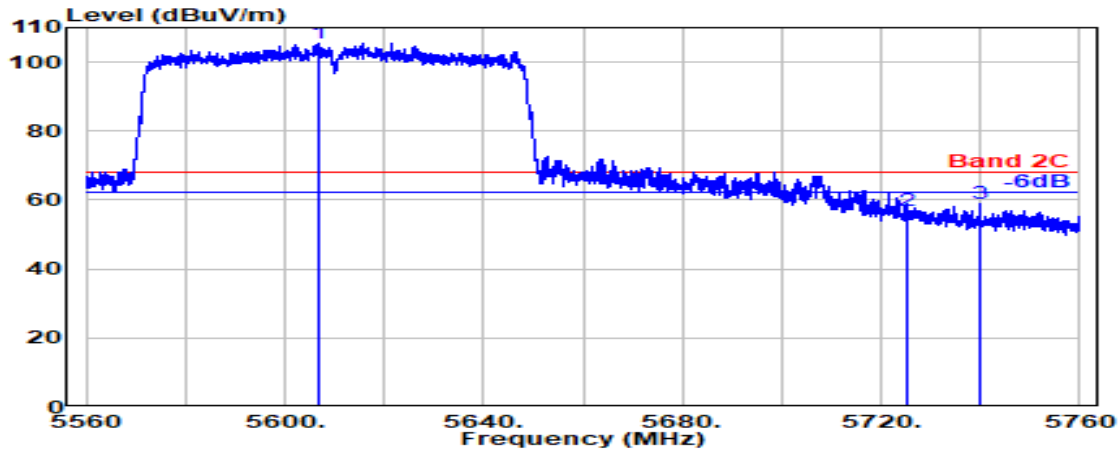

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5606.800	33.79	8.81	39.10	102.00	105.49	---	---	Peak
5725.000	33.60	8.92	39.14	53.29	56.68	68.20	11.52	Peak
5739.850	33.72	8.94	39.14	55.42	58.94	68.20	9.26	Peak

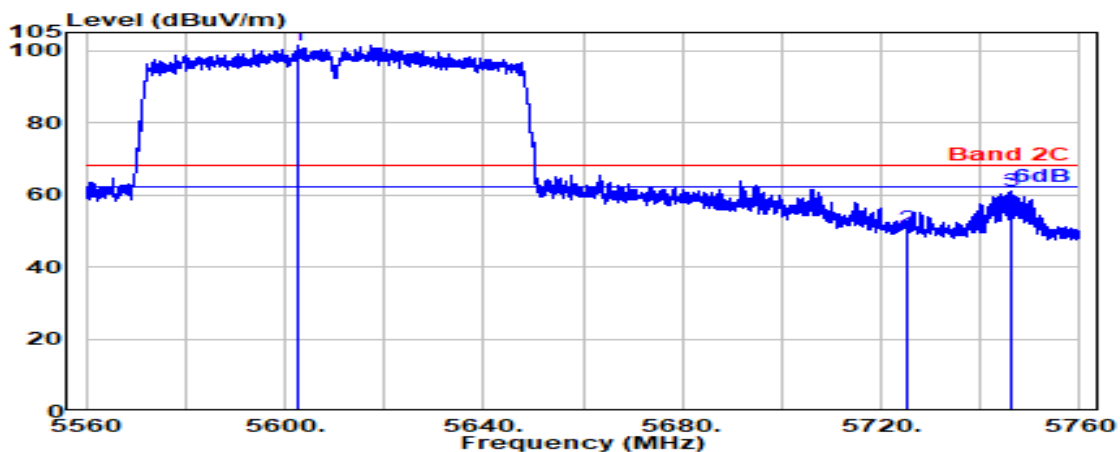

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5602.550	33.79	8.80	39.10	97.83	101.33	---	---	Peak
5725.000	33.60	8.92	39.14	47.30	50.68	68.20	17.52	Peak
5746.150	33.77	8.95	39.15	57.28	60.85	68.20	7.35	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

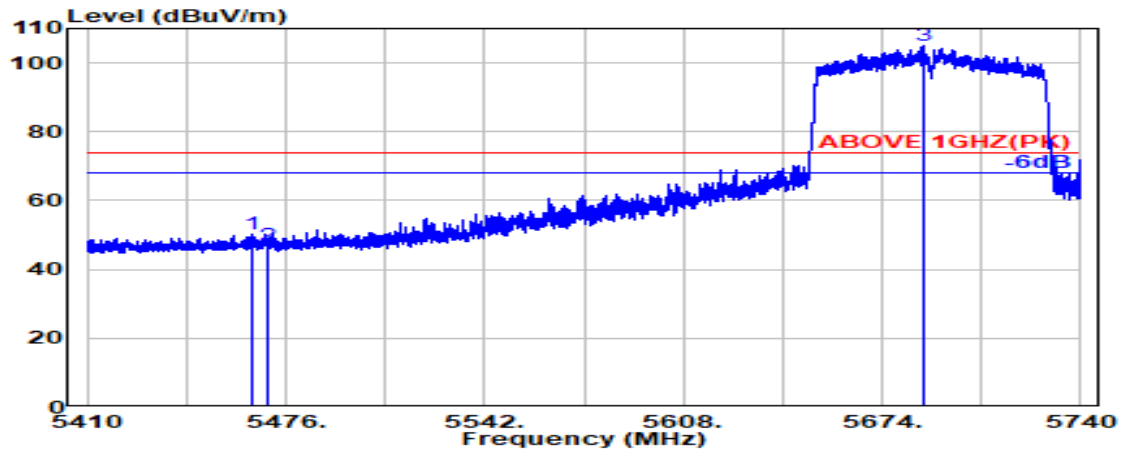

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.150	34.10	8.66	39.07	46.39	50.08	74.00	23.92	Peak
5470.000	34.10	8.67	39.07	43.24	46.94	74.00	27.06	Peak
@ 5688.050	33.47	8.89	39.13	101.59	104.82	---	---	Peak

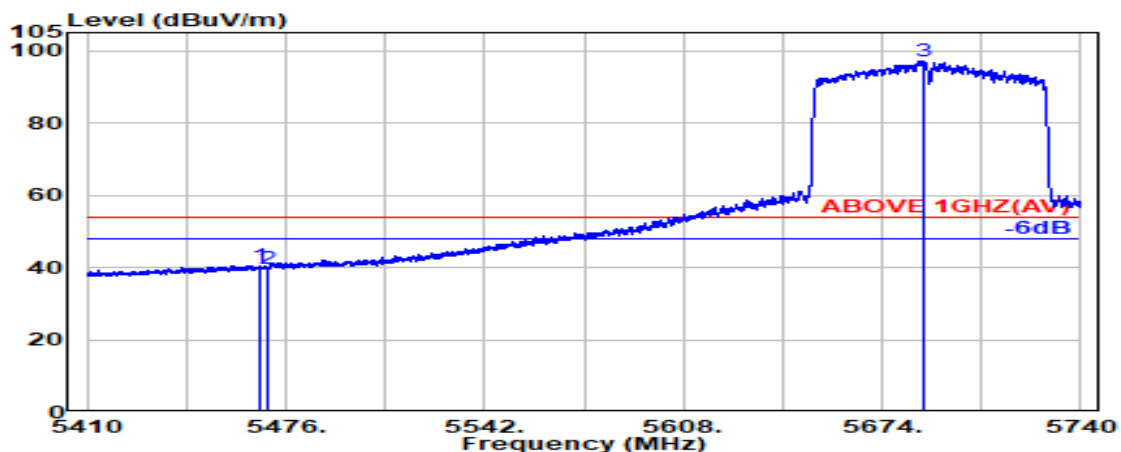


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.700	34.10	8.67	39.07	36.81	40.51	54.00	13.49	Average
5470.000	34.10	8.67	39.07	35.75	39.44	54.00	14.56	Average
@ 5687.450	33.48	8.89	39.13	93.98	97.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

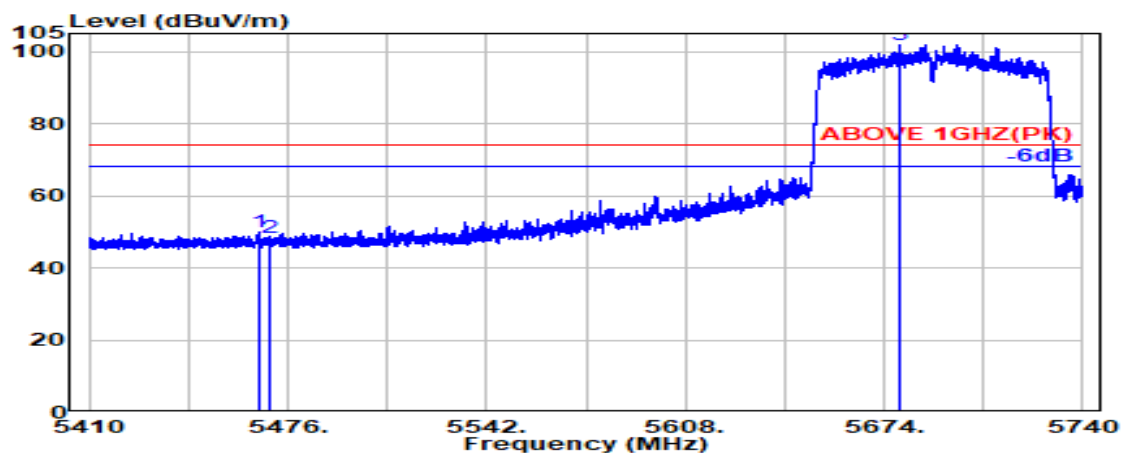

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.650	34.10	8.66	39.07	46.23	49.92	74.00	24.08	Peak
5470.000	34.10	8.67	39.07	44.65	48.35	74.00	25.65	Peak
@ 5679.500	33.52	8.88	39.13	98.49	101.76	---	---	Peak

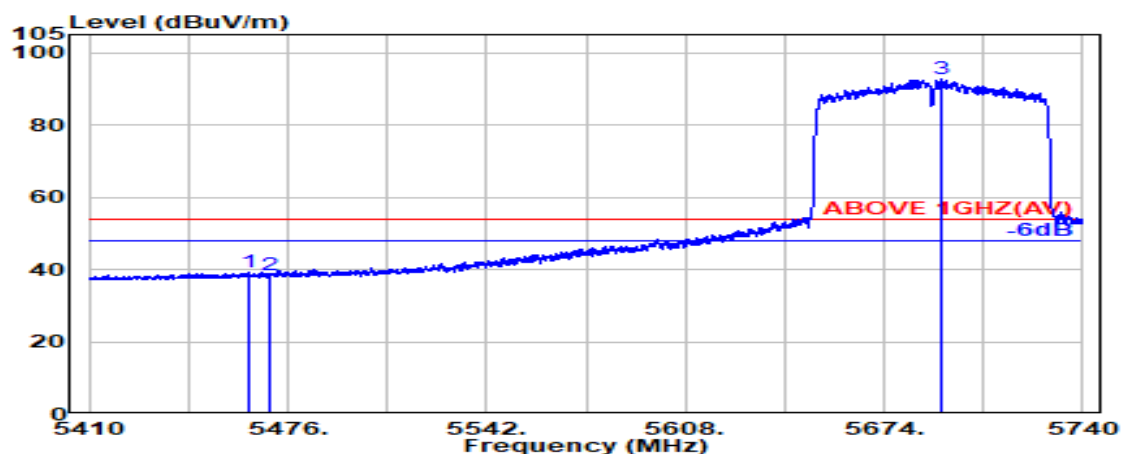


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5463.350	34.10	8.66	39.07	35.47	39.16	54.00	14.84	Average
5470.000	34.10	8.67	39.07	34.90	38.60	54.00	15.40	Average
@ 5693.400	33.44	8.89	39.13	89.51	92.71	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

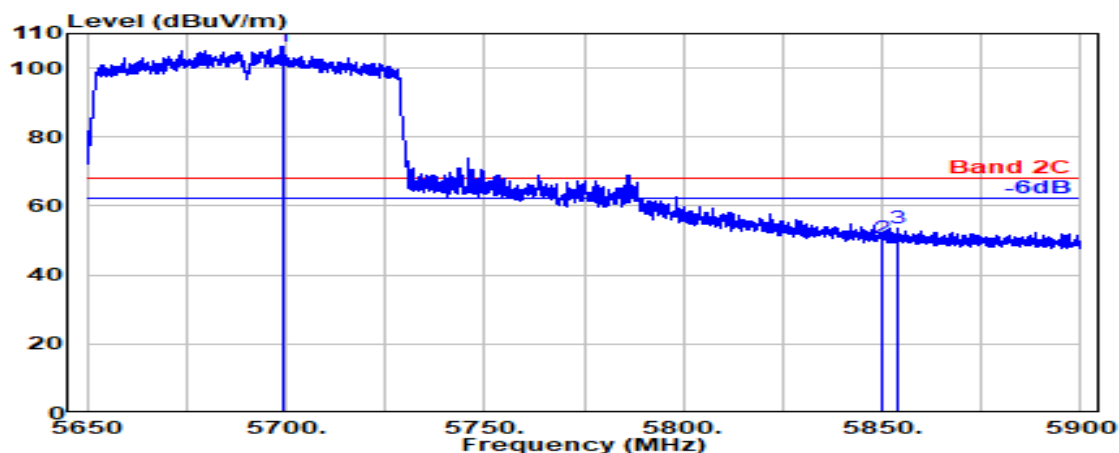

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5699.200	33.40	8.90	39.13	103.27	106.44	---	---	Peak
5850.000	33.90	9.05	39.18	46.84	50.61	68.20	17.59	Peak
5854.050	33.92	9.05	39.18	49.81	53.61	68.20	14.59	Peak

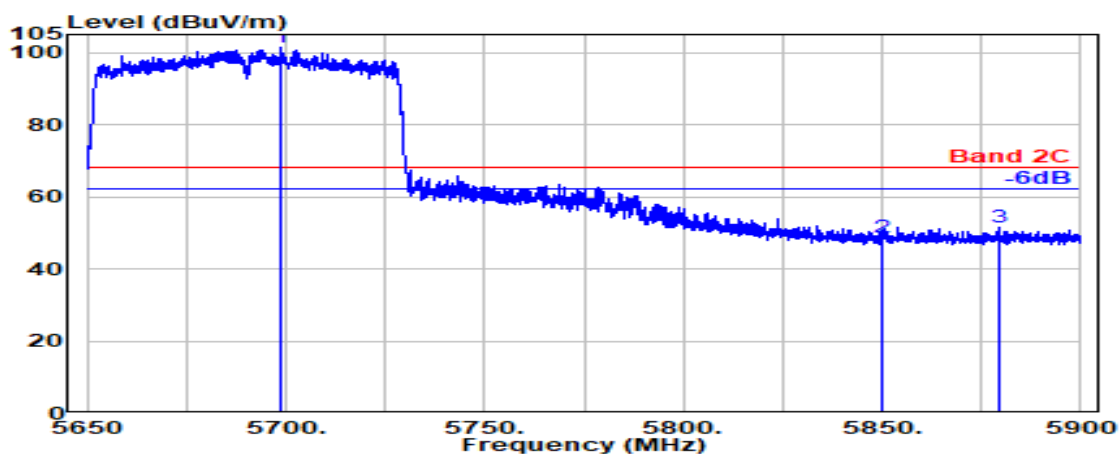

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.800	33.41	8.90	39.13	98.13	101.31	---	---	Peak
5850.000	33.90	9.05	39.18	45.09	48.86	68.20	19.34	Peak
5879.200	34.08	9.08	39.18	47.58	51.54	68.20	16.66	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

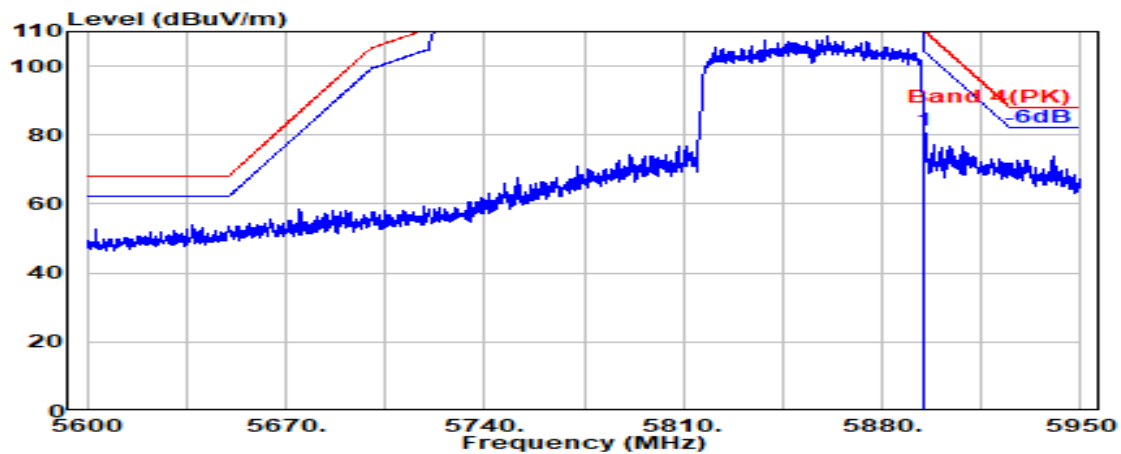

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	77.48	81.55	110.16	28.62	Peak

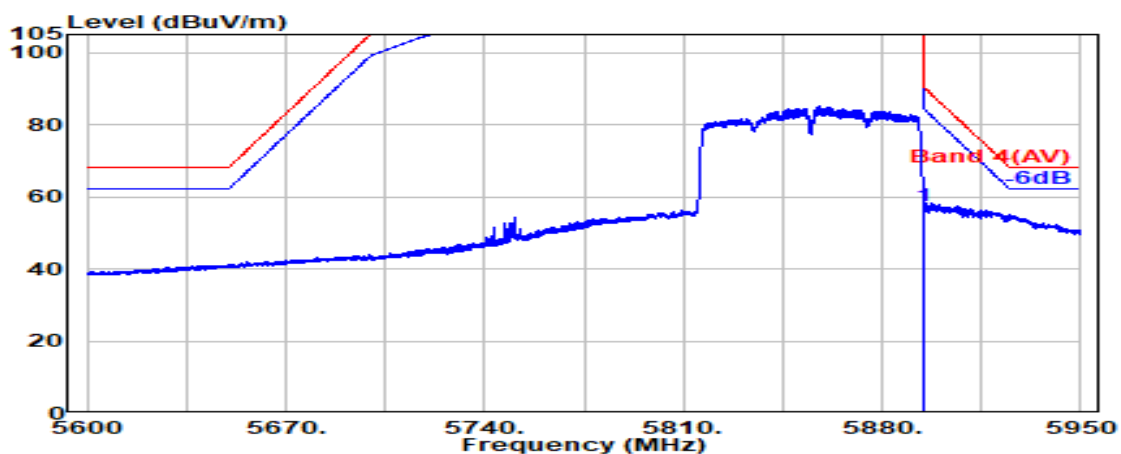

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	53.36	57.43	90.16	32.74	Average

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

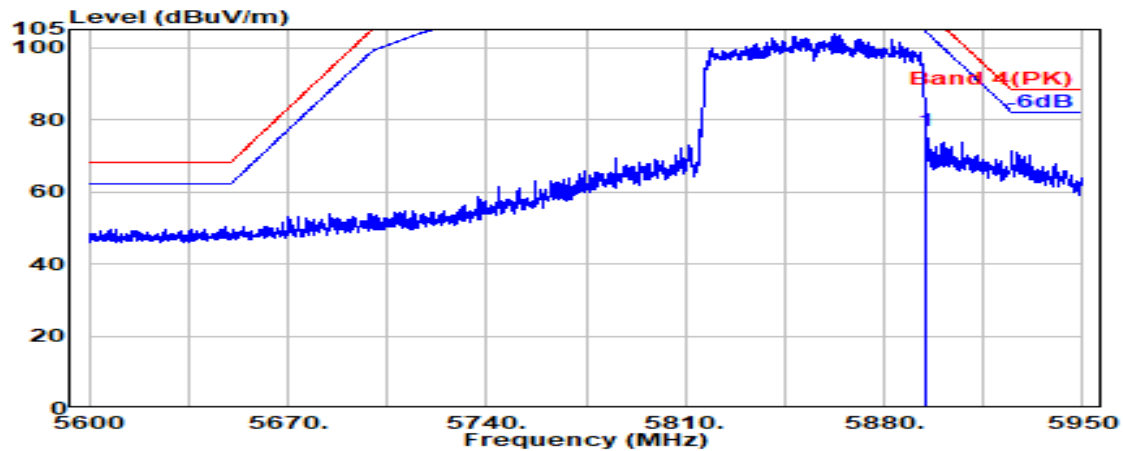

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	72.78	76.85	110.16	33.31	Peak

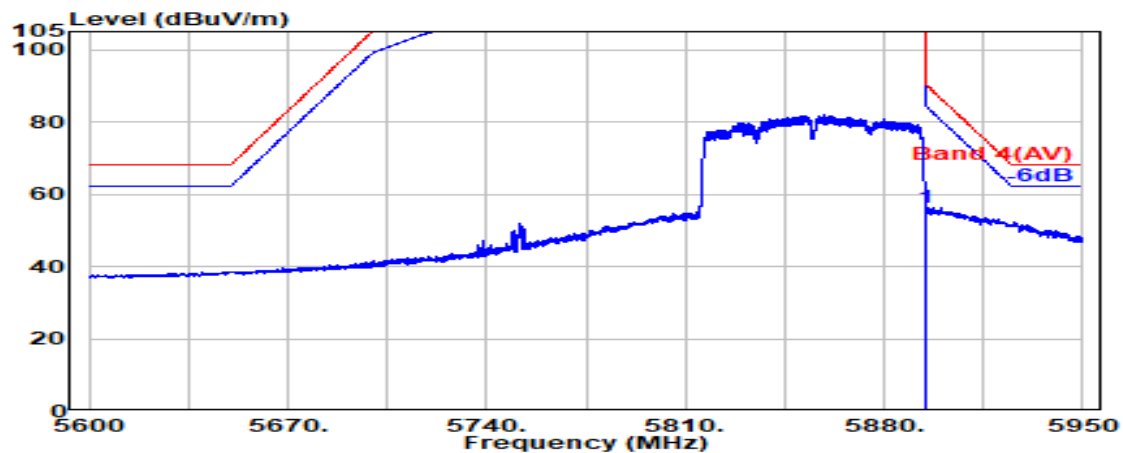


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	52.31	56.38	90.16	33.79	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

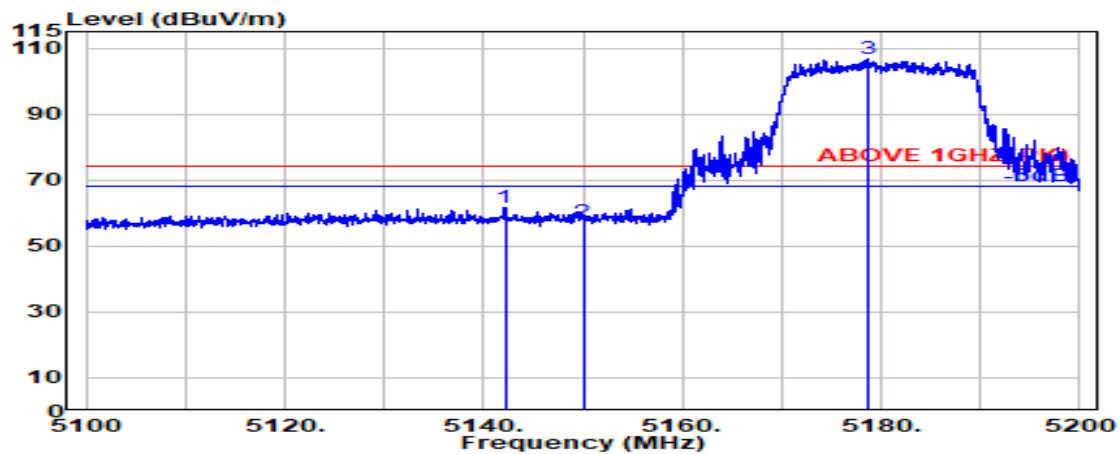

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.150	33.58	8.32	39.09	58.81	61.62	74.00	12.38	Peak
5150.000	33.60	8.33	39.09	54.56	57.39	74.00	16.61	Peak
@ 5178.650	33.60	8.36	39.09	103.88	106.74	---	---	Peak

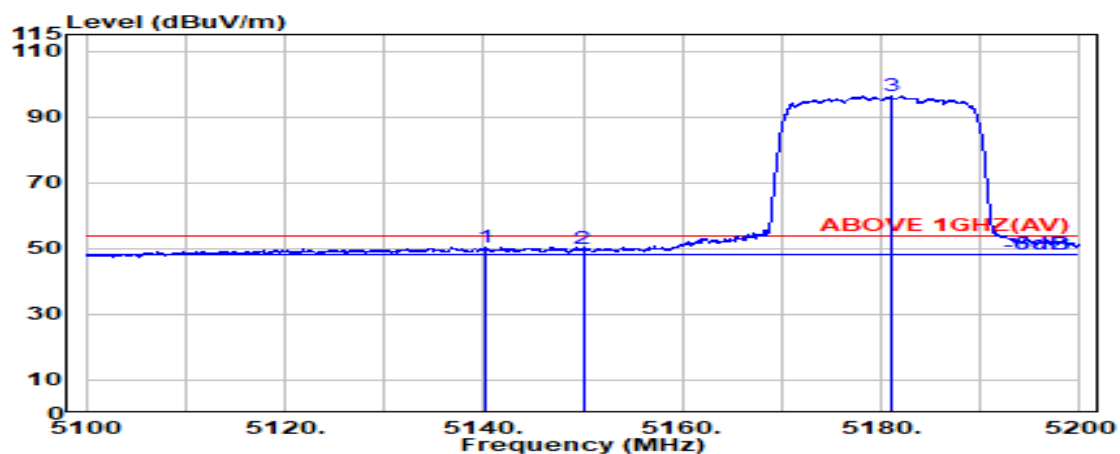

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.300	33.58	8.32	39.09	47.53	50.33	54.00	3.67	Average
5150.000	33.60	8.33	39.09	46.90	49.74	54.00	4.26	Average
@ 5181.050	33.60	8.36	39.09	93.55	96.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 1
		Frequency	TX 5180MHz

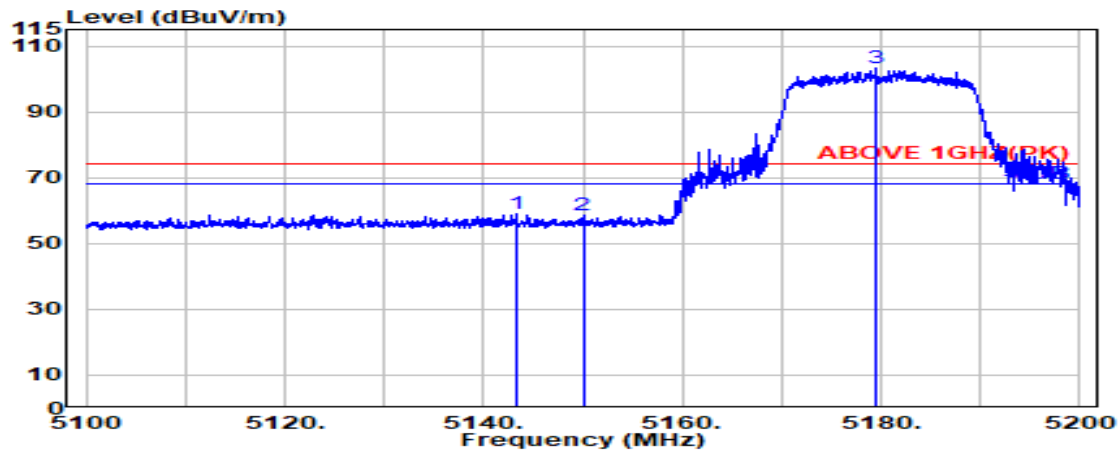

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.400	33.59	8.32	39.09	56.31	59.12	74.00	14.88	Peak
5150.000	33.60	8.33	39.09	55.57	58.41	74.00	15.59	Peak
@ 5179.500	33.60	8.36	39.09	100.59	103.46	---	---	Peak

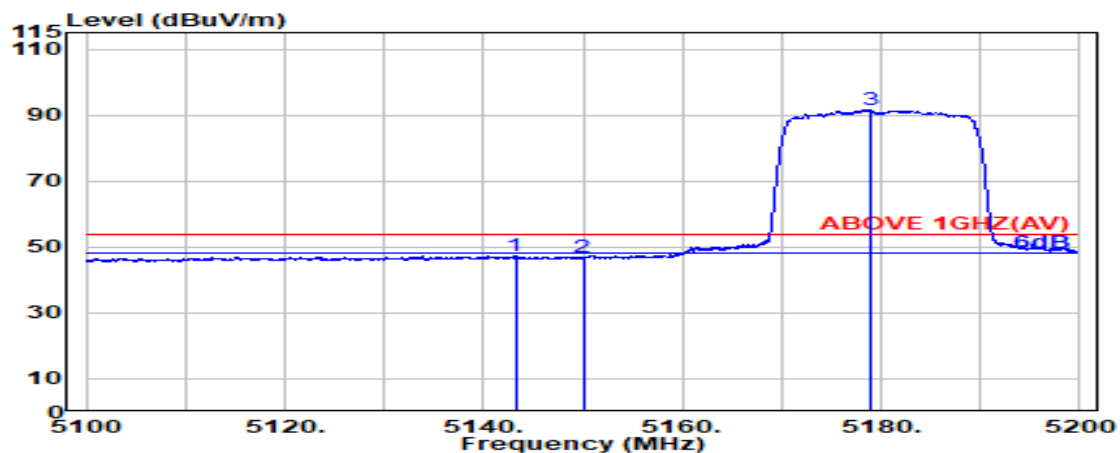

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.200	33.59	8.32	39.09	44.45	47.26	54.00	6.74	Average
5150.000	33.60	8.33	39.09	43.97	46.80	54.00	7.20	Average
@ 5178.950	33.60	8.36	39.09	88.68	91.55	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

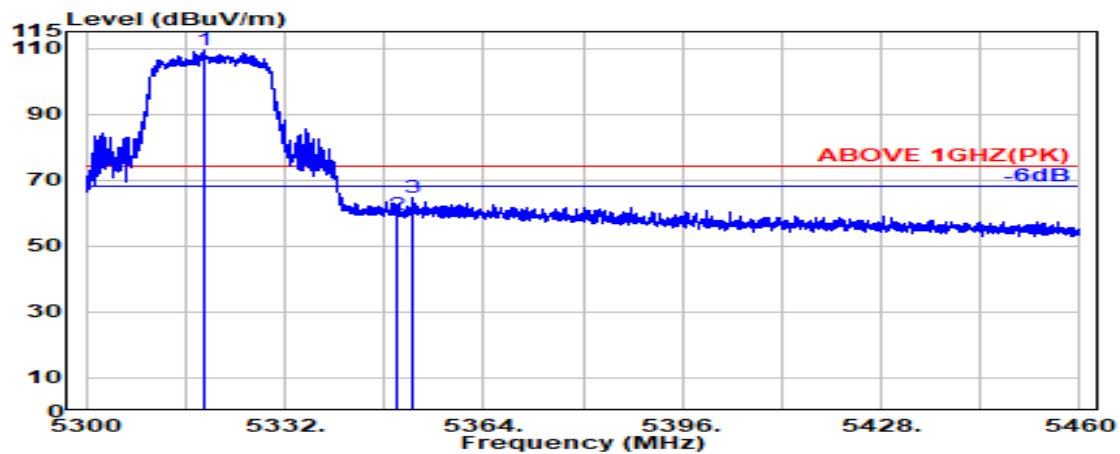

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5319.050	33.64	8.51	39.08	106.34	109.40	---	---	Peak
5350.000	33.70	8.54	39.08	56.39	59.55	74.00	14.45	Peak
5352.700	33.72	8.55	39.08	61.34	64.52	74.00	9.48	Peak

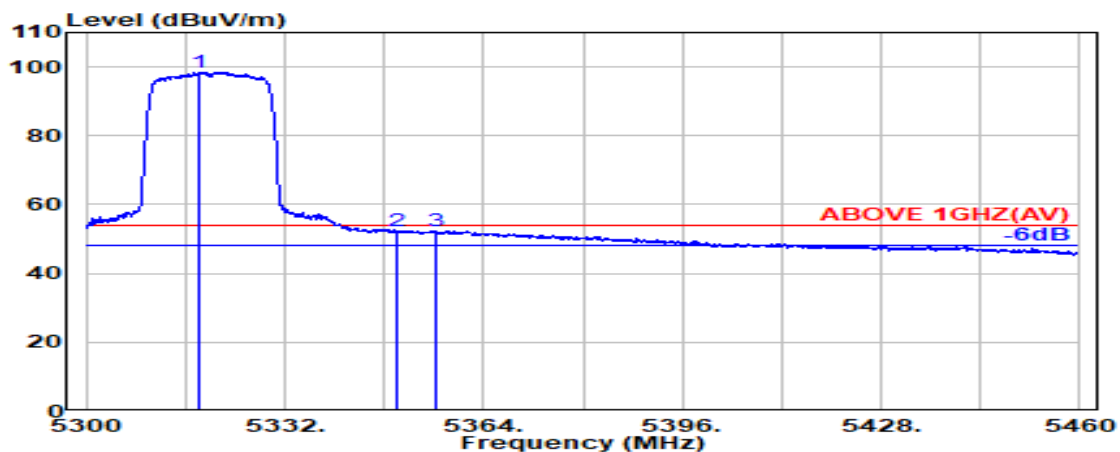

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5318.200	33.64	8.51	39.08	95.45	98.52	---	---	Average
5350.000	33.70	8.54	39.08	49.13	52.30	54.00	1.70	Average
5356.250	33.74	8.55	39.08	49.26	52.47	54.00	1.53	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2A
		Frequency	TX 5320MHz

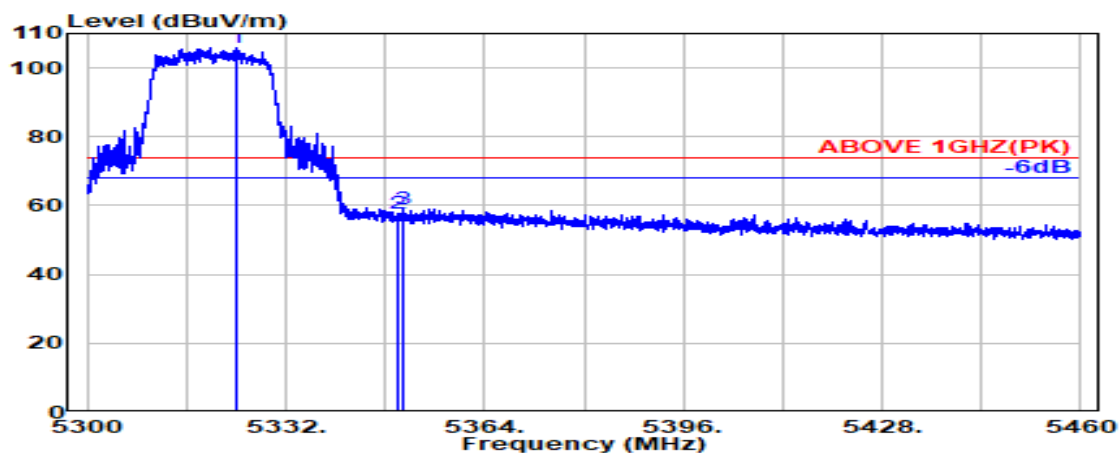

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.200	33.65	8.51	39.08	102.85	105.94	---	---	Peak
5350.000	33.70	8.54	39.08	54.33	57.50	74.00	16.50	Peak
5350.800	33.70	8.54	39.08	55.95	59.12	74.00	14.88	Peak

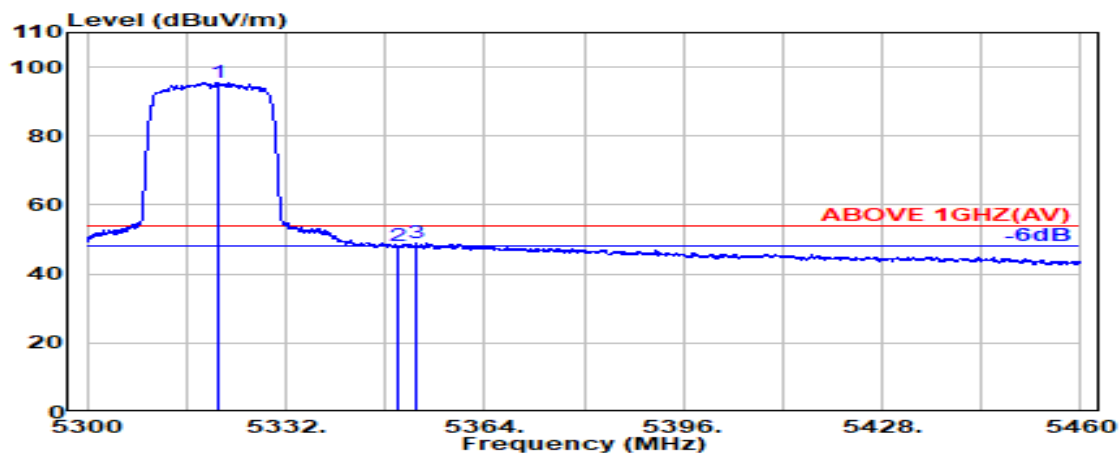

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.100	33.64	8.51	39.08	92.55	95.63	---	---	Average
5350.000	33.70	8.54	39.08	45.03	48.19	54.00	5.81	Average
5353.050	33.72	8.55	39.08	45.69	48.87	54.00	5.13	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

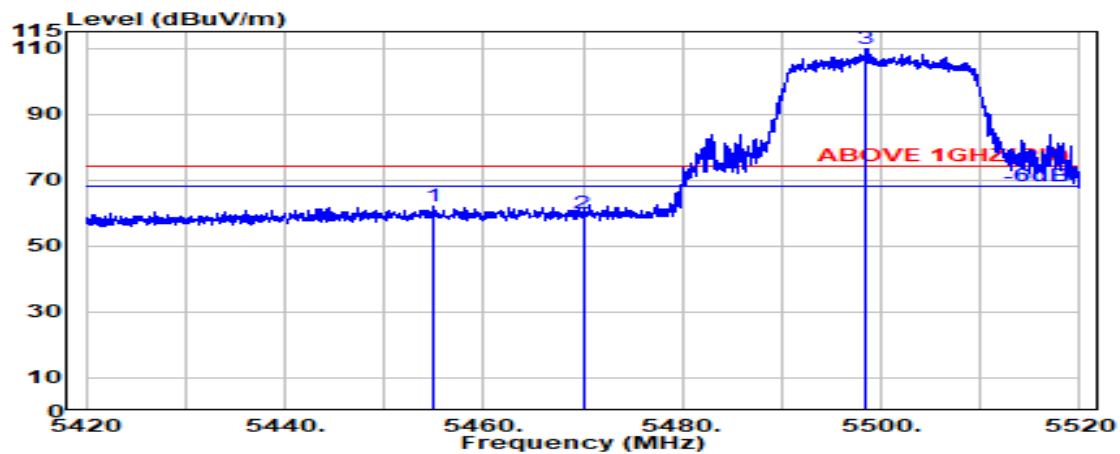

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5454.950	34.10	8.65	39.07	58.22	61.90	74.00	12.10	Peak
5470.000	34.10	8.67	39.07	56.22	59.92	74.00	14.08	Peak
@ 5498.400	34.10	8.70	39.07	105.98	109.71	---	---	Peak

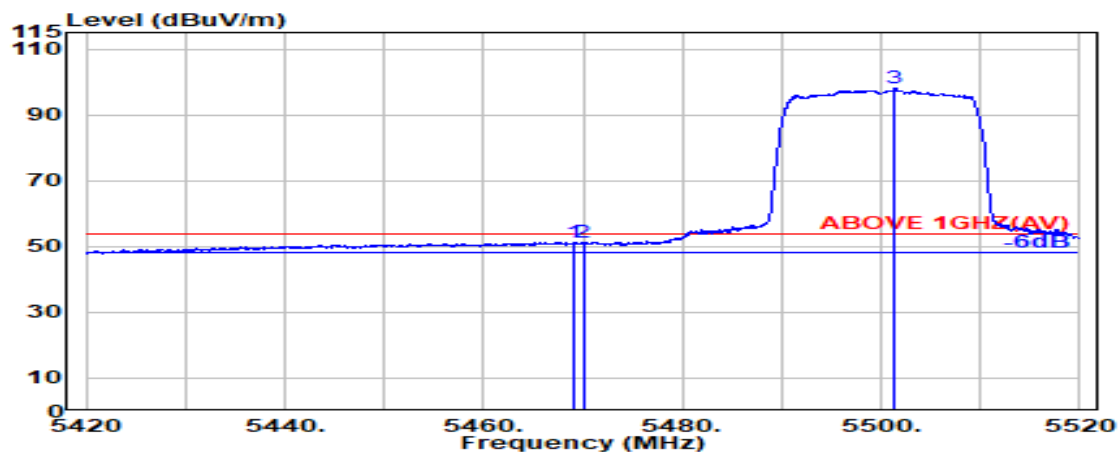

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5469.000	34.10	8.67	39.07	47.60	51.29	54.00	2.71	Average
5470.000	34.10	8.67	39.07	47.37	51.06	54.00	2.94	Average
@ 5501.400	34.10	8.70	39.07	94.25	97.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5500MHz

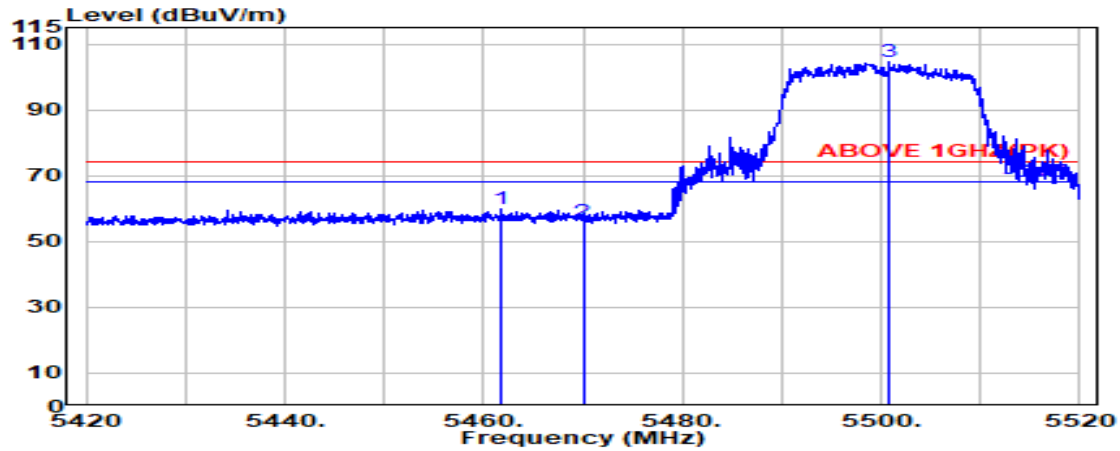

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.700	34.10	8.66	39.07	56.24	59.92	74.00	14.08	Peak
5470.000	34.10	8.67	39.07	52.49	56.19	74.00	17.81	Peak
@ 5500.850	34.10	8.70	39.07	100.89	104.61	---	---	Peak

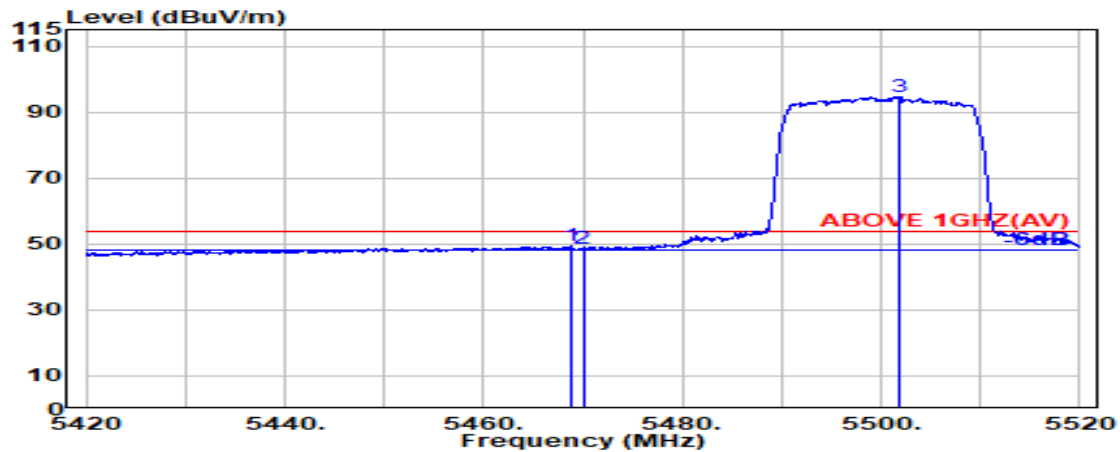

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.07	45.68	49.38	54.00	4.62	Average
5470.000	34.10	8.67	39.07	44.76	48.45	54.00	5.55	Average
@ 5501.950	34.10	8.70	39.07	90.88	94.61	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5700MHz

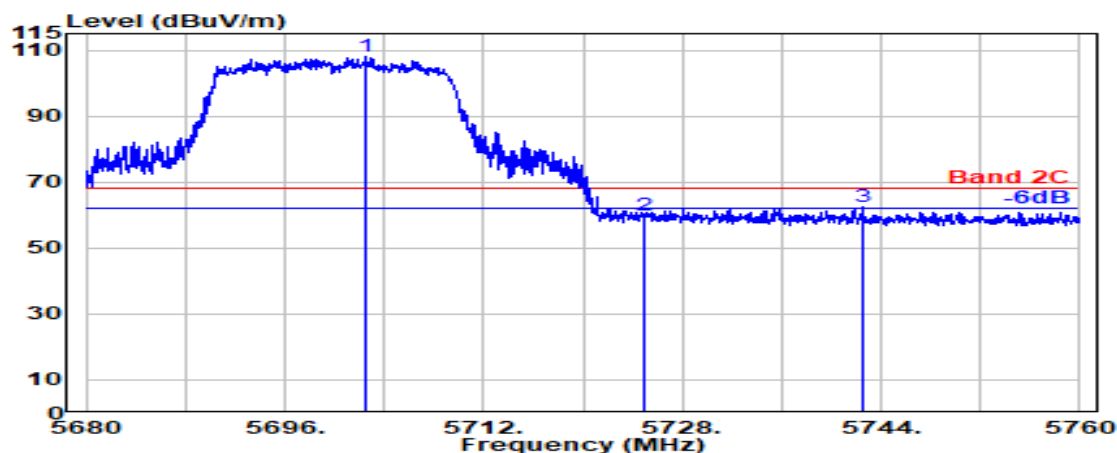

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.500	33.42	8.90	39.13	104.78	107.97	---	---	Peak
5725.000	33.60	8.92	39.14	56.68	60.07	68.20	8.13	Peak
5742.500	33.74	8.94	39.14	58.81	62.35	68.20	5.85	Peak

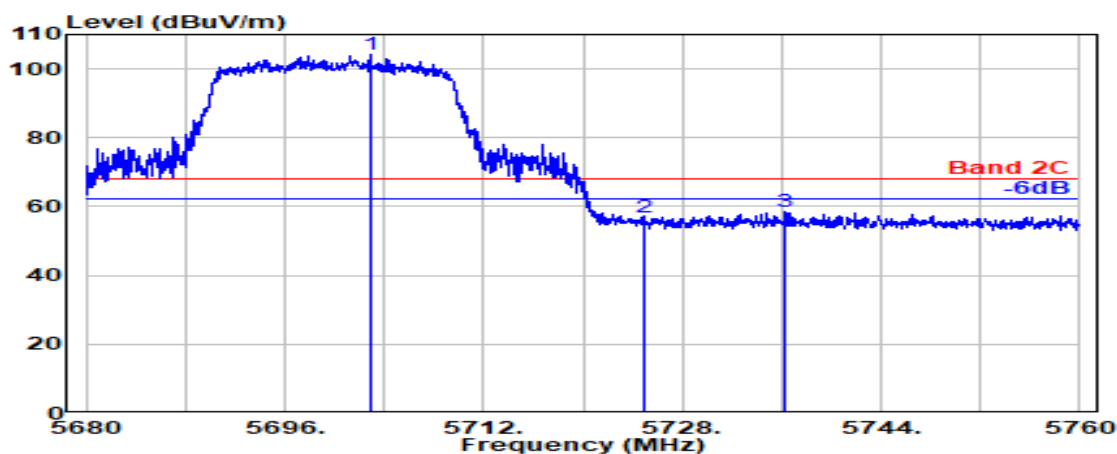

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.850	33.42	8.90	39.13	101.09	104.28	---	---	Peak
5725.000	33.60	8.92	39.14	53.47	56.85	68.20	11.35	Peak
5736.300	33.69	8.94	39.14	54.98	58.47	68.20	9.73	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

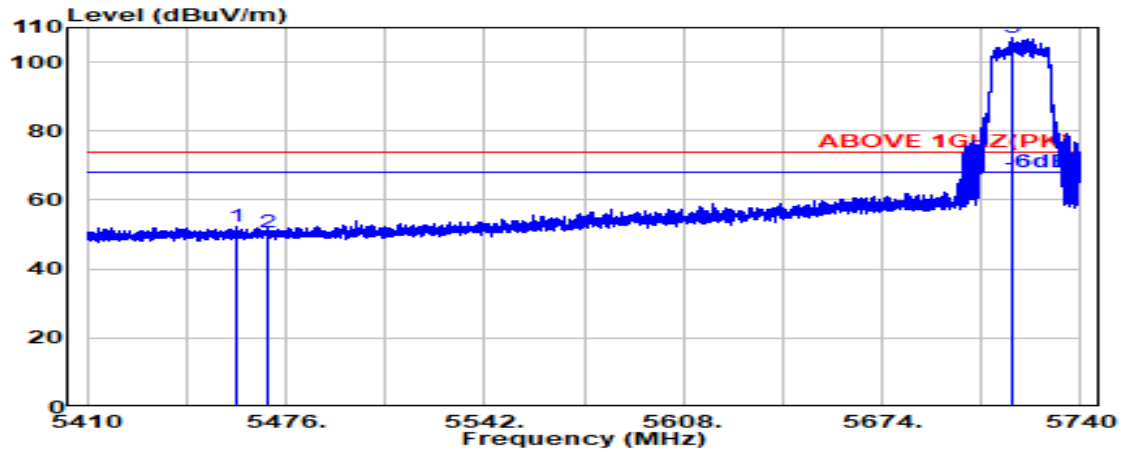

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.900	34.10	8.66	39.07	48.76	52.45	74.00	21.55	Peak
5470.000	34.10	8.67	39.07	47.01	50.71	74.00	23.29	Peak
@ 5717.550	33.54	8.92	39.14	103.90	107.22	---	---	Peak

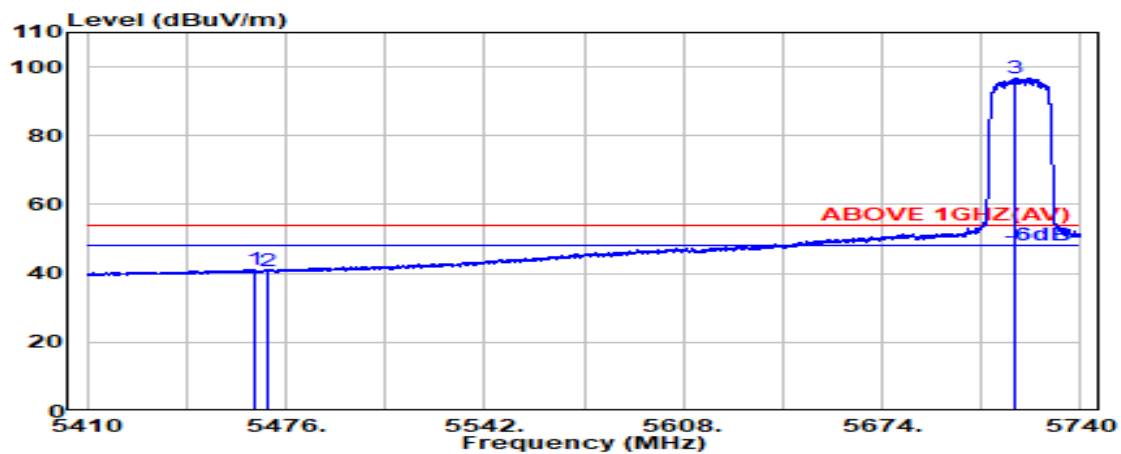


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.700	34.10	8.66	39.07	37.53	41.22	54.00	12.78	Average
5470.000	34.10	8.67	39.07	36.99	40.69	54.00	13.31	Average
@ 5718.000	33.54	8.92	39.14	93.56	96.88	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

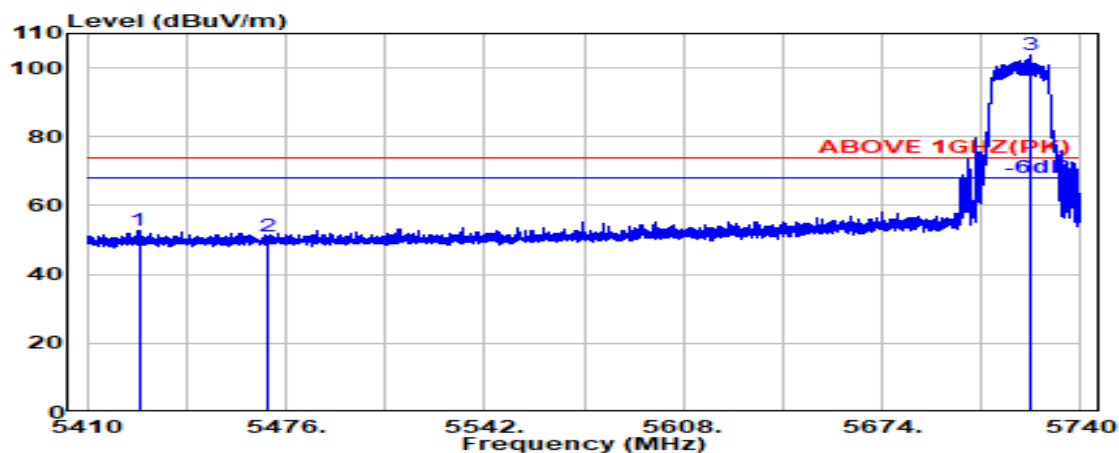

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5427.200	34.05	8.62	39.07	49.08	52.68	74.00	21.32	Peak
5470.000	34.10	8.67	39.07	47.34	51.03	74.00	22.97	Peak
@ 5723.350	33.59	8.92	39.14	100.23	103.60	---	---	Peak

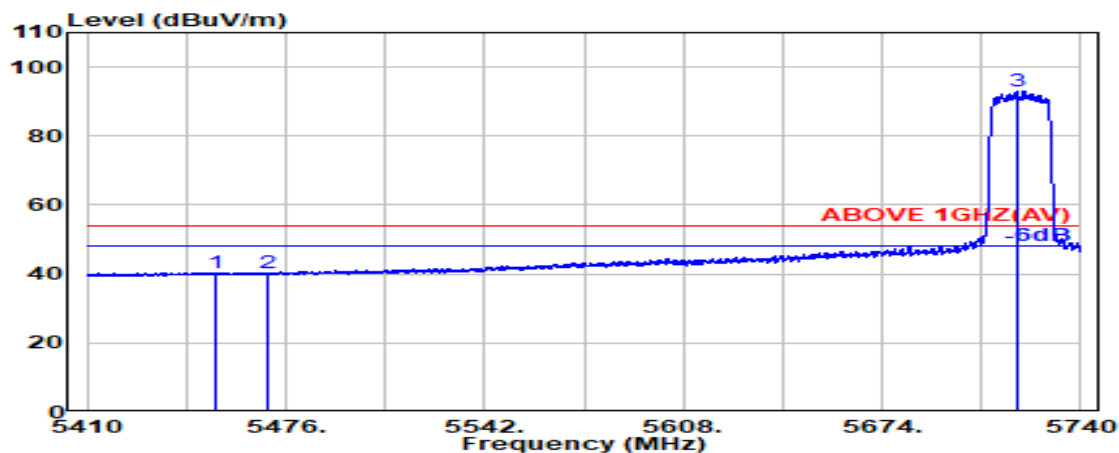


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.950	34.10	8.65	39.07	36.78	40.45	54.00	13.55	Average
5470.000	34.10	8.67	39.07	36.38	40.08	54.00	13.92	Average
@ 5719.000	33.55	8.92	39.14	89.84	93.18	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	U-NII Band 2C
		Frequency	TX 5720MHz

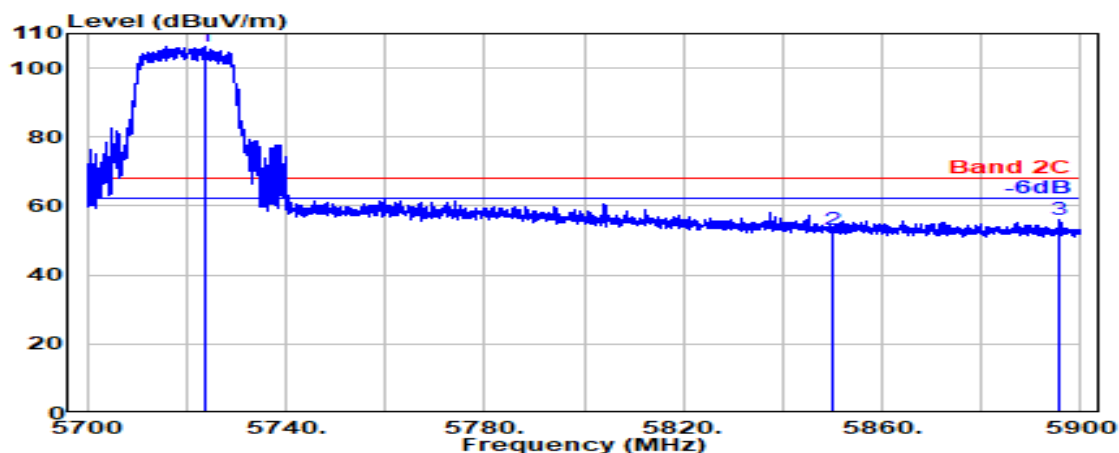

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.800	33.59	8.92	39.14	103.04	106.42	---	---	Peak
5850.000	33.90	9.05	39.18	49.40	53.17	68.20	15.03	Peak
5895.850	34.18	9.09	39.19	51.77	55.85	68.20	12.35	Peak

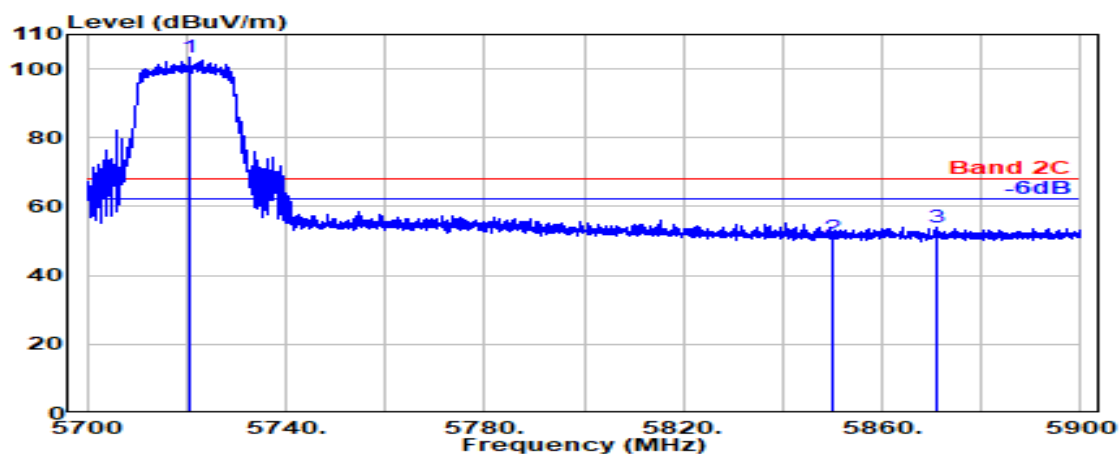

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.800	33.57	8.92	39.14	100.02	103.36	---	---	Peak
5850.000	33.90	9.05	39.18	47.49	51.26	68.20	16.94	Peak
5871.200	34.03	9.07	39.18	50.13	54.05	68.20	14.15	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

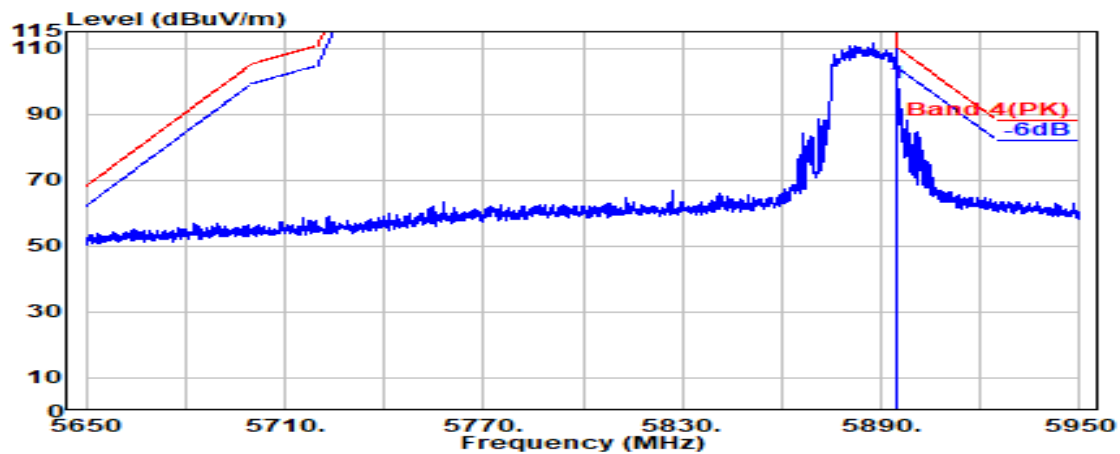

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	95.31	99.38	110.20	10.82	Peak

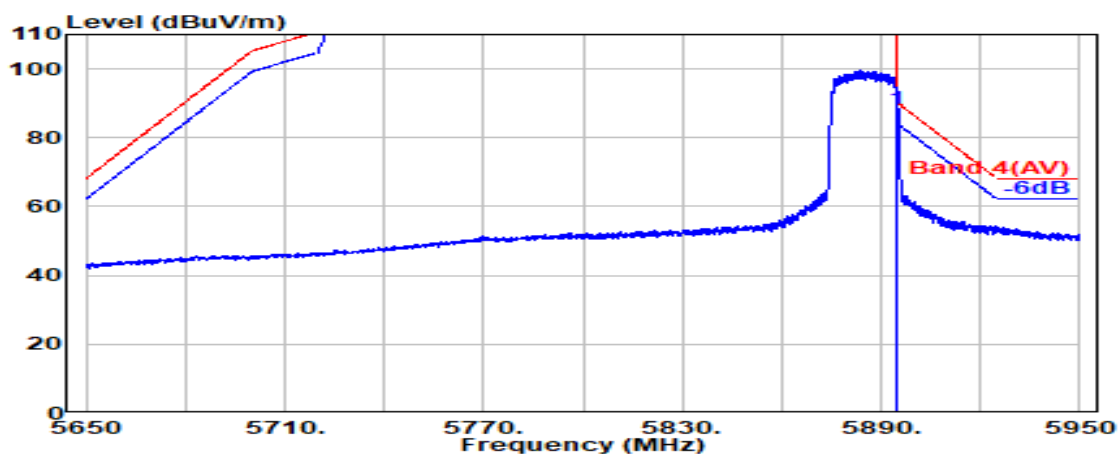


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	84.16	88.23	90.20	1.97	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	U-NII Band 4
		Frequency	TX 5885MHz

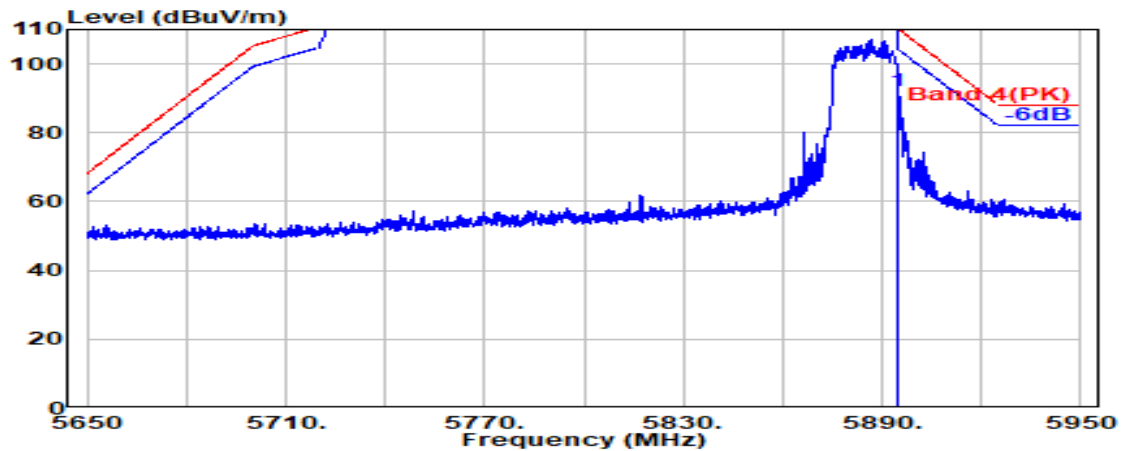

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	87.96	92.03	110.20	18.17	Peak

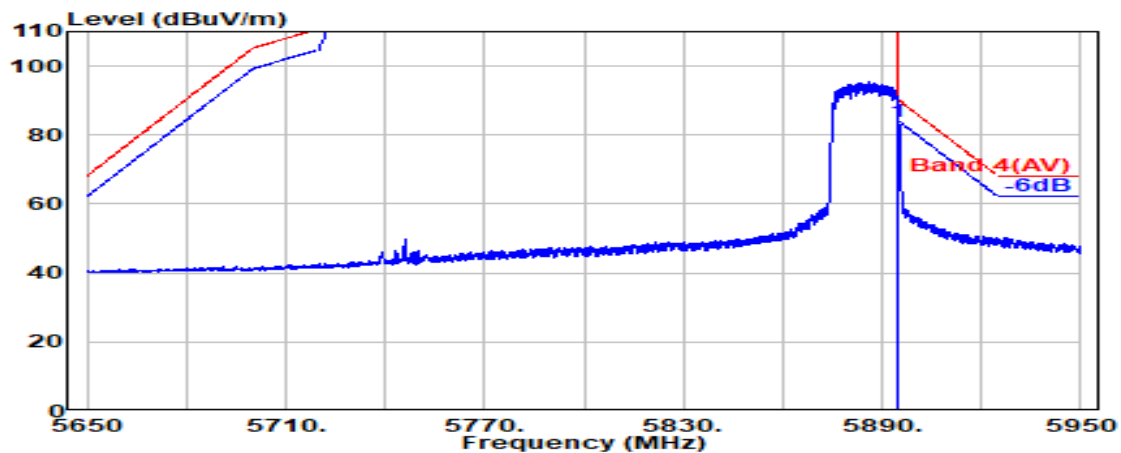


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	79.80	83.87	90.20	6.33	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

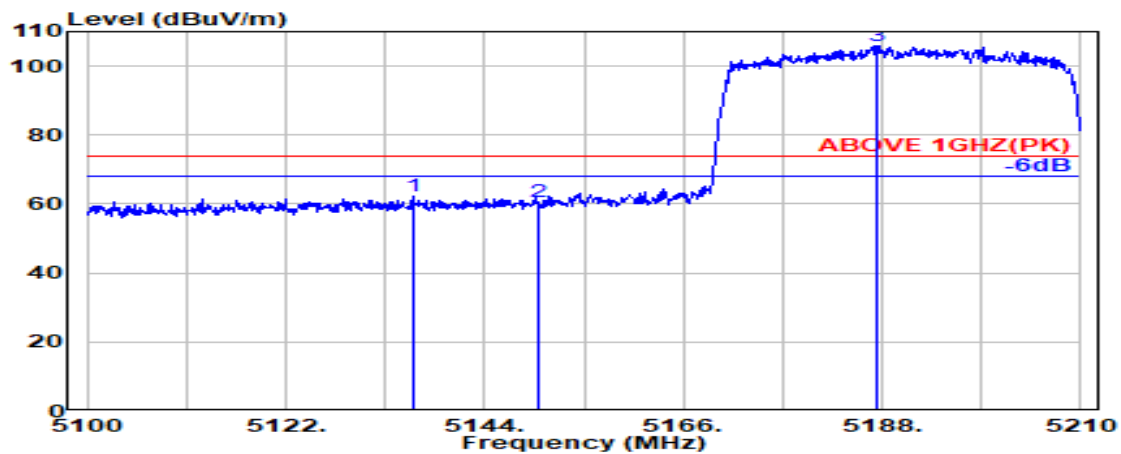

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5136.100	33.57	8.31	39.09	59.46	62.25	74.00	11.75	Peak
5150.000	33.60	8.33	39.09	57.68	60.52	74.00	13.48	Peak
@ 5187.300	33.60	8.37	39.09	103.17	106.05	---	---	Peak

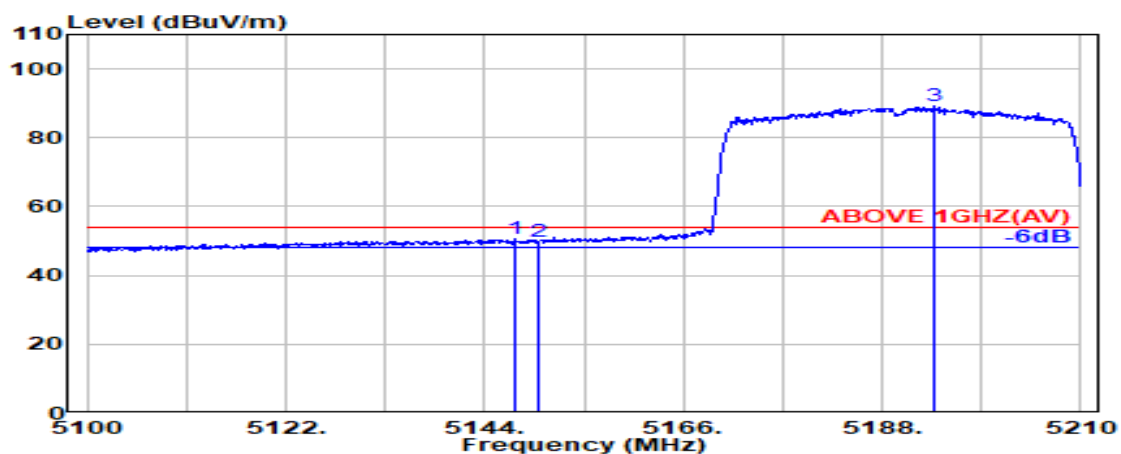

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5147.400	33.59	8.32	39.09	47.89	50.72	54.00	3.28	Average
5150.000	33.60	8.33	39.09	46.80	49.64	54.00	4.36	Average
@ 5193.800	33.60	8.37	39.09	86.25	89.13	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
		Frequency	TX 5190MHz

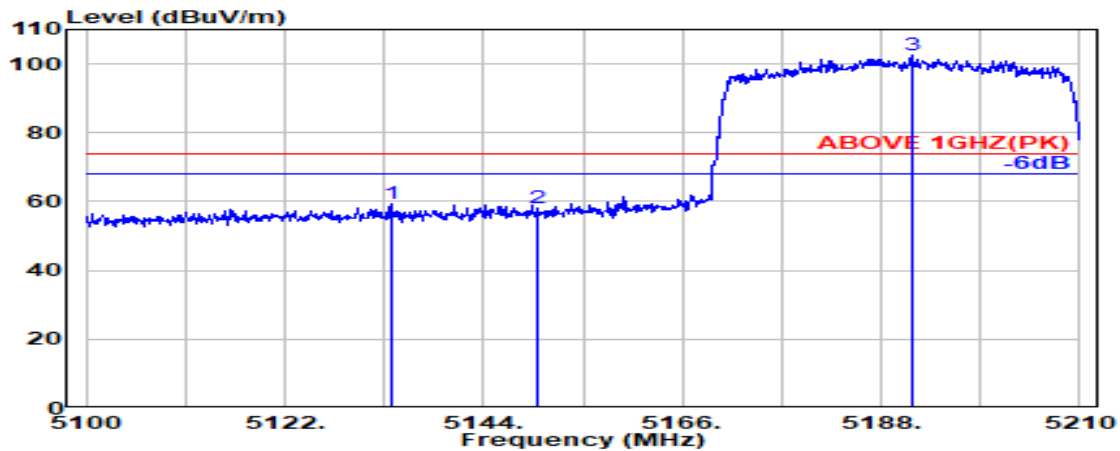

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.700	33.57	8.31	39.09	56.37	59.15	74.00	14.85	Peak
5150.000	33.60	8.33	39.09	55.23	58.07	74.00	15.93	Peak
@ 5191.400	33.60	8.37	39.09	99.73	102.61	---	---	Peak

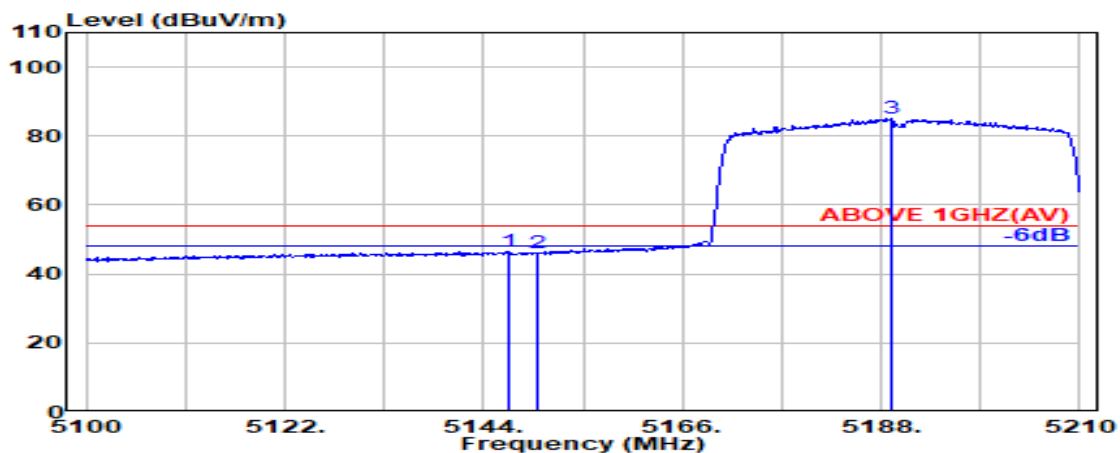

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.700	33.59	8.32	39.09	43.67	46.50	54.00	7.50	Average
5150.000	33.60	8.33	39.09	43.07	45.91	54.00	8.09	Average
@ 5189.200	33.60	8.37	39.09	82.29	85.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

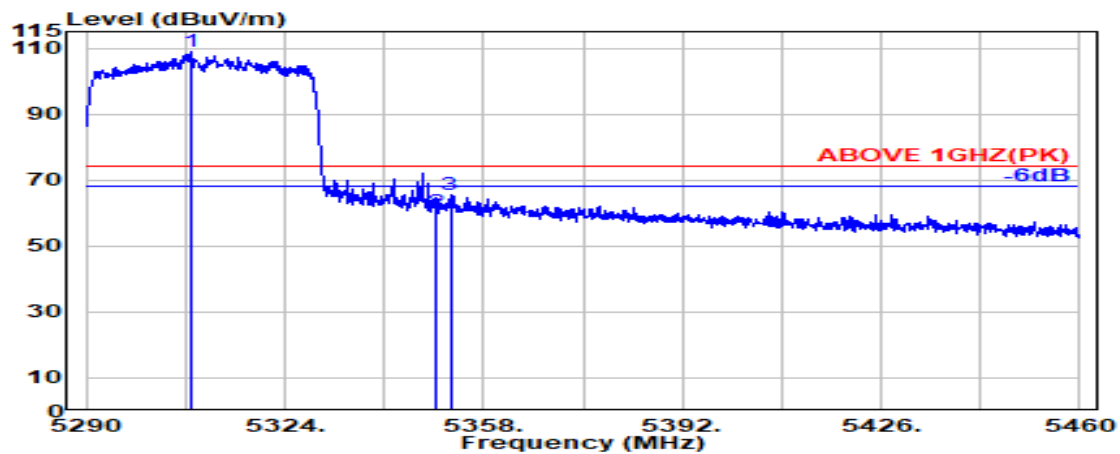

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.000	33.62	8.50	39.08	105.85	108.88	---	---	Peak
5350.000	33.70	8.54	39.08	57.22	60.39	74.00	13.61	Peak
5352.300	33.71	8.54	39.08	62.47	65.65	74.00	8.35	Peak

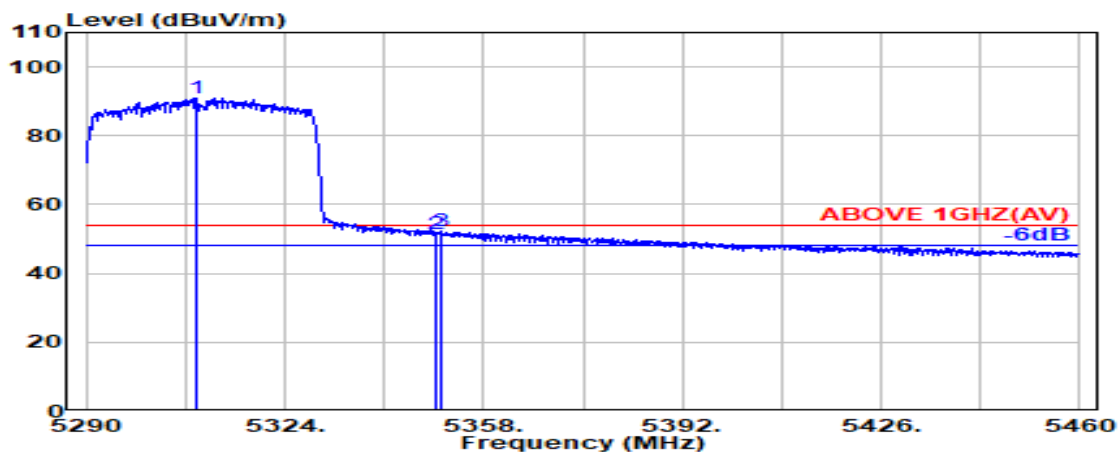

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5308.700	33.62	8.50	39.08	87.94	90.98	---	---	Average
5350.000	33.70	8.54	39.08	48.35	51.51	54.00	2.49	Average
5350.800	33.70	8.54	39.08	48.93	52.10	54.00	1.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
		Frequency	TX 5310MHz

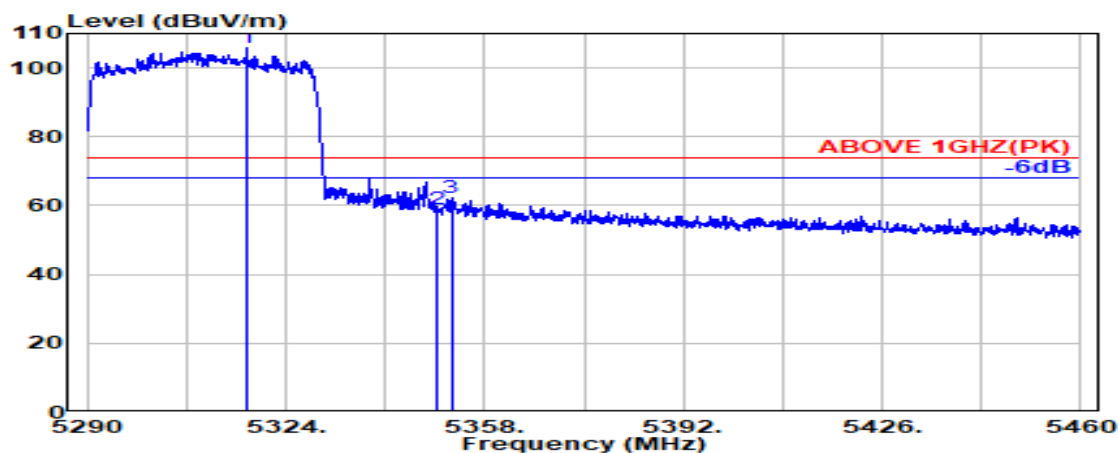

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.400	33.63	8.51	39.08	102.70	105.76	---	---	Peak
5350.000	33.70	8.54	39.08	55.90	59.06	74.00	14.94	Peak
5352.300	33.71	8.54	39.08	59.07	62.25	74.00	11.75	Peak

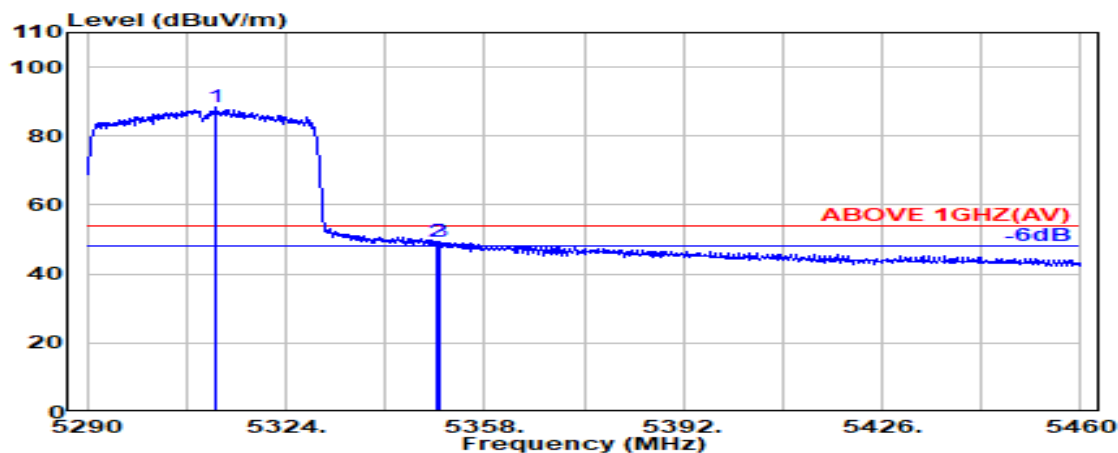

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5312.000	33.62	8.50	39.08	85.22	88.26	---	---	Average
5350.000	33.70	8.54	39.08	46.22	49.39	54.00	4.61	Average
5350.200	33.70	8.54	39.08	46.12	49.28	54.00	4.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

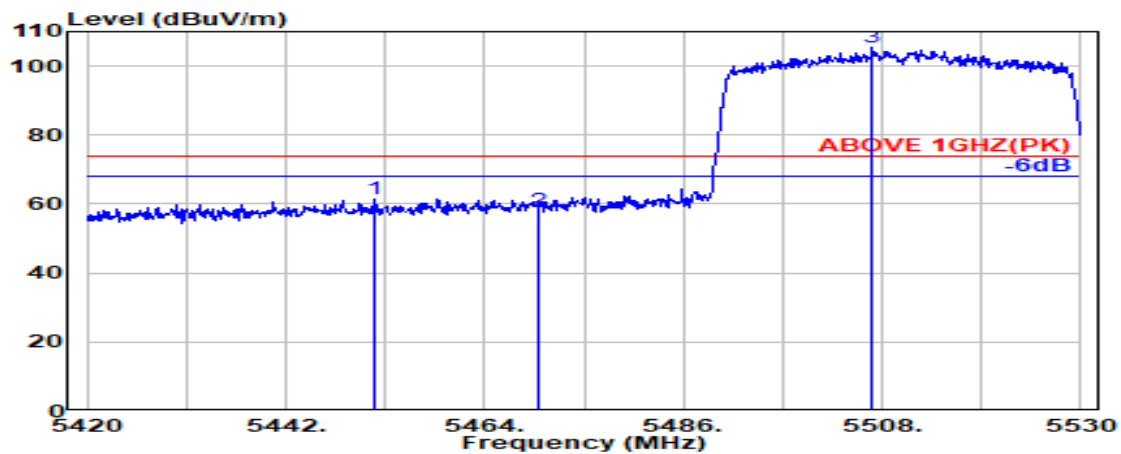

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.900	34.10	8.65	39.07	57.85	61.53	74.00	12.47	Peak
5470.000	34.10	8.67	39.07	54.57	58.26	74.00	15.74	Peak
@ 5506.800	34.09	8.71	39.07	101.78	105.50	---	---	Peak

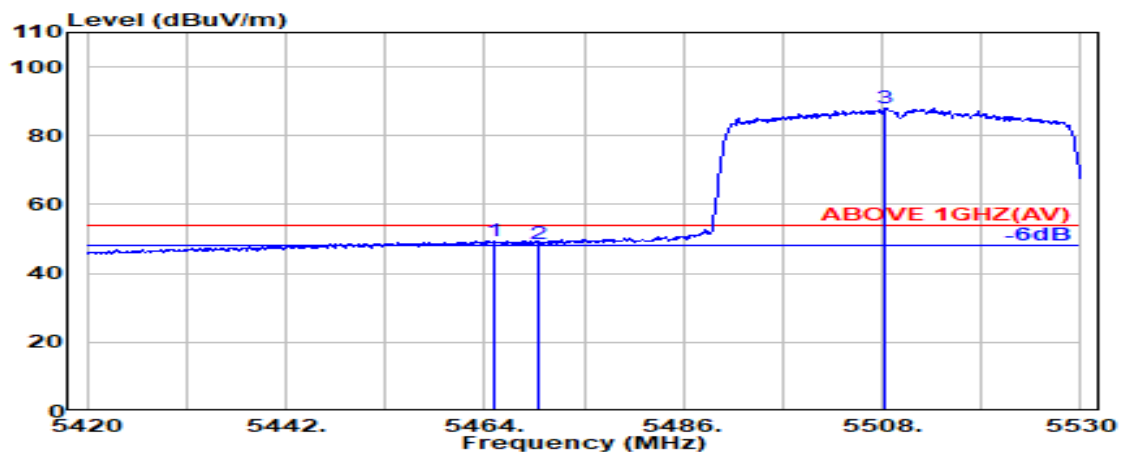

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5465.200	34.10	8.66	39.07	45.76	49.45	54.00	4.55	Average
5470.000	34.10	8.67	39.07	44.86	48.55	54.00	5.45	Average
5508.300	34.08	8.71	39.07	84.46	88.17	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5510MHz

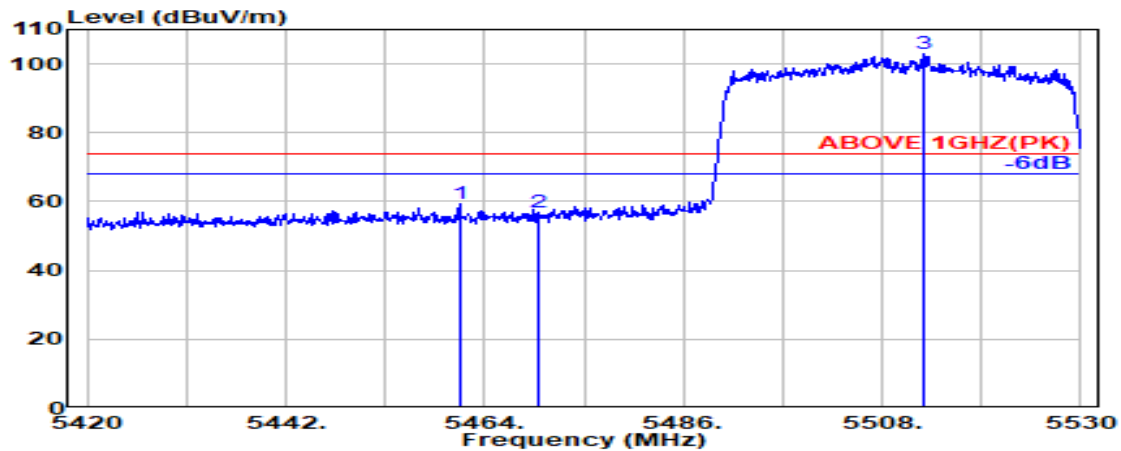

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.200	34.10	8.66	39.07	55.59	59.28	74.00	14.72	Peak
5470.000	34.10	8.67	39.07	52.96	56.66	74.00	17.34	Peak
@ 5512.500	34.07	8.71	39.07	99.05	102.76	---	---	Peak

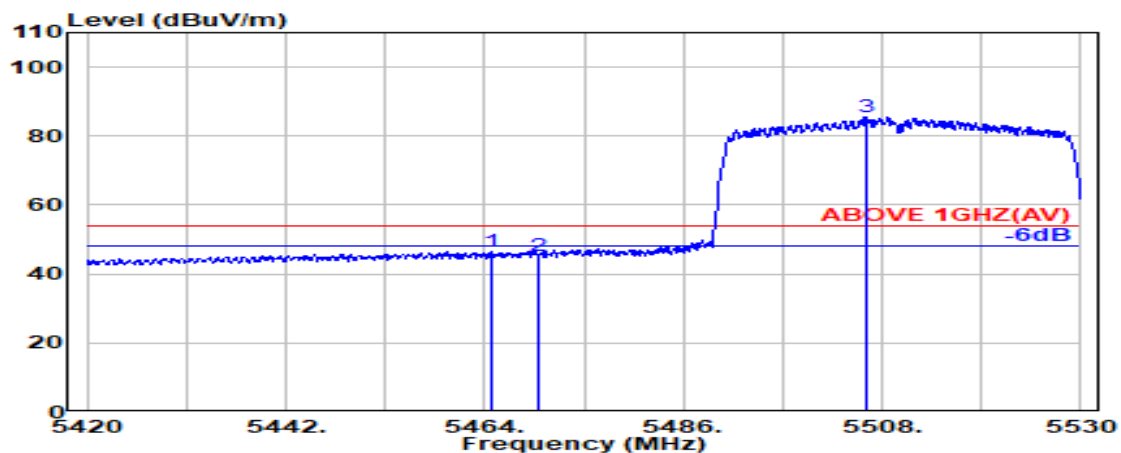

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.10	8.66	39.07	42.78	46.47	54.00	7.53	Average
5470.000	34.10	8.67	39.07	41.54	45.24	54.00	8.76	Average
@ 5506.200	34.09	8.70	39.07	81.90	85.62	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5670MHz

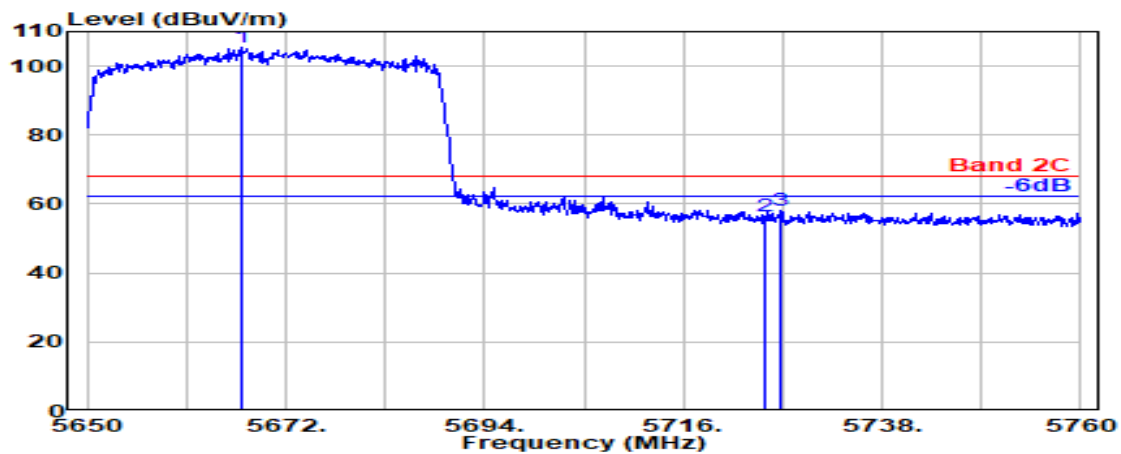

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5667.000	33.60	8.87	39.12	101.96	105.30	---	---	Peak
5725.000	33.60	8.92	39.14	53.24	56.63	68.20	11.57	Peak
5726.900	33.62	8.93	39.14	54.78	58.18	68.20	10.02	Peak

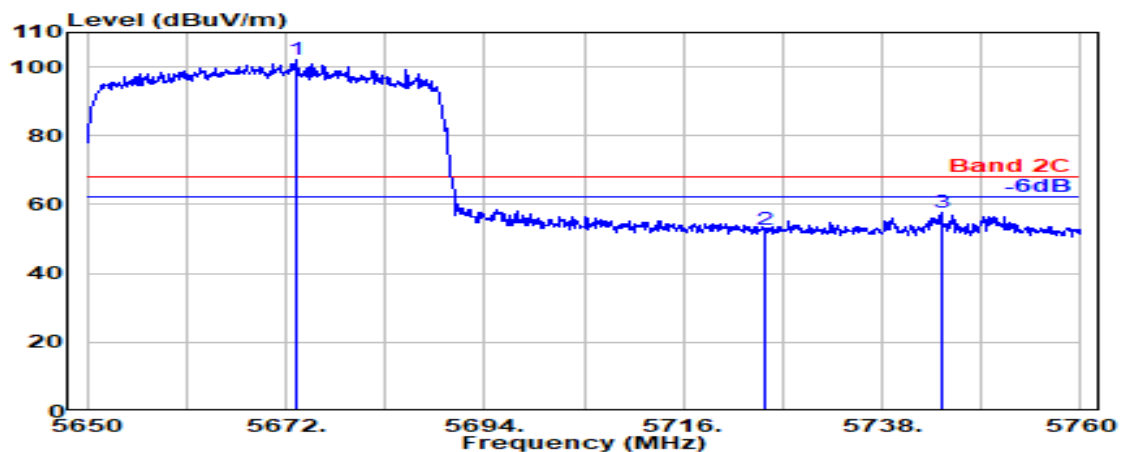

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5673.200	33.56	8.87	39.12	98.60	101.91	---	---	Peak
5725.000	33.60	8.92	39.14	49.26	52.65	68.20	15.55	Peak
5744.500	33.76	8.94	39.14	54.28	57.83	68.20	10.37	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

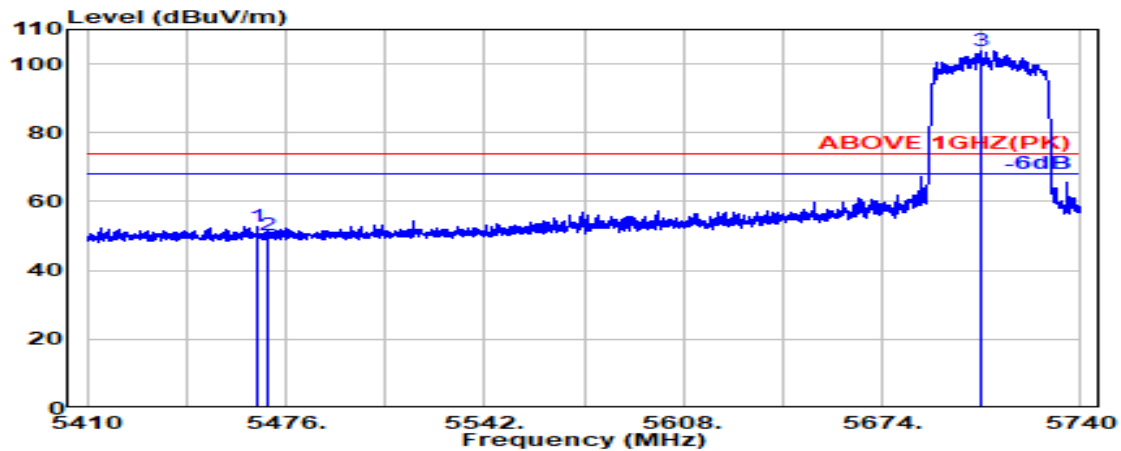

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.300	34.10	8.66	39.07	49.23	52.92	74.00	21.08	Peak
5470.000	34.10	8.67	39.07	46.60	50.30	74.00	23.70	Peak
@ 5706.800	33.45	8.91	39.13	100.57	103.79	---	---	Peak

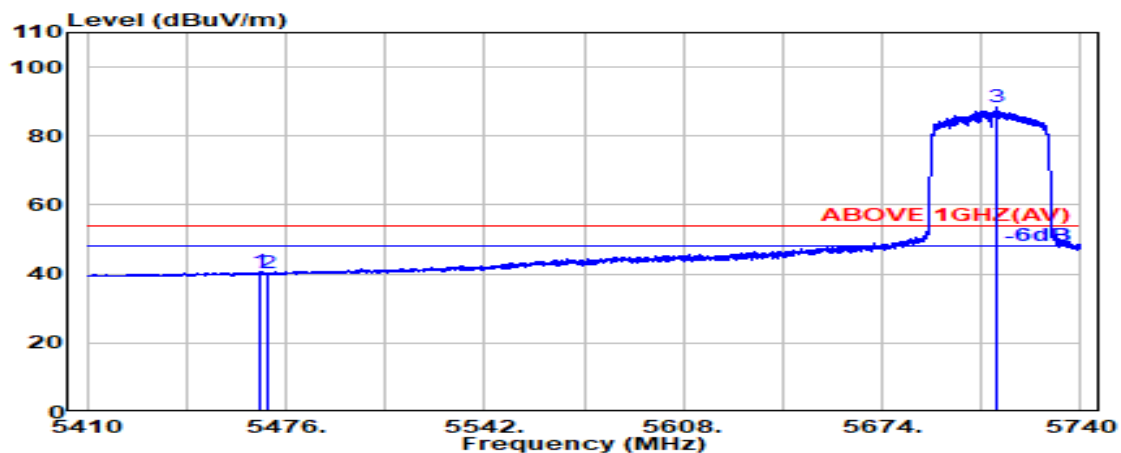

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.800	34.10	8.67	39.07	37.12	40.81	54.00	13.19	Average
5470.000	34.10	8.67	39.07	36.63	40.33	54.00	13.67	Average
@ 5712.100	33.50	8.91	39.14	85.00	88.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

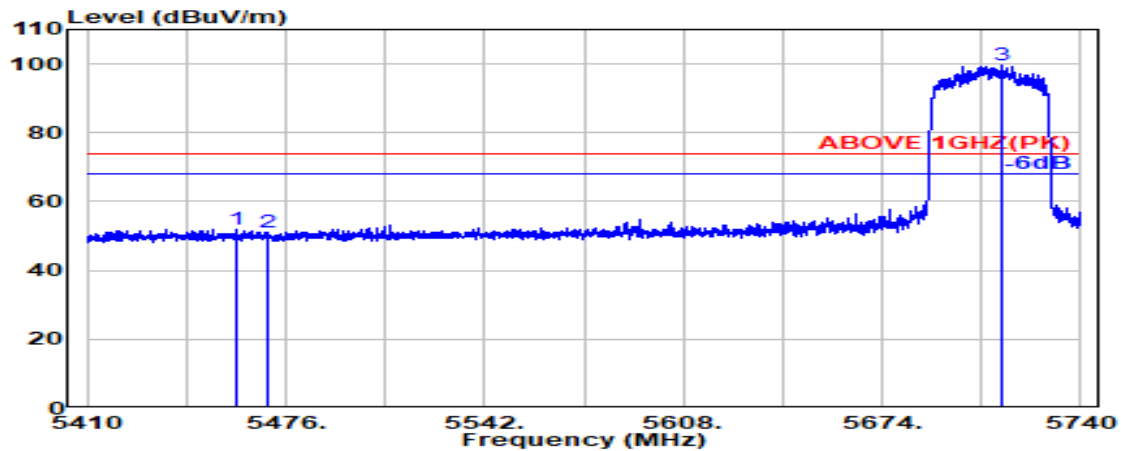

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5459.300	34.10	8.66	39.07	48.30	51.99	74.00	22.01	Peak
5470.000	34.10	8.67	39.07	47.39	51.08	74.00	22.92	Peak
5713.800	33.51	8.91	39.14	96.20	99.49	---	---	Peak

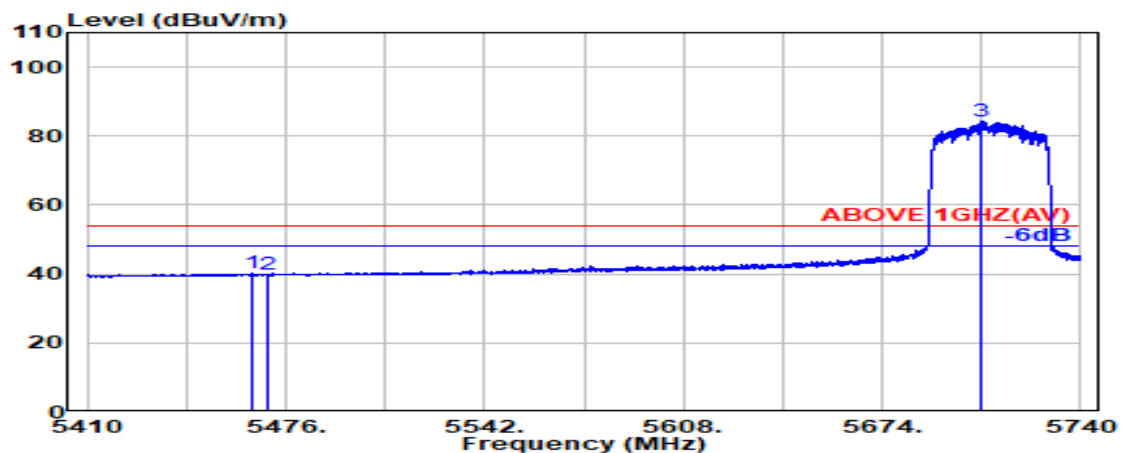

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.400	34.10	8.66	39.07	36.39	40.08	54.00	13.92	Average
5470.000	34.10	8.67	39.07	36.16	39.86	54.00	14.14	Average
@ 5706.800	33.45	8.91	39.13	81.12	84.34	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
		Frequency	TX 5710MHz

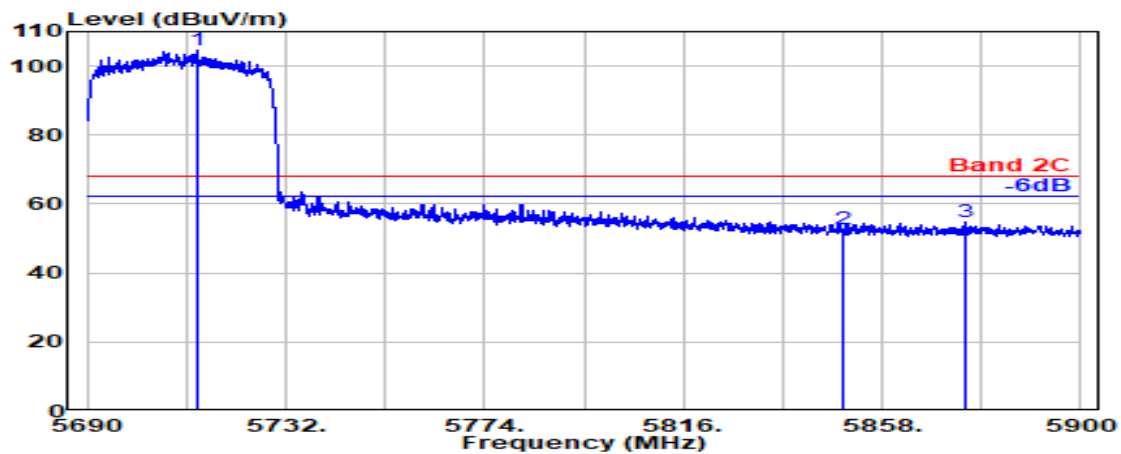

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5713.100	33.51	8.91	39.14	101.38	104.66	---	---	Peak
5850.000	33.90	9.05	39.18	48.92	52.69	68.20	15.51	Peak
5875.800	34.06	9.07	39.18	50.65	54.59	68.20	13.61	Peak

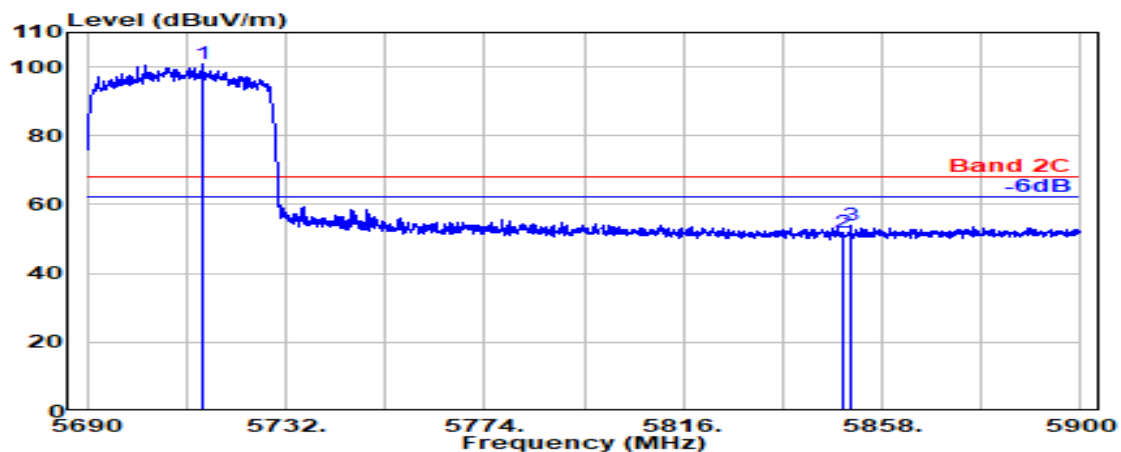

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5714.500	33.52	8.91	39.14	97.56	100.85	---	---	Peak
5850.000	33.90	9.05	39.18	47.92	51.69	68.20	16.51	Peak
5851.300	33.91	9.05	39.18	49.98	53.76	68.20	14.44	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

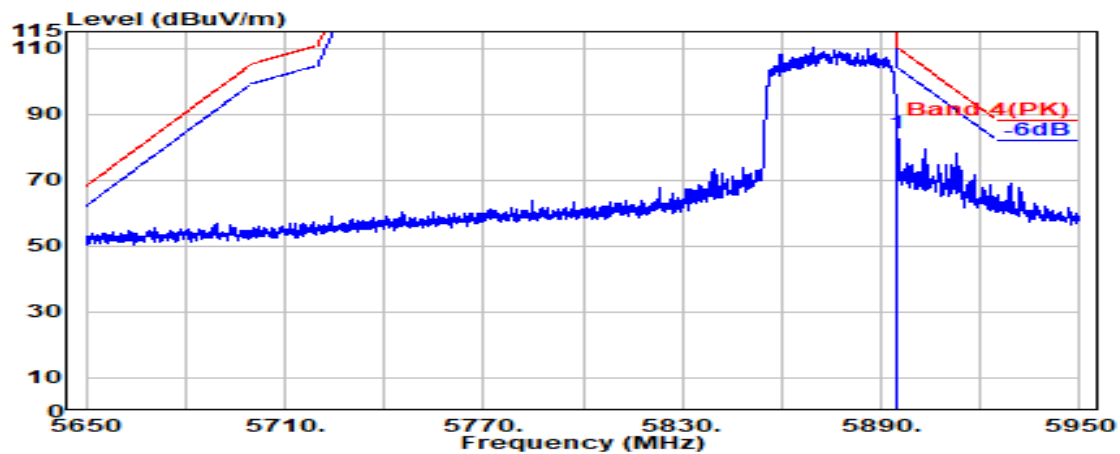

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	80.12	84.19	110.20	26.01	Peak

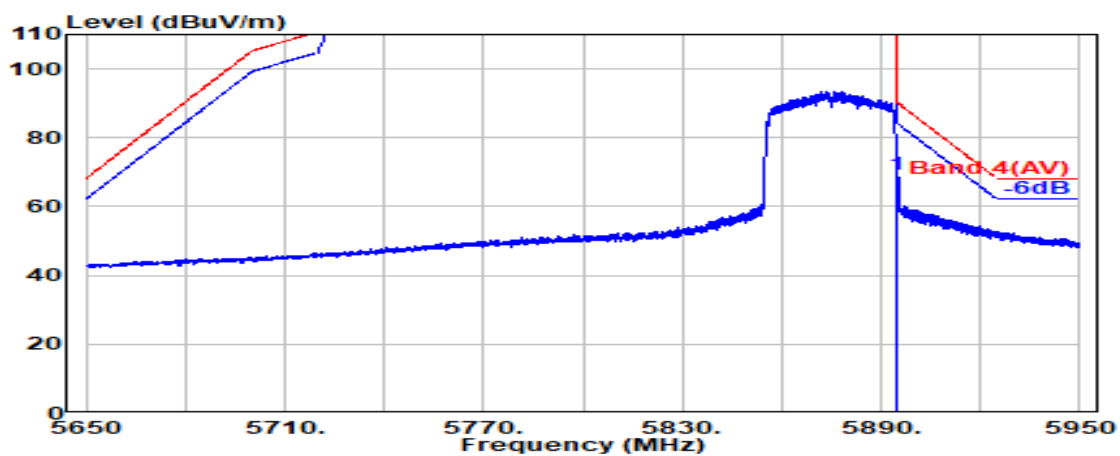


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	65.44	69.51	90.20	20.69	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 4
		Frequency	TX 5875MHz

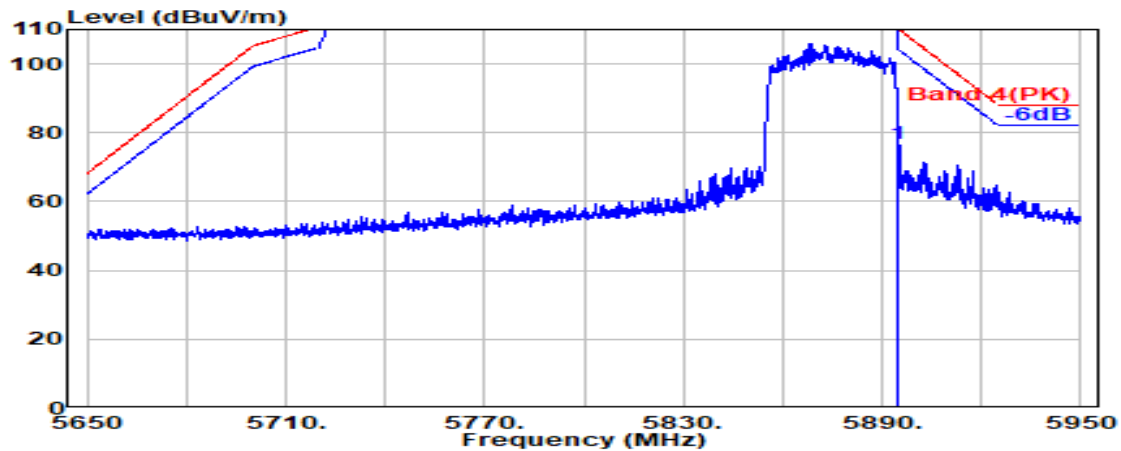

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	72.66	76.73	110.20	33.47	Peak

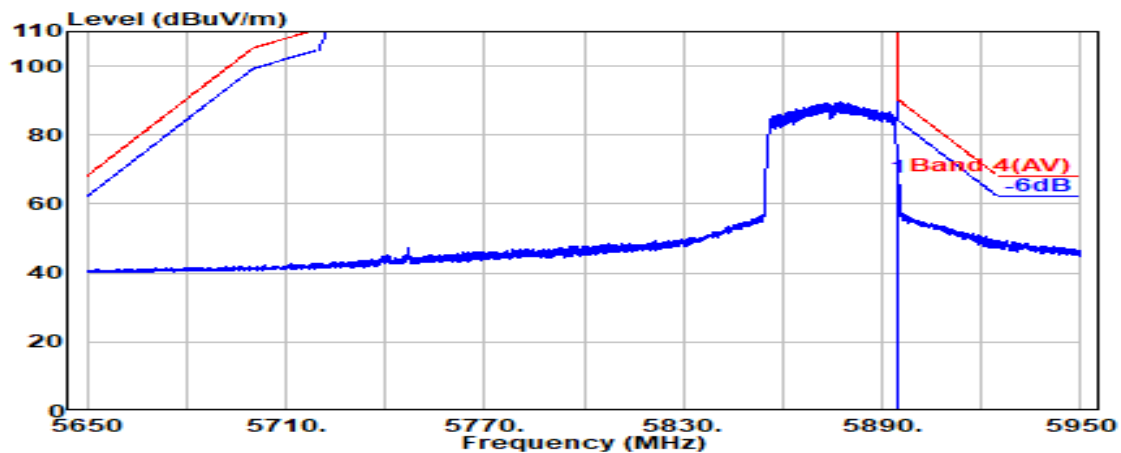


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.000	34.17	9.09	39.19	63.51	67.58	90.20	22.62	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

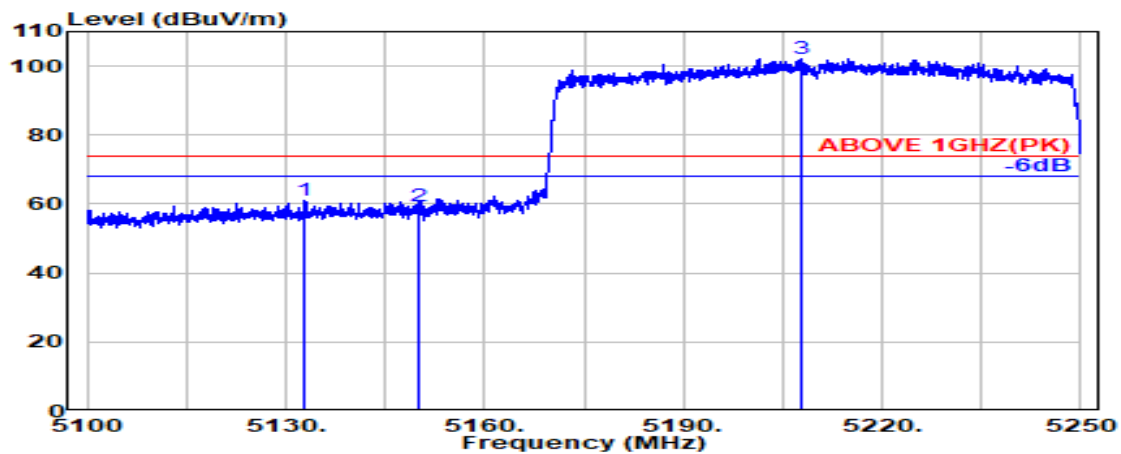

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.950	33.57	8.31	39.09	58.23	61.02	74.00	12.98	Peak
5150.000	33.60	8.33	39.09	56.42	59.26	74.00	14.74	Peak
@ 5207.800	33.62	8.39	39.09	99.24	102.15	---	---	Peak

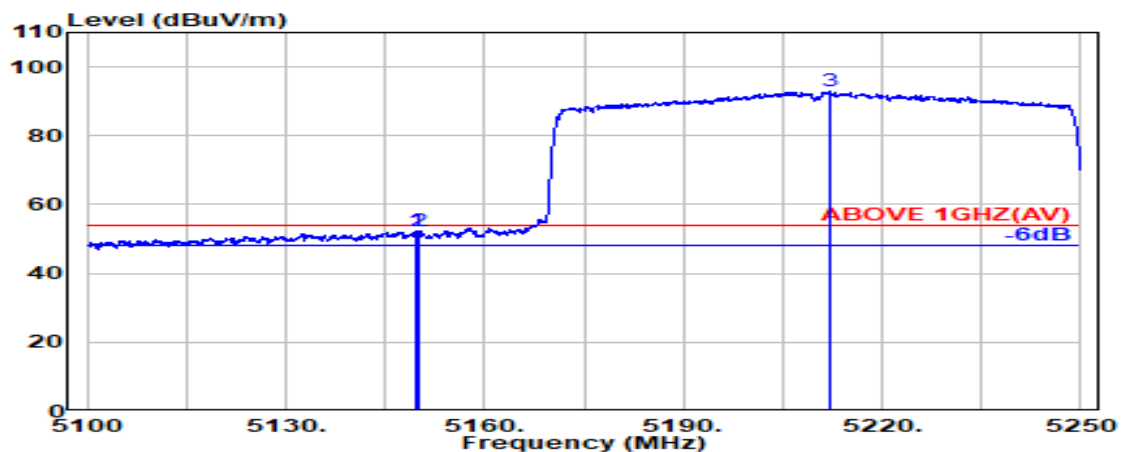

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.550	33.60	8.33	39.09	49.61	52.45	54.00	1.55	Average
5150.000	33.60	8.33	39.09	49.35	52.19	54.00	1.81	Average
@ 5212.200	33.62	8.39	39.09	89.87	92.81	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 1
		Frequency	TX 5210MHz

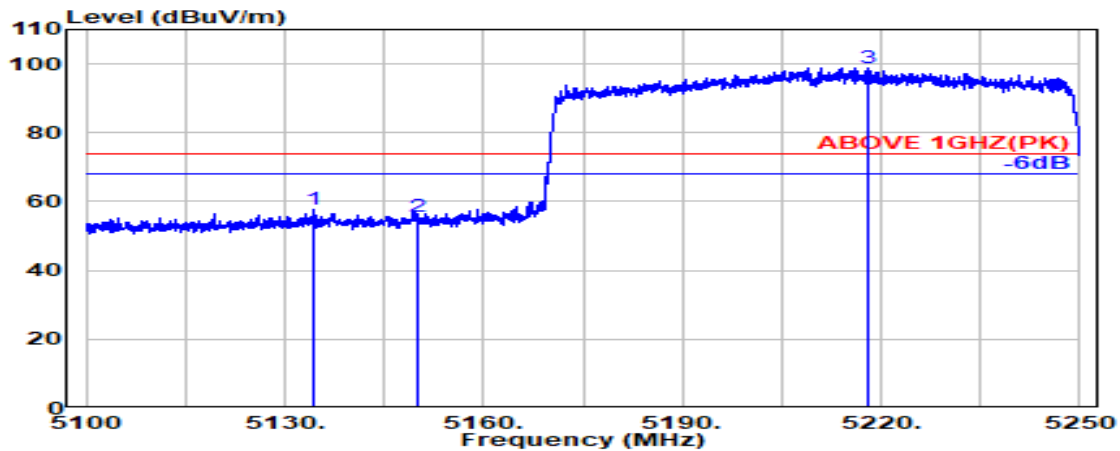

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.500	33.57	8.31	39.09	54.84	57.63	74.00	16.37	Peak
5150.000	33.60	8.33	39.09	52.75	55.59	74.00	18.41	Peak
@ 5217.850	33.64	8.40	39.09	96.05	99.00	---	---	Peak

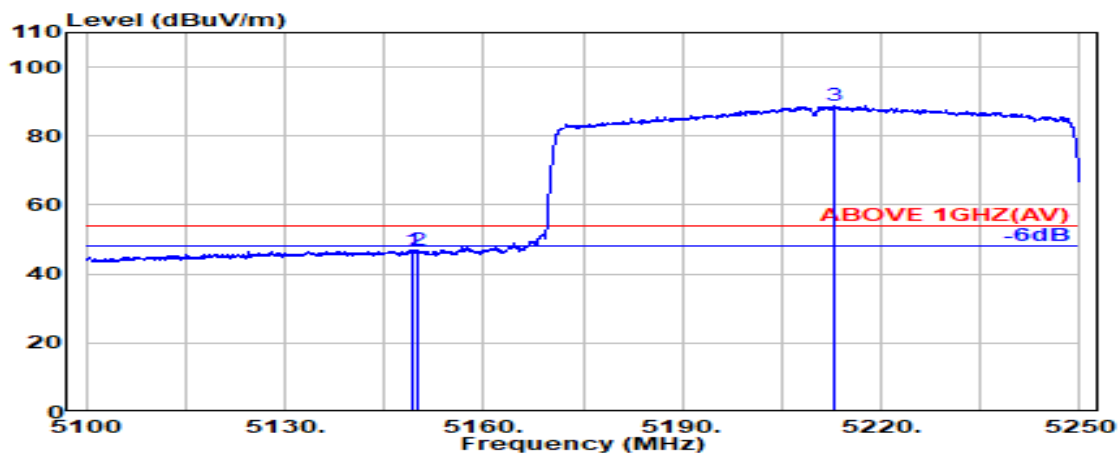

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.450	33.60	8.33	39.09	44.20	47.04	54.00	6.96	Average
5150.000	33.60	8.33	39.09	44.25	47.09	54.00	6.91	Average
@ 5212.750	33.63	8.40	39.09	85.94	88.88	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

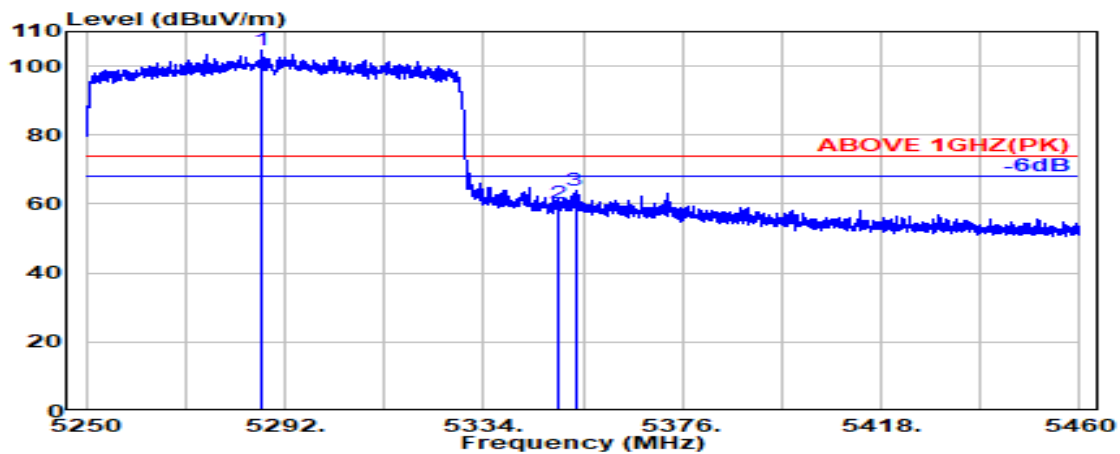

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5287.150	33.63	8.48	39.08	101.41	104.43	---	---	Peak
5350.000	33.70	8.54	39.08	57.17	60.33	74.00	13.67	Peak
5353.350	33.72	8.55	39.08	60.93	64.11	74.00	9.89	Peak

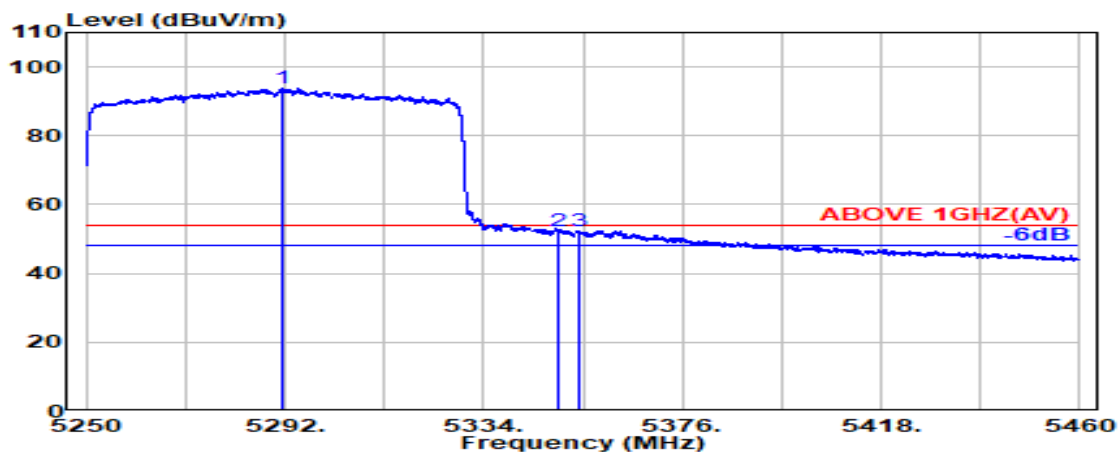

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5291.350	33.62	8.48	39.08	90.67	93.68	---	---	Average
5350.000	33.70	8.54	39.08	49.33	52.50	54.00	1.50	Average
5354.000	33.72	8.55	39.08	49.27	52.46	54.00	1.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2A
		Frequency	TX 5290MHz

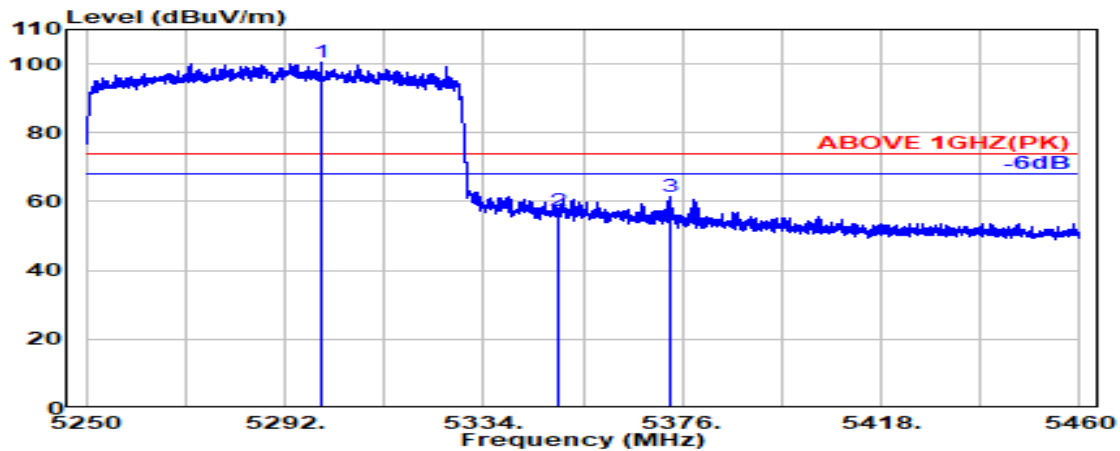

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5299.650	33.60	8.49	39.08	97.54	100.55	---	---	Peak
5350.000	33.70	8.54	39.08	54.15	57.31	74.00	16.69	Peak
5373.500	33.84	8.57	39.08	57.98	61.31	74.00	12.69	Peak

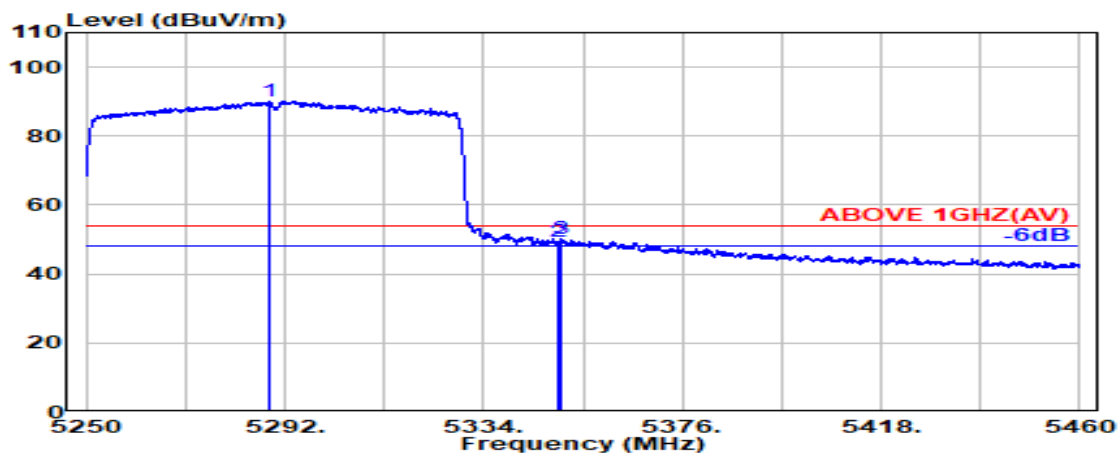

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.900	33.62	8.48	39.08	87.05	90.07	---	---	Average
5350.000	33.70	8.54	39.08	46.39	49.55	54.00	4.45	Average
5350.400	33.70	8.54	39.08	46.95	50.11	54.00	3.89	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

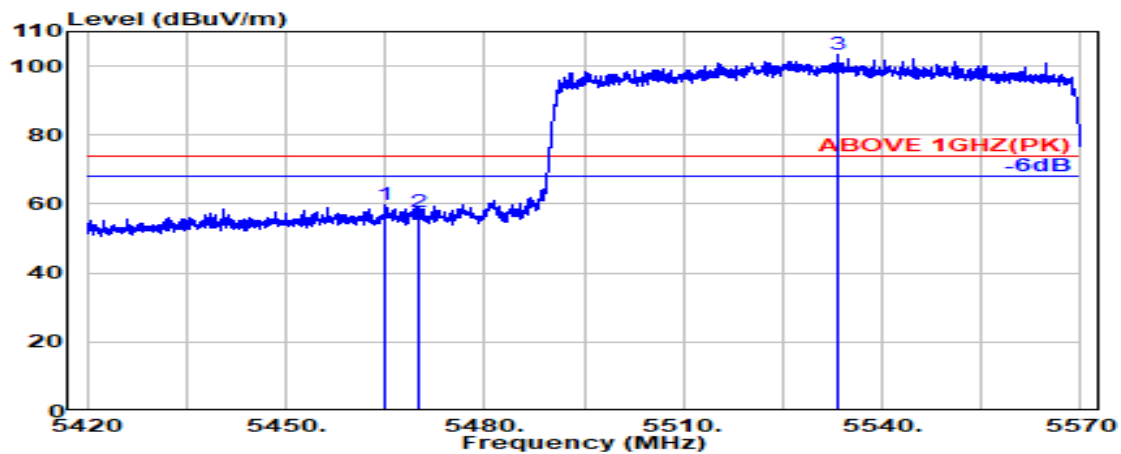

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.800	34.10	8.66	39.07	56.23	59.92	74.00	14.08	Peak
5470.000	34.10	8.67	39.07	54.19	57.89	74.00	16.11	Peak
@ 5533.450	34.03	8.73	39.08	99.53	103.22	---	---	Peak

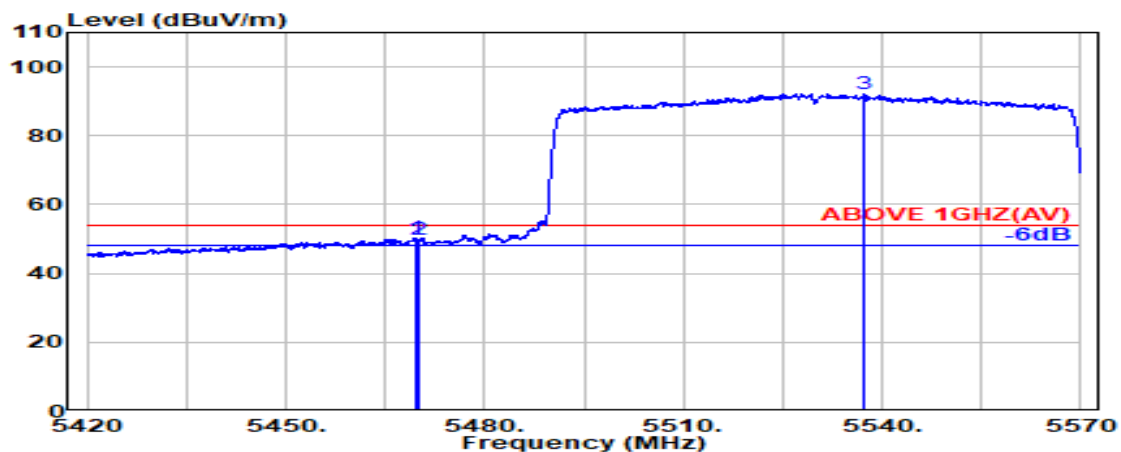

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.800	34.10	8.67	39.07	46.41	50.10	54.00	3.90	Average
5470.000	34.10	8.67	39.07	45.92	49.61	54.00	4.39	Average
@ 5537.350	34.03	8.74	39.08	88.51	92.19	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5530MHz

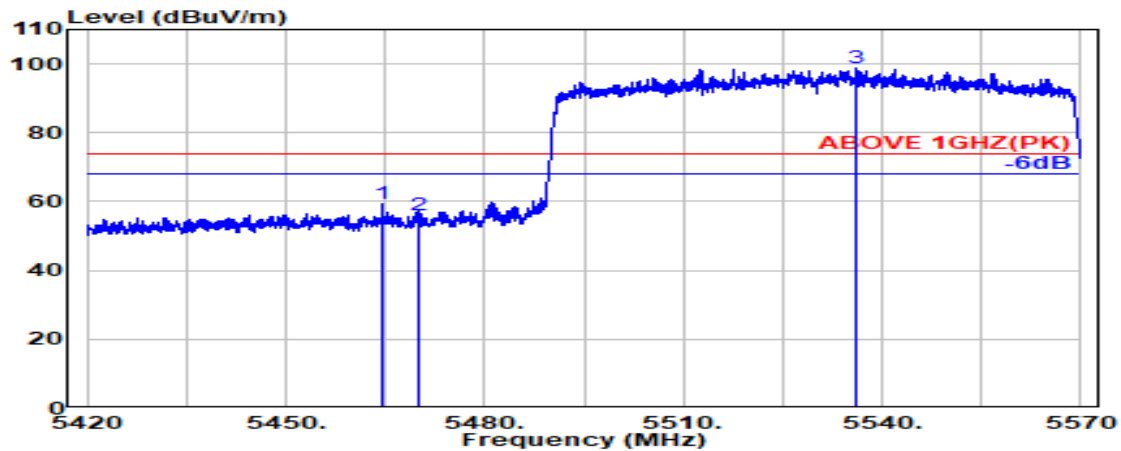

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.10	8.66	39.07	55.71	59.40	74.00	14.60	Peak
5470.000	34.10	8.67	39.07	52.27	55.96	74.00	18.04	Peak
@ 5536.200	34.03	8.74	39.08	95.29	98.97	---	---	Peak

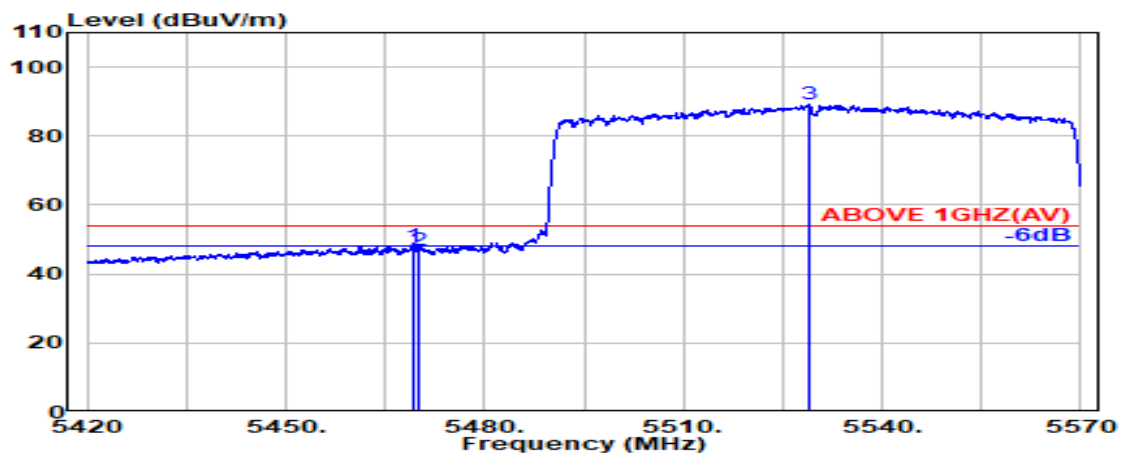

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.350	34.10	8.67	39.07	44.38	48.07	54.00	5.93	Average
5470.000	34.10	8.67	39.07	43.30	47.00	54.00	7.00	Average
@ 5528.850	34.04	8.73	39.08	85.68	89.37	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5610MHz

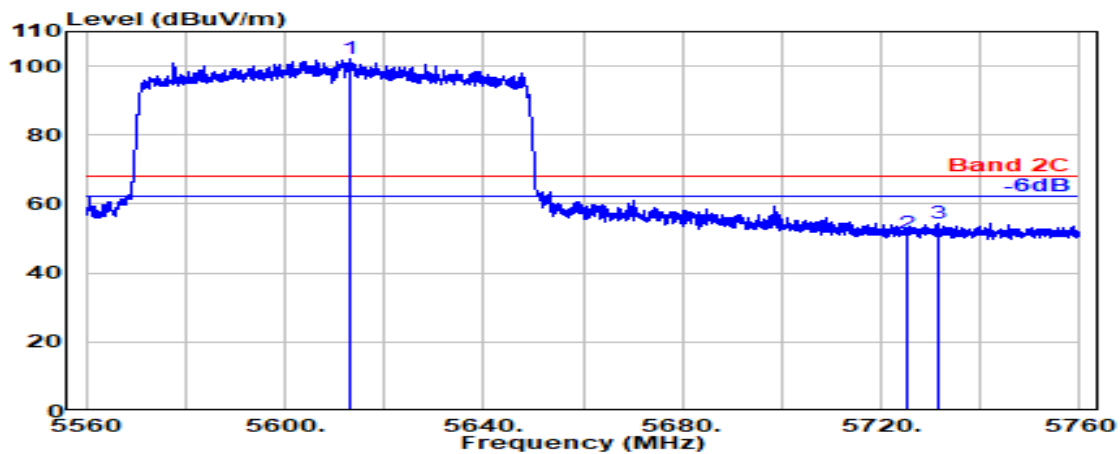

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5613.250	33.77	8.81	39.11	98.80	102.28	---	---	Peak
5725.000	33.60	8.92	39.14	48.26	51.65	68.20	16.55	Peak
5731.300	33.65	8.93	39.14	50.80	54.24	68.20	13.96	Peak

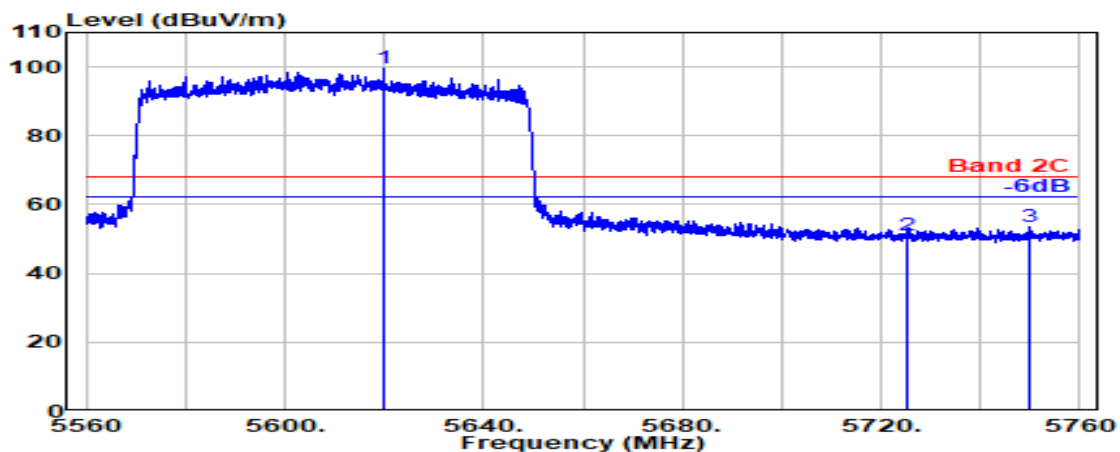

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.900	33.76	8.82	39.11	95.95	99.42	---	---	Peak
5725.000	33.60	8.92	39.14	47.61	51.00	68.20	17.20	Peak
5749.950	33.80	8.95	39.15	49.93	53.53	68.20	14.67	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

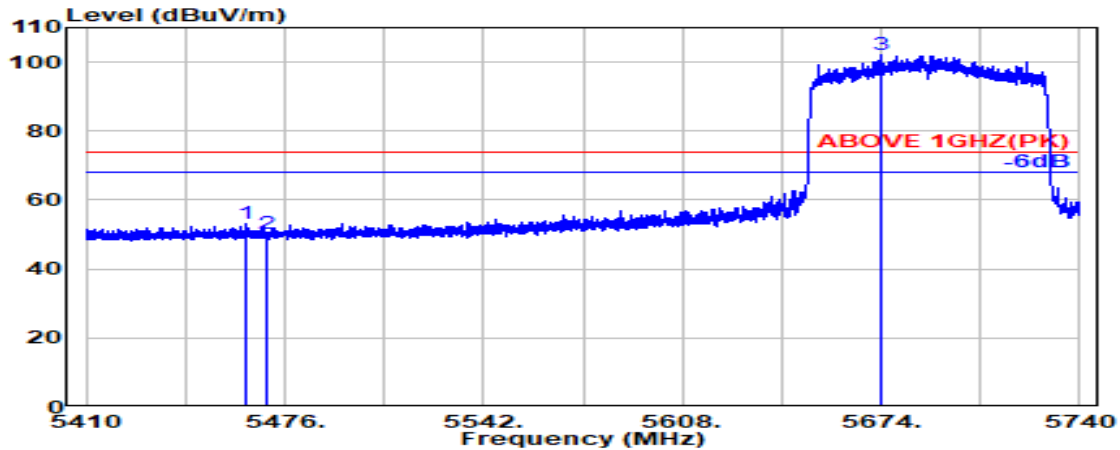

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.400	34.10	8.66	39.07	49.63	53.32	74.00	20.68	Peak
5470.000	34.10	8.67	39.07	46.59	50.29	74.00	23.71	Peak
@ 5673.700	33.56	8.87	39.12	98.93	102.24	---	---	Peak

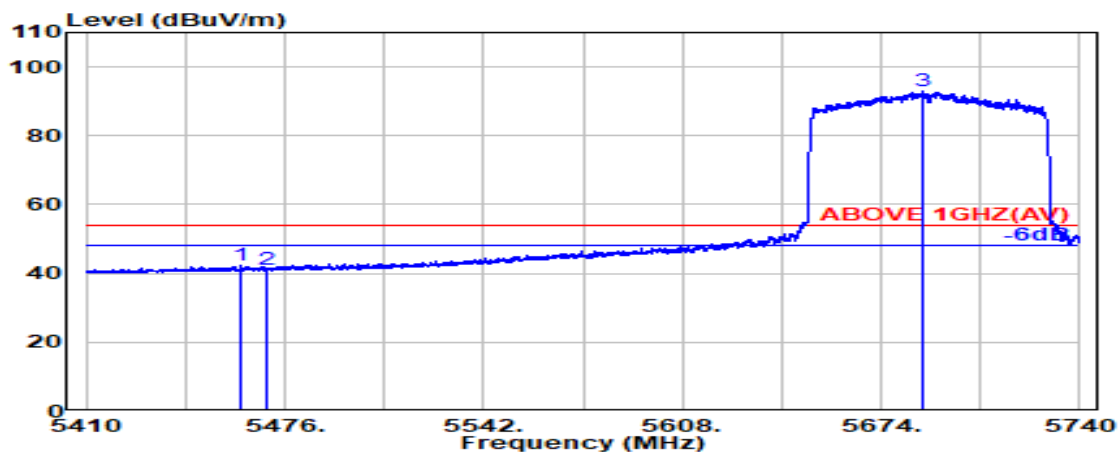

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.150	34.10	8.66	39.07	38.64	42.33	54.00	11.67	Average
5470.000	34.10	8.67	39.07	37.34	41.04	54.00	12.96	Average
@ 5688.200	33.47	8.89	39.13	89.62	92.85	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

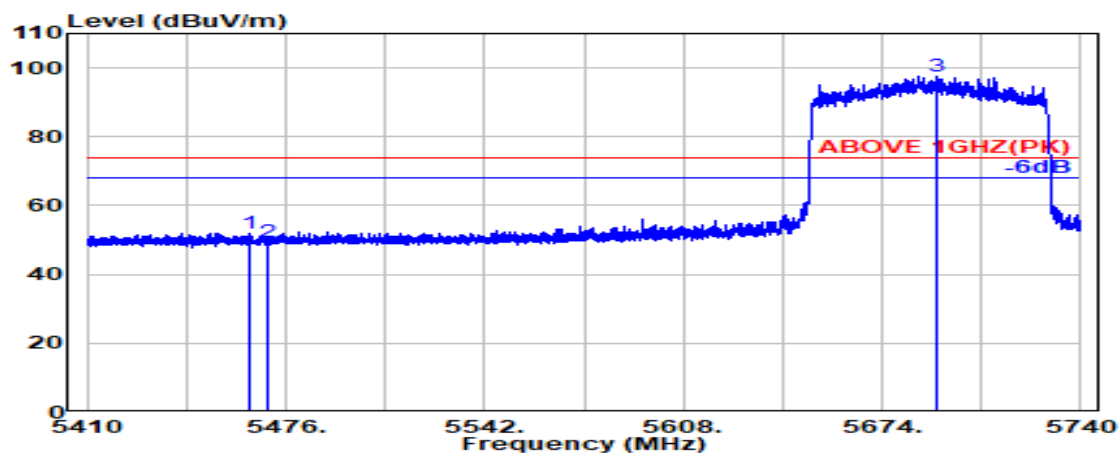

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.200	34.10	8.66	39.07	48.28	51.97	74.00	22.03	Peak
5470.000	34.10	8.67	39.07	45.84	49.54	74.00	24.46	Peak
@ 5692.000	33.45	8.89	39.13	94.40	97.61	---	---	Peak

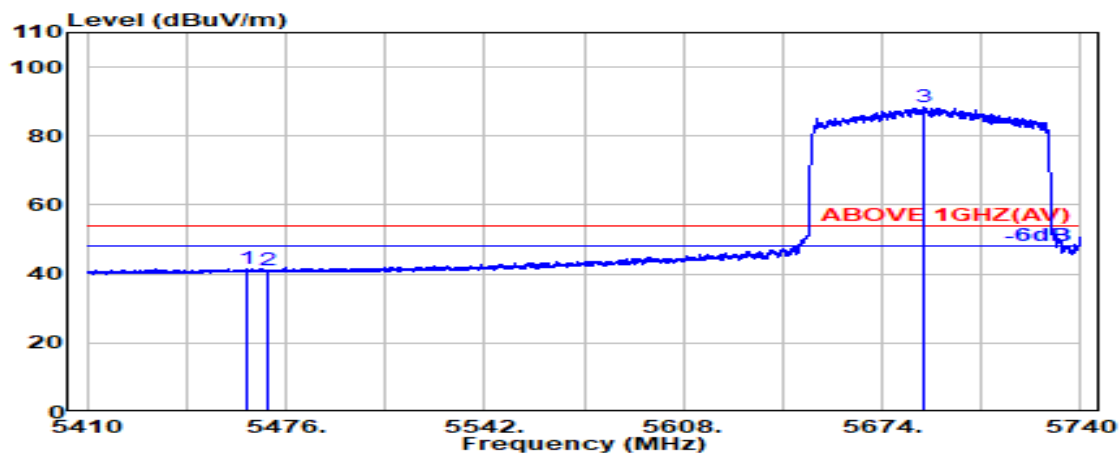

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.100	34.10	8.66	39.07	37.79	41.47	54.00	12.53	Average
5470.000	34.10	8.67	39.07	37.19	40.89	54.00	13.11	Average
@ 5688.000	33.47	8.89	39.13	85.01	88.25	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 2C
		Frequency	TX 5690MHz

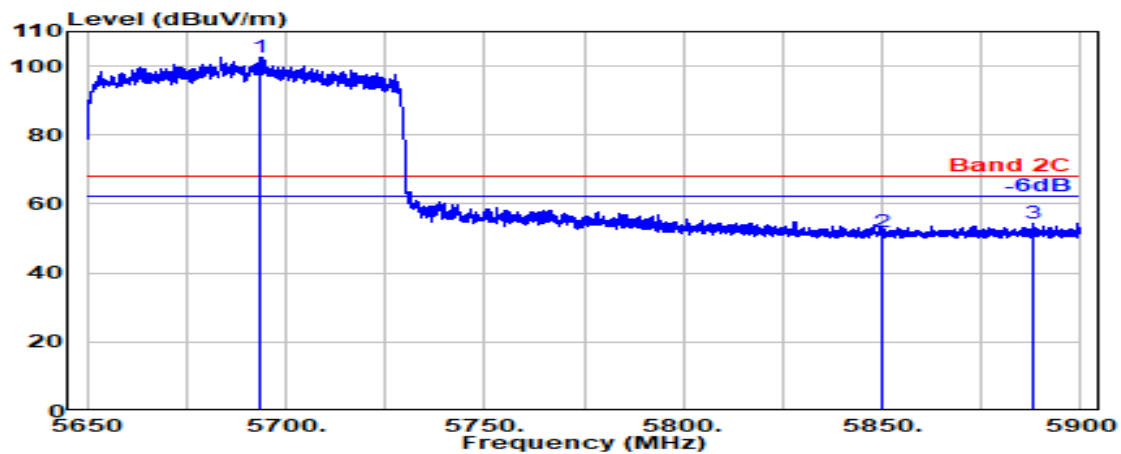

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5693.750	33.44	8.89	39.13	99.47	102.67	---	---	Peak
5850.000	33.90	9.05	39.18	48.03	51.80	68.20	16.40	Peak
5887.750	34.13	9.08	39.19	50.54	54.57	68.20	13.63	Peak

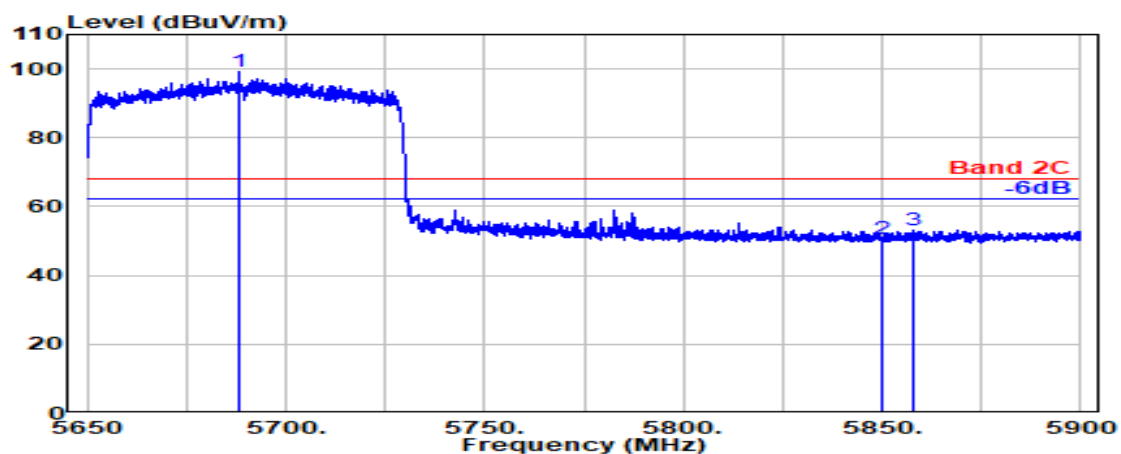

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5688.350	33.47	8.89	39.13	95.86	99.09	---	---	Peak
5850.000	33.90	9.05	39.18	47.06	50.83	68.20	17.37	Peak
5857.700	33.95	9.05	39.18	49.30	53.12	68.20	15.08	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

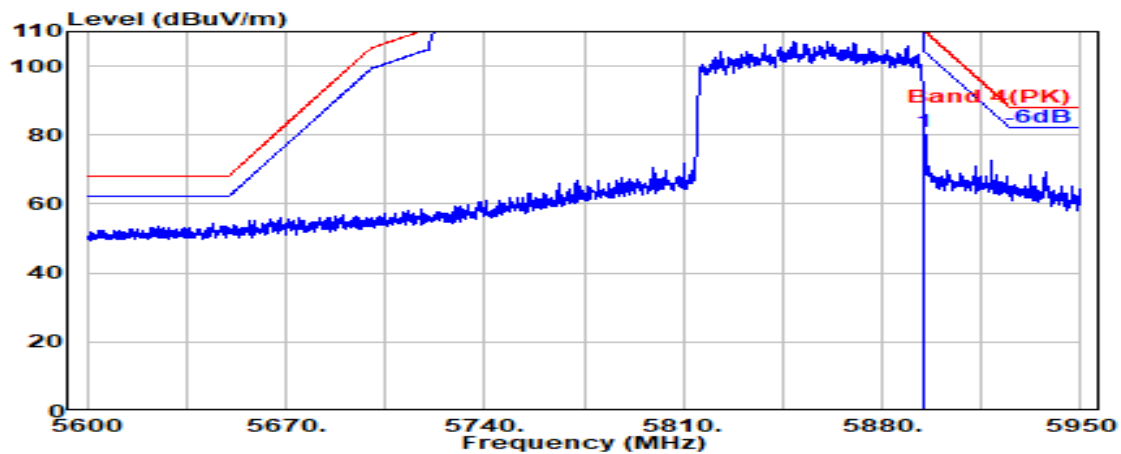

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	77.08	81.15	110.16	29.01	Peak

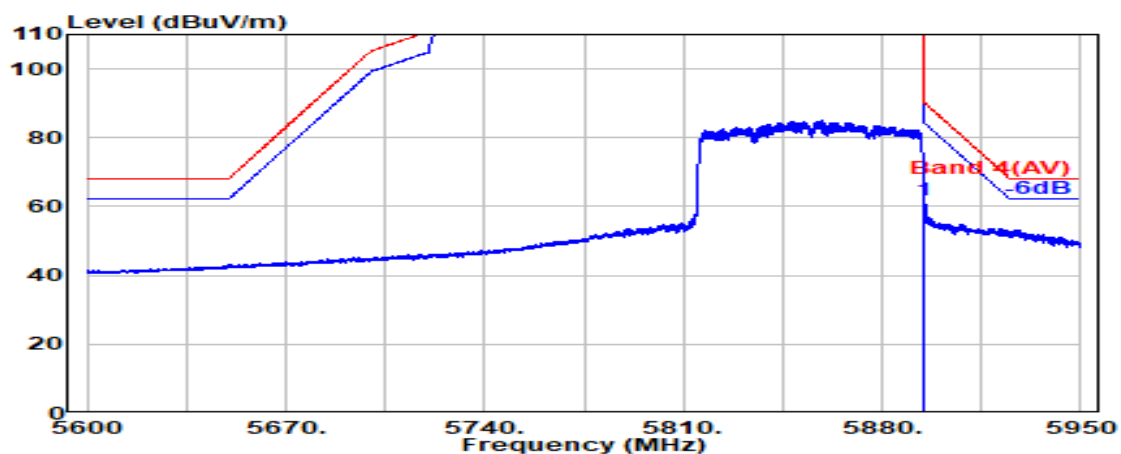

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	57.93	62.00	90.16	28.17	Average

Mode	802.11ax-HE80	U-NII Band	U-NII Band 4
		Frequency	TX 5855MHz

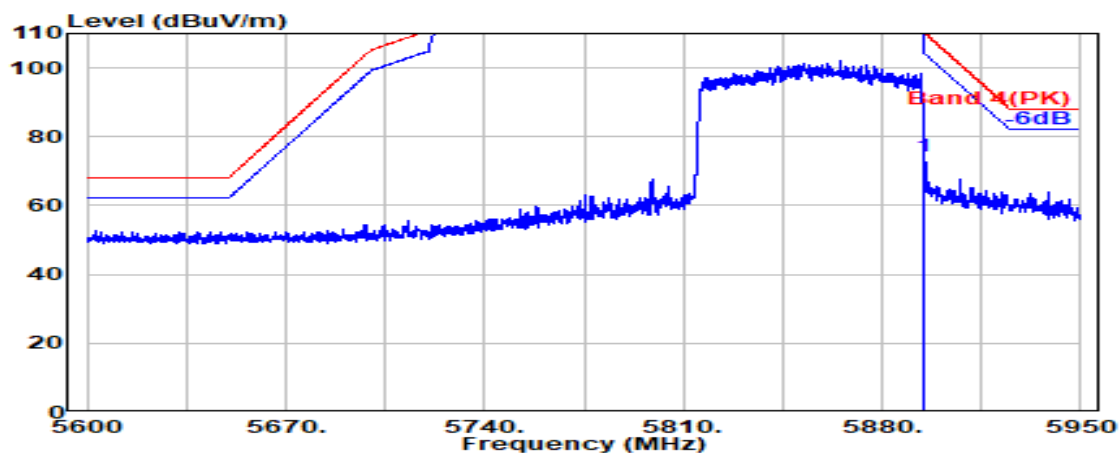

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	70.10	74.17	110.16	35.99	Peak

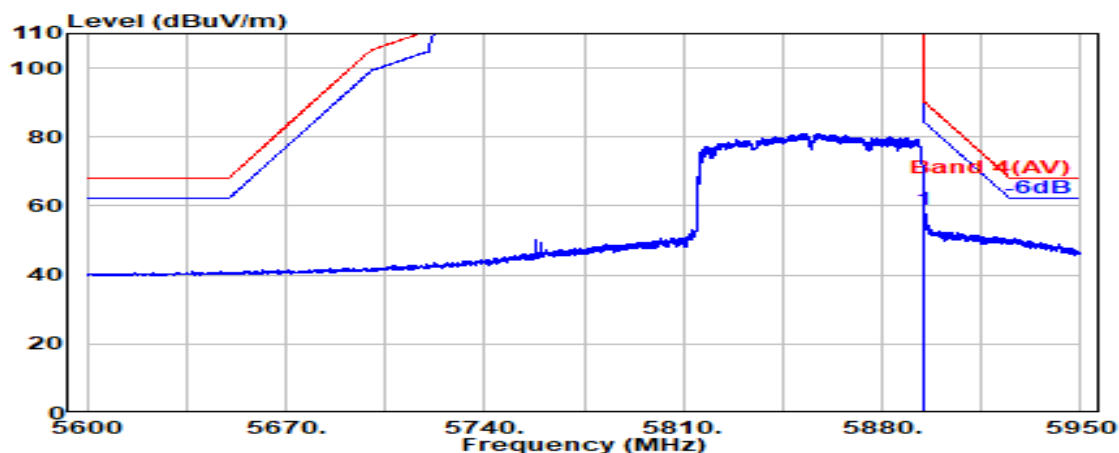


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5895.050	34.17	9.09	39.19	55.07	59.14	90.16	31.02	Average

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

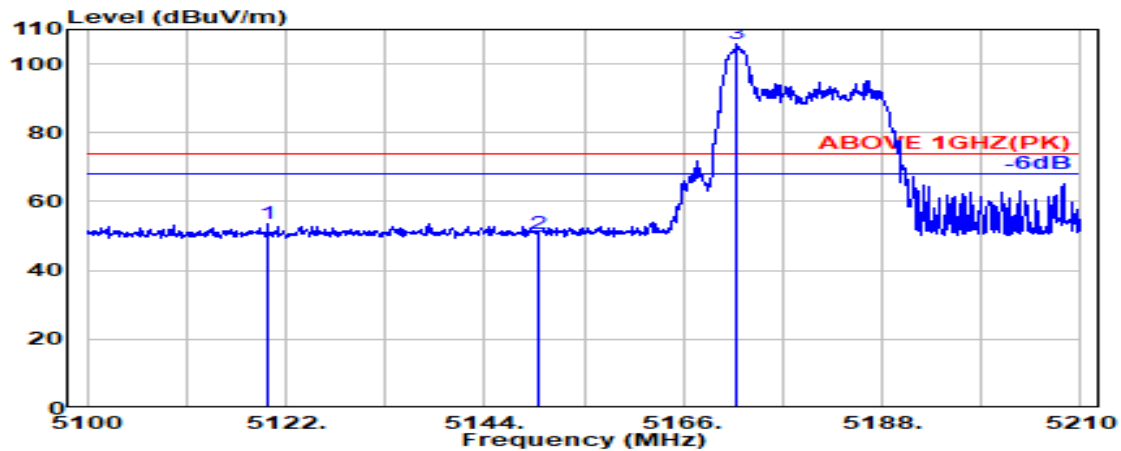

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5120.000	33.54	8.29	39.09	50.85	53.59	74.00	20.41	Peak
5150.000	33.60	8.33	39.09	47.82	50.66	74.00	23.34	Peak
@ 5171.900	33.60	8.35	39.09	103.17	106.03	---	---	Peak

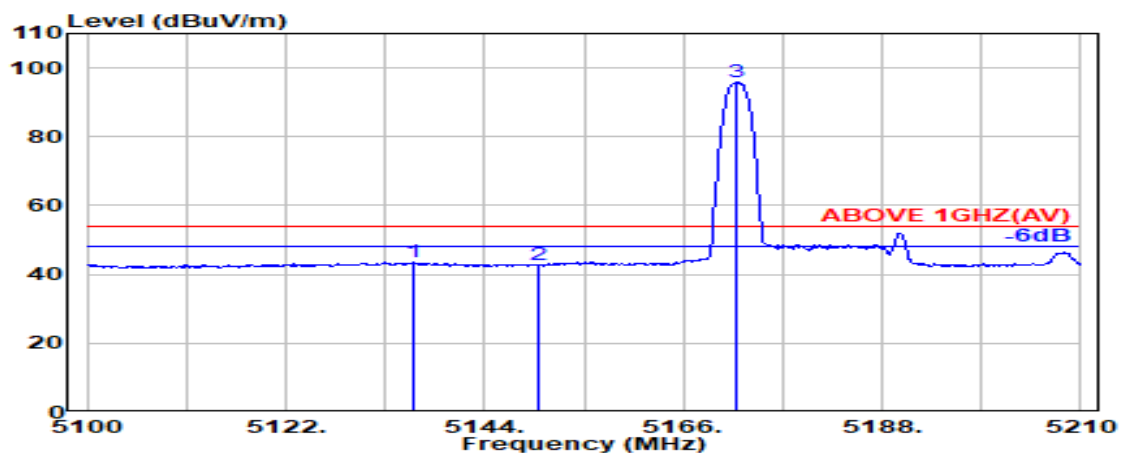


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.100	33.57	8.31	39.09	40.62	43.41	54.00	10.59	Average
5150.000	33.60	8.33	39.09	40.06	42.90	54.00	11.10	Average
@ 5171.800	33.60	8.35	39.09	92.88	95.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	26/0	Frequency	TX 5190MHz

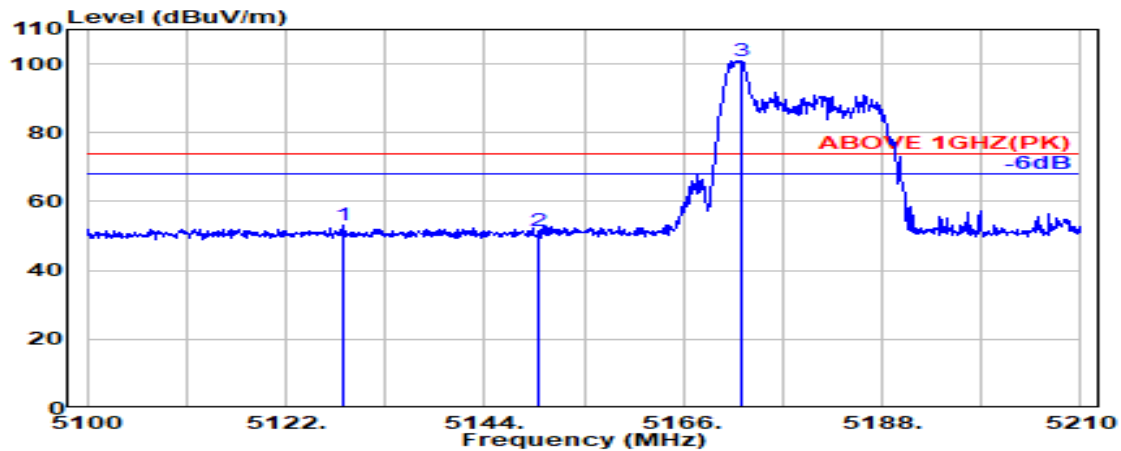

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5128.400	33.56	8.30	39.09	50.36	53.13	74.00	20.87	Peak
5150.000	33.60	8.33	39.09	48.74	51.58	74.00	22.42	Peak
@ 5172.500	33.60	8.35	39.09	98.14	101.00	---	---	Peak

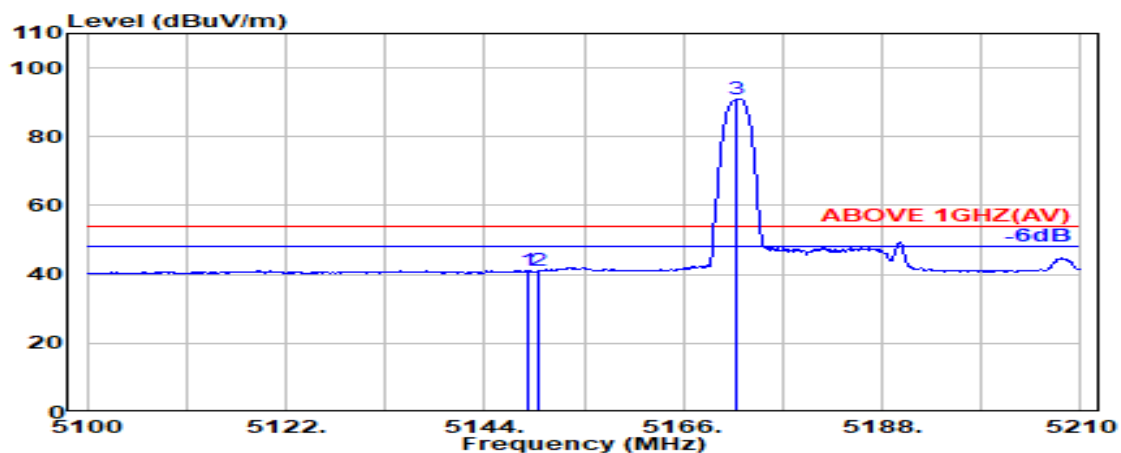

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	33.60	8.33	39.09	38.18	41.01	54.00	12.99	Average
5150.000	33.60	8.33	39.09	38.15	40.98	54.00	13.02	Average
@ 5172.000	33.60	8.35	39.09	88.21	91.07	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

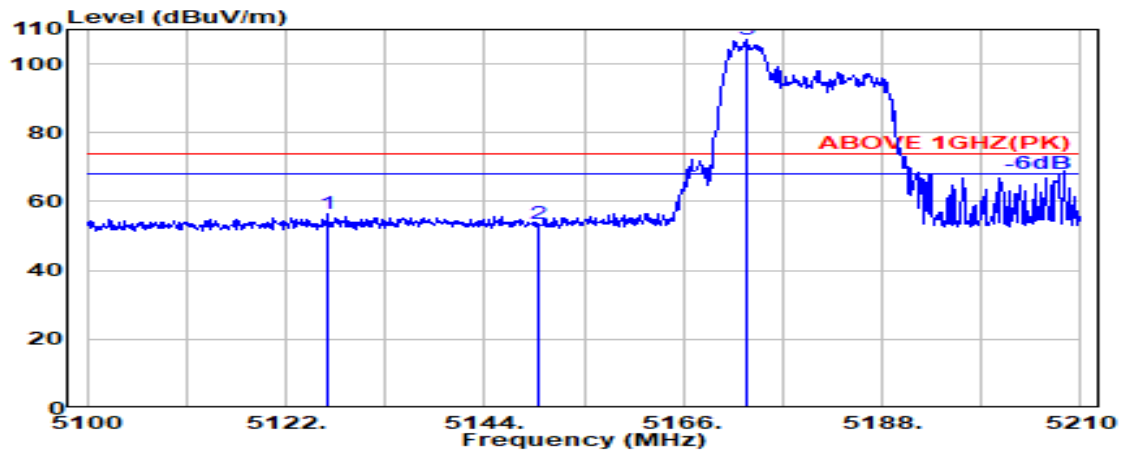

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5126.600	33.55	8.30	39.09	53.83	56.59	74.00	17.41	Peak
5150.000	33.60	8.33	39.09	50.88	53.72	74.00	20.28	Peak
@ 5172.900	33.60	8.35	39.09	104.07	106.93	---	---	Peak

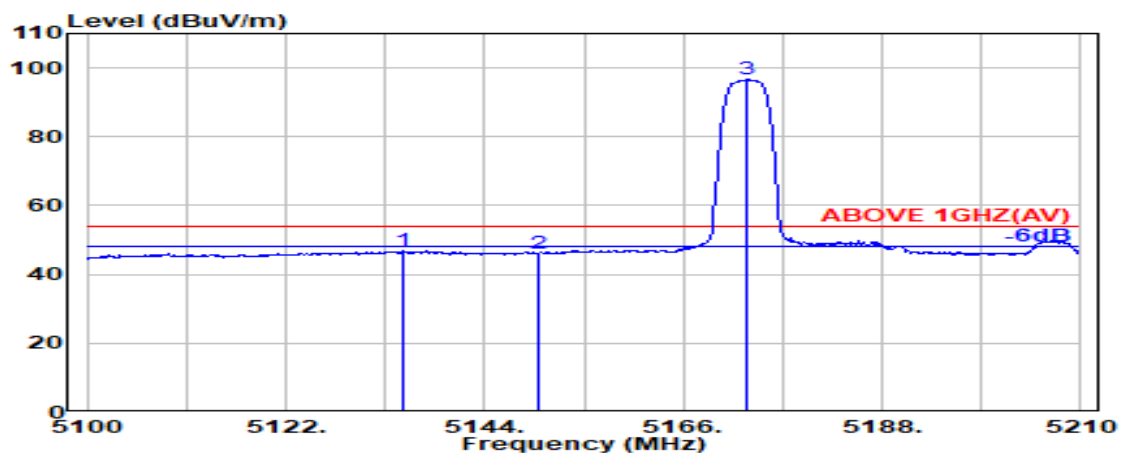

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.000	33.57	8.31	39.09	43.93	46.72	54.00	7.28	Average
5150.000	33.60	8.33	39.09	43.25	46.08	54.00	7.92	Average
@ 5172.900	33.60	8.35	39.09	93.69	96.56	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	52/37	Frequency	TX 5190MHz

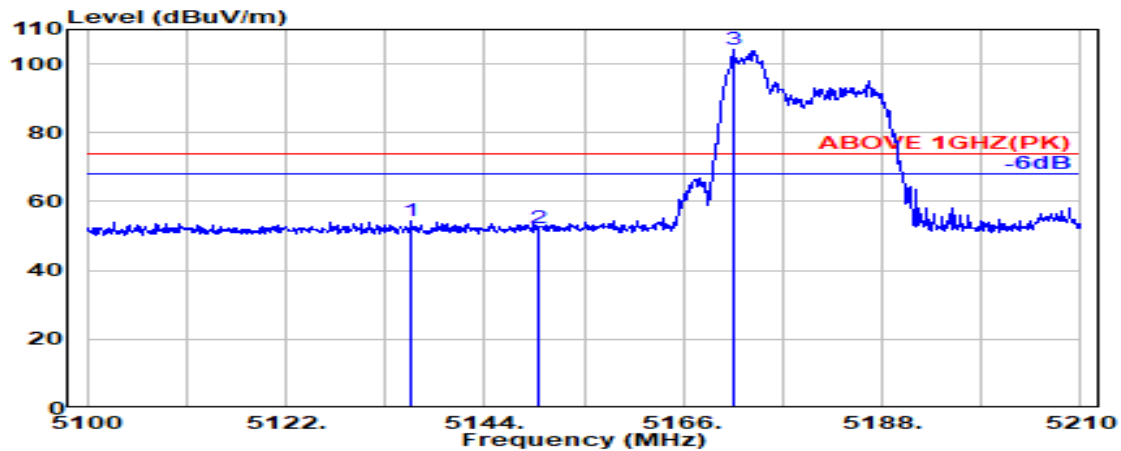

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.800	33.57	8.31	39.09	51.59	54.38	74.00	19.62	Peak
5150.000	33.60	8.33	39.09	49.38	52.22	74.00	21.78	Peak
@ 5171.500	33.60	8.35	39.09	101.15	104.01	---	---	Peak

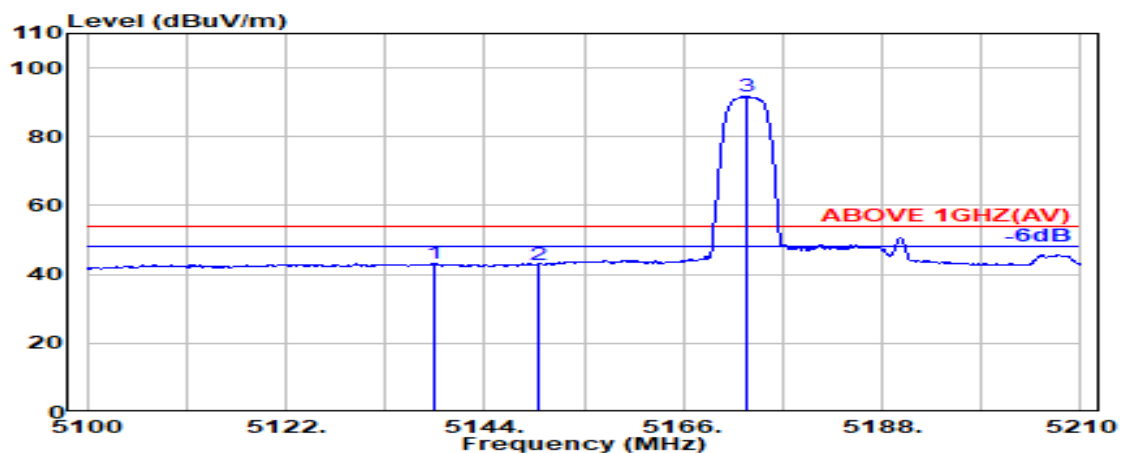

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.300	33.58	8.31	39.09	40.37	43.17	54.00	10.83	Average
5150.000	33.60	8.33	39.09	39.96	42.79	54.00	11.21	Average
@ 5173.000	33.60	8.35	39.09	88.92	91.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

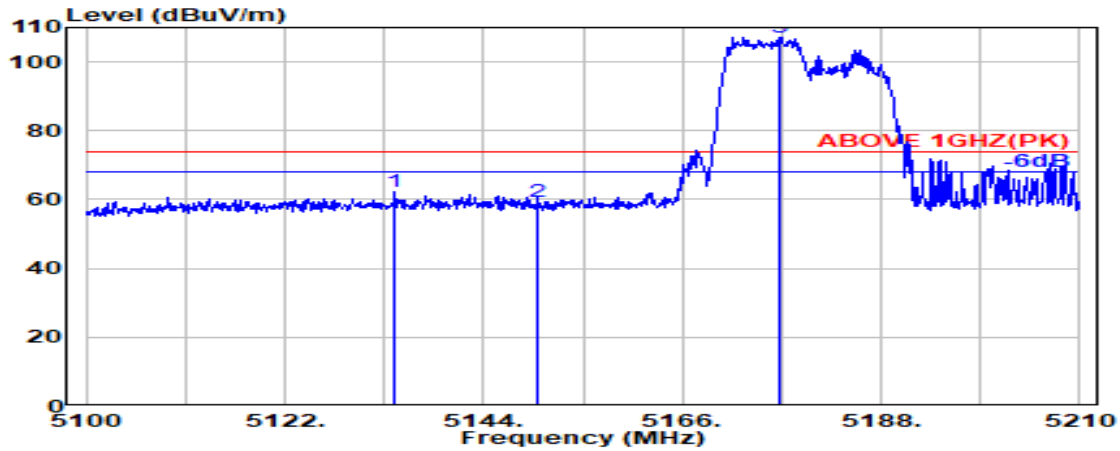

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.100	33.57	8.31	39.09	59.46	62.25	74.00	11.75	Peak
5150.000	33.60	8.33	39.09	56.49	59.32	74.00	14.68	Peak
@ 5176.900	33.60	8.36	39.09	104.37	107.23	---	---	Peak

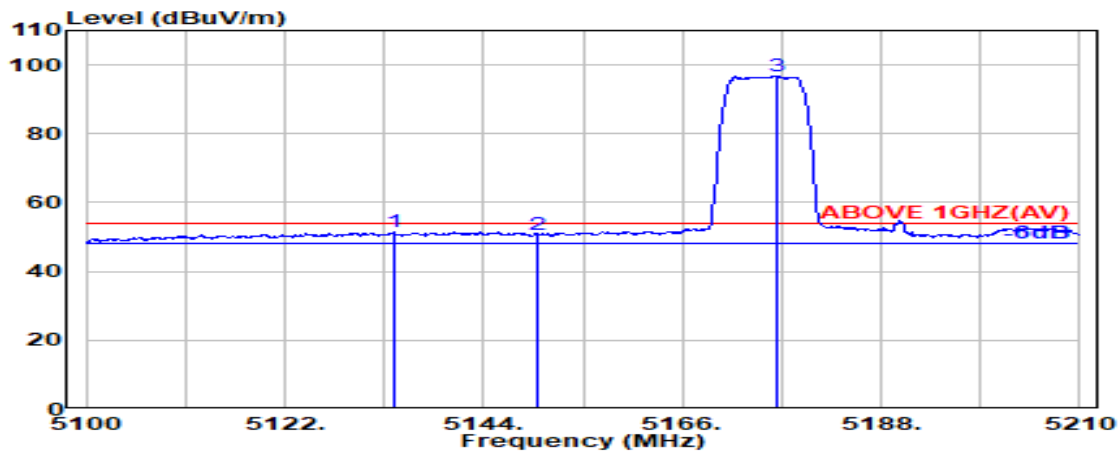

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5134.000	33.57	8.31	39.09	48.54	51.32	54.00	2.68	Average
5150.000	33.60	8.33	39.09	47.91	50.74	54.00	3.26	Average
@ 5176.500	33.60	8.36	39.09	94.03	96.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	106/53	Frequency	TX 5190MHz

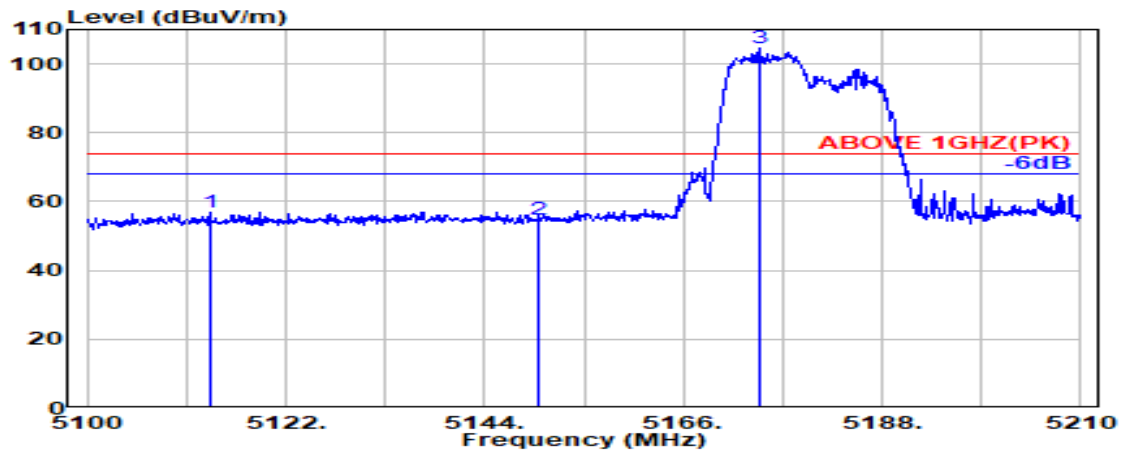

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.600	33.53	8.29	39.09	54.35	57.07	74.00	16.93	Peak
5150.000	33.60	8.33	39.09	51.96	54.80	74.00	19.20	Peak
@ 5174.400	33.60	8.35	39.09	101.63	104.49	---	---	Peak

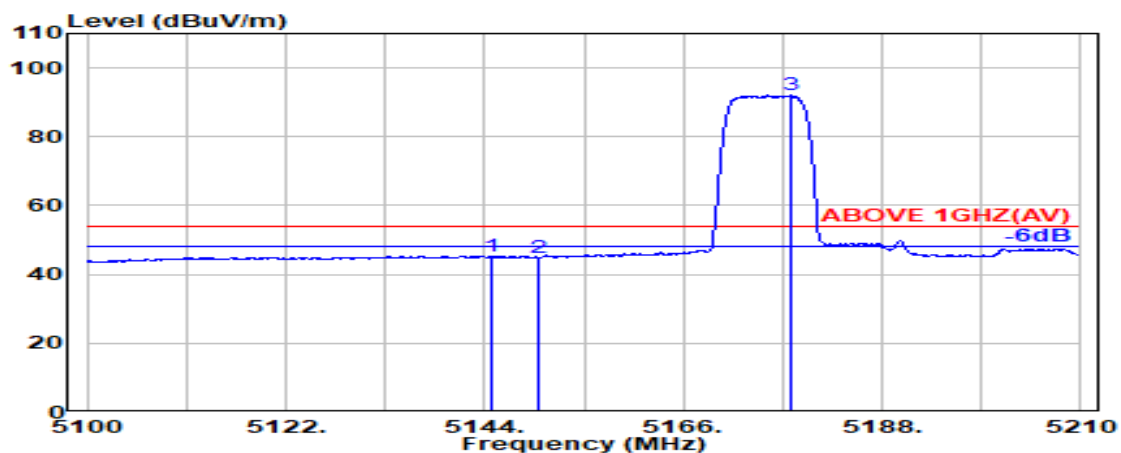

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	33.59	8.32	39.09	42.53	45.35	54.00	8.65	Average
5150.000	33.60	8.33	39.09	42.03	44.87	54.00	9.13	Average
@ 5177.800	33.60	8.36	39.09	89.14	92.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

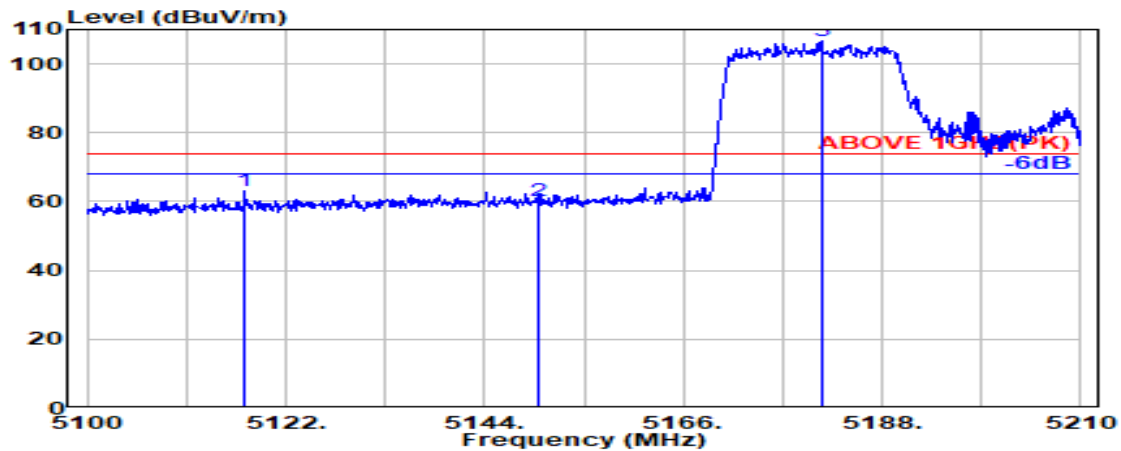

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.400	33.53	8.29	39.09	60.28	63.01	74.00	10.99	Peak
5150.000	33.60	8.33	39.09	57.48	60.32	74.00	13.68	Peak
@ 5181.300	33.60	8.36	39.09	103.91	106.78	---	---	Peak

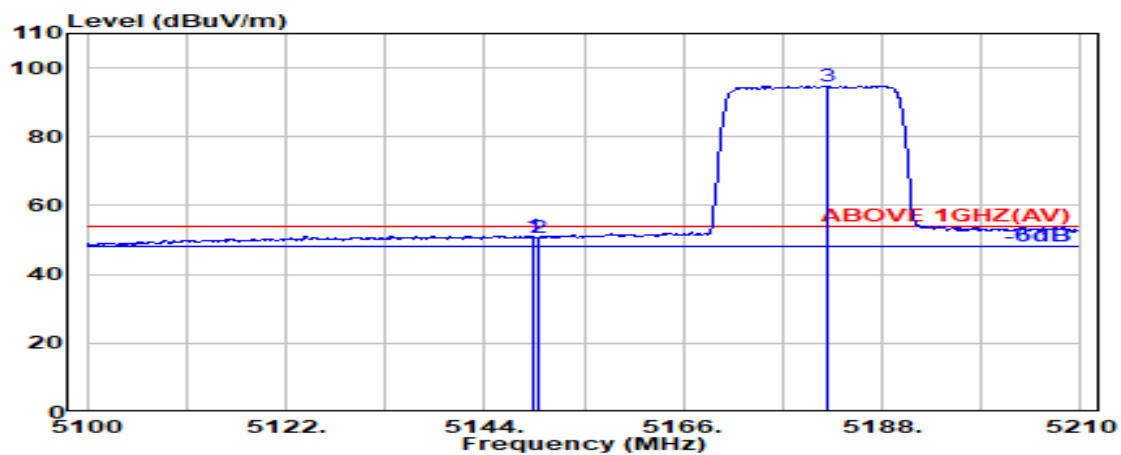

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	33.60	8.33	39.09	48.35	51.18	54.00	2.82	Average
5150.000	33.60	8.33	39.09	47.98	50.82	54.00	3.18	Average
@ 5181.900	33.60	8.36	39.09	91.96	94.84	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 1
RU Configuration	242/61	Frequency	TX 5190MHz

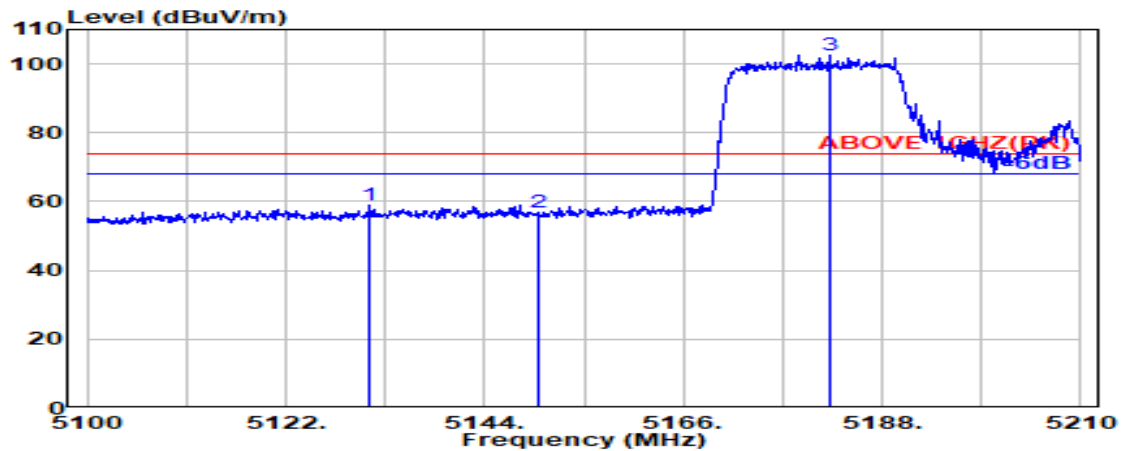

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5131.300	33.56	8.31	39.09	56.29	59.06	74.00	14.94	Peak
5150.000	33.60	8.33	39.09	54.08	56.91	74.00	17.09	Peak
@ 5182.100	33.60	8.36	39.09	99.79	102.66	---	---	Peak

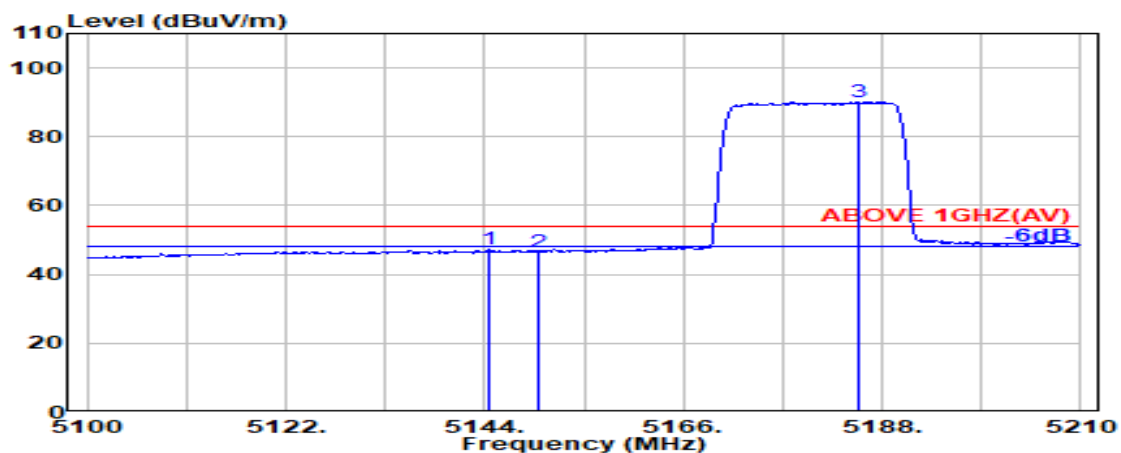

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5144.600	33.59	8.32	39.09	44.35	47.17	54.00	6.83	Average
5150.000	33.60	8.33	39.09	43.86	46.69	54.00	7.31	Average
5185.500	33.60	8.37	39.09	87.22	90.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

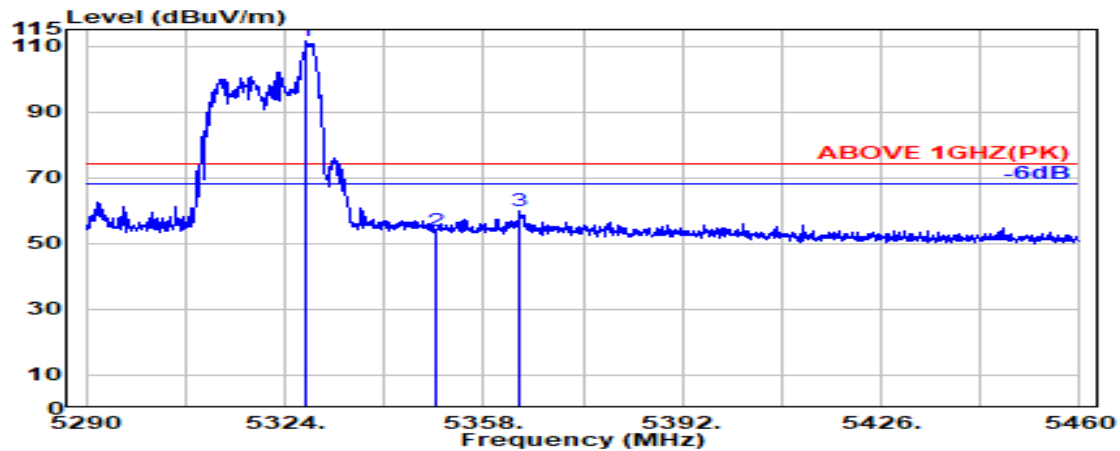

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.700	33.66	8.52	39.08	108.29	111.39	---	---	Peak
5350.000	33.70	8.54	39.08	50.47	53.63	74.00	20.37	Peak
5364.300	33.79	8.56	39.08	56.42	59.68	74.00	14.32	Peak

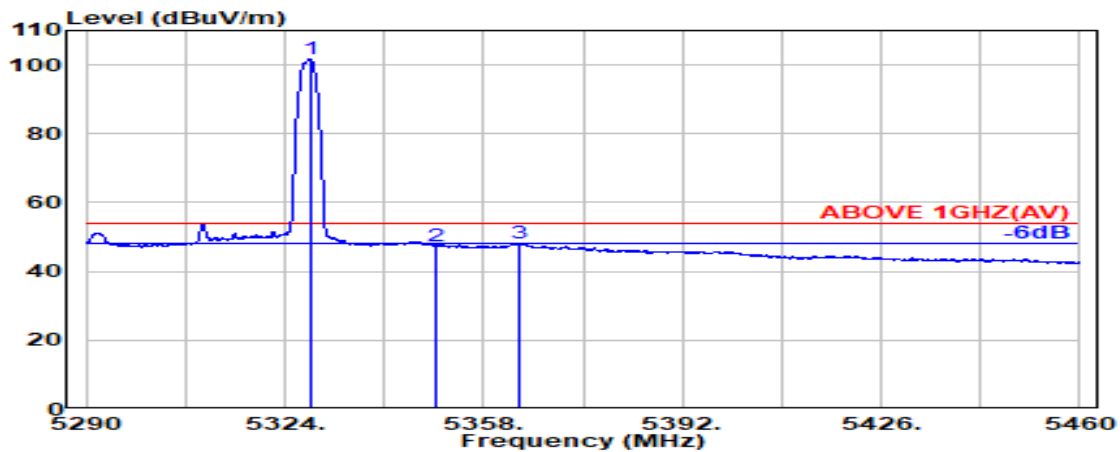

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.300	33.66	8.52	39.08	98.46	101.56	---	---	Average
5350.000	33.70	8.54	39.08	44.20	47.37	54.00	6.63	Average
5363.900	33.78	8.56	39.08	44.83	48.10	54.00	5.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	26/17	Frequency	TX 5310MHz

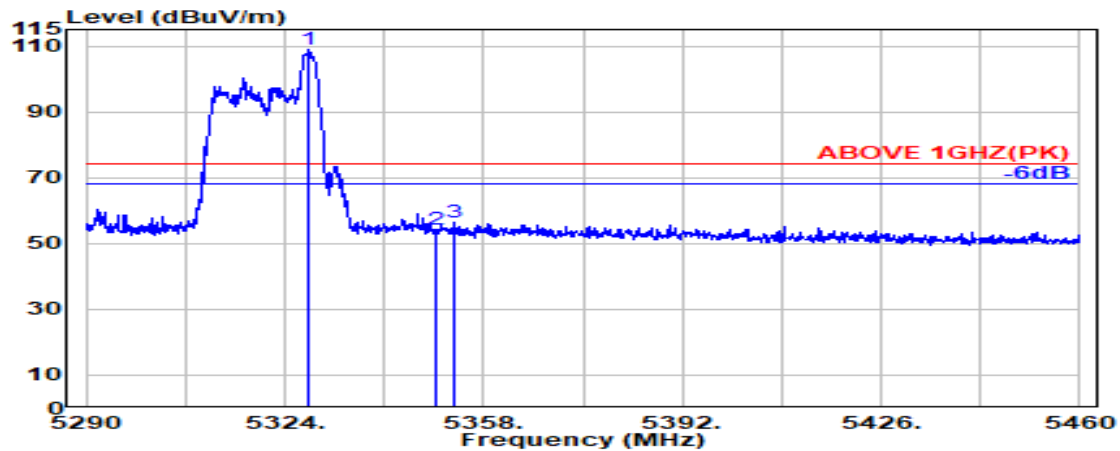

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.200	33.66	8.52	39.08	105.92	109.02	---	---	Peak
5350.000	33.70	8.54	39.08	51.03	54.19	74.00	19.81	Peak
5352.900	33.72	8.55	39.08	53.37	56.56	74.00	17.44	Peak

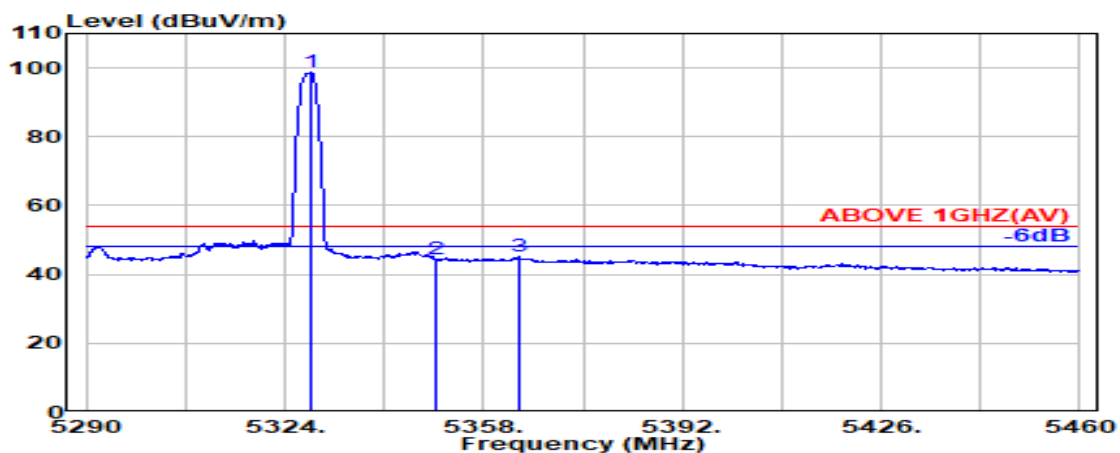

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.500	33.66	8.52	39.08	95.71	98.81	---	---	Average
5350.000	33.70	8.54	39.08	41.34	44.50	54.00	9.50	Average
5364.100	33.78	8.56	39.08	41.90	45.16	54.00	8.84	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

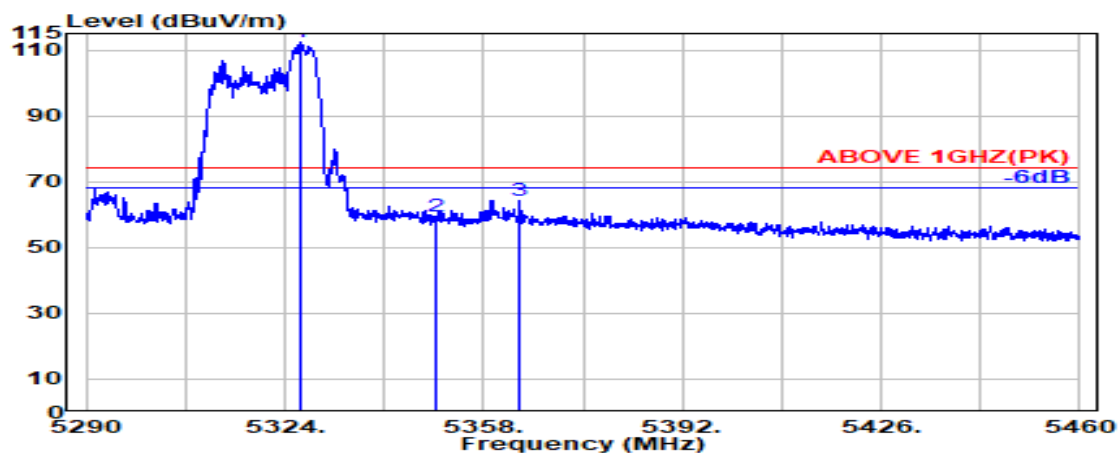

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.900	33.65	8.52	39.08	109.20	112.29	---	---	Peak
5350.000	33.70	8.54	39.08	56.33	59.49	74.00	14.51	Peak
5364.300	33.79	8.56	39.08	60.92	64.18	74.00	9.82	Peak

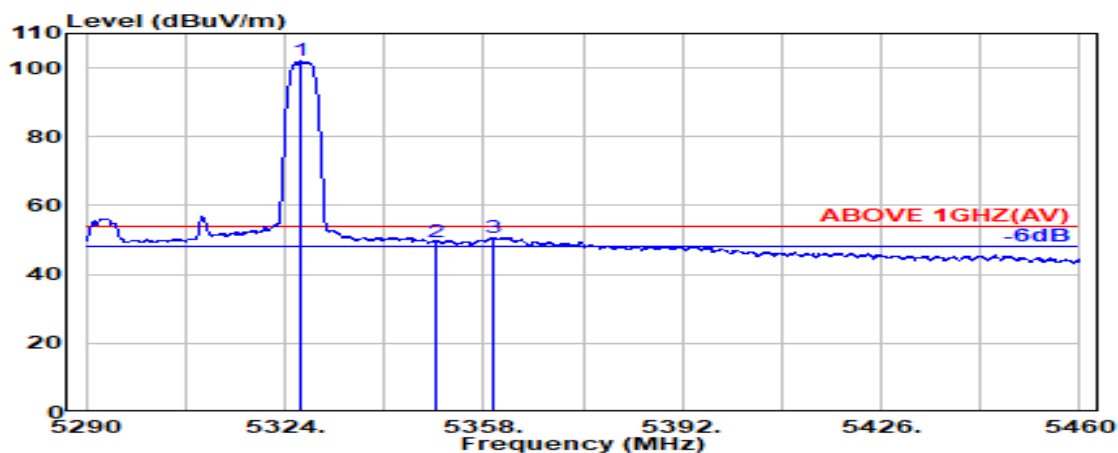

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.700	33.65	8.52	39.08	98.83	101.93	---	---	Average
5350.000	33.70	8.54	39.08	46.38	49.55	54.00	4.45	Average
5359.700	33.76	8.55	39.08	47.46	50.69	54.00	3.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	52/44	Frequency	TX 5310MHz

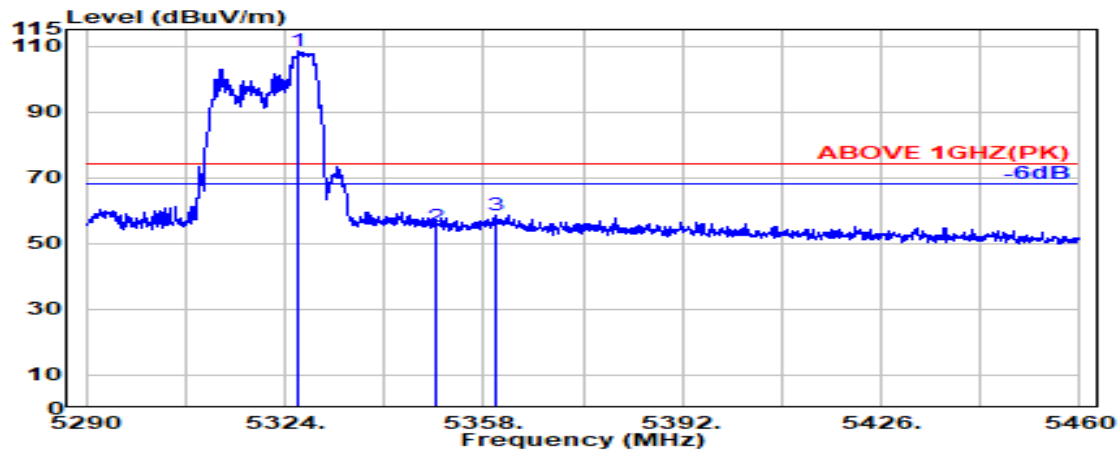

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.300	33.65	8.52	39.08	105.23	108.32	---	---	Peak
5350.000	33.70	8.54	39.08	51.84	55.00	74.00	19.00	Peak
5360.000	33.76	8.55	39.08	55.33	58.57	74.00	15.43	Peak

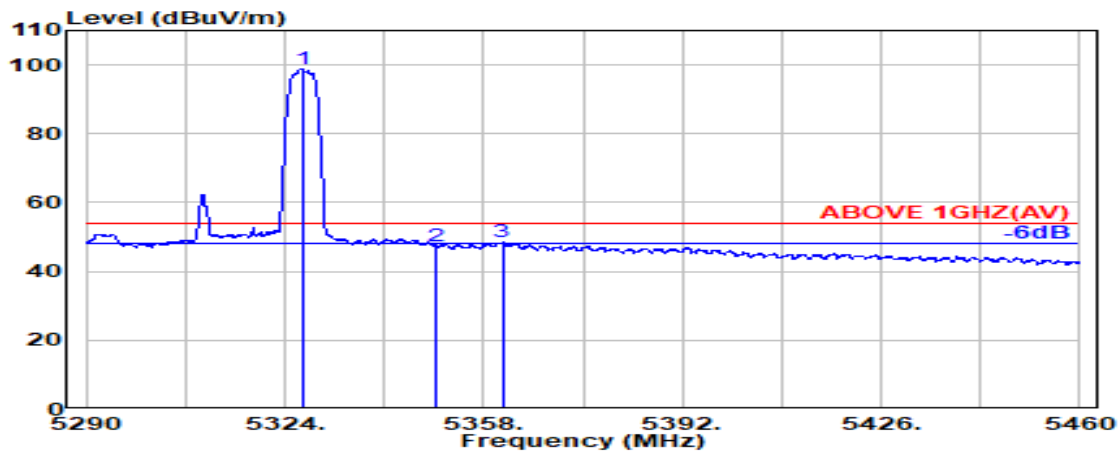

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	33.65	8.52	39.08	95.87	98.96	---	---	Average
5350.000	33.70	8.54	39.08	44.04	47.20	54.00	6.80	Average
5361.200	33.77	8.55	39.08	45.23	48.48	54.00	5.52	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

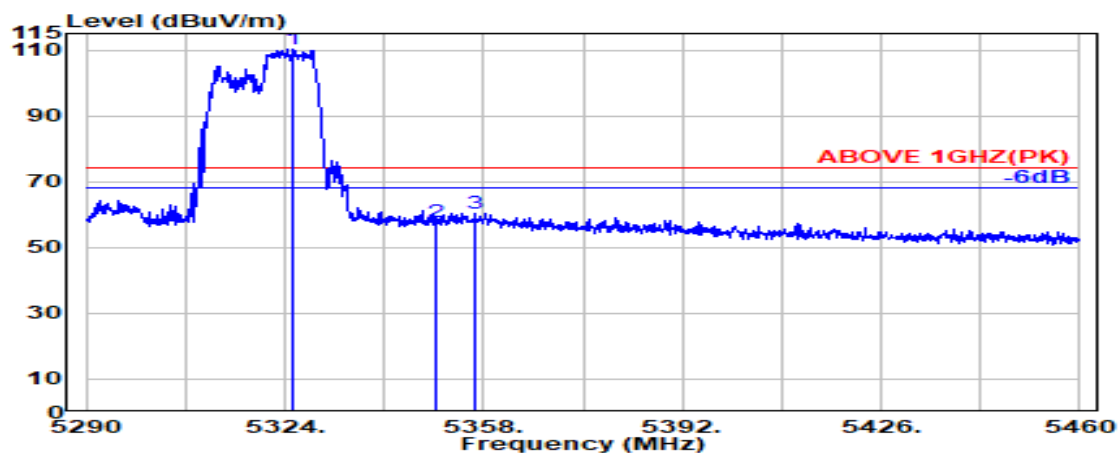

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.500	33.65	8.52	39.08	107.25	110.33	---	---	Peak
5350.000	33.70	8.54	39.08	54.60	57.76	74.00	16.24	Peak
5356.500	33.74	8.55	39.08	57.22	60.43	74.00	13.57	Peak

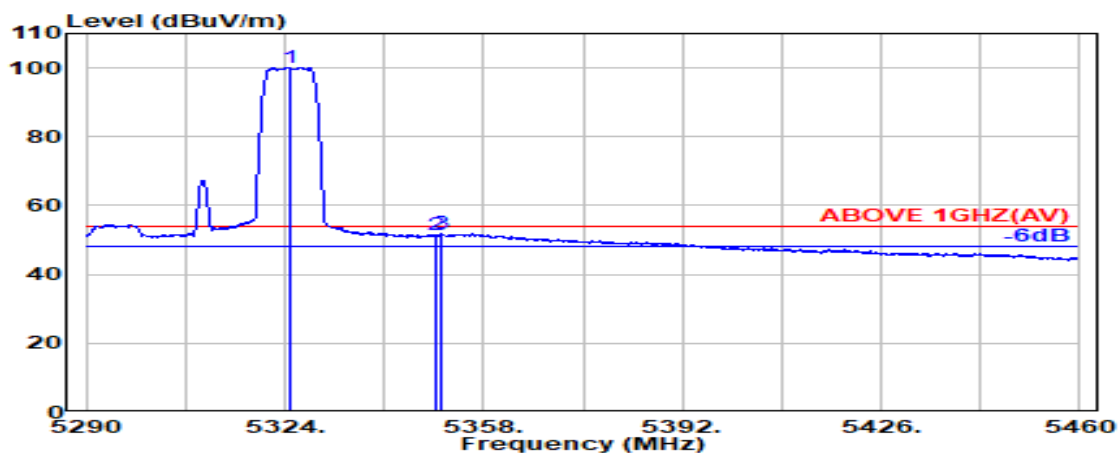

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5324.700	33.65	8.52	39.08	97.07	100.15	---	---	Average
5350.000	33.70	8.54	39.08	48.20	51.37	54.00	2.63	Average
5350.600	33.70	8.54	39.08	48.54	51.71	54.00	2.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	106/56	Frequency	TX 5310MHz

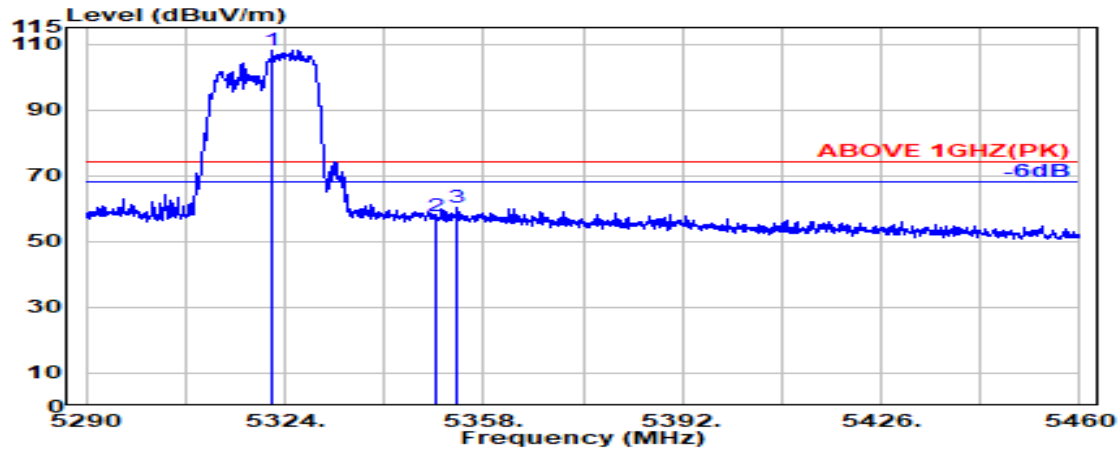

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.900	33.64	8.51	39.08	105.14	108.22	---	---	Peak
5350.000	33.70	8.54	39.08	54.73	57.89	74.00	16.11	Peak
5353.400	33.72	8.55	39.08	57.17	60.36	74.00	13.64	Peak

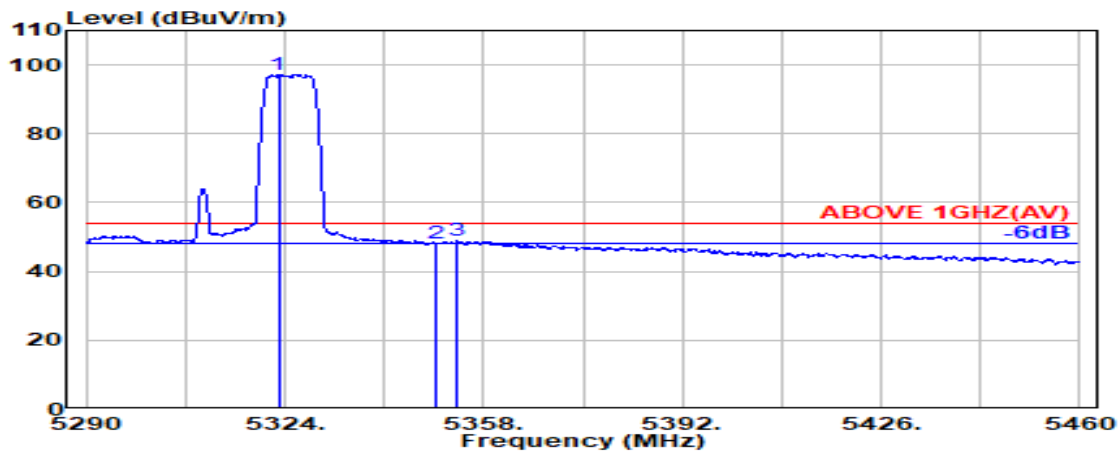

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.900	33.65	8.51	39.08	94.12	97.20	---	---	Average
5350.000	33.70	8.54	39.08	44.94	48.10	54.00	5.90	Average
5353.500	33.72	8.55	39.08	45.69	48.88	54.00	5.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

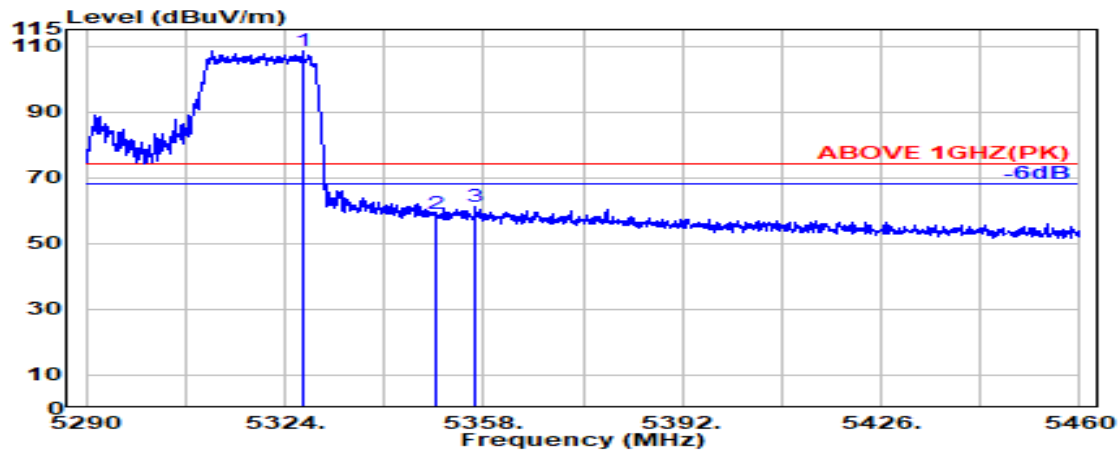

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.100	33.65	8.52	39.08	105.38	108.48	---	---	Peak
5350.000	33.70	8.54	39.08	55.99	59.16	74.00	14.84	Peak
5356.600	33.74	8.55	39.08	58.19	61.40	74.00	12.60	Peak

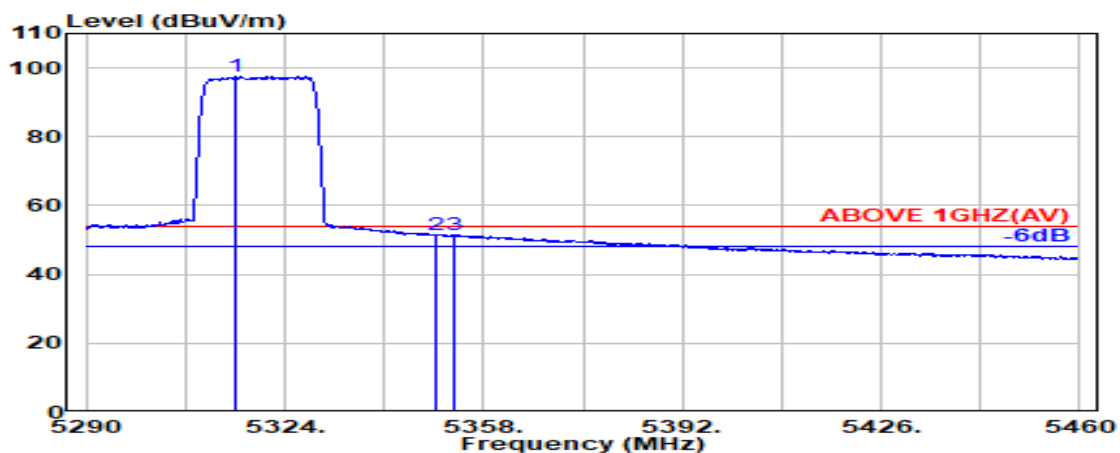

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.600	33.63	8.51	39.08	94.38	97.44	---	---	Average
5350.000	33.70	8.54	39.08	48.21	51.37	54.00	2.63	Average
5352.900	33.72	8.55	39.08	48.43	51.61	54.00	2.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2A
RU Configuration	242/62	Frequency	TX 5310MHz

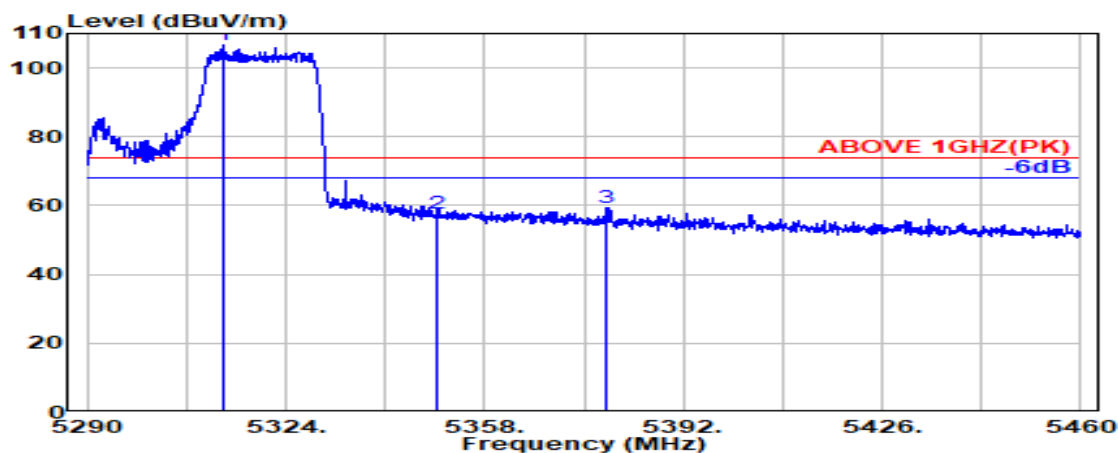

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5313.500	33.63	8.50	39.08	103.42	106.47	---	---	Peak
5350.000	33.70	8.54	39.08	54.65	57.81	74.00	16.19	Peak
5379.000	33.87	8.57	39.08	56.14	59.51	74.00	14.49	Peak

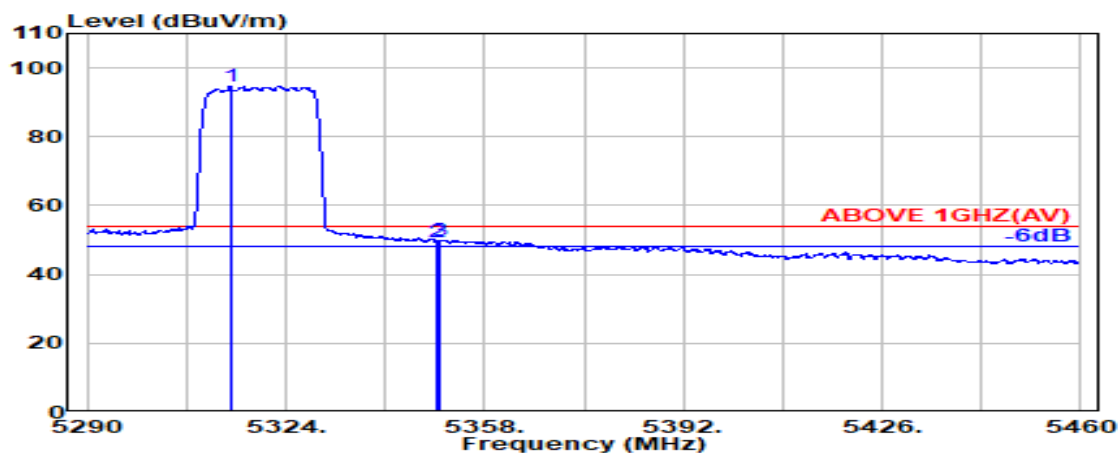

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5314.600	33.63	8.50	39.08	91.72	94.78	---	---	Average
5350.000	33.70	8.54	39.08	46.41	49.57	54.00	4.43	Average
5350.400	33.70	8.54	39.08	46.84	50.01	54.00	3.99	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

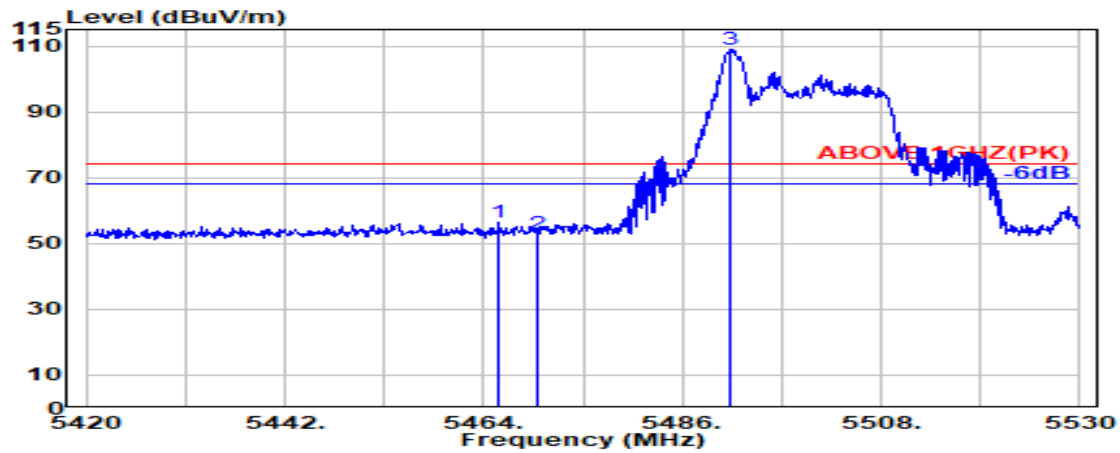

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.600	34.10	8.66	39.07	52.58	56.27	74.00	17.73	Peak
5470.000	34.10	8.67	39.07	49.26	52.96	74.00	21.04	Peak
@ 5491.300	34.10	8.69	39.07	105.37	109.09	---	---	Peak

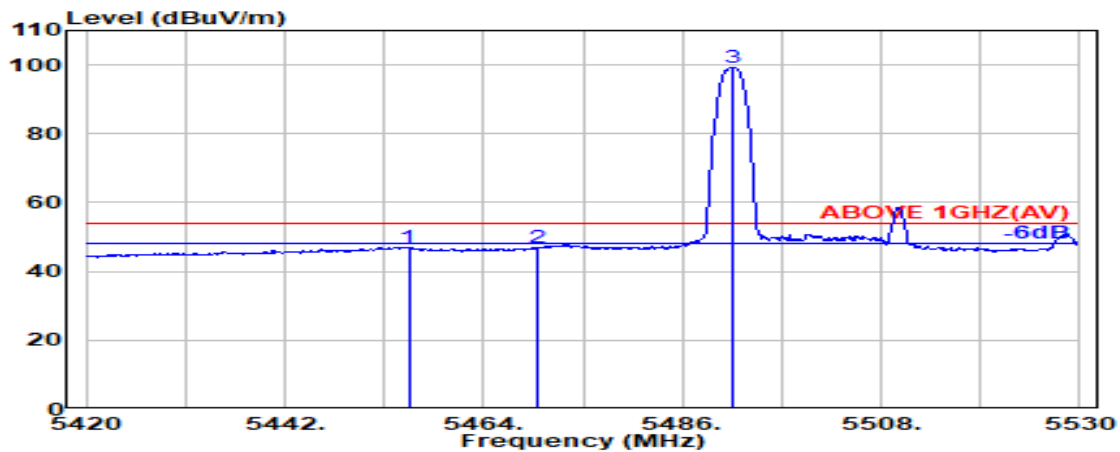

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5455.700	34.10	8.65	39.07	43.36	47.04	54.00	6.96	Average
5470.000	34.10	8.67	39.07	43.02	46.72	54.00	7.28	Average
@ 5491.600	34.10	8.69	39.07	95.66	99.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/0	Frequency	TX 5510MHz

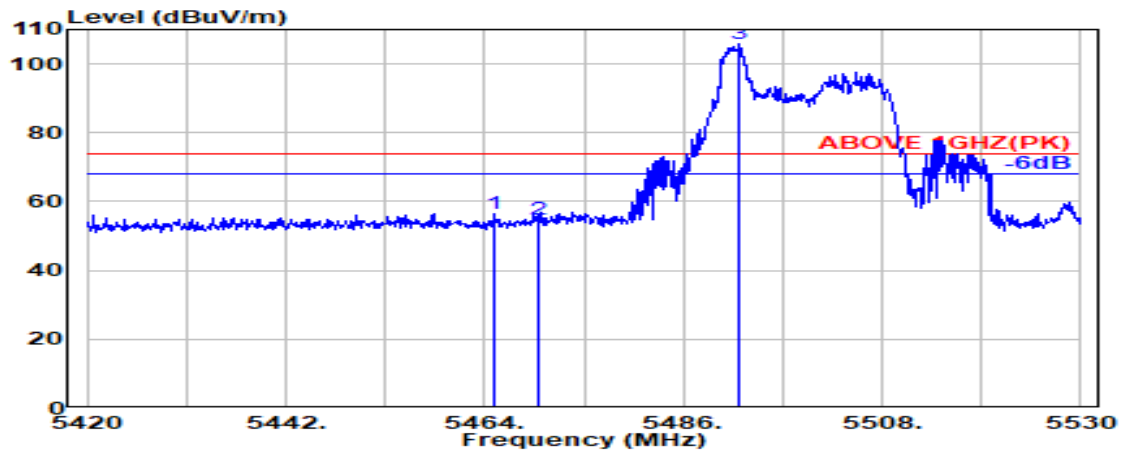

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.10	8.66	39.07	52.95	56.64	74.00	17.36	Peak
5470.000	34.10	8.67	39.07	51.17	54.87	74.00	19.13	Peak
@ 5492.200	34.10	8.69	39.07	102.32	106.04	---	---	Peak

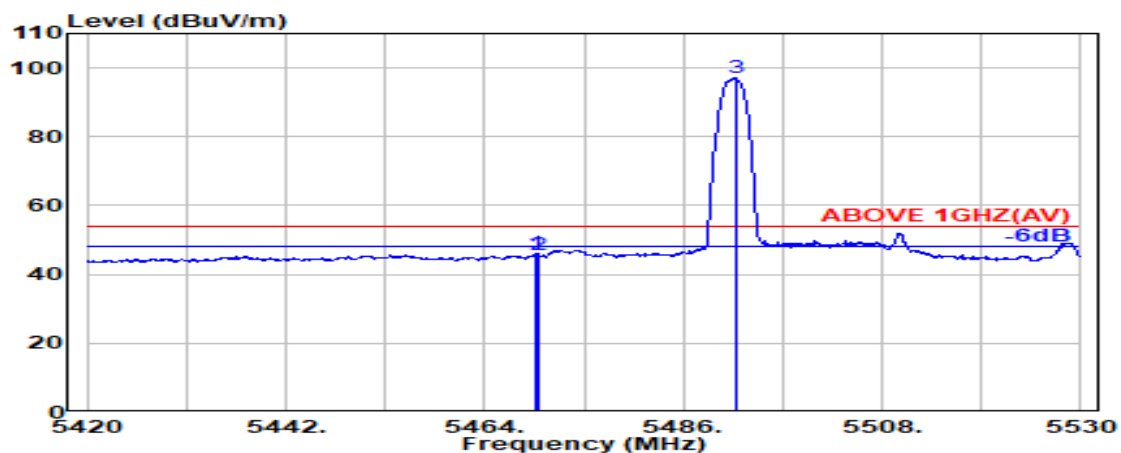

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.600	34.10	8.67	39.07	42.18	45.87	54.00	8.13	Average
5470.000	34.10	8.67	39.07	42.13	45.82	54.00	8.18	Average
@ 5491.900	34.10	8.69	39.07	93.37	97.09	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

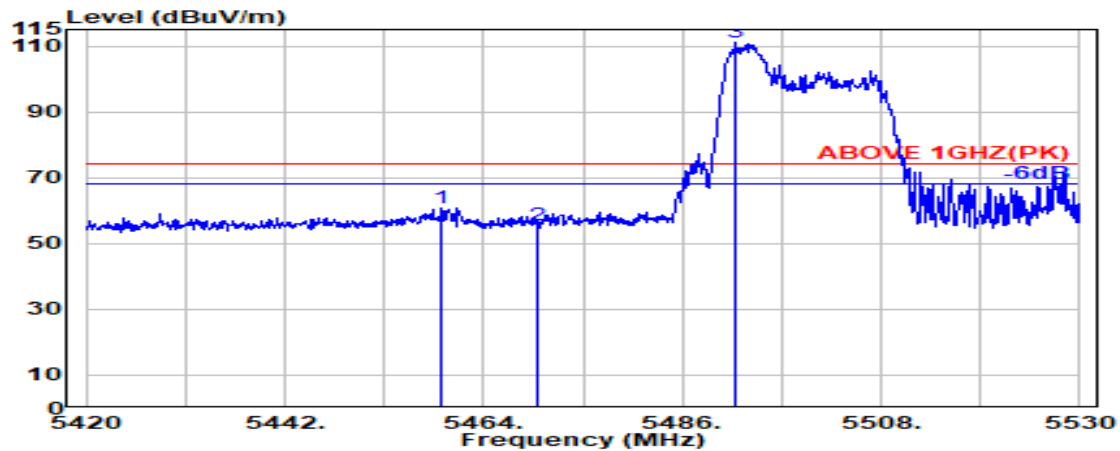

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.300	34.10	8.66	39.07	57.18	60.86	74.00	13.14	Peak
5470.000	34.10	8.67	39.07	51.85	55.55	74.00	18.45	Peak
@ 5492.000	34.10	8.69	39.07	107.31	111.03	---	---	Peak

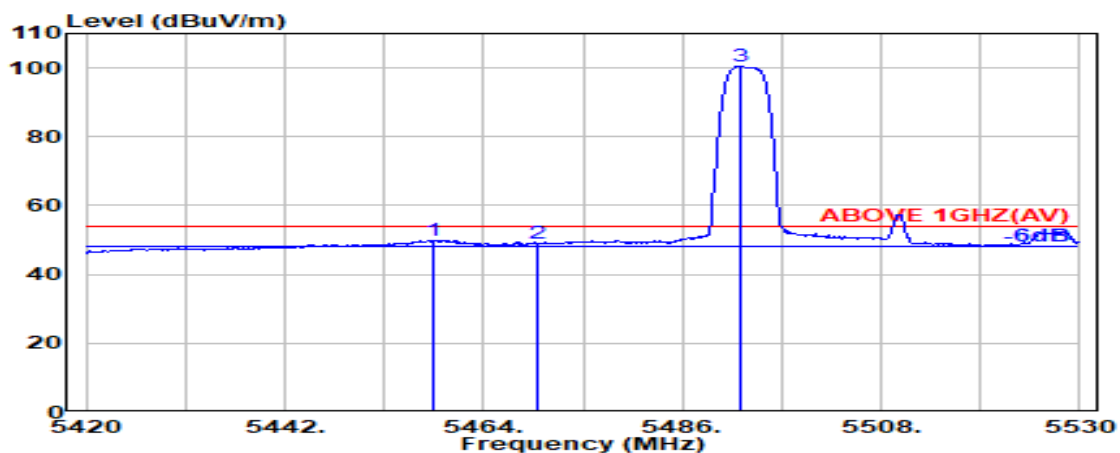

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.300	34.10	8.66	39.07	46.25	49.94	54.00	4.06	Average
5470.000	34.10	8.67	39.07	45.40	49.10	54.00	4.90	Average
@ 5492.500	34.10	8.69	39.07	96.78	100.50	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/37	Frequency	TX 5510MHz

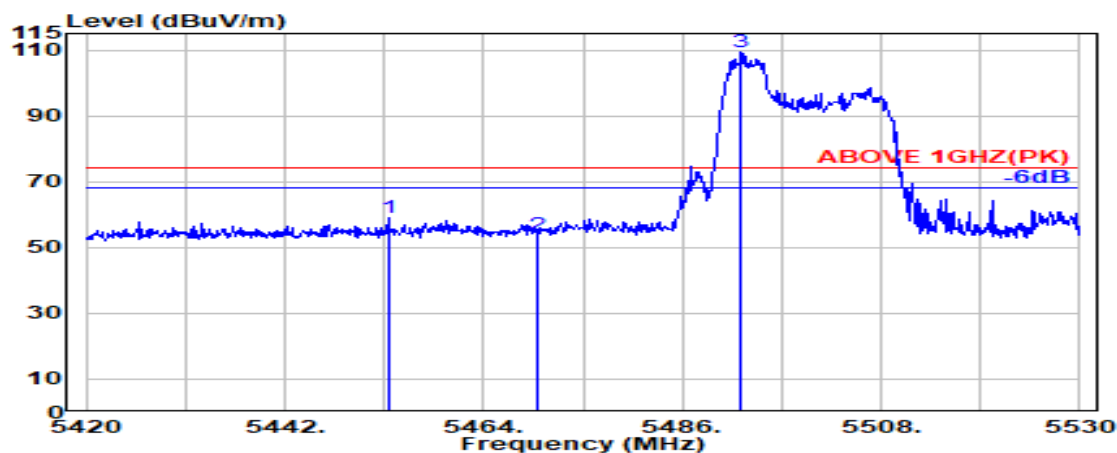

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.500	34.10	8.65	39.07	55.27	58.94	74.00	15.06	Peak
5470.000	34.10	8.67	39.07	49.96	53.66	74.00	20.34	Peak
@ 5492.500	34.10	8.69	39.07	105.62	109.34	---	---	Peak

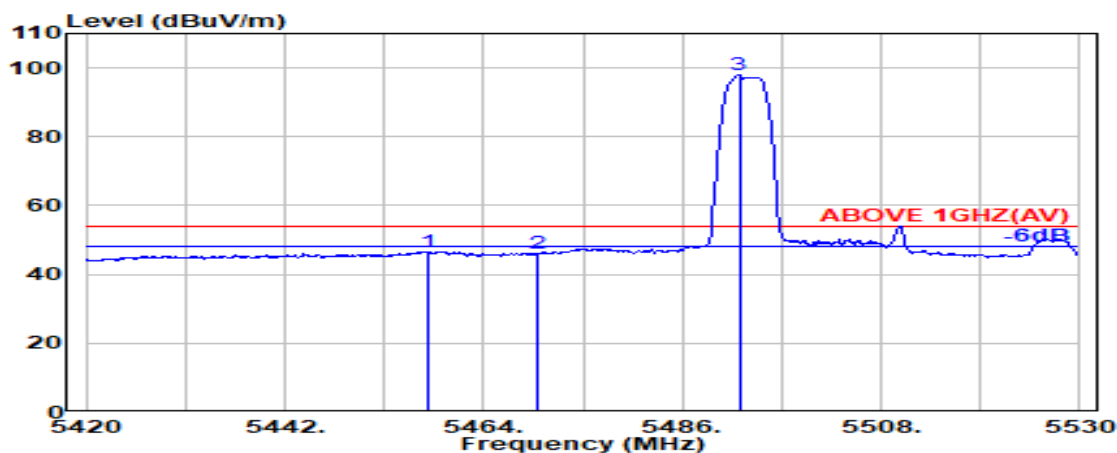

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.800	34.10	8.65	39.07	42.97	46.65	54.00	7.35	Average
5470.000	34.10	8.67	39.07	42.28	45.97	54.00	8.03	Average
@ 5492.300	34.10	8.69	39.07	94.26	97.98	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

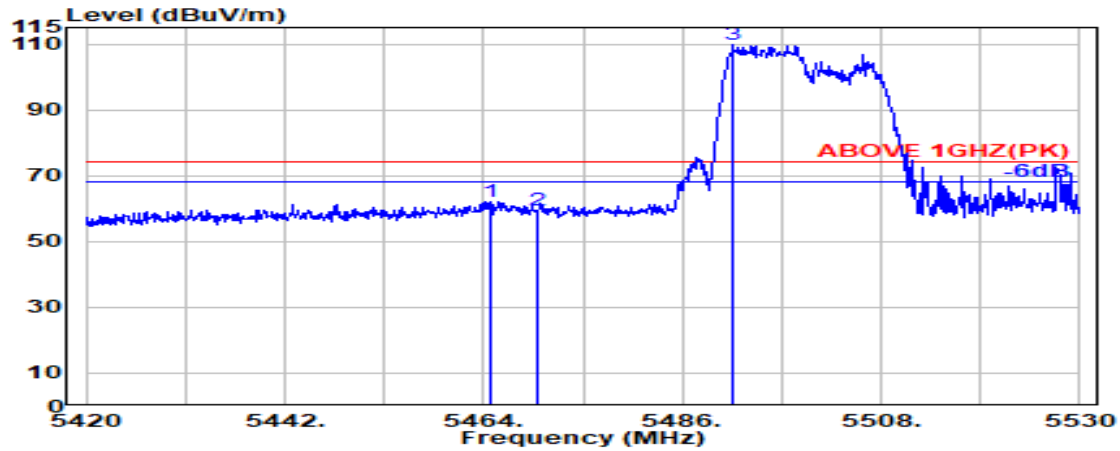

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.900	34.10	8.66	39.07	58.31	62.00	74.00	12.00	Peak
5470.000	34.10	8.67	39.07	55.65	59.35	74.00	14.65	Peak
@ 5491.600	34.10	8.69	39.07	106.03	109.75	---	---	Peak

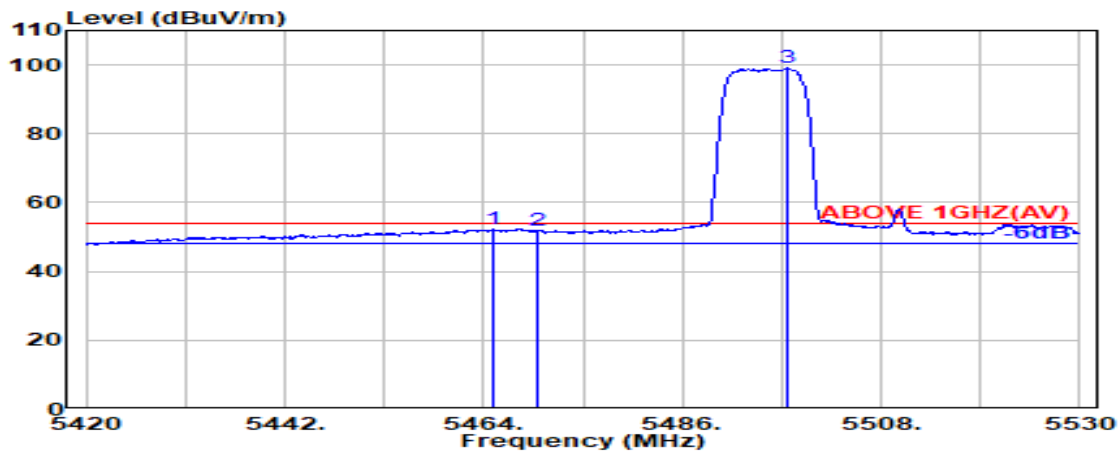

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.200	34.10	8.66	39.07	48.67	52.36	54.00	1.64	Average
5470.000	34.10	8.67	39.07	48.27	51.97	54.00	2.03	Average
@ 5497.500	34.10	8.70	39.07	95.29	99.01	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	106/53	Frequency	TX 5510MHz

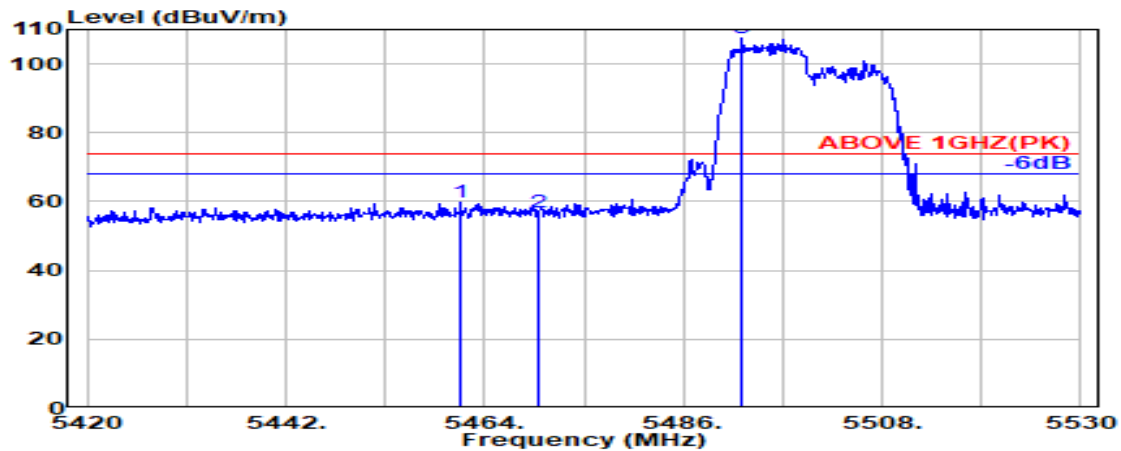

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5461.300	34.10	8.66	39.07	55.94	59.62	74.00	14.38	Peak
5470.000	34.10	8.67	39.07	53.02	56.72	74.00	17.28	Peak
@ 5492.500	34.10	8.69	39.07	103.75	107.47	---	---	Peak

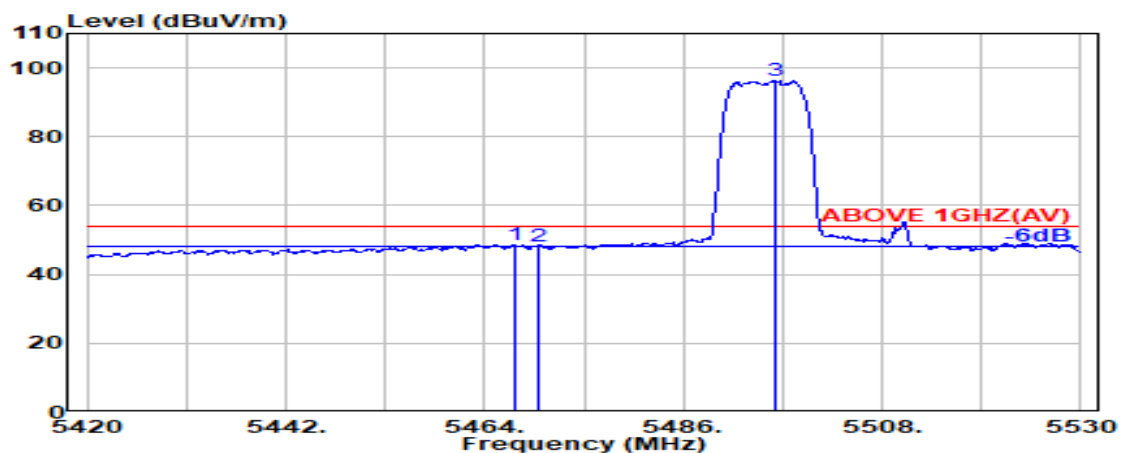

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.300	34.10	8.66	39.07	44.85	48.54	54.00	5.46	Average
5470.000	34.10	8.67	39.07	44.60	48.29	54.00	5.71	Average
@ 5496.200	34.10	8.69	39.07	92.58	96.30	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

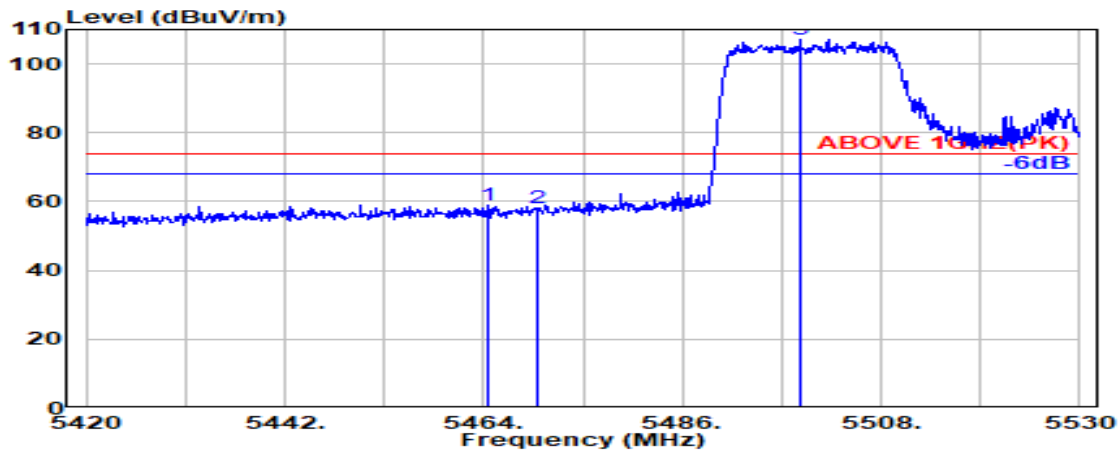

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.600	34.10	8.66	39.07	55.35	59.04	74.00	14.96	Peak
5470.000	34.10	8.67	39.07	54.59	58.28	74.00	15.72	Peak
@ 5499.100	34.10	8.70	39.07	103.50	107.22	---	---	Peak

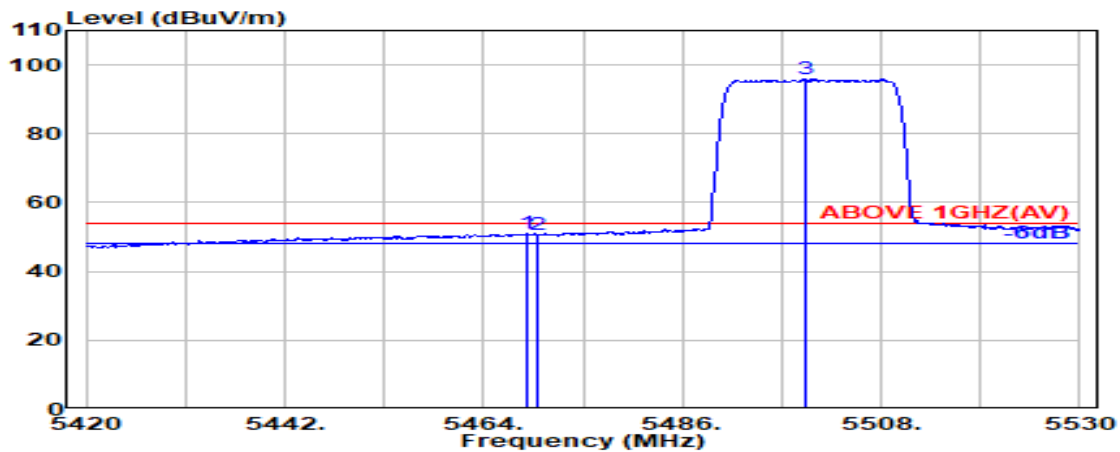


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.10	8.67	39.07	47.35	51.04	54.00	2.96	Average
5470.000	34.10	8.67	39.07	47.00	50.69	54.00	3.31	Average
@ 5499.600	34.10	8.70	39.07	92.23	95.96	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	242/61	Frequency	TX 5510MHz

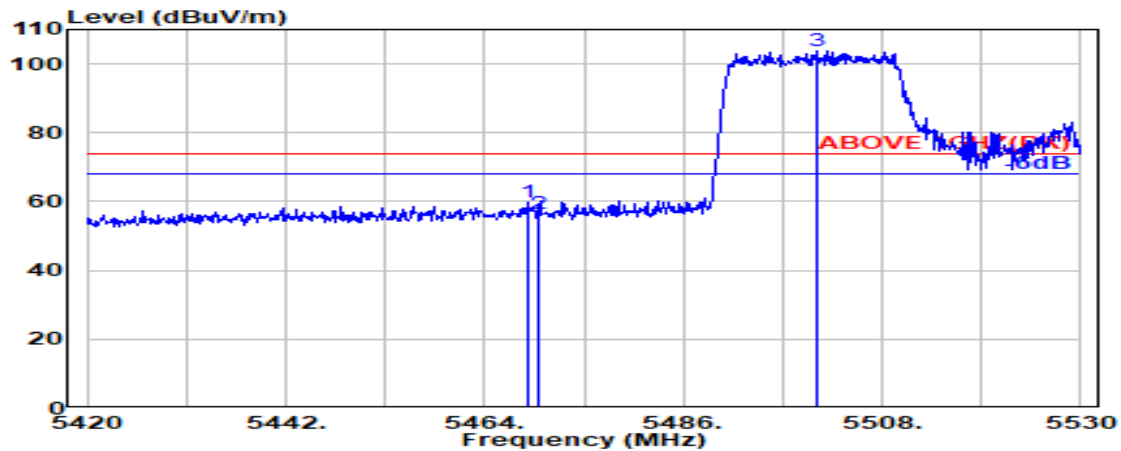

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.700	34.10	8.67	39.07	56.02	59.71	74.00	14.29	Peak
5470.000	34.10	8.67	39.07	52.66	56.35	74.00	17.65	Peak
@ 5500.900	34.10	8.70	39.07	99.90	103.63	---	---	Peak

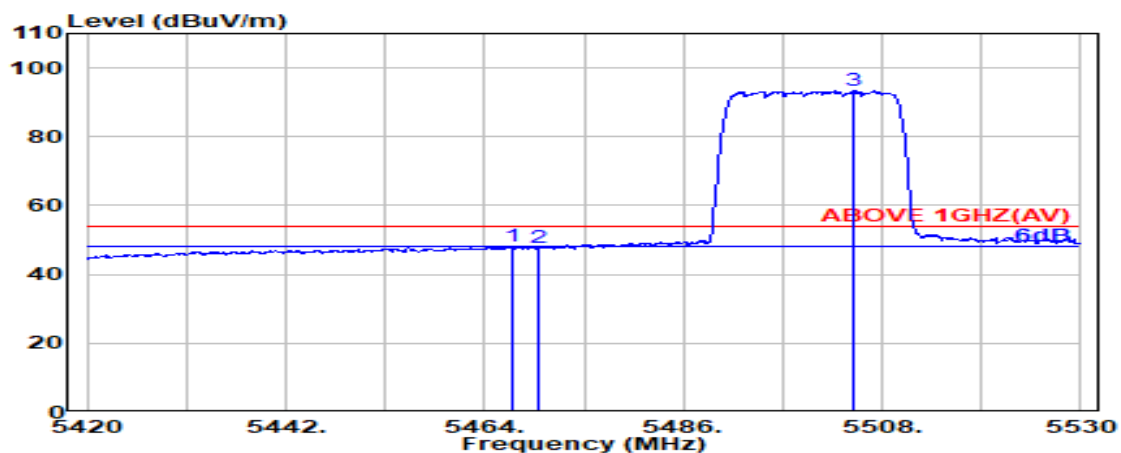


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.10	8.66	39.07	44.42	48.11	54.00	5.89	Average
5470.000	34.10	8.67	39.07	44.22	47.91	54.00	6.09	Average
@ 5504.700	34.09	8.70	39.07	89.68	93.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	26/17	Frequency	TX 5670MHz

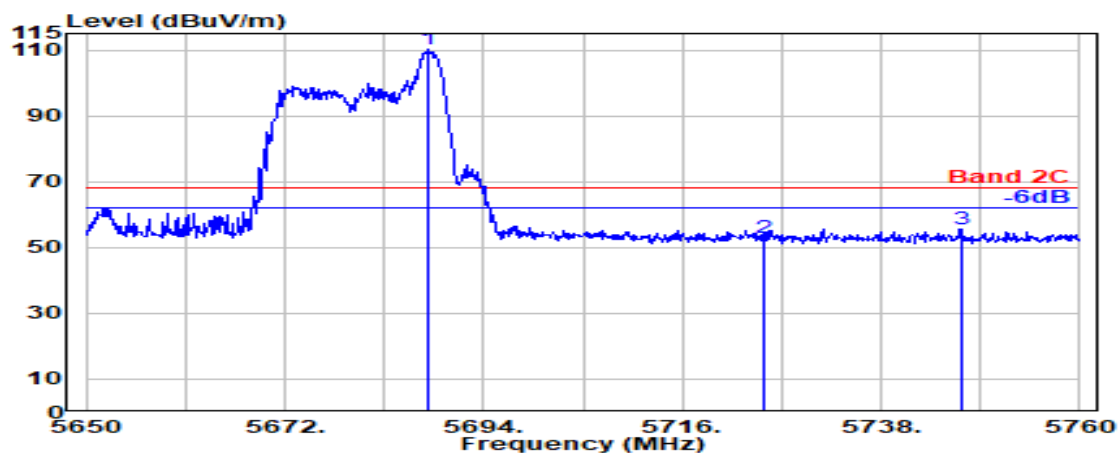

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5687.900	33.47	8.89	39.13	106.88	110.12	---	---	Peak
	5725.000	33.60	8.92	39.14	49.64	53.03	68.20	15.17	Peak
	5746.800	33.77	8.95	39.15	52.08	55.65	68.20	12.55	Peak

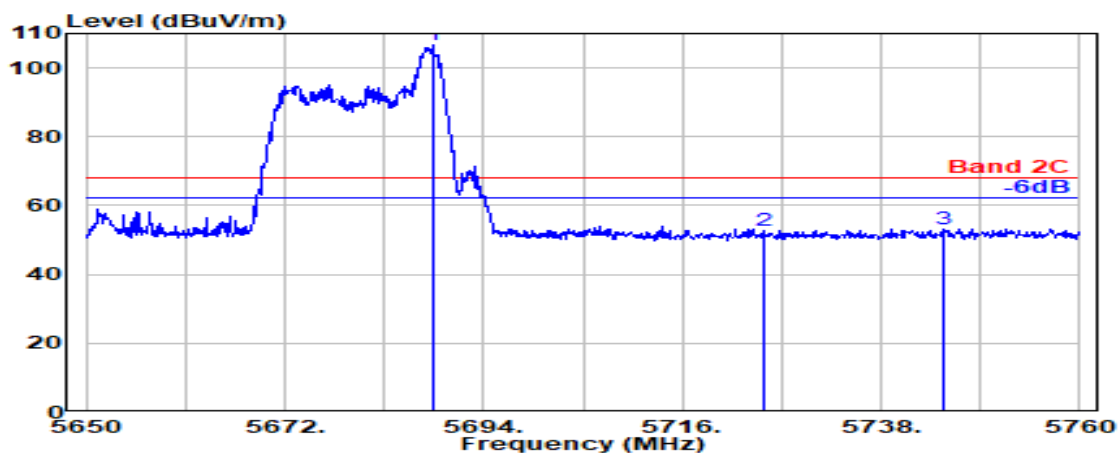

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5688.300	33.47	8.89	39.13	103.41	106.64	---	---	Peak
	5725.000	33.60	8.92	39.14	49.19	52.57	68.20	15.63	Peak
	5744.800	33.76	8.94	39.15	49.68	53.24	68.20	14.96	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	U-NII Band 2C
RU Configuration	52/44	Frequency	TX 5670MHz

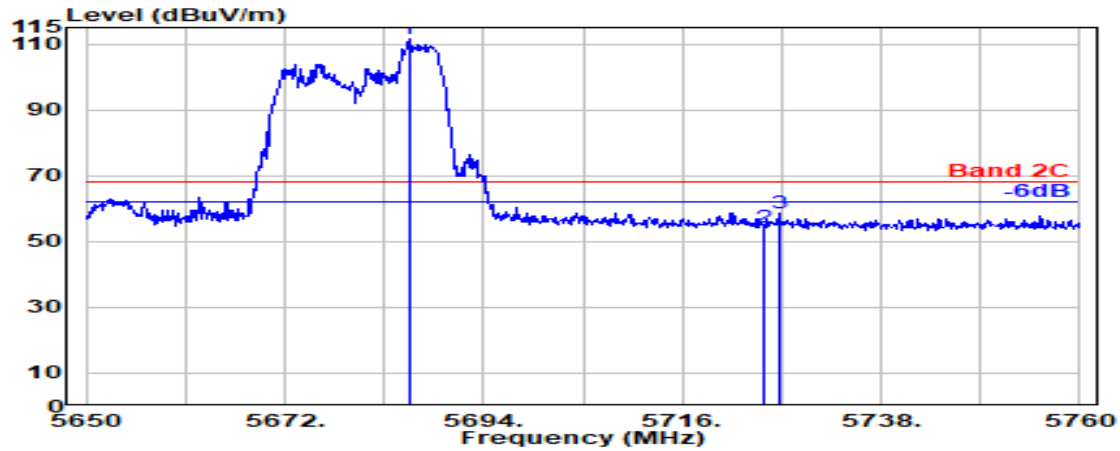

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5685.700	33.49	8.89	39.13	108.15	111.40	---	---	Peak
5725.000	33.60	8.92	39.14	51.04	54.43	68.20	13.77	Peak
5726.700	33.61	8.93	39.14	55.09	58.49	68.20	9.71	Peak

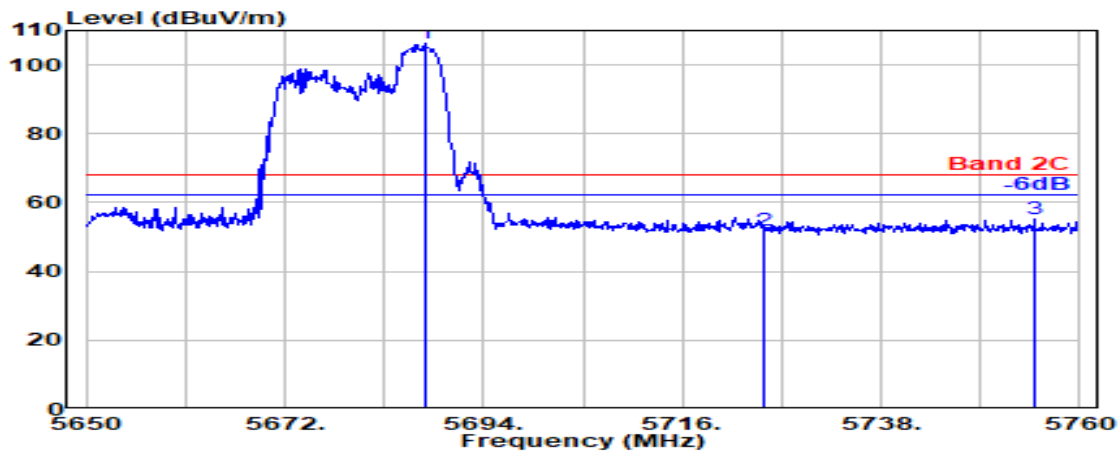

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5687.500	33.47	8.89	39.13	102.91	106.14	---	---	Peak
5725.000	33.60	8.92	39.14	48.32	51.71	68.20	16.49	Peak
5755.000	33.81	8.95	39.15	51.74	55.36	68.20	12.84	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.