



Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT20)	52	5260	4.14	9.53	11	PASS
	60	5300	4.14	9.44	11	PASS
	64	5320	4.14	9.45	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT20)	52	5260	6.79	6.7
	60	5300	6.7	6.42
	64	5320	6.69	6.59

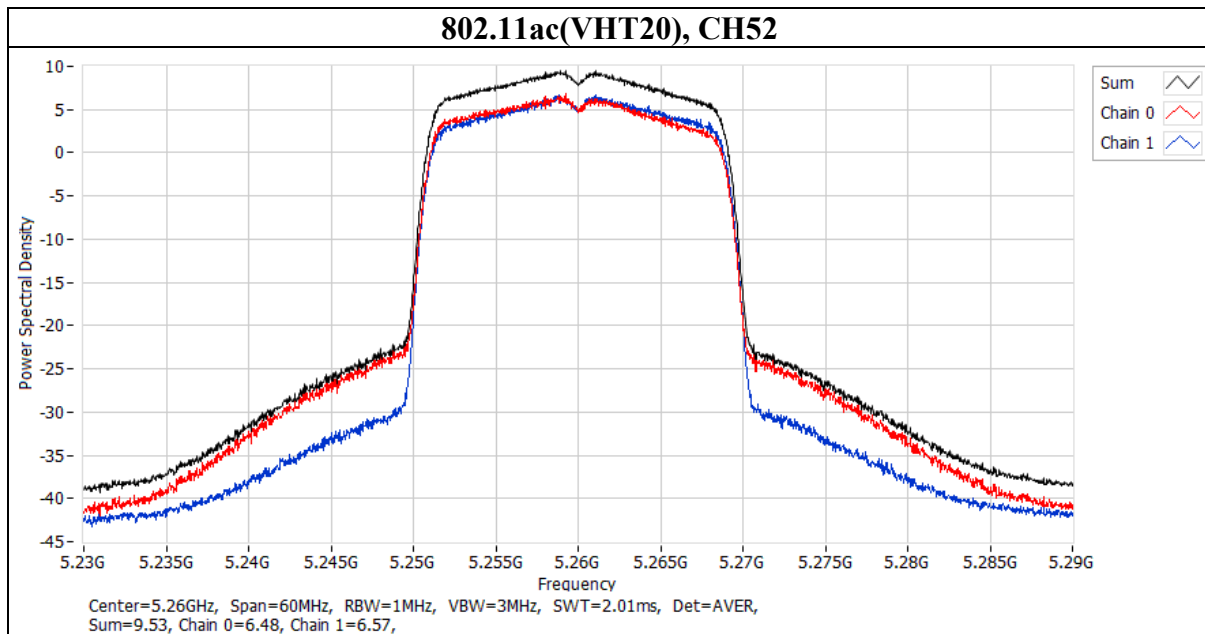


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT40)	54	5270	4.14	4.66	11	PASS
	62	5310	4.14	5.13	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT40)	54	5270	1.55	1.93
	62	5310	2.31	1.97

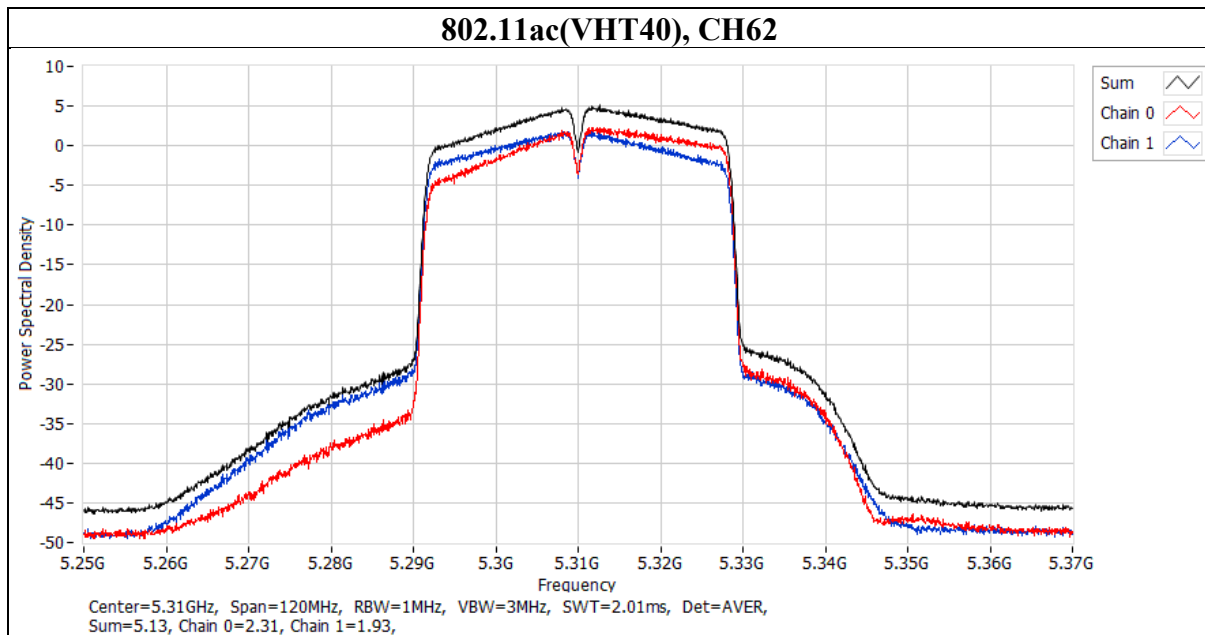


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT80)	58	5290	4.14	0.72	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT80)	58	5290	-2.54	-1.48

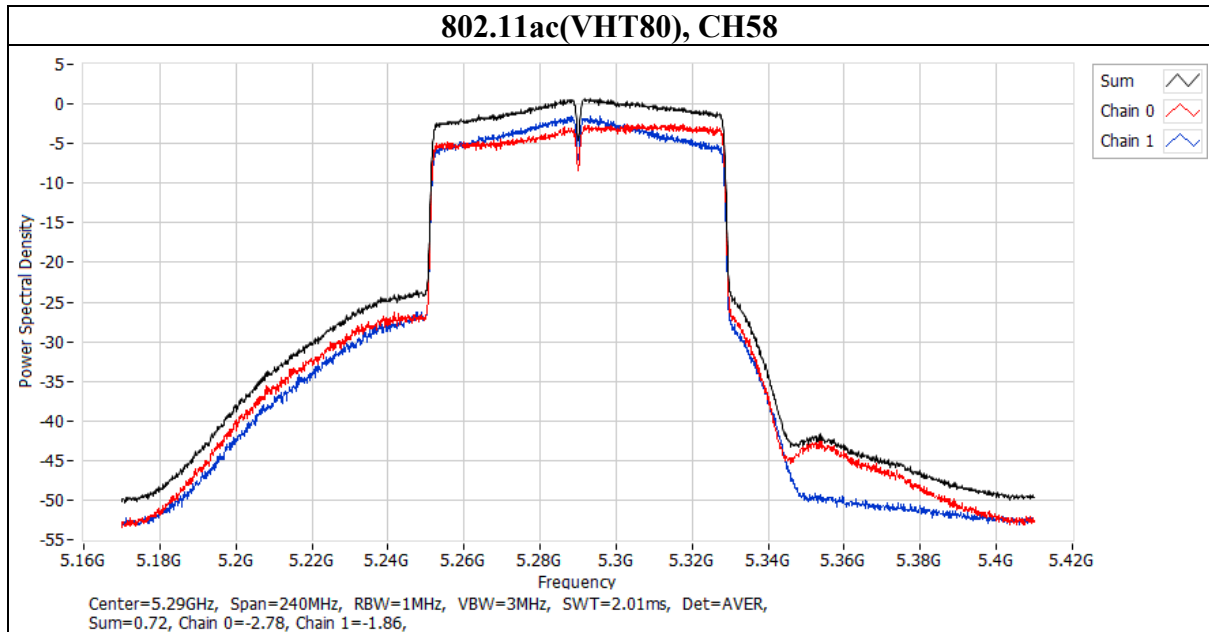


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)	52	5260	4.14	9.32	11	PASS
	60	5300	4.14	9.39	11	PASS
	64	5320	4.14	10.1	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)	52	5260	6.22	6.47
	60	5300	6.55	6.32
	64	5320	6.86	7.31

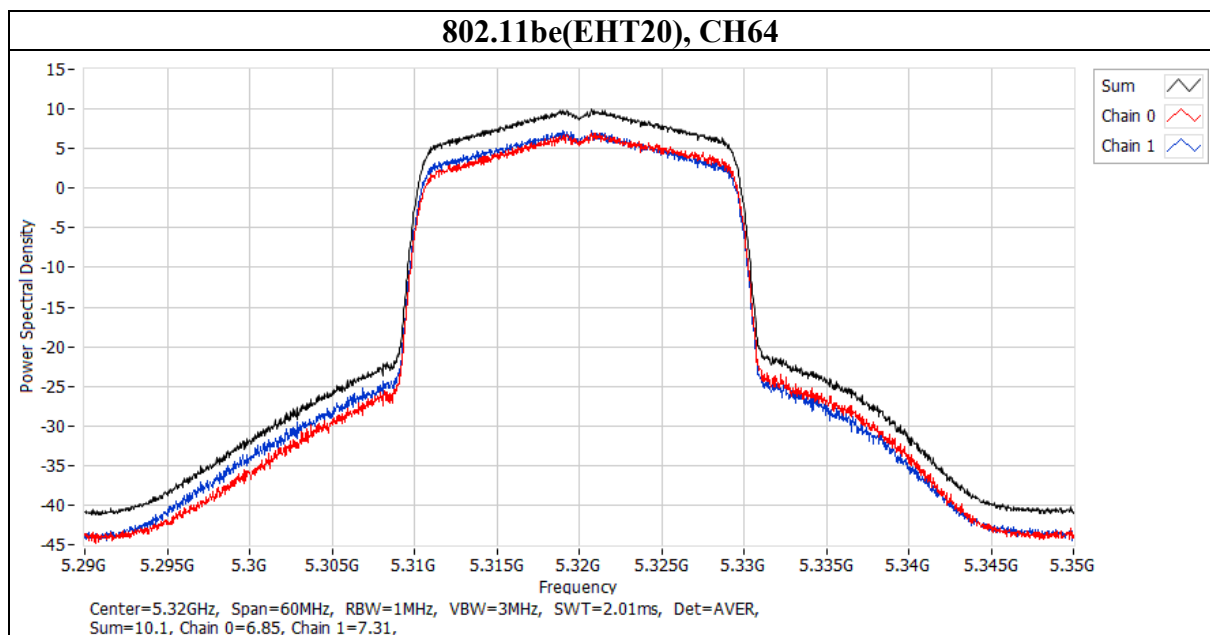


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT40)	54	5270	4.14	4.86	11	PASS
	62	5310	4.14	5.01	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT40)	54	5270	1.87	2.17
	62	5310	2.17	2.12

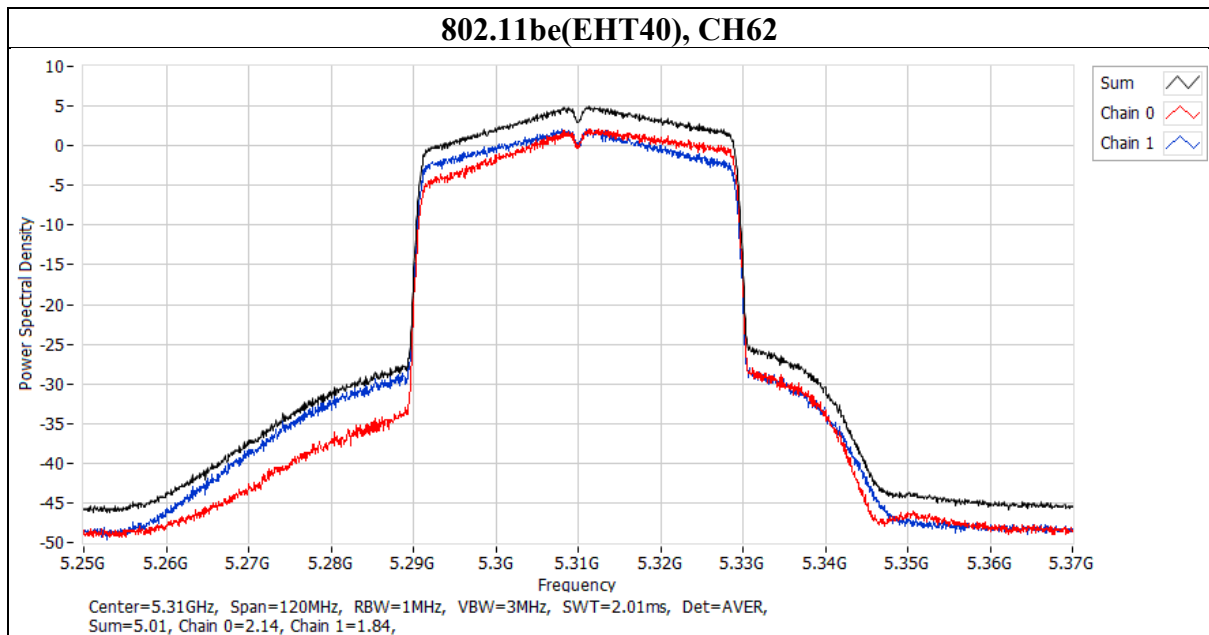


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)	58	5290	4.14	1.17	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)	58	5290	-2.3	-1.09

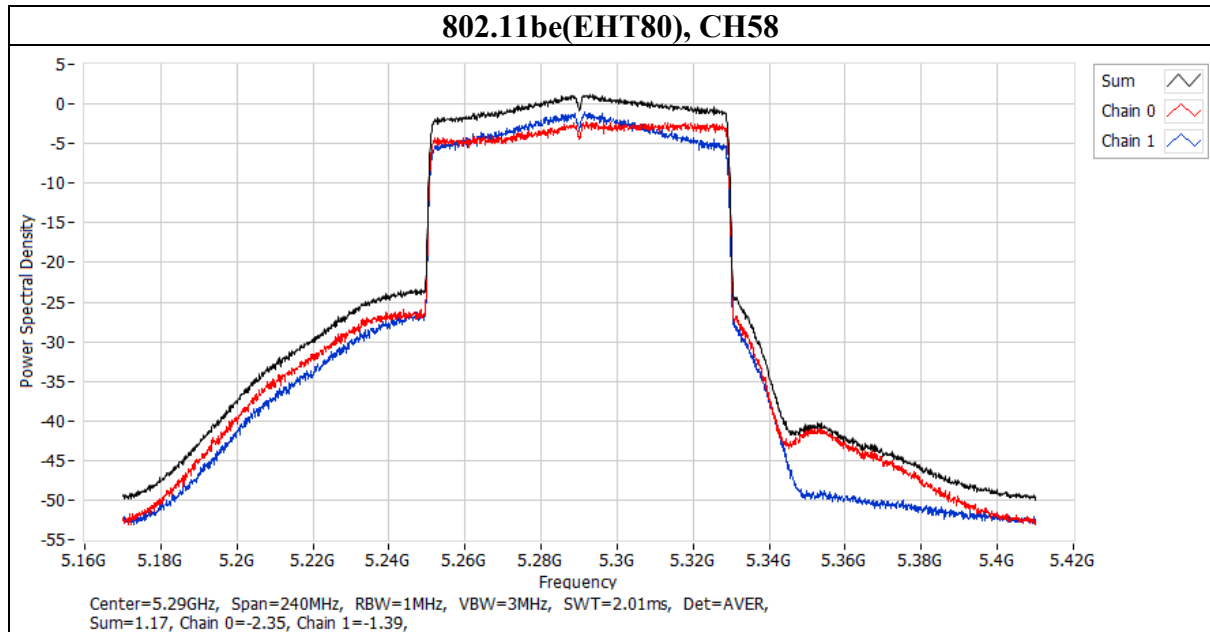


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	100	5500	1.71	5.79	11	PASS
	116	5580	1.71	6.3	11	PASS
	140	5700	1.71	7.7	11	PASS
	144	5720	1.71	7.34	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)
			Chain 0
802.11a	100	5500	5.79
	116	5580	6.3
	140	5700	7.7
	144	5720	7.34

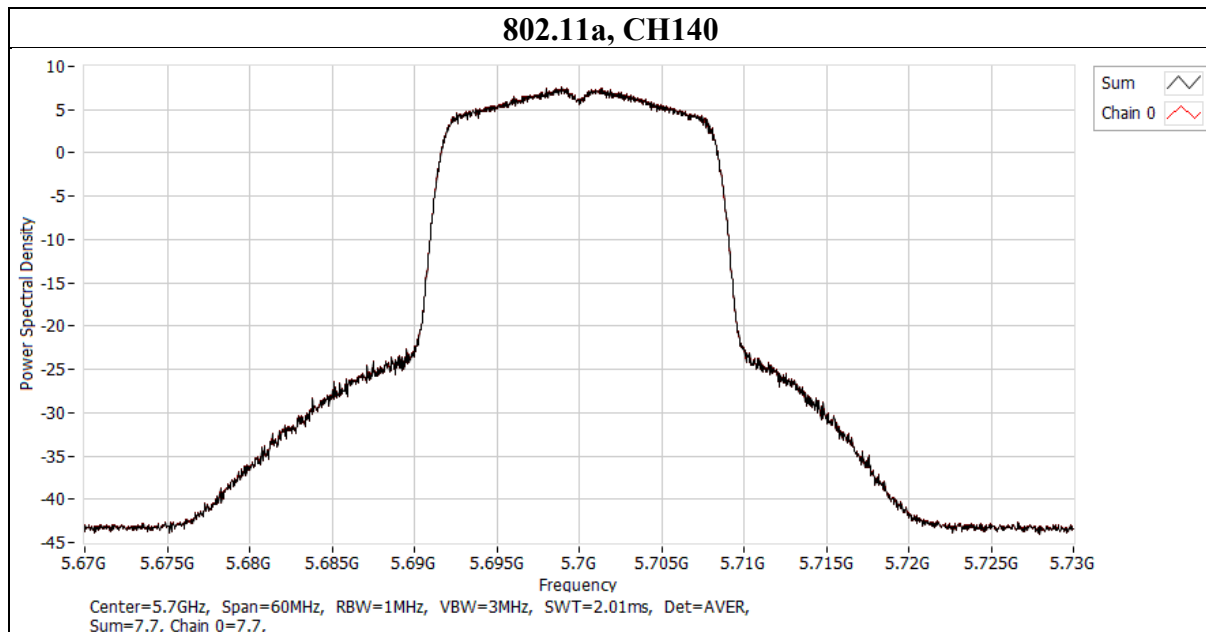


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT20)	100	5500	4.14	9.07	11	PASS
	116	5580	4.14	9.04	11	PASS
	140	5700	4.14	9.43	11	PASS
	144	5720	4.14	9.68	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT20)	100	5500	5.82	6.62
	116	5580	6.06	6.07
	140	5700	6.58	6.44
	144	5720	6.63	6.72

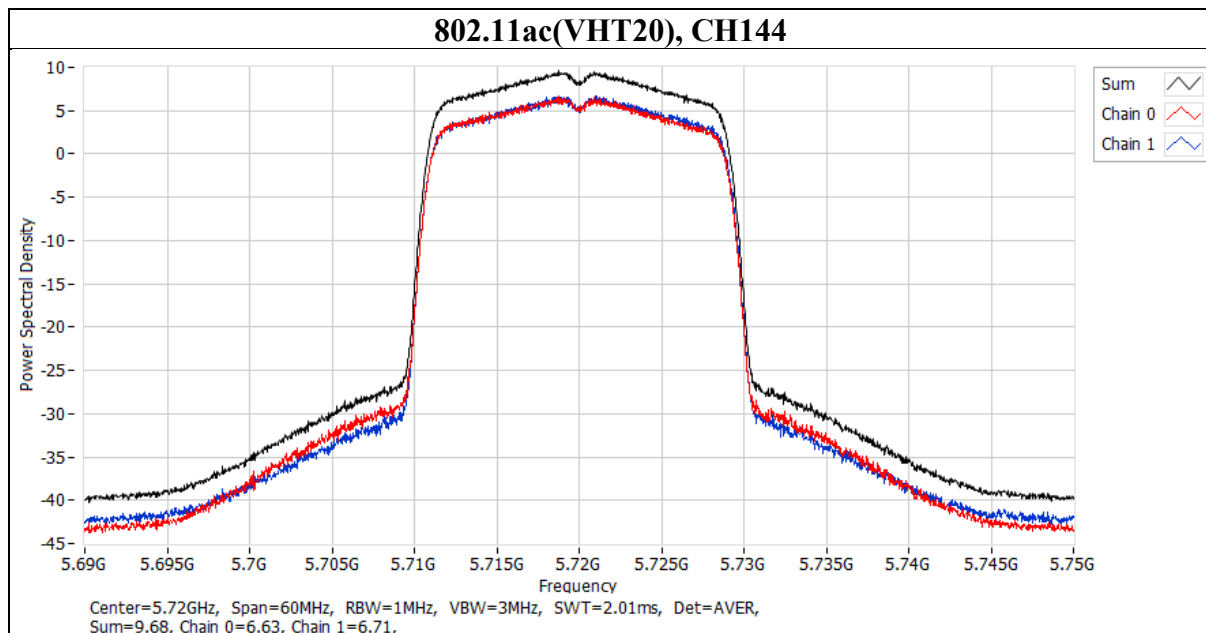


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT40)	102	5510	4.14	4.32	11	PASS
	110	5550	4.14	3.95	11	PASS
	134	5670	4.14	5.23	11	PASS
	142	5710	4.14	5.2	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT40)	102	5510	0.99	1.88
	110	5550	0.83	1.27
	134	5670	2.31	2.82
	142	5710	2.45	2.08

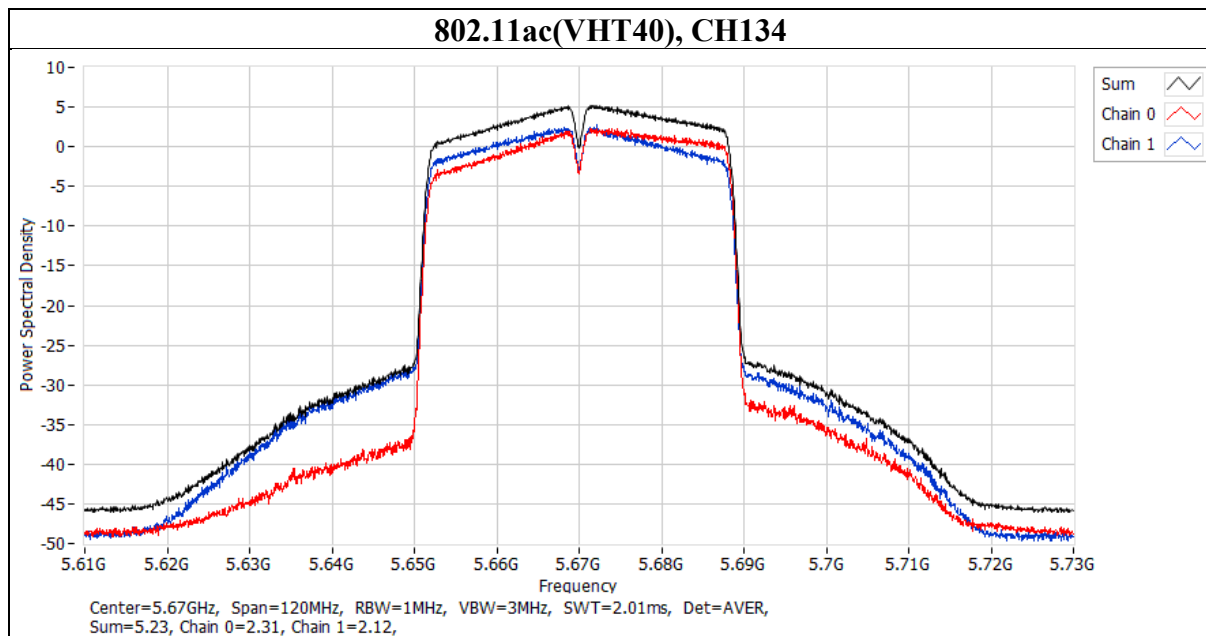


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11ac(VHT80)	106	5530	4.14	0.94	11	PASS
	122	5610	4.14	1.04	11	PASS
	138	5690	4.14	1.47	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11ac(VHT80)	106	5530	-3.07	-1.18
	122	5610	-1.76	-1.91
	138	5690	-1.13	-1.8

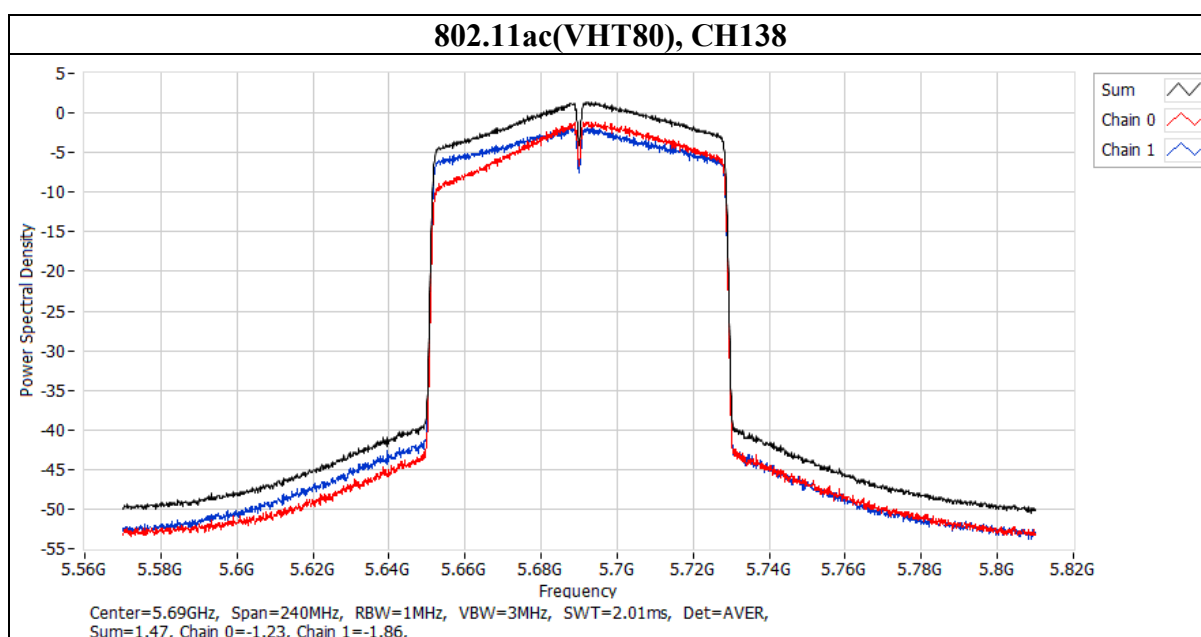


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)	100	5500	4.14	9.2	11	PASS
	116	5580	4.14	9.15	11	PASS
	140	5700	4.14	9.73	11	PASS
	144	5720	4.14	9.84	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)	100	5500	6.15	6.85
	116	5580	6.26	6.43
	140	5700	6.78	7.01
	144	5720	6.86	7.1

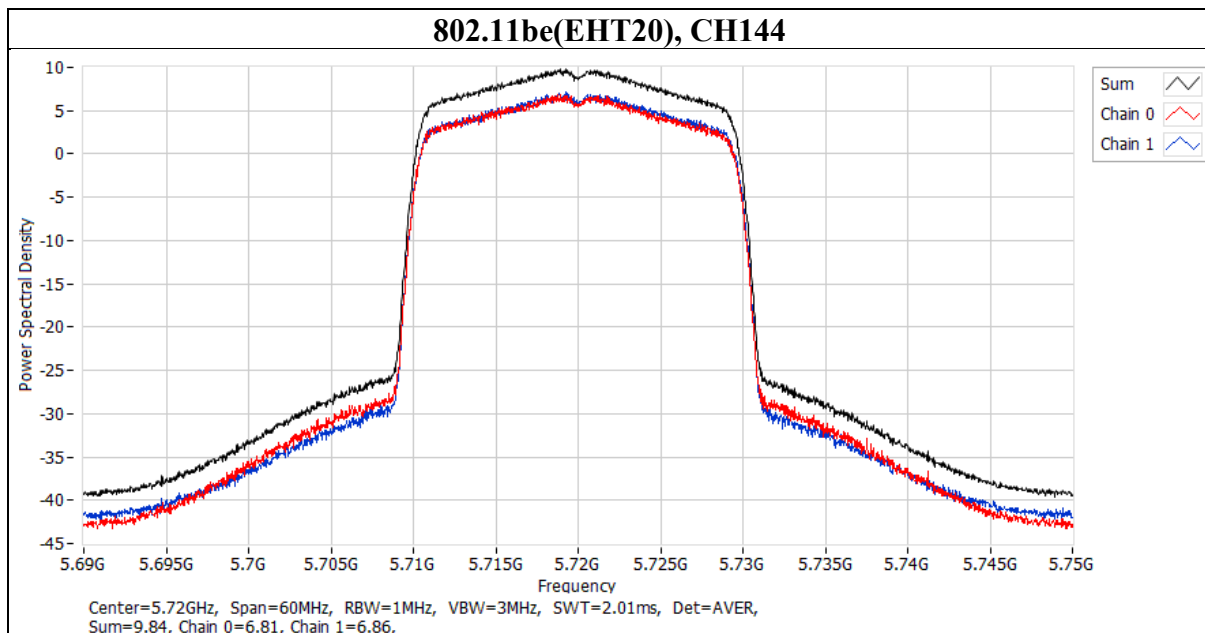


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT40)	102	5510	4.14	4.74	11	PASS
	110	5550	4.14	4.64	11	PASS
	134	5670	4.14	5.5	11	PASS
	142	5710	4.14	5.76	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT40)	102	5510	1.41	2.14
	110	5550	1.87	1.37
	134	5670	2.68	2.61
	142	5710	2.88	3.17

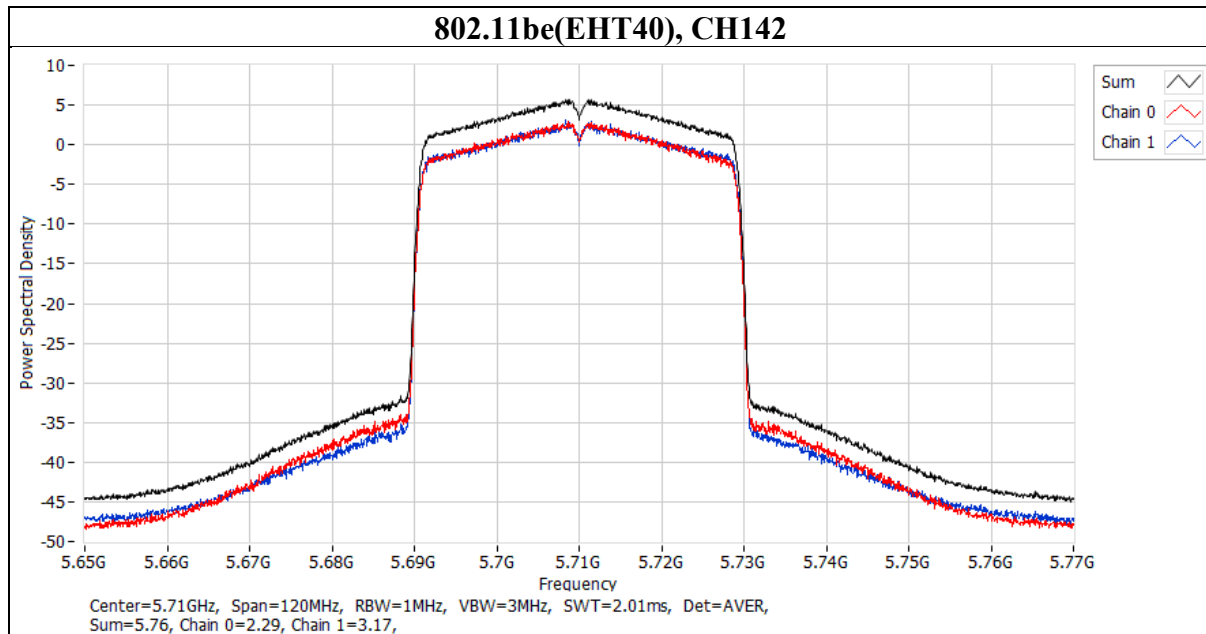


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)	106	5530	4.14	1.34	11	PASS
	122	5610	4.14	1.5	11	PASS
	138	5690	4.14	1.96	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)	106	5530	-2.63	-0.63
	122	5610	-0.96	-1.51
	138	5690	-0.73	-1.12

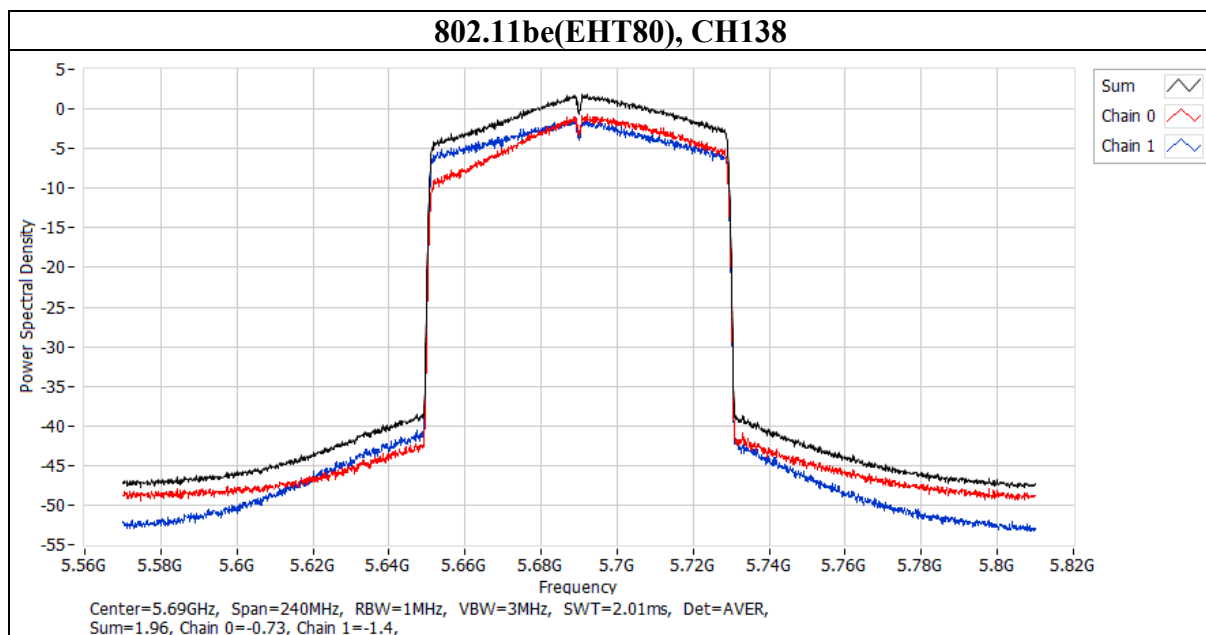


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	144	5720	2.22	1.71	7.17	30	PASS
	149	5745	2.22	1.71	6.73	30	PASS
	157	5785	2.22	1.71	6.13	30	PASS
	165	5825	2.22	1.71	6.16	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)
			Chain 0
802.11a	144	5720	4.95
	149	5745	4.51
	157	5785	3.91
	165	5825	3.94

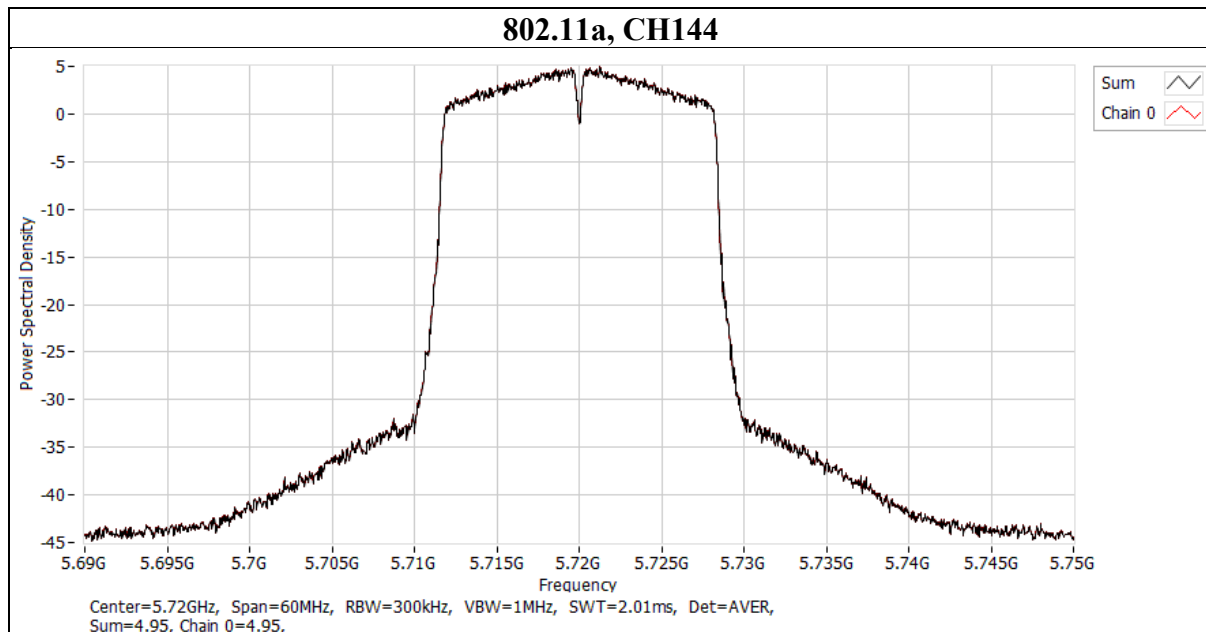


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11ac(VHT20)	144	5720	2.22	4.14	9.32	30	PASS
	149	5745	2.22	4.14	9.51	30	PASS
	157	5785	2.22	4.14	8.7	30	PASS
	165	5825	2.22	4.14	8.96	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11ac(VHT20)	144	5720	3.94	4.51
	149	5745	4.18	4.54
	157	5785	3.76	3.56
	165	5825	4.21	3.59

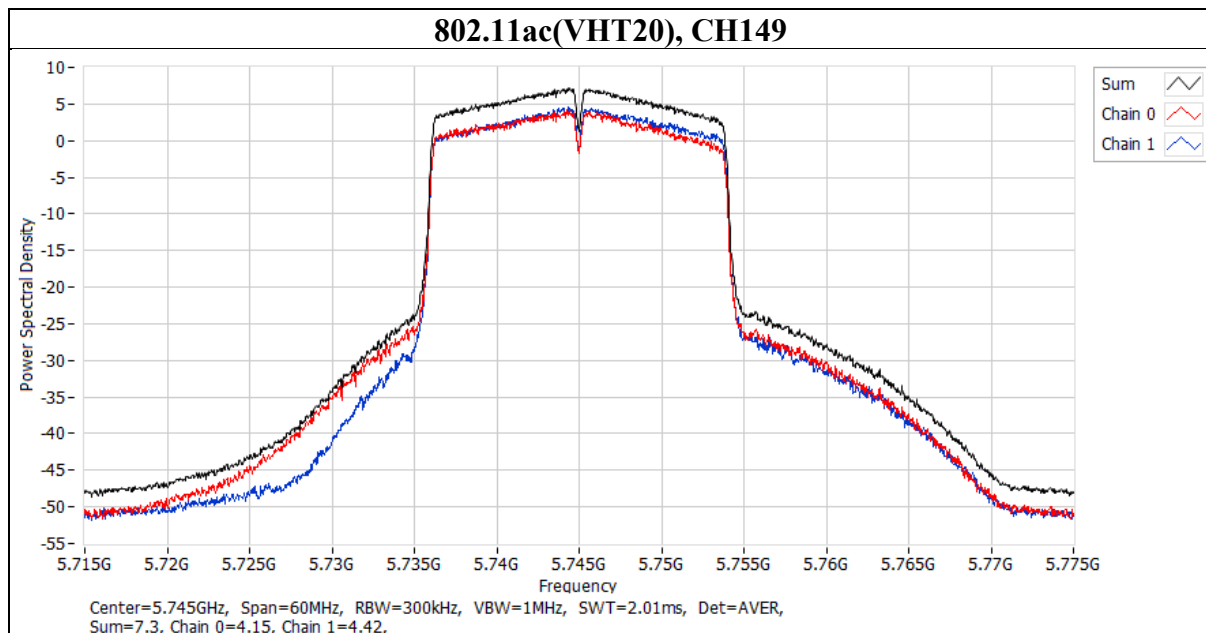


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11ac(VHT40)	142	5710	2.22	4.14	5.23	30	PASS
	151	5755	2.22	4.14	4.65	30	PASS
	159	5795	2.22	4.14	3.77	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11ac(VHT40)	142	5710	0.25	0.13
	151	5755	-0.63	-0.23
	159	5795	-1.14	-1.37

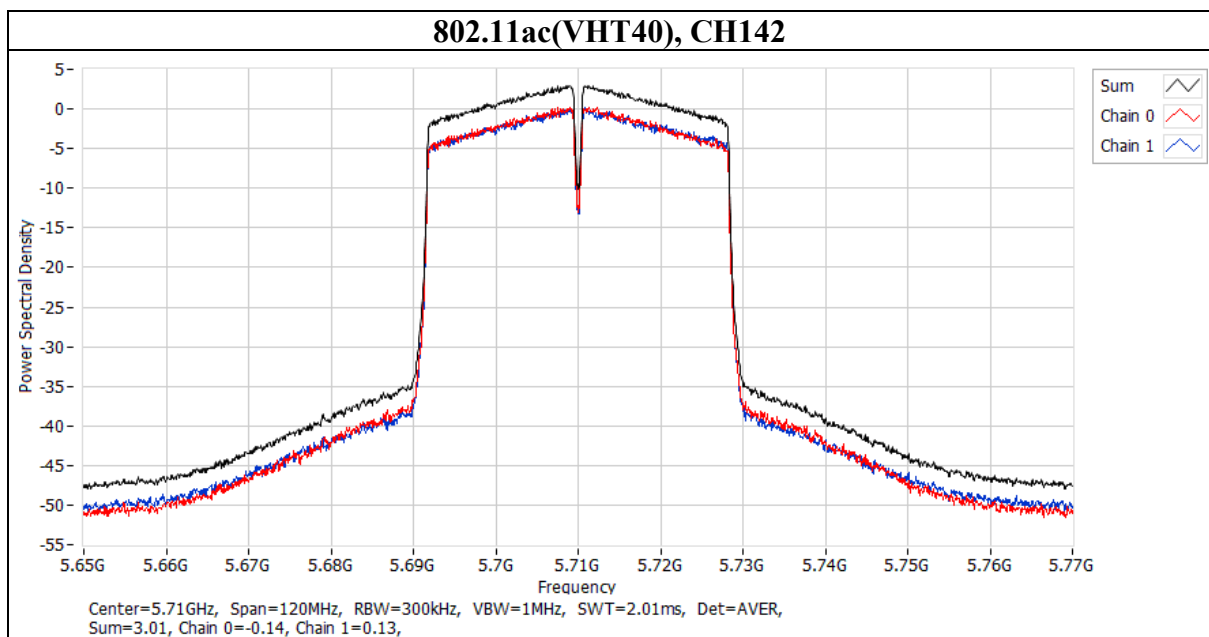


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11ac(VHT80)	138	5690	2.22	4.14	1.1	30	PASS
	155	5775	2.22	4.14	1.04	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11ac(VHT80)	138	5690	-3.77	-4.2
	155	5775	-4.76	-3.34

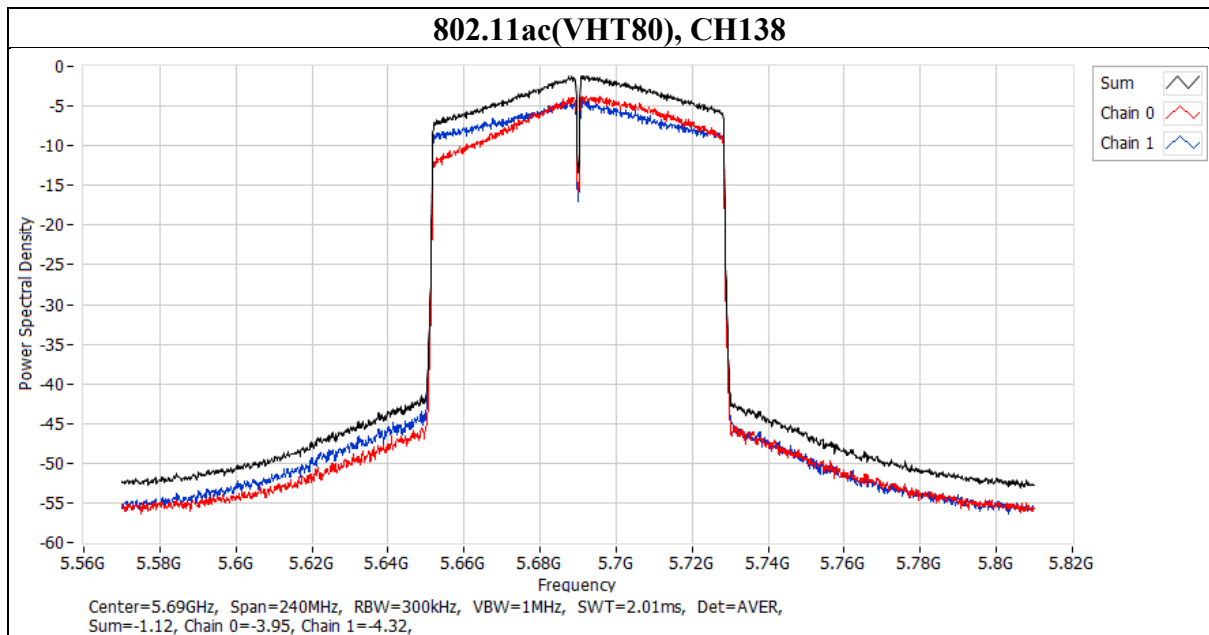


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT20)	144	5720	2.22	4.14	9.55	30	PASS
	149	5745	2.22	4.14	9.94	30	PASS
	157	5785	2.22	4.14	9.01	30	PASS
	165	5825	2.22	4.14	9.39	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT20)	144	5720	4.51	4.73
	149	5745	4.58	4.95
	157	5785	4.11	3.95
	165	5825	4.13	4.32

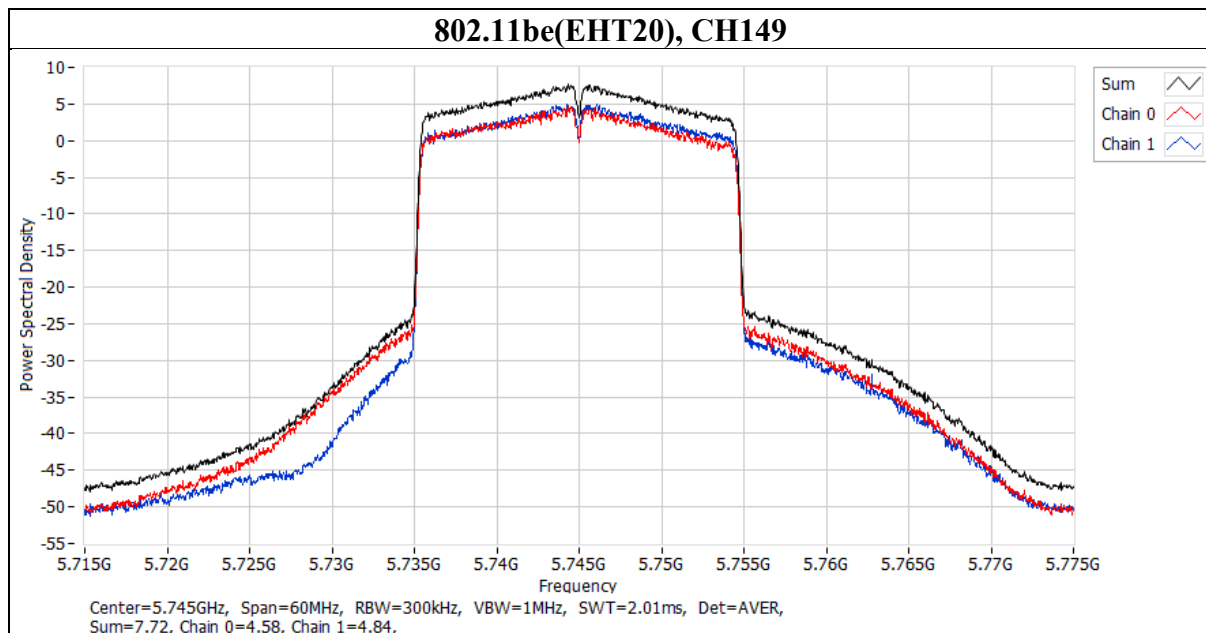


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT40)	142	5710	2.22	4.14	5.6	30	PASS
	151	5755	2.22	4.14	5.09	30	PASS
	159	5795	2.22	4.14	3.92	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT40)	142	5710	0.56	0.72
	151	5755	-0.47	0.28
	159	5795	-1.01	-0.68

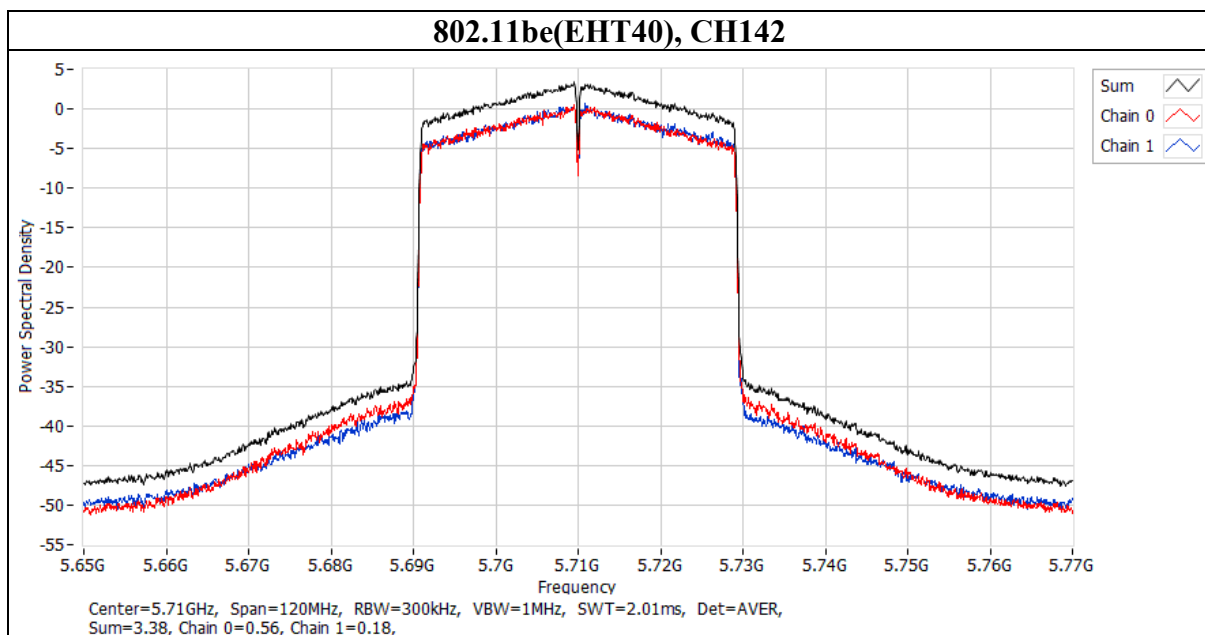


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT80)	138	5690	2.22	4.14	1.47	30	PASS
	155	5775	2.22	4.14	1.63	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT80)	138	5690	-3.28	-3.98
	155	5775	-3.88	-2.71

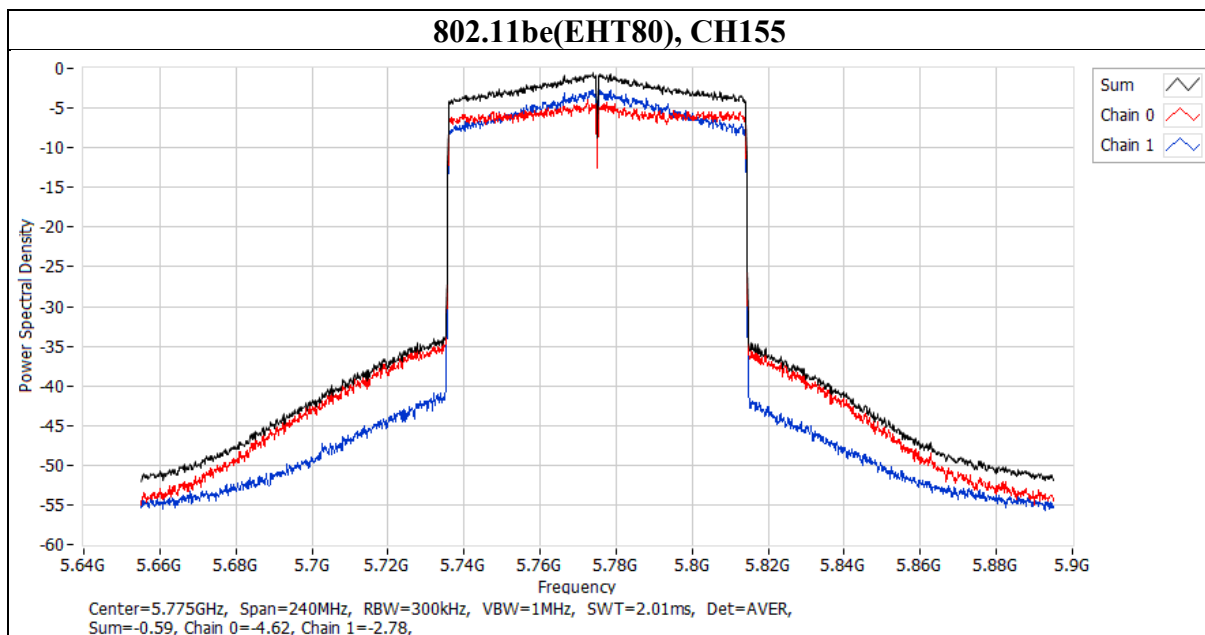


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU26	36	5180	4.14	5.87	11	PASS
	44	5220	4.14	6.01	11	PASS
	48	5240	4.14	6.28	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU26	36	5180	3.06	2.82
	44	5220	2.78	3.41
	48	5240	1.67	4.52

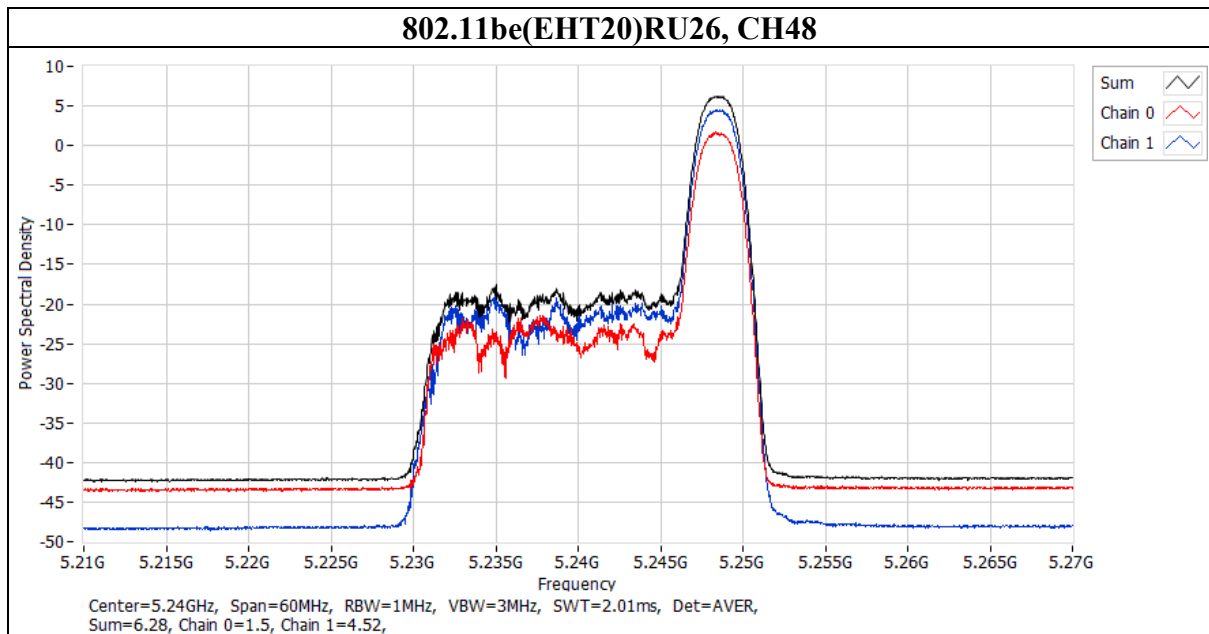


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU52	36	5180	4.14	6.18	11	PASS
	44	5220	4.14	6.09	11	PASS
	48	5240	4.14	6.2	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU52	36	5180	3.4	3.06
	44	5220	3	3.26
	48	5240	3.23	3.28

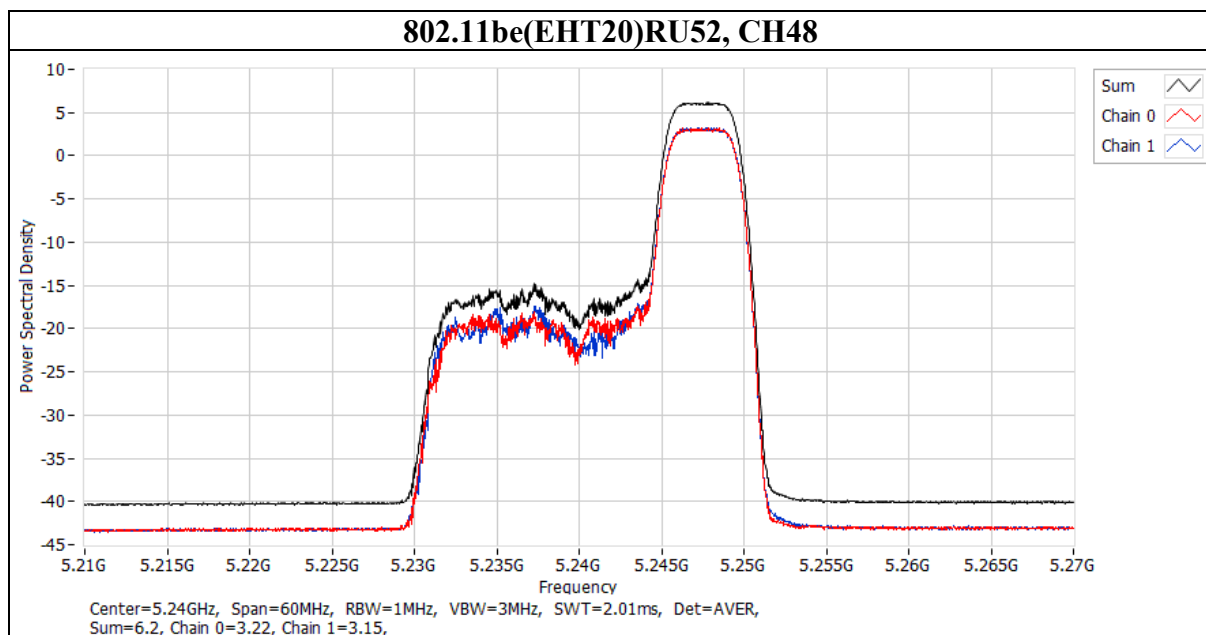


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU106	36	5180	4.14	6.26	11	PASS
	44	5220	4.14	5.86	11	PASS
	48	5240	4.14	6.17	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU106	36	5180	3.6	3.14
	44	5220	2.92	2.97
	48	5240	3.16	3.44

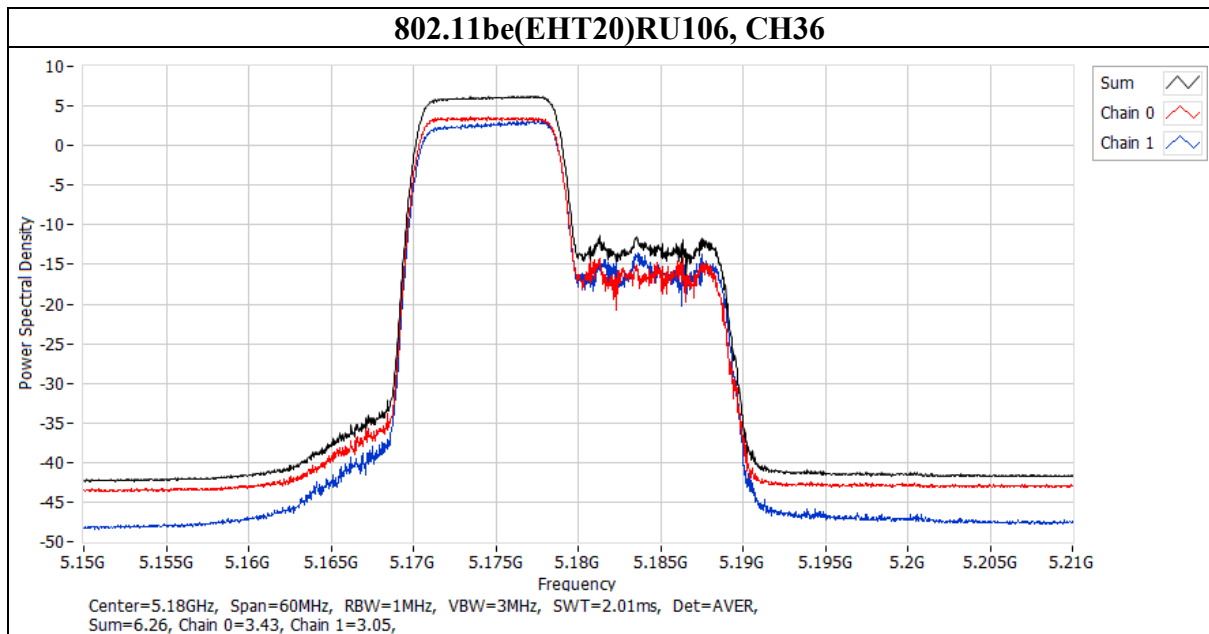


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU52+26	36	5180	4.14	5.9	11	PASS
	44	5220	4.14	6.23	11	PASS
	48	5240	4.14	5.97	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU52+26	36	5180	2.82	3.12
	44	5220	3.37	3.22
	48	5240	2.87	3.2

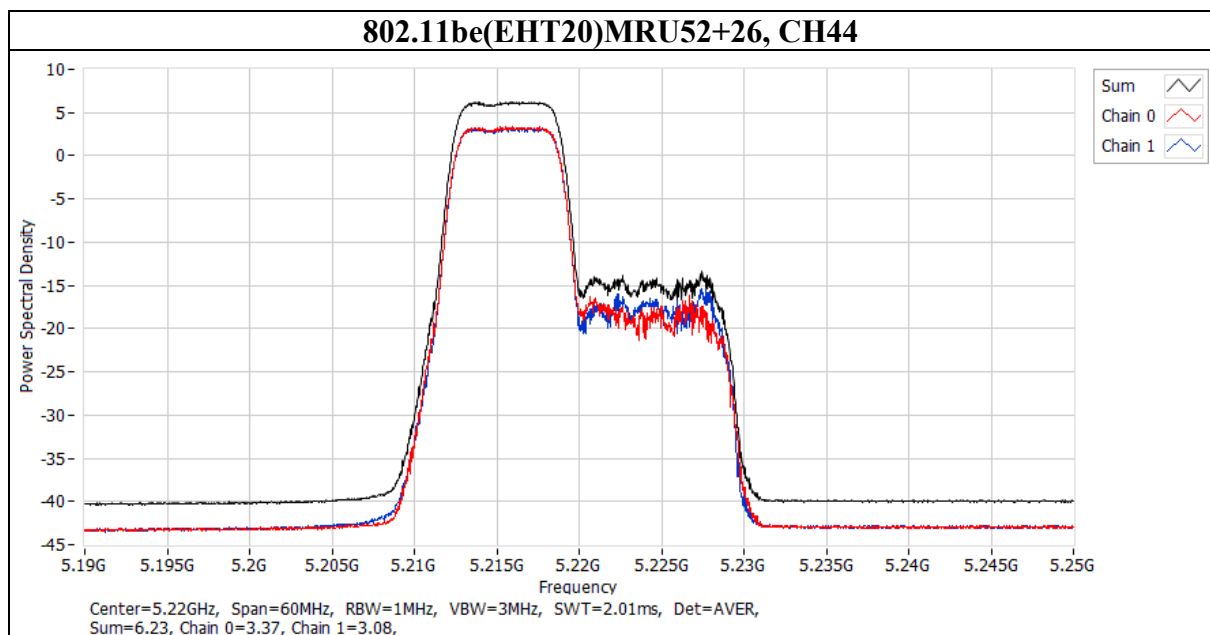


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU106+26	36	5180	4.14	6.12	11	PASS
	44	5220	4.14	6.23	11	PASS
	48	5240	4.14	6.22	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU106+26	36	5180	3.05	3.24
	44	5220	3.22	3.41
	48	5240	3.1	3.31

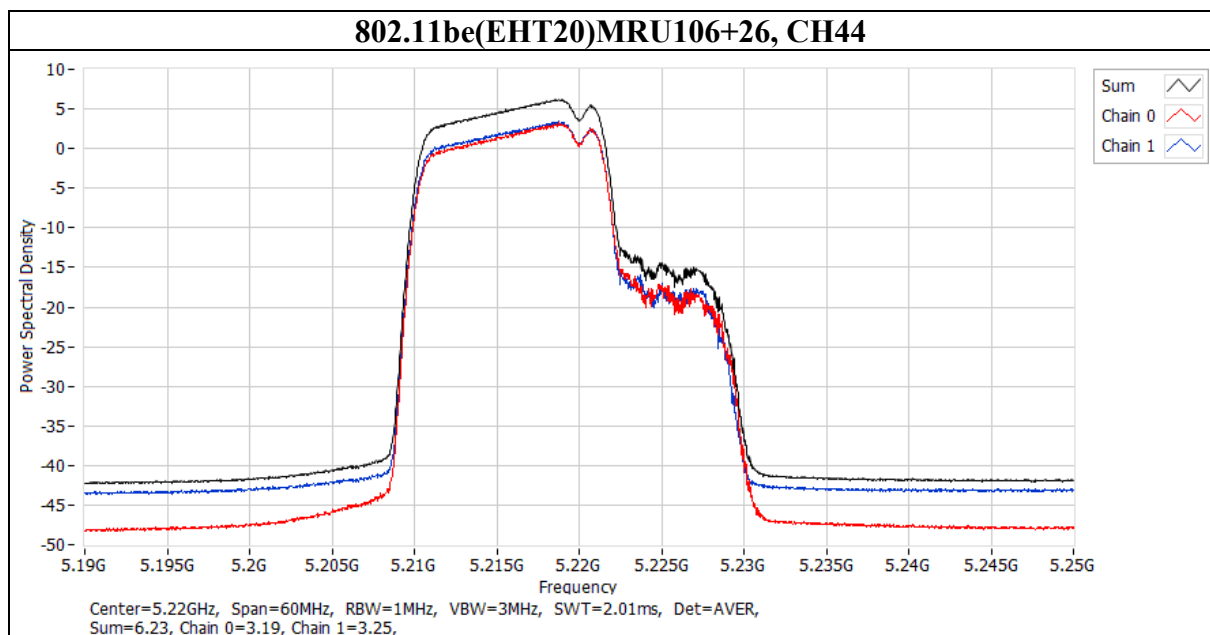


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)MRU484+242	42	5210	4.14	4	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)MRU484+242	42	5210	1.69	0.7

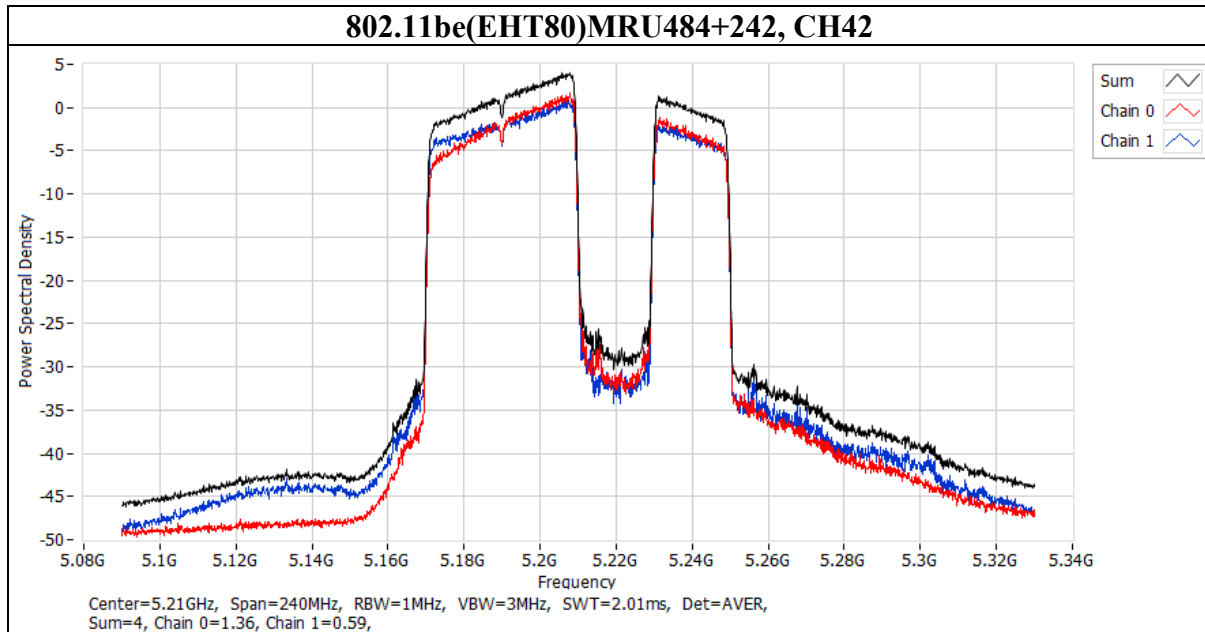


Mode (U-NII-1)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)Puncturing	42	5210	4.14	3.96	11	PASS

Mode (U-NII-1)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)Puncturing	42	5210	0.93	1.07

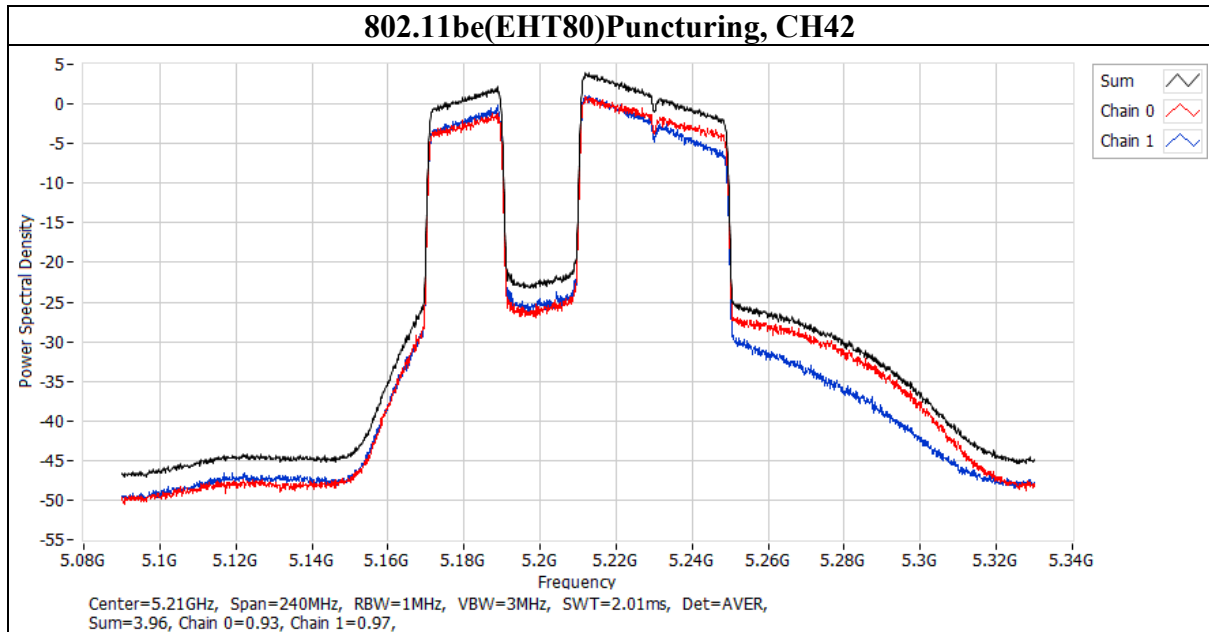


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU26	52	5260	4.14	10.9	11	PASS
	60	5300	4.14	10.84	11	PASS
	64	5320	4.14	10.75	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU26	52	5260	7.54	8.36
	60	5300	7.37	8.35
	64	5320	7.77	7.77

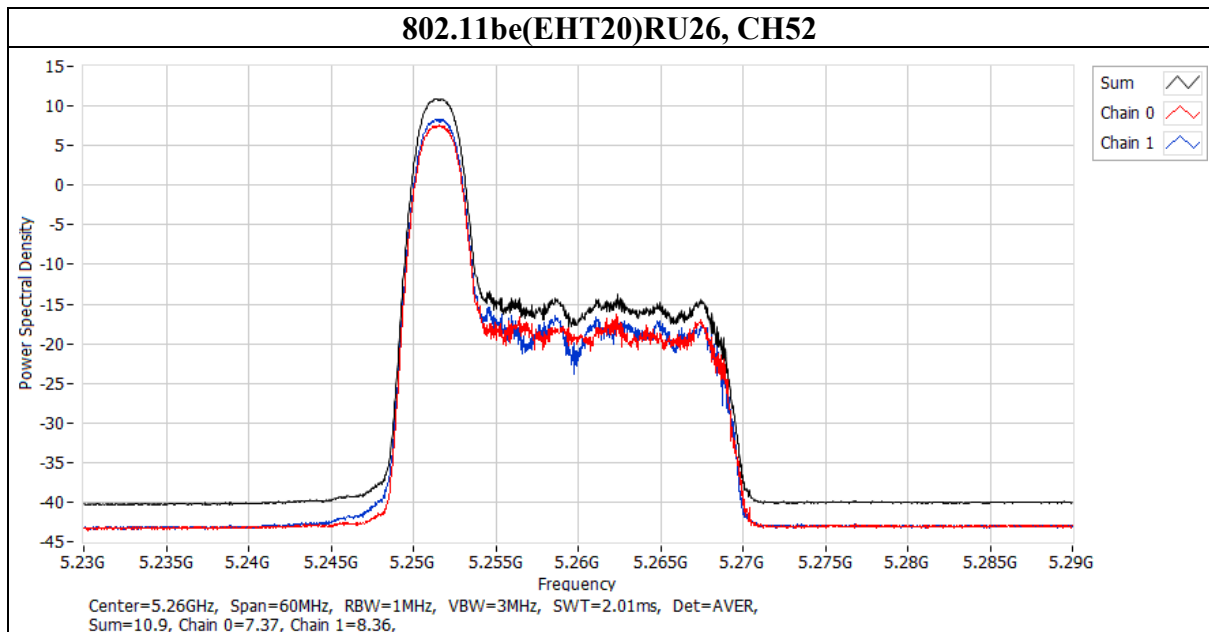


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU52	52	5260	4.14	10.61	11	PASS
	60	5300	4.14	10.66	11	PASS
	64	5320	4.14	10.89	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU52	52	5260	7.33	7.92
	60	5300	7.34	8.02
	64	5320	8.08	7.91

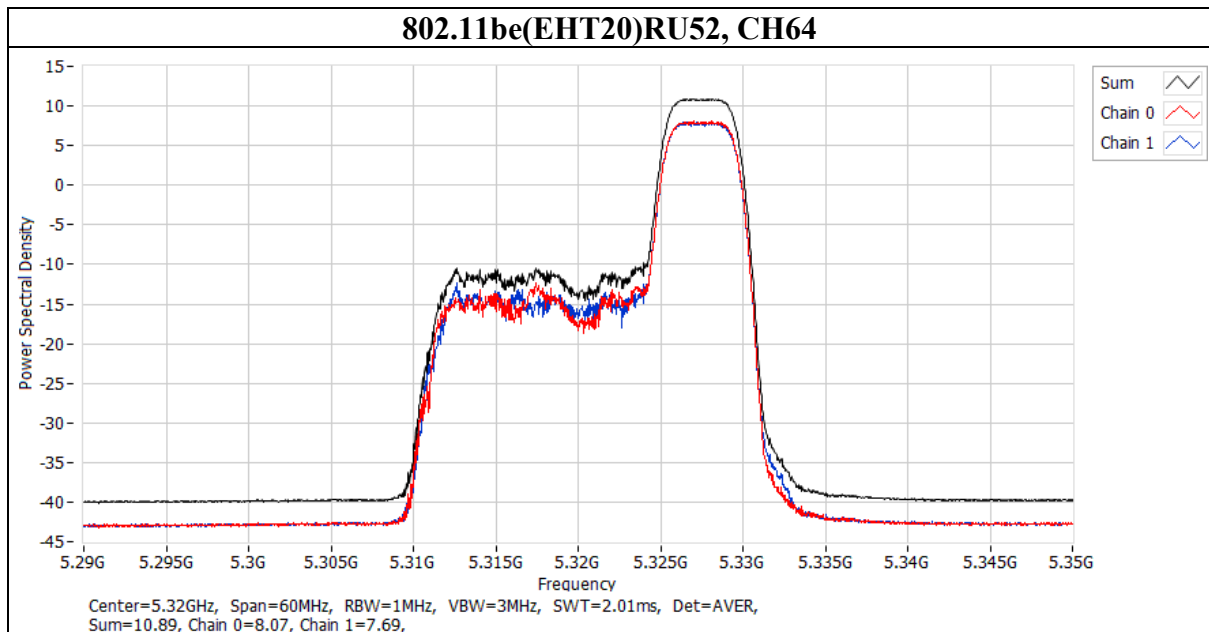


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU106	52	5260	4.14	10.6	11	PASS
	60	5300	4.14	10.59	11	PASS
	64	5320	4.14	10.61	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU106	52	5260	7.89	7.52
	60	5300	7.56	7.73
	64	5320	7.74	7.59

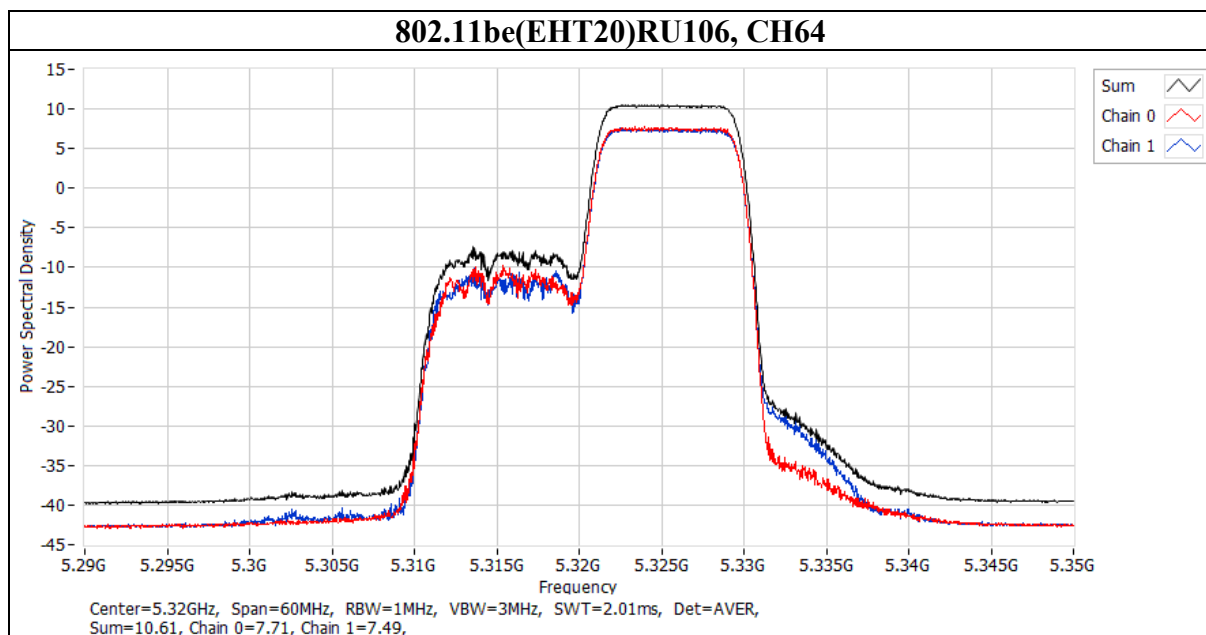


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU52+26	52	5260	4.14	10.81	11	PASS
	60	5300	4.14	10.83	11	PASS
	64	5320	4.14	10.71	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU52+26	52	5260	7.9	7.81
	60	5300	7.83	7.91
	64	5320	8.09	7.57

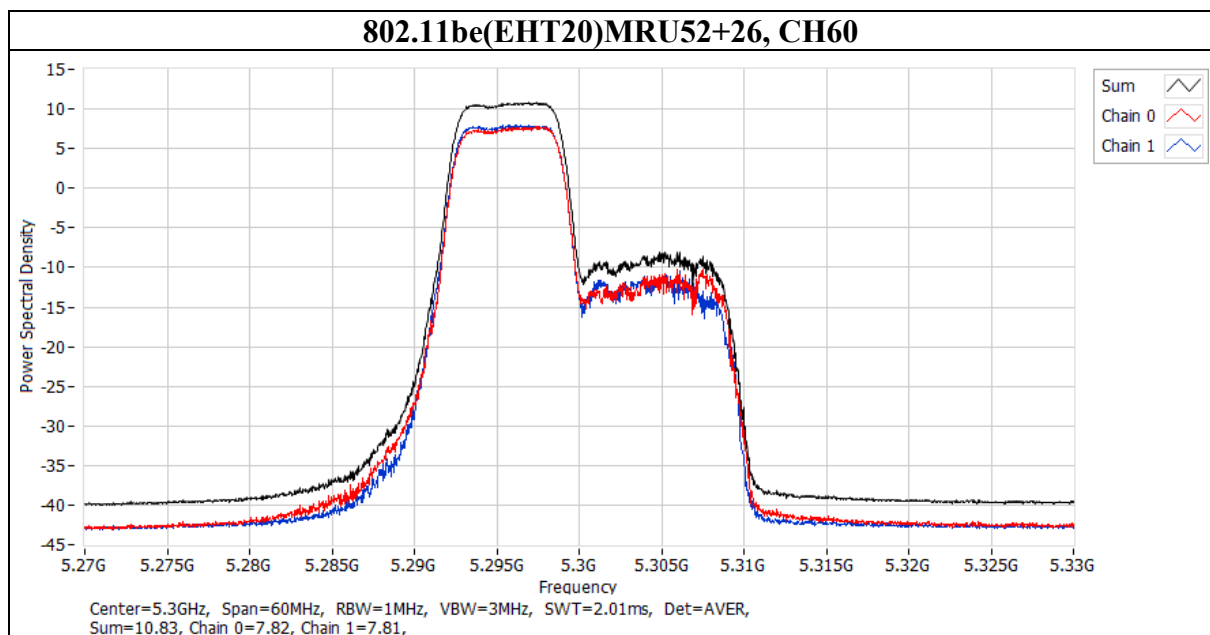


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU106+26	52	5260	4.14	10.86	11	PASS
	60	5300	4.14	10.59	11	PASS
	64	5320	4.14	10.5	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU106+26	52	5260	7.87	7.96
	60	5300	7.59	7.61
	64	5320	7.52	7.53

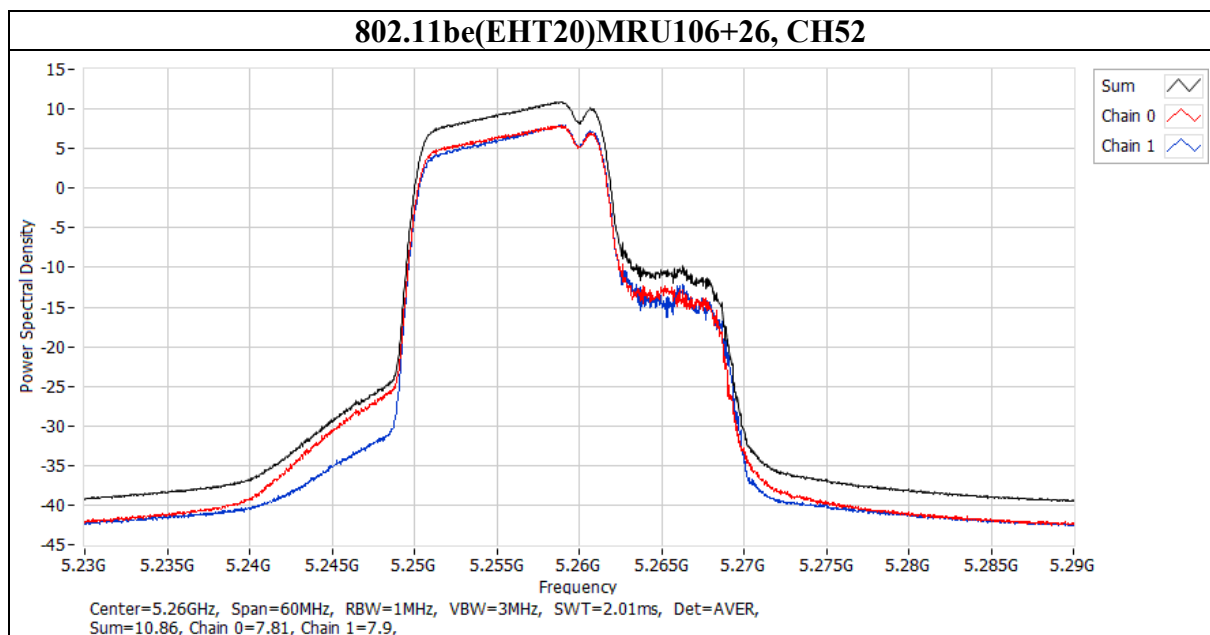


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)MRU484+242	58	5290	4.14	3.96	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)MRU484+242	58	5290	0.71	1.47

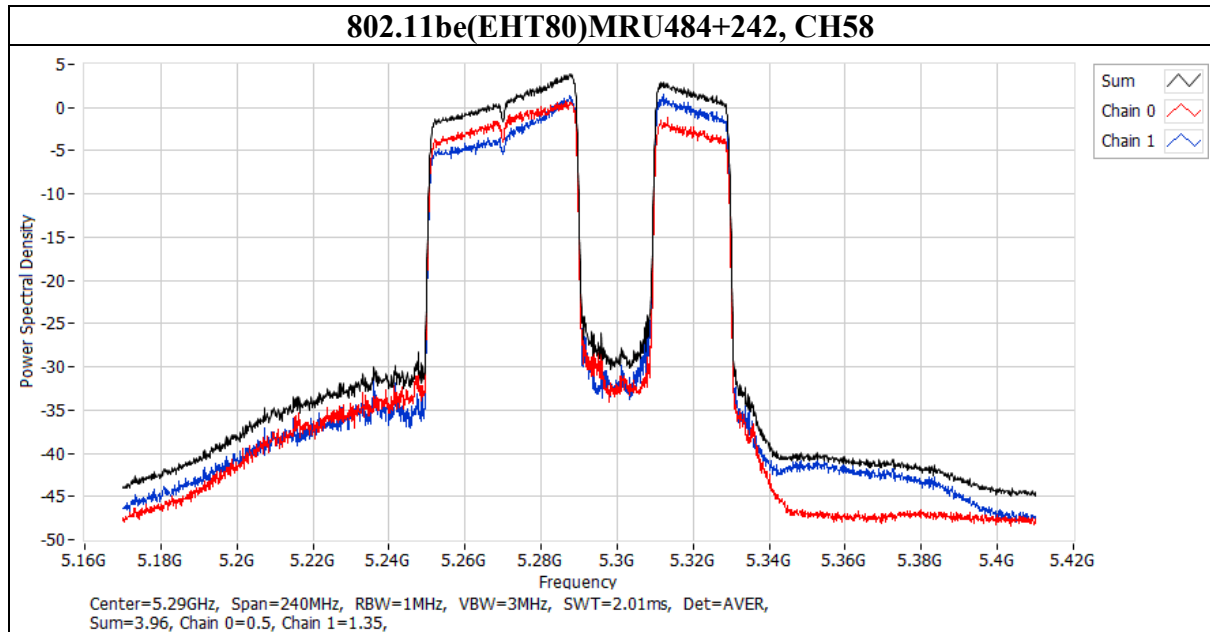


Mode (U-NII-2A)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)Puncturing	58	5290	4.14	3.42	11	PASS

Mode (U-NII-2A)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)Puncturing	58	5290	-0.23	1.17

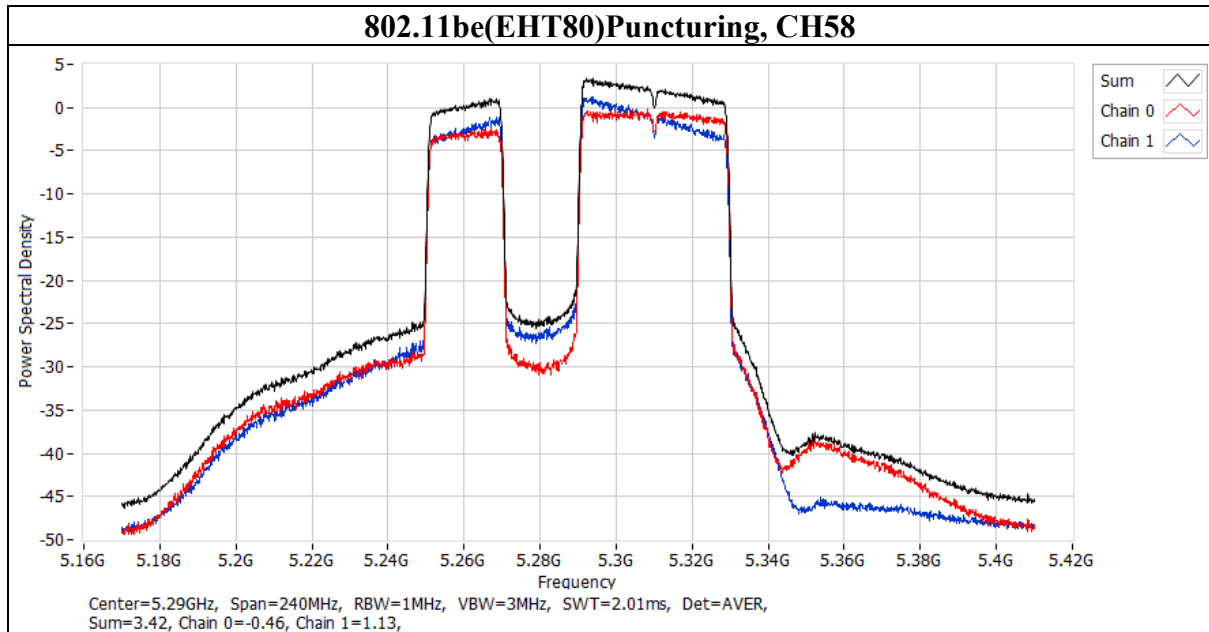


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU26	100	5500	4.14	10.78	11	PASS
	116	5580	4.14	10.51	11	PASS
	140	5700	4.14	10.9	11	PASS
	144	5720	4.14	10.84	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU26	100	5500	7.22	8.41
	116	5580	7.25	7.85
	140	5700	7.98	8.04
	144	5720	7.62	8.15

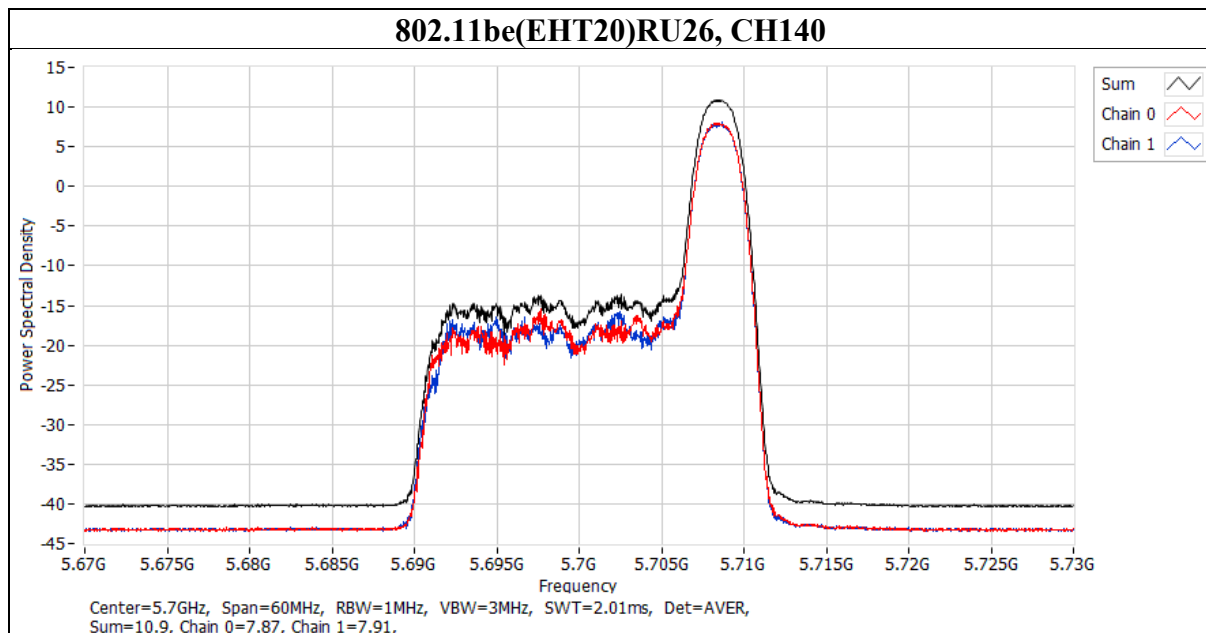


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU52	100	5500	4.14	10.54	11	PASS
	116	5580	4.14	10.78	11	PASS
	140	5700	4.14	10.56	11	PASS
	144	5720	4.14	10.7	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU52	100	5500	7.46	7.7
	116	5580	7.57	7.96
	140	5700	7.71	7.56
	144	5720	8.04	7.44

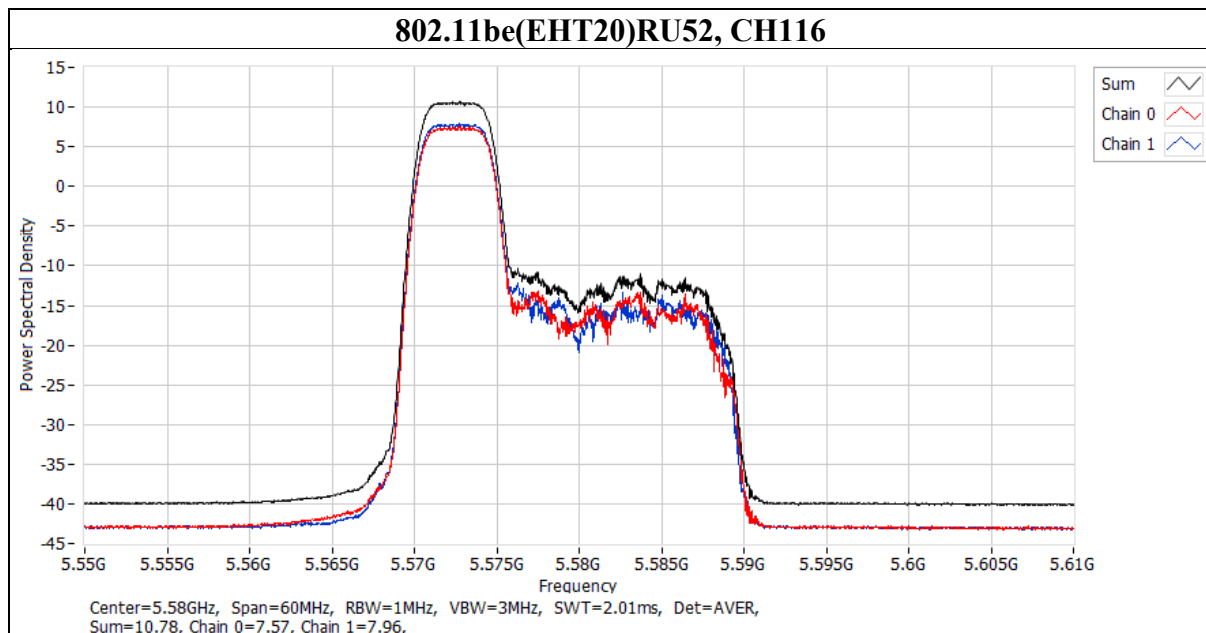


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)RU106	100	5500	4.14	10.66	11	PASS
	116	5580	4.14	10.74	11	PASS
	140	5700	4.14	10.63	11	PASS
	144	5720	4.14	10.87	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU106	100	5500	7.03	8.32
	116	5580	7.71	7.93
	140	5700	7.68	7.67
	144	5720	7.87	8.1

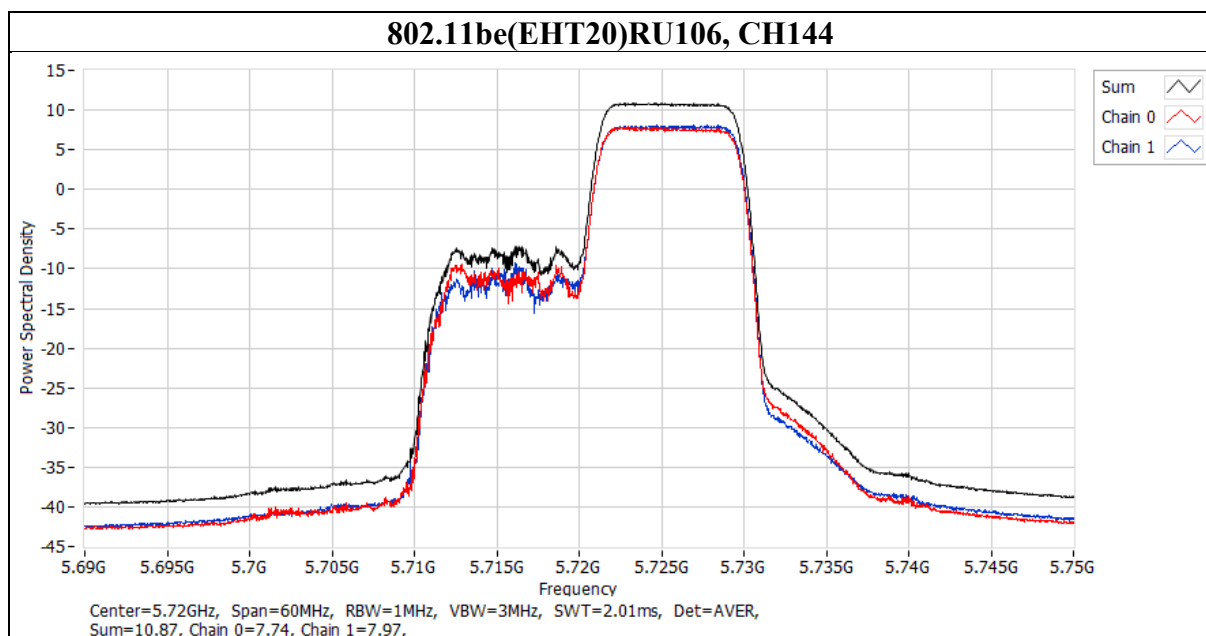


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU52+26	100	5500	4.14	10.64	11	PASS
	116	5580	4.14	10.67	11	PASS
	140	5700	4.14	10.87	11	PASS
	144	5720	4.14	10.75	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU52+26	100	5500	7.49	7.83
	116	5580	7.56	7.78
	140	5700	7.99	7.9
	144	5720	7.67	7.91

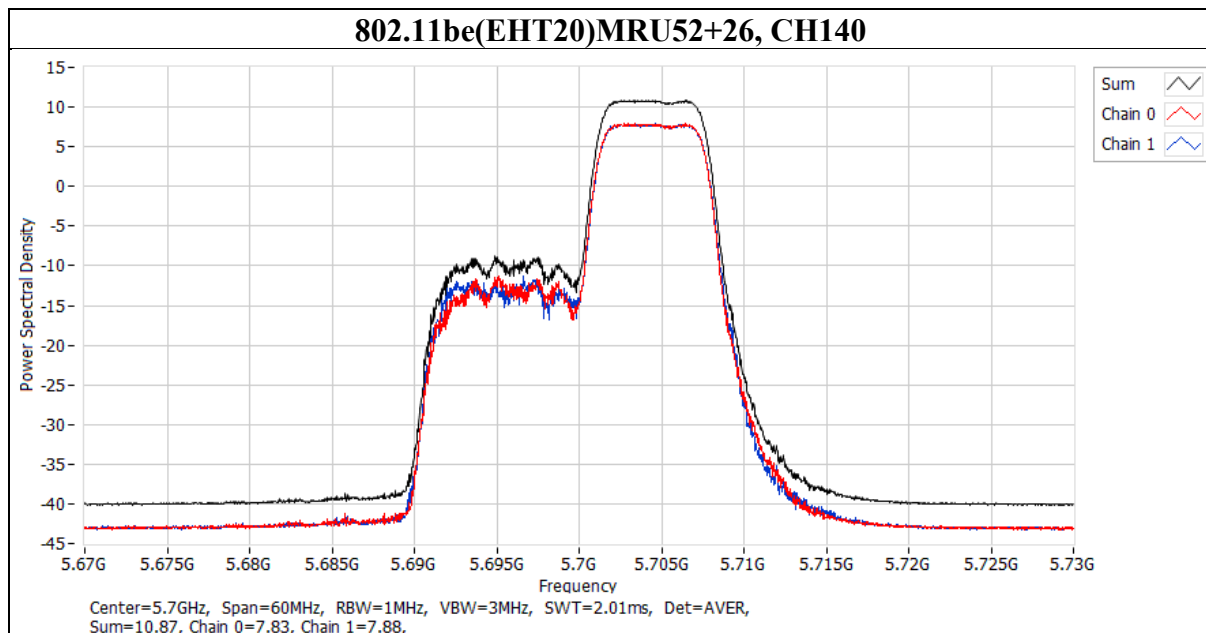


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT20)MRU106+26	100	5500	4.14	10.83	11	PASS
	116	5580	4.14	10.87	11	PASS
	140	5700	4.14	10.55	11	PASS
	144	5720	4.14	10.5	11	PASS

Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU106+26	100	5500	7.27	8.39
	116	5580	7.83	7.94
	140	5700	7.58	7.56
	144	5720	7.51	7.6

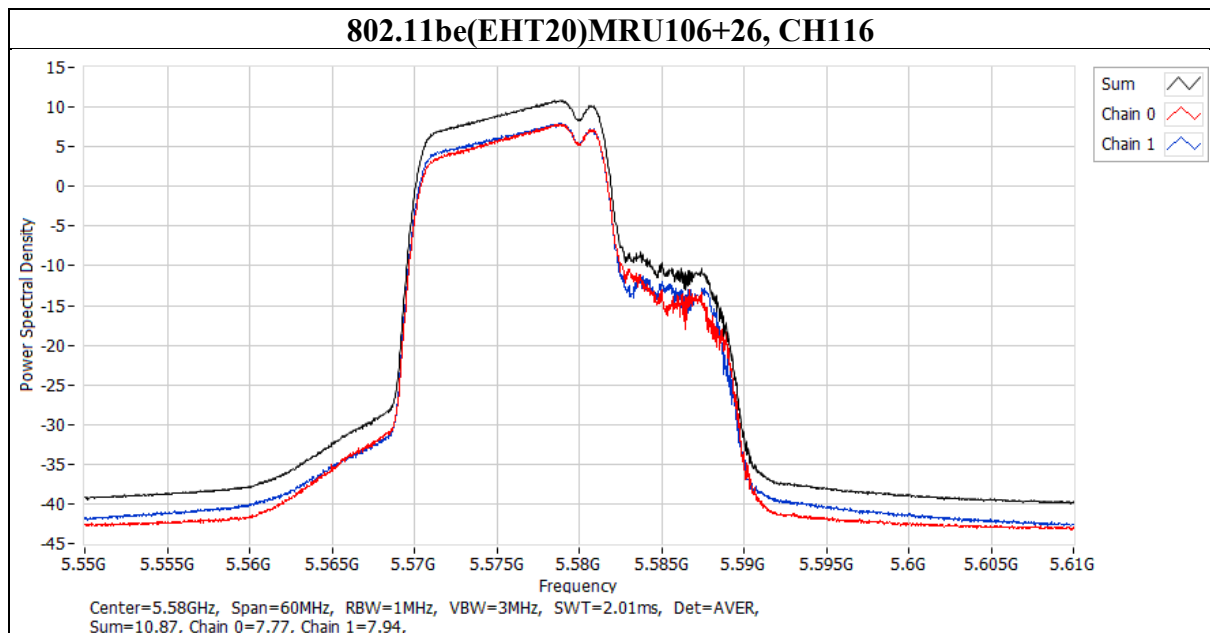


Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)MRU484+242	106	5530	4.14	3.15	11	PASS
	122	5610	4.14	3.49	11	PASS
	138	5690	4.14	3.51	11	PASS


Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)MRU484+242	106	5530	-0.78	1.13
	122	5610	0.65	0.62
	138	5690	0.62	0.76

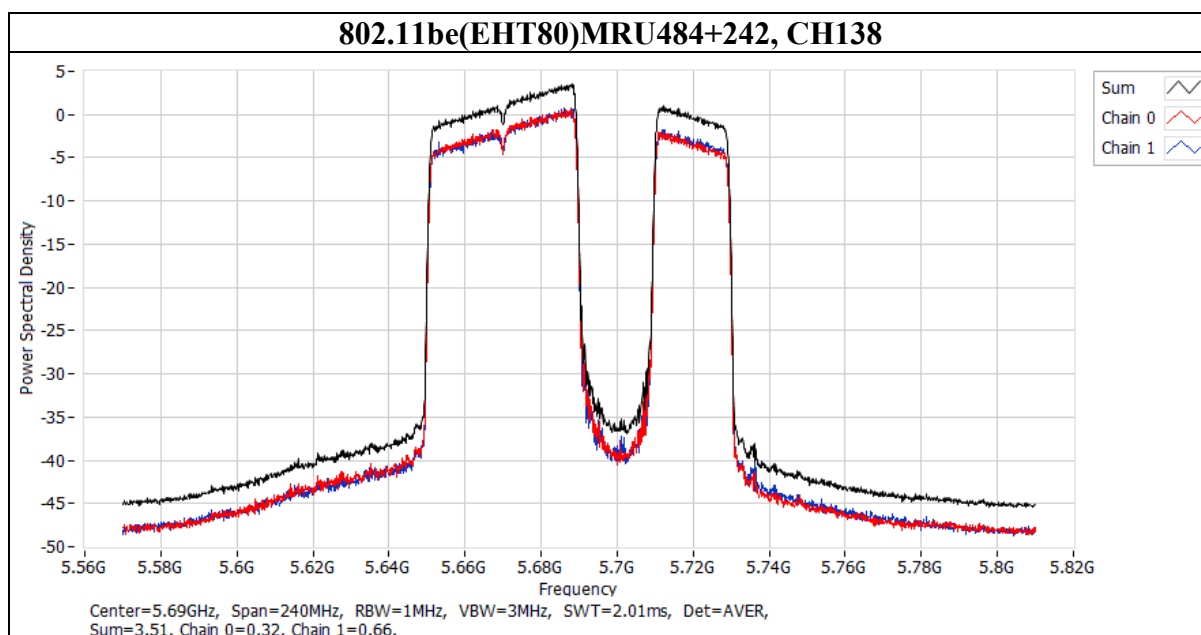

Mode (U-NII-2C)	CH	Freq (MHz)	Directional Gain (dBi)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11be(EHT80)Puncturing	106	5530	4.14	3.5	11	PASS
	122	5610	4.14	3.21	11	PASS
	138	5690	4.14	3.96	11	PASS


Mode (U-NII-2C)	CH	Freq (MHz)	PSD per Chain (dBm/MHz)	
			Chain 0	Chain 1
802.11be(EHT80)Puncturing	106	5530	0.84	0.76
	122	5610	0.75	0.04
	138	5690	1.54	0.93

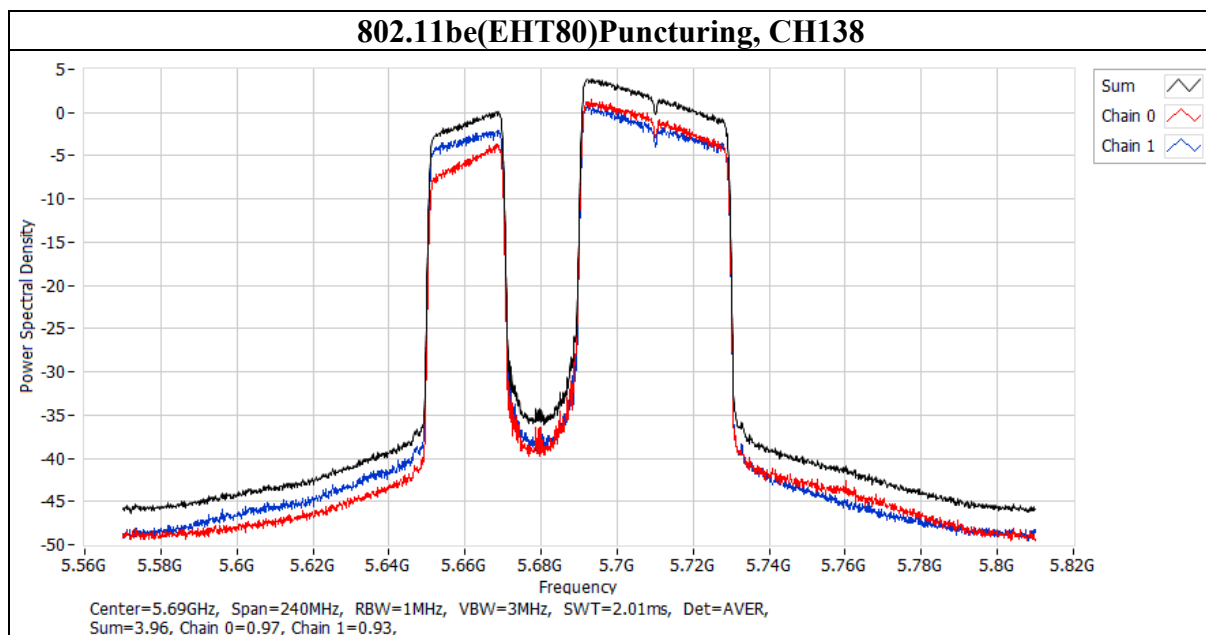

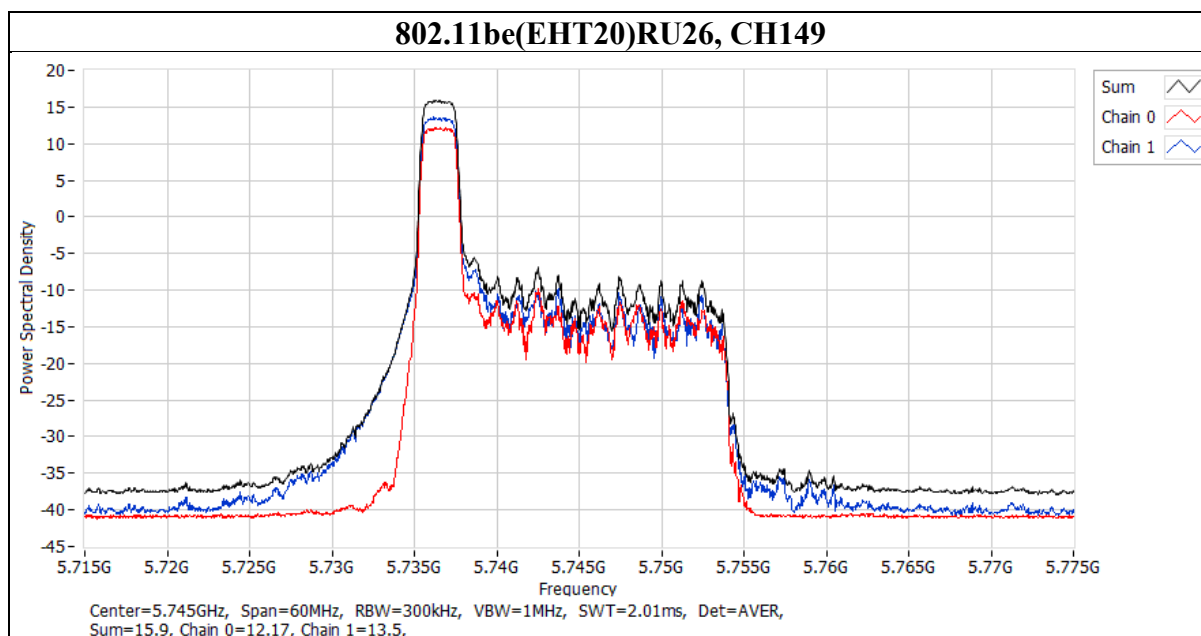


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT20)RU52	144	5720	2.22	4.14	10.52	30	PASS
	149	5745	2.22	4.14	15.43	30	PASS
	157	5785	2.22	4.14	13.75	30	PASS
	165	5825	2.22	4.14	14.25	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU52	144	5720	5.64	5.03
	149	5745	9.6	10.77
	157	5785	8.64	8.56
	165	5825	9.24	8.97

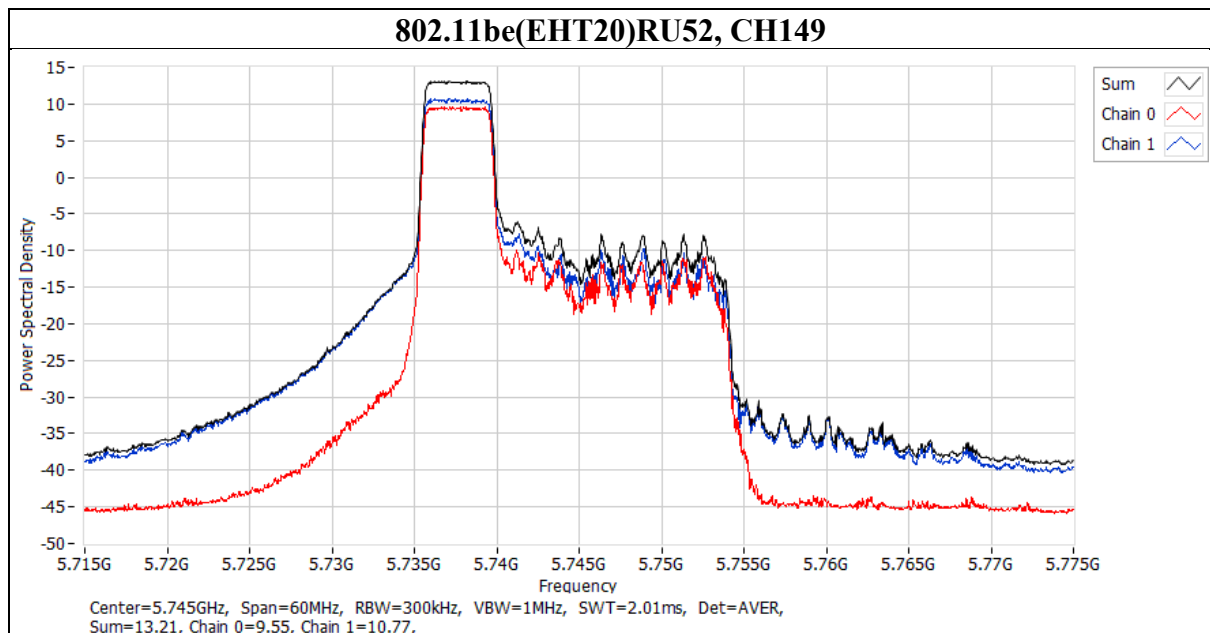


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT20)RU106	144	5720	2.22	4.14	10.61	30	PASS
	149	5745	2.22	4.14	12.51	30	PASS
	157	5785	2.22	4.14	10.94	30	PASS
	165	5825	2.22	4.14	11.26	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT20)RU106	144	5720	5.33	5.48
	149	5745	6.58	7.9
	157	5785	5.86	5.71
	165	5825	6.16	6.11

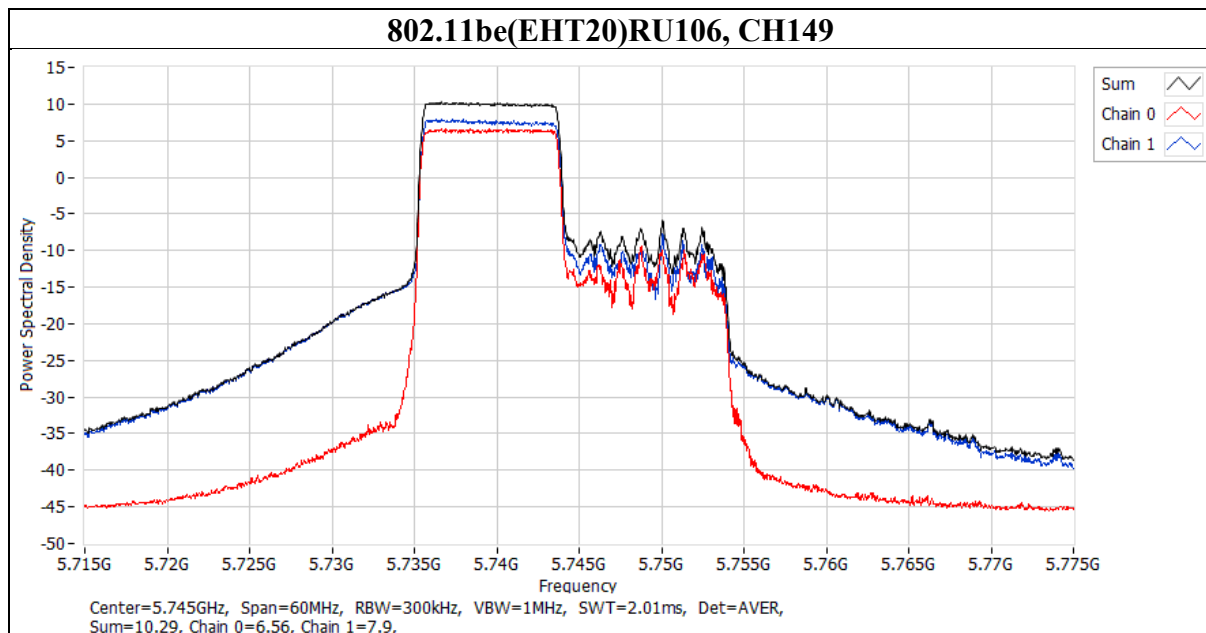


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT20)MRU52+26	144	5720	2.22	4.14	10.44	30	PASS
	149	5745	2.22	4.14	13.48	30	PASS
	157	5785	2.22	4.14	12.16	30	PASS
	165	5825	2.22	4.14	12.61	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU52+26	144	5720	5.21	5.43
	149	5745	8.35	8.33
	157	5785	7.18	6.8
	165	5825	7.54	7.43

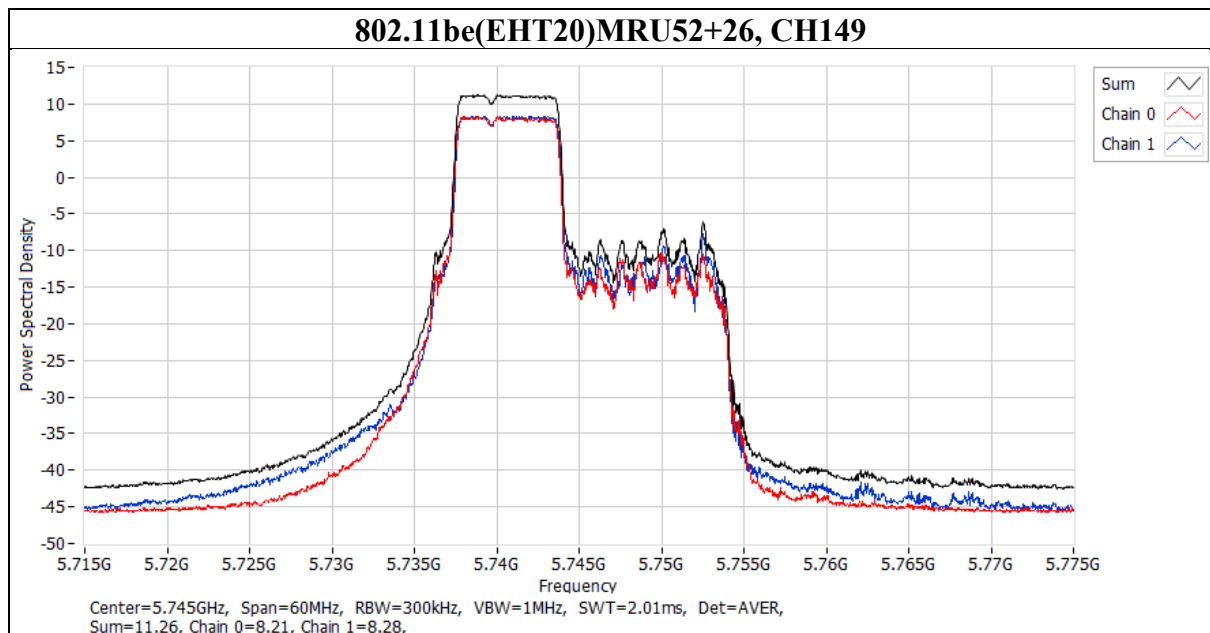


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT20)MRU106+ 26	144	5720	2.22	4.14	10.43	30	PASS
	149	5745	2.22	4.14	12.28	30	PASS
	157	5785	2.22	4.14	11.35	30	PASS
	165	5825	2.22	4.14	11.61	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT20)MRU106+26	144	5720	5.27	5.31
	149	5745	6.96	7.23
	157	5785	6.4	6.02
	165	5825	6.56	6.3

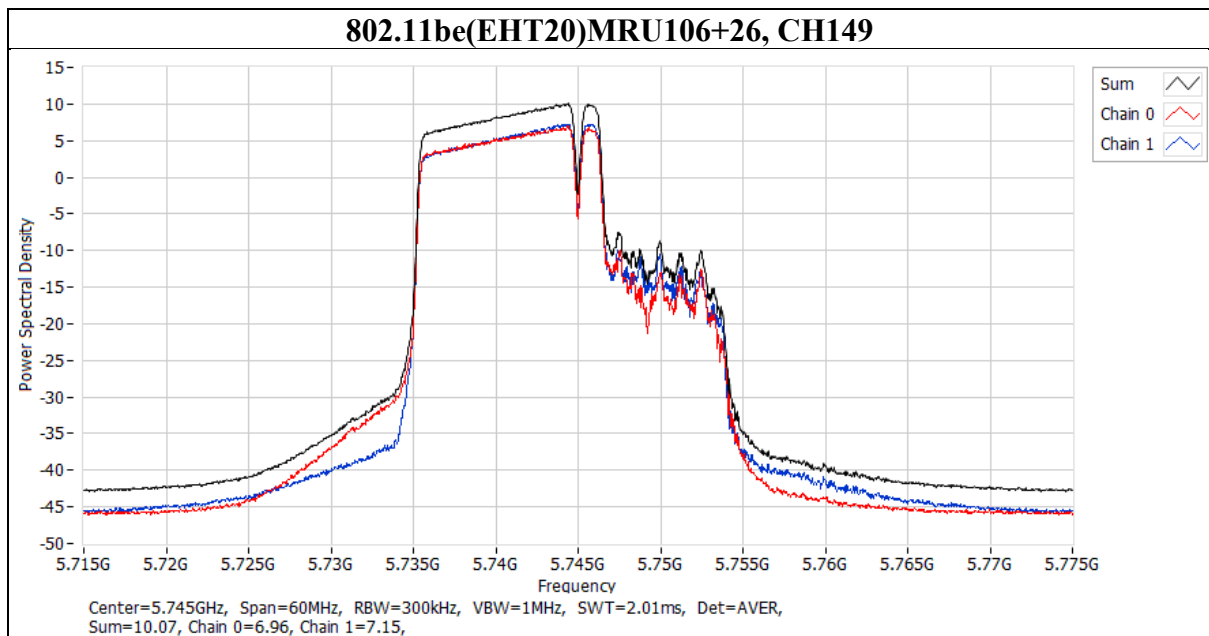


Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT80)MRU484+242	138	5690	2.22	4.14	3.28	30	PASS
	155	5775	2.22	4.14	4.11	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT80)MRU484+242	138	5690	-1.65	-1.76
	155	5775	-1.12	-0.95

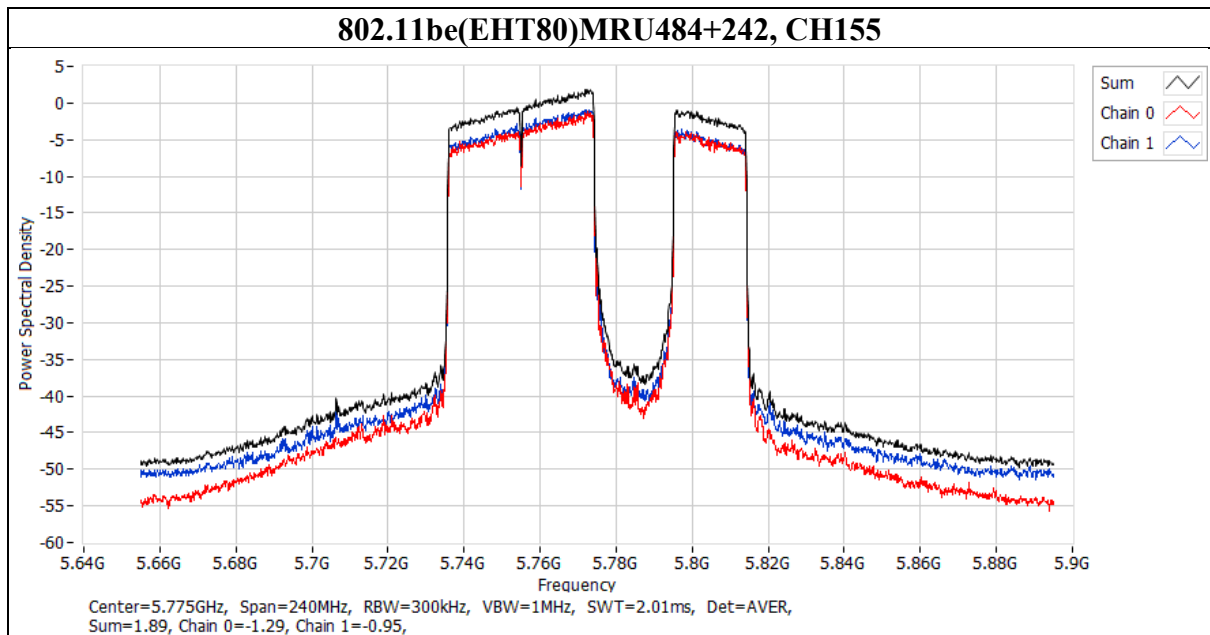

Mode (U-NII-3)	CH	Freq (MHz)	BWCF	Directional Gain (dBi)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11be(EHT80)Puncturing	138	5690	2.22	4.14	3.54	30	PASS
	155	5775	2.22	4.14	3.61	30	PASS

Mode (U-NII-3)	CH	Freq (MHz)	PSD per Chain (dBm/500kHz)	
			Chain 0	Chain 1
802.11be(EHT80)Puncturing	138	5690	-1.13	-1.52
	155	5775	-2.56	-0.55

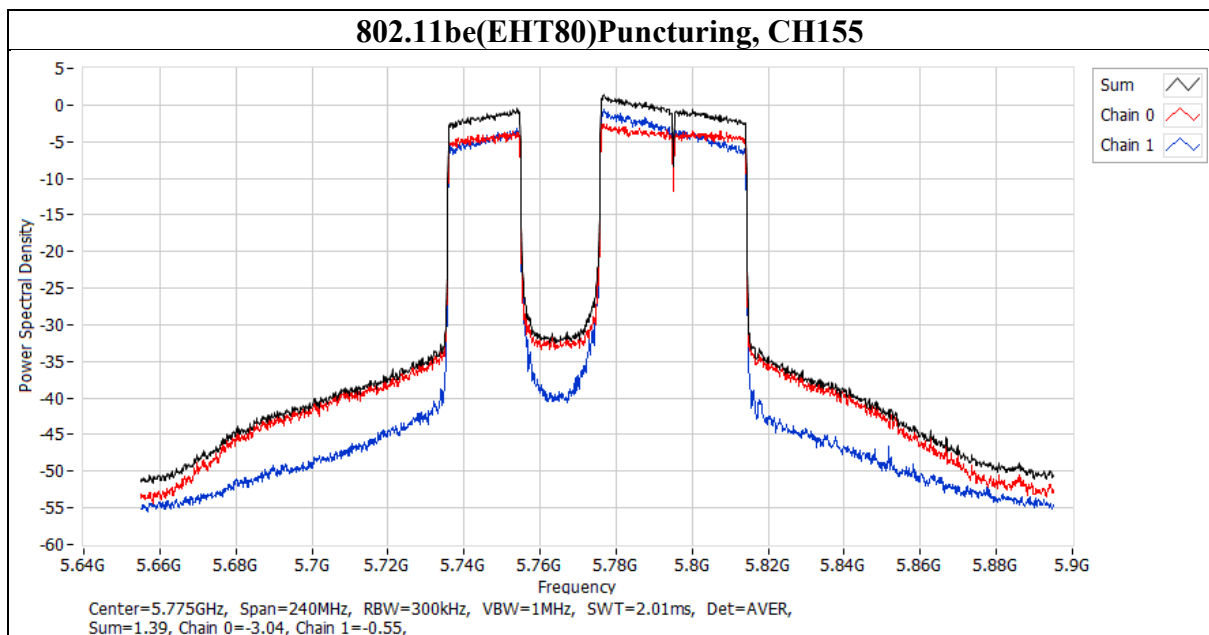

9.6. Frequency Stability


Requirements

The frequency of the carrier signal shall be maintained within band of operation.

Test procedure

- The EUT was placed inside the environmental test chamber and powered by nominal voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Test Setup

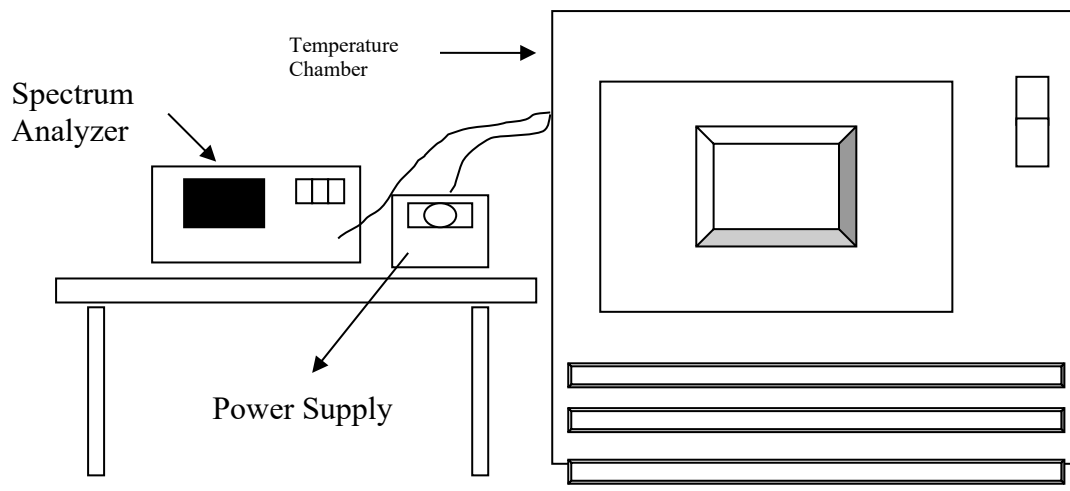

Test Data

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)
50	120	5180.0056	1.08	5180.003	0.58	5180.0058	1.12	5180.0021	0.41
40	120	5180.0111	2.14	5180.0091	1.76	5180.0134	2.59	5180.0116	2.24
30	120	5180.0058	1.12	5180.0023	0.44	5180.0053	1.02	5180.005	0.97
20	120	5179.9925	-1.45	5179.9946	-1.04	5179.9937	-1.22	5179.9937	-1.22
10	120	5179.9813	-3.61	5179.9826	-3.36	5179.9812	-3.63	5179.9828	-3.32
0	120	5179.976	-4.63	5179.9755	-4.73	5179.9766	-4.52	5179.9757	-4.69
-10	120	5180.0048	0.93	5180.0067	1.29	5180.0052	1.00	5180.0098	1.89
-20	120	5180.0268	5.17	5180.0252	4.86	5180.0269	5.19	5180.0248	4.79
-30	120	5180.0168	3.24	5180.0163	3.15	5180.0146	2.82	5180.0181	3.49
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)	Measured Frequency (MHz)	Freq. Drift (ppm)
20	138	5179.9918	-1.58	5179.9939	-1.18	5179.9942	-1.12	5179.993	-1.35
20	120	5179.9925	-1.45	5179.9946	-1.04	5179.9937	-1.22	5179.9937	-1.22
20	102	5179.9927	-1.41	5179.9953	-0.91	5179.9943	-1.10	5179.9931	-1.33

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

9.7. Radiated Spurious Emission

Requirements

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	^{*1} beyond 75 MHz or more above of the band edge. ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		
5850~5895 MHz	RSS-247 clause 6.2.5.3	5725 MHz and below: PK:27 (dBm/MHz) ^{*1} PK:15.6 (dBm/MHz) ^{*2} PK:10 (dBm/MHz) ^{*3} PK:-27 (dBm/MHz) ^{*4} 5895 MHz and above: AV:-27 (dBm/MHz) ^{*a} AV:15&-7 (dBm/MHz) ^{*b} AV:-5&-27 (dBm/MHz) ^{*c}	5725 MHz and below: PK:122.2 (dBμV/m) ^{*1} PK:110.8 (dBμV/m) ^{*2} PK:105.2 (dBμV/m) ^{*3} PK:68.2 (dBμV/m) ^{*4} 5895 MHz and above: AV: 68.2 (dBμV/m) ^{*a} AV:110.2&88.2 (dBμV/m) ^{*b} AV:90.2&68.2 (dBμV/m) ^{*c}
	^{*1} 5 MHz below the 5725 MHz band edge. ^{*2} 5 MHz below the 5725 MHz band edge decreasing linearly to 10 dBm/MHz at 25 MHz below ^{*3} 25 MHz below the 5725 MHz band edge decreasing linearly to -27 dBm/MHz at 75 MHz below ^{*4} More than 75 MHz below the 5725 MHz band edge. ^{*a} Fixed outdoor access points and fixed outdoor client devices shall not exceed -27 dBm/MHz e.i.r.p. spectral density at or above the 5895 MHz band edge. ^{*b} Indoor access points or indoor subordinate devices shall not exceed 15 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -7 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz. ^{*c} Client devices shall not exceed -5 dBm/MHz e.i.r.p. spectral density at the 5895 MHz band edge and shall decrease linearly to not exceed -27 dBm/MHz e.i.r.p. spectral density at or above 5925 MHz.		

Note:

The following formula is used to convert the effective isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Test Procedures

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

Peak

Frequency	RBW	VBW
9 kHz~150 kHz	200 Hz	600 Hz
150 kHz~30 MHz	10 kHz	30 kHz
30 MHz~1 GHz	120 kHz	360 kHz
Above 1GHz	1 MHz	3 MHz

Average for above 1GHz

RBW	VBW
1MHz	Refer to section 6.6 for duty cycle.

- d. All modes of operation were investigated (includes all external accessories) and the worst-case emissions are reported, the other emission levels were low against the limit.
- e. Test data of Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
- f. Test data of Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
- g. Test data of Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
- h. Test data of Notation "@" = Fundamental Frequency
- i. Test data of Notation "*" = Only required peak limit or the peak result under 20 dB above and complies with AVG limit, AVG result is deemed to comply with AVG limit.

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948


Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

Test Setup

<Frequency Range 9 kHz ~ 30 MHz>

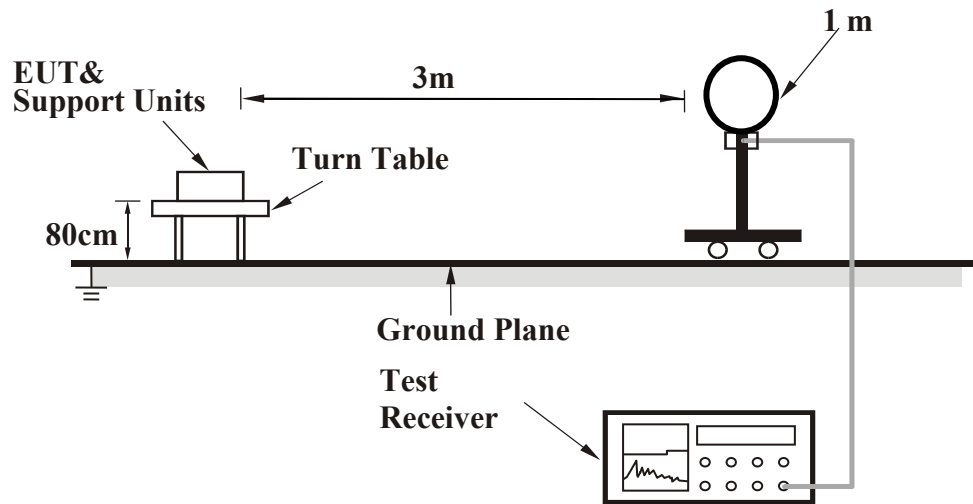

<Frequency Range 30 MHz ~ 1 GHz>

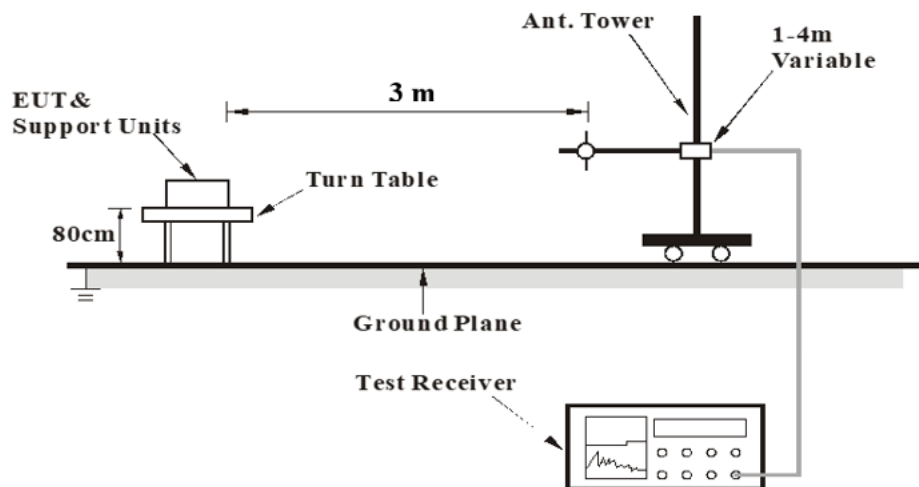

Underwriters Laboratories Taiwan Co., Ltd.


Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1

<Frequency Range above 1 GHz>

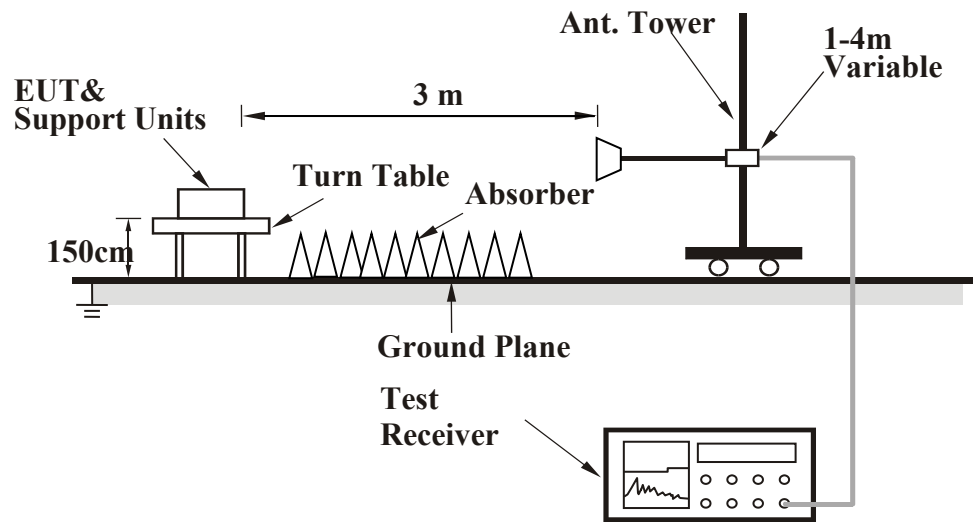


For the actual test configuration, please refer to the Setup Configurations.

Test Data

Above 1 GHz

Mode	802.11a	Channel	36
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5092.05	30.63	19.63	50.26	54	-3.74	AVG
		5136.85	42.52	19.73	62.25	74	-11.75	PK
	@	5180	87.93	19.67	107.6	N/A	N/A	PK
	@	5180	82.54	19.67	102.21	N/A	N/A	AVG
Vertical		5071.4	30.68	19.56	50.24	54	-3.76	AVG
		5087.15	41.52	19.61	61.13	74	-12.87	PK
	@	5180	85.35	19.67	105.02	N/A	N/A	PK
	@	5180	82.09	19.67	101.76	N/A	N/A	AVG

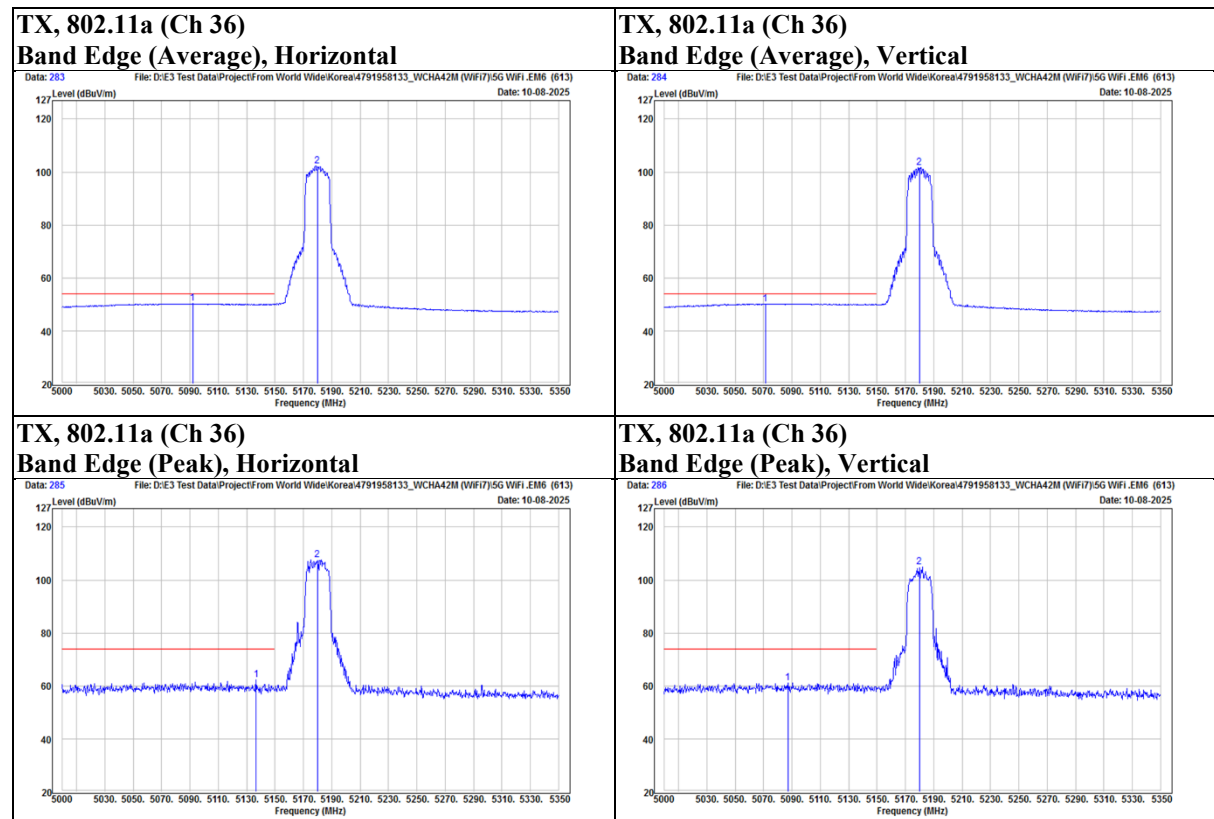

Underwriters Laboratories Taiwan Co., Ltd.

Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan


Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: Form-ULID-004739 (DCS:17-EM-F0878) / 6.1


Mode	802.11a	Channel	44
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5068.95	41.77	19.56	61.33	74	-12.67	PK
		5095.55	30.67	19.64	50.31	54	-3.69	AVG
	@	5220	88.28	19.48	107.76	N/A	N/A	PK
	@	5220	82.74	19.48	102.22	N/A	N/A	AVG
Vertical		5056.35	42.51	19.52	62.03	74	-11.97	PK
		5075.25	30.67	19.58	50.25	54	-3.75	AVG
	@	5220	90.85	19.48	110.33	N/A	N/A	PK
	@	5220	82.2	19.48	101.68	N/A	N/A	AVG

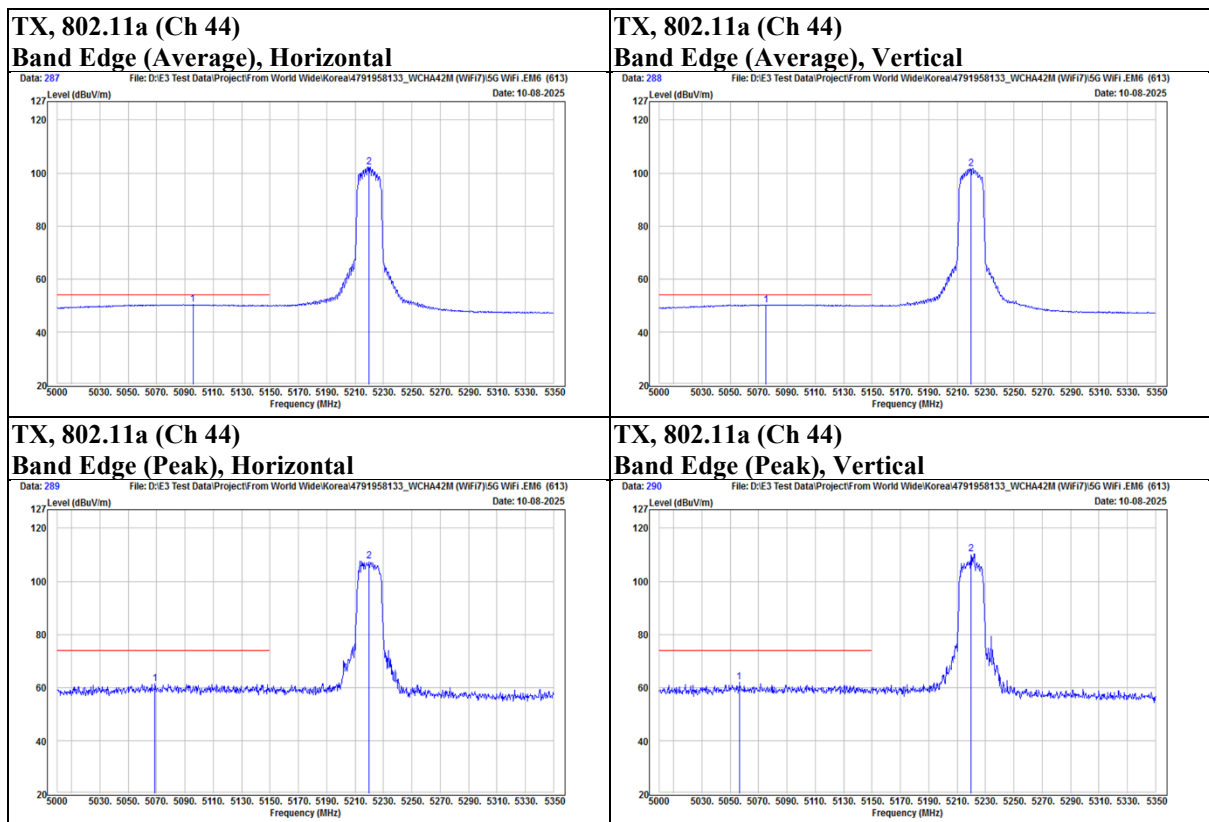


Mode	802.11a	Channel	48
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5075.6	41.8	19.58	61.38	74	-12.62	PK
		5098	30.69	19.65	50.34	54	-3.66	AVG
	@	5240	89.38	19.35	108.73	N/A	N/A	PK
	@	5240	81.64	19.35	100.99	N/A	N/A	AVG
Vertical		5072.8	30.66	19.57	50.23	54	-3.77	AVG
		5124.95	42.67	19.71	62.38	74	-11.62	PK
	@	5240	87.82	19.35	107.17	N/A	N/A	PK
	@	5240	81.23	19.35	100.58	N/A	N/A	AVG

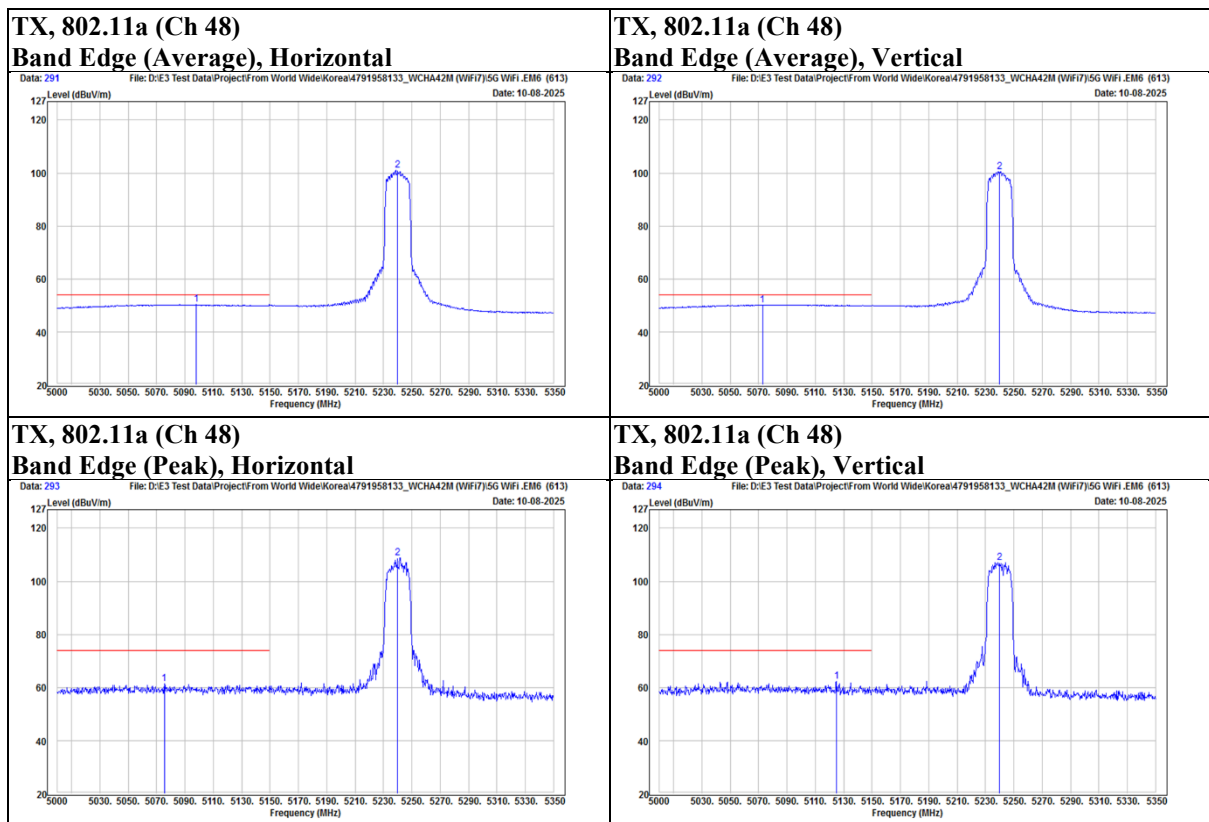


Mode	802.11a	Channel	52
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5260	89.04	19.24	108.28	N/A	N/A	PK
	@	5260	81.88	19.24	101.12	N/A	N/A	AVG
		5422.2	39.73	19.75	59.48	74	-14.52	PK
		5456.4	28.2	19.93	48.13	54	-5.87	AVG
Vertical	@	5260	88.73	19.24	107.97	N/A	N/A	PK
	@	5260	81.28	19.24	100.52	N/A	N/A	AVG
		5376.9	40.69	19.47	60.16	74	-13.84	PK
		5456.7	28.18	19.93	48.11	54	-5.89	AVG

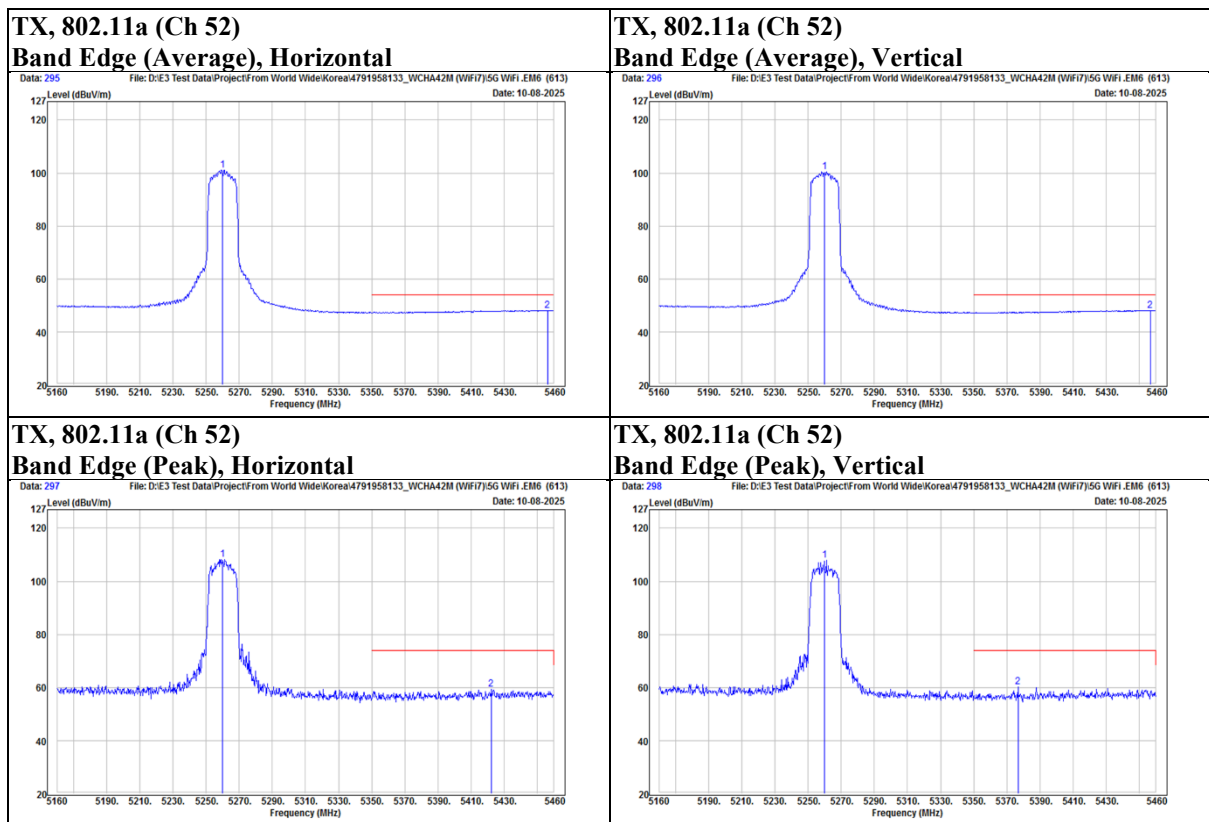


Mode	802.11a	Channel	60
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5300	91.69	19.08	110.77	N/A	N/A	PK
	@	5300	83.05	19.08	102.13	N/A	N/A	AVG
		5435.1	28.3	19.82	48.12	54	-5.88	AVG
		5442.9	40.44	19.86	60.3	74	-13.7	PK
Vertical	@	5300	88.23	19.08	107.31	N/A	N/A	PK
	@	5300	79.64	19.08	98.72	N/A	N/A	AVG
		5422.8	39.32	19.75	59.07	74	-14.93	PK
		5453.4	28.07	19.92	47.99	54	-6.01	AVG

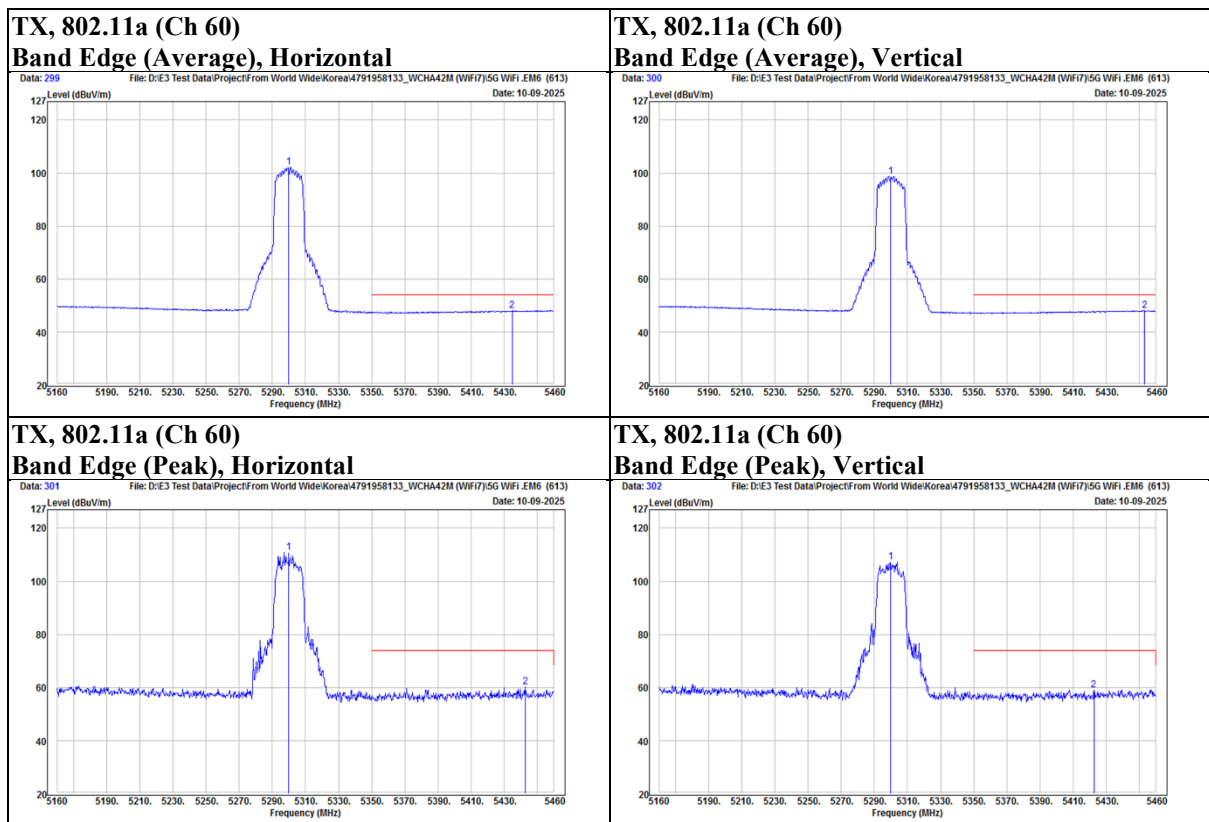


Mode	802.11a	Channel	64
------	---------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5320	90.98	19.17	110.15	N/A	N/A	PK
	@	5320	82.95	19.17	102.12	N/A	N/A	AVG
		5458.5	40.03	19.94	59.97	74	-14.03	PK
		5458.5	28.13	19.94	48.07	54	-5.93	AVG
Vertical	@	5320	87.76	19.17	106.93	N/A	N/A	PK
	@	5320	78.7	19.17	97.87	N/A	N/A	AVG
		5445.6	40.25	19.87	60.12	74	-13.88	PK
		5454.6	28.17	19.92	48.09	54	-5.91	AVG

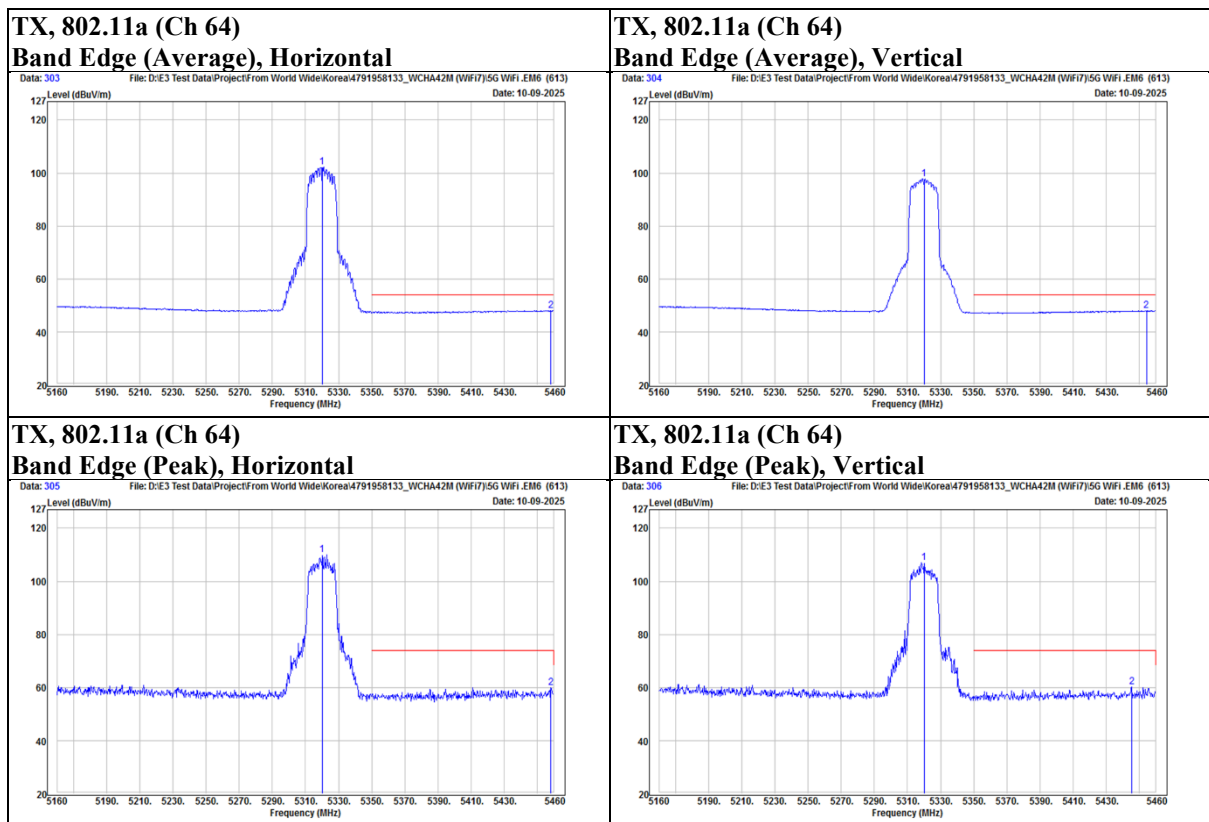


Mode	802.11a	Channel	100
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5440.25	39.65	19.85	59.5	74	-14.5	PK
		5454.95	28.36	19.92	48.28	54	-5.72	AVG
		5464.05	39.87	19.97	59.84	68.2	-8.36	PK
	@	5500	89.34	20.13	109.47	N/A	N/A	PK
	@	5500	81.7	20.13	101.83	N/A	N/A	AVG
Vertical		5409.45	39.98	19.68	59.66	74	-14.34	PK
		5454.95	28.21	19.92	48.13	54	-5.87	AVG
		5460.2	38.43	19.95	58.38	68.2	-9.82	PK
	@	5500	88.36	20.13	108.49	N/A	N/A	PK
	@	5500	79.74	20.13	99.87	N/A	N/A	AVG

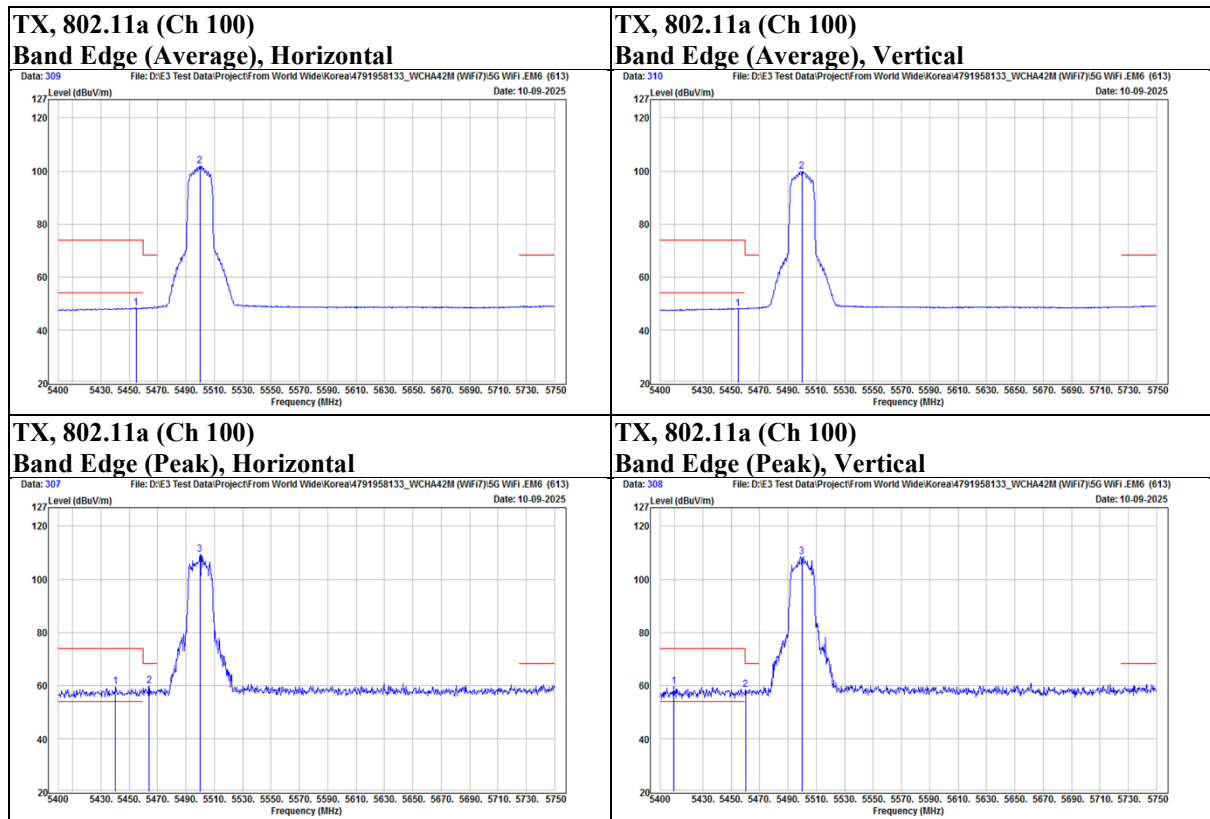


Mode	802.11a	Channel	116
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5418.55	39.36	19.72	59.08	74	-14.92	PK
		5459.15	28.28	19.95	48.23	54	-5.77	AVG
		5470	38.55	20	58.55	68.2	-9.65	PK
	@	5580	89.73	20.08	109.81	N/A	N/A	PK
	@	5580	82.76	20.08	102.84	N/A	N/A	AVG
		5735.65	40.48	20.3	60.78	68.2	-7.42	PK
Vertical		5413.3	40.11	19.69	59.8	74	-14.2	PK
		5458.8	28.02	19.94	47.96	54	-6.04	AVG
		5464.4	39.73	19.97	59.7	68.2	-8.5	PK
	@	5580	86.92	20.08	107	N/A	N/A	PK
	@	5580	79.57	20.08	99.65	N/A	N/A	AVG
		5741.6	39.73	20.35	60.08	68.2	-8.12	PK

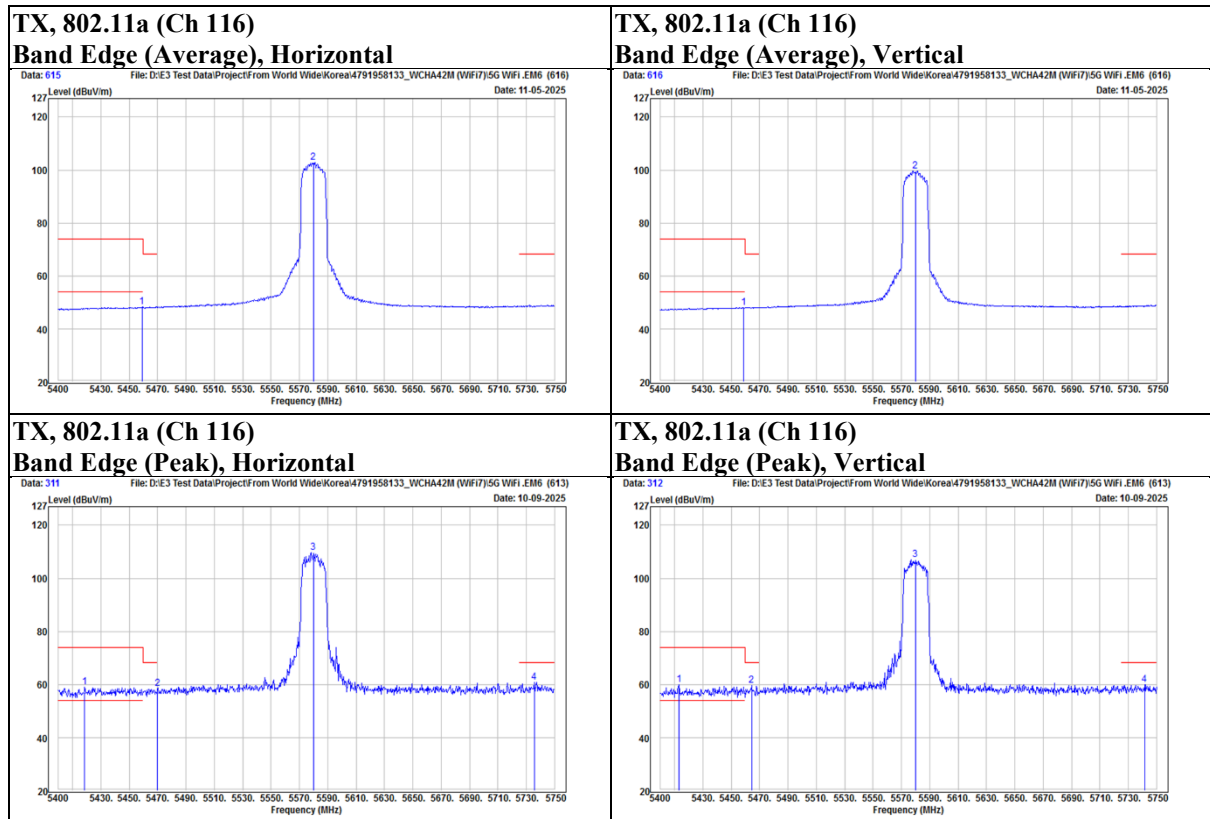


Mode	802.11a	Channel	140
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5429.75	39.81	19.79	59.6	74	-14.4	PK
		5459.5	28.28	19.95	48.23	54	-5.77	AVG
		5464.75	39.99	19.97	59.96	68.2	-8.24	PK
	@	5700	91.51	19.96	111.47	N/A	N/A	PK
	@	5700	83.13	19.96	103.09	N/A	N/A	AVG
		5738.8	40.23	20.33	60.56	68.2	-7.64	PK
Vertical		5430.1	40.2	19.79	59.99	74	-14.01	PK
		5453.55	28.1	19.92	48.02	54	-5.98	AVG
		5467.9	39.13	19.99	59.12	68.2	-9.08	PK
	@	5700	87.4	19.96	107.36	N/A	N/A	PK
	@	5700	79.48	19.96	99.44	N/A	N/A	AVG
		5748.25	39.39	20.43	59.82	68.2	-8.38	PK

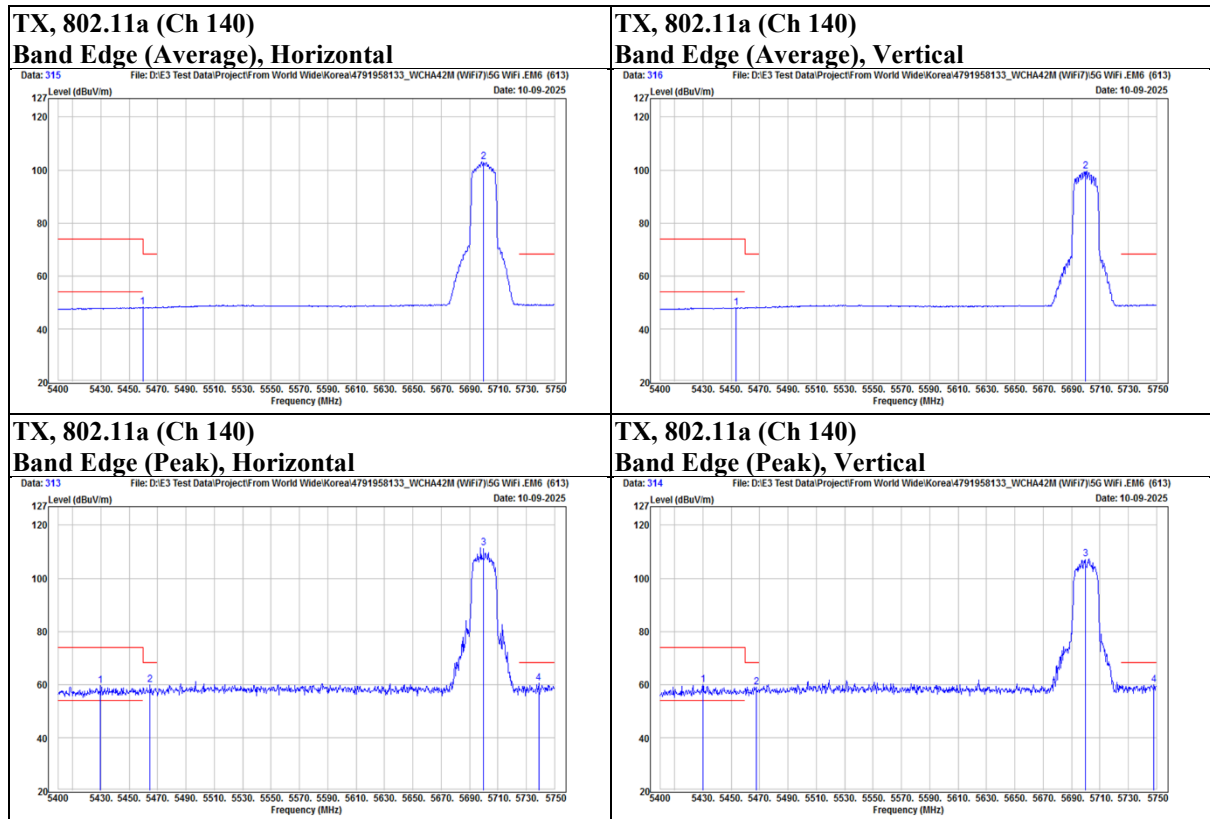


Mode	802.11a	Channel	149
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal		5560	40.29	20.06	60.35	68.2	-7.85	PK
		5669	40.76	20.01	60.77	82.3	-21.53	PK
	@	5745	90.24	20.39	110.63	N/A	N/A	PK
Vertical		5622	42.05	20.09	62.14	68.2	-6.06	PK
		5661.5	39.9	20.03	59.93	76.74	-16.81	PK
	@	5745	85.34	20.39	105.73	N/A	N/A	PK

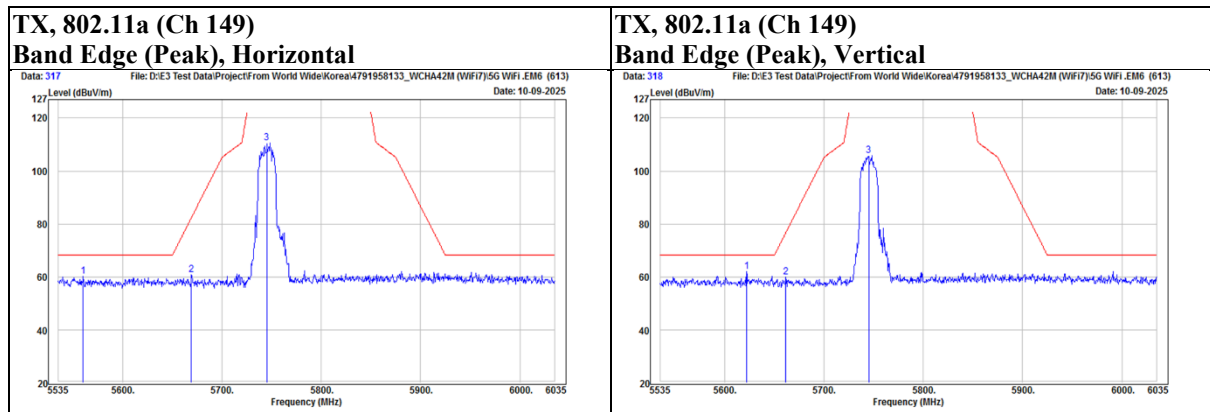


Mode	802.11a	Channel	157
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5570	40.35	20.08	60.43	68.2	-7.77	PK
		5677	39.86	20	59.86	88.22	-28.36	PK
		5785	89.96	20.83	110.79	N/A	N/A	PK
		5889.5	40.5	21.27	61.77	94.44	-32.67	PK
		6033.5	40.14	21.42	61.56	68.2	-6.64	PK
Vertical	@	5594	40.41	20.11	60.52	68.2	-7.68	PK
		5687	39.9	19.99	59.89	95.61	-35.72	PK
		5785	85.88	20.83	106.71	N/A	N/A	PK
		5924	40.13	21.24	61.37	68.94	-7.57	PK
		5948.5	40.6	21.22	61.82	68.2	-6.38	PK

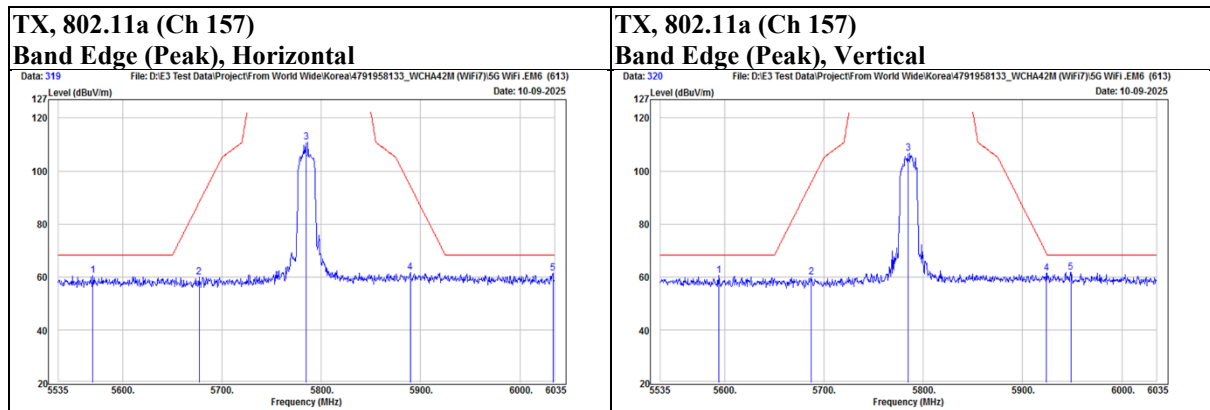

Mode	802.11a	Channel	165
------	---------	---------	-----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	@	5825	86.63	21.12	107.75	N/A	N/A	PK
		5917.5	40.72	21.25	61.97	73.73	-11.76	PK
		5950.5	40.45	21.21	61.66	68.2	-6.54	PK
Vertical	@	5825	85.32	21.12	106.44	N/A	N/A	PK
		5905.5	40.48	21.27	61.75	82.59	-20.84	PK
		5945	40.4	21.22	61.62	68.2	-6.58	PK

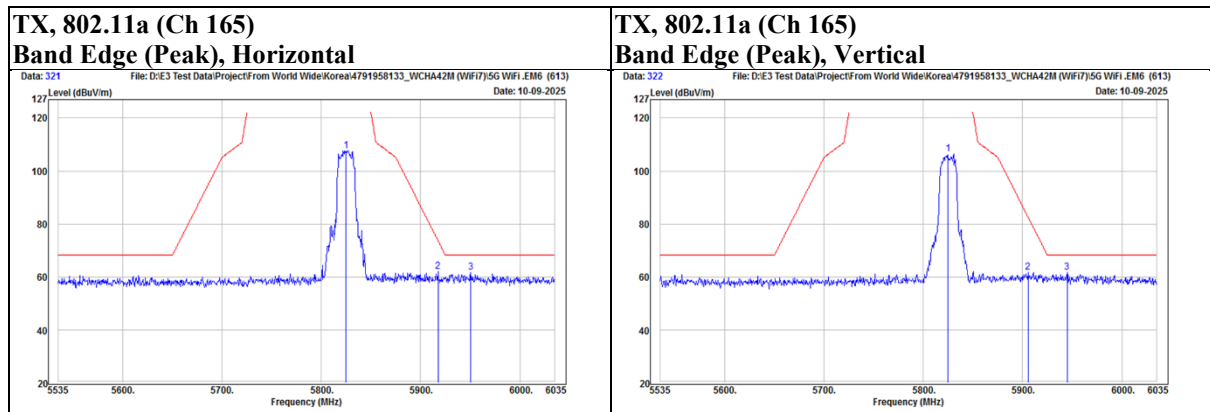

Mode	802.11a - Emission	Channel	36
------	--------------------	---------	----

Polarization	Notation	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
Horizontal	*	10360	30.28	17.77	48.05	68.2	-20.15	PK
		14500	28.28	26.09	54.37	68.2	-13.83	PK
		14500	20.01	26.09	46.1	54	-7.9	AVG
		15850	29.98	23.83	53.81	74	-20.19	PK
		15850	21.15	23.83	44.98	54	-9.02	AVG
	*	20720	33.15	3.98	37.13	74	-36.87	PK
	*	25900	33.91	9.47	43.38	68.2	-24.82	PK
	*	31080	33.07	11.68	44.75	68.2	-23.45	PK
	*	36260	37.38	11.19	48.57	68.2	-19.63	PK
		39592	38.03	17.11	55.14	74	-18.86	PK
		39592	28.19	17.11	45.3	54	-8.7	AVG
Vertical	*	10360	30.95	17.77	48.72	68.2	-19.48	PK
		14500	27.49	26.09	53.58	68.2	-14.62	PK
		14500	19.22	26.09	45.31	54	-8.69	AVG
		15415	28.42	24.19	52.61	74	-21.39	PK
		15415	19.59	24.19	43.78	54	-10.22	AVG
	*	20720	33.83	3.98	37.81	74	-36.19	PK
	*	25900	34.45	9.47	43.92	68.2	-24.28	PK
	*	31080	31.95	11.68	43.63	68.2	-24.57	PK
	*	36260	35.84	11.19	47.03	68.2	-21.17	PK
		39760	37.64	17.08	54.72	74	-19.28	PK
		39760	27.8	17.08	44.88	54	-9.12	AVG

