

TEST REPORT

 CTK Co., Ltd. The Power Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-04998-2 Page (1) / (78) Pages	
--	---	--	--

1. Client

- Name : Samsung Electronics Co Ltd
- Address : 19 Chapin Rd, Building D. Pine Brook, New Jersey, United States
- Date of Receipt : 2019-11-19

2. Manufacturer

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea

3. Use of Report : For FCC Certification / ISED Certification

4. Test Sample / Model: Wi-Fi/BT Transceiver / WCT730M, WCT733M, WCT734M

5. Date of Test : 2019-11-20 to 2020-01-03

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247
RSS-247 & RSS-Gen

7. Testing Environment: Temp.: (24 ± 1) °C, Humidity: (49 ± 3) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by  Bongjun, Jang: (Signature)	Technical Manager  Won-Jae, Hwang: (Signature)
-------------	--	---

2020-01-03

Republic of KOREA **CTK Co., Ltd.**

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-04998-2 Page (2) / (78) Pages	
--	---	--	--

REPORT REVISION HISTORY

Date	Revision	Page No
2019-12-19	Issued (CTK-2019-04998)	all
2020-01-03	Added to 2 467 MHz and 2 472 MHz (CTK-2019-04998-2)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
1.4 Model Differences.....	5
2. Facility and Accreditations.....	6
2.1 Test Facility	6
2.2 Laboratory Accreditations and Listings.....	6
2.3 Calibration Details of Equipment Used for Measurement.....	6
3. Test Specifications	7
3.1 Standards	7
3.2 Mode of operation during the test	8
3.3 Device Modifications	8
3.4 Maximum Measurement Uncertainty	8
3.5 Test Software	9
4. Technical Characteristic Test.....	10
4.1 6dB Bandwidth	10
4.2 OUTPUT POWER.....	18
4.3 Transmitter Power Spectral Density.....	27
4.4 Conducted Spurious emission.....	36
4.5 Radiated Emission	49
4.6 AC Conducted Emissions	75
APPENDIX A – Test Equipment Used For Tests	78

1. General Product Description

1.1 Client Information

Company	Samsung Electronics Co., Ltd.
Contact Point	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Republic of Korea
Contact Person	Name : Minhyung Cho E-mail : mh719.cho@samsung.com Tel : +82-277-2688 Fax : -

1.2 Product Information

FCC ID	A3LWCT730M
IC	649E-WCT730M
Product Description	Wi-Fi/BT Transceiver
Model name	WCT730M
Variant Model name	WCT733M, WCT734M
Operating Frequency	2 412 MHz – 2 472 MHz
RF Output Power	802.11b : 18.91 dBm (77.80 mW) 802.11g : 19.64 dBm (92.04 mW) 802.11n_HT20 : 18.57 dBm (71.94 mW)
Antenna Specification	Antenna type : Chip Antenna Peak Gain (2.4 GHz) : -0.03 dBi (ANT-L), 1.99 dBi (ANT-R)
Number of channels	13 (802.11b/g/n_HT20)
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Data Rate	802.11b : 11 / 5.5 / 2 / 1 Mbps 802.11g : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n: up to 144 Mbps
Power Source	DC 5 V
Hardware Rev	WCT730M, WCT733M : V2.1 WCT734M : V1.0
Software Rev	FC4

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253QPR
AC/DC Adapter	HP	HSTNN-LA40	-



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2019-04998-2
Page (5) / (78) Pages

1.4 Model Differences

Model Name	Type	Description
WCT730M	-	Basic model name, MIC parts mounted, acceleration sensor parts mounted
WCT733M	Type1	MIC parts not mounted, Acceleration sensor parts mounted
WCT733M	Type2	MIC parts not mounted, Acceleration sensor parts not mounted
WCT734M	Type1	MIC parts not mounted, Acceleration sensor parts mounted, IR sensor changed.
WCT734M	Type2	MIC parts not mounted, Acceleration sensor parts not mounted, IR sensor changed.

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious emission	C	
15.247(d)	Unwanted Emission(Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207	AC Conducted Emissions	C	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The sample was tested according to the following specification: FCC Part 15.247			
<u>Note 4:</u> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			

ISED Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
RSS-247 5.2(a)	6 dB Bandwidth	C	Conducted
RSS-247 5.4(d)	Maximum Output Power	C	
RSS-247 5.5	Conducted Spurious emission	C	
RSS-247 5.5	Unwanted Emission(Conducted)	C	
RSS-247 5.2(b)	Transmitter Power Spectral Density	C	
RSS-Gen 6.13	Radiated Emissions	C	Radiated
RSS-Gen 8.8	AC Conducted Emissions	C	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The sample was tested according to the following specification: RSS-247, RSS-GEN			
<u>Note 4:</u> The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
The results are only attached worst cases.

Test Frequency

802.11b/g/n_HT20

Lowest channel	Middle channel	Highest1 channel
2 412 MHz	2 437 MHz	2 462 MHz

Highest2 channel	Highest3 channel
2 467 MHz	2 472 MHz

Test mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11b	DSSS	1 Mbps	99.68 %	-
802.11g	OFDM	6 Mbps	97.06 %	0.13 dB
802.11n_HT20	OFDM	MCS 0	96.97 %	0.13 dB

3.3 Device Modifications

The following modifications were necessary for compliance:

Not applicable

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB
Power Spectral Density	± 1.5 dB
Occupied Bandwidth	± 0.1 MHz
Unwanted Emission(conducted)	± 3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	± 4.0 dB
Radiated Emissions ($f > 1$ GHz)	± 5.0 dB

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-04998-2 Page (9) / (78) Pages	
---	--	---	--

3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 6.0.1.0
Line Conducted Test	ESCI7, ESCI3 : EMC32 Ver. 8.50.0 ESR7 : EMC32 Ver. 8.53.0

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-04998-2 Page (10) / (78) Pages	
---	--	--	--

4. Technical Characteristic Test

4.1 6dB Bandwidth

Test Procedures

KDB 558074 - Section 8.2
ANSI C63.10-2013 - Section 11.8.2
RSS-Gen – Section 6.7

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 - Section 6.9
RSS-Gen – Section 6.7

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW $\geq 3 \times$ RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Sweep = auto couple
- f) Allow trace to fully stabilize
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Minimum Standard :

6 dB Bandwidth > 500kHz

Test Data :



ANT-L

	6 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11b		802.11g		802.11n_HT20	
Frequency	6dB	99%	6dB	99%	6dB	99%
2 412 MHz	9.122	13.85	15.17	16.39	15.17	17.54
2 437 MHz	9.57	13.87	15.17	16.39	15.17	17.53
2 462 MHz	9.14	13.89	15.16	16.41	15.17	17.54
2 467 MHz	9.12	13.65	15.17	16.33	15.17	17.50
2 472 MHz	9.12	13.49	15.17	16.33	15.17	17.51




ANT-R

	6 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11b		802.11g		802.11n_HT20	
Frequency	6dB	99%	6dB	99%	6dB	99%
2 412 MHz	9.12	13.64	15.16	16.36	15.74	17.53
2 437 MHz	9.13	13.85	15.17	16.37	15.75	17.54
2 462 MHz	9.14	13.88	15.17	16.37	15.74	17.54
2 467 MHz	9.05	13.73	15.17	16.33	15.75	17.53
2 472 MHz	9.12	13.72	15.17	16.32	15.75	17.50




See next pages for actual measured spectrum plots.

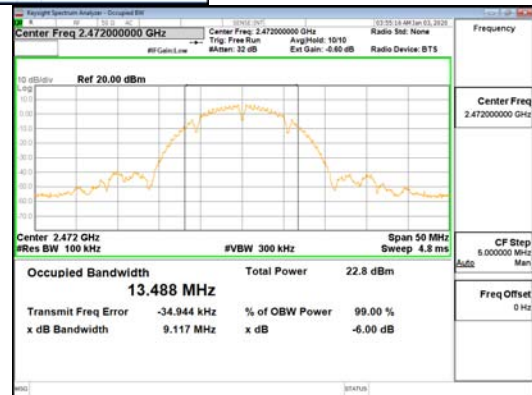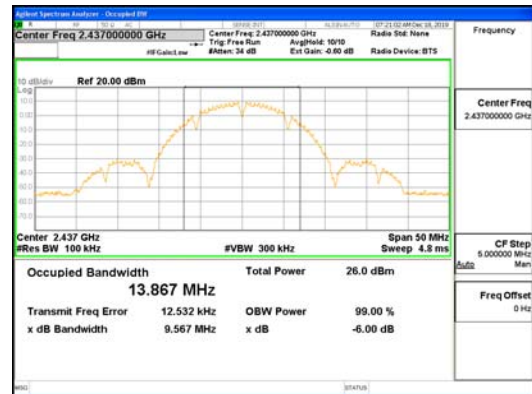



802.11b_ANT-L

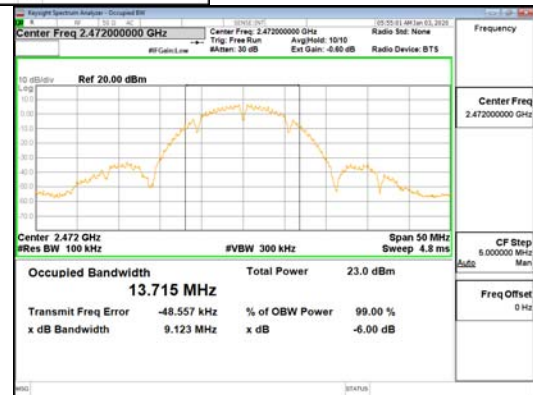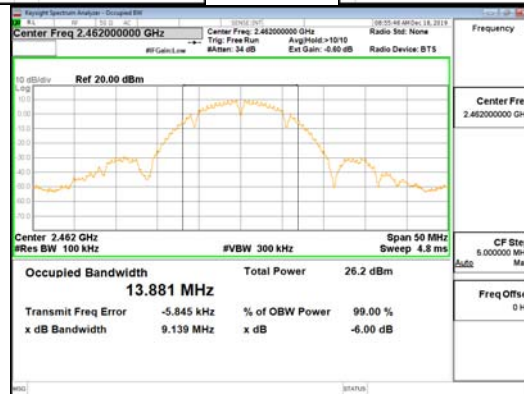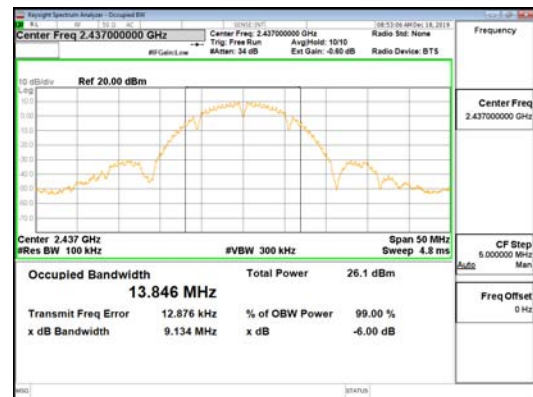


802.11b_ANT-R

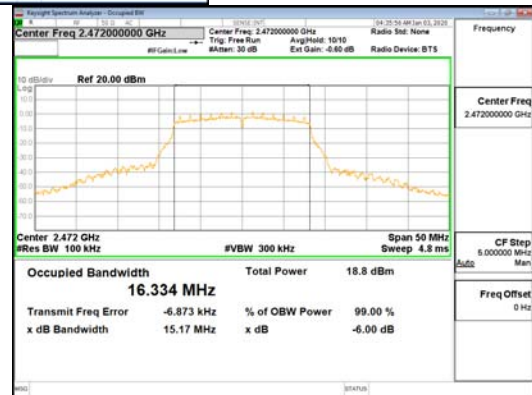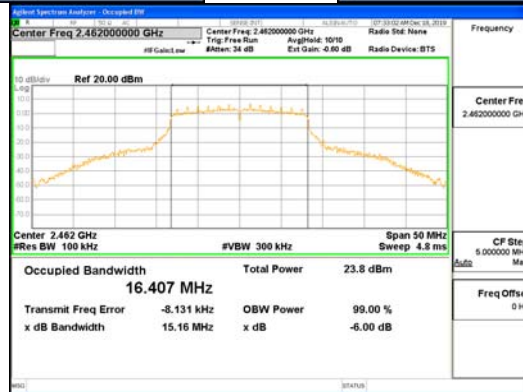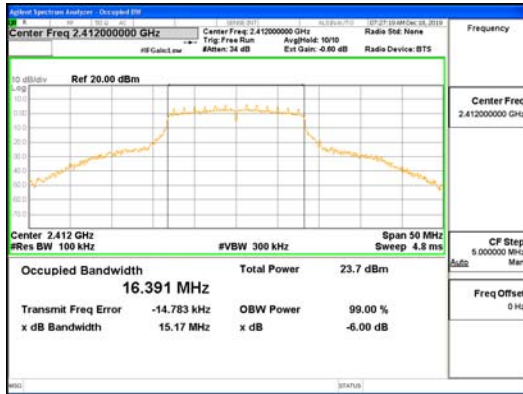



802.11g_ANT-L

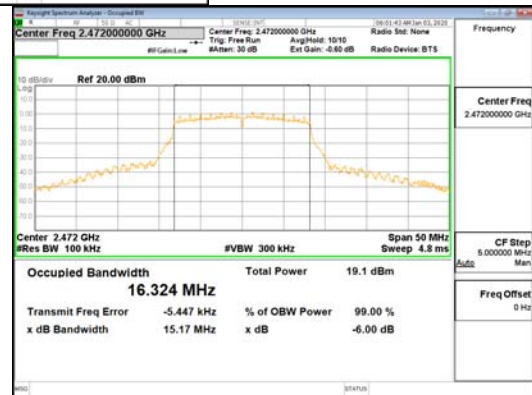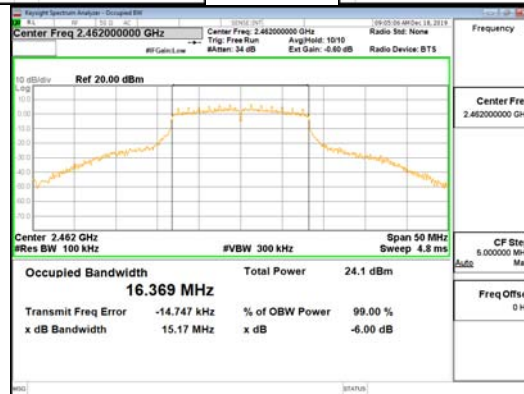

802.11g_ANT-R

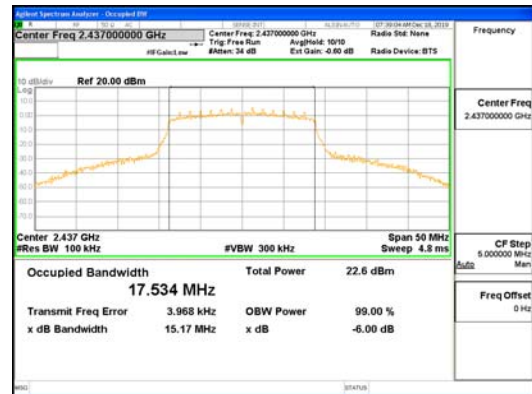

802.11n_HT20_ANT-L

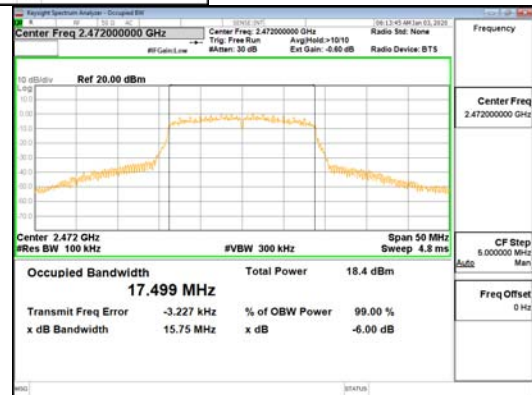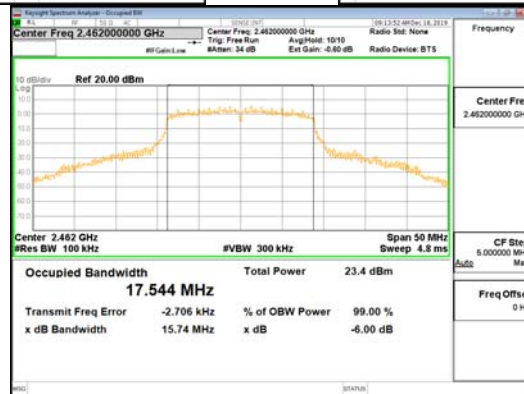


802.11n_HT20_ANT-R

4.2 OUTPUT POWER

Test Procedures

KDB 558074 - Section 8.3.2.2 (Average Power)
ANSI C63.10-2013 - Section 11.9.2.2
KDB 662911 D01, D02 (Multiple Transmitter Output)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) span $\geq 1.5 \times \text{OBW}$
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times \text{RBW}$
- d) Sweep time = auto
- e) Detector = RMS
- f) average at least 100
- g) Duty cycle factor = $10\log(1/x)$

Test mode	Duty Cycle Factor (dB)
802.11b	0.00
802.11g	0.13
802.11n_HT20	0.13

Limit

Operating Mode	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	ANT-L	-0.03	30.00
SISO	802.11b/g/n	ANT-R	1.99	30.00
MIMO (2Tx)	802.11g/n	ANT-L + ANT-R	4.11	30.00

Test Data :

ANT-L

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11b	2 412	18.41	0.00	18.41	30.00	11.59
	2 437	18.62	0.00	18.62	30.00	11.38
	2 462	18.82	0.00	18.82	30.00	11.18
	2 467	18.68	0.00	18.68	30.00	11.32
	2 472	15.45	0.00	15.45	30.00	14.55
802.11g	2 412	16.30	0.13	16.43	30.00	13.57
	2 437	16.32	0.13	16.45	30.00	13.55
	2 462	16.39	0.13	16.52	30.00	13.48
	2 467	13.95	0.13	14.08	30.00	15.92
	2 472	11.48	0.13	11.61	30.00	18.39
802.11n _HT20	2 412	14.99	0.13	15.12	30.00	14.88
	2 437	15.14	0.13	15.27	30.00	14.73
	2 462	15.19	0.13	15.32	30.00	14.68
	2 467	12.18	0.13	12.31	30.00	17.69
	2 472	10.23	0.13	10.36	30.00	19.64


ANT-R

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11b	2 412	18.46	0.00	18.46	30.00	11.54
	2 437	18.74	0.00	18.74	30.00	11.26
	2 462	18.91	0.00	18.91	30.00	11.09
	2 467	18.53	0.00	18.53	30.00	11.47
	2 472	15.57	0.00	15.57	30.00	14.43
802.11g	2 412	16.63	0.13	16.76	30.00	13.24
	2 437	16.51	0.13	16.64	30.00	13.36
	2 462	16.61	0.13	16.74	30.00	13.26
	2 467	13.77	0.13	13.90	30.00	16.10
	2 472	11.70	0.13	11.83	30.00	18.17
802.11n _HT20	2 412	15.66	0.13	15.79	30.00	14.21
	2 437	15.67	0.13	15.80	30.00	14.20
	2 462	15.66	0.13	15.79	30.00	14.21
	2 467	12.56	0.13	12.69	30.00	17.31
	2 472	10.71	0.13	10.84	30.00	19.16





ANT-L + ANT-R (MIMO)

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11g	2 412	19.48	0.13	19.61	30.00	10.39
	2 437	19.43	0.13	19.56	30.00	10.44
	2 462	19.51	0.13	19.64	30.00	10.36
	2 467	16.87	0.13	17.00	30.00	13.00
	2 472	14.60	0.13	14.73	30.00	15.27
802.11n _HT20	2 412	18.35	0.13	18.48	30.00	11.52
	2 437	18.42	0.13	18.55	30.00	11.45
	2 462	18.44	0.13	18.57	30.00	11.43
	2 467	15.38	0.13	15.51	30.00	14.49
	2 472	13.49	0.13	13.62	30.00	16.38





See next pages for actual measured spectrum plots.

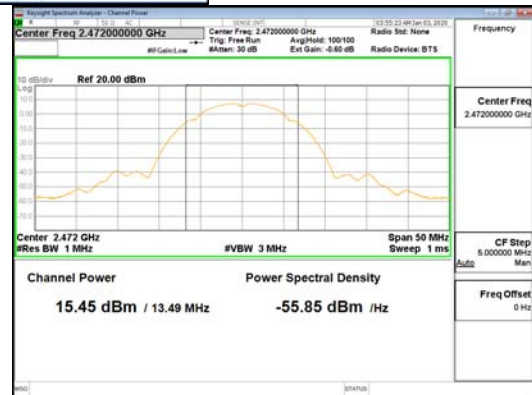





802.11b_ANT-L

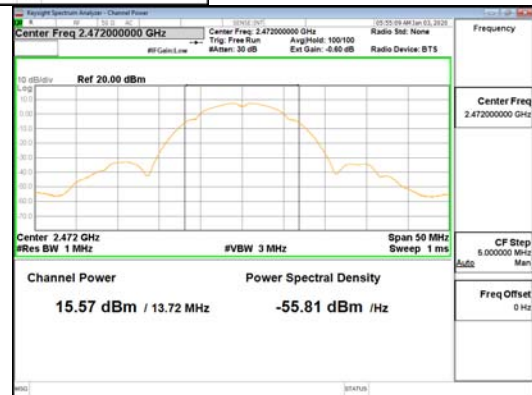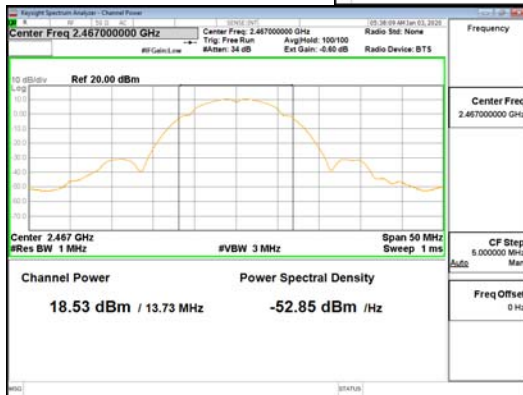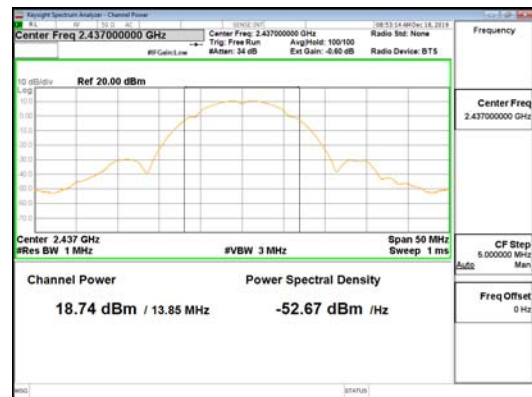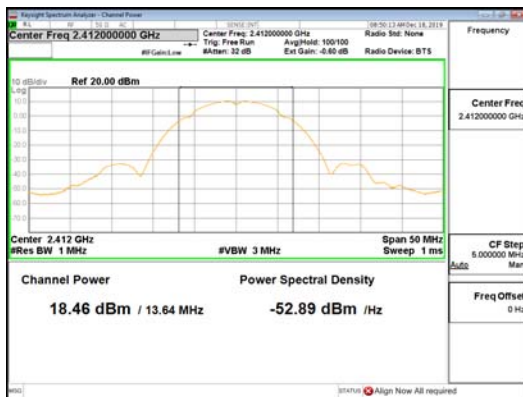






802.11b_ANT-R

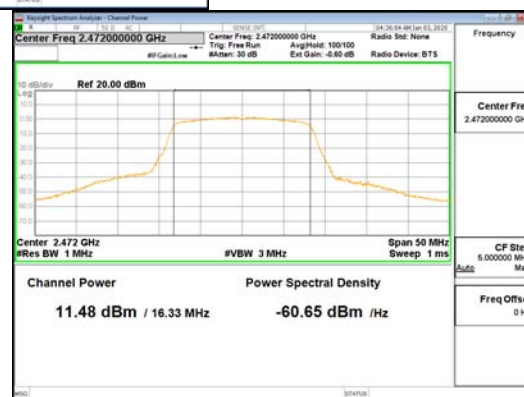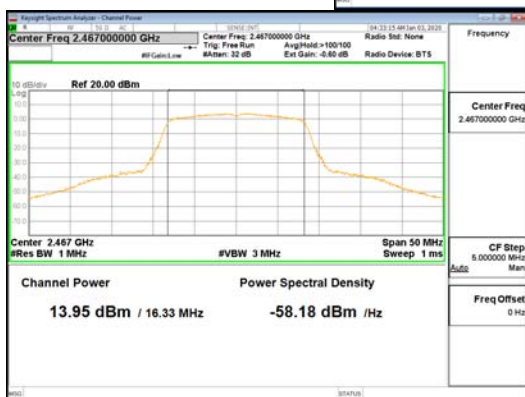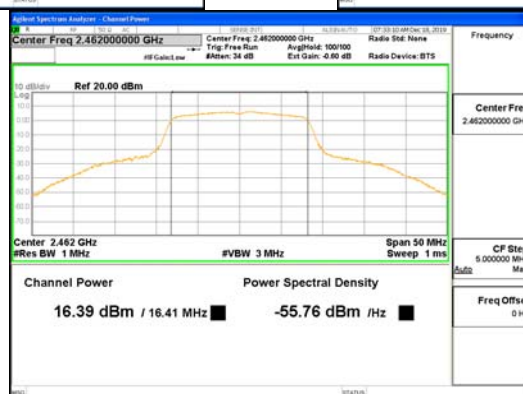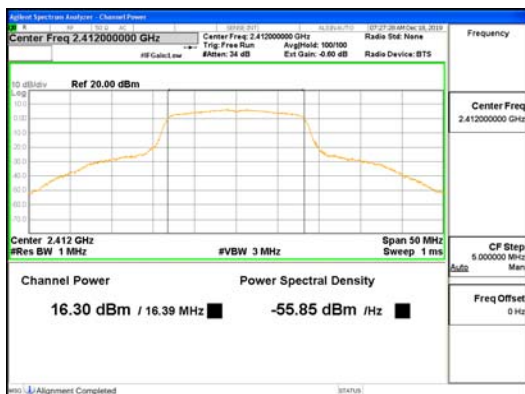






802.11g_ANT-L

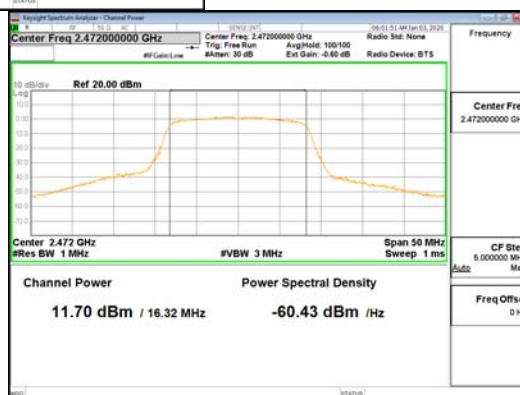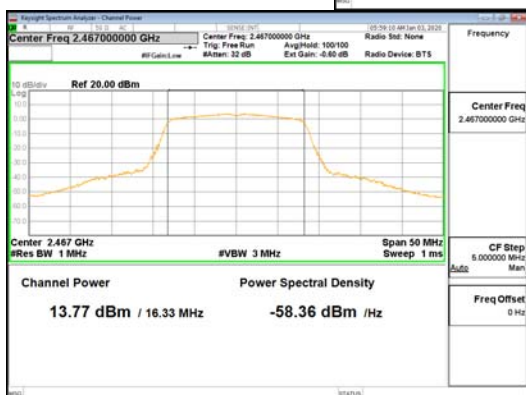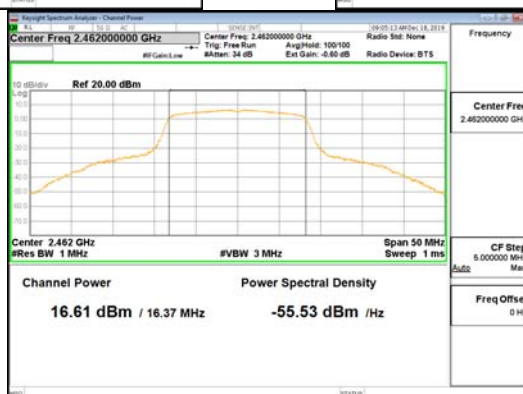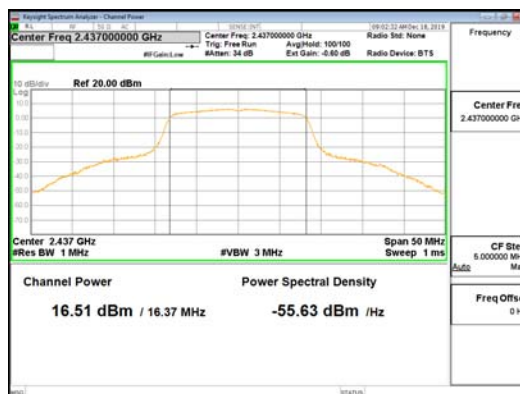

802.11g_ANT-R

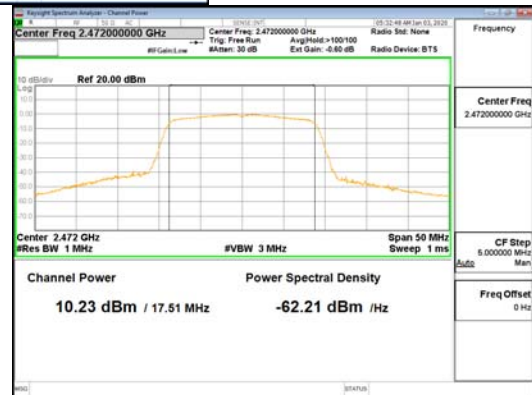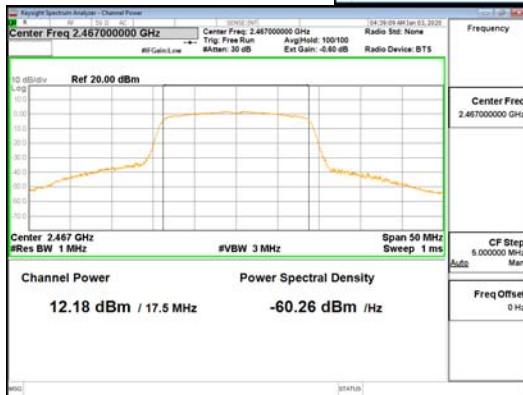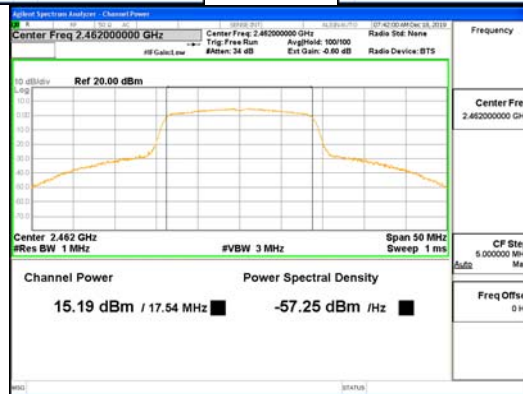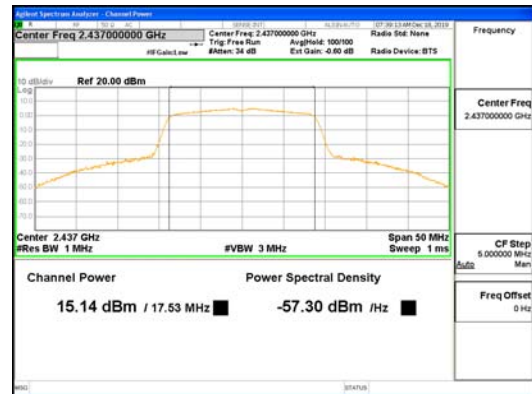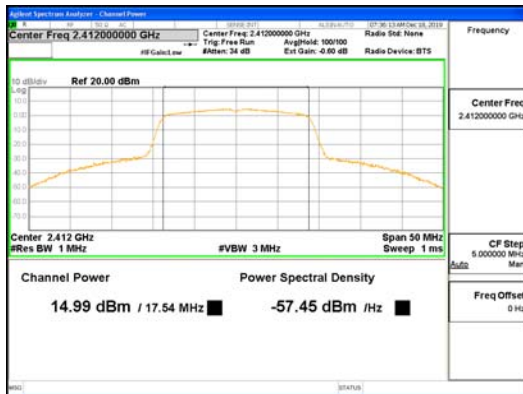

802.11n_HT20_ANT-L

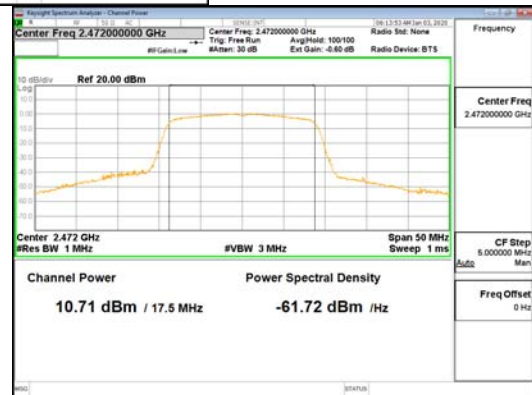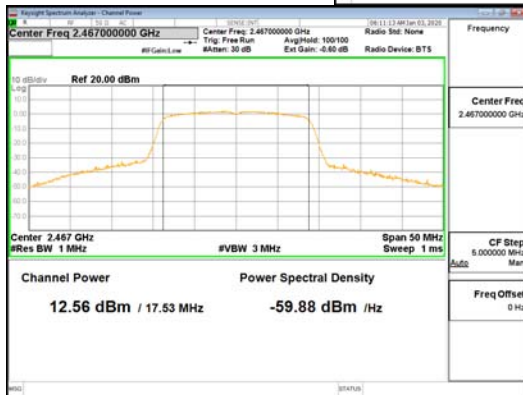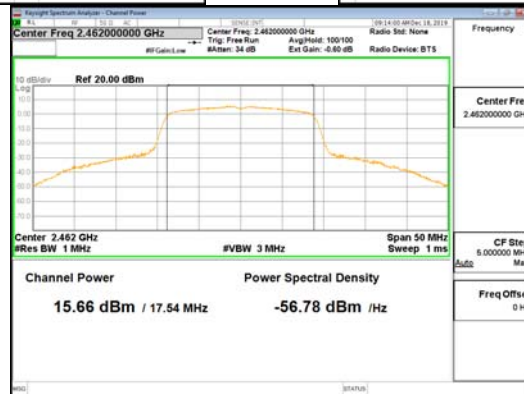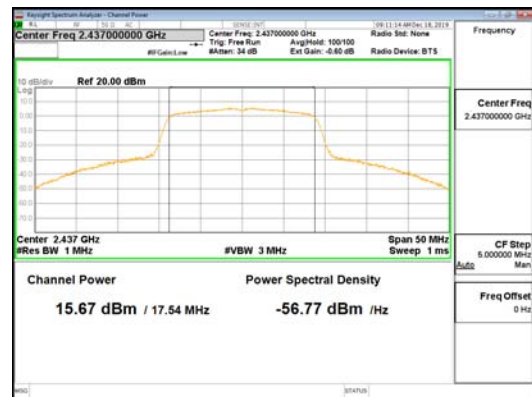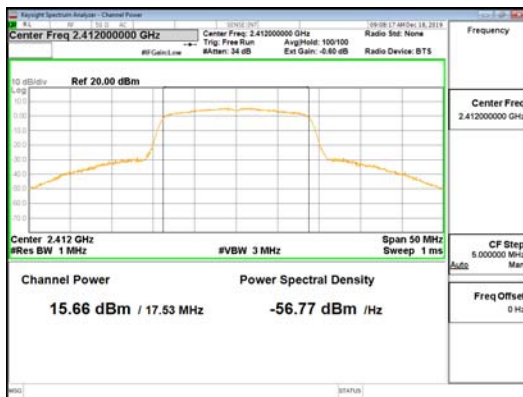

802.11n_HT20_ANT-R

4.3 Transmitter Power Spectral Density

Test Procedures

KDB 558074 - Section 8.4
ANSI C63.10-2013 - Section 11.10.2
KDB 662911 D01, D02 (Multiple Transmitter Output)

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- b) VBW $\geq 3 \times \text{RBW}$
- c) span $\geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode = max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

Limit

Operating Mode	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	802.11b/g/n	ANT-L	-0.03	8.00
SISO	802.11b/g/n	ANT-R	1.99	8.00
MIMO (2Tx)	802.11g/n	ANT-L + ANT-R	4.11	8.00

Test Data

ANT-L

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)	Margin(dB)
802.11b	2 412	4.98	8.00	3.02
	2 437	5.87	8.00	2.13
	2 462	-4.68	8.00	12.68
	2 467	6.80	8.00	1.20
	2 472	3.47	8.00	4.53
802.11g	2 412	-8.72	8.00	16.72
	2 437	-9.30	8.00	17.30
	2 462	-9.12	8.00	17.12
	2 467	-11.26	8.00	19.26
	2 472	-14.45	8.00	22.45
802.11n_HT20	2 412	-10.04	8.00	18.04
	2 437	-10.29	8.00	18.29
	2 462	-9.83	8.00	17.83
	2 467	-11.70	8.00	19.70
	2 472	-15.41	8.00	23.41





ANT-R

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)	Margin(dB)
802.11b	2 412	3.75	8.00	4.25
	2 437	6.54	8.00	1.46
	2 462	7.79	8.00	0.21
	2 467	5.81	8.00	2.19
	2 472	-7.09	8.00	15.09
802.11g	2 412	-9.59	8.00	17.59
	2 437	-8.74	8.00	16.74
	2 462	-7.42	8.00	15.42
	2 467	-11.51	8.00	19.51
	2 472	-12.08	8.00	20.08
802.11n_HT20	2 412	-9.81	8.00	17.81
	2 437	-8.43	8.00	16.43
	2 462	-9.47	8.00	17.47
	2 467	-11.84	8.00	19.84
	2 472	-14.42	8.00	22.42





ANT-L + ANT-R (MIMO)

Test Mode	Frequency (MHz)	Measured Power Density (dBm)	Limit (dBm)	Margin(dB)
802.11g	2 412	-6.12	8.00	14.12
	2 437	-6.00	8.00	14.00
	2 462	-5.18	8.00	13.18
	2 467	-8.37	8.00	16.37
	2 472	-10.09	8.00	18.09
802.11n_HT20	2 412	-6.91	8.00	14.91
	2 437	-6.25	8.00	14.25
	2 462	-6.64	8.00	14.64
	2 467	-8.76	8.00	16.76
	2 472	-11.88	8.00	19.88






See next pages for actual measured spectrum plots.

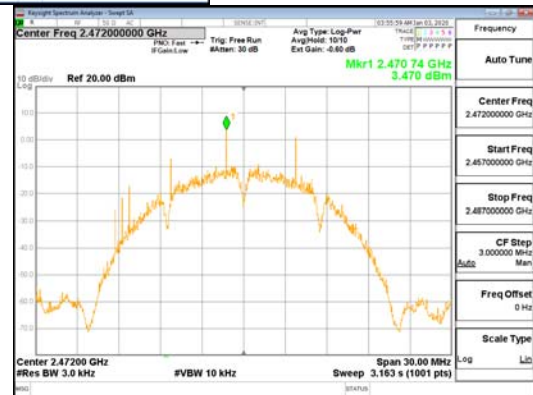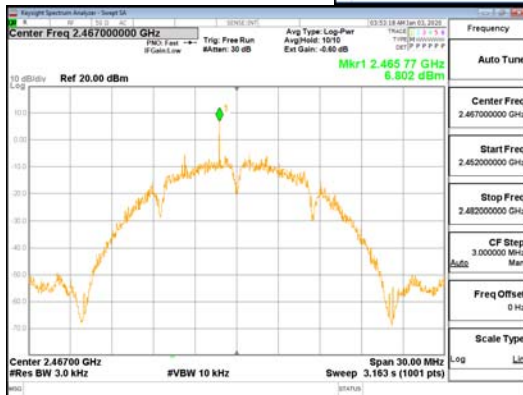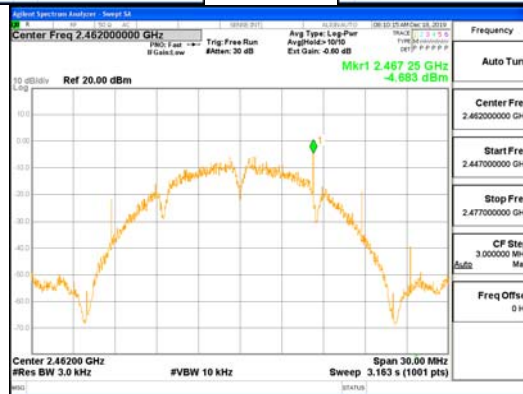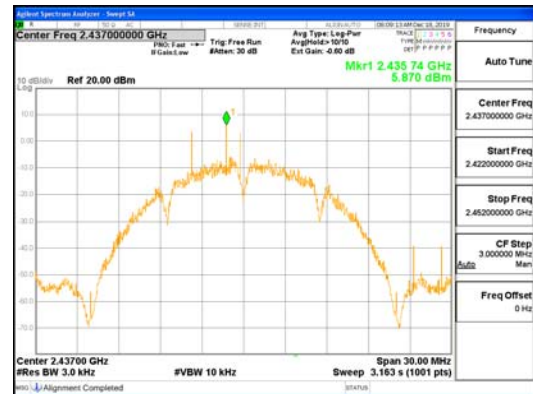






802.11b_ANT-L

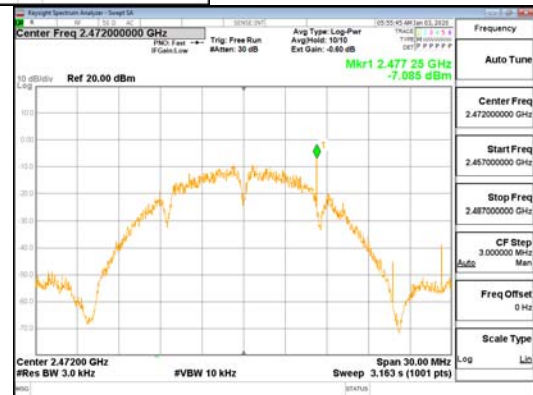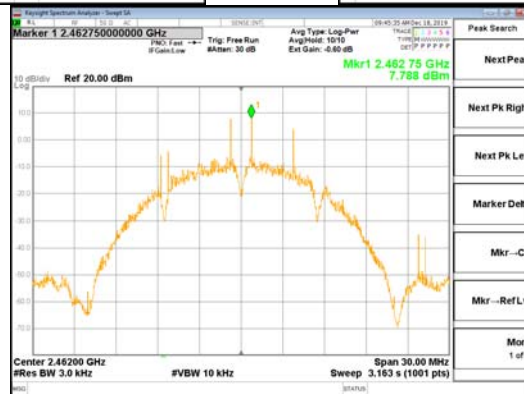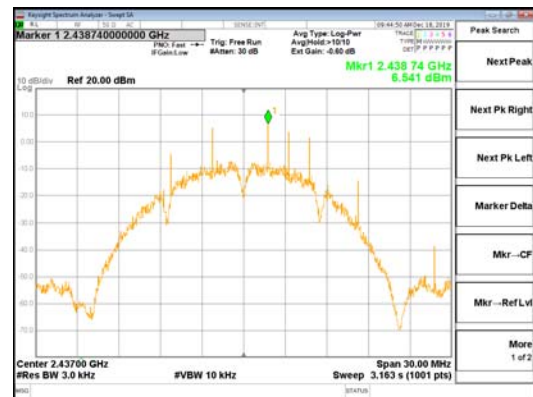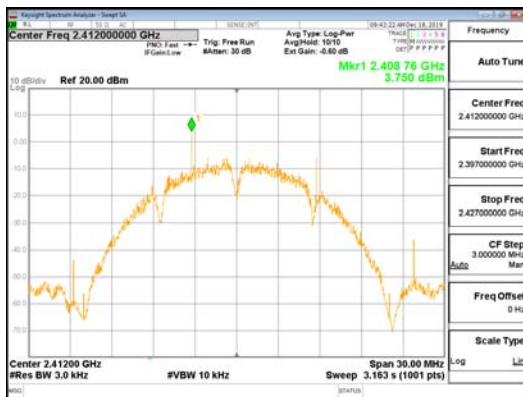





802.11b_ANT-R

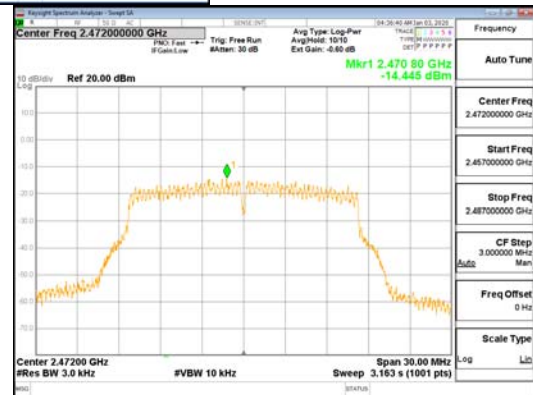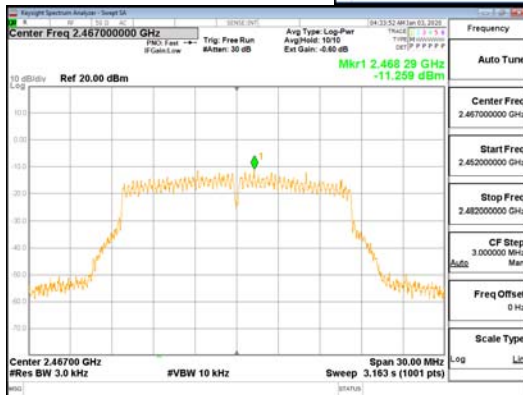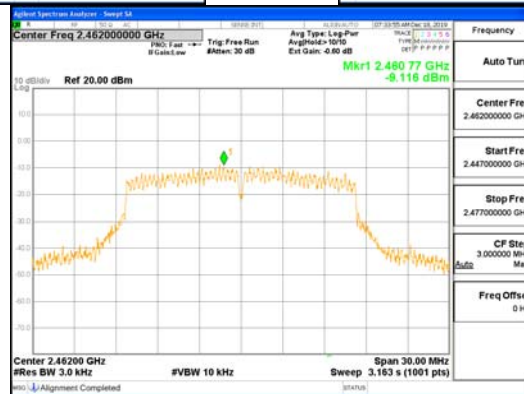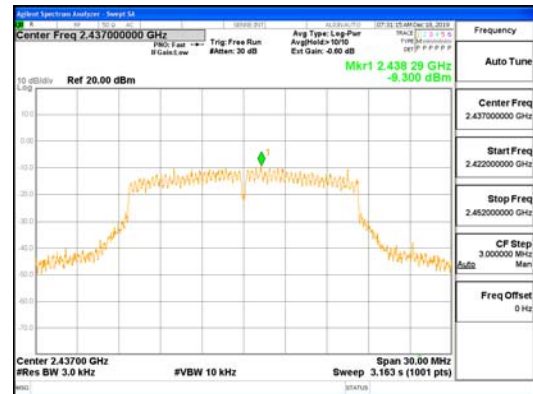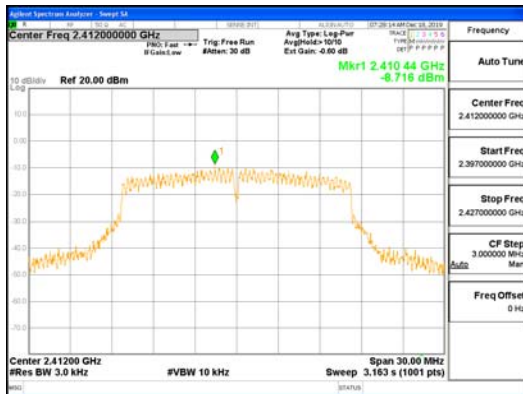






802.11g_ANT-L

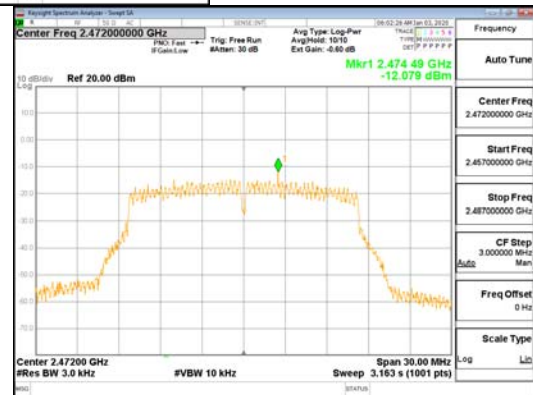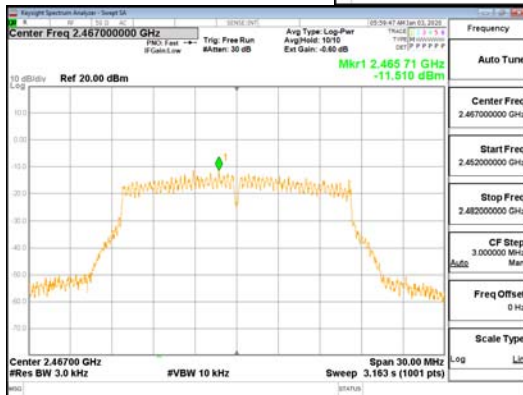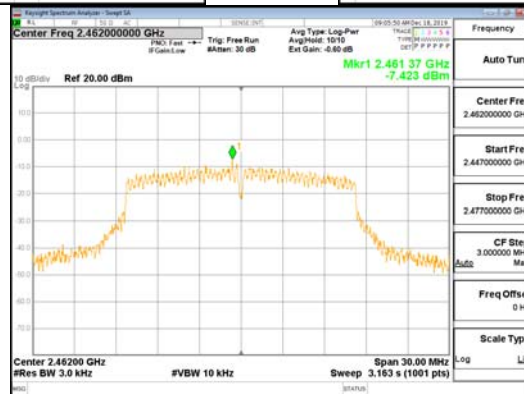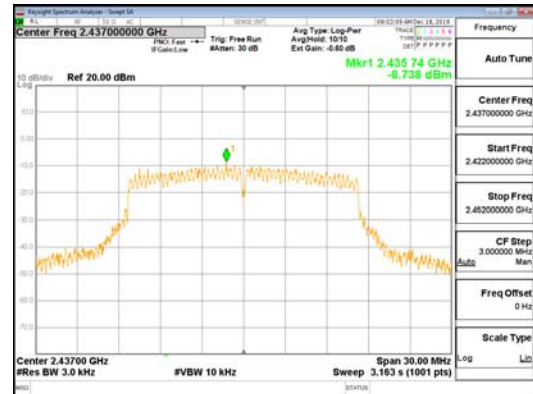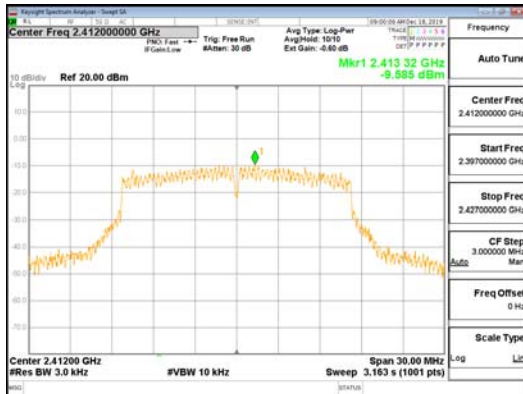

802.11g_ANT-R

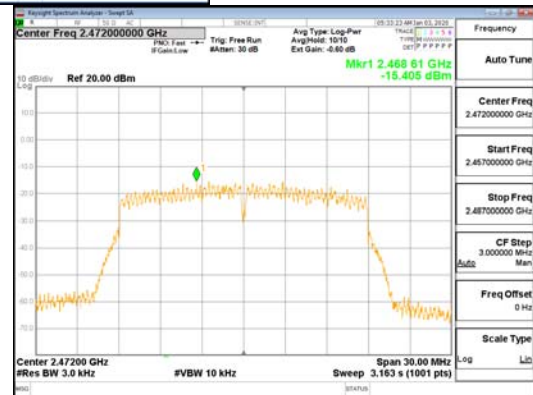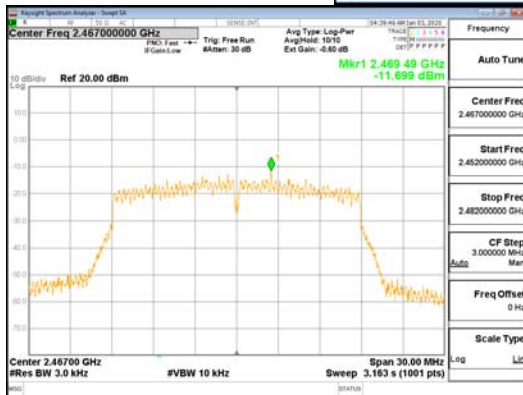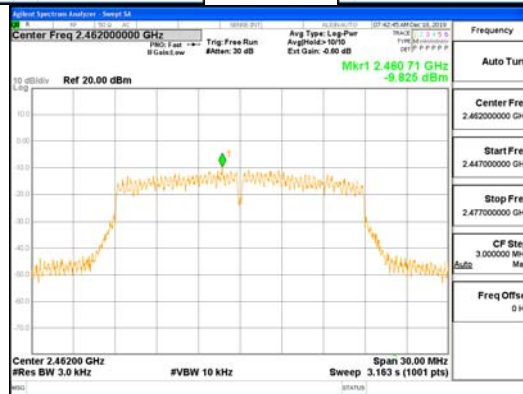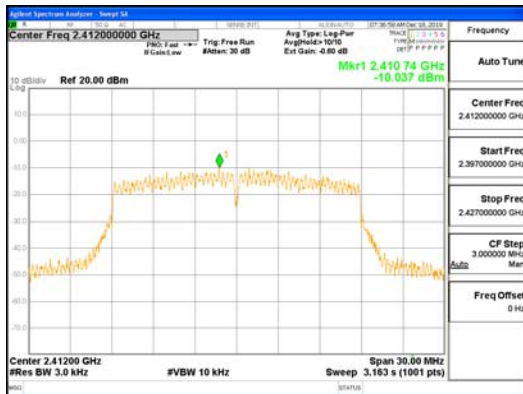

802.11n_HT20_ANT-L

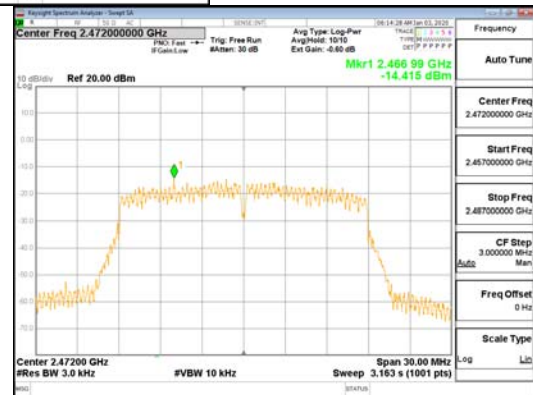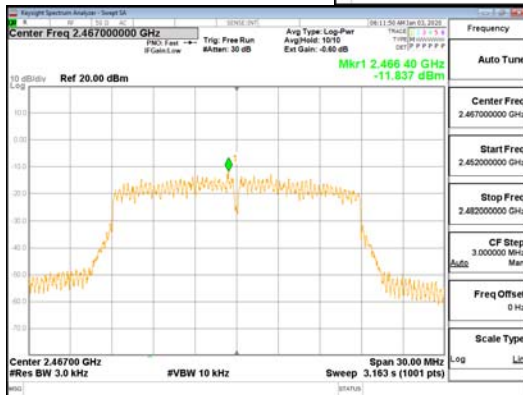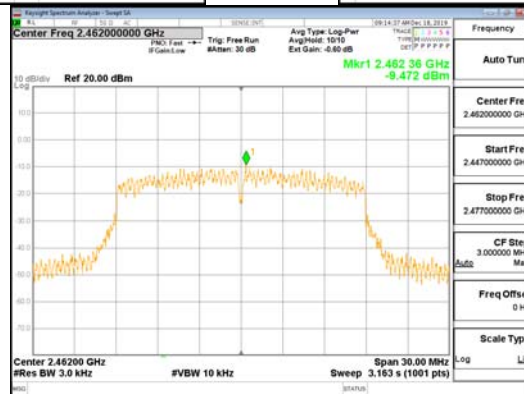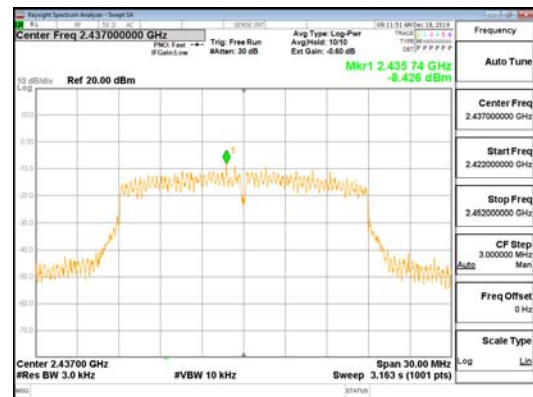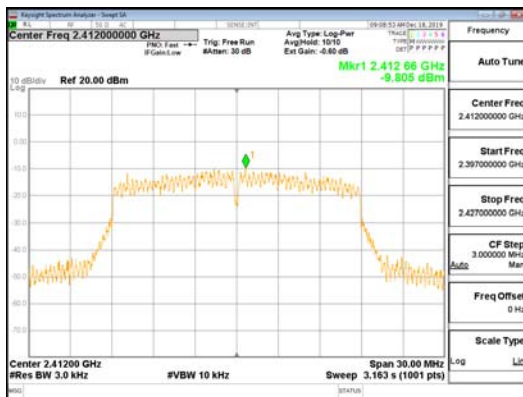

802.11n_HT20_ANT-R

4.4 Conducted Spurious emission

Test Procedures

KDB 558074 - Section 8.5
ANSI C63.10-2013 - Section 11.11.3
RSS-Gen - Section 6.13

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.
After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW $\geq 3 \times$ RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode= max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

Limit :

Emission level < 30 dBc





Test Data: Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 30dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.







802.11b_ANT-L

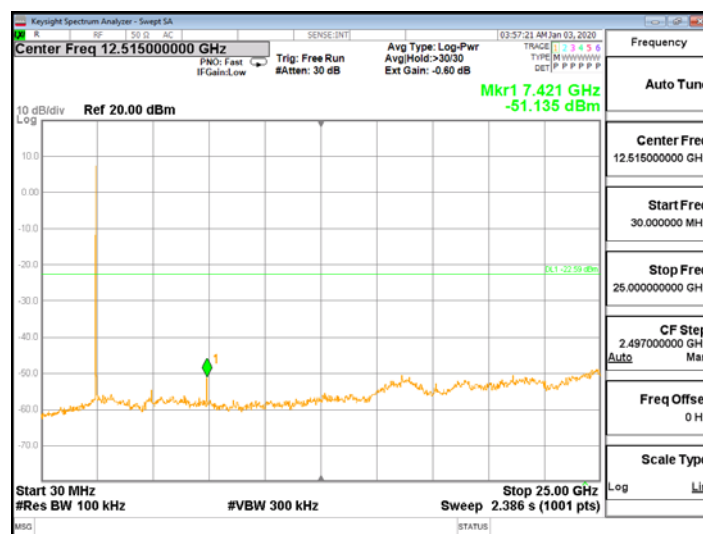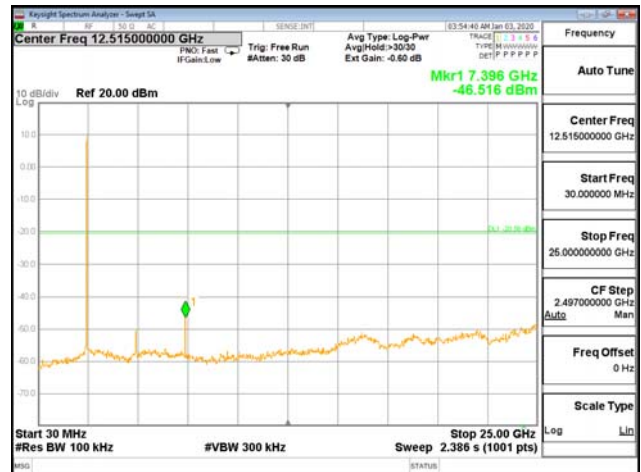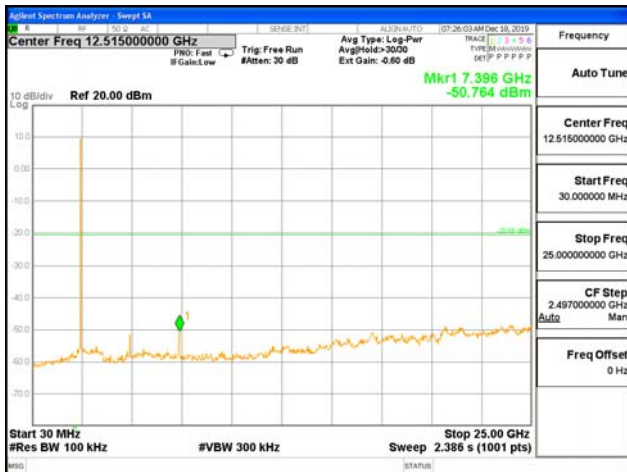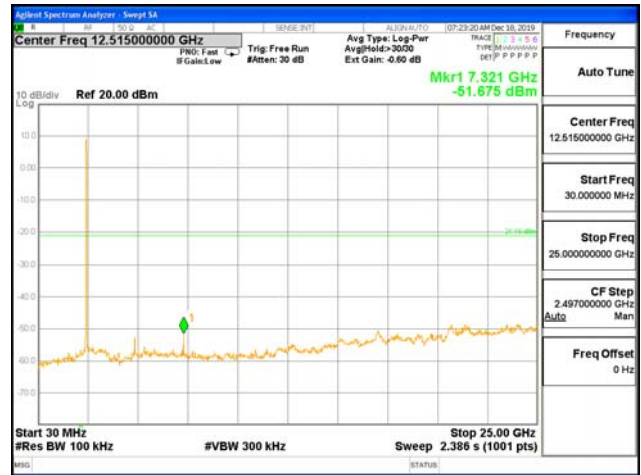


802.11b_ANT-L





802.11b_ANT-R

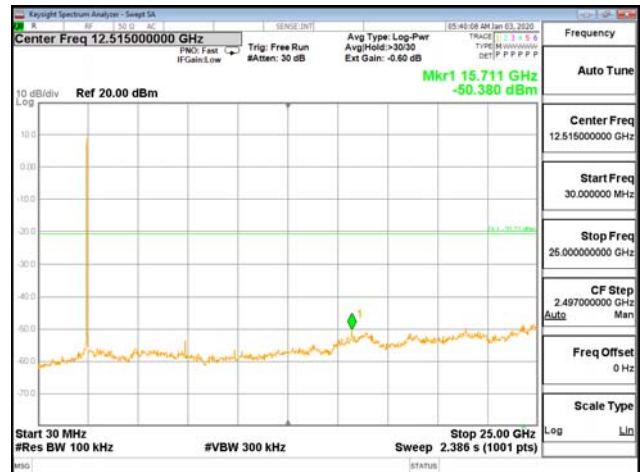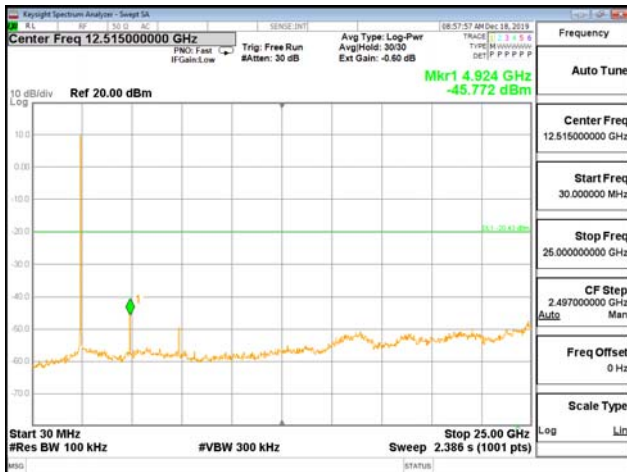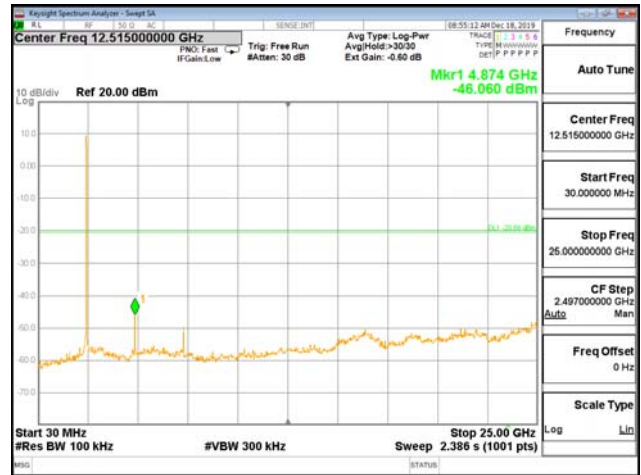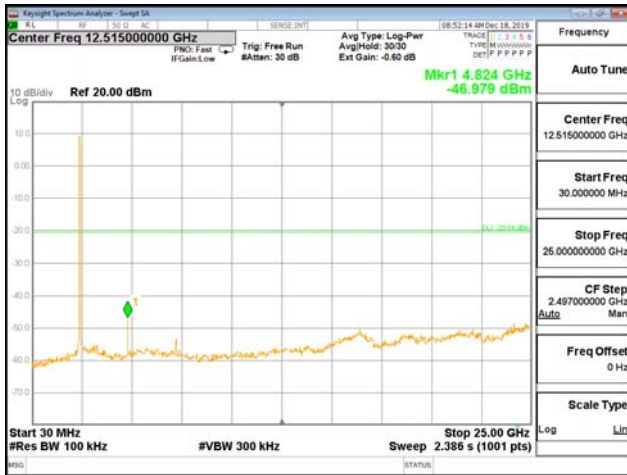


802.11b_ANT-R

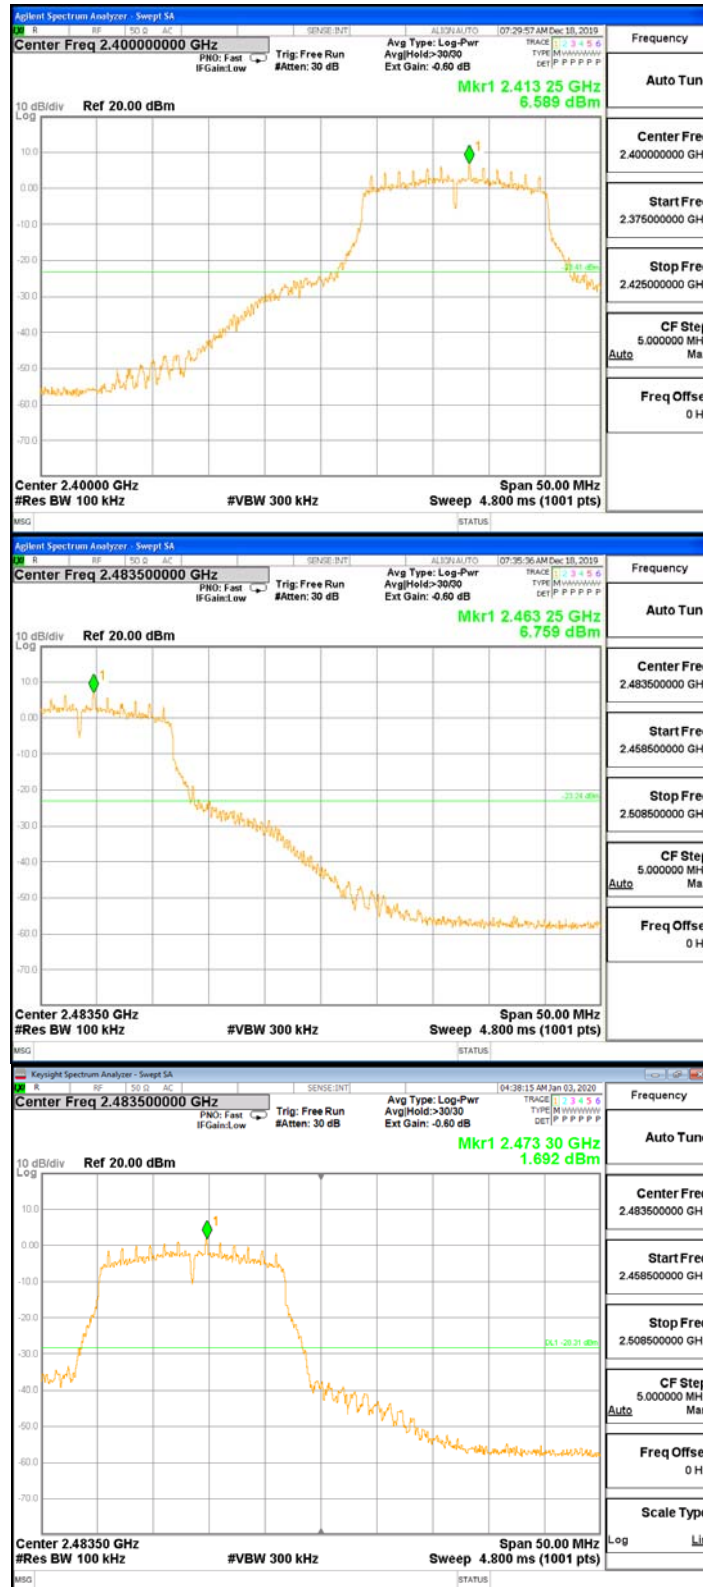




802.11g_ANT-L

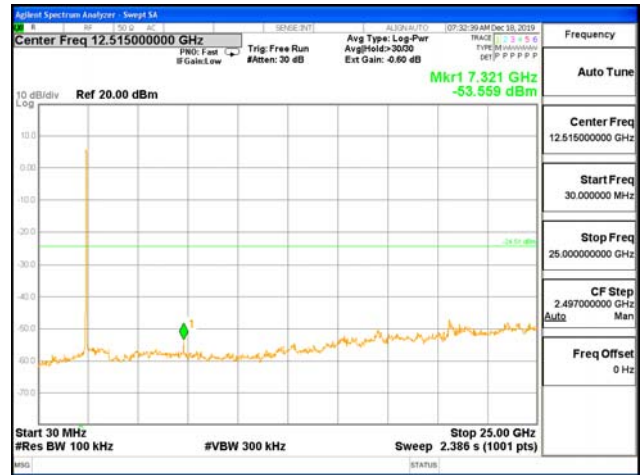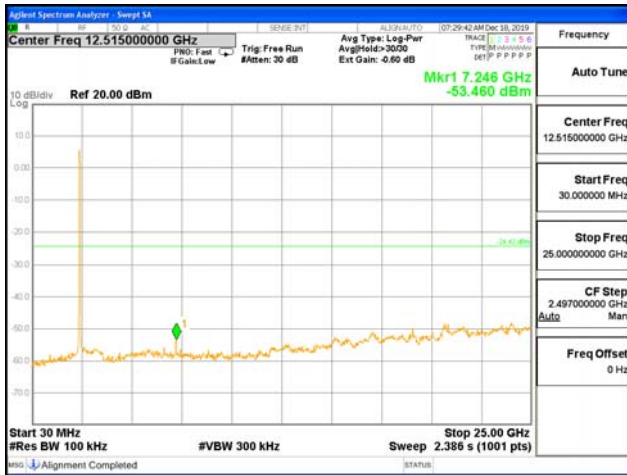


802.11g_ANT-L

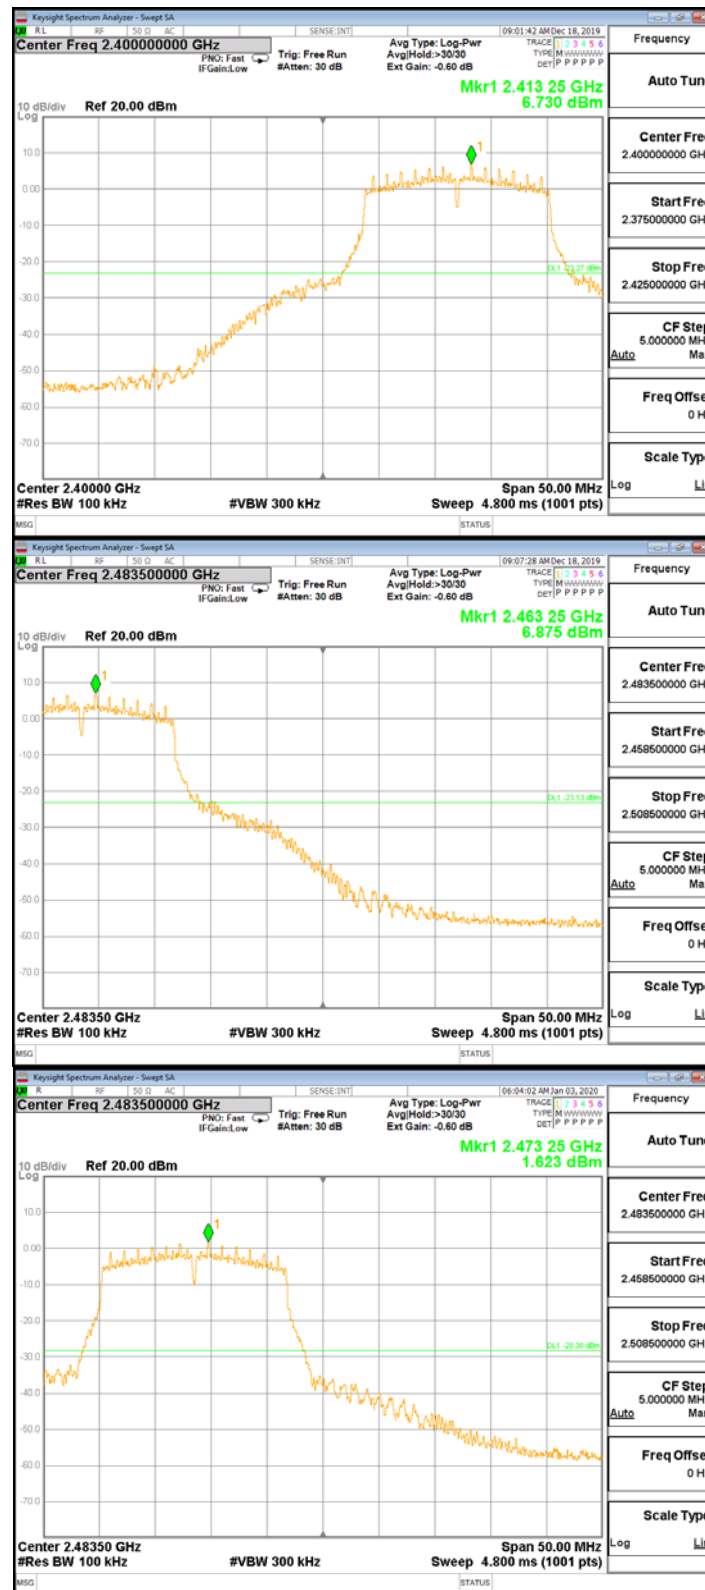




802.11g_ANT-R

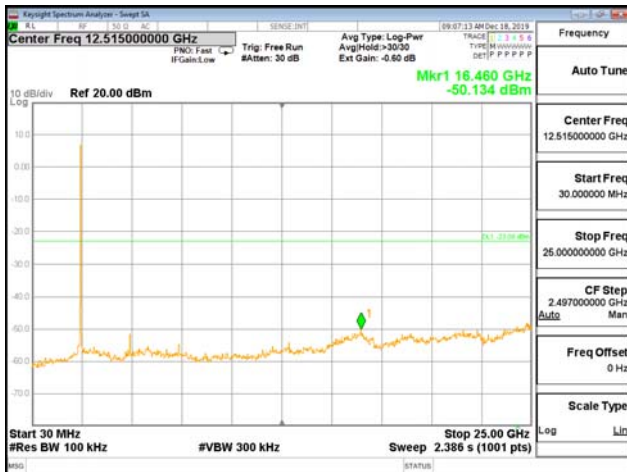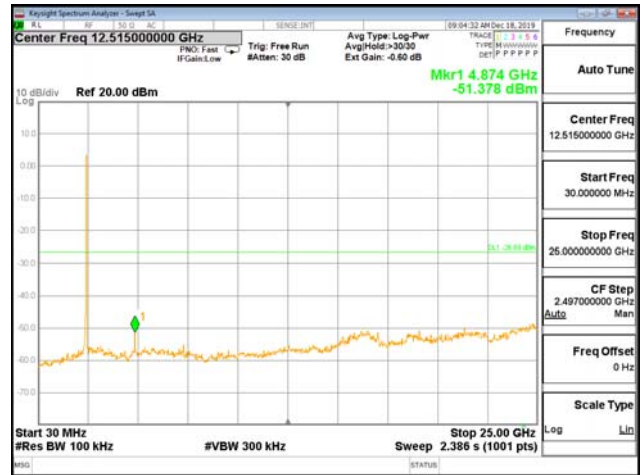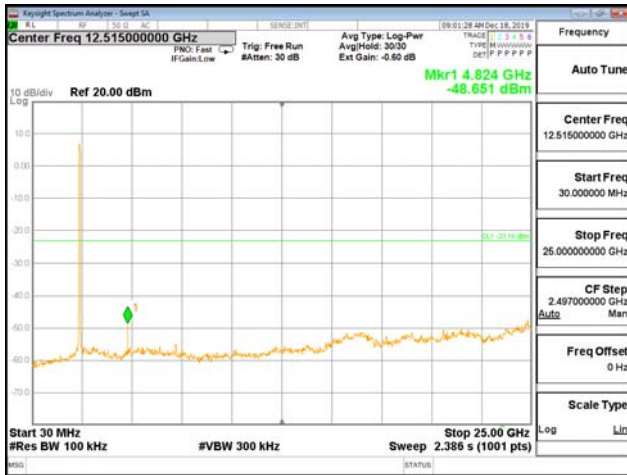


802.11g_ANT-R

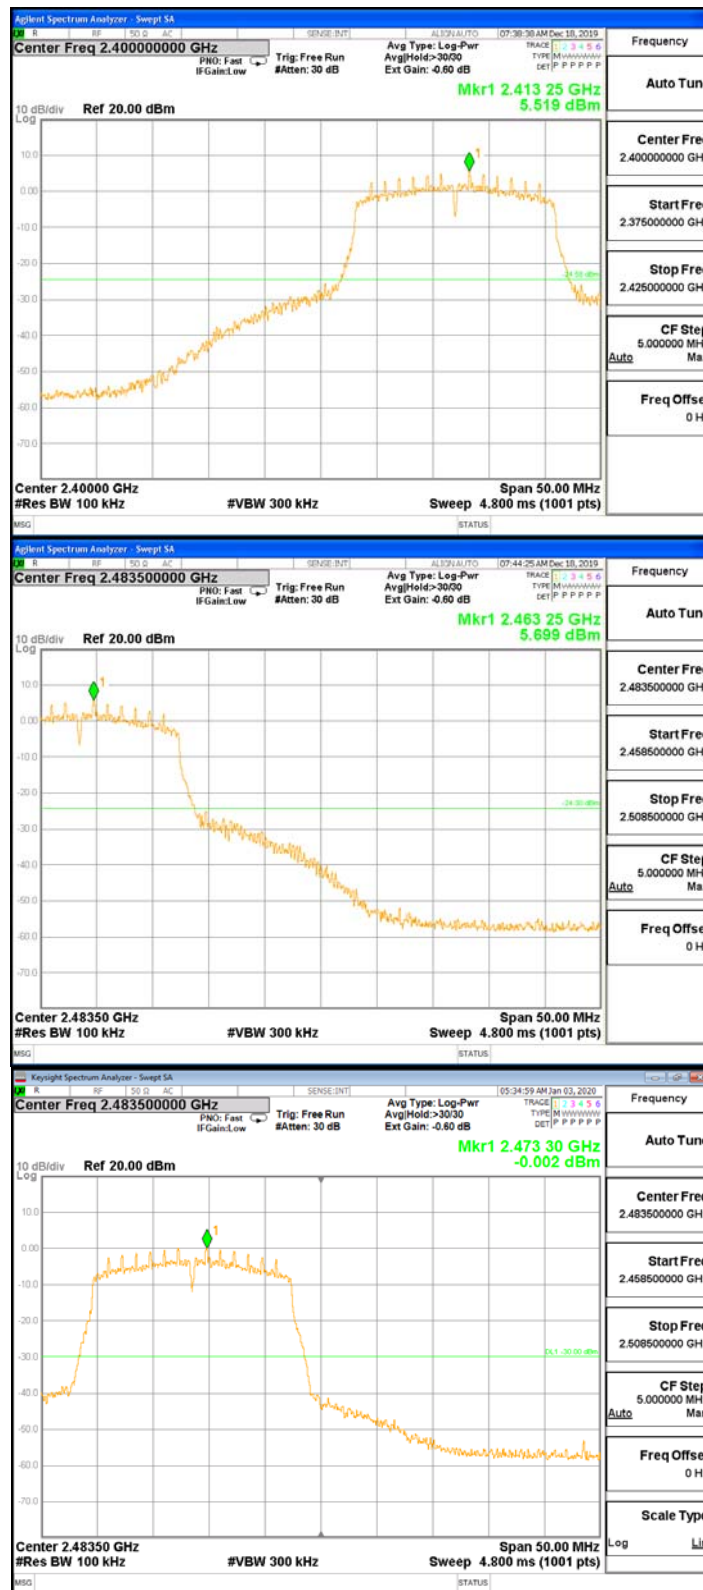





802.11n_HT20_ANT-L

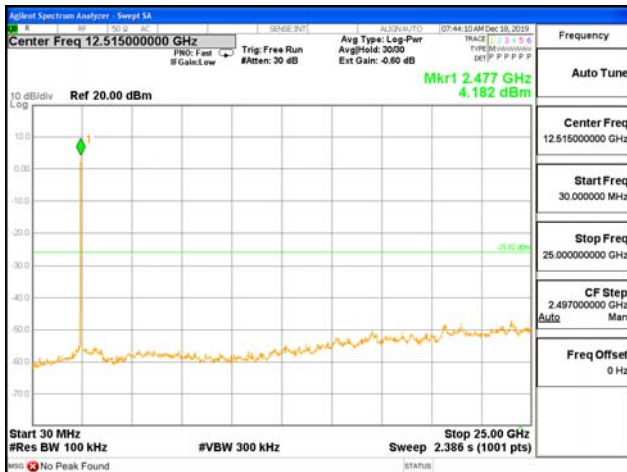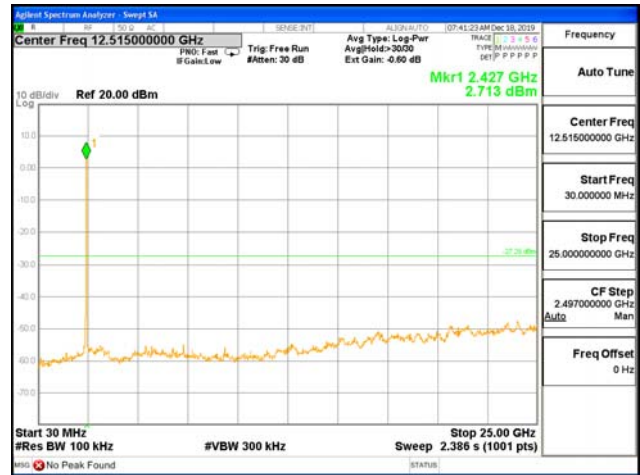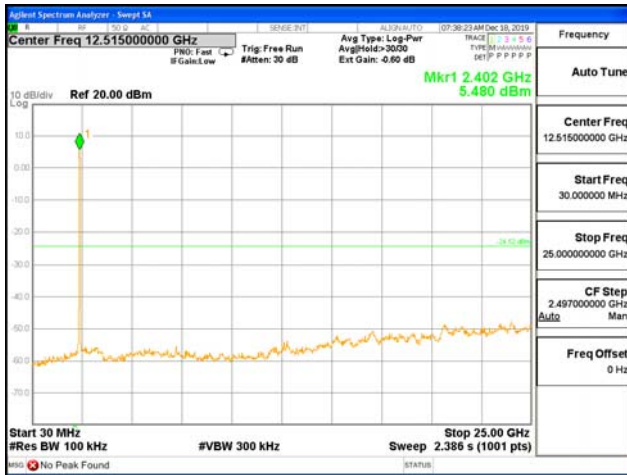

802.11n_HT20_ANT-L

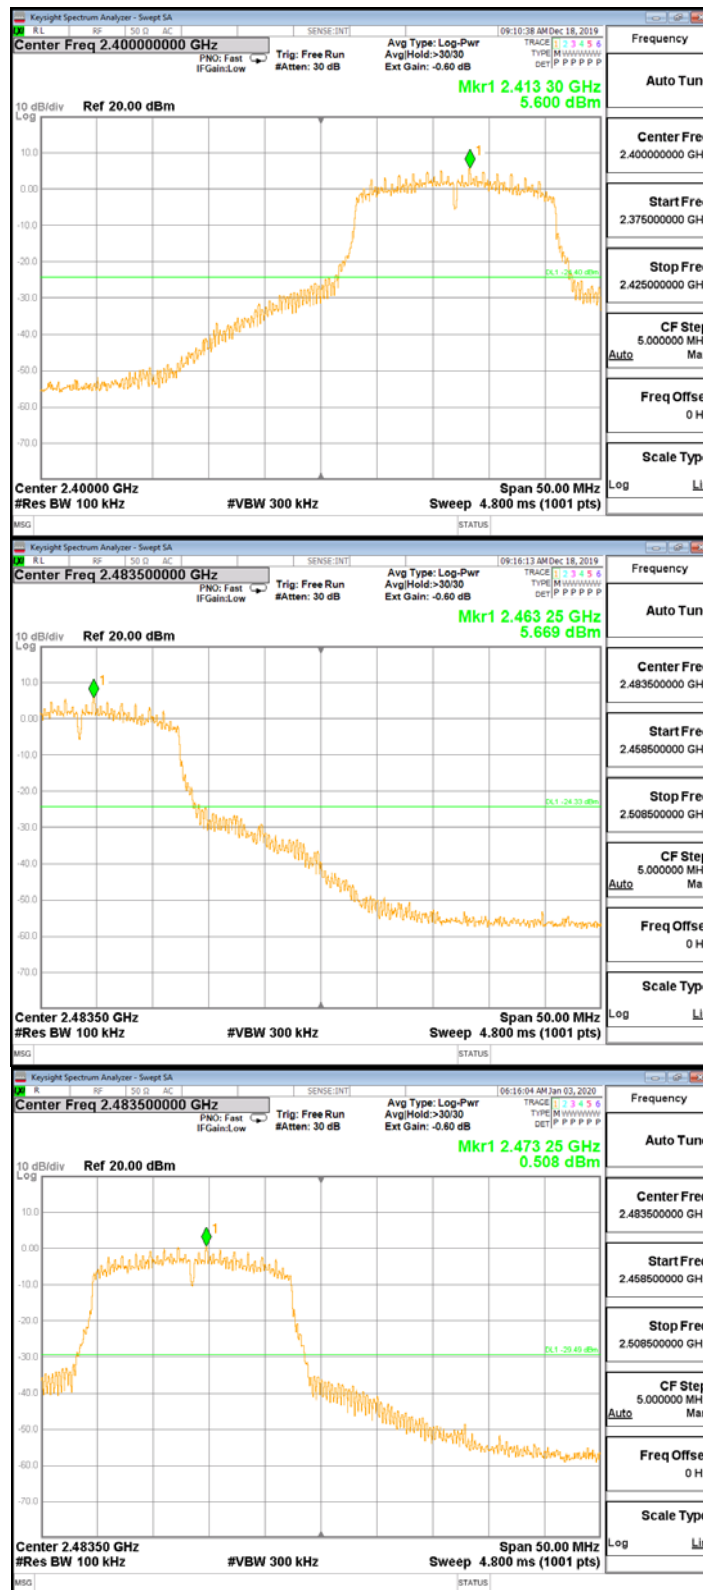

802.11n_HT20_ANT-R

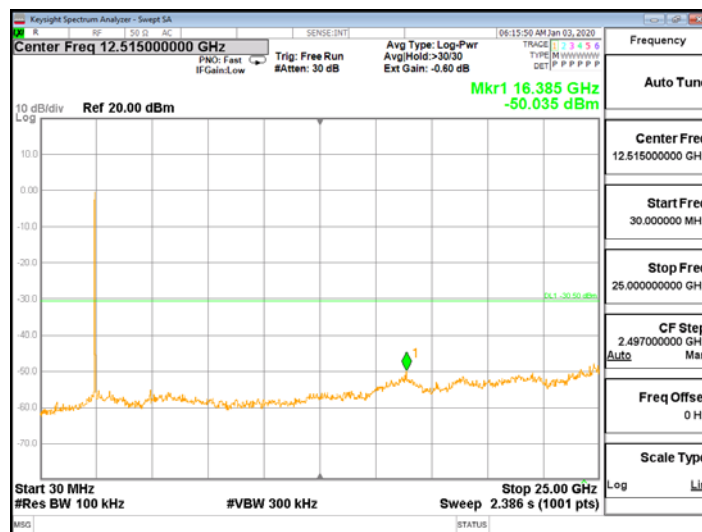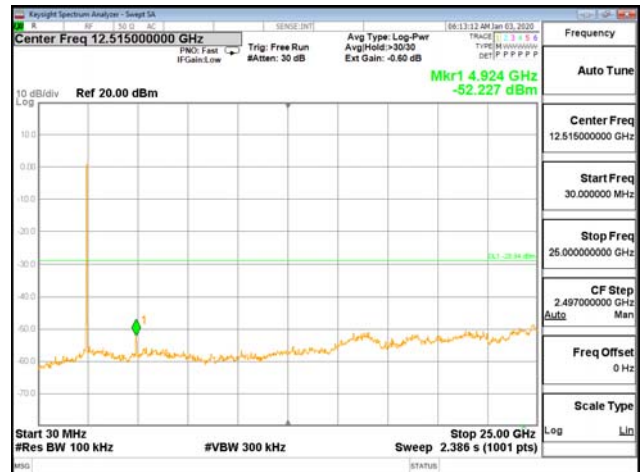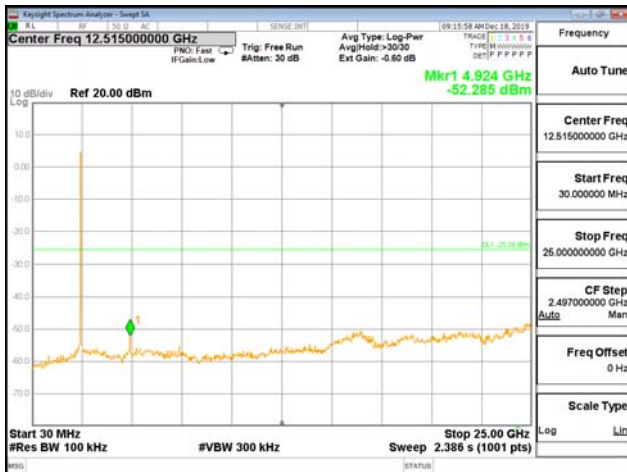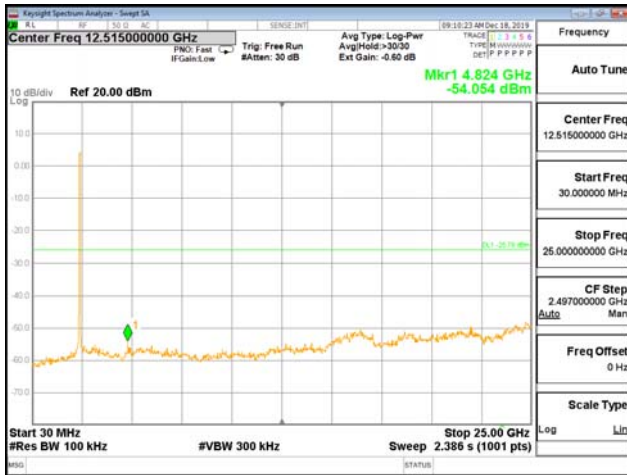

802.11n_HT20_ANT-R

4.5 Radiated Emission

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

KDB 558074 - Section 8.5, 8.6
ANSI C63.10-2013 - Section 11.11, 11.12
RSS-Gen - Section 6.13

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
b) VBW $\geq$ RBW
c) Detector = CISPR Quasi-peak
d) Sweep time = auto couple

- Peak

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = Peak
d) Sweep time = auto
e) Trace mode = max hold

- Average (duty cycle $\geq 98\%$)

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz
b) VBW $\geq 3 \times$ RBW
c) Detector = RMS
d) Sweep time = auto
e) Averaging type = power (i.e., RMS)
f) Trace mode = average (at least 100 traces)

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Frequency Range = 1 GHz ~ 25 GHz (2.4 GHz 10th harmonic)

a) RBW = 1 MHz

b) VBW $\geq 3 \times$ RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

If power averaging (RMS) mode, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.

Test mode	Duty Cycle Factor (dB)
802.11b	0.00
802.11g	0.13
802.11n_HT20	0.13

Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :

- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

We have done all test mode.

The worst-case antenna configuration and Test mode are determined to be as follows.

802.11b mode : ANT-L, ANT-R


802.11g mode : ANT-L + ANT-R (MIMO)

802.11n mode : ANT-L + ANT-R (MIMO)


So the results are only attached worst cases.

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

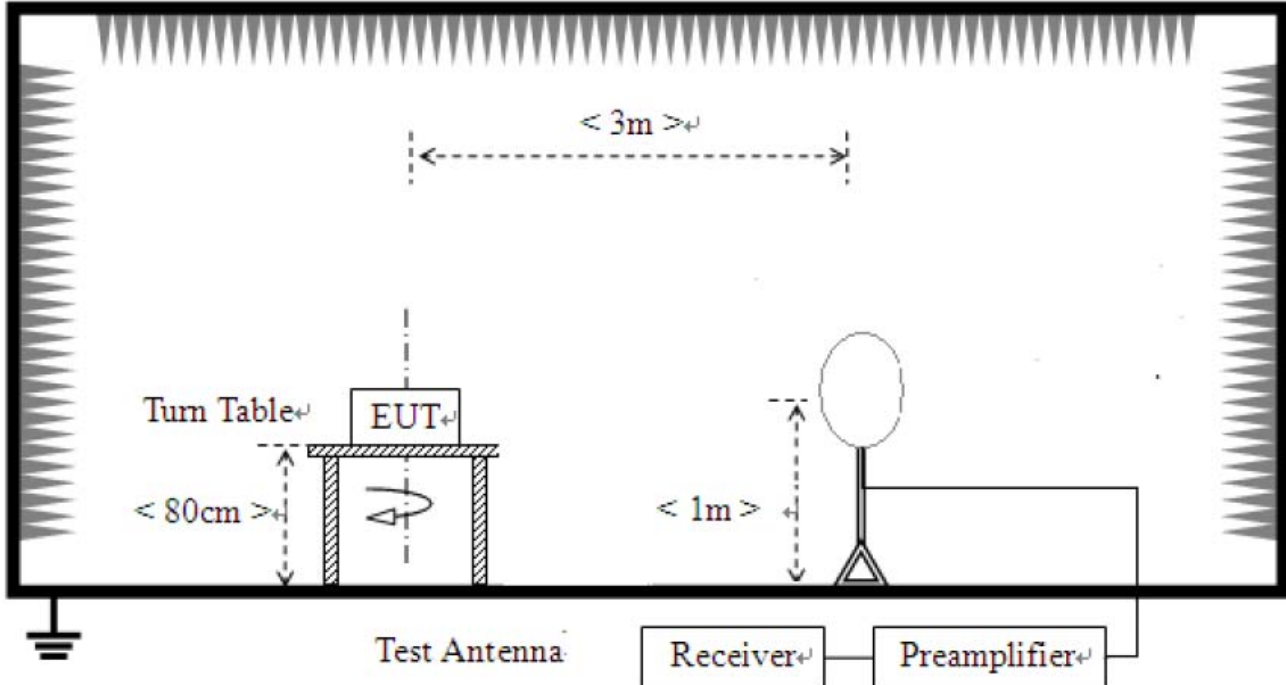

- 2) For field strength of emissions from 30 MHz to 1 GHz

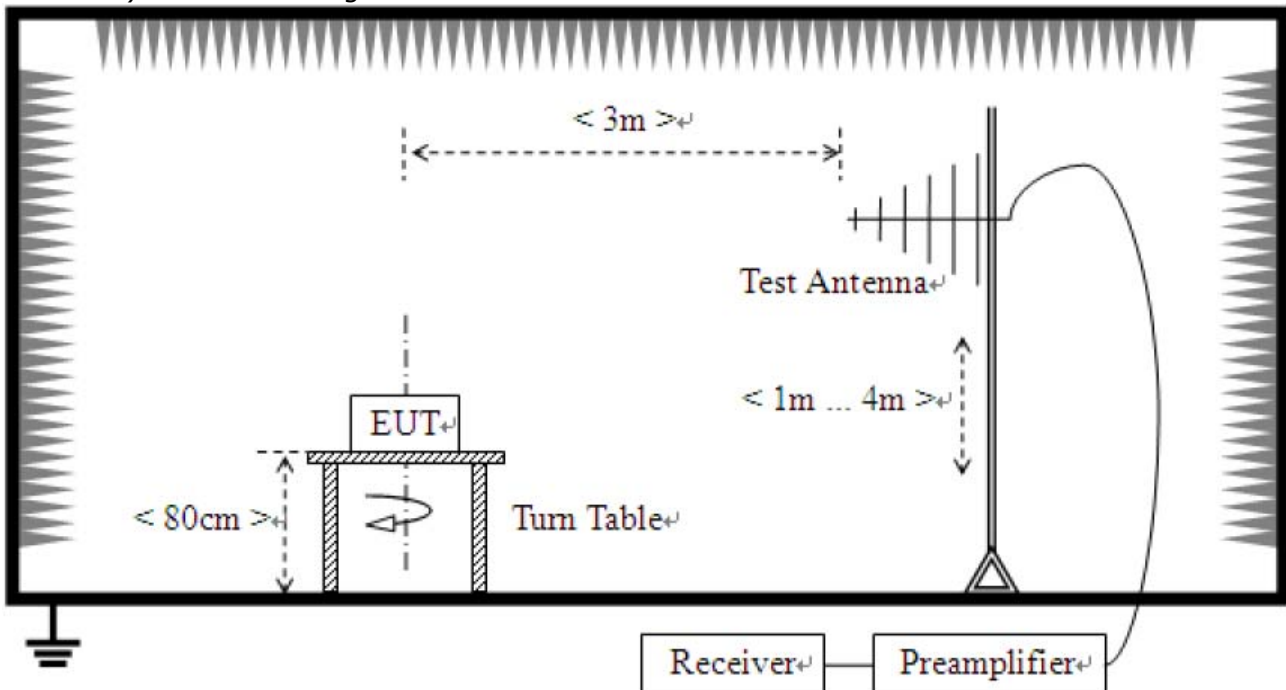

3) For field strength of emissions above 1 GHz

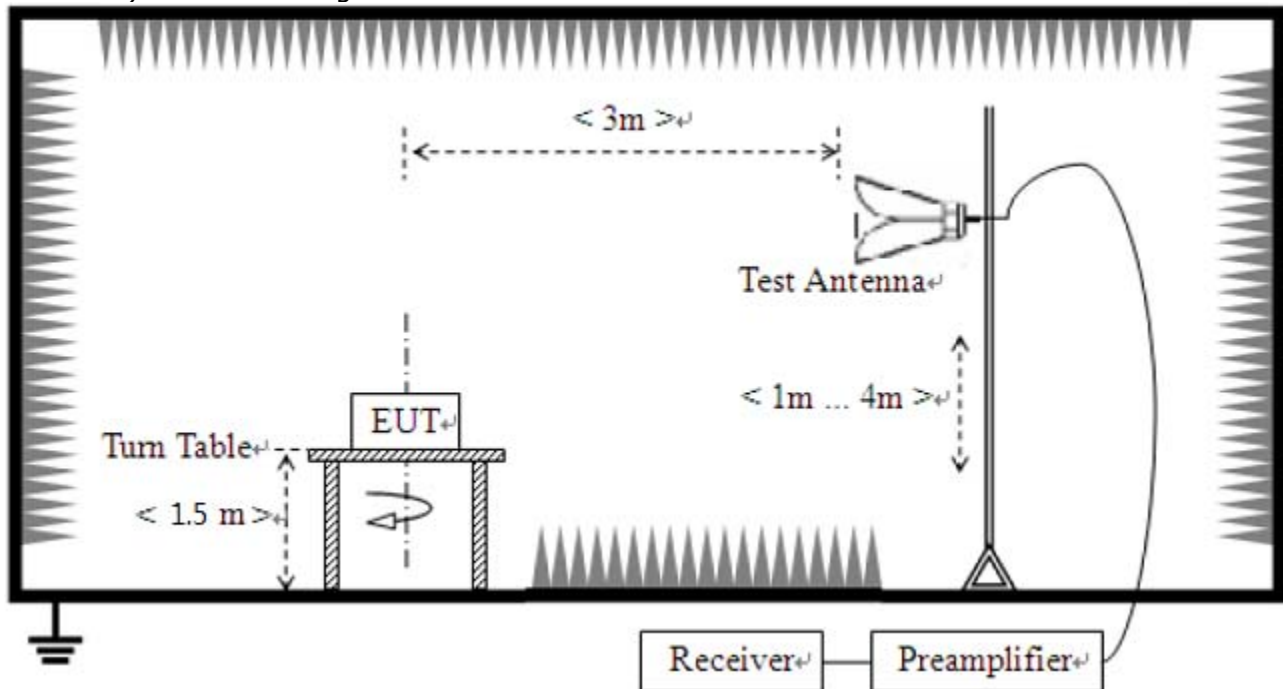

Test results


1) 9 kHz to 30 MHz

Test mode : Transmitter (Worst Case)

The requirements are:

☒ Complies

Test Data

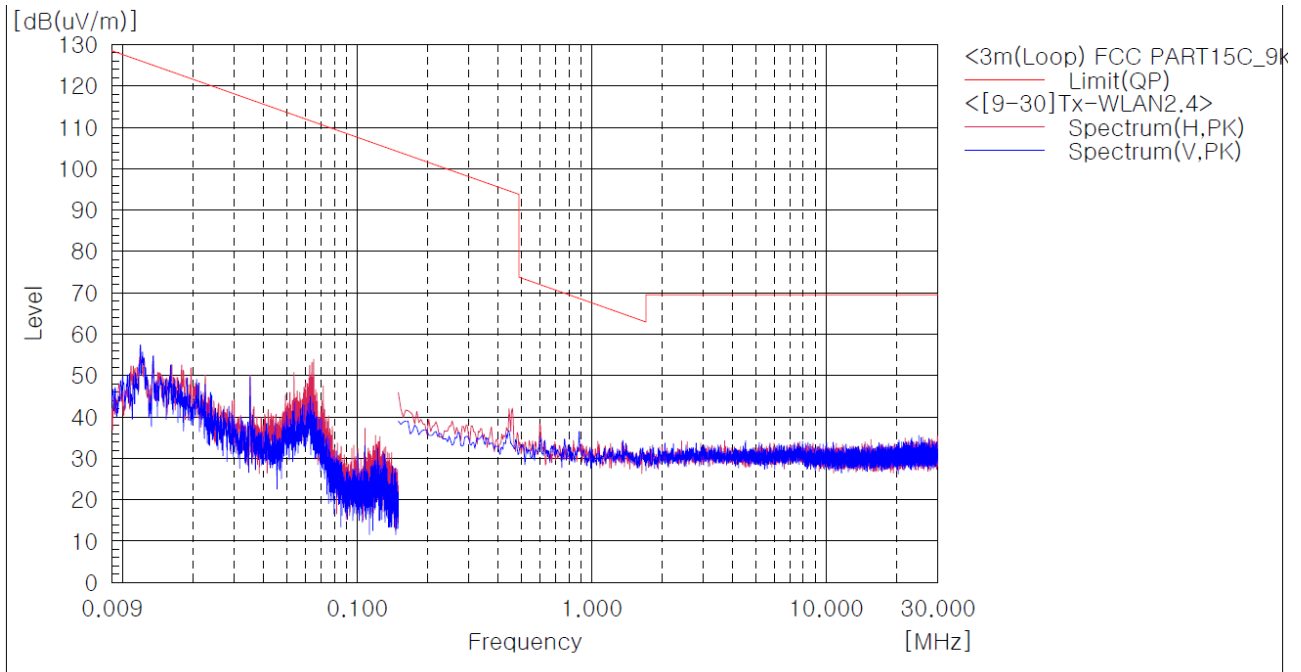

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.			

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : Receiver (Worst Case)

The requirements are:

☒ Complies

Test Data

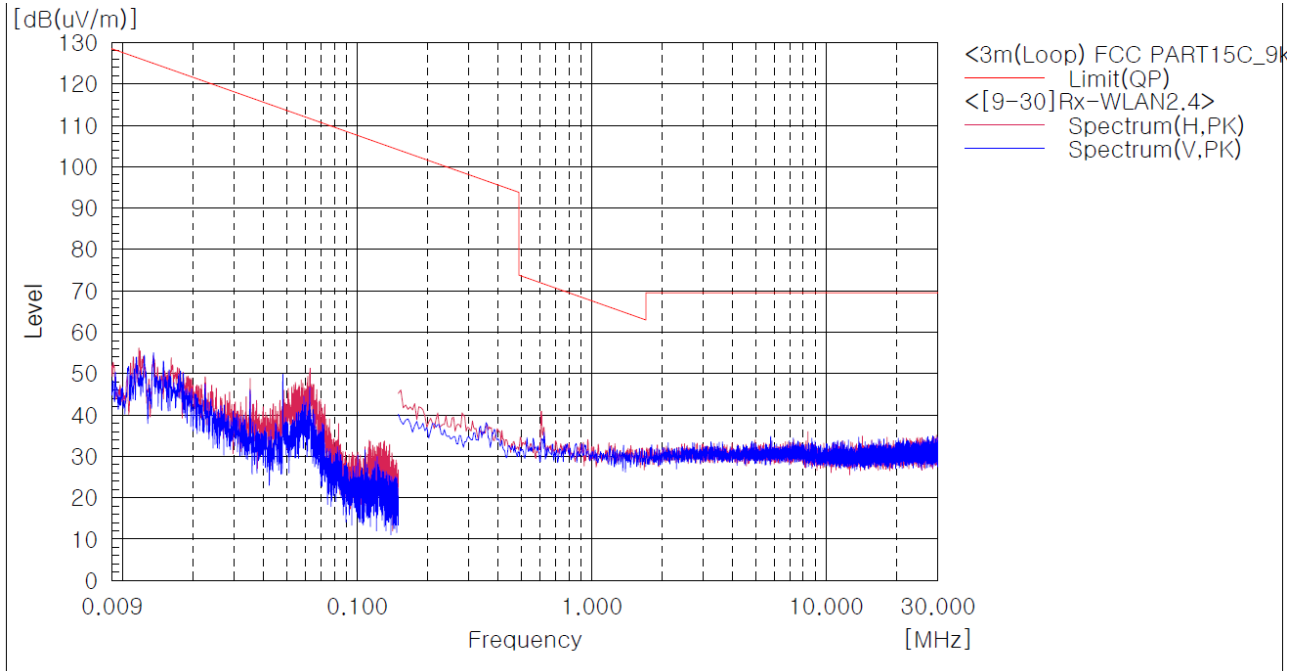

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.			

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : Transmitter (Worst Case)

The requirements are:

☒ Complies

Test Data

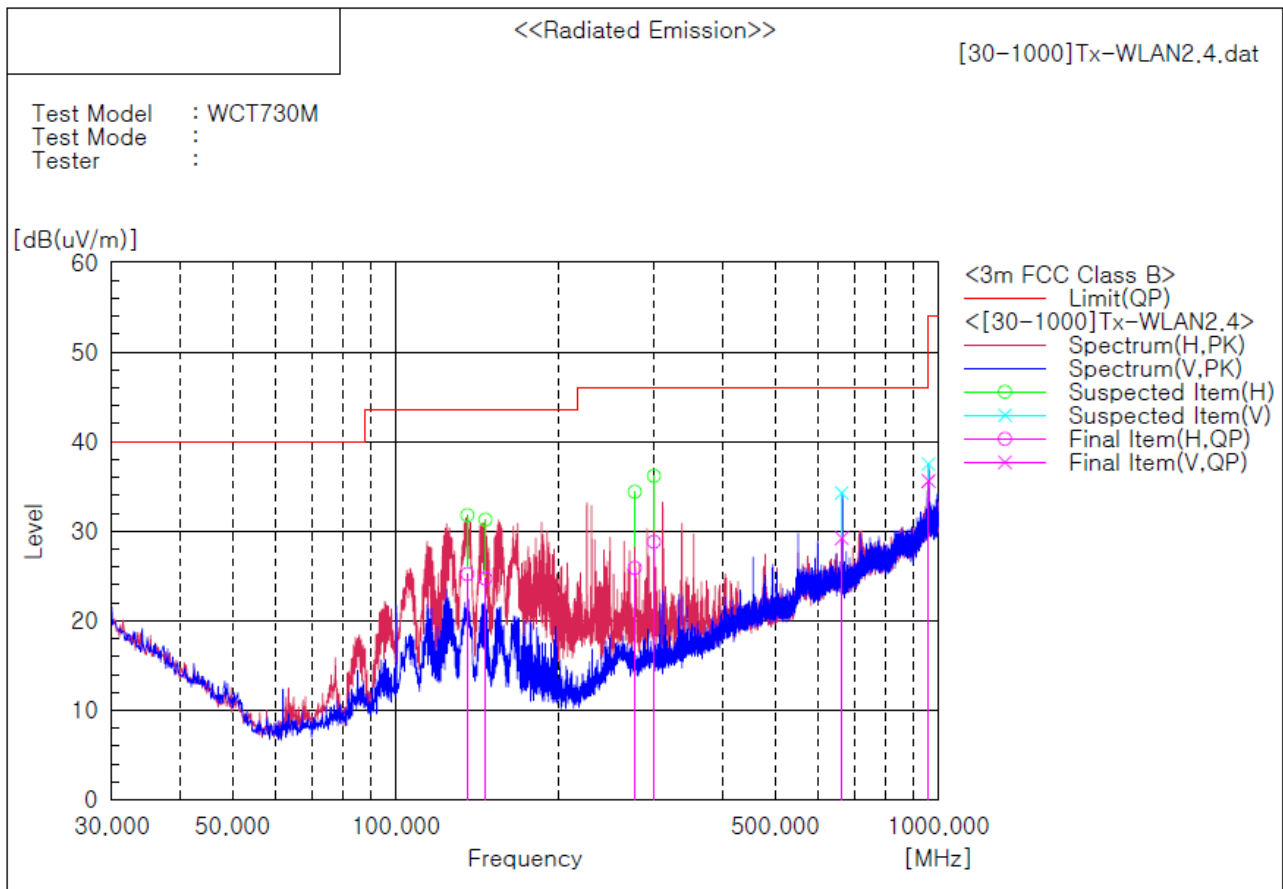


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	135.609	H	36.6	-11.4	25.2	43.5	18.3	209.0	19.0
2	146.400	H	36.5	-11.8	24.7	43.5	18.8	209.0	5.0
3	275.895	H	34.9	-9.0	25.9	46.0	20.1	101.0	337.0
4	299.296	H	37.2	-8.4	28.8	46.0	17.2	101.0	312.0
5	664.016	V	28.6	0.6	29.2	46.0	16.8	100.0	234.0
6	959.988	V	28.4	7.2	35.6	46.0	10.4	191.0	292.0

Remark :

- The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
- Result = Reading + c.f(Correction factor)
- Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

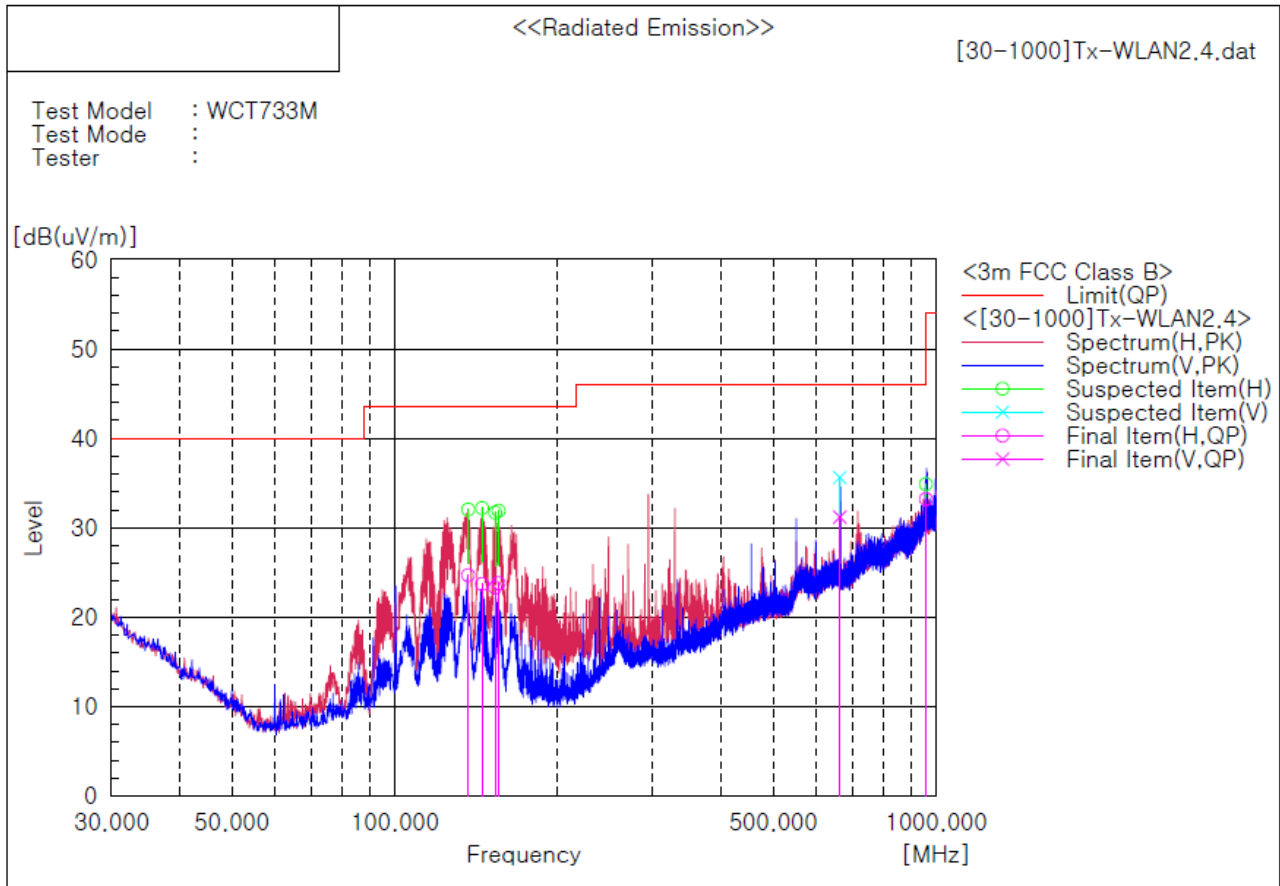


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	136.700	H	36.1	-11.4	24.7	43.5	18.8	209.0	18.0
2	145.066	H	35.4	-11.7	23.7	43.5	19.8	209.0	18.0
3	153.433	H	35.3	-12.0	23.3	43.5	20.2	209.0	12.0
4	155.615	H	35.9	-12.1	23.8	43.5	19.7	209.0	11.0
5	664.016	V	30.6	0.6	31.2	46.0	14.8	101.0	82.0
6	957.320	H	26.0	7.2	33.2	46.0	12.8	101.0	196.0

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

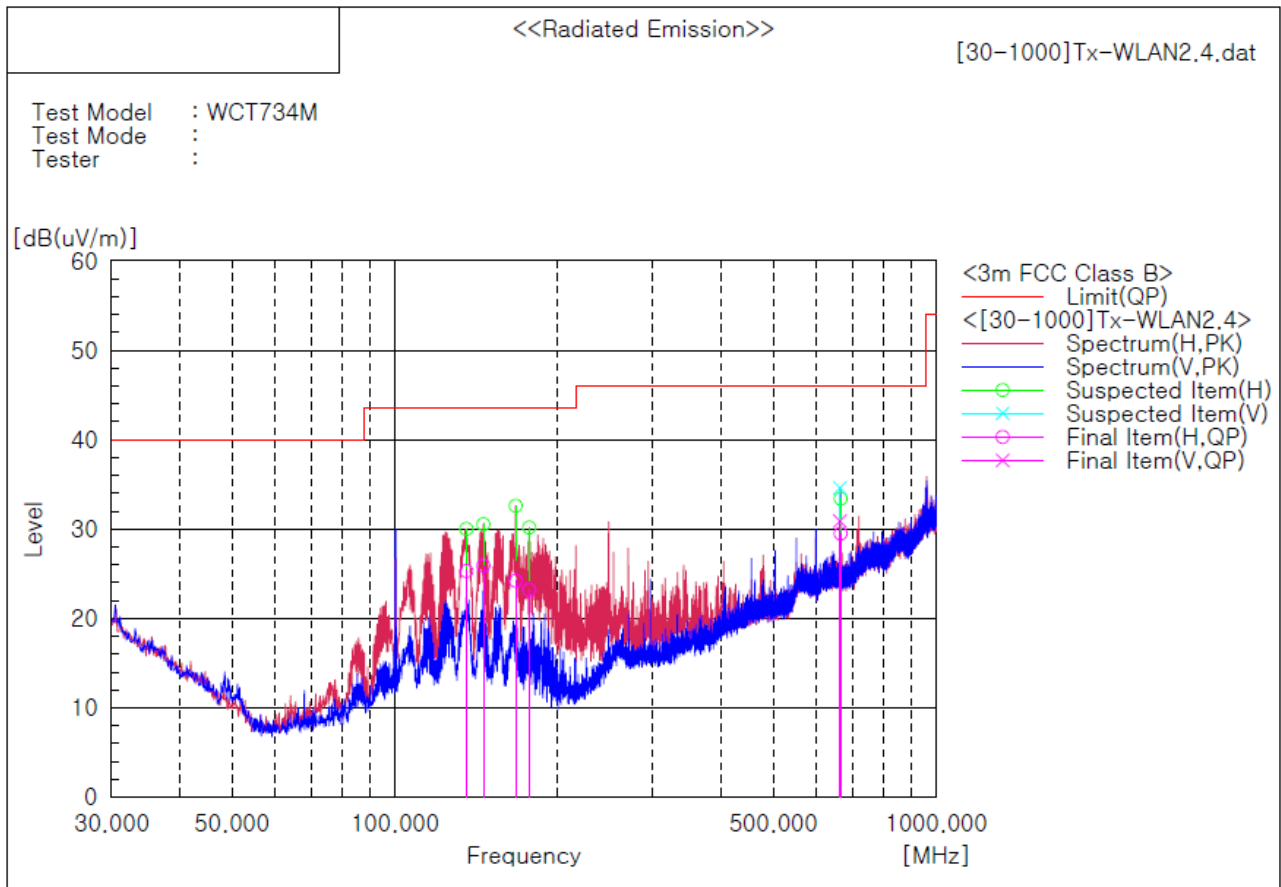

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	135.609	H	36.7	-11.4	25.3	43.5	18.2	192.0	37.0
2	145.794	H	37.6	-11.7	25.9	43.5	17.6	101.0	323.0
3	167.255	H	37.0	-12.8	24.2	43.5	19.3	192.0	37.0
4	177.198	H	36.6	-13.4	23.2	43.5	20.3	101.0	11.0
5	664.016	V	30.3	0.6	30.9	46.0	15.1	101.0	243.0
6	666.199	H	29.0	0.5	29.5	46.0	16.5	101.0	296.0

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

Test mode : Receiver (Worst Case)

The requirements are:

☒ Complies

Test Data

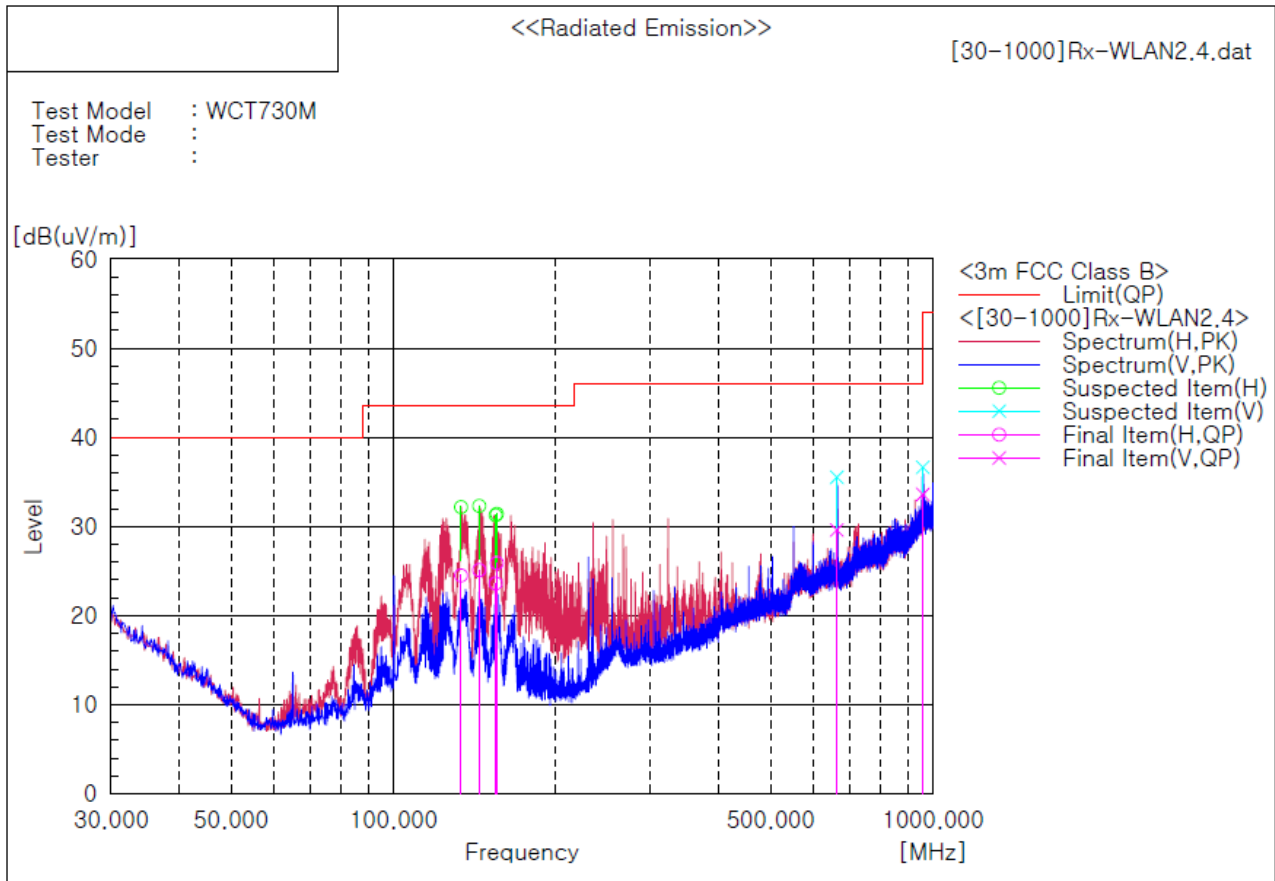


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	133.548	H	35.9	-11.4	24.5	43.5	19.0	209.0	20.0
2	144.339	H	36.8	-11.7	25.1	43.5	18.4	209.0	6.0
3	154.766	H	35.7	-12.1	23.6	43.5	19.9	209.0	9.0
4	155.615	H	38.0	-12.1	25.9	43.5	17.6	209.0	5.0
5	663.774	V	29.0	0.6	29.6	46.0	16.4	100.0	92.0
6	958.048	V	26.4	7.2	33.6	46.0	12.4	191.0	288.0

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

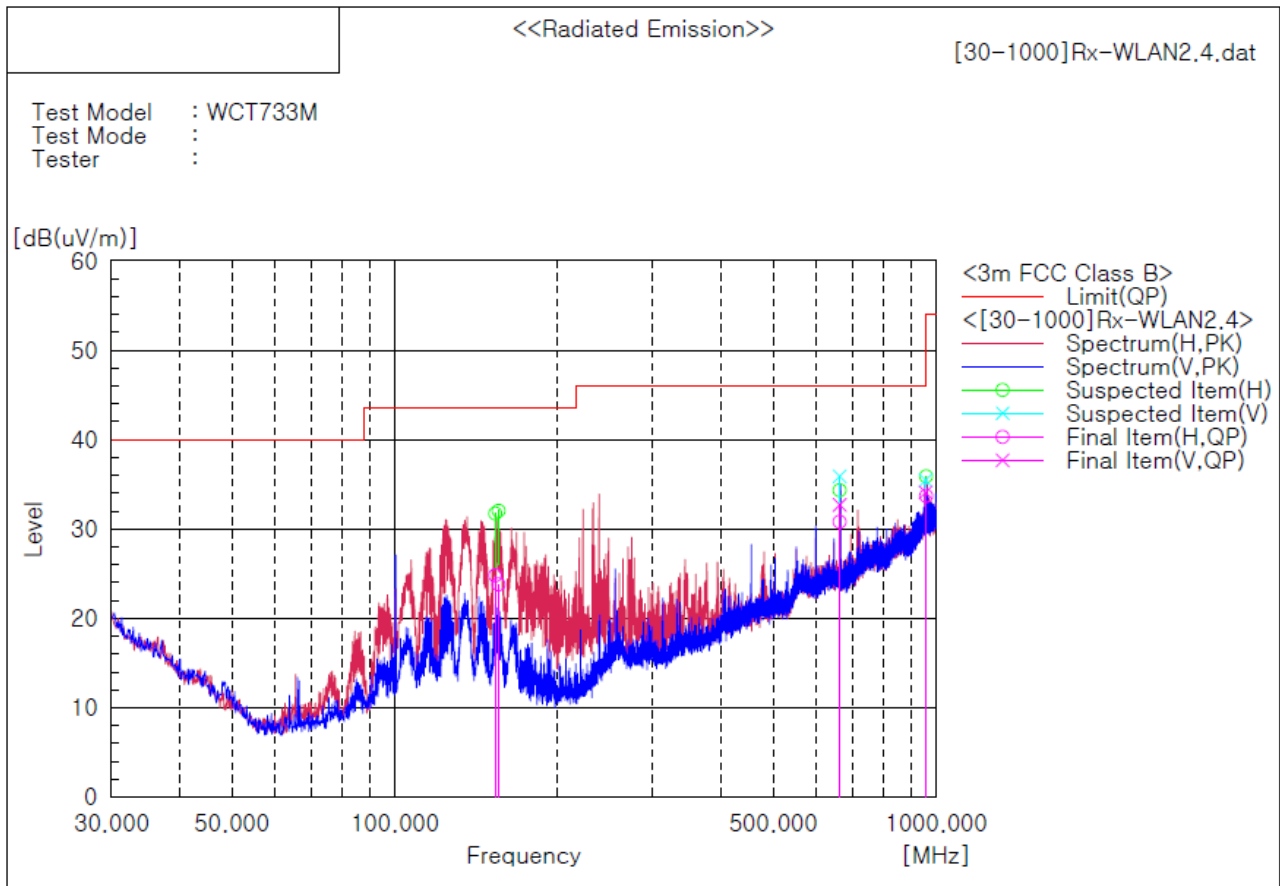


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	153.433	H	36.8	-12.0	24.8	43.5	18.7	194.0	351.0
2	155.615	H	35.9	-12.1	23.8	43.5	19.7	194.0	358.0
3	663.653	H	30.2	0.6	30.8	46.0	15.2	194.0	262.0
4	663.774	V	32.1	0.6	32.7	46.0	13.3	101.0	127.0
5	956.593	V	26.9	7.2	34.1	46.0	11.9	209.0	217.0
6	958.654	H	26.5	7.2	33.7	46.0	12.3	101.0	188.0

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

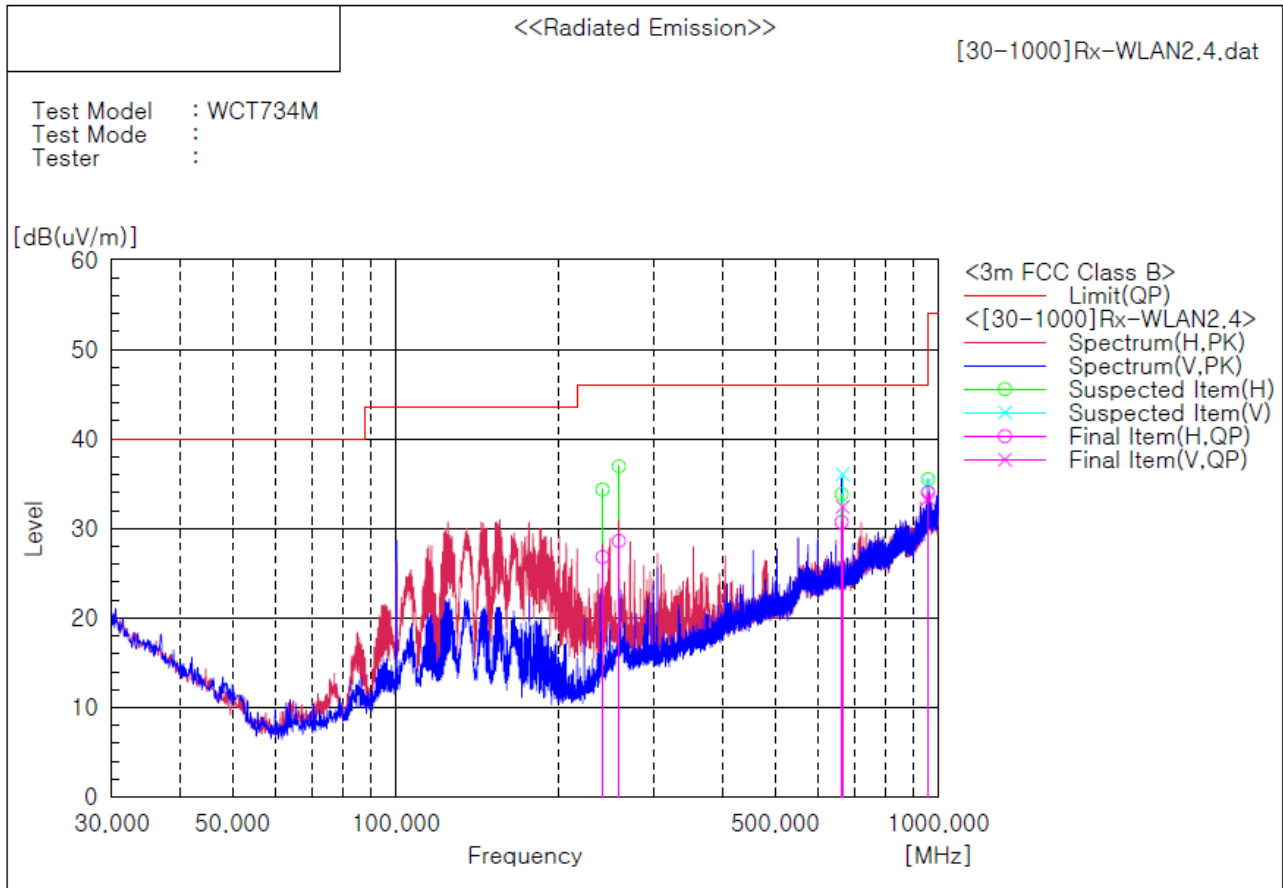

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	240.611	H	37.5	-10.7	26.8	46.0	19.2	101.0	320.0
2	257.950	H	36.6	-8.0	28.6	46.0	17.4	101.0	323.0
3	663.774	H	30.1	0.6	30.7	46.0	15.3	101.0	287.0
4	666.199	V	31.9	0.5	32.4	46.0	13.6	101.0	263.0
5	955.986	V	26.1	7.2	33.3	46.0	12.7	209.0	214.0
6	957.926	H	26.8	7.2	34.0	46.0	12.0	101.0	52.0

Remark :



1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain


3) above 1 GHz

The requirements are:

☒ Complies

Test Data

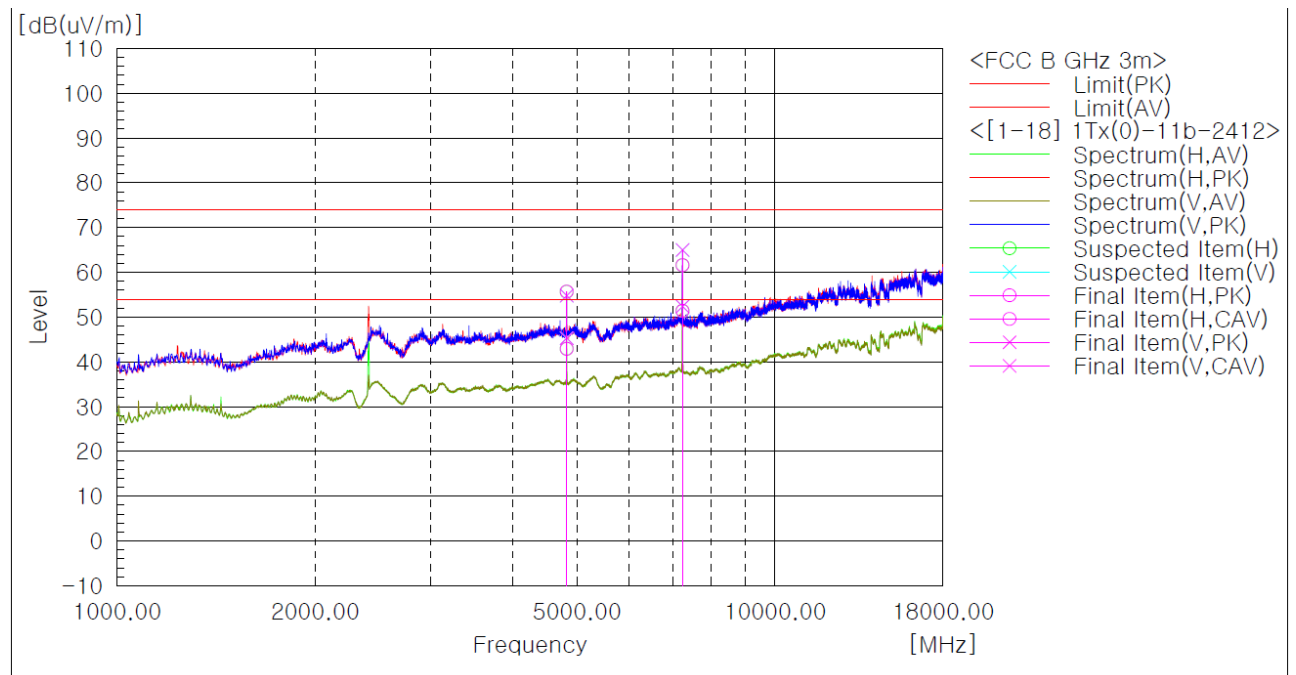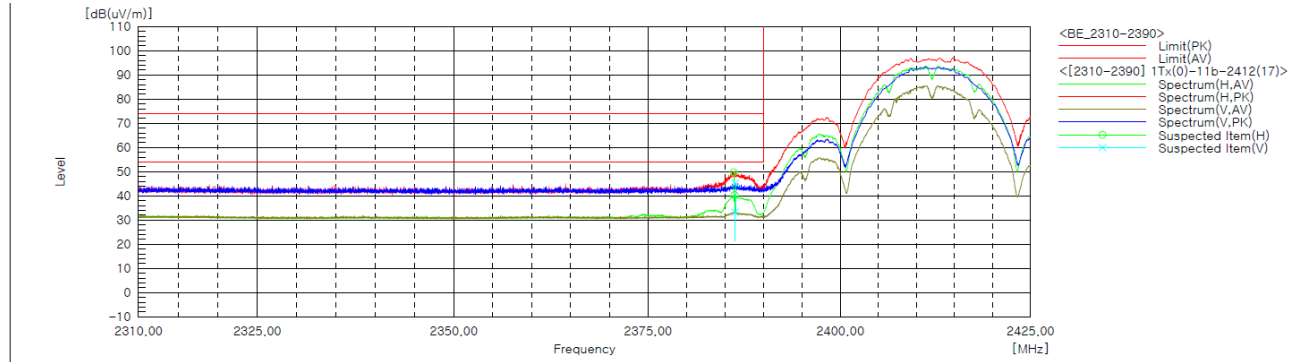

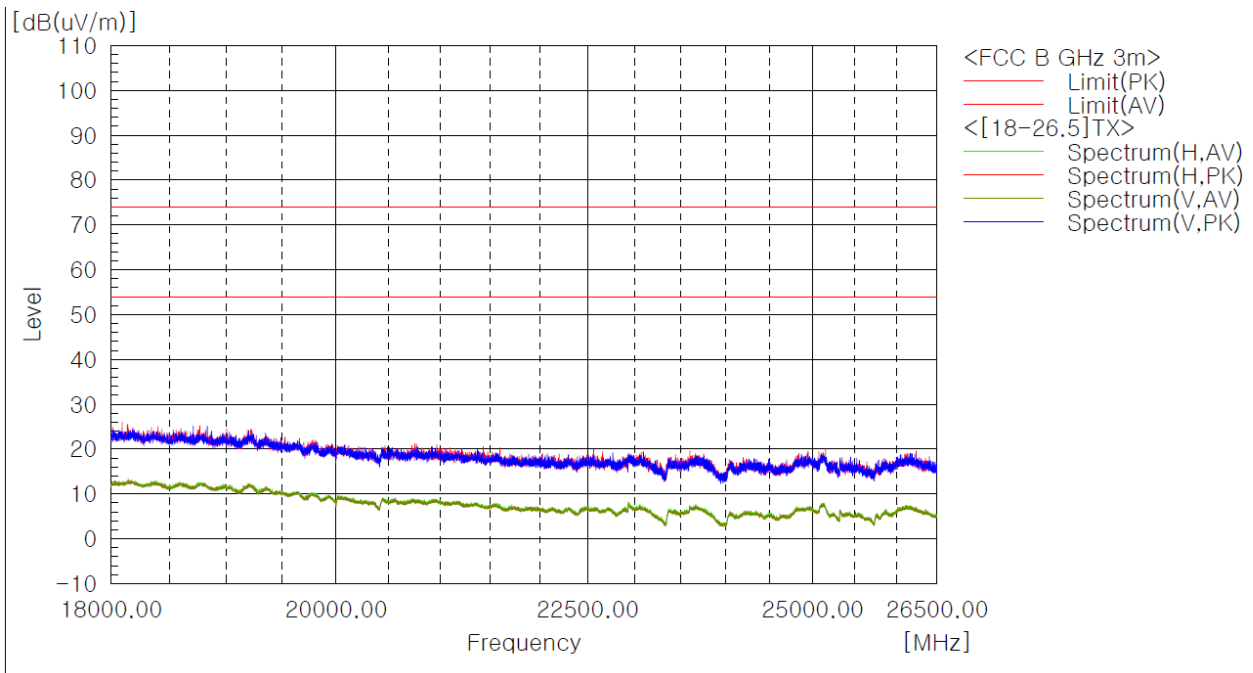

Test mode : Transmitter (802.11b, ANT-L)

Low (2 412 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 386.10	H	49.7	-----	74.0	-----	24.3	-----
2 386.23	H	-----	40.3	-----	54.0	-----	13.7
2 386.27	V	-----	33.2	-----	54.0	-----	20.8
2 386.35	V	45.2	-----	74.0	-----	28.8	-----
4 824.20	H	56.8	-----	74.0	-----	17.2	-----
4 824.22	V	-----	51.7	-----	54.0	-----	2.3
4 824.22	H	-----	49.8	-----	54.0	-----	4.2
4 824.29	V	56.1	-----	74.0	-----	17.9	-----
7 234.82	V	58.9	-----	74.0	-----	15.1	-----
7 235.41	V	-----	52.8	-----	54.0	-----	1.2
7 237.13	H	-----	47.0	-----	54.0	-----	7.0
7 237.28	H	58.1	-----	74.0	-----	15.9	-----

Mid (2 437 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
4 874.00	H	54.0	-----	74.0	-----	20.0	-----
4 874.01	V	52.4	-----	74.0	-----	21.6	-----
4 874.03	V	-----	43.1	-----	54.0	-----	10.9
4 874.09	H	-----	46.8	-----	54.0	-----	7.2
7 311.97	H	-----	42.8	-----	54.0	-----	11.2
7 312.09	V	-----	47.8	-----	54.0	-----	6.2
7 312.74	H	55.1	-----	74.0	-----	18.9	-----
7 312.98	V	56.3	-----	74.0	-----	17.7	-----

High1 (2 462 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 488.64	H	51.0	-----	74.0	-----	23.0	-----
2 488.71	H	-----	39.2	-----	54.0	-----	14.8
2 492.23	V	-----	36.7	-----	54.0	-----	17.3
2 496.54	V	48.9	-----	74.0	-----	25.1	-----
4 924.01	V	52.7	-----	74.0	-----	21.3	-----
4 924.05	V	-----	44.1	-----	54.0	-----	9.9
4 924.06	H	-----	48.3	-----	54.0	-----	5.7
4 924.20	H	54.3	-----	74.0	-----	19.7	-----
7 385.18	V	-----	44.1	-----	54.0	-----	9.9
7 386.66	H	54.1	-----	74.0	-----	19.9	-----
7 387.65	H	-----	41.3	-----	54.0	-----	12.7
7 387.98	V	54.5	-----	74.0	-----	19.5	-----

High2 (2 467 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.84	H	59.0	-----	74.0	-----	15.0	-----
2 484.26	H	-----	52.1	-----	54.0	-----	1.9
2 483.92	V	52.2	-----	74.0	-----	21.8	-----
2 484.21	V	-----	40.6	-----	54.0	-----	13.4
4 933.80	H	51.9	-----	74.0	-----	22.1	-----
4 933.80	H	-----	48.8	-----	54.0	-----	5.2
4 934.13	V	48.8	-----	74.0	-----	25.2	-----
4 934.13	V	-----	44.8	-----	54.0	-----	9.2
7 401.85	H	49.8	-----	74.0	-----	24.2	-----
7 403.48	H	-----	44.3	-----	54.0	-----	9.7
7 401.20	V	52.1	-----	74.0	-----	21.9	-----
7 402.18	V	-----	48.1	-----	54.0	-----	5.9

High3 (2 472 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 486.89	H	57.1	-----	74.0	-----	16.9	-----
2 487.23	H	-----	50.2	-----	54.0	-----	3.8
2 487.59	V	51.5	-----	74.0	-----	22.5	-----
2 484.90	V	-----	40.0	-----	54.0	-----	14.0
4 943.88	H	49.9	-----	74.0	-----	24.1	-----
4 943.88	H	-----	45.1	-----	54.0	-----	8.9
4 944.20	V	46.1	-----	74.0	-----	27.9	-----
4 943.88	V	-----	42.7	-----	54.0	-----	11.3

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : Transmitter (802.11b, ANT-R)

Low (2 412 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 383.72	H	-----	47.2	-----	54.0	-----	6.8
2 385.80	V	-----	41.3	-----	54.0	-----	12.7
2 386.42	V	50.5	-----	74.0	-----	23.5	-----
2 387.12	H	54.9	-----	74.0	-----	19.1	-----

Mid (2 437 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
4 874.08	H	-----	40.5	-----	54.0	-----	13.5
4 874.19	V	-----	38.9	-----	54.0	-----	15.1
4 874.23	H	50.2	-----	74.0	-----	23.8	-----
4 874.26	V	49.5	-----	74.0	-----	24.5	-----

High1 (2 462 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 487.65	V	52.5	-----	74.0	-----	21.5	-----
2 487.74	H	-----	48.9	-----	54.0	-----	5.1
2 487.77	V	-----	41.4	-----	54.0	-----	12.6
2 488.06	H	55.2	-----	74.0	-----	18.8	-----
4 923.82	H	50.3	-----	74.0	-----	23.7	-----
4 924.05	H	-----	40.8	-----	54.0	-----	13.2
4 924.14	V	-----	39.5	-----	54.0	-----	14.5
4 924.24	V	49.2	-----	74.0	-----	24.8	-----

High2 (2 467 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.74	H	56.0	-----	74.0	-----	18.0	-----
2 484.69	H	-----	43.7	-----	54.0	-----	10.3
2 484.53	V	52.7	-----	74.0	-----	21.3	-----
2 484.77	V	-----	40.7	-----	54.0	-----	13.3
4 933.80	H	47.6	-----	74.0	-----	26.4	-----
4 933.80	H	-----	43.4	-----	54.0	-----	10.6
4 933.48	V	46.4	-----	74.0	-----	27.6	-----
4 934.13	V	-----	40.6	-----	54.0	-----	13.4

High3 (2 472 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 485.11	H	62.8	-----	74.0	-----	11.2	-----
2 486.71	H	-----	53.3	-----	54.0	-----	0.7
2 487.13	V	58.4	-----	74.0	-----	15.6	-----
2 486.84	V	-----	49.6	-----	54.0	-----	4.4
4 943.88	H	47.8	-----	74.0	-----	26.2	-----
4 943.88	H	-----	43.3	-----	54.0	-----	10.7
4 943.88	V	44.8	-----	74.0	-----	29.2	-----
4 943.88	V	-----	40.5	-----	54.0	-----	13.5

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : Transmitter (802.11g)

Low (2 412 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV / m)]	Level AV [dB(uV / m)]	Limit PK [dB(uV / m)]	Limit AV [dB(uV / m)]	Margin PK [dB]	Margin AV [dB]
2 389.45	H	68.3	-----	74.0	-----	5.7	-----
2 389.83	V	60.2	-----	74.0	-----	13.8	-----
2 389.91	H	-----	48.5	-----	54.0	-----	5.5
2 390.00	V	-----	40.4	-----	54.0	-----	13.6
4 824.20	H	51.6	-----	74.0	-----	22.4	-----
4 824.05	H	-----	38.7	-----	54.0	-----	15.3
4 824.24	V	49.7	-----	74.0	-----	24.3	-----
4 824.36	V	-----	36.5	-----	54.0	-----	17.5
7 240.20	H	52.3	-----	74.0	-----	21.7	-----
7 250.65	H	-----	38.4	-----	54.0	-----	15.6
7 233.68	V	54.3	-----	74.0	-----	19.7	-----
7 238.48	V	-----	41.9	-----	54.0	-----	12.1

Mid (2 437 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV / m)]	Level AV [dB(uV / m)]	Limit PK [dB(uV / m)]	Limit AV [dB(uV / m)]	Margin PK [dB]	Margin AV [dB]
4 874.25	H	51.9	-----	74.0	-----	22.1	-----
4 873.87	H	-----	38.3	-----	54.0	-----	15.7
4 869.25	V	49.0	-----	74.0	-----	25.0	-----
4 874.31	V	-----	36.3	-----	54.0	-----	17.7
7 309.08	H	50.6	-----	74.0	-----	23.4	-----
7 313.45	H	-----	38.1	-----	54.0	-----	15.9
7 308.18	V	53.2	-----	74.0	-----	20.8	-----
7 311.50	V	-----	40.8	-----	54.0	-----	13.2

High1 (2 462 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.50	H	66.9	-----	74.0	-----	7.1	-----
2 483.57	H	-----	51.0	-----	54.0	-----	3.0
2 483.67	V	-----	45.4	-----	54.0	-----	8.6
2 484.36	V	64.2	-----	74.0	-----	9.8	-----
4 924.44	H	52.7	-----	74.0	-----	21.3	-----
4 924.13	H	-----	38.8	-----	54.0	-----	15.2
4 923.36	V	49.6	-----	74.0	-----	24.4	-----
4 924.27	V	-----	36.3	-----	54.0	-----	17.7
7 395.33	H	49.7	-----	74.0	-----	24.3	-----
7 380.65	H	-----	37.8	-----	54.0	-----	16.2
7 388.03	V	52.0	-----	74.0	-----	22.0	-----
7 383.95	V	-----	39.7	-----	54.0	-----	14.3

High2 (2 467 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.55	H	71.7	-----	74.0	-----	2.3	-----
2 483.52	H	-----	50.6	-----	54.0	-----	3.4
2 483.55	V	63.3	-----	74.0	-----	10.7	-----
2 483.54	V	-----	43.9	-----	54.0	-----	10.1

High3 (2 472 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 484.03	H	71.9	-----	74.0	-----	2.1	-----
2 485.72	H	-----	50.8	-----	54.0	-----	3.2
2 485.43	V	66.7	-----	74.0	-----	7.3	-----
2 484.29	V	-----	43.6	-----	54.0	-----	10.4

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down positon(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : Transmitter (802.11n_HT20)

Low (2 412 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 389.51	V	61.9	-----	74.0	-----	12.1	-----
2 389.65	H	71.3	-----	74.0	-----	2.7	-----
2 389.77	H	-----	52.3	-----	54.0	-----	1.7
2 389.88	V	-----	41.5	-----	54.0	-----	12.5
4 826.36	H	51.0	-----	74.0	-----	23.0	-----
4 824.01	H	-----	36.9	-----	54.0	-----	17.1
4 821.30	V	48.2	-----	74.0	-----	25.8	-----
4 824.22	V	-----	35.6	-----	54.0	-----	18.4
7 232.18	H	50.4	-----	74.0	-----	23.6	-----
7 245.48	H	-----	38.1	-----	54.0	-----	15.9
7 237.78	V	52.6	-----	74.0	-----	21.4	-----
7 232.08	V	-----	40.4	-----	54.0	-----	13.6

Mid (2 437 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
4 871.19	H	51.2	-----	74.0	-----	22.8	-----
4 874.11	H	-----	37.6	-----	54.0	-----	16.4
4 869.23	V	47.5	-----	74.0	-----	26.5	-----
4 874.06	V	-----	35.4	-----	54.0	-----	18.6
7 315.75	H	50.2	-----	74.0	-----	23.8	-----
7 308.45	H	-----	37.7	-----	54.0	-----	16.3
7 316.78	V	51.7	-----	74.0	-----	22.3	-----
7 311.08	V	-----	39.6	-----	54.0	-----	14.4

High1 (2 462 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.50	H	-----	52.5	-----	54.0	-----	1.5
2 483.51	H	71.3	-----	74.0	-----	2.7	-----
2 483.53	V	66.0	-----	74.0	-----	8.0	-----
2 483.56	V	-----	46.8	-----	54.0	-----	7.2
4 921.57	H	51.8	-----	74.0	-----	22.2	-----
4 923.83	H	-----	36.5	-----	54.0	-----	17.5
4 921.10	V	49.2	-----	74.0	-----	24.8	-----
4 924.62	V	-----	35.0	-----	54.0	-----	19.0
7 387.83	H	49.0	-----	74.0	-----	25.0	-----
7 380.78	H	-----	37.4	-----	54.0	-----	16.6
7 384.30	V	50.3	-----	74.0	-----	23.7	-----
7 380.90	V	-----	38.3	-----	54.0	-----	15.7

High2 (2 467 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 483.56	H	72.8	-----	74.0	-----	1.2	-----
2 483.52	H	-----	50.4	-----	54.0	-----	3.6
2 483.69	V	65.1	-----	74.0	-----	8.9	-----
2 483.51	V	-----	42.5	-----	54.0	-----	11.5
4 931.20	1.8	48.6	-----	74.0	-----	25.4	-----
4 939.00	1.8	-----	41.6	-----	54.0	-----	12.4
4 928.60	1.8	46.2	-----	74.0	-----	27.8	-----
4 935.75	1.8	-----	40.2	-----	54.0	-----	13.8



High3 (2 472 MHz)

Frequency [MHz]	(P)	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 484.47	H	71.8	-----	74.0	-----	2.2	-----
2 484.18	H	-----	47.3	-----	54.0	-----	6.7
2 483.99	V	67.4	-----	74.0	-----	6.6	-----
2 483.59	V	-----	41.6	-----	54.0	-----	12.4

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : Receiver (Worst Case)

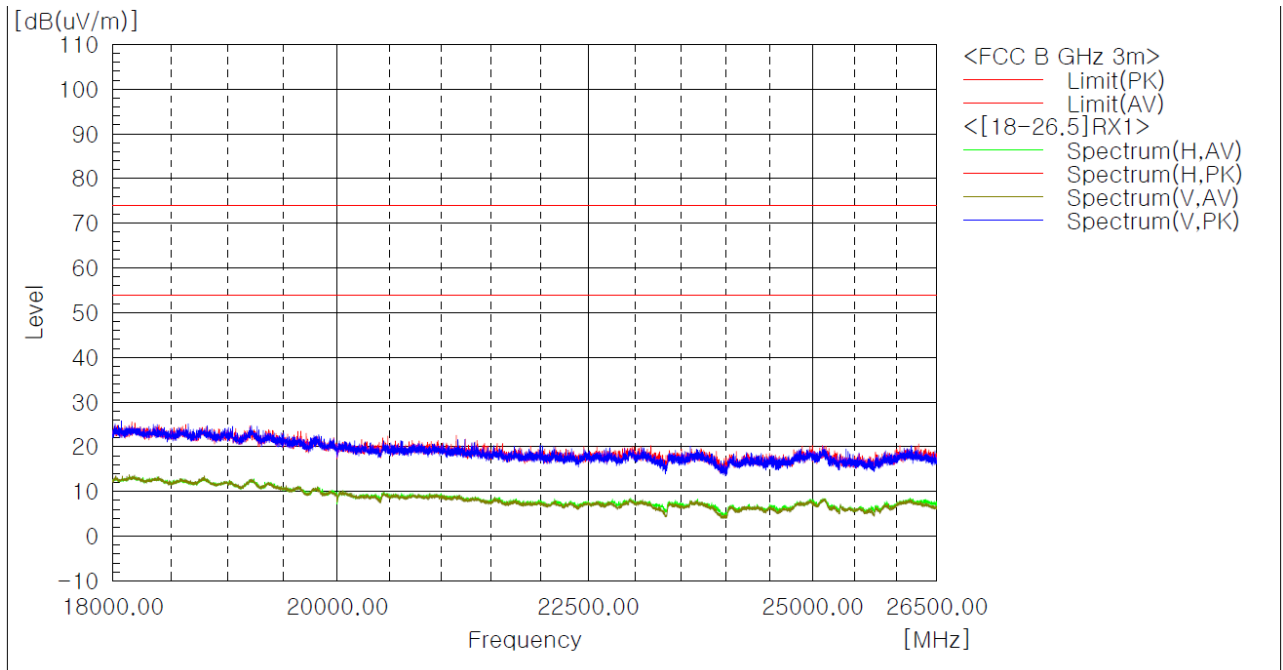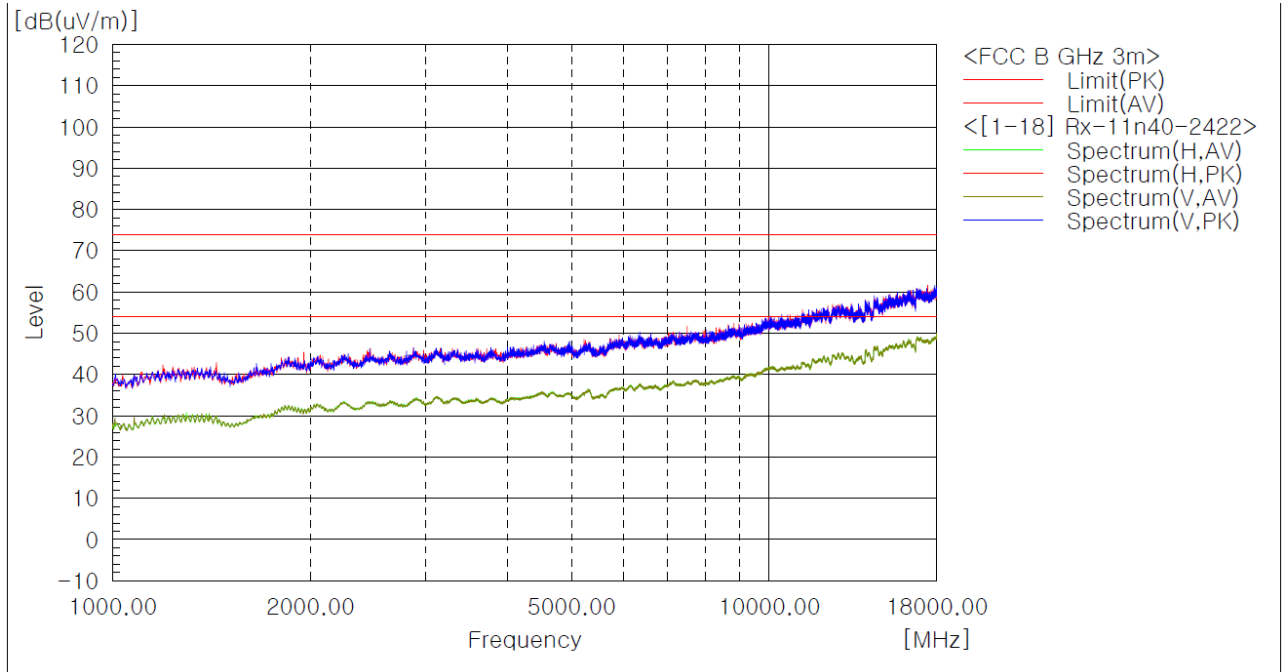

Frequency [MHz]	(P)	Level PK [dB(uV / m)]	Level AV [dB(uV / m)]	Limit PK [dB(uV / m)]	Limit AV [dB(uV / m)]	Margin PK [dB]	Margin AV [dB]
--------------------	-----	--------------------------	--------------------------	--------------------------	--------------------------	-------------------	-------------------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

4.6 AC Conducted Emissions

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

RSS-Gen - Section 8.8

Module has been tested by mounting the End product(Printer).

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results


The requirements are:

☒ Complies

Test Data

[LINE]

3CE_Class B_L1

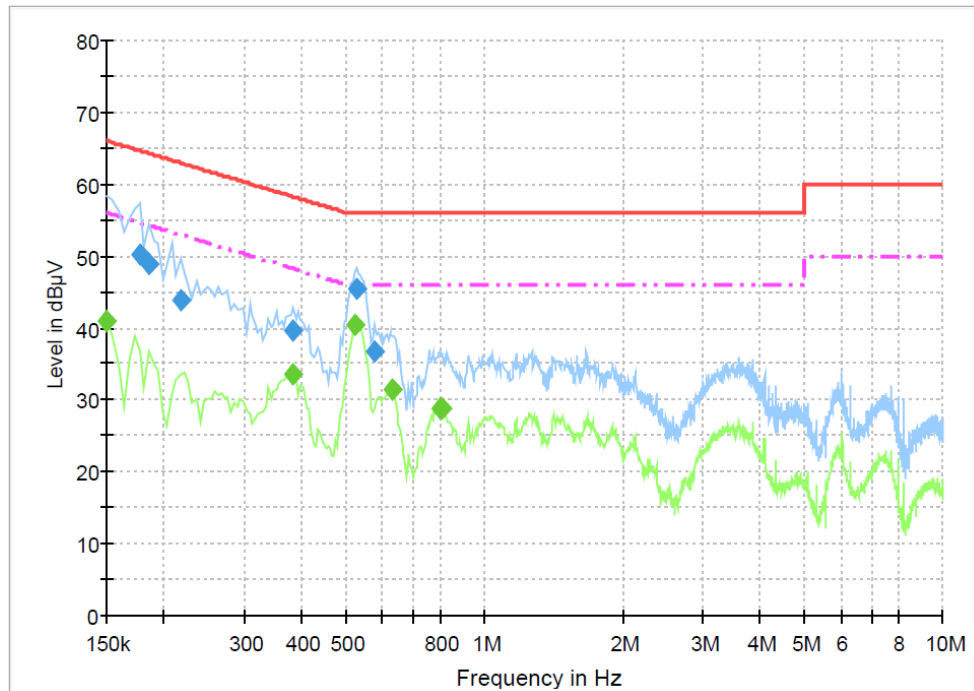

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	50.2	1000.0	9.000	On	L1	10.1	14.5	64.6
0.186000	48.9	1000.0	9.000	On	L1	10.0	15.3	64.2
0.217500	43.8	1000.0	9.000	On	L1	9.9	19.1	62.9
0.384000	39.6	1000.0	9.000	On	L1	10.0	18.6	58.2
0.528000	45.4	1000.0	9.000	On	L1	10.0	10.6	56.0
0.577500	36.7	1000.0	9.000	On	L1	10.0	19.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	41.0	1000.0	9.000	On	L1	9.8	15.0	56.0
0.384000	33.6	1000.0	9.000	On	L1	10.0	14.6	48.2
0.523500	40.4	1000.0	9.000	On	L1	10.0	5.6	46.0
0.631500	31.3	1000.0	9.000	On	L1	10.0	14.7	46.0
0.802500	28.9	1000.0	9.000	On	L1	9.9	17.1	46.0
0.807000	28.9	1000.0	9.000	On	L1	9.9	17.1	46.0

[NEUTRAL]

3CE_Class B_N

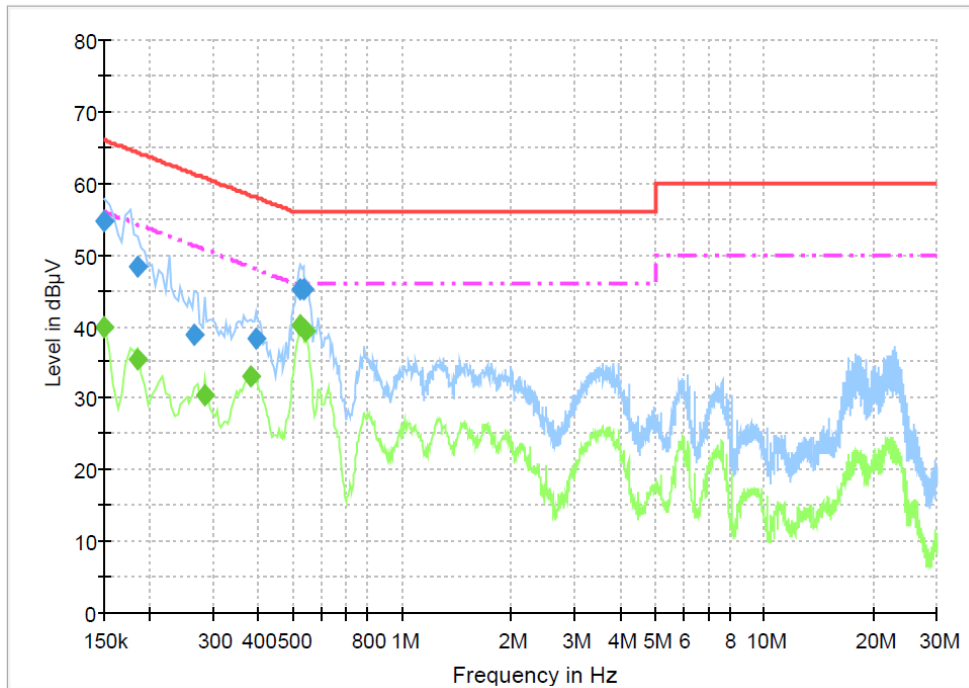

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	54.6	1000.0	9.000	On	N	9.8	11.4	66.0
0.186000	48.2	1000.0	9.000	On	N	10.0	16.0	64.2
0.267000	38.7	1000.0	9.000	On	N	9.8	22.5	61.2
0.393000	38.2	1000.0	9.000	On	N	10.0	19.8	58.0
0.523500	45.2	1000.0	9.000	On	N	10.0	10.8	56.0
0.537000	45.2	1000.0	9.000	On	N	10.0	10.8	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	39.8	1000.0	9.000	On	N	9.8	16.2	56.0
0.186000	35.3	1000.0	9.000	On	N	10.0	18.9	54.2
0.285000	30.4	1000.0	9.000	On	N	9.8	20.3	50.7
0.379500	33.1	1000.0	9.000	On	N	10.0	15.2	48.3
0.523500	40.2	1000.0	9.000	On	N	10.0	5.8	46.0
0.541500	39.5	1000.0	9.000	On	N	10.0	6.5	46.0

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2019-10-16	2020-10-16
2	Signal Analyzer	Agilent	N9020A	MY50200512	2019-04-23	2020-04-23
3	Signal Generator	Rohde & Schwarz	SMB100A	175528	2019-10-16	2020-10-16
4	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2019-10-22	2020-10-22
5	Bilog Antenna	Schaffner	CBL6111C	2551	2018-05-10	2020-05-10
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2018-05-27	2020-05-27
7	6dB Attenuator	R&S	DNF	272.4110.50-2	2019-10-25	2020-10-25
8	AMPLIFIER	SONOMA	310	291721	2019-01-28	2020-01-28
9	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2019-01-29	2020-01-29
10	Preamplifier	Agilent	8449B	3008A02011	2019-11-25	2020-11-25
11	Horn Antenna	ETS-Lindgren	3117	00154525	2019-09-25	2021-09-25
12	Horn Antenna	ETS-Lindgren	3116	00062916	2019-04-22	2021-04-22
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2019-01-28	2020-01-28
14	LISN	Rohde & Schwarz	ENV216	101235	2019-01-29	2020-01-29

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable	Canare Corporation	L-5D2W	N/A	2019-12-29
2	RF Cable	Junkosha Inc.	MWX221	1510S087	2019-11-20
3	RF Cable	Junkosha Inc.	MWX221	1510S085	2019-11-20
4	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2019-12-29
5	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2019-12-29
6	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2019-12-29
7	RF Cable	HUBER+SUHNER	SUCOFLEX 104	N/A	2019-08-10
8	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2019-08-10
9	RF Cable	HUBER+SUHNER	SUCOFLEX 106	N/A	2019-08-10