

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15 SUBPART E 15.407

**Report Reference No.**..... : **MTEB23060015-R1**

**FCC ID**..... : **A4C-10016A**

Compiled by

( position+printed name+signature)..: File administrators Alisa Luo

*Alisa*

Supervised by

( position+printed name+signature)..: Test Engineer Sunny Deng

*Sunny*

Approved by

( position+printed name+signature)..: Manager Yvette Zhou

*Yvette*

Date of issue.....: June 01,2023

**Representative Laboratory Name.** : **Shenzhen Most Technology Service Co., Ltd.**

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name**.....: **RM Acquisition LLC.**

Address.....: 8725 West Higgins Road Suite 900 Chicago, Illinois 60631

**Test specification**..... :

Standard.....: **FCC Part 15 Subpart E 15.407**

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description**.....: GPS Device

Trade Mark.....: **RAND McNALLY**

**Manufacturer**.....: **SHEN ZHEN APICAL TECHNOLOGY CO., LTD**

Model/Type reference.....: RandTab10

Listed Models .....: N/A

Ratings.....: DC3.7V by Battery  
DC 5V(by Car Charger)

Modulation .....: OFDM

Frequency.....: From 5180MHz-5240MHz; 5260MHz-5320MHz;  
5500MHz-5700MHz; 5745MHz-5825MHz

Hardware version.....: TND T1050-MT8176-MAIN-01B

Software version .....: O11019. TND 1050 -P1-220110-110

Result.....: **PASS**

TEST REPORT

Equipment under Test : GPS Device

Model /Type : RandTab10

Listed Models : N/A

**Applicant** : RM Acquisition LLC.

Address : 8725 West Higgins Road Suite 900 Chicago, Illinois 60631

**Manufacturer** : SHEN ZHEN APICAL TECHNOLOGY CO., LTD

Address : 9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district, Hi-tech Industrial Park, Nanshan, Shenzhen

|              |      |
|--------------|------|
| Test Result: | PASS |
|--------------|------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1 REVISION HISTORY .....</b>                               | <b>4</b>  |
| <b>2 TEST STANDARDS .....</b>                                 | <b>5</b>  |
| <b>3 SUMMARY .....</b>                                        | <b>6</b>  |
| 3.1 General Remarks .....                                     | 6         |
| 3.2 Product Description .....                                 | 6         |
| 3.3 Equipment Under Test .....                                | 6         |
| 3.4 Short description of the Equipment under Test (EUT) ..... | 6         |
| 3.5 EUT operation mode .....                                  | 7         |
| 3.6 Block Diagram of Test Setup .....                         | 7         |
| 3.1 Test Item (Equipment Under Test) Description* .....       | 7         |
| 3.2 Auxiliary Equipment (AE) Description .....                | 8         |
| 3.3 Antenna Information* .....                                | 8         |
| 3.4 Related Submittal(s) / Grant (s) .....                    | 8         |
| 3.5 Modifications .....                                       | 8         |
| <b>4 TEST ENVIRONMENT .....</b>                               | <b>9</b>  |
| 4.1 Address of the test laboratory .....                      | 9         |
| 4.2 Test Facility .....                                       | 9         |
| 4.3 Environmental conditions .....                            | 9         |
| 4.4 Test Description .....                                    | 10        |
| 4.5 Statement of the measurement uncertainty .....            | 10        |
| 4.6 Equipments Used during the Test .....                     | 11        |
| <b>5 TEST CONDITIONS AND RESULTS .....</b>                    | <b>12</b> |
| 5.1 AC Power Conducted Emission .....                         | 12        |
| 5.2 Radiated Emissions .....                                  | 15        |
| <b>6 TEST SETUP PHOTOS OF THE EUT .....</b>                   | <b>26</b> |
| <b>7 PHOTOS OF THE EUT .....</b>                              | <b>27</b> |

1 Revision History

| Revision | Issue Date | Revisions     | Revised By |
|----------|------------|---------------|------------|
| 00       | 2023-06-02 | Initial Issue | Alisa Luo  |
|          |            |               |            |
|          |            |               |            |

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v01r02

### 3 SUMMARY

#### 3.1 General Remarks

|                                |   |            |
|--------------------------------|---|------------|
| Date of receipt of test sample | : | 2023.05.25 |
| Testing commenced on           | : | 2023.05.26 |
| Testing concluded on           | : | 2023.06.01 |

#### 3.2 Product Description

|                      |                                                                                                             |                                                              |                                                  |               |
|----------------------|-------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------|---------------|
| Product Description: | GPS Device                                                                                                  |                                                              |                                                  |               |
| Model:               | RandTab10                                                                                                   |                                                              |                                                  |               |
| Power supply:        | DC3.7V by Battery<br>DC 5V(by USB)<br>DC 5V(by Car Charger)                                                 |                                                              |                                                  |               |
| Testing sample ID:   | MTYP01600                                                                                                   |                                                              |                                                  |               |
| WIFI                 |                                                                                                             |                                                              |                                                  |               |
| Supported type:      | 20MHz system                                                                                                | 40MHz system                                                 | 80MHz system                                     | 160MHz system |
|                      | 802.11a<br>802.11n<br>802.11ac                                                                              | 802.11n<br>802.11ac                                          | 802.11ac                                         | N/A           |
| Operation frequency: | 5180MHz-5240MHz<br>5260MHz-5320MHz<br>5500MHz-5700MHz<br>5745MHz-5825MHz                                    | 5190MHz-5230MHz<br>5270-5310<br>5510-5670<br>5755MHz-5795MHz | 5210MHz<br>5290MHz<br>5530MHz-5610MHz<br>5775MHz | N/A           |
| Modulation:          | OFDM                                                                                                        | OFDM                                                         | OFDM                                             | N/A           |
| Antenna type:        | PCB antenna                                                                                                 |                                                              |                                                  |               |
| Antenna gain:        | 5180MHz-5240MHz:2.40dBi,<br>5260MHz-5320MHz:2.40dBi,<br>5500MHz-5700MHz:2.40dBi,<br>5745MHz-5825MHz:2.40dBi |                                                              |                                                  |               |

#### 3.3 Equipment Under Test

##### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC3.7V by Battery  
DC 5V(by USB)  
DC 5V(by Car Charger)

#### 3.4 Short description of the Equipment under Test (EUT)

This is a GPS Device

For more details, refer to the user's manual of the EUT.

### 3.5 EUT operation mode


The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.  
All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

| Operating band               | 20MHz   |                 | 40MHz   |                 | 80MHz   |                 |
|------------------------------|---------|-----------------|---------|-----------------|---------|-----------------|
|                              | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| U-NII 1<br>(5150MHz-5250MHz) | 36      | 5180            | 38      | 5190            | 42      | 5210            |
|                              | 40      | 5200            |         |                 |         |                 |
|                              | 44      | 5220            | 46      | 5230            |         |                 |
|                              | 48      | 5240            |         |                 |         |                 |
| U-NII 2A                     | 52      | 5260            | 54      | 5270            | 58      | 5290            |
|                              | 56      | 5280            |         |                 |         |                 |
|                              | 60      | 5300            | 62      | 5310            |         |                 |
|                              | 64      | 5320            |         |                 |         |                 |
| U-NII 2C                     | 100     | 5500            | 102     | 5510            | 106     | 5530            |
|                              | 104     | 5520            |         |                 |         |                 |
|                              | 108     | 5540            | 110     | 5550            |         |                 |
|                              | 112     | 5560            |         |                 |         |                 |
|                              | 116     | 5580            | 118     | 5590            | 122     | 5610            |
|                              | 120     | 5600            |         |                 |         |                 |
|                              | 124     | 5620            | 126     | 5630            |         |                 |
|                              | 128     | 5640            |         |                 |         |                 |
|                              | 132     | 5660            | 134     | 5670            | --      | --              |
|                              | 140     | 5700            |         |                 | --      | --              |
| U-NII 3<br>(5725MHz-5850MHz) | 149     | 5745            | 151     | 5755            | 155     | 5775            |
|                              | 153     | 5765            |         |                 |         |                 |
|                              | 157     | 5785            | 159     | 5795            |         |                 |
|                              | 161     | 5805            |         |                 |         |                 |
|                              | 165     | 5825            | --      | --              | --      | --              |

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

### 3.6 Block Diagram of Test Setup



### 3.1 Test Item (Equipment Under Test) Description\*

| Short designation | EUT Name | EUT Description | Serial number | Hardware status | Software status |
|-------------------|----------|-----------------|---------------|-----------------|-----------------|
| EUT A             |          |                 |               |                 |                 |
| EUT B             |          |                 |               |                 |                 |
|                   |          |                 |               |                 |                 |

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.2 Auxiliary Equipment (AE) Description

| AE short designation | EUT Name (if available) | EUT Description | Serial number (if available) | Software (if used) |
|----------------------|-------------------------|-----------------|------------------------------|--------------------|
| AE 1                 | -                       |                 |                              |                    |
| AE 2                 | -                       |                 |                              |                    |

### 3.3 Antenna Information\*

| Short designation | Antenna Name | Antenna Type | Frequency Range                                                          | Serial number | Antenna Peak Gain |
|-------------------|--------------|--------------|--------------------------------------------------------------------------|---------------|-------------------|
| Antenna 1         | ---          | PCB antenna  | 5180MHz-5240MHz<br>5260MHz-5320MHz<br>5500MHz-5700MHz<br>5745MHz-5825MHz | ---           | 2.4dBi            |
| Antenna 2         |              |              |                                                                          |               |                   |
|                   |              |              |                                                                          |               |                   |

\*: declared by the applicant.

### 3.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

### 3.5 Modifications

No modifications were implemented to meet testing criteria.

## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

**Shenzhen Most Technology Service Co., Ltd.**

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 0031192610**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.3 Environmental conditions

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 23 ° C       |
|                       |              |
| Humidity:             | 48 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

AC Main Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
|                       |              |
| Humidity:             | 45 %         |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### 4.4 Test Description

| FCC Requirement                  |                             |      |
|----------------------------------|-----------------------------|------|
| FCC Part 15.207                  | AC Power Conducted Emission | PASS |
| FCC Part 15.407(b)/15.205/15.209 | Radiated Emissions          | PASS |

##### Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items                                                                                                                                                                                   | Mode                        | Data Rate |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------|
| Maximum Conducted Output Power<br>Power Spectral Density<br>Emission Bandwidth(26dBm Bandwidth)<br>Minimum Emission Bandwidth(6dBm Bandwidth)<br>Undesirable emission<br>Frequency Stability | 11a/OFDM                    | 54 Mbps   |
|                                                                                                                                                                                              | 11n(20MHz),11ac(20MHz)/OFDM | MCS0      |
|                                                                                                                                                                                              | 11n(40MHz),11ac(40MHz)/OFDM | MCS0      |
|                                                                                                                                                                                              | 11ac(80MHz)/OFDM            | MCS0      |

#### 4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10 Db                 | (1)   |
| Radiated Emission     | 1~18GHz    | 4.32 Db                 | (1)   |
| Radiated Emission     | 18-40GHz   | 5.54 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB                 | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.6 Equipments Used during the Test


| Item | Equipment                            | Manufacturer     | Model No.    | Serial No. | Firmware versions | Last Cal.  | Cal. Interval |
|------|--------------------------------------|------------------|--------------|------------|-------------------|------------|---------------|
| 1.   | L.I.S.N.                             | R&S              | ENV216       | 100093     | /                 | 2023/03/17 | 1 Year        |
| 2    | Three-phase artificial power network | Schwarzback Mess | NNLK8129     | 8129178    | /                 | 2023/03/17 | 1 Year        |
| 3.   | Receiver                             | R&S              | ESCI         | 100492     | V3.0-10-2         | 2023/03/17 | 1 Year        |
| 4    | Receiver                             | R&S              | ESPI         | 101202     | V3.0-10-2         | 2023/03/17 | 1 Year        |
| 5    | Spectrum analyzer                    | Agilent          | 9020A        | MT-E306    | A14.16            | 2023/03/17 | 1 Year        |
| 6    | Bilong Antenna                       | Sunol Sciences   | JB3          | A121206    | /                 | 2023/03/17 | 1 Year        |
| 7    | Horn antenna                         | HF Antenna       | HF Antenna   | MT-E158    | /                 | 2023/03/17 | 1 Year        |
| 8    | Loop antenna                         | Beijing Daze     | ZN30900B     | /          | /                 | 2023/03/17 | 1 Year        |
| 9    | Horn antenna                         | R&S              | OBH100400    | 26999002   | /                 | 2023/03/17 | 1 Year        |
| 10   | Wireless Communication Test Set      | R&S              | CMW500       | /          | CMW-BASE-3.7.21   | 2023/03/17 | 1 Year        |
| 11   | Spectrum analyzer                    | R&S              | FSP          | 100019     | V4.40 SP2         | 2023/03/17 | 1 Year        |
| 12   | High gain antenna                    | Schwarzbeck      | LB-180400KF  | MT-E389    | /                 | 2023/03/17 | 1 Year        |
| 13   | Preamplifier                         | Schwarzbeck      | BBV 9743     | MT-E390    | /                 | 2023/03/17 | 1 Year        |
| 14   | Pre-amplifier                        | EMCI             | EMC051845S E | MT-E391    | /                 | 2023/03/17 | 1 Year        |
| 15   | Pre-amplifier                        | Agilent          | 83051A       | MT-E392    | /                 | 2023/03/17 | 1 Year        |
| 16   | High pass filter unit                | Tonscend         | JS0806-F     | MT-E393    | /                 | 2023/03/17 | 1 Year        |
| 17   | RF Cable(below1GHz)                  | Times            | 9kHz-1GHz    | MT-E394    | /                 | 2023/03/17 | 1 Year        |
| 18   | RF Cable(above 1GHz)                 | Times            | 1-40G        | MT-E395    | /                 | 2023/03/17 | 1 Year        |
| 19   | RF Cable (9KHz-40GHz)                | Tonscend         | 170660       | N/A        | /                 | 2023/03/17 | 1 Year        |

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

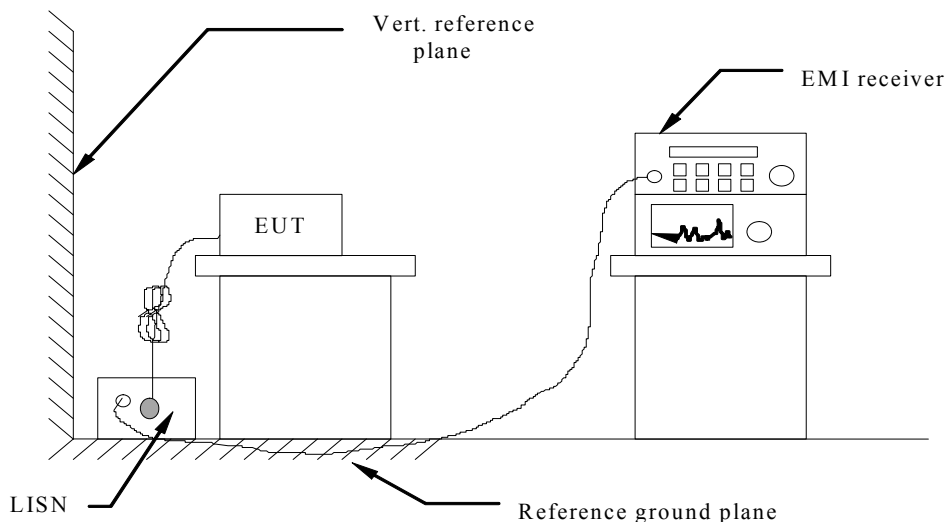

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |


\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

**TEST RESULTS**

Remark:

All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.:

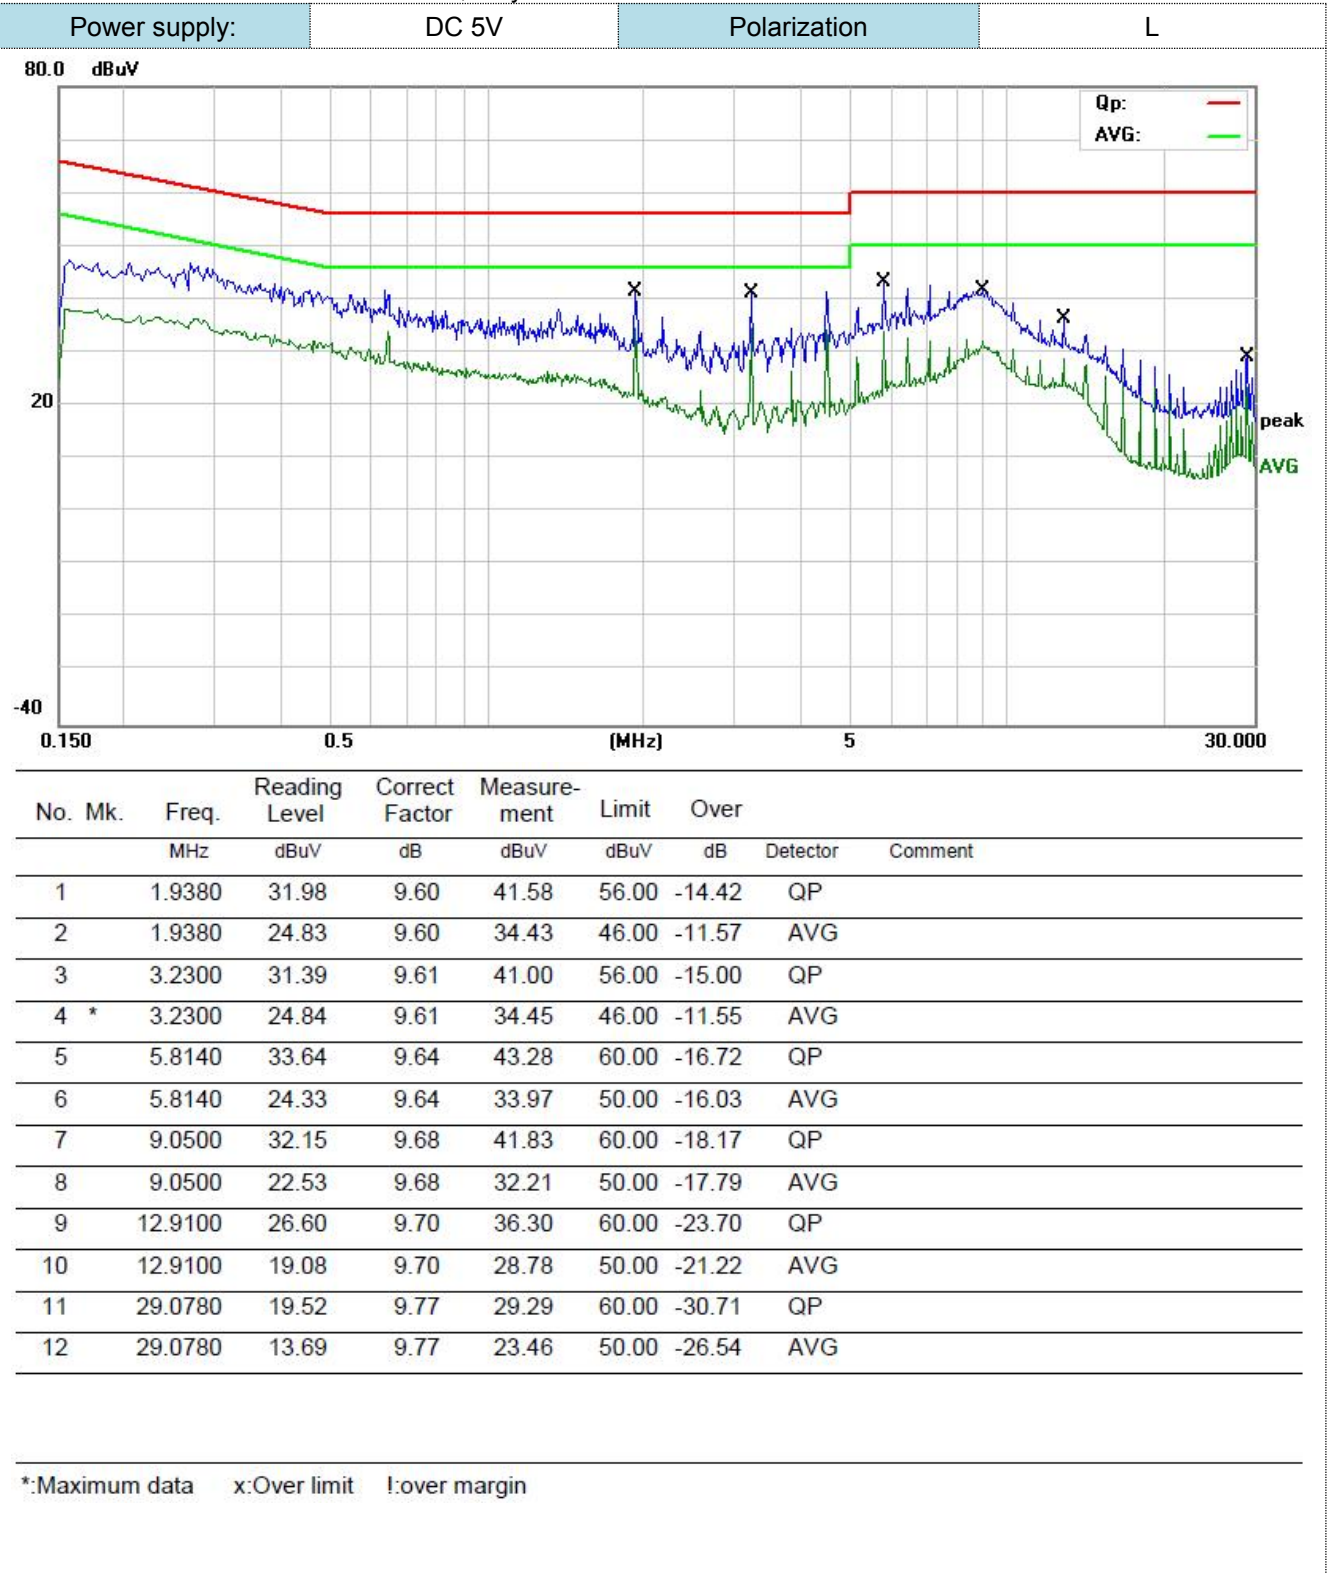

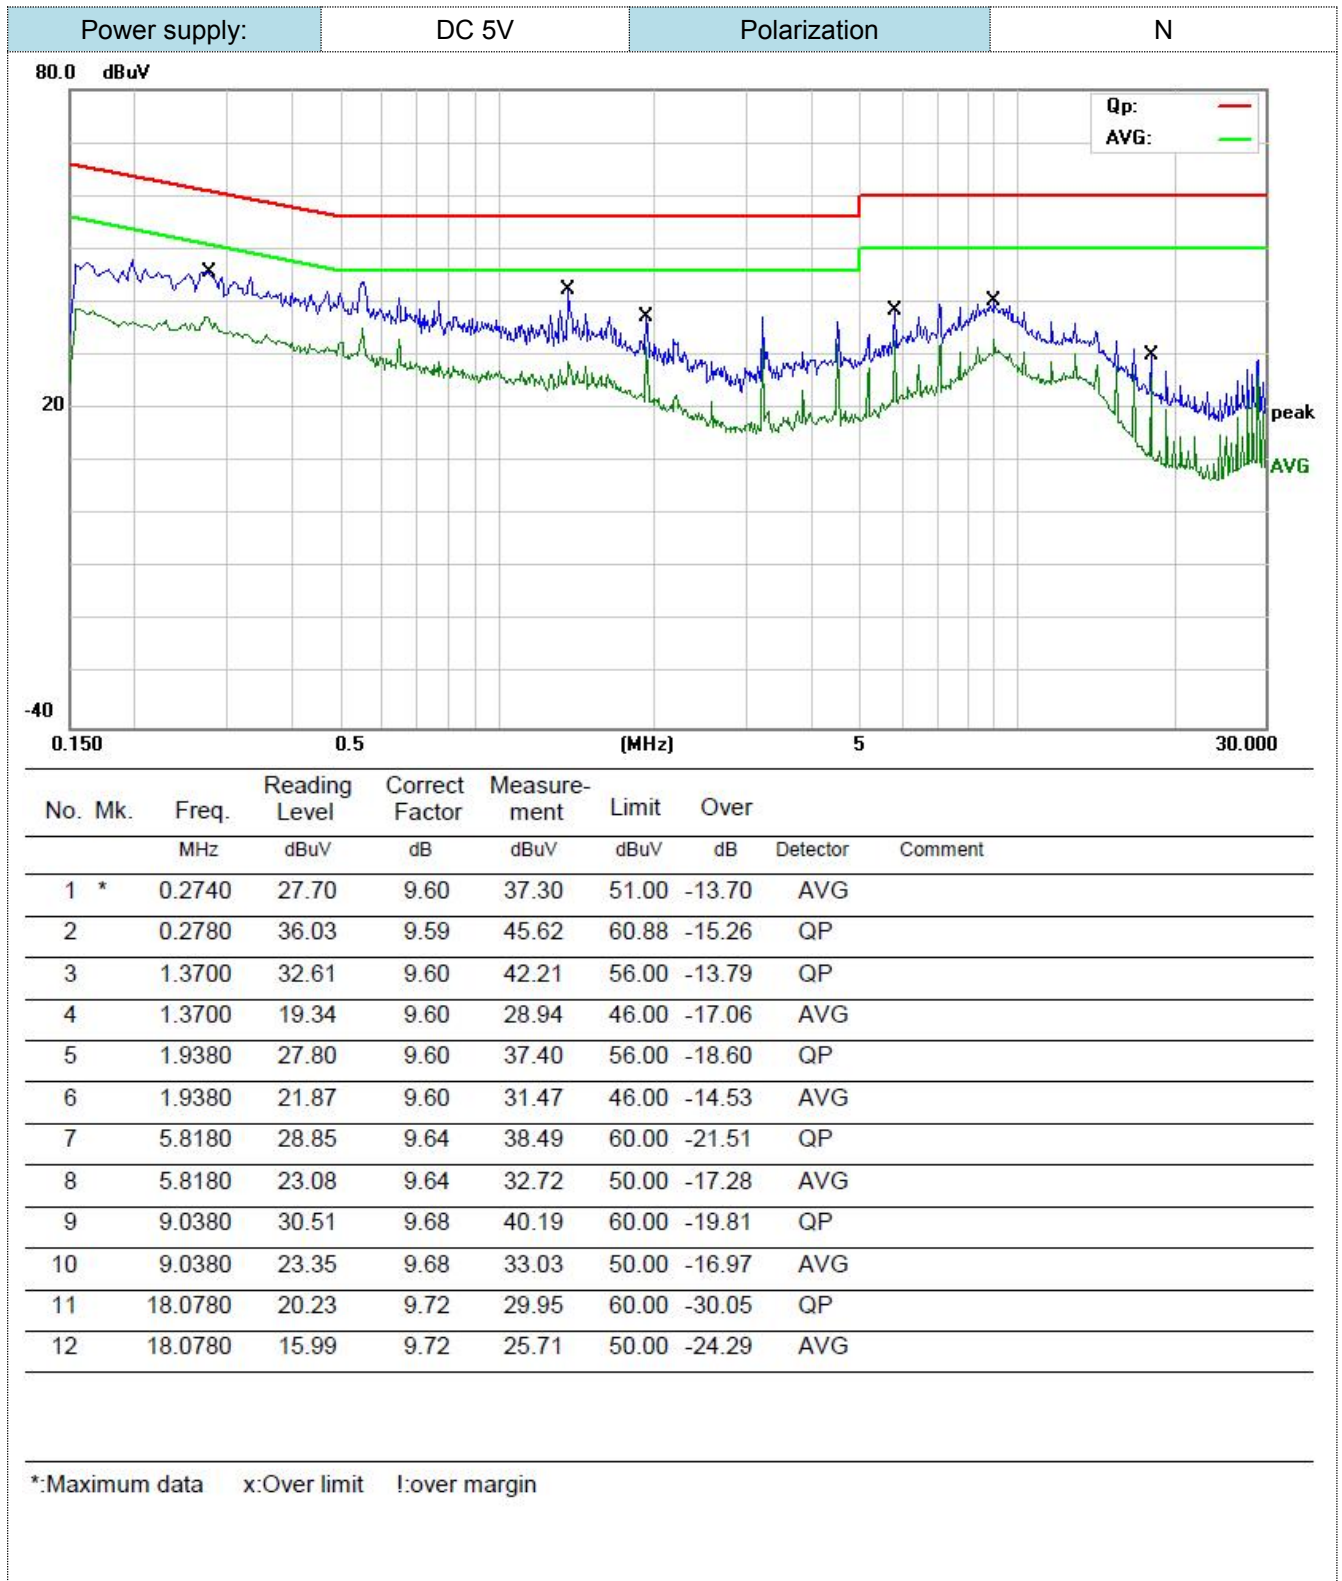

## 5.2 Radiated Emissions

### Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

#### Undesirable emission limits

| Requirement  | Limit(EIRP)     | Limit (Field strength at 3m) <sup>Note1</sup> |
|--------------|-----------------|-----------------------------------------------|
| 15.407(b)(1) | PK:-27(dBm/MHz) | PK:68.2(dBμV/m)                               |
| 15.407(b)(2) |                 |                                               |
| 15.407(b)(3) |                 |                                               |
| 15.407(b)(4) |                 |                                               |

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

#### Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                | Radiated (μV/m) |
|-----------------|-------------------|----------------------------------|-----------------|
| 0.009-0.49      | 3                 | 20log(2400/F(KHz))+40log(300/3)  | 2400/F(KHz)     |
| 0.49-1.705      | 3                 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz)    |
| 1.705-30        | 3                 | 20log(30)+ 40log(30/3)           | 30              |
| 30-88           | 3                 | 40.0                             | 100             |
| 88-216          | 3                 | 43.5                             | 150             |
| 216-960         | 3                 | 46.0                             | 200             |
| Above 960       | 3                 | 54.0                             | 500             |

**TEST CONFIGURATION**


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

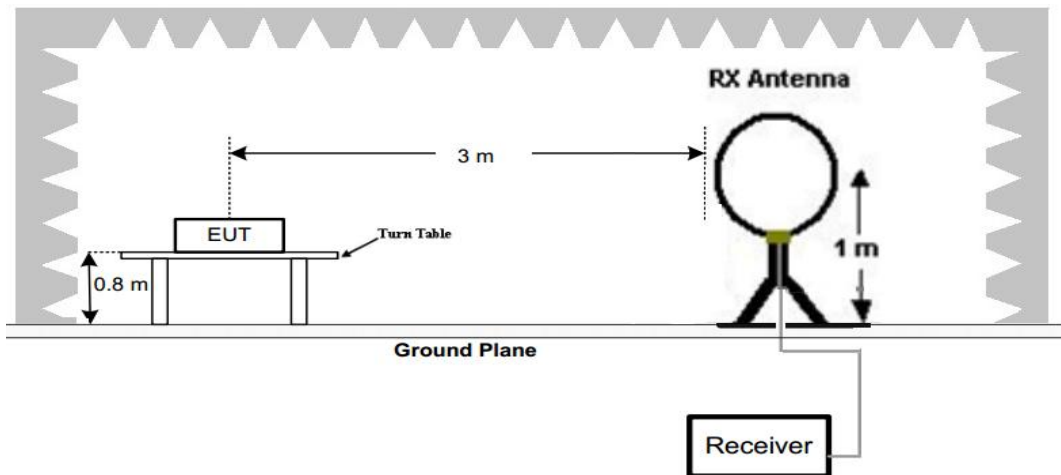

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

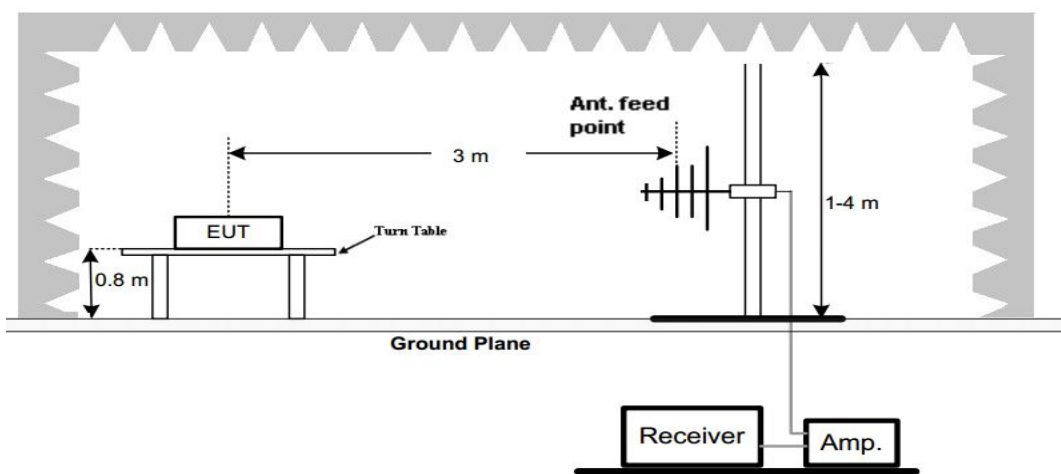

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

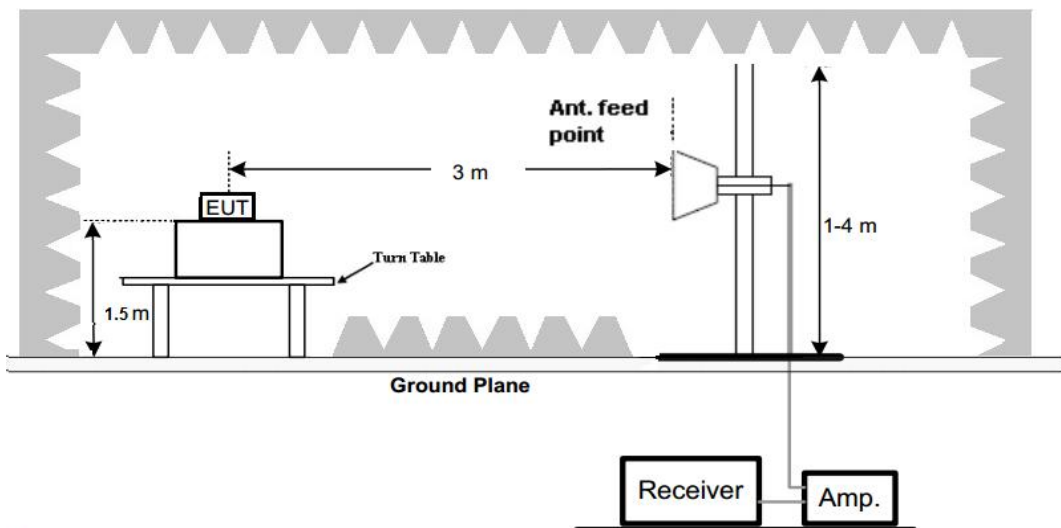

**Test Procedure**

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type   | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna | 3             |
| 30MHz-1GHz           | Bilog Antenna       | 3             |
| 1GHz-18GHz           | Horn Antenna        | 3             |
| 18GHz-25GHz          | Horn Antenna        | 1             |

- Setting test receiver/spectrum as following table states:


| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto                                                                       | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto                                                                      | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto                                                                   | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |


**TEST RESULTS**

Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for below 1GHz test, only the worst case 802.11a low channel of U-NII 1 band was recorded.
- All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
- Remark: Result=Reading value+Factor

For 30MHz-1GHz

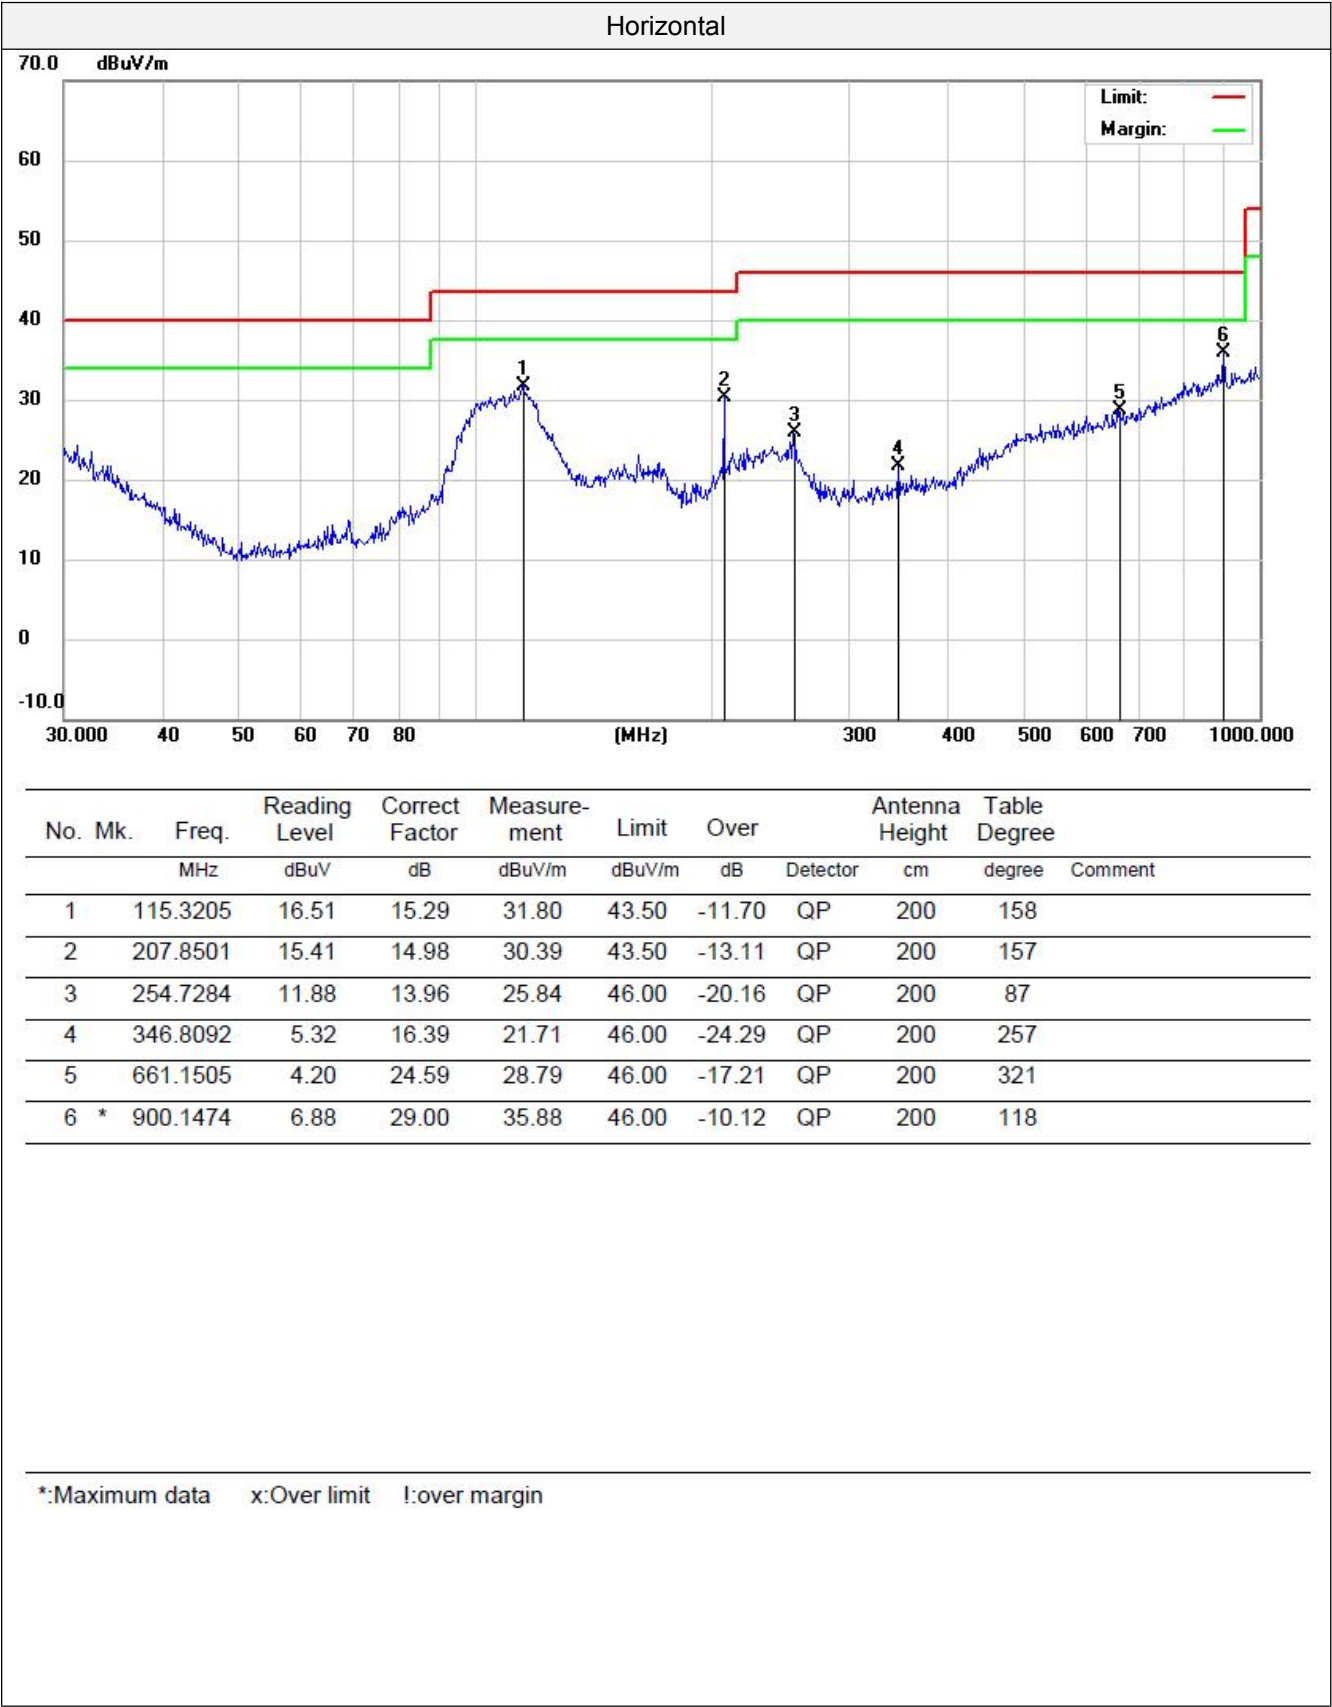

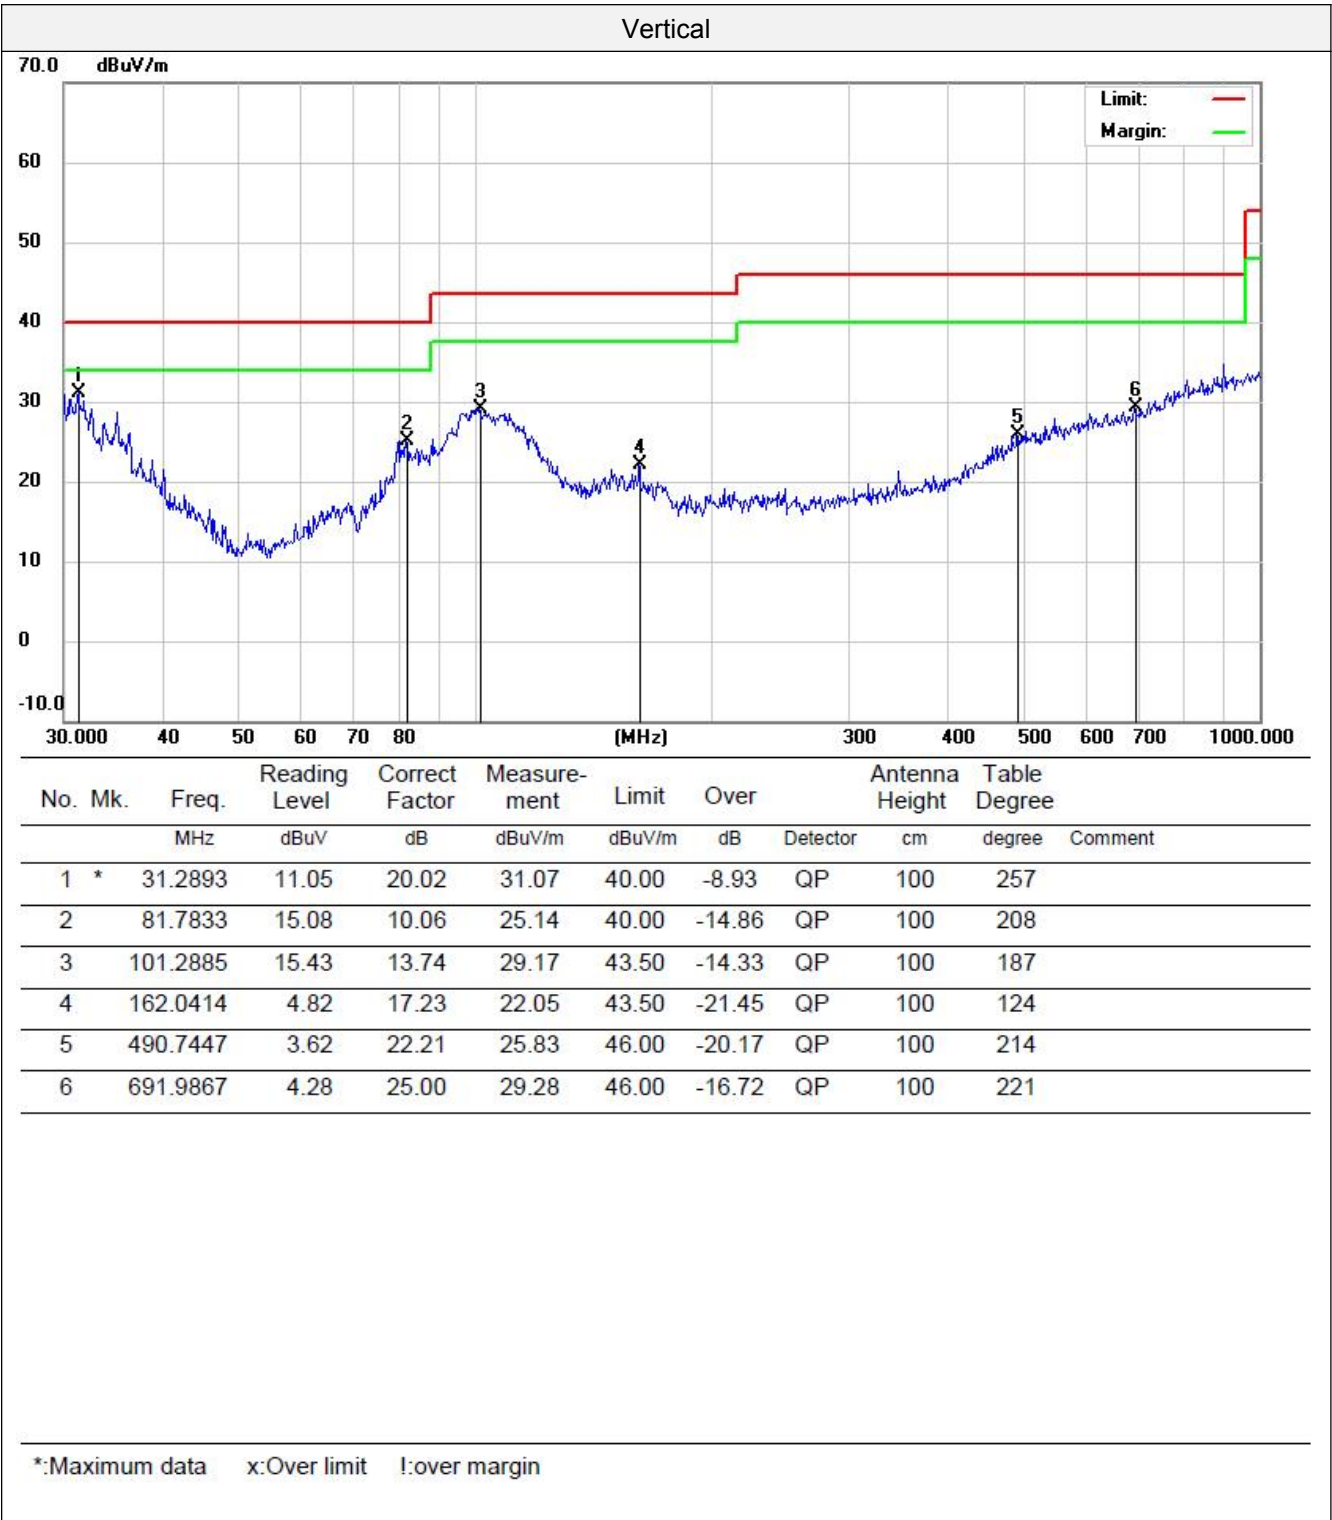

**For 1GHz to 40GHz**

Note: All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1

| Polar (H/V)                  | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a Mode -5180MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 3586            | 56.62                | 29.03               | 5.24            | 36.4               | 54.49                   | 68.2            | 13.71       | PK            |
| V                            | 3586            | 43.14                | 29.03               | 5.24            | 36.4               | 41.01                   | 54              | 12.99       | AV            |
| H                            | 3586            | 53.77                | 29.03               | 5.24            | 36.4               | 51.64                   | 68.2            | 16.56       | PK            |
| H                            | 3586            | 48.33                | 29.03               | 5.24            | 36.4               | 46.2                    | 54              | 7.8         | AV            |
| V                            | 10360           | 35.9                 | 39.41               | 11.45           | 34.28              | 52.48                   | 68.2            | 15.72       | PK            |
| V                            | 10360           | 25.15                | 39.41               | 11.45           | 34.28              | 41.73                   | 54              | 12.27       | AV            |
| H                            | 10360           | 35.64                | 39.41               | 11.45           | 34.28              | 52.22                   | 68.2            | 15.98       | PK            |
| H                            | 10360           | 28.37                | 39.41               | 11.45           | 34.28              | 44.95                   | 54              | 9.05        | AV            |
| <b>802.11a Mode -5200MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 3586            | 56.62                | 29.03               | 5.24            | 36.4               | 54.49                   | 68.2            | 13.71       | PK            |
| V                            | 3586            | 43.14                | 29.03               | 5.24            | 36.4               | 41.01                   | 54              | 12.99       | AV            |
| H                            | 3586            | 53.77                | 29.03               | 5.24            | 36.4               | 51.64                   | 68.2            | 16.56       | PK            |
| H                            | 3586            | 48.33                | 29.03               | 5.24            | 36.4               | 46.2                    | 54              | 7.8         | AV            |
| V                            | 10400           | 35.9                 | 39.41               | 11.45           | 34.28              | 52.48                   | 68.2            | 15.72       | PK            |
| V                            | 10400           | 25.15                | 39.41               | 11.45           | 34.28              | 41.73                   | 54              | 12.27       | AV            |
| H                            | 10400           | 35.64                | 39.41               | 11.45           | 34.28              | 52.22                   | 68.2            | 15.98       | PK            |
| H                            | 10400           | 28.37                | 39.41               | 11.45           | 34.28              | 44.95                   | 54              | 9.05        | AV            |
| <b>802.11b Mode -5240MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 3586            | 53.08                | 29.03               | 5.24            | 36.4               | 50.95                   | 68.2            | 17.25       | PK            |
| V                            | 3586            | 42.23                | 29.03               | 5.24            | 36.4               | 40.1                    | 54              | 13.9        | AV            |
| H                            | 3586            | 54.49                | 29.03               | 5.24            | 36.4               | 52.36                   | 68.2            | 15.84       | PK            |
| H                            | 3586            | 47.98                | 29.03               | 5.24            | 36.4               | 45.85                   | 54              | 8.15        | AV            |
| V                            | 10480           | 35.13                | 39.43               | 11.47           | 34.28              | 51.75                   | 68.2            | 16.45       | PK            |
| V                            | 10480           | 25.6                 | 39.43               | 11.47           | 34.28              | 42.22                   | 54              | 11.78       | AV            |
| H                            | 10480           | 37.27                | 39.43               | 11.47           | 34.28              | 53.89                   | 68.2            | 14.31       | PK            |
| H                            | 10480           | 29                   | 39.43               | 11.47           | 34.28              | 45.62                   | 54              | 8.38        | AV            |

## U-NII 2A

| Polar (H/V)                  | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamplifier factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------------|-----------------|----------------------|---------------------|-----------------|--------------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a Mode -5260MHz</b> |                 |                      |                     |                 |                          |                         |                 |             |               |
| V                            | 3603            | 56.25                | 29.03               | 5.24            | 36.4                     | 54.12                   | 68.2            | 14.08       | PK            |
| V                            | 3603            | 42.81                | 29.03               | 5.24            | 36.4                     | 40.68                   | 54              | 13.32       | AV            |
| H                            | 3603            | 53.75                | 29.03               | 5.24            | 36.4                     | 51.62                   | 68.2            | 16.58       | PK            |
| H                            | 3603            | 48.24                | 29.03               | 5.24            | 36.4                     | 46.11                   | 54              | 7.89        | AV            |
| V                            | 10520           | 34.13                | 39.43               | 11.47           | 34.28                    | 50.75                   | 68.2            | 17.45       | PK            |
| V                            | 10520           | 24.86                | 39.43               | 11.47           | 34.28                    | 41.48                   | 54              | 12.52       | AV            |
| H                            | 10520           | 35.46                | 39.43               | 11.47           | 34.28                    | 52.08                   | 68.2            | 16.12       | PK            |
| H                            | 10520           | 27.54                | 39.43               | 11.47           | 34.28                    | 44.16                   | 54              | 9.84        | AV            |
| <b>802.11a Mode -5280MHz</b> |                 |                      |                     |                 |                          |                         |                 |             |               |
| V                            | 3603            | 52.8                 | 29.03               | 5.24            | 36.4                     | 50.67                   | 68.2            | 17.53       | PK            |
| V                            | 3603            | 43.59                | 29.03               | 5.24            | 36.4                     | 41.46                   | 54              | 12.54       | AV            |
| H                            | 3603            | 54.01                | 29.03               | 5.24            | 36.4                     | 51.88                   | 68.2            | 16.32       | PK            |
| H                            | 3603            | 48.56                | 29.03               | 5.24            | 36.4                     | 46.43                   | 54              | 7.57        | AV            |
| V                            | 10560           | 37.19                | 39.43               | 11.47           | 34.28                    | 53.81                   | 68.2            | 14.39       | PK            |
| V                            | 10560           | 26.99                | 39.43               | 11.47           | 34.28                    | 43.61                   | 54              | 10.39       | AV            |
| H                            | 10560           | 36.09                | 39.43               | 11.47           | 34.28                    | 52.71                   | 68.2            | 15.49       | PK            |
| H                            | 10560           | 28.81                | 39.43               | 11.47           | 34.28                    | 45.43                   | 54              | 8.57        | AV            |
| <b>802.11b Mode -5320MHz</b> |                 |                      |                     |                 |                          |                         |                 |             |               |
| V                            | 3603            | 52.38                | 29.03               | 5.24            | 36.4                     | 50.25                   | 68.2            | 17.95       | PK            |
| V                            | 3603            | 42.56                | 29.03               | 5.24            | 36.4                     | 40.43                   | 54              | 13.57       | AV            |
| H                            | 3603            | 53.97                | 29.03               | 5.24            | 36.4                     | 51.84                   | 68.2            | 16.36       | PK            |
| H                            | 3603            | 48.04                | 29.03               | 5.24            | 36.4                     | 45.91                   | 54              | 8.09        | AV            |
| V                            | 10640           | 35.26                | 39.44               | 11.47           | 34.28                    | 51.89                   | 68.2            | 16.31       | PK            |
| V                            | 10640           | 26.54                | 39.44               | 11.47           | 34.28                    | 43.17                   | 54              | 10.83       | AV            |
| H                            | 10640           | 36.2                 | 39.44               | 11.47           | 34.28                    | 52.83                   | 68.2            | 15.37       | PK            |
| H                            | 10640           | 28.16                | 39.44               | 11.47           | 34.28                    | 44.79                   | 54              | 9.21        | AV            |

## U-NII 2C

| Polar (H/V)                  | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a Mode -5500MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 4982            | 51.51                | 32.52               | 5.24            | 36.4               | 52.87                   | 68.2            | 15.33       | PK            |
| V                            | 4982            | 39.52                | 32.52               | 5.24            | 36.4               | 40.88                   | 54              | 13.12       | AV            |
| H                            | 4982            | 50.19                | 32.52               | 5.24            | 36.4               | 51.55                   | 68.2            | 16.65       | PK            |
| H                            | 4982            | 43.18                | 32.52               | 5.24            | 36.4               | 44.54                   | 54              | 9.46        | AV            |
| V                            | 11000           | 35.34                | 39.46               | 11.47           | 34.28              | 51.99                   | 68.2            | 16.21       | PK            |
| V                            | 11000           | 23.45                | 39.46               | 11.47           | 34.28              | 40.1                    | 54              | 13.9        | AV            |
| H                            | 11000           | 35.36                | 39.46               | 11.47           | 34.28              | 52.01                   | 68.2            | 16.19       | PK            |
| H                            | 11000           | 27.8                 | 39.46               | 11.47           | 34.28              | 44.45                   | 54              | 9.55        | AV            |
| <b>802.11a Mode -5600MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 4982            | 49.72                | 32.52               | 5.24            | 36.4               | 51.08                   | 68.2            | 17.12       | PK            |
| V                            | 4982            | 39.84                | 32.52               | 5.24            | 36.4               | 41.2                    | 54              | 12.8        | AV            |
| H                            | 4982            | 50.59                | 32.52               | 5.24            | 36.4               | 51.95                   | 68.2            | 16.25       | PK            |
| H                            | 4982            | 42.93                | 32.52               | 5.24            | 36.4               | 44.29                   | 54              | 9.71        | AV            |
| V                            | 11200           | 35.9                 | 39.46               | 11.47           | 34.28              | 52.55                   | 68.2            | 15.65       | PK            |
| V                            | 11200           | 25.68                | 39.46               | 11.47           | 34.28              | 42.33                   | 54              | 11.67       | AV            |
| H                            | 11200           | 37.03                | 39.46               | 11.47           | 34.28              | 53.68                   | 68.2            | 14.52       | PK            |
| H                            | 11200           | 26.72                | 39.46               | 11.47           | 34.28              | 43.37                   | 54              | 10.63       | AV            |
| <b>802.11b Mode -5700MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 4982            | 49.72                | 32.52               | 5.24            | 36.4               | 51.08                   | 68.2            | 17.12       | PK            |
| V                            | 4982            | 39.84                | 32.52               | 5.24            | 36.4               | 41.2                    | 54              | 12.8        | AV            |
| H                            | 4982            | 50.59                | 32.52               | 5.24            | 36.4               | 51.95                   | 68.2            | 16.25       | PK            |
| H                            | 4982            | 42.93                | 32.52               | 5.24            | 36.4               | 44.29                   | 54              | 9.71        | AV            |
| V                            | 11400           | 35.9                 | 39.46               | 11.47           | 34.28              | 52.55                   | 68.2            | 15.65       | PK            |
| V                            | 11400           | 25.68                | 39.46               | 11.47           | 34.28              | 42.33                   | 54              | 11.67       | AV            |
| H                            | 11400           | 37.03                | 39.46               | 11.47           | 34.28              | 53.68                   | 68.2            | 14.52       | PK            |
| H                            | 11400           | 26.72                | 39.46               | 11.47           | 34.28              | 43.37                   | 54              | 10.63       | AV            |

## U-NII 3

| Polar (H/V)                  | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|------------------------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a Mode -5500MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 5112            | 52.15                | 32.84               | 5.24            | 36.4               | 53.83                   | 68.2            | 14.37       | PK            |
| V                            | 5112            | 38.85                | 32.84               | 5.24            | 36.4               | 40.53                   | 54              | 13.47       | AV            |
| H                            | 5112            | 50.7                 | 32.84               | 5.24            | 36.4               | 52.38                   | 68.2            | 15.82       | PK            |
| H                            | 5112            | 42.87                | 32.84               | 5.24            | 36.4               | 44.55                   | 54              | 9.45        | AV            |
| V                            | 11490           | 35.9                 | 39.52               | 11.47           | 34.28              | 52.61                   | 68.2            | 15.59       | PK            |
| V                            | 11490           | 24.63                | 39.52               | 11.47           | 34.28              | 41.34                   | 54              | 12.66       | AV            |
| H                            | 11490           | 34.62                | 39.52               | 11.47           | 34.28              | 51.33                   | 68.2            | 16.87       | PK            |
| H                            | 11490           | 27.52                | 39.52               | 11.47           | 34.28              | 44.23                   | 54              | 9.77        | AV            |
| <b>802.11a Mode -5600MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 5112            | 49.73                | 32.84               | 5.24            | 36.4               | 51.41                   | 68.2            | 16.79       | PK            |
| V                            | 5112            | 39.56                | 32.84               | 5.24            | 36.4               | 41.24                   | 54              | 12.76       | AV            |
| H                            | 5112            | 50.03                | 32.84               | 5.24            | 36.4               | 51.71                   | 68.2            | 16.49       | PK            |
| H                            | 5112            | 44.28                | 32.84               | 5.24            | 36.4               | 45.96                   | 54              | 8.04        | AV            |
| V                            | 11570           | 36.5                 | 39.52               | 11.47           | 34.28              | 53.21                   | 68.2            | 14.99       | PK            |
| V                            | 11570           | 26.5                 | 39.52               | 11.47           | 34.28              | 43.21                   | 54              | 10.79       | AV            |
| H                            | 11570           | 34.62                | 39.52               | 11.47           | 34.28              | 51.33                   | 68.2            | 16.87       | PK            |
| H                            | 11570           | 27.79                | 39.52               | 11.47           | 34.28              | 44.5                    | 54              | 9.5         | AV            |
| <b>802.11b Mode -5700MHz</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V                            | 5112            | 48.64                | 32.84               | 5.24            | 36.4               | 50.32                   | 68.2            | 17.88       | PK            |
| V                            | 5112            | 40.2                 | 32.84               | 5.24            | 36.4               | 41.88                   | 54              | 12.12       | AV            |
| H                            | 5112            | 49.38                | 32.84               | 5.24            | 36.4               | 51.06                   | 68.2            | 17.14       | PK            |
| H                            | 5112            | 44.54                | 32.84               | 5.24            | 36.4               | 46.22                   | 54              | 7.78        | AV            |
| V                            | 11650           | 34.68                | 39.52               | 11.47           | 34.28              | 51.39                   | 68.2            | 16.81       | PK            |
| V                            | 11650           | 26.64                | 39.52               | 11.47           | 34.28              | 43.35                   | 54              | 10.65       | AV            |
| H                            | 11650           | 35.29                | 39.52               | 11.47           | 34.28              | 52                      | 68.2            | 16.2        | PK            |
| H                            | 11650           | 28.72                | 39.52               | 11.47           | 34.28              | 45.43                   | 54              | 8.57        | AV            |

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

## Radiated Band Edge Test:

All 802.11a / 802.11n (HT20) / 802.11n (HT40)/802.11ac(HT20)/802.11ac(HT40)/802.11ac(HT80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

## U-NII 1

| Polar (H/V)    | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|----------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V              | 5150            | 53.81                | 31.22               | 7.62            | 36.5               | 56.15                   | 74              | 17.85       | PK            |
| V              | 5150            | 37.79                | 31.22               | 7.62            | 36.5               | 40.13                   | 54              | 13.87       | AV            |
| H              | 5150            | 54.65                | 31.22               | 7.62            | 36.5               | 56.99                   | 74              | 17.01       | PK            |
| H              | 5150            | 42.7                 | 31.22               | 7.62            | 36.5               | 45.04                   | 54              | 8.96        | AV            |
| V              | 5350            | 54.71                | 31.56               | 7.83            | 35.82              | 58.28                   | 74              | 15.72       | PK            |
| V              | 5350            | 39.19                | 31.56               | 7.83            | 35.82              | 42.76                   | 54              | 11.24       | AV            |
| H              | 5350            | 54.05                | 31.56               | 7.83            | 35.82              | 57.62                   | 74              | 16.38       | PK            |
| H              | 5350            | 39.7                 | 31.56               | 7.83            | 35.82              | 43.27                   | 54              | 10.73       | AV            |

## U-NII 2A

| Polar (H/V)    | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|----------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V              | 5150            | 53.66                | 31.22               | 7.62            | 36.5               | 56                      | 74              | 18          | PK            |
| V              | 5150            | 38.91                | 31.22               | 7.62            | 36.5               | 41.25                   | 54              | 12.75       | AV            |
| H              | 5150            | 56.07                | 31.22               | 7.62            | 36.5               | 58.41                   | 74              | 15.59       | PK            |
| H              | 5150            | 41.88                | 31.22               | 7.62            | 36.5               | 44.22                   | 54              | 9.78        | AV            |
| V              | 5350            | 53.67                | 31.56               | 7.83            | 35.82              | 57.24                   | 74              | 16.76       | PK            |
| V              | 5350            | 40.16                | 31.56               | 7.83            | 35.82              | 43.73                   | 54              | 10.27       | AV            |
| H              | 5350            | 54.05                | 31.56               | 7.83            | 35.82              | 57.62                   | 74              | 16.38       | PK            |
| H              | 5350            | 40.99                | 31.56               | 7.83            | 35.82              | 44.56                   | 54              | 9.44        | AV            |



## U-NII 2C

| Polar (H/V)    | Frequency (MHz) | Meter Reading (dBuV) | Antenna Factor (dB) | Cable loss (dB) | Preamp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Detector Type |
|----------------|-----------------|----------------------|---------------------|-----------------|--------------------|-------------------------|-----------------|-------------|---------------|
| <b>802.11a</b> |                 |                      |                     |                 |                    |                         |                 |             |               |
| V              | 5460            | 55.12                | 31.62               | 7.89            | 35.76              | 58.87                   | 74              | 15.13       | PK            |
| V              | 5460            | 36.41                | 31.62               | 7.89            | 35.76              | 40.16                   | 54              | 13.84       | AV            |
| H              | 5460            | 53.79                | 31.62               | 7.89            | 35.76              | 57.54                   | 74              | 16.46       | PK            |
| H              | 5460            | 42.29                | 31.62               | 7.89            | 35.76              | 46.04                   | 54              | 7.96        | AV            |
| V              | 5850            | 54.81                | 31.71               | 7.92            | 35.55              | 58.89                   | 74              | 15.11       | PK            |
| V              | 5850            | 39.44                | 31.71               | 7.92            | 35.55              | 43.52                   | 54              | 10.48       | AV            |
| H              | 5850            | 53.93                | 31.71               | 7.92            | 35.55              | 58.01                   | 74              | 15.99       | PK            |
| H              | 5850            | 41.46                | 31.71               | 7.92            | 35.55              | 45.54                   | 54              | 8.46        | AV            |

U-NII 3

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Antenna<br>Factor | Cable<br>loss | Preamp<br>factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|----------------|-----------|------------------|-------------------|---------------|------------------|-------------------|----------|--------|------------------|
|                | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)             | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| 802.11a        |           |                  |                   |               |                  |                   |          |        |                  |
| V              | 5460      | 52.9             | 31.62             | 7.89          | 35.76            | 56.65             | 74       | 17.35  | PK               |
| V              | 5460      | 37.04            | 31.62             | 7.89          | 35.76            | 40.79             | 54       | 13.21  | AV               |
| H              | 5460      | 54.16            | 31.62             | 7.89          | 35.76            | 57.91             | 74       | 16.09  | PK               |
| H              | 5460      | 40.43            | 31.62             | 7.89          | 35.76            | 44.18             | 54       | 9.82   | AV               |
| V              | 5850      | 55.55            | 31.71             | 7.92          | 35.55            | 59.63             | 74       | 14.37  | PK               |
| V              | 5850      | 37.94            | 31.71             | 7.92          | 35.55            | 42.02             | 54       | 11.98  | AV               |
| H              | 5850      | 53.8             | 31.71             | 7.92          | 35.55            | 57.88             | 74       | 16.12  | PK               |
| H              | 5850      | 40.34            | 31.71             | 7.92          | 35.55            | 44.42             | 54       | 9.58   | AV               |

## 6 Test Setup Photos of the EUT

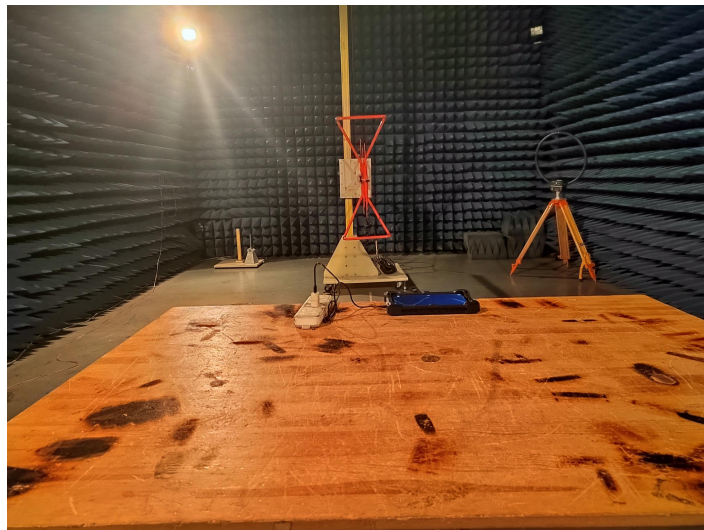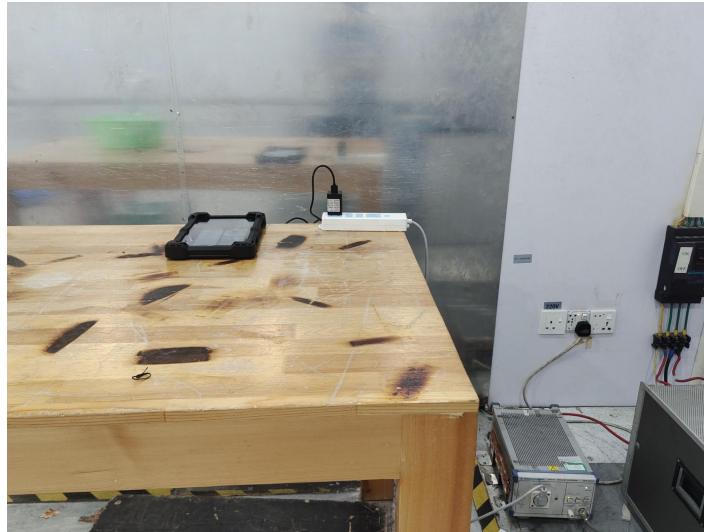

## **7 Photos of the EUT**

see photo report.

\*\*\*\*\* End of Report \*\*\*\*\*