

Oracle America, Inc

RF TEST REPORT

Report Type:

FCC Part 15.249 & ISSED RSS-210 RF report

Model:

Bump Bar K3-10W, Bump Bar K3-20W

REPORT NUMBER:

2512B1798SHA-001

ISSUE DATE:

June 26, 2026

DOCUMENT CONTROL NUMBER:

TTRF15.249_V1 © 2018 Intertek



TEST REPORT

Telephone: 86 21 6127 8200
www.intertek.com

Report no.: 2512B1798SHA-001

Applicant: Oracle America, Inc
500 Oracle Parkway Redwood City, CA 94065 US
Manufacturer: Oracle America, Inc
500 Oracle Parkway Redwood City, CA 94065 US
Manufacturing site: Oracle America, Inc
500 Oracle Parkway Redwood City, CA 94065 US
FCC ID: A4HBBK3
IC: 9870A-BBK3

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2024): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-210 Issue 9 (August 2016): Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

RSS-Gen Issue 5 (April 2018): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:



Project Engineer
Damon Ding

Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	6
1.3 DESCRIPTION OF TEST FACILITY.....	7
2 TEST SPECIFICATIONS.....	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST.....	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY.....	11
3 RADIATED EMISSION	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF RADIATED EMISSIONS	16
4 POWER LINE CONDUCTED EMISSION.....	21
4.1 LIMIT	21
4.2 TEST CONFIGURATION	21
4.3 MEASUREMENT PROCEDURE	22
4.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	23
5 ASSIGNED BANDWIDTH (20DB BANDWIDTH)	25
5.1 LIMIT	25
5.2 MEASUREMENT PROCEDURE	25
5.3 TEST CONFIGURATION	25
5.4 THE RESULTS.....	26
6 ANTENNA REQUIREMENT.....	27

Revision History

Report No.	Version	Description	Issued Date
2512B1798SHA-001	Rev. 01	Initial issue of report	June 26, 2026

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Radiated emission	15.249 & 15.209	RSS-210 Issue 9 Clause B.10	Pass
Power line conducted emission	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	RSS-Gen Issue 5 Clause 6.7	Pass
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Wireless Keyboard
Type/Model:	Bump Bar K3-10W, Bump Bar K3-20W
Description of EUT:	The EUT is Wireless Keyboard working at 2,4GHz, support 802.15.4 Zigbee function. There are two models in the family and difference is only keypad key numbers. The electronic and RF circuit are exactly same for the two models. The Bump Bar K3-10W was selected as the representative unit for testing, and the most adverse results obtained are presented in this report.
Rating:	3VDC, 30mA
Category of EUT:	Class A
EUT type:	☒ Table top ☐ Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	April 27,2026
Date of test:	April 27,2026- May 7,2026

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	Zigbee
Type of Modulation:	OQPSK
Channel Number:	1
Antenna Information:	PCB antenna design onboard, 1.95dbi Peak Gain

1.3 Description of Test Facility

Name : Intertek Testing Services (Shanghai FTZ) Co., Ltd.
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone : 86 21 61278200
Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab
recognized, certified, or Registration No. CNAS L21189
accredited by these FCC Accredited Lab
organizations Designation Number: CN0175
IC Registration Lab
CAB identifier.: CN0014
VCCI Registration Lab
Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
A2LA Accreditation Lab
Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2024)

ANSI C63.10 (2020)

RSS-210 Issue 9 (August 2016)

RSS-Gen Issue 5 (April 2018)

2.2 Mode of operation during the test

The EUT is a handheld device, so three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)				2400–2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
13	2415	/	/	/	/	/	/

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter	
Test Software	/
Working Mode	Zigbee
Test Channel	2415MHz
Power Setting	0

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

- 1) Radiated test mode: EUT transmitted signal with BT antenna;
- 2) Conducted test mode: EUT transmitted signal from BT RF port connected to SPA directly;

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	Dell Latitude 0726	/

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	21°C	53% RH
Assigned bandwidth (20dB bandwidth)	22°C	54% RH
Power line conducted emission	22°C	55% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESR7	EC 6194	2027-02-09
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2026-07-22
☒	Shielded room	Zhongyu	-	EC 2838	2026-07-22
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2026-08-05
☒	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2026-09-27
☒	Horn antenna	Tonscend	bha9120d	EC 6432-2	2026-04-10
☒	Horn antenna	ETS	3117	EC 4792-1	2026-09-27
☒	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
☒	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2026-12-09
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2026-07-11
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2026-05-25
☒	Power sensor	Keysight	N1914A	EC 5818-3	2027-03-10
☒	Vector Signal Generator	Agilent	N5182B	EC 5175	2027-03-10
☒	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2026-03-11
☒	Test Receiver	R&S	ESCI 7	EC 4501	2027-04-24
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	Testo	175h1	EC 6640	2026-08-03
☒	Pressure meter	YM3	Shanghai Mengde	EC 3320	2026-08-04

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Radiated emission

Test result: Pass

3.1 Limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
☐ 902 - 928	94	54
☒ 2400 - 2483.5	94	54
☐ 5725 - 5875	94	54
☐ 24000 - 24250	108	68

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

3.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported

3.3 Test Configuration


For Radiated emission below 30MHz:

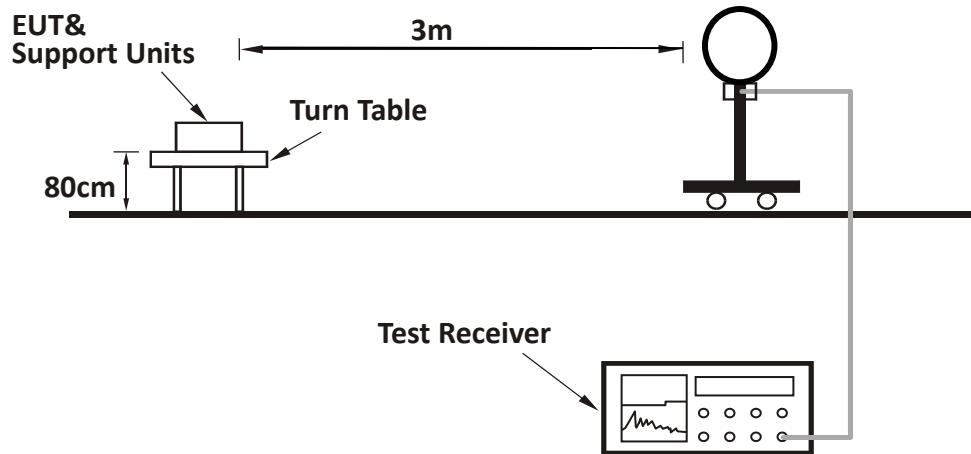

For Radiated emission 30MHz to 1GHz:

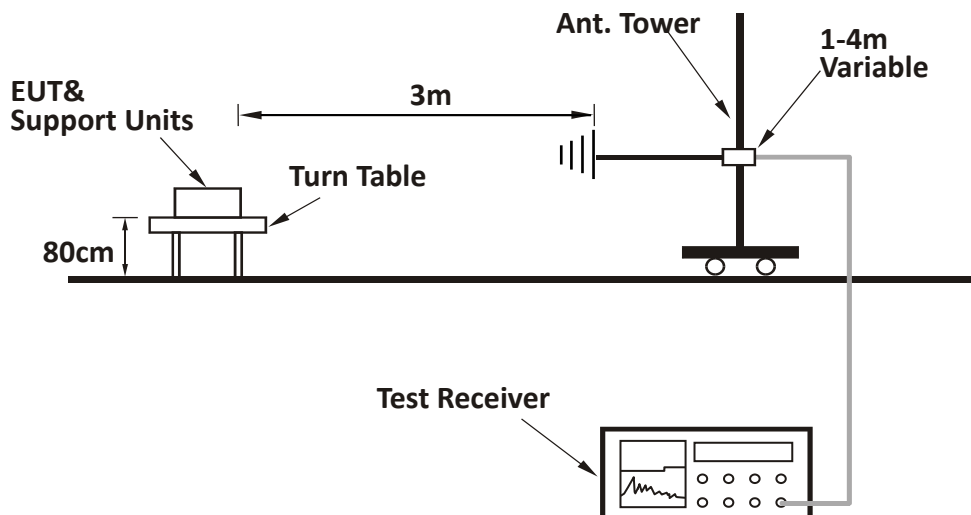



For Radiated emission above 1GHz:

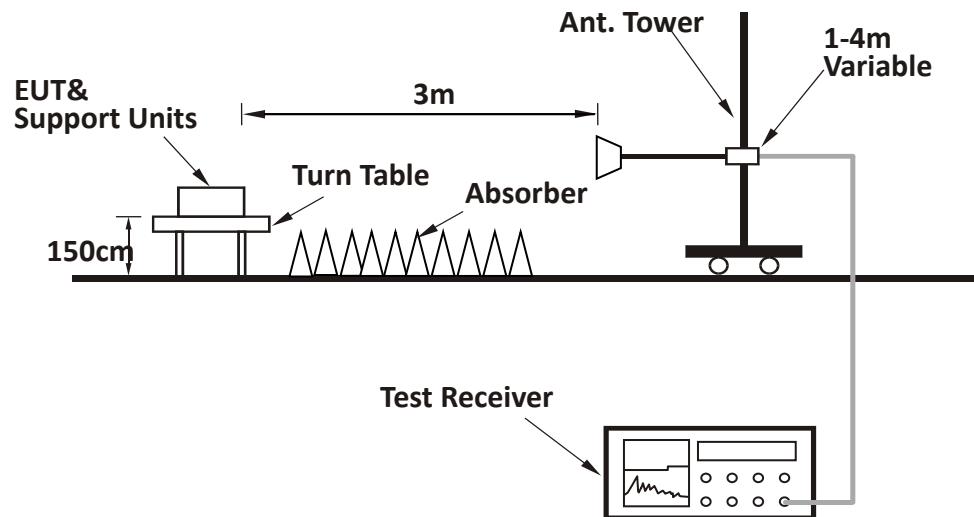

3.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

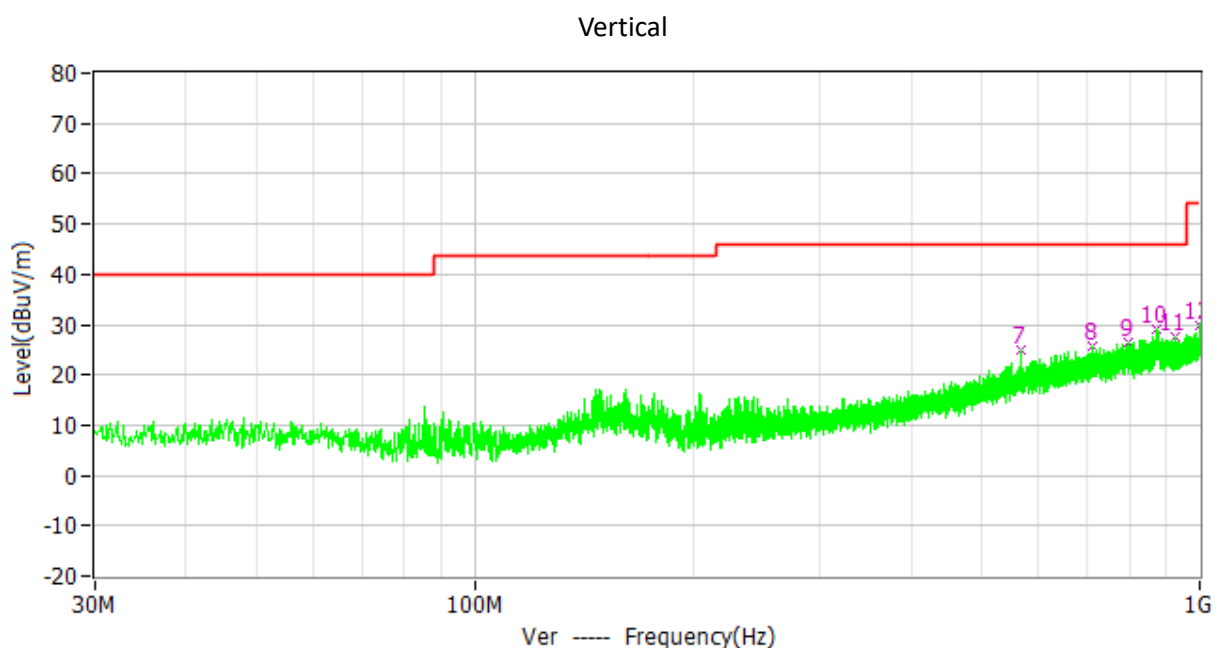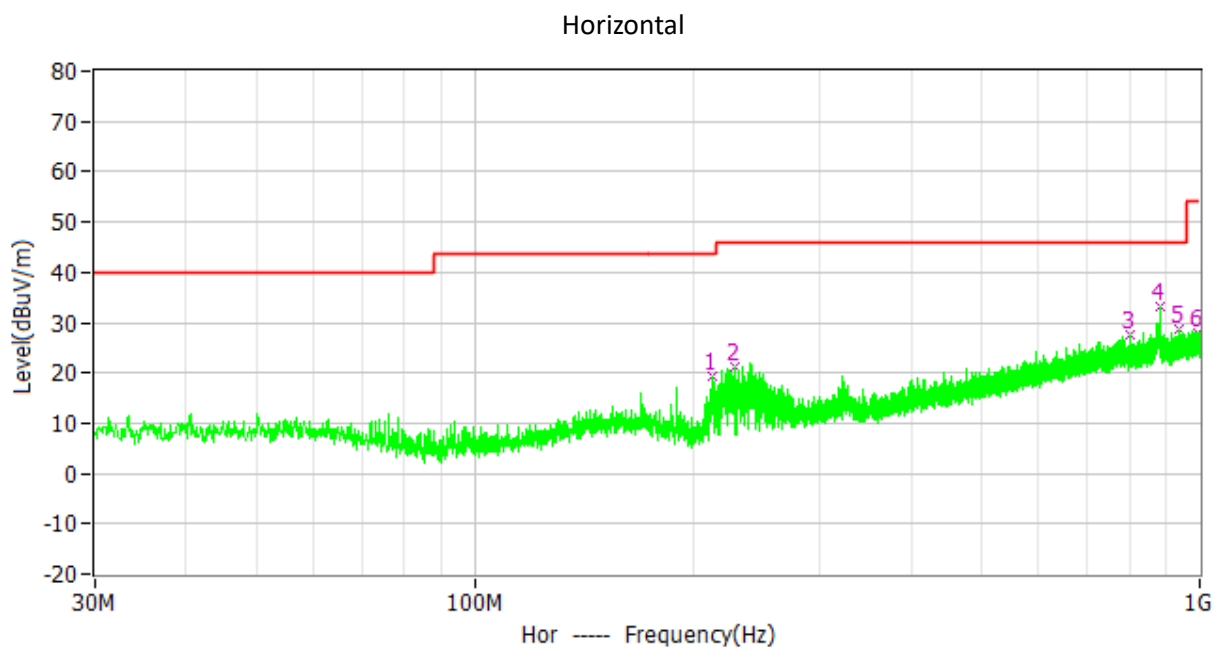

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	212.942MHz	19.2	19.20	43.5	24.3	PK
H	228.268MHz	21.3	11.60	46.0	24.7	PK
H	801.635MHz	27.4	7.50	46.0	18.6	PK
H	879.817MHz	33.2	13.10	46.0	12.8	PK
H	936.756MHz	28.8	20.70	46.0	17.2	PK
H	993.501MHz	27.9	23.30	54.0	26.1	PK
V	565.537MHz	25.0	19.20	46.0	21.0	PK
V	712.201MHz	25.7	11.60	46.0	20.3	PK
V	795.039MHz	26.3	7.50	46.0	19.7	PK
V	869.147MHz	29.1	19.20	46.0	16.9	PK
V	927.638MHz	27.7	20.50	46.0	18.3	PK
V	999.030MHz	30.0	23.30	54.0	24.0	PK

TEST REPORT

Test result above 1GHz:

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
2415Mhz	H	2415.00	97.50	34.36	114.00	16.50	PK
	V	2415.00	85.55	34.36	114.00	28.45	PK
	H	4830.00	49.31	6.50	74.00	24.69	PK
	V	4830.00	45.16	6.50	74.00	28.84	PK
	H	7245.00	48.45	9.30	74.00	25.55	PK
	V	7245.00	43.45	9.30	74.00	30.55	PK



- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

Duty Cycle:

The test data with maximum duty cycle was listed below.

The worst Duty cycle= $1.767 / 5.167 = 0.342$

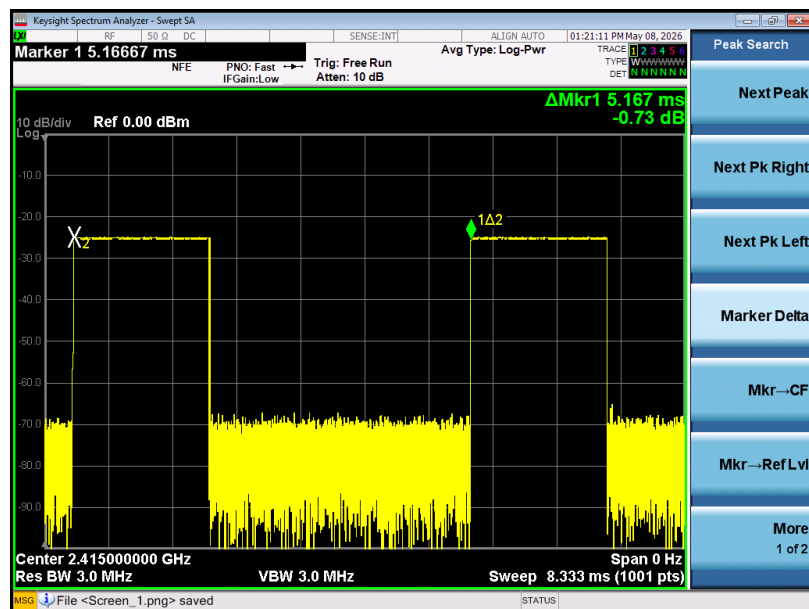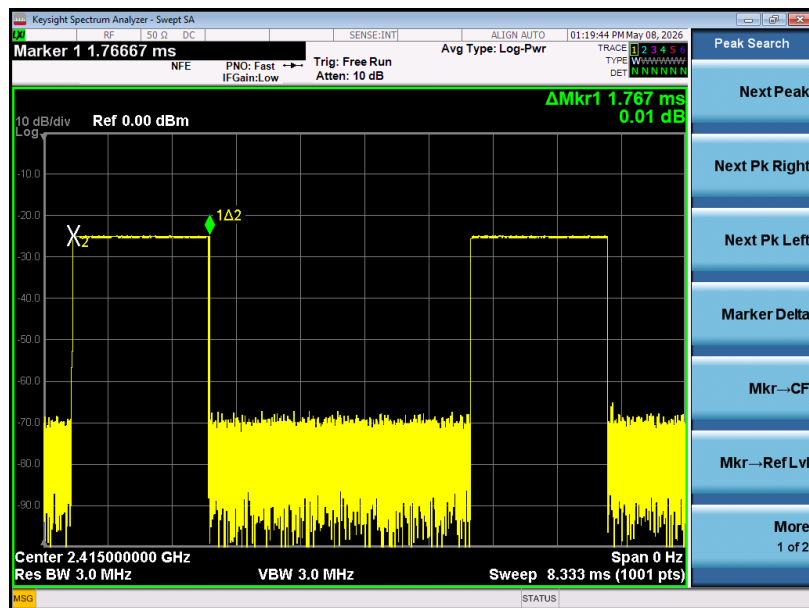

TEST REPORT

Calculating the AV value according to the duty cycle

Antenna	Frequency (MHz)	PK Reading (dBuV/m)	Correct Factor (dB)	AV Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2402.00	97.24	-9.33	87.91	94.00	8.28
V	2402.00	85.34		76.01	94.00	20.18
H	2440.00	97.50		88.17	94.00	8.02
V	2440.00	85.55		76.22	94.00	19.97
H	2480.00	96.56		87.23	94.00	8.96
V	2480.00	83.67		74.34	94.00	21.85

Remark:

1. Correct Factor = $20\lg(\text{duty cycle}) = 20\lg(1.767 / 5.167) = \mathbf{-9.33}$;
2. AV Reading = PK Reading + Correct Factor;
3. Margin = limit - AV Reading.

4 Power line conducted emission


Test result: Pass

4.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

4.2 Test Configuration

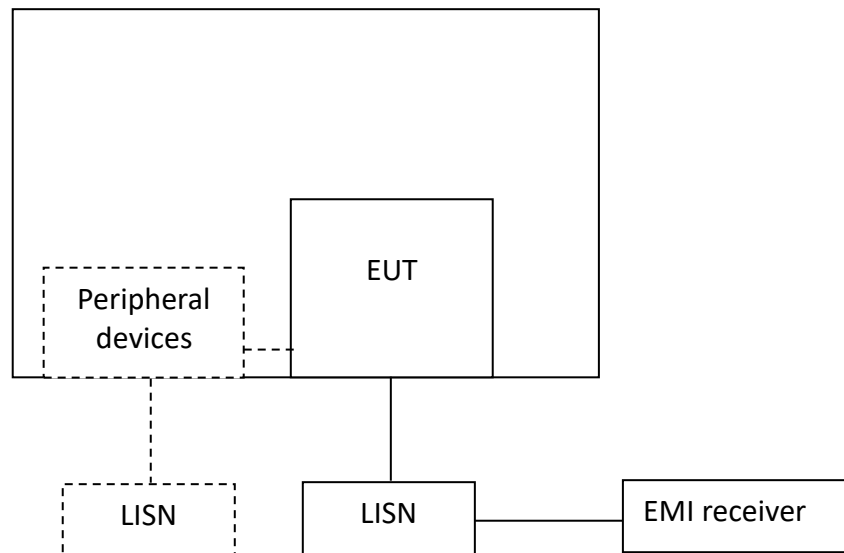

4.3 Measurement Procedure



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

4.4 Test Results of Power line conducted emission

Test Curve:

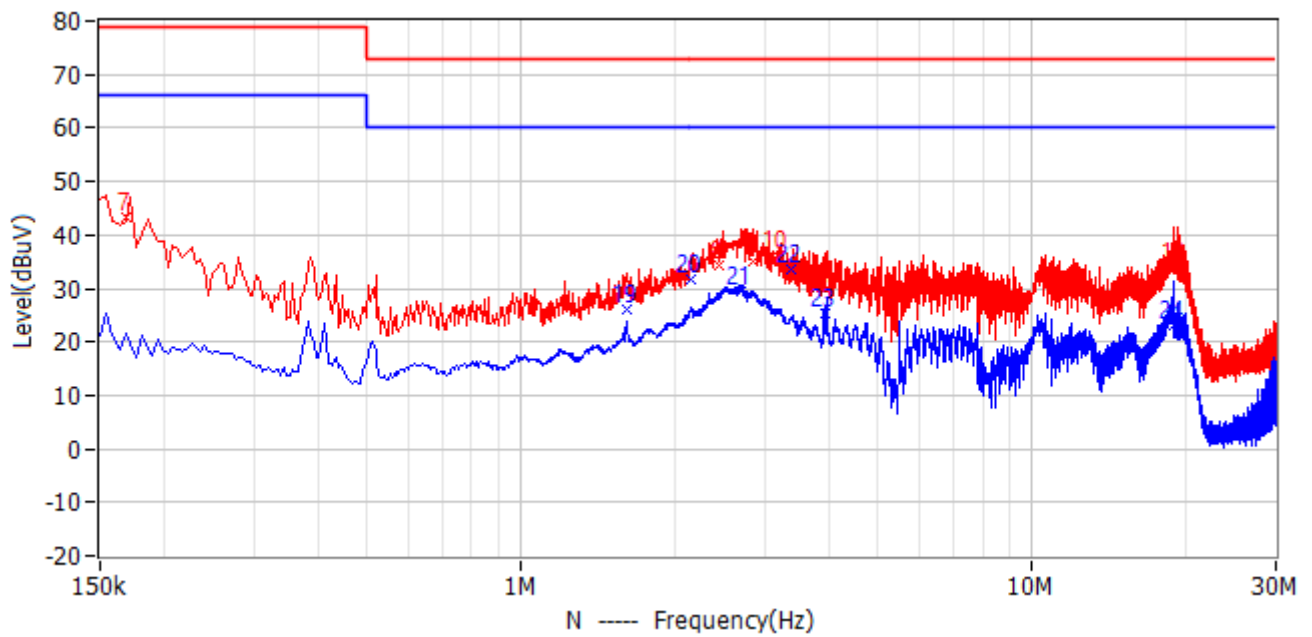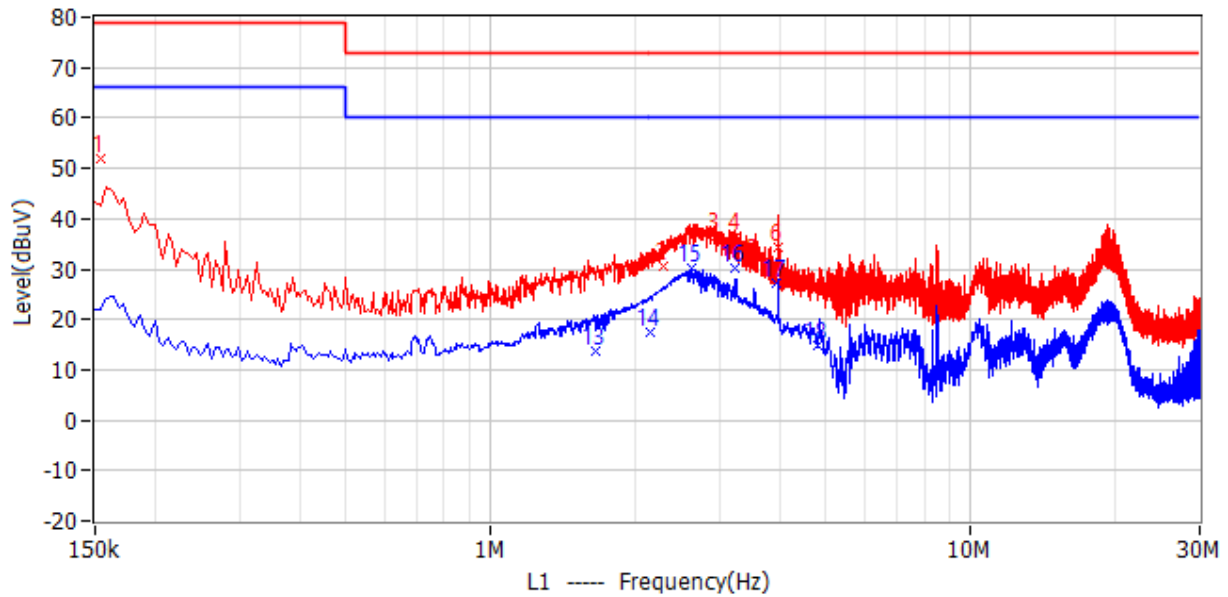

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	154.500kHz	79.00	51.78	-27.22	41.58	10.20	QP	L1
2	2.283MHz	73.00	30.53	-42.47	20.13	10.40	QP	L1
3	2.958MHz	73.00	36.55	-36.45	26.05	10.50	QP	L1
4	3.269MHz	73.00	36.50	-36.50	26.00	10.50	QP	L1
5	3.525MHz	73.00	31.25	-41.75	20.75	10.50	QP	L1
6	3.980MHz	73.00	34.23	-38.77	23.63	10.60	QP	L1
7	168.000kHz	79.00	43.13	-35.87	33.03	10.10	QP	N
8	2.432MHz	73.00	34.12	-38.88	23.62	10.50	QP	N
9	2.850MHz	73.00	35.11	-37.89	24.61	10.50	QP	N
10	3.183MHz	73.00	36.00	-37.00	25.40	10.60	QP	N
11	3.939MHz	73.00	29.80	-43.20	19.20	10.60	QP	N
12	19.073MHz	73.00	33.96	-39.04	22.46	11.50	QP	N
13	1.653MHz	60.00	13.57	-46.43	3.17	10.40	CAV	L1
14	2.153MHz	60.00	17.44	-42.56	7.04	10.40	CAV	L1
15	2.630MHz	60.00	30.29	-29.71	19.79	10.50	CAV	L1
16	3.215MHz	60.00	30.21	-29.79	19.71	10.50	CAV	L1
17	3.939MHz	60.00	27.30	-32.70	16.70	10.60	CAV	L1
18	4.799MHz	60.00	14.73	-45.27	4.03	10.70	CAV	L1
19	1.613MHz	60.00	26.25	-33.75	15.85	10.40	CAV	N
20	2.153MHz	60.00	31.75	-28.25	21.25	10.50	CAV	N
21	2.684MHz	60.00	29.59	-30.41	19.09	10.50	CAV	N
22	3.381MHz	60.00	33.56	-26.44	22.96	10.60	CAV	N
23	3.948MHz	60.00	25.38	-34.62	14.78	10.60	CAV	N
24	18.992MHz	60.00	22.91	-37.09	11.41	11.50	CAV	N

Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

5 Assigned bandwidth (20dB bandwidth)

Test result: Pass


5.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band.

5.2 Measurement Procedure

The 20dB Bandwidth is measured using the Spectrum Analyzer.
Set Span = 2 to 3 times the 20 dB bandwidth, RBW = approximately 1% of the 20 dB bandwidth, VBW>RBW, Sweep = auto, Detector = peak, Trace = max hold.
The test was performed at 2 channels (lowest and highest channel).

5.3 Test Configuration

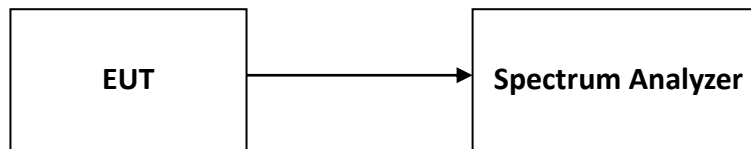

5.4 The results

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
OQPSK	2415	2.597	2.374	>2400	<2483.5
Limit		N/A	N/A	F _L >2400	F _H <2483.5
Result		Complied			

Channel L



6 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****