FCC RADIO TEST REPORT

FCC ID	:	**A4RG0DZQ**
Equipment	:	**Phone**
Applicant	:	**Google LLC** **1600 Amphitheatre Parkway,** **Mountain View, California, 94043 USA**
Standard	:	**FCC 47 CFR Part 2, 96**

The product was received on Sep. 08, 2022 and testing was performed from Sep. 21, 2022 to Nov. 08, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

Table of Contents

History of this test report **3**

Summary of Test Result **4**

1 General Description **5**

1.1 Product Feature of Equipment Under Test 5
1.2 Product Specification of Equipment Under Test 5
1.3 Modification of EUT 6
1.4 Testing Location 6
1.5 Applied Standards 7

2 Test Configuration of Equipment Under Test **8**

2.1 Test Mode 8
2.2 Connection Diagram of Test System 9
2.3 Support Unit used in test configuration 9
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 10

3 Conducted Test Items **11**

3.1 Measuring Instruments 11
3.2 Conducted Output Power 12
3.3 Peak-to-Average Ratio 13
3.4 EIRP 14
3.5 Occupied Bandwidth 15
3.6 Conducted Band Edge 16
3.7 Conducted Spurious Emission 17
3.8 Frequency Stability 18

4 Radiated Test Items **19**

4.1 Measuring Instruments 19
4.2 Test Setup 19
4.3 Test Result of Radiated Test 20
4.4 Radiated Spurious Emission 21

5 List of Measuring Equipment **22**

6 Uncertainty of Evaluation **24**

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test

Appendix C. Test Setup Photographs

History of this test report

Report No.	Version	Description	Issued Date
FG241215-02H	01	Initial issue of report	Nov. 25, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Pass	
3.4	§96.41	Effective Isotropic Radiated Power	Pass	-
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 8.70 dB at 14725.000 MHz for Primary Antenna Under limit 5.37 dB at 10654.000 MHz for ASDIV Antenna

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
   It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Rachel Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Phone
FCC ID	A4RG0DZQ
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/ NFC/GNSS/WPT Client WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
28291FQHN00195	Conducted Measurement EIRP
29081FQHN00197	Radiated Spurious Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	3552.5 MHz ~ 3697.5 MHz
Rx Frequency	3552.5 MHz ~ 3697.5 MHz
Bandwidth	10 MHz / 15 MHz / 20 MHz / 40 MHz
Maximum Output Power to Antenna	**<Primary Antenna>:** 24.42 dBm **<ASDIV Antenna>:** 22.94 dBm
Antenna Type	**<Primary Antenna>:** IFA Antenna **<ASDIV Antenna>:** IFA Antenna
Type of Modulation	PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

<Primary Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n48	Ant. 6	-2.7

<ASDIV Antenna>

Radio Tech	Band Number	Antenna name	Gain
5G NR	n48	Ant. 2	-2.6

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	**Sporton Site No.**
	TH03-HY
Test Engineer	Sherry Wu
Temperature (℃)	23.5~25
Relative Humidity (%)	48~52

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	**Sporton Site No.**
	03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Tim Lee and Wilson Wu
Temperature (℃)	20~25
Relative Humidity (%)	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26-2015
- ANSI / TIA-603-E
- FCC 47 CFR Part 2, 96
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 940660 D01 Part 96 CBRS Eqpt v03
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Test Items	Band	Bandwidth (MHz)				Modulation					RB #			Test Channel		
		10	15	20	40	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n48	v	v	v	v	v	v	v	v	v	v	v		v	v	v
26dB and 99% Bandwidth	n48	v	v	v	v	v	v	v	v	v			v		v	
Conducted Band Edge	n48	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	n48			v		v	v	v	v	v			v		v	
Conducted Spurious Emission	n48	v	v	v	v		v				v			v	v	v
E.I.R.P	n48	v	v	v	v	v	v	v	v	v	Max. Power					
Frequency Stability	n48			v		v					v				v	
Radiated Spurious Emission	n48	Worst Case												v	v	v
Remark	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All the radiated test cases were performed with Adapter 1 and USB Cable 2. 5. For radiated measurement, pre-scanned in two modes, DFT-s OFDM and CP OFDM. The worst cases (DFT-s OFDM) were recorded in this report, and the worst modes of FR1 and LTE for simultaneous transmission were verified and compliant. 6. For 5G NR test combination is EN-DC 66A_n48A. 7. During the preliminary test, both charging modes (Adapter mode and WPT Client mode) were verified. It is determined that the adaptor mode is the worst case for official test. 8. One representative bandwidth is selected to perform PAR and frequency stability.															

2.2 Connection Diagram of Test System

<EUT with Adapter>

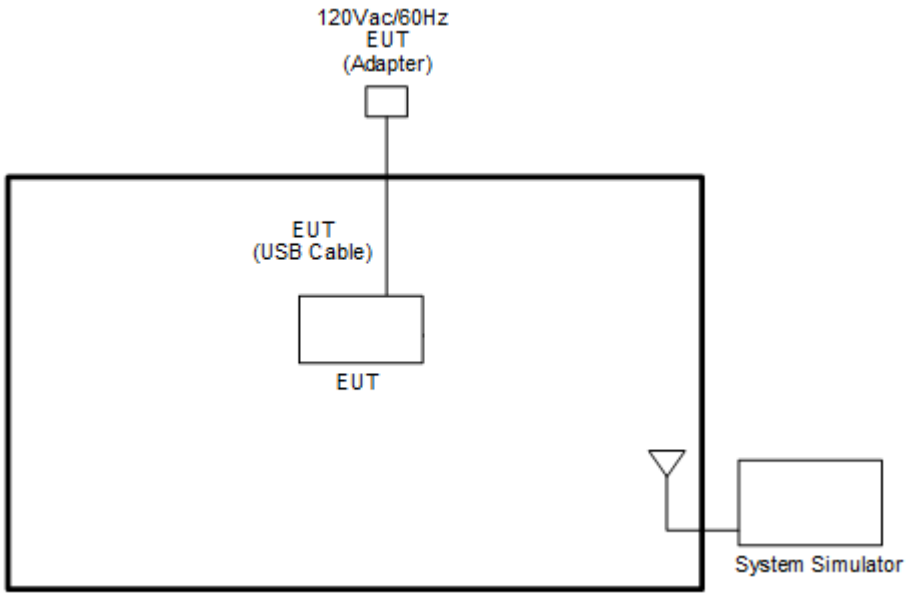

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

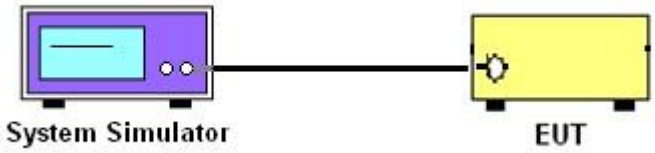

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band Edge and Conducted Spurious Emission

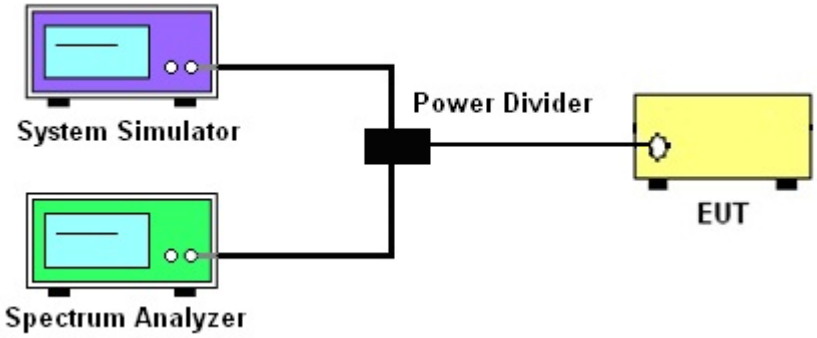

3.1.4 Frequency Stability

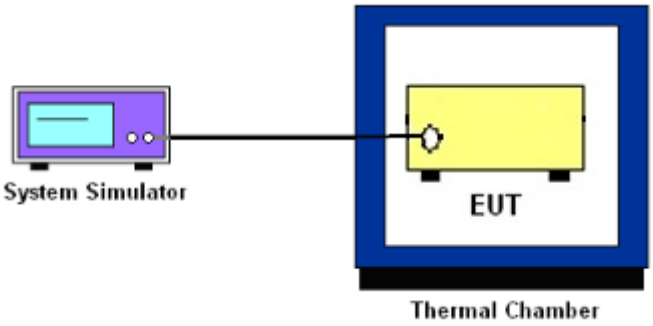

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP

3.4.1 Description of the EIRP Measurement

The EIRP of mobile transmitters must not exceed 23 dBm /10 megahertz for LTE Band 48.

The testing follows ANSI C63.26-2015 Section 5.2.5.5

According to KDB 412172 D01 Power Approach,

EIRP = PT + GT – LC, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

Device	Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a

Remark:

1. Total channel power is complied with EIRP limit 23dBm/10MHz.
2. The MIMO mode is completely uncorrelated, so the directional gain is selected the maximum gain among all antennas.

3.4.2 Test Procedures

The testing follows procedure in Section 5.2 of ANSI C63.26-2015 and KDB 940660 D01 Part 96 CBRS Eqpt v03 Section 3.2(b)(2)

Determine the EIRP by adding the effective antenna gain to the measured average conducted power level.

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
   (this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

The conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed −13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed −25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. For MIMO mode, add additional MIMO factor 10log(NTX=2) = 3.01dB into the spectrum analyzer offset.

For Adjacent Channel Leakage Ratio (ACLR) measurement,

1. The Adjacent Channel Leakage Ratio (ACLR) is the ratio of the average power in the assigned aggregated channel bandwidth to the average power over the equivalent adjacent channel bandwidth.
2. The option ACLR of spectrum analyzer is used and measures the ACLR ratio by setting equivalent channel bandwidth.
3. The measured ACLR ratio shall be at least 30 dB.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed −40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is −40dBm/MHz.
10. For MIMO mode, add additional MIMO factor 10log(NTX=2) = 3.01dB into the spectrum analyzer offset.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.2 Test Setup

For radiated emissions below 30MHz

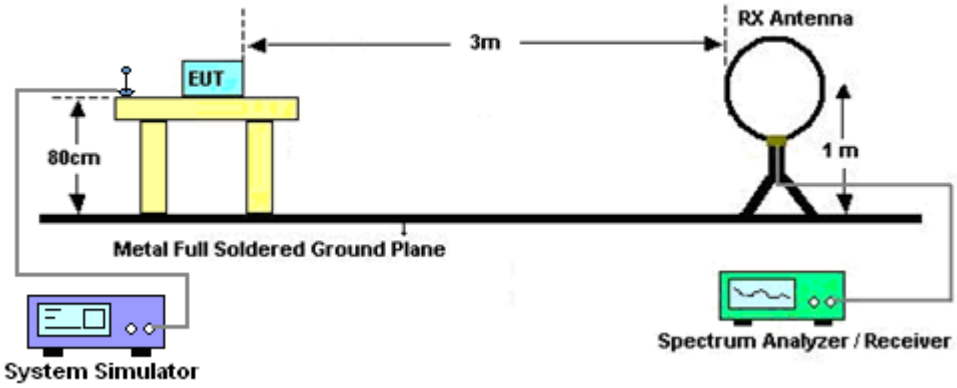

For radiated emissions from 30MHz to 1GHz

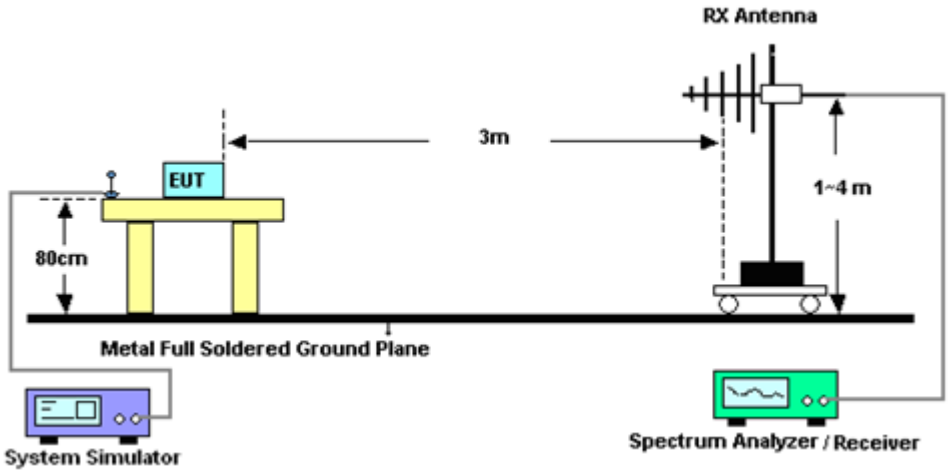

For radiated emissions from 1GHz to 18GHz

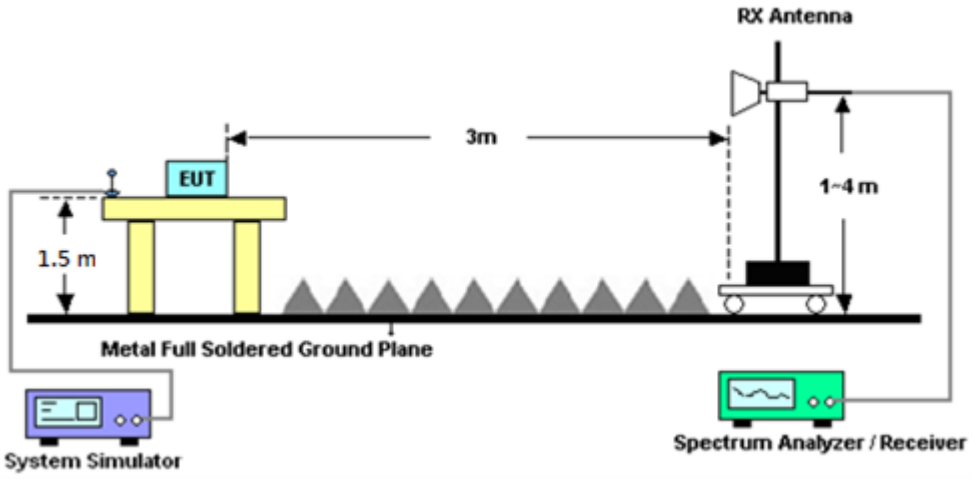

For radiated emissions above 18GHz

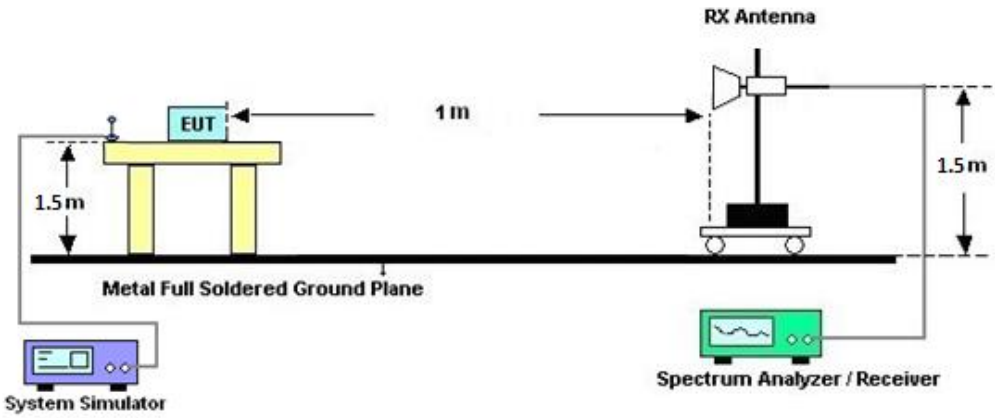

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz .

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
   Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
   EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
   ERP (dBm) = EIRP - 2.15
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	May 13, 2022	Sep. 21, 2022~ Oct. 22, 2022	May 12, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Dec. 03, 2021	Sep. 21, 2022~ Oct. 22, 2022	Dec. 02, 2022	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Sep. 21, 2022~ Oct. 22, 2022	Apr. 23, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 08, 2022	Sep. 21, 2022~ Oct. 22, 2022	Oct. 07, 2023	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar 10, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar 09, 2023	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	Sep. 21, 2022~ Oct. 22, 2022	Nov. 29, 2022	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 14, 2022	Sep. 21, 2022~ Oct. 22, 2022	May 13, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar. 22, 2023	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	Sep. 21, 2022~ Oct. 22, 2022	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900249	1GHz-18GHz	Dec. 22, 2021	Sep. 21, 2022~ Oct. 22, 2022	Dec. 21, 2022	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900269	1GHz-18GHz	Dec. 27, 2021	Sep. 21, 2022~ Oct. 22, 2022	Dec. 26, 2022	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Sep. 21, 2022~ Oct. 22, 2022	Dec. 23, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY53470118	10Hz~44GHz	Jan. 12, 2022	Sep. 21, 2022~ Oct. 22, 2022	Jan. 11, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Sep. 21, 2022~ Oct. 22, 2022	Dec. 09, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Sep. 21, 2022~ Oct. 22, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Mar. 08, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar. 07, 2023	Radiation (03CH12-HY)

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 15, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60SS	SN1	1.2GHz High Pass Filter	Mar. 15, 2022	Sep. 21, 2022~ Oct. 22, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3GHz High Pass Filter	Jul. 11, 2022	Sep. 21, 2022~ Oct. 22, 2022	Jul. 10, 2023	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 26, 2021	Sep. 21, 2022~ Oct. 22, 2022	Nov. 25, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 21, 2022~ Oct. 22, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 21, 2022~ Oct. 22, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 21, 2022~ Oct. 22, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Sep. 21, 2022~ Oct. 22, 2022	N/A	Radiation (03CH12-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890089	0V~64V ;0A~6A	Feb. 23, 2022	Sep. 21, 2022~ Nov. 08, 2022	Feb. 22, 2023	Conducted (TH03-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101048	10Hz~44GHz	May 05, 2022	Sep. 21, 2022~ Nov. 08, 2022	May 04, 2023	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 09, 2021	Sep. 21, 2022~ Nov. 08, 2022	Sep. 06, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8821C	6262116730	LTE	Jun. 15, 2022	Sep. 21, 2022~ Nov. 08, 2022	Jun. 14, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jun. 13, 2022	Sep. 21, 2022~ Nov. 08, 2022	Jun. 22, 2023	Conducted (TH03-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31 dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.25 dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.81 dB

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and EIRP

<Primary Antenna>

NR n48 Maximum Average Power [dBm] (GT - LC = -2.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	22.70	22.94	22.81	20.24	0.1057
10	1	22		22.58	22.82	22.90		
10	12	6		22.63	22.89	22.78		
10	1	0		22.21	22.41	22.28		
10	1	23		22.12	22.34	22.41		
10	24	0		22.12	22.38	22.24		
10	1	1	QPSK	22.71	22.90	22.74		
10	1	22		22.58	22.84	22.85		
10	12	6		22.65	22.91	22.78		
10	1	0		21.67	21.93	21.77		
10	1	23		21.55	21.84	21.84		
10	24	0		21.61	21.86	21.77		
10	1	1	16-QAM	21.78	21.96	21.67	19.26	0.0843
10	1	1	64-QAM	20.21	20.36	20.21		
10	1	1	256-QAM	18.21	18.44	18.06		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

NR n48 Maximum Average Power [dBm] (GT - LC = -2.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	18.79	22.89	22.78	20.22	0.1052
15	1	36		22.67	22.78	18.81		
15	18	9		22.71	22.82	22.73		
15	1	0		18.76	22.41	22.23		
15	1	37		22.13	22.26	18.80		
15	36	0		18.70	22.33	18.72		
15	1	1	QPSK	18.85	22.92	22.78		
15	1	36		22.73	22.84	18.83		
15	18	9		22.70	22.85	22.73		
15	1	0		18.83	21.91	21.78		
15	1	37		21.73	21.82	18.79		
15	36	0		18.71	21.85	18.72		
15	1	1	16-QAM	17.83	21.94	21.65	19.24	0.0839
15	1	1	64-QAM	17.76	20.43	20.41		
15	1	1	256-QAM	18.21	18.32	18.07		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n48 Maximum Average Power [dBm] (GT - LC = -2.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	18.75	22.92	22.73	20.23	0.1054
20	1	49		22.72	22.81	18.77		
20	25	12		22.74	22.84	22.72		
20	1	0		18.81	22.43	22.21		
20	1	50		22.21	22.37	18.75		
20	50	0		18.70	22.34	18.71		
20	1	1	QPSK	18.87	22.93	22.73		
20	1	49		22.70	22.91	18.74		
20	25	12		22.73	22.85	22.71		
20	1	0		18.86	21.93	21.72		
20	1	50		21.72	21.92	18.72		
20	50	0		18.71	21.82	18.69		
20	1	1	16-QAM	17.86	21.72	21.88	19.18	0.0828
20	1	1	64-QAM	17.94	20.14	20.14		
20	1	1	256-QAM	18.16	18.36	17.96		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

NR n48 Maximum Average Power [dBm] (GT - LC = -2.7 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	9.39	18.98	9.32	20.17	0.1040
40	1	104		9.11	18.68	9.14		
40	50	25		9.30	22.87	9.21		
40	1	0		9.38	18.90	9.30		
40	1	105		9.12	18.67	9.15		
40	100	0		9.24	18.31	9.14		
40	1	1	QPSK	9.33	18.84	9.31		
40	1	104		9.05	18.64	9.14		
40	50	25		9.28	22.84	9.21		
40	1	0		9.35	18.81	9.35		
40	1	105		9.08	18.64	9.13		
40	100	0		9.25	18.35	9.16		
40	1	1	16-QAM	9.15	18.86	9.23	16.16	0.0413
40	1	1	64-QAM	9.41	18.86	9.23		
40	1	1	256-QAM	9.07	18.36	9.23		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

<ASDIV Antenna>

NR n48 Maximum Average Power [dBm] (GT - LC = -2.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
10	1	1	PI/2 BPSK	24.03	24.03	24.39	21.82	0.1521
10	1	22		23.97	23.88	24.35		
10	12	6		24.02	23.92	24.38		
10	1	0		23.54	23.51	23.85		
10	1	23		23.47	23.37	23.81		
10	24	0		23.51	23.34	23.88		
10	1	1	QPSK	24.02	24.05	24.42		
10	1	22		24.01	23.94	24.36		
10	12	6		24.02	23.93	24.41		
10	1	0		23.02	23.11	23.41		
10	1	23		23.01	22.96	23.36		
10	24	0		23.02	22.95	23.37		
10	1	1	16-QAM	23.12	23.07	23.42	20.82	0.1208
10	1	1	64-QAM	21.59	21.45	21.61		
10	1	1	256-QAM	19.52	19.72	19.73		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

NR n48 Maximum Average Power [dBm] (GT - LC = -2.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
15	1	1	PI/2 BPSK	20.12	24.08	24.01	21.73	0.1489
15	1	36		24.00	23.88	19.66		
15	18	9		24.14	23.95	24.33		
15	1	0		20.14	23.54	23.51		
15	1	37		23.51	23.40	19.65		
15	36	0		20.15	23.42	19.97		
15	1	1	QPSK	20.14	24.05	24.03		
15	1	36		24.04	23.87	19.68		
15	18	9		24.17	23.95	24.33		
15	1	0		20.15	23.10	22.99		
15	1	37		23.03	22.89	19.65		
15	36	0		20.12	22.94	20.00		
15	1	1	16-QAM	19.21	23.03	23.04	20.44	0.1107
15	1	1	64-QAM	19.21	21.67	21.54		
15	1	1	256-QAM	19.42	19.56	19.30		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

NR n48 Maximum Average Power [dBm] (GT - LC = -2.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
20	1	1	PI/2 BPSK	20.07	24.01	23.93	21.64	0.1459
20	1	49		23.96	23.81	19.96		
20	25	12		24.14	23.84	24.24		
20	1	0		20.13	23.53	23.37		
20	1	50		23.44	23.27	19.98		
20	50	0		20.13	23.35	19.94		
20	1	1	QPSK	20.15	24.06	23.85		
20	1	49		23.98	23.82	20.09		
20	25	12		24.12	23.86	24.24		
20	1	0		20.12	23.05	22.87		
20	1	50		23.01	22.82	20.06		
20	50	0		20.07	22.85	19.99		
20	1	1	16-QAM	19.35	23.04	22.85	20.44	0.1107
20	1	1	64-QAM	19.21	21.37	21.21		
20	1	1	256-QAM	19.75	19.41	19.28		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

NR n48 Maximum Average Power [dBm] (GT - LC = -2.6 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP(W)
40	1	1	PI/2 BPSK	9.18	19.99	9.14	21.45	0.1396
40	1	104		8.75	19.57	9.12		
40	50	25		9.11	24.02	8.97		
40	1	0		9.16	19.99	9.14		
40	1	105		8.75	19.57	9.17		
40	100	0		9.10	19.51	8.92		
40	1	1	QPSK	9.21	19.98	9.12		
40	1	104		8.83	19.63	9.16		
40	50	25		9.12	24.05	8.92		
40	1	0		9.17	19.99	9.12		
40	1	105		8.73	19.63	9.15		
40	100	0		9.07	19.48	8.92		
40	1	1	16-QAM	9.28	19.83	9.05	17.44	0.0555
40	1	1	64-QAM	9.01	20.04	9.04		
40	1	1	256-QAM	9.12	19.45	8.87		
Limit	EIRP < 23dBm/10MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 23 dBm/10MHz.

FR1 n48

Peak-to-Average Ratio

Mode	FR1 n48 / 20MHz / DFT-S OFDM				
Mod.	PI/2 BPSK	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.48	5.44	5.70	7.12	PASS
Mode	FR1 n48 / 20MHz / DFT-S OFDM				
Mod.	256QAM				Limit: 13dB
RB Size	Full RB				Result
Middle CH	6.48				PASS

FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

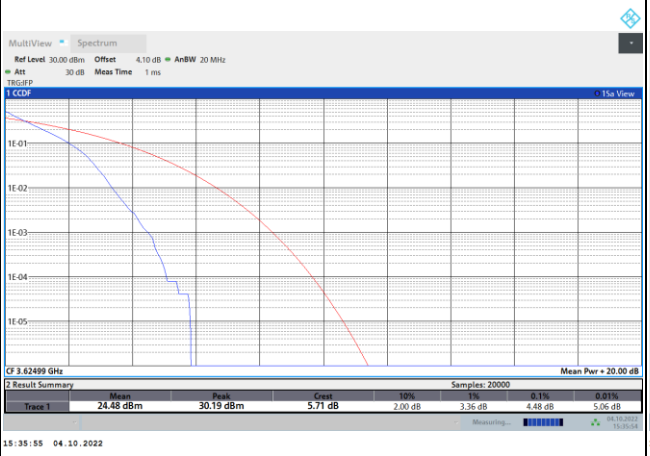

QPSK

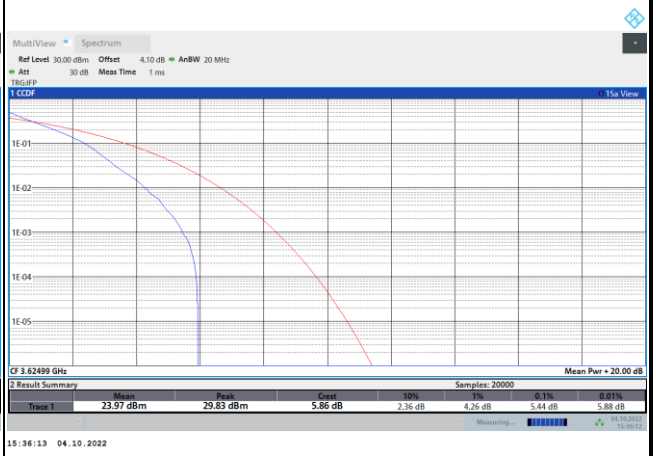

16QAM

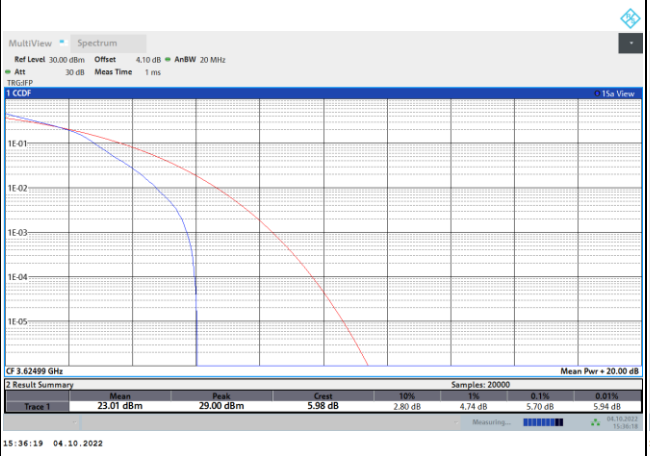

64QAM

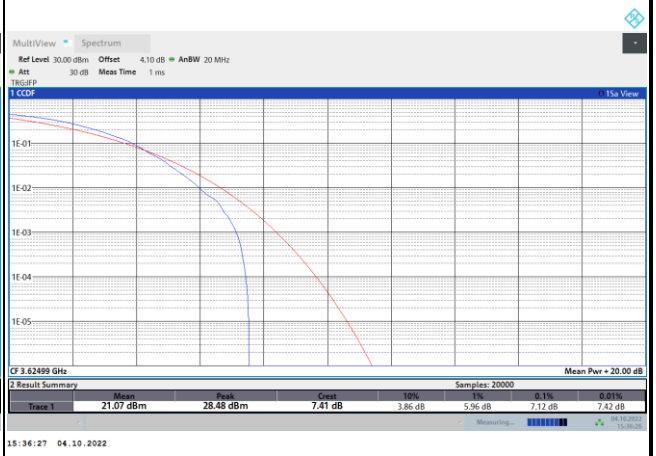

256QAM

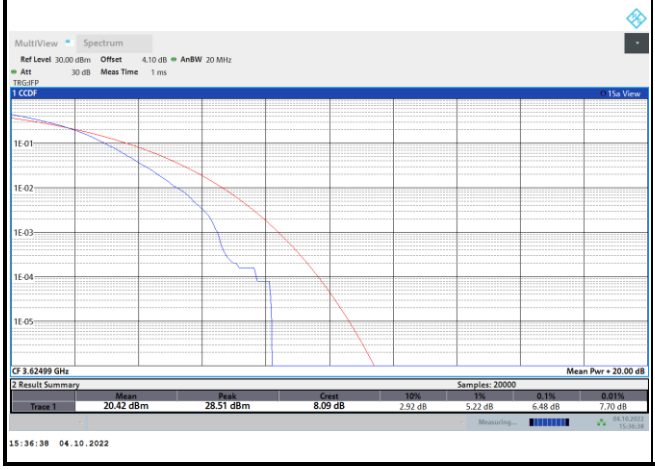

26dB Bandwidth

Mode	FR1 n48 : 26dB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	9.07	13.73	18.82	-	38.12	-	-	-
BW	80MHz	90MHz	100MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	-	-	-					

Mode	FR1 n48 : 26dB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	9.45	8.89	14.39	14.36	19.14	19.34	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	9.19	9.25	14.48	14.36	19.10	19.38	-	-
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	40.44	40.52	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	40.52	40.76	-	-	-	-	-	-
BW	80MHz		90MHz		100MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	-	-	-	-	-	-		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	-	-	-	-	-	-		

FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

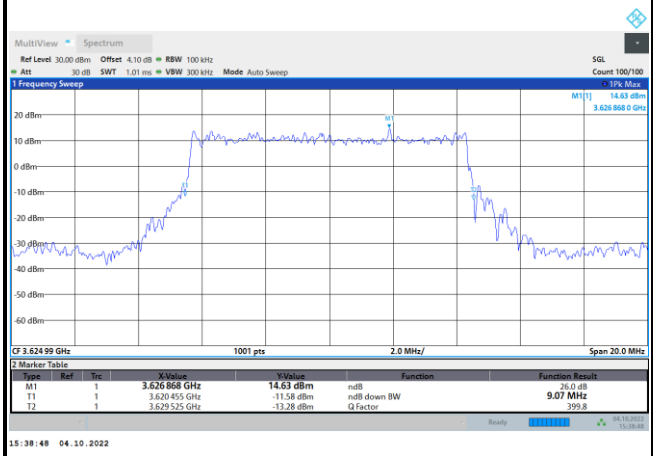

FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

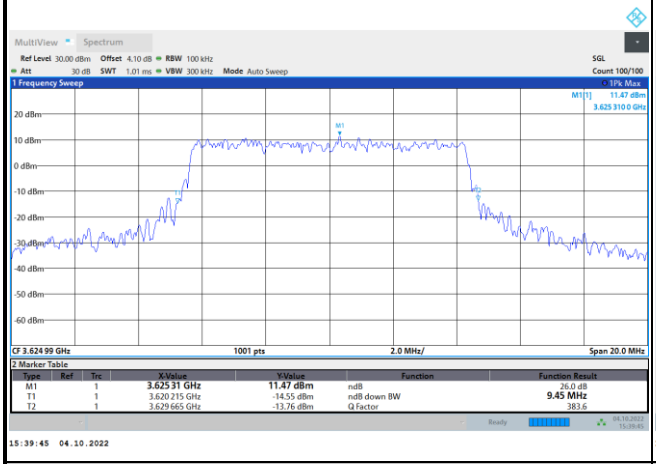

16QAM

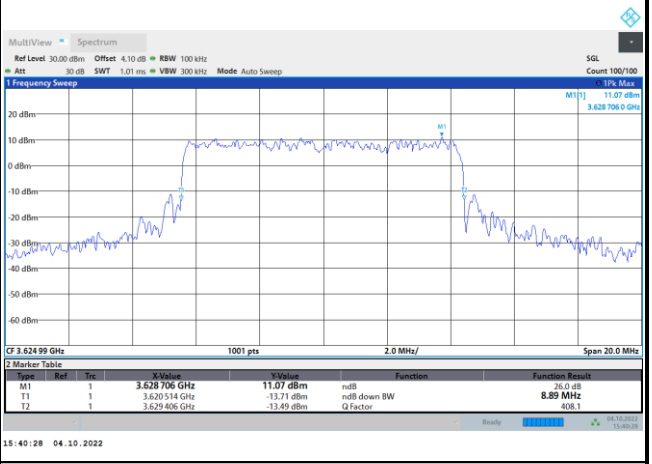

64QAM

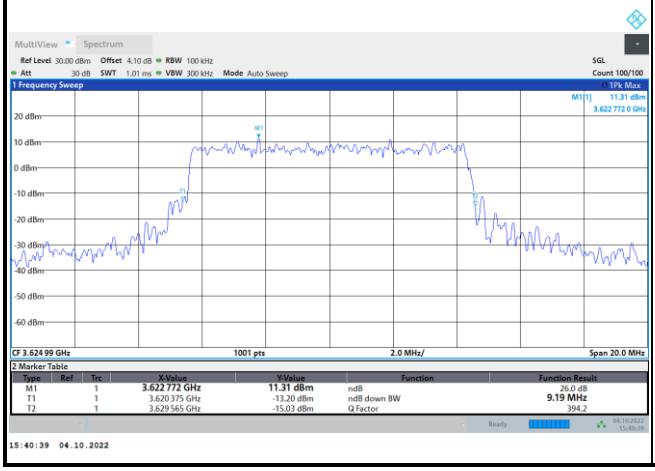

256QAM

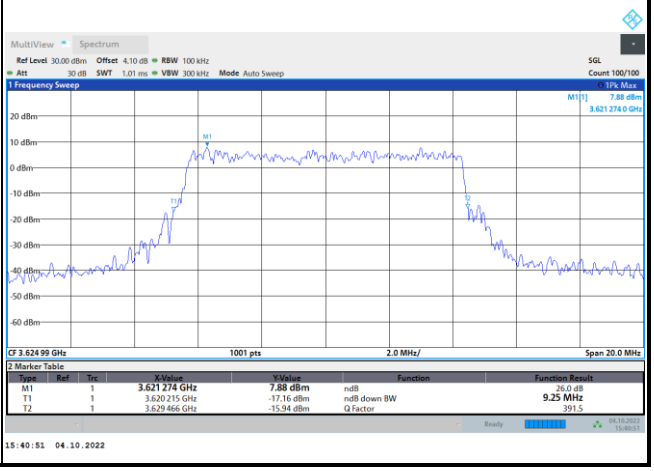

FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

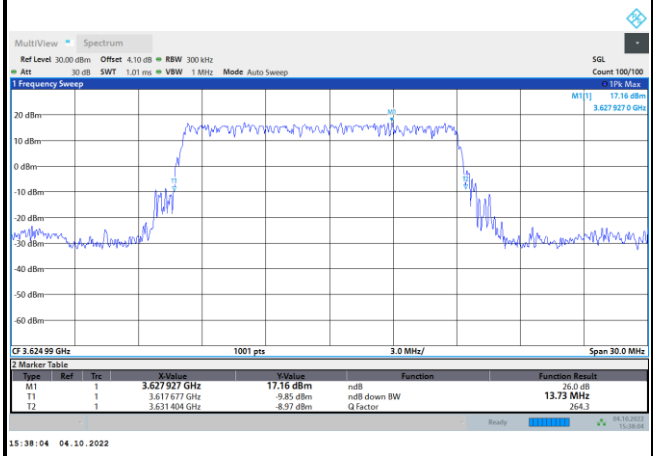

FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

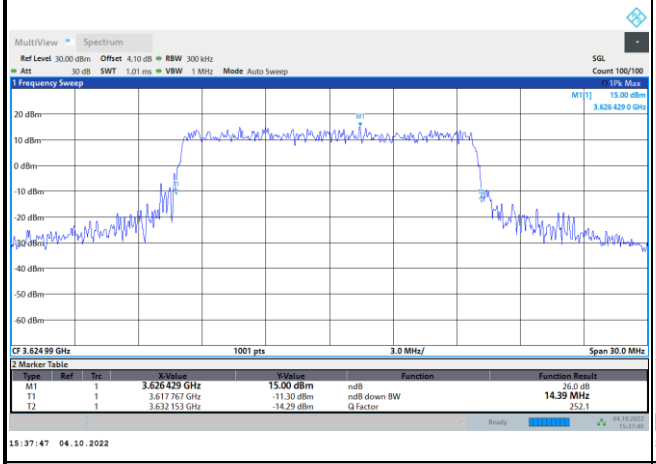

16QAM

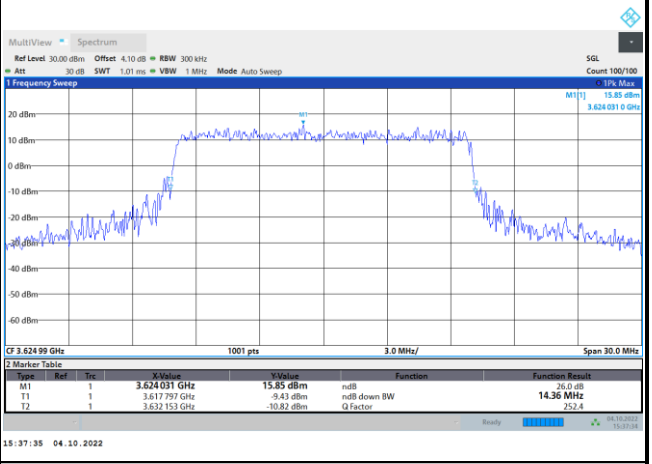

64QAM

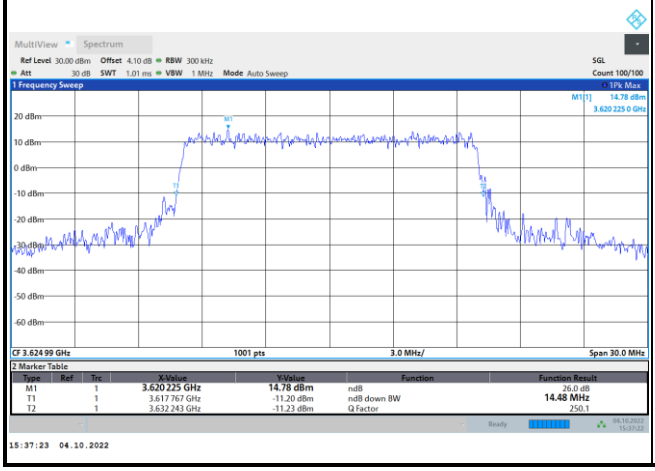

256QAM

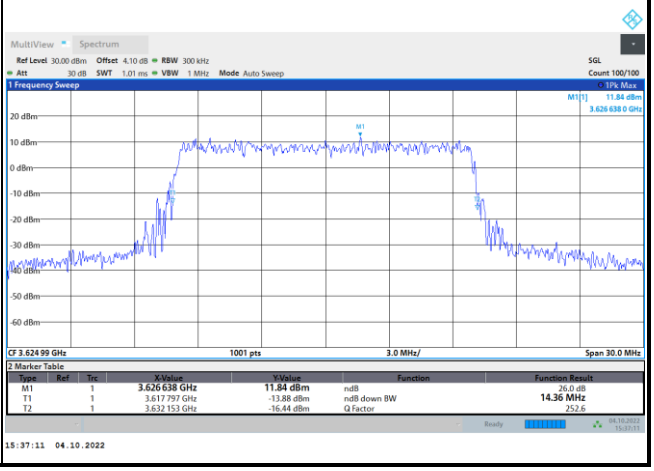

FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

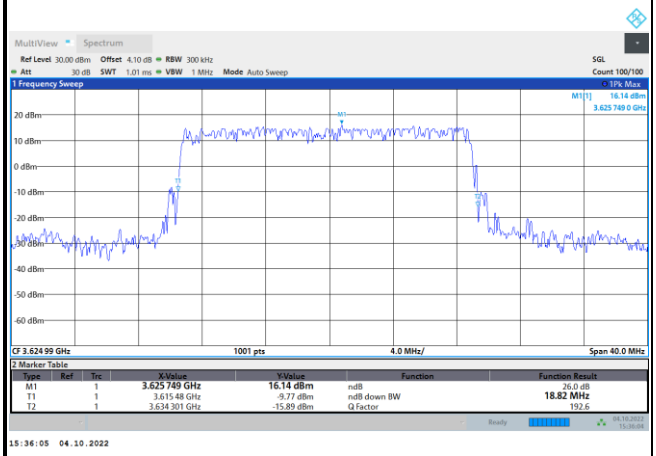

FR1 n48 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

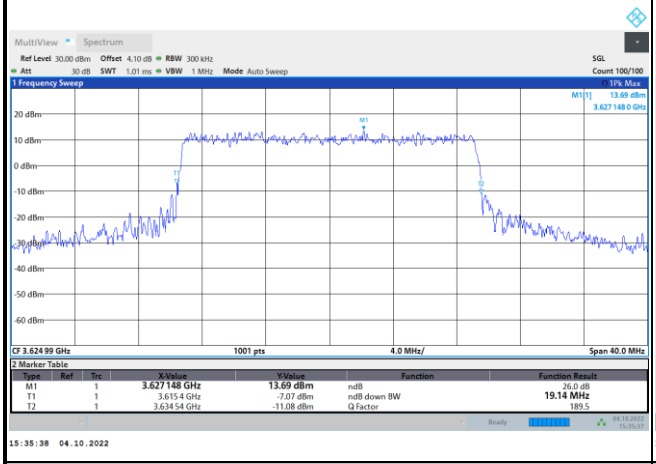

16QAM

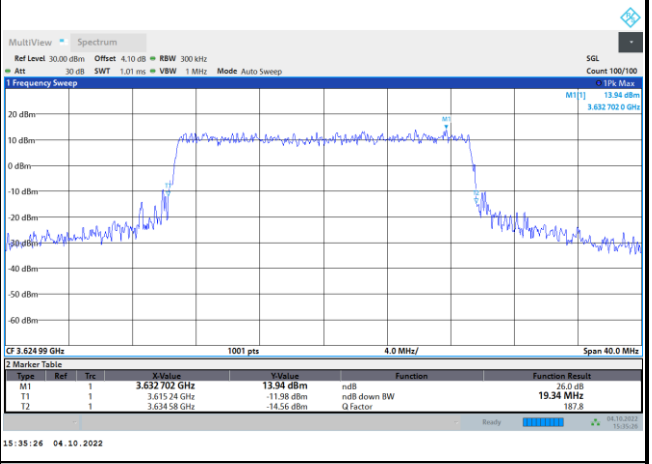

64QAM

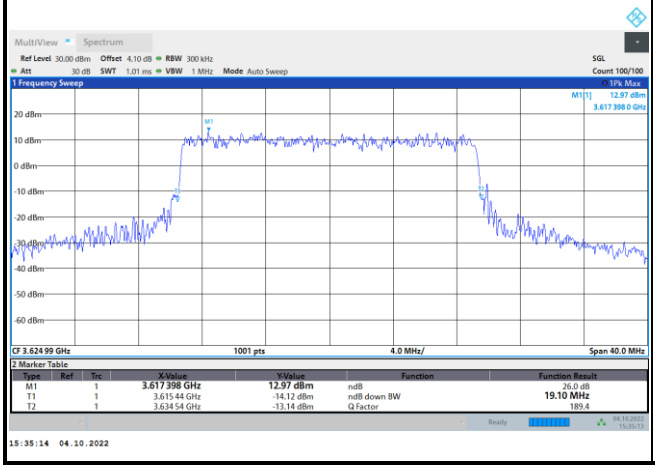

256QAM

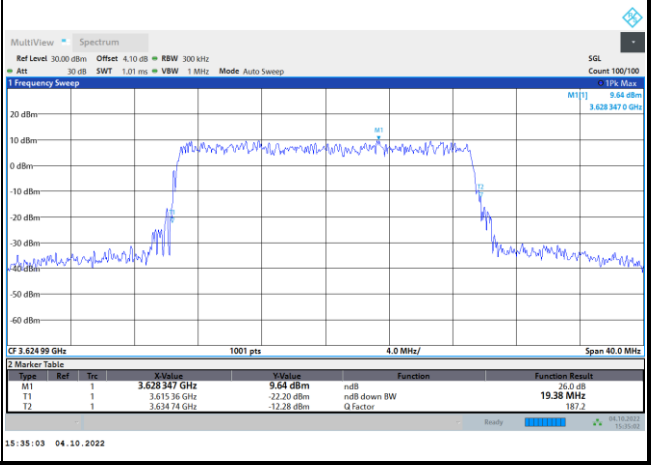

FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

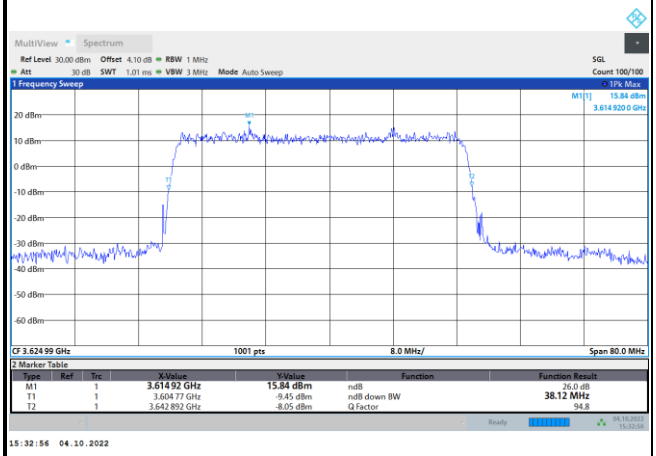

FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB

QPSK

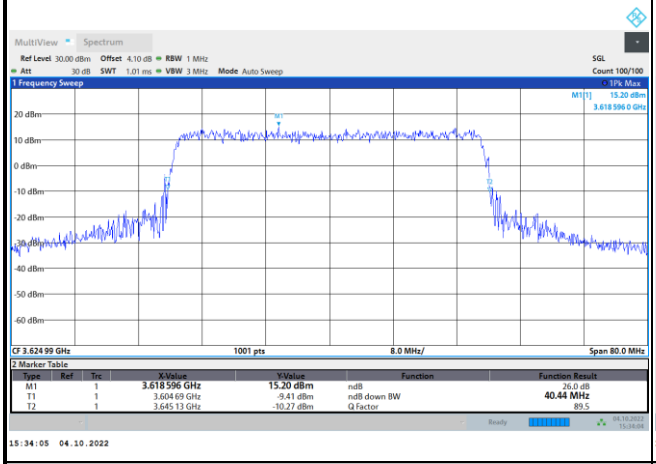

16QAM

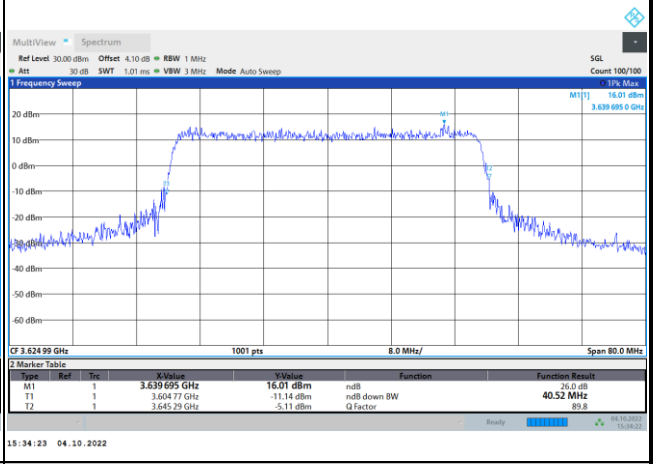

64QAM

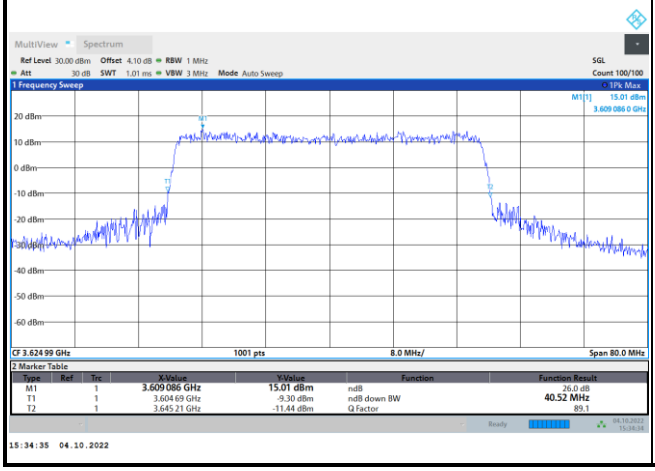

256QAM

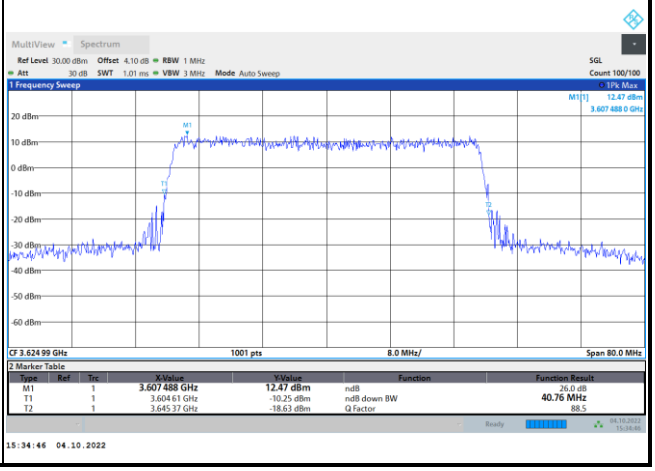

Occupied Bandwidth

Mode	FR1 n48 : OB BW(MHz) / DFT-S OFDM							
BW	10MHz	15MHz	20MHz	30MHz	40MHz	50MHz	60MHz	70MHz
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK
Middle CH	8.58	12.88	17.85	-	36.16	-	-	-
BW	80MHz	90MHz	100MHz					
Mod.	PI/2 BPSK	PI/2 BPSK	PI/2 BPSK					
Middle CH	-	-	-					

Mode	FR1 n48 : OB BW(MHz) / CP OFDM							
BW	10MHz		15MHz		20MHz		30MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	8.59	8.55	13.58	13.72	18.28	18.20	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	8.60	8.56	13.64	13.60	18.20	18.24	-	-
BW	40MHz		50MHz		60MHz		70MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	37.99	38.07	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	38.15	38.20	-	-	-	-	-	-
BW	80MHz		90MHz		100MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM		
Middle CH	-	-	-	-	-	-		
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM		
Middle CH	-	-	-	-	-	-		

FR1 n48 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

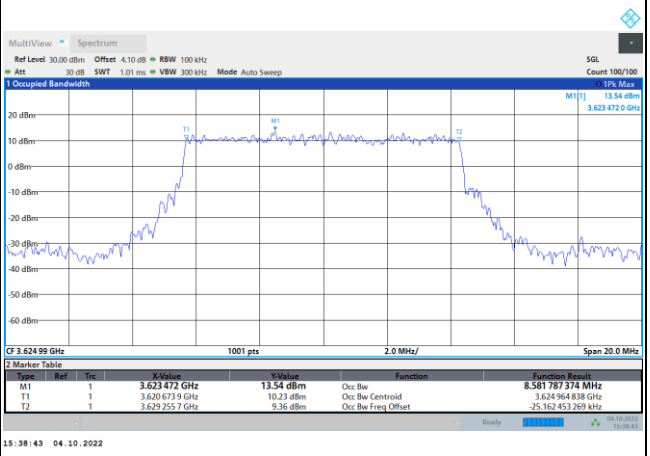

FR1 n48 / 10MHz / CP OFDM / Middle Channel / Full RB

QPSK

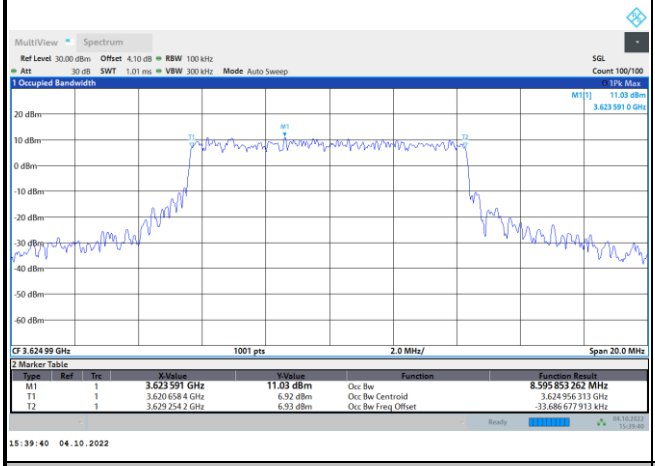

16QAM

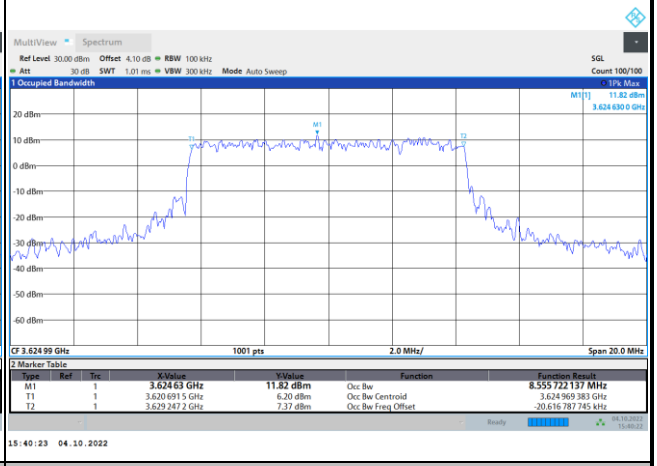

64QAM

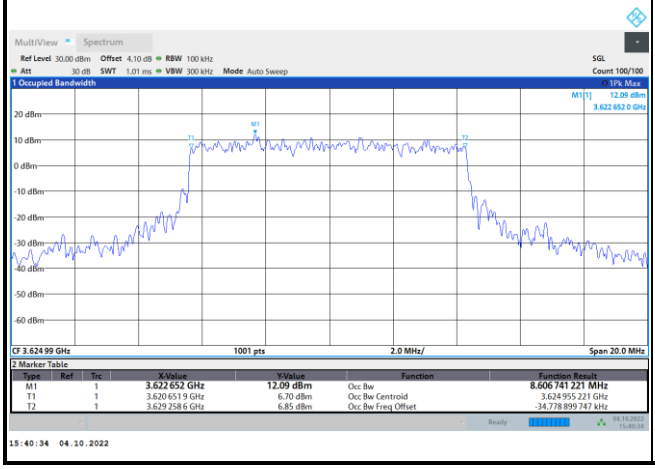

256QAM

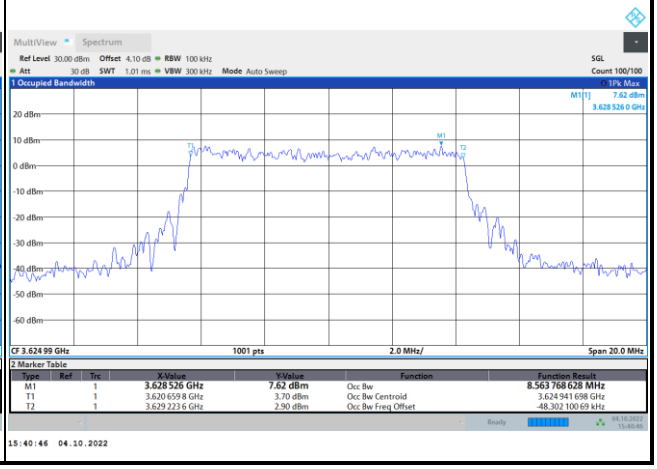

FR1 n48 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

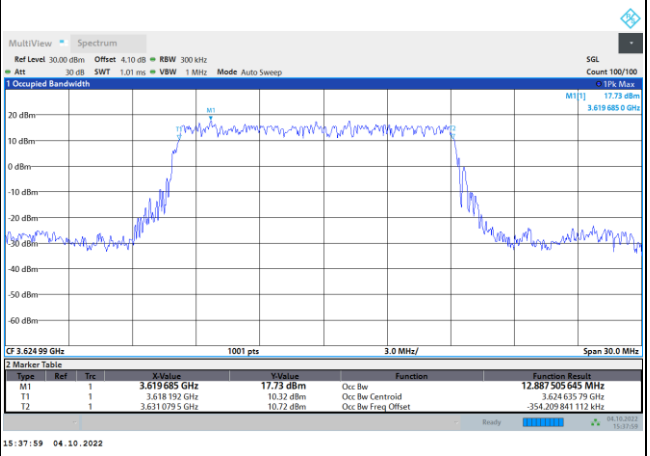

FR1 n48 / 15MHz / CP OFDM / Middle Channel / Full RB

QPSK

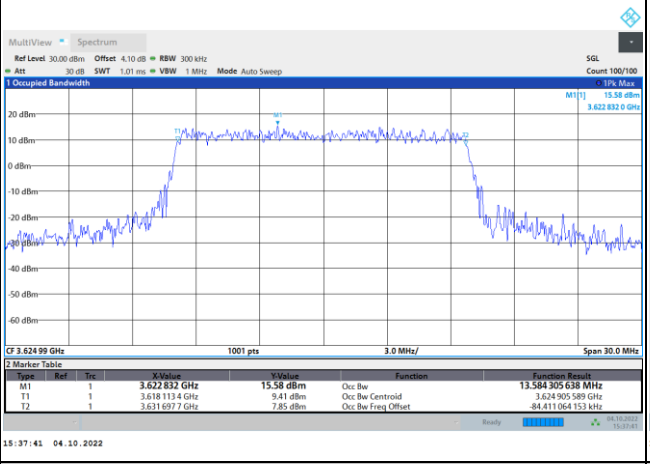

16QAM

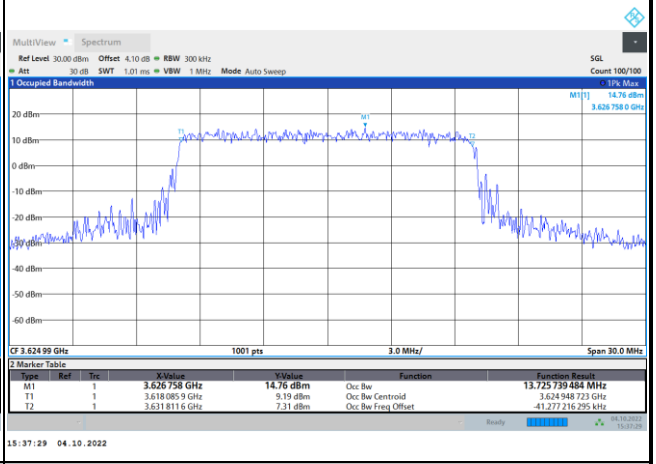

64QAM

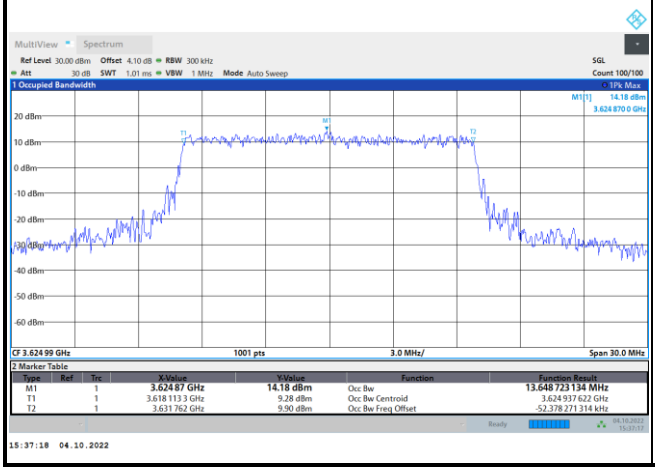

256QAM

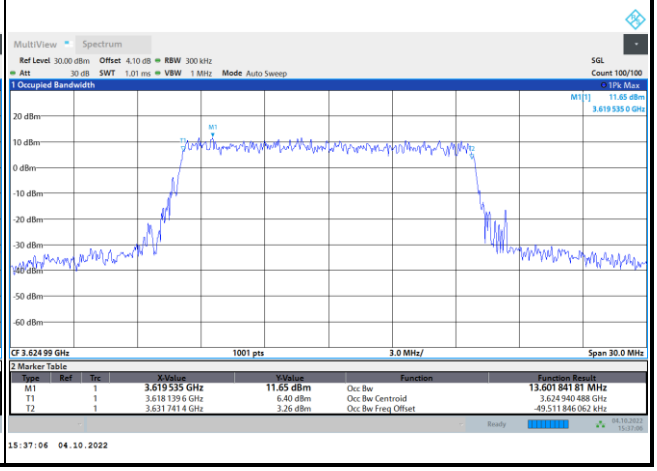

FR1 n48 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

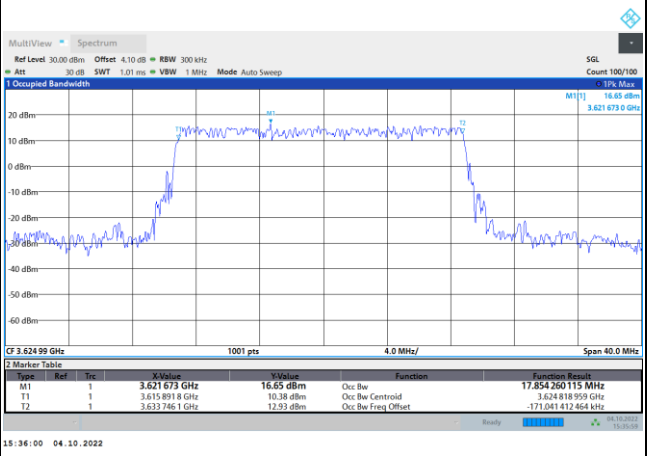

FR1 n48 / 20MHz / CP OFDM / Middle Channel / Full RB

QPSK

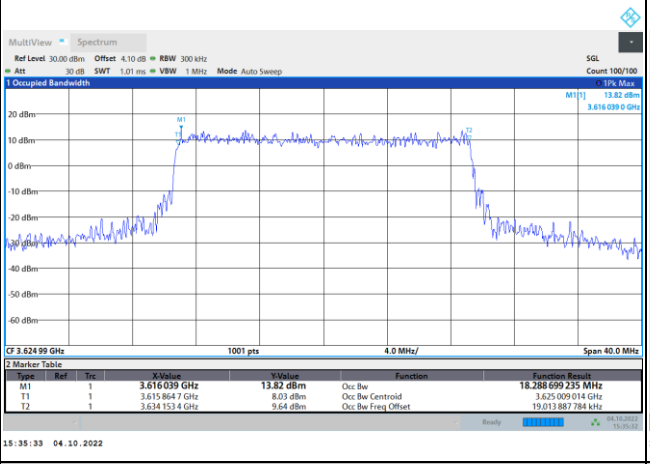

16QAM

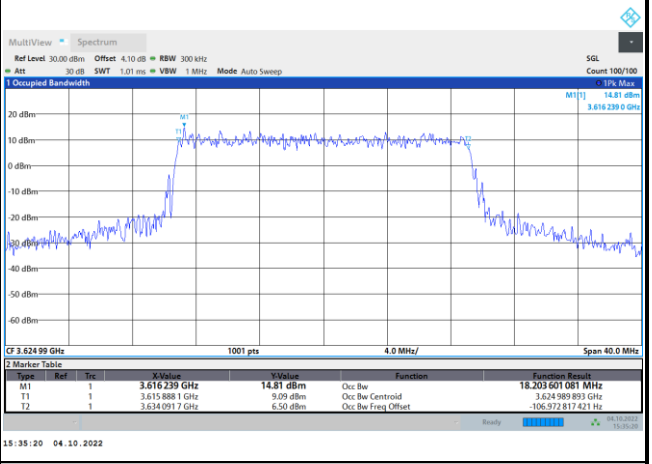

64QAM

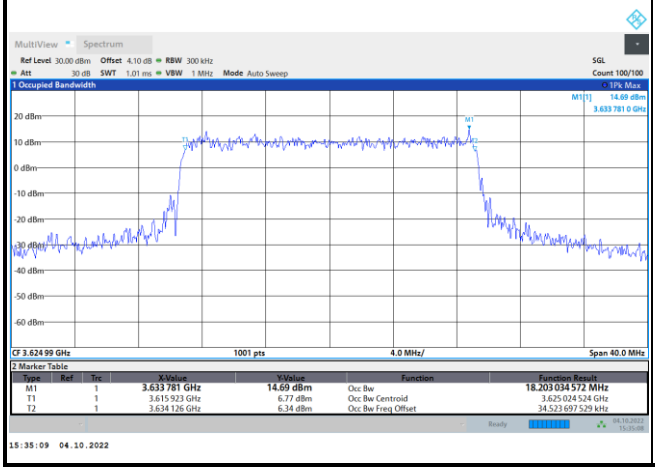

256QAM

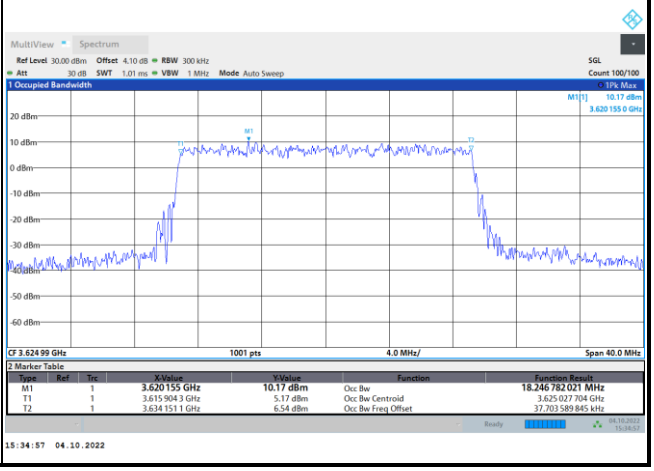

FR1 n48 / 40MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

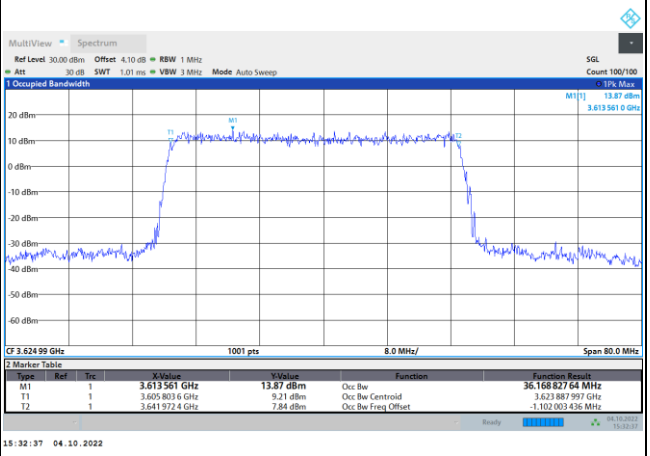

FR1 n48 / 40MHz / CP OFDM / Middle Channel / Full RB

QPSK

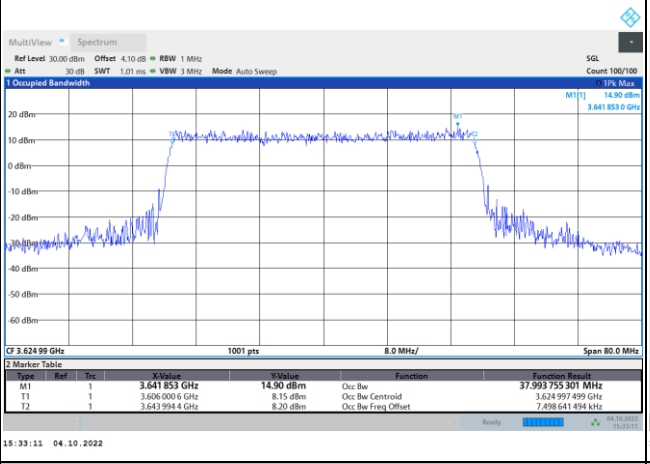

16QAM

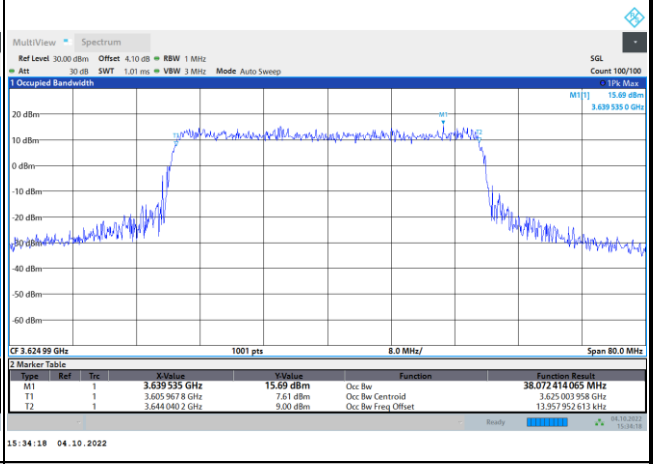

64QAM

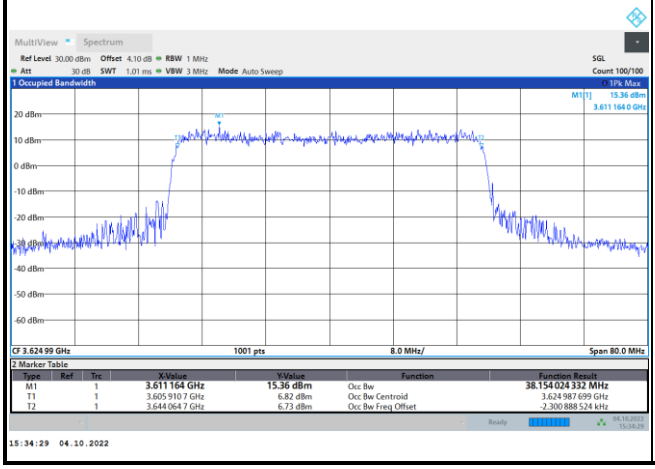

256QAM

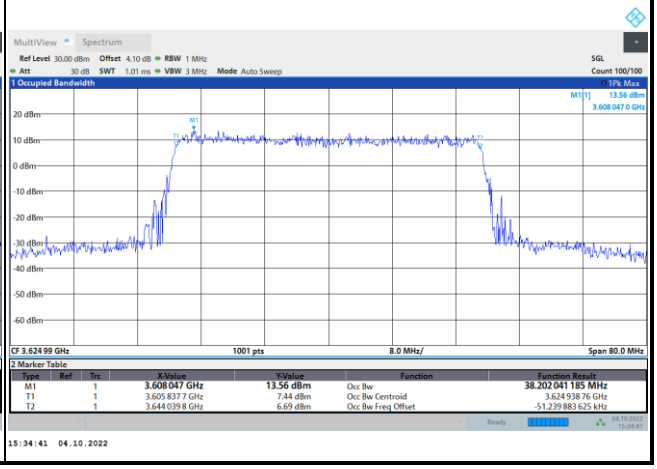

Unwanted Emission (MASK)

FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

Lowest Channel

1RB0

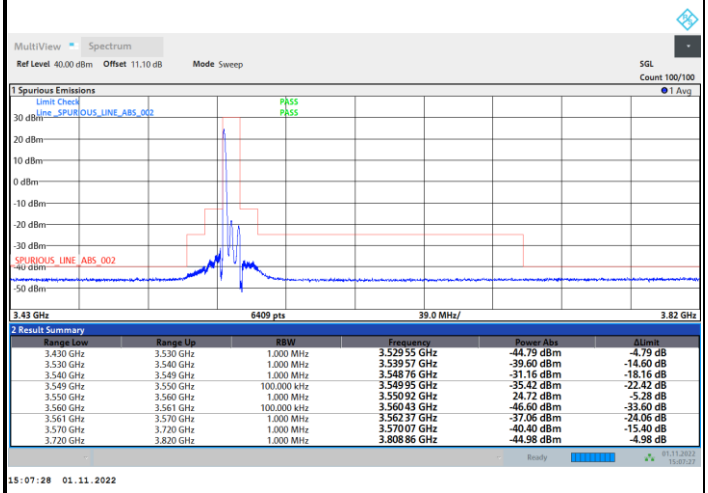

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.529 55 GHz	-44.79 dBm	-4.79 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 57 GHz	-39.60 dBm	-14.60 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 76 GHz	-31.16 dBm	-18.16 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 95 GHz	-35.42 dBm	-22.42 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.550 92 GHz	24.72 dBm	-5.28 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 43 GHz	-46.60 dBm	-33.60 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.562 37 GHz	-37.06 dBm	-24.06 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 07 GHz	-40.40 dBm	-15.40 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.808 86 GHz	-44.98 dBm	-4.98 dB

15:07:28 01.11.2022

1RBmax

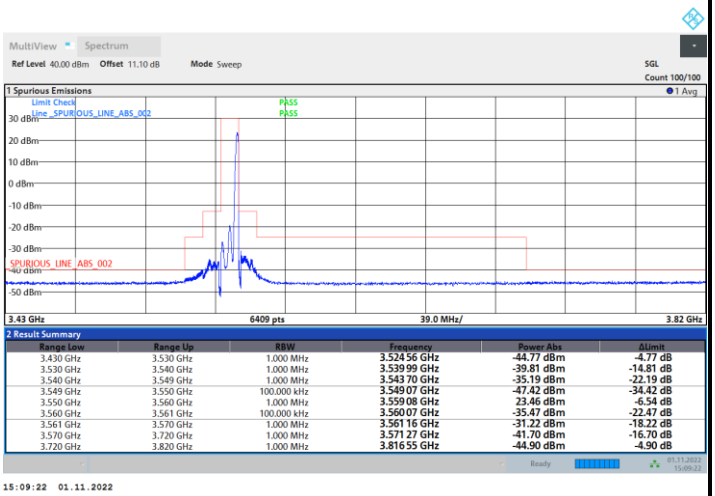

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.524 56 GHz	-44.77 dBm	-4.77 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 99 GHz	-39.81 dBm	-14.81 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.543 70 GHz	-35.19 dBm	-22.19 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 07 GHz	-47.42 dBm	-34.42 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.559 08 GHz	23.46 dBm	-6.54 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 07 GHz	-35.47 dBm	-22.47 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 16 GHz	-31.22 dBm	-18.22 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.571 27 GHz	-41.70 dBm	-16.70 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.816 55 GHz	-44.90 dBm	-4.90 dB

15:09:22 01.11.2022

Full RB

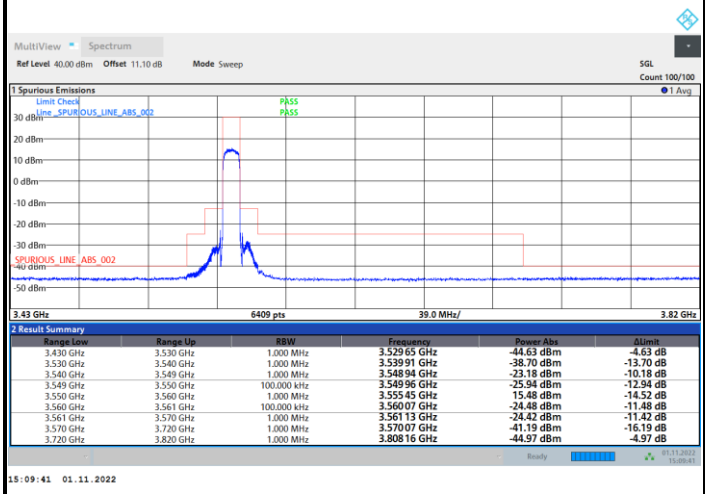

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.529 65 GHz	-44.63 dBm	-4.63 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 91 GHz	-38.70 dBm	-13.70 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 94 GHz	-23.18 dBm	-10.18 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 96 GHz	-25.94 dBm	-12.94 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.555 45 GHz	15.48 dBm	-14.52 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 07 GHz	-24.48 dBm	-11.48 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 13 GHz	-24.42 dBm	-11.42 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 07 GHz	-41.19 dBm	-16.19 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.808 16 GHz	-44.97 dBm	-4.97 dB

15:09:41 01.11.2022

FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

Middle Channel

1RB0

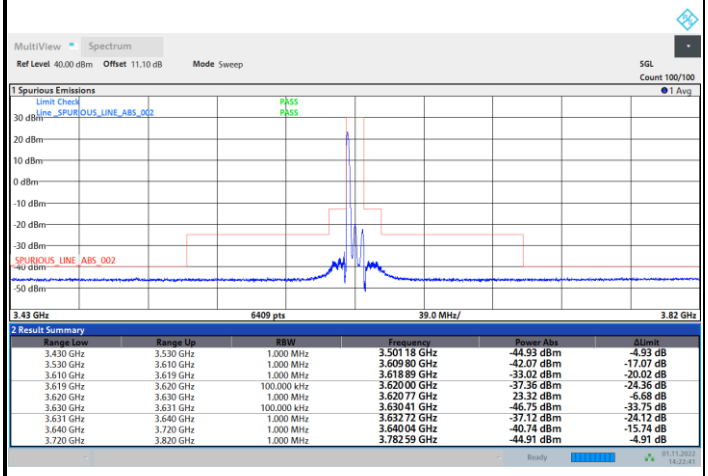

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.501 18 GHz	-44.93 dBm	-4.93 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 80 GHz	-42.07 dBm	-17.07 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 89 GHz	-33.02 dBm	-20.02 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.620 00 GHz	-37.36 dBm	-24.36 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.620 77 GHz	23.32 dBm	-6.68 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 41 GHz	-46.75 dBm	-33.75 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.632 72 GHz	-37.12 dBm	-24.12 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 04 GHz	-40.74 dBm	-15.74 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.782 59 GHz	-44.91 dBm	-4.91 dB

1RBmax

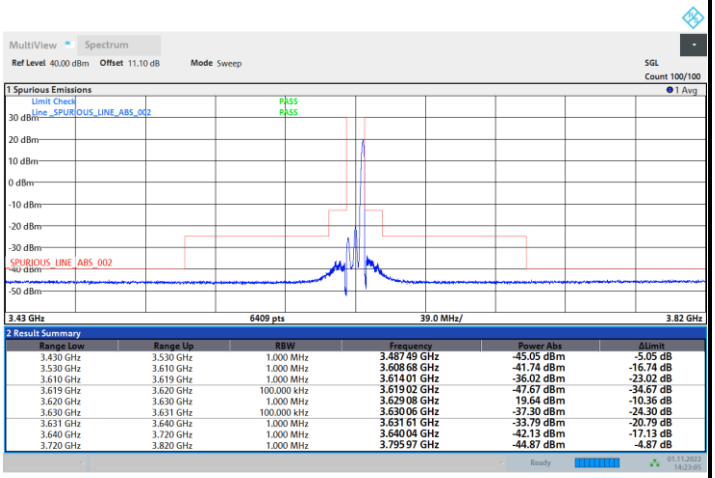

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.487 49 GHz	-45.05 dBm	-5.05 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.608 68 GHz	-41.74 dBm	-16.74 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.614 01 GHz	-36.02 dBm	-23.02 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 02 GHz	-47.67 dBm	-34.67 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.629 08 GHz	19.64 dBm	-10.36 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 06 GHz	-37.30 dBm	-24.30 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 61 GHz	-33.79 dBm	-20.79 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 06 GHz	-42.13 dBm	-17.13 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.795 97 GHz	-44.87 dBm	-4.87 dB

Full RB

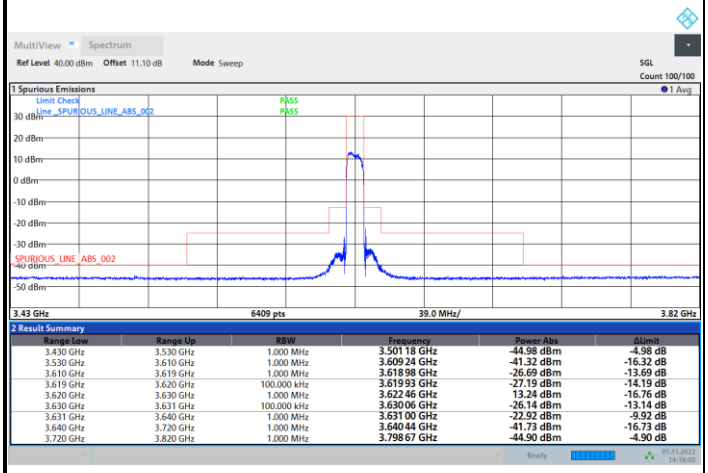

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.501 18 GHz	-44.98 dBm	-4.98 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 24 GHz	-41.32 dBm	-16.32 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 98 GHz	-26.69 dBm	-13.69 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 93 GHz	-27.19 dBm	-14.19 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.622 46 GHz	13.24 dBm	-16.76 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 06 GHz	-26.14 dBm	-13.14 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 00 GHz	-22.92 dBm	-9.92 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 44 GHz	-41.73 dBm	-16.73 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.798 67 GHz	-44.90 dBm	-4.90 dB

FR1 n48 / 10MHz / DFT-S OFDM / PI/2 BPSK

Highest Channel

1RB0

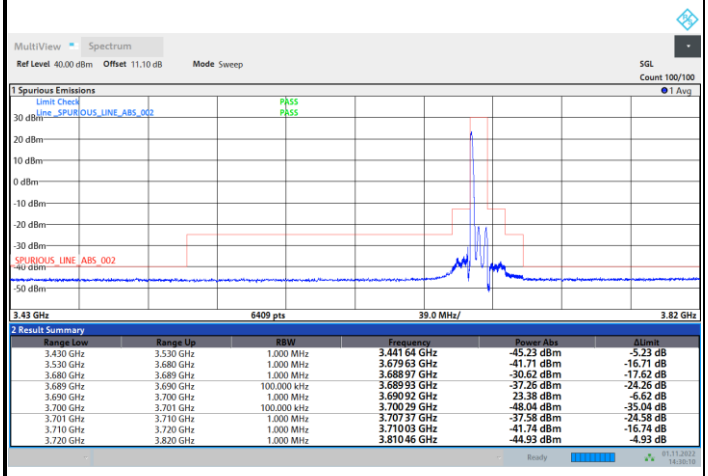

1RBmax

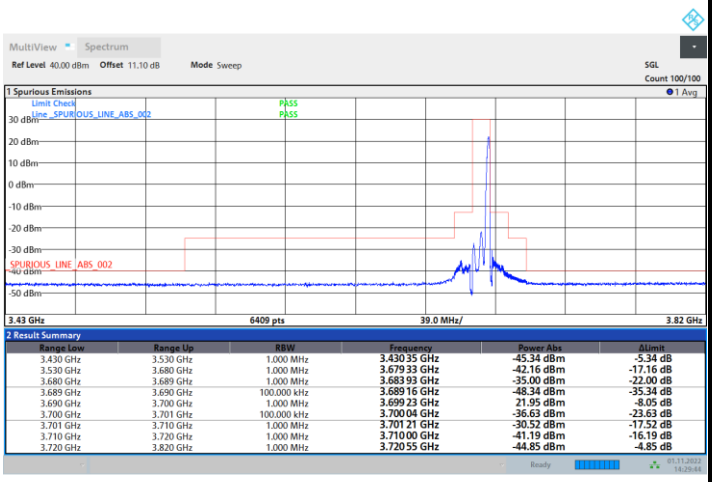

Full RB

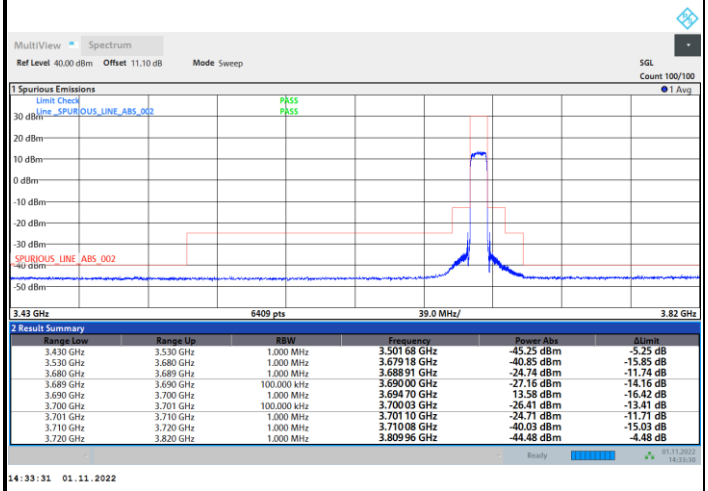

FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Lowest Channel

1RB0

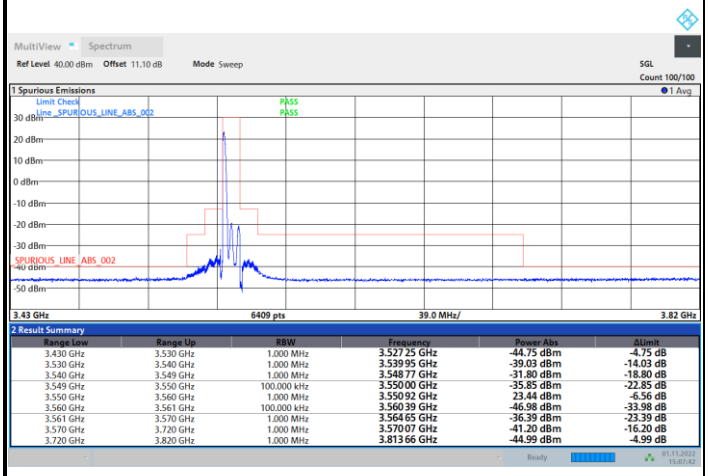

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.527 25 GHz	-44.75 dBm	-4.75 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 95 GHz	-39.03 dBm	-14.03 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 77 GHz	-31.80 dBm	-18.80 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.550 00 GHz	-35.85 dBm	-22.85 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.550 92 GHz	23.44 dBm	-6.56 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 39 GHz	-46.98 dBm	-33.98 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.564 65 GHz	-36.39 dBm	-23.39 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 07 GHz	-41.20 dBm	-16.20 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.813 66 GHz	-44.99 dBm	-4.99 dB

15:07:43 01.11.2022

1RBmax

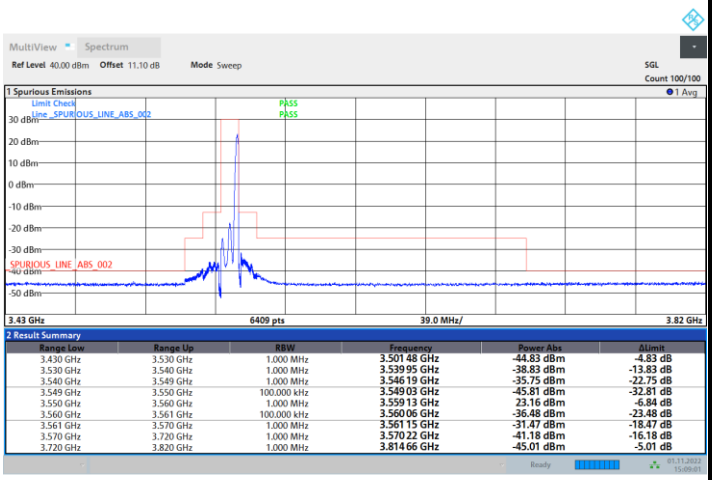

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.501 48 GHz	-44.83 dBm	-4.83 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 95 GHz	-38.83 dBm	-13.83 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.546 19 GHz	-35.75 dBm	-22.75 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 03 GHz	-45.81 dBm	-32.81 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.559 13 GHz	23.16 dBm	-6.84 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 06 GHz	-36.48 dBm	-23.48 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 15 GHz	-31.47 dBm	-18.47 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 22 GHz	-41.18 dBm	-16.18 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.814 66 GHz	-45.01 dBm	-5.01 dB

15:09:01 01.11.2022

Full RB

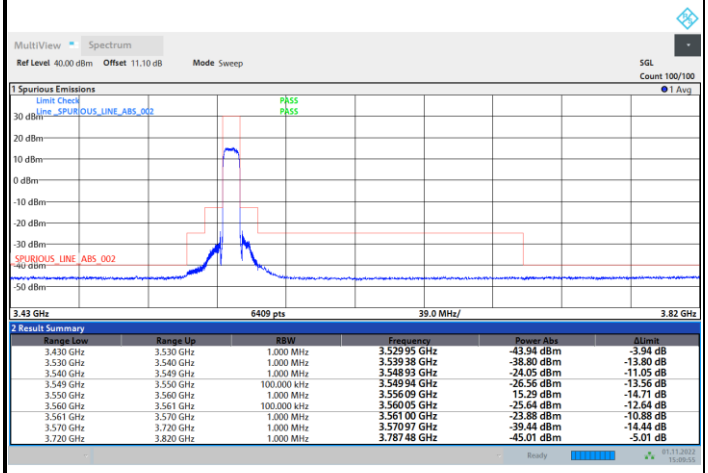

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.529 95 GHz	-43.94 dBm	-3.94 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 38 GHz	-38.80 dBm	-13.80 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 93 GHz	-24.05 dBm	-11.05 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 94 GHz	-26.56 dBm	-13.56 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.556 09 GHz	15.29 dBm	-14.71 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 05 GHz	-25.64 dBm	-12.64 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 00 GHz	-23.88 dBm	-10.88 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 97 GHz	-39.44 dBm	-14.44 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.787 48 GHz	-45.01 dBm	-5.01 dB

15:09:56 01.11.2022

FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Middle Channel

1RB0

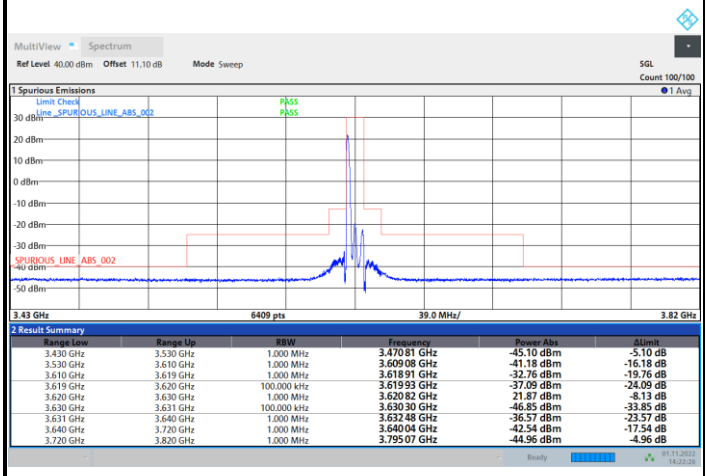

2 Result Summary

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.470 81 GHz	-45.10 dBm	-5.10 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 08 GHz	-41.18 dBm	-16.18 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 91 GHz	-32.76 dBm	-19.76 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 93 GHz	-37.09 dBm	-24.09 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.620 82 GHz	21.87 dBm	-8.13 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 30 GHz	-46.85 dBm	-33.85 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.632 48 GHz	-36.57 dBm	-23.57 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 04 GHz	-42.54 dBm	-17.54 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.795 07 GHz	-44.96 dBm	-4.96 dB

1RBmax

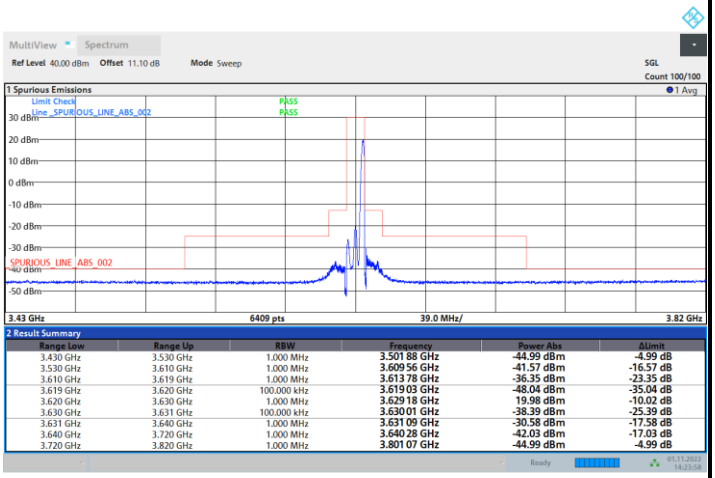

2 Result Summary

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.501 88 GHz	-44.99 dBm	-4.99 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 56 GHz	-41.57 dBm	-16.57 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.613 78 GHz	-36.35 dBm	-23.35 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 03 GHz	-48.04 dBm	-35.04 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.629 18 GHz	19.98 dBm	-10.02 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 01 GHz	-38.39 dBm	-25.39 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 09 GHz	-30.58 dBm	-17.58 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 28 GHz	-42.03 dBm	-17.03 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.801 07 GHz	-44.99 dBm	-4.99 dB

Full RB

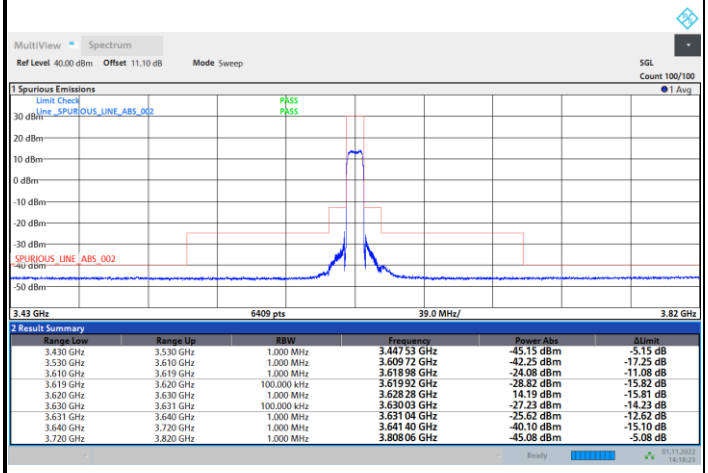

2 Result Summary

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.447 53 GHz	-45.15 dBm	-5.15 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 72 GHz	-42.25 dBm	-17.25 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 98 GHz	-24.08 dBm	-11.08 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 92 GHz	-28.82 dBm	-15.82 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.628 28 GHz	14.19 dBm	-15.81 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 03 GHz	-27.23 dBm	-14.23 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 04 GHz	-25.62 dBm	-12.62 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.641 40 GHz	-40.10 dBm	-15.10 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.808 06 GHz	-45.08 dBm	-5.08 dB

FR1 n48 / 10MHz / DFT-S OFDM / QPSK

Highest Channel

1RB0

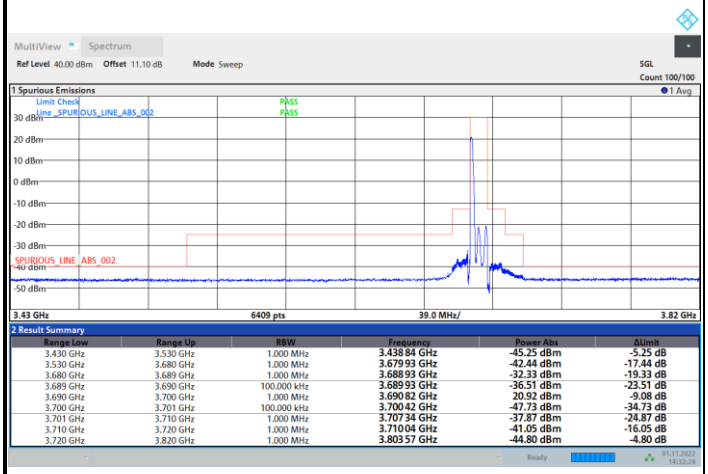

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.438 84 GHz	-45.25 dBm	-5.25 dB
3.530 GHz	3.680 GHz	1.000 MHz	3.679 93 GHz	-42.44 dBm	-17.44 dB
3.680 GHz	3.689 GHz	1.000 MHz	3.688 93 GHz	-32.33 dBm	-19.33 dB
3.689 GHz	3.690 GHz	100.000 kHz	3.689 93 GHz	-36.51 dBm	-23.51 dB
3.690 GHz	3.700 GHz	1.000 MHz	3.690 82 GHz	20.92 dBm	-9.08 dB
3.700 GHz	3.701 GHz	100.000 kHz	3.700 42 GHz	-47.73 dBm	-34.73 dB
3.701 GHz	3.710 GHz	1.000 MHz	3.707 34 GHz	-37.87 dBm	-24.87 dB
3.710 GHz	3.720 GHz	1.000 MHz	3.710 04 GHz	-41.05 dBm	-16.05 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.803 57 GHz	-44.80 dBm	-4.80 dB

1RBmax

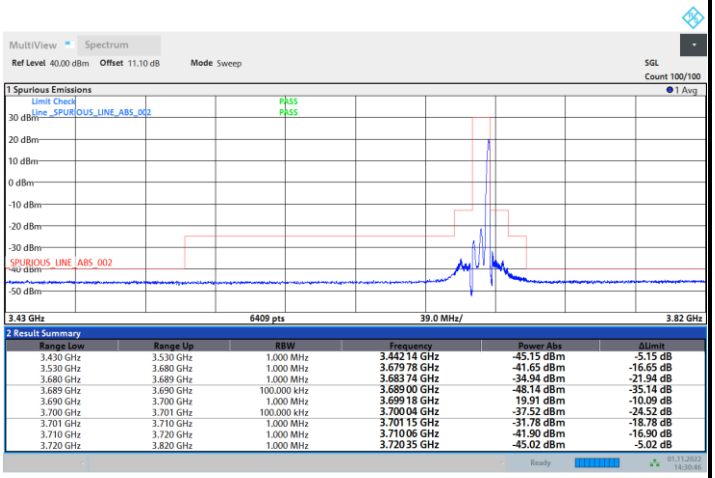

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.442 14 GHz	-45.15 dBm	-5.15 dB
3.530 GHz	3.680 GHz	1.000 MHz	3.679 78 GHz	-41.65 dBm	-16.65 dB
3.680 GHz	3.689 GHz	1.000 MHz	3.683 74 GHz	-34.94 dBm	-21.94 dB
3.689 GHz	3.690 GHz	100.000 kHz	3.689 00 GHz	-48.14 dBm	-35.14 dB
3.690 GHz	3.700 GHz	1.000 MHz	3.699 18 GHz	19.91 dBm	-10.09 dB
3.700 GHz	3.701 GHz	100.000 kHz	3.700 04 GHz	-37.52 dBm	-24.52 dB
3.701 GHz	3.710 GHz	1.000 MHz	3.701 15 GHz	-31.78 dBm	-18.78 dB
3.710 GHz	3.720 GHz	1.000 MHz	3.710 06 GHz	-41.90 dBm	-16.90 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.720 35 GHz	-45.02 dBm	-5.02 dB

Full RB

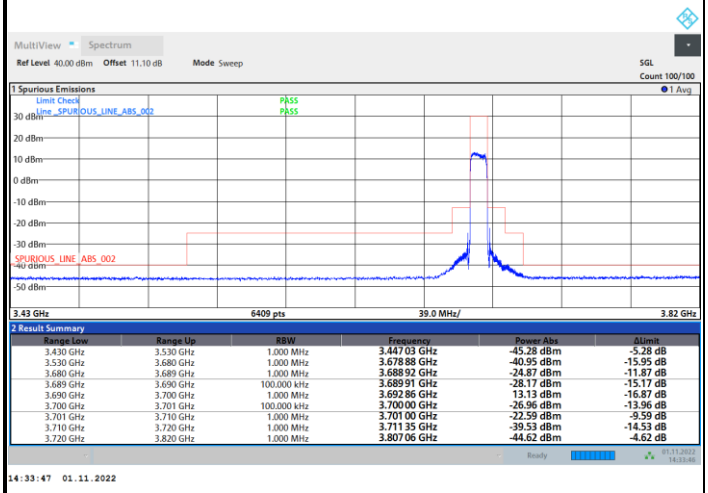

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.447 03 GHz	-45.28 dBm	-5.28 dB
3.530 GHz	3.680 GHz	1.000 MHz	3.678 88 GHz	-40.95 dBm	-15.95 dB
3.680 GHz	3.689 GHz	1.000 MHz	3.688 92 GHz	-24.87 dBm	-11.87 dB
3.689 GHz	3.690 GHz	100.000 kHz	3.689 91 GHz	-28.17 dBm	-15.17 dB
3.690 GHz	3.700 GHz	1.000 MHz	3.692 86 GHz	13.13 dBm	-16.87 dB
3.700 GHz	3.701 GHz	100.000 kHz	3.700 00 GHz	-26.96 dBm	-13.96 dB
3.701 GHz	3.710 GHz	1.000 MHz	3.701 00 GHz	-22.59 dBm	-9.59 dB
3.710 GHz	3.720 GHz	1.000 MHz	3.711 35 GHz	-39.53 dBm	-14.53 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.807 06 GHz	-44.62 dBm	-4.62 dB

FR1 n48 / 10MHz / DFT-S OFDM / 16QAM

Lowest Channel

1RB0

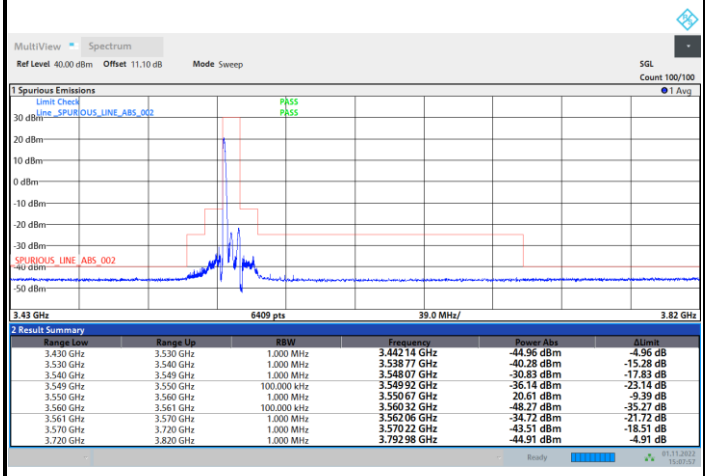

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.442 14 GHz	-44.96 dBm	-4.96 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.538 77 GHz	-40.28 dBm	-15.28 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 07 GHz	-30.83 dBm	-17.83 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 92 GHz	-36.14 dBm	-23.14 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.550 67 GHz	20.61 dBm	-9.39 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 32 GHz	-48.27 dBm	-35.27 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.562 06 GHz	-34.72 dBm	-21.72 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 22 GHz	-43.51 dBm	-18.51 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.792 98 GHz	-44.91 dBm	-4.91 dB

15:07:58 01.11.2022

1RBmax

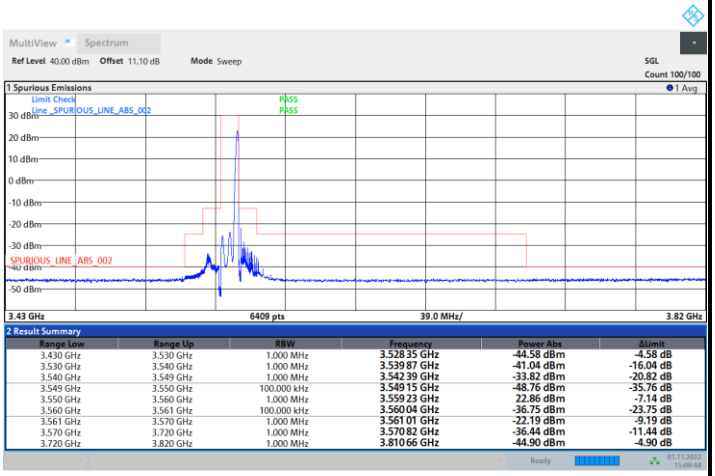

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.528 35 GHz	-44.58 dBm	-4.58 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 87 GHz	-41.04 dBm	-16.04 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.542 39 GHz	-33.82 dBm	-20.82 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 15 GHz	-48.76 dBm	-35.76 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.559 23 GHz	22.86 dBm	-7.14 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 04 GHz	-36.75 dBm	-23.75 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 01 GHz	-22.19 dBm	-9.19 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 82 GHz	-36.44 dBm	-11.44 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.810 66 GHz	-44.90 dBm	-4.90 dB

15:08:45 01.11.2022

Full RB

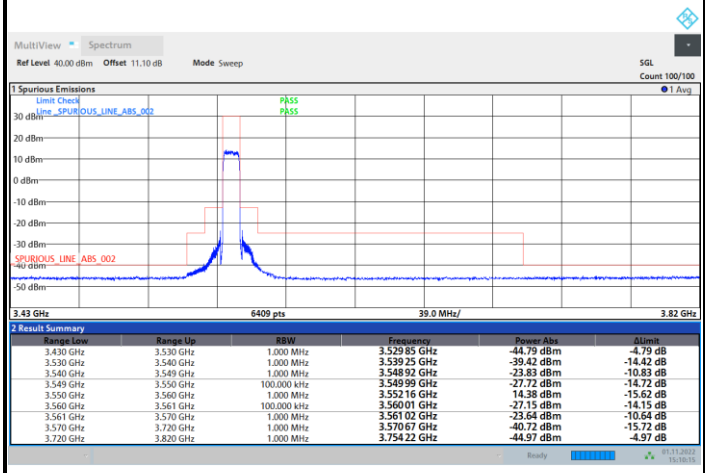

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.529 85 GHz	-44.79 dBm	-4.79 dB
3.530 GHz	3.540 GHz	1.000 MHz	3.539 25 GHz	-39.42 dBm	-14.42 dB
3.540 GHz	3.549 GHz	1.000 MHz	3.548 92 GHz	-23.83 dBm	-10.83 dB
3.549 GHz	3.550 GHz	100.000 kHz	3.549 99 GHz	-27.72 dBm	-14.72 dB
3.550 GHz	3.560 GHz	1.000 MHz	3.552 16 GHz	14.38 dBm	-15.62 dB
3.560 GHz	3.561 GHz	100.000 kHz	3.560 01 GHz	-27.15 dBm	-14.15 dB
3.561 GHz	3.570 GHz	1.000 MHz	3.561 02 GHz	-23.64 dBm	-10.64 dB
3.570 GHz	3.720 GHz	1.000 MHz	3.570 67 GHz	-40.72 dBm	-15.72 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.754 22 GHz	-44.97 dBm	-4.97 dB

15:10:16 01.11.2022

FR1 n48 / 10MHz / DFT-S OFDM / 16QAM

Middle Channel

1RB0

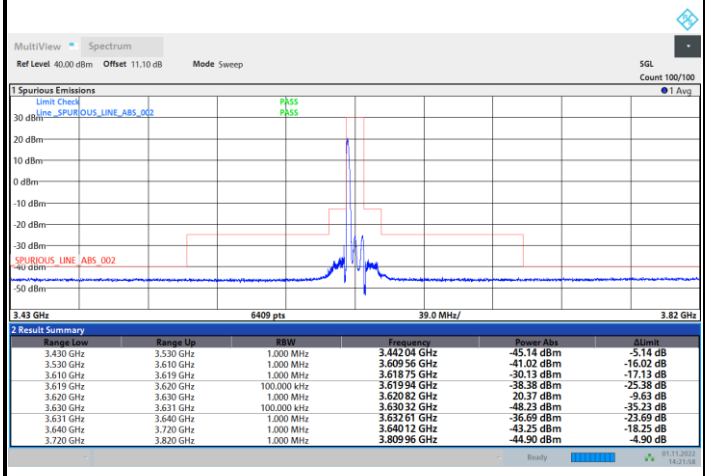

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.442 04 GHz	-45.14 dBm	-5.14 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 56 GHz	-41.02 dBm	-16.02 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 75 GHz	-30.13 dBm	-17.13 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 94 GHz	-38.38 dBm	-25.38 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.620 82 GHz	20.37 dBm	-9.63 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 32 GHz	-48.23 dBm	-35.23 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.632 61 GHz	-36.69 dBm	-23.69 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 12 GHz	-43.25 dBm	-18.25 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.809 96 GHz	-44.90 dBm	-4.90 dB

1RBmax

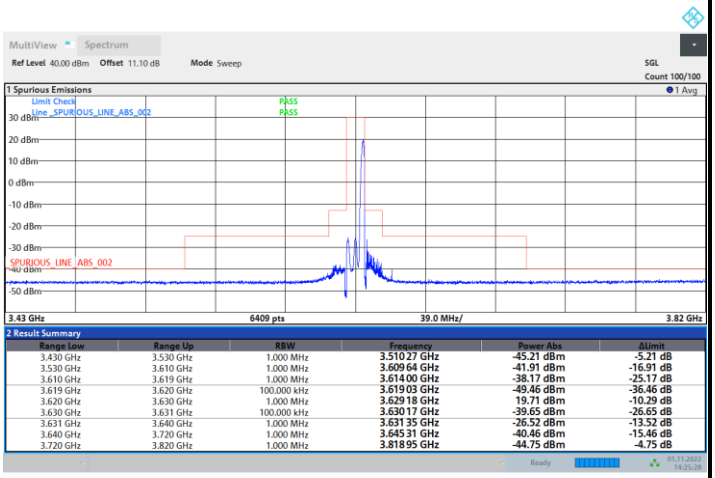

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.510 27 GHz	-45.21 dBm	-5.21 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 64 GHz	-41.91 dBm	-16.91 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.614 00 GHz	-38.17 dBm	-25.17 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 03 GHz	-49.46 dBm	-36.46 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.629 18 GHz	19.71 dBm	-10.29 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 17 GHz	-39.65 dBm	-26.65 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 35 GHz	-26.52 dBm	-13.52 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.645 31 GHz	-40.46 dBm	-15.46 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.818 95 GHz	-44.75 dBm	-4.75 dB

Full RB

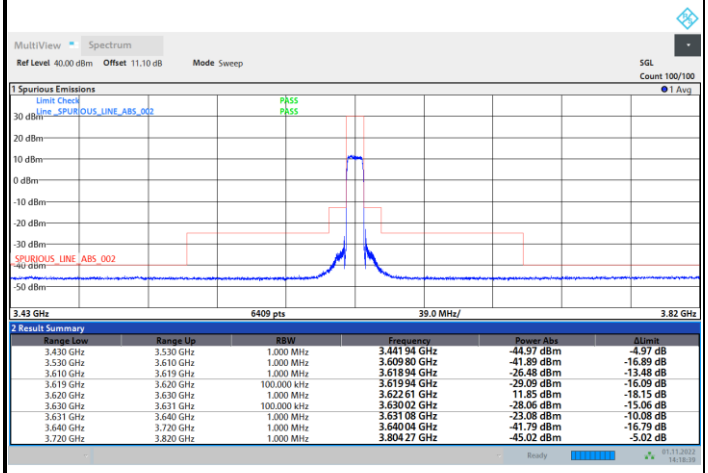

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
3.430 GHz	3.530 GHz	1.000 MHz	3.441 94 GHz	-44.97 dBm	-4.97 dB
3.530 GHz	3.610 GHz	1.000 MHz	3.609 80 GHz	-41.89 dBm	-16.89 dB
3.610 GHz	3.619 GHz	1.000 MHz	3.618 94 GHz	-26.48 dBm	-13.48 dB
3.619 GHz	3.620 GHz	100.000 kHz	3.619 94 GHz	-29.09 dBm	-16.09 dB
3.620 GHz	3.630 GHz	1.000 MHz	3.622 61 GHz	11.85 dBm	-18.15 dB
3.630 GHz	3.631 GHz	100.000 kHz	3.630 02 GHz	-28.06 dBm	-15.06 dB
3.631 GHz	3.640 GHz	1.000 MHz	3.631 08 GHz	-23.08 dBm	-10.08 dB
3.640 GHz	3.720 GHz	1.000 MHz	3.640 04 GHz	-41.79 dBm	-16.79 dB
3.720 GHz	3.820 GHz	1.000 MHz	3.804 27 GHz	-45.02 dBm	-5.02 dB