




FCC RADIO TEST REPORT

FCC ID : A4RG0F3Y
Equipment : Wireless Device
Model Name : G0F3Y
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 26, 2026 and testing was performed from Jan. 30, 2026 to Mar. 13, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements	20
4 List of Measuring Equipment	21
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5O3007H	01	Initial issue of report	Mar. 24, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs LTE/NTN, Bluetooth, Bluetooth-LE, Bluetooth-LE ASK, Bluetooth-LE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz and GNSS.
Antenna Type Bluetooth: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
5C261WRDQL13VE	RF Conducted Measurement
5C251WRDQL13JT	Radiated Spurious Emission
5C261WRDQL13RY	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-6.0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

<Bluetooth – LE GFSK>

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	-	-	27	2429	54	2456
	-	-	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	-	-	50	2452	-	-
	-	-	51	2453	-	-
	-	-	52	2454	-	-
	26	2428	53	2455	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth-LE GFSK / GFSK
	Mode 1: Bluetooth-LE GFSK Tx CH02_2404 MHz_1Mbps
	Mode 2: Bluetooth-LE GFSK Tx CH38_2440 MHz_1Mbps
	Mode 3: Bluetooth-LE GFSK Tx CH76_2478 MHz_1Mbps
	Mode 4: Bluetooth-LE GFSK Tx CH02_2404 MHz_2Mbps
	Mode 5: Bluetooth-LE GFSK Tx CH38_2440 MHz_2Mbps
	Mode 6: Bluetooth-LE GFSK Tx CH76_2478 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth-LE GFSK (1M CH38) Tx + USB Cable (Charging from AC Adapter)
Remark: - The detailed Radiated test modes are shown in Appendix C. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

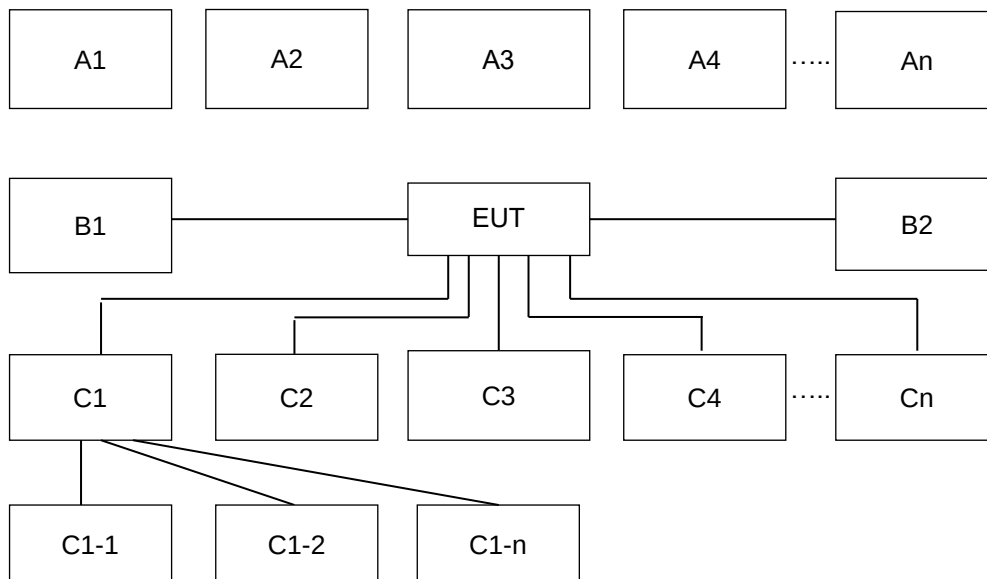

2.4 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.40” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

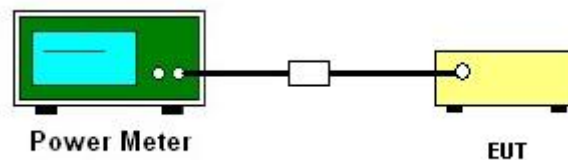

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

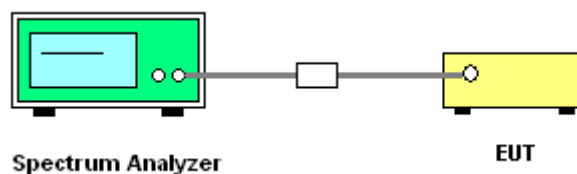

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

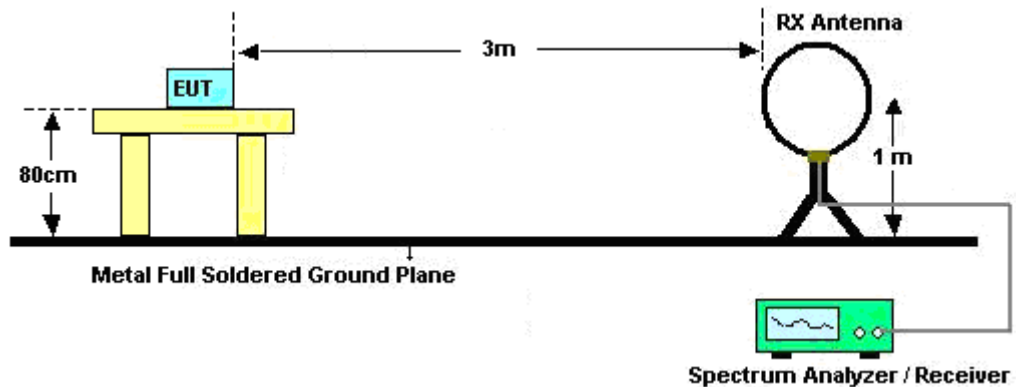


For radiated test from 30MHz to 1GHz

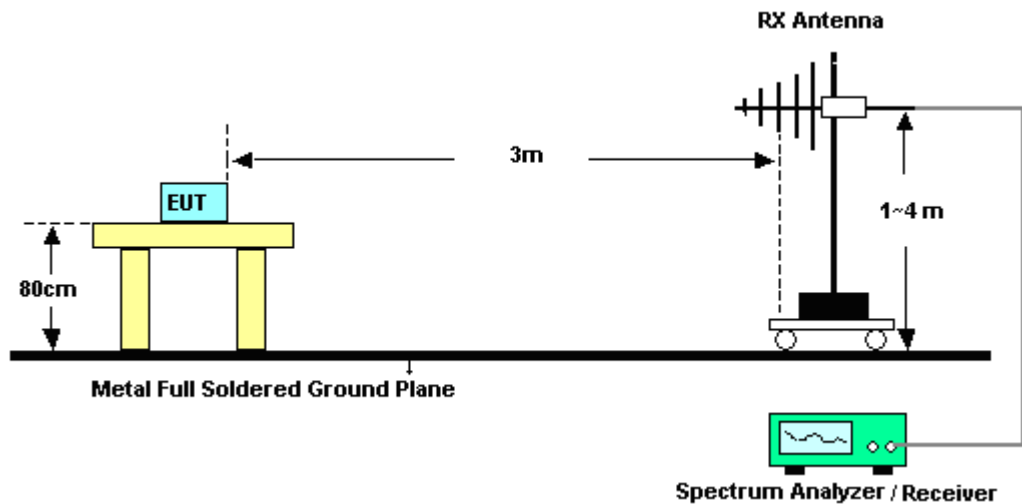

For radiated test from 1GHz to 18GHz

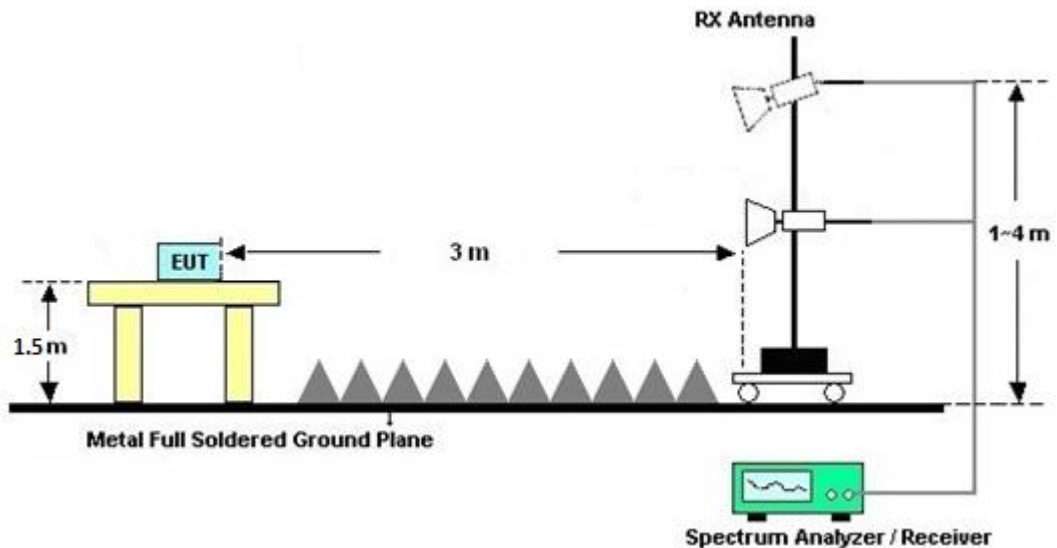

For radiated test above 18GHz

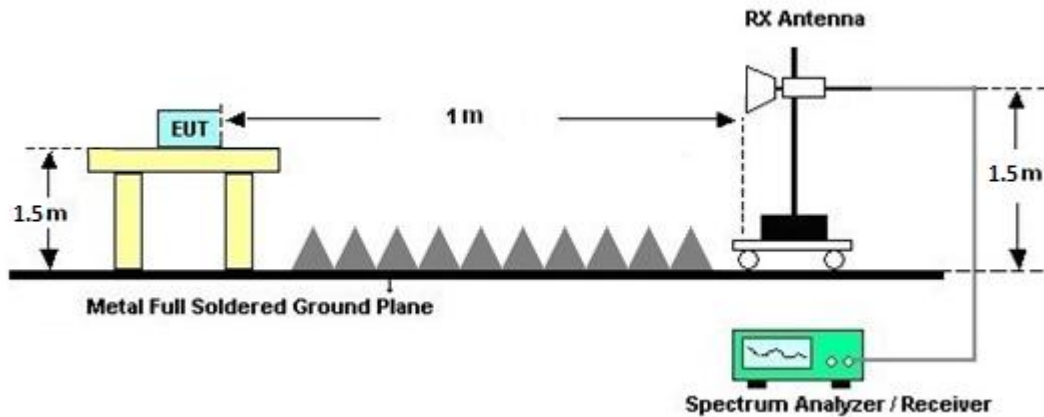

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

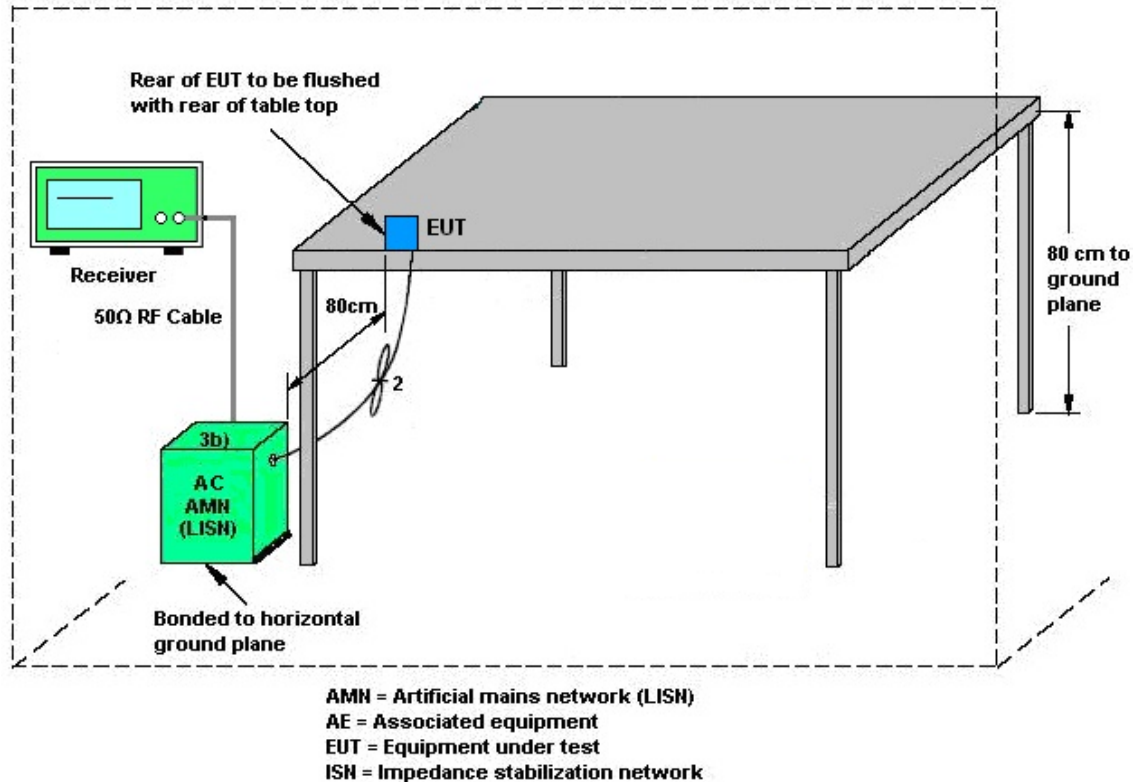

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Dec. 10, 2026	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Nov. 26, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Nov. 25, 2026	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Aug. 07, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Aug. 06, 2026	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Jul. 01, 2026	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 13, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Jul. 12, 2026	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 26, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Sep. 25, 2026	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Aug. 25, 2026	Radiation (03CH21-HY)
EXA Signal Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 09, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Sep. 08, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 04, 2026	Feb. 03, 2026 ~ Mar. 05, 2026	Mar. 03, 2027	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 11, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Aug. 10, 2026	Radiation (03CH21-HY)
RF Cable	EMCI	EMC101Y-KM-KM-1000	240906	30MHz~40GHz	Oct. 21, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2025	Feb. 03, 2026 ~ Mar. 05, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 03, 2026 ~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 03, 2026 ~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 03, 2026 ~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 03, 2026 ~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 13, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 13, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2025	Mar. 13, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 2, 2026	Mar. 13, 2026	Mar. 1, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 13, 2026	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Mar. 13, 2026	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 13, 2026	Oct. 20, 2026	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jan. 30, 2026 ~ Feb. 25, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO3 7 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Jan. 30, 2026 ~ Feb. 25, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101468	10HZ~44GHZ	Mar. 13, 2025	Jan. 30, 2026 ~ Feb. 25, 2026	Mar. 12, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Jan. 30, 2026 ~ Feb. 25, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ver sion_240513	N/A	Conducted Other Test Item	N/A	Jan. 30, 2026 ~ Feb. 25, 2026	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiming Liu	Temperature:	21~25	°C
Test Date:	2026/1/30~2026/2/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	1Mbps	1	2	2404	1.051	0.670	0.50	Pass
BLE GFSK	1Mbps	1	38	2440	1.050	0.681	0.50	Pass
BLE GFSK	1Mbps	1	76	2478	1.052	0.676	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	1Mbps	1	2	2404	19.40	30.00	-6.00	13.40	36.00	Pass
BLE GFSK	1Mbps	1	38	2440	19.40	30.00	-6.00	13.40	36.00	Pass
BLE GFSK	1Mbps	1	76	2478	19.30	30.00	-6.00	13.30	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	1Mbps	1	2	2404	19.32	2.64	-6.00	8.00	Pass
BLE GFSK	1Mbps	1	38	2440	19.17	1.82	-6.00	8.00	Pass
BLE GFSK	1Mbps	1	76	2478	19.07	2.44	-6.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE GFSK	2Mbps	1	2	2404	2.098	1.151	0.50	Pass
BLE GFSK	2Mbps	1	38	2440	2.093	1.156	0.50	Pass
BLE GFSK	2Mbps	1	76	2478	2.087	1.176	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE GFSK	2Mbps	1	2	2404	19.40	30.00	-6.00	13.40	36.00	Pass
BLE GFSK	2Mbps	1	38	2440	19.40	30.00	-6.00	13.40	36.00	Pass
BLE GFSK	2Mbps	1	76	2478	19.40	30.00	-6.00	13.40	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE GFSK	2Mbps	1	2	2404	19.38	-1.96	-6.00	8.00	Pass
BLE GFSK	2Mbps	1	38	2440	19.35	-1.60	-6.00	8.00	Pass
BLE GFSK	2Mbps	1	76	2478	19.15	-2.07	-6.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1M>

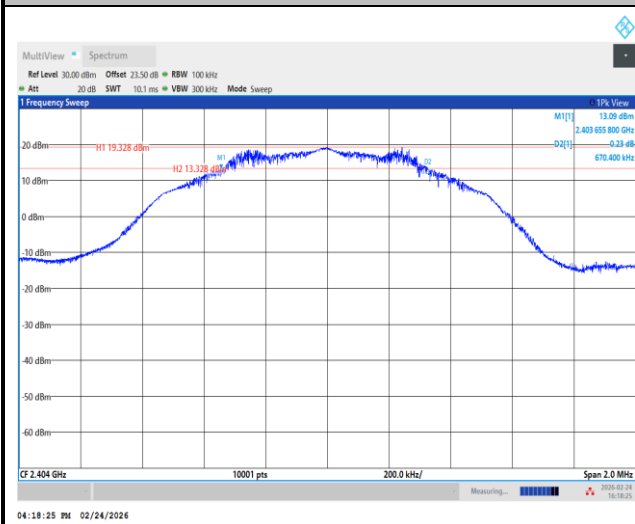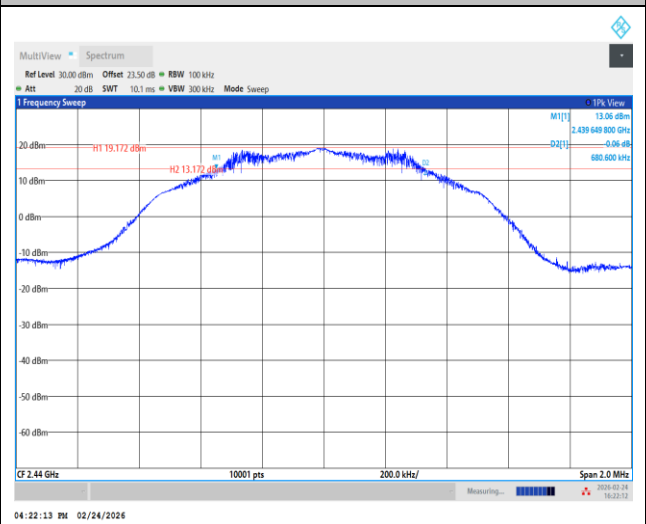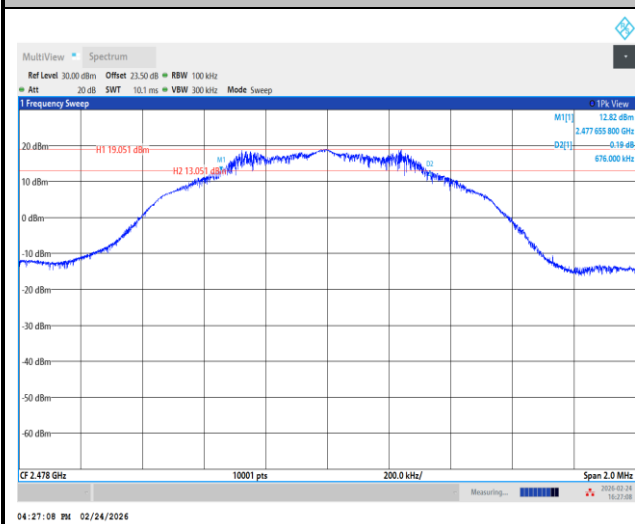6 dB Bandwidth Plot on Channel 01**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 76**




<2M>


6 dB Bandwidth Plot on Channel 01

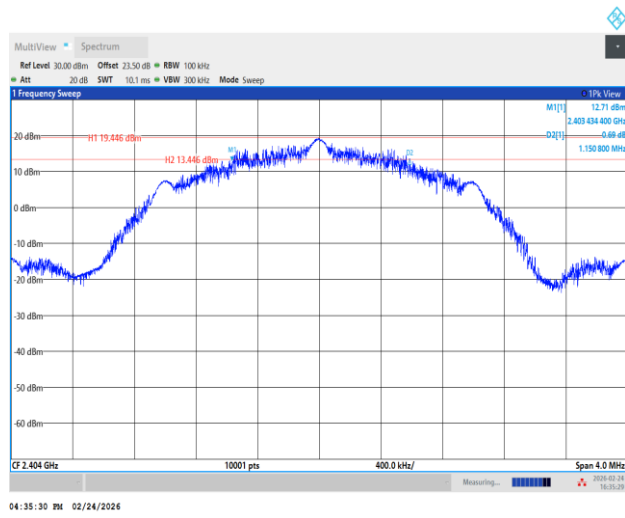

6 dB Bandwidth Plot on Channel 19



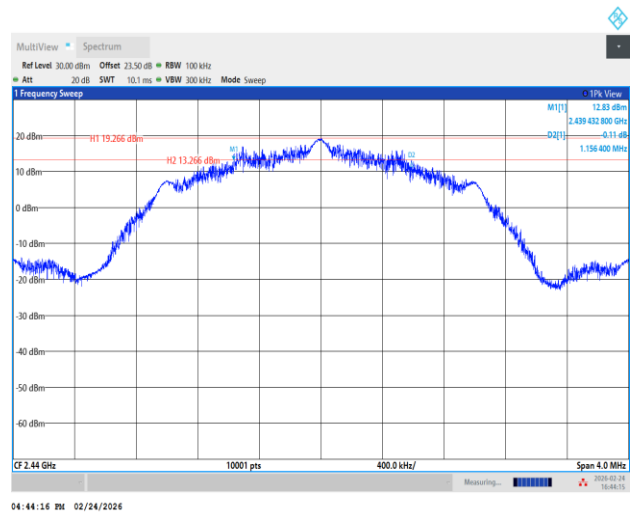


6 dB Bandwidth Plot on Channel 76

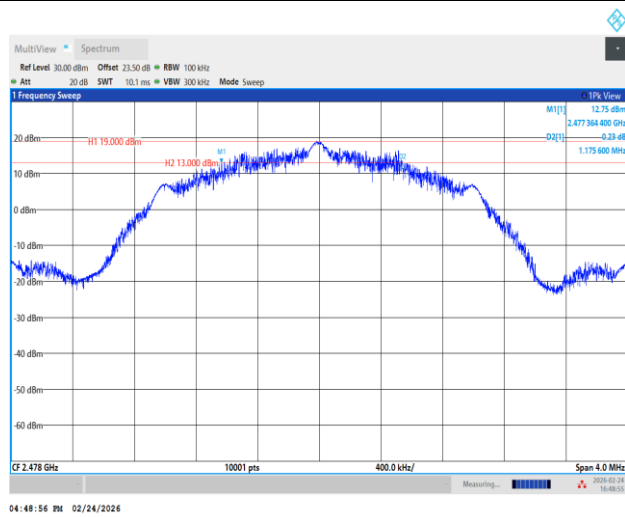

**99% Occupied Bandwidth**


<1M>

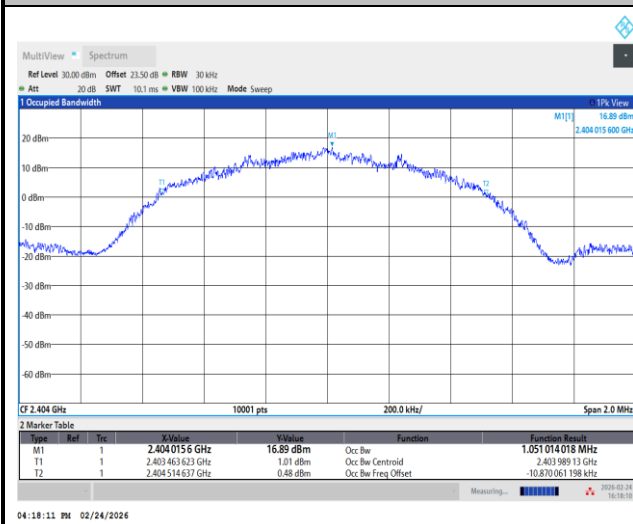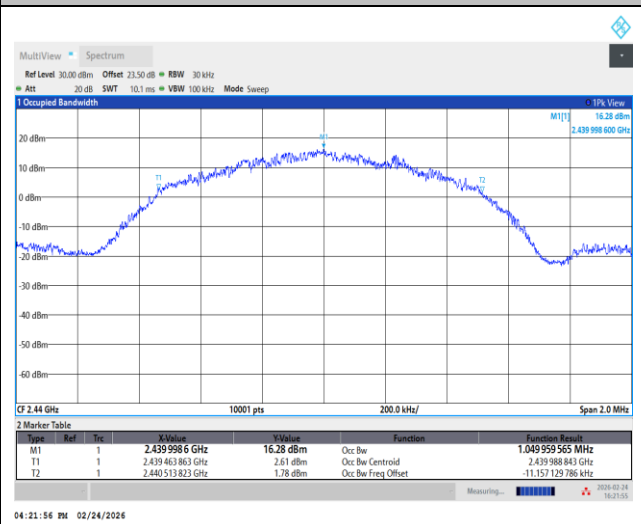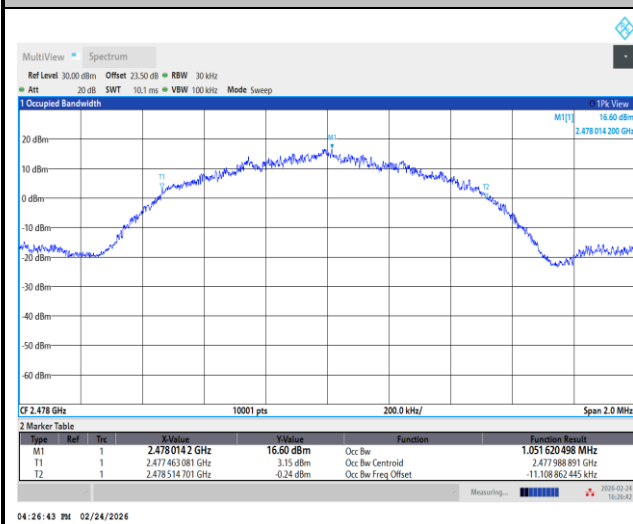99% Occupied Bandwidth Plot on Channel 01**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 76**




<2M>

99% Occupied Bandwidth Plot on Channel 01

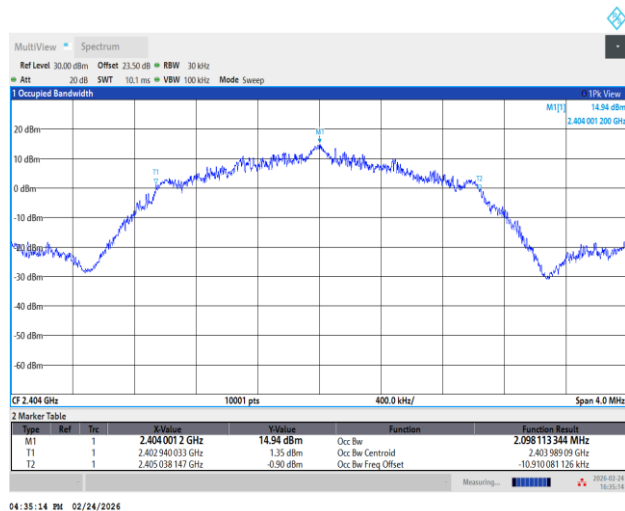


04:35:14 PM 02/24/2024

99% Occupied Bandwidth Plot on Channel 19

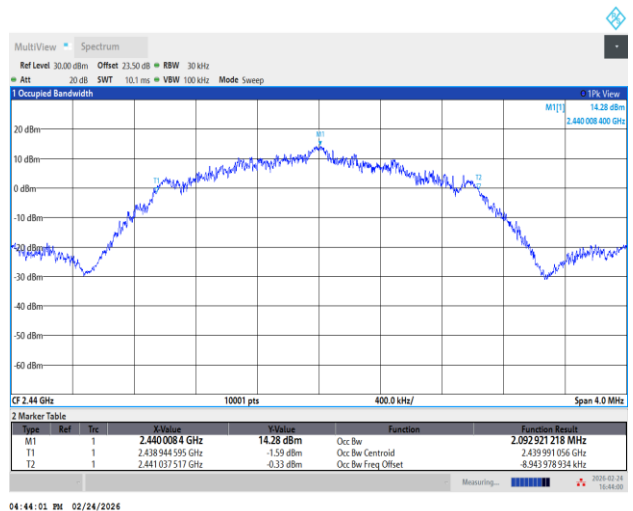

04:44:01 PM 02/24/2024




99% Occupied Bandwidth Plot on Channel 76

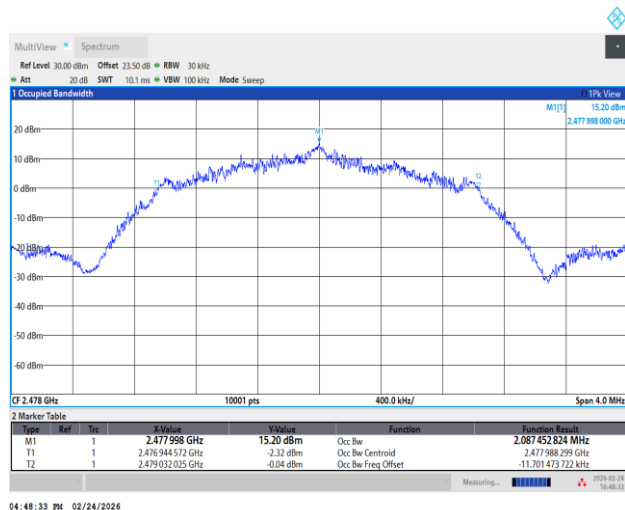

04:48:33 PM 02/24/2024

**Power Spectral Density (dBm/3kHz)**


<1M>

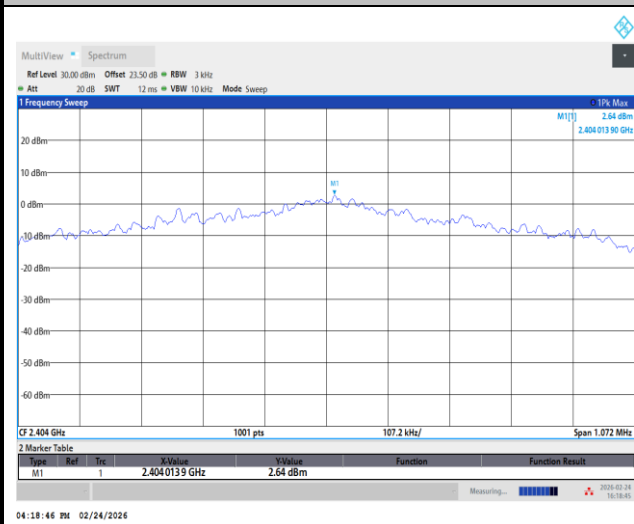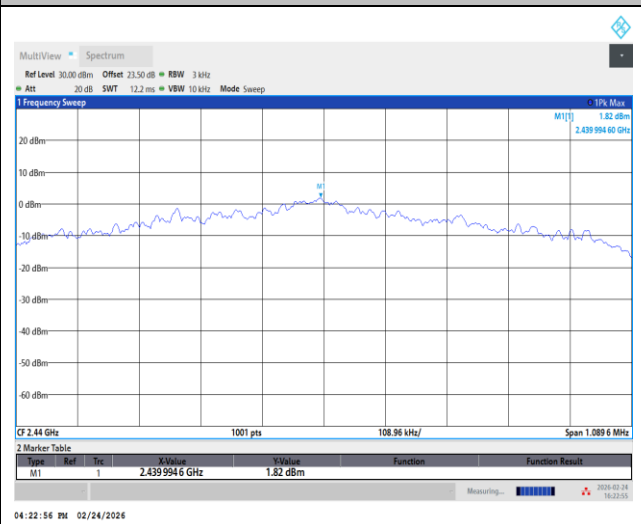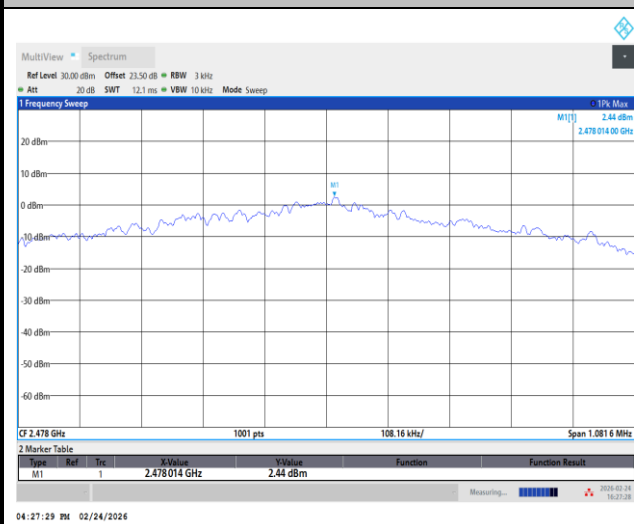Power Density (dBm/3kHz) Plot Channel 01**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 76**




<2M>


Power Density (dBm/3kHz) Plot Channel 01

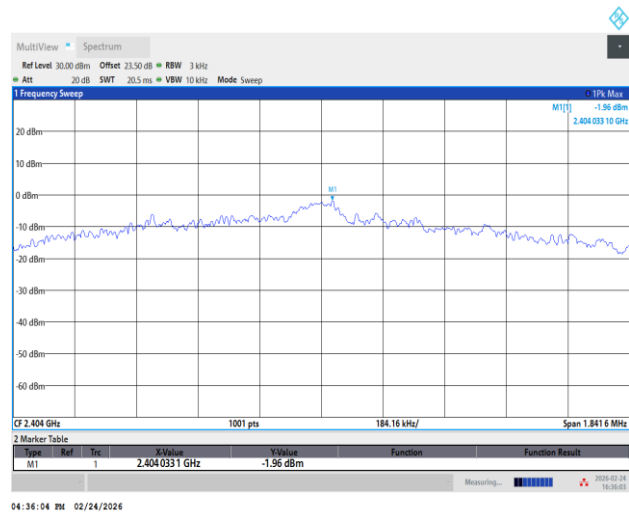

Power Density (dBm/3kHz) Plot Channel 19




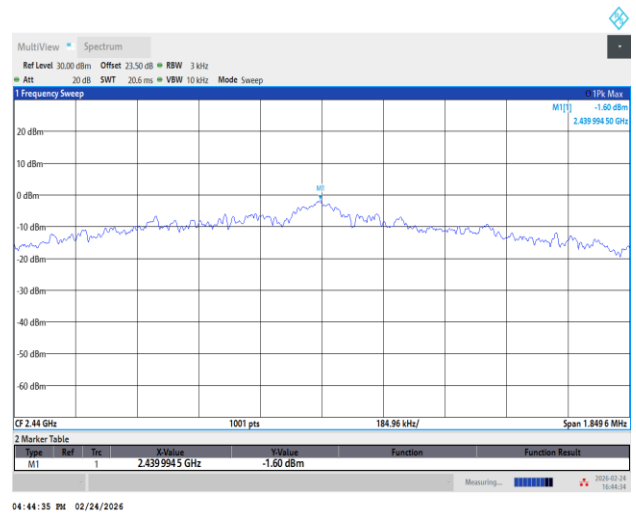


Power Density (dBm/3kHz) Plot Channel 76

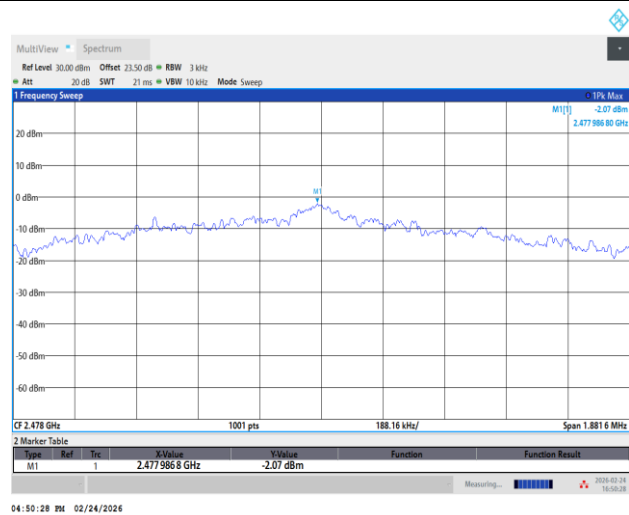

**Band Edge and Conducted Spurious Emission**


<1M>

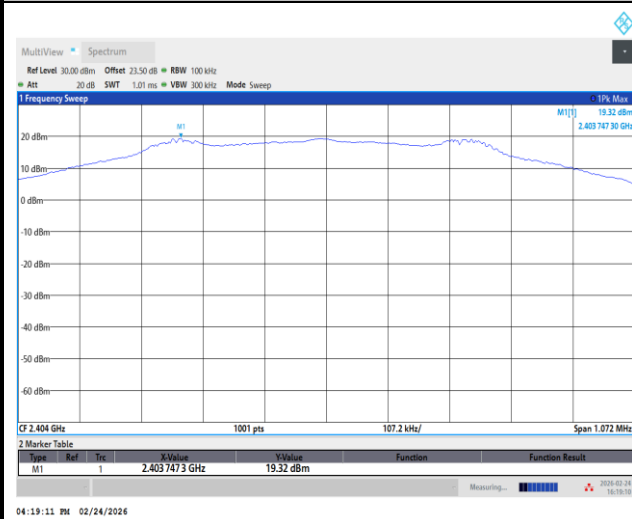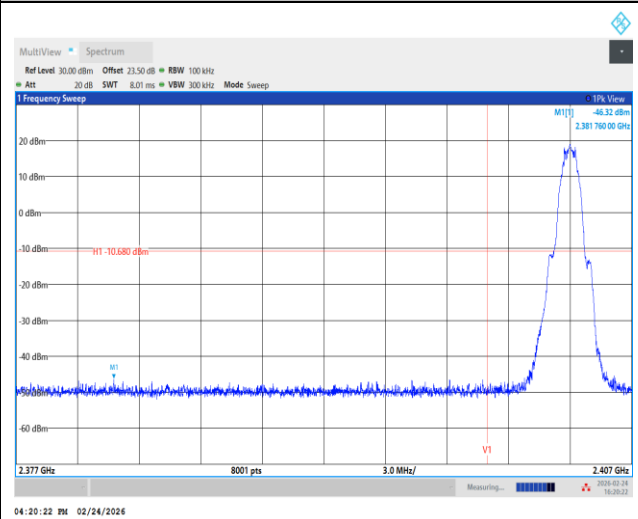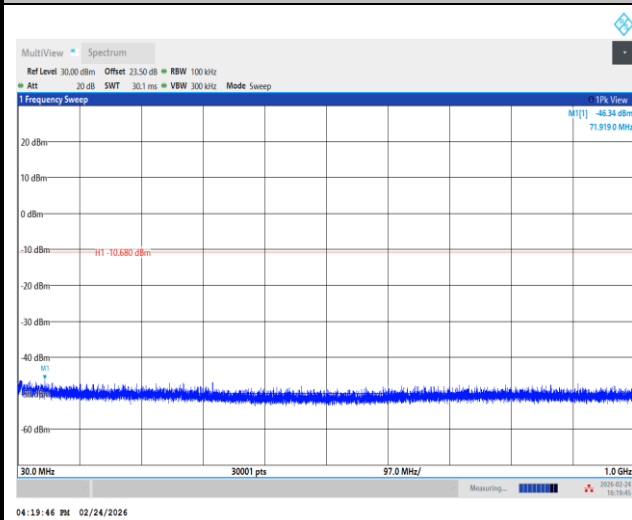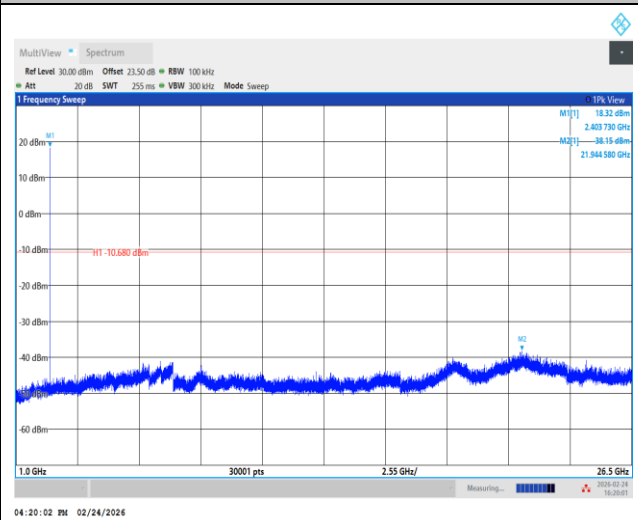Channel 01**100kHz PSD reference Level Plot****Plot on Channel 01****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19


100kHz PSD reference Level Plot

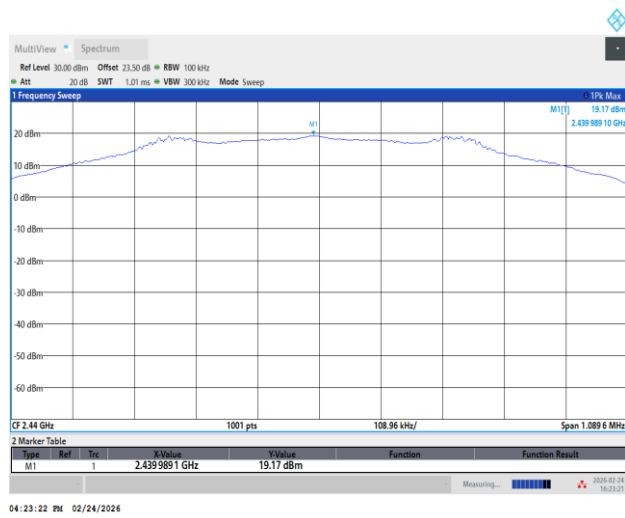

Spurious Emission 30MHz~1GHz Plot

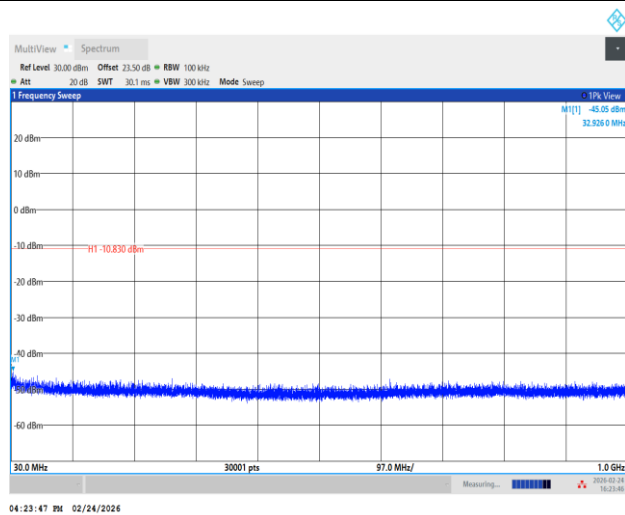


Spurious Emission 1GHz~26.5GHz Plot

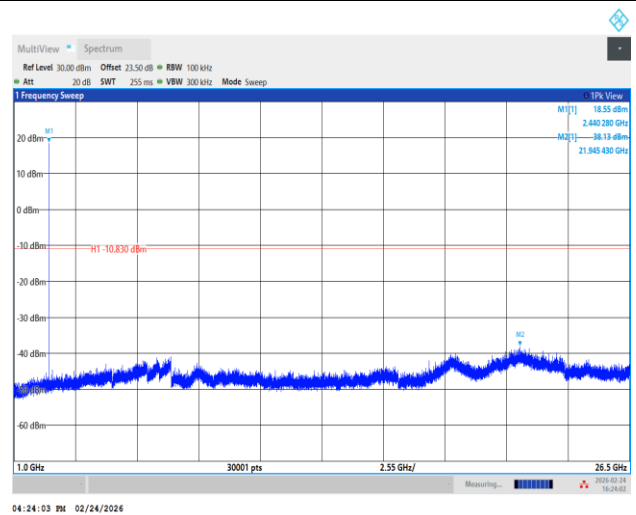




Channel 76


100kHz PSD reference Level Plot

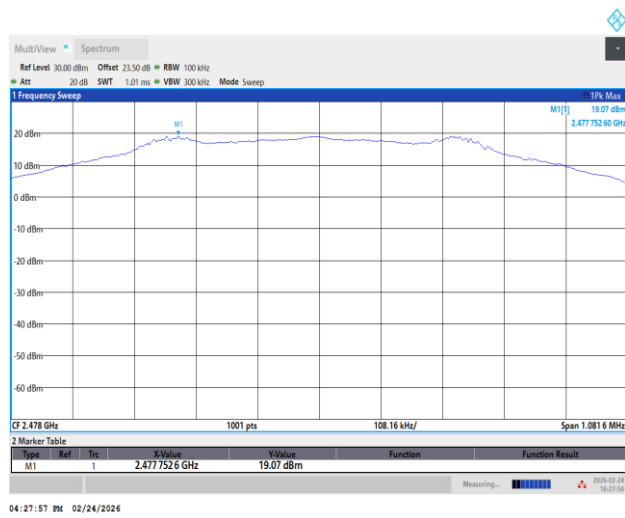


Plot on Channel 76

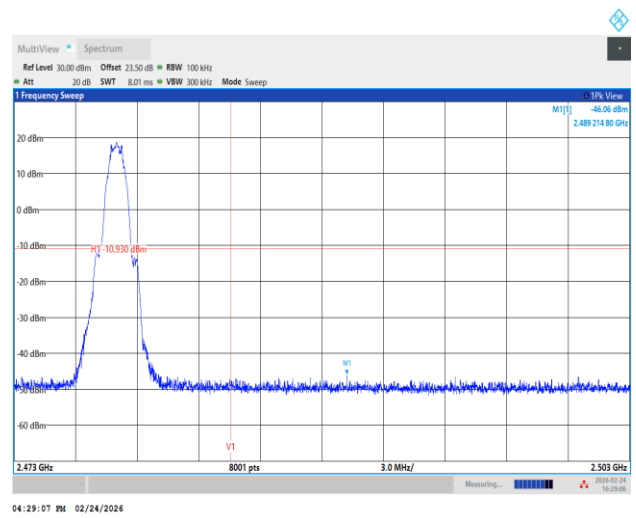

Spurious Emission 30MHz~1GHz Plot

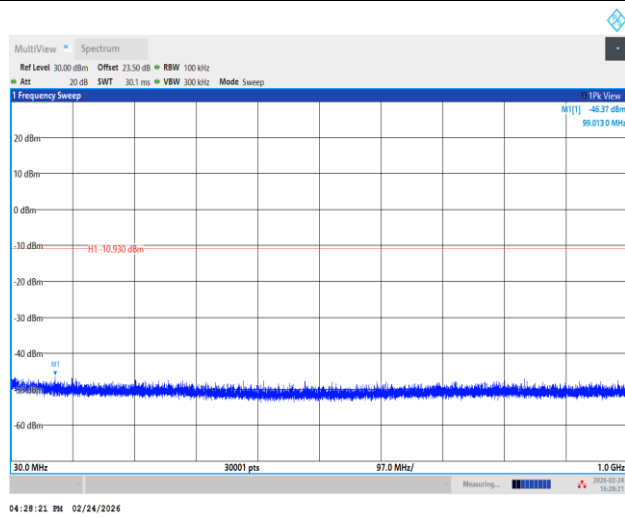


Spurious Emission 1GHz~26.5GHz Plot

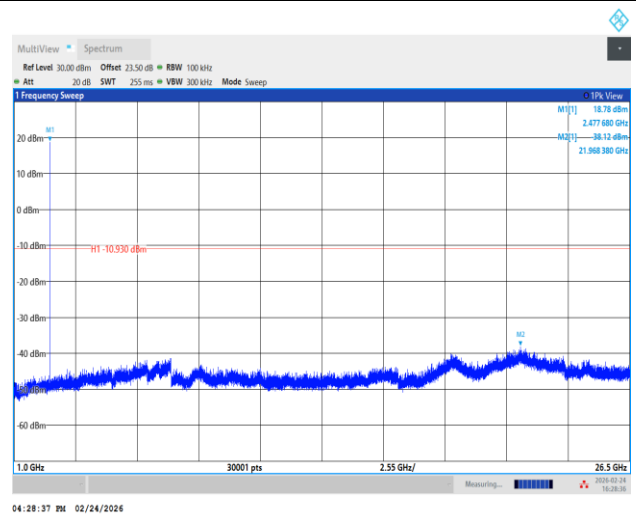




<2M>

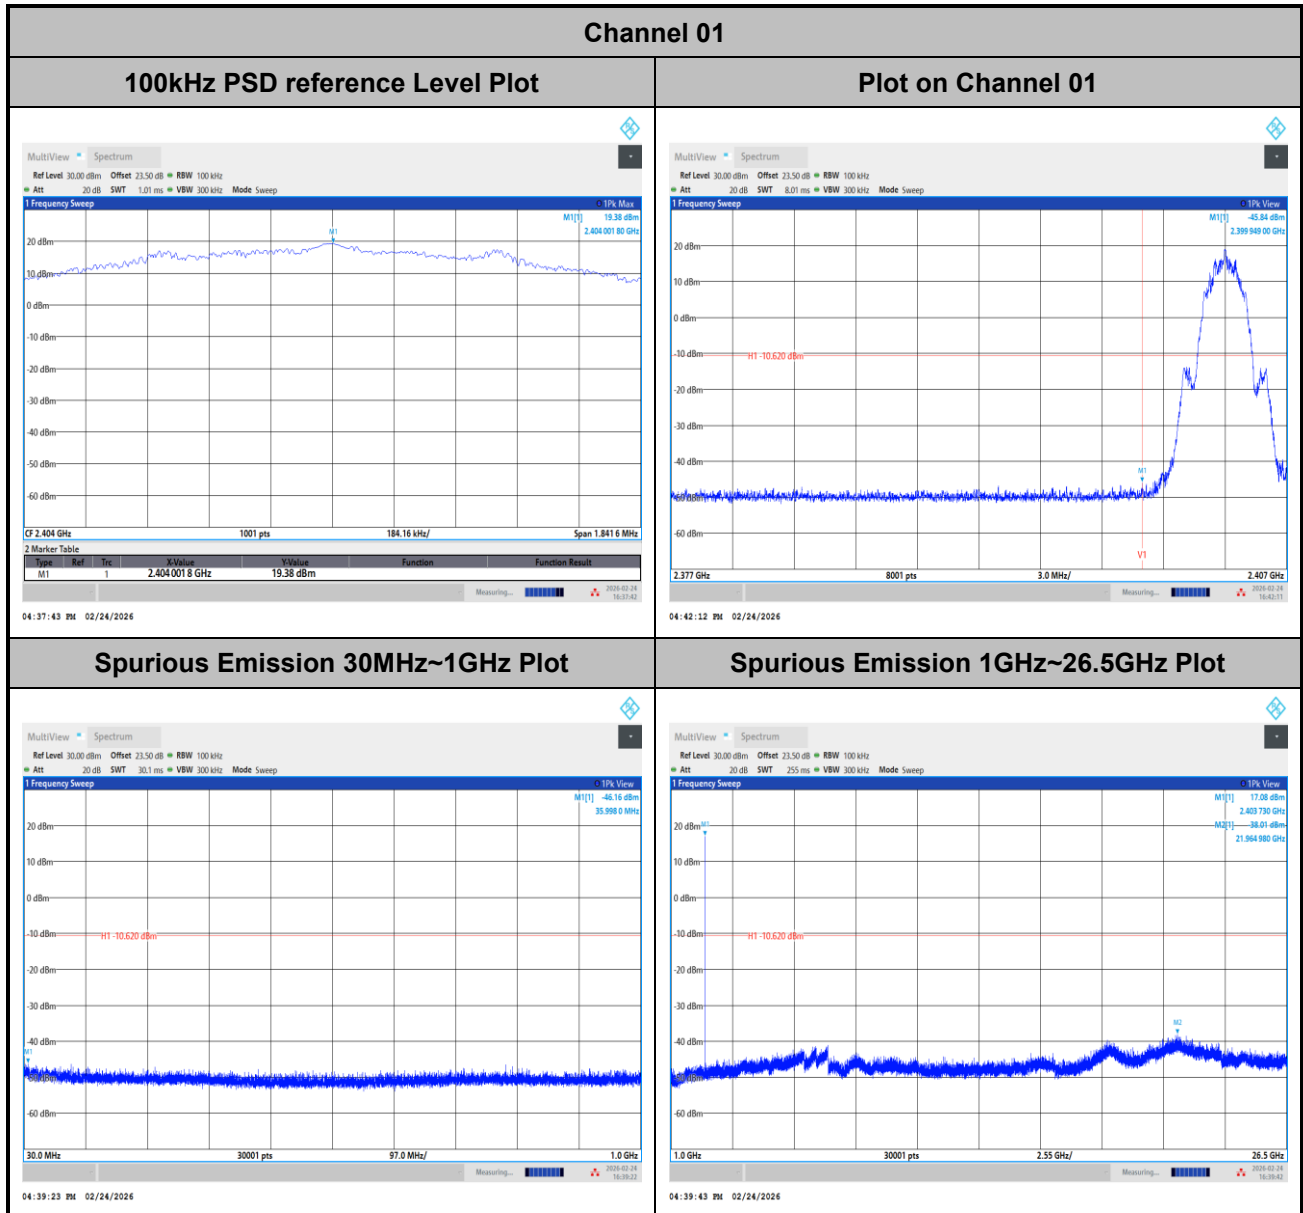




Channel 19


100kHz PSD reference Level Plot

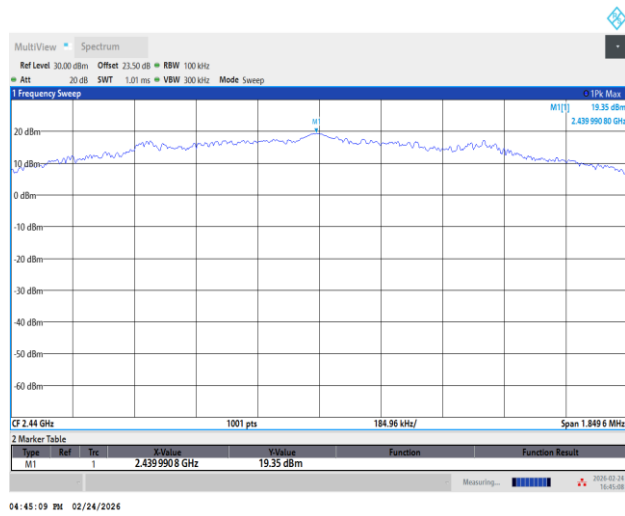

Spurious Emission 30MHz~1GHz Plot

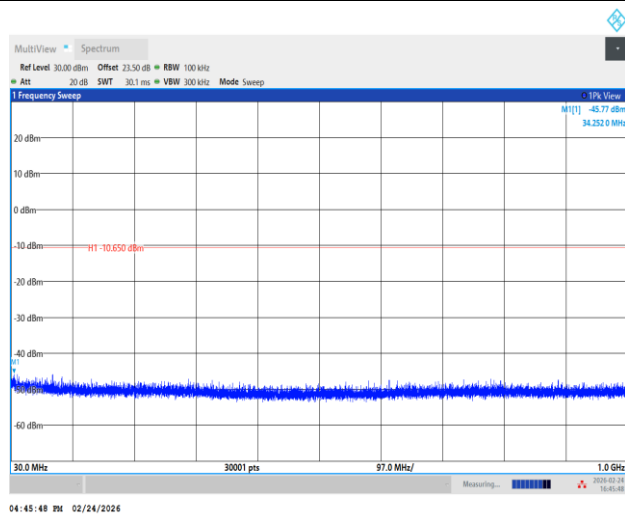


Spurious Emission 1GHz~26.5GHz Plot

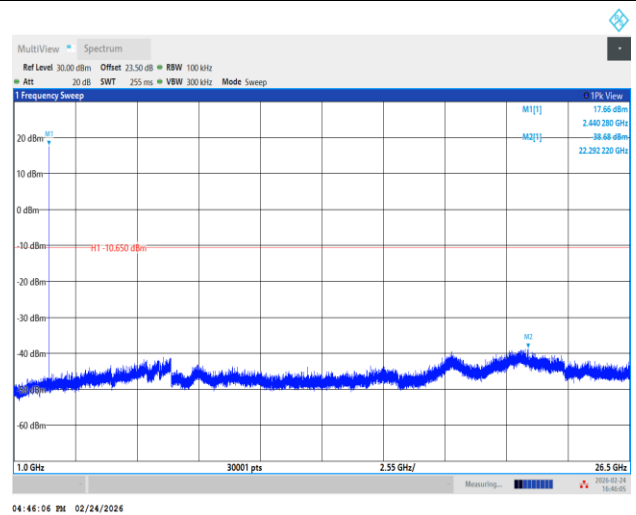




Channel 76


100kHz PSD reference Level Plot

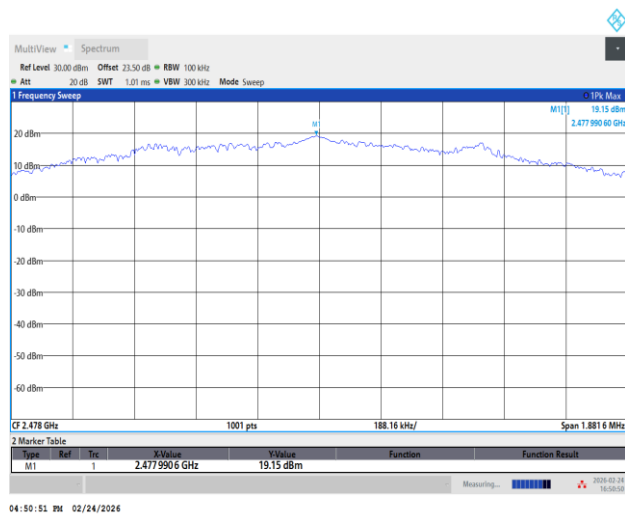


Plot on Channel 76

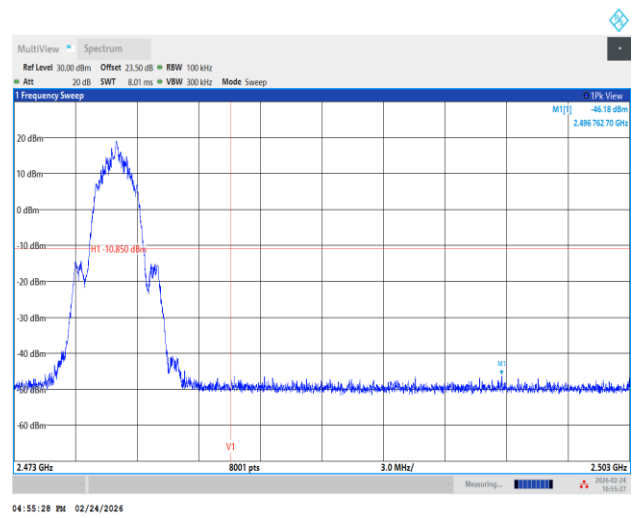

Spurious Emission 30MHz~1GHz Plot

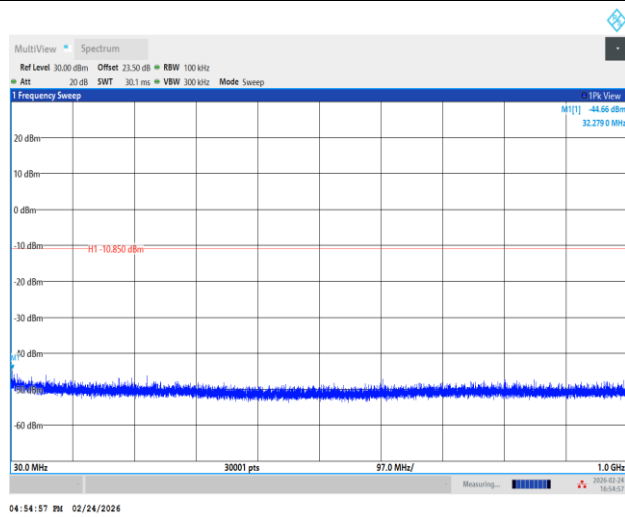

Spurious Emission 1GHz~26.5GHz Plot

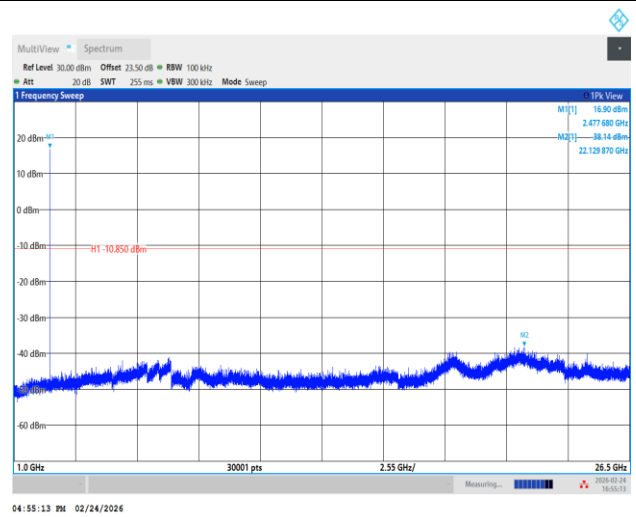




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	17.2~23.6℃
		Relative Humidity :	46.7~49.9%

EUT Information

Report NO : 5O3007
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

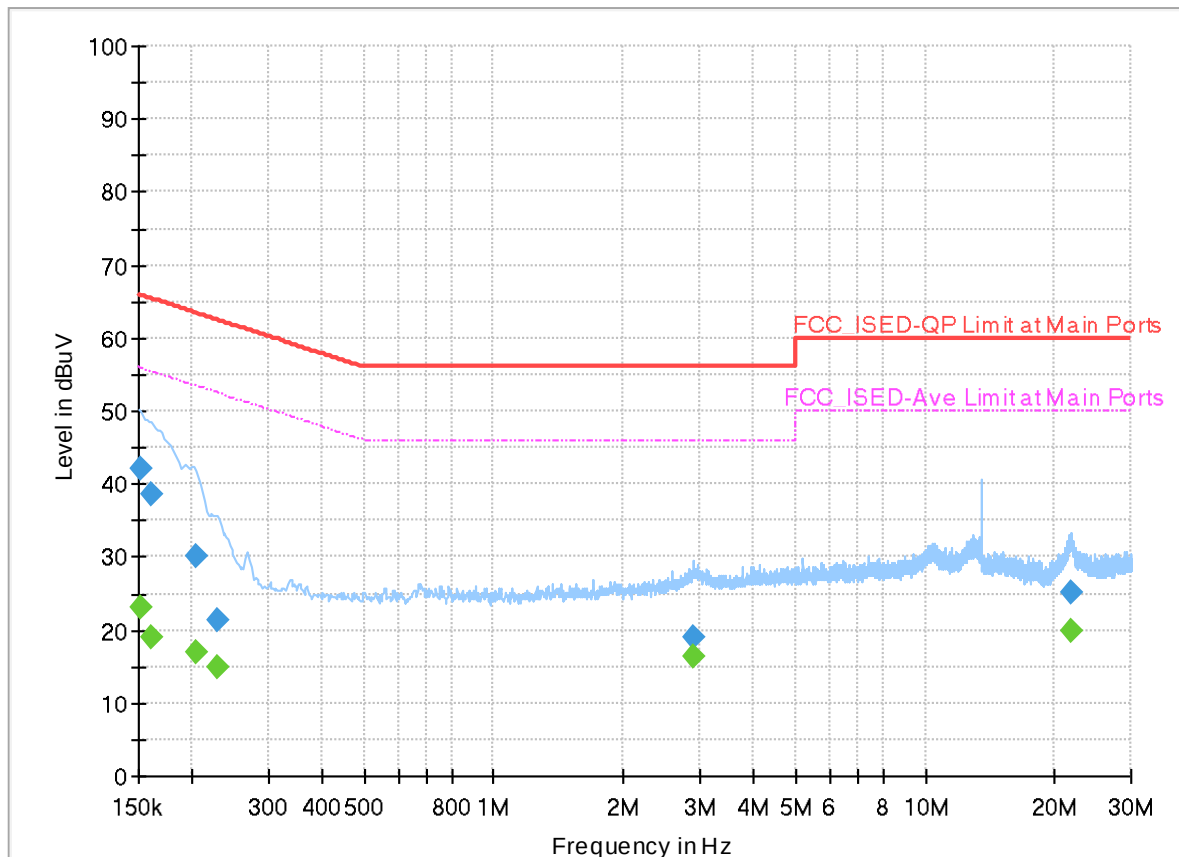


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	23.19	55.88	32.69	L1	ON	20.0
0.152250	42.17	---	65.88	23.71	L1	ON	20.0
0.161250	---	19.09	55.40	36.31	L1	ON	20.0
0.161250	38.56	---	65.40	26.84	L1	ON	20.0
0.204000	---	17.00	53.45	36.45	L1	ON	20.0
0.204000	30.17	---	63.45	33.28	L1	ON	20.0
0.228750	---	15.04	52.50	37.46	L1	ON	20.0
0.228750	21.25	---	62.50	41.25	L1	ON	20.0
2.901750	---	16.47	46.00	29.53	L1	ON	20.1
2.901750	18.90	---	56.00	37.10	L1	ON	20.1
21.889500	---	19.77	50.00	30.23	L1	ON	20.9
21.889500	25.08	---	60.00	34.92	L1	ON	20.9

EUT Information

Report NO : 5O3007
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

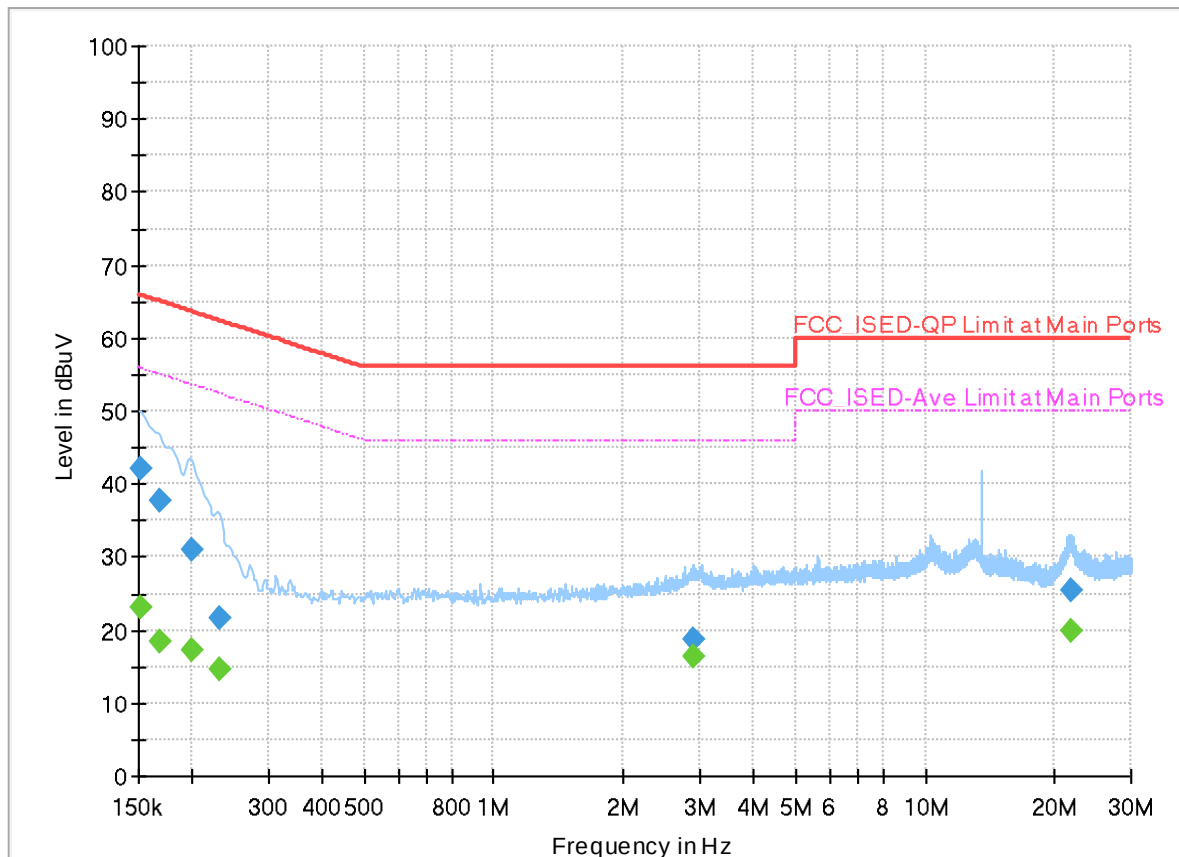

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	23.18	55.88	32.70	N	ON	20.0
0.152250	42.23	---	65.88	23.65	N	ON	20.0
0.168000	---	18.45	55.06	36.61	N	ON	20.0
0.168000	37.75	---	65.06	27.31	N	ON	20.0
0.199500	---	17.30	53.63	36.33	N	ON	20.0
0.199500	31.12	---	63.63	32.51	N	ON	20.0
0.231000	---	14.74	52.41	37.67	N	ON	20.0
0.231000	21.62	---	62.41	40.79	N	ON	20.0
2.890500	---	16.48	46.00	29.52	N	ON	20.1
2.890500	18.82	---	56.00	37.18	N	ON	20.1
21.855750	---	20.02	50.00	29.98	N	ON	20.9
21.855750	25.45	---	60.00	34.55	N	ON	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer:	Jack Cheng and Ray Lung	Temperature:	21.1 ~ 25.7°C
		Relative Humidity:	55.8 ~ 63.2%

Note symbol

-L	Low channel location
-R	High channel location





C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	0	Bluetooth-LE_GFSK	02	2404	1Mbps	-
Mode 2	2400-2483.5	0	Bluetooth-LE_GFSK	38	2440	1Mbps	-
Mode 3	2400-2483.5	0	Bluetooth-LE_GFSK	76	2478	1Mbps	-
Mode 4	2400-2483.5	0	Bluetooth-LE_GFSK	02	2404	2Mbps	-
Mode 5	2400-2483.5	0	Bluetooth-LE_GFSK	38	2440	2Mbps	-
Mode 6	2400-2483.5	0	Bluetooth-LE_GFSK	76	2478	2Mbps	-
Mode 7	2400-2483.5	0	Bluetooth-LE_GFSK	SHF (Above 18GHz)			
Mode 8	2400-2483.5	0	Bluetooth-LE_GFSK	LF (Below 1GHz)			

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GFSK	02	2330.87	44.72	54.00	-9.28	H	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	02	7212.00	41.10	54.00	-12.90	H	Avg.	Pass	Harmonic
2	Bluetooth-LE_GFSK	38	2494.66	45.24	54.00	-8.76	H	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	38	7320.00	41.42	54.00	-12.58	H	Avg.	Pass	Harmonic
3	Bluetooth-LE_GFSK	76	2490.30	45.07	54.00	-8.93	H	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	76	7434.00	43.33	54.00	-10.67	V	Avg.	Pass	Harmonic
4	Bluetooth-LE_GFSK	02	2372.70	46.67	54.00	-7.33	H	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	02	4808.00	46.95	54.00	-7.05	H	Avg.	Pass	Harmonic
5	Bluetooth-LE_GFSK	38	2361.74	46.31	54.00	-7.69	V	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	38	7320.00	43.38	54.00	-10.62	V	Avg.	Pass	Harmonic
6	Bluetooth-LE_GFSK	76	2493.05	46.60	54.00	-7.40	H	Avg.	Pass	Band Edge
	Bluetooth-LE_GFSK	76	7434.00	44.39	54.00	-9.61	H	Avg.	Pass	Harmonic
7	SHF		24783.31	40.93	74.00	-33.07	V	Peak	Pass	-
8	LF		741.01	35.07	46.00	-10.93	V	Peak	Pass	-

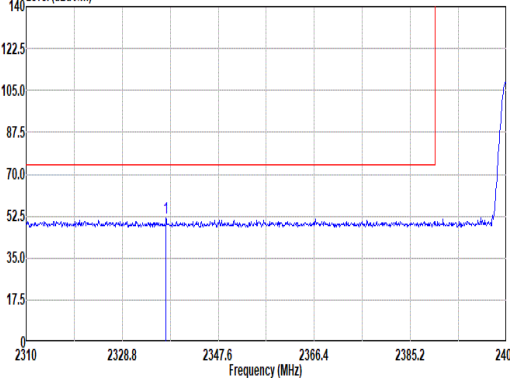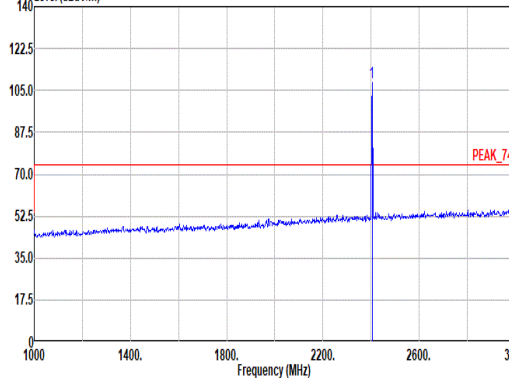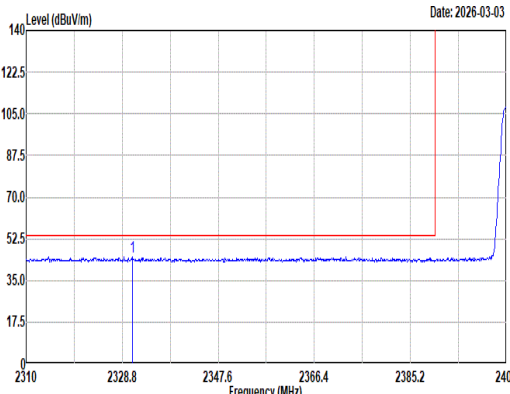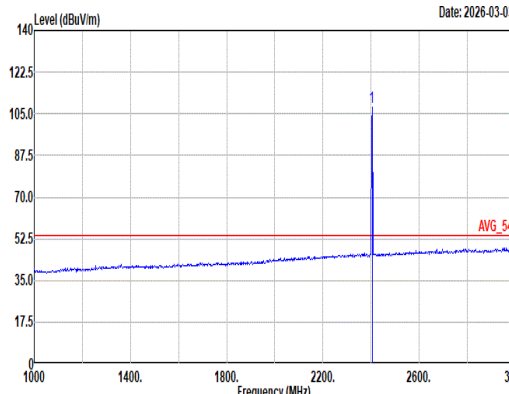

		1																																																																																																		
Mode	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2337.35</td><td>51.55</td><td>74.00</td><td>-22.45</td><td>30.73</td><td>26.83</td><td>8.40</td><td>32.80</td><td>10.39</td><td>118</td><td>300</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2337.35	51.55	74.00	-22.45	30.73	26.83	8.40	32.80	10.39	118	300	Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>108.44</td><td>-----</td><td>-----</td><td>95.60</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>118</td><td>300</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	108.44	-----	-----	95.60	26.74	8.54	32.84	10.40	118	300	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2337.35	51.55	74.00	-22.45	30.73	26.83	8.40	32.80	10.39	118	300	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2404.00	108.44	-----	-----	95.60	26.74	8.54	32.84	10.40	118	300	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2330.07</td><td>44.72</td><td>54.00</td><td>-9.28</td><td>31.84</td><td>26.89</td><td>8.39</td><td>32.79</td><td>10.39</td><td>118</td><td>300</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2330.07	44.72	54.00	-9.28	31.84	26.89	8.39	32.79	10.39	118	300	Average	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>107.93</td><td>-----</td><td>-----</td><td>95.09</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>118</td><td>300</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	107.93	-----	-----	95.09	26.74	8.54	32.84	10.40	118	300	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2330.07	44.72	54.00	-9.28	31.84	26.89	8.39	32.79	10.39	118	300	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2404.00	107.93	-----	-----	95.09	26.74	8.54	32.84	10.40	118	300	Average																																																																																								



Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2320.81</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>38.44</td><td>26.99</td><td>8.37</td><td>32.79</td><td>10.39</td><td>200</td><td>176</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2320.81	51.40	74.00	-22.60	38.44	26.99	8.37	32.79	10.39	200	176	Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>103.75</td><td>74.00</td><td>29.75</td><td>90.91</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>200</td><td>176</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2404.00	103.75	74.00	29.75	90.91	26.74	8.54	32.84	10.40	200	176	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2320.81	51.40	74.00	-22.60	38.44	26.99	8.37	32.79	10.39	200	176	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2404.00	103.75	74.00	29.75	90.91	26.74	8.54	32.84	10.40	200	176	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2357.28</td><td>44.62</td><td>54.00</td><td>-9.38</td><td>31.72</td><td>26.87</td><td>8.44</td><td>32.81</td><td>10.40</td><td>200</td><td>176</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2357.28	44.62	54.00	-9.38	31.72	26.87	8.44	32.81	10.40	200	176	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>103.53</td><td>74.00</td><td>29.53</td><td>90.69</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>200</td><td>176</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2404.00	103.53	74.00	29.53	90.69	26.74	8.54	32.84	10.40	200	176	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2357.28	44.62	54.00	-9.38	31.72	26.87	8.44	32.81	10.40	200	176	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2404.00	103.53	74.00	29.53	90.69	26.74	8.54	32.84	10.40	200	176	Average																																																																														







Mode	1																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz																																																																																																																																																																								
ANT	0																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>45.84</td><td>74.00</td><td>-28.16</td><td>33.17</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4808.00</td><td>37.85</td><td>54.00</td><td>-16.15</td><td>25.18</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7212.00</td><td>49.10</td><td>74.00</td><td>-24.90</td><td>32.76</td><td>36.40</td><td>14.94</td><td>36.35</td><td>1.35</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7212.00</td><td>41.10</td><td>54.00</td><td>-12.90</td><td>24.76</td><td>36.40</td><td>14.94</td><td>36.35</td><td>1.35</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	45.84	74.00	-28.16	33.17	32.22	12.13	34.11	2.43	--	Peak	2	4808.00	37.85	54.00	-16.15	25.18	32.22	12.13	34.11	2.43	--	Average	3	7212.00	49.10	74.00	-24.90	32.76	36.40	14.94	36.35	1.35	--	Peak	4	7212.00	41.10	54.00	-12.90	24.76	36.40	14.94	36.35	1.35	--	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>32.42</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4808.00</td><td>37.10</td><td>54.00</td><td>-16.90</td><td>24.43</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7212.00</td><td>48.99</td><td>74.00</td><td>-25.01</td><td>32.65</td><td>36.40</td><td>14.94</td><td>36.35</td><td>1.35</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7212.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>24.65</td><td>36.40</td><td>14.94</td><td>36.35</td><td>1.35</td><td>--</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	45.09	74.00	-28.91	32.42	32.22	12.13	34.11	2.43	--	Peak	2	4808.00	37.10	54.00	-16.90	24.43	32.22	12.13	34.11	2.43	--	Average	3	7212.00	48.99	74.00	-25.01	32.65	36.40	14.94	36.35	1.35	--	Peak	4	7212.00	40.99	54.00	-13.01	24.65	36.40	14.94	36.35	1.35	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4808.00	45.84	74.00	-28.16	33.17	32.22	12.13	34.11	2.43	--	Peak																																																																																																																																																														
2	4808.00	37.85	54.00	-16.15	25.18	32.22	12.13	34.11	2.43	--	Average																																																																																																																																																														
3	7212.00	49.10	74.00	-24.90	32.76	36.40	14.94	36.35	1.35	--	Peak																																																																																																																																																														
4	7212.00	41.10	54.00	-12.90	24.76	36.40	14.94	36.35	1.35	--	Average																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4808.00	45.09	74.00	-28.91	32.42	32.22	12.13	34.11	2.43	--	Peak																																																																																																																																																														
2	4808.00	37.10	54.00	-16.90	24.43	32.22	12.13	34.11	2.43	--	Average																																																																																																																																																														
3	7212.00	48.99	74.00	-25.01	32.65	36.40	14.94	36.35	1.35	--	Peak																																																																																																																																																														
4	7212.00	40.99	54.00	-13.01	24.65	36.40	14.94	36.35	1.35	--	Average																																																																																																																																																														



Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL

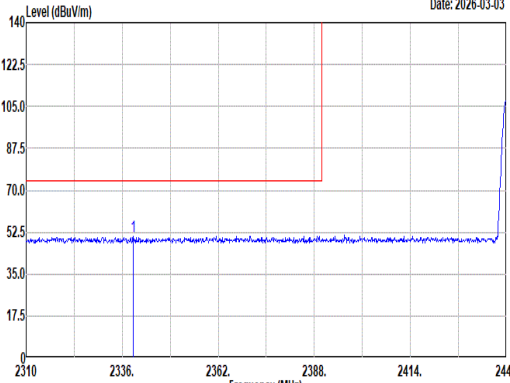
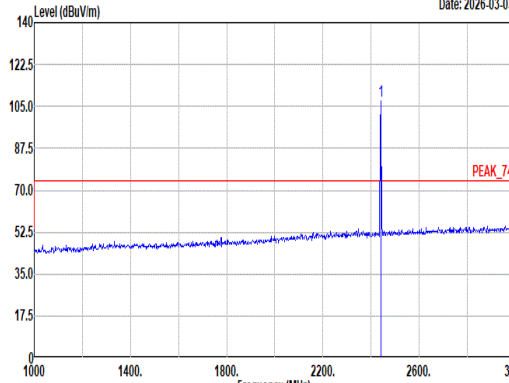
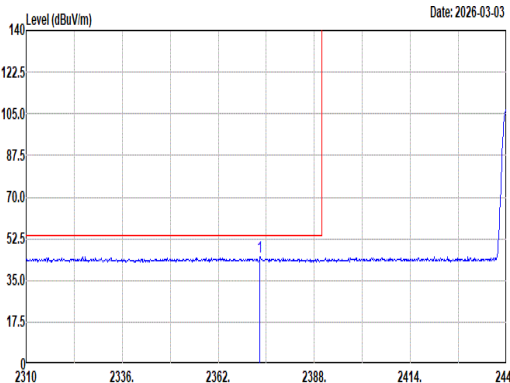
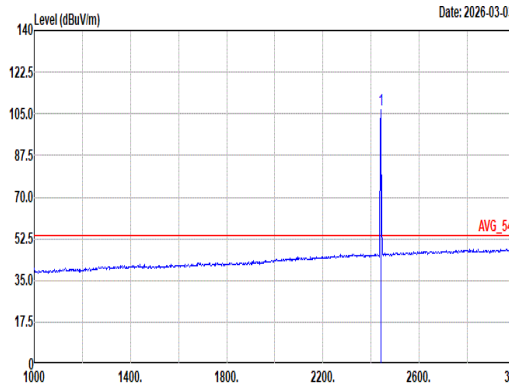


Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2338.99</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>38.11</td><td>26.81</td><td>8.41</td><td>32.80</td><td>10.39</td><td>111</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2338.99	50.92	74.00	-23.08	38.11	26.81	8.41	32.80	10.39	111	302	Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>107.39</td><td>-----</td><td>-----</td><td>94.65</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>111</td><td>302</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.39	-----	-----	94.65	26.60	8.60	32.86	10.40	111	302	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2338.99	50.92	74.00	-23.08	38.11	26.81	8.41	32.80	10.39	111	302	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	107.39	-----	-----	94.65	26.60	8.60	32.86	10.40	111	302	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.31</td><td>44.99</td><td>54.00</td><td>-9.01</td><td>32.10</td><td>26.83</td><td>8.48</td><td>32.82</td><td>10.40</td><td>111</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.31	44.99	54.00	-9.01	32.10	26.83	8.48	32.82	10.40	111	302	Average	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>106.87</td><td>-----</td><td>-----</td><td>94.13</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>111</td><td>302</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	106.87	-----	-----	94.13	26.60	8.60	32.86	10.40	111	302	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2373.31	44.99	54.00	-9.01	32.10	26.83	8.48	32.82	10.40	111	302	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	106.87	-----	-----	94.13	26.60	8.60	32.86	10.40	111	302	Average																																																																																								



Mode	2	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz	
ANT	0	
Pol.	Horizontal	Fundamental
Peak		

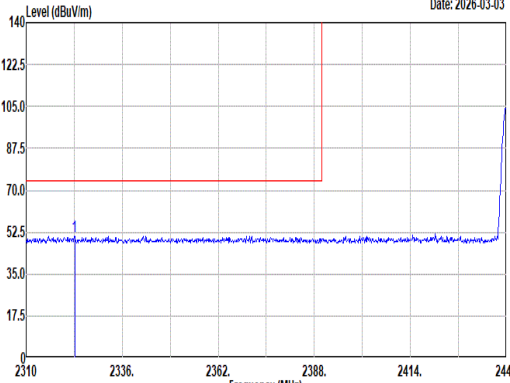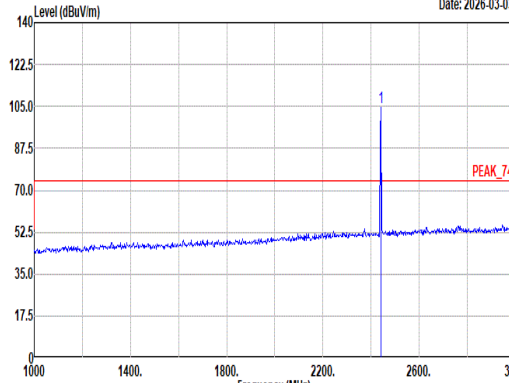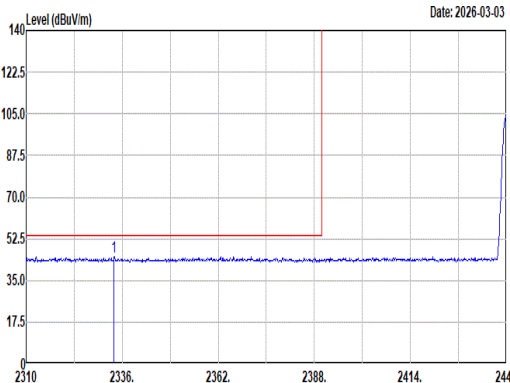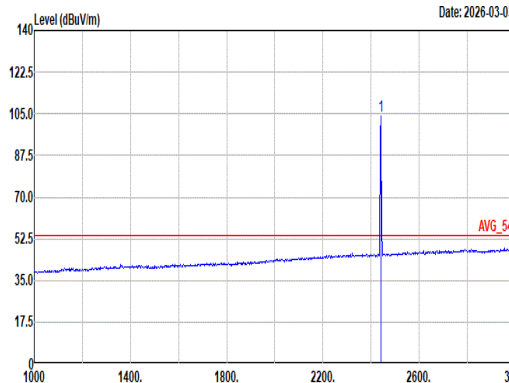

Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2333.13</td><td>50.75</td><td>74.00</td><td>-23.25</td><td>37.00</td><td>26.97</td><td>8.38</td><td>32.79</td><td>10.39</td><td>398</td><td>220</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2333.13	50.75	74.00	-23.25	37.00	26.97	8.38	32.79	10.39	398	220	Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>104.52</td><td>-----</td><td>-----</td><td>91.78</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>398</td><td>220</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	104.52	-----	-----	91.78	26.60	8.60	32.86	10.40	398	220	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2333.13	50.75	74.00	-23.25	37.00	26.97	8.38	32.79	10.39	398	220	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	104.52	-----	-----	91.78	26.60	8.60	32.86	10.40	398	220	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2333.79</td><td>44.89</td><td>54.00</td><td>-9.11</td><td>32.03</td><td>26.86</td><td>8.40</td><td>32.79</td><td>10.39</td><td>398</td><td>220</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2333.79	44.89	54.00	-9.11	32.03	26.86	8.40	32.79	10.39	398	220	Average	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>104.14</td><td>-----</td><td>-----</td><td>91.40</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>398</td><td>220</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	104.14	-----	-----	91.40	26.60	8.60	32.86	10.40	398	220	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2333.79	44.89	54.00	-9.11	32.03	26.86	8.40	32.79	10.39	398	220	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	104.14	-----	-----	91.40	26.60	8.60	32.86	10.40	398	220	Average																																																																																								





Mode	2																																								
	Band Edge - R																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																								
ANT	0																																								
Pol.	Vertical	Fundamental																																							
Peak	Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.42</td><td>51.05</td><td>74.00</td><td>-22.95</td><td>38.07</td><td>26.77</td><td>8.69</td><td>32.89</td><td>10.41</td><td>398</td><td>228</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.42	51.05	74.00	-22.95	38.07	26.77	8.69	32.89	10.41	398	228	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	2488.42	51.05	74.00	-22.95	38.07	26.77	8.69	32.89	10.41	398	228	Peak																													
Avg	Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SWT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2489.44</td><td>45.05</td><td>54.00</td><td>-8.95</td><td>32.04</td><td>26.79</td><td>8.70</td><td>32.89</td><td>10.41</td><td>398</td><td>228</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.44	45.05	54.00	-8.95	32.04	26.79	8.70	32.89	10.41	398	228	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	2489.44	45.05	54.00	-8.95	32.04	26.79	8.70	32.89	10.41	398	228	Average																													



Mode	2																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																																																																																																																																																																					
ANT	0																																																																																																																																																																																					
Pol.	Horizontal							Vertical																																																																																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>46.64</td><td>74.00</td><td>-27.36</td><td>33.74</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>38.65</td><td>54.00</td><td>-15.35</td><td>25.75</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>49.42</td><td>74.00</td><td>-24.58</td><td>32.62</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>41.42</td><td>54.00</td><td>-12.58</td><td>24.62</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4880.00	46.64	74.00	-27.36	33.74	32.36	12.26	34.09	2.37	--	--	--	Peak	2	4880.00	38.65	54.00	-15.35	25.75	32.36	12.26	34.09	2.37	--	--	--	Average	3	7320.00	49.42	74.00	-24.58	32.62	36.72	15.06	36.38	1.40	--	--	--	Peak	4	7320.00	41.42	54.00	-12.58	24.62	36.72	15.06	36.38	1.40	--	--	--	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>33.08</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>37.99</td><td>54.00</td><td>-16.01</td><td>25.09</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>48.96</td><td>74.00</td><td>-25.04</td><td>32.16</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>40.96</td><td>54.00</td><td>-13.04</td><td>24.16</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4880.00	45.98	74.00	-28.02	33.08	32.36	12.26	34.09	2.37	--	--	--	Peak	2	4880.00	37.99	54.00	-16.01	25.09	32.36	12.26	34.09	2.37	--	--	--	Average	3	7320.00	48.96	74.00	-25.04	32.16	36.72	15.06	36.38	1.40	--	--	--	Peak	4	7320.00	40.96	54.00	-13.04	24.16	36.72	15.06	36.38	1.40	--	--	--	Average
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																										
1	4880.00	46.64	74.00	-27.36	33.74	32.36	12.26	34.09	2.37	--	--	--	Peak																																																																																																																																																																									
2	4880.00	38.65	54.00	-15.35	25.75	32.36	12.26	34.09	2.37	--	--	--	Average																																																																																																																																																																									
3	7320.00	49.42	74.00	-24.58	32.62	36.72	15.06	36.38	1.40	--	--	--	Peak																																																																																																																																																																									
4	7320.00	41.42	54.00	-12.58	24.62	36.72	15.06	36.38	1.40	--	--	--	Average																																																																																																																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																										
1	4880.00	45.98	74.00	-28.02	33.08	32.36	12.26	34.09	2.37	--	--	--	Peak																																																																																																																																																																									
2	4880.00	37.99	54.00	-16.01	25.09	32.36	12.26	34.09	2.37	--	--	--	Average																																																																																																																																																																									
3	7320.00	48.96	74.00	-25.04	32.16	36.72	15.06	36.38	1.40	--	--	--	Peak																																																																																																																																																																									
4	7320.00	40.96	54.00	-13.04	24.16	36.72	15.06	36.38	1.40	--	--	--	Average																																																																																																																																																																									



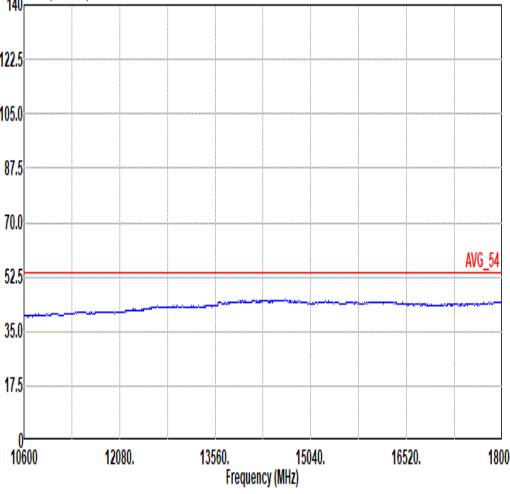
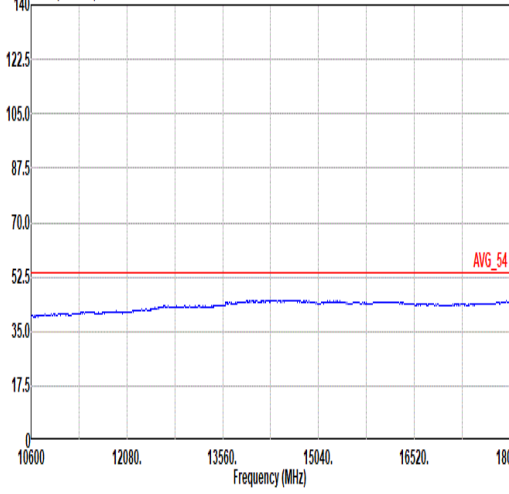


Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL





Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz																																																																																			
ANT	0																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2499.71</td><td>51.84</td><td>74.00</td><td>-22.16</td><td>38.82</td><td>26.00</td><td>8.71</td><td>32.90</td><td>10.41</td><td>111</td><td>304</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2499.71	51.84	74.00	-22.16	38.82	26.00	8.71	32.90	10.41	111	304	Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>109.59</td><td>-----</td><td>-----</td><td>96.00</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>111</td><td>304</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2478.00	109.59	-----	-----	96.00	26.60	8.67	32.89	10.41	111	304	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2499.71	51.84	74.00	-22.16	38.82	26.00	8.71	32.90	10.41	111	304	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2478.00	109.59	-----	-----	96.00	26.60	8.67	32.89	10.41	111	304	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2490.30</td><td>45.07</td><td>54.00</td><td>-8.93</td><td>32.05</td><td>26.00</td><td>8.70</td><td>32.89</td><td>10.41</td><td>111</td><td>304</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2490.30	45.07	54.00	-8.93	32.05	26.00	8.70	32.89	10.41	111	304	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>109.19</td><td>-----</td><td>-----</td><td>96.40</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>111</td><td>304</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2478.00	109.19	-----	-----	96.40	26.60	8.67	32.89	10.41	111	304	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2490.30	45.07	54.00	-8.93	32.05	26.00	8.70	32.89	10.41	111	304	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2478.00	109.19	-----	-----	96.40	26.60	8.67	32.89	10.41	111	304	Average																																																																									

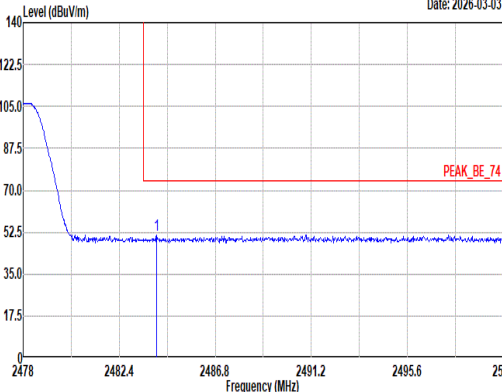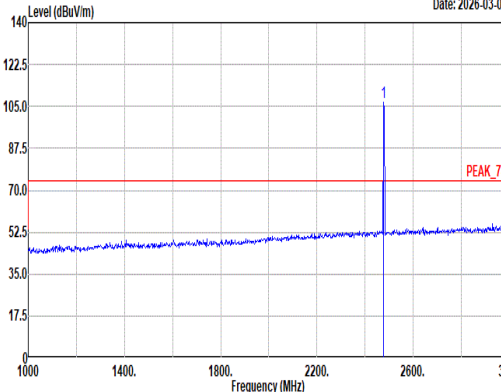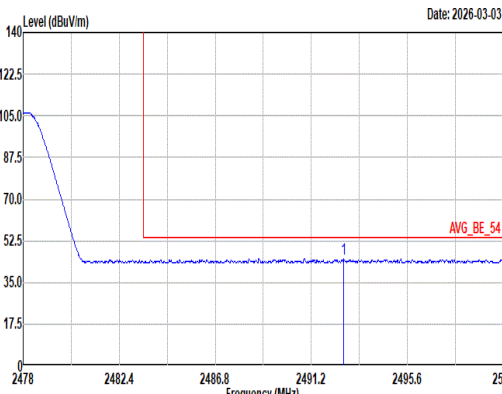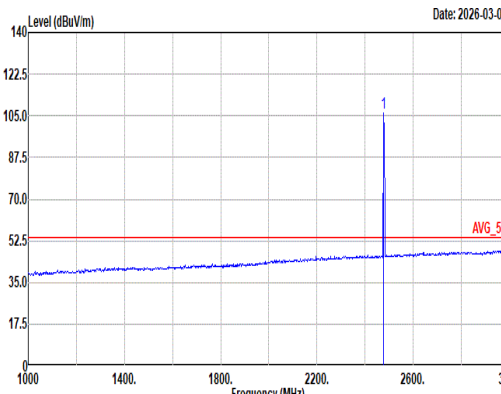

Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Level (dBuV/m) Date: 2026-03-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2478 2482.4 2486.8 2491.2 2495.6 2500 Frequency (MHz) PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.12</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>38.49</td><td>26.60</td><td>8.69</td><td>32.89</td><td>10.41</td><td>308</td><td>172</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.12	51.38	74.00	-22.62	38.49	26.60	8.69	32.89	10.41	308	172	Peak	 Level (dBuV/m) Date: 2026-03-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>106.70</td><td>-----</td><td>-----</td><td>93.91</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>308</td><td>172</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	106.70	-----	-----	93.91	26.60	8.67	32.89	10.41	308	172	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2484.12	51.38	74.00	-22.62	38.49	26.60	8.69	32.89	10.41	308	172	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2478.00	106.70	-----	-----	93.91	26.60	8.67	32.89	10.41	308	172	Peak																																																																														
Avg	 Level (dBuV/m) Date: 2026-03-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2478 2482.4 2486.8 2491.2 2495.6 2500 Frequency (MHz) AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2492.70</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>31.77</td><td>26.80</td><td>8.70</td><td>32.90</td><td>10.41</td><td>308</td><td>172</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2492.70	44.78	54.00	-9.22	31.77	26.80	8.70	32.90	10.41	308	172	Average	 Level (dBuV/m) Date: 2026-03-03 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:22.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2478.00</td><td>106.29</td><td>-----</td><td>-----</td><td>93.50</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>308</td><td>172</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	106.29	-----	-----	93.50	26.60	8.67	32.89	10.41	308	172	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2492.70	44.78	54.00	-9.22	31.77	26.80	8.70	32.90	10.41	308	172	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2478.00	106.29	-----	-----	93.50	26.60	8.67	32.89	10.41	308	172	Average																																																																														



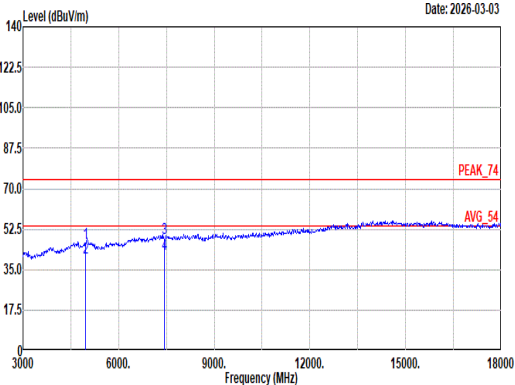
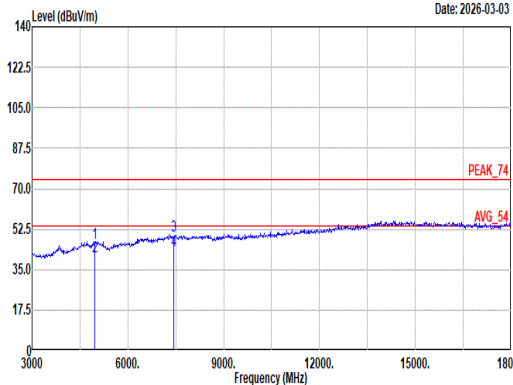


Mode	3																																																																																																																																																																								
	Harmonic																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz																																																																																																																																																																								
ANT	0																																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																																		
Peak Avg	 Level (dBuV/m) Date: 2026-03-03 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>46.72</td><td>74.00</td><td>-27.28</td><td>33.46</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4956.00</td><td>40.08</td><td>54.00</td><td>-13.92</td><td>26.82</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7434.00</td><td>48.47</td><td>74.00</td><td>-25.53</td><td>31.40</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7434.00</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>24.41</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47</td><td>--</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.72	74.00	-27.28	33.46	32.62	12.40	34.07	2.31	--	Peak	2	4956.00	40.08	54.00	-13.92	26.82	32.62	12.40	34.07	2.31	--	Average	3	7434.00	48.47	74.00	-25.53	31.40	36.83	15.19	36.42	1.47	--	Peak	4	7434.00	41.48	54.00	-12.52	24.41	36.83	15.19	36.42	1.47	--	Average	 Level (dBuV/m) Date: 2026-03-03 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4956.00</td><td>46.49</td><td>74.00</td><td>-27.51</td><td>33.23</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4956.00</td><td>40.47</td><td>54.00</td><td>-13.53</td><td>27.21</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7434.00</td><td>49.46</td><td>74.00</td><td>-24.54</td><td>32.39</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7434.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>26.26</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47</td><td>--</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.49	74.00	-27.51	33.23	32.62	12.40	34.07	2.31	--	Peak	2	4956.00	40.47	54.00	-13.53	27.21	32.62	12.40	34.07	2.31	--	Average	3	7434.00	49.46	74.00	-24.54	32.39	36.83	15.19	36.42	1.47	--	Peak	4	7434.00	43.33	54.00	-10.67	26.26	36.83	15.19	36.42	1.47	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4956.00	46.72	74.00	-27.28	33.46	32.62	12.40	34.07	2.31	--	Peak																																																																																																																																																														
2	4956.00	40.08	54.00	-13.92	26.82	32.62	12.40	34.07	2.31	--	Average																																																																																																																																																														
3	7434.00	48.47	74.00	-25.53	31.40	36.83	15.19	36.42	1.47	--	Peak																																																																																																																																																														
4	7434.00	41.48	54.00	-12.52	24.41	36.83	15.19	36.42	1.47	--	Average																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	4956.00	46.49	74.00	-27.51	33.23	32.62	12.40	34.07	2.31	--	Peak																																																																																																																																																														
2	4956.00	40.47	54.00	-13.53	27.21	32.62	12.40	34.07	2.31	--	Average																																																																																																																																																														
3	7434.00	49.46	74.00	-24.54	32.39	36.83	15.19	36.42	1.47	--	Peak																																																																																																																																																														
4	7434.00	43.33	54.00	-10.67	26.26	36.83	15.19	36.42	1.47	--	Average																																																																																																																																																														







Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL

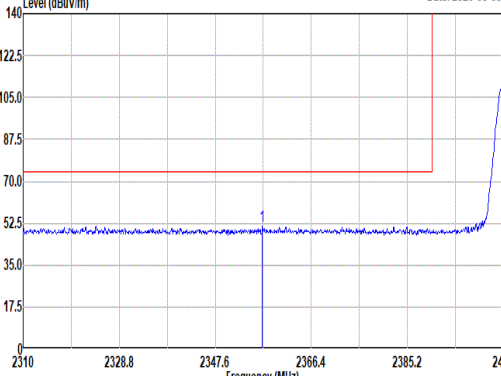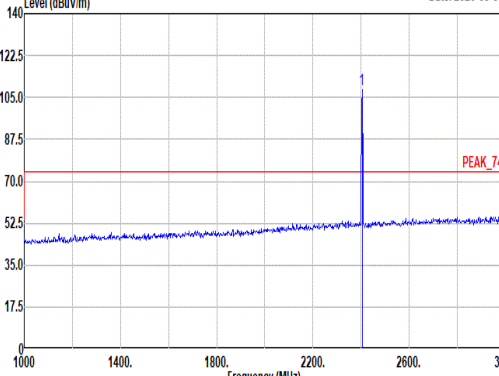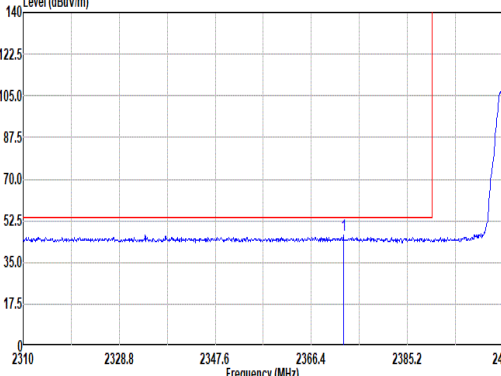
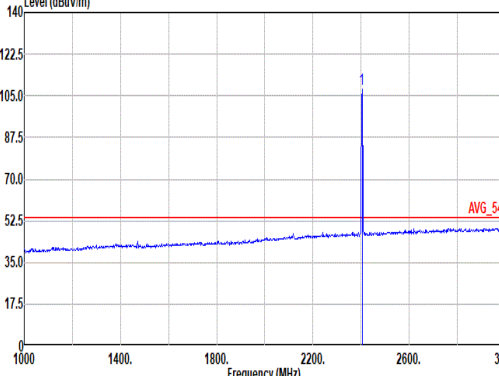


Mode	4																																																																																								
	Band Edge																																																																																								
	2400-2483.5 Bluetooth-LE_GFSK_CH02_2404MHz																																																																																								
ANT	0																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2356.81</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>38.37</td><td>26.87</td><td>8.44</td><td>32.81</td><td>10.40</td><td>115</td><td>299</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2356.81	51.27	74.00	-22.73	38.37	26.87	8.44	32.81	10.40	115	299	Peak	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>108.54</td><td>-----</td><td>-----</td><td>95.70</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>115</td><td>299</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2404.00	108.54	-----	-----	95.70	26.74	8.54	32.84	10.40	115	299	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2356.81	51.27	74.00	-22.73	38.37	26.87	8.44	32.81	10.40	115	299	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2404.00	108.54	-----	-----	95.70	26.74	8.54	32.84	10.40	115	299	Peak																																																																													
Avg	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2372.70</td><td>46.67</td><td>54.00</td><td>-7.33</td><td>33.76</td><td>26.85</td><td>8.48</td><td>32.82</td><td>10.40</td><td>115</td><td>299</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2372.70	46.67	54.00	-7.33	33.76	26.85	8.48	32.82	10.40	115	299	Average	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2404.00</td><td>107.69</td><td>-----</td><td>-----</td><td>94.85</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>115</td><td>299</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2404.00	107.69	-----	-----	94.85	26.74	8.54	32.84	10.40	115	299	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2372.70	46.67	54.00	-7.33	33.76	26.85	8.48	32.82	10.40	115	299	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2404.00	107.69	-----	-----	94.85	26.74	8.54	32.84	10.40	115	299	Average																																																																													

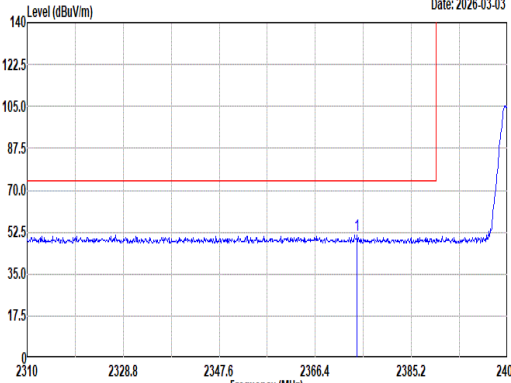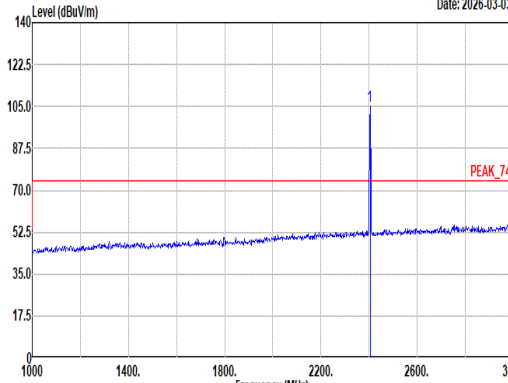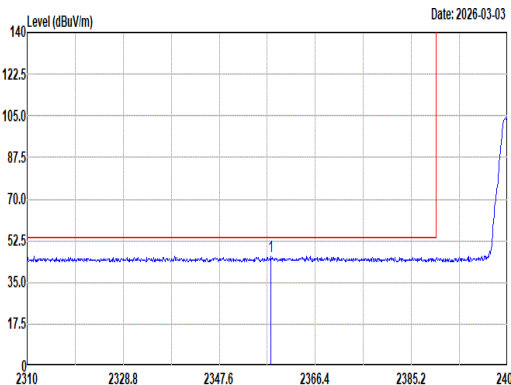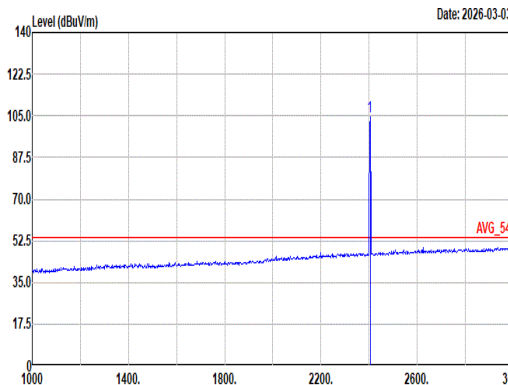

Mode	4																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2374.58</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>38.44</td><td>26.81</td><td>8.48</td><td>32.82</td><td>10.40</td><td>228 174 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2374.58	51.31	74.00	-22.69	38.44	26.81	8.48	32.82	10.40	228 174 Peak	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2404.00</td><td>105.36</td><td>-----</td><td>-----</td><td>92.52</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>228 174 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2404.00	105.36	-----	-----	92.52	26.74	8.54	32.84	10.40	228 174 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2374.58	51.31	74.00	-22.69	38.44	26.81	8.48	32.82	10.40	228 174 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2404.00	105.36	-----	-----	92.52	26.74	8.54	32.84	10.40	228 174 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2357.75</td><td>46.04</td><td>54.00</td><td>-7.96</td><td>33.12</td><td>26.88</td><td>8.45</td><td>32.81</td><td>10.40</td><td>228 174 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2357.75	46.04	54.00	-7.96	33.12	26.88	8.45	32.81	10.40	228 174 Average	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2404.00</td><td>104.60</td><td>-----</td><td>-----</td><td>91.76</td><td>26.74</td><td>8.54</td><td>32.84</td><td>10.40</td><td>228 174 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2404.00	104.60	-----	-----	91.76	26.74	8.54	32.84	10.40	228 174 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2357.75	46.04	54.00	-7.96	33.12	26.88	8.45	32.81	10.40	228 174 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 2404.00	104.60	-----	-----	91.76	26.74	8.54	32.84	10.40	228 174 Average																																																																																	

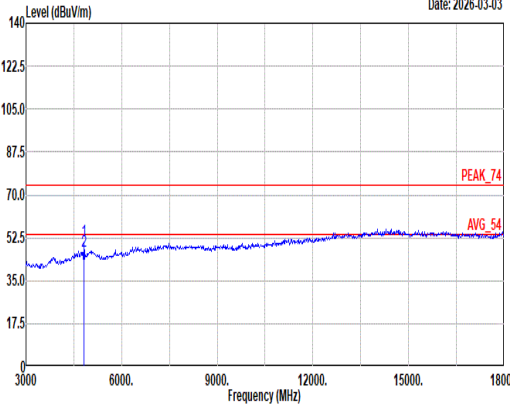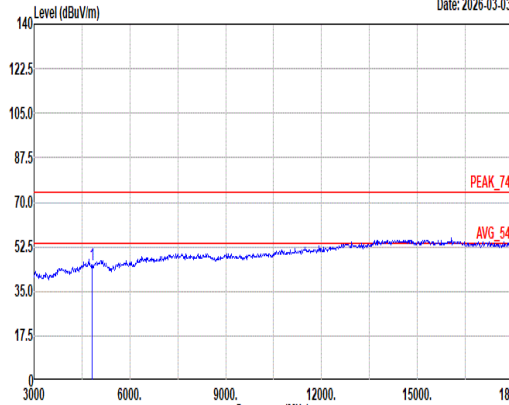

Mode	4																																																																																																							
	Harmonic																																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz																																																																																																							
ANT	0																																																																																																							
Pol.	Horizontal						Vertical																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4888.00</td><td>51.38</td><td>74.00</td><td>-22.62</td><td>38.71</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>102</td><td></td><td>4 Peak</td></tr><tr><td>2</td><td>4888.00</td><td>46.95</td><td>54.00</td><td>-7.05</td><td>34.28</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>102</td><td></td><td>4 Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4888.00	51.38	74.00	-22.62	38.71	32.22	12.13	34.11	2.43	102		4 Peak	2	4888.00	46.95	54.00	-7.05	34.28	32.22	12.13	34.11	2.43	102		4 Average	Level (dBuV/m) Date: 2026-03-03  Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4888.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>32.54</td><td>32.22</td><td>12.13</td><td>34.11</td><td>2.43</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4888.00	45.21	74.00	-28.79	32.54	32.22	12.13	34.11	2.43	--	--	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4888.00	51.38	74.00	-22.62	38.71	32.22	12.13	34.11	2.43	102		4 Peak																																																																																												
2	4888.00	46.95	54.00	-7.05	34.28	32.22	12.13	34.11	2.43	102		4 Average																																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	4888.00	45.21	74.00	-28.79	32.54	32.22	12.13	34.11	2.43	--	--	Peak																																																																																												



Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH02_2404MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03 Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03 Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	5																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2341.46</td><td>51.23</td><td>74.00</td><td>-22.77</td><td>38.43</td><td>26.00</td><td>8.41</td><td>32.80</td><td>10.39</td><td>114</td><td>302</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2341.46	51.23	74.00	-22.77	38.43	26.00	8.41	32.80	10.39	114	302	Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>107.98</td><td>-----</td><td>-----</td><td>95.24</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>114</td><td>302</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	107.98	-----	-----	95.24	26.60	8.60	32.86	10.40	114	302	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2341.46	51.23	74.00	-22.77	38.43	26.00	8.41	32.80	10.39	114	302	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	107.98	-----	-----	95.24	26.60	8.60	32.86	10.40	114	302	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2329.37</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>33.31</td><td>26.91</td><td>8.39</td><td>32.79</td><td>10.39</td><td>114</td><td>302</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2329.37	46.21	54.00	-7.79	33.31	26.91	8.39	32.79	10.39	114	302	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>107.13</td><td>-----</td><td>-----</td><td>94.39</td><td>26.60</td><td>8.60</td><td>32.86</td><td>10.40</td><td>114</td><td>302</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2440.00	107.13	-----	-----	94.39	26.60	8.60	32.86	10.40	114	302	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2329.37	46.21	54.00	-7.79	33.31	26.91	8.39	32.79	10.39	114	302	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2440.00	107.13	-----	-----	94.39	26.60	8.60	32.86	10.40	114	302	Average																																																																														



Mode	5											
	Band Edge - R											
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz											
ANT	0											
Pol.	Horizontal						Fundamental					
Peak	<											



	5											
Mode	Band Edge - L											
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz											
ANT	0											
Pol.	Vertical						Fundamental					
Peak	Level (dBuV/m) </											



Mode	5																																															
	Band Edge - R																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																															
ANT	0																																															
Pol.	Vertical						Fundamental																																									
Peak	Level (dBuV/m) Date: 2026-03-03 PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.76</td><td>51.95</td><td>74.00</td><td>-22.05</td><td>38.98</td><td>26.76</td><td>8.69</td><td>32.89</td><td>10.41</td><td>400</td><td>220</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.76	51.95	74.00	-22.05	38.98	26.76	8.69	32.89	10.41	400	220	Peak	Blank					
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1 2487.76	51.95	74.00	-22.05	38.98	26.76	8.69	32.89	10.41	400	220	Peak																																					
Avg	Level (dBuV/m) Date: 2026-03-03 AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2499.88</td><td>46.29</td><td>54.00</td><td>-7.71</td><td>33.27</td><td>26.80</td><td>8.71</td><td>32.90</td><td>10.41</td><td>400</td><td>220</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2499.88	46.29	54.00	-7.71	33.27	26.80	8.71	32.90	10.41	400	220	Average	Blank					
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1 2499.88	46.29	54.00	-7.71	33.27	26.80	8.71	32.90	10.41	400	220	Average																																					



Mode	5																																																																																																																																																												
	Harmonic																																																																																																																																																												
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz																																																																																																																																																												
ANT	0																																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>47.76</td><td>74.00</td><td>-26.24</td><td>34.06</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>28.63</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>7320.00</td><td>48.96</td><td>74.00</td><td>-25.04</td><td>32.16</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>7320.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>25.92</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	47.76	74.00	-26.24	34.06	32.36	12.26	34.09	2.37	--	Peak	2	4880.00	41.53	54.00	-12.47	28.63	32.36	12.26	34.09	2.37	--	Average	3	7320.00	48.96	74.00	-25.04	32.16	36.72	15.06	36.38	1.40	--	Peak	4	7320.00	42.72	54.00	-11.28	25.92	36.72	15.06	36.38	1.40	--	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>33.32</td><td>32.36</td><td>12.26</td><td>34.09</td><td>2.37</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>49.62</td><td>74.00</td><td>-24.38</td><td>32.82</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>26.58</td><td>36.72</td><td>15.06</td><td>36.38</td><td>1.40</td><td>--</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.22	74.00	-27.78	33.32	32.36	12.26	34.09	2.37	--	Peak	2	7320.00	49.62	74.00	-24.38	32.82	36.72	15.06	36.38	1.40	--	Peak	3	7320.00	43.38	54.00	-10.62	26.58	36.72	15.06	36.38	1.40	--	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																			
1	4880.00	47.76	74.00	-26.24	34.06	32.36	12.26	34.09	2.37	--	Peak																																																																																																																																																		
2	4880.00	41.53	54.00	-12.47	28.63	32.36	12.26	34.09	2.37	--	Average																																																																																																																																																		
3	7320.00	48.96	74.00	-25.04	32.16	36.72	15.06	36.38	1.40	--	Peak																																																																																																																																																		
4	7320.00	42.72	54.00	-11.28	25.92	36.72	15.06	36.38	1.40	--	Average																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																			
1	4880.00	46.22	74.00	-27.78	33.32	32.36	12.26	34.09	2.37	--	Peak																																																																																																																																																		
2	7320.00	49.62	74.00	-24.38	32.82	36.72	15.06	36.38	1.40	--	Peak																																																																																																																																																		
3	7320.00	43.38	54.00	-10.62	26.58	36.72	15.06	36.38	1.40	--	Average																																																																																																																																																		







Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2440MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03 Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03 Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	6																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2497.95</td><td>52.00</td><td>74.00</td><td>-22.00</td><td>38.98</td><td>26.00</td><td>8.71</td><td>32.90</td><td>10.41</td><td>100</td><td>49</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2497.95	52.00	74.00	-22.00	38.98	26.00	8.71	32.90	10.41	100	49	Peak	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2478.00</td><td>108.84</td><td>-----</td><td>-----</td><td>96.05</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>100</td><td>49</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	108.84	-----	-----	96.05	26.60	8.67	32.89	10.41	100	49	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2497.95	52.00	74.00	-22.00	38.98	26.00	8.71	32.90	10.41	100	49	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2478.00	108.84	-----	-----	96.05	26.60	8.67	32.89	10.41	100	49	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2493.05</td><td>46.60</td><td>54.00</td><td>-7.40</td><td>33.59</td><td>26.00</td><td>8.70</td><td>32.90</td><td>10.41</td><td>100</td><td>49</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2493.05	46.60	54.00	-7.40	33.59	26.00	8.70	32.90	10.41	100	49	Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2478.00</td><td>108.13</td><td>-----</td><td>-----</td><td>95.34</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>100</td><td>49</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2478.00	108.13	-----	-----	95.34	26.60	8.67	32.89	10.41	100	49	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2493.05	46.60	54.00	-7.40	33.59	26.00	8.70	32.90	10.41	100	49	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2478.00	108.13	-----	-----	95.34	26.60	8.67	32.89	10.41	100	49	Average																																																																														

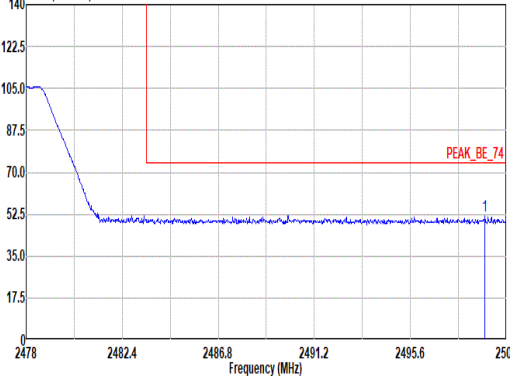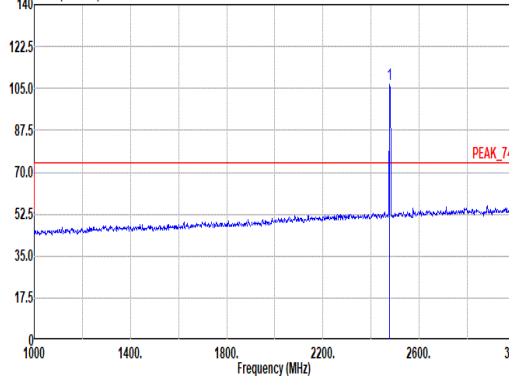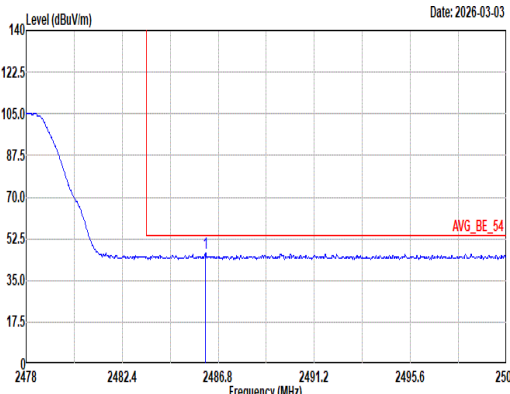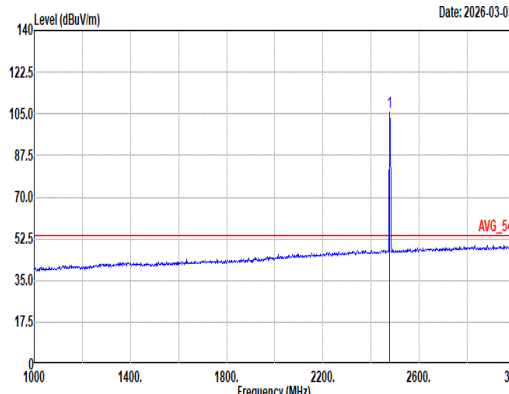

Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH76_2478MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.01</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>38.75</td><td>26.00</td><td>8.71</td><td>32.90</td><td>10.41</td><td>129</td><td>167</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.01	51.77	74.00	-22.23	38.75	26.00	8.71	32.90	10.41	129	167	Peak	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>106.71</td><td>-----</td><td>-----</td><td>93.92</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>129</td><td>167</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	106.71	-----	-----	93.92	26.60	8.67	32.89	10.41	129	167	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2499.01	51.77	74.00	-22.23	38.75	26.00	8.71	32.90	10.41	129	167	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	106.71	-----	-----	93.92	26.60	8.67	32.89	10.41	129	167	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.21</td><td>46.44</td><td>54.00</td><td>-7.56</td><td>33.51</td><td>26.72</td><td>8.69</td><td>32.89</td><td>10.41</td><td>129</td><td>167</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.21	46.44	54.00	-7.56	33.51	26.72	8.69	32.89	10.41	129	167	Average	Level (dBuV/m) Date: 2026-03-03  Frequency (MHz) Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:39.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>105.62</td><td>-----</td><td>-----</td><td>92.83</td><td>26.60</td><td>8.67</td><td>32.89</td><td>10.41</td><td>129</td><td>167</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	105.62	-----	-----	92.83	26.60	8.67	32.89	10.41	129	167	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2486.21	46.44	54.00	-7.56	33.51	26.72	8.69	32.89	10.41	129	167	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2478.00	105.62	-----	-----	92.83	26.60	8.67	32.89	10.41	129	167	Average																																																																																								





Mode	6																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_ Bluetooth-LE_GFSK_CH76_2478MHz																																																																																																																																							
ANT	0																																																																																																																																							
Pol.	Horizontal								Vertical																																																																																																																															
Peak Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4956.00</td><td>46.92</td><td>74.00</td><td>-27.08</td><td>33.66</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31 -- -- Peak</td></tr><tr><td>2</td><td>7434.00</td><td>49.83</td><td>74.00</td><td>-24.17</td><td>32.76</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47 -- -- Peak</td></tr><tr><td>3</td><td>7434.00</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>27.32</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47 -- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4956.00	46.92	74.00	-27.08	33.66	32.62	12.40	34.07	2.31 -- -- Peak	2	7434.00	49.83	74.00	-24.17	32.76	36.83	15.19	36.42	1.47 -- -- Peak	3	7434.00	44.39	54.00	-9.61	27.32	36.83	15.19	36.42	1.47 -- -- Average	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4956.00</td><td>46.54</td><td>74.00</td><td>-27.46</td><td>33.28</td><td>32.62</td><td>12.40</td><td>34.07</td><td>2.31 -- -- Peak</td></tr><tr><td>2</td><td>7434.00</td><td>49.40</td><td>74.00</td><td>-24.60</td><td>32.33</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47 -- -- Peak</td></tr><tr><td>3</td><td>7434.00</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>27.12</td><td>36.83</td><td>15.19</td><td>36.42</td><td>1.47 -- -- Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4956.00	46.54	74.00	-27.46	33.28	32.62	12.40	34.07	2.31 -- -- Peak	2	7434.00	49.40	74.00	-24.60	32.33	36.83	15.19	36.42	1.47 -- -- Peak	3	7434.00	44.19	54.00	-9.81	27.12	36.83	15.19	36.42	1.47 -- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1	4956.00	46.92	74.00	-27.08	33.66	32.62	12.40	34.07	2.31 -- -- Peak																																																																																																																															
2	7434.00	49.83	74.00	-24.17	32.76	36.83	15.19	36.42	1.47 -- -- Peak																																																																																																																															
3	7434.00	44.39	54.00	-9.61	27.32	36.83	15.19	36.42	1.47 -- -- Average																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																															
1	4956.00	46.54	74.00	-27.46	33.28	32.62	12.40	34.07	2.31 -- -- Peak																																																																																																																															
2	7434.00	49.40	74.00	-24.60	32.33	36.83	15.19	36.42	1.47 -- -- Peak																																																																																																																															
3	7434.00	44.19	54.00	-9.81	27.12	36.83	15.19	36.42	1.47 -- -- Average																																																																																																																															



Mode	6	
	Harmonic	
	2400-2483.5_ Bluetooth-LE_GFSK_CH76_2478MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-03-03 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_250807 VERTICAL

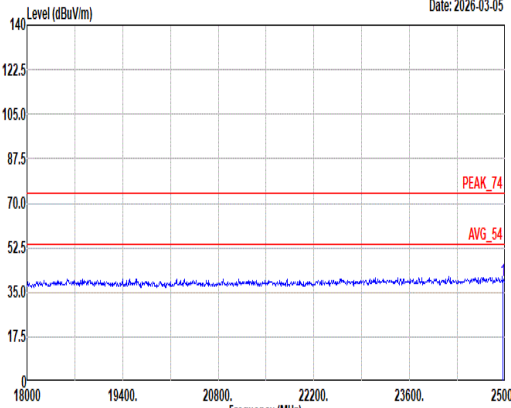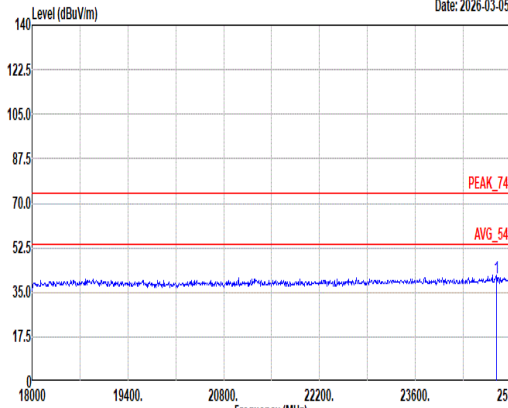


Mode	7																																																																																																		
	SHF																																																																																																		
ANT	0																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_74 1m BBHA9170_1223_250702 HORIZONTAL						Site : 03CH21-HY Condition: PEAK_74 1m BBHA9170_1223_250702 VERTICAL																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24964.75</td><td>39.70</td><td>74.00</td><td>-34.30</td><td>41.12</td><td>39.57</td><td>28.83</td><td>60.28</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24964.75	39.70	74.00	-34.30	41.12	39.57	28.83	60.28	-9.54	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24783.31</td><td>40.93</td><td>74.00</td><td>-33.07</td><td>42.34</td><td>39.57</td><td>28.73</td><td>60.17</td><td>-9.54</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24783.31	40.93	74.00	-33.07	42.34	39.57	28.73	60.17	-9.54	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	24964.75	39.70	74.00	-34.30	41.12	39.57	28.83	60.28	-9.54	--	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	24783.31	40.93	74.00	-33.07	42.34	39.57	28.73	60.17	-9.54	--	--	PEAK																																																																																							



Mode	8																																																																																																																																																																																					
	LF																																																																																																																																																																																					
ANT	0																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2026-03-05 Site : 03CH21-HY Condition: QP 3m LF_633038001_251126 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.97</td><td>20.49</td><td>40.00</td><td>-19.51</td><td>28.47</td><td>23.64</td><td>0.87</td><td>32.51</td><td>0.02 -- -- Peak</td></tr><tr><td>2</td><td>98.87</td><td>30.18</td><td>43.50</td><td>-13.32</td><td>44.79</td><td>16.05</td><td>1.75</td><td>32.46</td><td>0.05 -- -- Peak</td></tr><tr><td>3</td><td>216.24</td><td>24.72</td><td>46.00</td><td>-21.28</td><td>39.62</td><td>14.93</td><td>2.57</td><td>32.46</td><td>0.06 -- -- Peak</td></tr><tr><td>4</td><td>333.61</td><td>27.07</td><td>46.00</td><td>-18.93</td><td>36.38</td><td>19.92</td><td>3.21</td><td>32.51</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>717.73</td><td>34.93</td><td>46.00</td><td>-11.07</td><td>35.67</td><td>27.08</td><td>4.70</td><td>32.65</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>952.47</td><td>33.95</td><td>46.00</td><td>-12.05</td><td>28.44</td><td>31.11</td><td>5.40</td><td>31.20</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	20.49	40.00	-19.51	28.47	23.64	0.87	32.51	0.02 -- -- Peak	2	98.87	30.18	43.50	-13.32	44.79	16.05	1.75	32.46	0.05 -- -- Peak	3	216.24	24.72	46.00	-21.28	39.62	14.93	2.57	32.46	0.06 -- -- Peak	4	333.61	27.07	46.00	-18.93	36.38	19.92	3.21	32.51	0.07 -- -- Peak	5	717.73	34.93	46.00	-11.07	35.67	27.08	4.70	32.65	0.13 -- -- Peak	6	952.47	33.95	46.00	-12.05	28.44	31.11	5.40	31.20	0.20 -- -- Peak	Level (dBuV/m) Date: 2026-03-05 Site : 03CH21-HY Condition: QP 3m LF_633038001_251126 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>31.94</td><td>27.39</td><td>40.00</td><td>-12.61</td><td>35.92</td><td>23.07</td><td>0.89</td><td>32.51</td><td>0.02 -- -- Peak</td></tr><tr><td>2</td><td>97.90</td><td>29.38</td><td>43.50</td><td>-14.12</td><td>44.07</td><td>15.98</td><td>1.74</td><td>32.46</td><td>0.05 -- -- Peak</td></tr><tr><td>3</td><td>263.77</td><td>19.57</td><td>46.00</td><td>-26.43</td><td>28.83</td><td>20.29</td><td>2.85</td><td>32.47</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>459.71</td><td>26.32</td><td>46.00</td><td>-19.68</td><td>31.77</td><td>23.32</td><td>3.76</td><td>32.62</td><td>0.09 -- -- Peak</td></tr><tr><td>5</td><td>741.01</td><td>35.07</td><td>46.00</td><td>-10.93</td><td>34.51</td><td>28.24</td><td>4.76</td><td>32.58</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>953.44</td><td>33.97</td><td>46.00</td><td>-12.03</td><td>28.38</td><td>31.18</td><td>5.40</td><td>31.19</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	31.94	27.39	40.00	-12.61	35.92	23.07	0.89	32.51	0.02 -- -- Peak	2	97.90	29.38	43.50	-14.12	44.07	15.98	1.74	32.46	0.05 -- -- Peak	3	263.77	19.57	46.00	-26.43	28.83	20.29	2.85	32.47	0.07 -- -- Peak	4	459.71	26.32	46.00	-19.68	31.77	23.32	3.76	32.62	0.09 -- -- Peak	5	741.01	35.07	46.00	-10.93	34.51	28.24	4.76	32.58	0.14 -- -- Peak	6	953.44	33.97	46.00	-12.03	28.38	31.18	5.40	31.19	0.20 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.97	20.49	40.00	-19.51	28.47	23.64	0.87	32.51	0.02 -- -- Peak																																																																																																																																																																													
2	98.87	30.18	43.50	-13.32	44.79	16.05	1.75	32.46	0.05 -- -- Peak																																																																																																																																																																													
3	216.24	24.72	46.00	-21.28	39.62	14.93	2.57	32.46	0.06 -- -- Peak																																																																																																																																																																													
4	333.61	27.07	46.00	-18.93	36.38	19.92	3.21	32.51	0.07 -- -- Peak																																																																																																																																																																													
5	717.73	34.93	46.00	-11.07	35.67	27.08	4.70	32.65	0.13 -- -- Peak																																																																																																																																																																													
6	952.47	33.95	46.00	-12.05	28.44	31.11	5.40	31.20	0.20 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	31.94	27.39	40.00	-12.61	35.92	23.07	0.89	32.51	0.02 -- -- Peak																																																																																																																																																																													
2	97.90	29.38	43.50	-14.12	44.07	15.98	1.74	32.46	0.05 -- -- Peak																																																																																																																																																																													
3	263.77	19.57	46.00	-26.43	28.83	20.29	2.85	32.47	0.07 -- -- Peak																																																																																																																																																																													
4	459.71	26.32	46.00	-19.68	31.77	23.32	3.76	32.62	0.09 -- -- Peak																																																																																																																																																																													
5	741.01	35.07	46.00	-10.93	34.51	28.24	4.76	32.58	0.14 -- -- Peak																																																																																																																																																																													
6	953.44	33.97	46.00	-12.03	28.38	31.18	5.40	31.19	0.20 -- -- Peak																																																																																																																																																																													

Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE GFSK for 1Mbps	15.97	46	21.74	22kHz
Bluetooth - LE GFSK for 2Mbps	10.71	27	37.04	39kHz

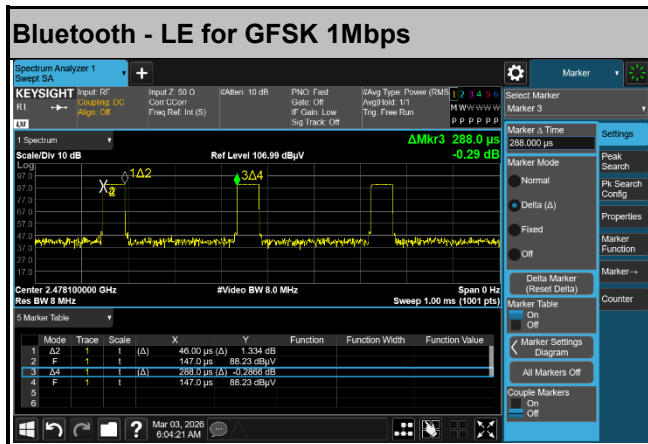

————THE END————