

#01_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7) @ 2462 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.497 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.11 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.182 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 17.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.457 W/kg

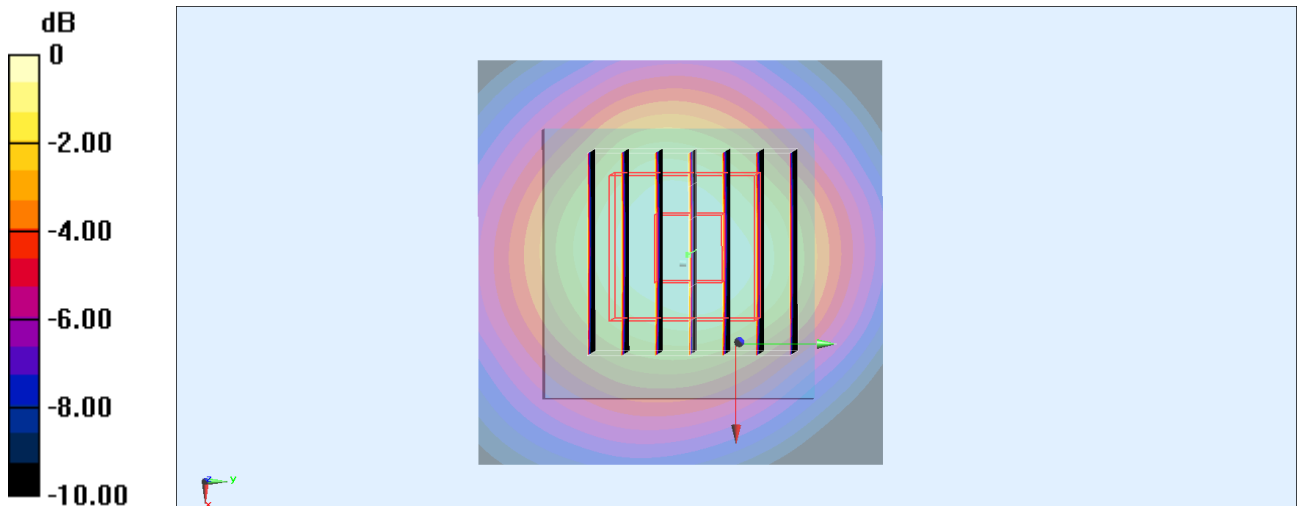

0 dB = 0.457 W/kg = -3.40 dBW/kg

#02_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch52

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.529$ S/m; $\epsilon_r = 34.536$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.63, 5.81, 5.62) @ 5260 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.241 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.250 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.049 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 0.390 W/kg

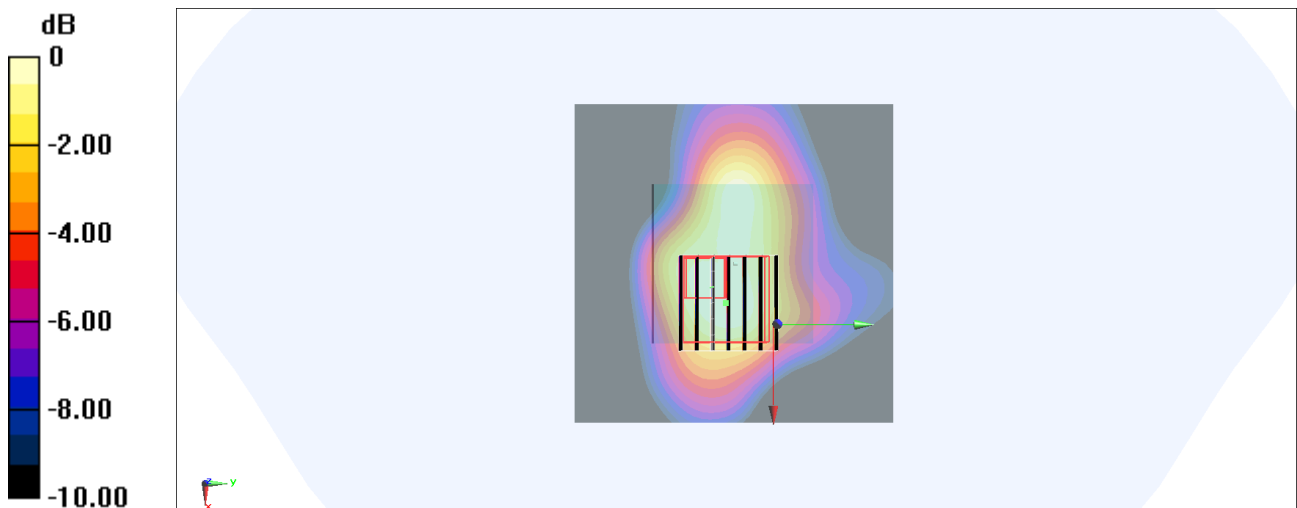

0 dB = 0.241 W/kg = -6.18 dBW/kg

#03_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch100

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5500 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.788$ S/m; $\epsilon_r = 34.031$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.21, 5.37, 5.19) @ 5500 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.188 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.433 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.018 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.170 W/kg

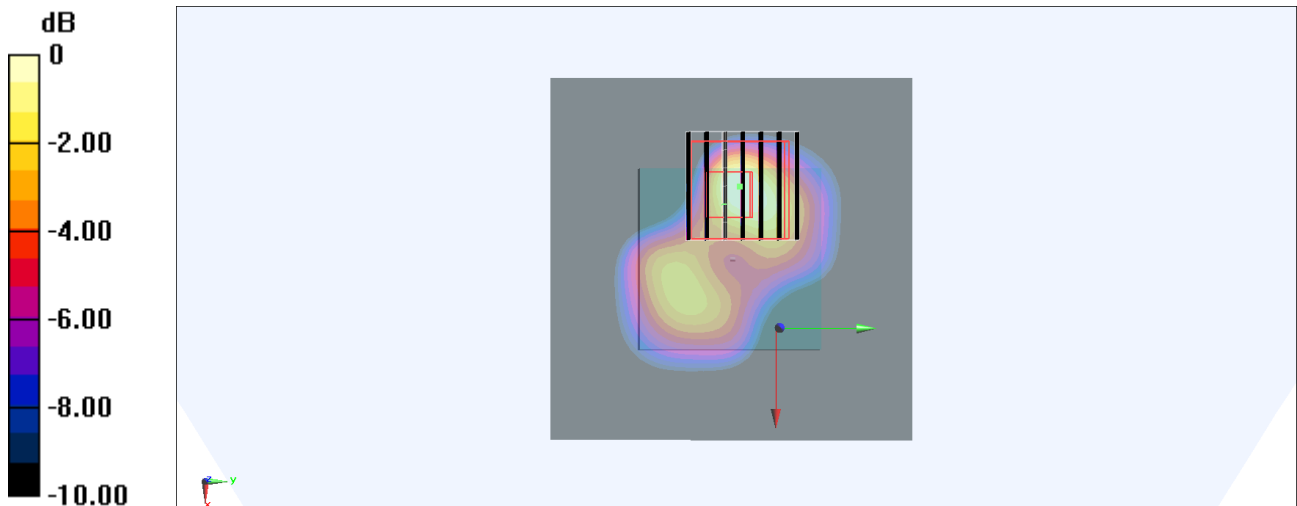

0 dB = 0.170 W/kg = -7.70 dBW/kg

#04_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch157

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5785 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.138$ S/m; $\epsilon_r = 33.575$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09) @ 5785 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.760 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.797 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.116 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.887 W/kg

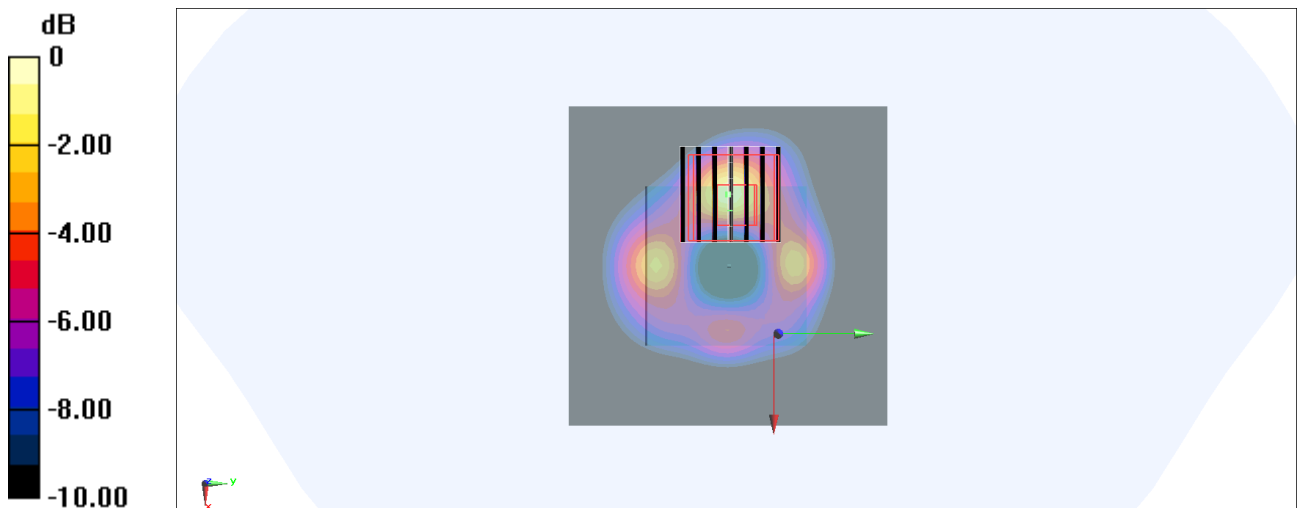

0 dB = 0.887 W/kg = -0.52 dBW/kg

#05_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch169

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5845 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5845$ MHz; $\sigma = 5.176$ S/m; $\epsilon_r = 33.381$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09) @ 5845 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.572 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.346 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.098 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

Maximum value of SAR (measured) = 0.778 W/kg

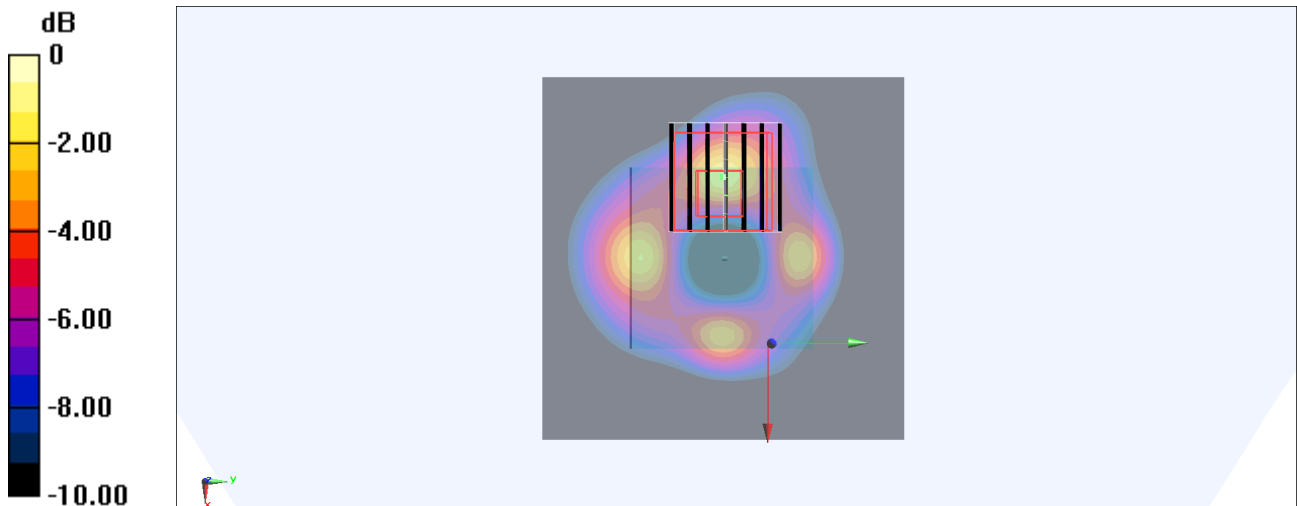

0 dB = 0.778 W/kg = -1.09 dBW/kg

#06_Bluetooth_1Mbps_Front_10mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7) @ 2402 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.330 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.67 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.775 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 0.324 W/kg

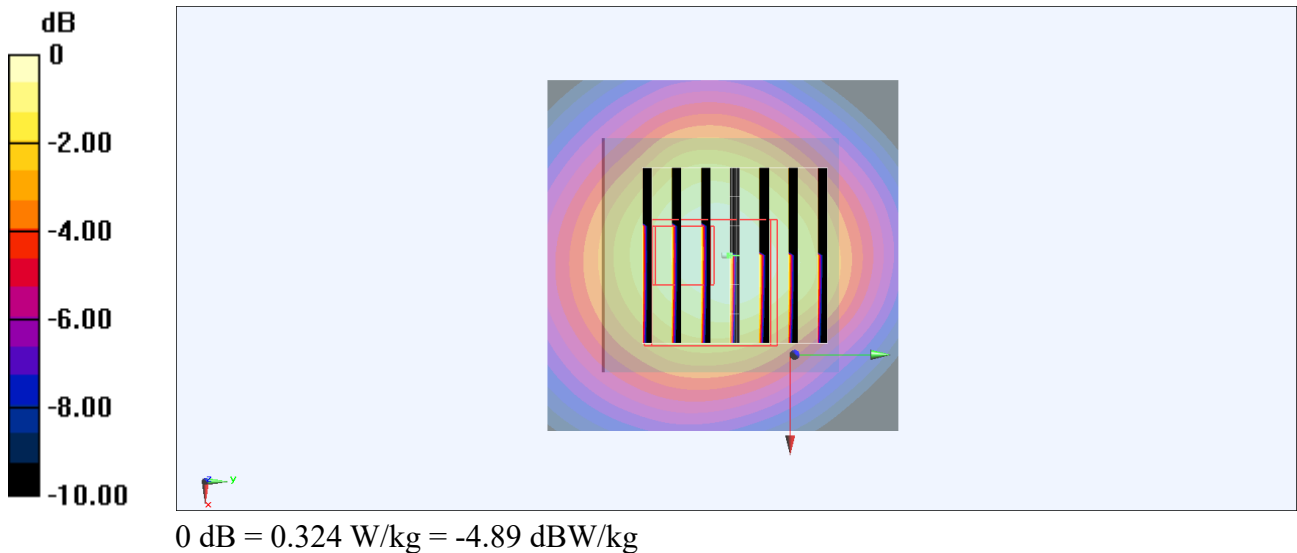

#07_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: UID 10415 - AAA, IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7) @ 2462 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.206 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.26 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.072 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.217 W/kg

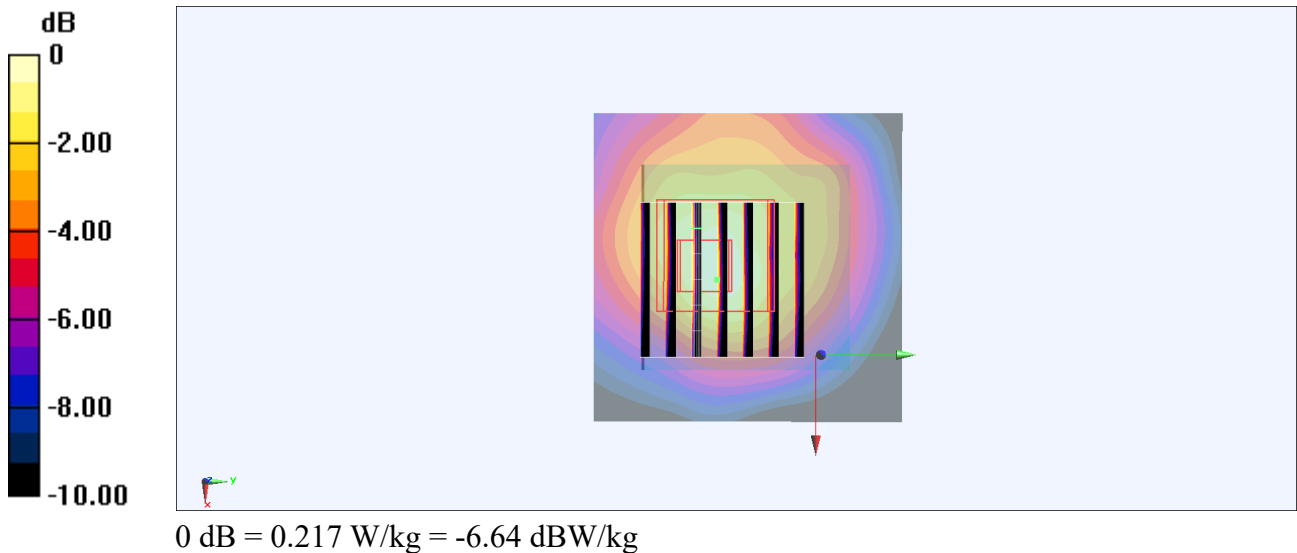

#08_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch52

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.529$ S/m; $\epsilon_r = 34.536$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.63, 5.81, 5.62) @ 5260 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.389 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.446 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.038 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.412 W/kg

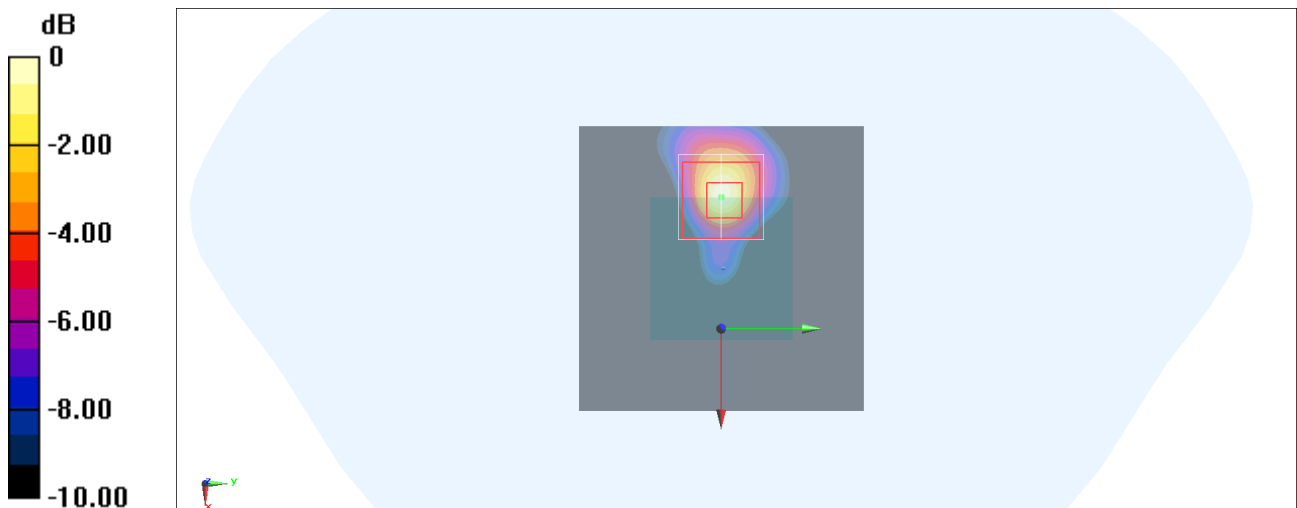

0 dB = 0.412 W/kg = -3.85 dBW/kg

#09_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch100

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5500 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.788$ S/m; $\epsilon_r = 34.031$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.21, 5.37, 5.19) @ 5500 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.119 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.852 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.008 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.122 W/kg

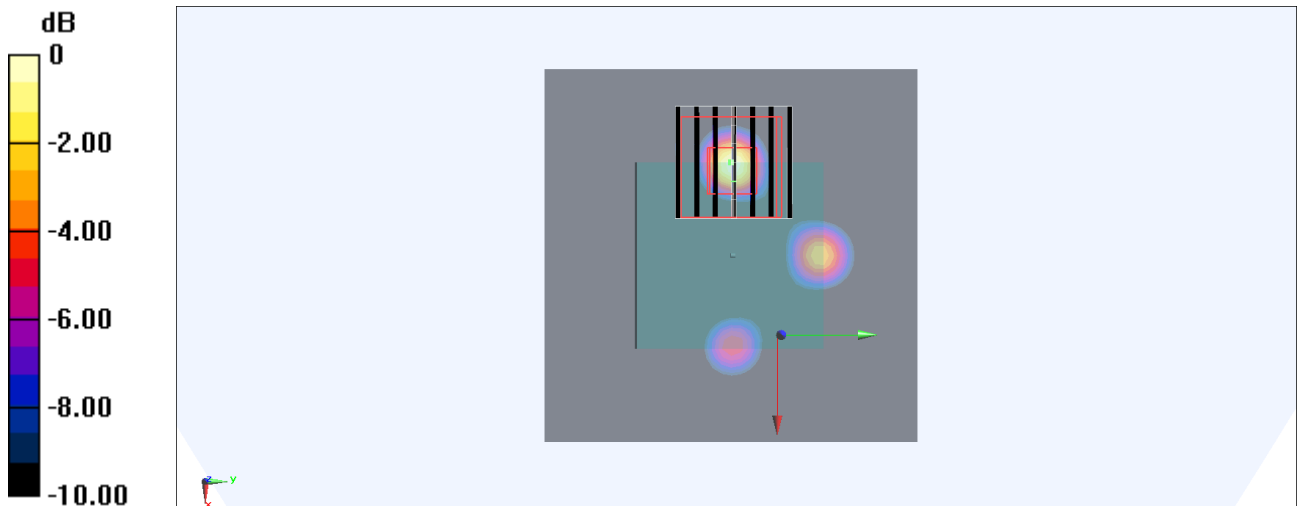

0 dB = 0.122 W/kg = -9.14 dBW/kg

#10_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch157

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5785 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.138$ S/m; $\epsilon_r = 33.575$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09) @ 5785 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.288 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.247 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.016 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.341 W/kg

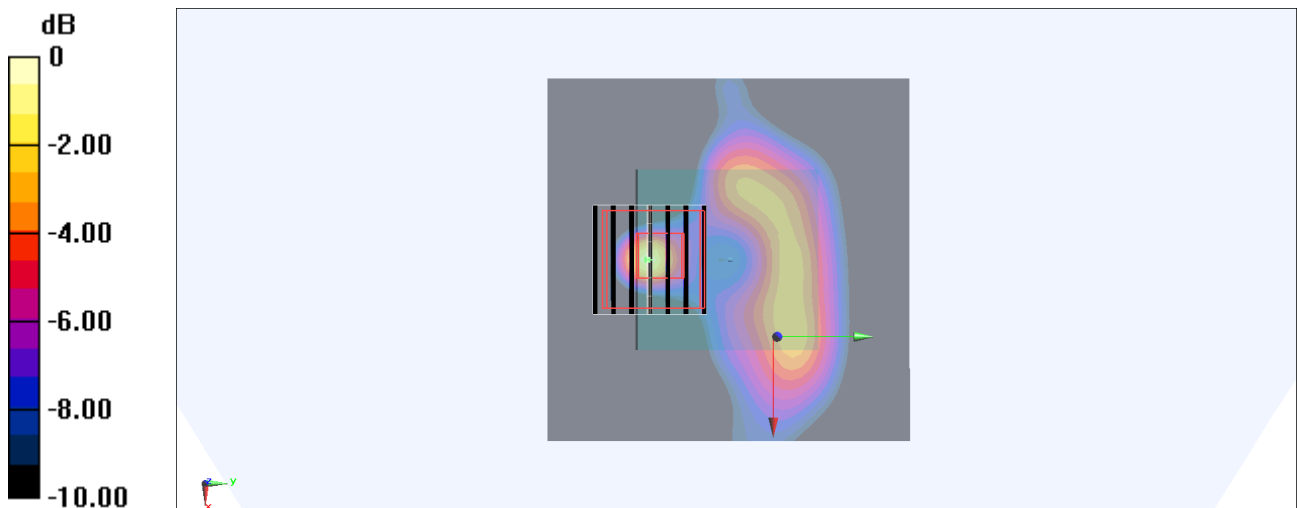

0 dB = 0.341 W/kg = -4.67 dBW/kg

#11_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch169

Communication System: UID 10583 - AAD, IEEE 802.11a/h WiFi 5 GHz; Frequency: 5845 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 5845$ MHz; $\sigma = 5.176$ S/m; $\epsilon_r = 33.381$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09) @ 5845 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (41x41x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.323 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.091 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.011 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.340 W/kg

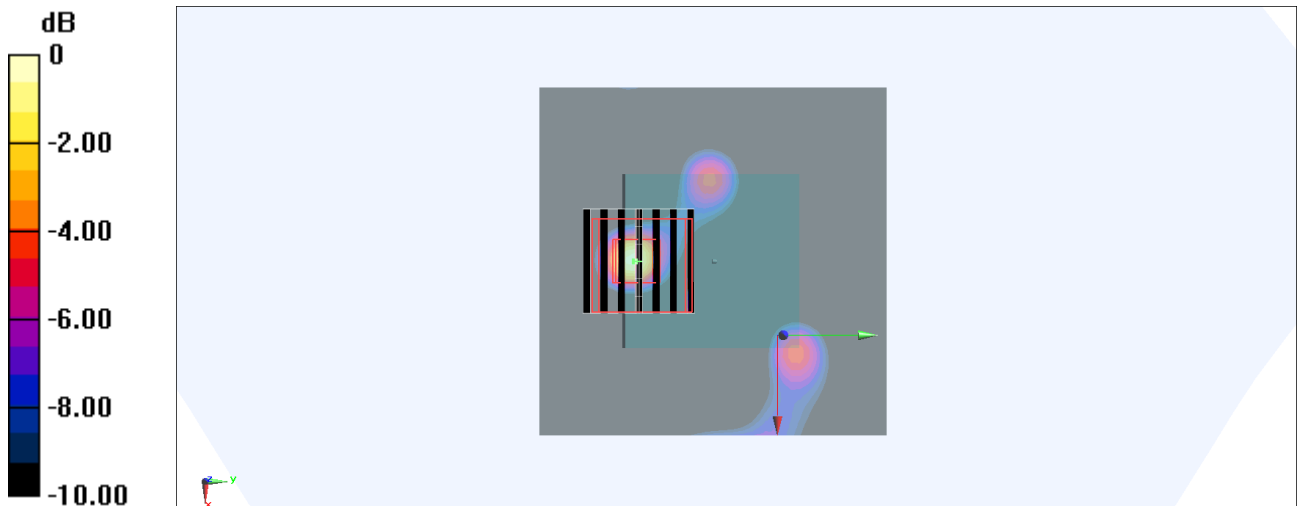

0 dB = 0.340 W/kg = -4.69 dBW/kg

#12_Bluetooth_1Mbps_Back_0mm_Ch0

Communication System: UID 10032 - CAA, IEEE 802.15.1 Bluetooth; Frequency: 2402 MHz

Medium: HSL_600~7200_260312 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 39.623$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7) @ 2402 MHz; Calibrated: 2025/7/1
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn376; Calibrated: 2025/5/6
- Phantom: SAM_Right; Type: QD000P40CD; Serial: TP:1681
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.141 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.362 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.040 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.132 W/kg

