

Date: 2025-08-09

#01_GSM850_GPRS 4 Tx slots_Right Cheek_0mm_Ch128

Communication System: GPRS-FDD; Frequency: 824.200 MHz

Medium: HSL_835_250809 Medium parameters used: $f = 824.200$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.818 W/kg; SAR (10g) = 0.544 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.798 W/kg; SAR (8g) = 0.523 W/kg; SAR (10g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.9 %

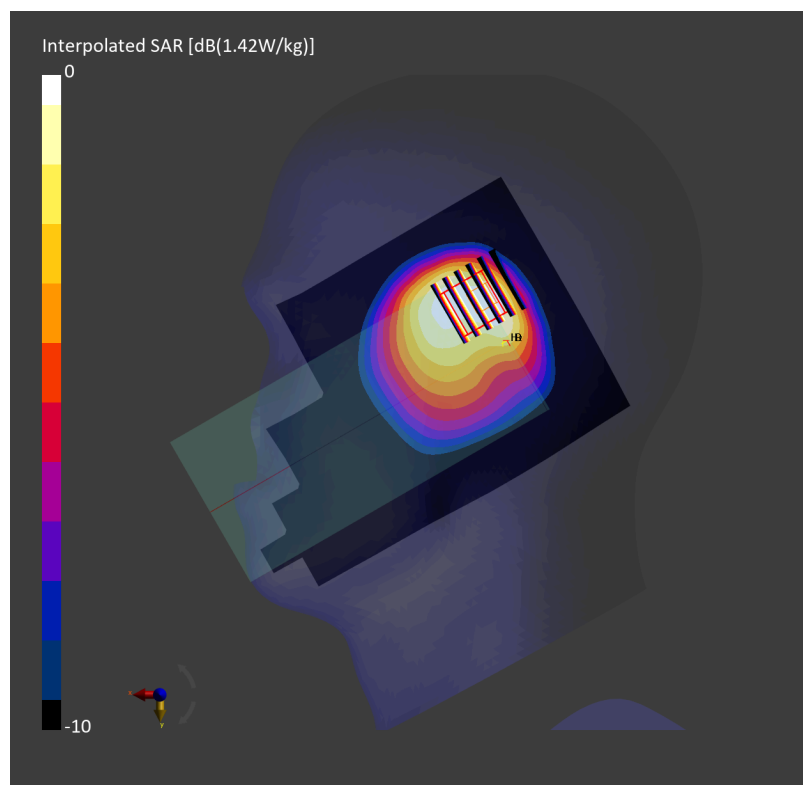

Date: 2025-08-05

#02_GSM1900_GPRS 4 Tx slots_Right Cheek_0mm_Ch512

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_1900_250805 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.183 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.329 W/kg; SAR (8g) = 0.224 W/kg; SAR (10g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 92.7 %

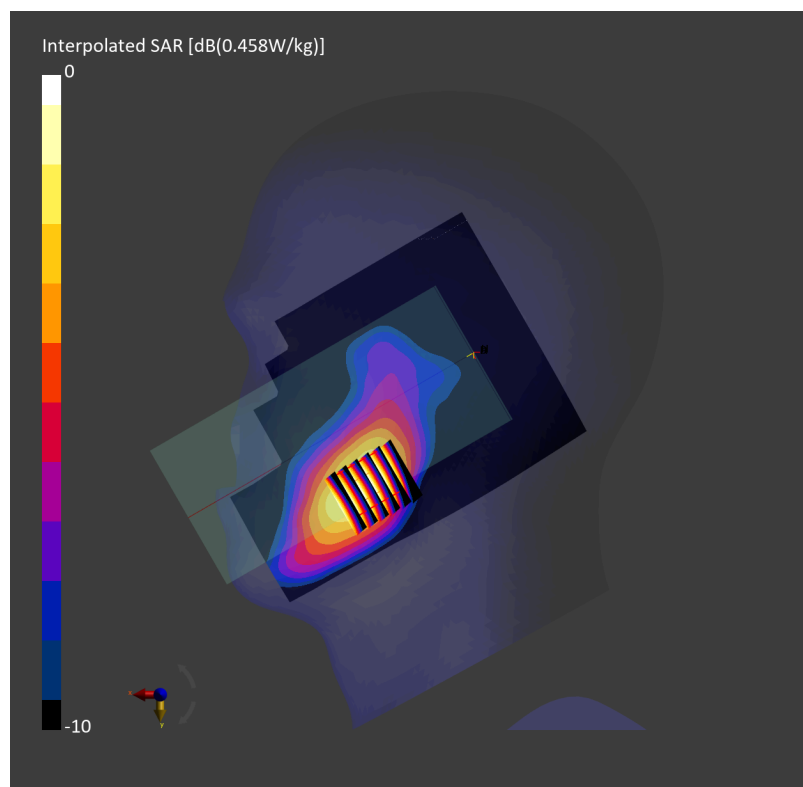

Date: 2025-08-05

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_1900_250805 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.682 W/kg; SAR (10g) = 0.399 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.733 W/kg; SAR (8g) = 0.485 W/kg; SAR (10g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.6 %

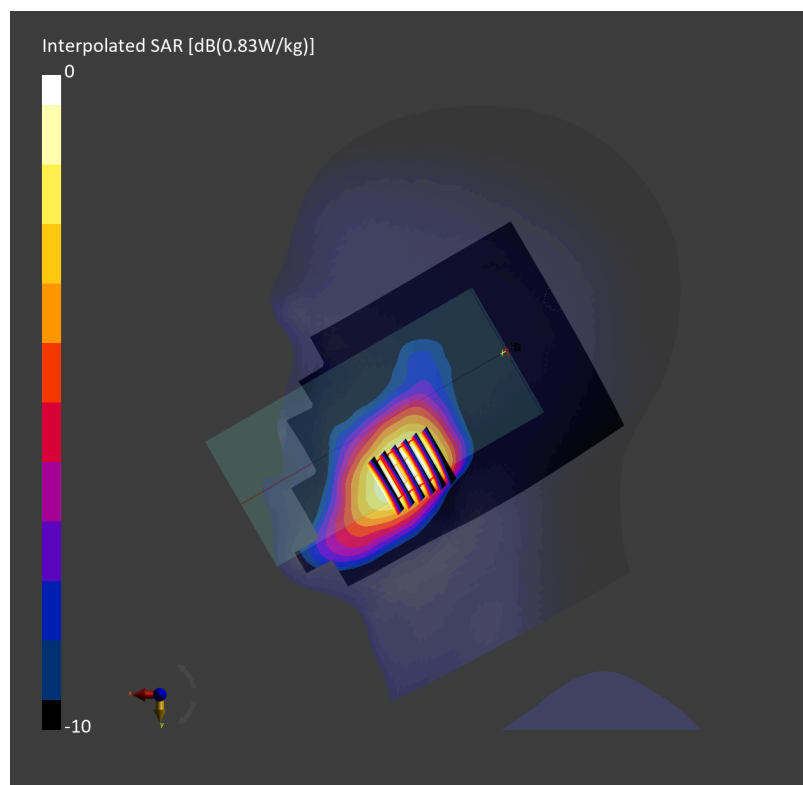

Date: 2025-08-07

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_1750_250807 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.196 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.348 W/kg; SAR (8g) = 0.240 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 93.1 %

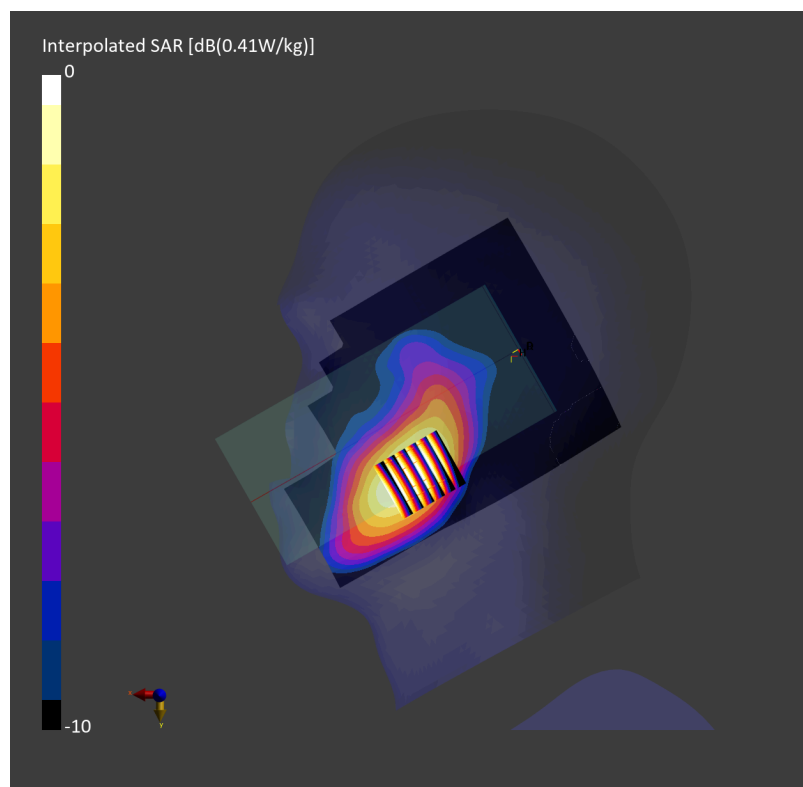

Date: 2025-08-09

#05_WCDMA V_RMC 12.2Kbps_Right Tilted_0mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_835_250809 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.591 W/kg;


Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.928 W/kg; SAR (8g) = 0.514 W/kg; SAR (10g) = 0.482 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

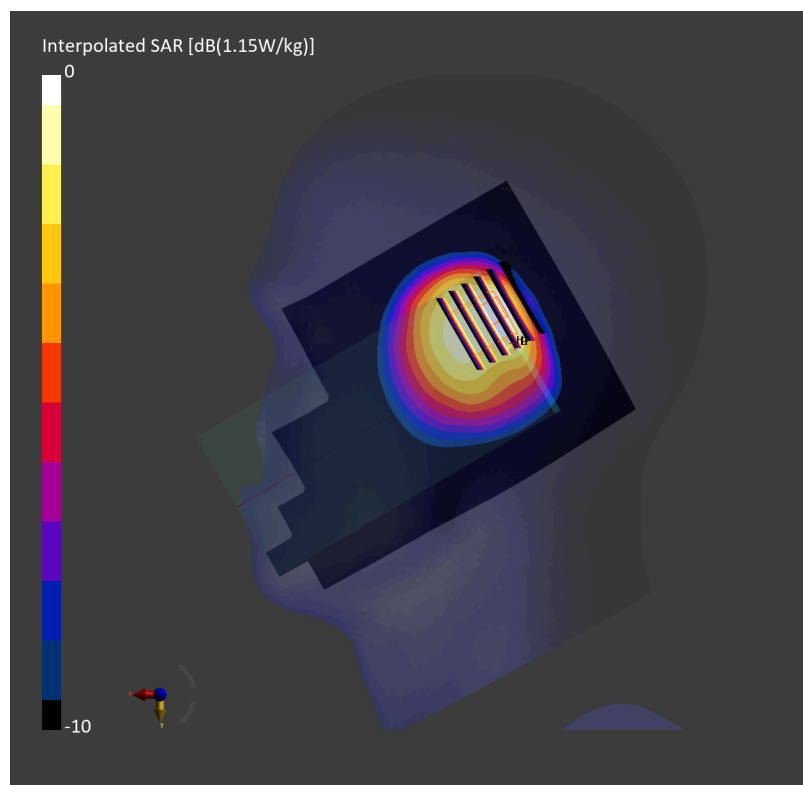

Date: 2025-08-01

#06_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_2600_250801 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.336 W/kg; SAR (10g) = 0.173 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.343 W/kg; SAR (8g) = 0.206 W/kg; SAR (10g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

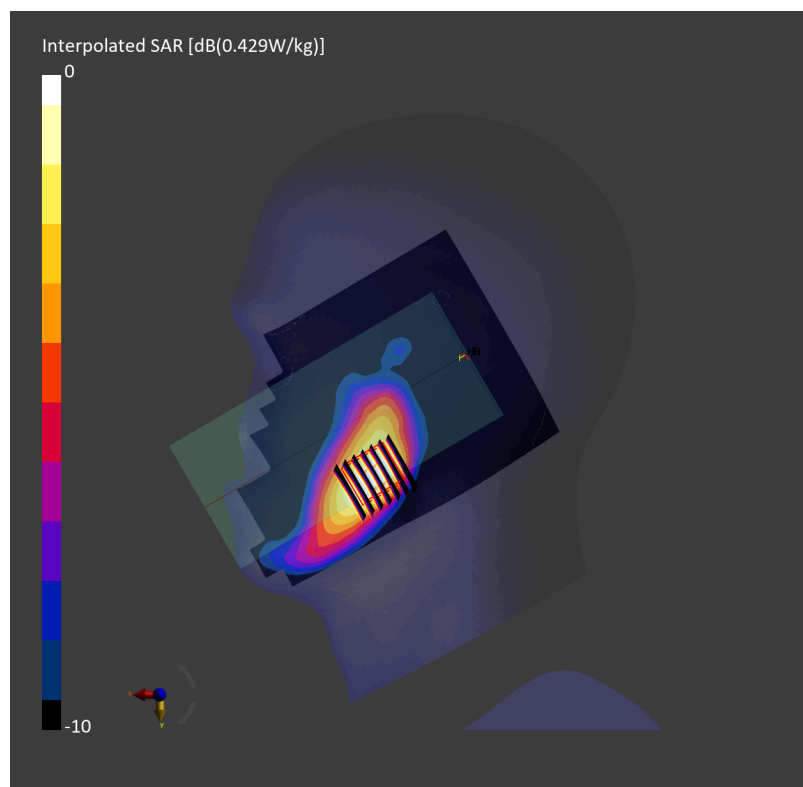

Date: 2025-08-11

#07_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_250811 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.847 W/kg; SAR (10g) = 0.545 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.746 W/kg; SAR (8g) = 0.459 W/kg; SAR (10g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.5 %

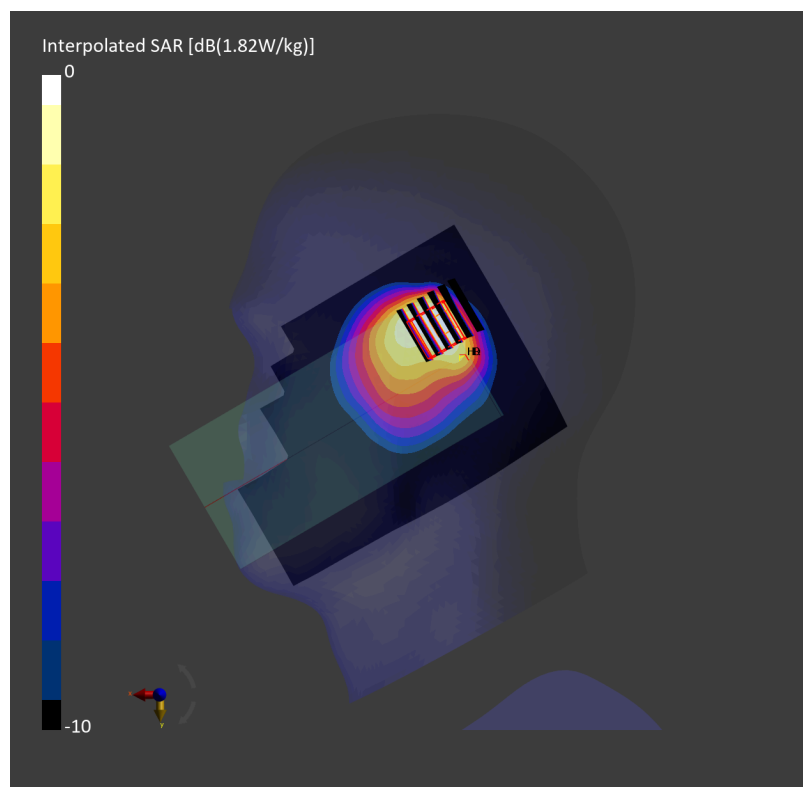

Date: 2025-08-05

#08_LTE Band 2_20M_QPSK_1_0_Right Cheek_0mm_Ch18700

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_1900_250805 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.323 W/kg; SAR (10g) = 0.184 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.338 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 92.4 %

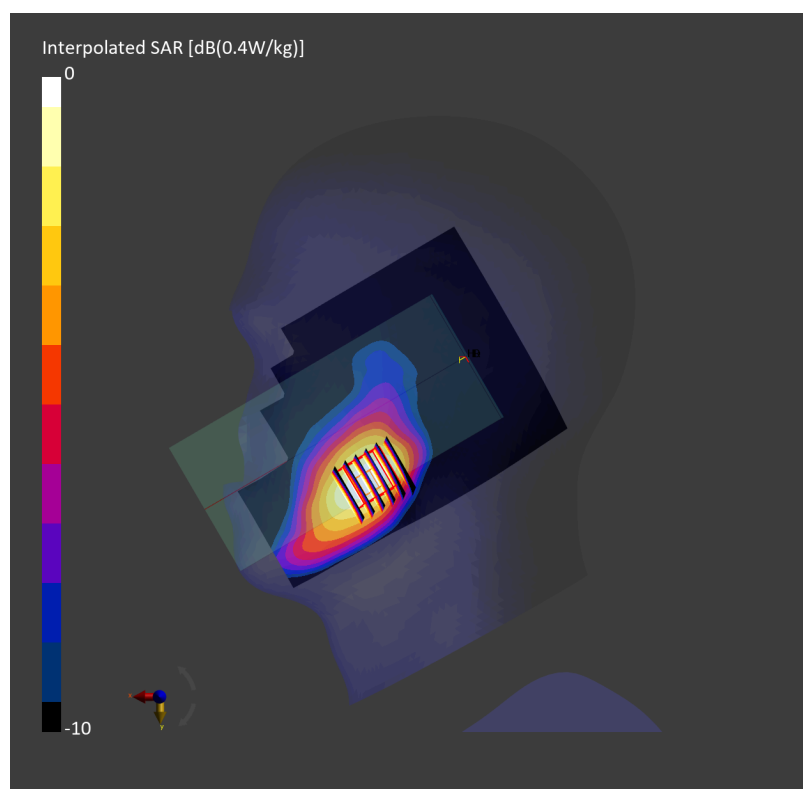

Date: 2025-08-09

#09_LTE Band 26_15M_QPSK_36_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz;

Medium: HSL_835_250809 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.802 W/kg; SAR (10g) = 0.524 W/kg;


Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.757 W/kg; SAR (8g) = 0.473 W/kg; SAR (10g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.0 %

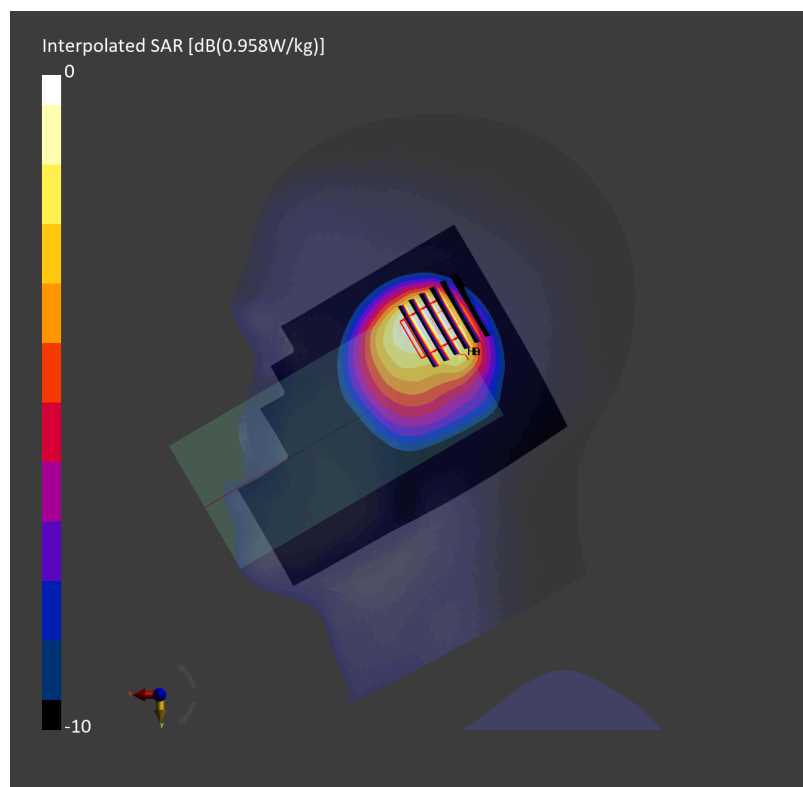

Date: 2025-08-07

#10_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz

Medium: HSL_1750_250807 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.316 W/kg; SAR (10g) = 0.185 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.329 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 92.4 %

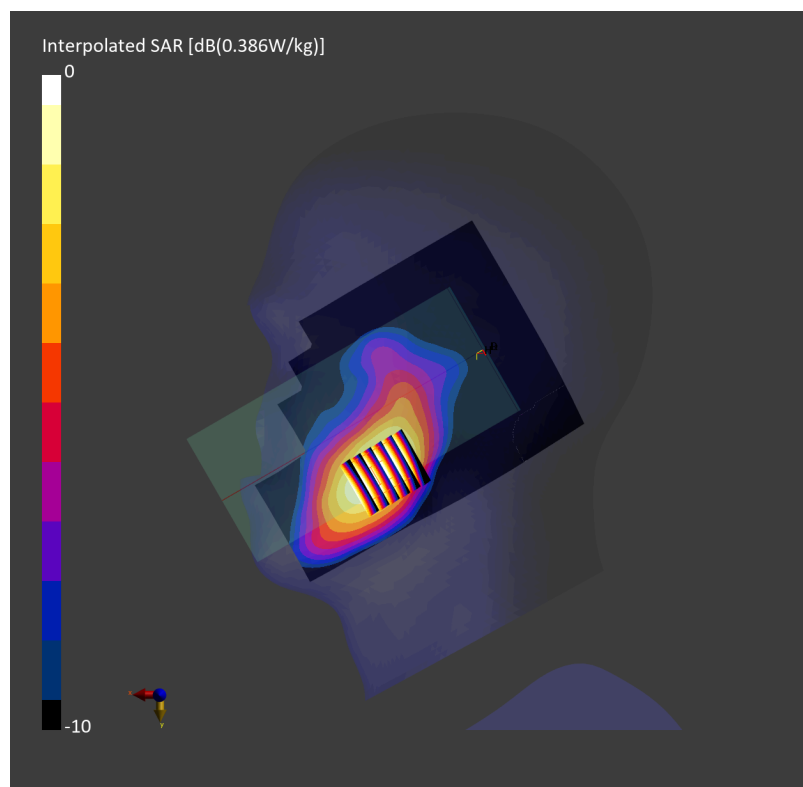

Date: 2025-08-02

#11_LTE Band 41_20M_QPSK_1_0_Right Cheek_0mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_2600_250802 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.260 W/kg; SAR (10g) = 0.133 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.269 W/kg; SAR (8g) = 0.160 W/kg; SAR (10g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

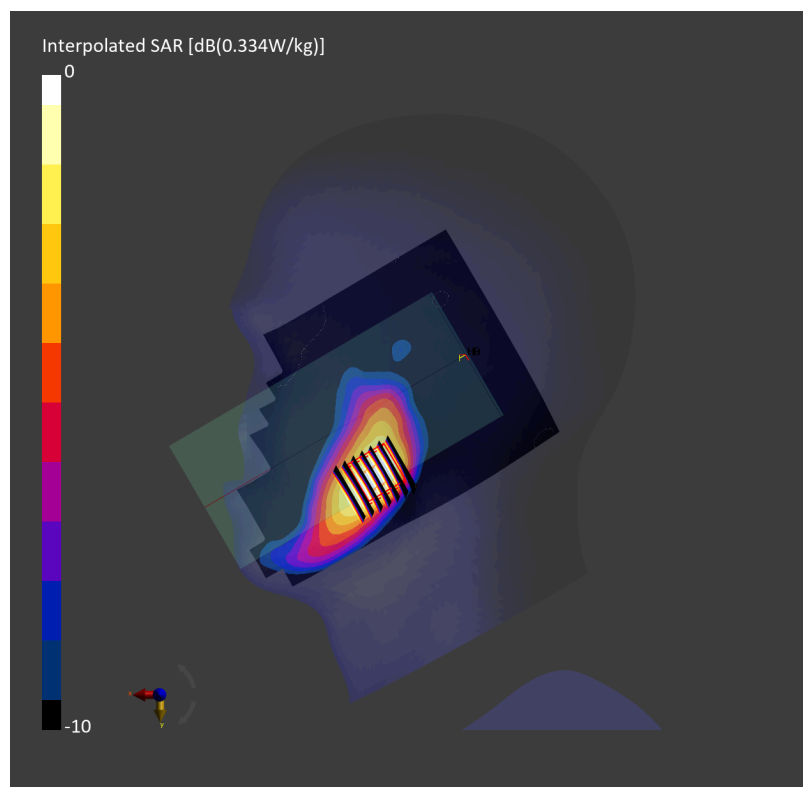

Date: 2025-08-01

#12_FR1 n7_50M_BPSK_135_68_Right Cheek_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_2600_250801 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.187 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.362 W/kg; SAR (8g) = 0.220 W/kg; SAR (10g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

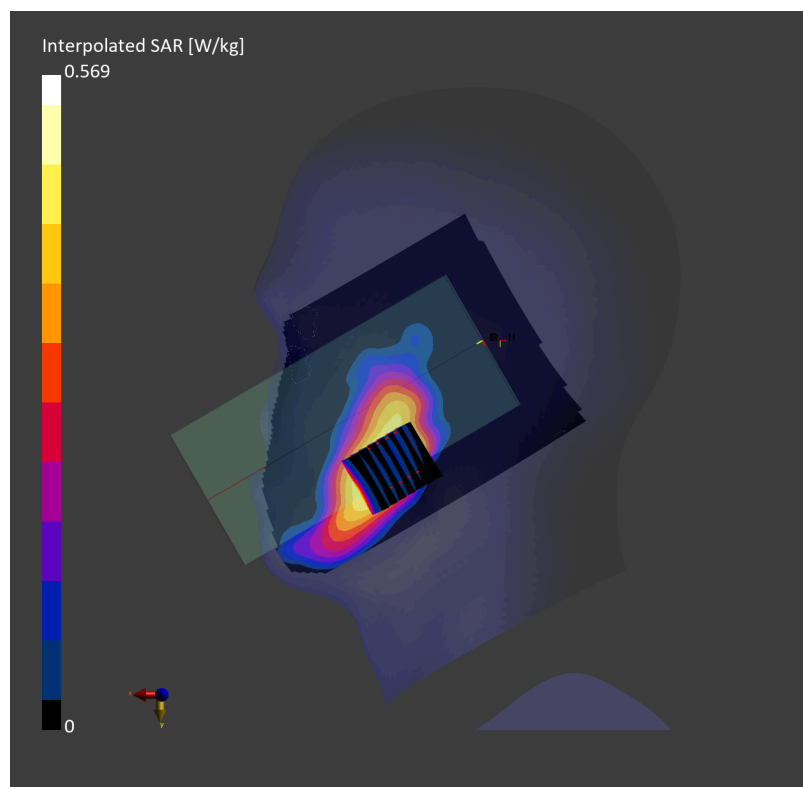

Date: 2025-08-12

#13_FR1 n12_15M_BPSK_1_1_Right Cheek_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_250812 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.63, 9.34, 9.85); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.809 W/kg; SAR (10g) = 0.529 W/kg;


Zoom Scan (38.4 mm x 38.4 mm x 33.4 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.724 W/kg; SAR (8g) = 0.484 W/kg; SAR (10g) = 0.457 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

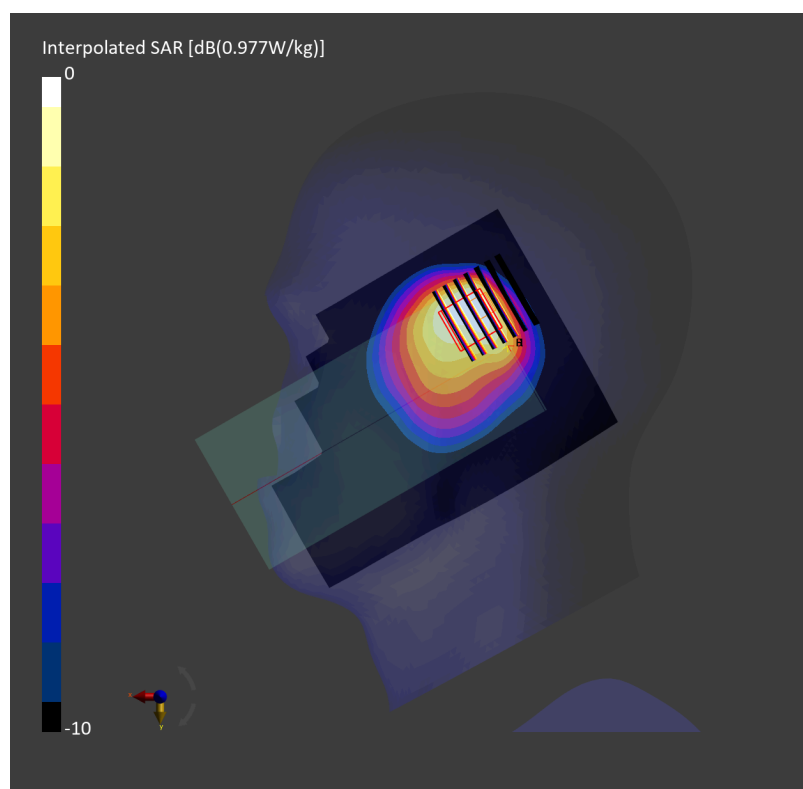

Date: 2025-08-06

#14_FR1 n2_40M_BPSK_108_54_Right Cheek_0mm_Ch376000

Communication System: 5G NR; Frequency: 1880.000 MHz

Medium: HSL_1900_250806 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.58, 7.36, 7.76); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: CW, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.311 W/kg; SAR (10g) = 0.180 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.321 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 91.8 %

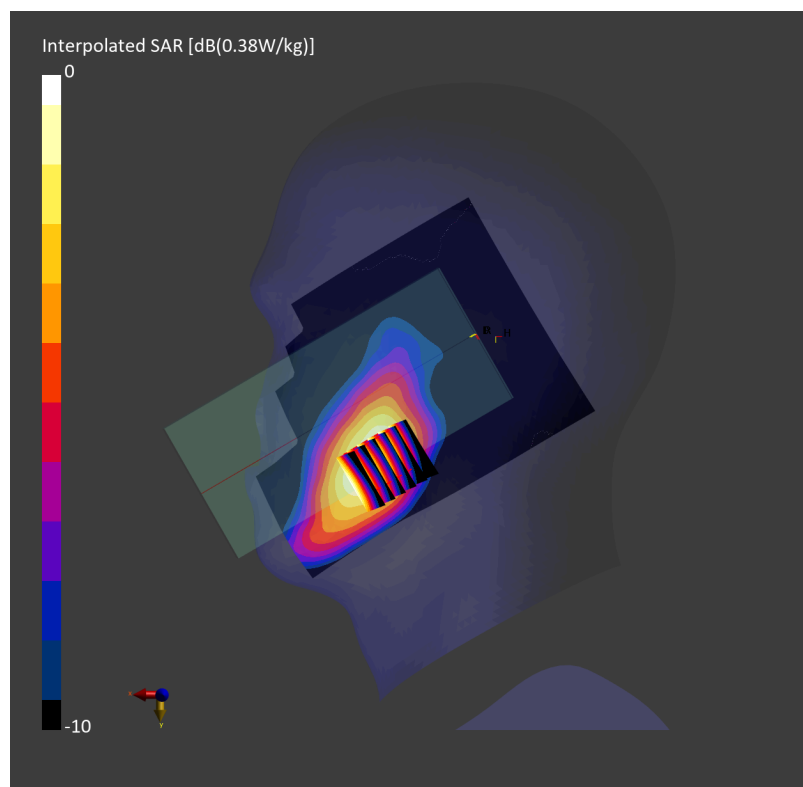

Date: 2025-08-10

#15_FR1 n26_20M_BPSK_1_1_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_835_250810 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(9.45, 9.17, 9.66); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.495 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.771 W/kg; SAR (8g) = 0.489 W/kg; SAR (10g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

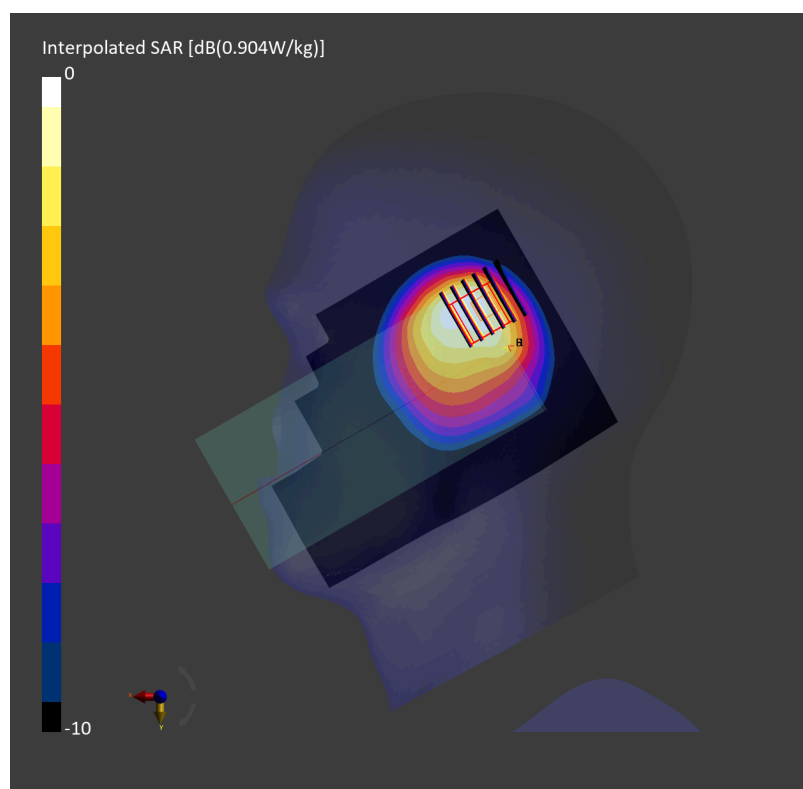

Date: 2025-08-08

#16_FR1 n66_40M_BPSK_108_54_Right Cheek_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_1750_250808 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.75, 7.52, 7.93); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.343 W/kg; SAR (10g) = 0.201 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.357 W/kg; SAR (8g) = 0.248 W/kg; SAR (10g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 92.2 %

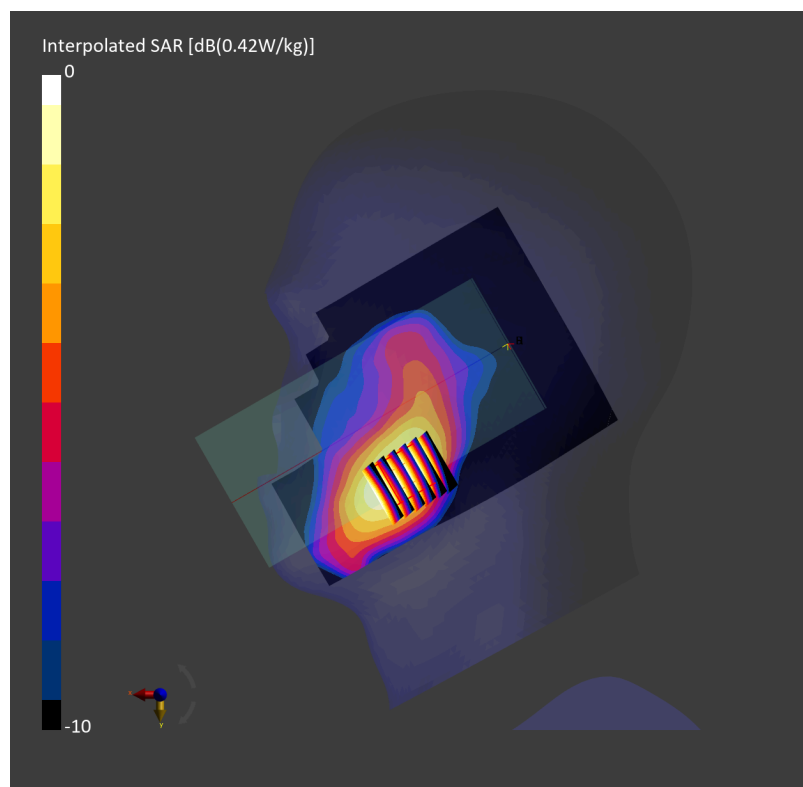

Date: 2025-08-03

#17_FR1 n41_100M_BPSK_1_1_Right Cheek_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_2600_250803 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 2.00$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(6.86, 6.65, 7.02); Calibrated: 2025-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.719 W/kg; SAR (10g) = 0.375 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.793 W/kg; SAR (8g) = 0.469 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

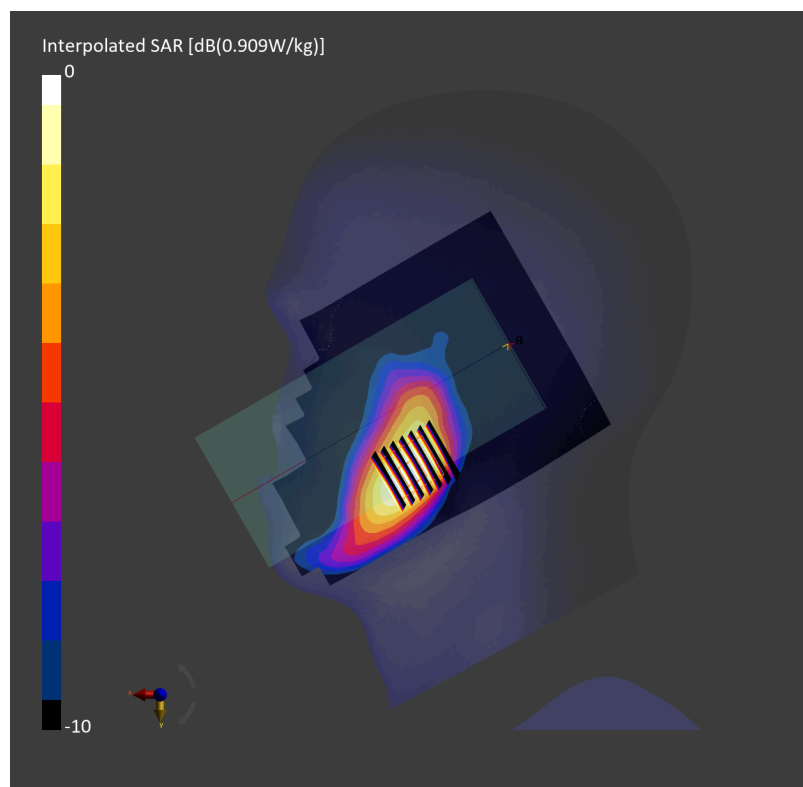

Date: 2025-08-25

#18_WLAN2.4GHz_802.11b 1Mbps_Left Tilted_0mm_Ch13;Ant 4

Communication System: 802.11b; Frequency: 2472.000 MHz

Medium: HSL_2450_250825 Medium parameters used: $f = 2472.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7.0); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.849 W/kg; SAR (10g) = 0.331 W/kg;

TSL Correction: No correction

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.850 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: No correction

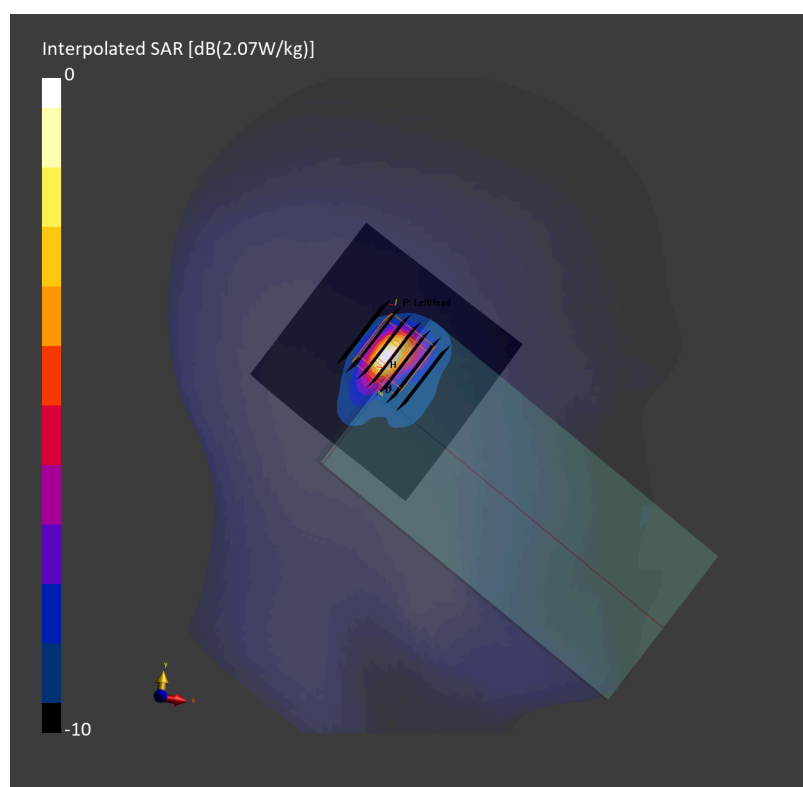

Date: 2025-08-26

#19_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch48;Ant 4+3

Communication System: 802.11a; Frequency: 5240.000 MHz

Medium: HSL_5G_250826 Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.63, 5.81, 5.62); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.605 W/kg; SAR (10g) = 0.232 W/kg;

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.18 dB

SAR (1g) = 0.243 W/kg; SAR (8g) = 0.106 W/kg; SAR (10g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.9 %

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.608 W/kg; SAR (8g) = 0.260 W/kg; SAR (10g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

TSL Correction: No correction

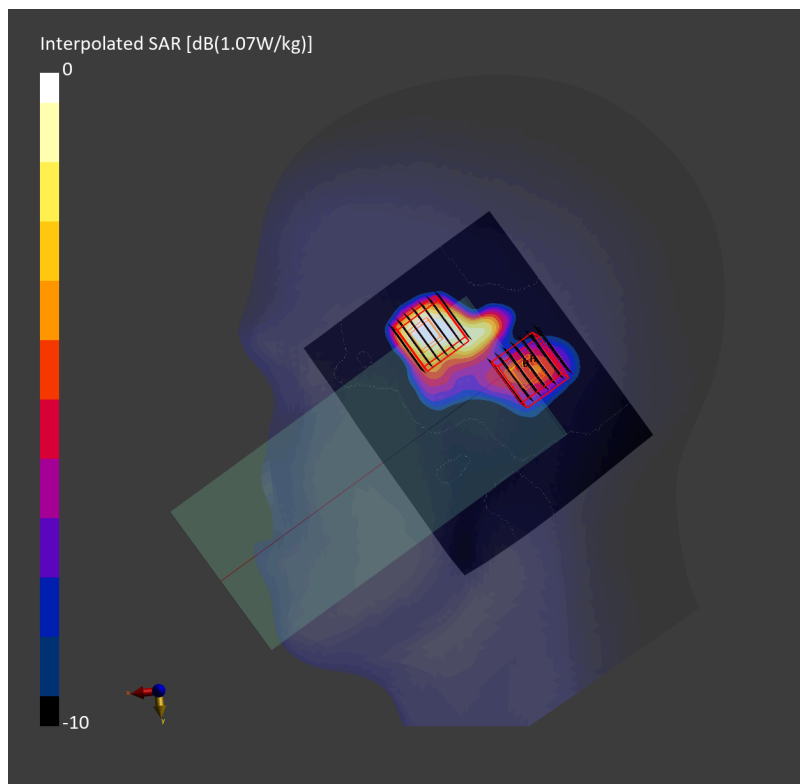

Date: 2025-08-26

#20_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch52;Ant 4+3

Communication System: 802.11a; Frequency: 5260.000 MHz

Medium: HSL_5G_250826 Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.61$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.63, 5.81, 5.62); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.752 W/kg; SAR (10g) = 0.289 W/kg;

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.381 W/kg; SAR (8g) = 0.148 W/kg; SAR (10g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.0 %

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.754 W/kg; SAR (8g) = 0.332 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

TSL Correction: No correction

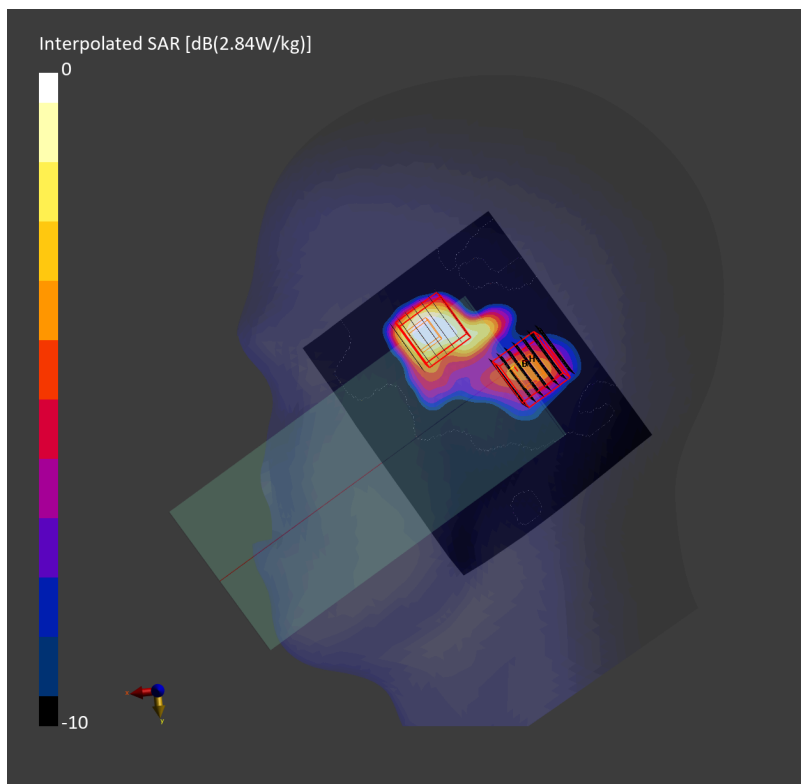

Date: 2025-08-27

#21_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch138;Ant 4+3

Communication System: 802.11ac; Frequency: 5690.000 MHz

Medium: HSL_5G_250827 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.21, 5.37, 5.19); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.233 W/kg;

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.095 W/kg; SAR (10g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.8 %

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.882 W/kg; SAR (8g) = 0.282 W/kg; SAR (10g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.0 %

TSL Correction: No correction

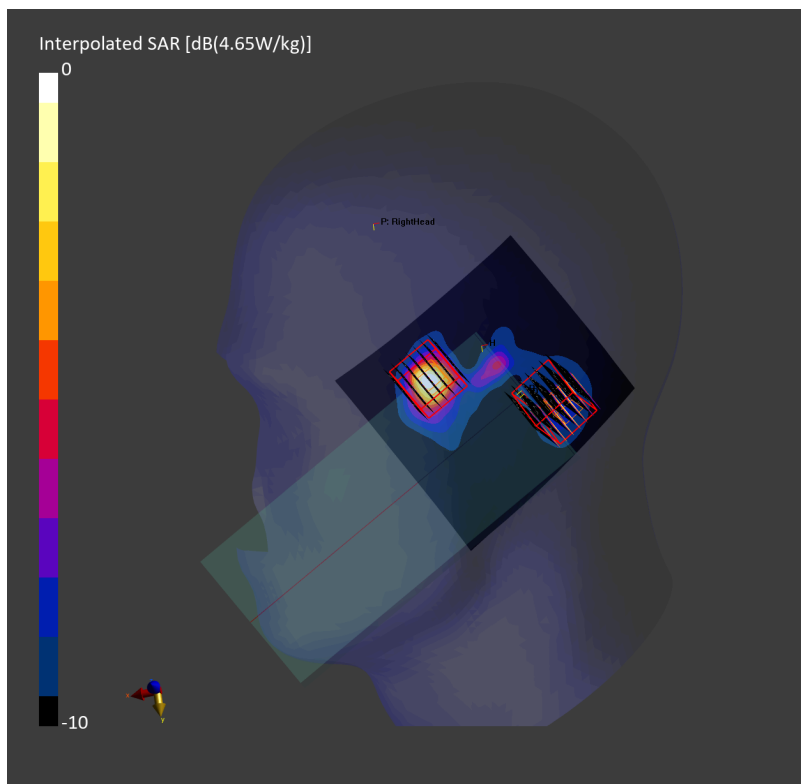

Date: 2025-08-28

#22_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155;Ant 4+3

Communication System: 802.11ac; Frequency: 5775.000 MHz

Medium: HSL_5G_250828 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.851 W/kg; SAR (10g) = 0.280 W/kg;

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.181 W/kg; SAR (8g) = 0.068 W/kg; SAR (10g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.3 %

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 0.986 W/kg; SAR (8g) = 0.330 W/kg; SAR (10g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.1 %

TSL Correction: No correction

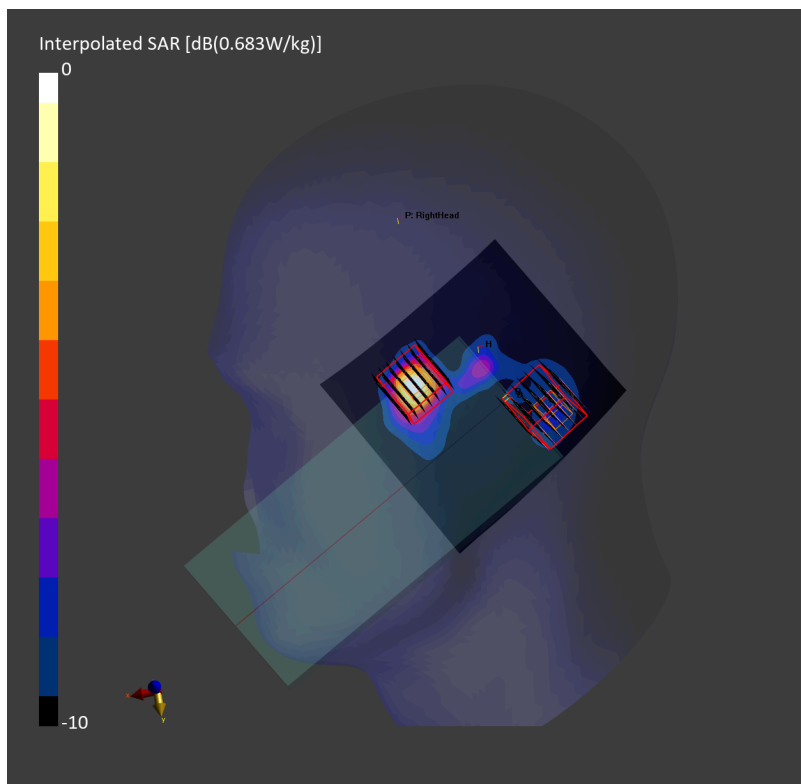

Date: 2025-08-28

#23_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch171;Ant 4+3

Communication System: 802.11ac; Frequency: 5855.000 MHz

Medium: HSL_5G_250828 Medium parameters used: $f = 5855.000$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.1, 5.27, 5.09); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (100.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.236 W/kg;

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.173 W/kg; SAR (8g) = 0.061 W/kg; SAR (10g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.9 %

TSL Correction: No correction

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.889 W/kg; SAR (8g) = 0.283 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.9 %

TSL Correction: No correction

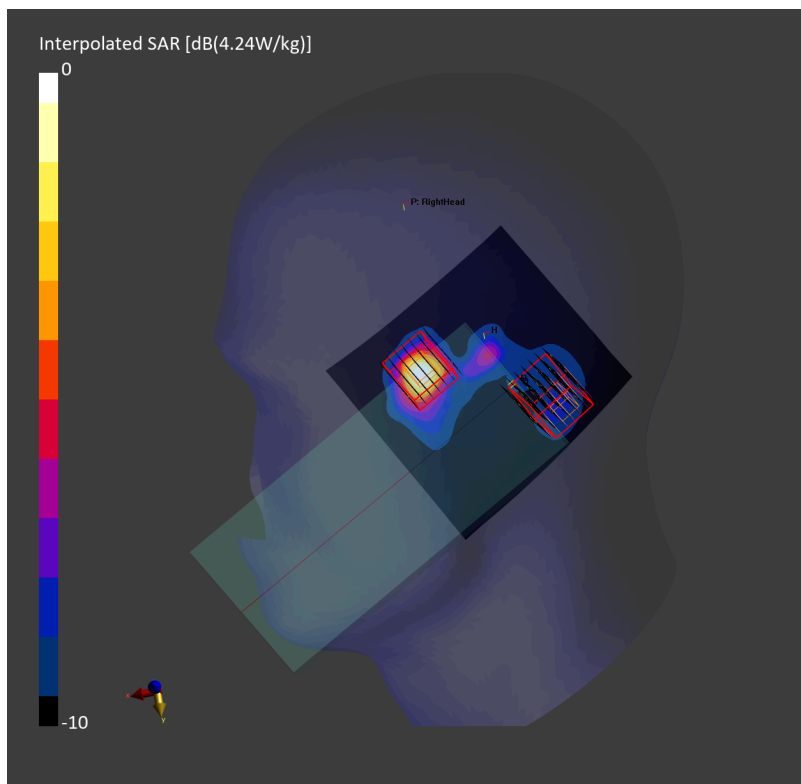

Date: 2025-08-30

#24_WLAN6GHz_802.11ax-HE80 MCS0_Left Tilted_0mm_Ch71;Ant 4

Communication System: 802.11ax; Frequency: 6305.000 MHz

Medium: HSL_6G_250830 Medium parameters used: $f = 6305.000$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(5.26, 5.42, 5.25); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (102.0 mm x 102.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.393 W/kg; SAR (10g) = 0.127 W/kg;

TSL Correction: No correction

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.02 dB


SAR (1g) = 0.466 W/kg; SAR (8g) = 0.162 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 45.7 %

psAPD (1.0cm², sq) = 4.66 [W/m²]; psAPD (4.0cm², sq) = 3.24 [W/m²]

TSL Correction: No correction

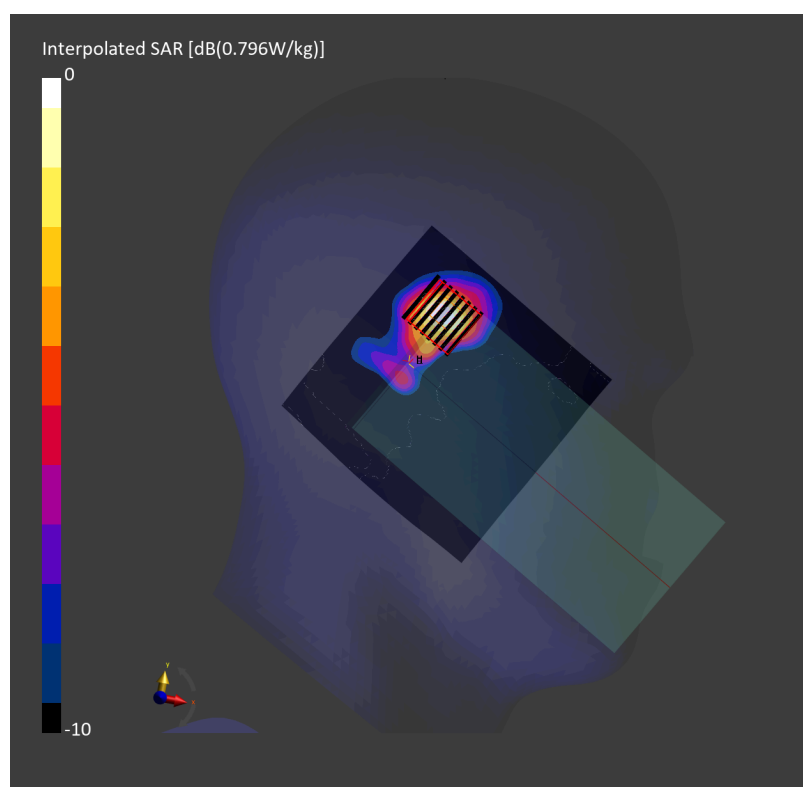

Date: 2025-08-24

#25_Bluetooth_1Mbps_Left Tilted_0mm_Ch0;Ant 4

Communication System: Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_2450_250824 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.02, 7.24, 7.0); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.407 W/kg; SAR (10g) = 0.160 W/kg;

TSL Correction: No correction

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.412 W/kg; SAR (8g) = 0.180 W/kg; SAR (10g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

TSL Correction: No correction

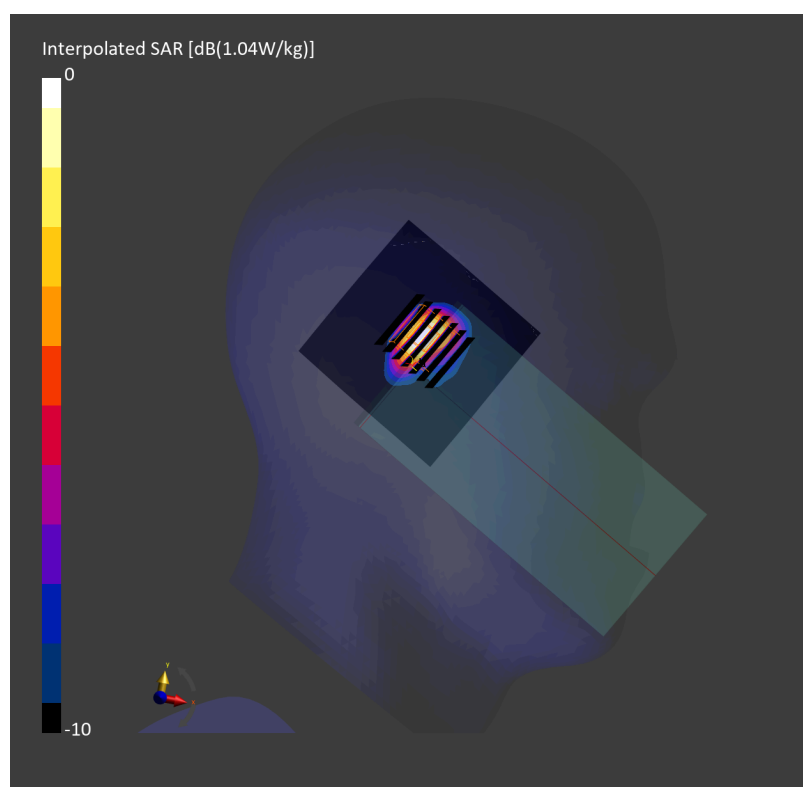

Date: 2025-08-02

#26_GSM850_GPRS 4 Tx slots_Left Edge_5mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_835_250802 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.36, 7.56, 9.63); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.810 W/kg; SAR (10g) = 0.534 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.807 W/kg; SAR (8g) = 0.573 W/kg; SAR (10g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 18.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

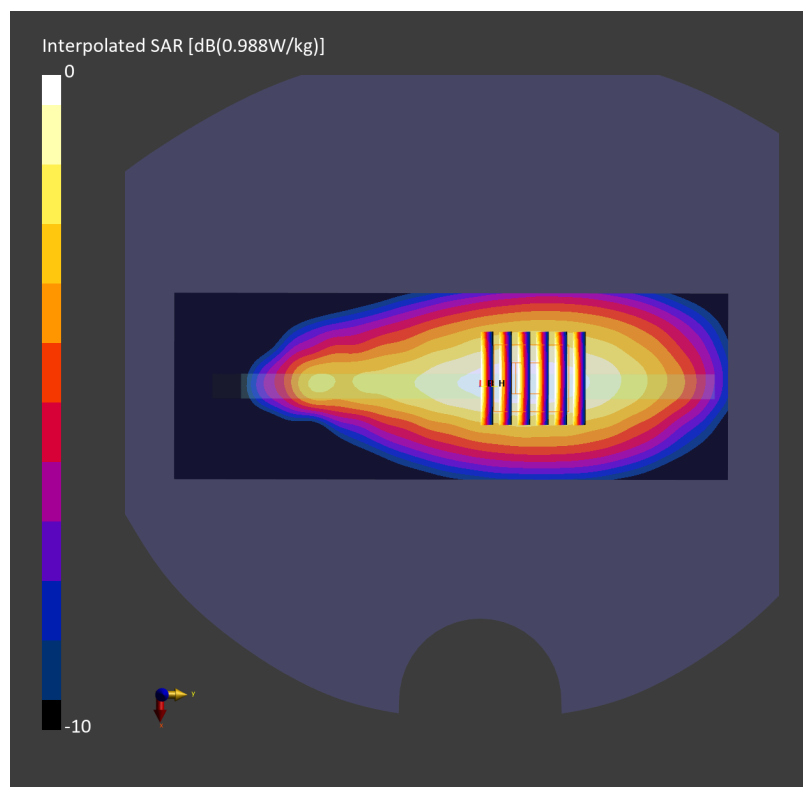

Date: 2025-08-08

#27_GSM1900_GPRS 4Tx slots_Back_5mm_Ch512

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_1900_250808 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.22, 6.53, 8.31); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.555 W/kg; SAR (10g) = 0.300 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.618 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 91.9 %

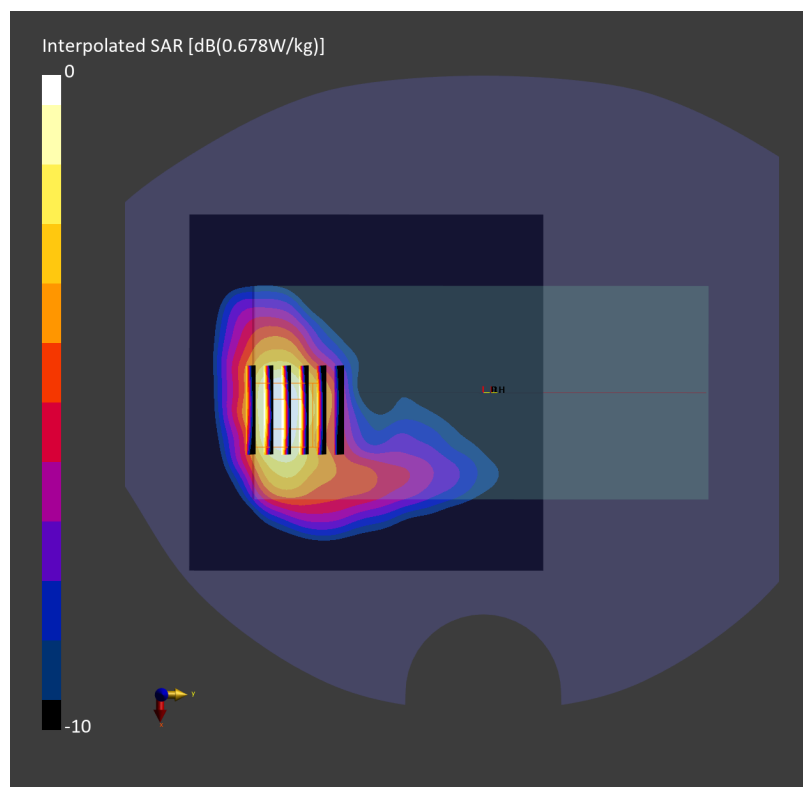

Date: 2025-08-08

#28_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_1900_250808 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.22, 6.53, 8.31); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.272 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.578 W/kg; SAR (8g) = 0.349 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 91.6 %

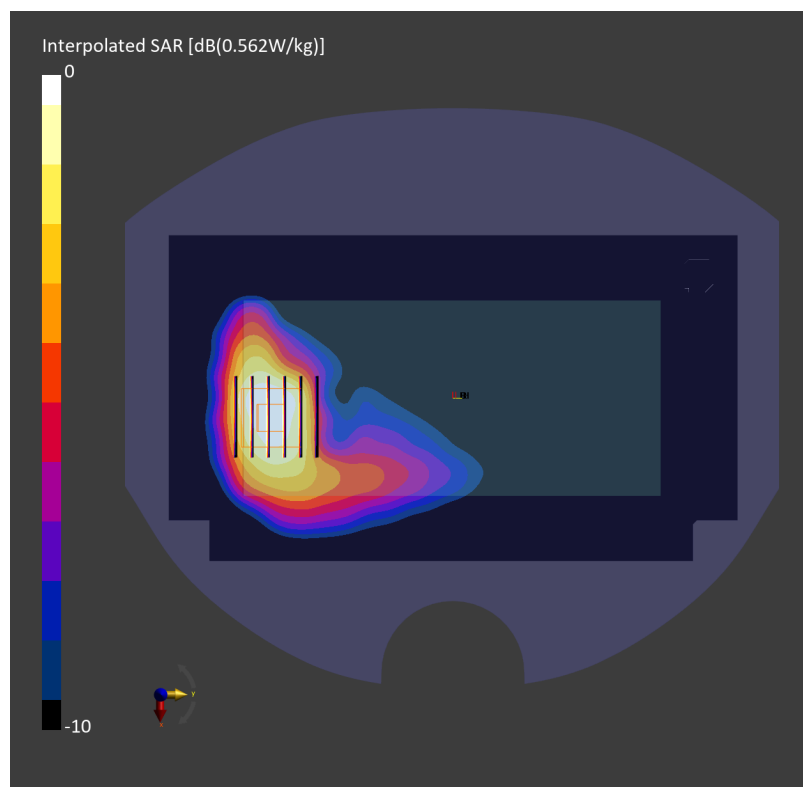

Date: 2025-08-07

#29_WCDMA IV_RMC 12.2Kbps_Bottom Edge_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_1750_250807 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.53, 6.81, 8.67); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.666 W/kg; SAR (10g) = 0.337 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.722 W/kg; SAR (8g) = 0.393 W/kg; SAR (10g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

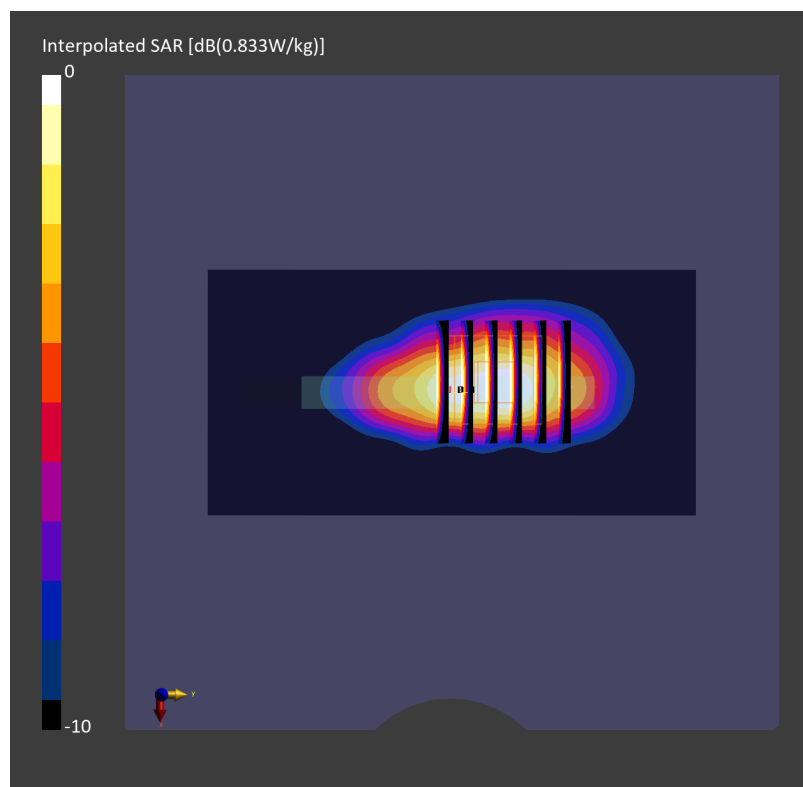

Date: 2025-08-02

#30_WCDMA V_RMC 12.2Kbps_Left Edge_5mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_835_250802 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.36, 7.56, 9.63); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.788 W/kg; SAR (10g) = 0.518 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.746 W/kg; SAR (8g) = 0.520 W/kg; SAR (10g) = 0.494 W/kg

Smallest distance from peaks to all points 3 dB below = 19.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.3 %

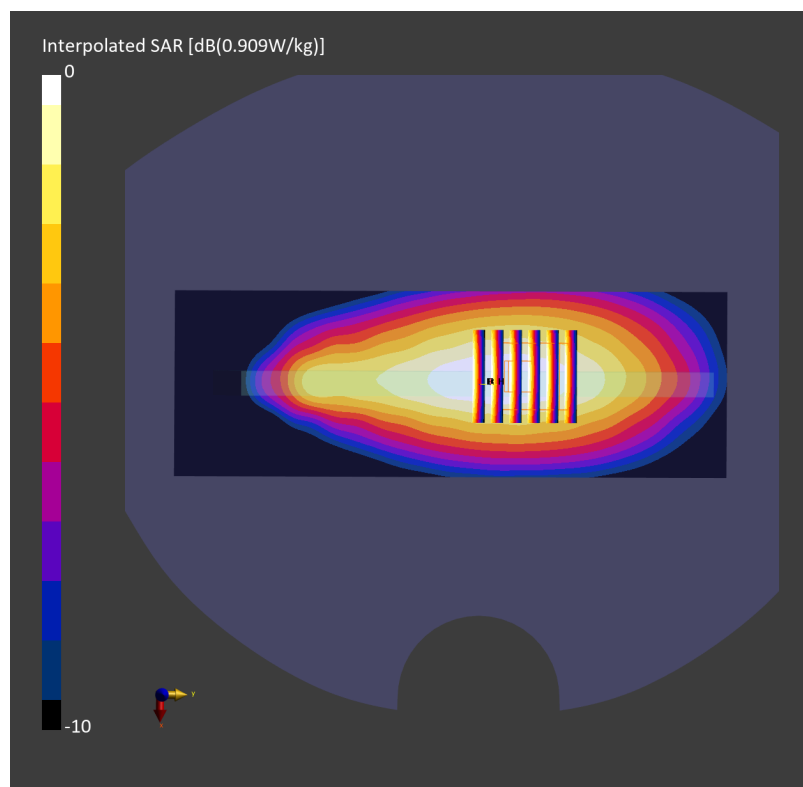

Date: 2025-08-16

#31_LTE Band 7_20M_QPSK_50_0_Left Edge_5mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.98, 6.31, 8.03); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.279 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.643 W/kg; SAR (8g) = 0.312 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

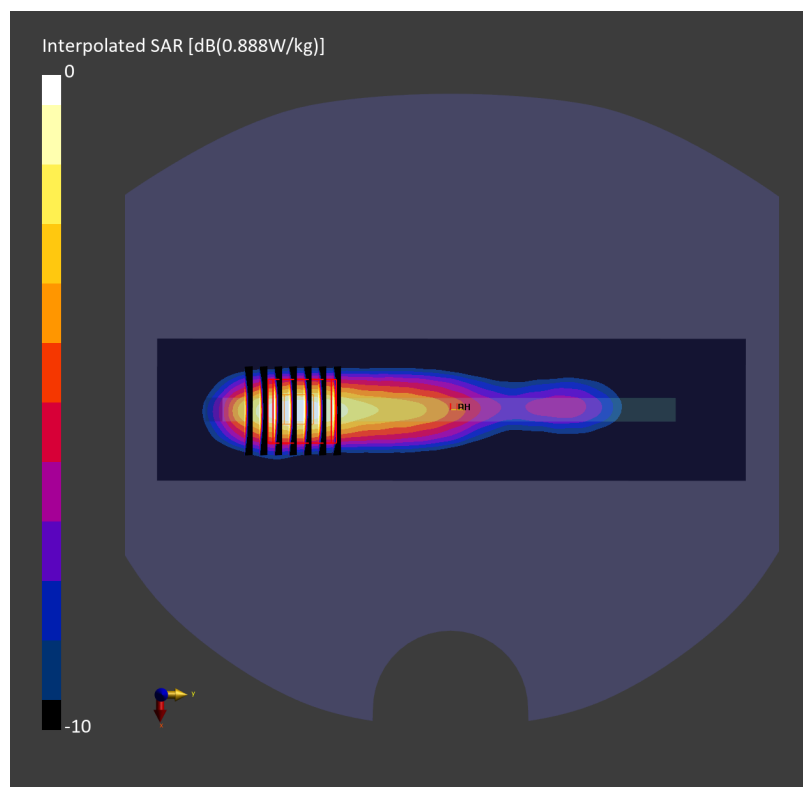

Date: 2025-08-01

#32_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_250801 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.72, 7.89, 10.05); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.436 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.660 W/kg; SAR (8g) = 0.423 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

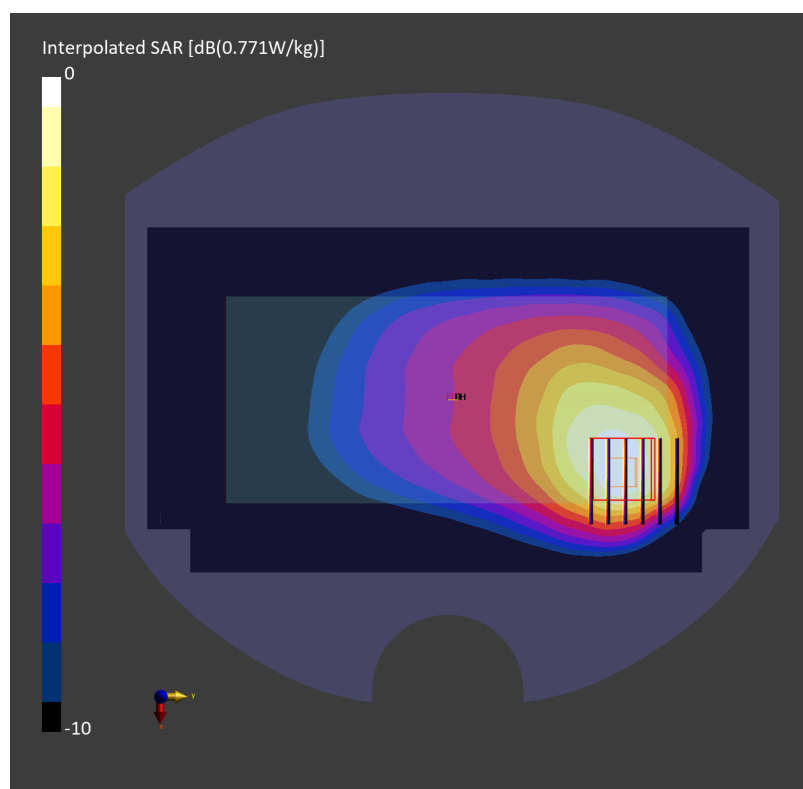

Date: 2025-08-12

#33_LTE Band 2_20M_QPSK_50_0_Back_5mm_Ch18700

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_1900_250812 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.22, 6.53, 8.31); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.330 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.636 W/kg; SAR (8g) = 0.348 W/kg; SAR (10g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

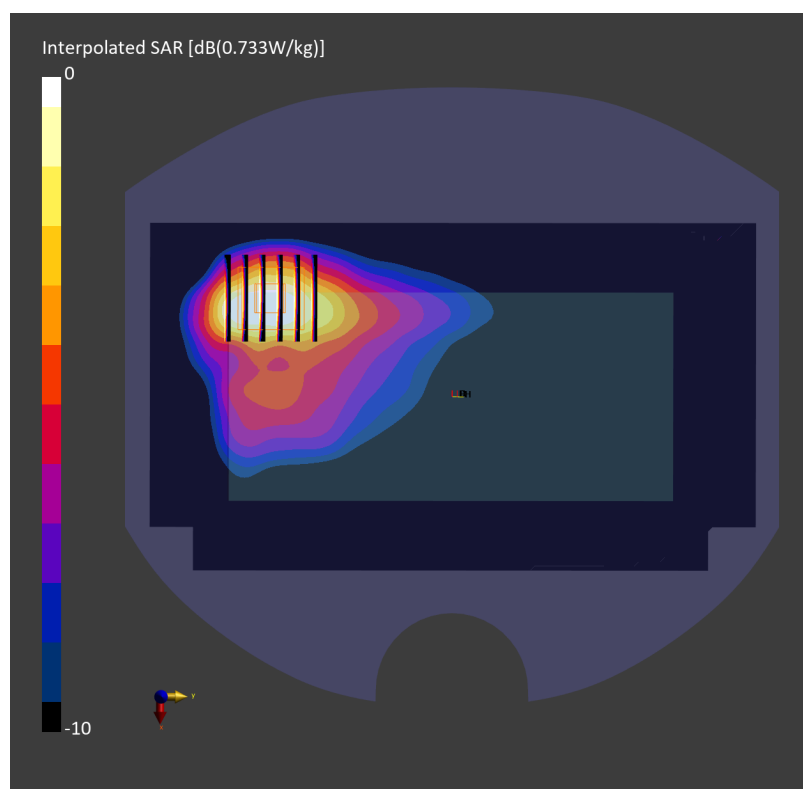

Date: 2025-08-02

#34_LTE Band 26_15M_QPSK_36_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_835_250802 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.36, 7.56, 9.63); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.652 W/kg; SAR (10g) = 0.425 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.647 W/kg; SAR (8g) = 0.410 W/kg; SAR (10g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

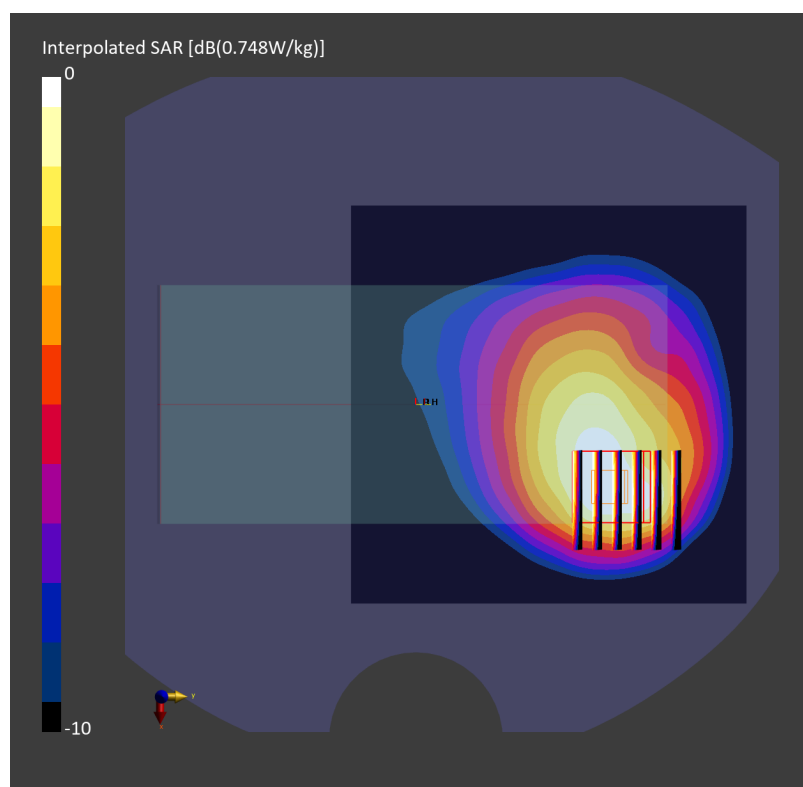

Date: 2025-08-07

#35_LTE Band 66_20M_QPSK_50_0_Bottom Edge_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_1750_250807 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.53, 6.81, 8.67); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.808 W/kg; SAR (10g) = 0.398 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.875 W/kg; SAR (8g) = 0.468 W/kg; SAR (10g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

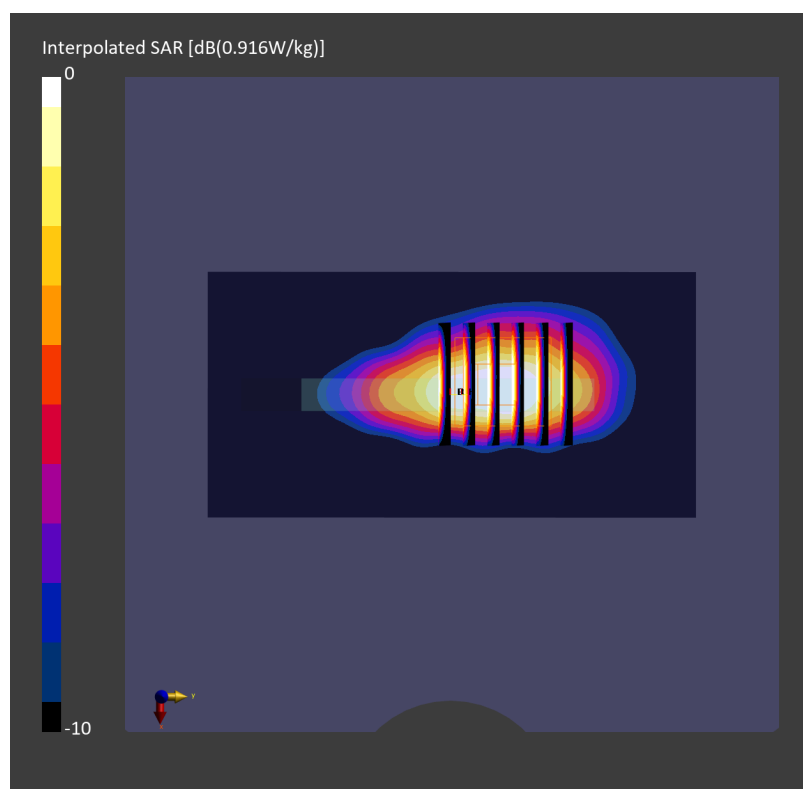

Date: 2025-08-18

#36_LTE Band 41_20M_QPSK_50_0_Left Edge_5mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_2600_250818 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.98, 6.31, 8.03); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.271 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.630 W/kg; SAR (8g) = 0.306 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

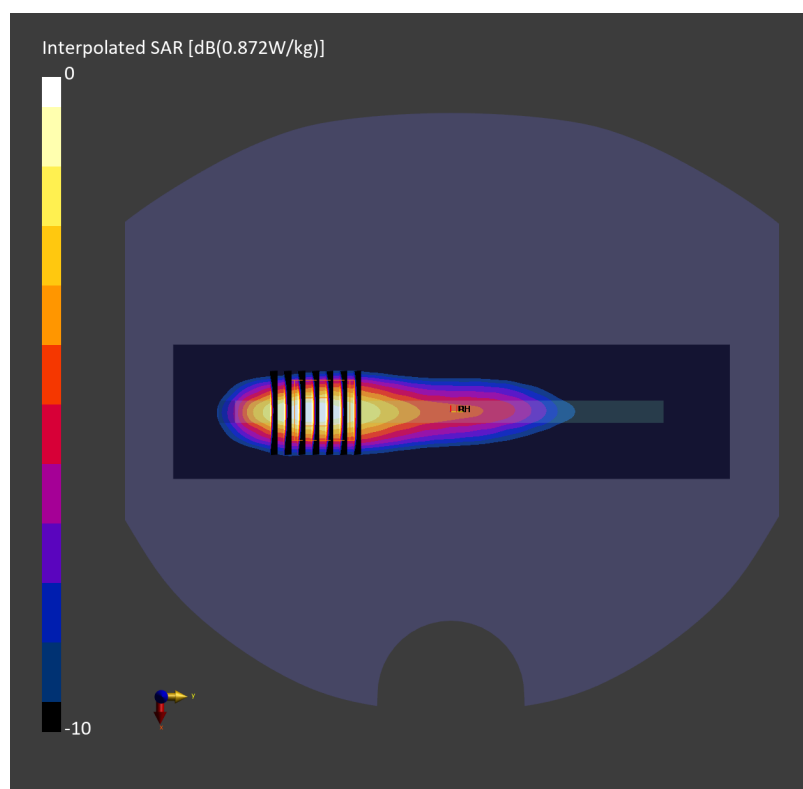

Date: 2025-08-16

#37_FR1 n7_50M_BPSK_135_68_Left Edge_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_2600_250816 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(6.98, 6.31, 8.03); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.578 W/kg; SAR (10g) = 0.255 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.587 W/kg; SAR (8g) = 0.285 W/kg; SAR (10g) = 0.256 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

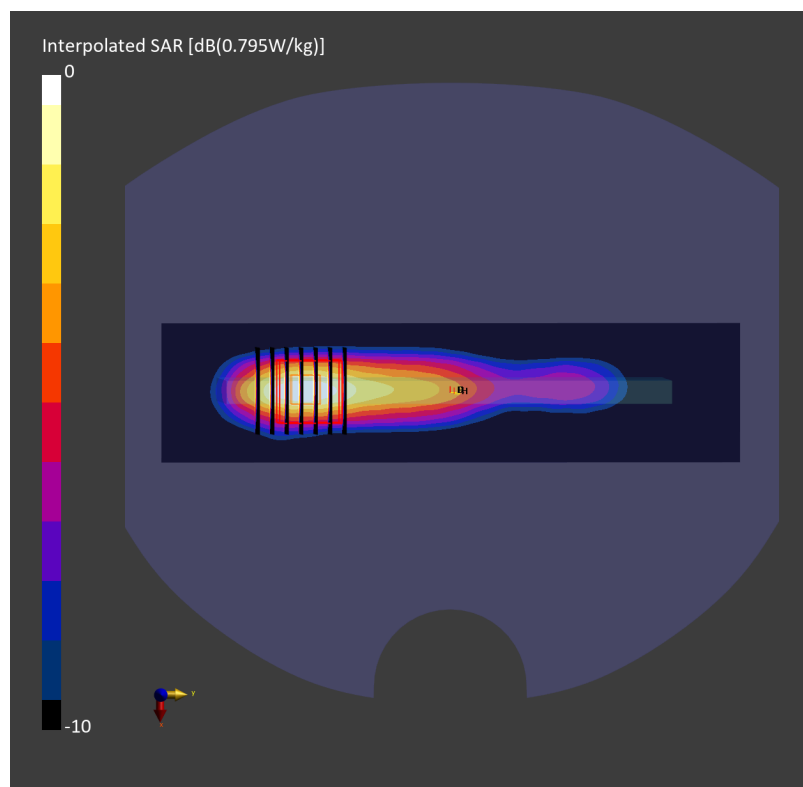

Date: 2025-08-05

#38_FR1 n12_15M_BPSK_36_22_Back_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_250805 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.72, 7.89, 10.05); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.433 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.668 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

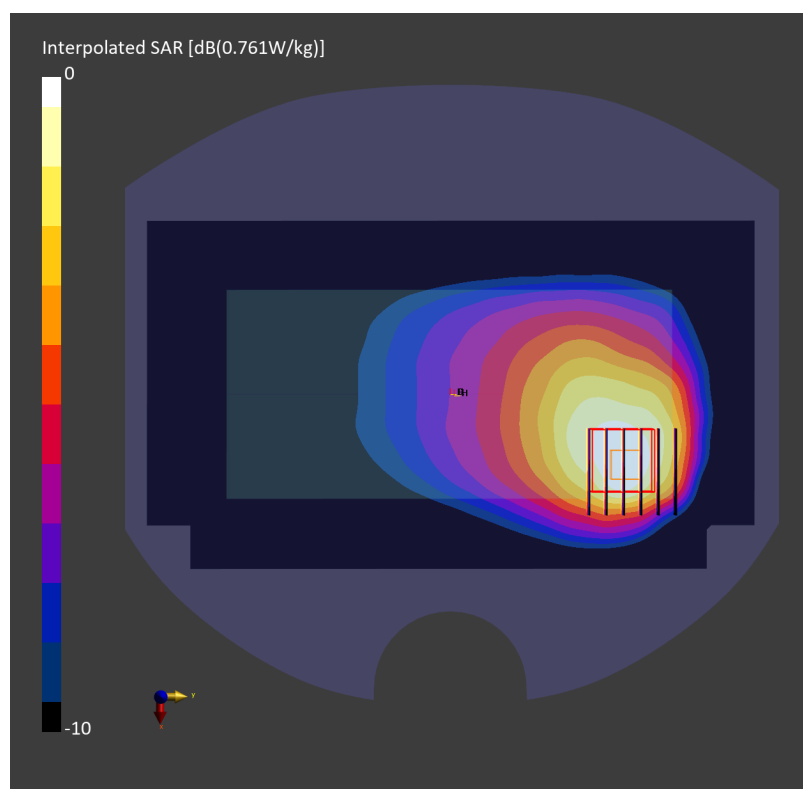

Date: 2025-08-08

#39_FR1 n2_40M_BPSK_1_1_Right Edge_5mm_Ch376000

Communication System: 5G NR; Frequency: 1880.000 MHz

Medium: HSL_1900_250808 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.22, 6.53, 8.31); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.698 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

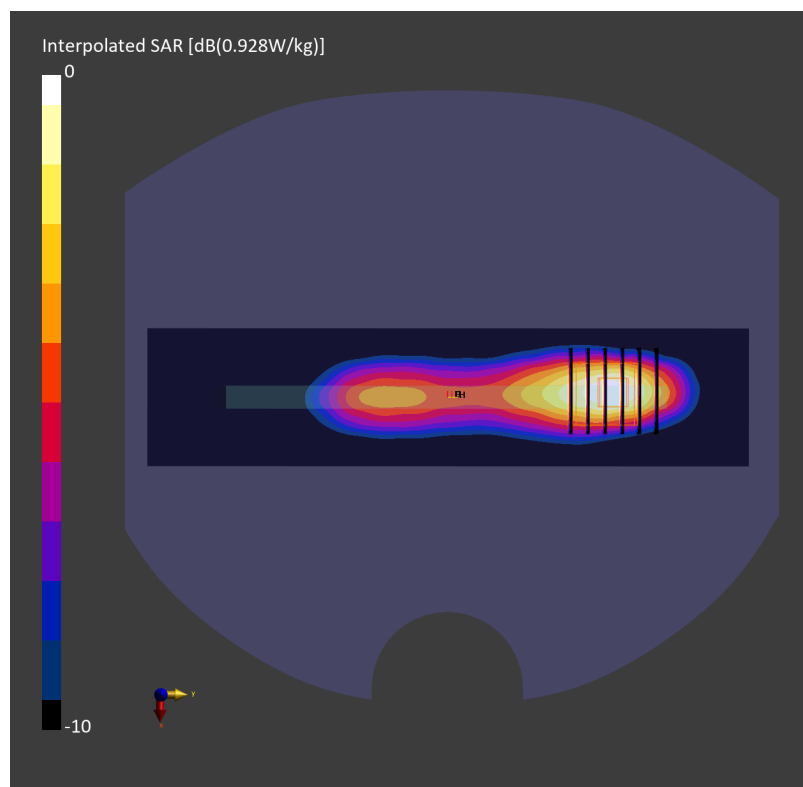

Date: 2025-08-02

#40_FR1 n26_20M_BPSK_1_1_Back_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_835_250802 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(8.36, 7.56, 9.63); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.659 W/kg; SAR (10g) = 0.428 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.641 W/kg; SAR (8g) = 0.408 W/kg; SAR (10g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

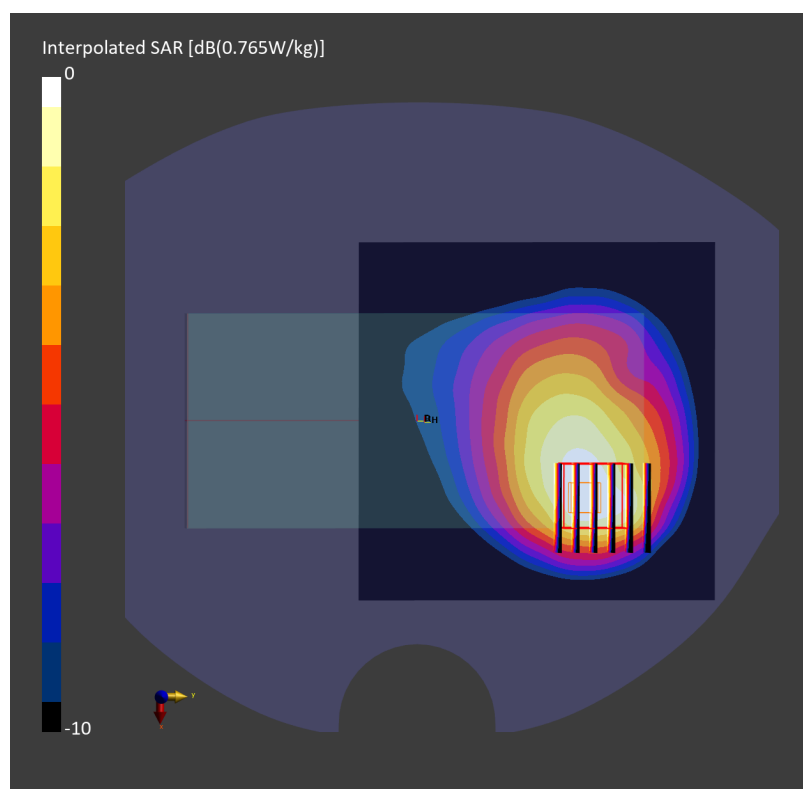

Date: 2025-08-11

#41_FR1 n66_40M_BPSK_108_54_Bottom Edge_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_1750_250811 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(7.53, 6.81, 8.67); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1311; Calibrated: 2025-06-11
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1719; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.679 W/kg; SAR (10g) = 0.338 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.683 W/kg; SAR (8g) = 0.375 W/kg; SAR (10g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

