



FCC RADIO TEST REPORT

FCC ID : A4RG1EGQ
Equipment : Phone
Model Name : GE1GQ
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on May 08, 2025 and testing was performed from May 08, 2025 to Jul. 18, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System	8
2.3 Support Unit used in test configuration	8
2.4 Measurement Results Explanation Example	8
2.5 Frequency List of Low/Middle/High Channels	9
3 Conducted Test Result	10
3.1 Measuring Instruments	10
3.2 Conducted Output Power and ERP/EIRP	11
3.3 Peak-to-Average Ratio	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge	14
3.6 Conducted Spurious Emission	15
3.7 Frequency Stability	16
4 Radiated Test Items	17
4.1 Measuring Instruments	17
4.2 Test Setup	17
4.3 Test Result of Radiated Test	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment.....	20
6 Measurement Uncertainty	21
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG550731A	01	Initial issue of report	Sep. 23, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band II) (WCDMA Band IV)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Steve Chen

Report Producer: Dara Chiu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/ax, NFC, WPC Rx, and GNSS.
Antenna Type WWAN: <Ant. 0>: ILA Antenna <Ant. 1>: ILA Antenna <Ant. 2>: IFA Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

Antenna information					
Band	Ant0	Ant1	Ant2	Main Ant. #	Sub Ant. #
GSM 850	-3.2	-4	-	0	1
GSM 1900	-1.8	-	-0.3	2	0
WCDMA B5	-3.2	-4	-	0	1
WCDMA B2	-1.8	-	-0.3	2	0
WCDMA B4	-0.3	-	0	2	0

Remark:

1. For Test Items, Main Ant. means Tx0 and Sub Ant. means Tx1.
2. After preliminary scan, the main antenna Ant 0 for Low band and main antenna Ant 2 for Mid/high band are selected as the worst mode to be reported for conducted test.

EUT Information List	
S/N	Performed Test Item
56061JEA300087	Conducted Measurement ERP/EIRP
56061JEA300409	Radiated Spurious Emission

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Eric Wu
Temperature (°C)	22.8~24.8 °C
Relative Humidity (%)	30.3~32.3 %

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Tim Lee, Wilson Wu, and Gerry Wei
Temperature (°C)	20 ~ 25
Relative Humidity (%)	50 ~ 60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find the worst plane as following table.

Plane	Main Antenna	Sub Antenna
GSM850	X with Adapter	Z with Adapter
WCDMA Band V	X with Adapter	Z with Adapter
GSM1900	X with Adapter	X with Adapter
WCDMA Band II	X with Adapter	X with Adapter
WCDMA Band IV	Y with Adapter	X with Adapter

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes, data rates and positions were investigated.


Test modes are chosen to be reported as the worst cases configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GSM Link for TX0 ■ GPRS Class 8 Link for TX1 ■ EDGE Class 8 Link for TX0 and TX1	■ GSM Link for TX0 ■ GPRS Class 8 Link for TX1 ■ EDGE Class 8 Link for TX0 and TX1
GSM1900	■ GSM Link for TX0 ■ GPRS Class 8 Link for TX1 ■ EDGE Class 8 Link for TX0 and TX1	■ GSM Link for TX0 ■ GPRS Class 8 Link for TX1 ■ EDGE Class 8 Link for TX0 and TX1
WCDMA Band V	■ RMC 12.2Kbps Link for TX0 and TX1	■ RMC 12.2Kbps Link for TX0 and TX1
WCDMA Band II	■ RMC 12.2Kbps Link for TX0 and TX1	■ RMC 12.2Kbps Link for TX0 and TX1
WCDMA Band IV	■ RMC 12.2Kbps Link for TX0 and TX1	■ RMC 12.2Kbps Link for TX0 and TX1

Remark: All the radiated test cases were performed with USB Cable 1.

2.2 Connection Diagram of Test System

<EUT with Adapter>

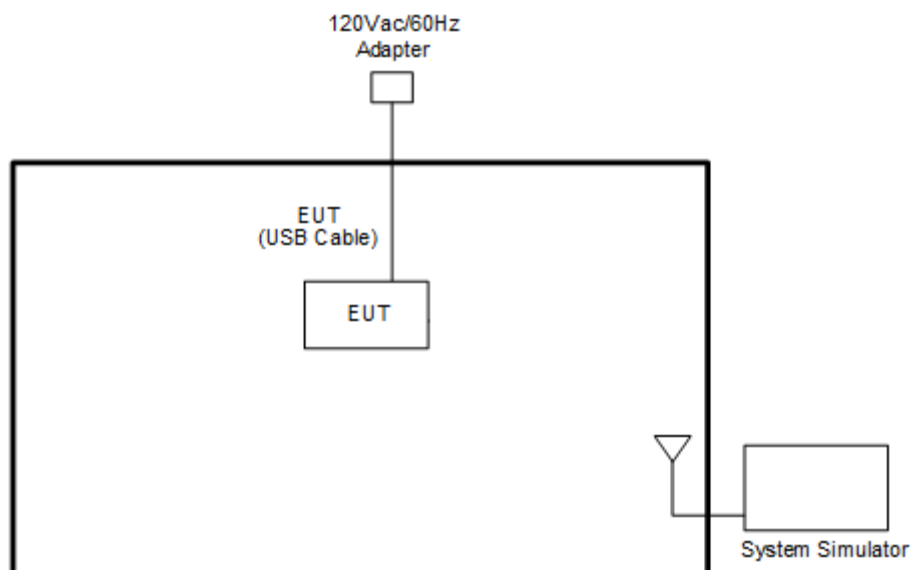

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	AC Adapter	N/A	GW8L7	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

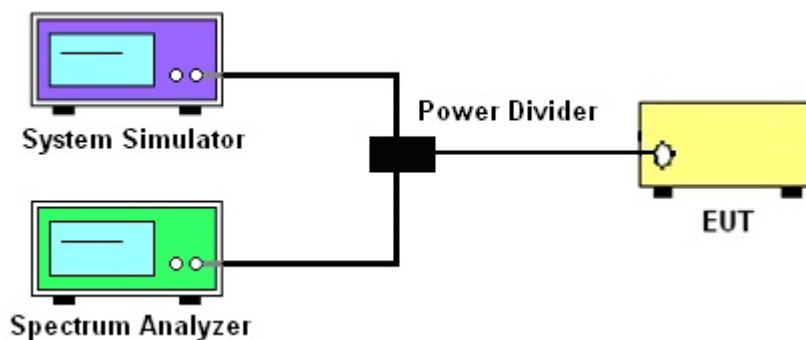

3.1.4 Frequency Stability

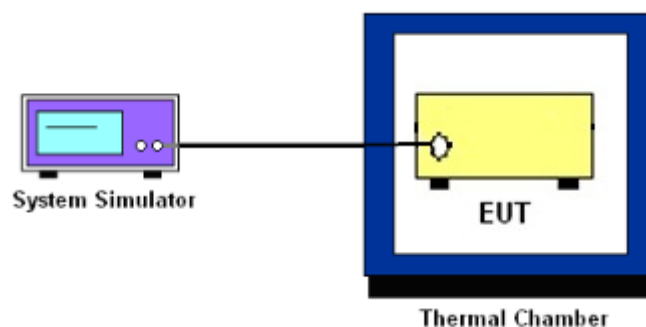

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT is connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers are measured.
4. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT is connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT is connected to the spectrum analyzer by an RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency is measured.
4. The conducted spurious emission for the whole frequency range is taken.
5. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature is decreased to -30°C and the EUT is stabilized before testing. Power is applied and the maximum change in frequency is recorded within one minute.
3. With power OFF, the temperature is raised in 10°C steps up to 50°C . The EUT is stabilized at each step for at least half an hour. Power is applied and the maximum frequency change is recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT is placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT is varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency is measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

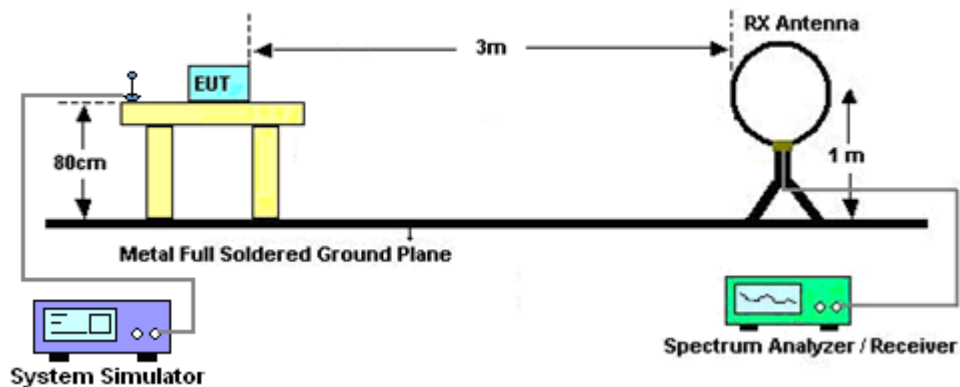


For radiated test from 30MHz to 1GHz

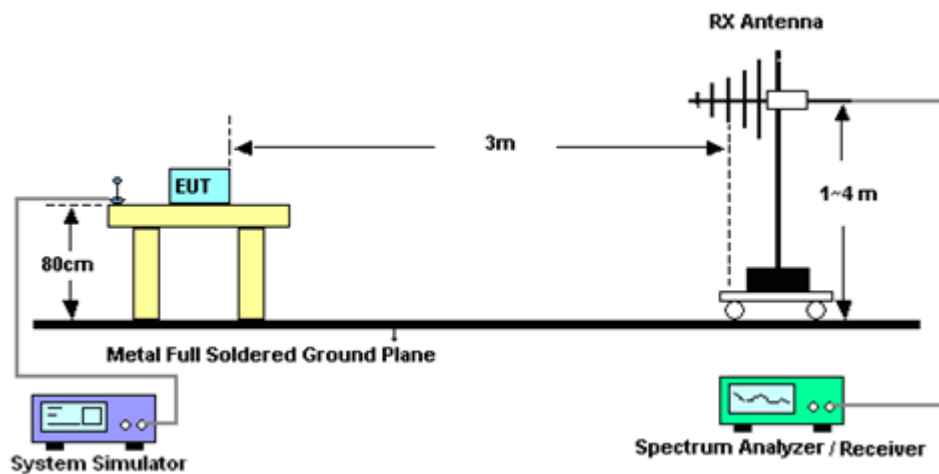

For radiated test from 1GHz to 18GHz

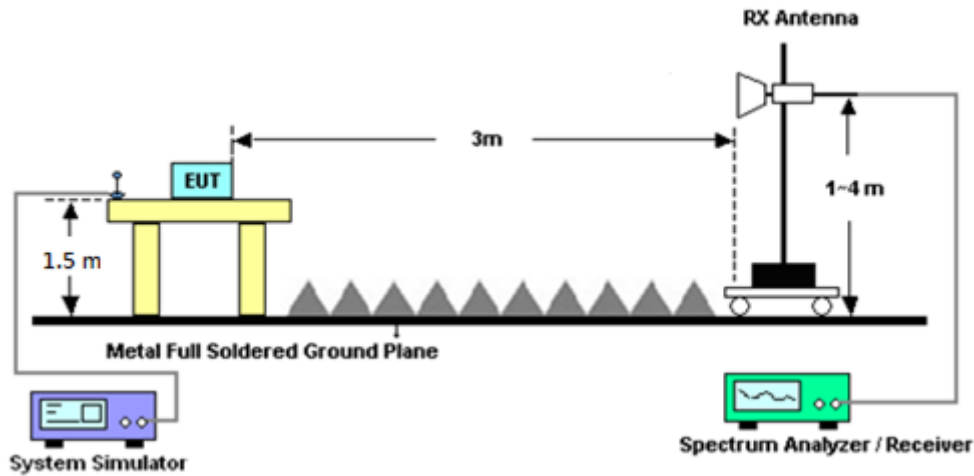

For radiated test above 18GHz

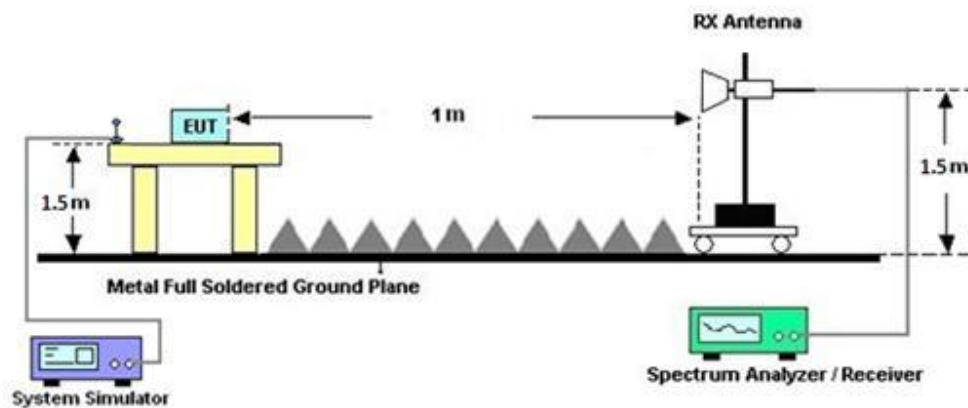

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
$$\text{EIRP(dBm)} = \text{Level (dBuV/m)} + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
8. ERP (dBm) = EIRP (dBm) - 2.15
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 25, 2024	Jul. 11, 2025 ~ Jul. 18, 2025	Sep. 24, 2025	Conducted (TH03-HY)
Base Station	Rohde & Schwarz	CMU200	117995	GSM/GPRS/WCDMA/CDMA	Aug. 08, 2024	Jul. 11, 2025 ~ Jul. 18, 2025	Aug. 07, 2025	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPE-2323	GET910896	0V~64V ; 0A~6A	Nov. 26, 2024	Jul. 11, 2025 ~ Jul. 18, 2025	Nov. 25, 2025	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	LHU-113	1012005860	-20℃~85℃	Dec. 10, 2024	Jul. 11, 2025 ~ Jul. 18, 2025	Dec. 09, 2025	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	N/A	Mar. 03, 2025	Jul. 11, 2025 ~ Jul. 18, 2025	Mar. 02, 2026	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 18, 2024	May 08, 2025 ~ Jul. 15, 2025	Dec. 17, 2025	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	May 08, 2025 ~ Jul. 15, 2025	Nov. 26, 2025	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02114	1GHz~18GHz	Jul. 11, 2024	May 08, 2025 ~ Jun. 27, 2025	Jul. 10, 2025	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Jul. 29, 2024	Jun. 28, 2025 ~ Jul. 15, 2025	Jul. 28, 2025	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18 G-56-01-A70	EC1900269	1GHz-18GHz	Dec. 19, 2024	May 08, 2025 ~ Jul. 15, 2025	Dec. 18, 2025	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Aug.09, 2024	May 08, 2025 ~ Jul. 15, 2025	Aug.08, 2025	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz~26.5GHz	Sep. 09, 2024	May 08, 2025 ~ Jul. 15, 2025	Sep. 08, 2025	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz-40GHz	Nov. 18, 2024	May 08, 2025 ~ Jul. 15, 2025	Nov. 17, 2025	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2024	May 08, 2025 ~ Jul. 15, 2025	Dec. 01, 2025	Radiation (03CH12-HY)
Notch Filter	Wainwright	WLKS1200-1 2SS	SN2	1.2GHz Low Pass Filter	Mar. 12, 2025	May 08, 2025 ~ Jul. 15, 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX12-270 0-3000-18000 -60ST	SN2	3GHz High Pass Filter	Mar. 12, 2025	May 08, 2025 ~ Jul. 15, 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000 -40ST	SN2	6.75GHz High Pass Filter	Mar. 12, 2025	May 08, 2025 ~ Jul. 15, 2025	Mar. 11, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 19, 2024	May 08, 2025 ~ Jul. 15, 2025	Dec. 18, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Nov. 01, 2024	May 08, 2025 ~ Jul. 15, 2025	Oct. 31, 2025	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM -KM-100	240907	30MHz~40GHz	Nov. 14, 2024	May 08, 2025 ~ Jul. 15, 2025	Nov. 13, 2025	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP210090	N/A	Aug. 29, 2024	May 08, 2025 ~ Jul. 15, 2025	Aug. 28, 2025	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 08, 2025 ~ Jul. 15, 2025	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	May 08, 2025 ~ Jul. 15, 2025	N/A	Radiation (03CH12-HY)
5G Wireless Test Platform	Anritsu	MT8000A	6262134937	FR1+FR2	Jul. 31, 2024	May 08, 2025 ~ Jul. 15, 2025	Jul. 30, 2025	Radiation (03CH12-HY)
Base Station	Anritsu	MT8821C	6262116733	LTE FDD/TDD LTE-2CC DLCA/ULCA	Jul. 31, 2024	May 08, 2025 ~ Jul. 15, 2025	Jul. 30, 2025	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	May 08, 2025 ~ Jul. 15, 2025	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	May 08, 2025 ~ Jul. 15, 2025	N/A	Radiation (03CH12-HY)

6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Appendix A. Test Results of Conducted Test

Conducted Output Power (Average power and ERP/EIRP)

<TX 0 >

GSM850 Maximum Average Power [dBm] (GT - LC = -3.2 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.68	33.03	32.79	27.68	0.5861
GPRS class 8	32.62	32.95	32.73		
GPRS class 10	31.94	31.62	31.35		
GPRS class 11	31.15	30.70	30.61		
GPRS class 12	29.91	29.65	29.57		
EGPRS class 8	27.09	27.12	26.74	21.77	0.1503
EGPRS class 10	26.07	25.78	25.69		
EGPRS class 11	24.60	24.76	24.58		
EGPRS class 12	23.64	23.60	23.47		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = -0.3 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	29.27	29.60	29.32	29.30	0.8511
GPRS class 8	29.11	29.52	29.39		
GPRS class 10	28.38	28.60	28.53		
GPRS class 11	28.47	28.48	28.45		
GPRS class 12	27.50	27.39	27.29		
EGPRS class 8	25.84	26.05	25.91	25.75	0.3758
EGPRS class 10	25.34	25.15	24.90		
EGPRS class 11	24.03	23.95	23.68		
EGPRS class 12	23.30	23.09	23.30		
Limit	EIRP < 2W			Result	Pass

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -3.2 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.90	24.75	24.64	19.55	0.0902
HSDPA Subtest-1	24.85	24.65	24.56		
HSDPA Subtest-2	24.88	24.72	24.63		
HSDPA Subtest-3	24.44	24.28	24.18		
HSDPA Subtest-4	24.42	24.30	24.16		
HSUPA Subtest-1	23.92	23.88	23.74		
HSUPA Subtest-2	22.33	22.33	22.19		
HSUPA Subtest-3	23.59	23.55	23.45		
HSUPA Subtest-4	22.54	22.53	22.44		
HSUPA Subtest-5	24.80	24.80	24.70		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -0.3 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.63	24.55	24.41	24.33	0.2710
HSDPA Subtest-1	24.53	24.40	24.20		
HSDPA Subtest-2	24.60	24.48	24.33		
HSDPA Subtest-3	24.36	24.23	23.99		
HSDPA Subtest-4	24.26	24.21	24.02		
HSUPA Subtest-1	23.51	23.52	23.34		
HSUPA Subtest-2	22.90	22.76	22.61		
HSUPA Subtest-3	23.62	23.56	23.34		
HSUPA Subtest-4	22.78	22.76	22.54		
HSUPA Subtest-5	24.60	24.50	24.50		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 0 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.72	24.66	24.43	24.72	0.2965
HSDPA Subtest-1	24.68	24.61	24.49		
HSDPA Subtest-2	24.71	24.66	24.54		
HSDPA Subtest-3	24.43	24.33	24.23		
HSDPA Subtest-4	24.41	24.30	24.17		
HSUPA Subtest-1	23.78	23.62	23.71		
HSUPA Subtest-2	23.18	23.06	23.14		
HSUPA Subtest-3	23.68	23.72	23.60		
HSUPA Subtest-4	23.15	23.15	23.20		
HSUPA Subtest-5	24.60	24.60	24.70		
Limit	EIRP < 1W			Result	Pass

<TX 1>

GSM850 Maximum Average Power [dBm] (GT - LC = -4 dB)					
Channel	128	189	251	ERP (dBm)	ERP (W)
Frequency	824.2	836.4	848.8		
GSM	32.10	32.05	32.04	25.96	0.3945
GPRS class 8	32.11	32.07	32.06		
GPRS class 10	31.52	31.24	31.21		
GPRS class 11	30.49	30.26	30.25		
GPRS class 12	29.26	29.09	29.07		
EGPRS class 8	26.65	26.56	26.44	20.50	0.1122
EGPRS class 10	25.42	25.37	25.33		
EGPRS class 11	24.07	23.89	23.90		
EGPRS class 12	23.06	23.03	23.03		
Limit	ERP < 7W			Result	Pass

GSM1900 Maximum Average Power [dBm] (GT - LC = -1.8 dB)					
Channel	512	661	810	EIRP (dBm)	EIRP (W)
Frequency	1850.2	1880	1909.8		
GSM	27.93	27.86	27.78	26.15	0.4121
GPRS class 8	27.95	27.91	27.83		
GPRS class 10	27.30	27.13	26.96		
GPRS class 11	27.17	27.00	26.96		
GPRS class 12	26.00	25.85	25.79		
EGPRS class 8	24.62	24.47	24.18	22.82	0.1914
EGPRS class 10	23.94	23.54	23.48		
EGPRS class 11	22.87	22.45	22.38		
EGPRS class 12	21.53	21.32	21.12		
Limit	EIRP < 2W			Result	Pass

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -4 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.54	24.40	24.28	18.39	0.0690
HSDPA Subtest-1	24.45	24.39	24.27		
HSDPA Subtest-2	24.46	24.37	24.25		
HSDPA Subtest-3	23.06	22.92	22.79		
HSDPA Subtest-4	23.59	23.42	23.37		
HSUPA Subtest-1	23.56	23.47	23.32		
HSUPA Subtest-2	22.07	21.94	21.76		
HSUPA Subtest-3	23.01	22.92	22.80		
HSUPA Subtest-4	22.07	21.85	21.77		
HSUPA Subtest-5	24.50	24.34	24.20		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = -1.8 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	24.09	23.94	23.75	22.29	0.1694
HSDPA Subtest-1	24.00	23.89	23.68		
HSDPA Subtest-2	24.03	23.83	23.68		
HSDPA Subtest-3	24.03	23.87	23.70		
HSDPA Subtest-4	24.07	23.86	23.72		
HSUPA Subtest-1	22.97	22.86	22.74		
HSUPA Subtest-2	22.60	22.44	22.18		
HSUPA Subtest-3	23.02	22.95	22.80		
HSUPA Subtest-4	22.57	22.49	22.28		
HSUPA Subtest-5	24.00	23.90	23.70		
Limit	EIRP < 2W			Result	Pass







WCDMA Band IV Maximum Average Power [dBm] (GT - LC = -0.3 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	24.22	24.09	23.94	23.92	0.2466
HSDPA Subtest-1	24.10	24.08	23.88		
HSDPA Subtest-2	24.15	23.97	23.85		
HSDPA Subtest-3	24.18	24.05	23.87		
HSDPA Subtest-4	24.19	23.98	23.88		
HSUPA Subtest-1	23.15	23.01	22.95		
HSUPA Subtest-2	22.66	22.62	22.57		
HSUPA Subtest-3	23.10	23.04	22.95		
HSUPA Subtest-4	22.69	22.65	22.50		
HSUPA Subtest-5	24.20	24.10	23.90		
Limit	EIRP < 1W			Result	Pass

A2. GSM

Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.52	3.32	PASS
Middle CH	0.56	3.08	
Highest CH	0.60	3.32	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.64	3.36	PASS
Middle CH	0.64	3.28	
Highest CH	0.64	3.28	

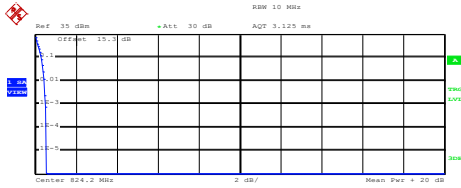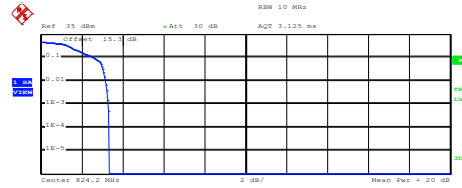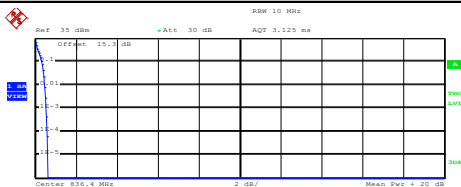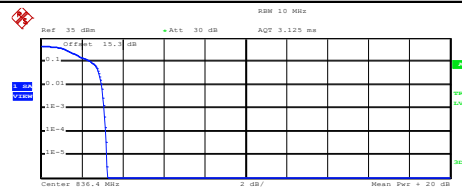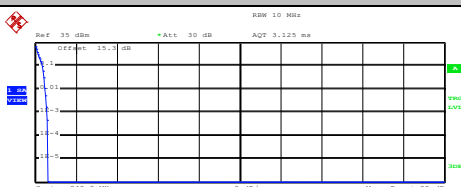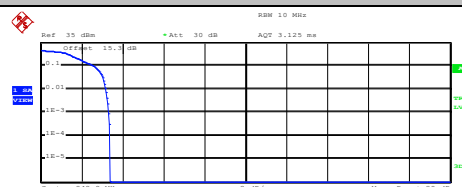
GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Center 824.2 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 32.30 dBm Peak 32.85 dBm Crest 0.55 dB 10 % 0.32 dB 1 % 0.44 dB .1 % 0.52 dB .01 % 0.56 dB Date: 14.JUL.2025 15:01:15		 Center 824.2 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 26.34 dBm Peak 29.68 dBm Crest 3.34 dB 10 % 2.60 dB 1 % 3.16 dB .1 % 3.32 dB .01 % 3.36 dB Date: 14.JUL.2025 15:20:35	
Middle Channel		Middle Channel	
 Center 836.4 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 32.53 dBm Peak 33.14 dBm Crest 0.61 dB 10 % 0.32 dB 1 % 0.48 dB .1 % 0.56 dB .01 % 0.60 dB Date: 14.JUL.2025 15:01:37		 Center 836.4 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 26.79 dBm Peak 30.03 dBm Crest 3.24 dB 10 % 2.44 dB 1 % 2.96 dB .1 % 3.08 dB .01 % 3.16 dB Date: 14.JUL.2025 15:20:57	
Highest Channel		Highest Channel	
 Center 848.8 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 32.87 dBm Peak 33.49 dBm Crest 0.61 dB 10 % 0.36 dB 1 % 0.48 dB .1 % 0.60 dB .01 % 0.64 dB Date: 14.JUL.2025 15:01:55		 Center 848.8 MHz Ref: 35 dBm Offset: 15.0 dB Att: 30 dB AQT: 3.125 ms Mean Pwr: +20 dB Trace 1 Mean 26.80 dBm Peak 30.17 dBm Crest 3.37 dB 10 % 2.60 dB 1 % 3.16 dB .1 % 3.32 dB .01 % 3.40 dB Date: 14.JUL.2025 15:21:17	

GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
<			

**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.310	0.323
Middle CH	0.318	0.319
Highest CH	0.313	0.309

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.322	0.318
Middle CH	0.309	0.306
Highest CH	0.315	0.314

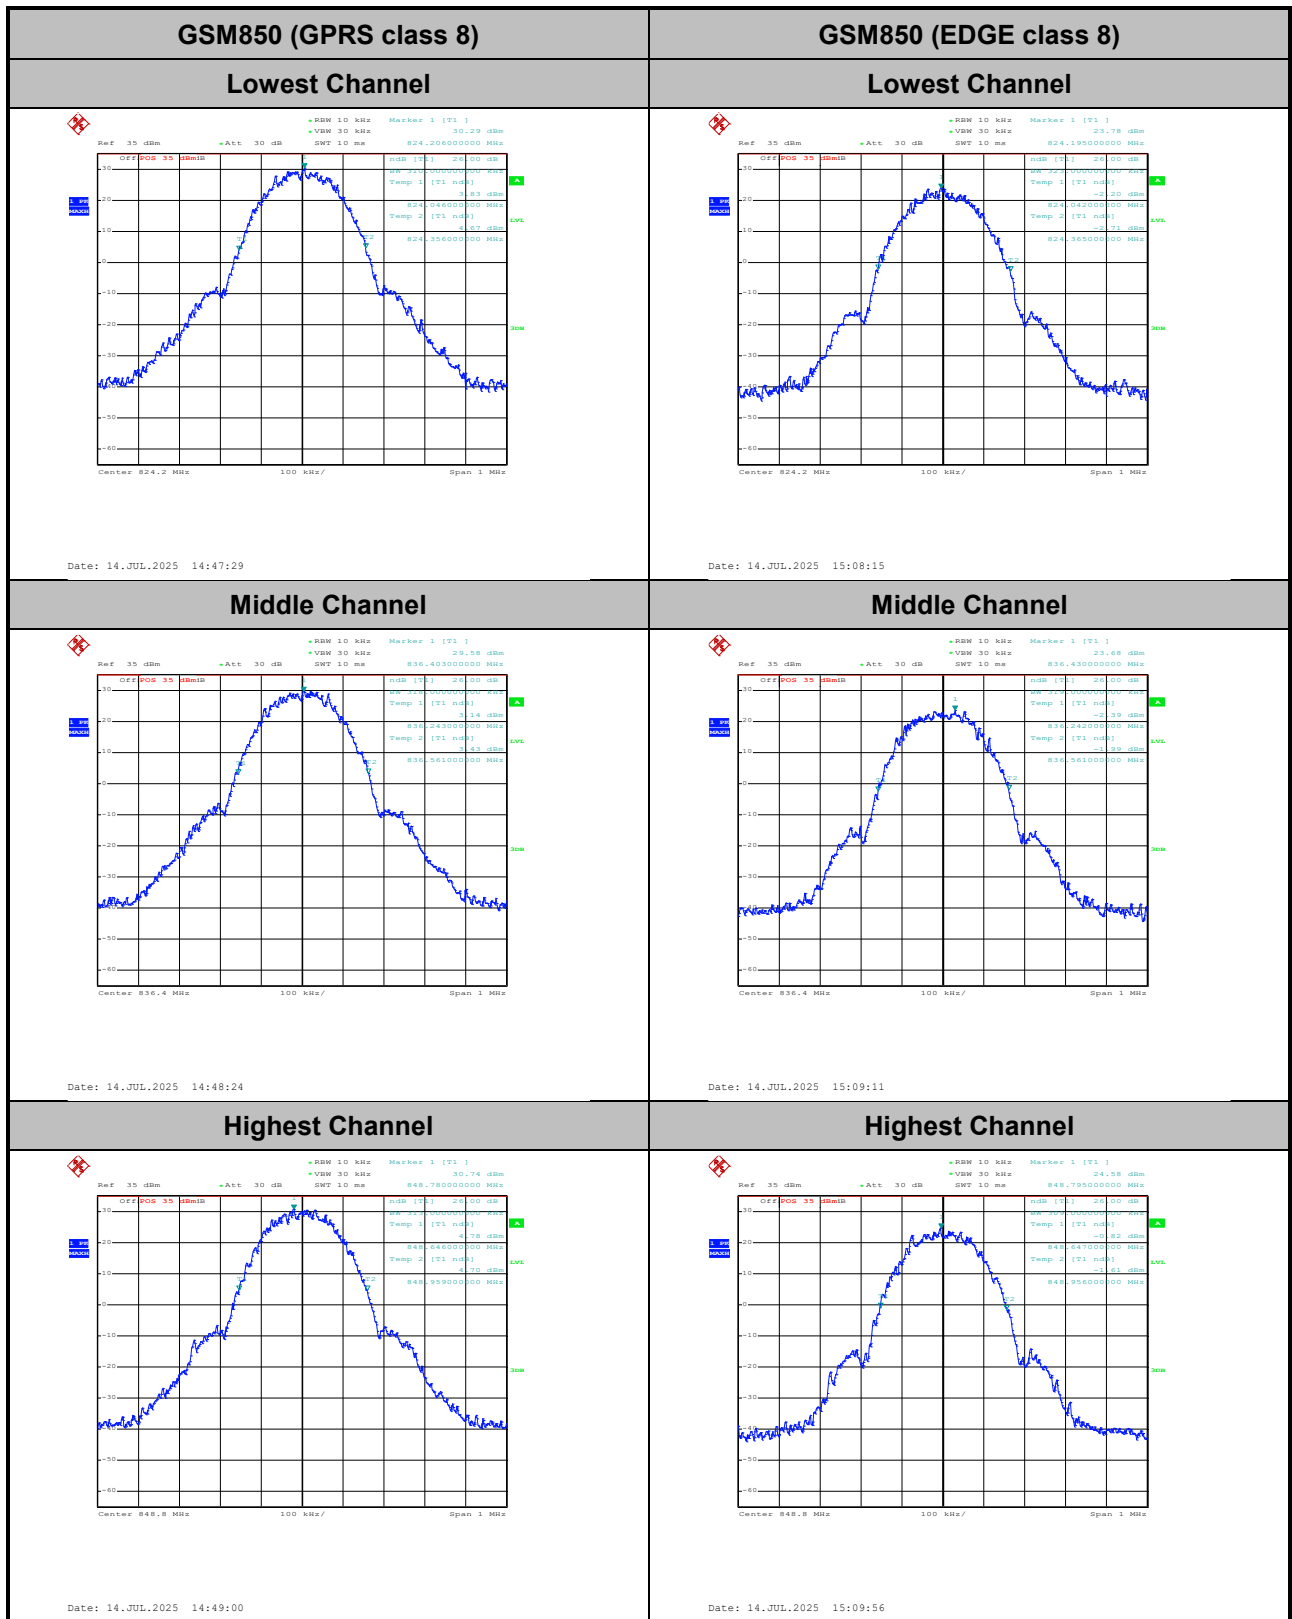


[illegible]

Occupied Bandwidth

Mode	GSM850 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.248	0.250
Middle CH	0.246	0.249
Highest CH	0.244	0.246

Mode	GSM1900 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.245	0.247
Middle CH	0.245	0.248
Highest CH	0.245	0.249

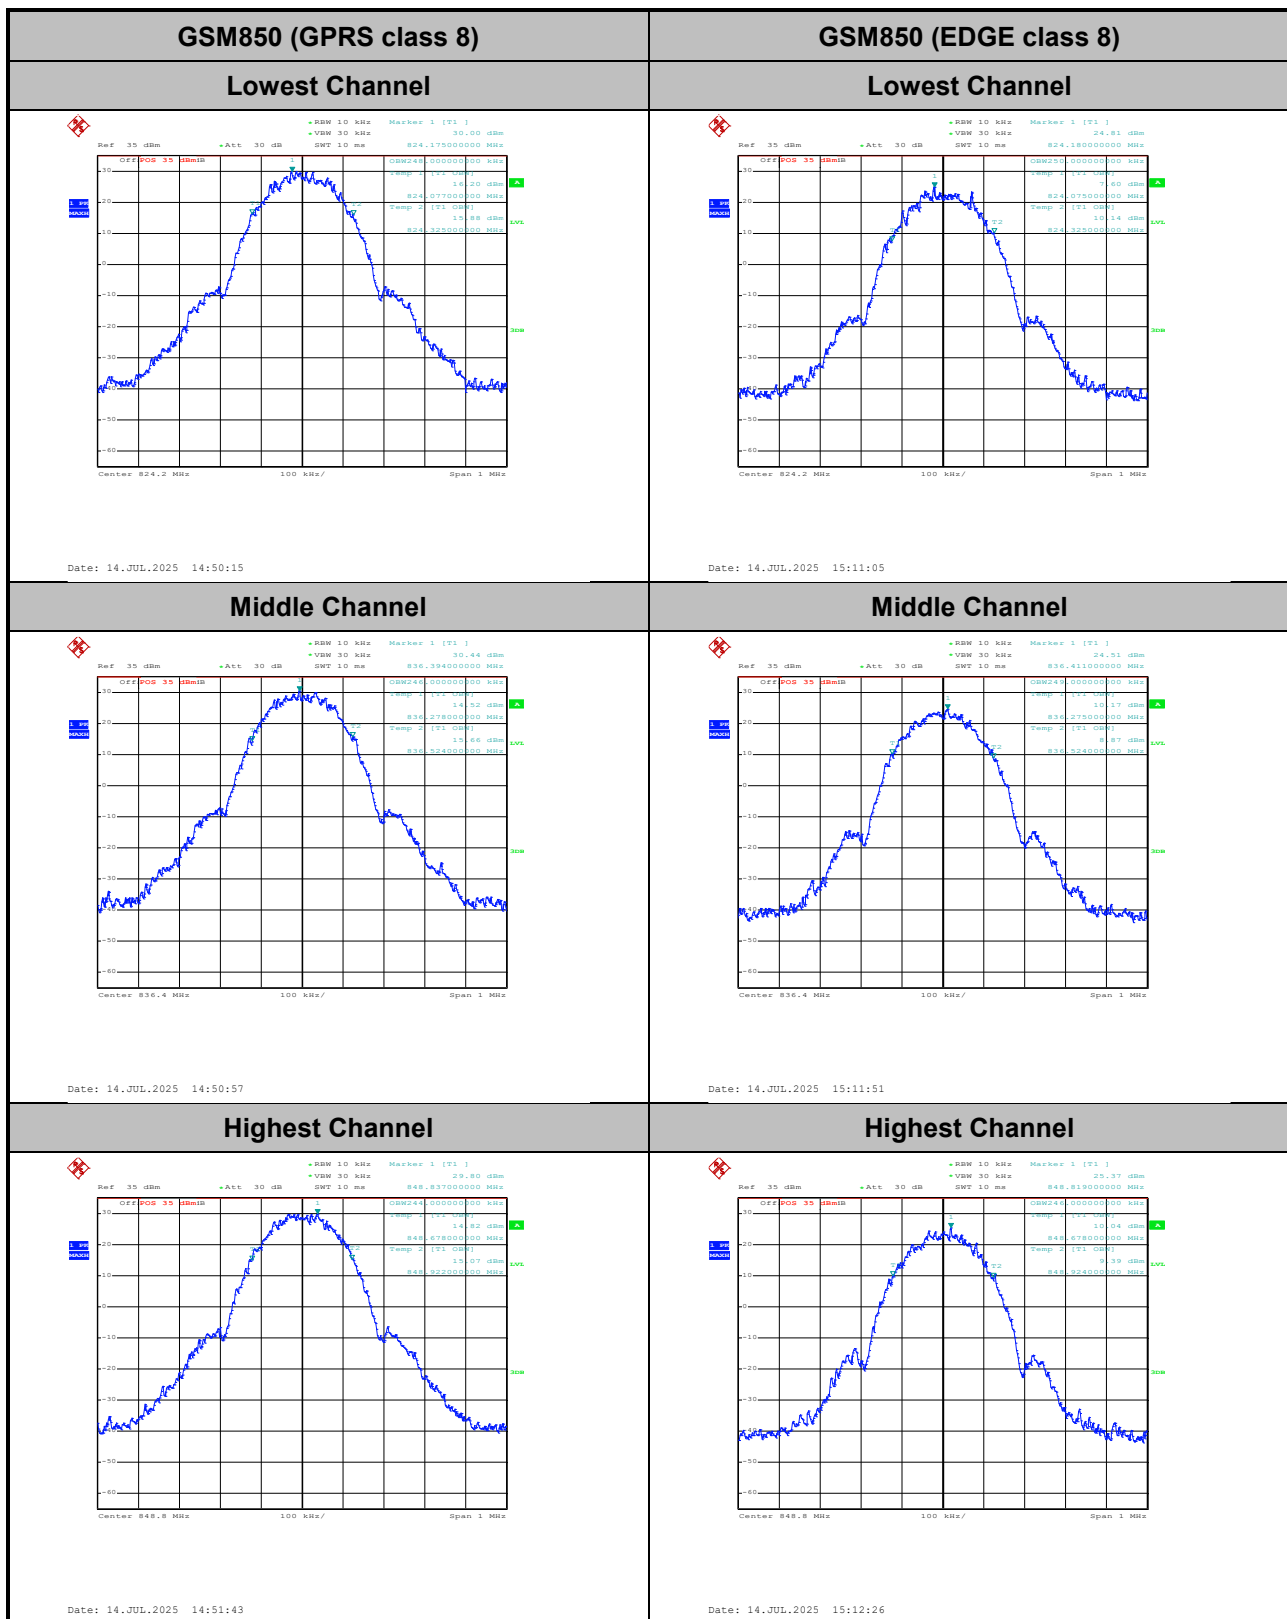






Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

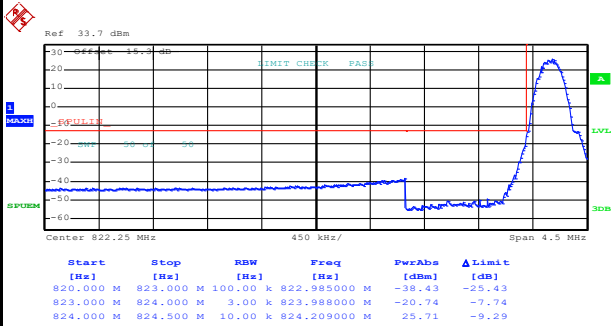

Date: 14.JUL.2025 14:54:12


Highest Band Edge

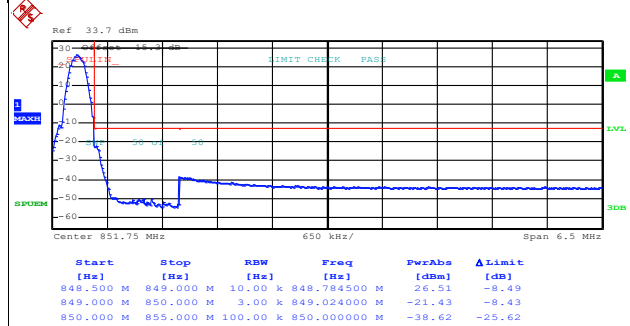

Date: 14.JUL.2025 14:55:48


GSM850 (EDGE class 8)

Lowest Band Edge

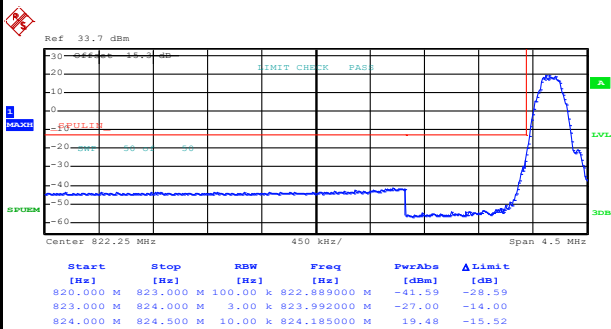

Date: 14.JUL.2025 15:14:37

Highest Band Edge

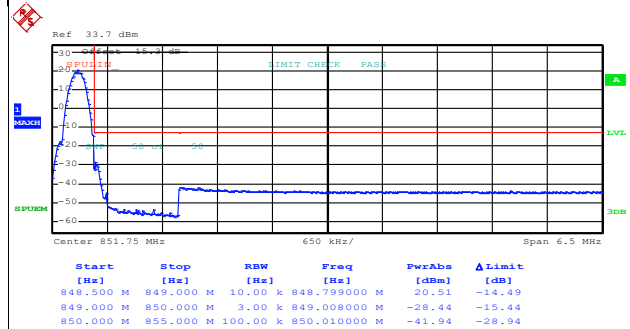


Date: 14.JUL.2025 15:16:13




GSM1900 (GPRS class 8)

Lowest Band Edge

Highest Band Edge

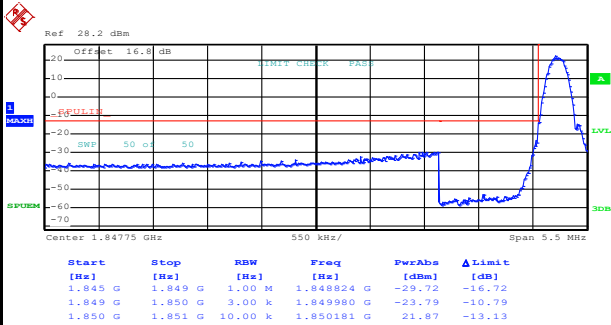

Date: 14.JUL.2025 11:49:20

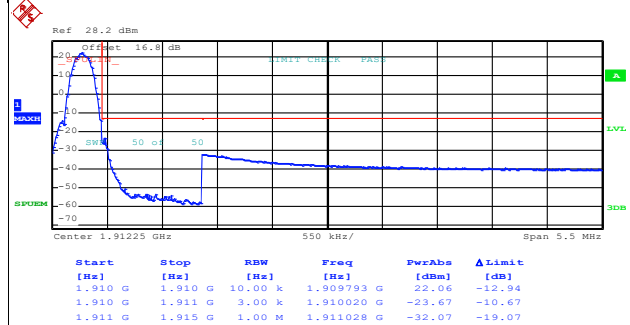


Date: 14.JUL.2025 11:51:08


GSM1900 (EDGE class 8)

Lowest Band Edge

Highest Band Edge






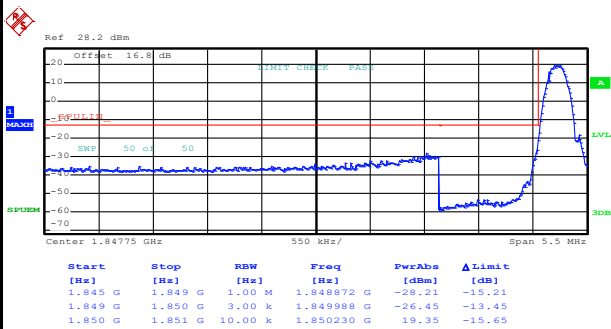


Date: 14.JUL.2025 14:24:01

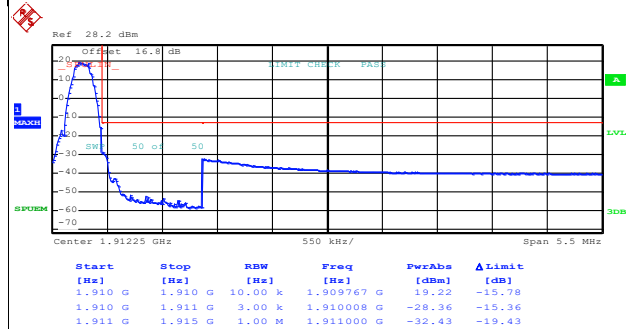

Date: 14.JUL.2025 14:25:38

Conducted Spurious Emission

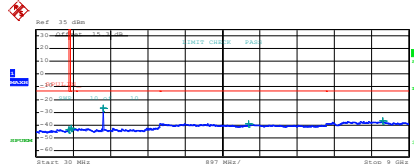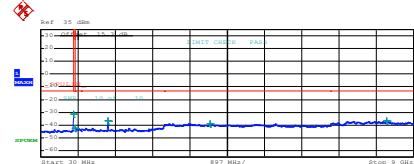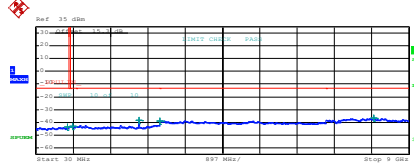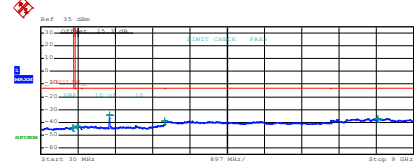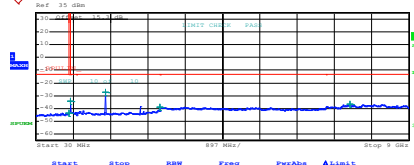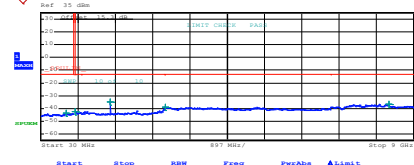GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>852.502500 M</td><td>-43.50</td><td>-30.50</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>875.517500 M</td><td>-42.59</td><td>-29.59</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-26.66</td><td>-13.66</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.1470000 G</td><td>-38.76</td><td>-25.76</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.3675000 G</td><td>-36.60</td><td>-23.60</td></tr></table> Date: 14.JUL.2025 14:57:47		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	852.502500 M	-43.50	-30.50	855.000 M	1.000 G	1.00 M	875.517500 M	-42.59	-29.59	1.000 G	3.000 G	1.00 M	1.6485000 G	-26.66	-13.66	3.000 G	7.000 G	1.00 M	5.1470000 G	-38.76	-25.76	7.000 G	9.000 G	1.00 M	8.3675000 G	-36.60	-23.60	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>852.802500 M</td><td>-31.10</td><td>-18.10</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>882.213750 M</td><td>-42.75</td><td>-29.75</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6485000 G</td><td>-36.46</td><td>-23.46</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>4.0960000 G</td><td>-38.89</td><td>-25.89</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.3485000 G</td><td>-36.92</td><td>-23.92</td></tr></table> Date: 14.JUL.2025 15:17:39		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	852.802500 M	-31.10	-18.10	855.000 M	1.000 G	1.00 M	882.213750 M	-42.75	-29.75	1.000 G	3.000 G	1.00 M	1.6485000 G	-36.46	-23.46	3.000 G	7.000 G	1.00 M	4.0960000 G	-38.89	-25.89	7.000 G	9.000 G	1.00 M	8.3485000 G	-36.92	-23.92
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	852.502500 M	-43.50	-30.50																																																																																		
855.000 M	1.000 G	1.00 M	875.517500 M	-42.59	-29.59																																																																																		
1.000 G	3.000 G	1.00 M	1.6485000 G	-26.66	-13.66																																																																																		
3.000 G	7.000 G	1.00 M	5.1470000 G	-38.76	-25.76																																																																																		
7.000 G	9.000 G	1.00 M	8.3675000 G	-36.60	-23.60																																																																																		
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	852.802500 M	-31.10	-18.10																																																																																		
855.000 M	1.000 G	1.00 M	882.213750 M	-42.75	-29.75																																																																																		
1.000 G	3.000 G	1.00 M	1.6485000 G	-36.46	-23.46																																																																																		
3.000 G	7.000 G	1.00 M	4.0960000 G	-38.89	-25.89																																																																																		
7.000 G	9.000 G	1.00 M	8.3485000 G	-36.92	-23.92																																																																																		
Middle Channel		Middle Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>791.165000 M</td><td>-43.88</td><td>-30.88</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>905.460000 M</td><td>-43.04</td><td>-30.04</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>2.5095000 G</td><td>-39.38</td><td>-25.38</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0030000 G</td><td>-38.86</td><td>-25.86</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.1425000 G</td><td>-36.88</td><td>-23.88</td></tr></table> Date: 14.JUL.2025 14:58:45		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	791.165000 M	-43.88	-30.88	855.000 M	1.000 G	1.00 M	905.460000 M	-43.04	-30.04	1.000 G	3.000 G	1.00 M	2.5095000 G	-39.38	-25.38	3.000 G	7.000 G	1.00 M	3.0030000 G	-38.86	-25.86	7.000 G	9.000 G	1.00 M	8.1425000 G	-36.88	-23.88	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>801.237500 M</td><td>-44.09</td><td>-31.09</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>907.013750 M</td><td>-43.08</td><td>-30.08</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6790000 G</td><td>-34.24</td><td>-21.24</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0050000 G</td><td>-38.84</td><td>-25.84</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.1470000 G</td><td>-37.03</td><td>-24.03</td></tr></table> Date: 14.JUL.2025 15:18:47		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	801.237500 M	-44.09	-31.09	855.000 M	1.000 G	1.00 M	907.013750 M	-43.08	-30.08	1.000 G	3.000 G	1.00 M	1.6790000 G	-34.24	-21.24	3.000 G	7.000 G	1.00 M	3.0050000 G	-38.84	-25.84	7.000 G	9.000 G	1.00 M	8.1470000 G	-37.03	-24.03
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	791.165000 M	-43.88	-30.88																																																																																		
855.000 M	1.000 G	1.00 M	905.460000 M	-43.04	-30.04																																																																																		
1.000 G	3.000 G	1.00 M	2.5095000 G	-39.38	-25.38																																																																																		
3.000 G	7.000 G	1.00 M	3.0030000 G	-38.86	-25.86																																																																																		
7.000 G	9.000 G	1.00 M	8.1425000 G	-36.88	-23.88																																																																																		
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	801.237500 M	-44.09	-31.09																																																																																		
855.000 M	1.000 G	1.00 M	907.013750 M	-43.08	-30.08																																																																																		
1.000 G	3.000 G	1.00 M	1.6790000 G	-34.24	-21.24																																																																																		
3.000 G	7.000 G	1.00 M	3.0050000 G	-38.84	-25.84																																																																																		
7.000 G	9.000 G	1.00 M	8.1470000 G	-37.03	-24.03																																																																																		
Highest Channel		Highest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>817.430000 M</td><td>-43.51</td><td>-30.51</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.034250 M</td><td>-34.13</td><td>-21.13</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6380000 G</td><td>-37.23</td><td>-14.23</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0050000 G</td><td>-38.89</td><td>-25.89</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>7.5780000 G</td><td>-36.62</td><td>-23.62</td></tr></table> Date: 14.JUL.2025 14:59:39		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	817.430000 M	-43.51	-30.51	855.000 M	1.000 G	1.00 M	855.034250 M	-34.13	-21.13	1.000 G	3.000 G	1.00 M	1.6380000 G	-37.23	-14.23	3.000 G	7.000 G	1.00 M	3.0050000 G	-38.89	-25.89	7.000 G	9.000 G	1.00 M	7.5780000 G	-36.62	-23.62	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>Power</th><th>ΔLimit</th></tr><tr><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[MHz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>850.000 M</td><td>855.000 M</td><td>1.00 M</td><td>831.387500 M</td><td>-43.92</td><td>-30.92</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.034250 M</td><td>-42.27</td><td>-29.27</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.6375000 G</td><td>-34.62</td><td>-21.62</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.0240000 G</td><td>-38.98</td><td>-25.98</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.4010000 G</td><td>-36.40</td><td>-23.40</td></tr></table> Date: 14.JUL.2025 15:19:54		Start	Stop	RBW	Freq	Power	ΔLimit	[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]	850.000 M	855.000 M	1.00 M	831.387500 M	-43.92	-30.92	855.000 M	1.000 G	1.00 M	855.034250 M	-42.27	-29.27	1.000 G	3.000 G	1.00 M	1.6375000 G	-34.62	-21.62	3.000 G	7.000 G	1.00 M	3.0240000 G	-38.98	-25.98	7.000 G	9.000 G	1.00 M	8.4010000 G	-36.40	-23.40
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	817.430000 M	-43.51	-30.51																																																																																		
855.000 M	1.000 G	1.00 M	855.034250 M	-34.13	-21.13																																																																																		
1.000 G	3.000 G	1.00 M	1.6380000 G	-37.23	-14.23																																																																																		
3.000 G	7.000 G	1.00 M	3.0050000 G	-38.89	-25.89																																																																																		
7.000 G	9.000 G	1.00 M	7.5780000 G	-36.62	-23.62																																																																																		
Start	Stop	RBW	Freq	Power	ΔLimit																																																																																		
[MHz]	[MHz]	[MHz]	[MHz]	[dBm]	[dB]																																																																																		
850.000 M	855.000 M	1.00 M	831.387500 M	-43.92	-30.92																																																																																		
855.000 M	1.000 G	1.00 M	855.034250 M	-42.27	-29.27																																																																																		
1.000 G	3.000 G	1.00 M	1.6375000 G	-34.62	-21.62																																																																																		
3.000 G	7.000 G	1.00 M	3.0240000 G	-38.98	-25.98																																																																																		
7.000 G	9.000 G	1.00 M	8.4010000 G	-36.40	-23.40																																																																																		



GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0036	0.0024	PASS
40	Normal Voltage	0.0012	0.0167	
30	Normal Voltage	0.0215	0.0072	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0012	0.0048	
0	Normal Voltage	0.0203	0.0060	
-10	Normal Voltage	0.0299	0.0215	
-20	Normal Voltage	0.0323	0.0108	
-30	Normal Voltage	0.0024	0.0203	
20	Maximum Voltage	0.0060	0.0167	
20	Normal Voltage	0.0179	0.0012	
20	Minimum Voltage	0.0048	0.0191	

Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0138	0.0149	PASS
40	Normal Voltage	0.0021	0.0069	
30	Normal Voltage	0.0027	0.0032	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0053	0.0027	
0	Normal Voltage	0.0032	0.0032	
-10	Normal Voltage	0.0005	0.0011	
-20	Normal Voltage	0.0005	0.0048	
-30	Normal Voltage	0.0128	0.0059	
20	Maximum Voltage	0.0074	0.0037	
20	Normal Voltage	0.0011	0.0005	
20	Minimum Voltage	0.0043	0.0043	

Note: Normal Voltage = 3.9 V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage = 4.5 V









A3. WCDMA

Peak-to-Average Ratio


Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.36	3.32	3.64	PASS
Middle CH	3.36	3.40	3.56	
Highest CH	3.28	3.40	3.72	

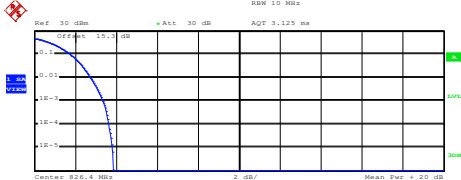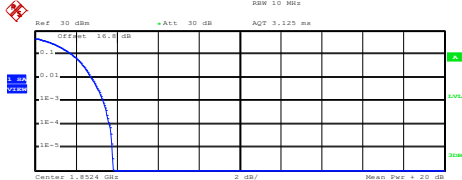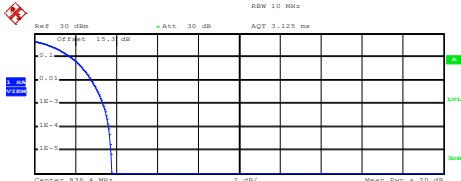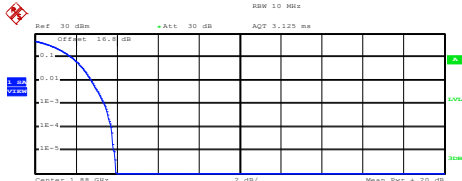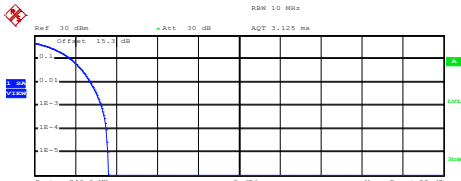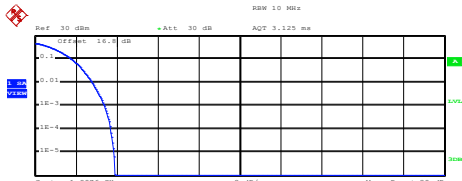

WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
 Center 836.4 MHz Mean Pwr + 20 dB Trace 1 Mean 23.76 dBm Peak 27.64 dBm Crest 3.88 dB 10 % 1.76 dB 1 % 2.76 dB .1 % 3.36 dB .01 % 3.64 dB Date: 11.JUL.2025 17:18:14	 Center 1.8524 GHz Mean Pwr + 20 dB Trace 1 Mean 24.33 dBm Peak 28.14 dBm Crest 3.80 dB 10 % 1.80 dB 1 % 2.76 dB .1 % 3.32 dB .01 % 3.64 dB Date: 17.JUL.2025 10:29:52
Middle Channel	Middle Channel
 Center 836.4 MHz Mean Pwr + 20 dB Trace 1 Mean 23.65 dBm Peak 27.43 dBm Crest 3.78 dB 10 % 1.80 dB 1 % 2.80 dB .1 % 3.36 dB .01 % 3.64 dB Date: 11.JUL.2025 17:18:40	 Center 1.85 GHz Mean Pwr + 20 dB Trace 1 Mean 24.19 dBm Peak 28.14 dBm Crest 3.94 dB 10 % 1.80 dB 1 % 2.76 dB .1 % 3.40 dB .01 % 3.72 dB Date: 17.JUL.2025 10:30:16
Highest Channel	Highest Channel
 Center 846.6 MHz Mean Pwr + 20 dB Trace 1 Mean 23.74 dBm Peak 27.36 dBm Crest 3.62 dB 10 % 1.80 dB 1 % 2.76 dB .1 % 3.28 dB .01 % 3.52 dB Date: 11.JUL.2025 17:19:00	 Center 1.9076 GHz Mean Pwr + 20 dB Trace 1 Mean 24.07 dBm Peak 27.99 dBm Crest 3.92 dB 10 % 1.80 dB 1 % 2.80 dB .1 % 3.40 dB .01 % 3.72 dB Date: 17.JUL.2025 10:30:35


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

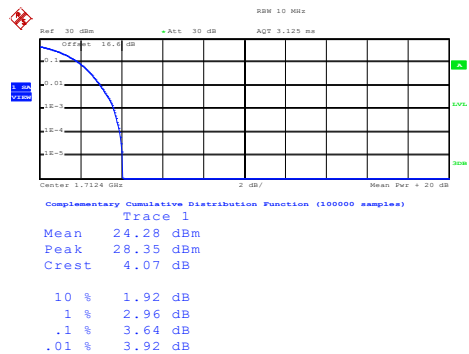


Date: 17.JUL.2025 10:53:41

Middle Channel

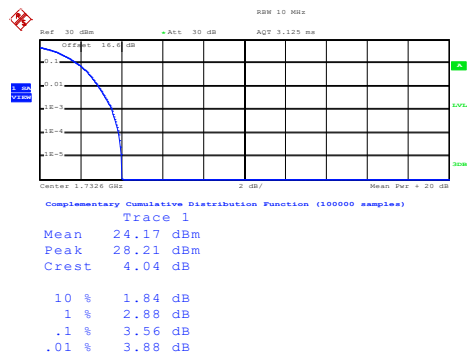

Date: 17.JUL.2025 10:54:05


Highest Channel

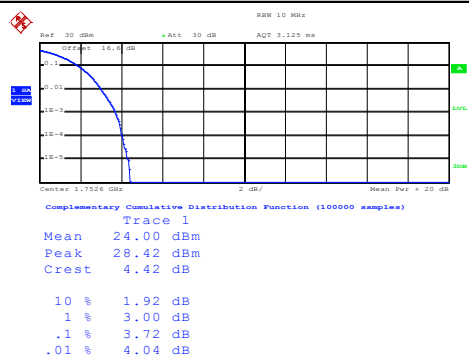

Date: 17.JUL.2025 10:54:32


**26dB Bandwidth**

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.75	4.76	4.74
Middle CH	4.74	4.75	4.76
Highest CH	4.73	4.75	4.75

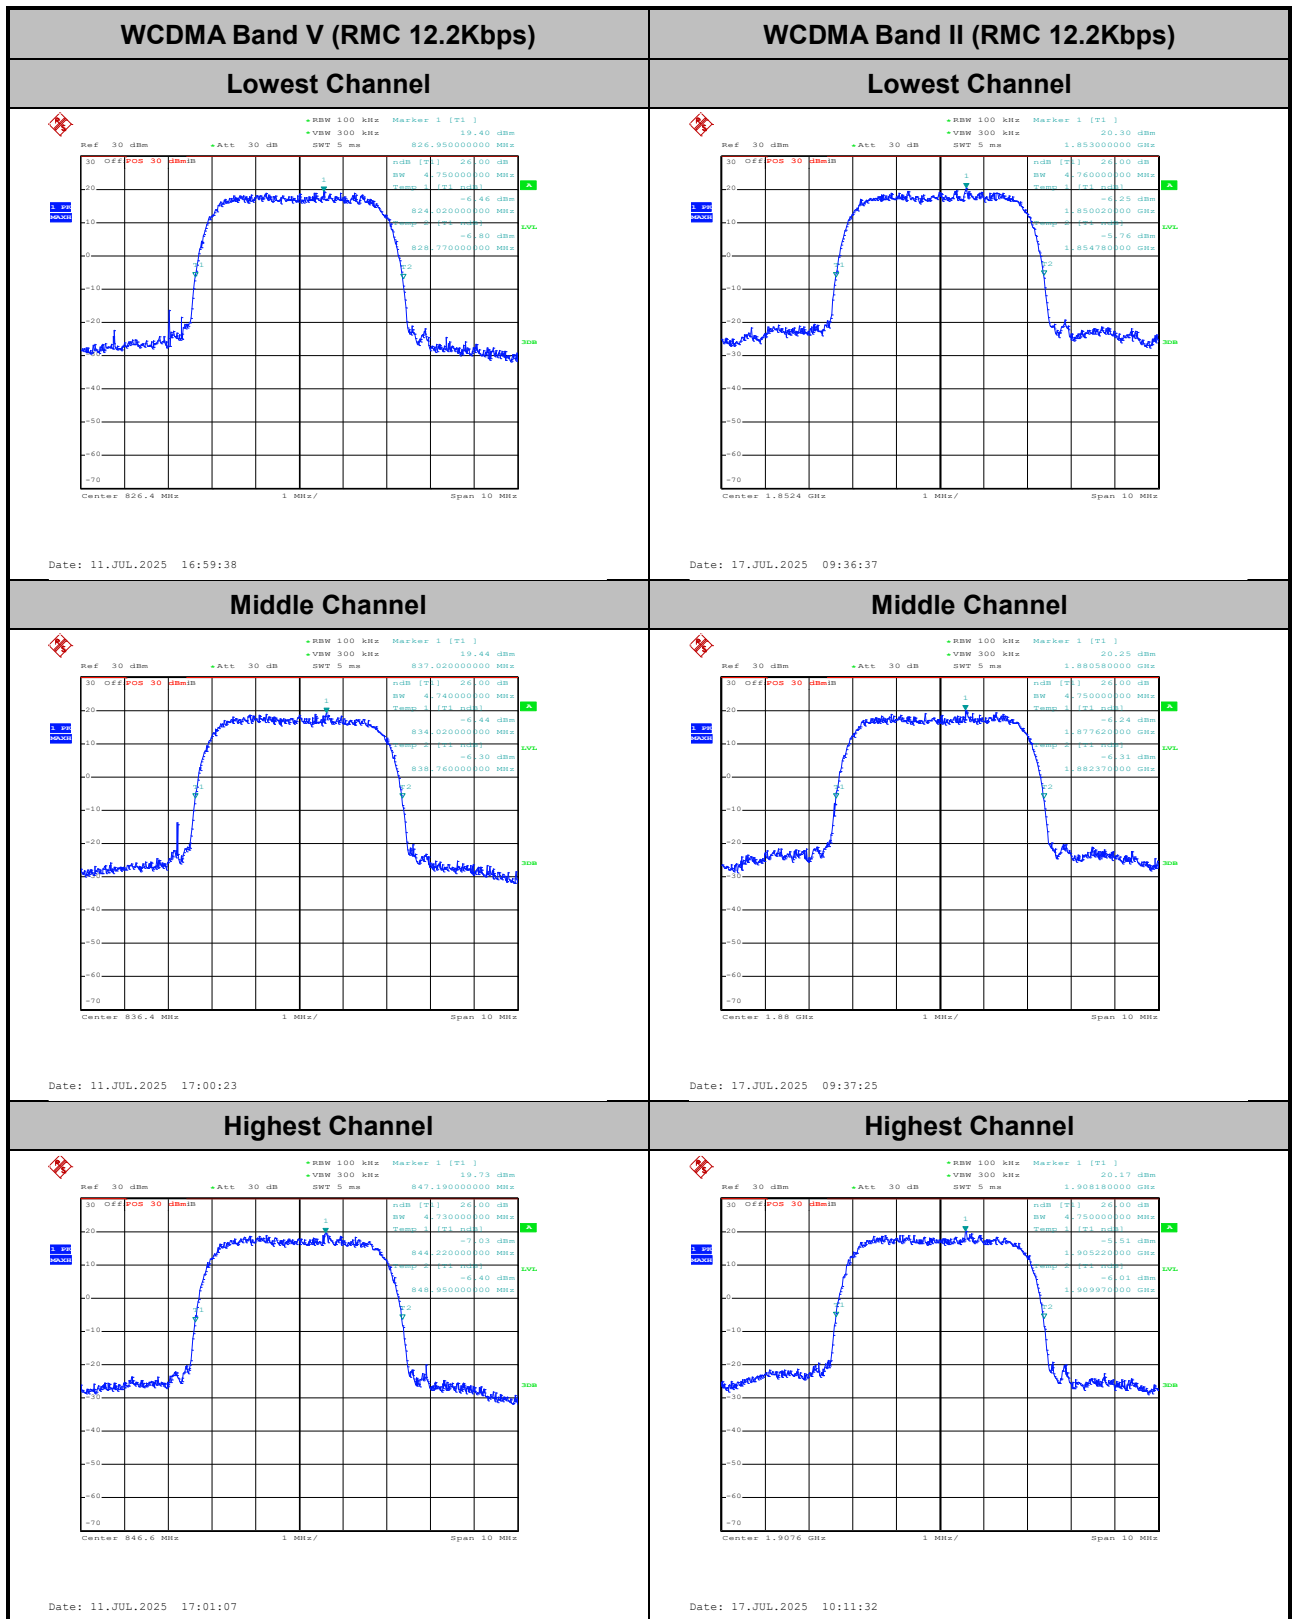


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

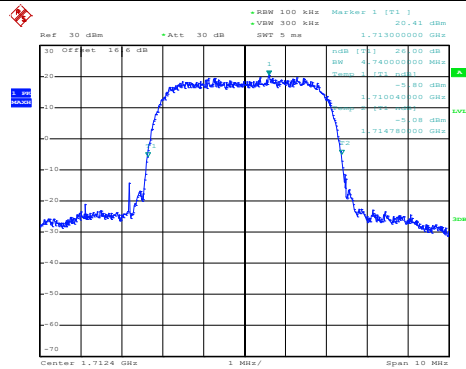


Date: 17.JUL.2025 10:37:30

Middle Channel

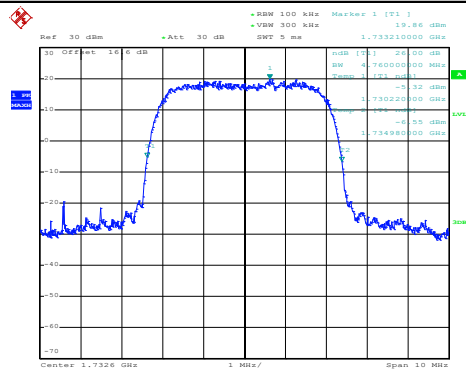

Date: 17.JUL.2025 10:38:26

Highest Channel

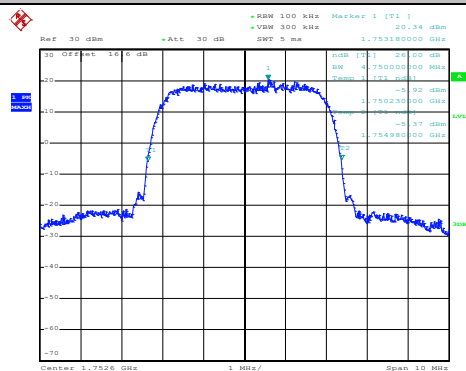

Date: 17.JUL.2025 10:39:13


**Occupied Bandwidth**

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.16	4.17	4.16
Middle CH	4.16	4.17	4.18
Highest CH	4.15	4.17	4.18




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

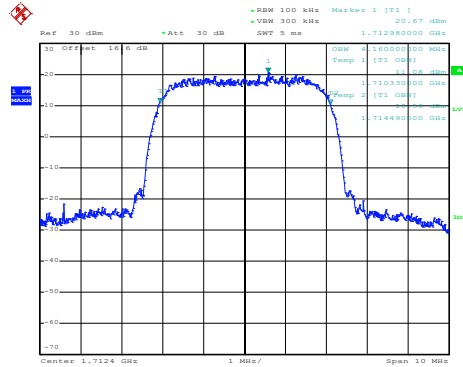


Date: 17.JUL.2025 10:40:37

Middle Channel

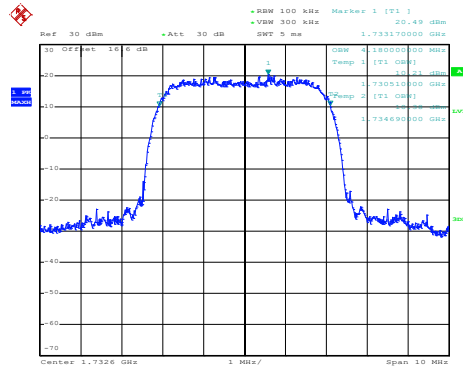

Date: 17.JUL.2025 10:41:19

Highest Channel

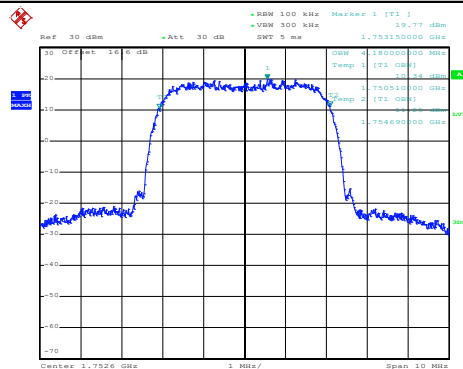


Date: 17.JUL.2025 10:42:03



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

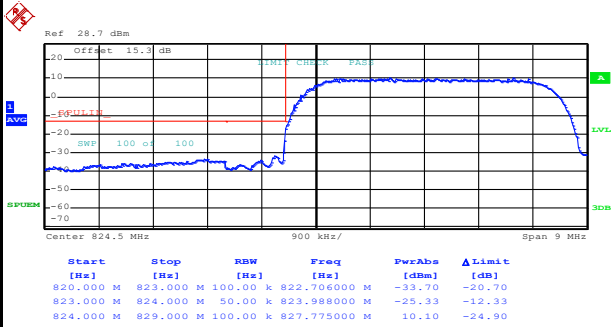

Date: 11.JUL.2025 17:07:16


Highest Band Edge

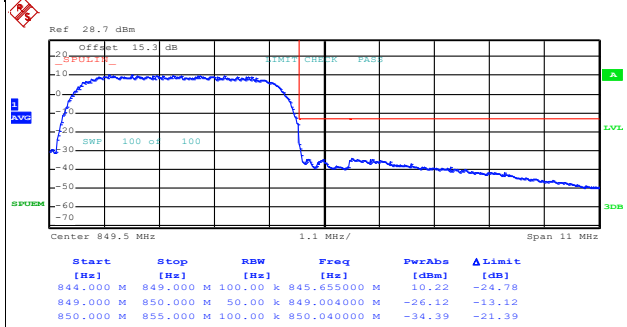

Date: 11.JUL.2025 17:13:39


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

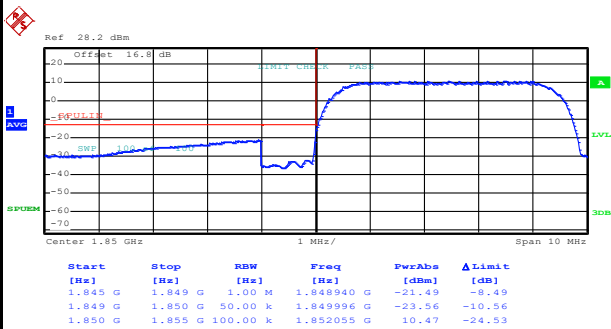

Date: 17.JUL.2025 10:18:54

Highest Band Edge

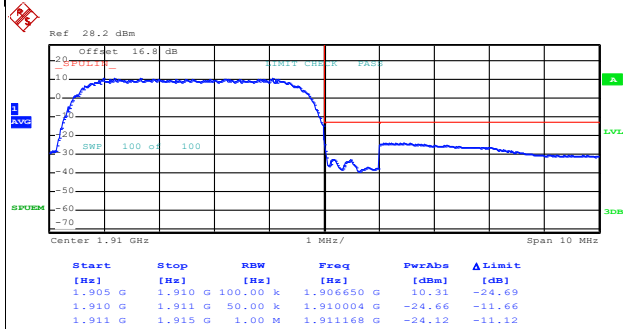


Date: 17.JUL.2025 10:22:40




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

Highest Band Edge

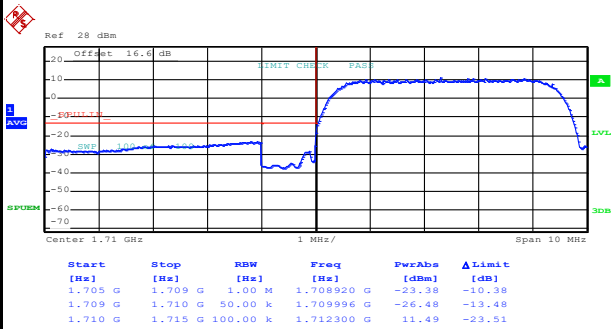







Date: 17.JUL.2025 10:45:37

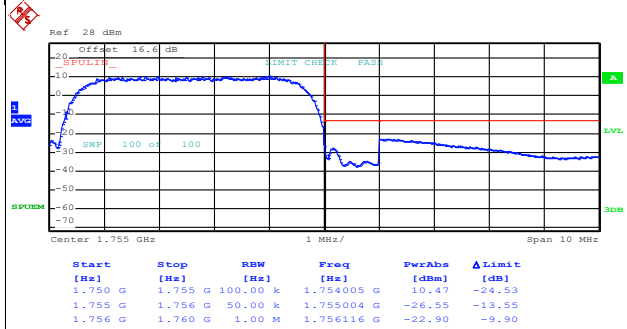

Date: 17.JUL.2025 10:48:34




Conducted Spurious Emission

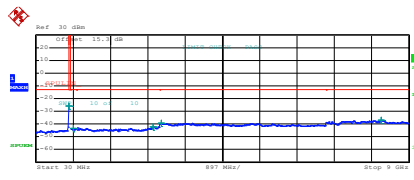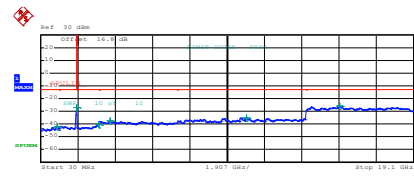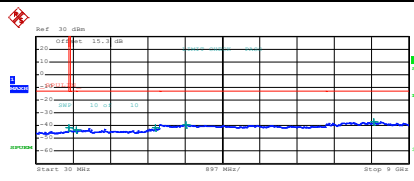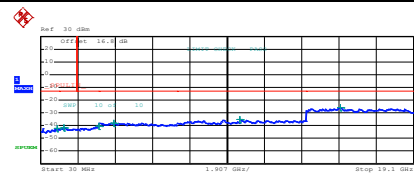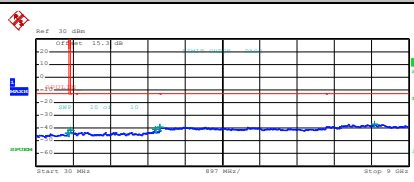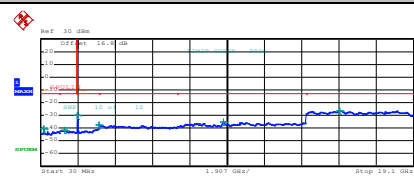WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																																																																														
Lowest Channel	Lowest Channel																																																																														
<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,210000 M</td><td>-26.10</td><td>-13.10</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>930,436255 M</td><td>-43.36</td><td>-30.36</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,8545000 G</td><td>-42.08</td><td>-29.08</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,0510000 G</td><td>-39.30</td><td>-26.30</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,3395000 G</td><td>-36.83</td><td>-23.83</td></tr></table> Date: 11.JUL.2025 17:15:06	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,210000 M	-26.10	-13.10	855,000 M	1,000 G	1,000 M	930,436255 M	-43.36	-30.36	1,000 G	3,000 G	1,000 M	2,8545000 G	-42.08	-29.08	3,000 G	7,000 G	1,000 M	3,0510000 G	-39.30	-26.30	7,000 G	9,000 G	1,000 M	8,3395000 G	-36.83	-23.83	<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>859,350000 M</td><td>-42.17</td><td>-29.17</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,844788 G</td><td>-27.01</td><td>-14.01</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,998200 G</td><td>-40.26</td><td>-27.26</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,566000 G</td><td>-37.77</td><td>-24.77</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,562350 G</td><td>-35.41</td><td>-22.41</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,307750 G</td><td>-26.06</td><td>-13.06</td></tr></table> Date: 17.JUL.2025 10:25:31	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	859,350000 M	-42.17	-29.17	1,000 G	1,845 G	1,000 M	1,844788 G	-27.01	-14.01	1,915 G	3,000 G	1,000 M	2,998200 G	-40.26	-27.26	3,000 G	7,000 G	1,000 M	3,566000 G	-37.77	-24.77	7,000 G	13,600 G	1,000 M	10,562350 G	-35.41	-22.41	13,600 G	19,100 G	1,000 M	15,307750 G	-26.06	-13.06
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,210000 M	-26.10	-13.10																																																																										
855,000 M	1,000 G	1,000 M	930,436255 M	-43.36	-30.36																																																																										
1,000 G	3,000 G	1,000 M	2,8545000 G	-42.08	-29.08																																																																										
3,000 G	7,000 G	1,000 M	3,0510000 G	-39.30	-26.30																																																																										
7,000 G	9,000 G	1,000 M	8,3395000 G	-36.83	-23.83																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	859,350000 M	-42.17	-29.17																																																																										
1,000 G	1,845 G	1,000 M	1,844788 G	-27.01	-14.01																																																																										
1,915 G	3,000 G	1,000 M	2,998200 G	-40.26	-27.26																																																																										
3,000 G	7,000 G	1,000 M	3,566000 G	-37.77	-24.77																																																																										
7,000 G	13,600 G	1,000 M	10,562350 G	-35.41	-22.41																																																																										
13,600 G	19,100 G	1,000 M	15,307750 G	-26.06	-13.06																																																																										
Middle Channel	Middle Channel																																																																														
<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>819,802500 M</td><td>-41.49</td><td>-28.49</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>930,296250 M</td><td>-43.56</td><td>-30.56</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,9040000 G</td><td>-41.91</td><td>-28.91</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,6430000 G</td><td>-39.10</td><td>-26.10</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,1655000 G</td><td>-37.07</td><td>-24.07</td></tr></table> Date: 11.JUL.2025 17:16:27	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	819,802500 M	-41.49	-28.49	855,000 M	1,000 G	1,000 M	930,296250 M	-43.56	-30.56	1,000 G	3,000 G	1,000 M	2,9040000 G	-41.91	-28.91	3,000 G	7,000 G	1,000 M	3,6430000 G	-39.10	-26.10	7,000 G	9,000 G	1,000 M	8,1655000 G	-37.07	-24.07	<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>871,980000 M</td><td>-42.06</td><td>-29.06</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,228125 G</td><td>-41.86</td><td>-28.86</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>2,993219 G</td><td>-40.23</td><td>-27.23</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,756000 G</td><td>-39.00</td><td>-25.00</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>10,218500 G</td><td>-34.95</td><td>-21.95</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,307563 G</td><td>-25.95</td><td>-12.95</td></tr></table> Date: 17.JUL.2025 10:26:36	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	871,980000 M	-42.06	-29.06	1,000 G	1,845 G	1,000 M	1,228125 G	-41.86	-28.86	1,915 G	3,000 G	1,000 M	2,993219 G	-40.23	-27.23	3,000 G	7,000 G	1,000 M	3,756000 G	-39.00	-25.00	7,000 G	13,600 G	1,000 M	10,218500 G	-34.95	-21.95	13,600 G	19,100 G	1,000 M	15,307563 G	-25.95	-12.95
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	819,802500 M	-41.49	-28.49																																																																										
855,000 M	1,000 G	1,000 M	930,296250 M	-43.56	-30.56																																																																										
1,000 G	3,000 G	1,000 M	2,9040000 G	-41.91	-28.91																																																																										
3,000 G	7,000 G	1,000 M	3,6430000 G	-39.10	-26.10																																																																										
7,000 G	9,000 G	1,000 M	8,1655000 G	-37.07	-24.07																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	871,980000 M	-42.06	-29.06																																																																										
1,000 G	1,845 G	1,000 M	1,228125 G	-41.86	-28.86																																																																										
1,915 G	3,000 G	1,000 M	2,993219 G	-40.23	-27.23																																																																										
3,000 G	7,000 G	1,000 M	3,756000 G	-39.00	-25.00																																																																										
7,000 G	13,600 G	1,000 M	10,218500 G	-34.95	-21.95																																																																										
13,600 G	19,100 G	1,000 M	15,307563 G	-25.95	-12.95																																																																										
Highest Channel	Highest Channel																																																																														
<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,000 M</td><td>809,335000 M</td><td>-44.11</td><td>-31.11</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,000 M</td><td>930,072500 M</td><td>-41.60</td><td>-28.60</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,000 M</td><td>2,9040000 G</td><td>-41.34</td><td>-28.34</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,6140000 G</td><td>-39.31</td><td>-26.31</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,000 M</td><td>8,1700000 G</td><td>-38.88</td><td>-25.88</td></tr></table> Date: 11.JUL.2025 17:17:24	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	820,000 M	1,000 M	809,335000 M	-44.11	-31.11	855,000 M	1,000 G	1,000 M	930,072500 M	-41.60	-28.60	1,000 G	3,000 G	1,000 M	2,9040000 G	-41.34	-28.34	3,000 G	7,000 G	1,000 M	3,6140000 G	-39.31	-26.31	7,000 G	9,000 G	1,000 M	8,1700000 G	-38.88	-25.88	<table><tr><th>Start [Hz]</th><th>Stop [Hz]</th><th>RBW [Hz]</th><th>Freq [Hz]</th><th>PwrAve [dBm]</th><th>ΔLimit [dB]</th></tr><tr><td>30,000 M</td><td>1,000 G</td><td>1,000 M</td><td>170,407500 M</td><td>-40.44</td><td>-27.44</td></tr><tr><td>1,000 G</td><td>1,845 G</td><td>1,000 M</td><td>1,246800 G</td><td>-41.91</td><td>-28.91</td></tr><tr><td>1,915 G</td><td>3,000 G</td><td>1,000 M</td><td>1,915271 G</td><td>-29.78</td><td>-16.78</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,000 M</td><td>3,004000 G</td><td>-37.81</td><td>-24.81</td></tr><tr><td>7,000 G</td><td>13,600 G</td><td>1,000 M</td><td>9,362800 G</td><td>-35.28</td><td>-22.28</td></tr><tr><td>13,600 G</td><td>19,100 G</td><td>1,000 M</td><td>15,318063 G</td><td>-26.24</td><td>-13.24</td></tr></table> Date: 17.JUL.2025 10:28:16	Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]	30,000 M	1,000 G	1,000 M	170,407500 M	-40.44	-27.44	1,000 G	1,845 G	1,000 M	1,246800 G	-41.91	-28.91	1,915 G	3,000 G	1,000 M	1,915271 G	-29.78	-16.78	3,000 G	7,000 G	1,000 M	3,004000 G	-37.81	-24.81	7,000 G	13,600 G	1,000 M	9,362800 G	-35.28	-22.28	13,600 G	19,100 G	1,000 M	15,318063 G	-26.24	-13.24
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	820,000 M	1,000 M	809,335000 M	-44.11	-31.11																																																																										
855,000 M	1,000 G	1,000 M	930,072500 M	-41.60	-28.60																																																																										
1,000 G	3,000 G	1,000 M	2,9040000 G	-41.34	-28.34																																																																										
3,000 G	7,000 G	1,000 M	3,6140000 G	-39.31	-26.31																																																																										
7,000 G	9,000 G	1,000 M	8,1700000 G	-38.88	-25.88																																																																										
Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAve [dBm]	ΔLimit [dB]																																																																										
30,000 M	1,000 G	1,000 M	170,407500 M	-40.44	-27.44																																																																										
1,000 G	1,845 G	1,000 M	1,246800 G	-41.91	-28.91																																																																										
1,915 G	3,000 G	1,000 M	1,915271 G	-29.78	-16.78																																																																										
3,000 G	7,000 G	1,000 M	3,004000 G	-37.81	-24.81																																																																										
7,000 G	13,600 G	1,000 M	9,362800 G	-35.28	-22.28																																																																										
13,600 G	19,100 G	1,000 M	15,318063 G	-26.24	-13.24																																																																										




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

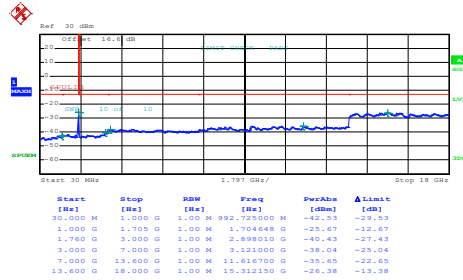


Date: 17.JUL.2025 10:50:35

Middle Channel

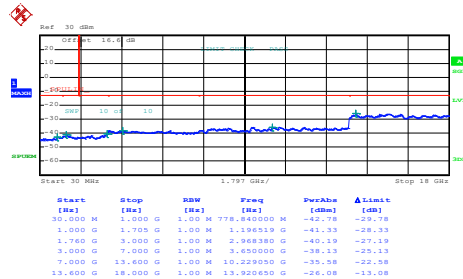

Date: 17.JUL.2025 10:51:41

Highest Channel

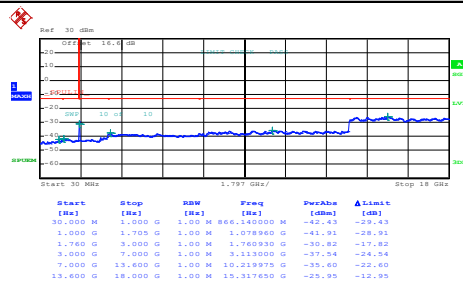

Date: 17.JUL.2025 10:52:49

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	2.5ppm
50	Normal Voltage	0.0096	PASS
40	Normal Voltage	0.0167	
30	Normal Voltage	0.0036	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0012	
0	Normal Voltage	0.0036	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0024	
20	Maximum Voltage	0.0108	
20	Normal Voltage	0.0132	
20	Minimum Voltage	0.0048	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	2.5ppm
50	Normal Voltage	0.0101	PASS
40	Normal Voltage	0.0080	
30	Normal Voltage	0.0074	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0005	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0016	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0085	
20	Maximum Voltage	0.0096	
20	Normal Voltage	0.0064	
20	Minimum Voltage	0.0069	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	2.5ppm
50	Normal Voltage	0.0185	PASS
40	Normal Voltage	0.0139	
30	Normal Voltage	0.0098	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0029	
0	Normal Voltage	0.0035	
-10	Normal Voltage	0.0023	
-20	Normal Voltage	0.0023	
-30	Normal Voltage	0.0150	
20	Maximum Voltage	0.0133	
20	Normal Voltage	0.0127	
20	Minimum Voltage	0.0144	

Note: Normal Voltage = 3.9 V. ; Minimum Voltage = 3.6 V. ; Maximum Voltage = 4.5 V



Appendix B. Radiated Spurious Emission Test Data

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	AmplCbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	GSM 850	H	2546	-37.46	RMS	27.98	-59.62	0.18	-95.23	89.23	-13.00	-24.46	H	0
2	Part 22H	GSM 850	M	2509	-30.31	RMS	27.84	-59.72	0.20	-95.23	96.60	-13.00	-17.31	V	1
3	Part 22H	WCDMA B5	M	2509	-63.58	RMS	27.84	-59.72	0.20	-95.23	63.33	-13.00	-50.58	H	0
4	Part 22H	WCDMA B5	M	2509	-53.22	RMS	27.84	-59.72	0.20	-95.23	73.69	-13.00	-40.22	V	1
1	Part 24E	GSM 1900	M	5640	-35.47	Average	33.38	-55.05	0.23	-95.23	81.20	-13.00	-22.47	V	2
2	Part 24E	GSM 1900	H	5729	-47.24	Average	33.82	-54.86	0.37	-95.23	68.66	-13.00	-34.24	V	0
3	Part 24E	WCDMA B2	M	5640	-58.64	RMS	32.94	-55.05	0.23	-95.23	58.47	-13.00	-45.64	V	2
4	Part 24E	WCDMA B2	L	7409	-59.20	RMS	36.30	-53.42	0.24	-95.23	52.91	-13.00	-46.20	H	0
1	Part 27L	WCDMA B4	H	5257	-58.17	RMS	32.99	-55.98	0.72	-95.23	59.33	-13.00	-45.17	H	2
2	Part 27L	WCDMA B4	H	7010	-59.97	RMS	35.72	-53.64	0.30	-95.23	52.88	-13.00	-46.97	H	0




Ant 0

Part 22H Mode 1

GSM 850 Ch128

L

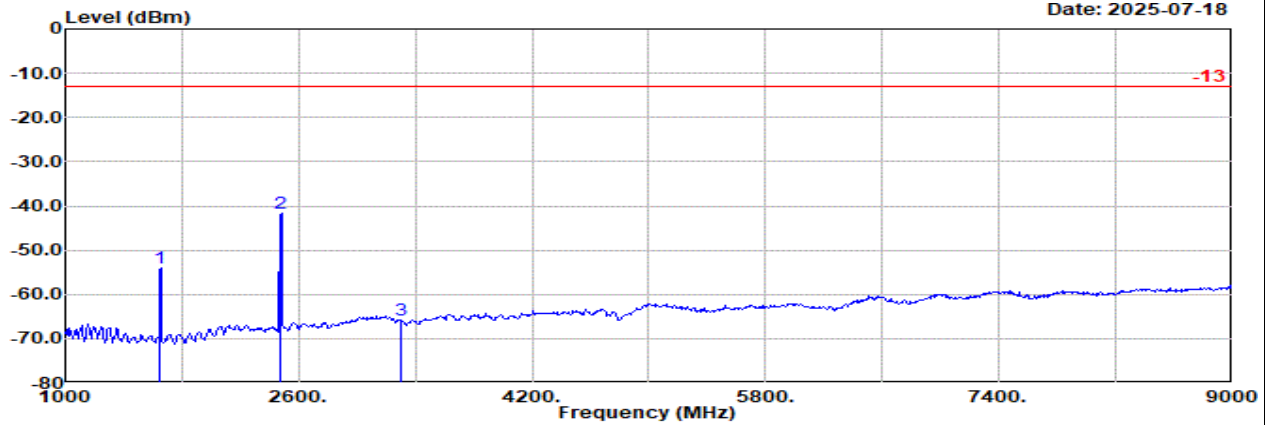


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: GSM 850 Ch128

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	1648.00	-53.99	RMS	25.11	-61.01	0.41	-95.23	76.73	-13.00	-40.99	Horizontal	
2	2472.00	-41.71	RMS	27.69	-59.78	0.22	-95.23	85.39	-13.00	-28.71	Horizontal	
3	3296.00	-65.72	RMS	29.51	-58.13	0.20	-95.23	57.93	-13.00	-52.72	Horizontal	

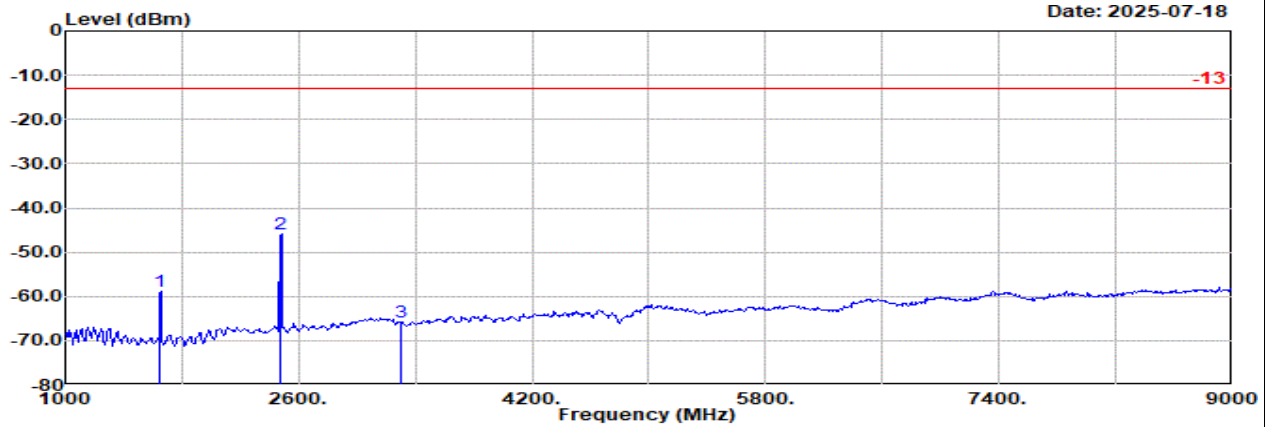

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: GSM 850 Ch128

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	1648.00	-58.81	RMS	25.11	-61.01	0.41	-95.23	71.91	-13.00	-45.81	Vertical	
2	2472.00	-45.93	RMS	27.69	-59.78	0.22	-95.23	81.17	-13.00	-32.93	Vertical	
3	3296.00	-65.76	RMS	29.51	-58.13	0.20	-95.23	57.89	-13.00	-52.76	Vertical	




Ant 0

Part 22H Mode 1

GSM 850 Ch189

M

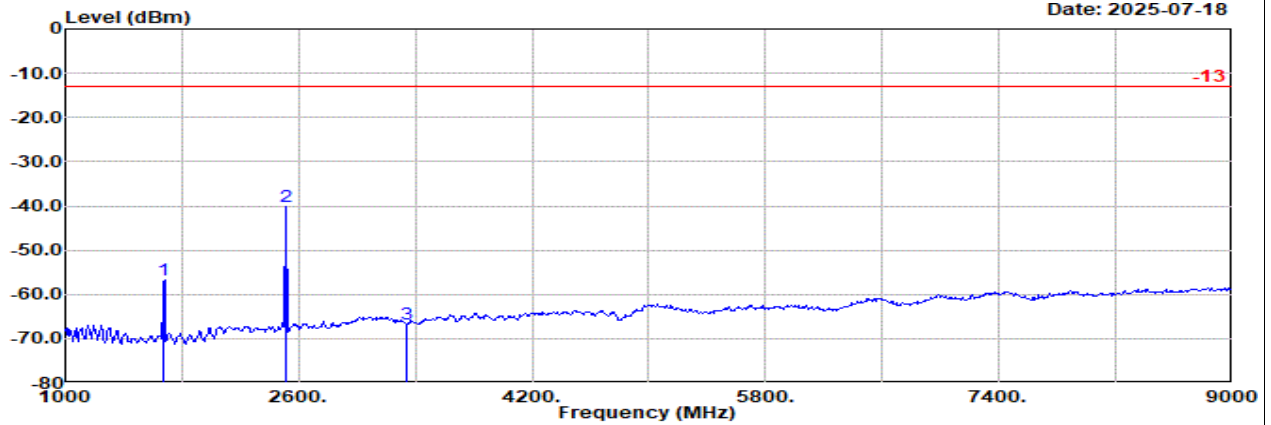


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: GSM 850 Ch189

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1673.00	-56.74	RMS	25.10	-60.97	0.39	-95.23	73.97	-13.00	-43.74	Horizontal	
2	2509.00	-40.15	RMS	27.84	-59.72	0.20	-95.23	86.76	-13.00	-27.15	Horizontal	
3	3345.00	-66.78	RMS	29.59	-58.07	0.24	-95.23	56.69	-13.00	-53.78	Horizontal	

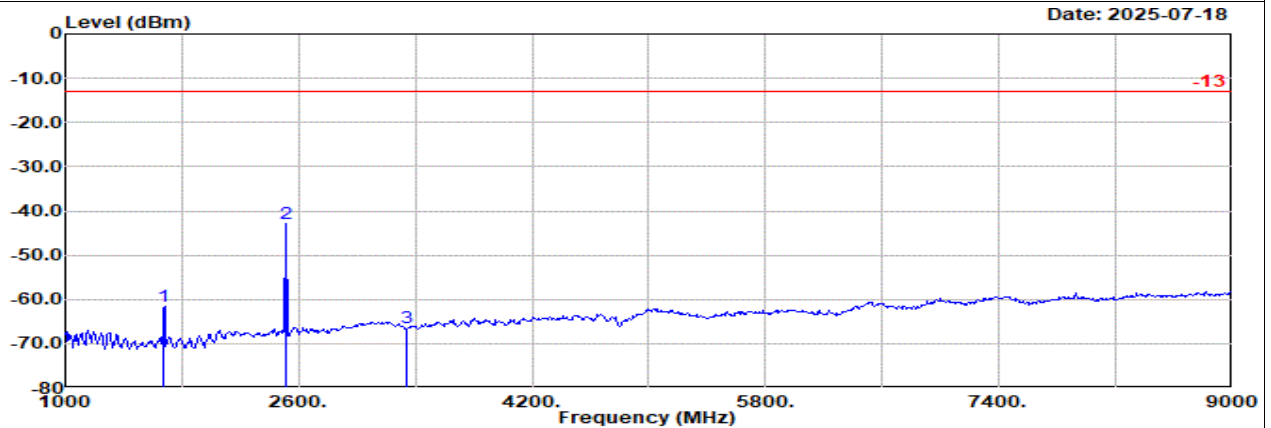

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: GSM 850 Ch189

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1673.00	-61.53	RMS	25.10	-60.97	0.39	-95.23	69.18	-13.00	-48.53	Vertical	
2	2509.00	-42.93	RMS	27.84	-59.72	0.20	-95.23	83.98	-13.00	-29.93	Vertical	
3	3345.00	-66.31	RMS	29.59	-58.07	0.24	-95.23	57.16	-13.00	-53.31	Vertical	




Ant 0

Part 22H Mode 1

GSM 850 Ch251

H

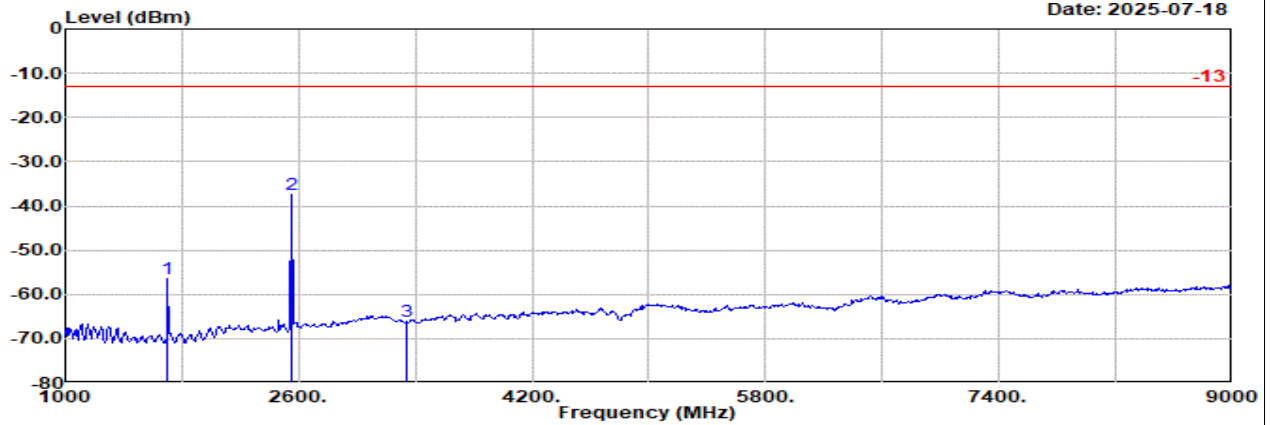


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: GSM 850 Ch251

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-56.40	RMS		25.10	-60.94	0.38	-95.23	74.29	-13.00	-43.40	Horizontal
2	2546.00	-37.46	RMS		27.98	-59.62	0.18	-95.23	89.23	-13.00	-24.46	Horizontal
3	3345.00	-66.25	RMS		29.59	-58.07	0.24	-95.23	57.22	-13.00	-53.25	Horizontal

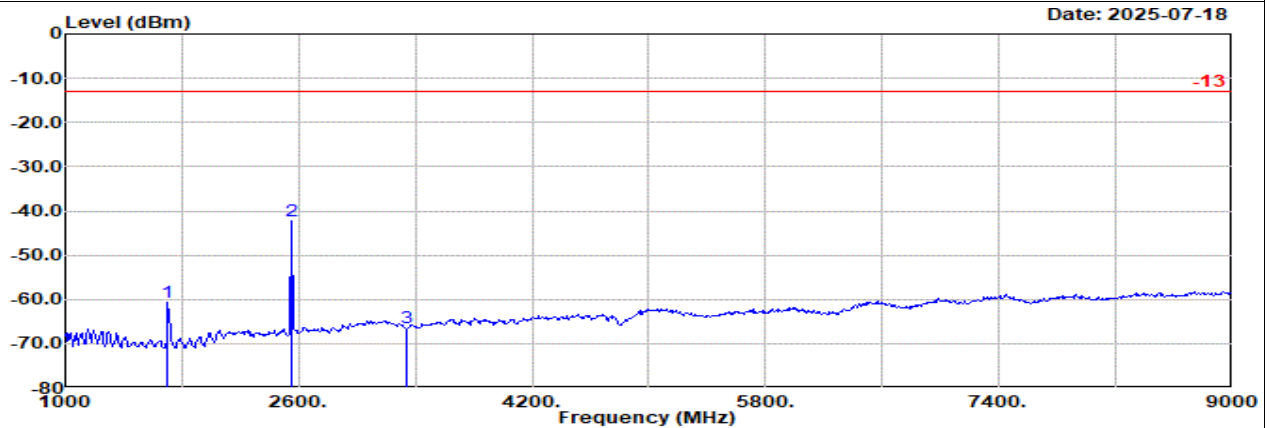

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: GSM 850 Ch251

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-60.53	RMS		25.10	-60.94	0.38	-95.23	70.16	-13.00	-47.53	Vertical
2	2546.00	-42.14	RMS		27.98	-59.62	0.18	-95.23	84.55	-13.00	-29.14	Vertical
3	3345.00	-66.41	RMS		29.59	-58.07	0.24	-95.23	57.06	-13.00	-53.41	Vertical




Ant 0

Part 22H Mode 3

WCDMA B5 Ch4132

L

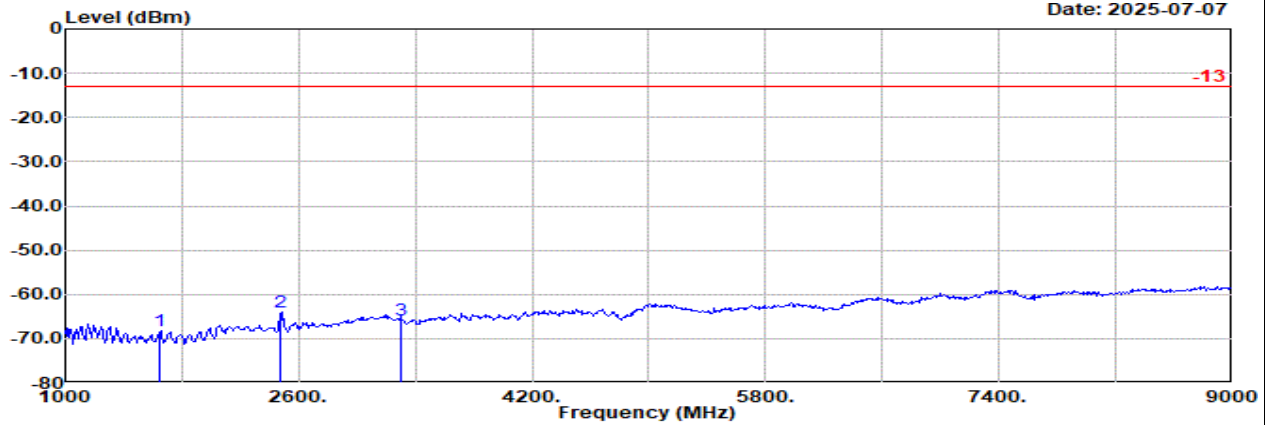


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band 5 Ch4132

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1652.00	-68.33	RMS	25.10	-61.00	0.40	-95.23	62.40	-13.00	-55.33	Horizontal
2	2479.00	-64.00	RMS	27.72	-59.77	0.21	-95.23	63.07	-13.00	-51.00	Horizontal
3	3305.00	-65.82	RMS	29.51	-58.12	0.20	-95.23	57.82	-13.00	-52.82	Horizontal

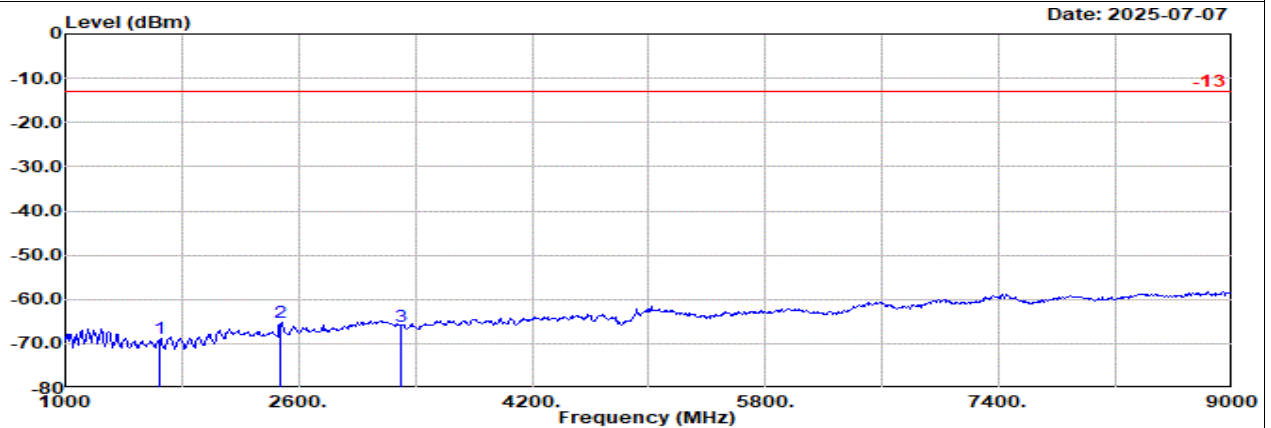

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical


: WCDMA Band 5 Ch4132

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1652.00	-68.91	RMS	25.10	-61.00	0.40	-95.23	61.82	-13.00	-55.91	Vertical
2	2479.00	-65.21	RMS	27.72	-59.77	0.21	-95.23	61.86	-13.00	-52.21	Vertical
3	3305.00	-66.16	RMS	29.51	-58.12	0.20	-95.23	57.48	-13.00	-53.16	Vertical




Ant 0

Part 22H Mode 3
WCDMA B5 Ch4182
M

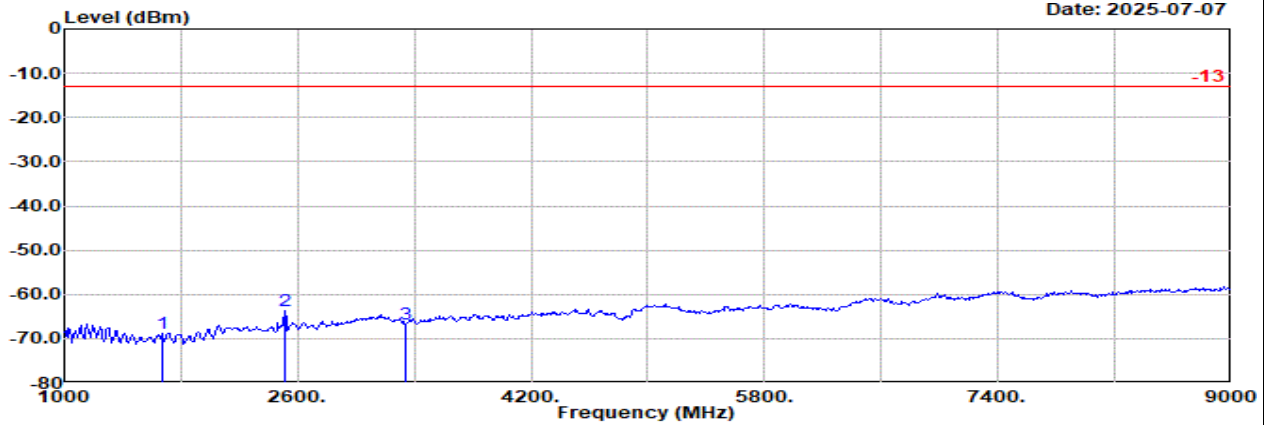

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Horizontal
: WCDMA Band 5 Ch4182

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1672.00	-68.91	RMS	25.10	-60.97	0.39	-95.23	61.80	-13.00	-55.91	Horizontal
2	2509.00	-63.58	RMS	27.84	-59.72	0.20	-95.23	63.33	-13.00	-50.58	Horizontal
3	3345.00	-66.73	RMS	29.59	-58.07	0.24	-95.23	56.74	-13.00	-53.73	Horizontal

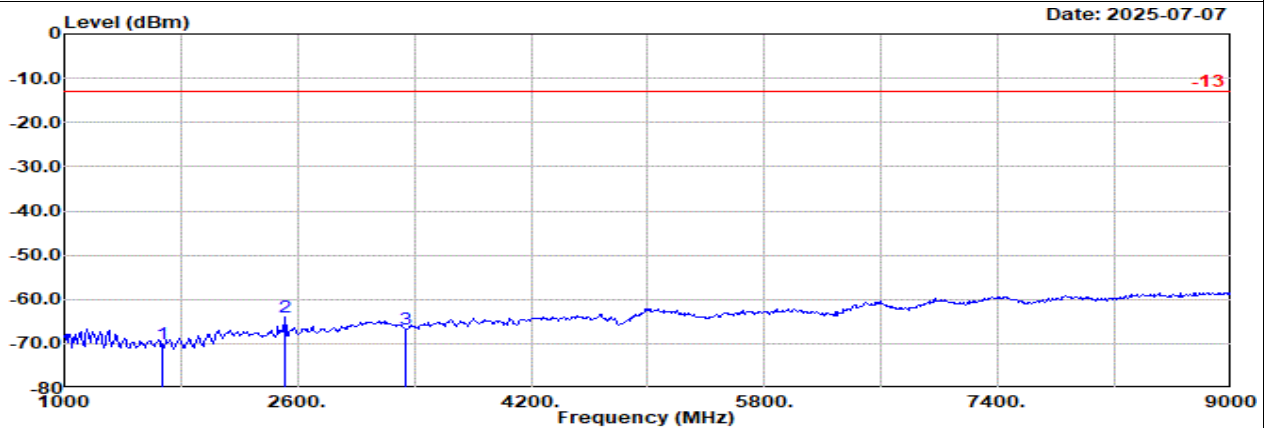

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Vertical
: WCDMA Band 5 Ch4182

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1672.00	-70.06	RMS	25.10	-60.97	0.39	-95.23	60.65	-13.00	-57.06	Vertical
2	2509.00	-63.86	RMS	27.84	-59.72	0.20	-95.23	63.05	-13.00	-50.86	Vertical
3	3345.00	-66.84	RMS	29.59	-58.07	0.24	-95.23	56.63	-13.00	-53.84	Vertical




Ant 0

Part 22H Mode 3

WCDMA B5 Ch4233

H

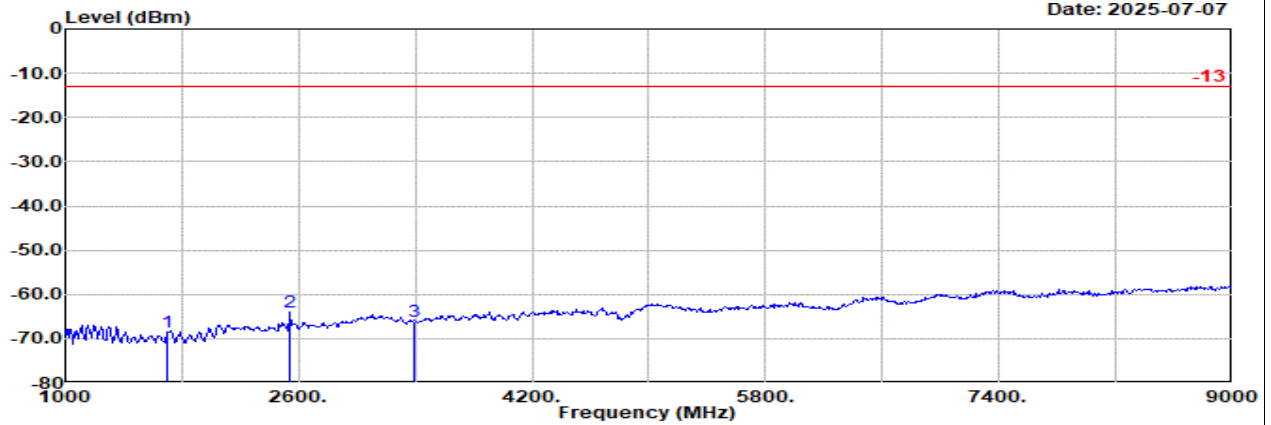


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band 5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1693.00	-68.56	RMS	25.10	-60.94	0.38	-95.23	62.13	-13.00	-55.56	Horizontal
2	2539.00	-64.13	RMS	27.96	-59.64	0.19	-95.23	62.59	-13.00	-51.13	Horizontal
3	3386.00	-66.05	RMS	29.60	-58.01	0.27	-95.23	57.32	-13.00	-53.05	Horizontal

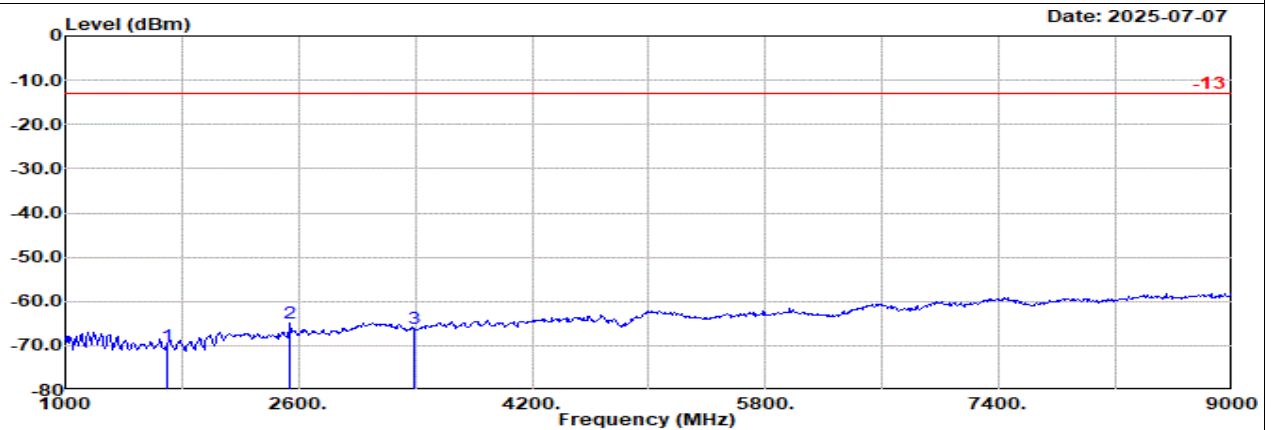

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band 5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1693.00	-69.93	RMS	25.10	-60.94	0.38	-95.23	60.76	-13.00	-56.93	Vertical
2	2539.00	-64.81	RMS	27.96	-59.64	0.19	-95.23	61.91	-13.00	-51.81	Vertical
3	3386.00	-66.01	RMS	29.60	-58.01	0.27	-95.23	57.36	-13.00	-53.01	Vertical




Ant 1

Part 22H Mode 2

GSM 850 Ch128

L

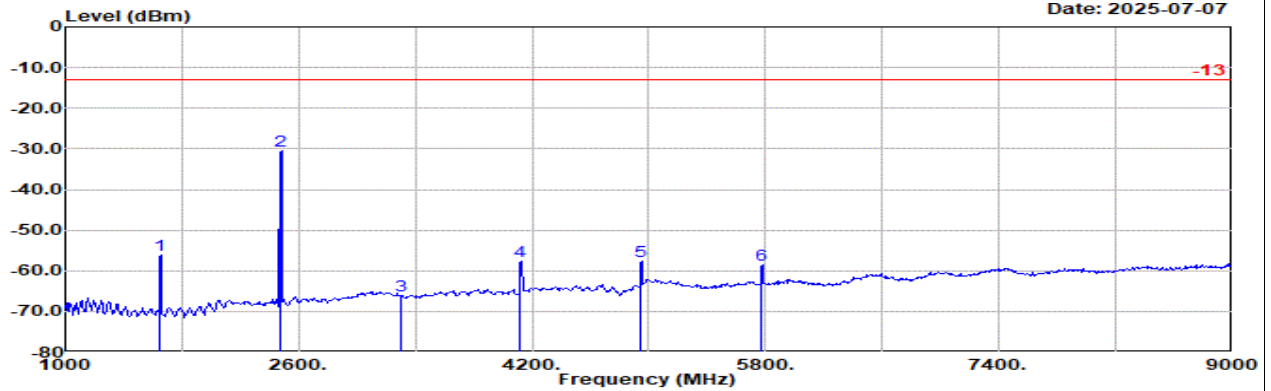


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb dB/m	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
	MHz	dBm									
1	1648.00	-56.23	RMS	25.11	-61.01	0.41	-95.23	74.49	-13.00	-43.23	Horizontal
2	2472.00	-30.47	RMS	27.69	-59.78	0.22	-95.23	96.63	-13.00	-17.47	Horizontal
3	3296.00	-66.01	RMS	29.51	-58.13	0.20	-95.23	57.64	-13.00	-53.01	Horizontal
4	4121.00	-57.74	RMS	31.04	-57.59	0.06	-95.23	63.98	-13.00	-44.74	Horizontal
5	4945.00	-57.80	RMS	32.87	-56.79	0.05	-95.23	61.30	-13.00	-44.80	Horizontal
6	5769.00	-58.48	RMS	33.71	-54.78	0.27	-95.23	57.55	-13.00	-45.48	Horizontal

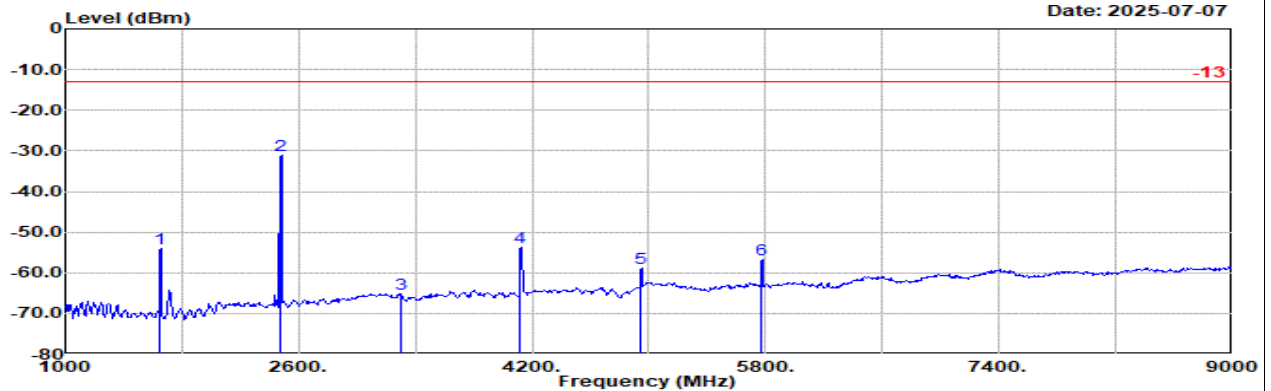

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: GSM 850 Ch128

	Freq	Level	Detector	Ant Factor	Amp\Cb dB/m	Filter dB	EIRPCF dB	Readin dBuV	Limit dBm	Margin dB	Pol
	MHz	dBm									
1	1648.00	-54.15	RMS	25.11	-61.01	0.41	-95.23	76.57	-13.00	-41.15	Vertical
2	2472.00	-31.11	RMS	27.69	-59.78	0.22	-95.23	95.99	-13.00	-18.11	Vertical
3	3296.00	-65.28	RMS	29.51	-58.13	0.20	-95.23	58.37	-13.00	-52.28	Vertical
4	4121.00	-53.76	RMS	31.04	-57.59	0.06	-95.23	67.96	-13.00	-40.76	Vertical
5	4945.00	-59.00	RMS	32.87	-56.79	0.05	-95.23	60.10	-13.00	-46.00	Vertical
6	5769.00	-56.90	RMS	33.71	-54.78	0.27	-95.23	59.13	-13.00	-43.90	Vertical




Ant 1

Part 22H Mode 2

GSM 850 Ch189

M

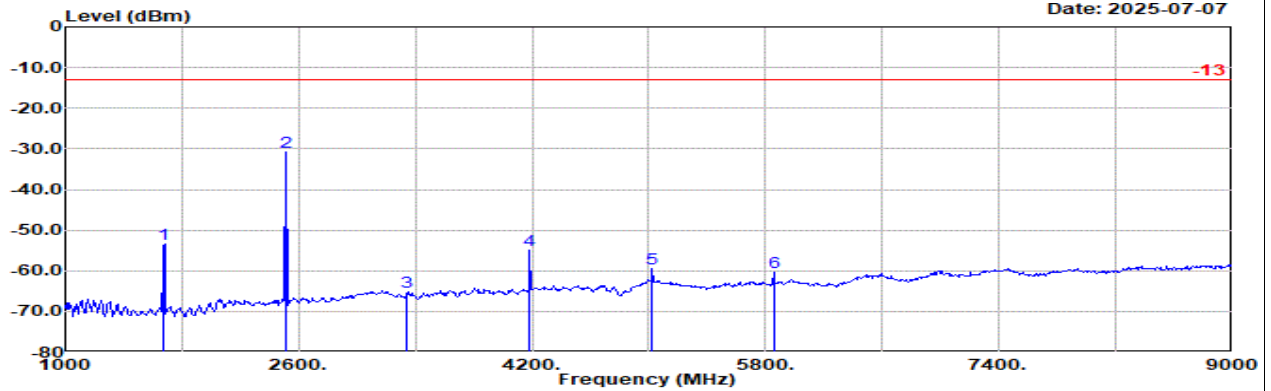


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1673.00	-53.39	RMS	25.10	-60.97	0.39	-95.23	77.32	-13.00	-40.39	Horizontal
2	2509.00	-30.71	RMS	27.84	-59.72	0.20	-95.23	96.20	-13.00	-17.71	Horizontal
3	3345.00	-65.28	RMS	29.59	-58.07	0.24	-95.23	58.19	-13.00	-52.28	Horizontal
4	4182.00	-54.96	RMS	31.10	-57.58	0.03	-95.23	66.72	-13.00	-41.96	Horizontal
5	5018.00	-59.41	RMS	33.19	-56.59	0.04	-95.23	59.18	-13.00	-46.41	Horizontal
6	5855.00	-60.52	RMS	34.02	-54.55	0.28	-95.23	54.96	-13.00	-47.52	Horizontal

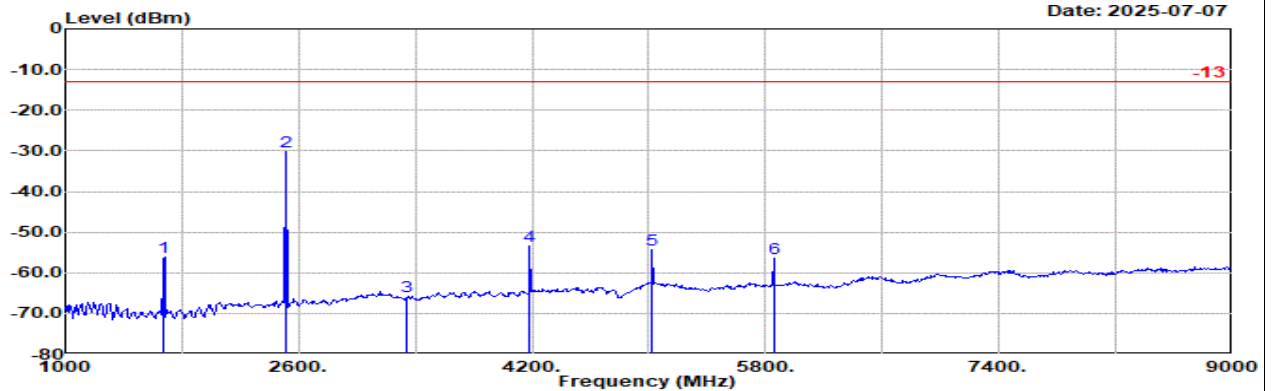

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: GSM 850 Ch189

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB
1	1673.00	-56.27	RMS	25.10	-60.97	0.39	-95.23	74.44	-13.00	-43.27	Vertical
2	2509.00	-30.31	RMS	27.84	-59.72	0.20	-95.23	96.60	-13.00	-17.31	Vertical
3	3345.00	-65.77	RMS	29.59	-58.07	0.24	-95.23	57.70	-13.00	-52.77	Vertical
4	4182.00	-53.45	RMS	31.10	-57.58	0.03	-95.23	68.23	-13.00	-40.45	Vertical
5	5018.00	-54.26	RMS	33.19	-56.59	0.04	-95.23	64.33	-13.00	-41.26	Vertical
6	5855.00	-56.30	RMS	34.02	-54.55	0.28	-95.23	59.18	-13.00	-43.30	Vertical




Ant 1

Part 22H Mode 2


GSM 850 Ch251

H

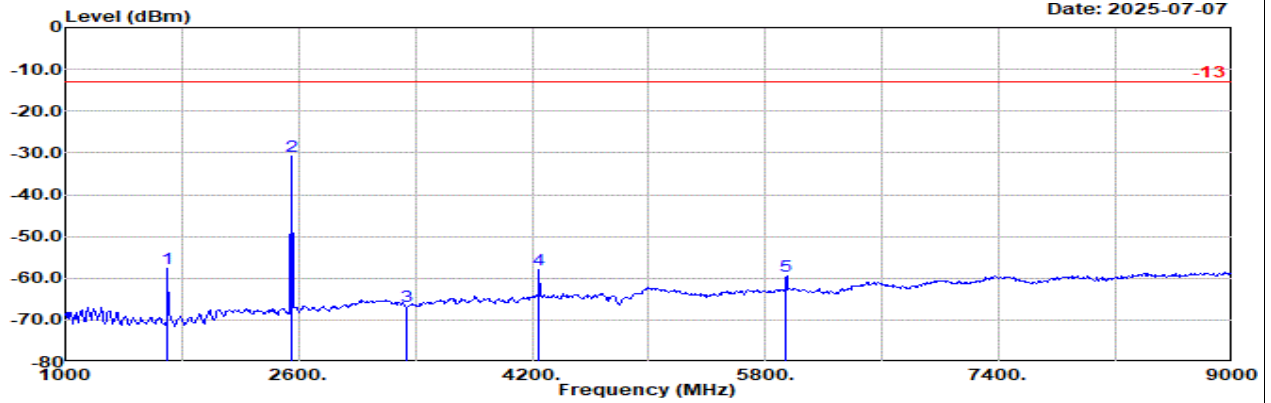

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Horizontal
: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-57.53	RMS	25.10	-60.94	0.38	-95.23	73.16	-13.00	-44.53	Horizontal
2	2546.00	-30.76	RMS	27.98	-59.62	0.18	-95.23	95.93	-13.00	-17.76	Horizontal
3	3345.00	-66.73	RMS	29.59	-58.07	0.24	-95.23	56.74	-13.00	-53.73	Horizontal
4	4244.00	-58.08	RMS	31.19	-57.56	0.04	-95.23	63.48	-13.00	-45.08	Horizontal
5	5942.00	-59.53	RMS	34.12	-54.29	0.23	-95.23	55.64	-13.00	-46.53	Horizontal

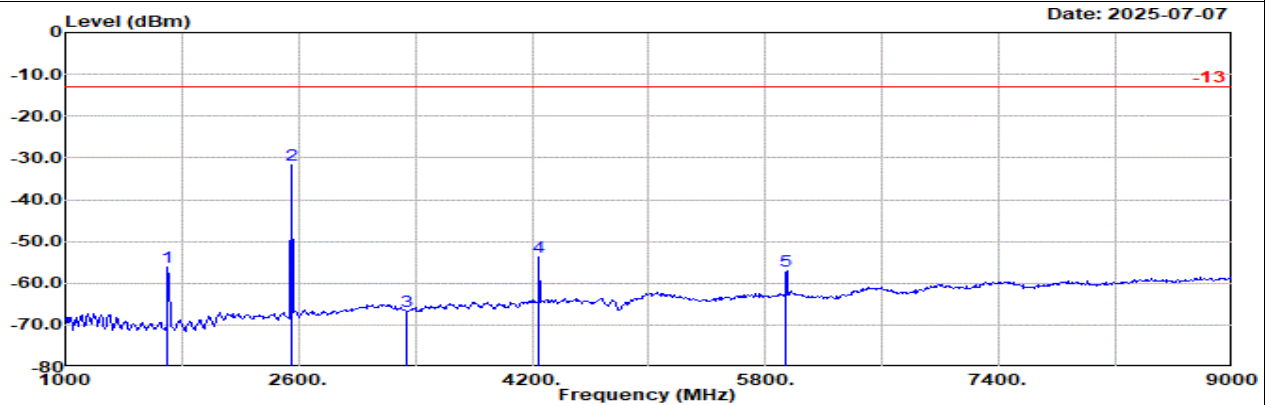

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Vertical
: GSM 850 Ch251

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	1697.00	-56.03	RMS	25.10	-60.94	0.38	-95.23	74.66	-13.00	-43.03	Vertical
2	2546.00	-31.59	RMS	27.98	-59.62	0.18	-95.23	95.10	-13.00	-18.59	Vertical
3	3345.00	-66.66	RMS	29.59	-58.07	0.24	-95.23	56.81	-13.00	-53.66	Vertical
4	4244.00	-53.59	RMS	31.19	-57.56	0.04	-95.23	67.97	-13.00	-40.59	Vertical
5	5942.00	-57.16	RMS	34.12	-54.29	0.23	-95.23	58.01	-13.00	-44.16	Vertical




Ant 1

Part 22H Mode 4

WCDMA B5 Ch4132

L

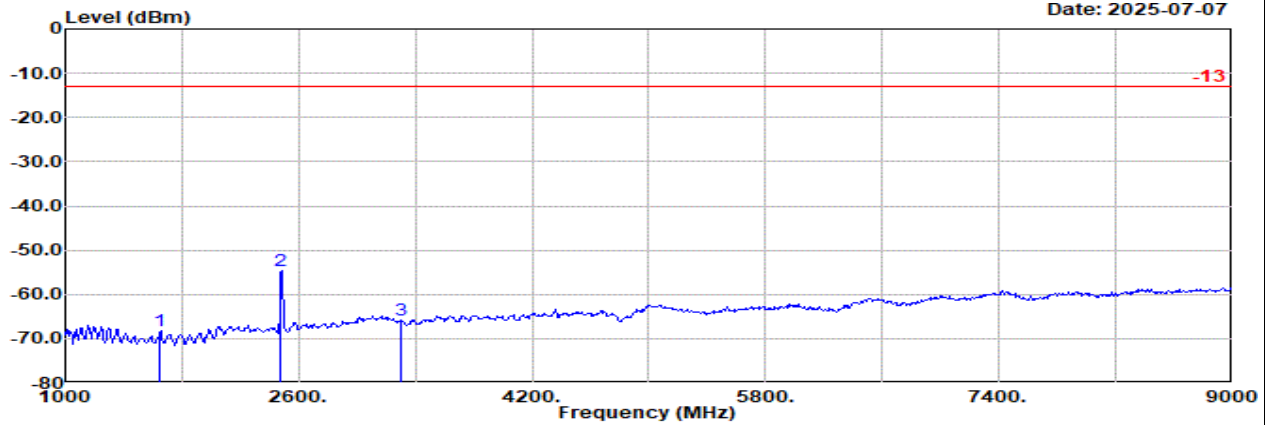


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band 5 Ch4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
				dB/m	dB	dB	dB	dBuV	dBm	dB
1	1652.00	-68.34	RMS	25.10	-61.00	0.40	-95.23	62.39	-13.00	-55.34
2	2479.00	-54.63	RMS	27.72	-59.77	0.21	-95.23	72.44	-13.00	-41.63
3	3305.00	-65.90	RMS	29.51	-58.12	0.20	-95.23	57.74	-13.00	-52.90

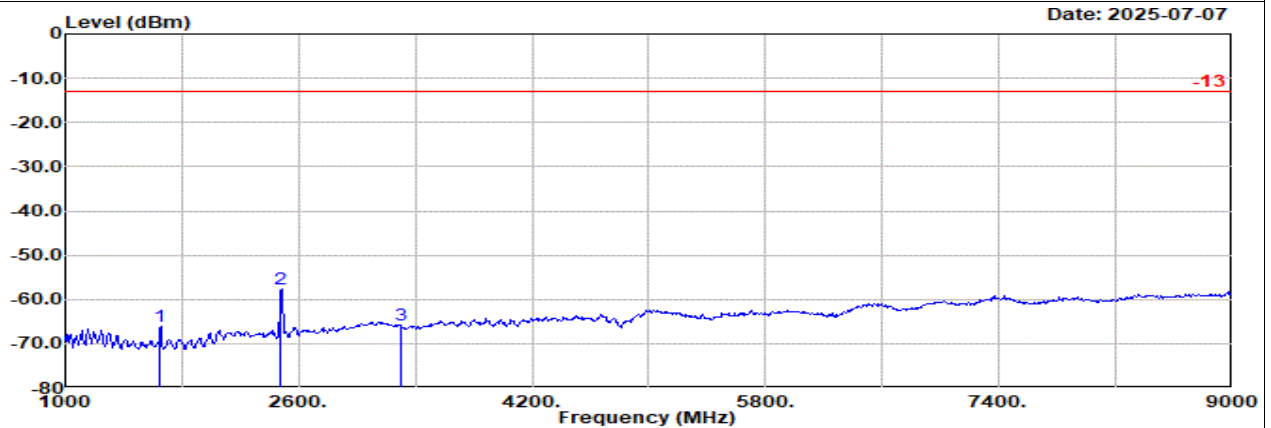

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band 5 Ch4132

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
				dB/m	dB	dB	dB	dBuV	dBm	dB
1	1652.00	-66.17	RMS	25.10	-61.00	0.40	-95.23	64.56	-13.00	-53.17
2	2479.00	-57.58	RMS	27.72	-59.77	0.21	-95.23	69.49	-13.00	-44.58
3	3305.00	-65.94	RMS	29.51	-58.12	0.20	-95.23	57.70	-13.00	-52.94




Ant 1

Part 22H Mode 4

WCDMA B5 Ch4182

M

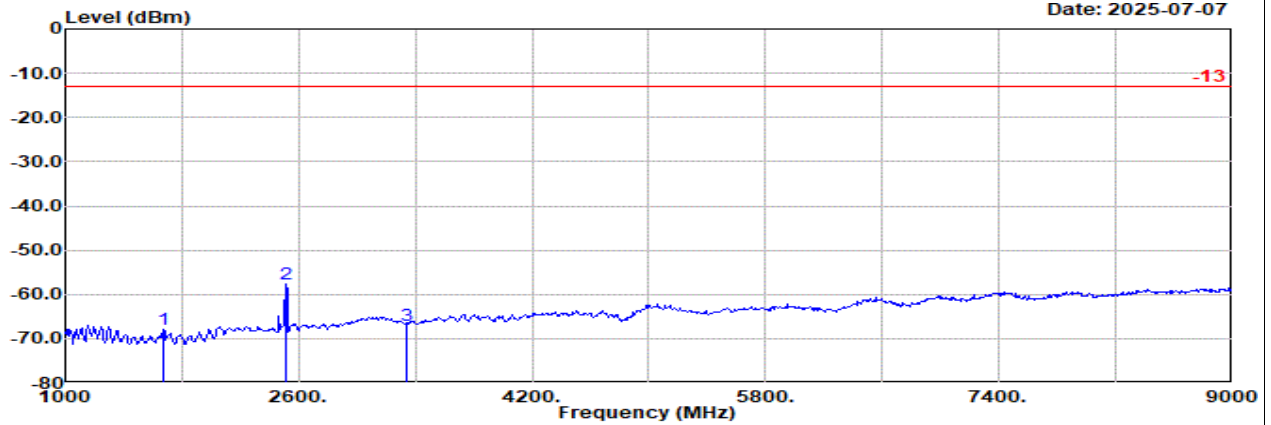


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band 5 Ch4182

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
				dB/m	dB	dB	dB	dBuV	dBm	dB
1	1672.00	-67.94	RMS	25.10	-60.97	0.39	-95.23	62.77	-13.00	-54.94
2	2509.00	-57.60	RMS	27.84	-59.72	0.20	-95.23	69.31	-13.00	-44.60
3	3345.00	-66.98	RMS	29.59	-58.07	0.24	-95.23	56.49	-13.00	-53.98

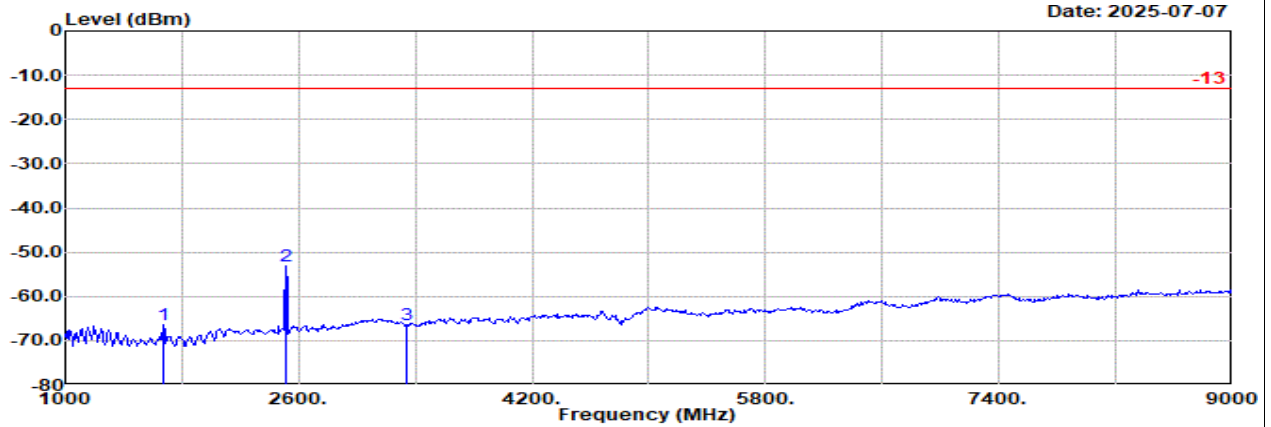

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band 5 Ch4182

	Freq MHz	Level dBm	Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit	Margin	Pol
				Factor	1					
				dB/m	dB	dB	dB	dBuV	dBm	dB
1	1672.00	-66.36	RMS	25.10	-60.97	0.39	-95.23	64.35	-13.00	-53.36
2	2509.00	-53.22	RMS	27.84	-59.72	0.20	-95.23	73.69	-13.00	-40.22
3	3345.00	-66.51	RMS	29.59	-58.07	0.24	-95.23	56.96	-13.00	-53.51




Ant 1

Part 22H Mode 4

WCDMA B5 Ch4233

H

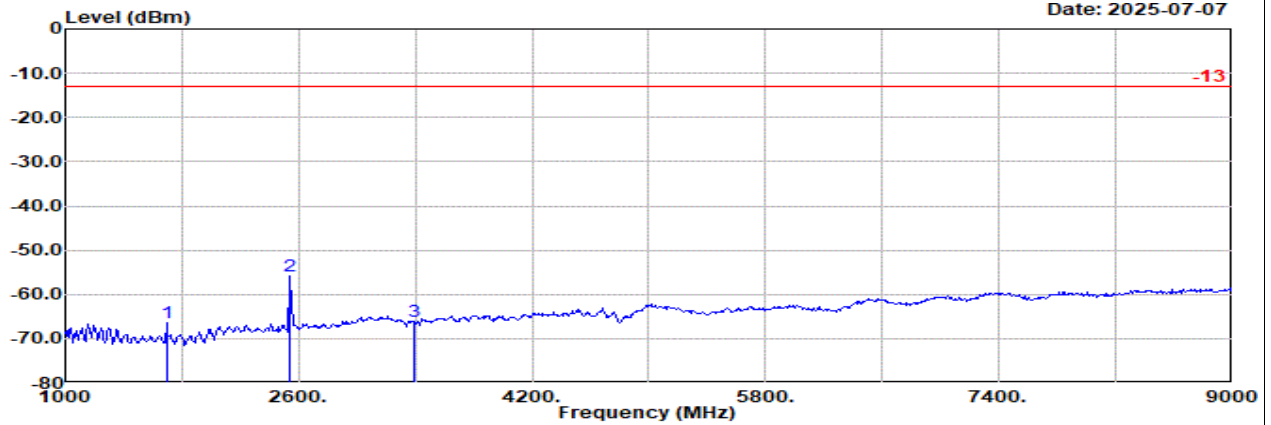


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band 5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1693.00	-66.34	RMS	25.10	-60.94	0.38	-95.23	64.35	-13.00	-53.34	Horizontal
2	2539.00	-55.77	RMS	27.96	-59.64	0.19	-95.23	70.95	-13.00	-42.77	Horizontal
3	3386.00	-66.04	RMS	29.60	-58.01	0.27	-95.23	57.33	-13.00	-53.04	Horizontal

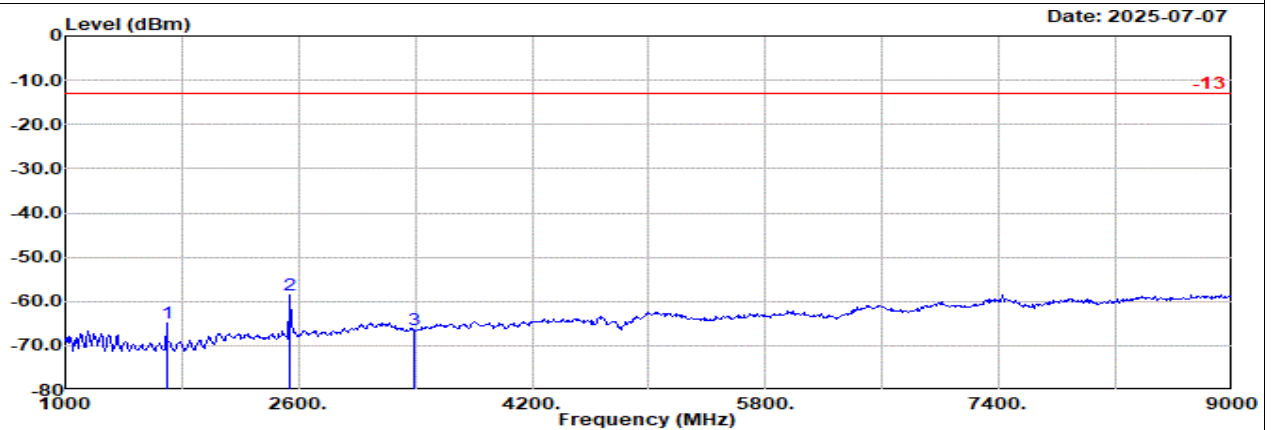

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band 5 Ch4233

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBm	dB	
1	1693.00	-65.05	RMS	25.10	-60.94	0.38	-95.23	65.64	-13.00	-52.05	Vertical
2	2539.00	-58.44	RMS	27.96	-59.64	0.19	-95.23	68.28	-13.00	-45.44	Vertical
3	3386.00	-66.30	RMS	29.60	-58.01	0.27	-95.23	57.07	-13.00	-53.30	Vertical




Ant 2

Part 24E Mode 1


GSM 1900 Ch512

L

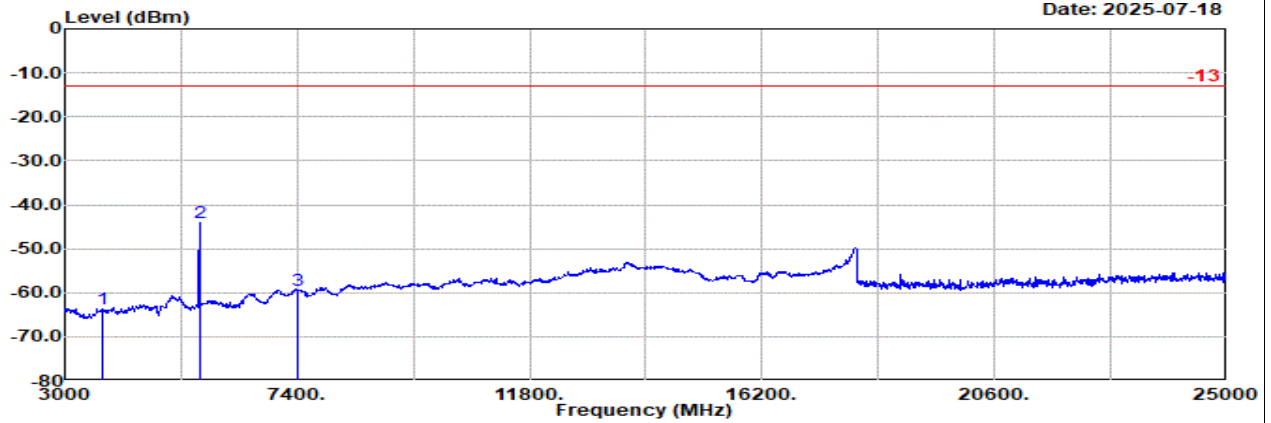

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Horizontal
: GSM 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3700.00	-63.84	Average	29.90	-57.83	0.87	-95.23	58.47	-13.00	-50.84	Horizontal	
2	5550.00	-44.19	Average	33.30	-55.24	0.23	-95.23	72.75	-13.00	-31.19	Horizontal	
3	7400.00	-59.58	Average	36.90	-53.43	0.25	-95.23	51.93	-13.00	-46.58	Horizontal	

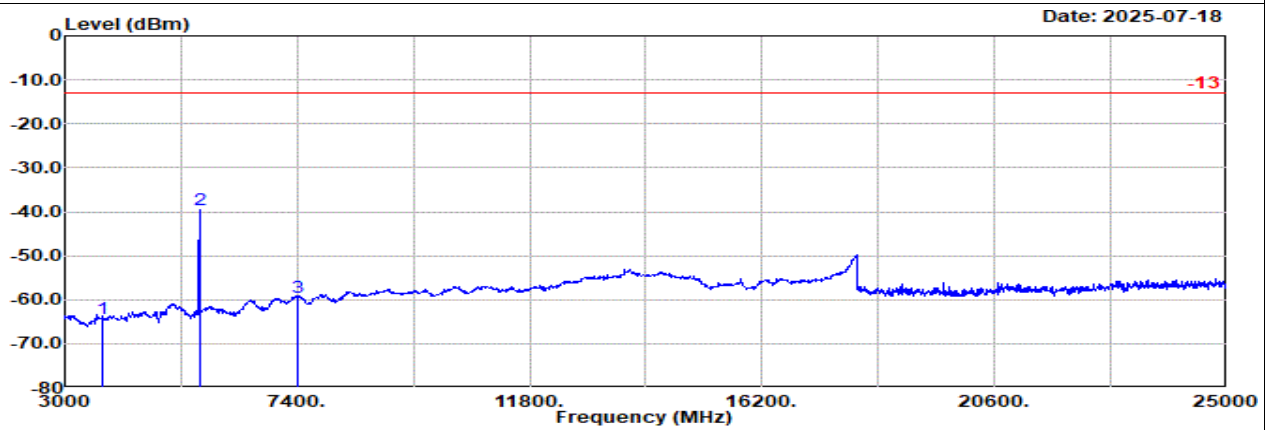

Site : 03CH12-HY
Condition: -13 3m 9120D-02114-250702 Vertical
: GSM 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3700.00	-64.45	Average	29.90	-57.83	0.87	-95.23	57.86	-13.00	-51.45	Vertical	
2	5550.00	-39.50	Average	33.30	-55.24	0.23	-95.23	77.44	-13.00	-26.50	Vertical	
3	7400.00	-59.56	Average	36.90	-53.43	0.25	-95.23	51.95	-13.00	-46.56	Vertical	




Ant 2

Part 24E Mode 1

GSM 1900 Ch661

M

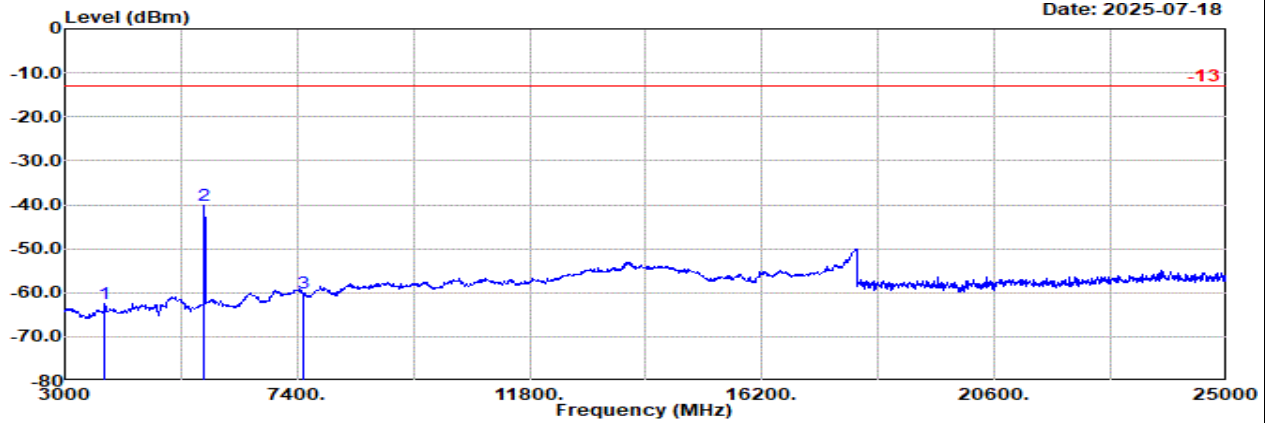


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Horizontal

: GSM 1900 Ch661

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF		Readin g	Limit	Margin Pol	
	MHz	dBm			dB/m	dB		dB	dB			dB	
1	3760.00	-62.49	Average	30.26	-57.80	0.72	-95.23	59.56	-13.00	-49.49	Horizontal		
2	5640.00	-40.20	Average	33.38	-55.05	0.23	-95.23	76.47	-13.00	-27.20	Horizontal		
3	7520.00	-60.06	Average	36.52	-53.41	0.12	-95.23	51.94	-13.00	-47.06	Horizontal		

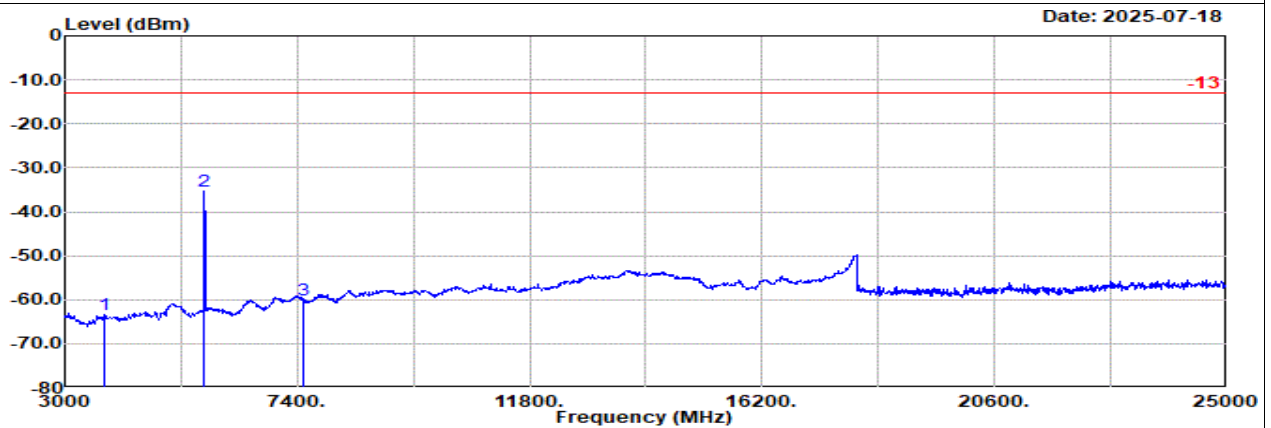

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: GSM 1900 Ch661

	Freq Level		Detector	Ant Factor	Amp\Cb		Filter	EIRPCF		Readin g	Limit	Margin Pol	
	MHz	dBm			dB/m	dB		dB	dB			dB	
1	3760.00	-63.28	Average	30.26	-57.80	0.72	-95.23	58.77	-13.00	-50.28	Vertical		
2	5640.00	-35.47	Average	33.38	-55.05	0.23	-95.23	81.20	-13.00	-22.47	Vertical		
3	7520.00	-60.21	Average	36.52	-53.41	0.12	-95.23	51.79	-13.00	-47.21	Vertical		




Ant 2

Part 24E Mode 1

GSM 1900 Ch810

H

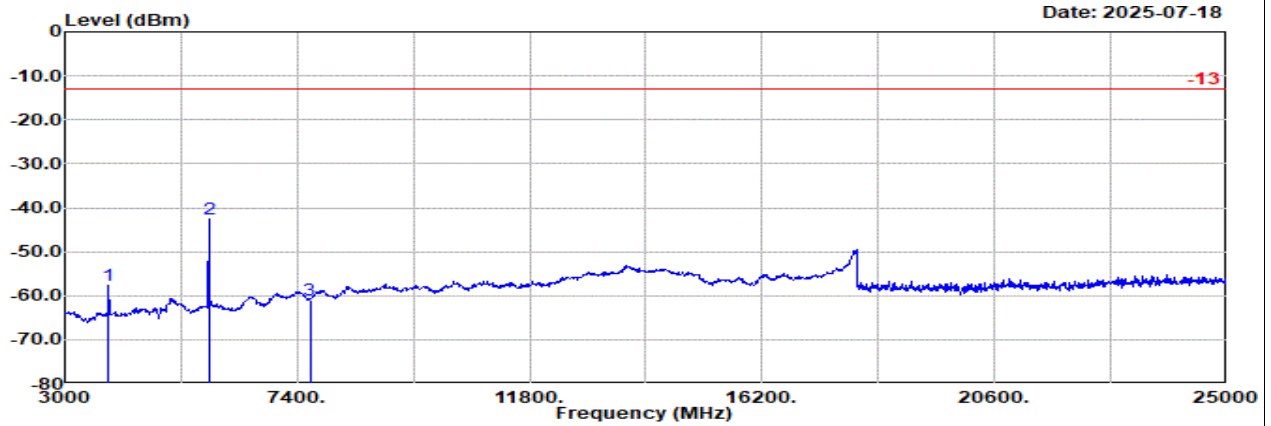


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Horizontal

: GSM 1900 Ch810

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
	MHz	dBm		Factor	1		g			
1	3819.00	-57.56	Average	30.65	-57.76	0.62	-95.23	64.16	-13.00	-44.56 Horizontal
2	5729.00	-42.47	Average	33.82	-54.86	0.37	-95.23	73.43	-13.00	-29.47 Horizontal
3	7639.00	-60.96	Average	36.56	-53.42	0.07	-95.23	51.06	-13.00	-47.96 Horizontal

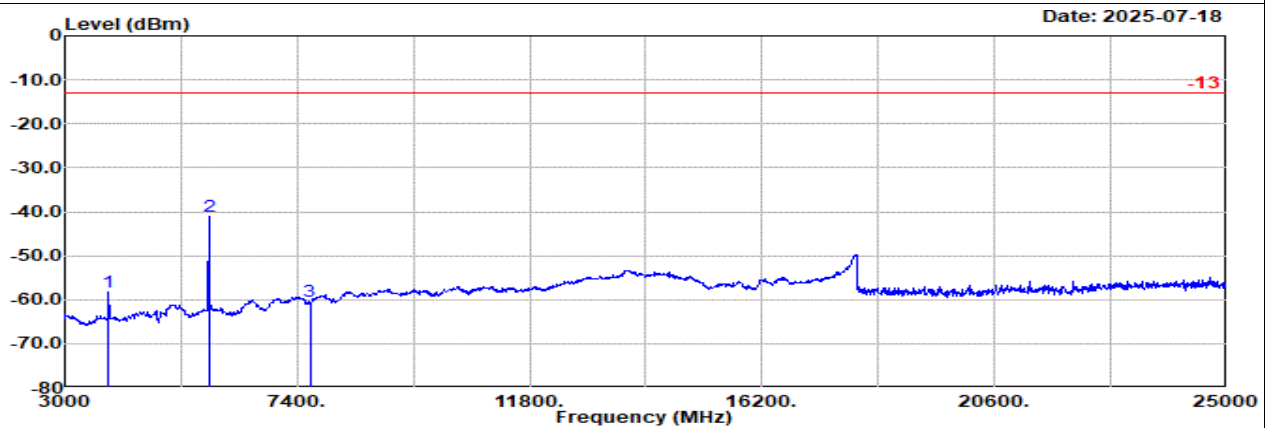

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: GSM 1900 Ch810

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin Pol	
	MHz	dBm		Factor	1		g			
1	3819.00	-58.32	Average	30.65	-57.76	0.62	-95.23	63.40	-13.00	-45.32 Vertical
2	5729.00	-41.04	Average	33.82	-54.86	0.37	-95.23	74.86	-13.00	-28.04 Vertical
3	7639.00	-60.49	Average	36.56	-53.42	0.07	-95.23	51.53	-13.00	-47.49 Vertical




Ant 2

Part 24E Mode 3

WCDMA B2 Ch9262

L

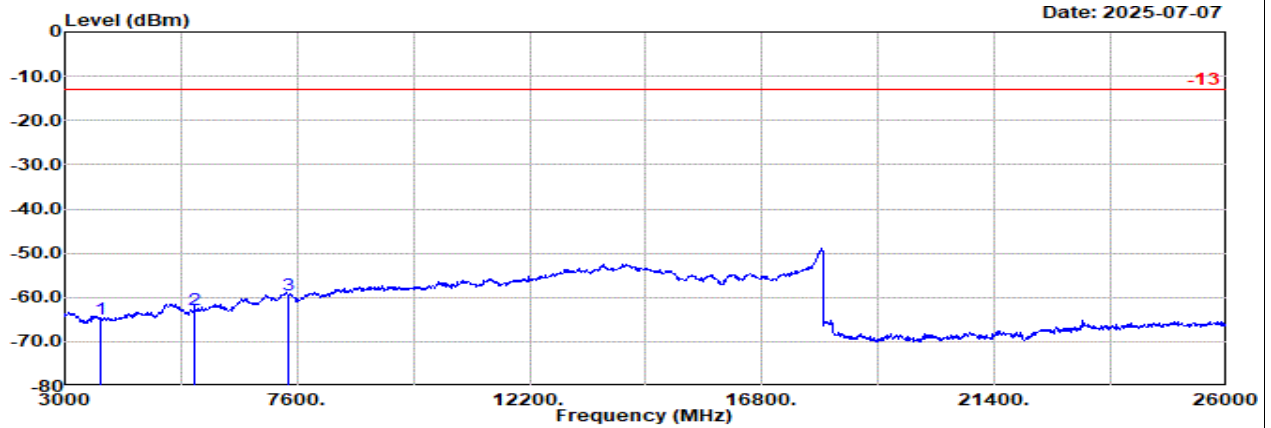


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9262

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	3704.00	-64.84	RMS	29.72	-57.83	0.86	-95.23	0.00	-13.00	-51.84
2	5557.00	-62.91	RMS	32.87	-55.23	0.22	-95.23	54.46	-13.00	-49.91
3	7409.00	-59.57	RMS	36.30	-53.42	0.24	-95.23	52.54	-13.00	-46.57

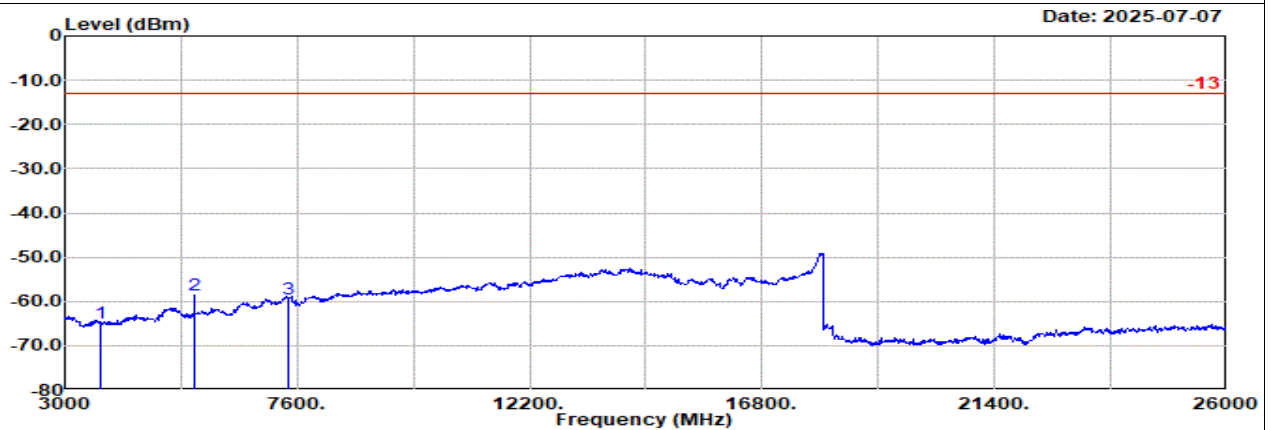

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9262

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	3704.00	-64.83	RMS	29.72	-57.83	0.86	-95.23	57.65	-13.00	-51.83
2	5557.00	-58.68	RMS	32.87	-55.23	0.22	-95.23	58.69	-13.00	-45.68
3	7409.00	-59.49	RMS	36.30	-53.42	0.24	-95.23	52.62	-13.00	-46.49




Ant 2

Part 24E Mode 3

WCDMA B2 Ch9400

M

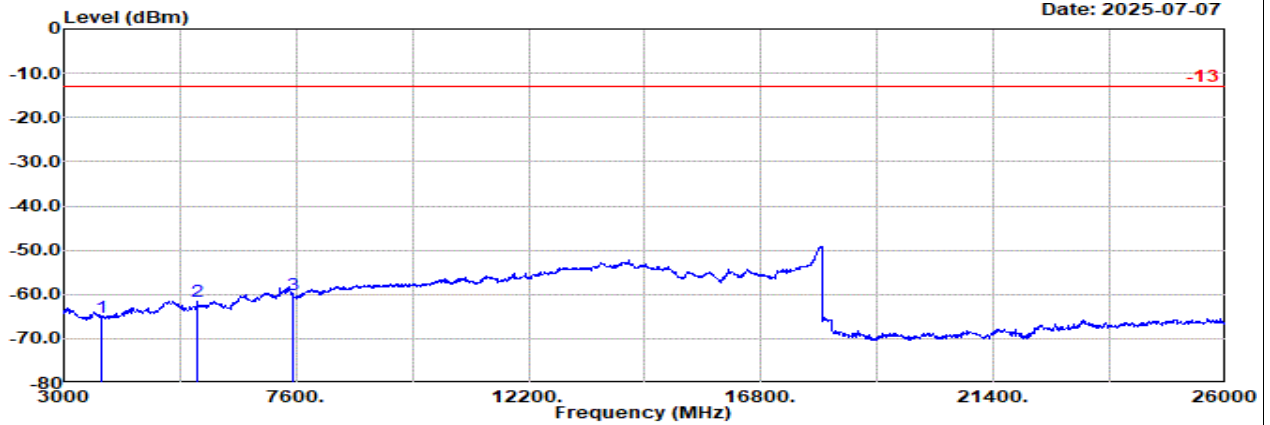


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-65.07	RMS	30.08	-57.80	0.72	-95.23	57.16	-13.00	-52.07	Horizontal	
2	5640.00	-61.67	RMS	32.94	-55.05	0.23	-95.23	55.44	-13.00	-48.67	Horizontal	
3	7520.00	-60.15	RMS	36.12	-53.41	0.12	-95.23	52.25	-13.00	-47.15	Horizontal	

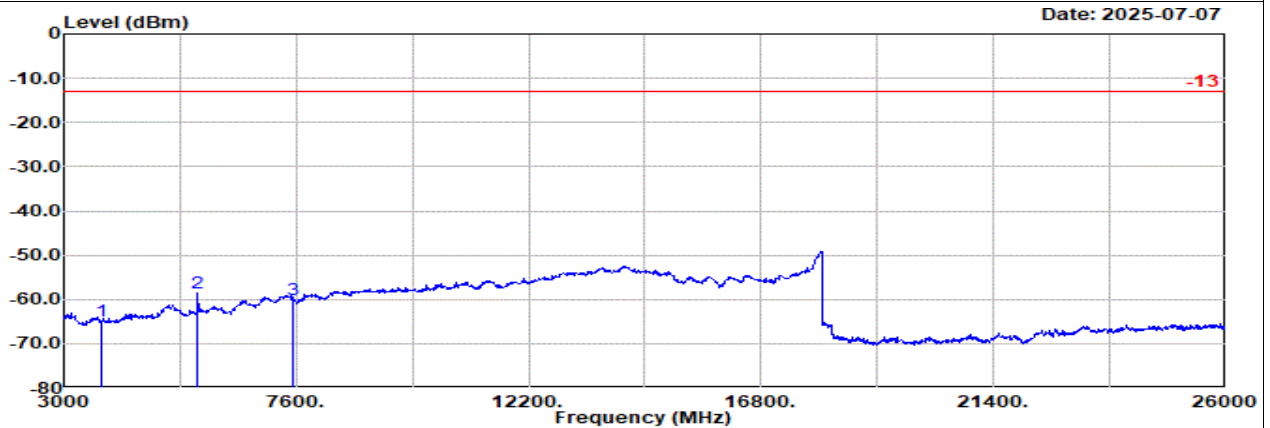

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm			dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-65.05	RMS	30.08	-57.80	0.72	-95.23	57.18	-13.00	-52.05	Vertical	
2	5640.00	-58.64	RMS	32.94	-55.05	0.23	-95.23	58.47	-13.00	-45.64	Vertical	
3	7520.00	-60.00	RMS	36.12	-53.41	0.12	-95.23	52.40	-13.00	-47.00	Vertical	




Ant 2

Part 24E Mode 3

WCDMA B2 Ch9538

H

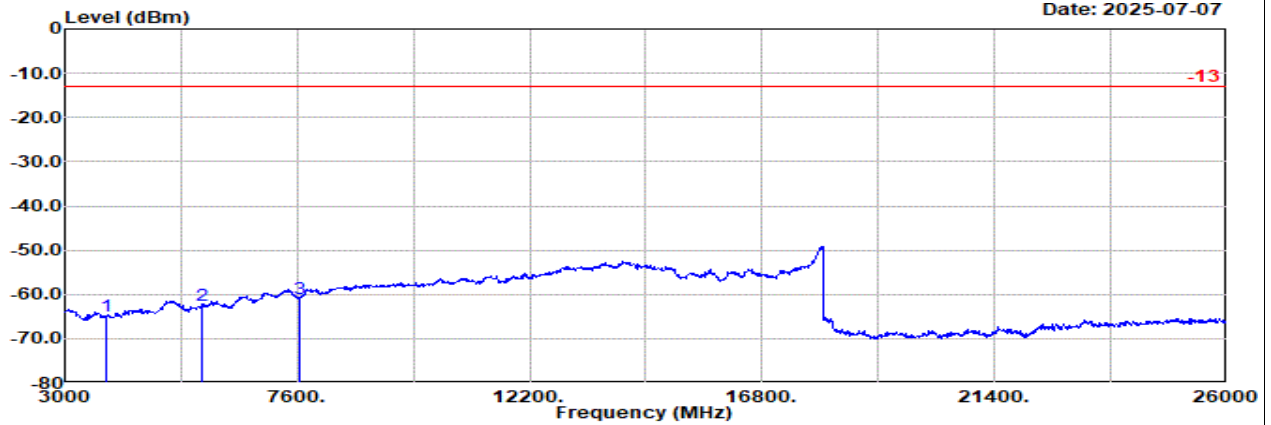


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	3815.00	-64.86	RMS	30.52	-57.77	0.62	-95.23	57.00	-13.00	-51.86	Horizontal	
2	5722.00	-62.51	RMS	33.49	-54.88	0.36	-95.23	53.75	-13.00	-49.51	Horizontal	
3	7630.00	-60.85	RMS	36.16	-53.42	0.07	-95.23	51.57	-13.00	-47.85	Horizontal	

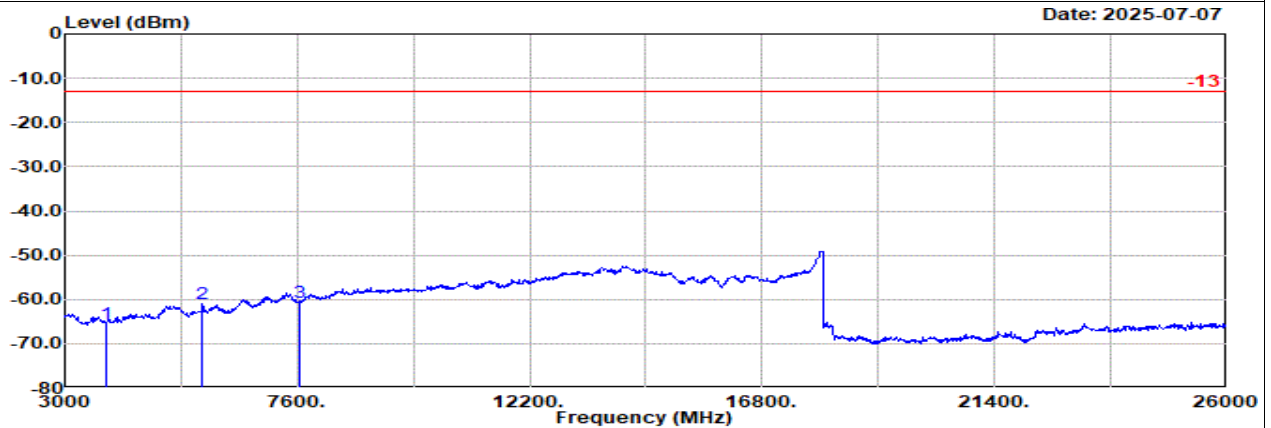

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	3815.00	-65.44	RMS	30.52	-57.77	0.62	-95.23	56.42	-13.00	-52.44	Vertical	
2	5722.00	-60.92	RMS	33.49	-54.88	0.36	-95.23	55.34	-13.00	-47.92	Vertical	
3	7630.00	-60.82	RMS	36.16	-53.42	0.07	-95.23	51.60	-13.00	-47.82	Vertical	




Ant 0

Part 24E Mode 2

GSM 1900 Ch512

L

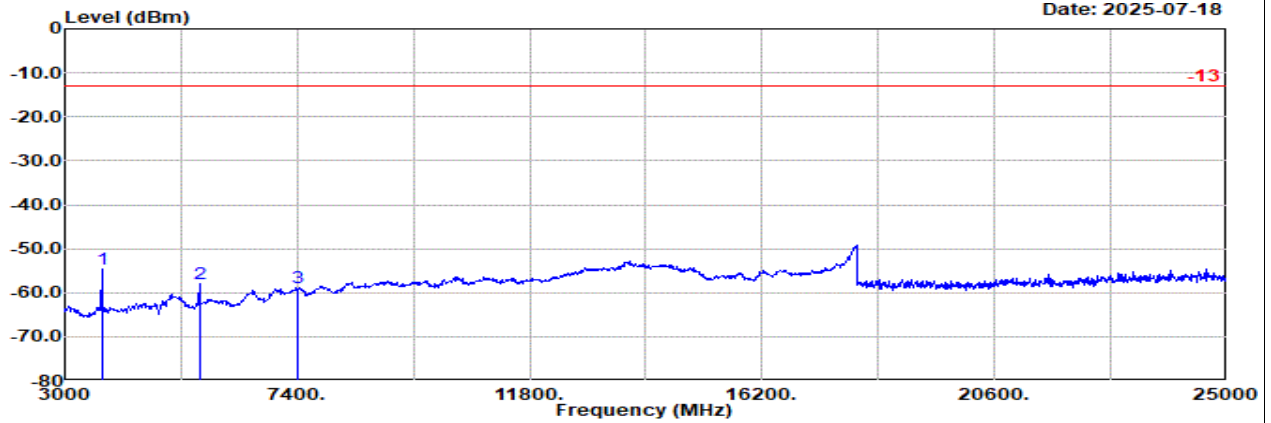


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Horizontal

: GSM 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB					
1	3700.00	-54.59	Average	29.90	-57.83	0.87	-95.23	-64.32	-13.00	-41.59	Horizontal
2	5550.00	-58.02	Average	33.30	-55.24	0.23	-95.23	0.00	-13.00	-45.02	Horizontal
3	7400.00	-58.90	Average	36.90	-53.43	0.25	-95.23	0.00	-13.00	-45.90	Horizontal

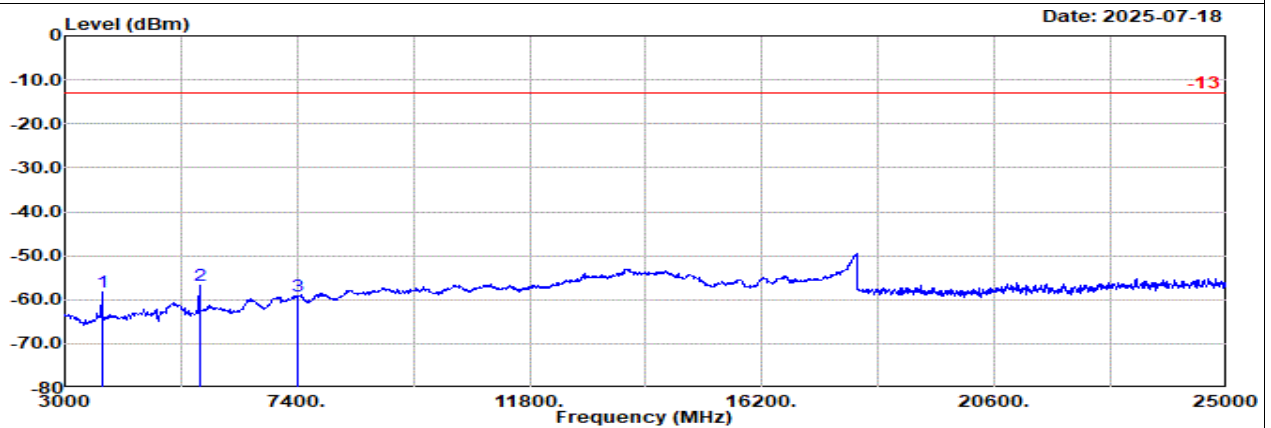

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: GSM 1900 Ch512

	Freq Level		Detector	Ant Factor	Amp\Cb Filter 1		EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm			dB/m	dB					
1	3700.00	-58.23	Average	29.90	-57.83	0.87	-95.23	64.08	-13.00	-45.23	Vertical
2	5550.00	-56.88	Average	33.30	-55.24	0.23	-95.23	60.06	-13.00	-43.88	Vertical
3	7400.00	-59.07	Average	36.90	-53.43	0.25	-95.23	52.44	-13.00	-46.07	Vertical




Ant 0

Part 24E Mode 2

GSM 1900 Ch661

M

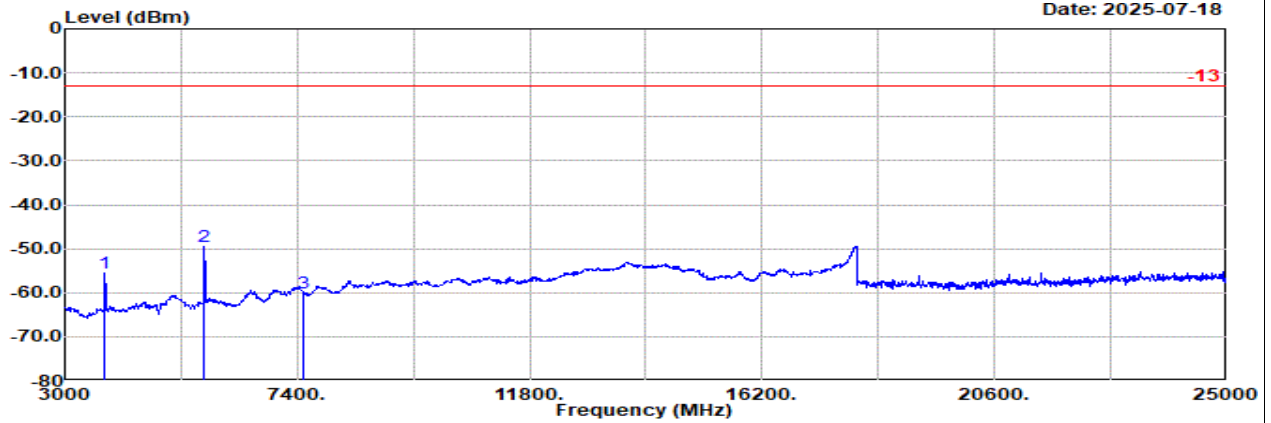


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Horizontal

: GSM 1900 Ch661

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	3760.00	-55.50	Average	30.26	-57.80	0.72	-95.23	66.55	-13.00	-42.50	Horizontal
2	5640.00	-49.58	Average	33.38	-55.05	0.23	-95.23	67.09	-13.00	-36.58	Horizontal
3	7520.00	-60.03	Average	36.52	-53.41	0.12	-95.23	51.97	-13.00	-47.03	Horizontal

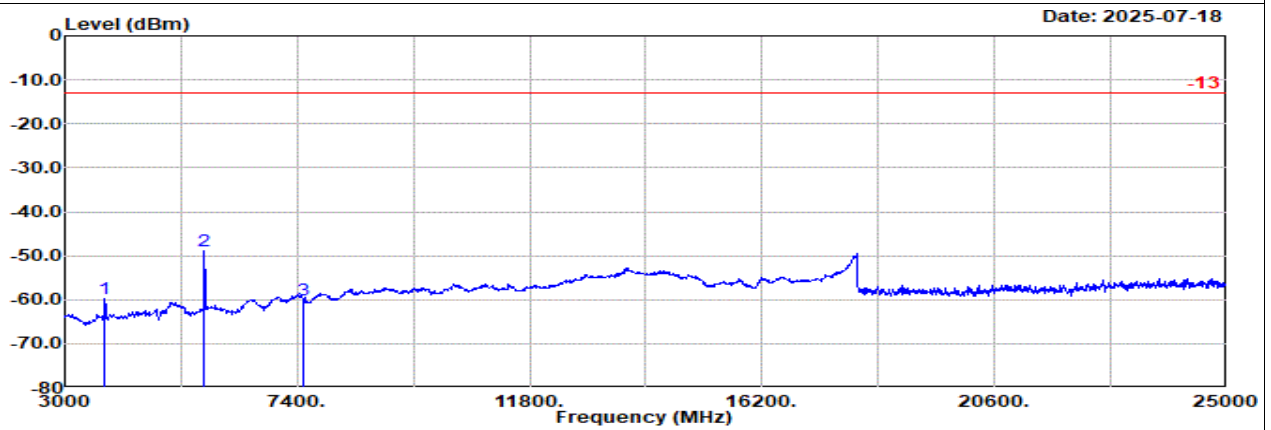

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: GSM 1900 Ch661

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	3760.00	-59.79	Average	30.26	-57.80	0.72	-95.23	62.26	-13.00	-46.79	Vertical
2	5640.00	-48.87	Average	33.38	-55.05	0.23	-95.23	67.80	-13.00	-35.87	Vertical
3	7520.00	-60.01	Average	36.52	-53.41	0.12	-95.23	51.99	-13.00	-47.01	Vertical




Ant 0

Part 24E Mode 2

GSM 1900 Ch810

H

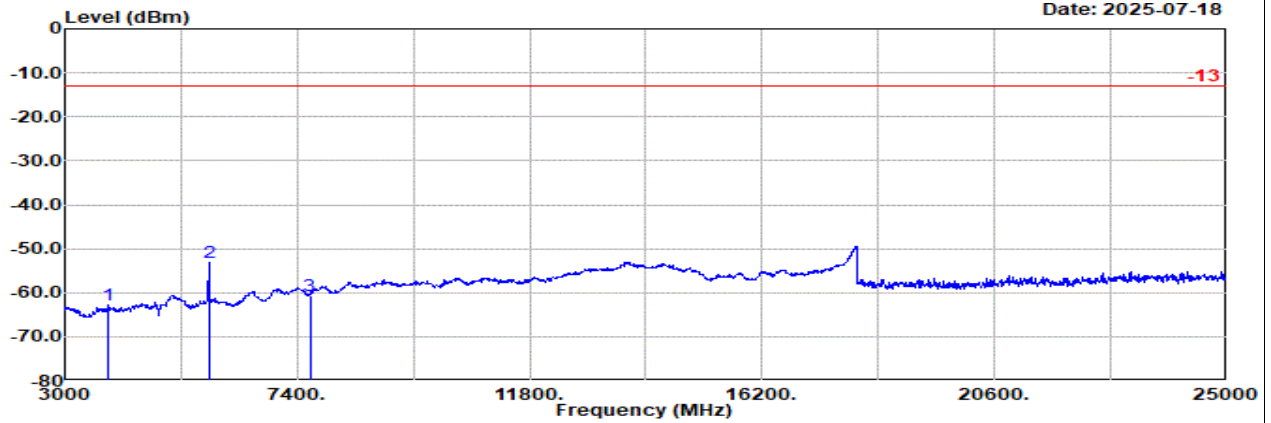


Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Horizontal

: GSM 1900 Ch810

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB		dB	dB		dBm	dB	
1	3819.00	-62.87	Average	30.65	-57.76	0.62	-95.23	58.85	-13.00	-49.87	Horizontal	
2	5729.00	-53.21	Average	33.82	-54.86	0.37	-95.23	62.69	-13.00	-40.21	Horizontal	
3	7639.00	-60.54	Average	36.56	-53.42	0.07	-95.23	51.48	-13.00	-47.54	Horizontal	

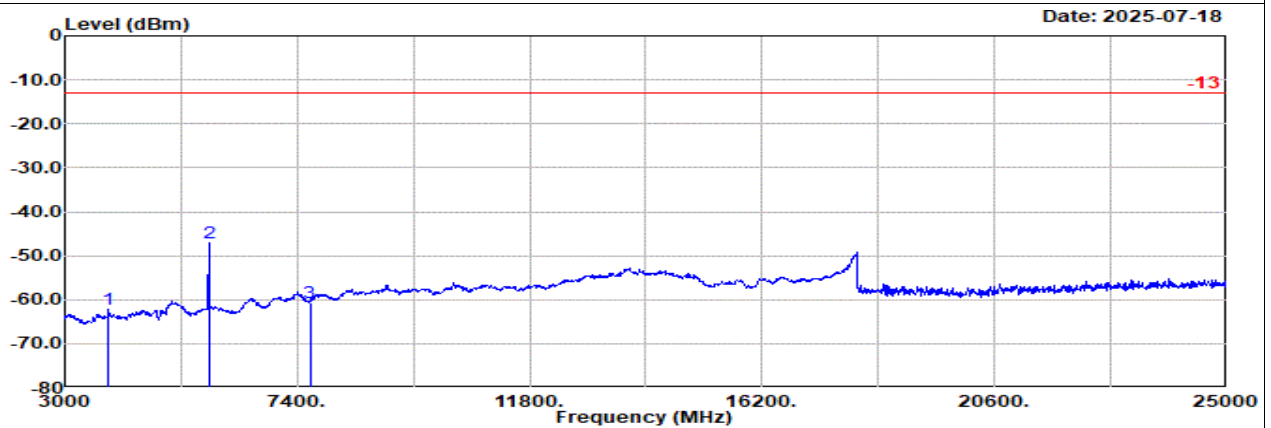

Site : 03CH12-HY

Condition: -13 3m 9120D-02114-250702 Vertical

: GSM 1900 Ch810

	Freq Level		Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
	MHz	dBm		Factor	dB		dB	dB		dBm	dB	
1	3819.00	-62.14	Average	30.65	-57.76	0.62	-95.23	59.58	-13.00	-49.14	Vertical	
2	5729.00	-47.24	Average	33.82	-54.86	0.37	-95.23	68.66	-13.00	-34.24	Vertical	
3	7639.00	-60.59	Average	36.56	-53.42	0.07	-95.23	51.43	-13.00	-47.59	Vertical	




Ant 0

Part 24E Mode 4

WCDMA B2 Ch9262

L

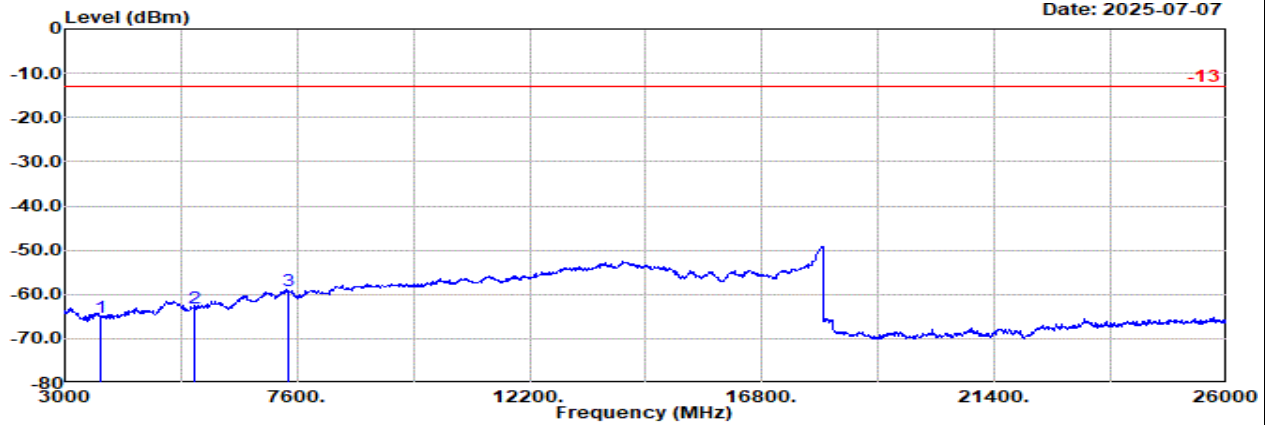


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9262

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-65.11	RMS	29.72	-57.83	0.86	-95.23	57.37	-13.00	-52.11	Horizontal	
2	5557.00	-63.18	RMS	32.87	-55.23	0.22	-95.23	54.19	-13.00	-50.18	Horizontal	
3	7409.00	-59.20	RMS	36.30	-53.42	0.24	-95.23	52.91	-13.00	-46.20	Horizontal	

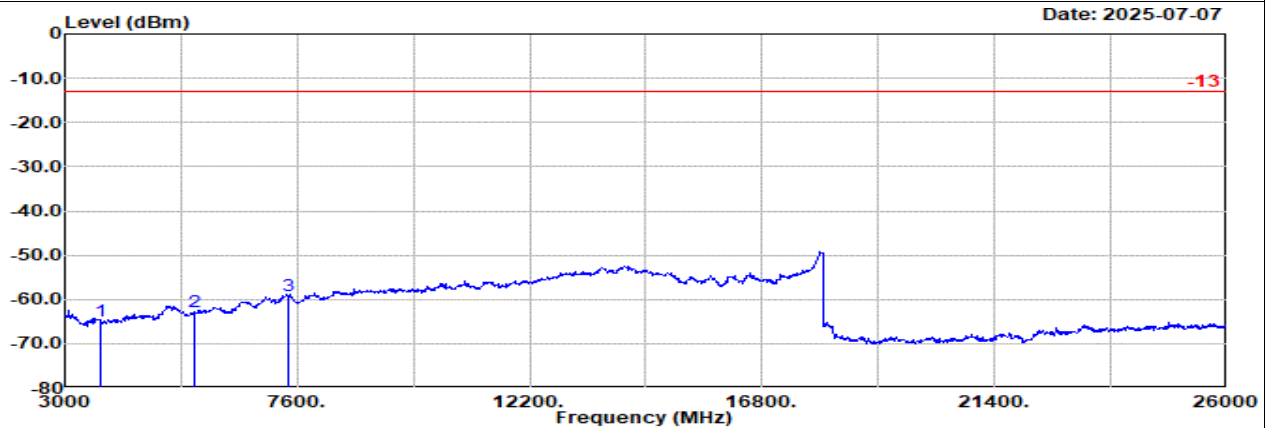

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9262

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3704.00	-65.00	RMS	29.72	-57.83	0.86	-95.23	57.48	-13.00	-52.00	Vertical	
2	5557.00	-62.66	RMS	32.87	-55.23	0.22	-95.23	54.71	-13.00	-49.66	Vertical	
3	7409.00	-59.25	RMS	36.30	-53.42	0.24	-95.23	52.86	-13.00	-46.25	Vertical	




Ant 0

Part 24E Mode 4

WCDMA B2 Ch9400

M

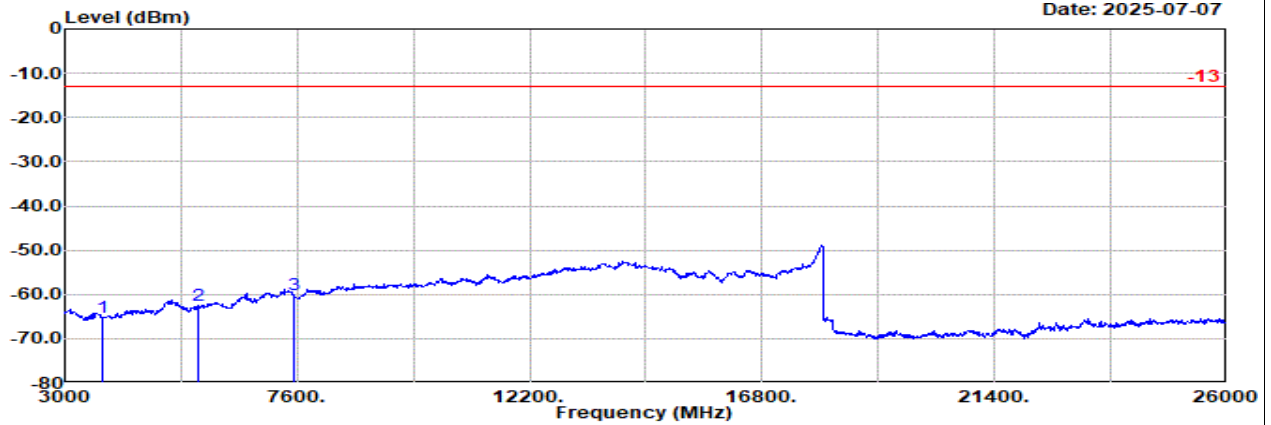


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-65.22	RMS	30.08	-57.80	0.72	-95.23	57.01	-13.00	-52.22	Horizontal	
2	5640.00	-62.57	RMS	32.94	-55.05	0.23	-95.23	54.54	-13.00	-49.57	Horizontal	
3	7520.00	-60.01	RMS	36.12	-53.41	0.12	-95.23	52.39	-13.00	-47.01	Horizontal	

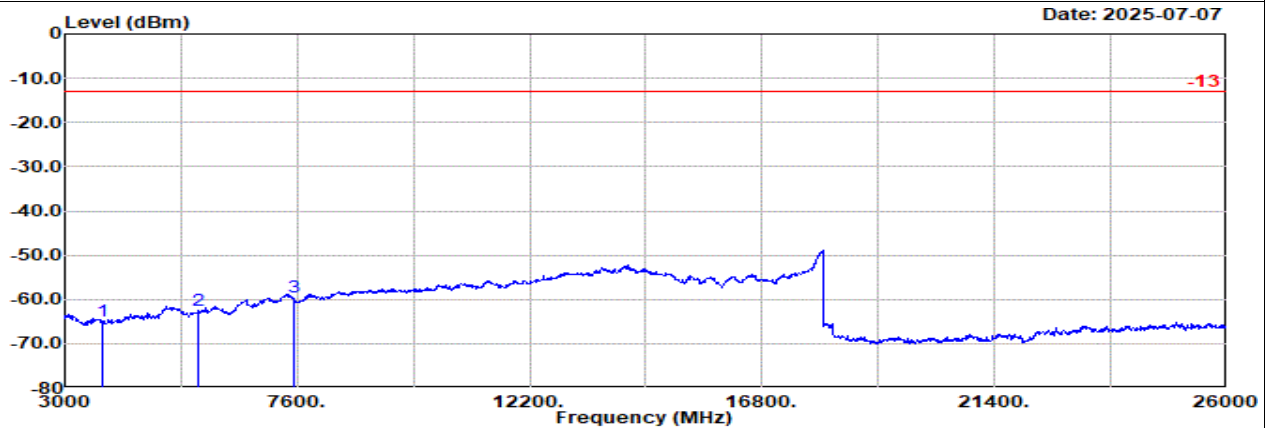

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9400

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3760.00	-64.95	RMS	30.08	-57.80	0.72	-95.23	57.28	-13.00	-51.95	Vertical	
2	5640.00	-62.46	RMS	32.94	-55.05	0.23	-95.23	54.65	-13.00	-49.46	Vertical	
3	7520.00	-59.54	RMS	36.12	-53.41	0.12	-95.23	52.86	-13.00	-46.54	Vertical	




Ant 0

Part 24E Mode 4

WCDMA B2 Ch9538

H

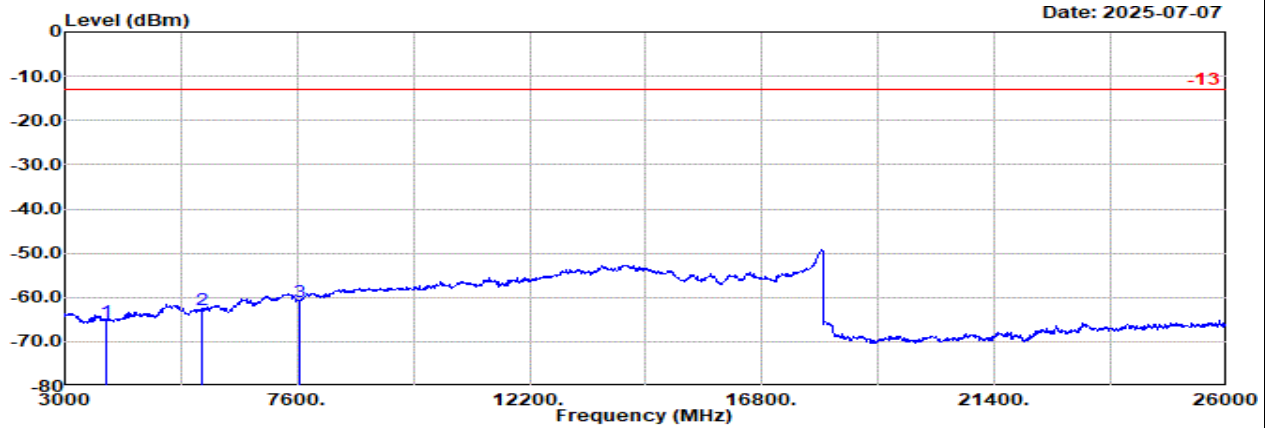


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	3815.00	-65.57	RMS	30.52	-57.77	0.62	-95.23	56.29	-13.00	-52.57	Horizontal	
2	5722.00	-62.85	RMS	33.49	-54.88	0.36	-95.23	53.41	-13.00	-49.85	Horizontal	
3	7630.00	-60.87	RMS	36.16	-53.42	0.07	-95.23	51.55	-13.00	-47.87	Horizontal	

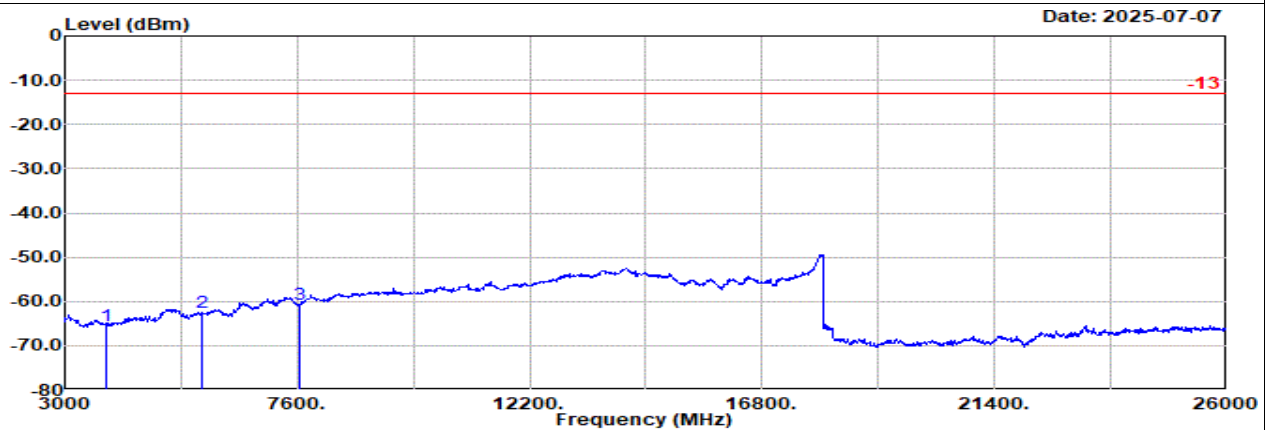

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band2 Ch9538

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm					dB	dB	dBuV	dBm	dB	
1	3815.00	-65.39	RMS	30.52	-57.77	0.62	-95.23	56.47	-13.00	-52.39	Vertical	
2	5722.00	-62.63	RMS	33.49	-54.88	0.36	-95.23	53.63	-13.00	-49.63	Vertical	
3	7630.00	-60.73	RMS	36.16	-53.42	0.07	-95.23	51.69	-13.00	-47.73	Vertical	




Ant 2

Part 27L Mode 1

WCDMA B4 Ch1312

L

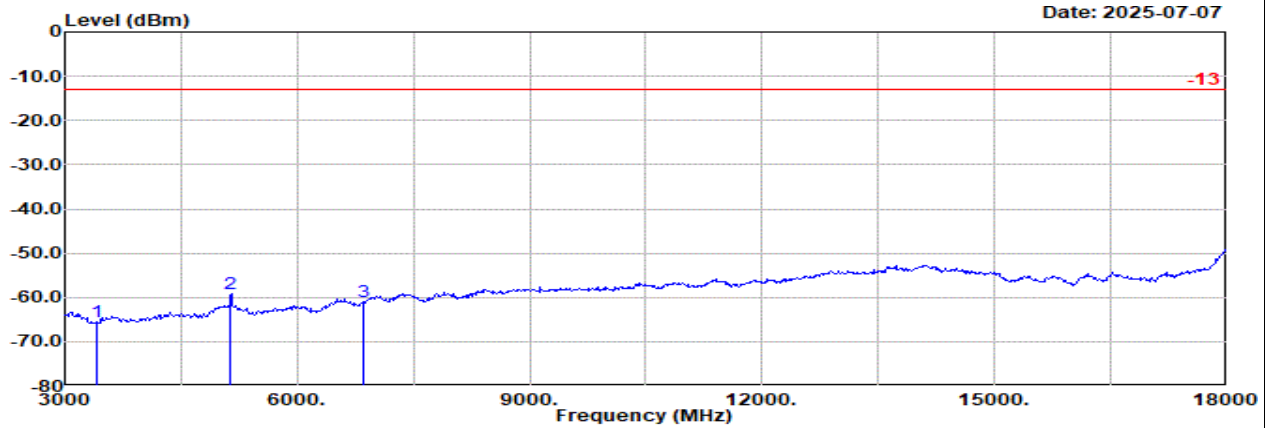


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3424.00	-65.56	RMS	29.55	-57.98	0.95	-95.23	57.15	-13.00	-52.56	Horizontal	
2	5137.00	-59.03	RMS	33.05	-56.28	0.77	-95.23	58.66	-13.00	-46.03	Horizontal	
3	6849.00	-61.12	RMS	35.60	-53.78	0.23	-95.23	52.06	-13.00	-48.12	Horizontal	

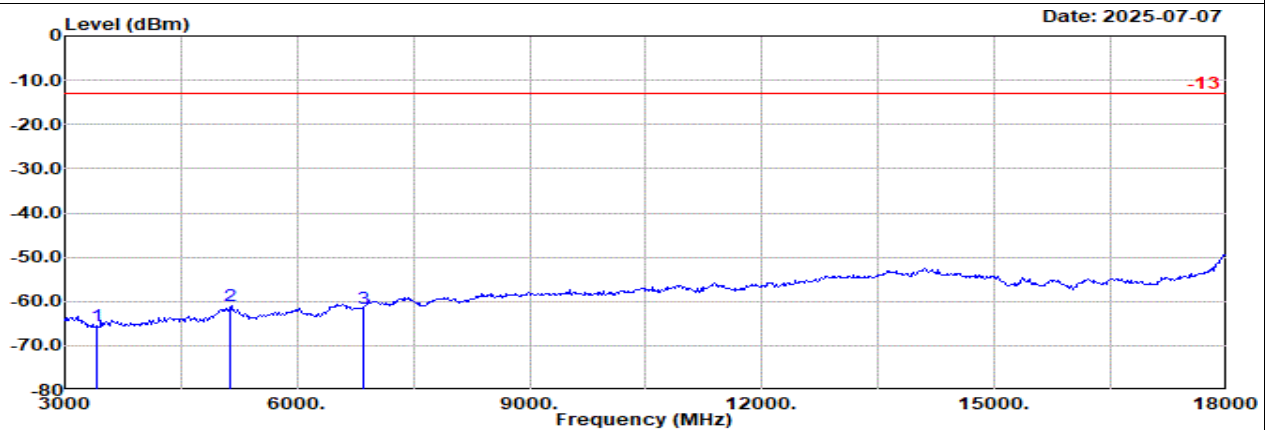

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3424.00	-65.61	RMS	29.55	-57.98	0.95	-95.23	57.10	-13.00	-52.61	Vertical	
2	5137.00	-61.13	RMS	33.05	-56.28	0.77	-95.23	56.56	-13.00	-48.13	Vertical	
3	6849.00	-61.58	RMS	35.60	-53.78	0.23	-95.23	51.60	-13.00	-48.58	Vertical	




Ant 2

Part 27L Mode 1

WCDMA B4 Ch1413

M

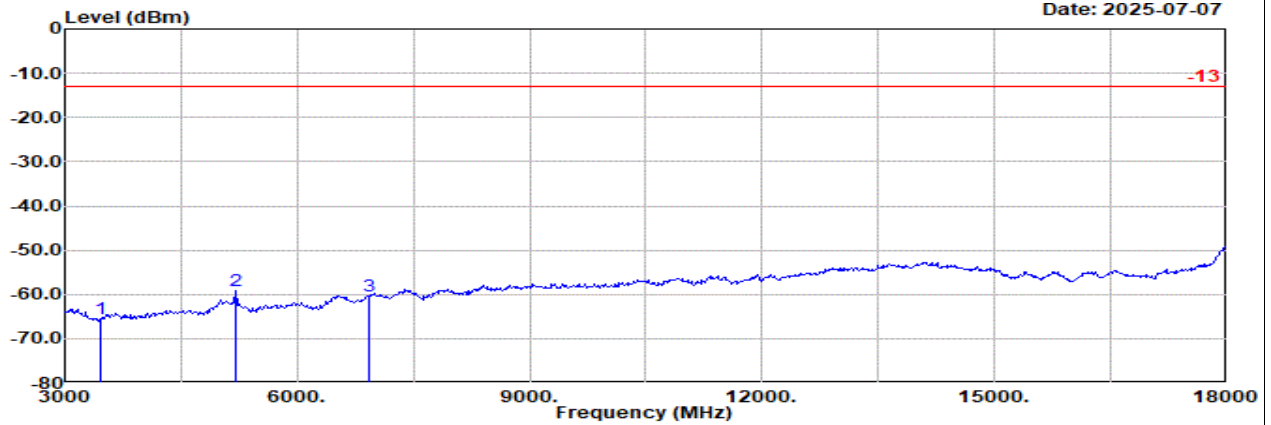


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-65.40	RMS	29.50	-57.94	0.99	-95.23	57.28	-13.00	-52.40	Horizontal	
2	5197.00	-59.31	RMS	33.10	-56.12	0.83	-95.23	58.11	-13.00	-46.31	Horizontal	
3	6930.00	-60.40	RMS	35.70	-53.71	0.27	-95.23	52.57	-13.00	-47.40	Horizontal	

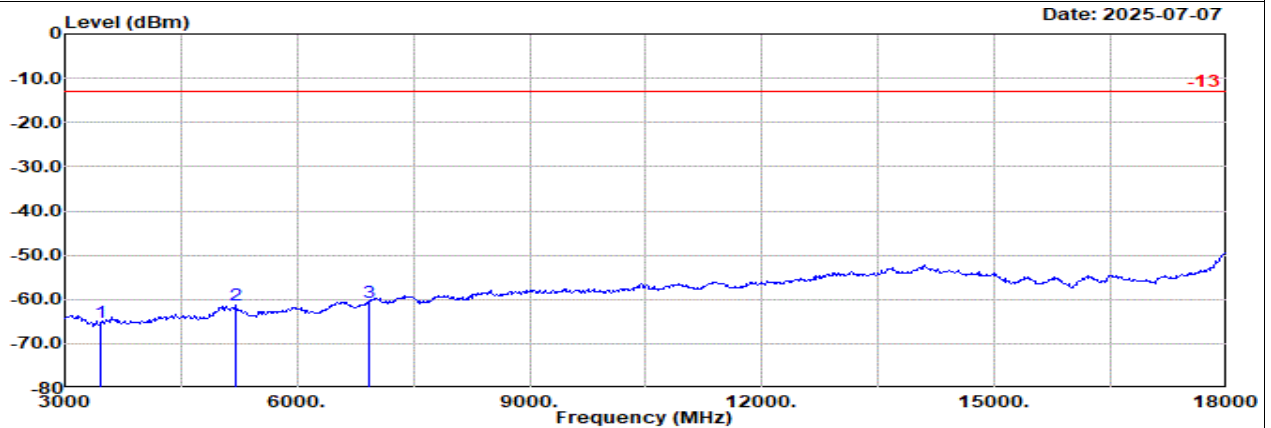

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1							
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-65.17	RMS	29.50	-57.94	0.99	-95.23	57.51	-13.00	-52.17	Vertical	
2	5197.00	-61.21	RMS	33.10	-56.12	0.83	-95.23	56.21	-13.00	-48.21	Vertical	
3	6930.00	-60.57	RMS	35.70	-53.71	0.27	-95.23	52.40	-13.00	-47.57	Vertical	




Ant 2

Part 27L Mode 1

WCDMA B4 Ch1513

H

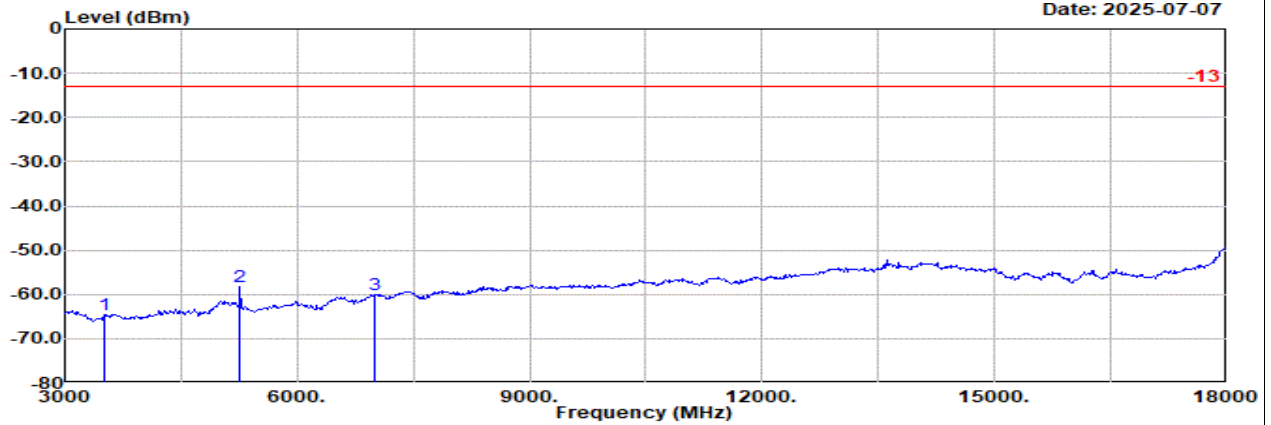


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-64.68	RMS	29.50	-57.91	1.02	-95.23	57.94	-13.00	-51.68	Horizontal
2	5257.00	-58.17	RMS	32.99	-55.98	0.72	-95.23	59.33	-13.00	-45.17	Horizontal
3	7010.00	-60.14	RMS	35.72	-53.64	0.30	-95.23	52.71	-13.00	-47.14	Horizontal

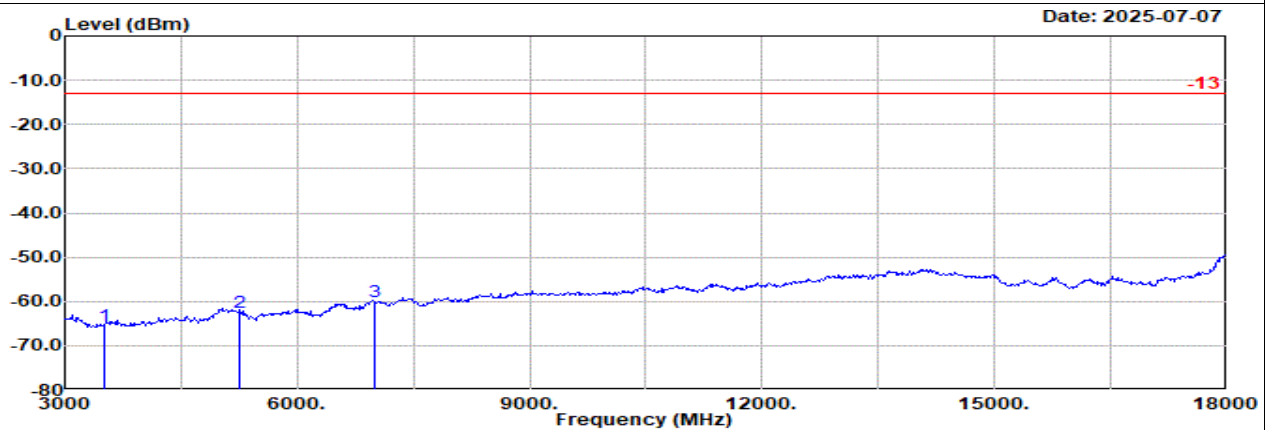

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical

: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF	Readin	Limit	Margin	Pol
				Factor	1						
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-65.56	RMS	29.50	-57.91	1.02	-95.23	57.06	-13.00	-52.56	Vertical
2	5257.00	-62.59	RMS	32.99	-55.98	0.72	-95.23	54.91	-13.00	-49.59	Vertical
3	7010.00	-60.04	RMS	35.72	-53.64	0.30	-95.23	52.81	-13.00	-47.04	Vertical




Ant 0

Part 27L Mode 2

WCDMA B4 Ch1312

L

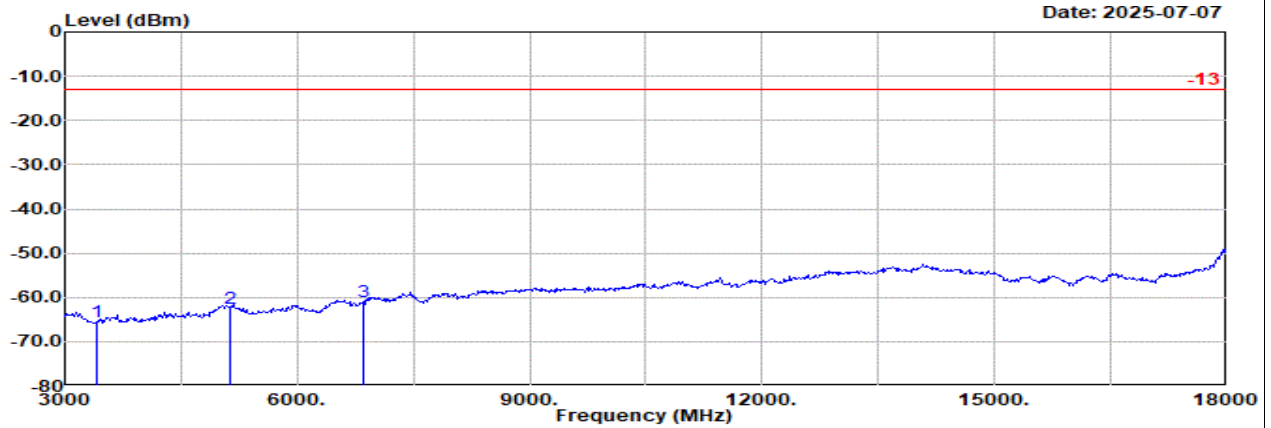


Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Horizontal

: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm							g			
1	3424.00	-65.50	RMS	29.55	-57.98	0.95	-95.23		57.21	-13.00	-52.50	Horizontal
2	5137.00	-62.36	RMS	33.05	-56.28	0.77	-95.23		55.33	-13.00	-49.36	Horizontal
3	6849.00	-61.07	RMS	35.60	-53.78	0.23	-95.23		52.11	-13.00	-48.07	Horizontal

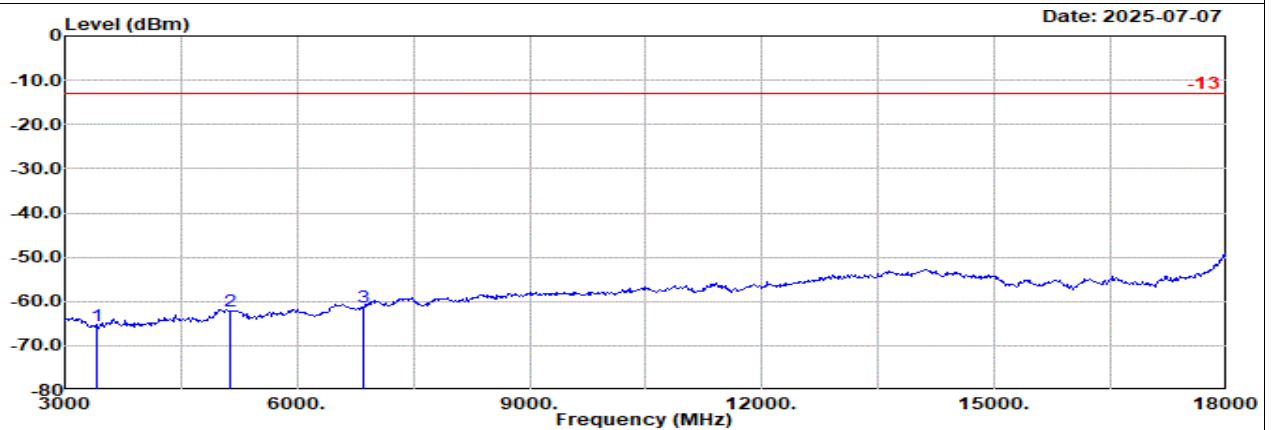

Site : 03CH12-HY

Condition: -13 3m 9120D-02038-240729 Vertical


: WCDMA Band4 CH1312

	Freq	Level	Detector	Ant		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	Amp\Cb		1					
	MHz	dBm							g			
1	3424.00	-65.64	RMS	29.55	-57.98	0.95	-95.23		57.07	-13.00	-52.64	Vertical
2	5137.00	-62.33	RMS	33.05	-56.28	0.77	-95.23		55.36	-13.00	-49.33	Vertical
3	6849.00	-61.27	RMS	35.60	-53.78	0.23	-95.23		51.91	-13.00	-48.27	Vertical




Ant 0

Part 27L Mode 2
WCDMA B4 Ch1413
M

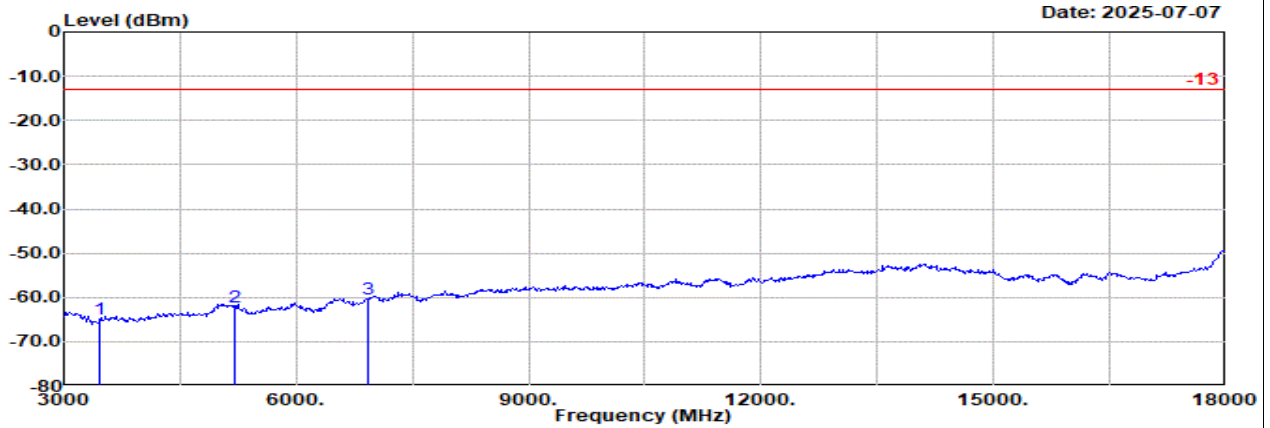

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Horizontal
: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin	Pol
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-65.02	RMS	29.50	-57.94	0.99	-95.23	57.66	-13.00	-52.02	Horizontal
2	5197.00	-62.08	RMS	33.10	-56.12	0.83	-95.23	55.34	-13.00	-49.08	Horizontal
3	6930.00	-60.50	RMS	35.70	-53.71	0.27	-95.23	52.47	-13.00	-47.50	Horizontal

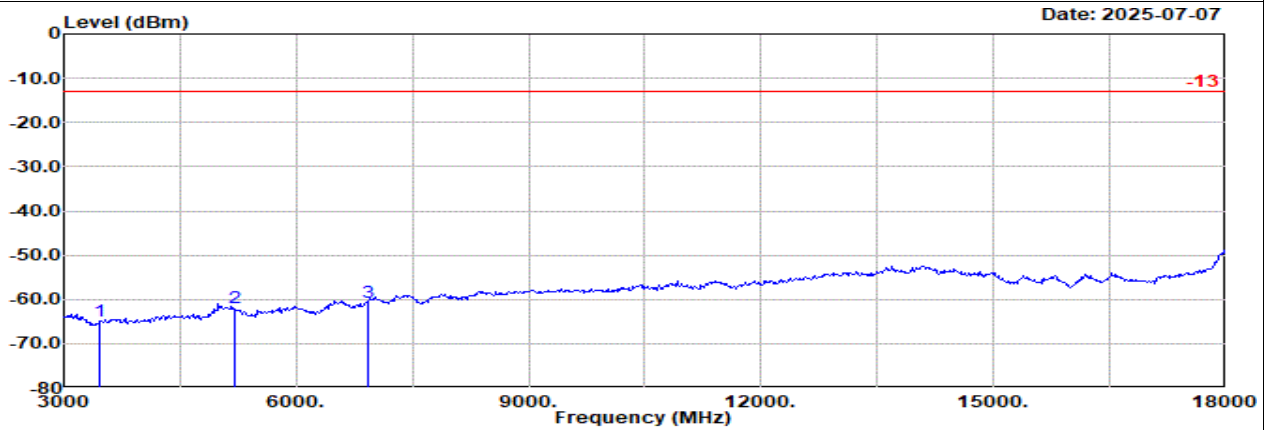

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Vertical
: WCDMA Band4 CH1413

	Freq	Level	Detector	Ant Amp\Cb Filter				Readin	Limit	Margin	Pol
				Factor	1	EIRPCF					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	3465.00	-65.06	RMS	29.50	-57.94	0.99	-95.23	57.62	-13.00	-52.06	Vertical
2	5197.00	-62.01	RMS	33.10	-56.12	0.83	-95.23	55.41	-13.00	-49.01	Vertical
3	6930.00	-60.64	RMS	35.70	-53.71	0.27	-95.23	52.33	-13.00	-47.64	Vertical




Ant 0

Part 27L Mode 2


WCDMA B4 Ch1513

H

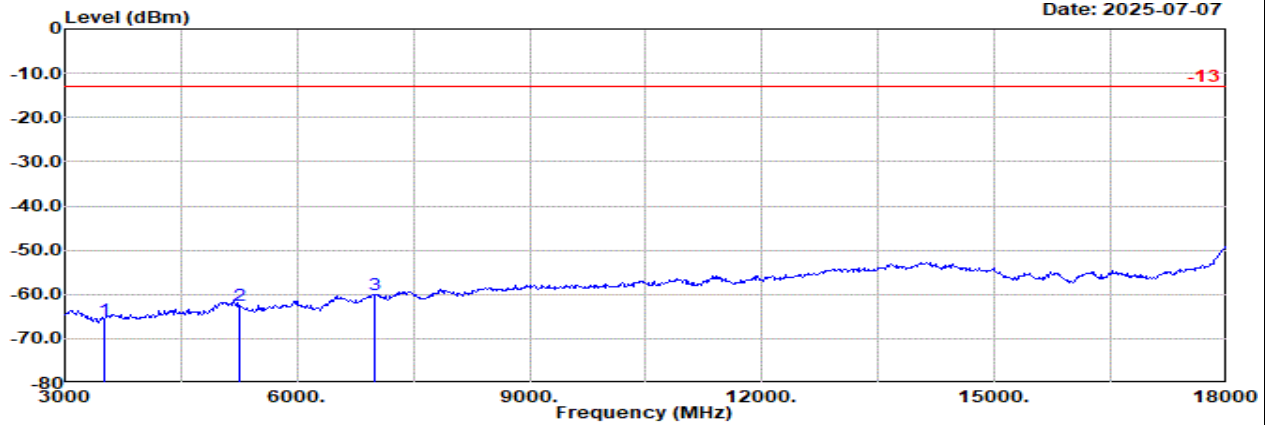

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Horizontal
: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-65.66	RMS	29.50	-57.91	1.02	-95.23	56.96	-13.00	-52.66	Horizontal	
2	5257.00	-62.51	RMS	32.99	-55.98	0.72	-95.23	54.99	-13.00	-49.51	Horizontal	
3	7010.00	-59.97	RMS	35.72	-53.64	0.30	-95.23	52.88	-13.00	-46.97	Horizontal	

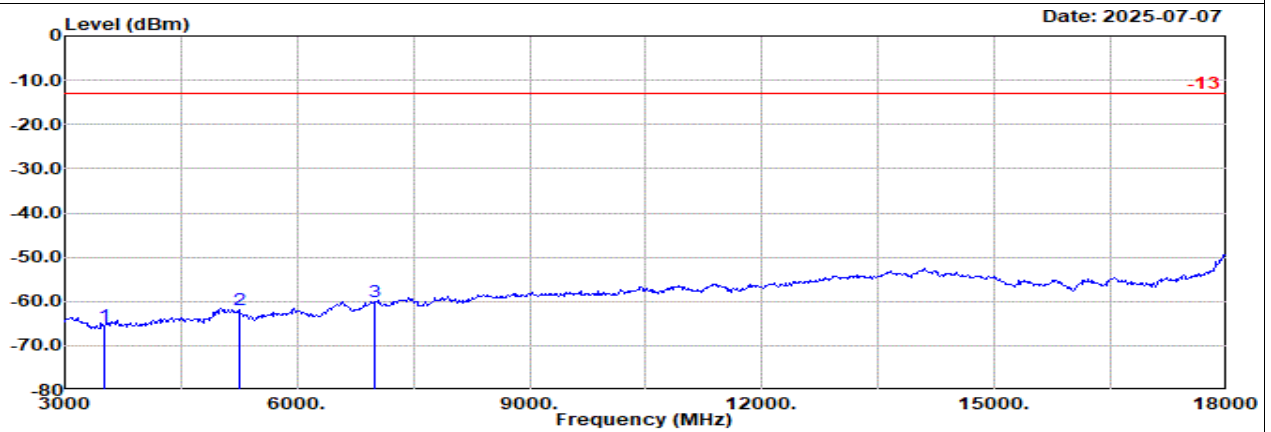

Site : 03CH12-HY
Condition: -13 3m 9120D-02038-240729 Vertical
: WCDMA Band4 CH1513

	Freq	Level	Detector	Ant Amp\Cb		Filter	EIRPCF		Readin	Limit	Margin	Pol
				Factor	1				g			
	MHz	dBm		dB/m	dB	dB	dB	dB	dBuV	dBm	dB	
1	3505.00	-65.62	RMS	29.50	-57.91	1.02	-95.23	57.00	-13.00	-52.62	Vertical	
2	5257.00	-62.02	RMS	32.99	-55.98	0.72	-95.23	55.48	-13.00	-49.02	Vertical	
3	7010.00	-60.17	RMS	35.72	-53.64	0.30	-95.23	52.68	-13.00	-47.17	Vertical	




Ant 0

Part 22H Mode 2


GSM 850 Ch251

H

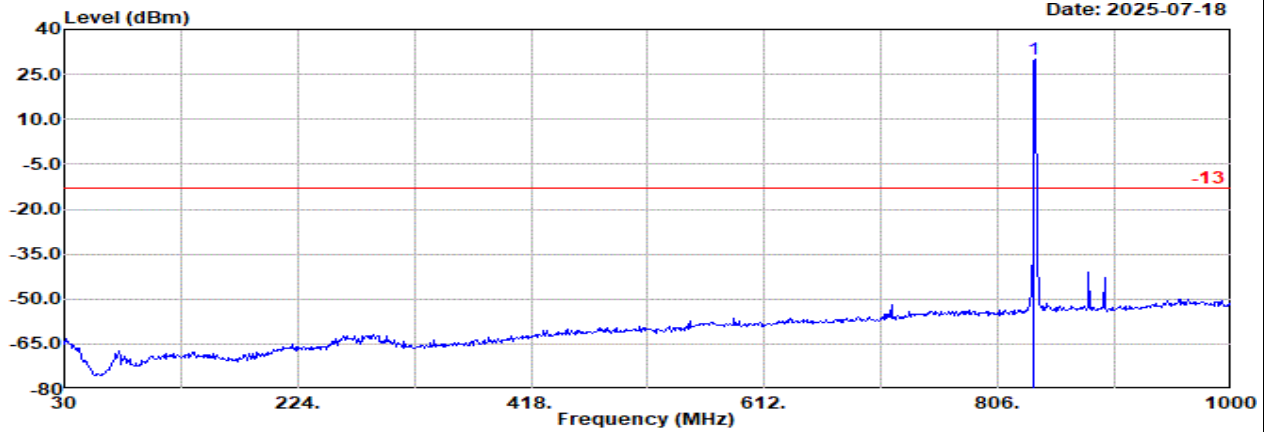

Site : 03CH12-HY
Condition: -13 3m Bilog_37059_20241127 Horizontal
: GSM 850 Ch251
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm									
1	836.00	29.93	Average	28.85	3.99	0.00	-95.23	92.32	-13.00	42.93	Horizontal

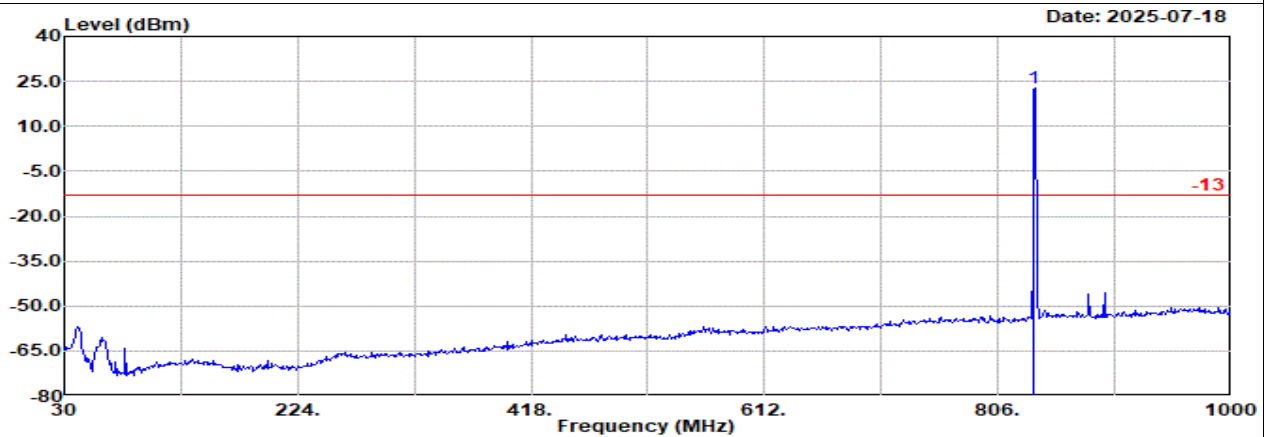

Site : 03CH12-HY
Condition: -13 3m Bilog_37059_20241127 Vertical
: GSM 850 Ch251
: #1 is fundamental signal which can be ignored.

	Freq	Level	Detector	Ant Factor	Amp\Cb	Filter	EIRPCF	Readin	Limit	Margin	Pol
	MHz	dBm									
1	836.00	22.78	Average	28.85	3.99	0.00	-95.23	85.17	-13.00	35.78	Vertical

Remark: #1 is fundamental signal which can be ignored.

THE END