

#01_GSM850_GPRS 4 Tx slots_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260105 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.340 W/kg; SAR (10g) = 0.231 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.359 W/kg; SAR (8g) = 0.286 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 23.1 mm

Ratio of SAR at M2 to SAR at M1 = 96.0 %

TSL Correction: Positive only

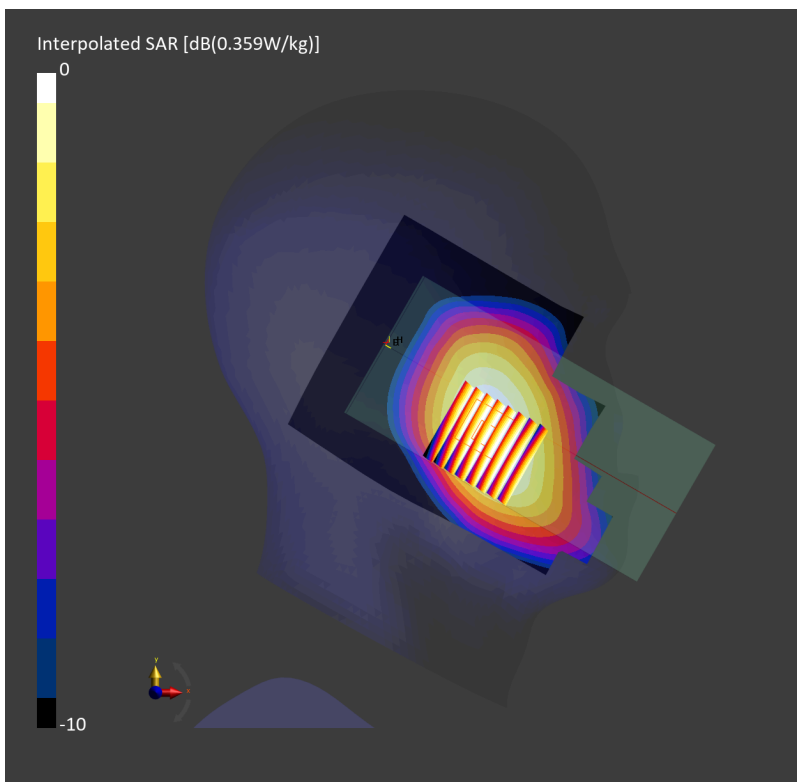

#02_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.632 W/kg; SAR (10g) = 0.407 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.401 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 69.7 %

TSL Correction: Positive only

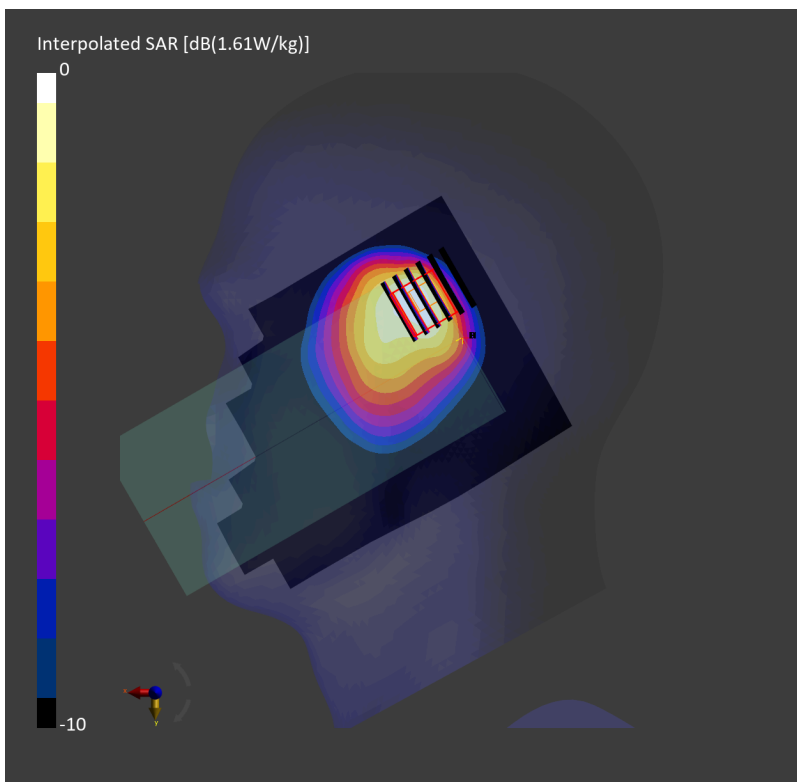

#03_LTE Band 48_20M_QPSK_50_0_Right Cheek_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.430 W/kg; SAR (10g) = 0.155 W/kg;

TSL Correction: Positive only

Zoom Scan (30.8 mm x 30.8 mm x 29.1 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.422 W/kg; SAR (8g) = 0.158 W/kg; SAR (10g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.2 %

TSL Correction: Positive only

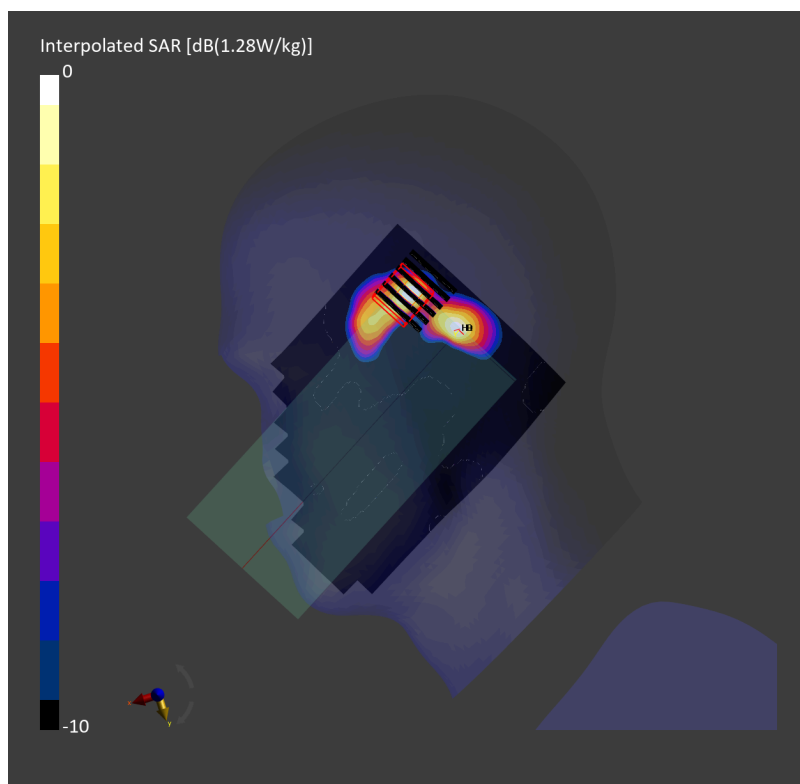

#04_FR1 n77_100M_BPSK_1_271_Right Cheek_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260207 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 37.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.45, 6.17, 6.86); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.577 W/kg; SAR (10g) = 0.217 W/kg;

TSL Correction: Positive only

Zoom Scan (32.8 mm x 32.8 mm x 33.4 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 0.581 W/kg; SAR (8g) = 0.230 W/kg; SAR (10g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.3 %

TSL Correction: Positive only

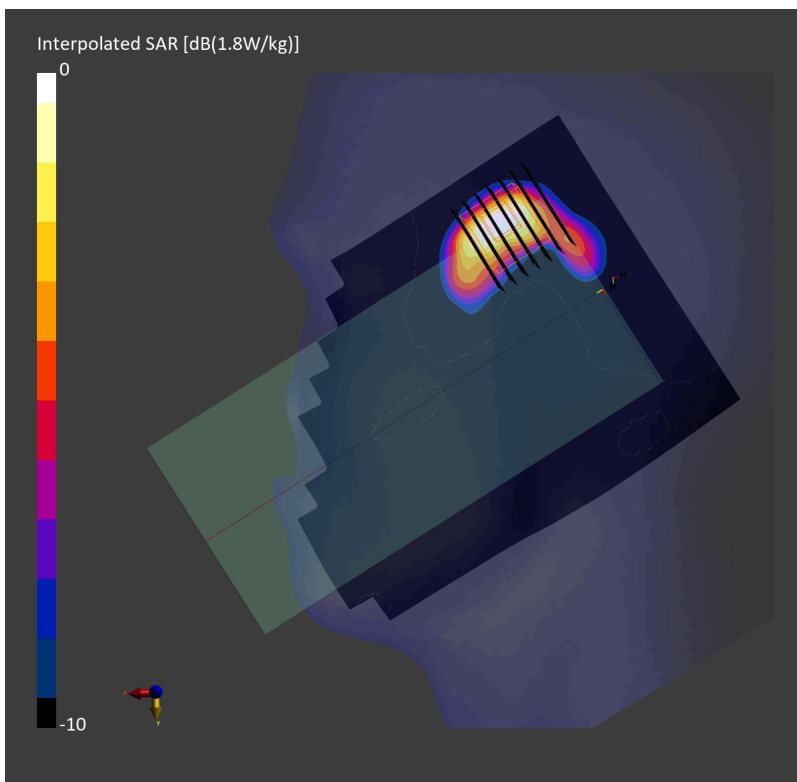

#05_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.627 W/kg; SAR (10g) = 0.316 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.669 W/kg; SAR (8g) = 0.388 W/kg; SAR (10g) = 0.357 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 86.6 %

TSL Correction: Positive only

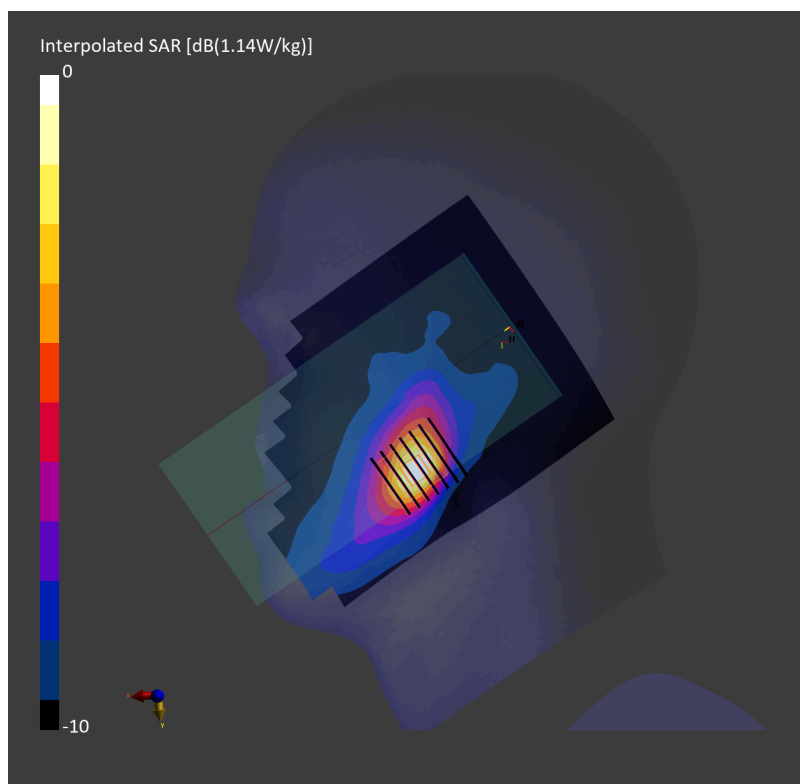

#06_LTE Band 66_20M_QPSK_50_50_Left Cheek_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.275 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 33.4 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.4 mm


Power Drift = 0.18 dB

SAR (1g) = 0.628 W/kg; SAR (8g) = 0.313 W/kg; SAR (10g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

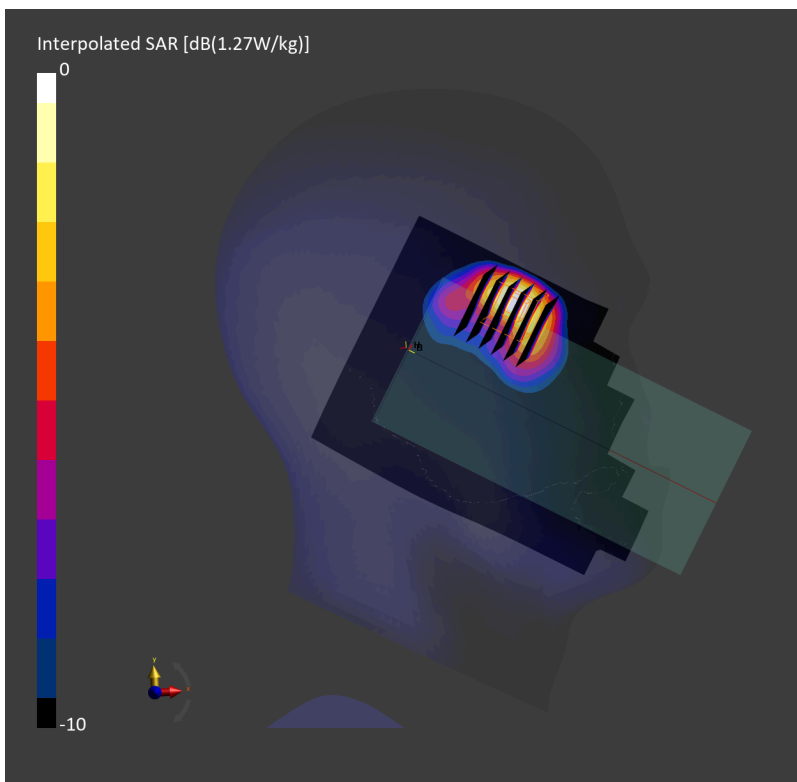

#07_LTE Band 48_20M_QPSK_50_0_Left Cheek_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.76$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.605 W/kg; SAR (10g) = 0.236 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

TSL Correction: Positive only

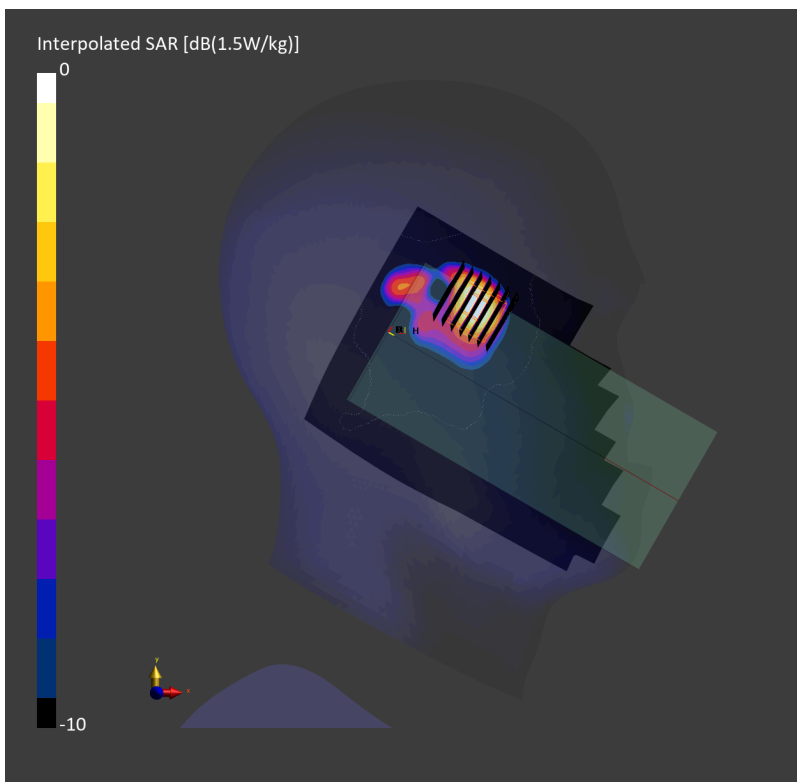

#08_FR1 n77_100M_BPSK_135_0_Left Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.65$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.231 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.604 W/kg; SAR (8g) = 0.262 W/kg; SAR (10g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

TSL Correction: Positive only

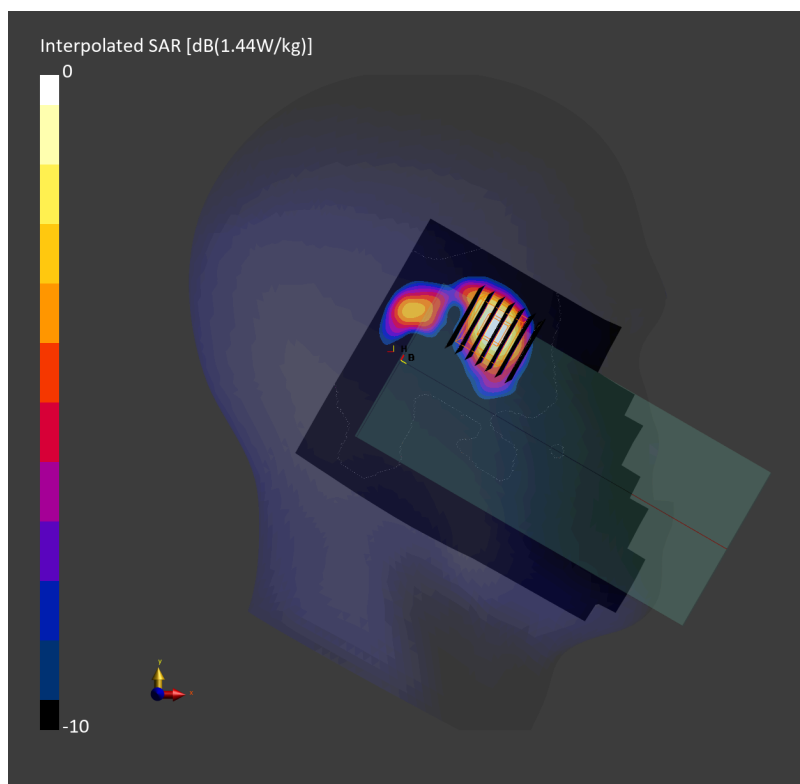

#09_LTE Band 48_20M_QPSK_1_0_Left Cheek_0mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260104 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.122 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.17 dB

SAR (1g) = 0.289 W/kg; SAR (8g) = 0.146 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

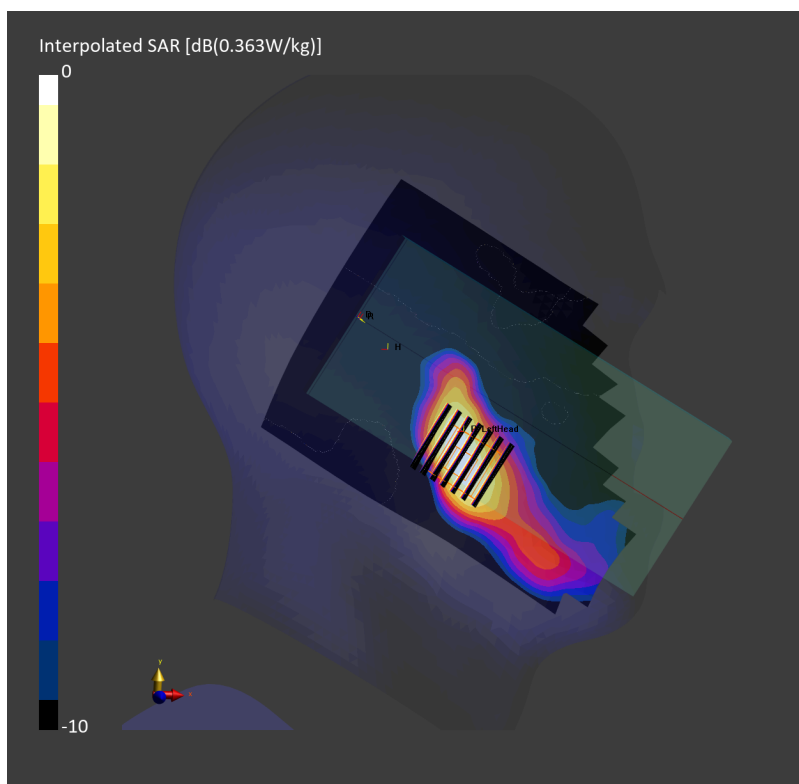

#10_FR1 n77_100M_QPSK_135_69_Left Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260207 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.69$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.649 W/kg; SAR (10g) = 0.295 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.716 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

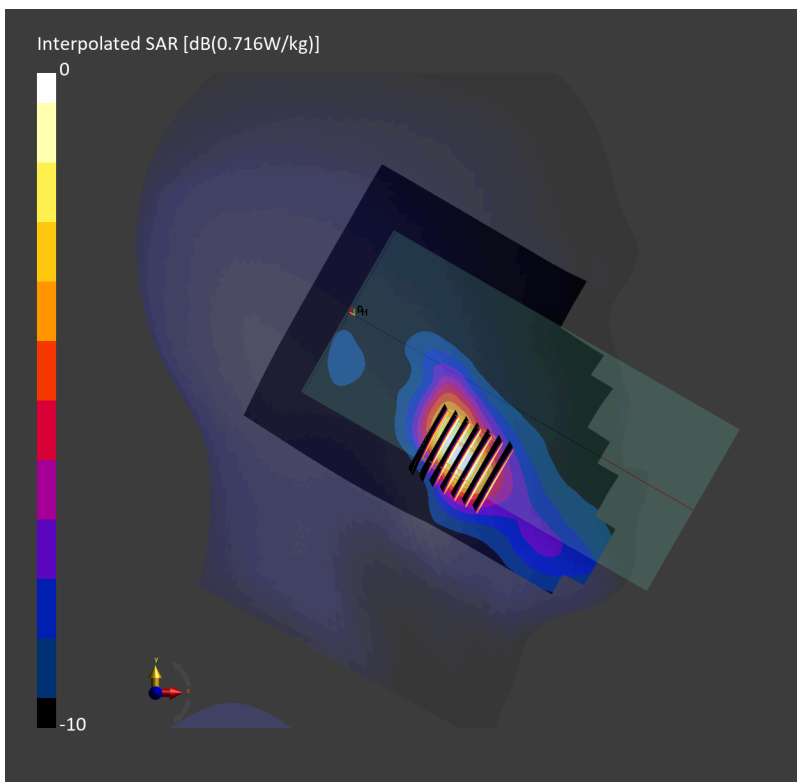

#11_LTE Band 48_20M_QPSK_1_0_Right Cheek_0mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260104 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.172 W/kg; SAR (10g) = 0.077 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 0.176 W/kg; SAR (8g) = 0.087 W/kg; SAR (10g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

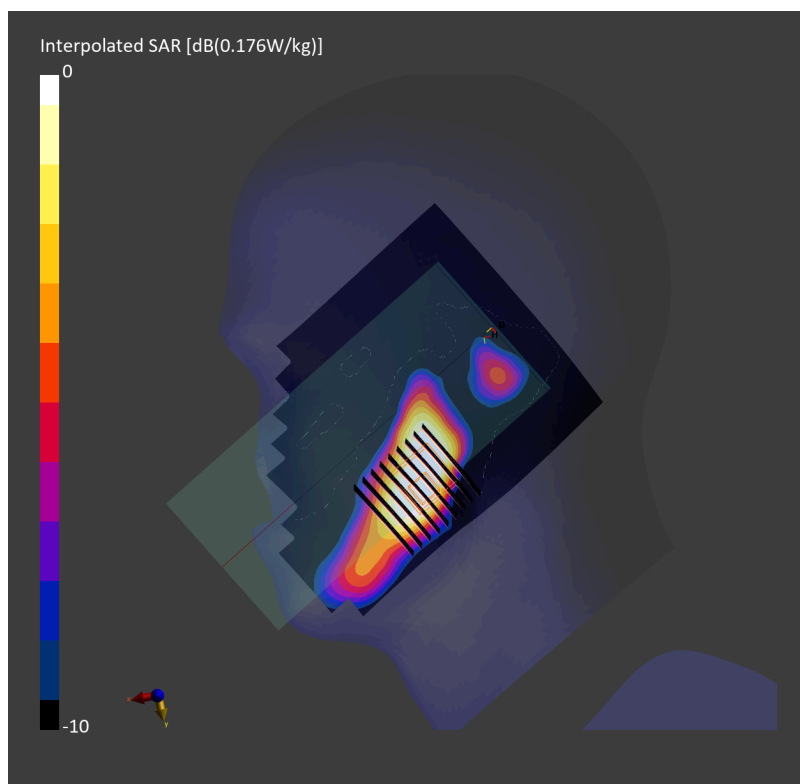

#12_FR1 n77_100M_QPSK_1_137_Right Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260209 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.235 W/kg; SAR (10g) = 0.104 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.263 W/kg; SAR (8g) = 0.130 W/kg; SAR (10g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

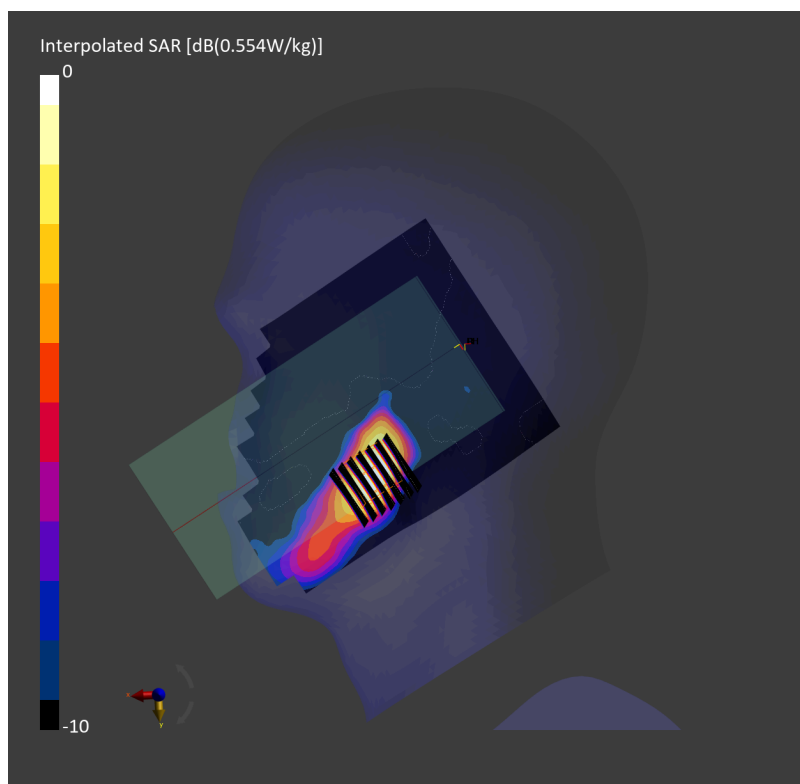

#13_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.166 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.417 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.387 W/kg; SAR (8g) = 0.167 W/kg; SAR (10g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

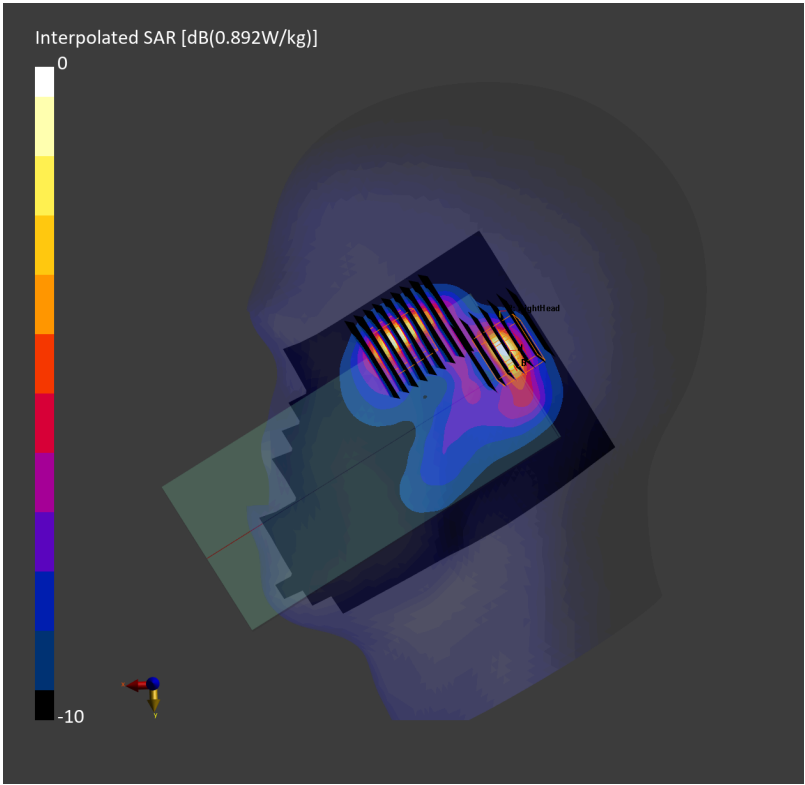

#14_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.398 W/kg; SAR (10g) = 0.143 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.15 dB

SAR (1g) = 0.059 W/kg; SAR (8g) = 0.020 W/kg; SAR (10g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.0 %

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.418 W/kg; SAR (8g) = 0.163 W/kg; SAR (10g) = 0.148 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.0 %

TSL Correction: Positive only

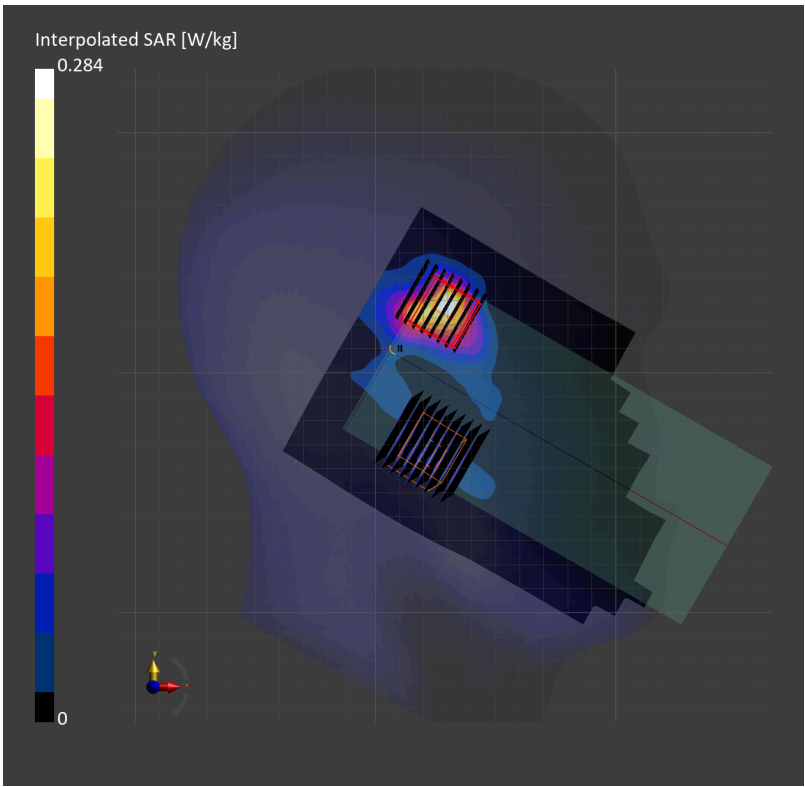

#15_Bluetooth_1Mbps_Right Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260323 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.132 W/kg; SAR (10g) = 0.062 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.139 W/kg; SAR (8g) = 0.070 W/kg; SAR (10g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

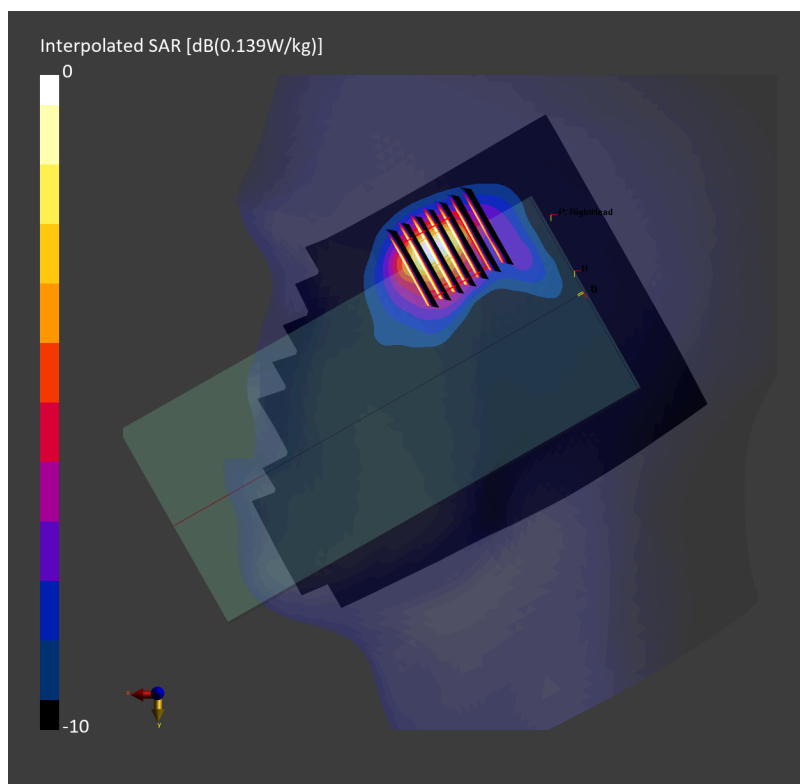

#16_Thread_250K_Right Cheek_0mm_Ch11

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2405.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2405.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.151 W/kg; SAR (10g) = 0.071 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.156 W/kg; SAR (8g) = 0.078 W/kg; SAR (10g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

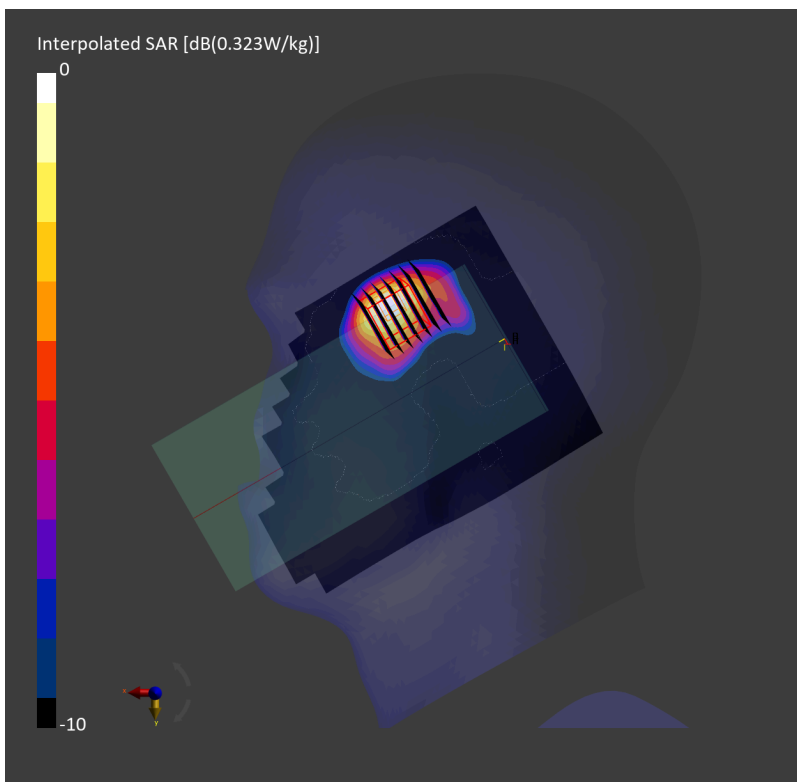

#17_WCDMA II_RMC 12.2Kbps_Bottom Edge_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260125 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.380 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.822 W/kg; SAR (8g) = 0.429 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

TSL Correction: Positive only

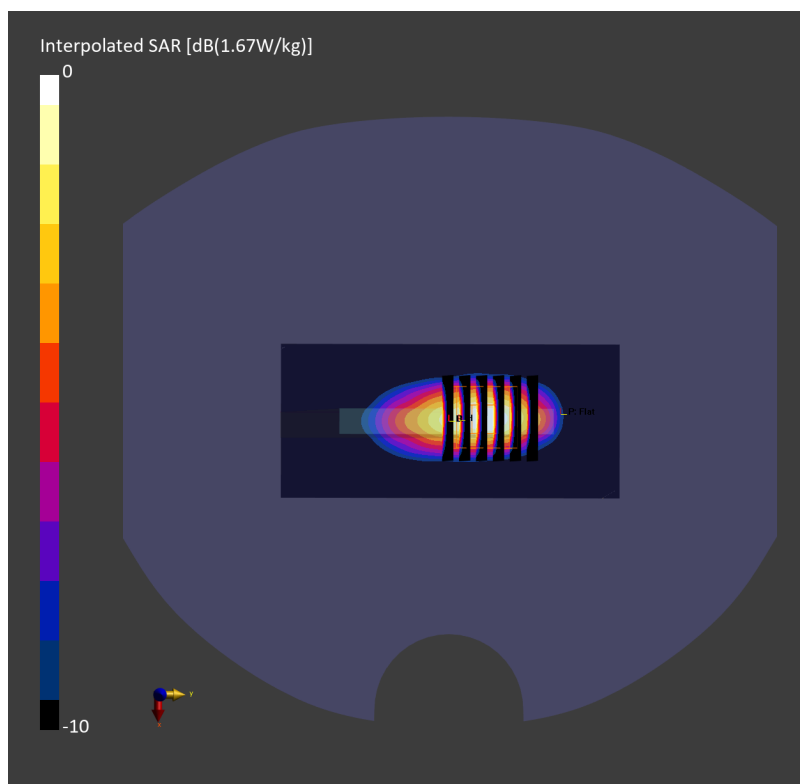

#18_LTE Band 66_20M_QPSK_50_50_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260128 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.13 dB

SAR (1g) = 0.728 W/kg; SAR (8g) = 0.446 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 23.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

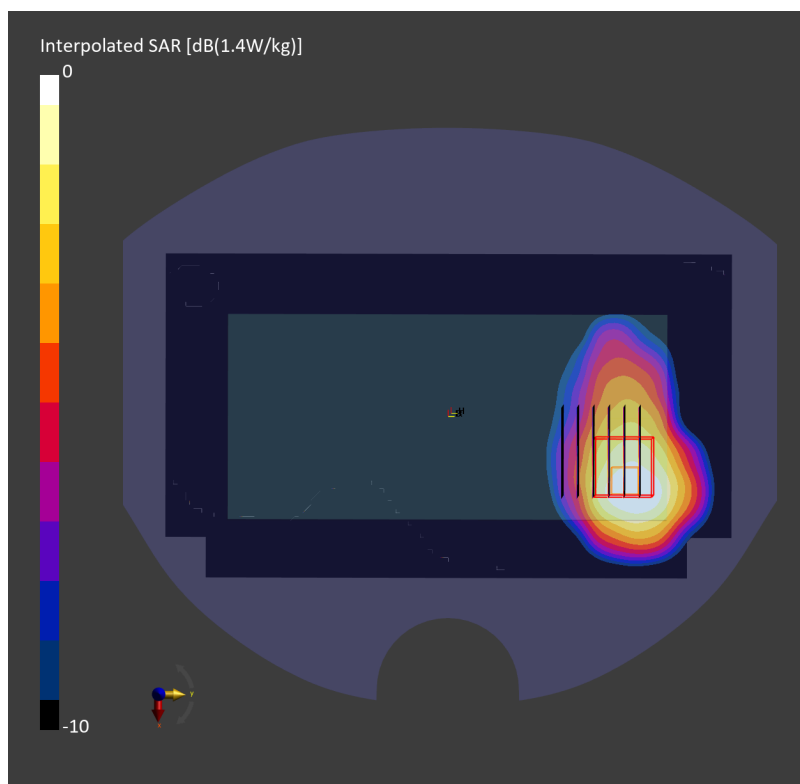

#19_LTE Band 48_20M_QPSK_50_50_Left Edge_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.493 W/kg; SAR (10g) = 0.173 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.503 W/kg; SAR (8g) = 0.189 W/kg; SAR (10g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

TSL Correction: Positive only

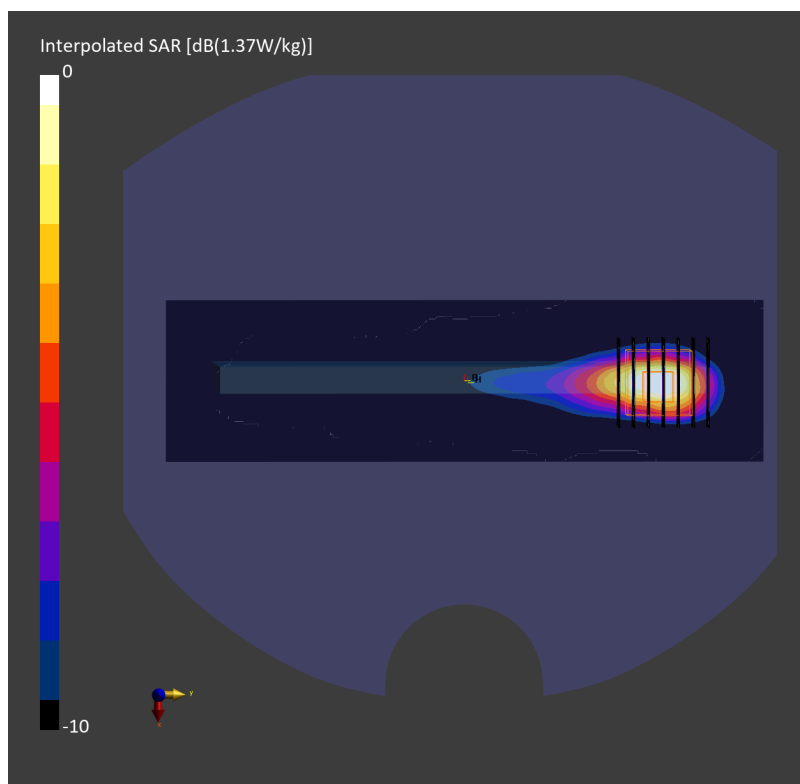

#20_FR1 n77_100M_BPSK_135_138_Left Edge_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.414 W/kg; SAR (10g) = 0.143 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.432 W/kg; SAR (8g) = 0.163 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

TSL Correction: Positive only

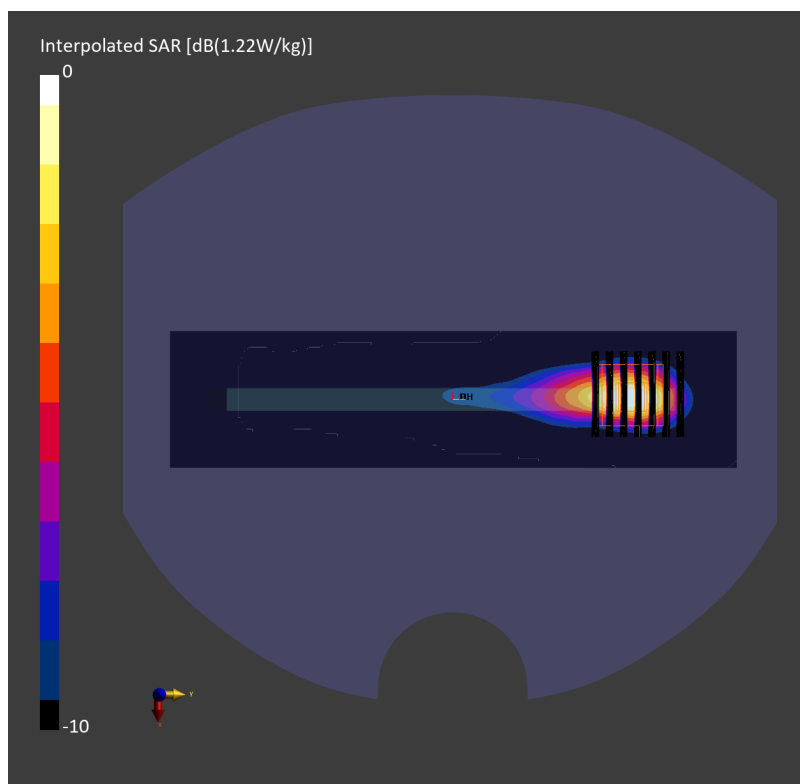

#21_FR1 n25_40M_BPSK_1_214_Right Edge_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.388 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.793 W/kg; SAR (8g) = 0.435 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

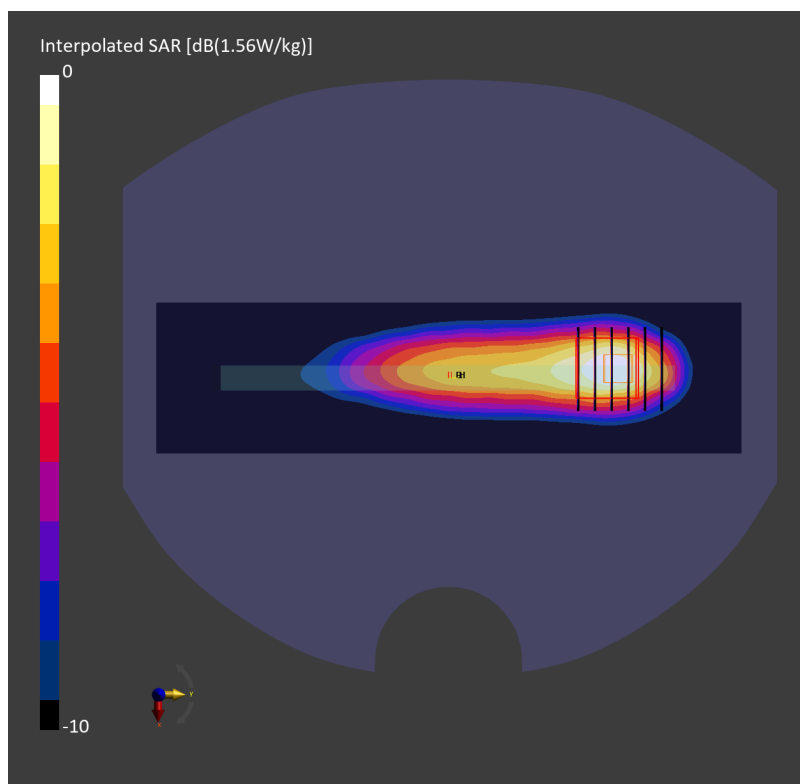

#22_FR1 n25_40M_BPSK_216_0_Right Edge_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.717 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.775 W/kg; SAR (8g) = 0.406 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

TSL Correction: Positive only

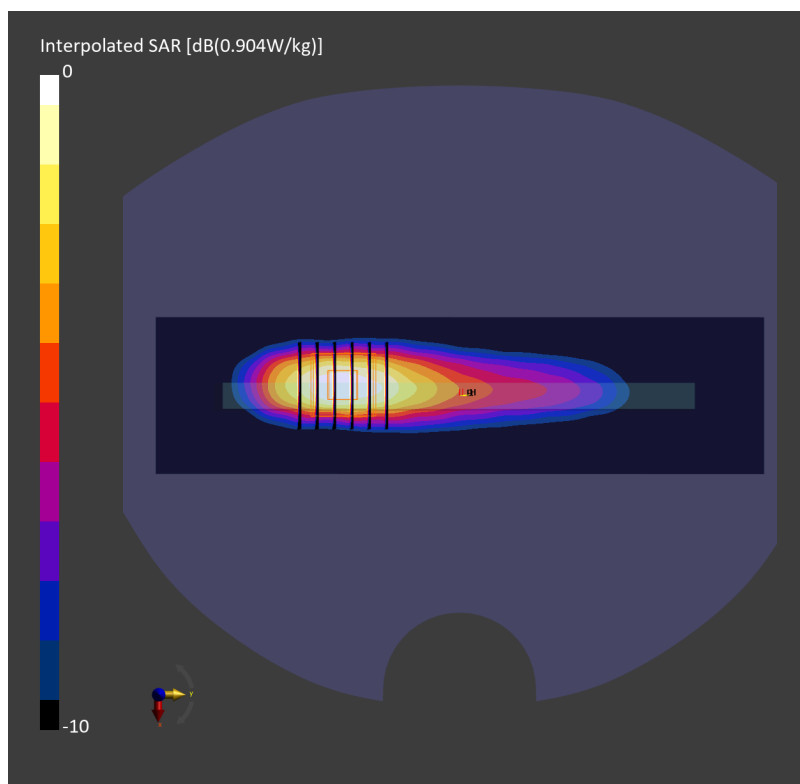

#23_LTE Band 48_20M_QPSK_50_0_Back_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.265 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.663 W/kg; SAR (8g) = 0.304 W/kg; SAR (10g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 71.2 %

TSL Correction: Positive only

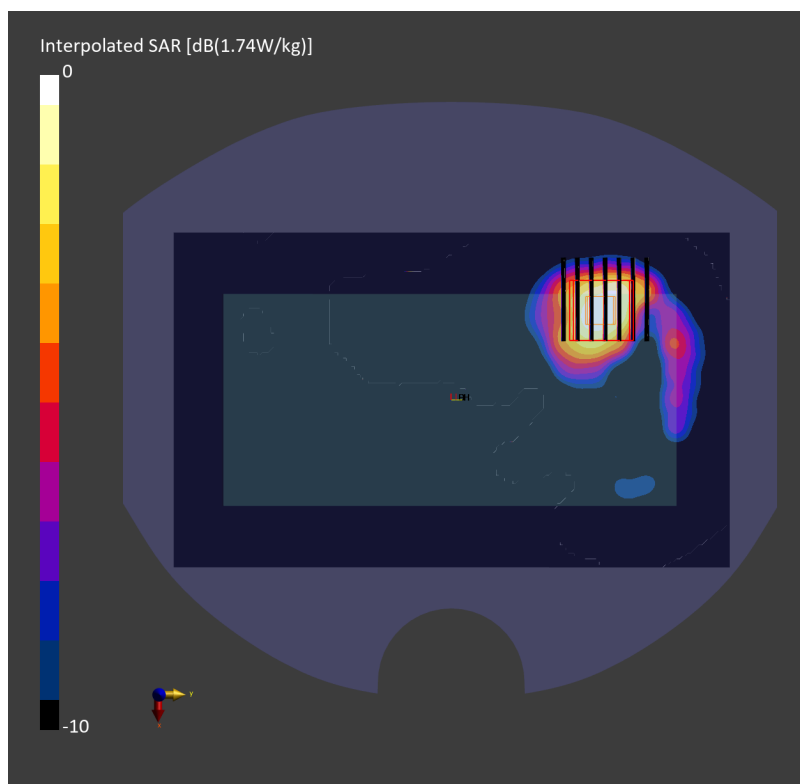

#24_FR1 n77_100M_BPSK_1_137_Top Edge_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.131 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.413 W/kg; SAR (8g) = 0.154 W/kg; SAR (10g) = 0.134 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

TSL Correction: Positive only

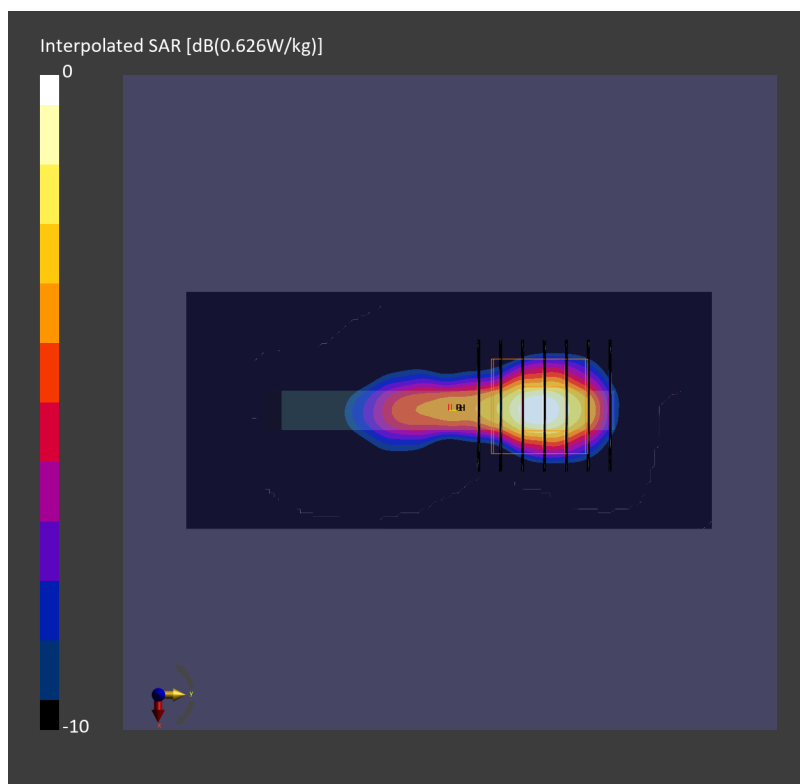

#25_LTE Band 48_20M_QPSK_50_0_Left Edge_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.686 W/kg; SAR (10g) = 0.265 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.701 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

TSL Correction: Positive only

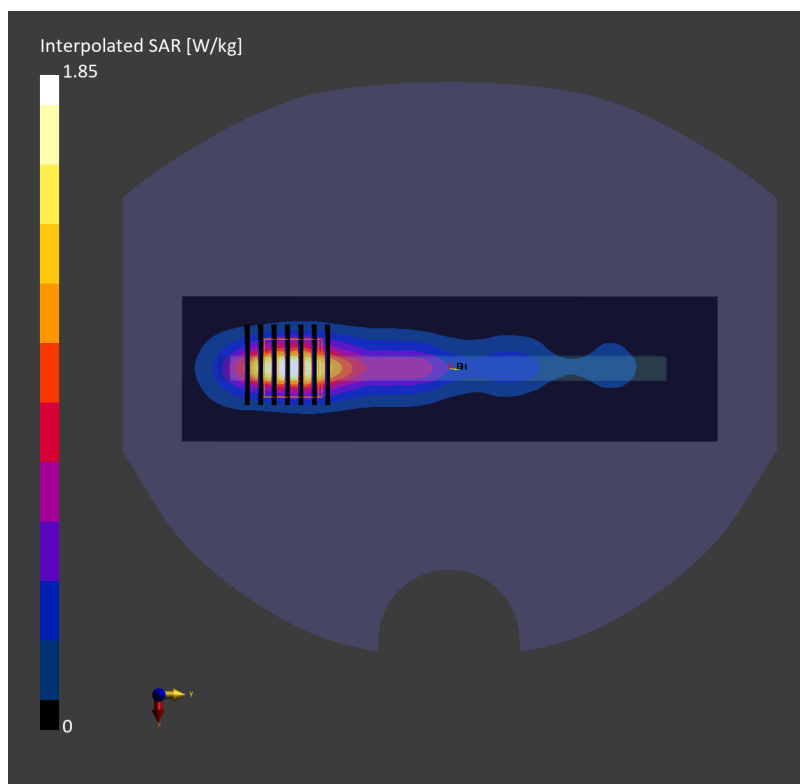

#26_FR1 n77_100M_BPSK_135_0_Left Edge_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.738 W/kg; SAR (10g) = 0.265 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.741 W/kg; SAR (8g) = 0.299 W/kg; SAR (10g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

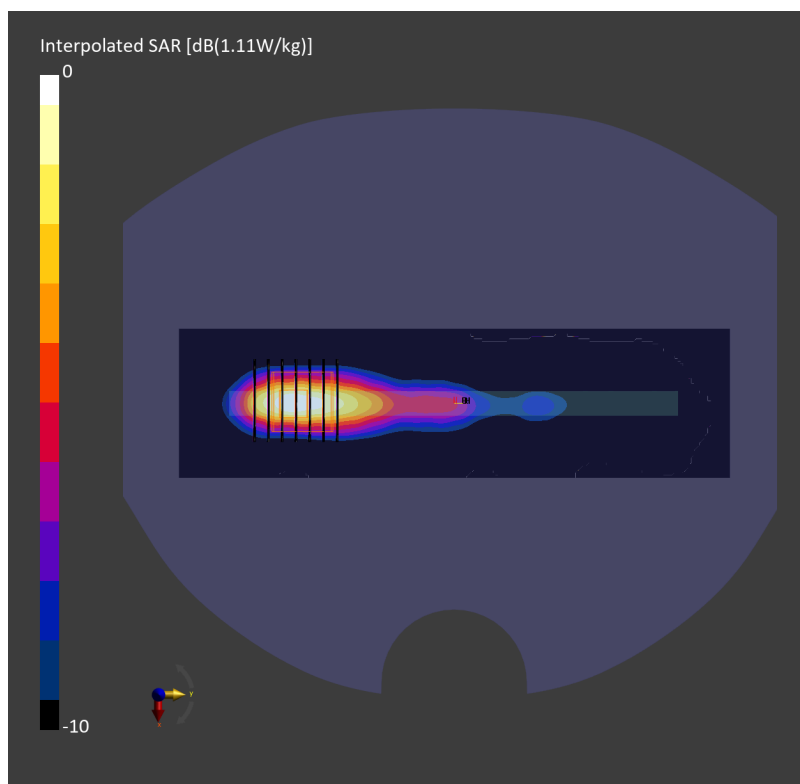

#27_LTE Band 48_20M_QPSK_50_0_Right Edge_5mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.238 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.694 W/kg; SAR (8g) = 0.282 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.2 %

TSL Correction: Positive only

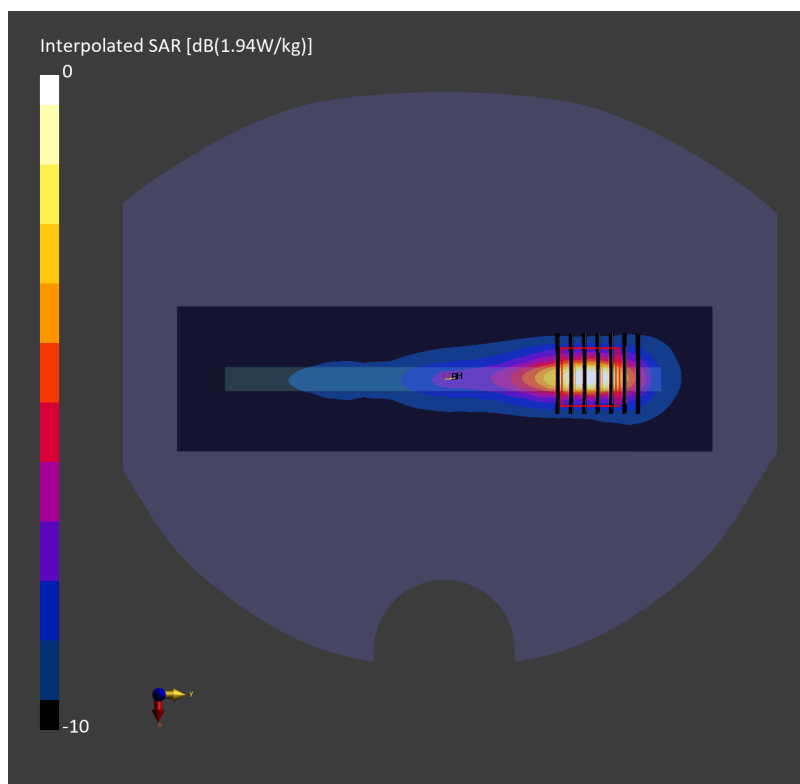

#28_FR1 n77_100M_BPSK_135_0_Right Edge_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260225 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.576 W/kg; SAR (10g) = 0.214 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.239 W/kg; SAR (10g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

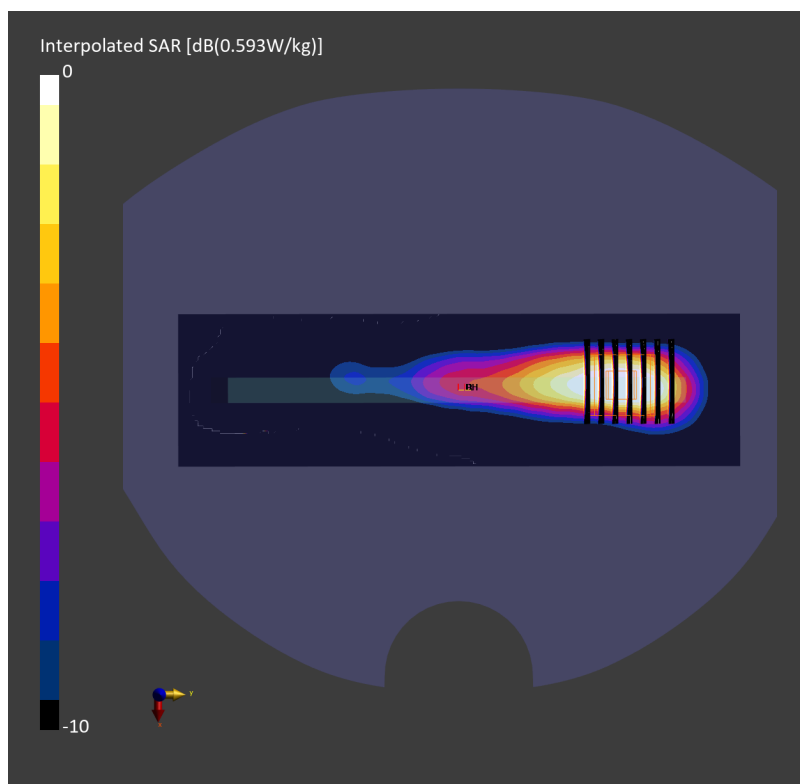

#29_WLAN2.4GHz_802.11b 1Mbps_Left Edge_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260321 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.140 W/kg; SAR (10g) = 0.060 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.148 W/kg; SAR (8g) = 0.070 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

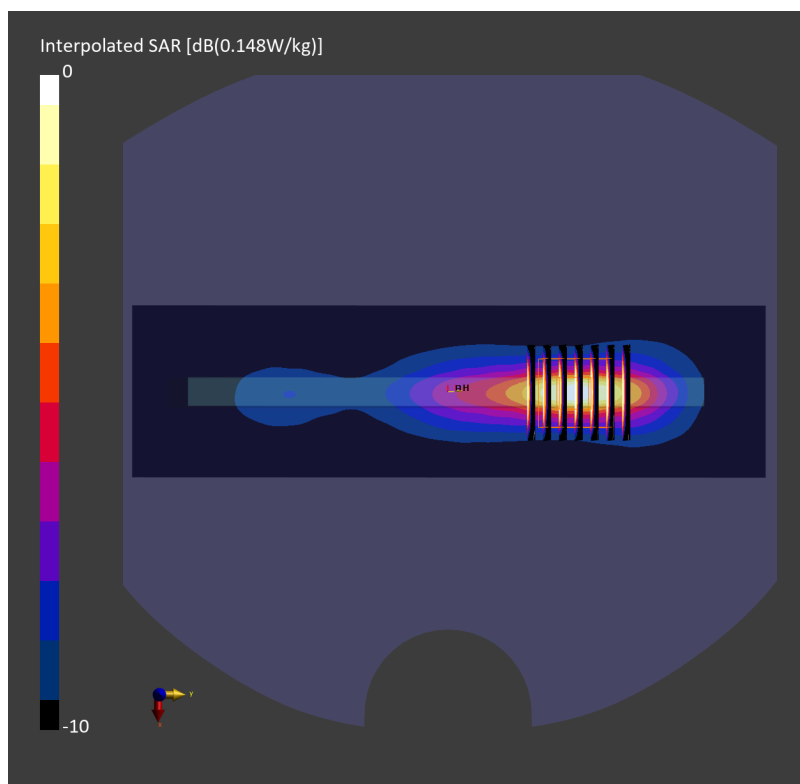

#30_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f=5775.000$ MHz; $\sigma=5.21$ S/m; $\epsilon_r=36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.92, 4.71, 5.23); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.150 W/kg; SAR (10g) = 0.038 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.102 W/kg; SAR (8g) = 0.028 W/kg; SAR (10g) = 0.023 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.5 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.155 W/kg; SAR (8g) = 0.040 W/kg; SAR (10g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 47.5 %

TSL Correction: Positive only

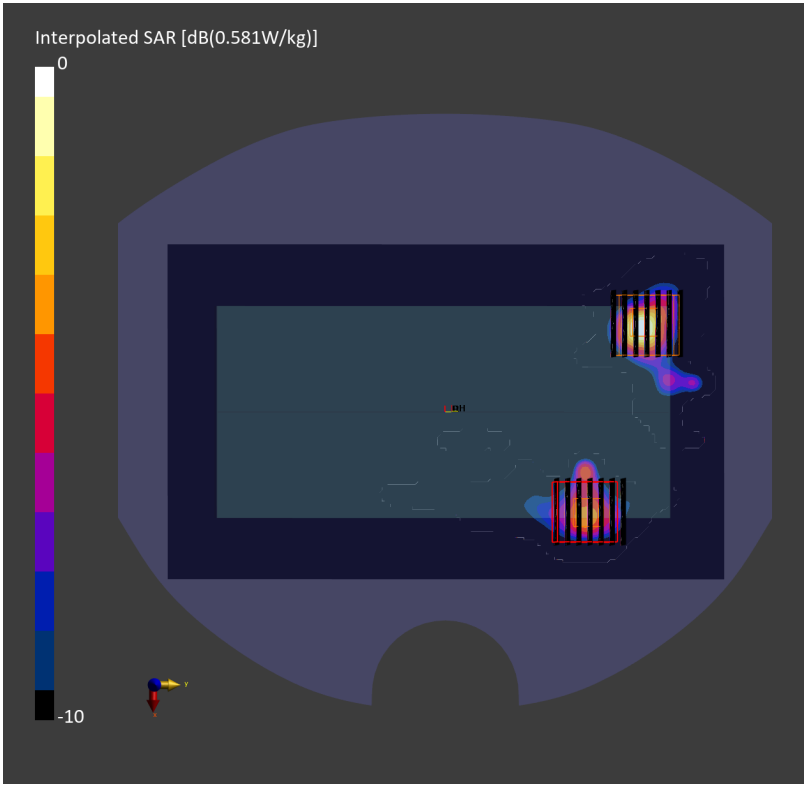

#31_Bluetooth_1Mbps_Top Edge_5mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.342 W/kg; SAR (10g) = 0.139 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.365 W/kg; SAR (8g) = 0.164 W/kg; SAR (10g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

TSL Correction: Positive only

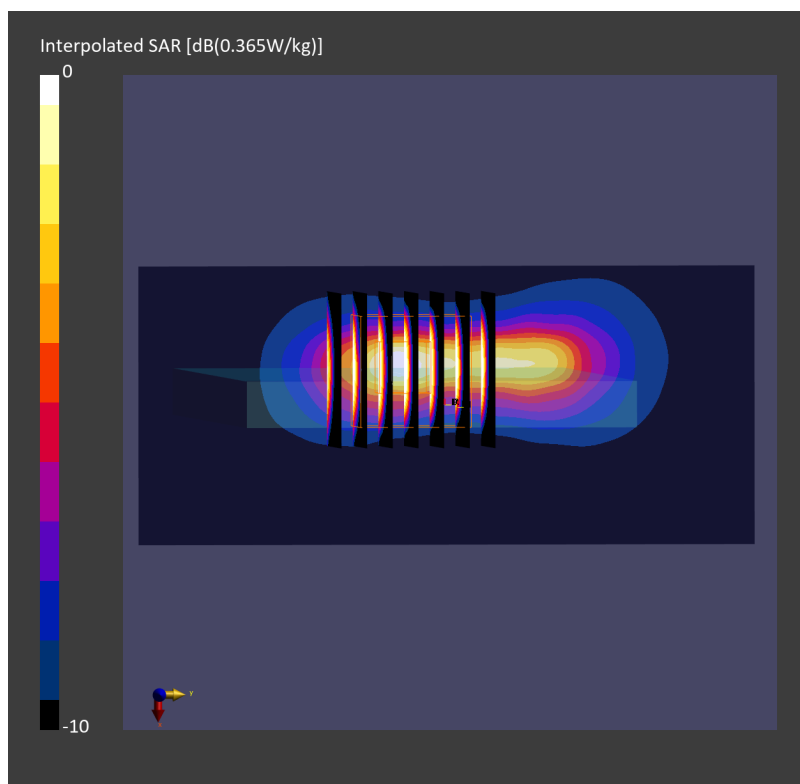

#32_Thread_250K_Left Edge_5mm_Ch11

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2405.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2405.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.157 W/kg; SAR (10g) = 0.070 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.167 W/kg; SAR (8g) = 0.080 W/kg; SAR (10g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

TSL Correction: Positive only

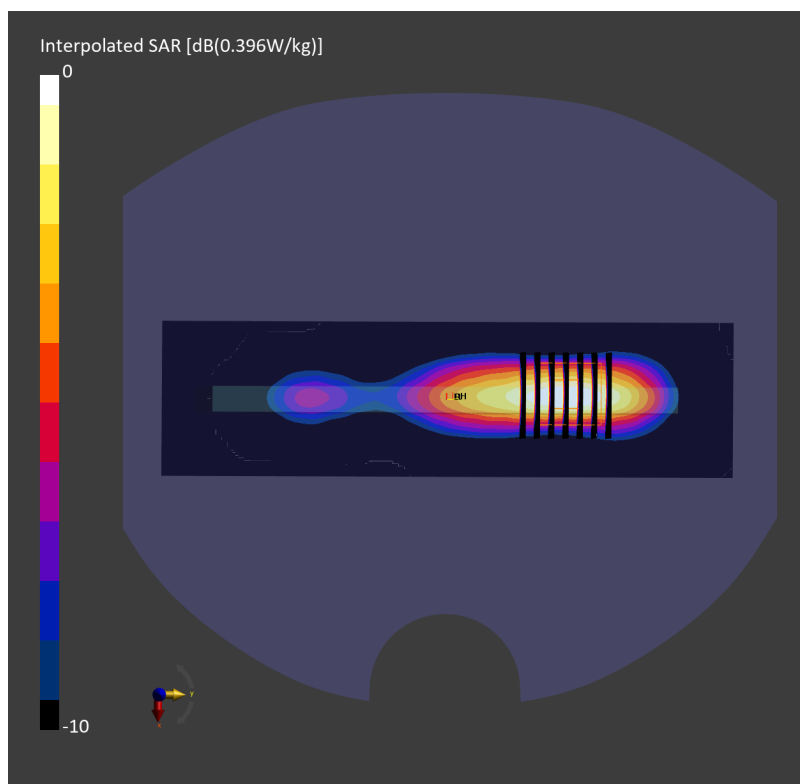

#33_FR1 n12_15M_BPSK_1_77_Back_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.536 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.625 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

TSL Correction: Positive only

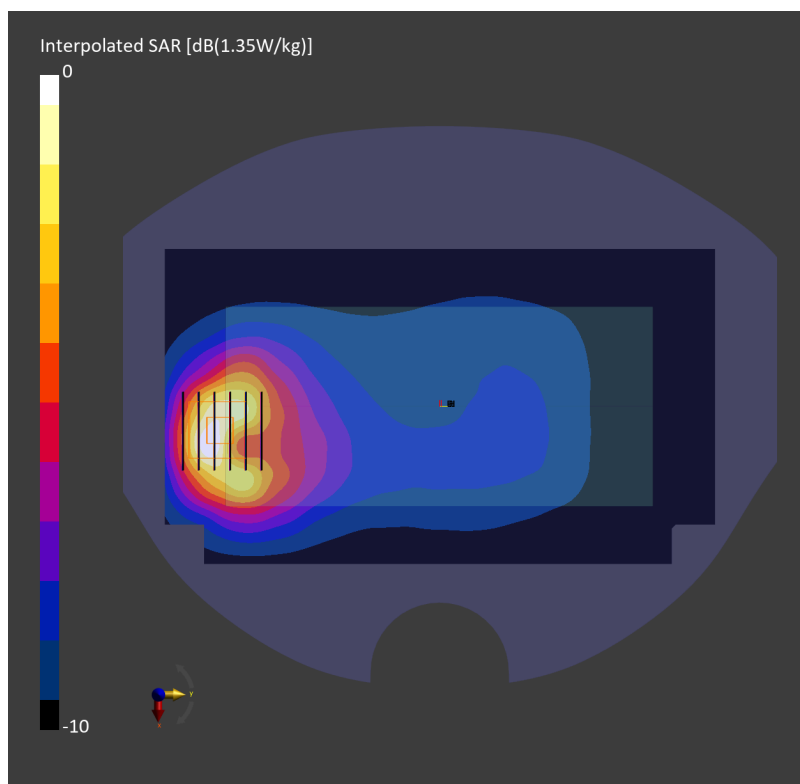

#34_LTE Band 66_20M_QPSK_50_50_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260128 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.13 dB

SAR (1g) = 0.728 W/kg; SAR (8g) = 0.446 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 23.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

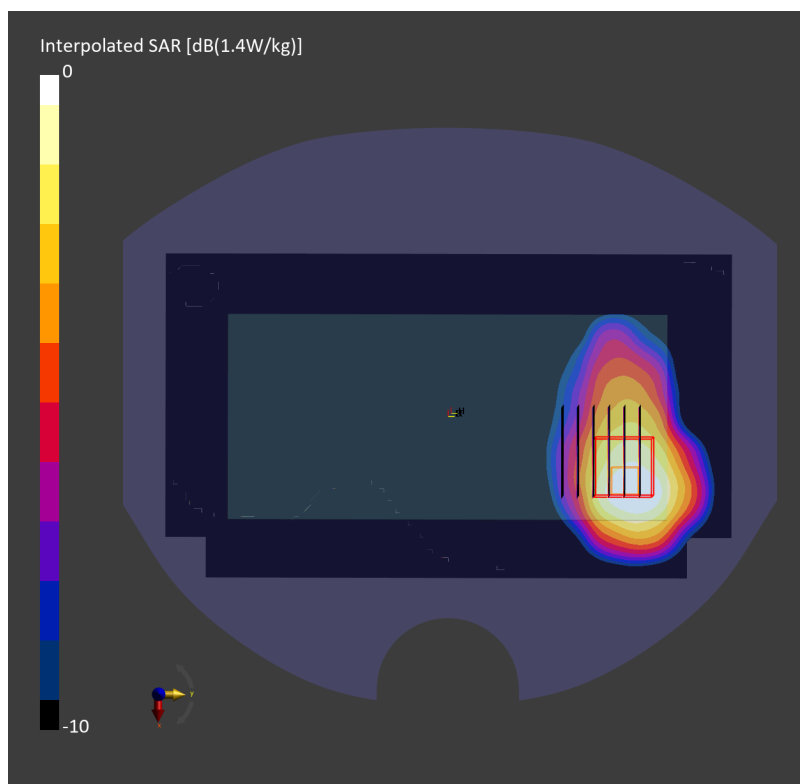

#35_LTE Band 48_20M_QPSK_1_99_Back_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.562 W/kg; SAR (10g) = 0.205 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.581 W/kg; SAR (8g) = 0.230 W/kg; SAR (10g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

TSL Correction: Positive only

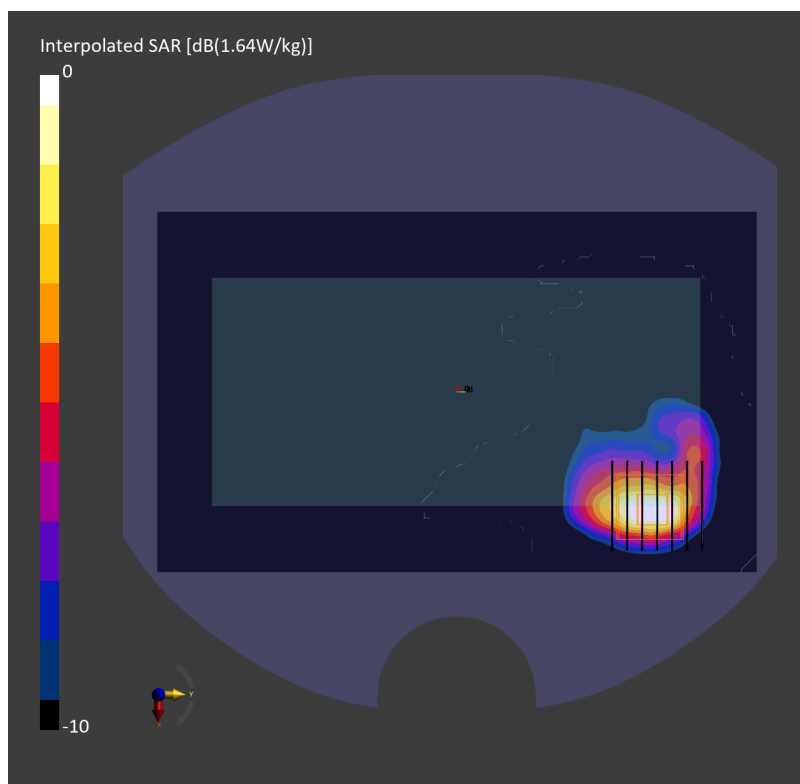

#36_FR1 n77_100M_BPSK_135_138_Back_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.495 W/kg; SAR (10g) = 0.192 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 0.520 W/kg; SAR (8g) = 0.208 W/kg; SAR (10g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.2 %

TSL Correction: Positive only

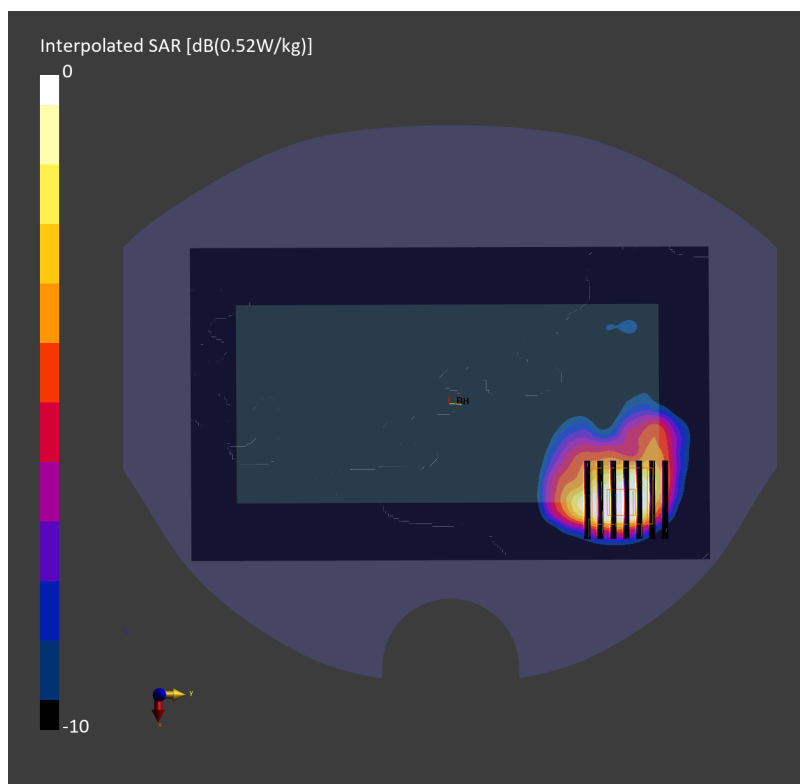

#37_WCDMA IV_RMC 12.2Kbps_Front_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260125 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.346 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.635 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

TSL Correction: Positive only

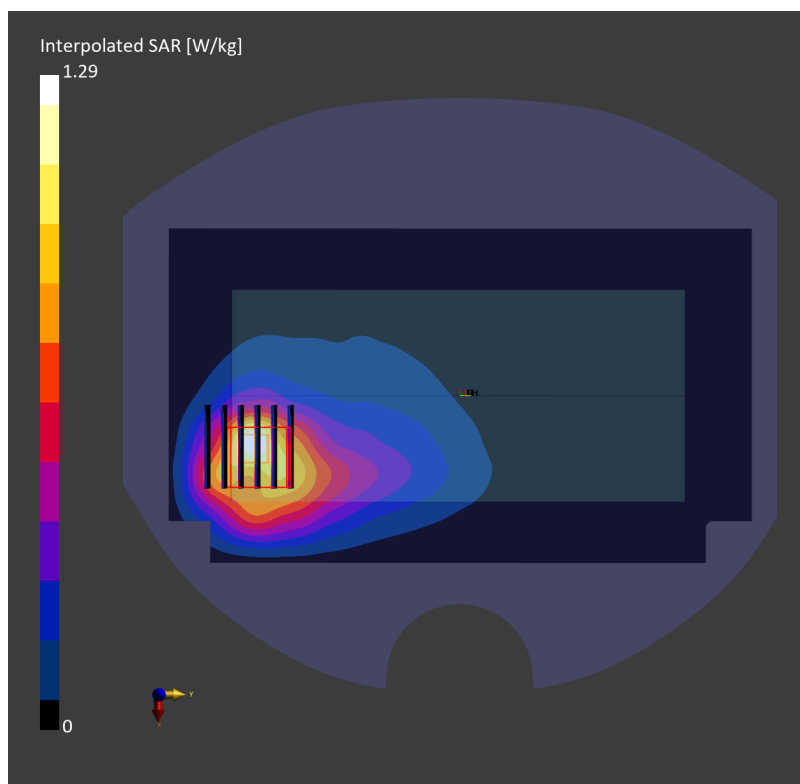

#38_LTE Band 25_20M_QPSK_50_50_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.521 W/kg; SAR (10g) = 0.286 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.645 W/kg; SAR (8g) = 0.333 W/kg; SAR (10g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

TSL Correction: Positive only

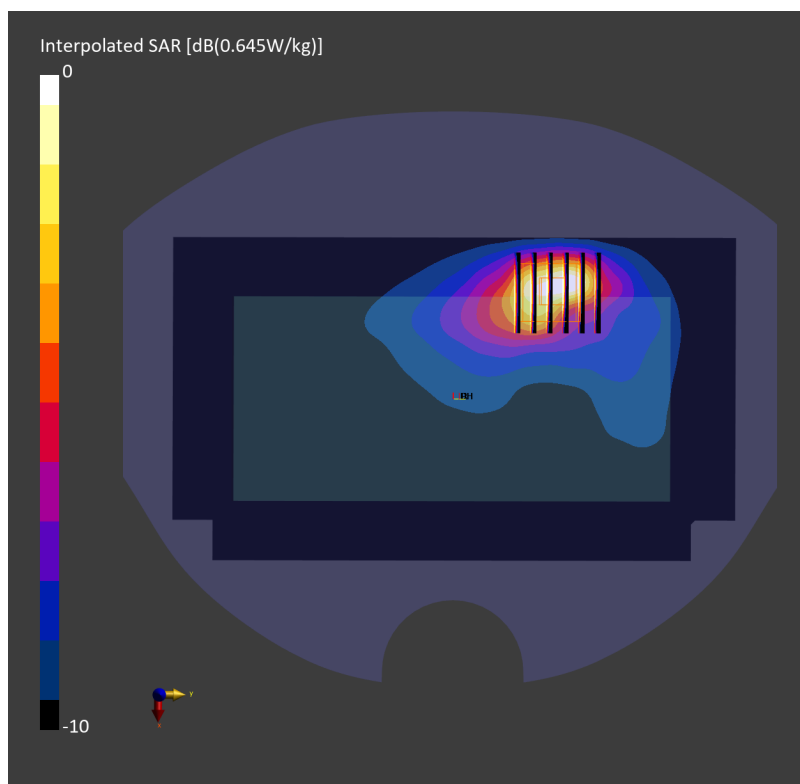

#39_LTE Band 48_20M_QPSK_50_0_Back_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.265 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.663 W/kg; SAR (8g) = 0.304 W/kg; SAR (10g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 71.2 %

TSL Correction: Positive only

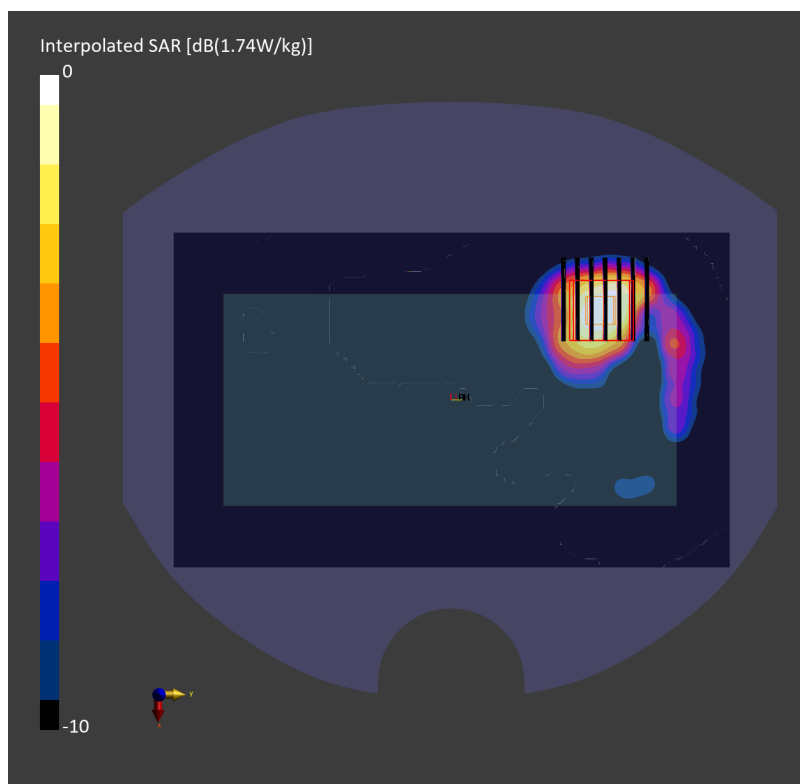

#40_FR1 n77_100M_BPSK_1_137_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.403 W/kg; SAR (10g) = 0.178 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.09 dB

SAR (1g) = 0.398 W/kg; SAR (8g) = 0.187 W/kg; SAR (10g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

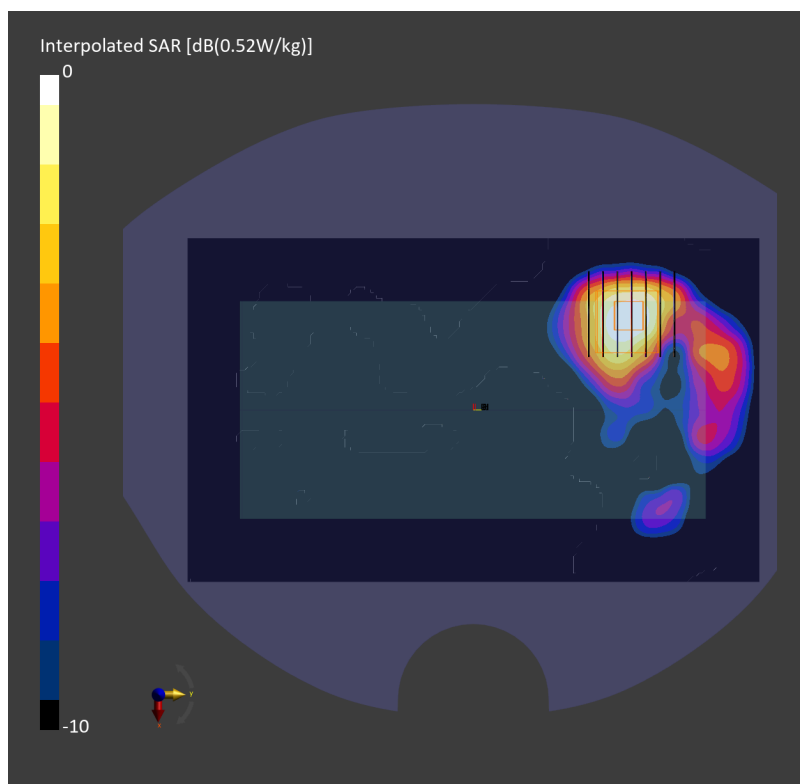

#41_LTE Band 48_20M_QPSK_50_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.286 W/kg; SAR (10g) = 0.117 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.292 W/kg; SAR (8g) = 0.123 W/kg; SAR (10g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

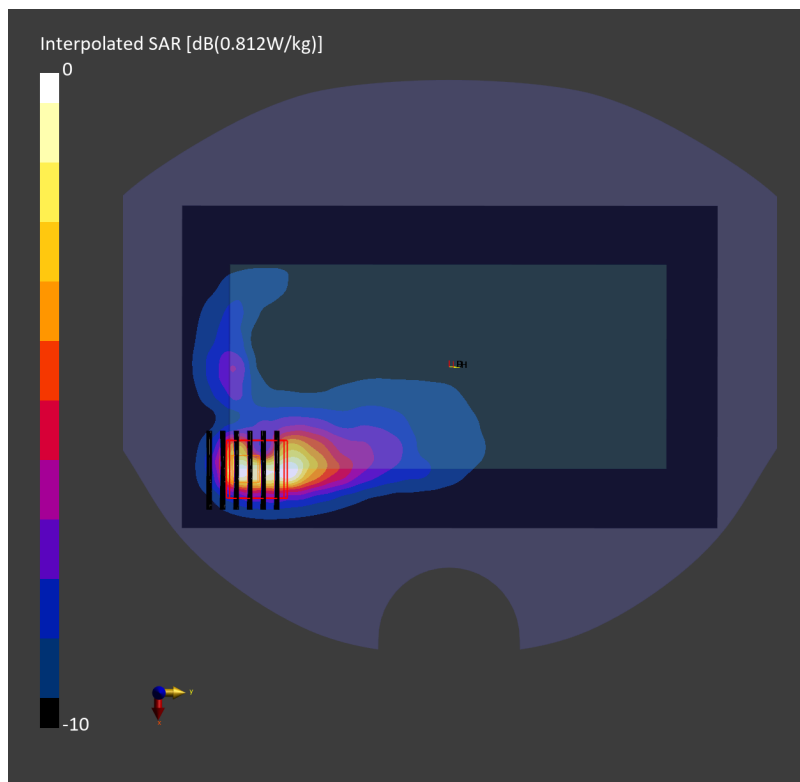

#42_FR1 n77_100M_BPSK_135_0_Back_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.389 W/kg; SAR (10g) = 0.154 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.412 W/kg; SAR (8g) = 0.164 W/kg; SAR (10g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

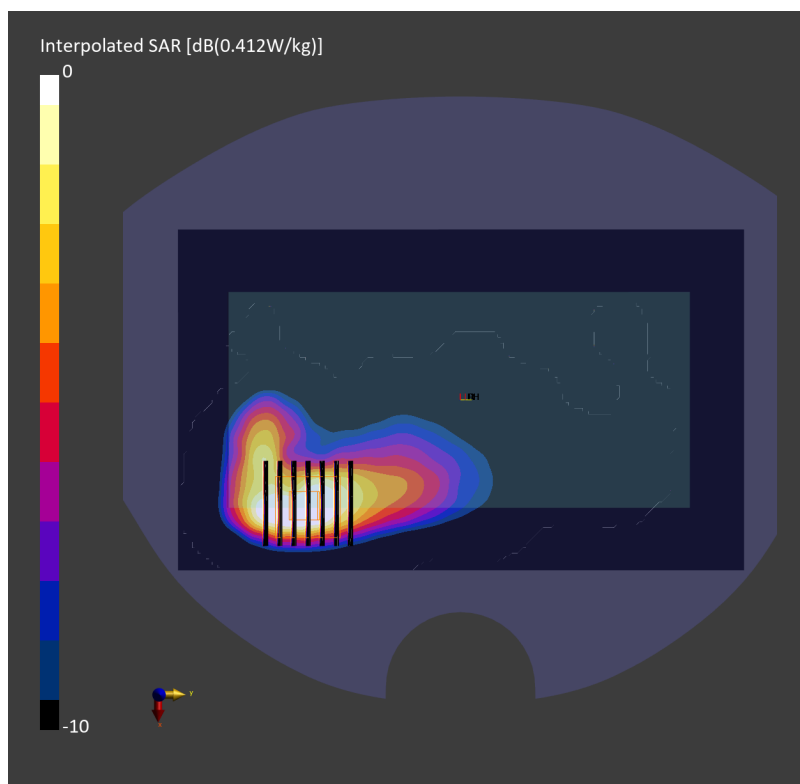

#43_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.140 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.17 dB

SAR (1g) = 0.359 W/kg; SAR (8g) = 0.151 W/kg; SAR (10g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.6 %

TSL Correction: Positive only

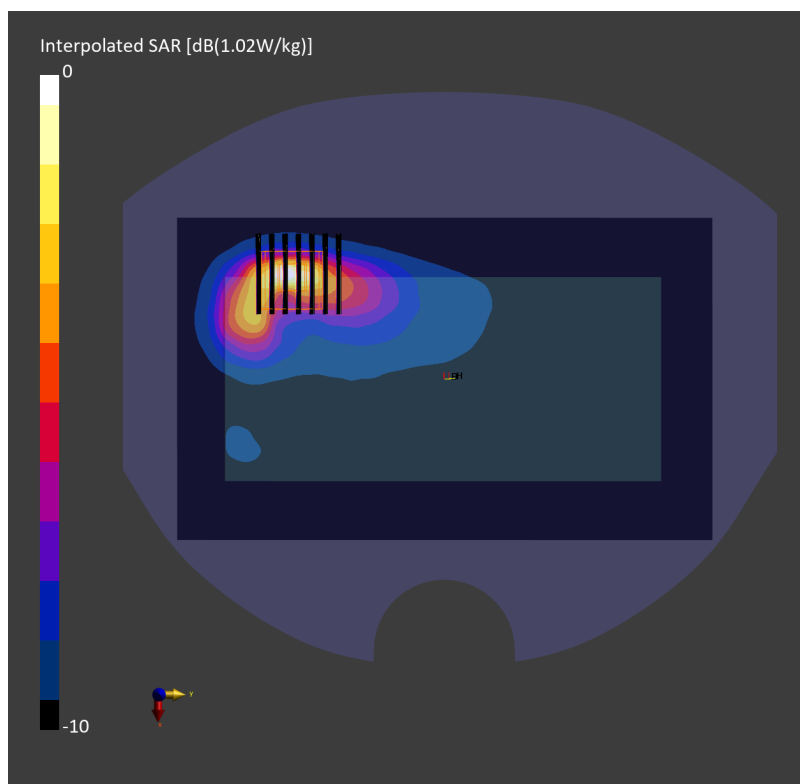

#44_FR1 n77_100M_BPSK_1_137_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260331 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.68$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.400 W/kg; SAR (10g) = 0.171 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.415 W/kg; SAR (8g) = 0.185 W/kg; SAR (10g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.8 %

TSL Correction: Positive only

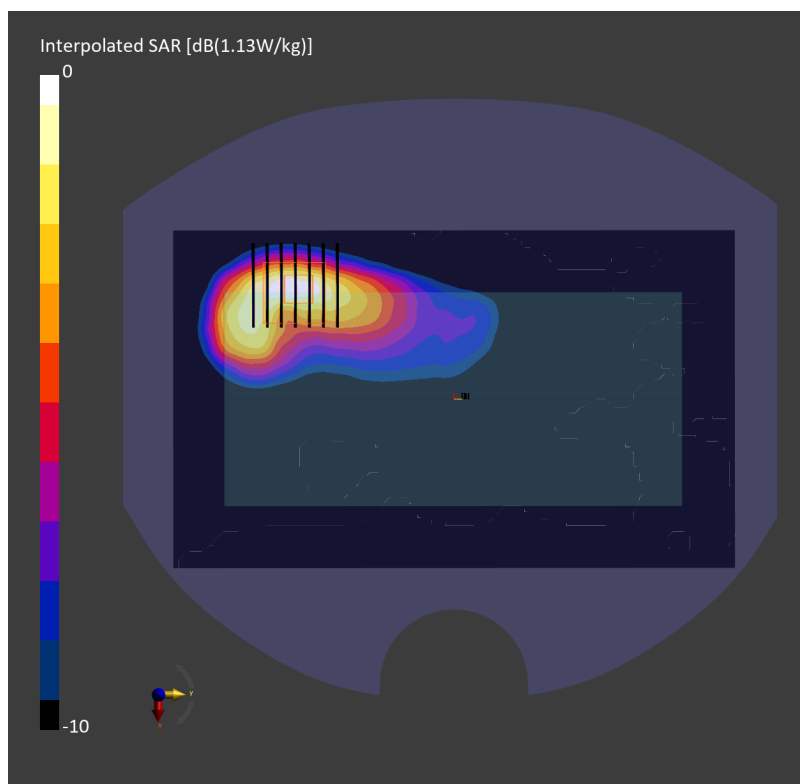

#45_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.618 W/kg; SAR (10g) = 0.288 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.636 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.298 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.16 dB

SAR (1g) = 0.416 W/kg; SAR (8g) = 0.215 W/kg; SAR (10g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

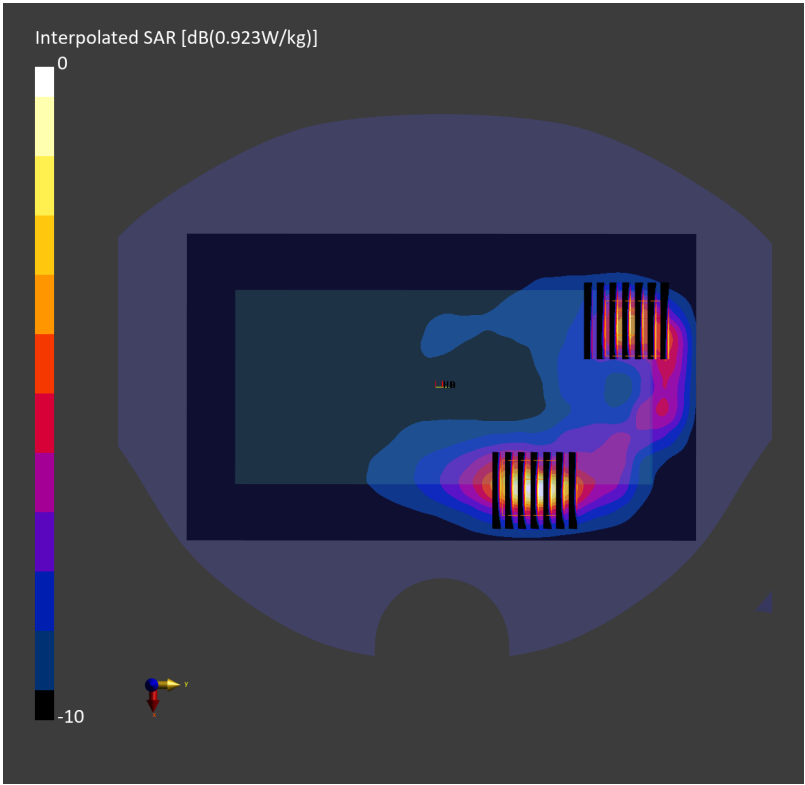

#46_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.173 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.541 W/kg; SAR (8g) = 0.203 W/kg; SAR (10g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.9 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.640 W/kg; SAR (8g) = 0.223 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 54.9 %

TSL Correction: Positive only

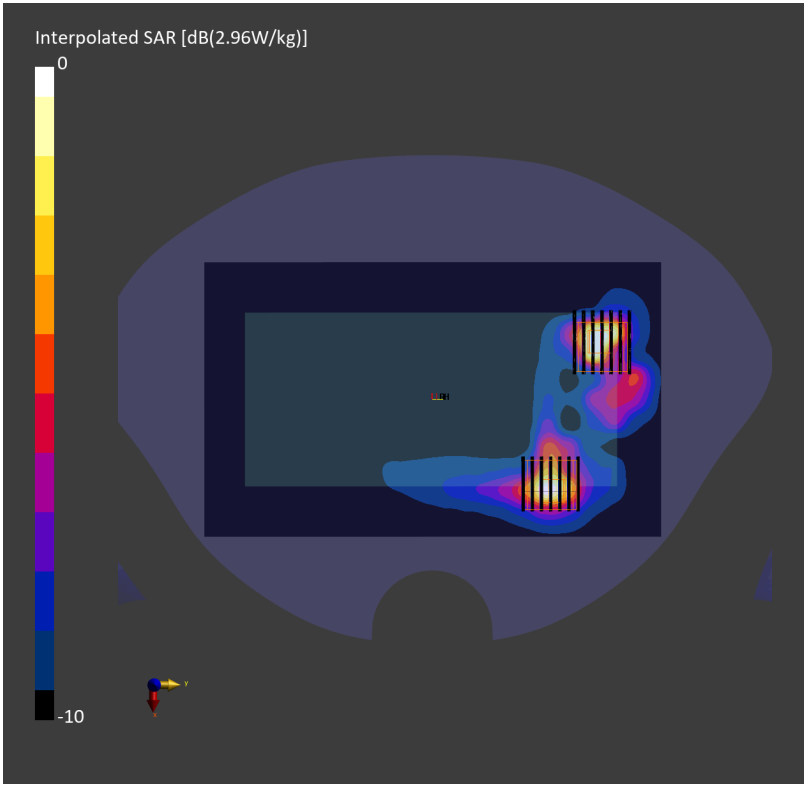

#47_Bluetooth_1Mbps_Back_5mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260323 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.682 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 31.2 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.731 W/kg; SAR (8g) = 0.334 W/kg; SAR (10g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

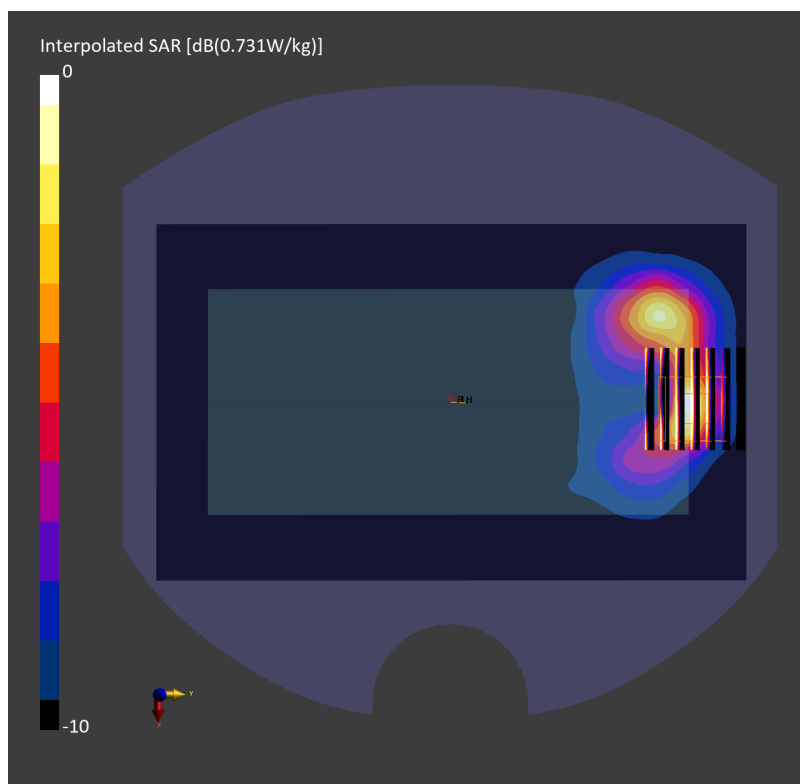

#48_Thread_250K_Back_5mm_Ch25

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2475.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2475.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.06, 6.75, 7.51); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.752 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.768 W/kg; SAR (8g) = 0.389 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

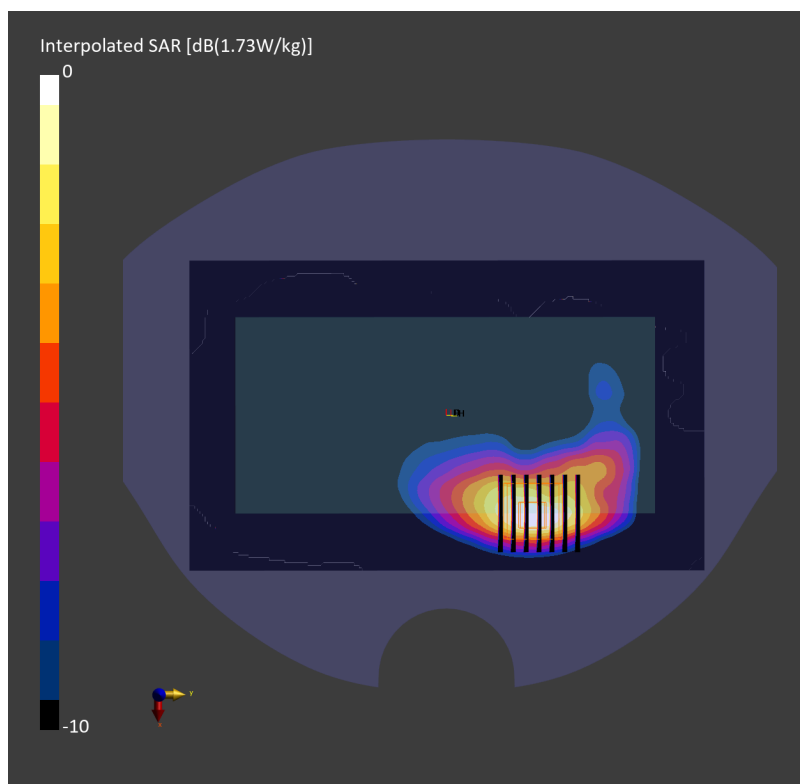

#49_FR1 n30_10M_BPSK_1_1_Bottom Edge_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260330 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.72, 6.71, 6.41); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.44 W/kg; SAR (10g) = 1.06 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 2.42 W/kg; SAR (8g) = 1.11 W/kg; SAR (10g) = 0.993 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.5 %

TSL Correction: Positive only

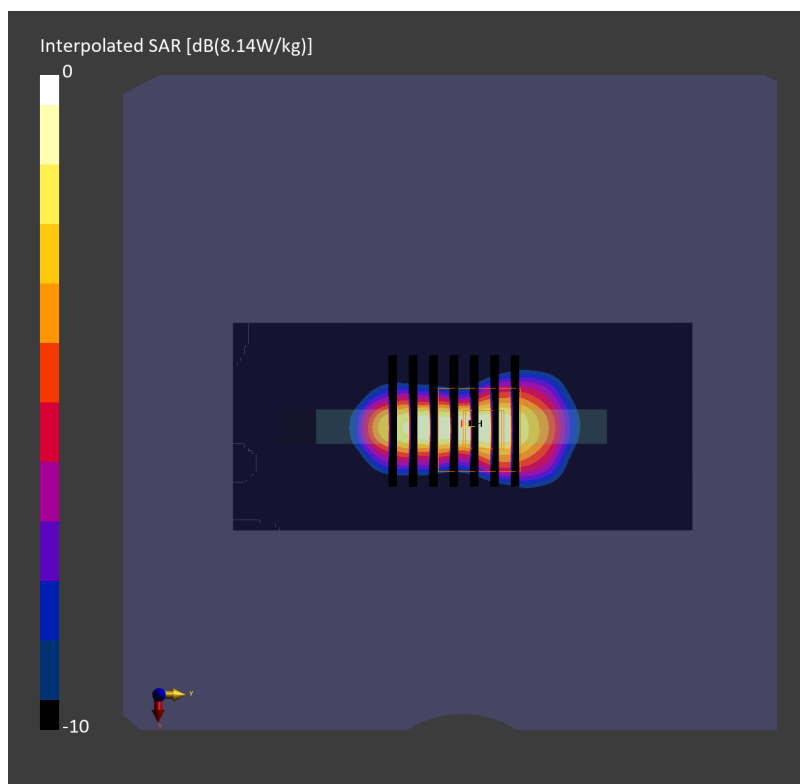

#50_FR1 n41_HPUE_100M_BPSK_135_0_Top Edge_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260330 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 1.71 W/kg; SAR (10g) = 0.701 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 1.64 W/kg; SAR (8g) = 0.709 W/kg; SAR (10g) = 0.632 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.2 %

TSL Correction: Positive only

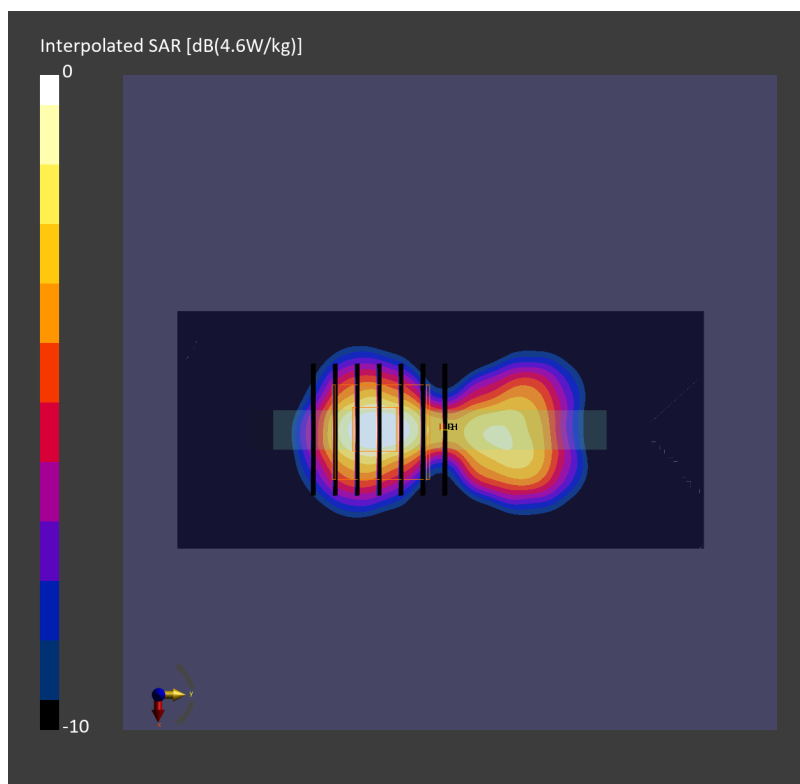

#52_NTN Band 23_3.75K_BPSK_1_46_Front_0mm_Ch25501

Communication System: CW; Frequency: 2000.100 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2000.100$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.85, 6.84, 6.53); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.20 W/kg; SAR (10g) = 1.86 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 4.19 W/kg; SAR (8g) = 1.88 W/kg; SAR (10g) = 1.69 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

TSL Correction: Positive only

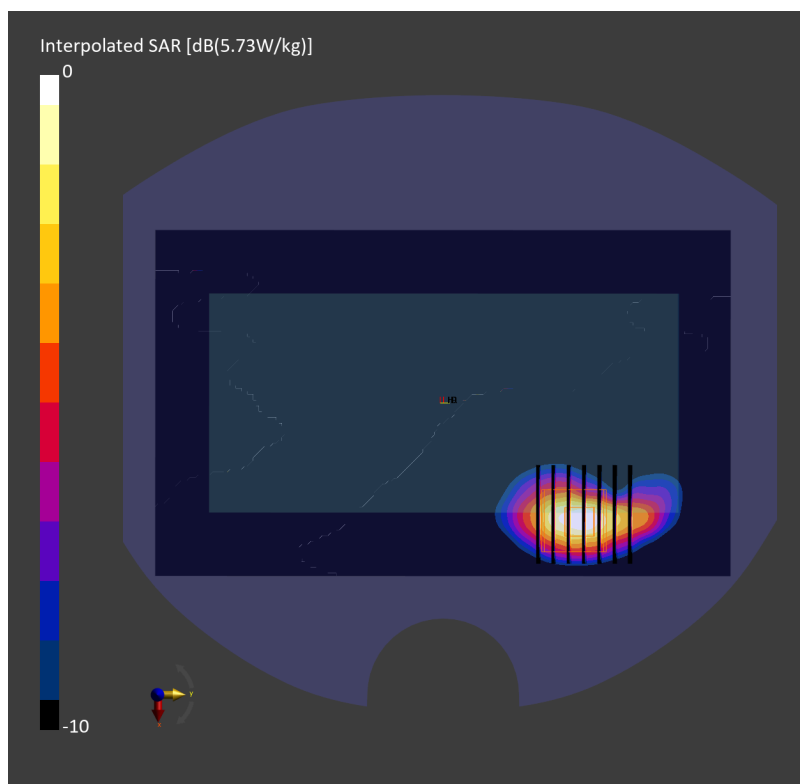

#53_WLAN5GHz_802.11ac-VHT160 MCS0_Left Edge_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.92, 4.71, 5.23); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.19 dB

SAR (1g) = 1.94 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.8 %

TSL Correction: Positive only

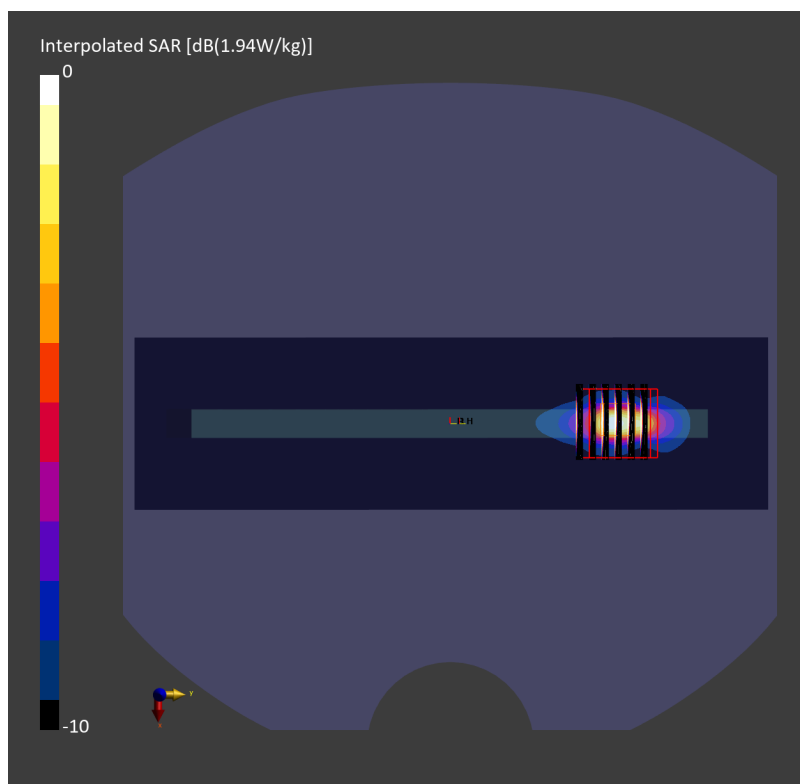

#54_NFC_ASK_Top Edge_0mm

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_600-7200_260410 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.723$ S/m; $\epsilon_r = 53.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.026 W/kg; SAR (10g) = 0.015 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.021 W/kg; SAR (8g) = 0.008 W/kg; SAR (10g) = 0.007 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.6 %

TSL Correction: Positive only

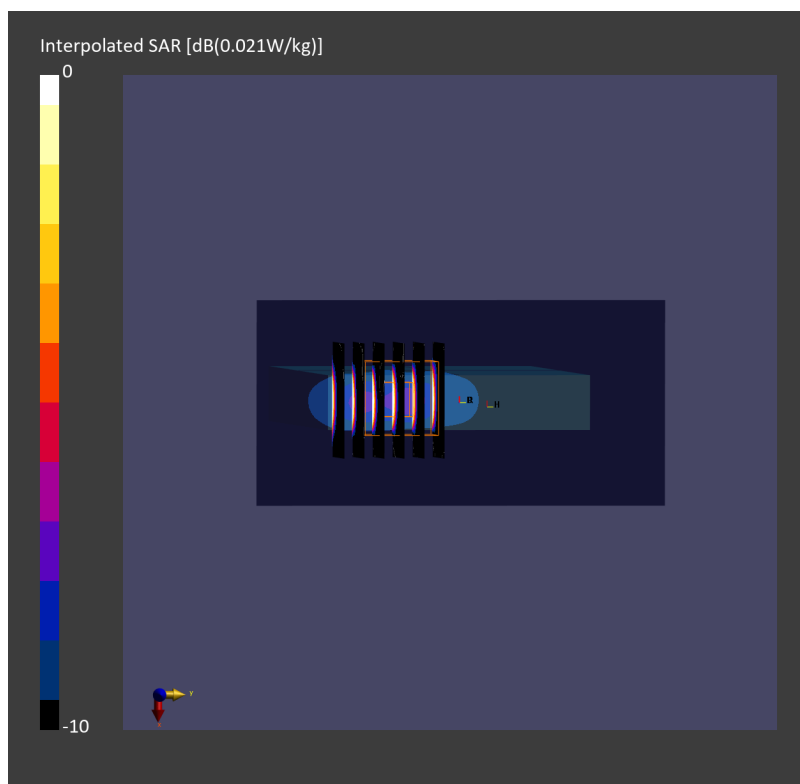

#55_WLAN6GHz_802.11ax-HE160 MCS0_Right Cheek_0mm_Ch47

Communication System: IEEE 802.11ax; Frequency: 6185.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.453 W/kg; SAR (10g) = 0.131 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.520 W/kg; SAR (8g) = 0.153 W/kg; SAR (10g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

psAPD (1.0cm², sq) = 5.20 [W/m²]; psAPD (4.0cm², sq) = 3.14 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.07 dB


SAR (1g) = 0.175 W/kg; SAR (8g) = 0.066 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

psAPD (1.0cm², sq) = 1.75 [W/m²]; psAPD (4.0cm², sq) = 1.32 [W/m²]

TSL Correction: Positive only

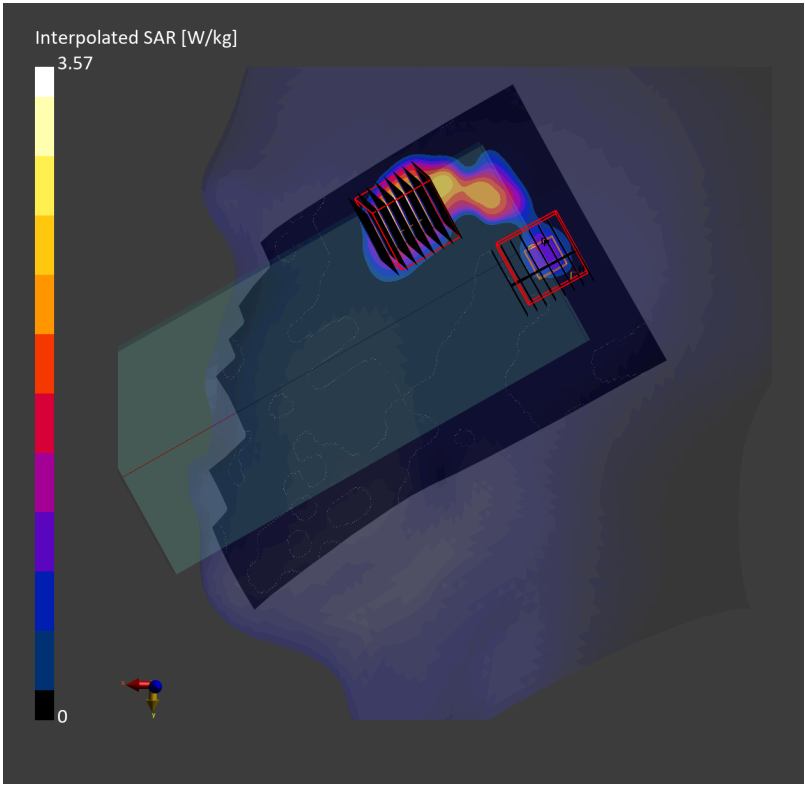

#56_WLAN6GHz_802.11ax-HE160 MCS0_Back_5mm_Ch207

Communication System: IEEE 802.11ax; Frequency: 6985.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 6985.000$ MHz; $\sigma = 6.74$ S/m; $\epsilon_r = 33.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.062 W/kg;

TSL Correction: Positive only

Zoom Scan (34.0 mm x 34.0 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.132 W/kg; SAR (8g) = 0.049 W/kg; SAR (10g) = 0.046 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.4 %

psAPD (1.0cm², sq) = 1.32 [W/m²]; psAPD (4.0cm², sq) = 0.980 [W/m²]

TSL Correction: Positive only

Zoom Scan (34.0 mm x 34.0 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB


SAR (1g) = 0.202 W/kg; SAR (8g) = 0.072 W/kg; SAR (10g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.4 %

psAPD (1.0cm², sq) = 2.02 [W/m²]; psAPD (4.0cm², sq) = 1.44 [W/m²]

TSL Correction: Positive only

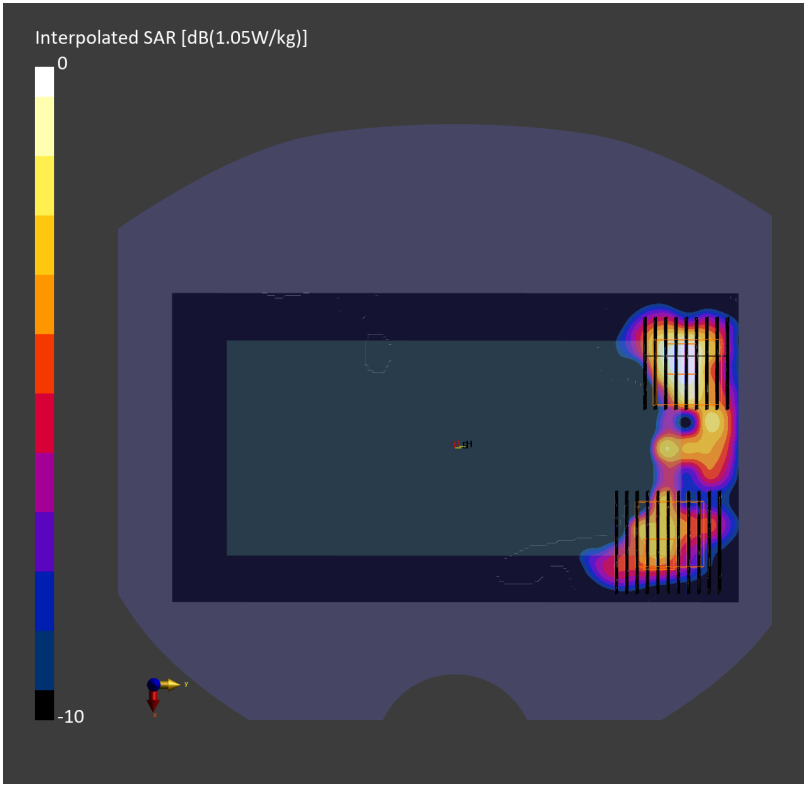

#57_WLAN6GHz_802.11ax-HE160 MCS0_Back_5mm_Ch47

Communication System: IEEE 802.11ax; Frequency: 6185.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.163 W/kg;

TSL Correction: Positive only

Zoom Scan (27.2 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.12 dB

SAR (1g) = 0.278 W/kg; SAR (8g) = 0.095 W/kg; SAR (10g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.7 %

psAPD (1.0cm², sq) = 2.78 [W/m²]; psAPD (4.0cm², sq) = 1.89 [W/m²]

TSL Correction: Positive only

Zoom Scan (27.2 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.08 dB


SAR (1g) = 0.662 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.7 %

psAPD (1.0cm², sq) = 6.62 [W/m²]; psAPD (4.0cm², sq) = 4.15 [W/m²]

TSL Correction: Positive only

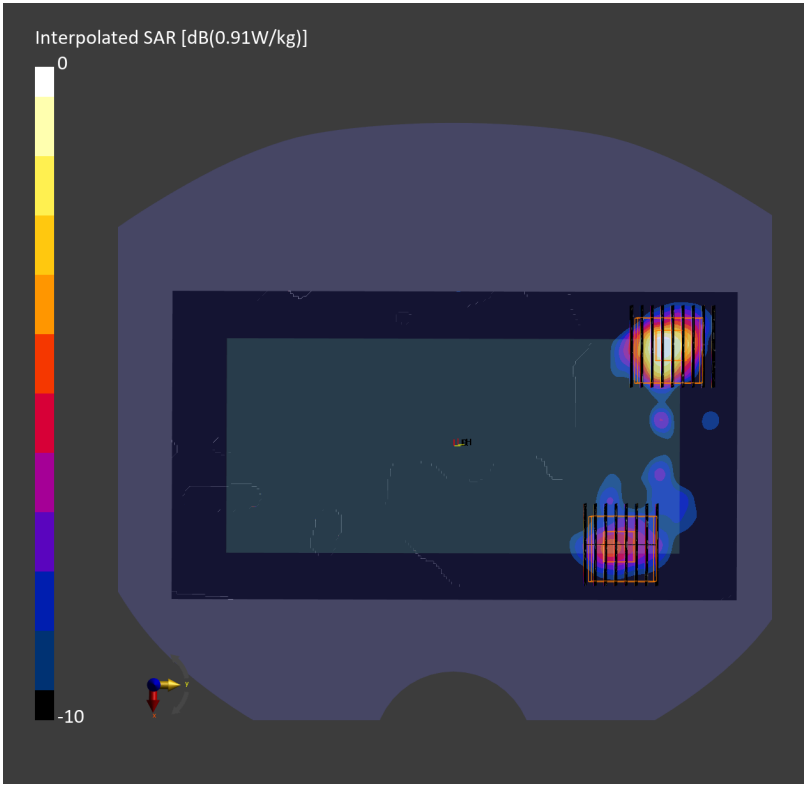

#58_WLAN6GHz_802.11ax-HE160 MCS0_Left Edge_0mm_Ch15

Communication System: IEEE 802.11ax; Frequency: 6025.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 6025.000$ MHz; $\sigma = 5.54$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (48.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.83 W/kg; SAR (10g) = 0.448 W/kg;

TSL Correction: Positive only

Zoom Scan (23.2 mm x 23.2 mm x 25.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm

Power Drift = 0.07 dB


SAR (1g) = 1.81 W/kg; SAR (8g) = 0.529 W/kg; SAR (10g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 43.5 %

psAPD (1.0cm², sq) = 18.1 [W/m²]; psAPD (4.0cm², sq) = 10.5 [W/m²]

TSL Correction: Positive only

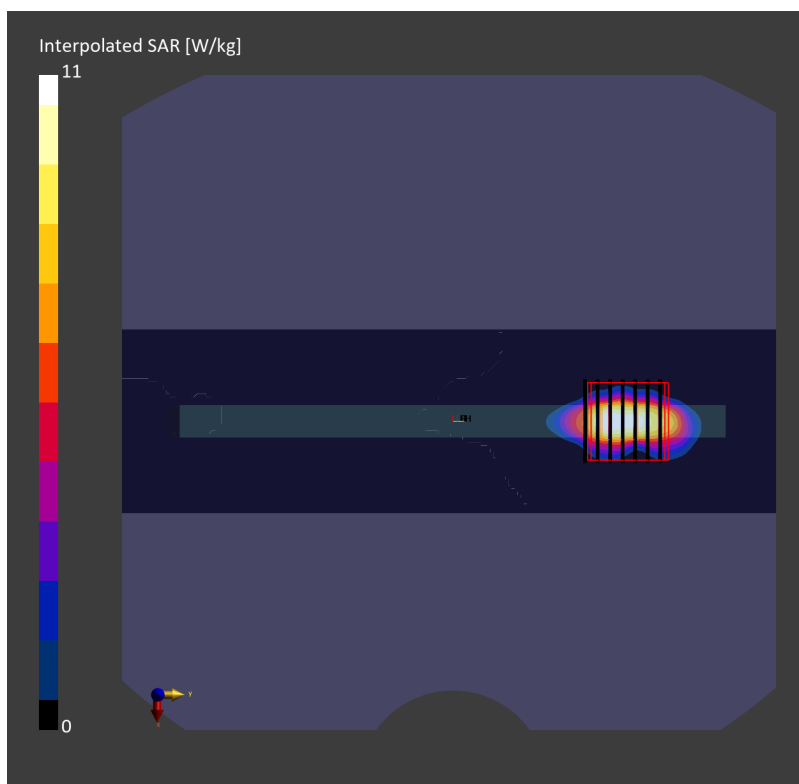

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	162.0 x 76.0 x 8.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	Front, 2.00	6665.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1109	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4ip Sn1823, 2025–07–11

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	130.0 x 90.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–03–27
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.57
psPDtot+ [W/m ²]	4.39
H _{max} [A/m]	0.212
E _{max} [V/m]	80.6
max _(Stot) [W/m ²]	10.1
Power Drift [dB]	–0.13
IPDn	2.35

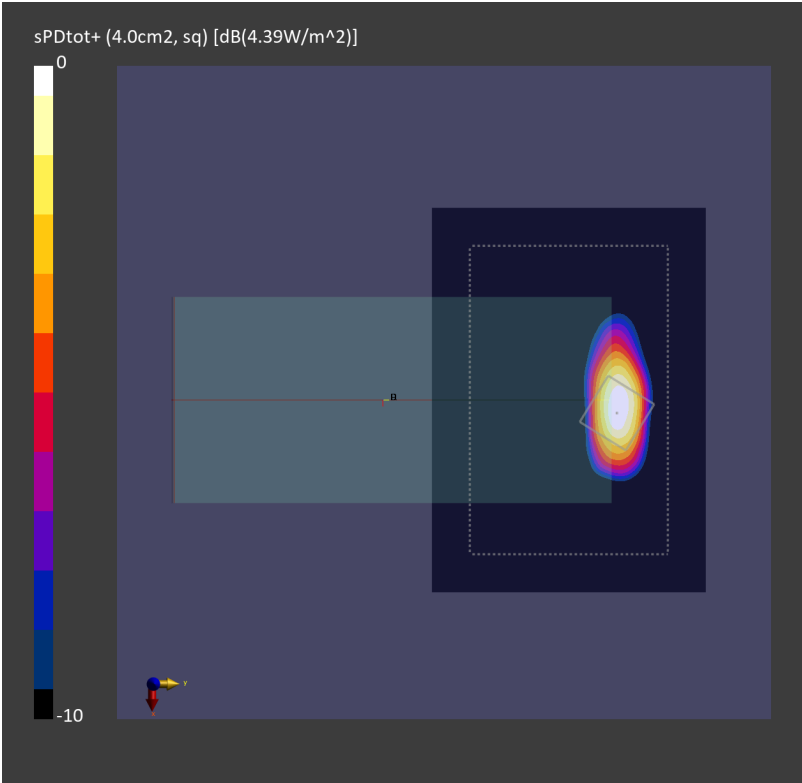

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	162.0 x 76.0 x 8.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE LEFT, 2.00	6505.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn656, 2026–01–15

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	105.0 x 105.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–04–01
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.10
psPDtot+ [W/m ²]	3.76
H _{max} [A/m]	0.323
E _{max} [V/m]	86.3
max _(Stot) [W/m ²]	9.43
Power Drift [dB]	–0.00
IPDn	2.07

