Mode	84	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	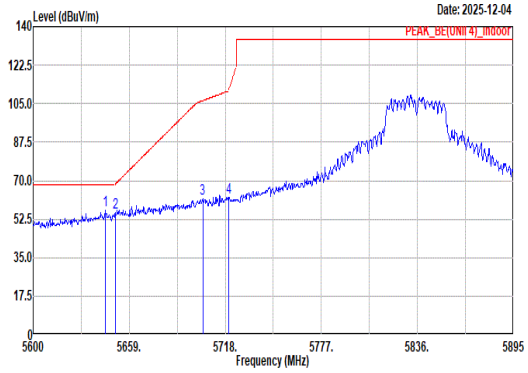 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5644.25 56.41 68.20 -11.79 46.80 33.17 13.24 36.80 0.00 100 297 Peak 2 5650.45 55.45 68.53 -13.08 45.80 33.20 13.25 36.80 0.00 100 297 Peak 3 5704.14 61.97 106.36 -44.39 51.72 33.72 13.33 36.80 0.00 100 297 Peak 4 5720.07 62.15 110.95 -48.80 51.81 33.78 13.35 36.79 0.00 100 297 Peak	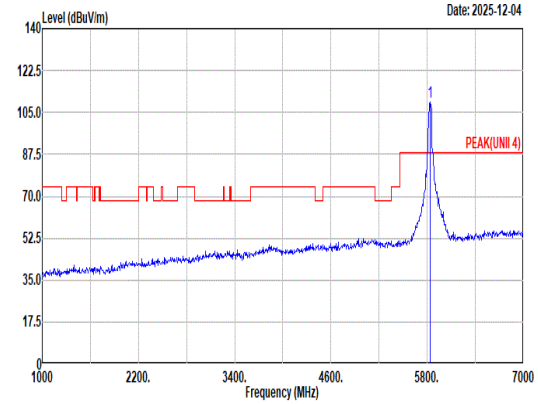 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5835.00 109.18 ------ ------ 98.32 34.10 13.54 36.78 0.00 100 297 Peak
Avg	Blank	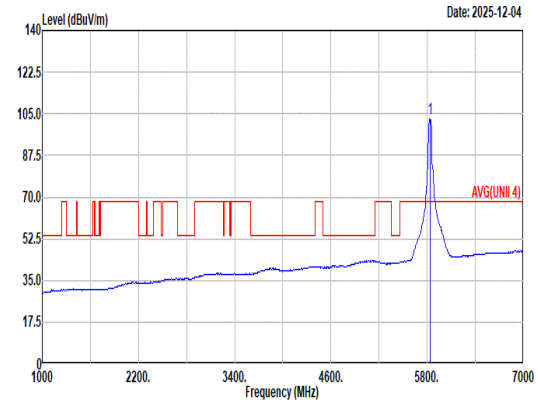 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5835.00 103.17 ------ ------ 92.32 34.10 13.53 36.78 0.00 100 297 Average

Mode	84	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	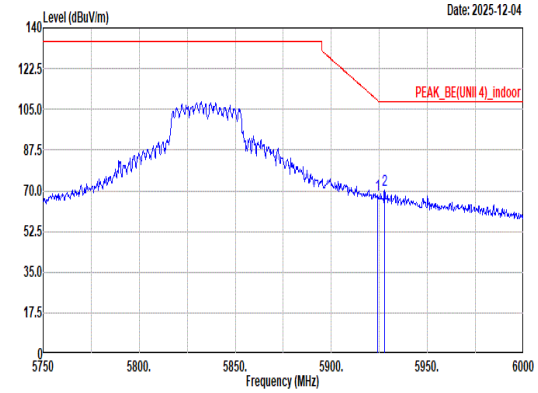 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 68.26 108.93 -40.67 57.08 34.25 13.70 36.77 0.00 100 297 Peak 2 5927.75 70.08 108.20 -38.12 58.90 34.24 13.71 36.77 0.00 100 297 Peak	Blank
Avg	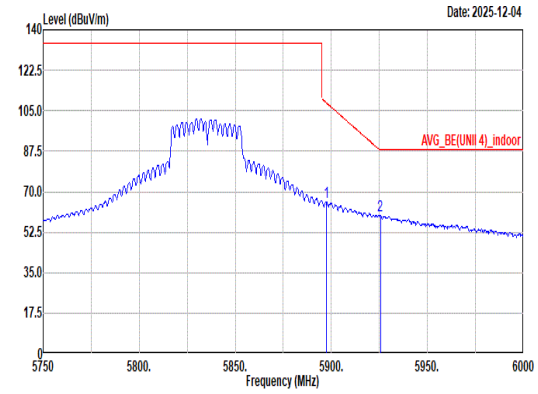 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5897.25 65.72 108.55 -42.83 54.55 34.29 13.65 36.77 0.00 100 297 Average 2 5925.50 59.49 88.20 -28.71 48.31 34.25 13.70 36.77 0.00 100 297 Average	Blank

Mode	84	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	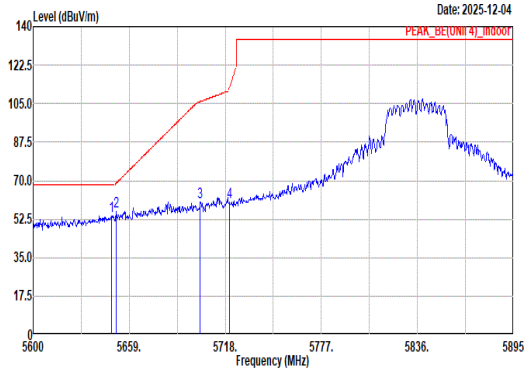 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5648.09 53.97 68.20 -14.23 44.33 33.19 13.25 36.80 0.00 100 342 Peak 2 5651.04 55.76 68.97 -13.21 46.10 33.21 13.25 36.80 0.00 100 342 Peak 3 5702.66 60.12 105.95 -45.83 49.88 33.71 13.33 36.80 0.00 100 342 Peak 4 5720.36 60.31 111.62 -51.31 49.97 33.78 13.35 36.79 0.00 100 342 Peak	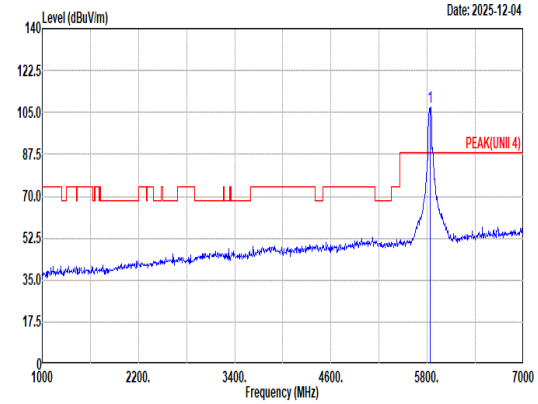 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5835.00 107.14 ------ ------ 96.27 34.10 13.55 36.78 0.00 100 342 Peak
Avg	Blank	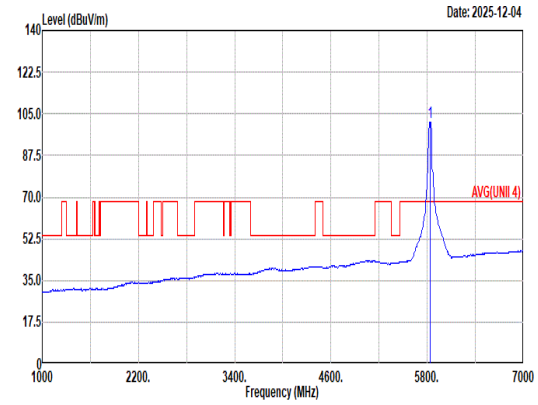 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5835.00 101.52 ------ ------ 90.65 34.10 13.55 36.78 0.00 100 342 Average

Mode	84	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	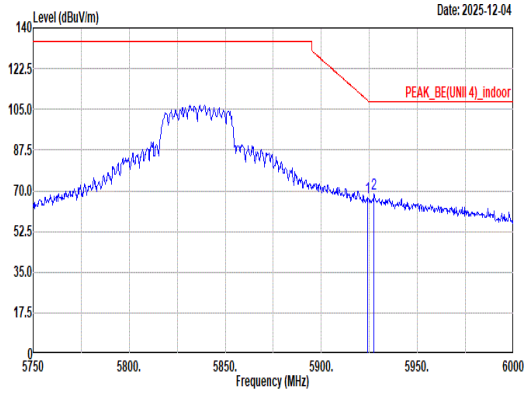 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 67.30 108.93 -41.63 56.12 34.25 13.70 36.77 0.00 100 342 Peak 2 5927.50 68.67 108.20 -39.53 57.49 34.24 13.71 36.77 0.00 100 342 Peak	Blank
Avg	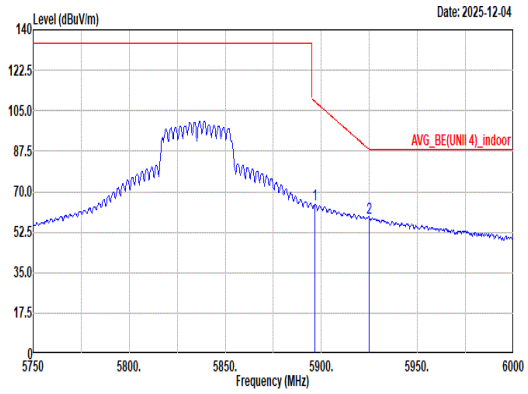 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5896.75 64.54 108.91 -44.37 53.37 34.29 13.65 36.77 0.00 100 342 Average 2 5925.00 58.60 88.20 -29.60 47.42 34.25 13.70 36.77 0.00 100 342 Average	Blank

Mode	84	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	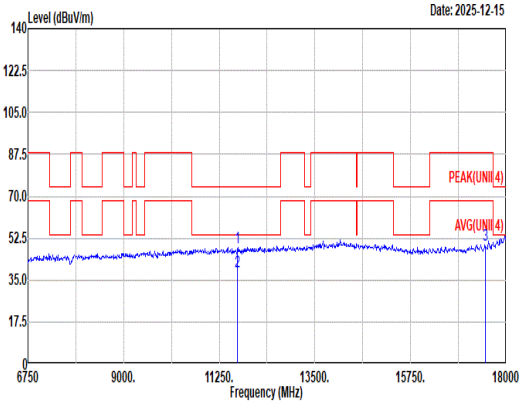 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 48.55 74.00 -25.45 47.09 38.74 19.49 57.33 0.56 -- -- Peak 2 11670.00 38.48 54.00 -15.52 37.02 38.74 19.49 57.33 0.56 -- -- Average 3 17505.00 49.60 88.20 -38.60 45.49 38.72 24.07 59.12 0.44 -- -- Peak	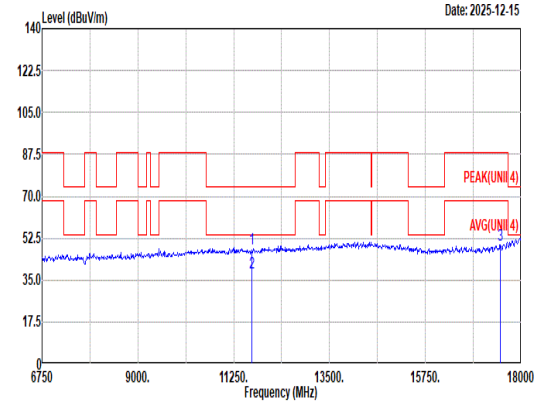 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 48.11 74.00 -25.89 46.65 38.74 19.49 57.33 0.56 -- -- Peak 2 11670.00 38.25 54.00 -15.75 36.79 38.74 19.49 57.33 0.56 -- -- Average 3 17505.00 49.53 88.20 -38.67 45.42 38.72 24.07 59.12 0.44 -- -- Peak

Mode	84	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH167_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	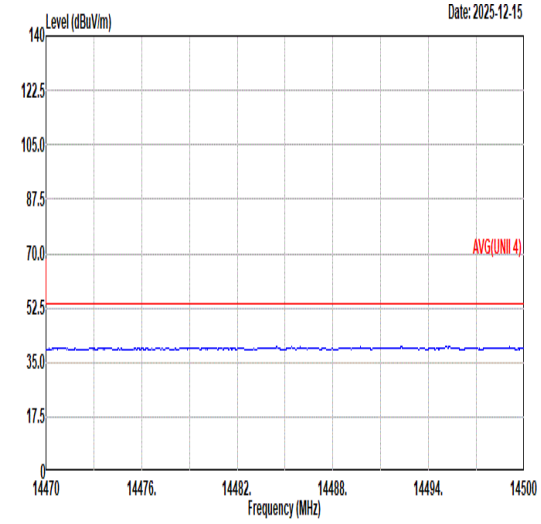 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	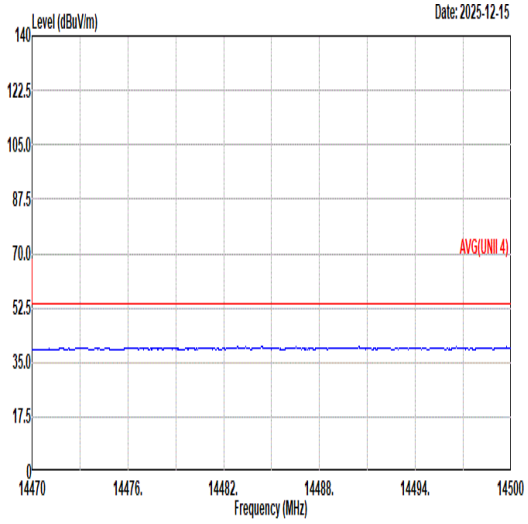 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	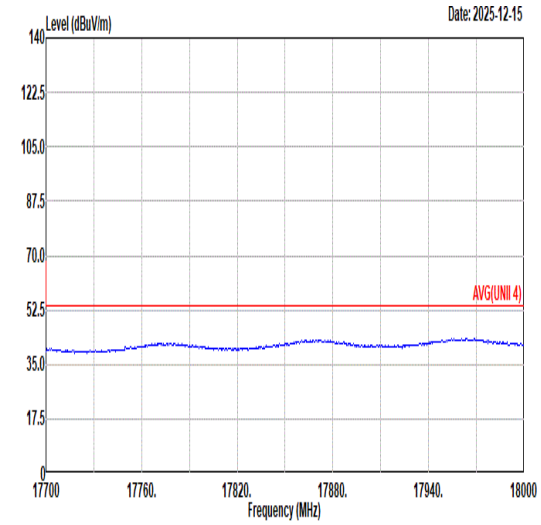 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	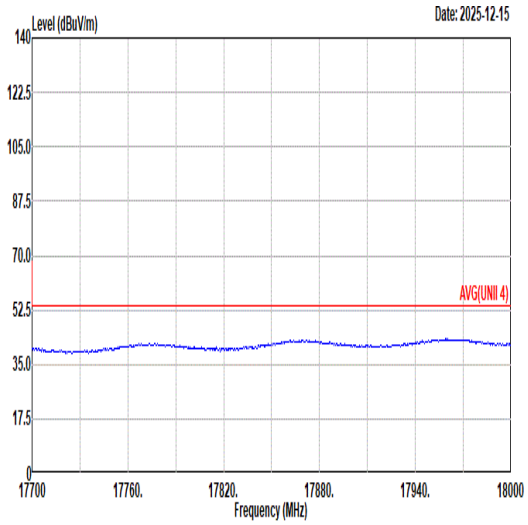 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	85	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	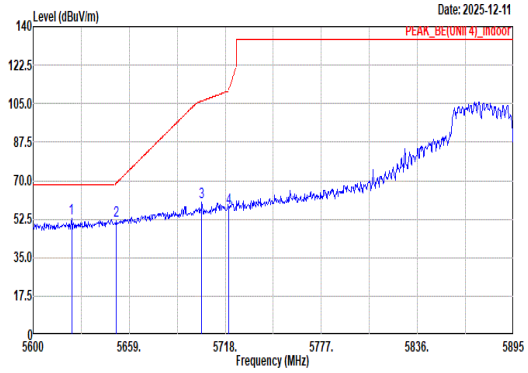 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.60 52.58 68.20 -15.62 43.14 33.04 13.21 36.81 0.00 200 340 Peak 2 5651.04 51.93 68.97 -17.04 42.27 33.21 13.25 36.80 0.00 200 340 Peak 3 5703.55 60.17 106.19 -46.02 49.93 33.71 13.33 36.80 0.00 200 340 Peak 4 5720.07 57.59 110.95 -53.36 47.25 33.78 13.35 36.79 0.00 200 340 Peak	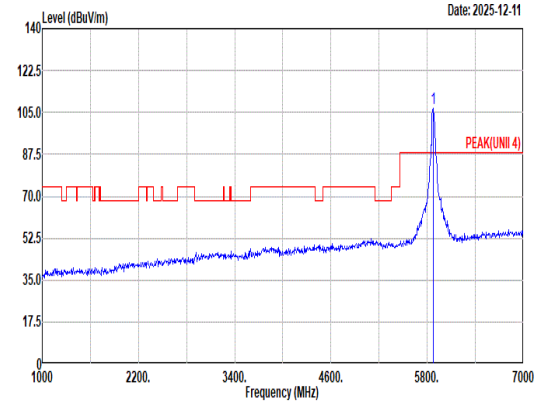 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 106.65 ------ ------ 95.64 34.19 13.60 36.78 0.00 200 340 Peak
Avg	Blank	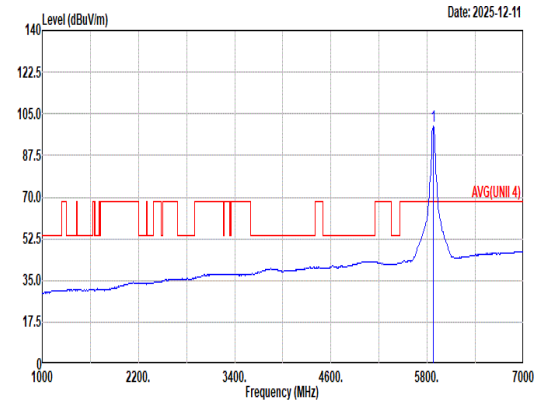 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 99.96 ------ ------ 88.95 34.19 13.60 36.78 0.00 200 340 Average

Mode	85	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	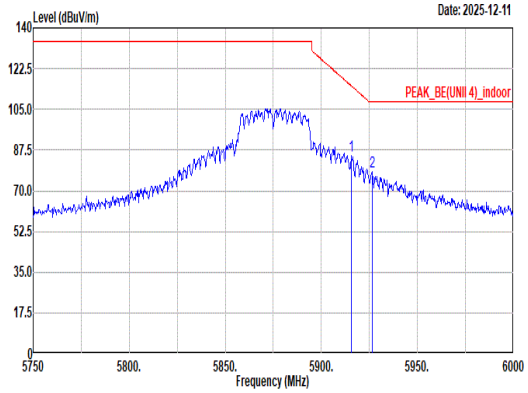 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5915.75 85.19 114.97 -29.78 74.01 34.27 13.68 36.77 0.00 200 340 Peak 2 5926.50 77.93 108.20 -30.27 66.75 34.25 13.70 36.77 0.00 200 340 Peak	Blank
Avg	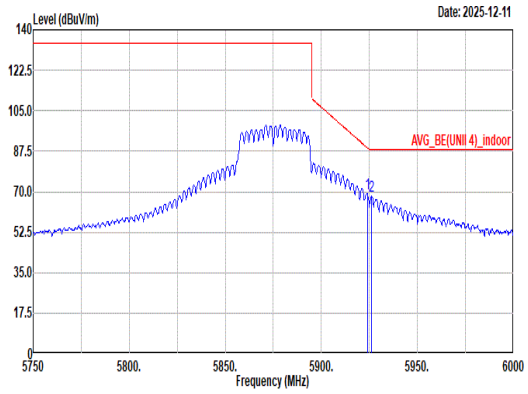 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 69.21 88.93 -19.72 58.03 34.25 13.70 36.77 0.00 200 340 Average 2 5926.00 68.06 88.20 -20.14 56.88 34.25 13.70 36.77 0.00 200 340 Average	Blank

Mode	85	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	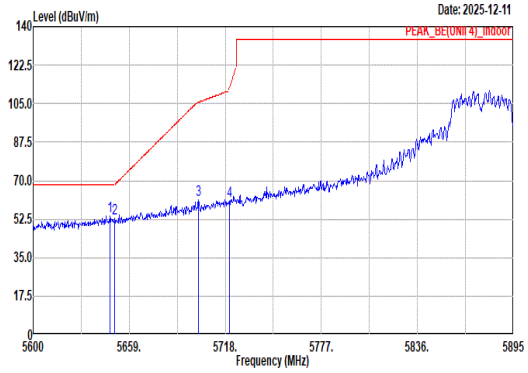 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5647.20 53.97 68.20 -14.23 44.34 33.18 13.25 36.80 0.00 224 32 Peak 2 5650.15 52.77 68.31 -15.54 43.12 33.20 13.25 36.80 0.00 224 32 Peak 3 5701.48 61.47 105.62 -44.15 51.23 33.71 13.33 36.80 0.00 224 32 Peak 4 5720.36 60.85 111.62 -50.77 50.51 33.78 13.35 36.79 0.00 224 32 Peak	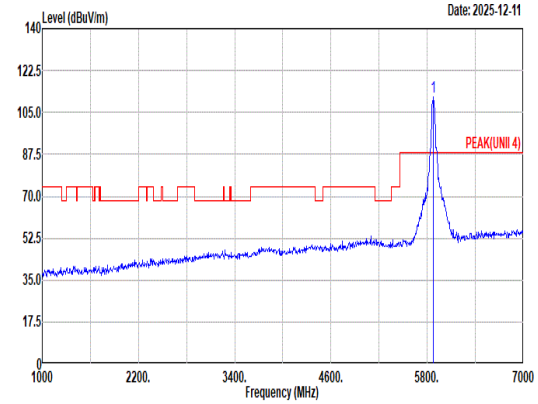 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 111.57 ------ ------ 100.56 34.19 13.60 36.78 0.00 224 32 Peak
Avg	Blank	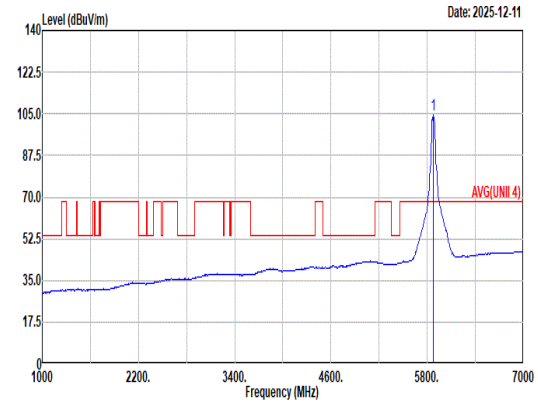 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 104.63 ------ ------ 93.60 34.20 13.61 36.78 0.00 224 32 Average

Mode	85	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	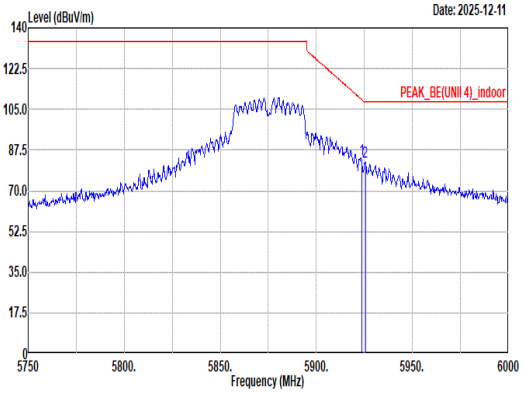 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 83.69 109.30 -25.61 72.51 34.25 13.70 36.77 0.00 224 32 Peak 2 5925.50 82.61 108.20 -25.59 71.43 34.25 13.70 36.77 0.00 224 32 Peak	Blank
Avg	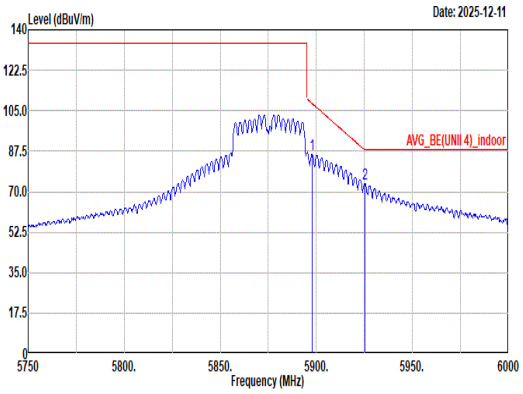 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5897.75 86.30 108.18 -21.88 75.13 34.29 13.65 36.77 0.00 224 32 Average 2 5925.25 73.69 88.20 -14.51 62.51 34.25 13.70 36.77 0.00 224 32 Average	Blank

Mode	85	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	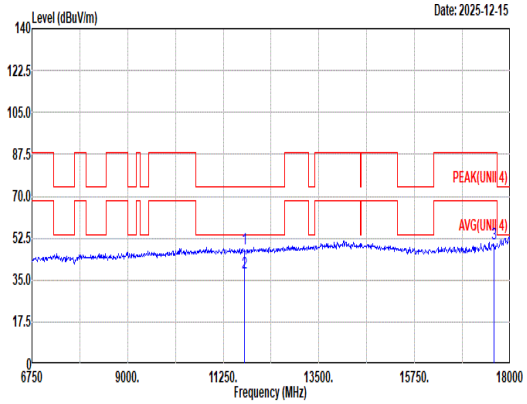 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 48.00 74.00 -26.00 46.31 38.85 19.57 57.28 0.55 -- -- Peak 2 11750.00 38.19 54.00 -15.81 36.50 38.85 19.57 57.28 0.55 -- -- Average 3 17625.00 50.35 88.20 -37.85 45.34 39.22 24.15 58.80 0.44 -- -- Peak	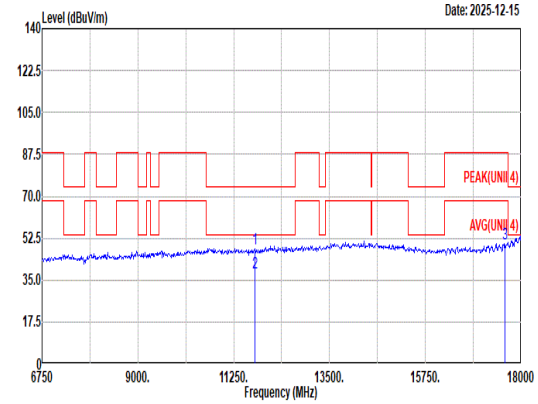 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 48.25 74.00 -25.75 46.56 38.85 19.57 57.28 0.55 -- -- Peak 2 11750.00 38.24 54.00 -15.76 36.55 38.85 19.57 57.28 0.55 -- -- Average 3 17625.00 50.36 88.20 -37.84 45.35 39.22 24.15 58.80 0.44 -- -- Peak

Mode	85	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	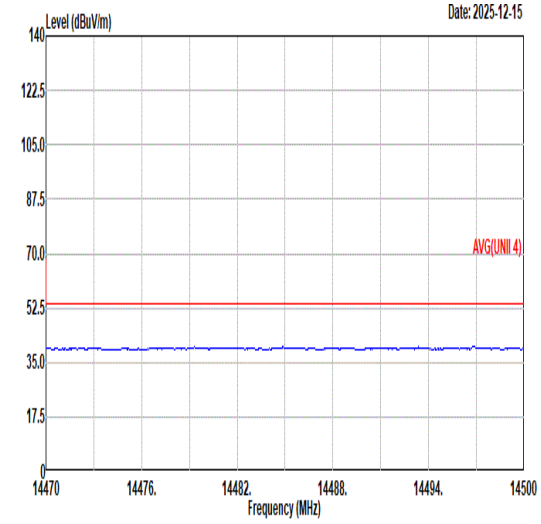 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	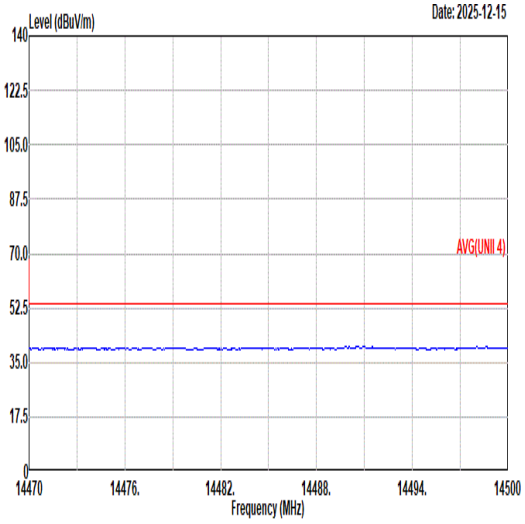 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	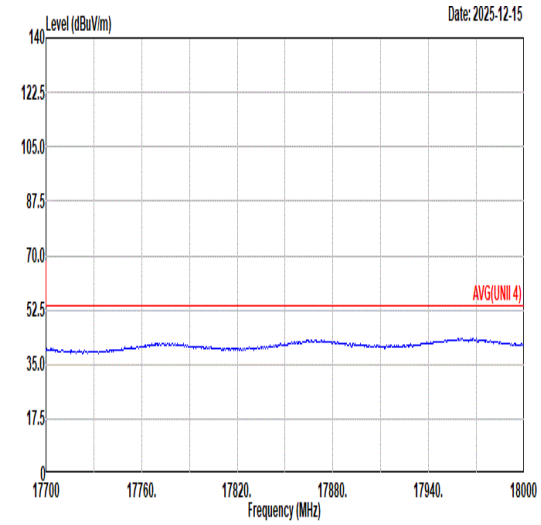 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	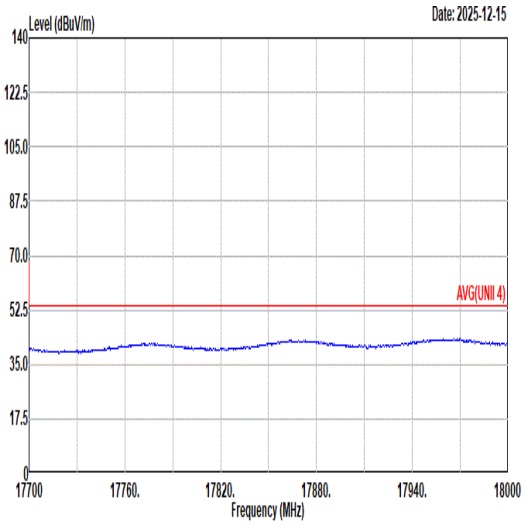 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	86
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	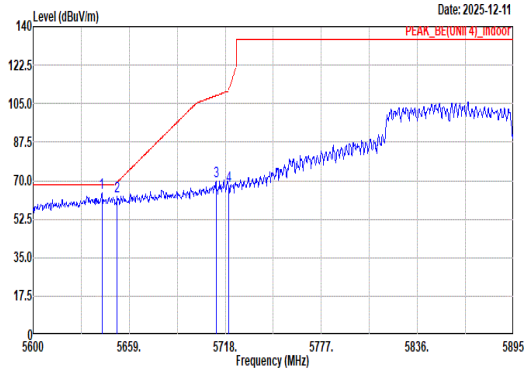 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5642.19 64.32 68.20 -3.88 54.73 33.15 13.24 36.80 0.00 131 360 Peak 2 5651.63 63.12 69.41 -6.29 53.45 33.22 13.25 36.80 0.00 131 360 Peak 3 5712.40 69.93 108.67 -38.74 59.63 33.75 13.34 36.79 0.00 131 360 Peak 4 5720.07 67.60 110.95 -43.35 57.26 33.78 13.35 36.79 0.00 131 360 Peak	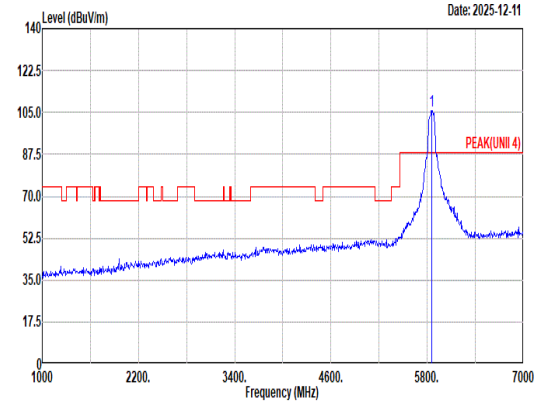 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 105.88 ------ ------ 94.91 34.16 13.59 36.78 0.00 131 360 Peak
Avg	Blank	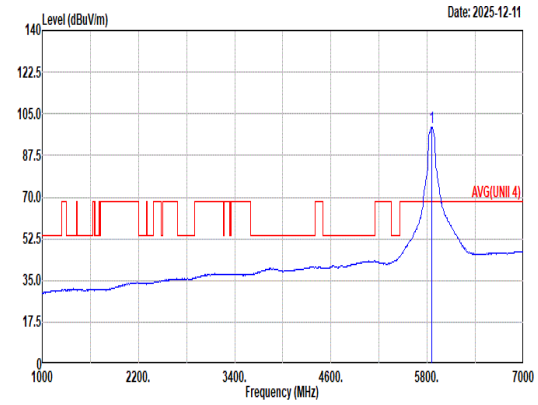 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 99.51 ------ ------ 88.64 34.10 13.55 36.78 0.00 131 360 Average

Mode	86	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	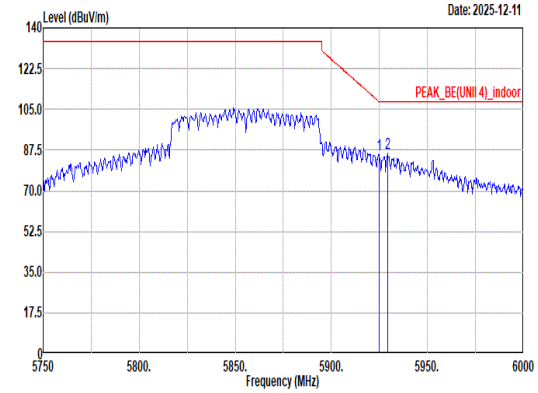 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.75 85.48 108.38 -22.90 74.30 34.25 13.70 36.77 0.00 131 360 Peak 2 5929.25 85.91 108.20 -22.29 74.73 34.24 13.71 36.77 0.00 131 360 Peak	Blank
Avg	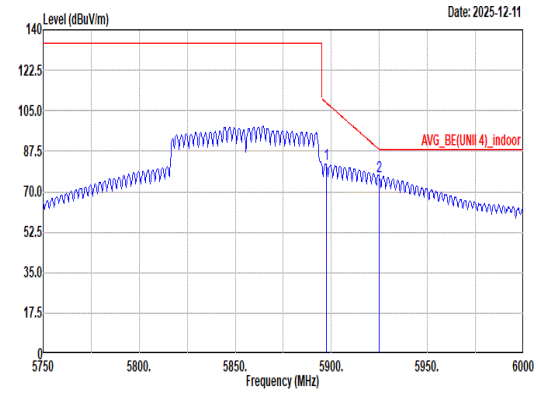 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5897.25 81.99 108.55 -26.56 70.82 34.29 13.65 36.77 0.00 131 360 Average 2 5925.00 76.69 88.20 -11.51 65.51 34.25 13.70 36.77 0.00 131 360 Average	Blank

Mode	86
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	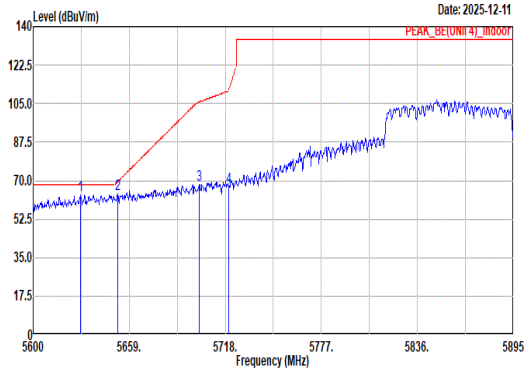 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5629.21 63.39 68.20 -4.81 53.89 33.08 13.22 36.80 0.00 201 36 Peak 2 5651.92 63.75 69.63 -5.88 54.07 33.22 13.26 36.80 0.00 201 36 Peak 3 5702.07 68.16 105.78 -37.62 57.92 33.71 13.33 36.80 0.00 201 36 Peak 4 5720.07 67.35 110.95 -43.60 57.01 33.78 13.35 36.79 0.00 201 36 Peak	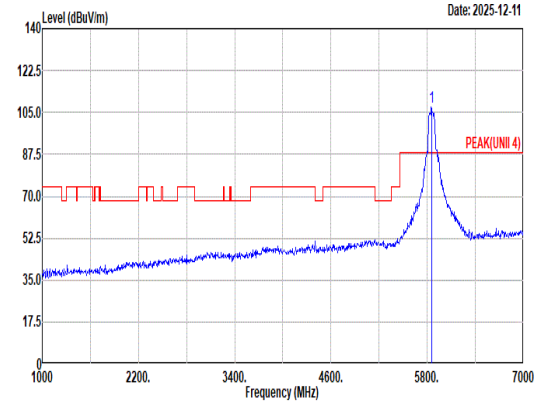 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 107.18 ------ ------ 96.30 34.10 13.56 36.78 0.00 201 36 Peak
Avg	Blank	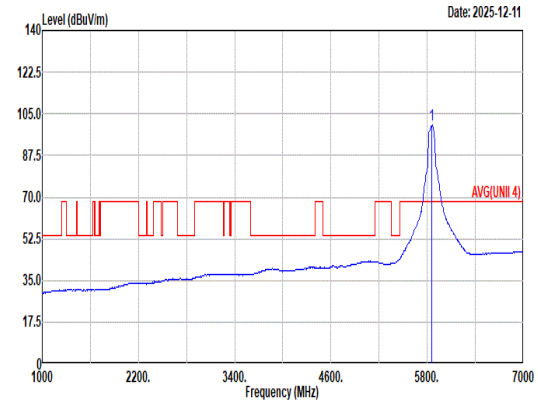 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 100.37 ------ ------ 89.40 34.16 13.59 36.78 0.00 201 36 Average

Mode	86	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	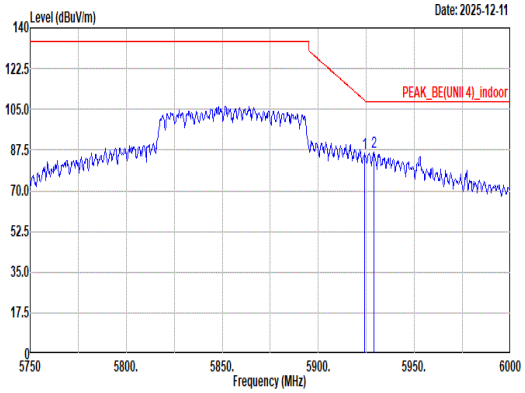 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 86.11 108.75 -22.64 74.93 34.25 13.70 36.77 0.00 201 36 Peak 2 5928.75 86.40 108.20 -21.80 75.22 34.24 13.71 36.77 0.00 201 36 Peak	Blank
Avg	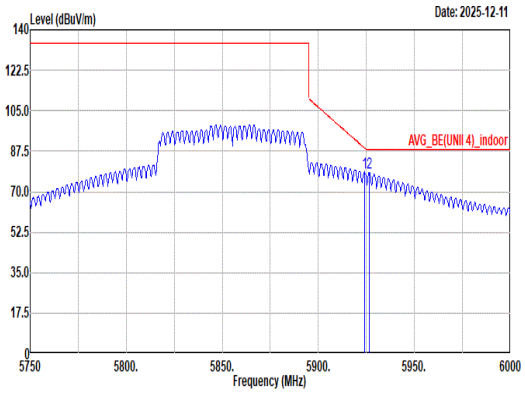 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 78.36 88.75 -10.39 67.18 34.25 13.70 36.77 0.00 201 36 Average 2 5926.50 78.23 88.20 -9.97 67.05 34.25 13.70 36.77 0.00 201 36 Average	Blank

Mode	86	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	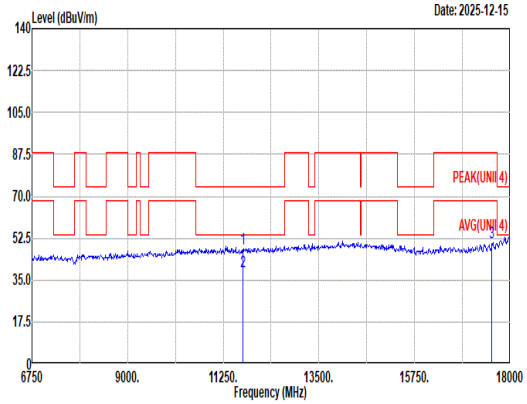 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.04 74.00 -25.96 46.46 38.81 19.53 57.31 0.55 -- -- Peak 2 11710.00 38.34 54.00 -15.66 36.76 38.81 19.53 57.31 0.55 -- -- Average 3 17565.00 50.74 88.20 -37.46 46.19 38.96 24.11 58.96 0.44 -- -- Peak	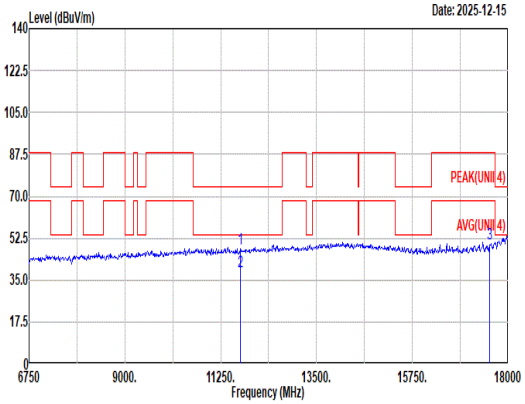 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.24 74.00 -25.76 46.66 38.81 19.53 57.31 0.55 -- -- Peak 2 11710.00 38.33 54.00 -15.67 36.75 38.81 19.53 57.31 0.55 -- -- Average 3 17565.00 50.31 88.20 -37.89 45.76 38.96 24.11 58.96 0.44 -- -- Peak

Mode	86	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	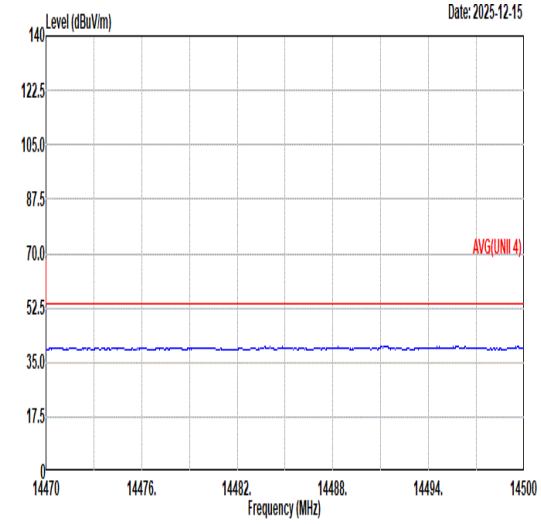	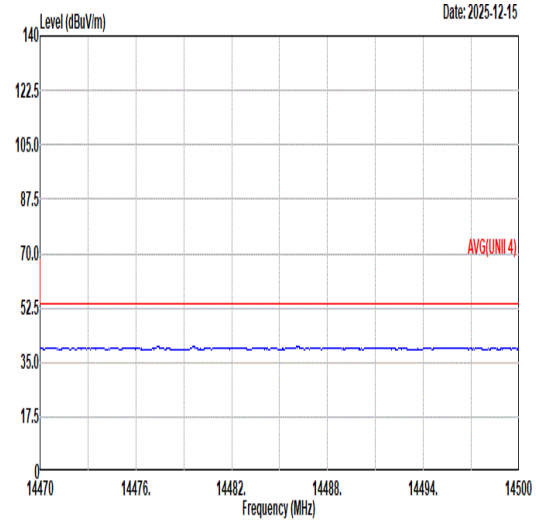
17.7G ~18G Avg	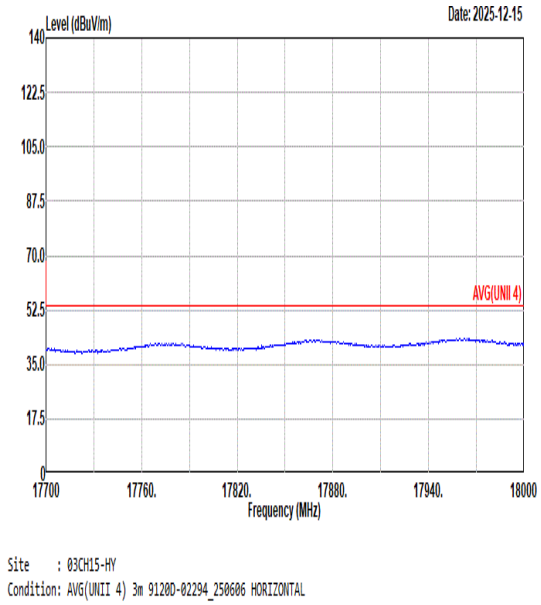	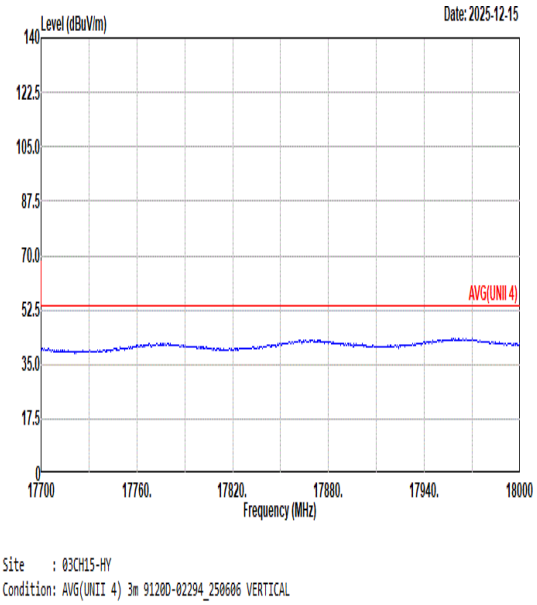

Mode	87
	Band Edge - L
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	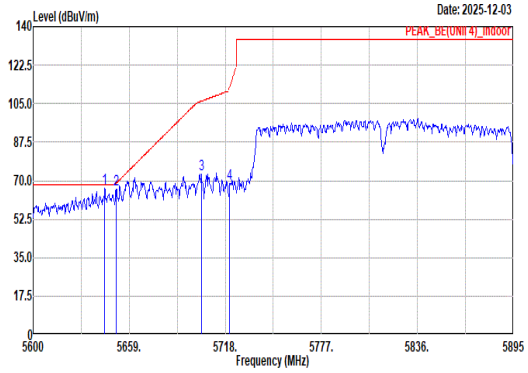 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.96 66.43 68.20 -1.77 56.83 33.16 13.24 36.80 0.00 100 16 Peak 2 5651.04 66.07 68.97 -2.90 56.41 33.21 13.25 36.80 0.00 100 16 Peak 3 5703.25 72.94 106.11 -33.17 62.70 33.71 13.33 36.80 0.00 100 16 Peak 4 5720.66 68.66 112.29 -43.63 58.32 33.78 13.35 36.79 0.00 100 16 Peak	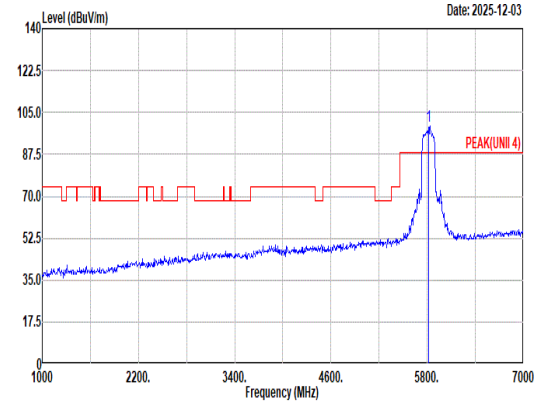 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 99.42 ------ ------ 88.56 34.10 13.54 36.78 0.00 100 16 Peak
Avg	Blank	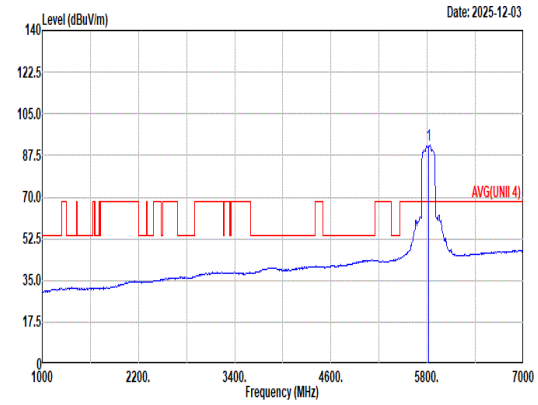 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 92.04 ------ ------ 81.18 34.10 13.54 36.78 0.00 100 16 Average

Mode	87	
	Band Edge - R	
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	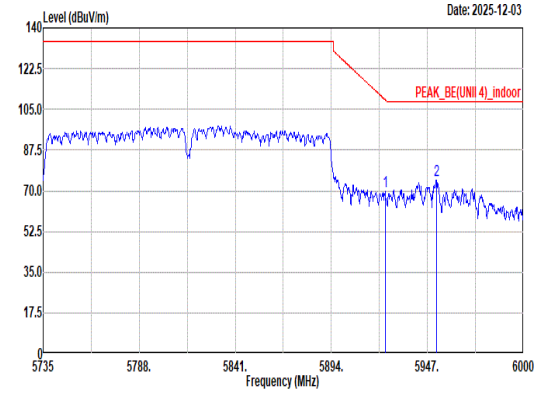 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.68 69.54 109.17 -39.63 58.36 34.25 13.70 36.77 0.00 100 16 Peak 2 5952.04 74.47 108.20 -33.73 63.29 34.20 13.75 36.77 0.00 100 16 Peak	Blank
Avg	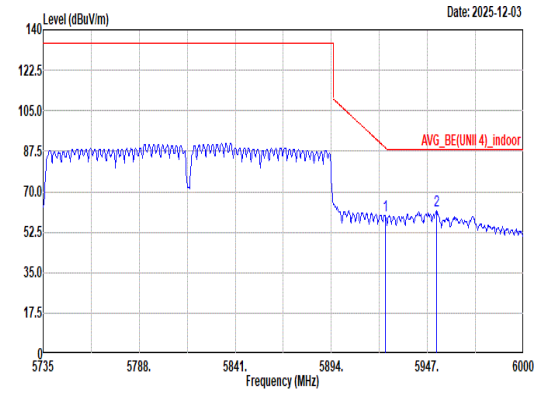 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.95 59.52 88.97 -29.45 48.34 34.25 13.70 36.77 0.00 100 16 Average 2 5952.04 61.69 88.20 -26.51 50.51 34.20 13.75 36.77 0.00 100 16 Average	Blank

Mode	87
	Band Edge - L
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	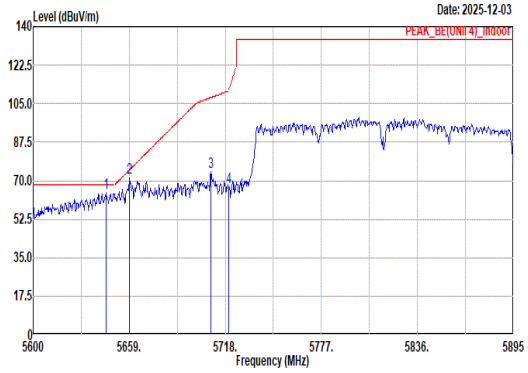 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.84 64.53 68.20 -3.67 54.91 33.17 13.25 36.80 0.00 100 357 Peak 2 5659.00 71.11 74.88 -3.77 61.35 33.29 13.27 36.80 0.00 100 357 Peak 3 5709.15 73.75 107.76 -34.01 63.46 33.74 13.34 36.79 0.00 100 357 Peak 4 5720.07 66.87 110.95 -44.08 56.53 33.78 13.35 36.79 0.00 100 357 Peak	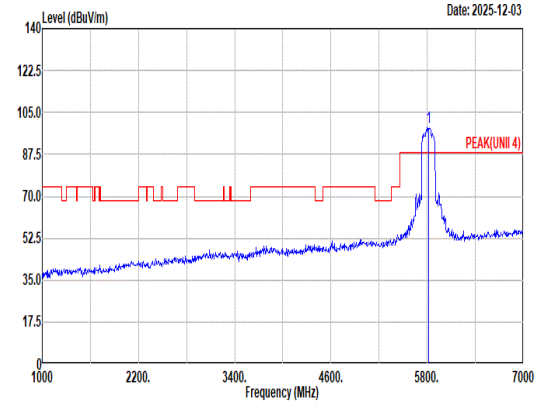 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 98.78 ------ ------ 87.99 34.10 13.47 36.78 0.00 100 357 Peak
Avg	Blank	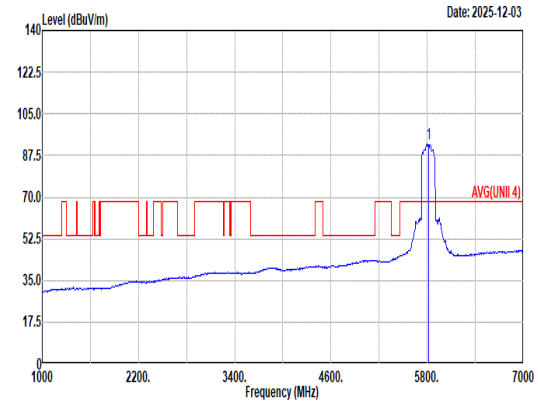 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 92.33 ------ ------ 81.57 34.08 13.46 36.78 0.00 100 357 Average

Mode	87	
	Band Edge - R	
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	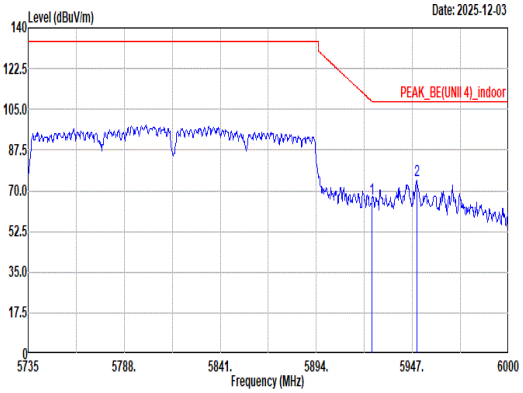 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.74 66.57 108.39 -41.82 55.39 34.25 13.70 36.77 0.00 100 357 Peak 2 5949.39 74.56 108.20 -33.64 63.38 34.20 13.75 36.77 0.00 100 357 Peak	Blank
Avg	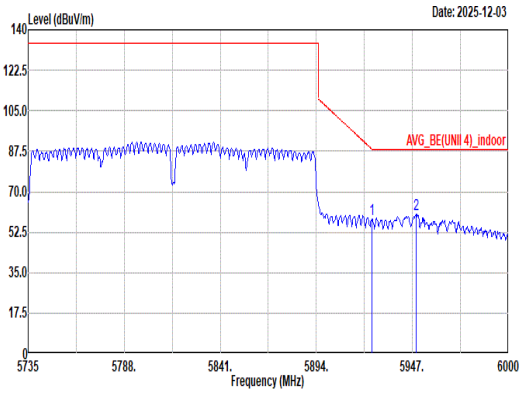 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:2.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.74 58.15 88.39 -30.24 46.97 34.25 13.70 36.77 0.00 100 357 Average 2 5949.12 60.20 88.20 -28.00 49.02 34.20 13.75 36.77 0.00 100 357 Average	Blank

Mode	87	
	Harmonic	
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	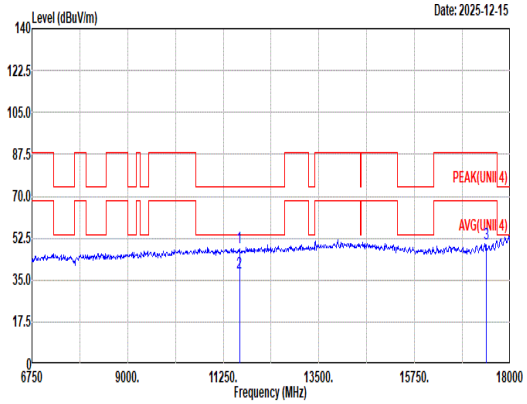 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 48.37 74.00 -25.63 47.04 38.66 19.46 57.35 0.56 -- -- Peak 2 11630.00 38.17 54.00 -15.83 36.84 38.66 19.46 57.35 0.56 -- -- Average 3 17445.00 50.23 88.20 -37.97 46.15 38.76 24.03 59.15 0.44 -- -- Peak	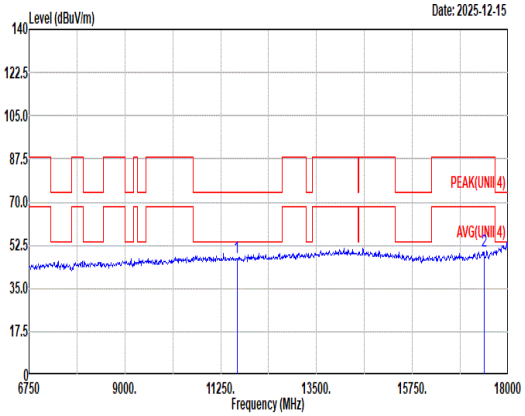 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 47.74 74.00 -26.26 46.41 38.66 19.46 57.35 0.56 -- -- Peak 2 17445.00 50.10 88.20 -38.10 46.02 38.76 24.03 59.15 0.44 -- -- Peak

Mode	87	
	Harmonic	
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	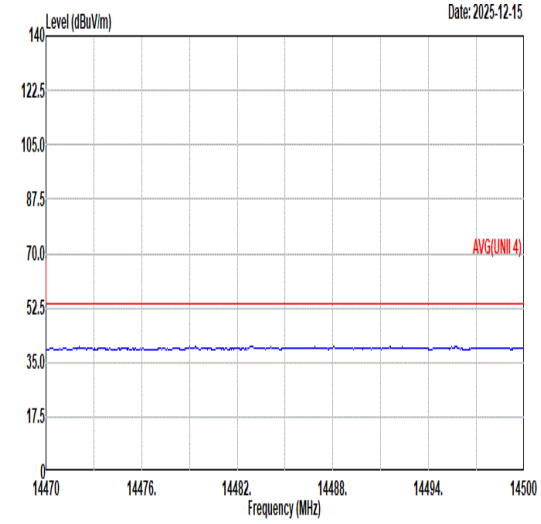 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	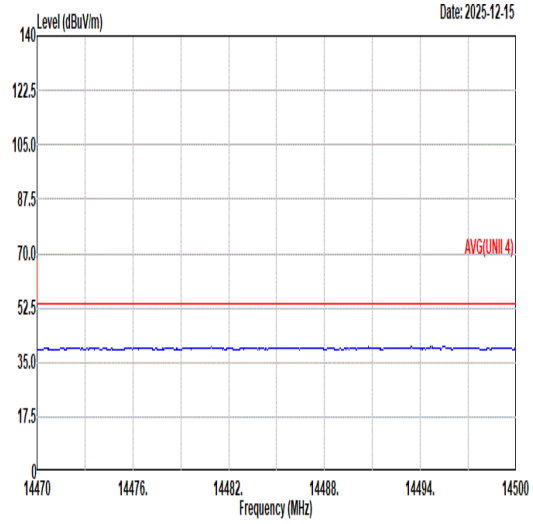 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	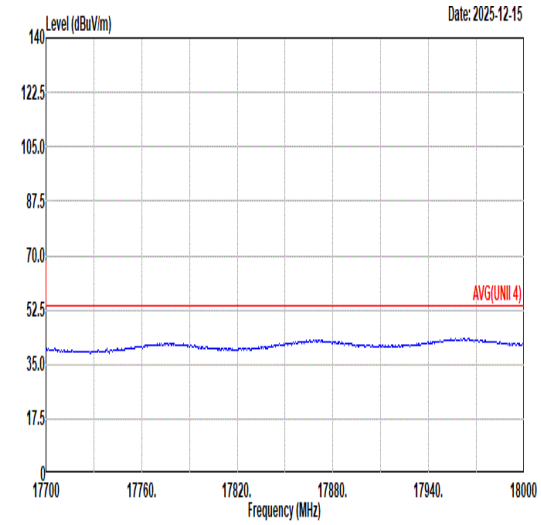 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	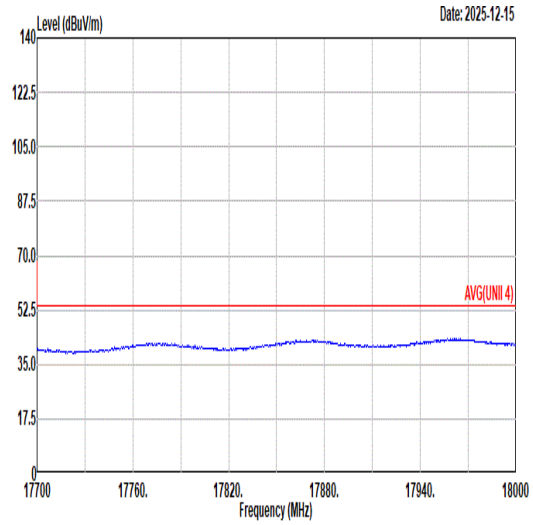 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	88	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	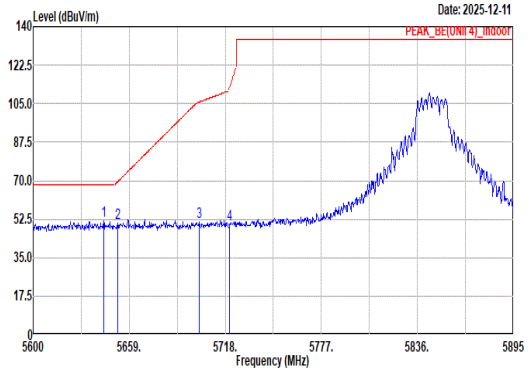 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5643.37 51.52 68.20 -16.68 41.92 33.16 13.24 36.80 0.00 203 360 Peak 2 5651.92 50.80 69.63 -18.83 41.12 33.22 13.26 36.80 0.00 203 360 Peak 3 5701.78 51.25 105.70 -54.45 41.01 33.71 13.33 36.80 0.00 203 360 Peak 4 5720.66 50.20 112.29 -62.09 39.86 33.78 13.35 36.79 0.00 203 360 Peak	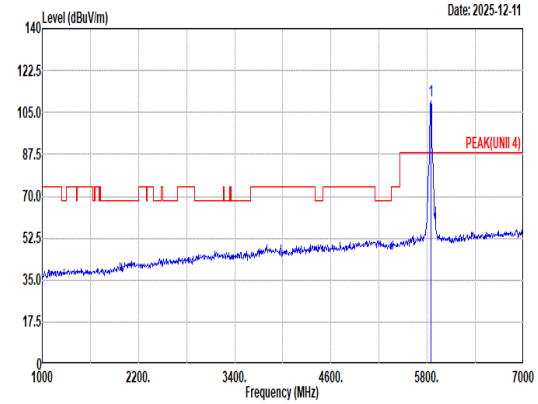 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5845.00 109.84 ------ ------ 98.97 34.10 13.55 36.78 0.00 203 360 Peak
Avg	Blank	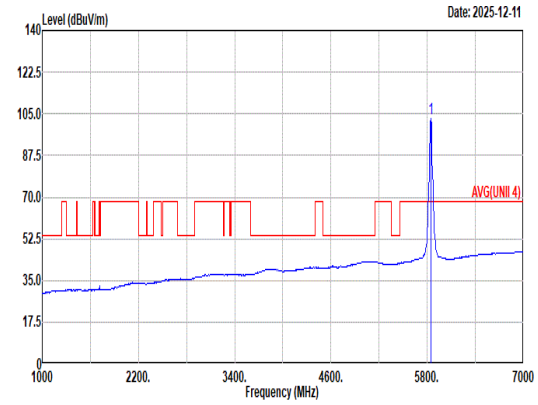 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5845.00 103.20 ------ ------ 92.33 34.10 13.55 36.78 0.00 203 360 Average

Mode	88	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	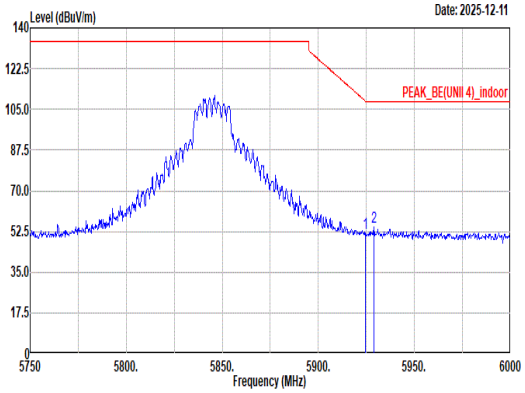 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.50 51.94 108.57 -56.63 40.76 34.25 13.70 36.77 0.00 203 360 Peak 2 5929.00 54.42 108.20 -53.78 43.24 34.24 13.71 36.77 0.00 203 360 Peak	Blank
Avg	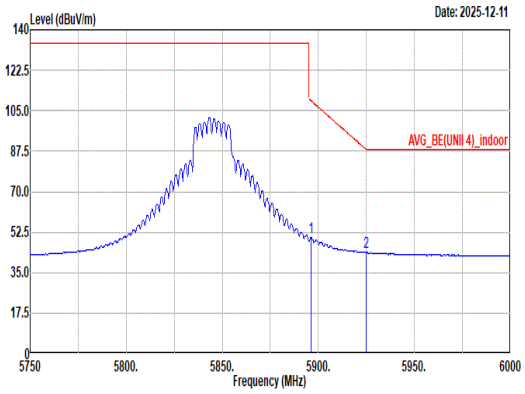 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5896.25 50.09 109.28 -59.19 38.93 34.28 13.65 36.77 0.00 203 360 Average 2 5925.00 43.75 88.20 -44.45 32.57 34.25 13.70 36.77 0.00 203 360 Average	Blank

Mode	88	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	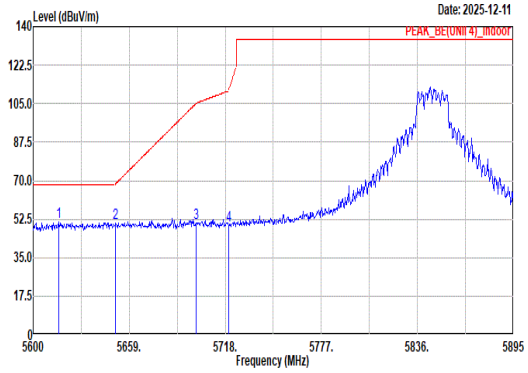 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5615.64 51.05 68.20 -17.15 41.67 32.99 13.20 36.81 0.00 226 29 Peak 2 5650.74 50.92 68.75 -17.83 41.26 33.21 13.25 36.80 0.00 226 29 Peak 3 5700.30 50.86 105.28 -54.42 40.63 33.70 13.33 36.80 0.00 226 29 Peak 4 5720.07 49.83 110.95 -61.12 39.49 33.78 13.35 36.79 0.00 226 29 Peak	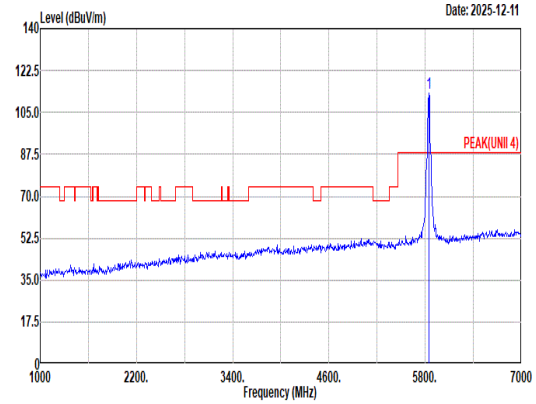 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5845.00 113.07 ------ ------ 102.19 34.10 13.56 36.78 0.00 226 29 Peak
Avg	Blank	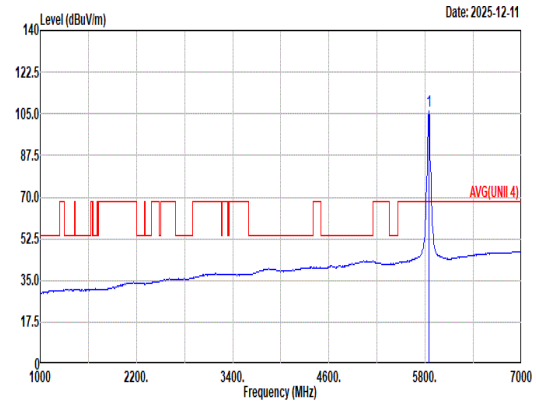 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5845.00 105.93 ------ ------ 95.05 34.10 13.56 36.78 0.00 226 29 Average

Mode	88	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	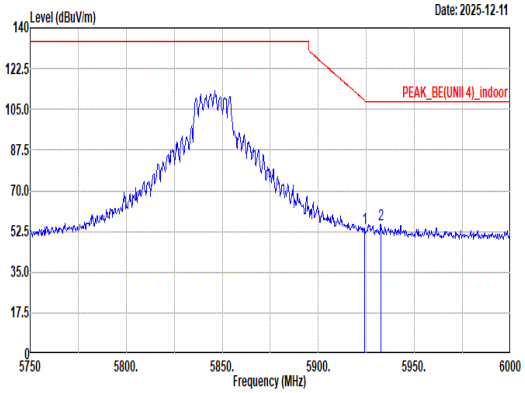 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 54.13 108.93 -54.80 42.95 34.25 13.70 36.77 0.00 226 29 Peak 2 5932.50 55.57 108.20 -52.63 44.38 34.24 13.72 36.77 0.00 226 29 Peak	Blank
Avg	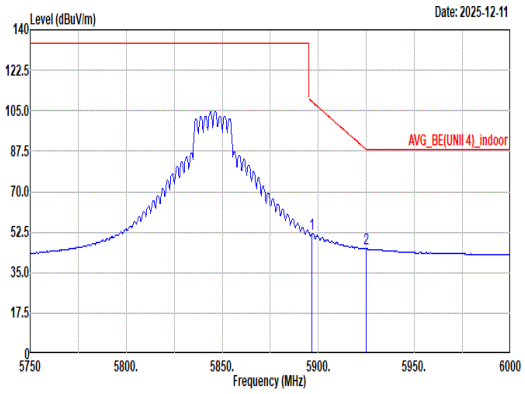 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5896.50 51.94 109.10 -57.16 40.77 34.29 13.65 36.77 0.00 226 29 Average 2 5925.00 45.24 88.20 -42.96 34.06 34.25 13.70 36.77 0.00 226 29 Average	Blank

Mode	88	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	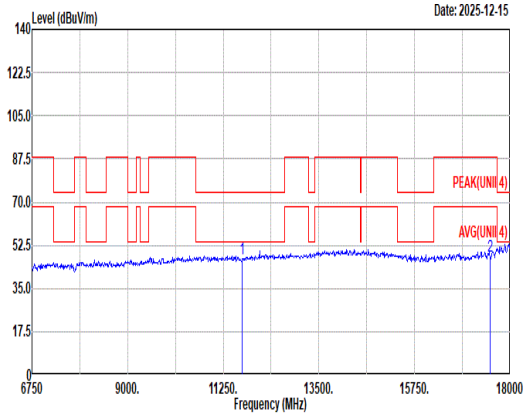 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 47.28 74.00 -26.72 45.75 38.78 19.51 57.32 0.56 -- -- Peak 2 17535.00 47.89 88.20 -40.31 43.56 38.84 24.09 59.04 0.44 -- -- Peak	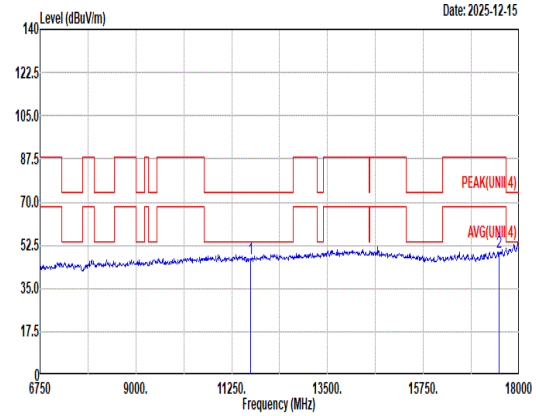 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 47.20 74.00 -26.80 45.67 38.78 19.51 57.32 0.56 -- -- Peak 2 17535.00 49.62 88.20 -38.58 45.29 38.84 24.09 59.04 0.44 -- -- Peak

Mode	88	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Full RU_5845MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	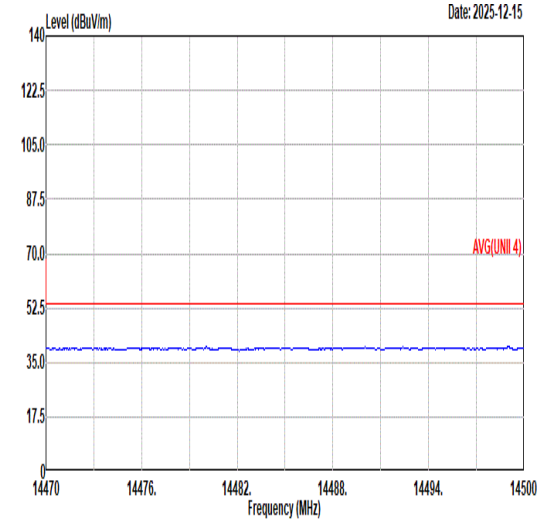 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	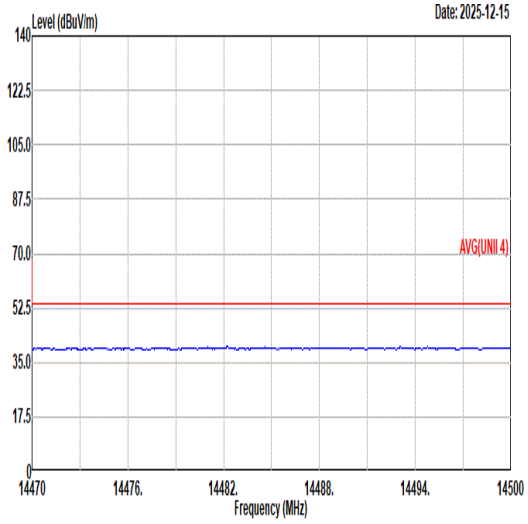 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	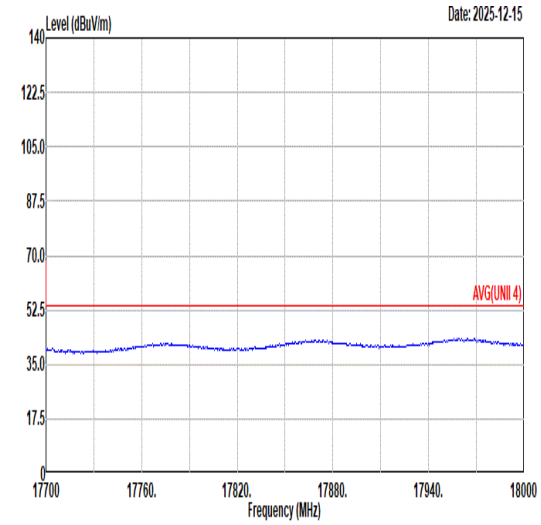 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	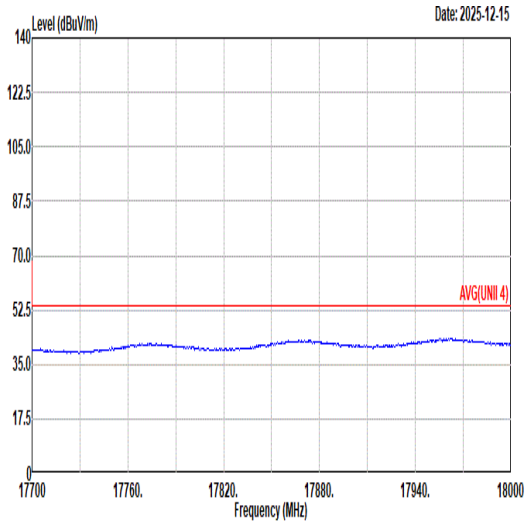 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	89	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	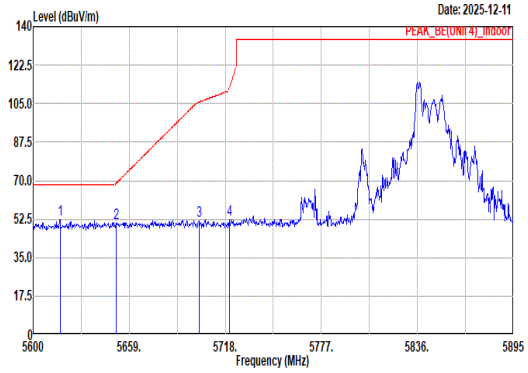 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5616.52 52.47 68.20 -15.73 43.08 33.00 13.20 36.81 0.00 100 16 Peak 2 5651.04 50.69 68.97 -18.28 41.03 33.21 13.25 36.80 0.00 100 16 Peak 3 5701.78 51.62 105.70 -54.08 41.38 33.71 13.33 36.80 0.00 100 16 Peak 4 5720.36 52.16 111.62 -59.46 41.82 33.78 13.35 36.79 0.00 100 16 Peak	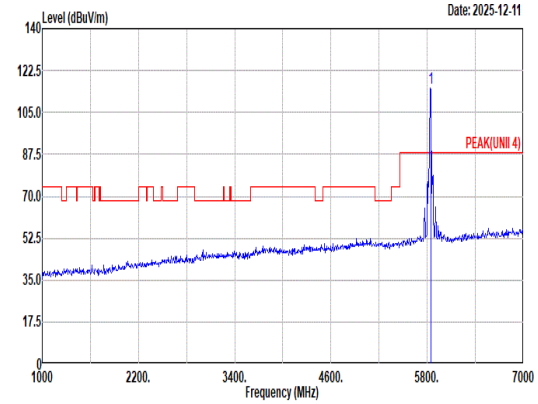 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 115.38 ------ ------ 104.52 34.10 13.54 36.78 0.00 100 16 Peak
Avg	Blank	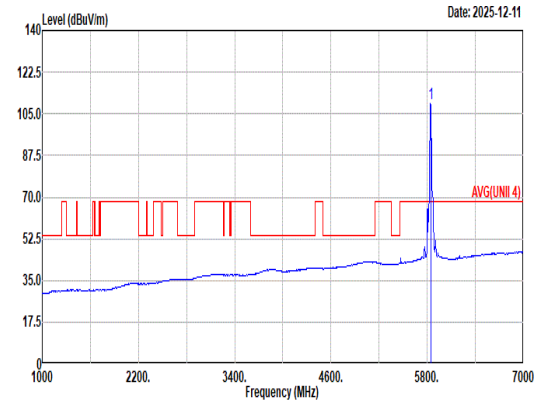 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 109.60 ------ ------ 98.74 34.10 13.54 36.78 0.00 100 16 Average

Mode	89	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	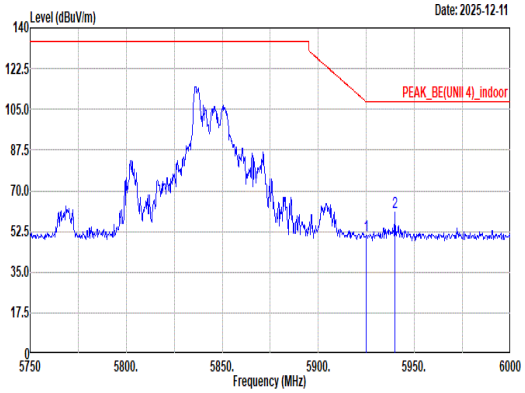 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.75 50.84 108.38 -57.54 39.66 34.25 13.70 36.77 0.00 100 16 Peak 2 5939.75 61.01 108.20 -47.19 49.83 34.22 13.73 36.77 0.00 100 16 Peak	Blank
Avg	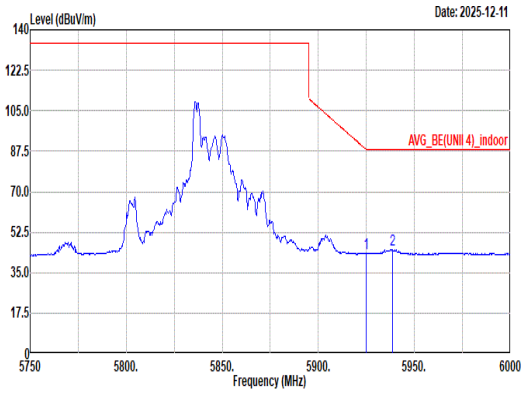 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 43.16 88.20 -45.04 31.98 34.25 13.70 36.77 0.00 100 16 Average 2 5938.75 44.91 88.20 -43.29 33.73 34.22 13.73 36.77 0.00 100 16 Average	Blank

Mode	89	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	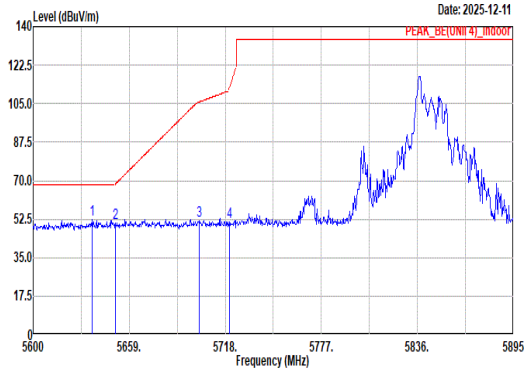 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5636.29 52.31 68.20 -15.89 42.76 33.12 13.23 36.80 0.00 225 27 Peak 2 5650.74 50.70 68.75 -18.05 41.04 33.21 13.25 36.80 0.00 225 27 Peak 3 5701.78 51.68 105.70 -54.02 41.44 33.71 13.33 36.80 0.00 225 27 Peak 4 5720.36 51.07 111.62 -60.55 40.73 33.78 13.35 36.79 0.00 225 27 Peak	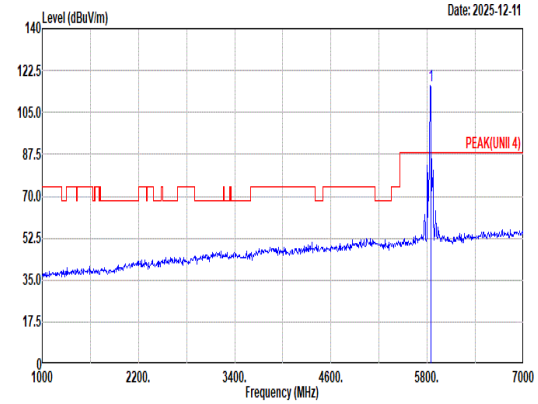 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 116.31 ------ ------ 105.45 34.10 13.54 36.78 0.00 225 27 Peak
Avg	Blank	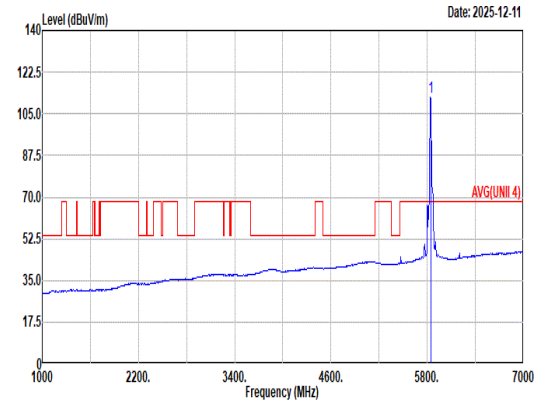 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 112.08 ------ ------ 101.22 34.10 13.54 36.78 0.00 225 27 Average

Mode	89	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 26/0_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	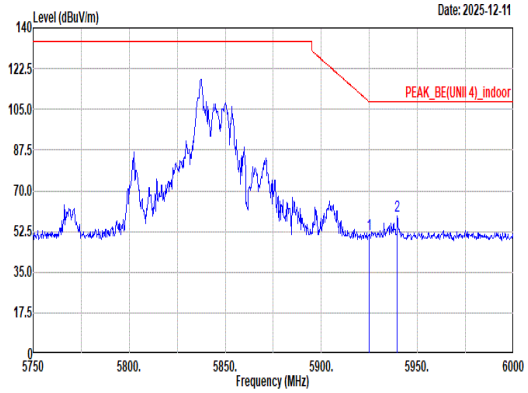 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 51.46 108.20 -56.74 40.28 34.25 13.70 36.77 0.00 225 27 Peak 2 5939.50 59.37 108.20 -48.83 48.19 34.22 13.73 36.77 0.00 225 27 Peak	Blank
Avg	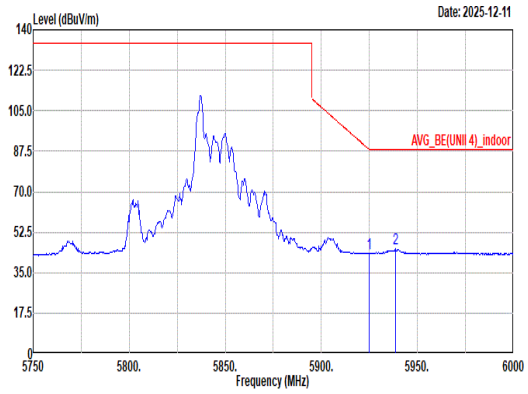 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 43.49 88.20 -44.71 32.31 34.25 13.70 36.77 0.00 225 27 Average 2 5938.50 45.23 88.20 -42.97 34.05 34.22 13.73 36.77 0.00 225 27 Average	Blank

Mode	90	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	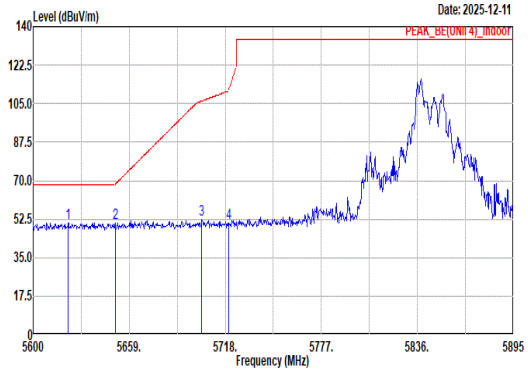 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5621.54 50.77 68.20 -17.43 41.34 33.03 13.21 36.81 0.00 139 360 Peak 2 5650.45 50.97 68.53 -17.56 41.32 33.20 13.25 36.80 0.00 139 360 Peak 3 5703.55 52.31 106.19 -53.88 42.07 33.71 13.33 36.80 0.00 139 360 Peak 4 5720.07 50.58 110.95 -60.37 40.24 33.78 13.35 36.79 0.00 139 360 Peak	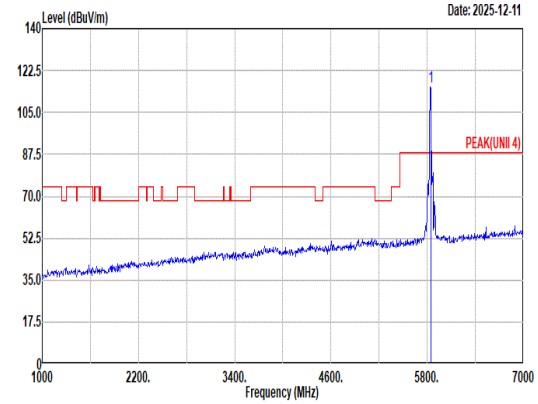 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 115.47 ------ ------ 104.61 34.10 13.54 36.78 0.00 139 360 Peak
Avg	Blank	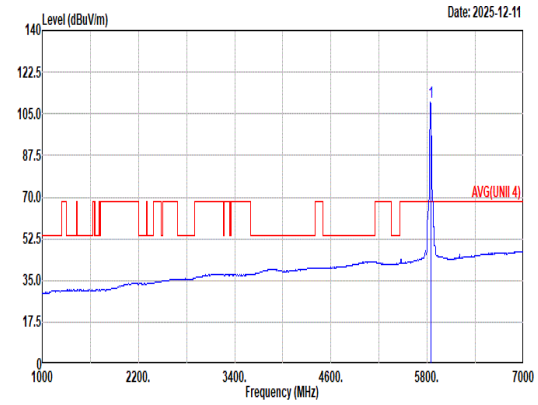 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 109.82 ------ ------ 98.96 34.10 13.54 36.78 0.00 139 360 Average

Mode	90	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	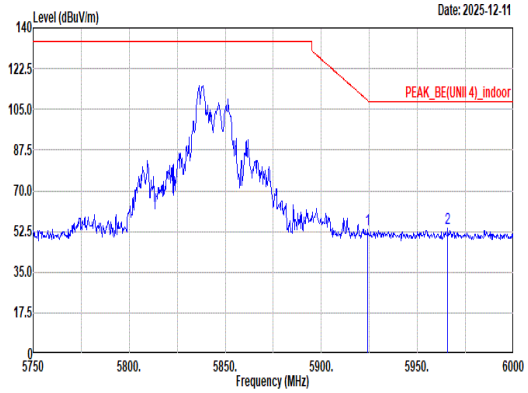 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 53.10 108.75 -55.65 41.92 34.25 13.70 36.77 0.00 139 360 Peak 2 5965.75 53.98 108.20 -54.22 42.76 34.20 13.78 36.76 0.00 139 360 Peak	Blank
Avg	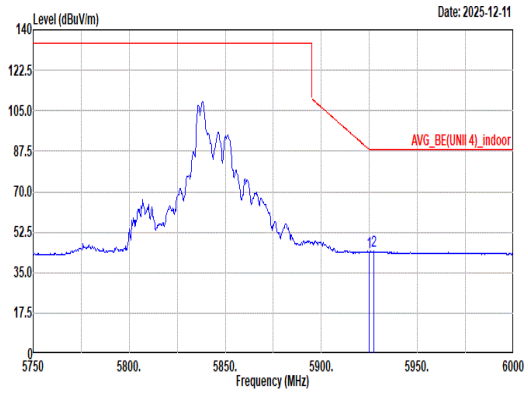 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 43.83 88.20 -44.37 32.65 34.25 13.70 36.77 0.00 139 360 Average 2 5927.50 44.23 88.20 -43.97 33.05 34.24 13.71 36.77 0.00 139 360 Average	Blank

Mode	90	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	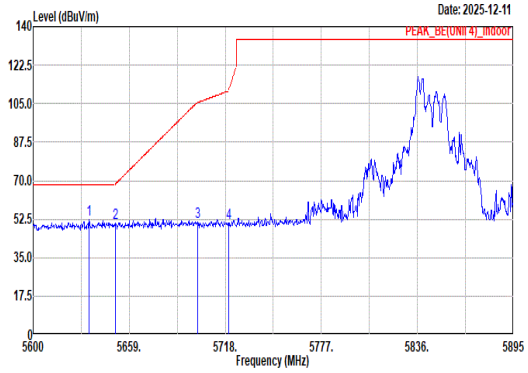 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5634.52 52.19 68.20 -16.01 42.65 33.11 13.23 36.80 0.00 192 35 Peak 2 5650.74 50.49 68.75 -18.26 40.83 33.21 13.25 36.80 0.00 192 35 Peak 3 5701.19 51.25 105.53 -54.28 41.02 33.70 13.33 36.80 0.00 192 35 Peak 4 5720.07 50.54 110.95 -60.41 40.20 33.78 13.35 36.79 0.00 192 35 Peak	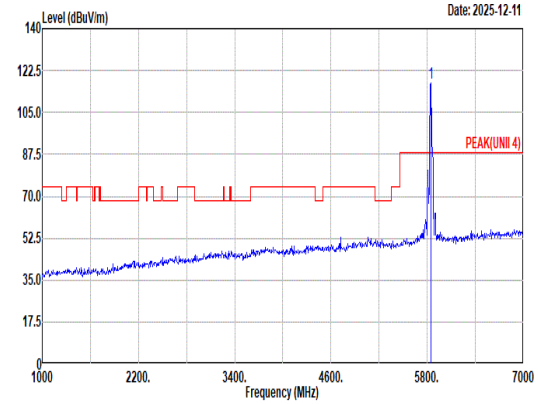 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5845.00 117.30 ------ ------ 106.43 34.10 13.55 36.78 0.00 192 35 Peak
Avg	Blank	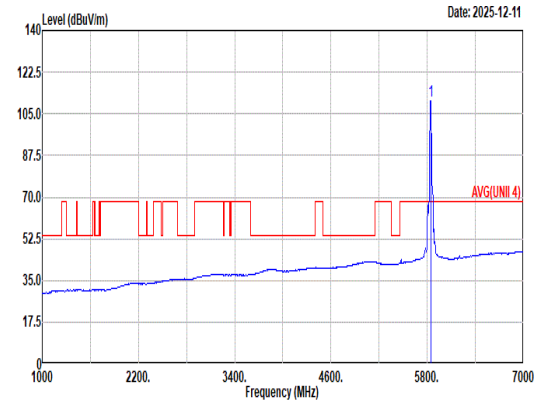 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto 1 5845.00 110.48 ------ ------ 99.62 34.10 13.54 36.78 0.00 192 35 Average

Mode	90	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 52/37_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	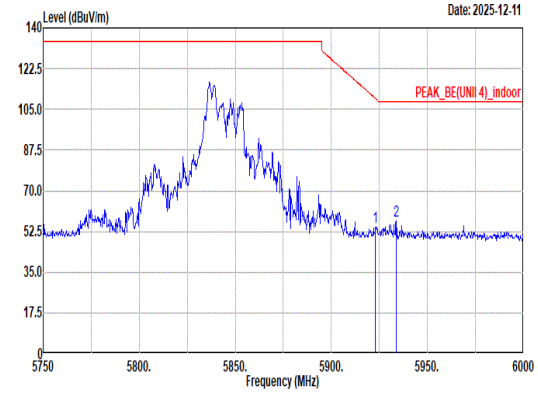 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.00 54.54 109.66 -55.12 43.36 34.25 13.70 36.77 0.00 192 35 Peak 2 5933.75 56.94 108.20 -51.26 45.76 34.23 13.72 36.77 0.00 192 35 Peak	Blank
Avg	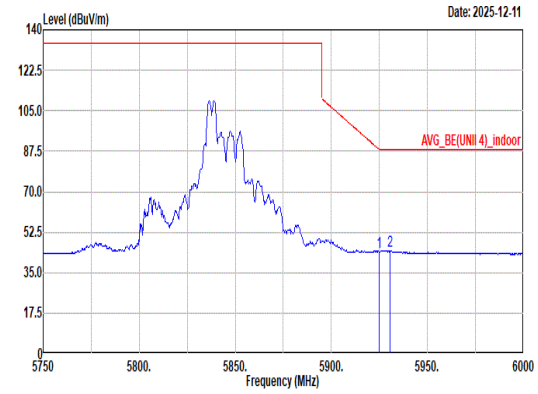 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 44.08 88.20 -44.12 32.90 34.25 13.70 36.77 0.00 192 35 Average 2 5930.50 44.54 88.20 -43.66 33.36 34.24 13.71 36.77 0.00 192 35 Average	Blank

Mode	91	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	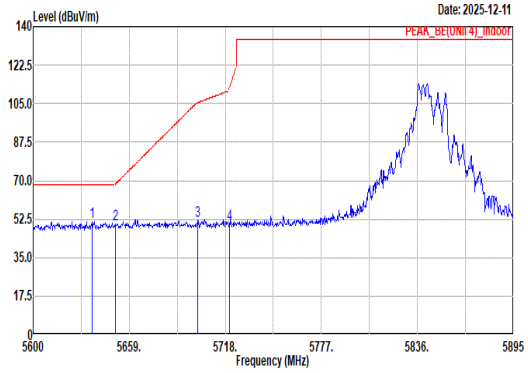 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5636.29 51.33 68.20 -16.87 41.78 33.12 13.23 36.80 0.00 126 360 Peak 2 5650.74 50.43 68.75 -18.32 40.77 33.21 13.25 36.80 0.00 126 360 Peak 3 5701.19 51.68 105.53 -53.85 41.45 33.70 13.33 36.80 0.00 126 360 Peak 4 5720.36 50.32 111.62 -61.30 39.98 33.78 13.35 36.79 0.00 126 360 Peak	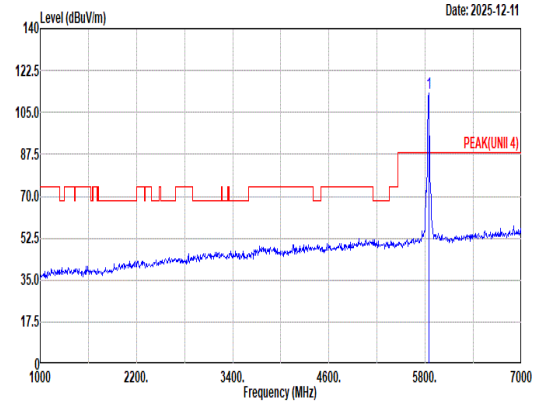 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5845.00 113.29 ------ ------ 102.42 34.10 13.55 36.78 0.00 126 360 Peak
Avg	Blank	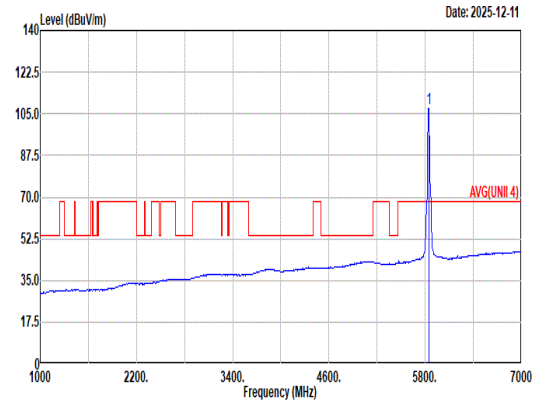 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto 1 5845.00 107.15 ------ ------ 96.28 34.10 13.55 36.78 0.00 126 360 Average

Mode	91	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	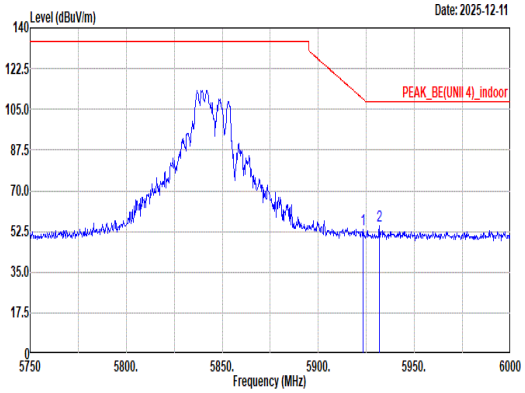 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.25 53.25 109.48 -56.23 42.07 34.25 13.70 36.77 0.00 126 360 Peak 2 5931.75 54.94 108.20 -53.26 43.76 34.24 13.71 36.77 0.00 126 360 Peak	Blank
Avg	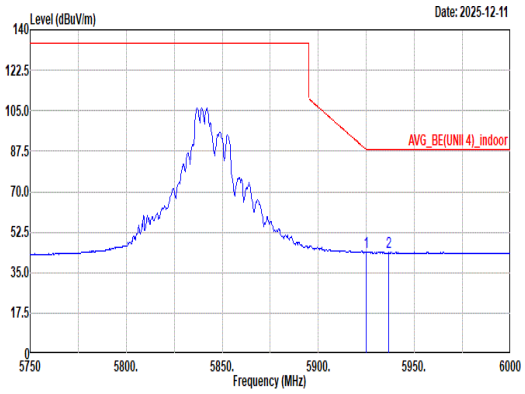 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 43.74 88.20 -44.46 32.56 34.25 13.70 36.77 0.00 126 360 Average 2 5936.50 43.81 88.20 -44.39 32.63 34.23 13.72 36.77 0.00 126 360 Average	Blank

Mode	91
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	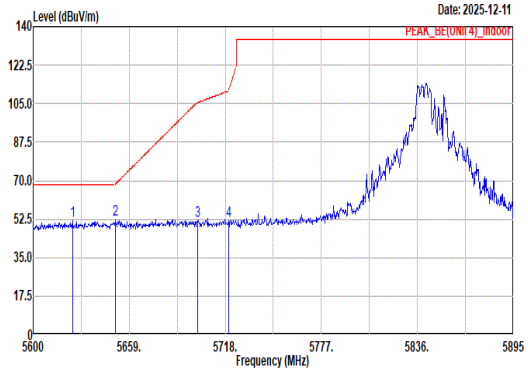 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5624.19 51.92 68.20 -16.28 42.46 33.05 13.22 36.81 0.00 200 33 Peak 2 5650.45 52.13 68.53 -16.40 42.48 33.20 13.25 36.80 0.00 200 33 Peak 3 5701.19 51.73 105.53 -53.80 41.50 33.70 13.33 36.80 0.00 200 33 Peak 4 5720.07 51.60 110.95 -59.35 41.26 33.78 13.35 36.79 0.00 200 33 Peak	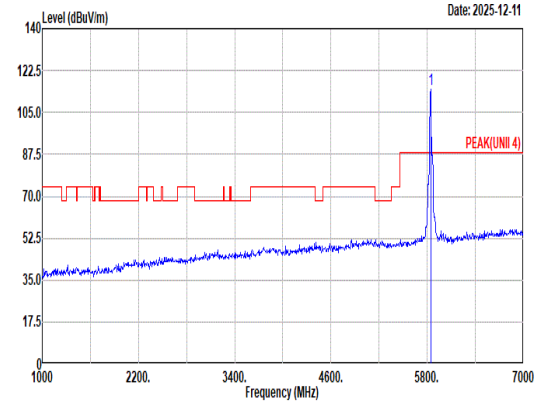 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 114.47 ------ ------ 103.60 34.10 13.55 36.78 0.00 200 33 Peak
Avg	Blank	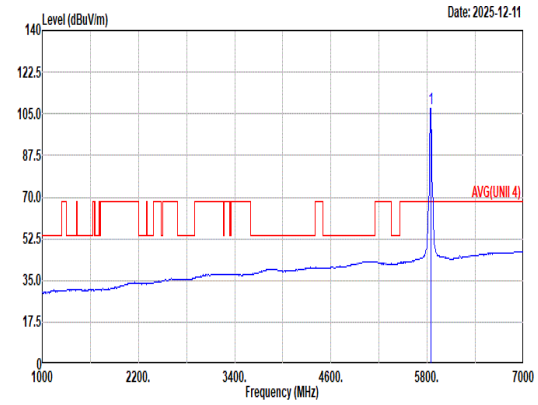 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 107.36 ------ ------ 96.50 34.10 13.54 36.78 0.00 200 33 Average

Mode	91	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH169_Partial RU 106/53_5845MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	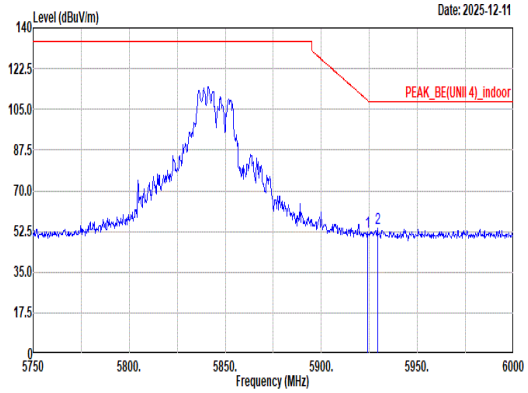 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 52.23 108.93 -56.70 41.05 34.25 13.70 36.77 0.00 200 33 Peak 2 5929.25 53.95 108.20 -54.25 42.77 34.24 13.71 36.77 0.00 200 33 Peak	Blank
Avg	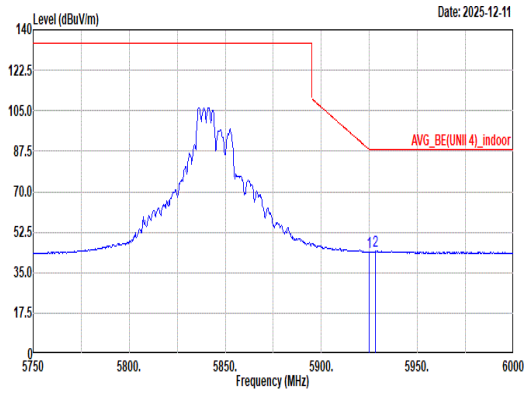 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 43.97 88.20 -44.23 32.79 34.25 13.70 36.77 0.00 200 33 Average 2 5928.00 44.29 88.20 -43.91 33.11 34.24 13.71 36.77 0.00 200 33 Average	Blank

Mode	92
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	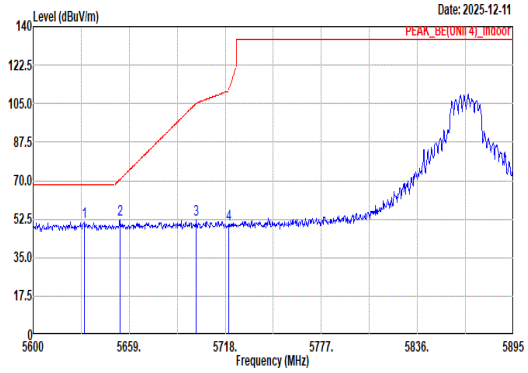 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5631.27 51.50 68.20 -16.70 41.98 33.09 13.23 36.80 0.00 188 360 Peak 2 5653.40 52.18 70.72 -18.54 42.49 33.23 13.26 36.80 0.00 188 360 Peak 3 5700.30 52.08 105.28 -53.20 41.85 33.70 13.33 36.80 0.00 188 360 Peak 4 5720.07 49.96 110.95 -60.99 39.62 33.78 13.35 36.79 0.00 188 360 Peak	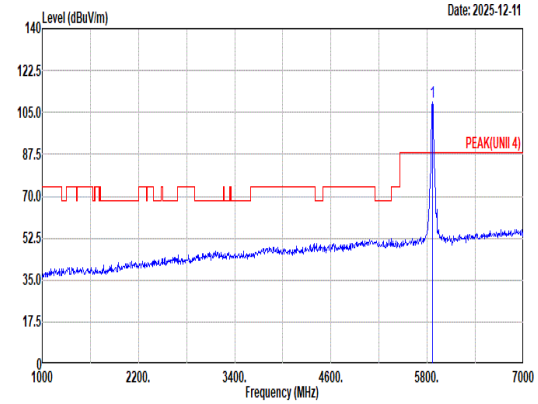 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 109.11 ------ ------ 98.14 34.16 13.59 36.78 0.00 188 360 Peak
Avg	Blank	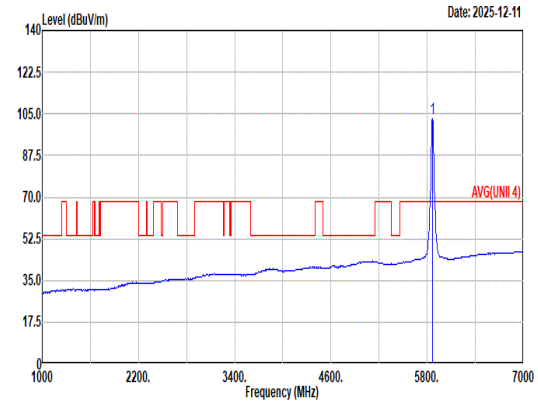 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 103.05 ------ ------ 92.08 34.16 13.59 36.78 0.00 188 360 Average

Mode	92	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	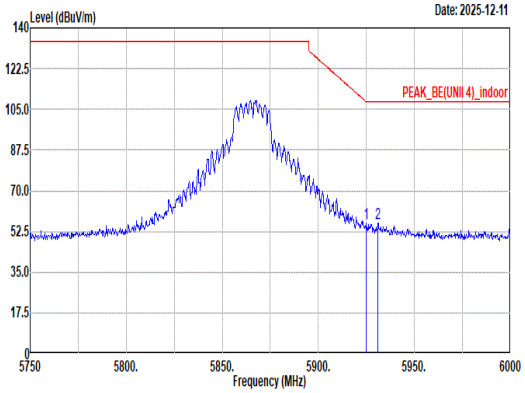 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 56.14 108.20 -52.06 44.96 34.25 13.70 36.77 0.00 188 360 Peak 2 5931.00 56.26 108.20 -51.94 45.08 34.24 13.71 36.77 0.00 188 360 Peak	Blank
Avg	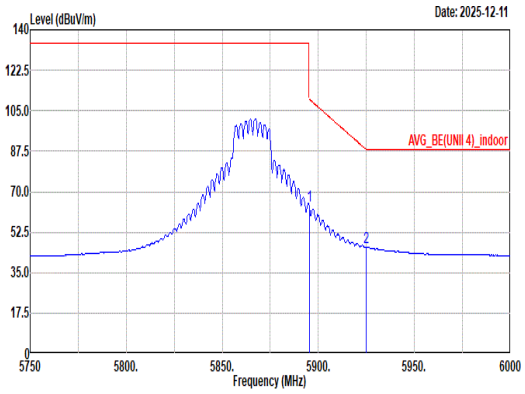 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 64.14 110.02 -45.88 52.98 34.28 13.65 36.77 0.00 188 360 Average 2 5925.00 46.17 88.20 -42.03 34.99 34.25 13.70 36.77 0.00 188 360 Average	Blank

Mode	92
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	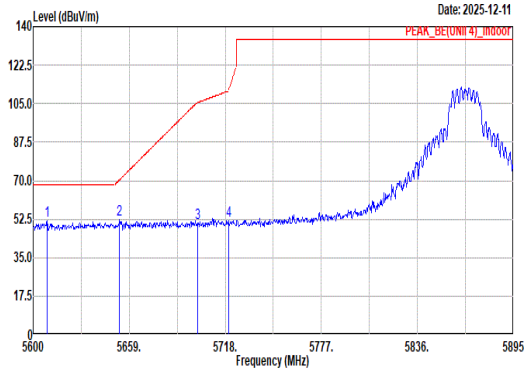 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5608.56 51.59 68.20 -16.61 42.26 32.95 13.19 36.81 0.00 207 32 Peak 2 5653.10 52.30 70.50 -18.20 42.61 33.23 13.26 36.80 0.00 207 32 Peak 3 5700.89 50.89 105.45 -54.56 40.66 33.70 13.33 36.80 0.00 207 32 Peak 4 5720.07 51.83 110.95 -59.12 41.49 33.78 13.35 36.79 0.00 207 32 Peak	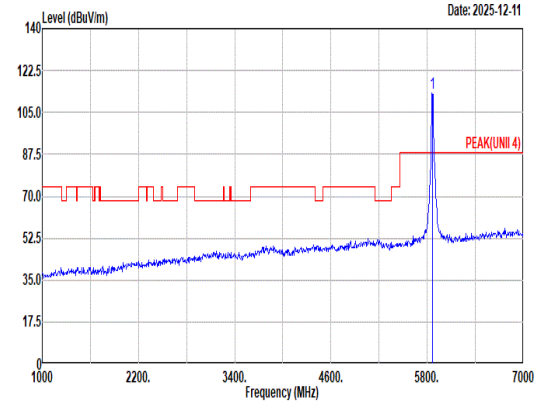 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 113.05 ------ ------ 102.11 34.14 13.58 36.78 0.00 207 32 Peak
Avg	Blank	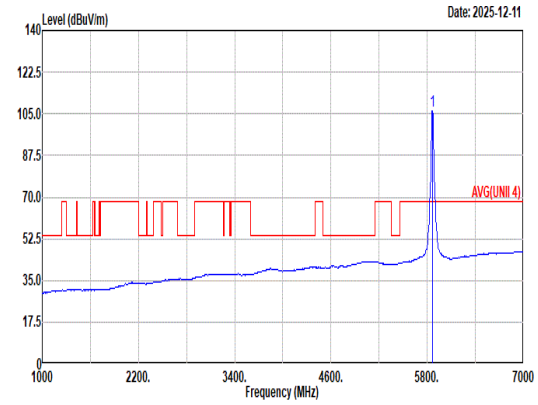 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 106.39 ------ ------ 95.42 34.16 13.59 36.78 0.00 207 32 Average

Mode	92	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	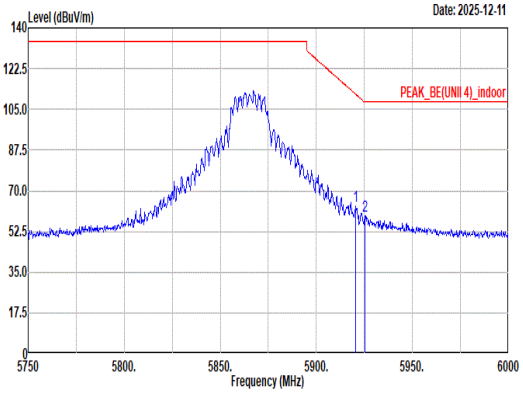 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5920.50 63.43 111.49 -48.06 52.25 34.26 13.69 36.77 0.00 207 32 Peak 2 5925.25 59.33 108.20 -48.87 48.15 34.25 13.70 36.77 0.00 207 32 Peak	Blank
Avg	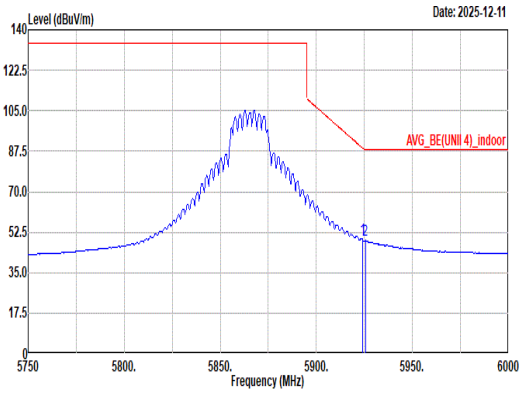 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 49.50 88.93 -39.43 38.32 34.25 13.70 36.77 0.00 207 32 Average 2 5925.50 48.91 88.20 -39.29 37.73 34.25 13.70 36.77 0.00 207 32 Average	Blank

Mode	92	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	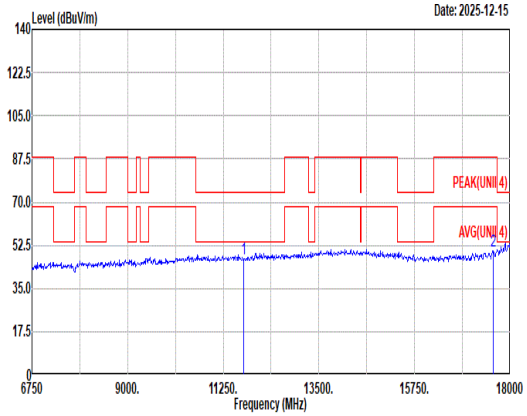 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 47.26 74.00 -26.74 45.63 38.83 19.55 57.30 0.55 -- -- Peak 2 17595.00 50.23 88.20 -37.97 45.46 39.08 24.13 58.88 0.44 -- -- Peak	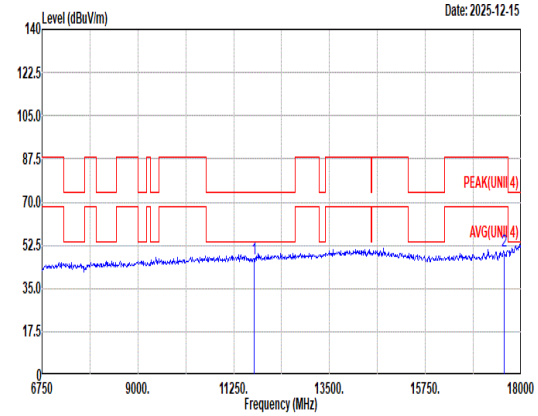 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 47.16 74.00 -26.84 45.53 38.83 19.55 57.30 0.55 -- -- Peak 2 17595.00 50.13 88.20 -38.07 45.36 39.08 24.13 58.88 0.44 -- -- Peak

Mode	92	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH173_Full RU_5865MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	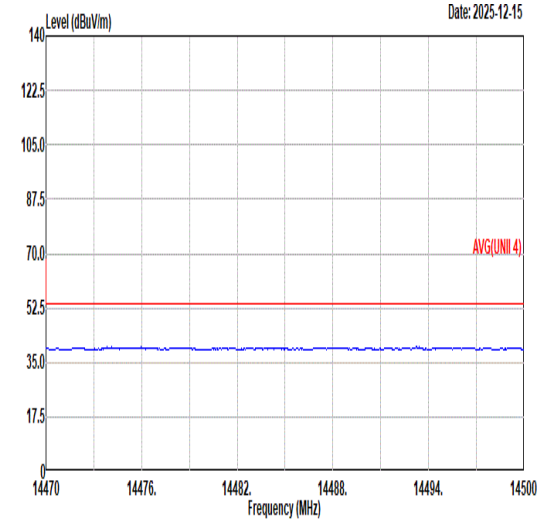 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	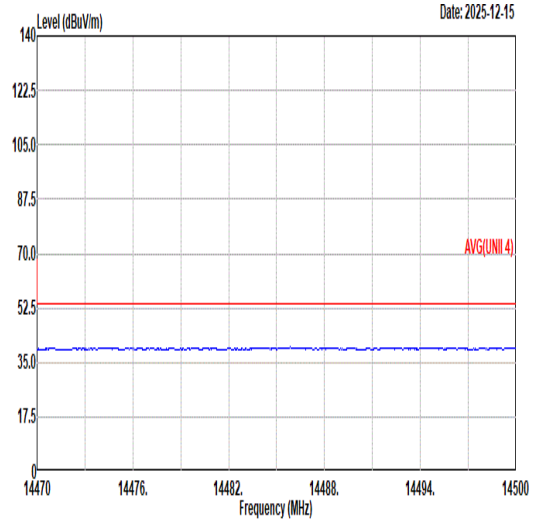 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	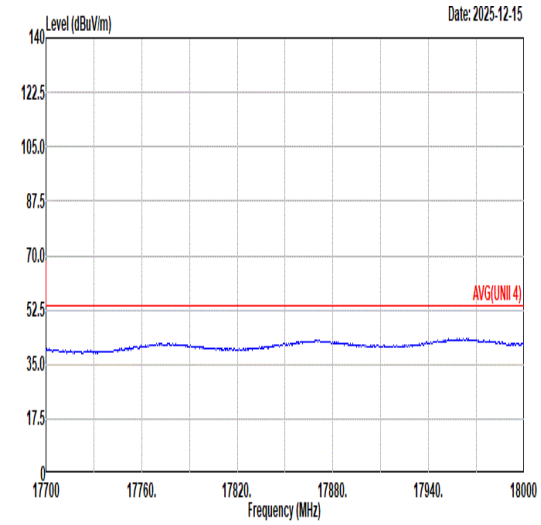 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	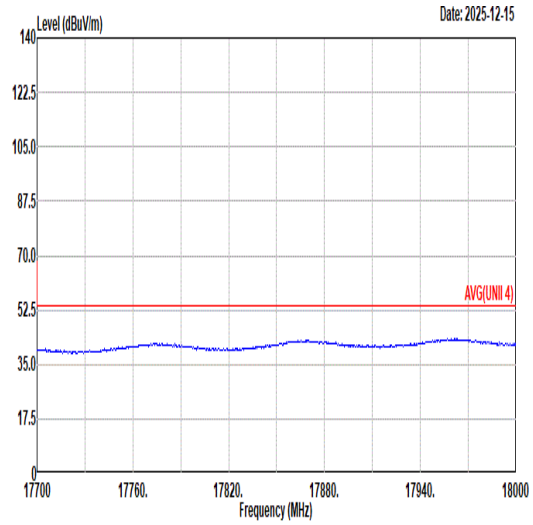 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	93	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	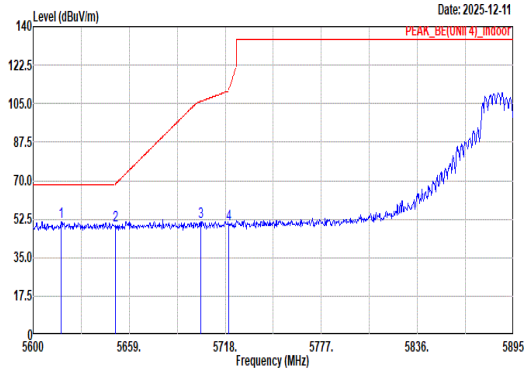 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5617.11 51.28 68.20 -16.92 41.89 33.00 13.20 36.81 0.00 100 15 Peak 2 5650.45 49.68 68.53 -18.85 40.03 33.20 13.25 36.80 0.00 100 15 Peak 3 5702.96 51.26 106.03 -54.77 41.02 33.71 13.33 36.80 0.00 100 15 Peak 4 5720.07 50.33 110.95 -60.62 39.99 33.78 13.35 36.79 0.00 100 15 Peak	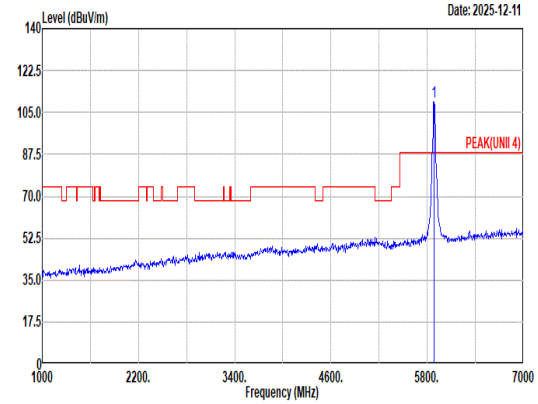 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 109.49 ------ ------ 98.44 34.21 13.61 36.77 0.00 100 15 Peak
Avg	Blank	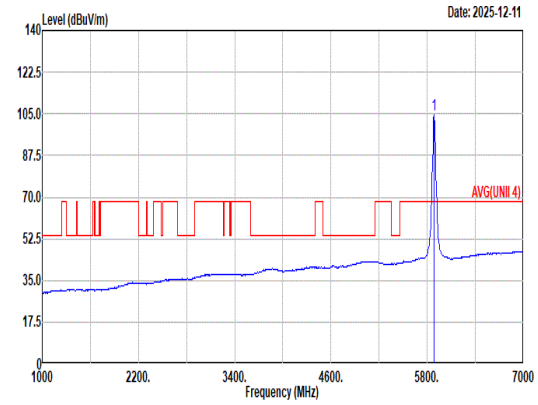 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 104.43 ------ ------ 93.33 34.24 13.63 36.77 0.00 100 15 Average

Mode	93	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	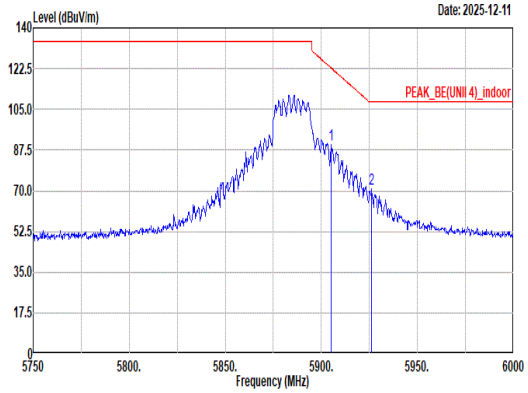 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5905.25 89.68 122.67 -32.99 78.50 34.29 13.66 36.77 0.00 100 15 Peak 2 5926.25 70.92 108.20 -37.28 59.74 34.25 13.70 36.77 0.00 100 15 Peak	Blank
Avg	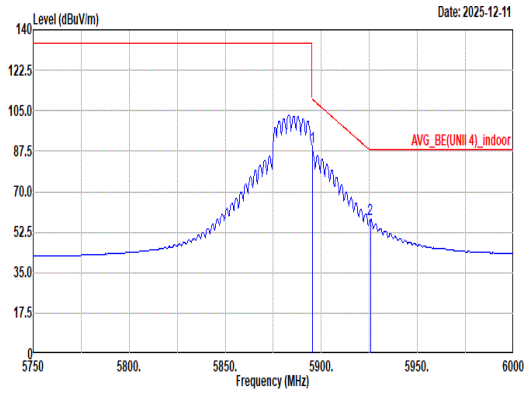 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 89.23 110.02 -20.79 78.07 34.28 13.65 36.77 0.00 100 15 Average 2 5925.50 58.05 88.20 -30.15 46.87 34.25 13.70 36.77 0.00 100 15 Average	Blank

Mode	93
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	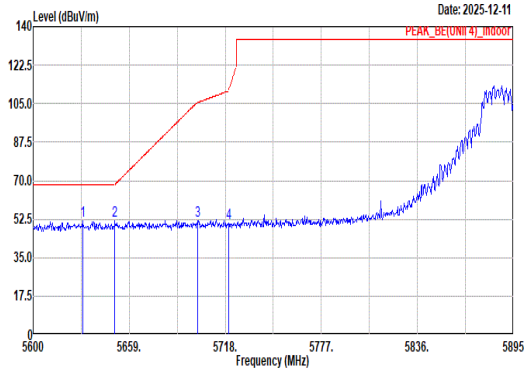 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.39 51.66 68.20 -16.54 42.16 33.08 13.22 36.80 0.00 200 31 Peak 2 5650.15 51.61 68.31 -16.70 41.96 33.20 13.25 36.80 0.00 200 31 Peak 3 5701.19 51.83 105.53 -53.70 41.60 33.70 13.33 36.80 0.00 200 31 Peak 4 5720.07 50.75 110.95 -60.20 40.41 33.78 13.35 36.79 0.00 200 31 Peak	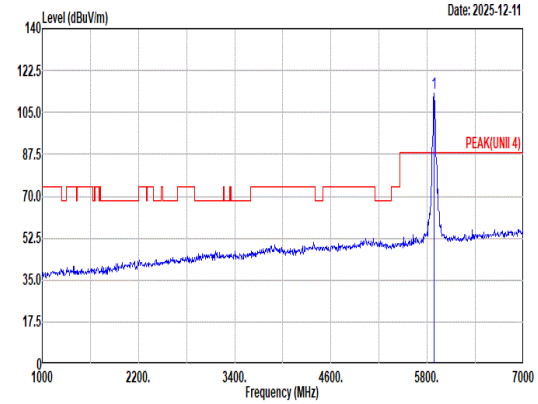 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 112.99 ------ ------ 101.89 34.24 13.63 36.77 0.00 200 31 Peak
Avg	Blank	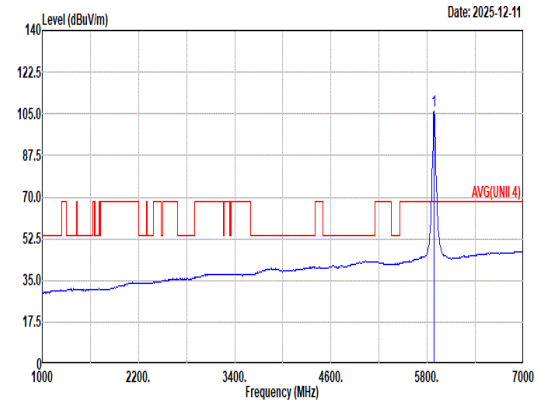 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 106.36 ------ ------ 95.26 34.24 13.63 36.77 0.00 200 31 Average

Mode	93	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	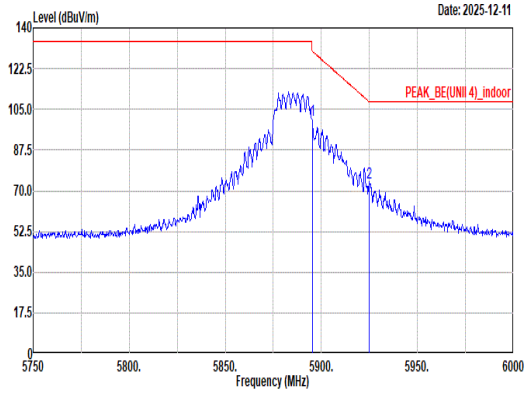 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 100.57 130.02 -29.45 89.41 34.28 13.65 36.77 0.00 200 31 Peak 2 5925.00 73.69 108.20 -34.51 62.51 34.25 13.70 36.77 0.00 200 31 Peak	Blank
Avg	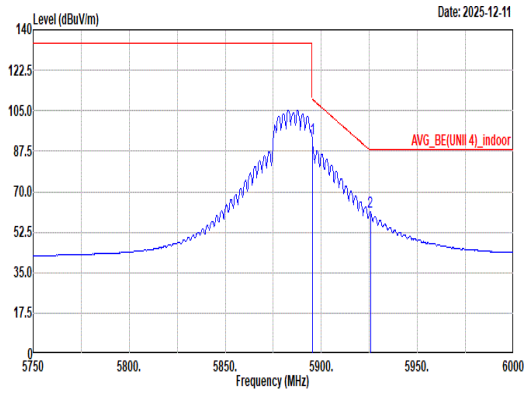 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 92.82 110.02 -17.20 81.66 34.28 13.65 36.77 0.00 200 31 Average 2 5925.50 61.34 88.20 -26.86 50.16 34.25 13.70 36.77 0.00 200 31 Average	Blank

Mode	93	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	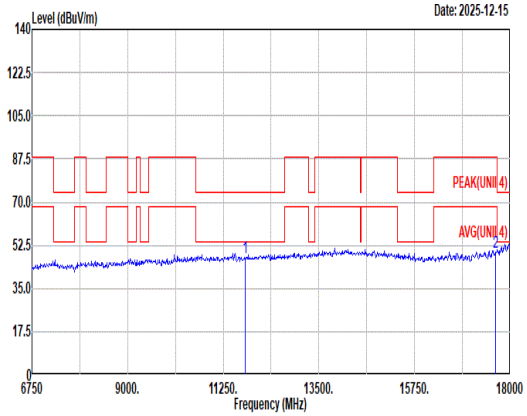 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11770.00 47.67 74.00 -26.33 45.93 38.87 19.59 57.27 0.55 -- -- Peak 2 17655.00 49.79 88.20 -38.41 44.52 39.38 24.17 58.72 0.44 -- -- Peak	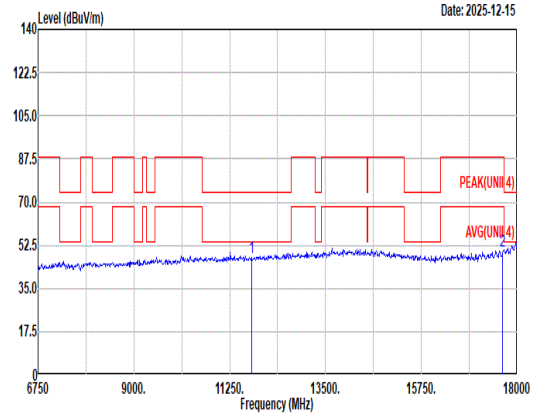 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11770.00 47.54 74.00 -26.46 45.80 38.87 19.59 57.27 0.55 -- -- Peak 2 17655.00 49.97 88.20 -38.23 44.70 39.38 24.17 58.72 0.44 -- -- Peak

Mode	93	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Full RU_5885MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	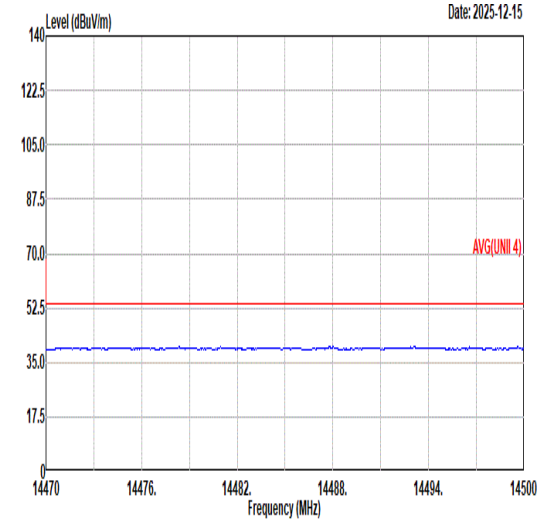 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	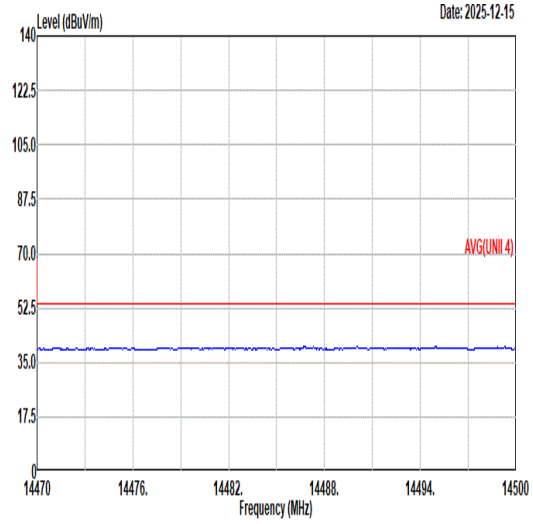 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	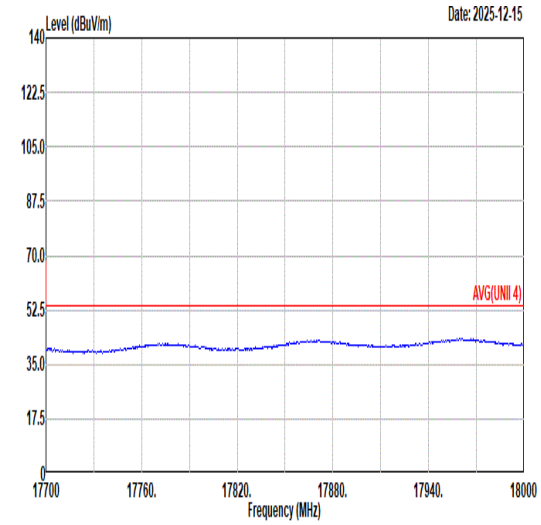 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	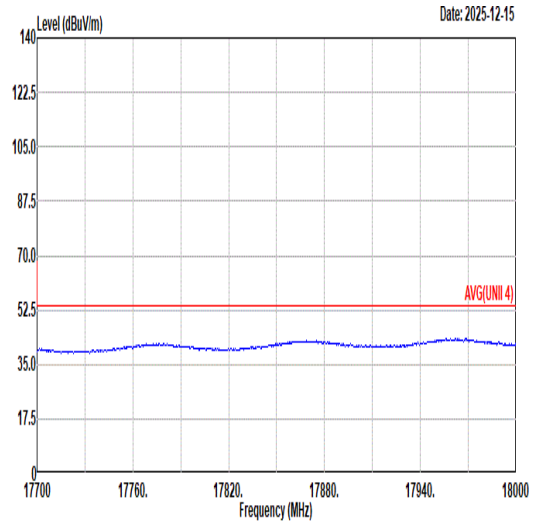 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	94	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	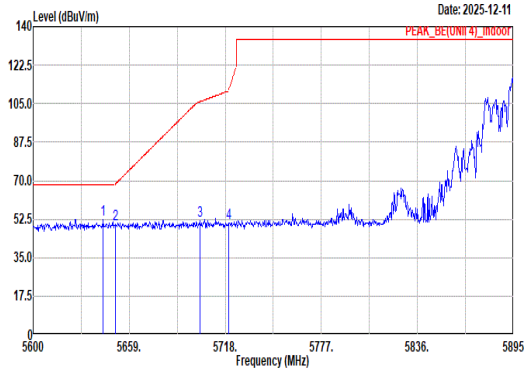 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5643.07 52.32 68.20 -15.88 42.72 33.16 13.24 36.80 0.00 100 19 Peak 2 5650.45 49.94 68.53 -18.59 40.29 33.20 13.25 36.80 0.00 100 19 Peak 3 5702.66 51.71 105.95 -54.24 41.47 33.71 13.33 36.80 0.00 100 19 Peak 4 5720.07 50.77 110.95 -60.18 40.43 33.78 13.35 36.79 0.00 100 19 Peak	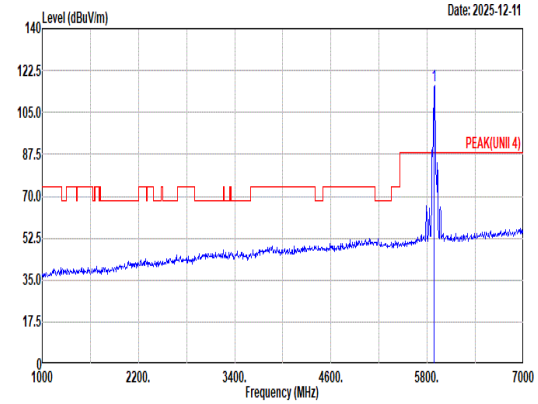 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5885.00 116.14 ------ ------ 104.98 34.28 13.65 36.77 0.00 100 19 Peak
Avg	Blank	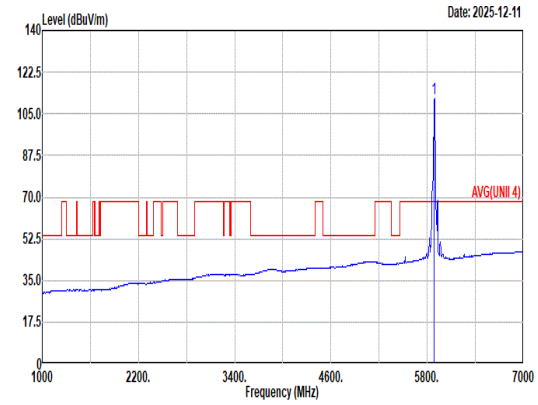 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5885.00 111.34 ------ ------ 100.18 34.28 13.65 36.77 0.00 100 19 Average

Mode	94	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	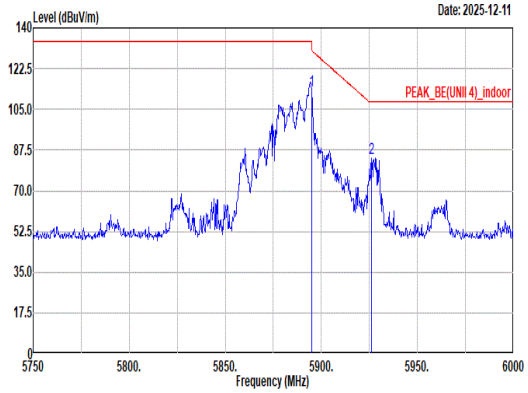 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 112.93 130.20 -17.27 101.77 34.28 13.65 36.77 0.00 100 19 Peak 2 5926.00 84.15 108.20 -24.05 72.97 34.25 13.70 36.77 0.00 100 19 Peak	Blank
Avg	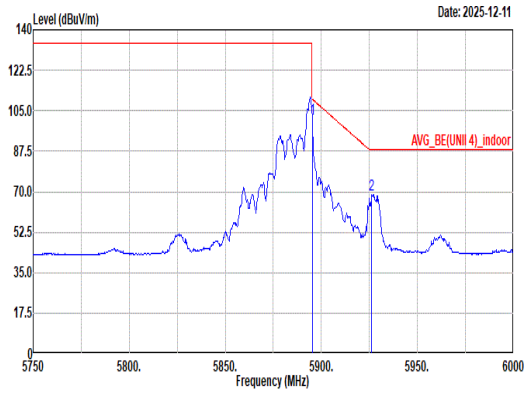 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 101.59 110.02 -8.43 90.43 34.28 13.65 36.77 0.00 100 19 Average 2 5926.25 68.56 88.20 -19.64 57.38 34.25 13.70 36.77 0.00 100 19 Average	Blank

Mode	94	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	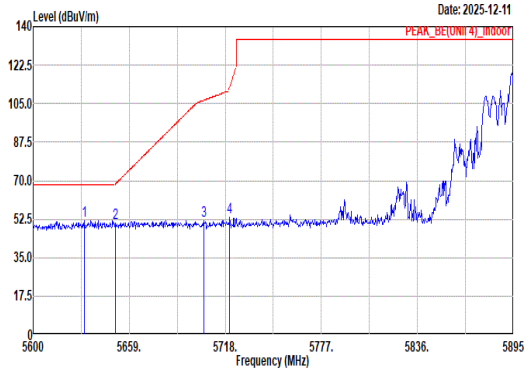 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5631.27 51.68 68.20 -16.52 42.16 33.09 13.23 36.80 0.00 243 31 Peak 2 5650.45 50.58 68.53 -17.95 40.93 33.20 13.25 36.80 0.00 243 31 Peak 3 5705.02 51.99 106.61 -54.62 41.74 33.72 13.33 36.80 0.00 243 31 Peak 4 5720.66 53.21 112.29 -59.08 42.87 33.78 13.35 36.79 0.00 243 31 Peak	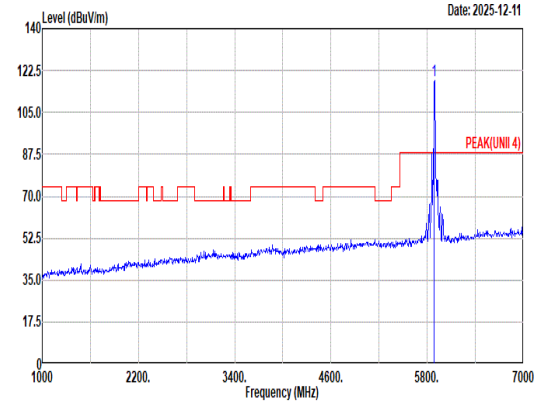 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5885.00 118.53 ------ ------ 107.37 34.28 13.65 36.77 0.00 243 31 Peak
Avg	Blank	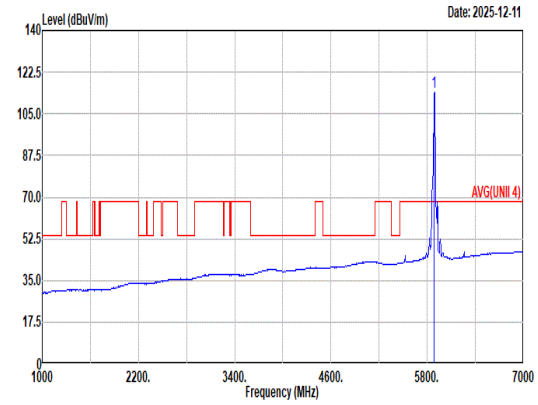 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5885.00 114.36 ------ ------ 103.20 34.28 13.65 36.77 0.00 243 31 Average

Mode	94	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 26/8_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	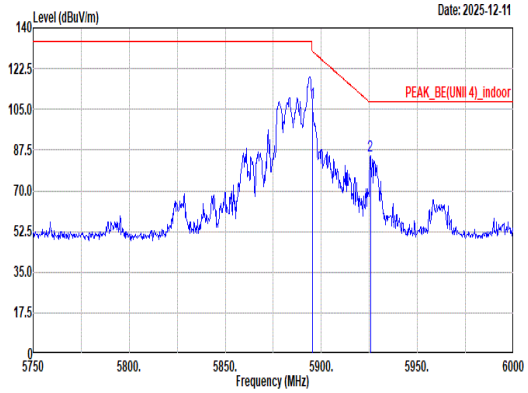 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 107.66 130.02 -22.36 96.50 34.28 13.65 36.77 0.00 243 31 Peak 2 5925.50 84.80 108.20 -23.40 73.62 34.25 13.70 36.77 0.00 243 31 Peak	Blank
Avg	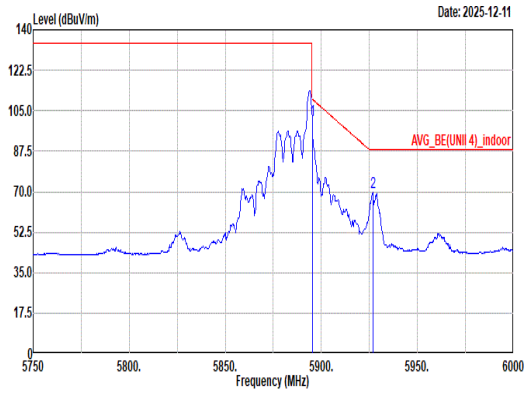 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 101.08 110.02 -8.94 89.92 34.28 13.65 36.77 0.00 243 31 Average 2 5926.75 69.51 88.20 -18.69 58.33 34.25 13.70 36.77 0.00 243 31 Average	Blank

Mode	95
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	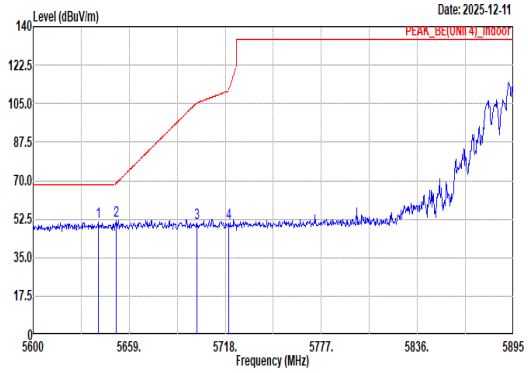 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.83 51.04 68.20 -17.16 41.46 33.14 13.24 36.80 0.00 165 360 Peak 2 5651.04 51.79 68.97 -17.18 42.13 33.21 13.25 36.80 0.00 165 360 Peak 3 5700.60 50.70 105.37 -54.67 40.47 33.70 13.33 36.80 0.00 165 360 Peak 4 5720.07 50.55 110.95 -60.40 40.21 33.78 13.35 36.79 0.00 165 360 Peak	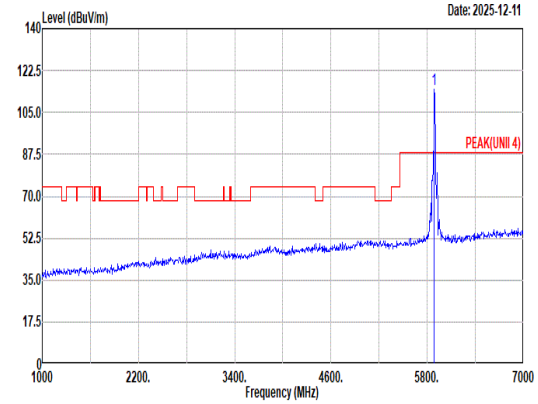 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 114.68 ------ ------ 103.55 34.26 13.64 36.77 0.00 165 360 Peak
Avg	Blank	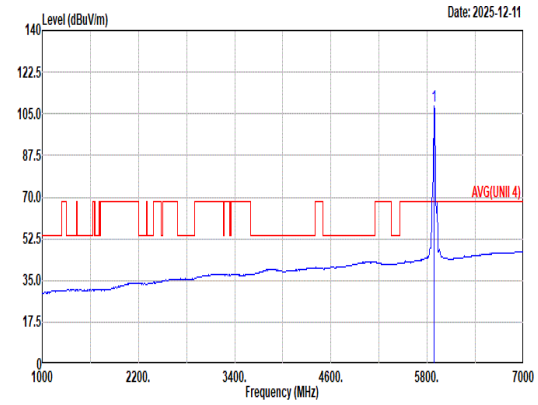 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 108.42 ------ ------ 97.29 34.26 13.64 36.77 0.00 165 360 Average

Mode	95	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	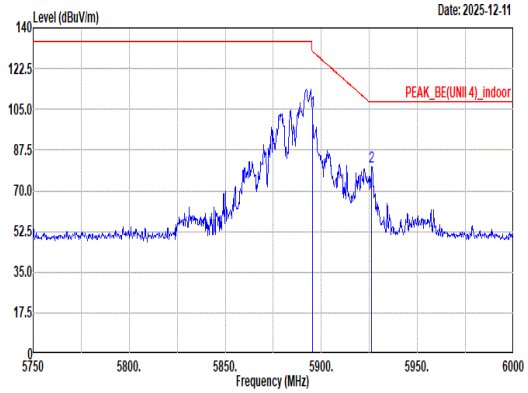 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 104.00 130.02 -26.02 92.84 34.28 13.65 36.77 0.00 165 360 Peak 2 5926.25 80.30 108.20 -27.90 69.12 34.25 13.70 36.77 0.00 165 360 Peak	Blank
Avg	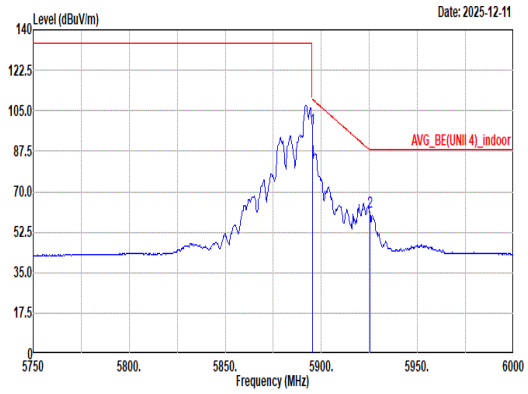 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 97.27 110.02 -12.75 86.11 34.28 13.65 36.77 0.00 165 360 Average 2 5925.25 61.10 88.20 -27.10 49.92 34.25 13.70 36.77 0.00 165 360 Average	Blank

Mode	95	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	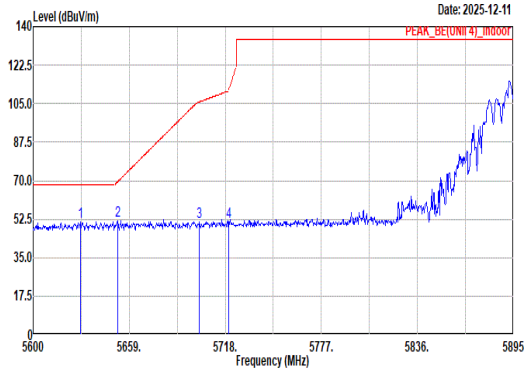 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5628.91 51.47 68.20 -16.73 41.98 33.07 13.22 36.80 0.00 197 29 Peak 2 5651.92 51.53 69.63 -18.10 41.85 33.22 13.26 36.80 0.00 197 29 Peak 3 5702.07 51.32 105.78 -54.46 41.08 33.71 13.33 36.80 0.00 197 29 Peak 4 5720.07 51.22 110.95 -59.73 40.88 33.78 13.35 36.79 0.00 197 29 Peak	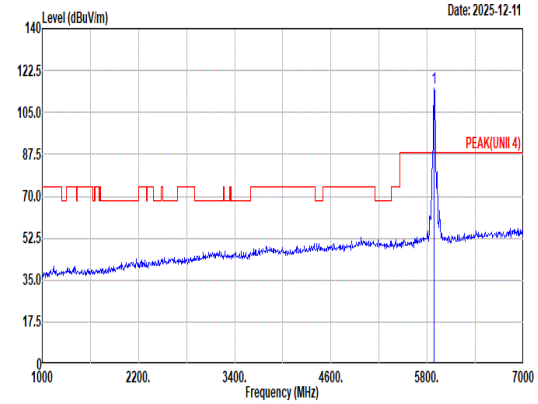 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 115.19 ------ ------ 104.06 34.26 13.64 36.77 0.00 197 29 Peak
Avg	Blank	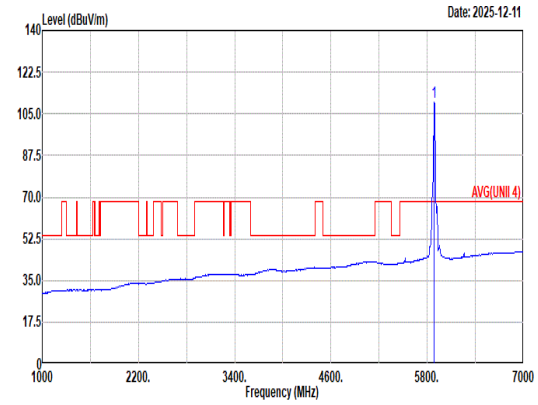 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 109.75 ------ ------ 98.62 34.26 13.64 36.77 0.00 197 29 Average

Mode	95	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 52/40_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	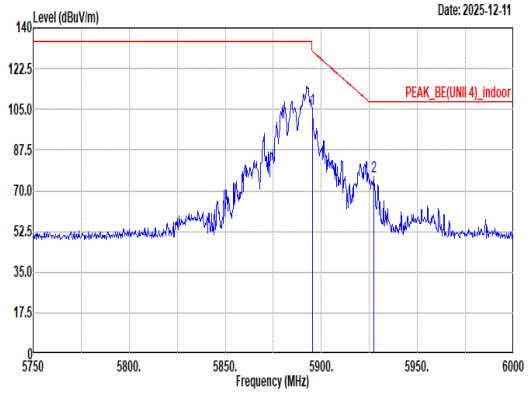 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 104.92 130.02 -25.10 93.76 34.28 13.65 36.77 0.00 197 29 Peak 2 5927.25 75.95 108.20 -32.25 64.76 34.25 13.71 36.77 0.00 197 29 Peak	Blank
Avg	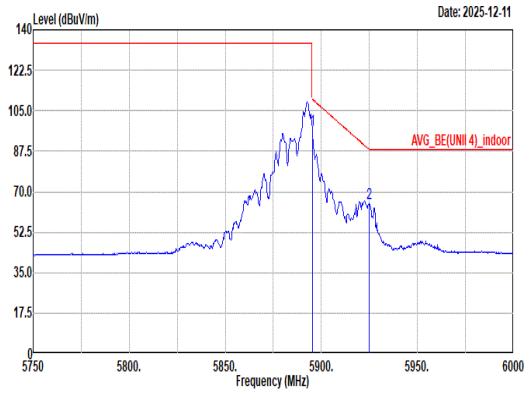 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 96.90 110.02 -13.12 85.74 34.28 13.65 36.77 0.00 197 29 Average 2 5925.00 65.11 88.20 -23.09 53.93 34.25 13.70 36.77 0.00 197 29 Average	Blank

Mode	96
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	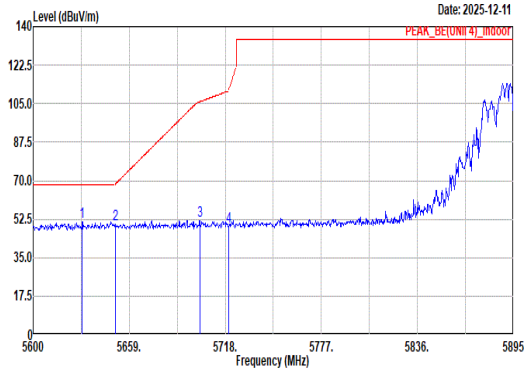 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5630.09 51.38 68.20 -16.82 41.88 33.08 13.22 36.80 0.00 133 360 Peak 2 5650.45 50.42 68.53 -18.11 40.77 33.20 13.25 36.80 0.00 133 360 Peak 3 5702.37 51.76 105.86 -54.10 41.52 33.71 13.33 36.80 0.00 133 360 Peak 4 5720.07 49.04 110.95 -61.91 38.70 33.78 13.35 36.79 0.00 133 360 Peak	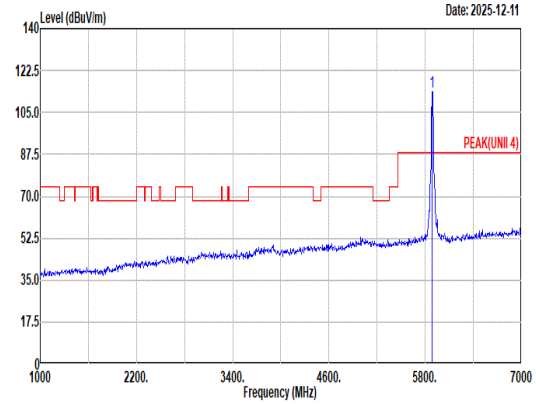 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5885.00 113.83 ------ ------ 102.67 34.28 13.65 36.77 0.00 133 360 Peak
Avg	Blank	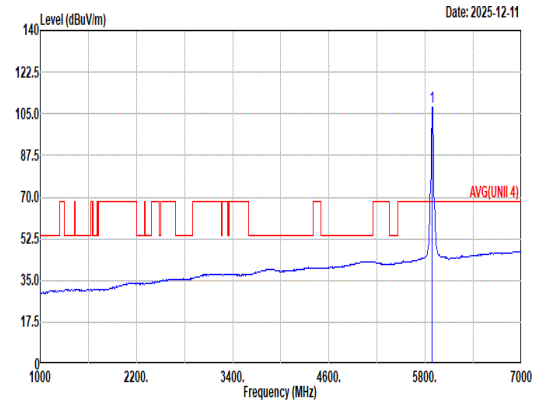 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto 1 5885.00 107.84 ------ ------ 96.71 34.26 13.64 36.77 0.00 133 360 Average

Mode	96	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	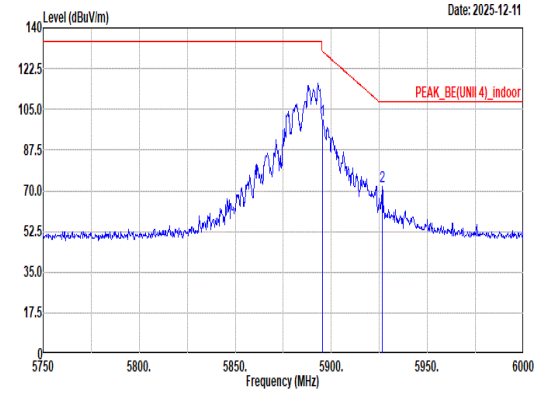 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.50 100.39 129.83 -29.44 89.23 34.28 13.65 36.77 0.00 133 360 Peak 2 5926.50 71.61 108.20 -36.59 60.43 34.25 13.70 36.77 0.00 133 360 Peak	Blank
Avg	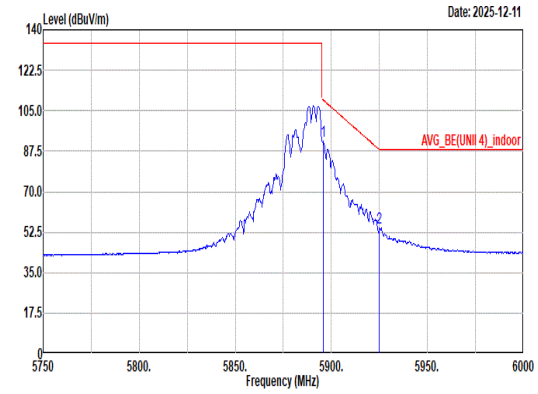 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.75 91.91 109.65 -17.74 80.75 34.28 13.65 36.77 0.00 133 360 Average 2 5925.00 54.64 88.20 -33.56 43.46 34.25 13.70 36.77 0.00 133 360 Average	Blank

Mode	96	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	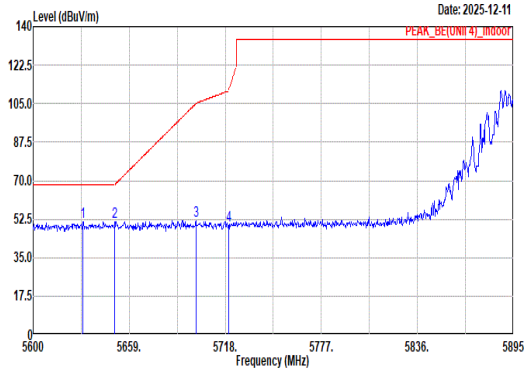 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.68 51.20 68.20 -17.00 41.70 33.08 13.22 36.80 0.00 170 0 Peak 2 5650.15 51.48 68.31 -16.83 41.83 33.20 13.25 36.80 0.00 170 0 Peak 3 5700.01 51.97 105.20 -53.23 41.74 33.70 13.33 36.80 0.00 170 0 Peak 4 5720.07 49.85 110.95 -61.10 39.51 33.78 13.35 36.79 0.00 170 0 Peak	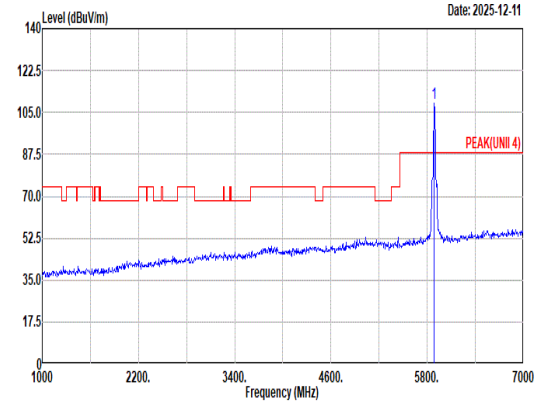 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 108.89 ------ ------ 97.76 34.26 13.64 36.77 0.00 170 0 Peak
Avg	Blank	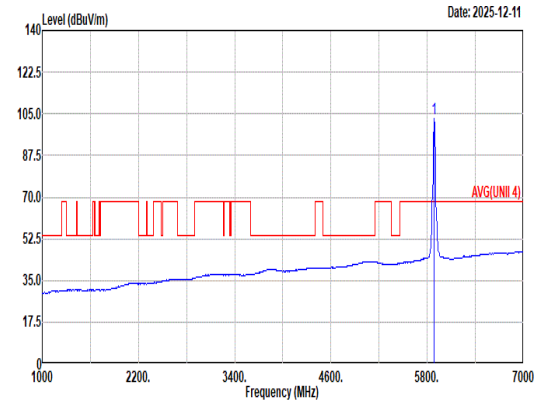 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 103.08 ------ ------ 91.95 34.26 13.64 36.77 0.00 170 0 Average

Mode	96	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT20_CH177_Partial RU 106/54_5885MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	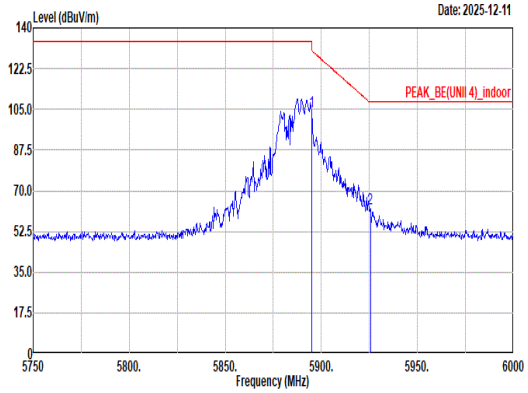 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 104.26 130.20 -25.94 93.10 34.28 13.65 36.77 0.00 170 0 Peak 2 5925.50 62.50 108.20 -45.70 51.32 34.25 13.70 36.77 0.00 170 0 Peak	Blank
Avg	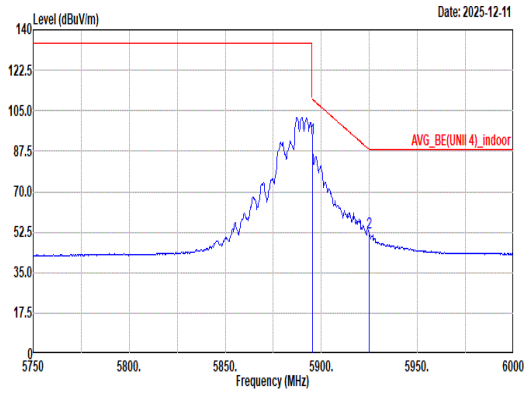 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 93.05 110.02 -16.97 81.89 34.28 13.65 36.77 0.00 170 0 Average 2 5925.00 52.56 88.20 -35.64 41.38 34.25 13.70 36.77 0.00 170 0 Average	Blank

Mode	97
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz
ANT	3+4

Pol.	Horizontal	Fundamental
Peak	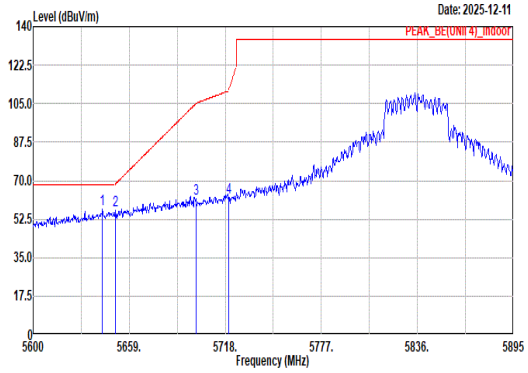 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5642.48 57.01 68.20 -11.19 47.42 33.15 13.24 36.80 0.00 100 18 Peak 2 5650.45 56.27 68.53 -12.26 46.62 33.20 13.25 36.80 0.00 100 18 Peak 3 5700.01 61.59 105.20 -43.61 51.36 33.70 13.33 36.80 0.00 100 18 Peak 4 5720.07 62.44 110.95 -48.51 52.10 33.78 13.35 36.79 0.00 100 18 Peak	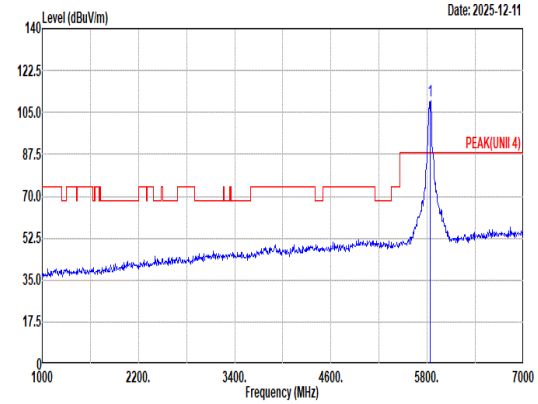 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 109.72 ------ ------ 98.85 34.10 13.55 36.78 0.00 100 18 Peak
Avg	Blank	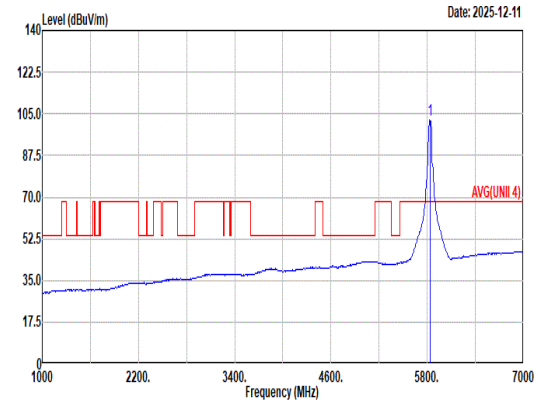 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 102.23 ------ ------ 91.38 34.10 13.53 36.78 0.00 100 18 Average

Mode	97	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	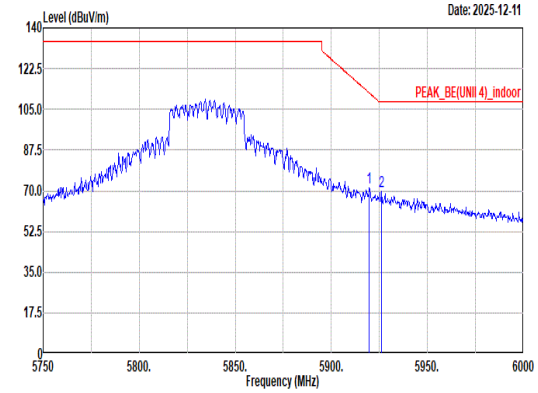 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5919.75 71.13 112.04 -40.91 59.95 34.26 13.69 36.77 0.00 100 18 Peak 2 5926.25 69.99 108.20 -38.21 58.81 34.25 13.70 36.77 0.00 100 18 Peak	Blank
Avg	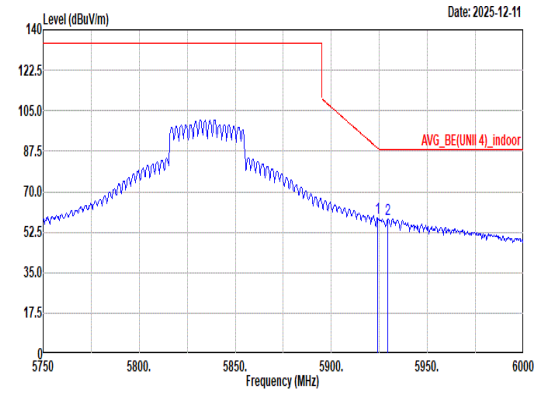 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 58.49 88.75 -30.26 47.31 34.25 13.70 36.77 0.00 100 18 Average 2 5929.50 58.25 88.20 -29.95 47.07 34.24 13.71 36.77 0.00 100 18 Average	Blank

Mode	97
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	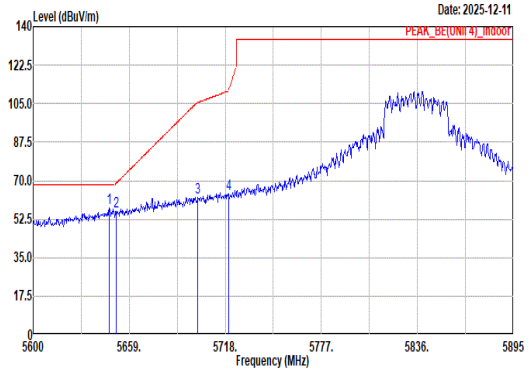 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.91 57.56 68.20 -10.64 47.93 33.18 13.25 36.80 0.00 128 25 Peak 2 5651.04 55.98 68.97 -12.99 46.32 33.21 13.25 36.80 0.00 128 25 Peak 3 5701.19 62.28 105.53 -43.25 52.05 33.70 13.33 36.80 0.00 128 25 Peak 4 5720.07 64.05 110.95 -46.90 53.71 33.78 13.35 36.79 0.00 128 25 Peak	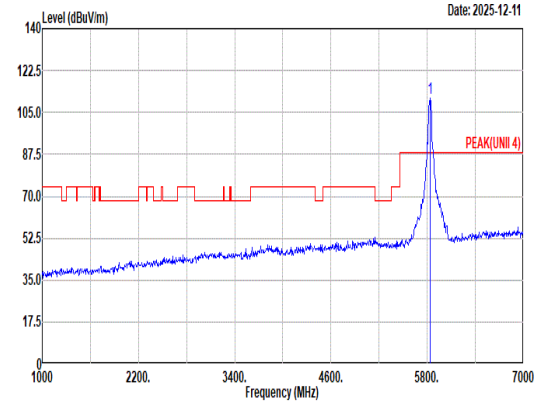 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 111.03 ------ ------ 100.17 34.10 13.54 36.78 0.00 128 25 Peak
Avg	Blank	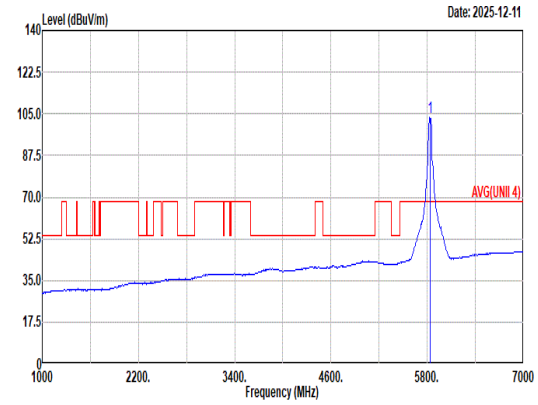 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 103.52 ------ ------ 92.67 34.10 13.53 36.78 0.00 128 25 Average

Mode	97	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	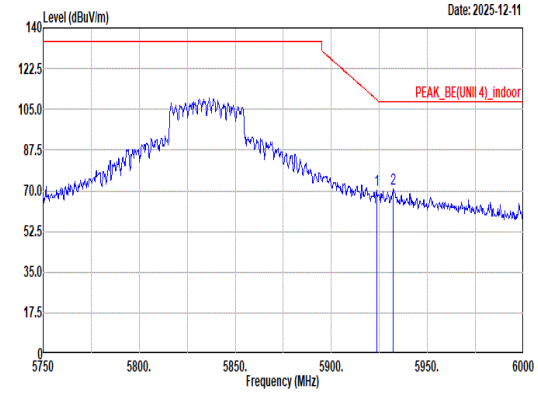 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 70.02 109.30 -39.28 58.84 34.25 13.70 36.77 0.00 128 25 Peak 2 5932.25 70.75 108.20 -37.45 59.57 34.24 13.71 36.77 0.00 128 25 Peak	Blank
Avg	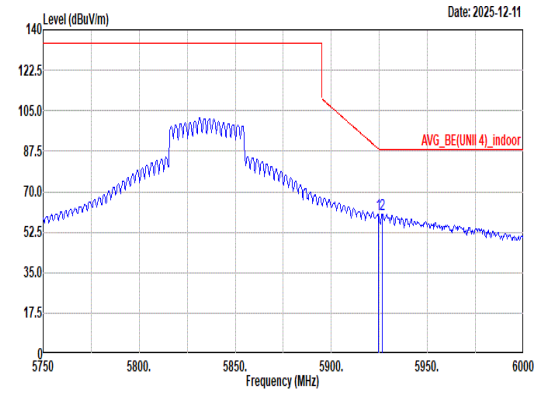 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.50 60.31 88.57 -28.26 49.13 34.25 13.70 36.77 0.00 128 25 Average 2 5926.50 60.36 88.20 -27.84 49.18 34.25 13.70 36.77 0.00 128 25 Average	Blank

Mode	97	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	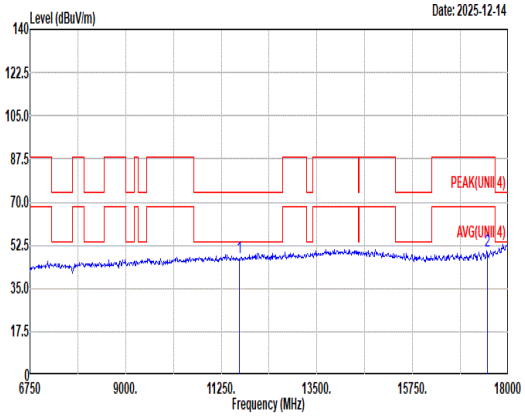 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 47.35 74.00 -26.65 45.89 38.74 19.49 57.33 0.56 -- -- Peak 2 17505.00 50.05 88.20 -38.15 45.94 38.72 24.07 59.12 0.44 -- -- Peak	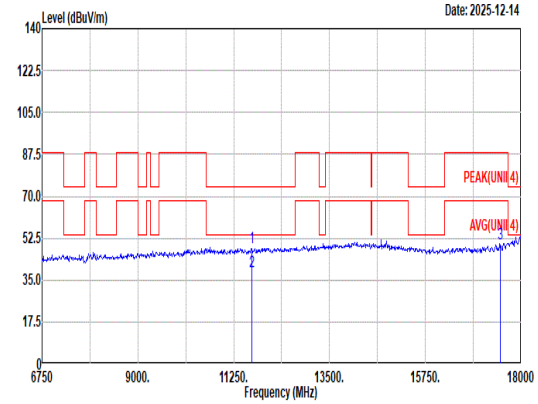 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 48.86 74.00 -25.14 47.40 38.74 19.49 57.33 0.56 -- -- Peak 2 11670.00 38.49 54.00 -15.51 37.03 38.74 19.49 57.33 0.56 -- -- Average 3 17505.00 50.15 88.20 -38.05 46.04 38.72 24.07 59.12 0.44 -- -- Peak

Mode	97	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH167_Full RU_5835MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	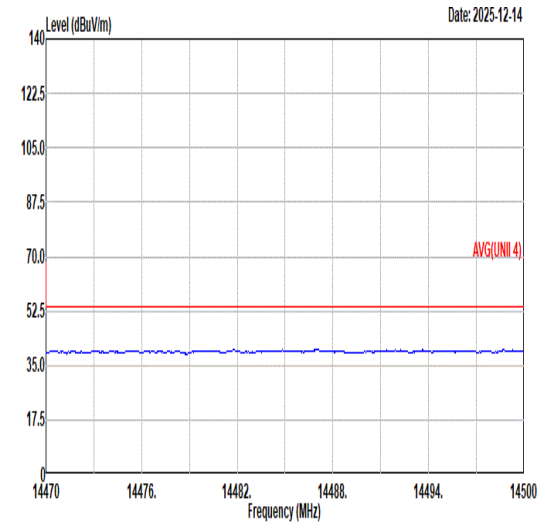 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	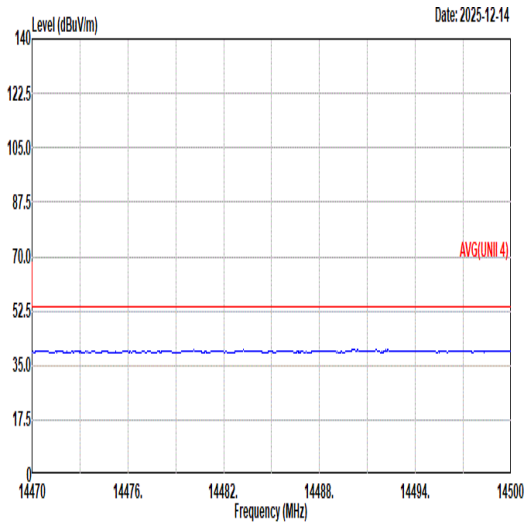 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	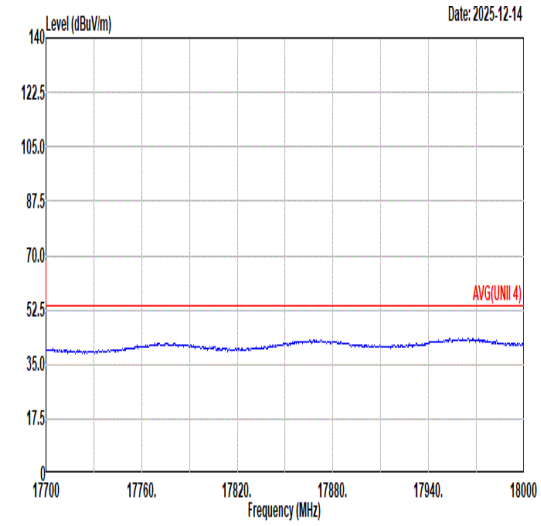 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	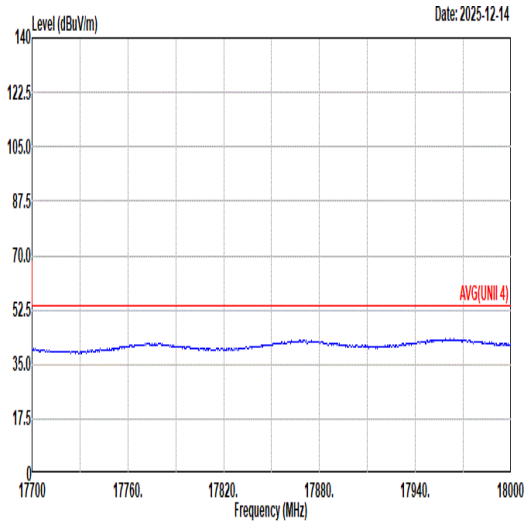 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	98	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	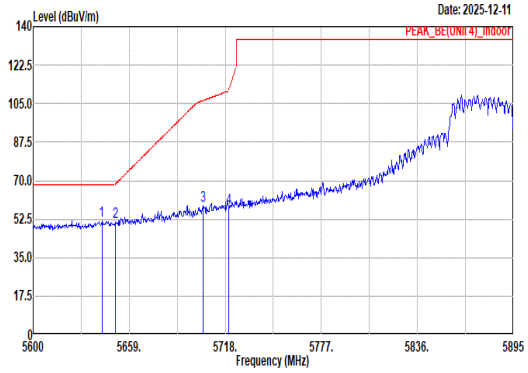 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5642.19 51.83 68.20 -16.37 42.24 33.15 13.24 36.80 0.00 130 352 Peak 2 5650.74 51.18 68.75 -17.57 41.52 33.21 13.25 36.80 0.00 130 352 Peak 3 5704.43 58.80 106.44 -47.64 48.55 33.72 13.33 36.80 0.00 130 352 Peak 4 5720.07 57.32 110.95 -53.63 46.98 33.78 13.35 36.79 0.00 130 352 Peak	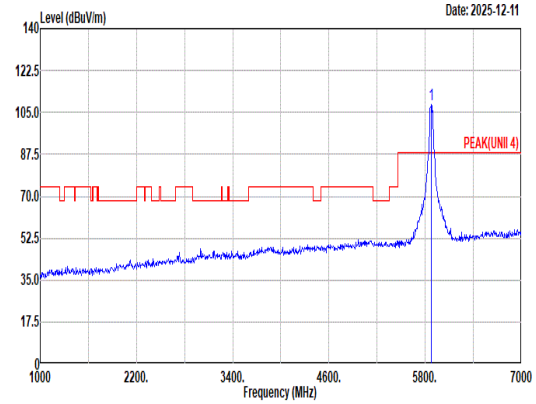 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5875.00 108.12 ------ ------ 97.07 34.21 13.61 36.77 0.00 130 352 Peak
Avg	Blank	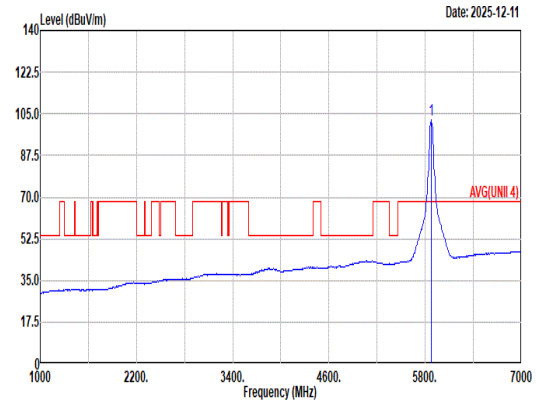 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5875.00 102.36 ------ ------ 91.35 34.19 13.60 36.78 0.00 130 352 Average

Mode	98	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	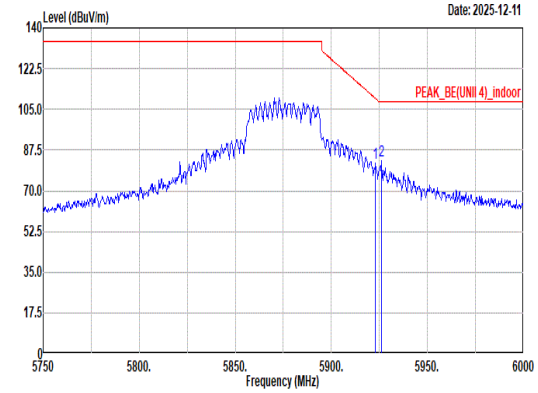 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.00 82.04 109.66 -27.62 70.86 34.25 13.70 36.77 0.00 130 352 Peak 2 5926.00 83.11 108.20 -25.09 71.93 34.25 13.70 36.77 0.00 130 352 Peak	Blank
Avg	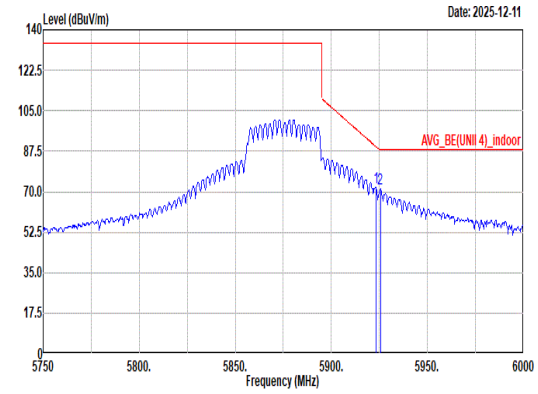 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.25 72.04 89.48 -17.44 60.86 34.25 13.70 36.77 0.00 130 352 Average 2 5925.50 71.09 88.20 -17.11 59.91 34.25 13.70 36.77 0.00 130 352 Average	Blank

Mode	98	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	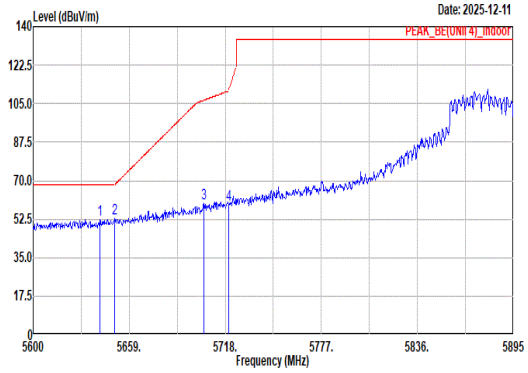 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.01 52.53 68.20 -15.67 42.94 33.15 13.24 36.80 0.00 208 28 Peak 2 5650.15 52.64 68.31 -15.67 42.99 33.20 13.25 36.80 0.00 208 28 Peak 3 5704.73 59.44 106.52 -47.08 49.19 33.72 13.33 36.80 0.00 208 28 Peak 4 5720.07 59.23 110.95 -51.72 48.89 33.78 13.35 36.79 0.00 208 28 Peak	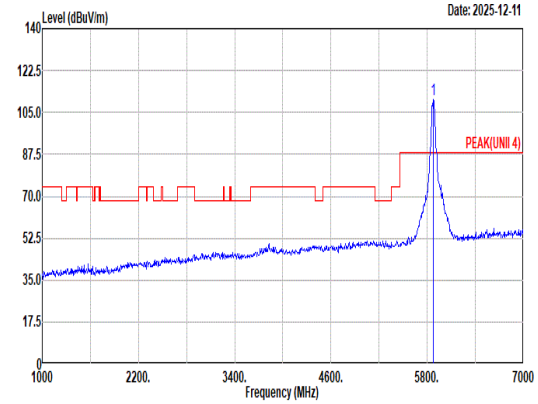 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 110.41 ------ ------ 99.36 34.21 13.61 36.77 0.00 208 28 Peak
Avg	Blank	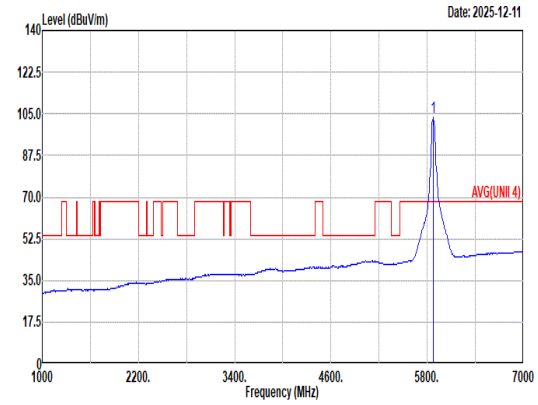 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 103.40 ------ ------ 92.39 34.19 13.60 36.78 0.00 208 28 Average

Mode	98	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	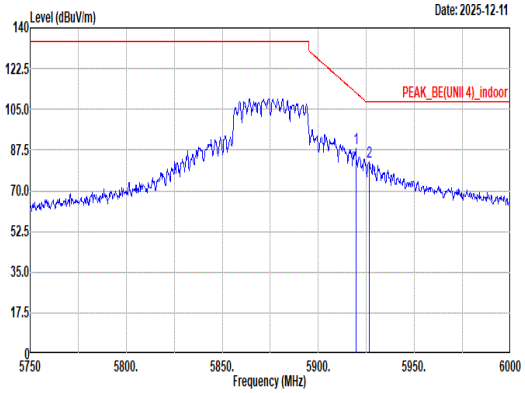 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5919.50 88.49 112.22 -23.73 77.31 34.26 13.69 36.77 0.00 208 28 Peak 2 5926.50 82.27 108.20 -25.93 71.09 34.25 13.70 36.77 0.00 208 28 Peak	Blank
Avg	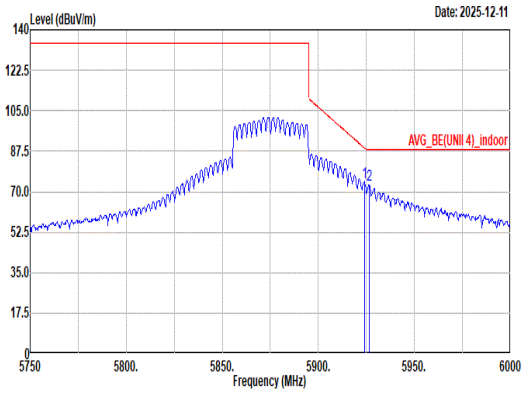 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 74.13 88.75 -14.62 62.95 34.25 13.70 36.77 0.00 208 28 Average 2 5926.50 72.86 88.20 -15.34 61.68 34.25 13.70 36.77 0.00 208 28 Average	Blank

Mode	98	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	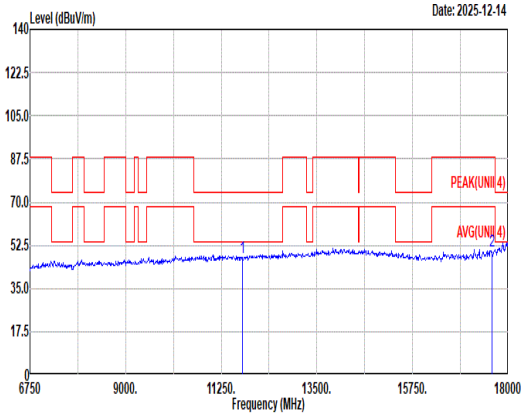 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 47.72 74.00 -26.28 46.03 38.85 19.57 57.28 0.55 -- -- Peak 2 17625.00 50.36 88.20 -37.84 45.35 39.22 24.15 58.80 0.44 -- -- Peak	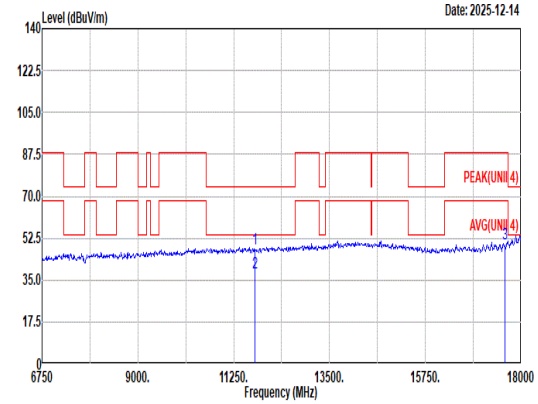 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 48.13 74.00 -25.87 46.44 38.85 19.57 57.28 0.55 -- -- Peak 2 11750.00 38.26 54.00 -15.74 36.57 38.85 19.57 57.28 0.55 -- -- Average 3 17625.00 50.04 88.20 -38.16 45.03 39.22 24.15 58.80 0.44 -- -- Peak

Mode	98	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT40_CH175_Full RU_5875MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	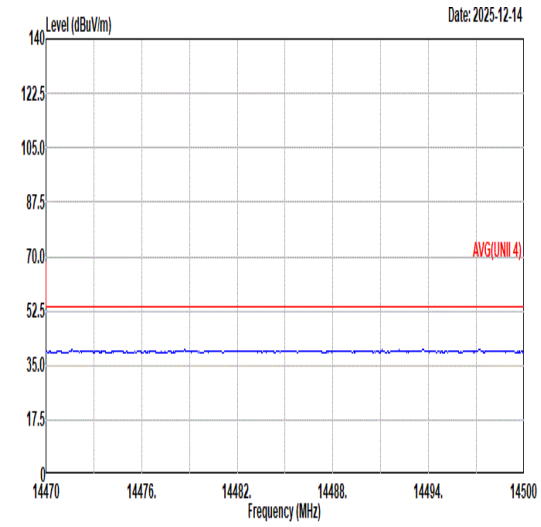 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	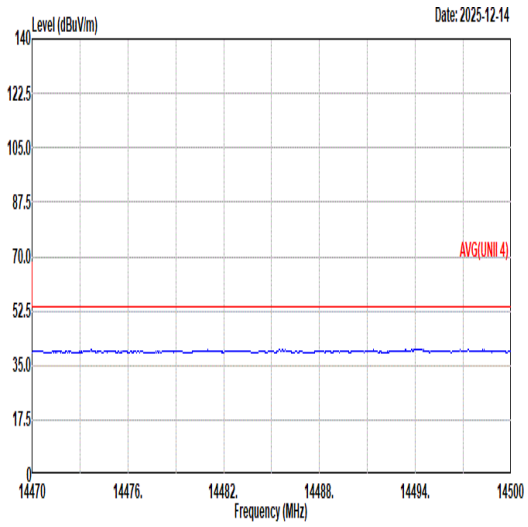 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	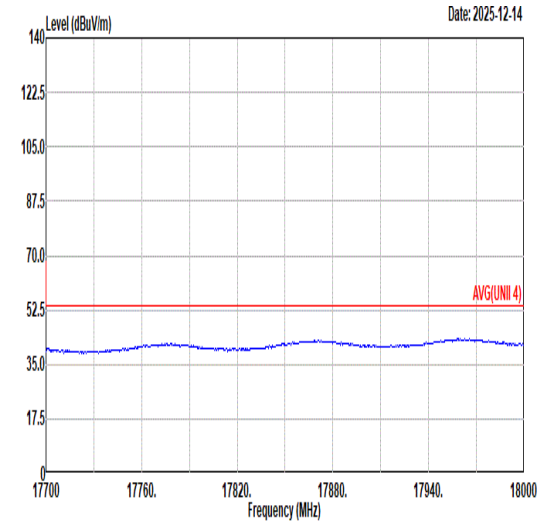 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	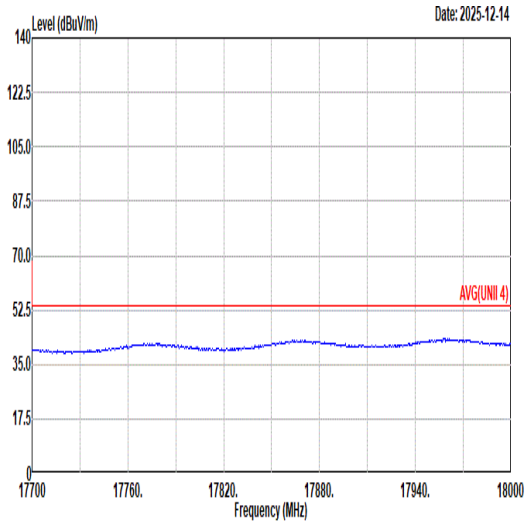 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	99	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	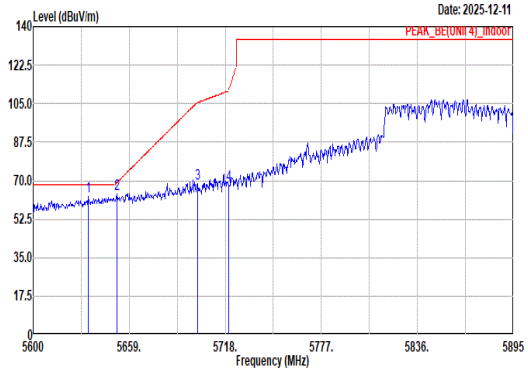 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5633.63 63.03 68.20 -5.17 53.50 33.10 13.23 36.80 0.00 130 18 Peak 2 5651.33 64.04 69.19 -5.15 54.38 33.21 13.25 36.80 0.00 130 18 Peak 3 5700.89 68.42 105.45 -37.03 58.19 33.70 13.33 36.80 0.00 130 18 Peak 4 5720.07 68.37 110.95 -42.58 58.03 33.78 13.35 36.79 0.00 130 18 Peak	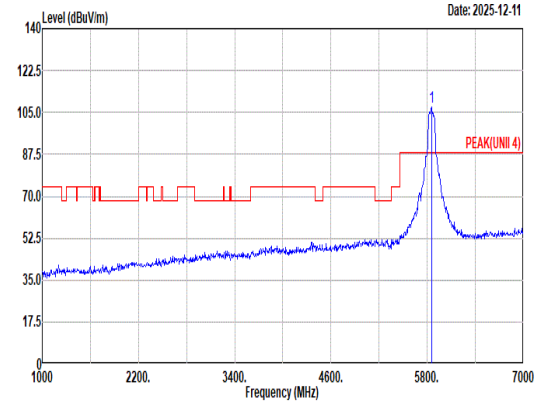 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 107.33 ------ ------ 96.42 34.12 13.57 36.78 0.00 130 18 Peak
Avg	Blank	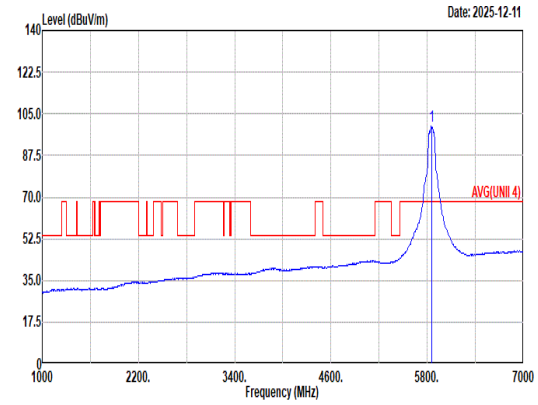 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 99.71 ------ ------ 88.84 34.10 13.55 36.78 0.00 130 18 Average

Mode	99	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	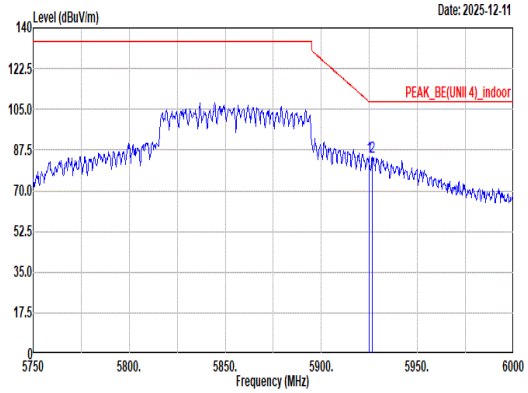 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.75 84.47 108.38 -23.91 73.29 34.25 13.70 36.77 0.00 130 18 Peak 2 5926.50 84.38 108.20 -23.82 73.20 34.25 13.70 36.77 0.00 130 18 Peak	Blank
Avg	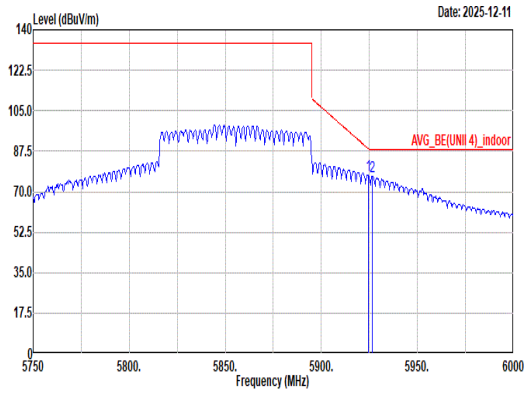 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.50 77.27 88.57 -11.30 66.09 34.25 13.70 36.77 0.00 130 18 Average 2 5926.50 76.61 88.20 -11.59 65.43 34.25 13.70 36.77 0.00 130 18 Average	Blank

Mode	99
	Band Edge - L
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz
ANT	3+4

Pol.	Vertical	Fundamental
Peak	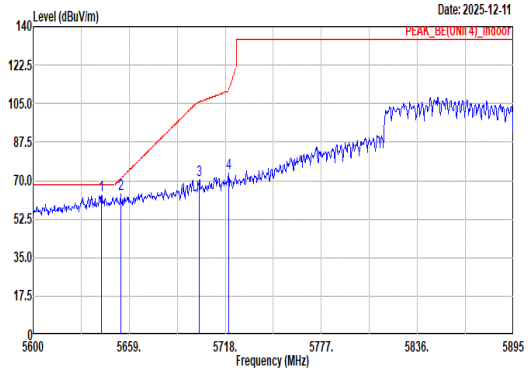 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5641.89 63.45 68.20 -4.75 53.86 33.15 13.24 36.80 0.00 200 26 Peak 2 5653.69 64.11 70.94 -6.83 54.41 33.24 13.26 36.80 0.00 200 26 Peak 3 5702.07 70.24 105.78 -35.54 60.00 33.71 13.33 36.80 0.00 200 26 Peak 4 5720.07 73.67 110.95 -37.28 63.33 33.78 13.35 36.79 0.00 200 26 Peak	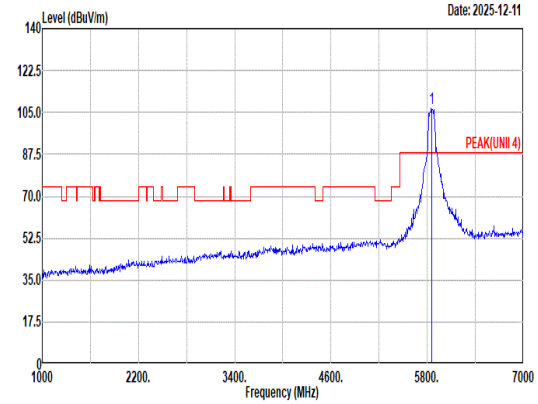 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 106.92 ------ ------ 96.04 34.10 13.56 36.78 0.00 200 26 Peak
Avg	Blank	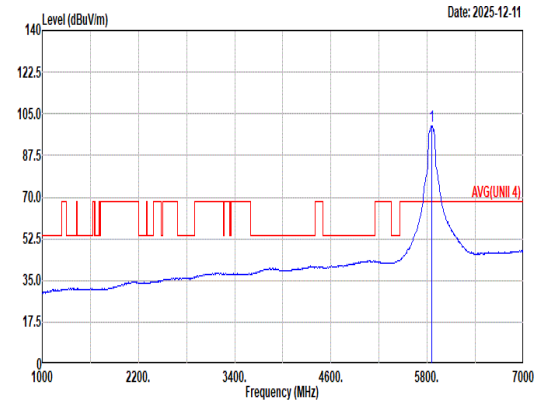 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 100.03 ------ ------ 89.06 34.16 13.59 36.78 0.00 200 26 Average

Mode	99	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	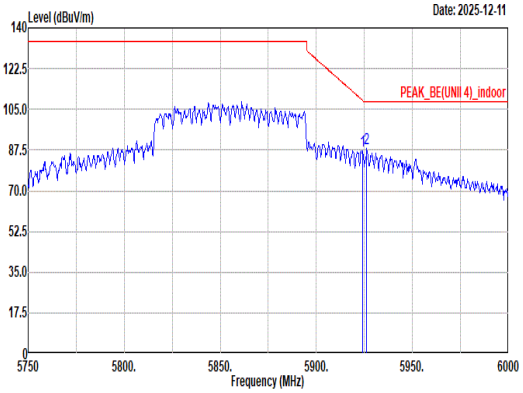 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 87.37 108.75 -21.38 76.19 34.25 13.70 36.77 0.00 200 26 Peak 2 5926.25 88.36 108.20 -19.84 77.18 34.25 13.70 36.77 0.00 200 26 Peak	Blank
Avg	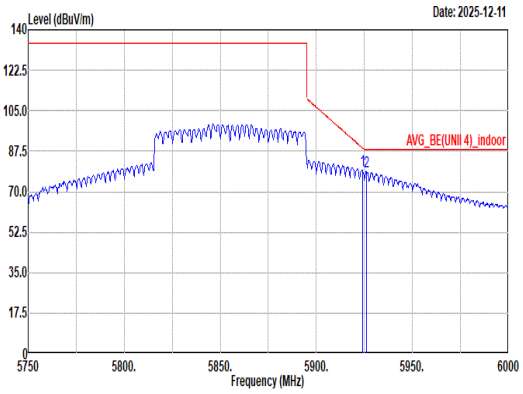 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 78.99 88.93 -9.94 67.81 34.25 13.70 36.77 0.00 200 26 Average 2 5926.25 78.79 88.20 -9.41 67.61 34.25 13.70 36.77 0.00 200 26 Average	Blank

Mode	99	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	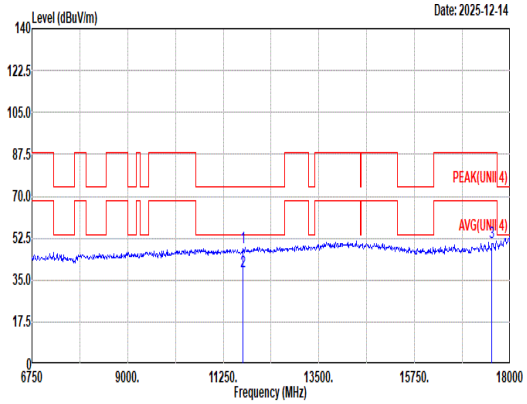 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.51 74.00 -25.49 46.93 38.81 19.53 57.31 0.55 -- -- Peak 2 11710.00 38.34 54.00 -15.66 36.76 38.81 19.53 57.31 0.55 -- -- Average 3 17565.00 50.56 88.20 -37.64 46.01 38.96 24.11 58.96 0.44 -- -- Peak	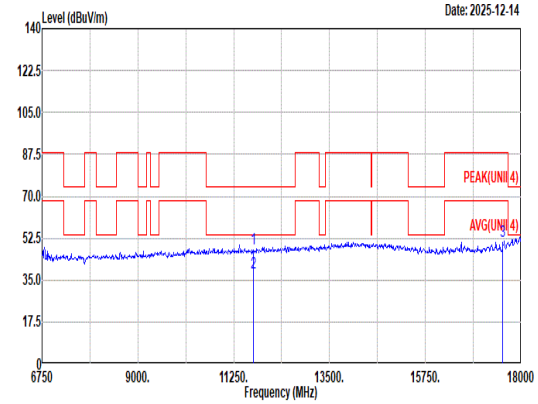 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 48.00 74.00 -26.00 46.42 38.81 19.53 57.31 0.55 -- -- Peak 2 11710.00 37.85 54.00 -16.15 36.27 38.81 19.53 57.31 0.55 -- -- Average 3 17565.00 51.15 88.20 -37.05 46.60 38.96 24.11 58.96 0.44 -- -- Peak

Mode	99	
	Harmonic	
	U-NII-4_5.85-5.895_802.11be EHT80_CH171_Full RU_5855MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	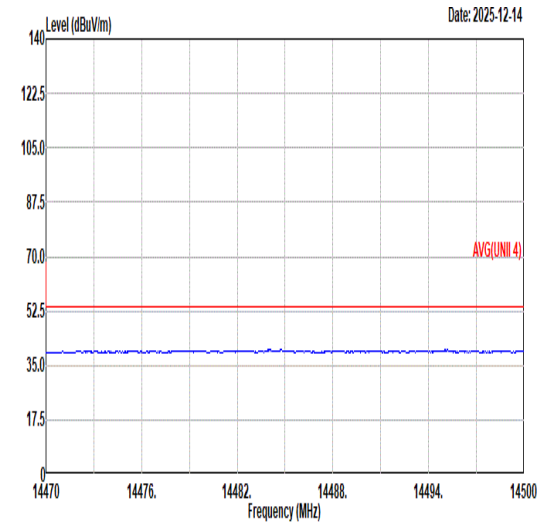 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	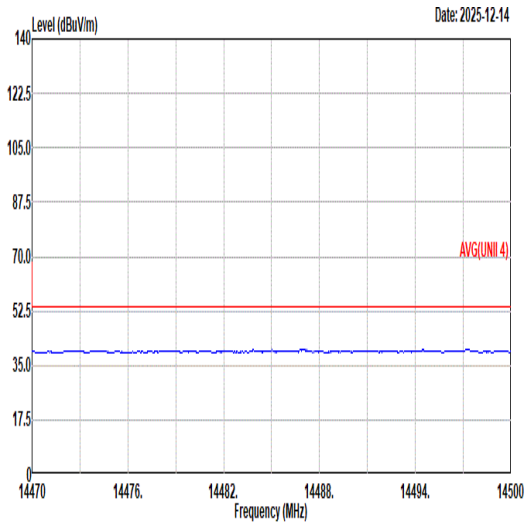 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL
17.7G ~18G Avg	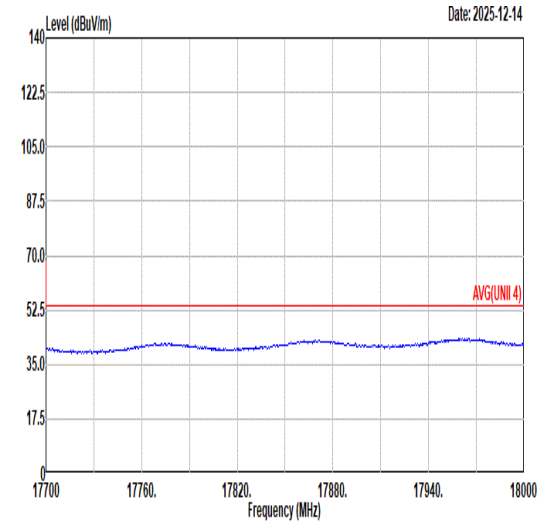 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL	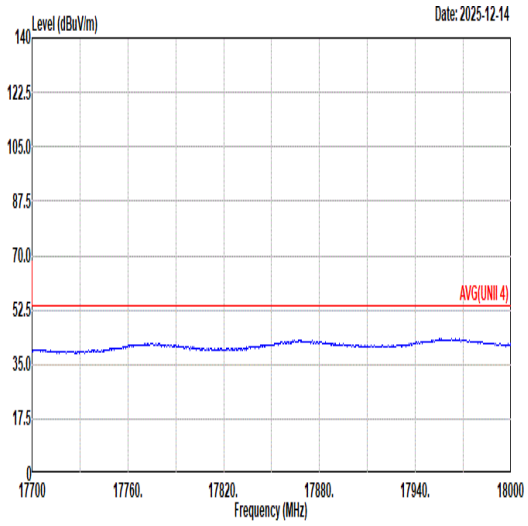 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL

Mode	100	
	Band Edge - L	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	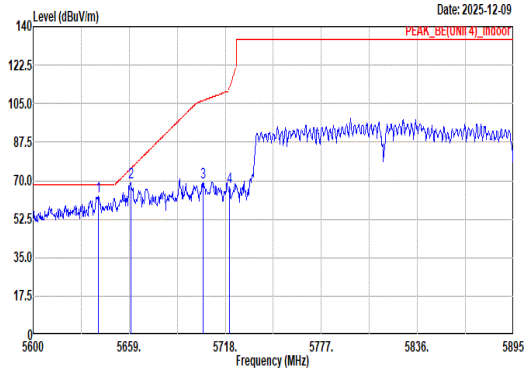 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5639.83 62.94 68.20 -5.26 53.36 33.14 13.24 36.80 0.00 100 18 Peak 2 5659.89 69.30 75.54 -6.24 59.53 33.30 13.27 36.80 0.00 100 18 Peak 3 5704.43 69.02 106.44 -37.42 58.77 33.72 13.33 36.80 0.00 100 18 Peak 4 5720.66 67.08 112.29 -45.21 56.74 33.78 13.35 36.79 0.00 100 18 Peak	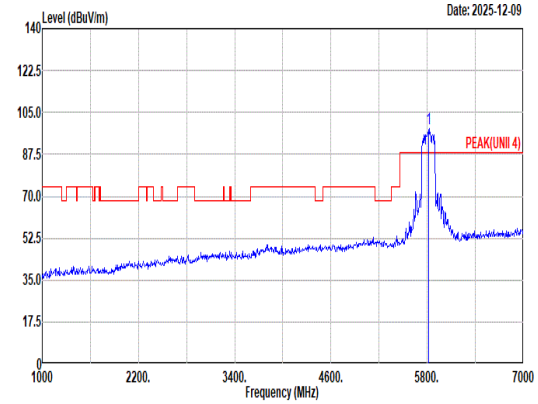 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 98.24 ------ ------ 87.41 34.10 13.51 36.78 0.00 100 18 Peak
Avg	Blank	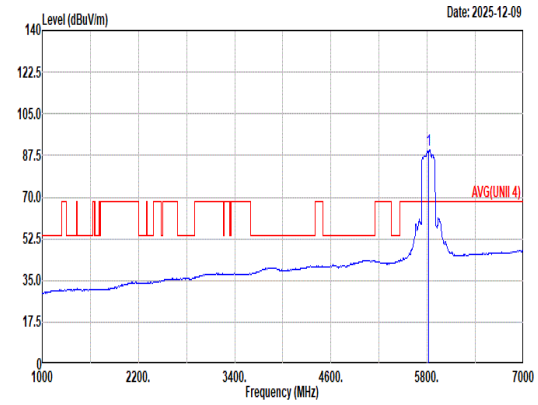 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 89.65 ------ ------ 78.79 34.10 13.54 36.78 0.00 100 18 Average

Mode	100	
	Band Edge - R	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Fundamental
Peak	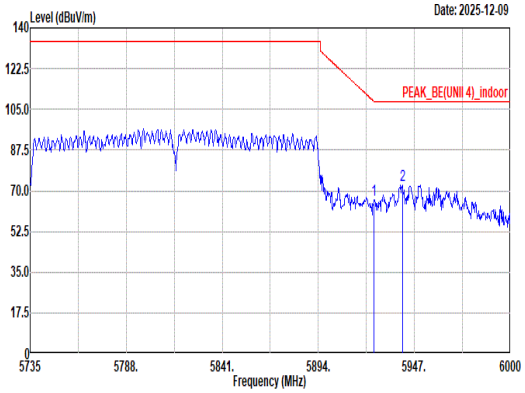 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.74 65.84 108.39 -42.55 54.66 34.25 13.70 36.77 0.00 100 18 Peak 2 5940.38 72.64 108.20 -35.56 61.46 34.22 13.73 36.77 0.00 100 18 Peak	Blank
Avg	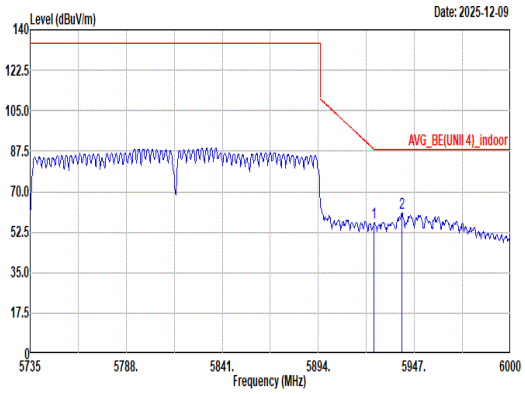 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.74 56.29 88.39 -32.10 45.11 34.25 13.70 36.77 0.00 100 18 Average 2 5940.11 60.68 88.20 -27.52 49.50 34.22 13.73 36.77 0.00 100 18 Average	Blank

Mode	100	
	Band Edge - L	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	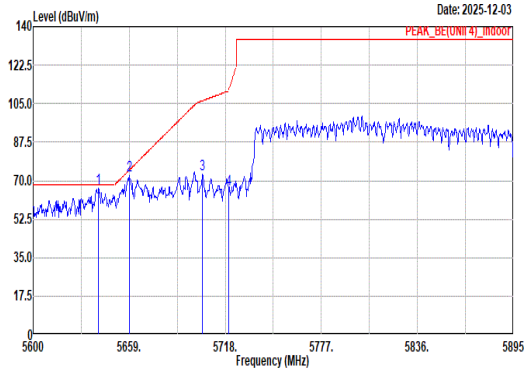 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5640.12 66.63 68.20 -1.57 57.05 33.14 13.24 36.80 0.00 300 351 Peak 2 5659.00 72.62 74.88 -2.26 62.86 33.29 13.27 36.80 0.00 300 351 Peak 3 5703.84 72.65 106.28 -33.63 62.40 33.72 13.33 36.80 0.00 300 351 Peak 4 5720.07 66.18 110.95 -44.77 55.84 33.78 13.35 36.79 0.00 300 351 Peak	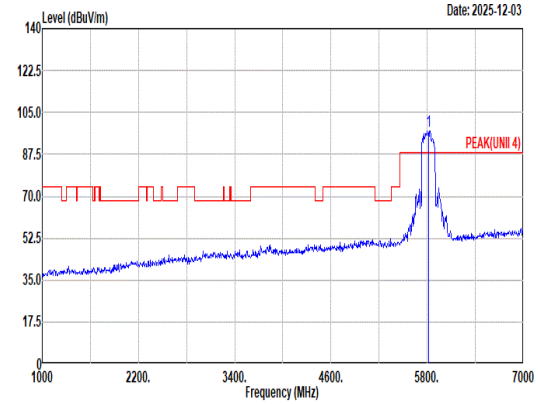 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 97.45 ------ ------ 86.66 34.10 13.47 36.78 0.00 300 351 Peak
Avg	Blank	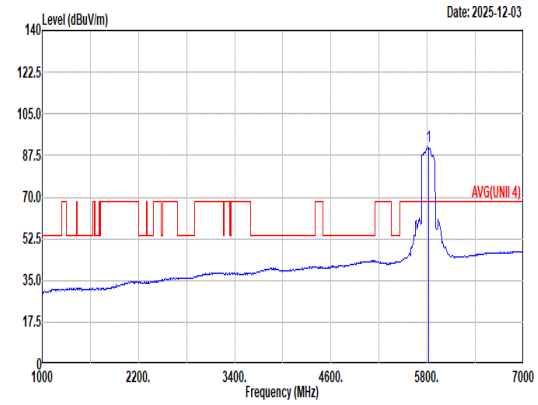 Site : 03CH15-HY Condition: AVG(UNII 4) 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5815.00 91.24 ------ ------ 80.48 34.08 13.46 36.78 0.00 300 351 Average

Mode	100	
	Band Edge - R	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Vertical	Fundamental
Peak	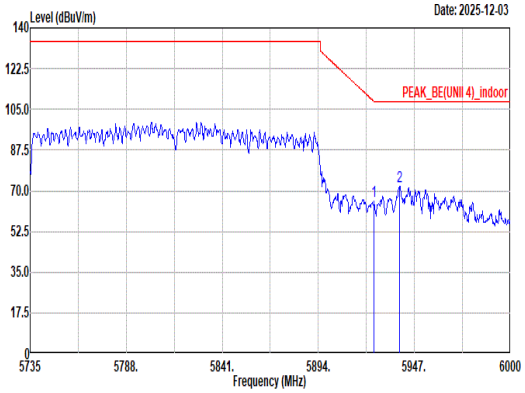 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.74 65.41 108.39 -42.98 54.23 34.25 13.70 36.77 0.00 300 351 Peak 2 5938.79 72.10 108.20 -36.10 60.92 34.22 13.73 36.77 0.00 300 351 Peak	Blank
Avg	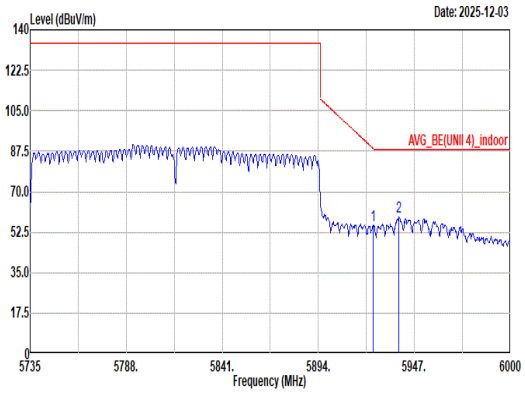 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m 9120D-02294_250606 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.21 55.53 88.78 -33.25 44.35 34.25 13.70 36.77 0.00 300 351 Average 2 5938.52 58.94 88.20 -29.26 47.76 34.22 13.73 36.77 0.00 300 351 Average	Blank

Mode	100	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak Avg	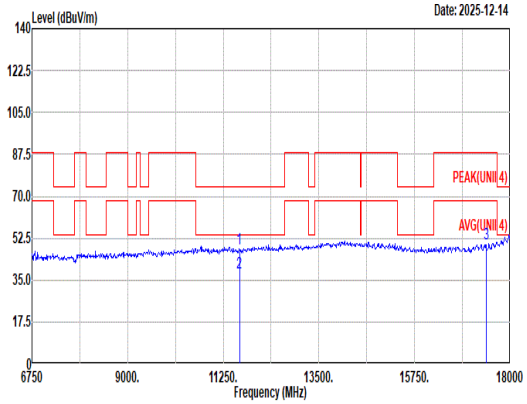 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 48.16 74.00 -25.84 46.83 38.66 19.46 57.35 0.56 -- -- Peak 2 11630.00 38.09 54.00 -15.91 36.76 38.66 19.46 57.35 0.56 -- -- Average 3 17445.00 50.04 88.20 -38.16 45.96 38.76 24.03 59.15 0.44 -- -- Peak	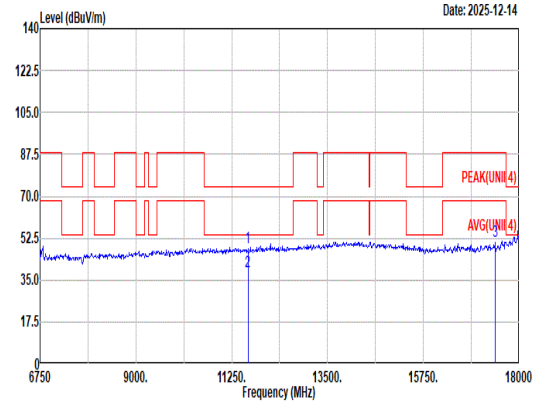 Site : 03CH15-HY Condition: PEAK(UNII 4) 3m 9120D-02294_250606 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11630.00 48.84 74.00 -25.16 47.51 38.66 19.46 57.35 0.56 -- -- Peak 2 11630.00 38.52 54.00 -15.48 37.19 38.66 19.46 57.35 0.56 -- -- Average 3 17445.00 51.09 88.20 -37.11 47.01 38.76 24.03 59.15 0.44 -- -- Peak

Mode	100	
	Harmonic	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	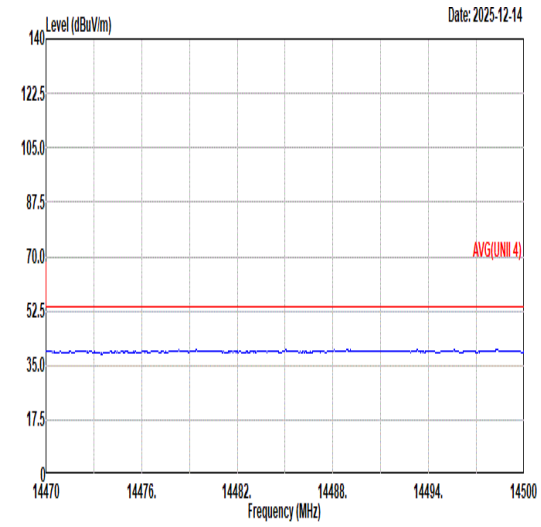	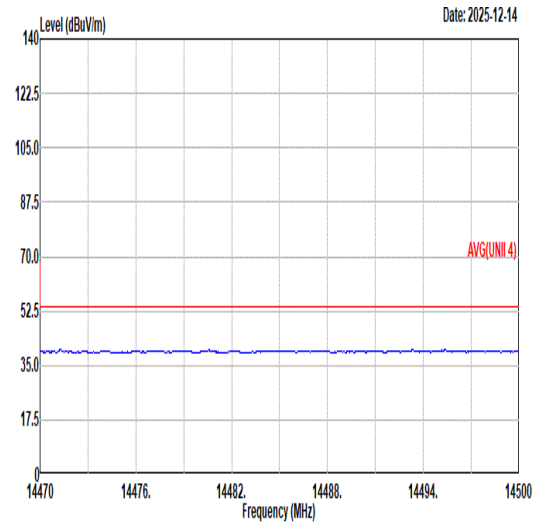
17.7G ~18G Avg	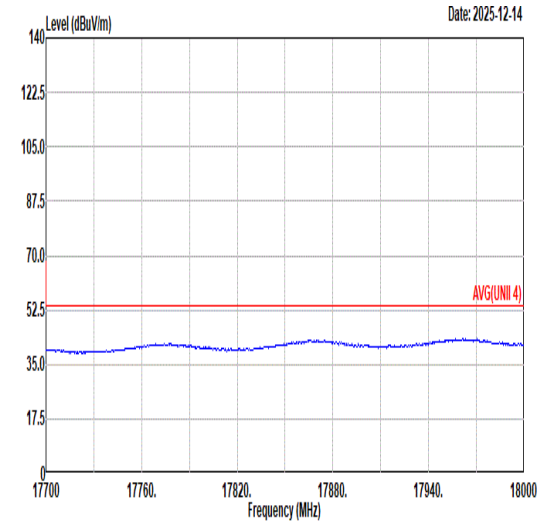	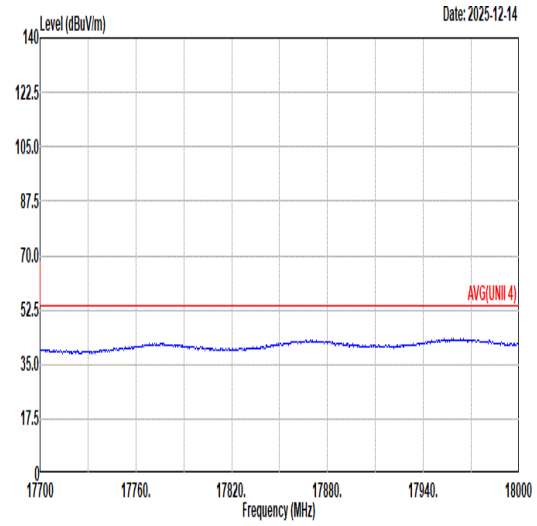

Mode	110	
	LF	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
QP/ Peak	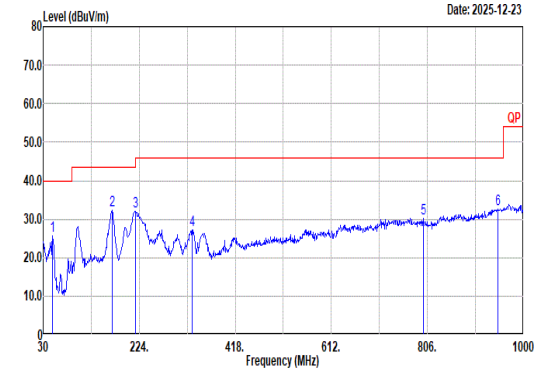	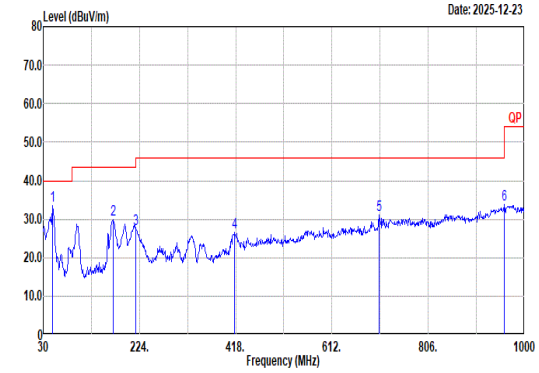

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	48.43	25.68	40.00	-14.32	41.61	15.22	1.20	32.46	0.11	--	--	Peak
2	169.68	32.38	43.50	-11.12	46.42	15.81	2.30	32.38	0.23	--	--	Peak
3	216.24	31.98	46.00	-14.02	46.63	15.02	2.58	32.34	0.09	--	--	Peak
4	330.70	27.13	46.00	-18.87	36.25	19.81	3.18	32.28	0.17	--	--	Peak
5	797.27	30.05	46.00	-15.95	28.82	28.13	4.92	32.05	0.23	--	--	Peak
6	948.59	32.62	46.00	-13.38	27.13	30.82	5.38	31.06	0.35	--	--	Peak

Site : 03CH15-HY
Condition: QP 3m Bilog_41912 & 05_250301 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	49.40	33.43	40.00	-6.57	49.79	14.77	1.21	32.46	0.12	--	--	Peak
2	170.65	29.95	43.50	-13.55	44.07	15.73	2.31	32.39	0.23	--	--	Peak
3	217.21	27.61	46.00	-18.39	42.19	15.09	2.58	32.34	0.09	--	--	Peak
4	416.06	26.44	46.00	-19.56	32.83	22.26	3.57	32.34	0.12	--	--	Peak
5	707.06	31.01	46.00	-14.99	31.67	26.82	4.66	32.29	0.15	--	--	Peak
6	959.26	33.86	46.00	-12.14	27.98	31.08	5.41	30.96	0.35	--	--	Peak

Mode	111	
	SHF	
	U-NII-4_5.725-5.85_802.11be EHT160_CH163_Full RU_5815MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
Peak	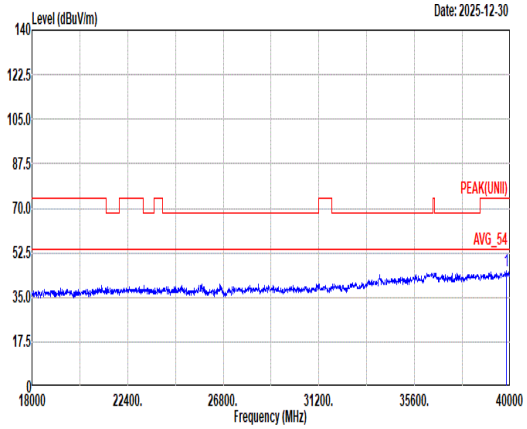 Site : 03CH15-HY Condition: PEAK(UNII) 1m SHF_994_250109 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 39835.00 45.27 74.00 -28.73 58.51 43.93 8.40 56.03 -9.54 -- -- Peak	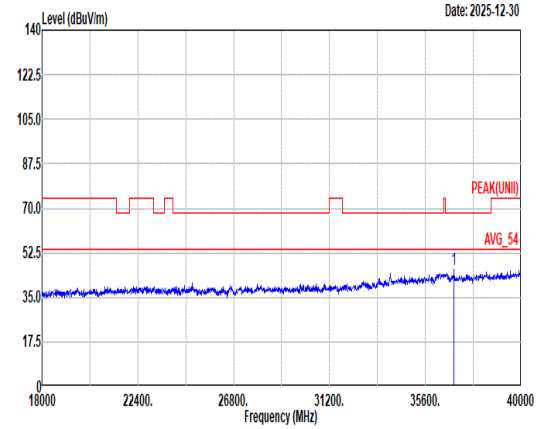 Site : 03CH15-HY Condition: PEAK(UNII) 1m SHF_994_250109 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 36909.00 46.15 68.20 -22.05 63.62 42.66 7.95 58.54 -9.54 -- -- Peak

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
3+4	802.11a	99.51	-	-	10Hz	0.02
3+4	802.11an HT20	99.34	-	-	10Hz	0.03
3+4	802.11an HT40	98.92	-	-	10Hz	0.05
3+4	802.11ac VHT20	99.21	-	-	10Hz	0.03
3+4	802.11ac VHT40	98.92	-	-	10Hz	0.05
3+4	802.11ac VHT80	97.75	870	1.15	1.2kHz	0.10
3+4	802.11ac VHT160	95.80	456	2.19	2.2kHz	0.19
3+4	802.11ax HE20 Full RU	99.31	-	-	10Hz	0.03
3+4	802.11ax HE20 26 RU	97.89	1620	0.62	680Hz	0.09
3+4	802.11ax HE20 52 RU	97.67	1465	0.68	750Hz	0.10
3+4	802.11ax HE20 106 RU	97.01	1300	0.77	820Hz	0.13
3+4	802.11ax HE40 Full RU	98.65	-	-	10Hz	0.06
3+4	802.11ax HE80 Full RU	97.22	735	1.36	1.5kHz	0.12
3+4	802.11ax HE160 Full RU	95.24	400	2.50	2.7kHz	0.21
3+4	802.11be EHT20 Full RU	99.31	-	-	10Hz	0.03
3+4	802.11be EHT20 26 RU	97.77	1620	0.62	680Hz	0.10
3+4	802.11be EHT20 52 RU	97.33	1460	0.68	750Hz	0.12
3+4	802.11be EHT20 106 RU	97.01	1300	0.77	820Hz	0.13
3+4	802.11be EHT20 52T+26T	98.85	-	-	10Hz	0.05
3+4	802.11be EHT20 106T+26T	98.04	-	-	10Hz	0.09
3+4	802.11be EHT40 Full RU	98.67	-	-	10Hz	0.06
3+4	802.11be EHT80 Full RU	97.24	741	1.35	1.5kHz	0.12
3+4	802.11be EHT80 Puncture 20	98.04	-	-	10Hz	0.09