


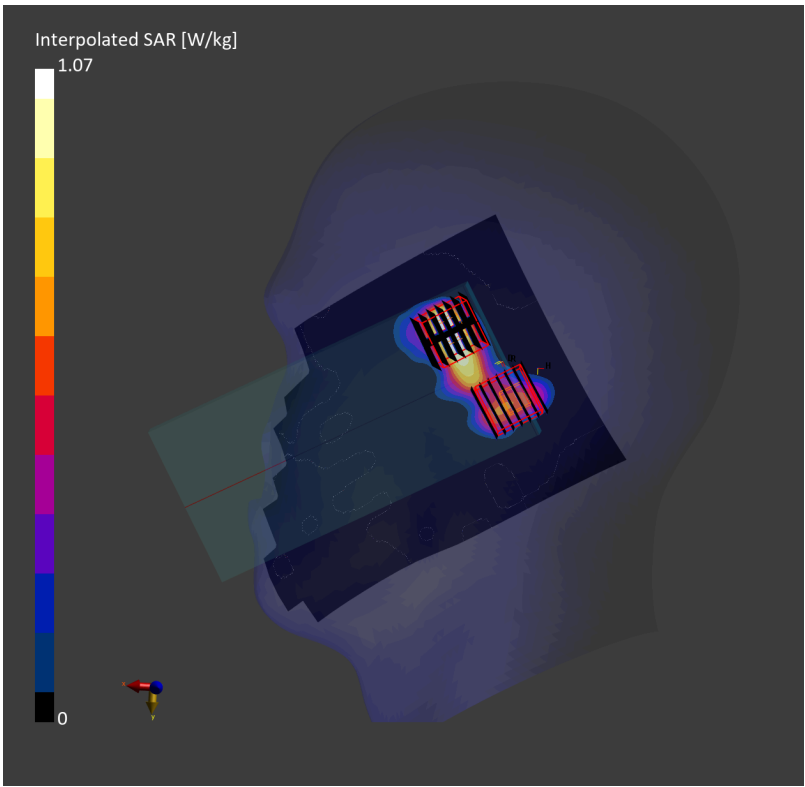

#32_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.00$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.61, 4.6, 4.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.515 W/kg; SAR (10g) = 0.154 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.649 W/kg; SAR (8g) = 0.197 W/kg; SAR (10g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.9 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.395 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.9 %

TSL Correction: Positive only

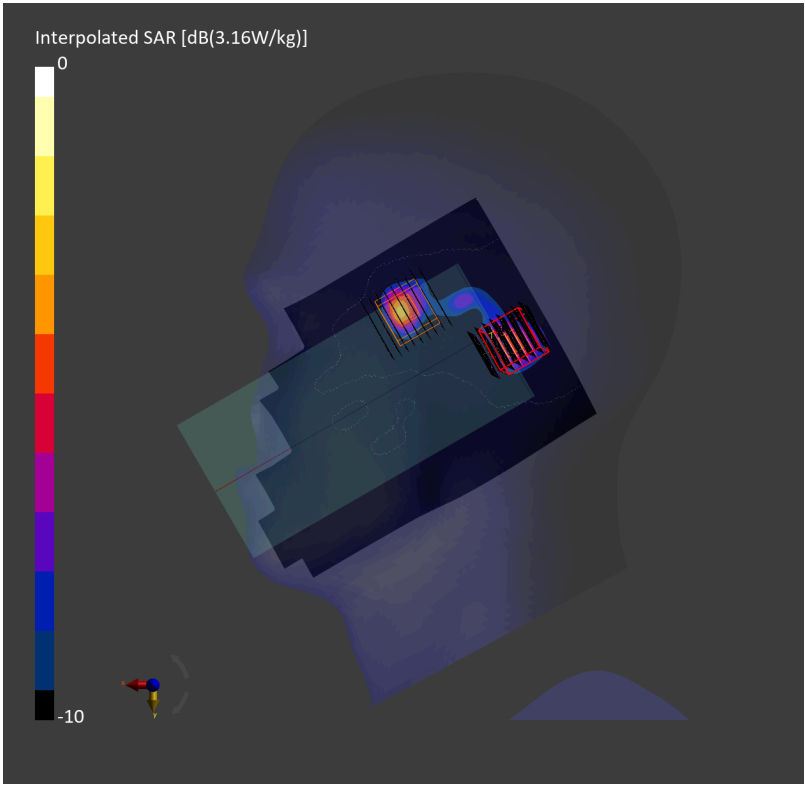

#33_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260311 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.92, 4.71, 5.23); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.589 W/kg; SAR (10g) = 0.199 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.768 W/kg; SAR (8g) = 0.250 W/kg; SAR (10g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.2 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.350 W/kg; SAR (8g) = 0.131 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.2 %

TSL Correction: Positive only

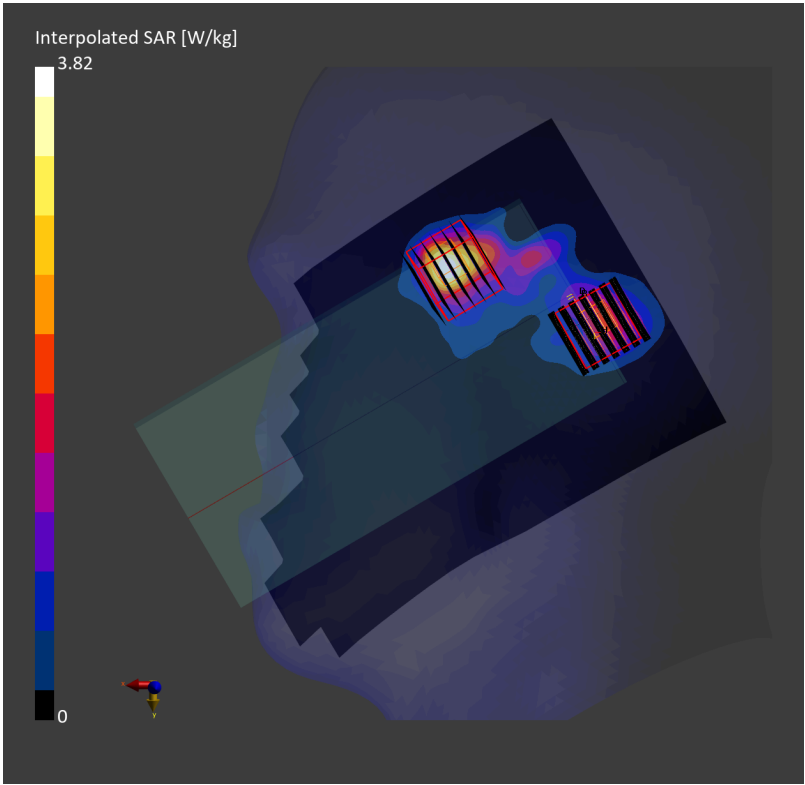

#34_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.55, 4.54, 4.34); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.732 W/kg; SAR (10g) = 0.236 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.738 W/kg; SAR (8g) = 0.241 W/kg; SAR (10g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.375 W/kg; SAR (8g) = 0.135 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

TSL Correction: Positive only

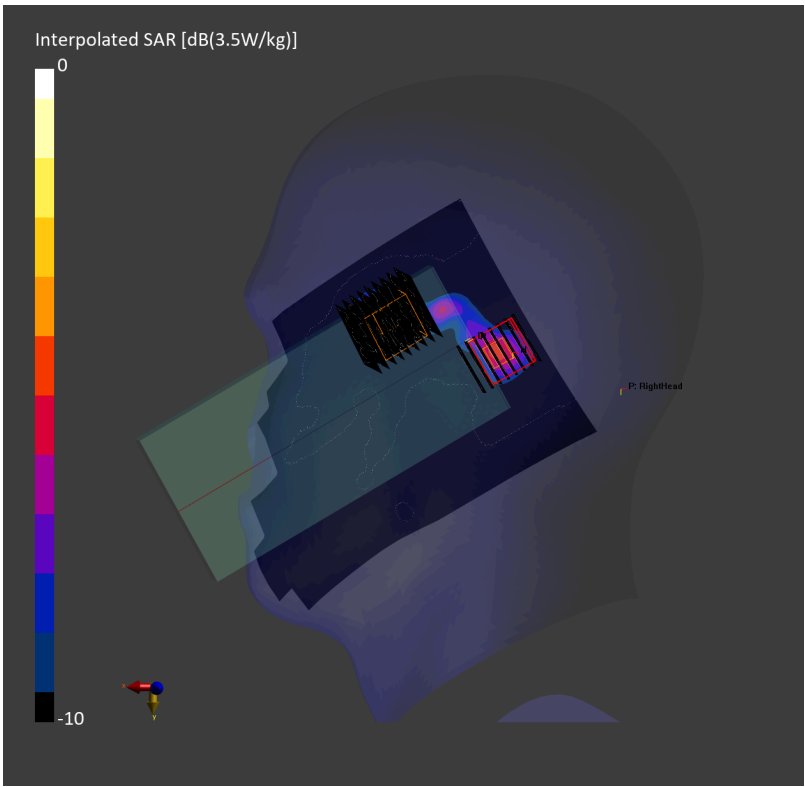

#35_WLAN6GHz_802.11ax-HE160 MCS0_Right Cheek_0mm_Ch15

Communication System: IEEE 802.11ax; Frequency: 6185.000 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.65$ S/m; $\epsilon_r = 32.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.386 W/kg; SAR (10g) = 0.116 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.484 W/kg; SAR (8g) = 0.157 W/kg; SAR (10g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

psAPD (1.0cm², sq) = 4.84 [W/m²]; psAPD (4.0cm², sq) = 3.15 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.12 dB


SAR (1g) = 0.268 W/kg; SAR (8g) = 0.100 W/kg; SAR (10g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

psAPD (1.0cm², sq) = 2.68 [W/m²]; psAPD (4.0cm², sq) = 2.00 [W/m²]

TSL Correction: Positive only

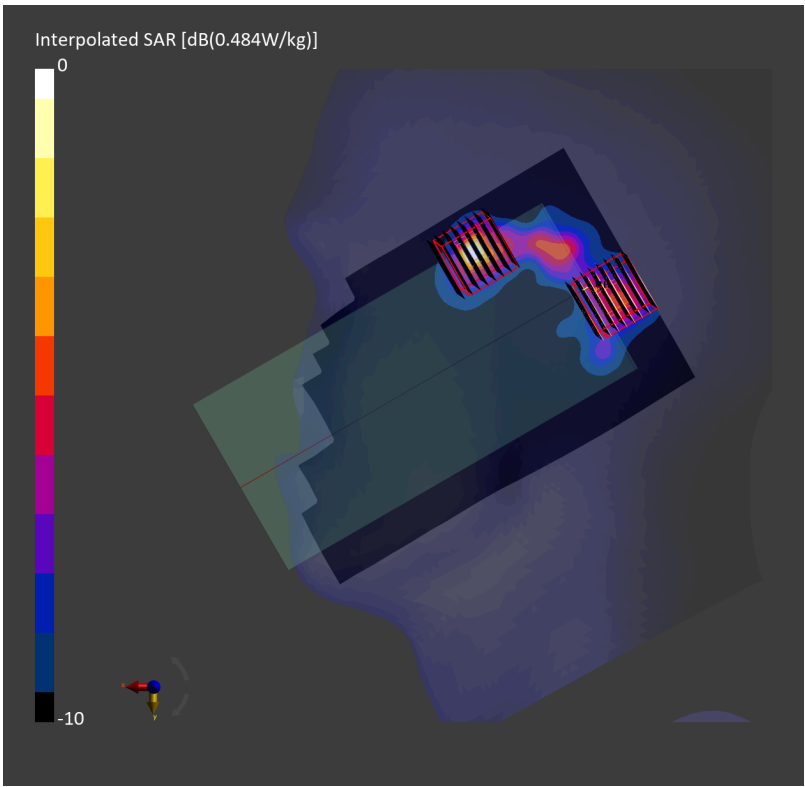

#36_Bluetooth_1Mbps_Left Tilted_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.220 W/kg; SAR (8g) = 0.096 W/kg; SAR (10g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

TSL Correction: Positive only

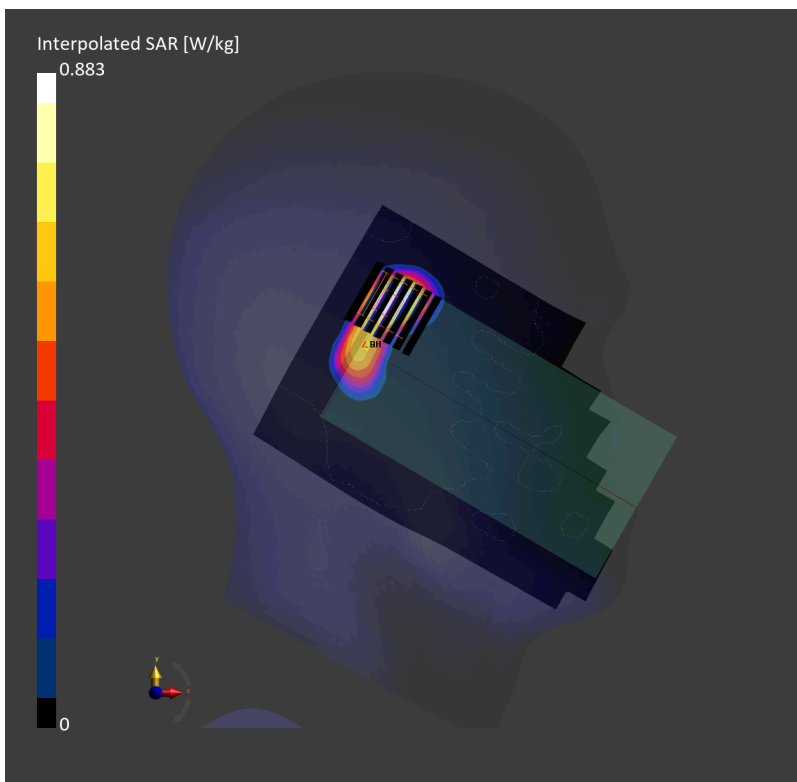

#37_Thread_250K_Right Cheek_0mm_Ch26

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.151 W/kg; SAR (10g) = 0.070 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.153 W/kg; SAR (8g) = 0.076 W/kg; SAR (10g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

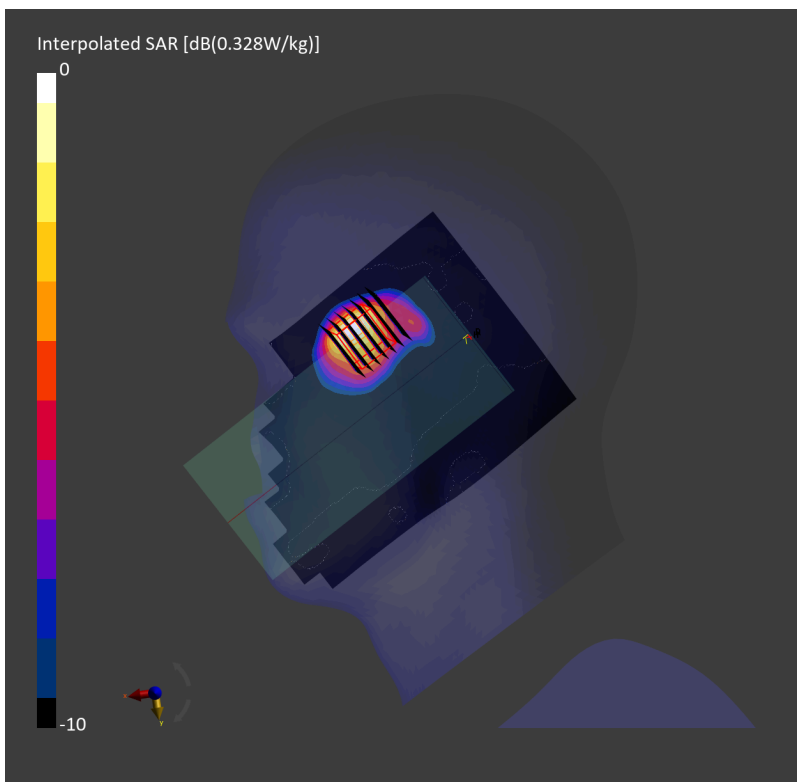

#38_GSM850_GPRS 4 Tx slots_Back_5mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.662 W/kg; SAR (10g) = 0.413 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.668 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

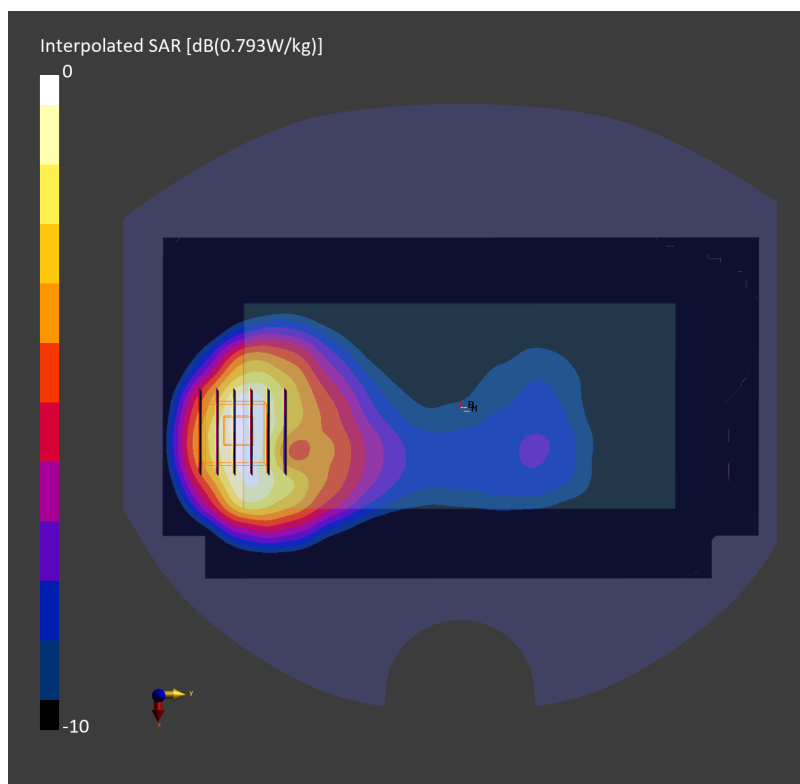

#39_GSM1900_GPRS 4 Tx slots_Bottom Edge_5mm_Ch810

Communication System: GPRS-FDD; Frequency: 1909.800 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 1909.800$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.352 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.767 W/kg; SAR (8g) = 0.395 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.1 %

TSL Correction: Positive only

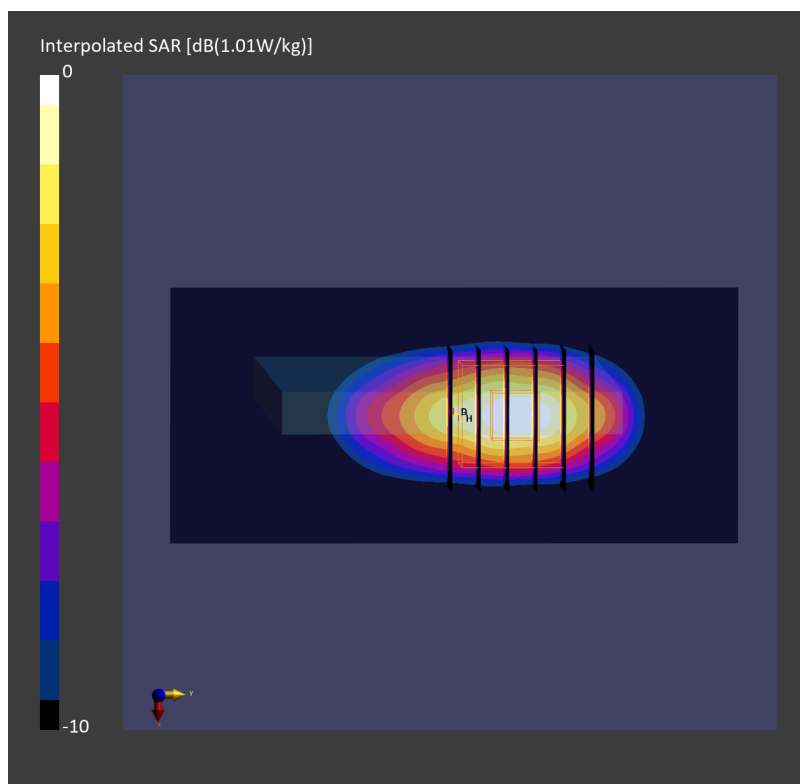

#40_WCDMA II_RMC 12.2Kbps_Right Edge_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260120 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.832 W/kg; SAR (10g) = 0.435 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 36.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.802 W/kg; SAR (8g) = 0.462 W/kg; SAR (10g) = 0.426 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

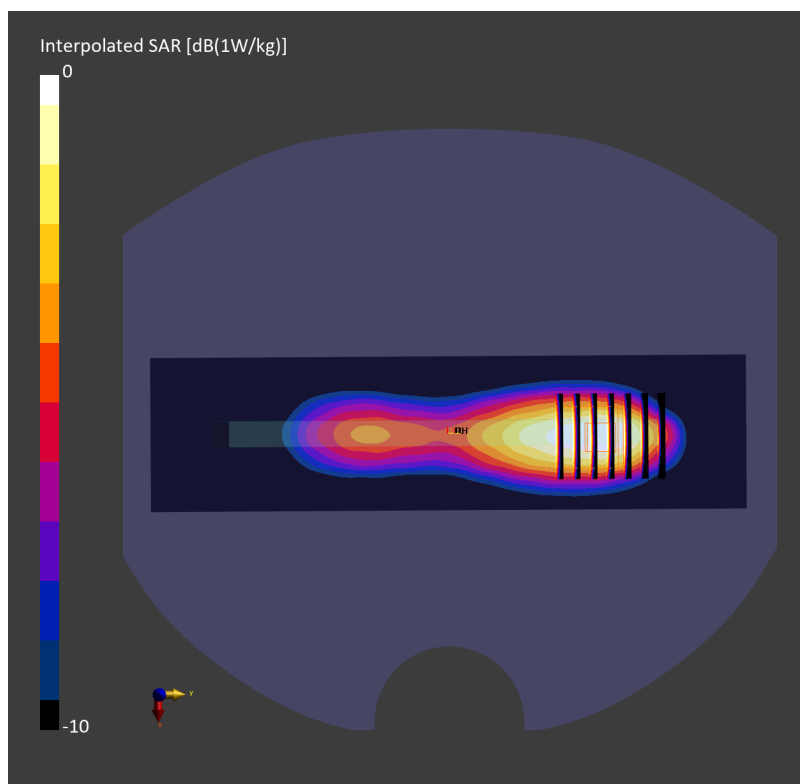

#41_WCDMA IV_RMC 12.2Kbps_Bottom Edge_5mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260120 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.352 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.740 W/kg; SAR (8g) = 0.390 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

TSL Correction: Positive only

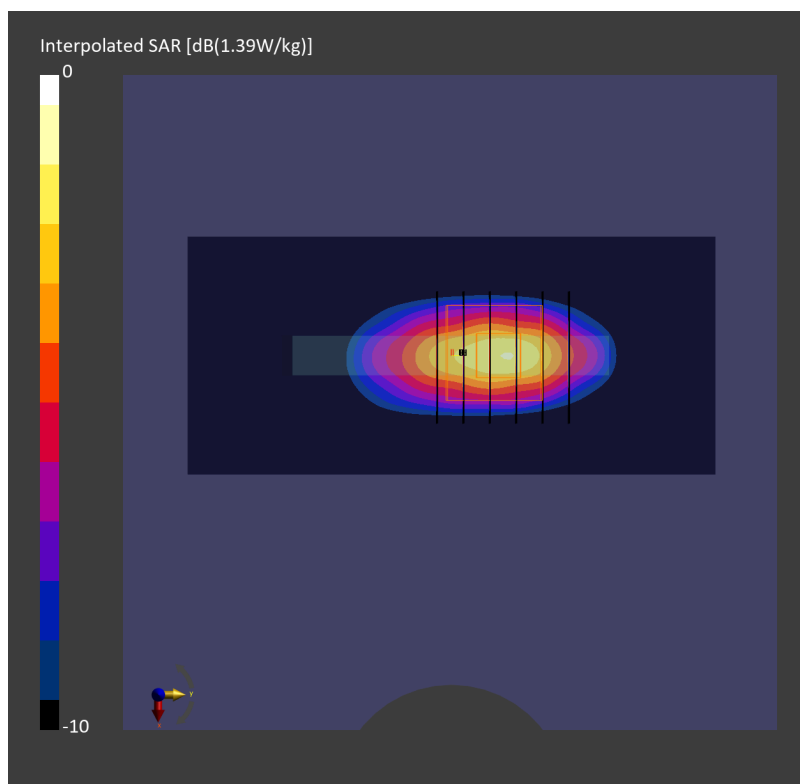

#42_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.563 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.562 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

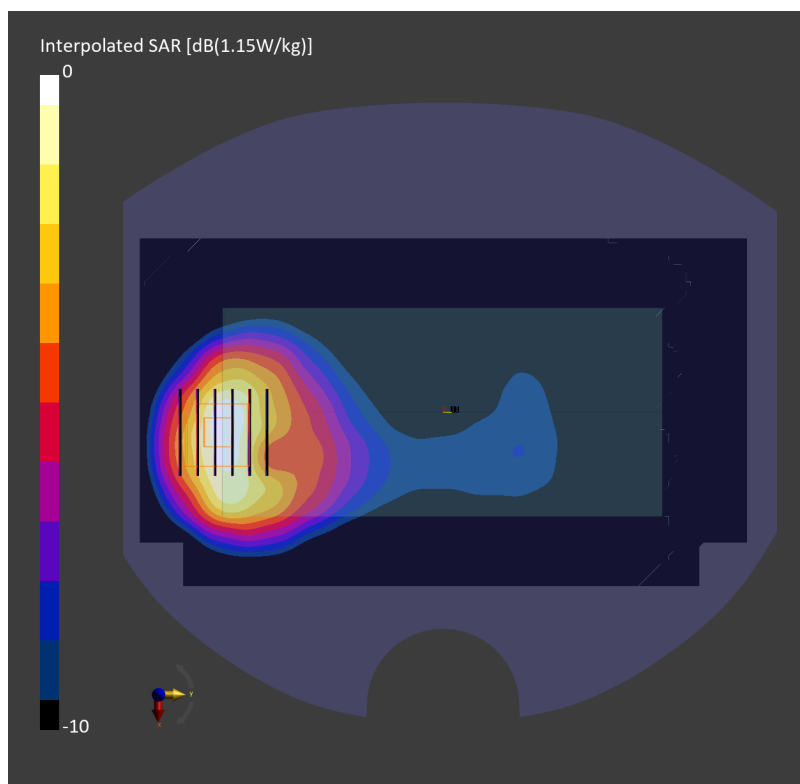

#43_LTE Band 7_20M_QPSK_50_0_Right Edge_5mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.838 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.832 W/kg; SAR (8g) = 0.420 W/kg; SAR (10g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

TSL Correction: Positive only

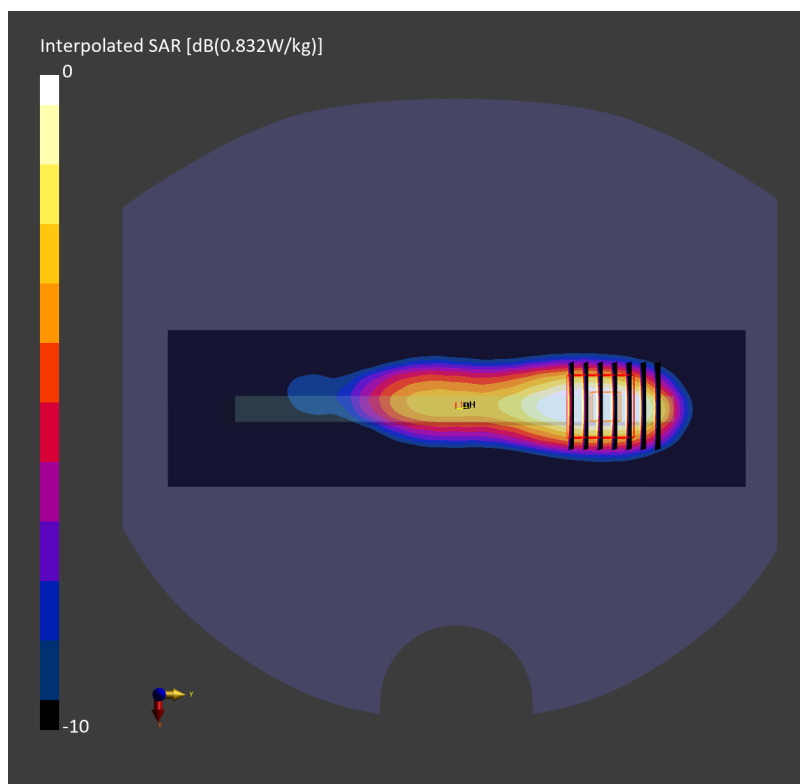

#44_LTE Band 12_10M_QPSK_25_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f=707.500$ MHz; $\sigma=0.892$ S/m; $\epsilon_r=42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.400 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.623 W/kg; SAR (8g) = 0.351 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

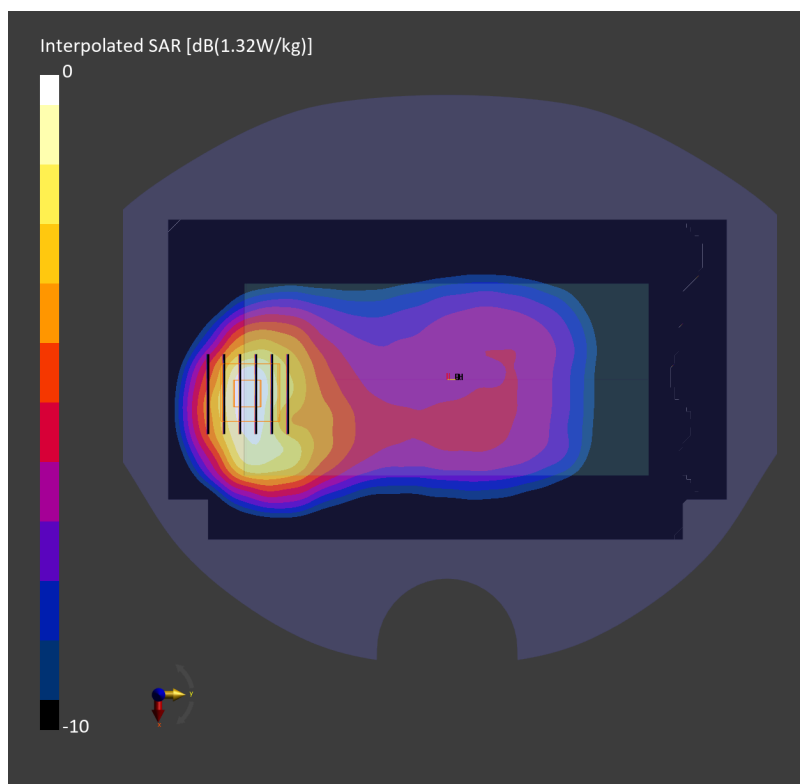

#45_LTE Band 13_10M_QPSK_25_12_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.562 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.320 W/kg; SAR (10g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

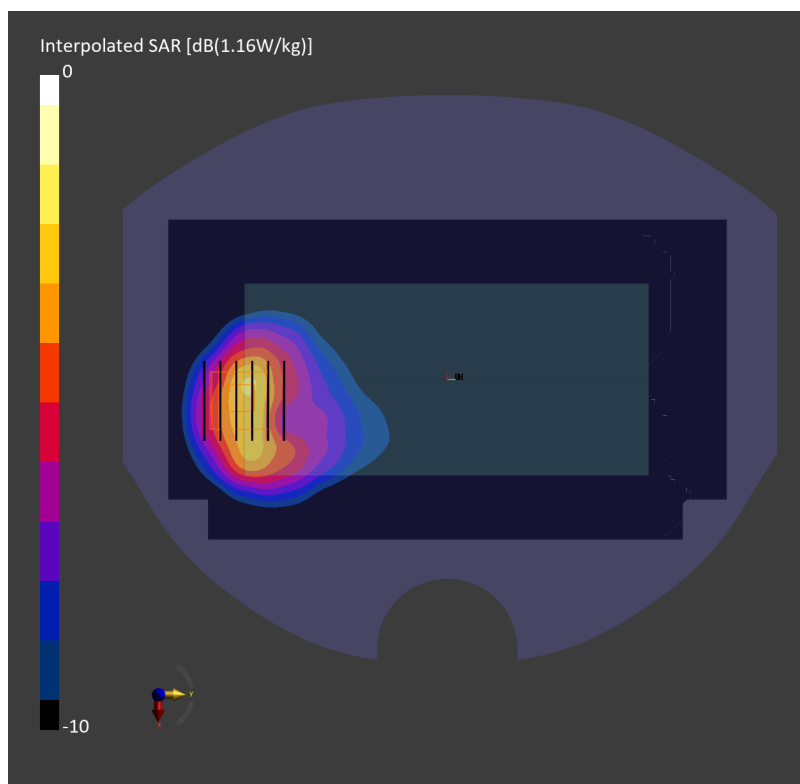

#46_LTE Band 14_10M_QPSK_25_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.452 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.780 W/kg; SAR (8g) = 0.437 W/kg; SAR (10g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

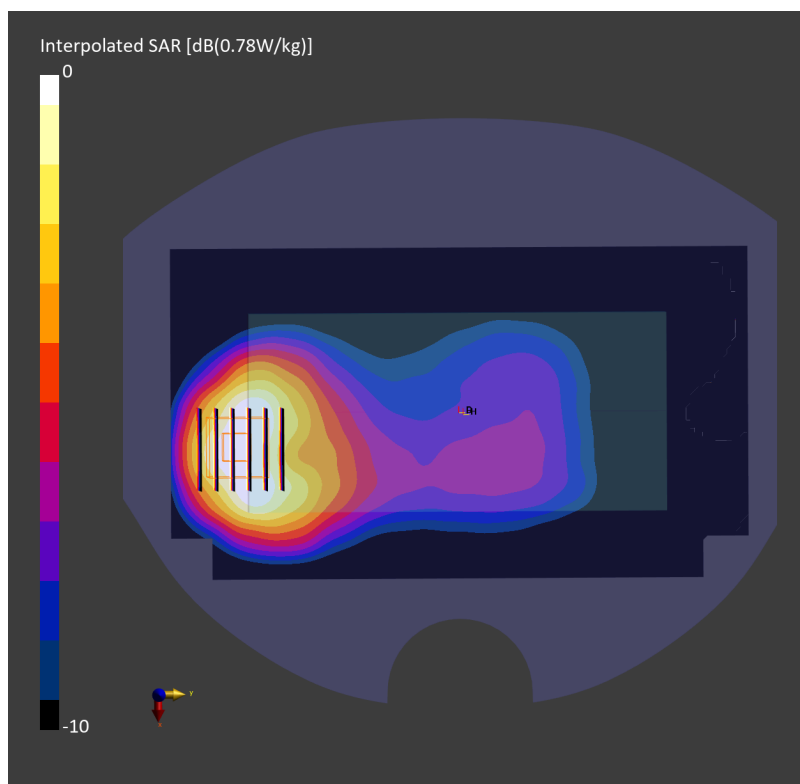

#47_LTE Band 25_20M_QPSK_50_0_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260117 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.848 W/kg; SAR (10g) = 0.467 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.698 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

TSL Correction: Positive only

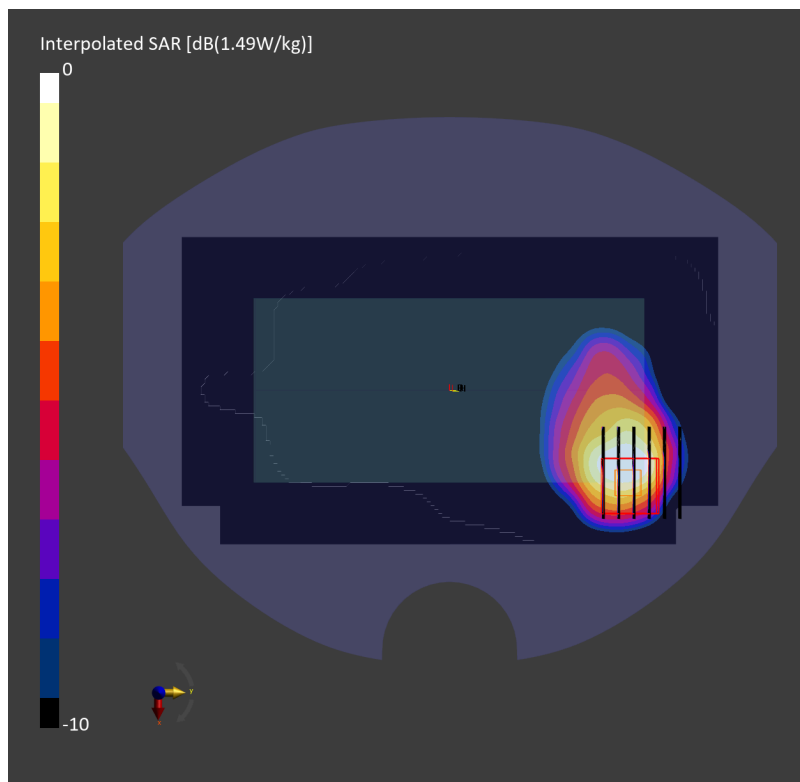

#48_LTE Band 26_15M_QPSK_36_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.652 W/kg; SAR (10g) = 0.421 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.740 W/kg; SAR (8g) = 0.414 W/kg; SAR (10g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

TSL Correction: Positive only

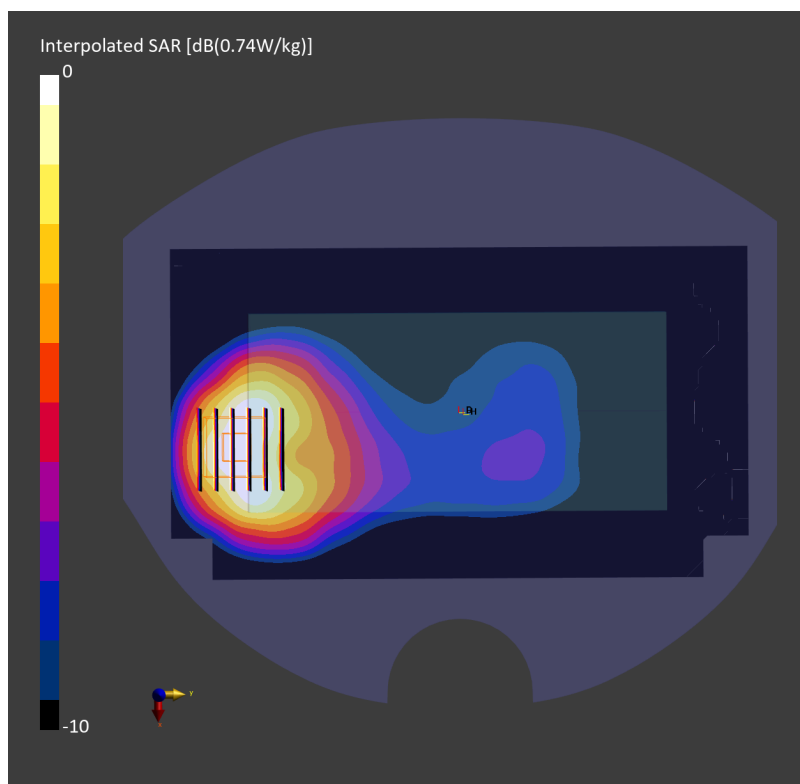

#49_LTE Band 30_10M_QPSK_1_0_Bottom Edge_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.74$ S/m; $\epsilon_r=40.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.37, 7.25, 7.29); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.323 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.738 W/kg; SAR (8g) = 0.367 W/kg; SAR (10g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

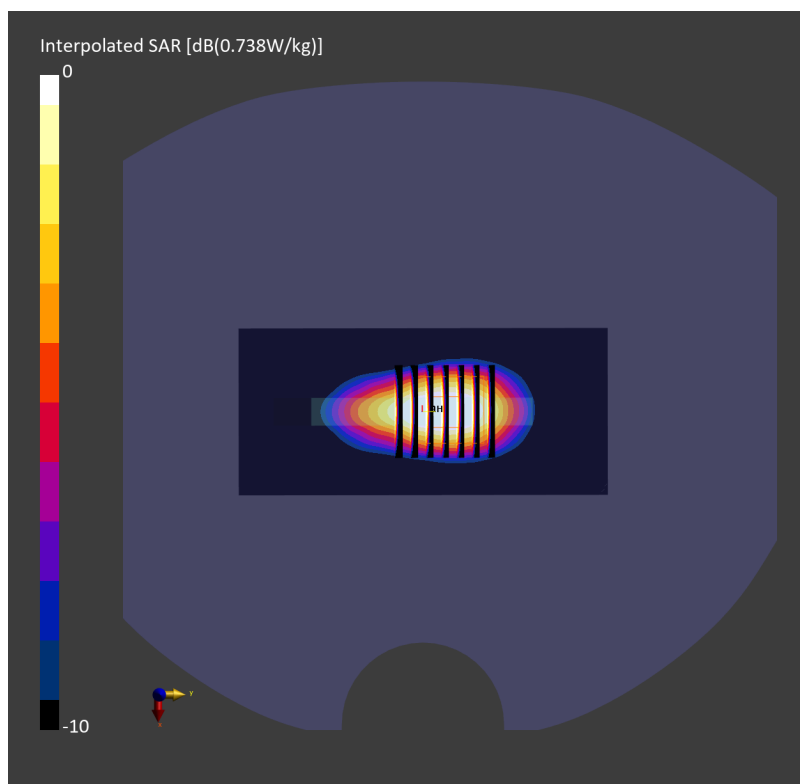

#50_LTE Band 66_20M_QPSK_50_0_Bottom Edge_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260115 Medium parameters used: $f=1770.000$ MHz; $\sigma=1.35$ S/m; $\epsilon_r=42.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.783 W/kg; SAR (10g) = 0.388 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.829 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

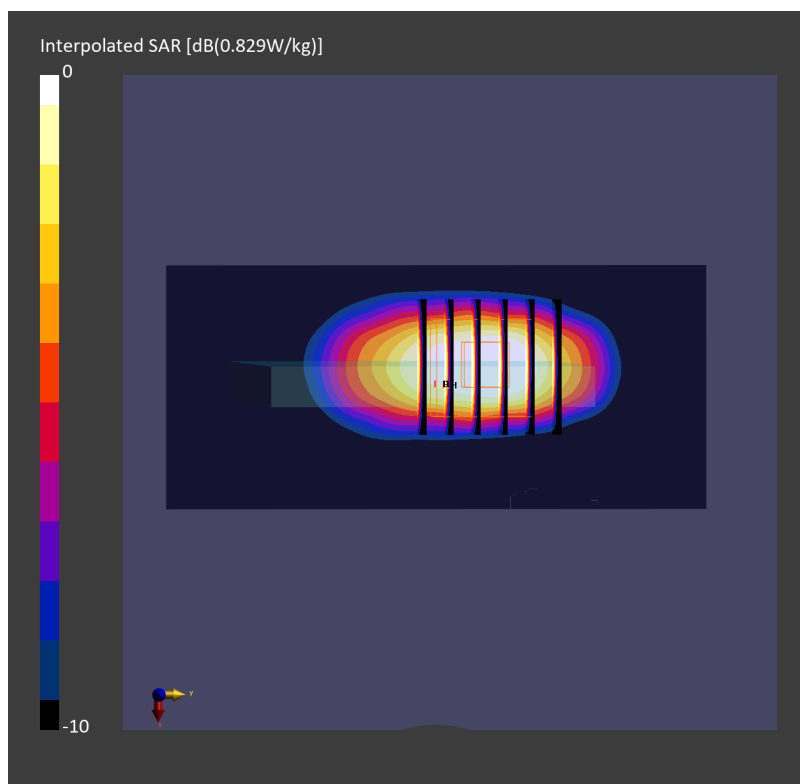

#51_LTE Band 71_20M_QPSK_50_0_Left Edge_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.373 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.563 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.378 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

TSL Correction: Positive only

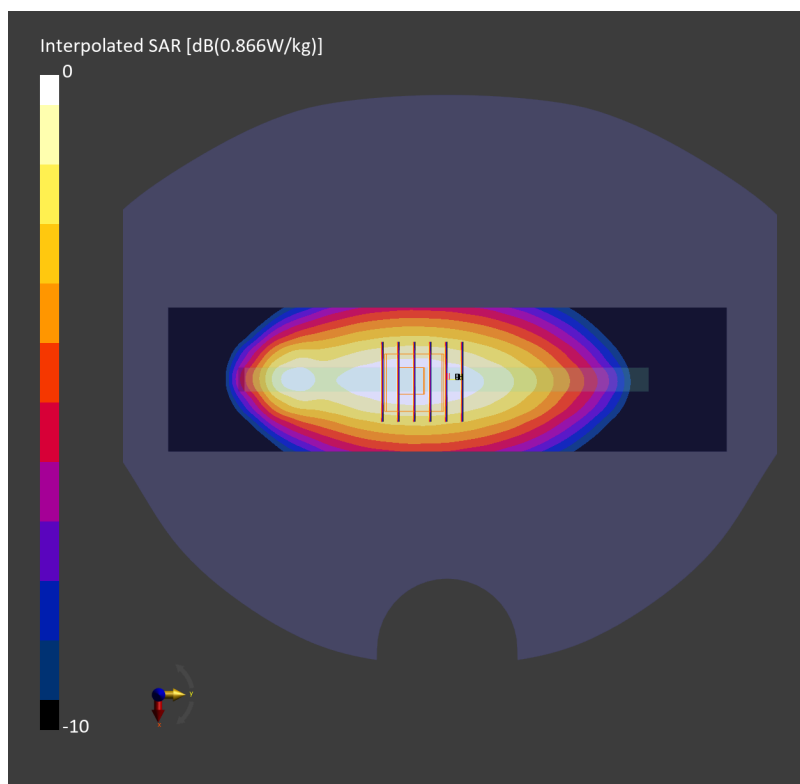

#52_LTE Band 41_20M_QPSK_1_0_Right Edge_5mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.376 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.802 W/kg; SAR (8g) = 0.409 W/kg; SAR (10g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

TSL Correction: Positive only

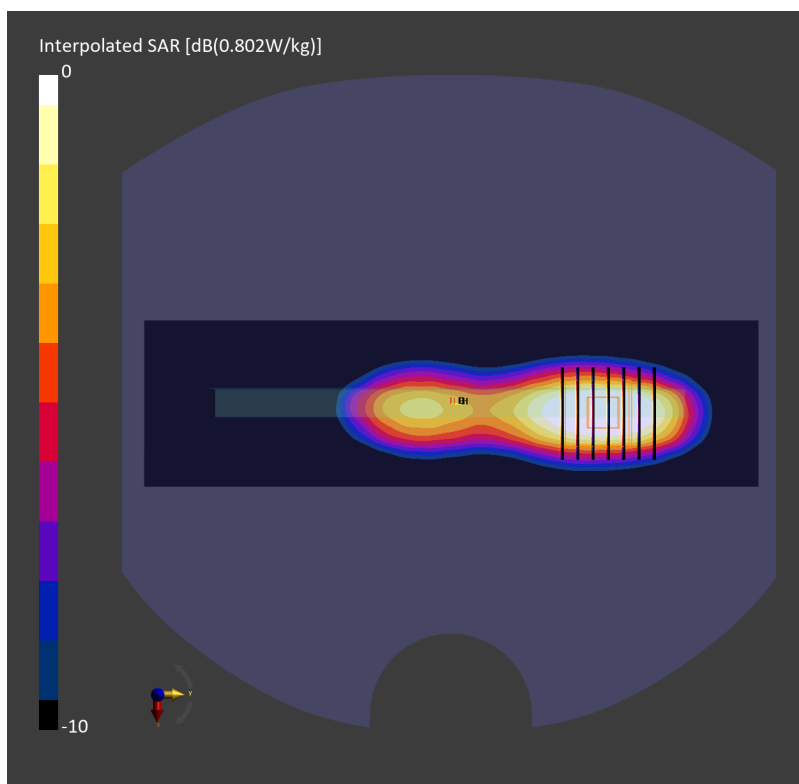

#53_LTE Band 48_20M_QPSK_50_50_Right Edge_5mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.260 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.712 W/kg; SAR (8g) = 0.298 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

TSL Correction: Positive only

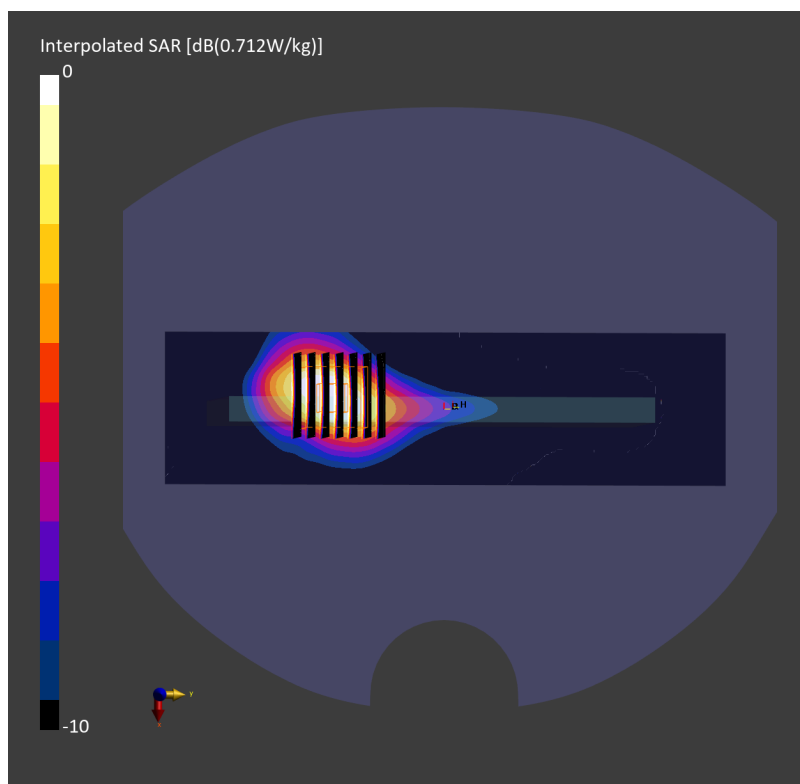

#54_FR1 n7_50M_BPSK_135_135_Right Edge_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.732 W/kg; SAR (10g) = 0.340 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.765 W/kg; SAR (8g) = 0.386 W/kg; SAR (10g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

TSL Correction: Positive only

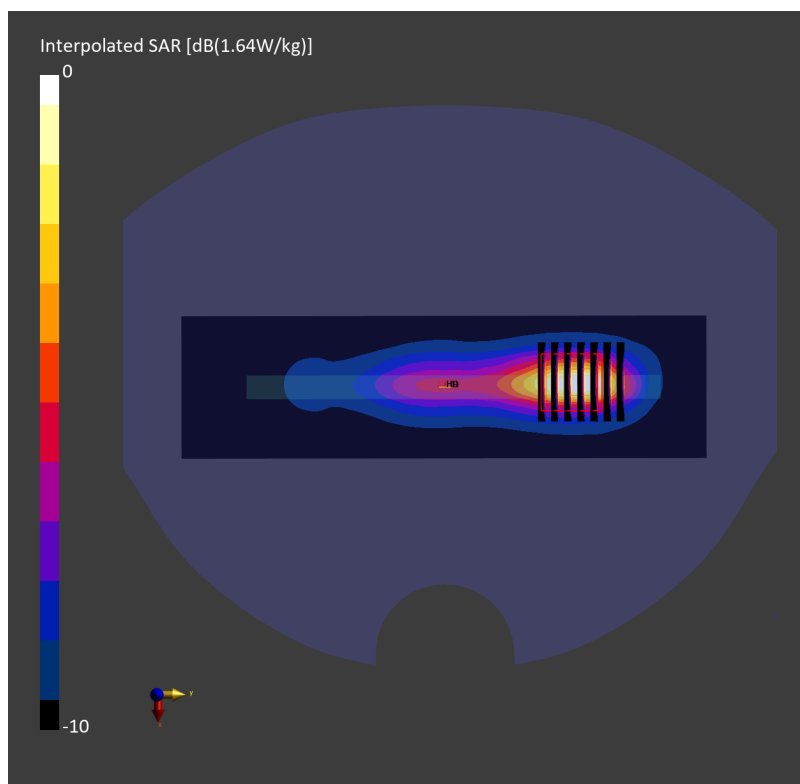

#55_FR1 n12_15M_BPSK_1_77_Back_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.356 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

TSL Correction: Positive only

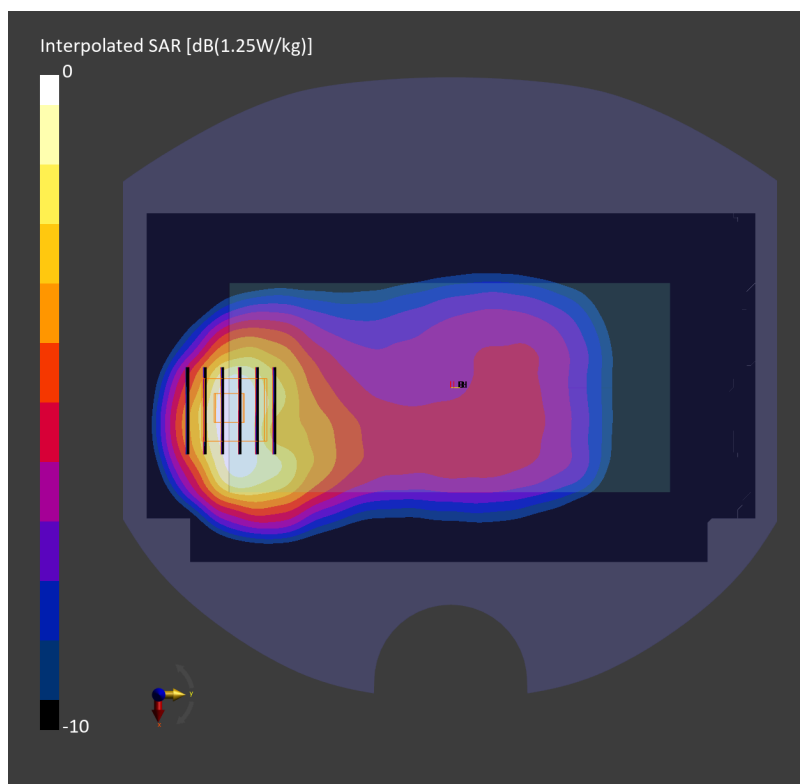

#56_FR1 n13_10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.446 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.765 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

TSL Correction: Positive only

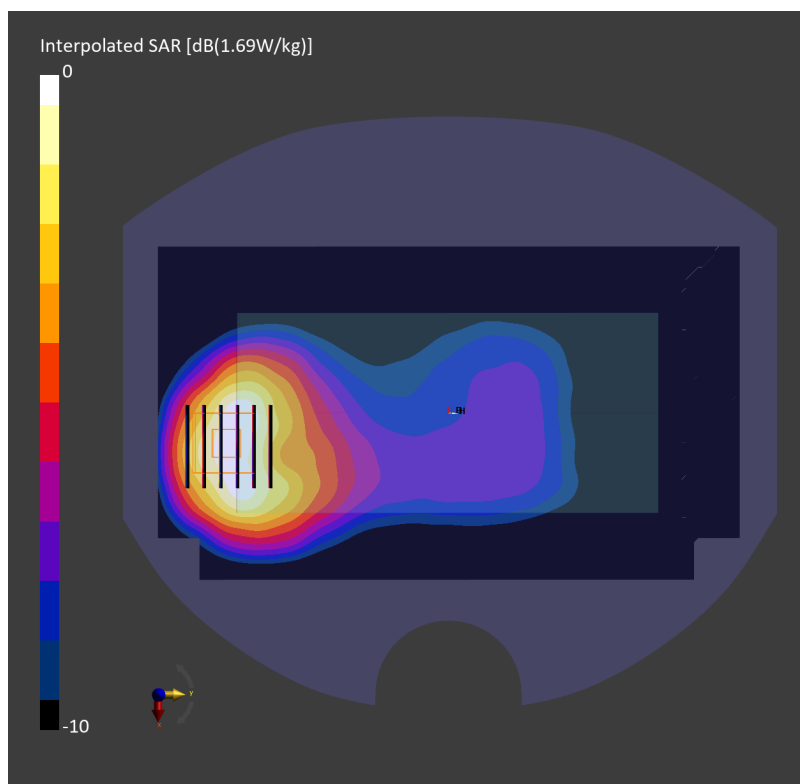

#57_FR1 n14_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.404 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.718 W/kg; SAR (8g) = 0.405 W/kg; SAR (10g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

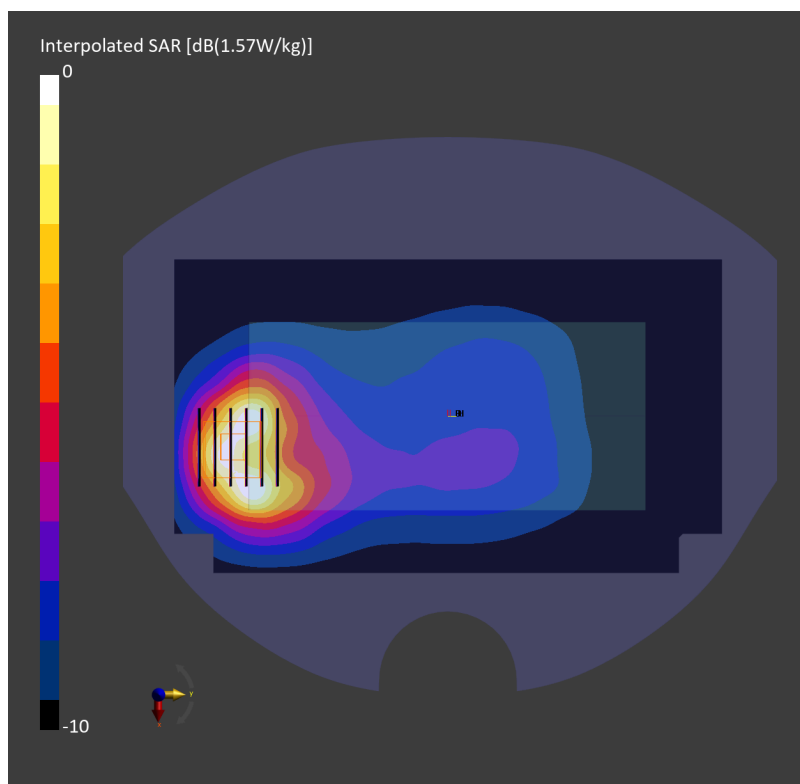

#58_FR1 n25_40M_BPSK_1_108_Right Edge_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.785 W/kg; SAR (10g) = 0.393 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.775 W/kg; SAR (8g) = 0.418 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

TSL Correction: Positive only

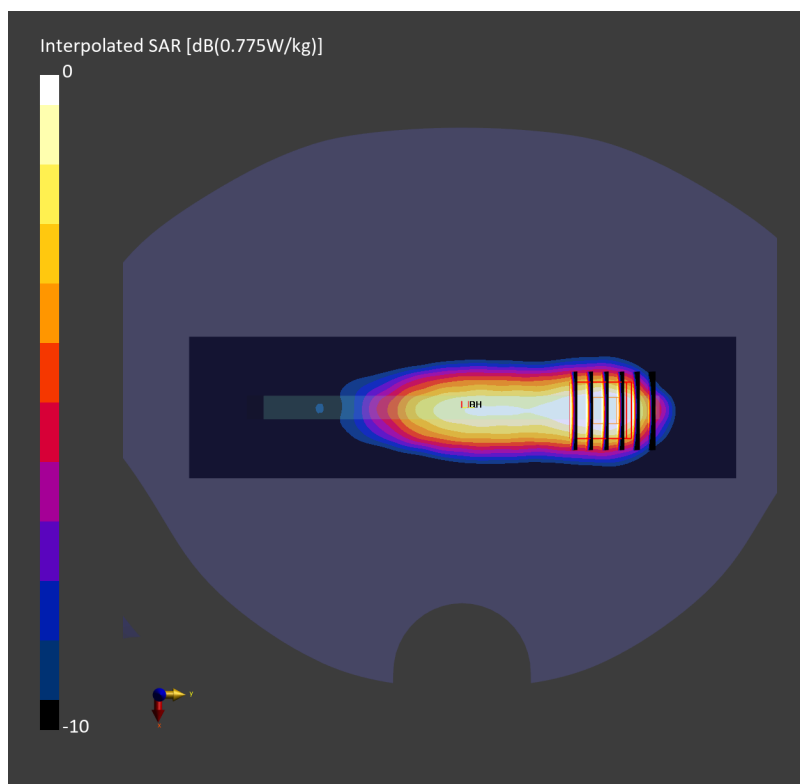

#59_FR1 n26_20M_BPSK_1_1_Back_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.447 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.771 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

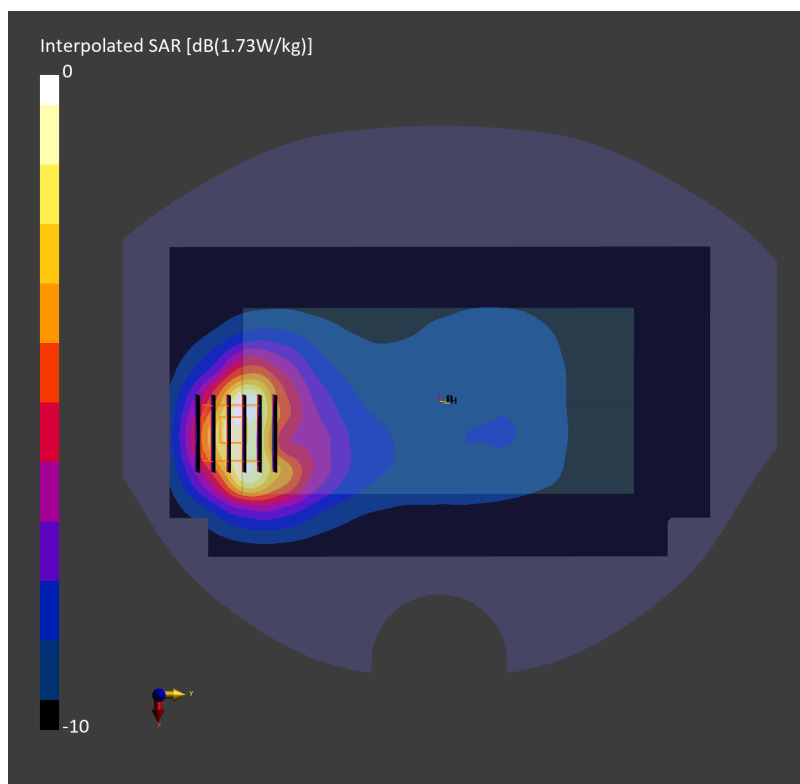

#60_FR1 n30_10M_BPSK_25_0_Right Edge_5mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.72, 6.71, 6.41); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.820 W/kg; SAR (10g) = 0.388 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.809 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.376 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

TSL Correction: Positive only

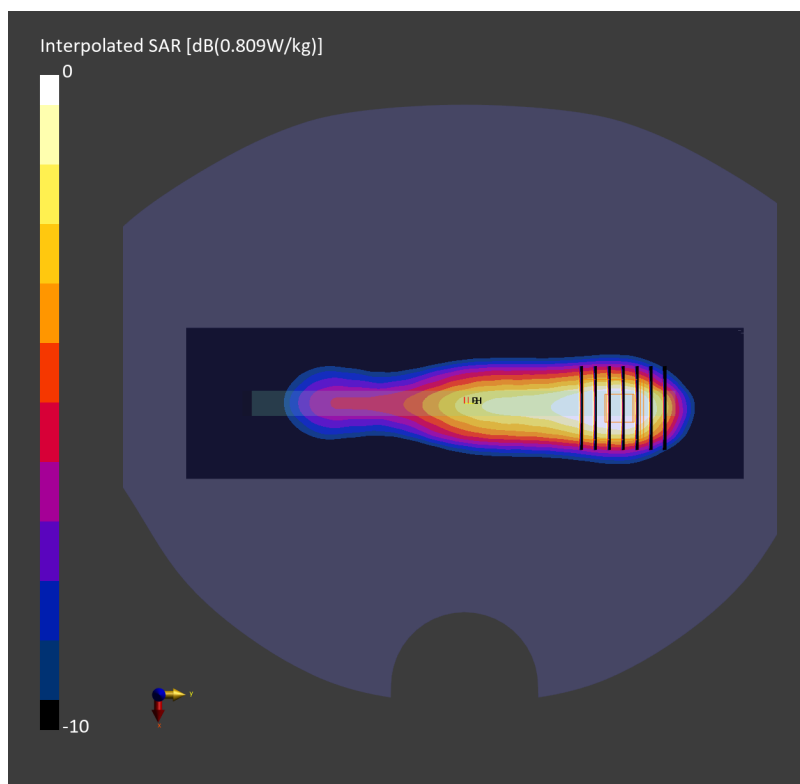

#61_FR1 n66_45M_BPSK_1_120_Right Edge_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.398 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.753 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

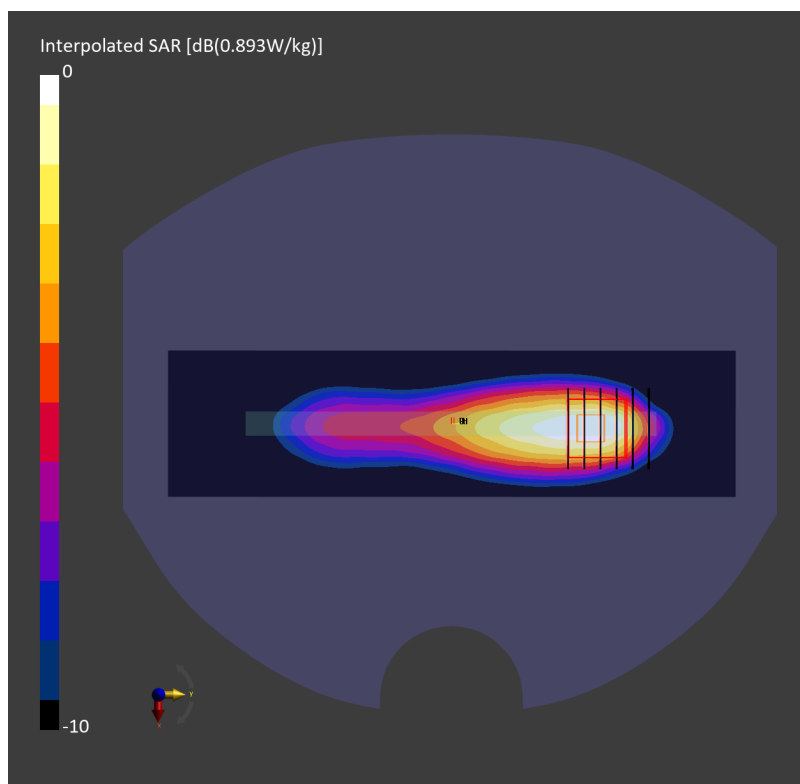

#62_FR1 n70_15M_BPSK_1_77_Bottom Edge_5mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.764 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.776 W/kg; SAR (8g) = 0.408 W/kg; SAR (10g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

TSL Correction: Positive only

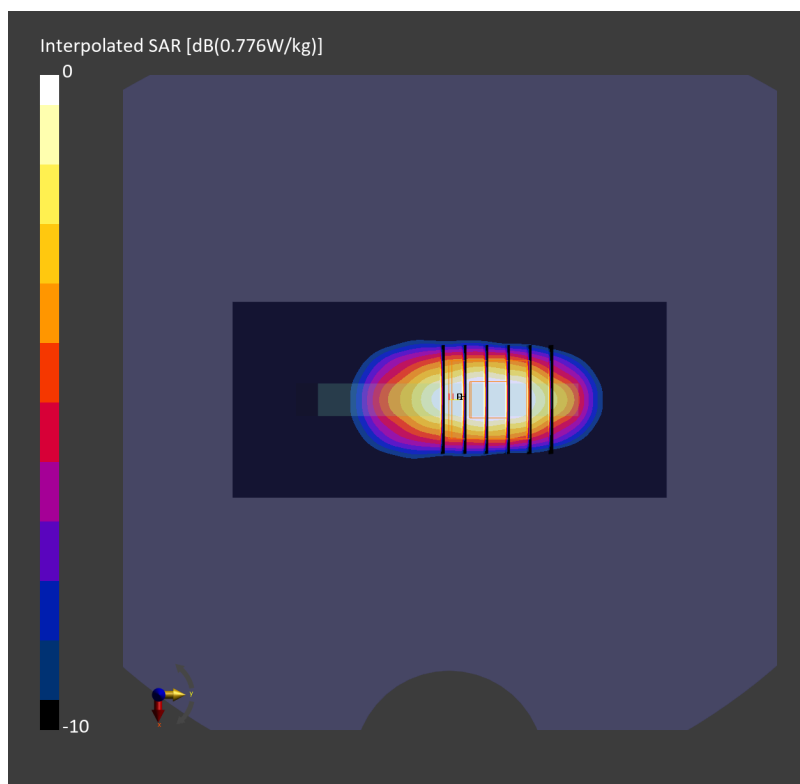

#63_FR1 n71_35M_BPSK_90_45_Back_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.793 W/kg; SAR (10g) = 0.496 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.768 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

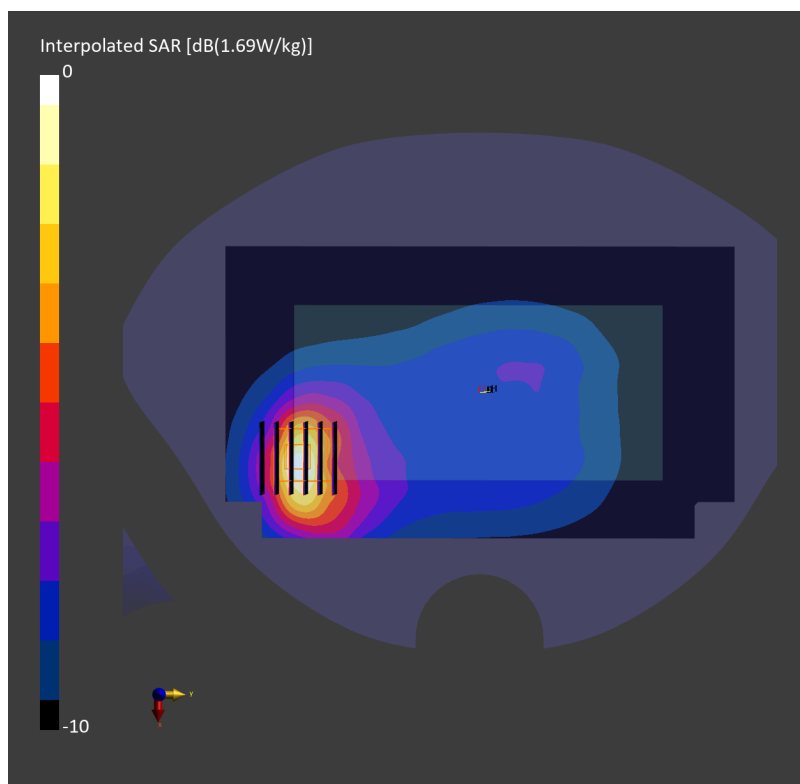

#64_FR1 n41_100M_BPSK_1_271_Right Edge_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260216 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.808 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.825 W/kg; SAR (8g) = 0.389 W/kg; SAR (10g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

TSL Correction: Positive only

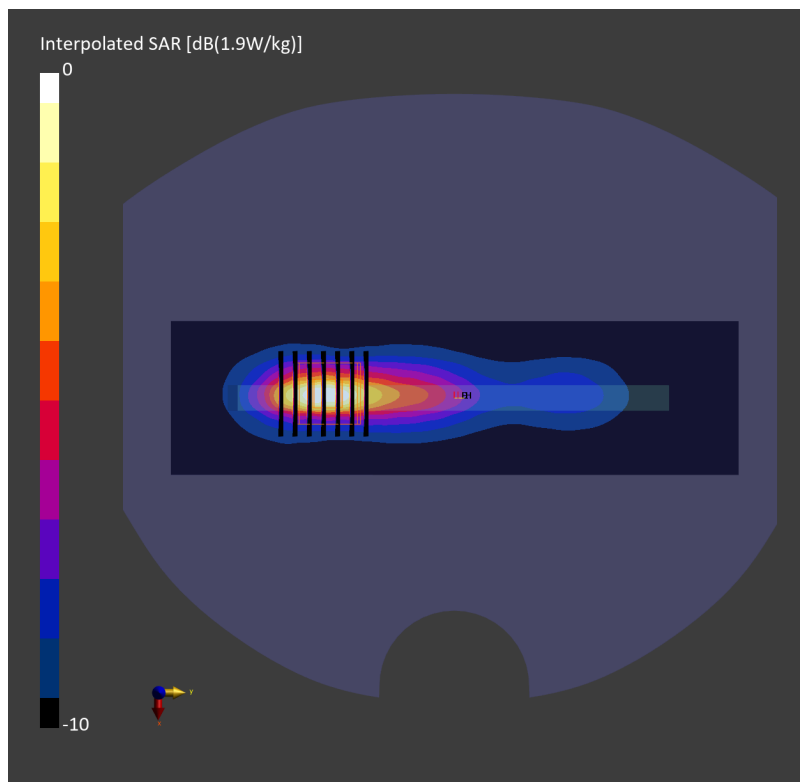

#65_FR1 n48_20M_BPSK_25_12_Top Edge_5mm_Ch637334

Communication System: 5G NR; Frequency: 3560.005 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 3560.005$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10900-AAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.594 W/kg; SAR (10g) = 0.200 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.641 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

TSL Correction: Positive only

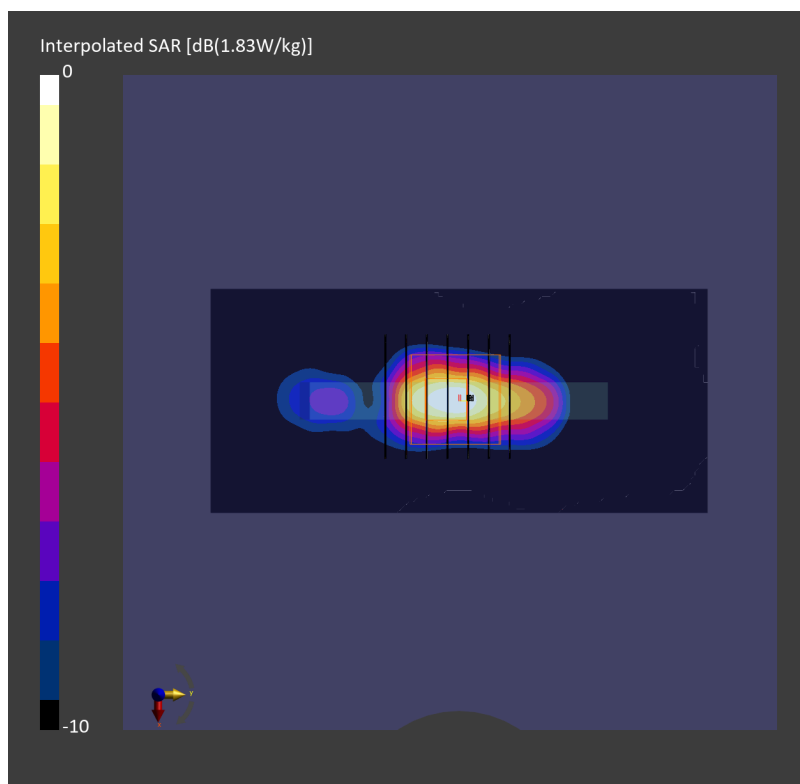

#66_FR1 n77_100M_BPSK_135_69_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.746 W/kg; SAR (10g) = 0.305 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.730 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

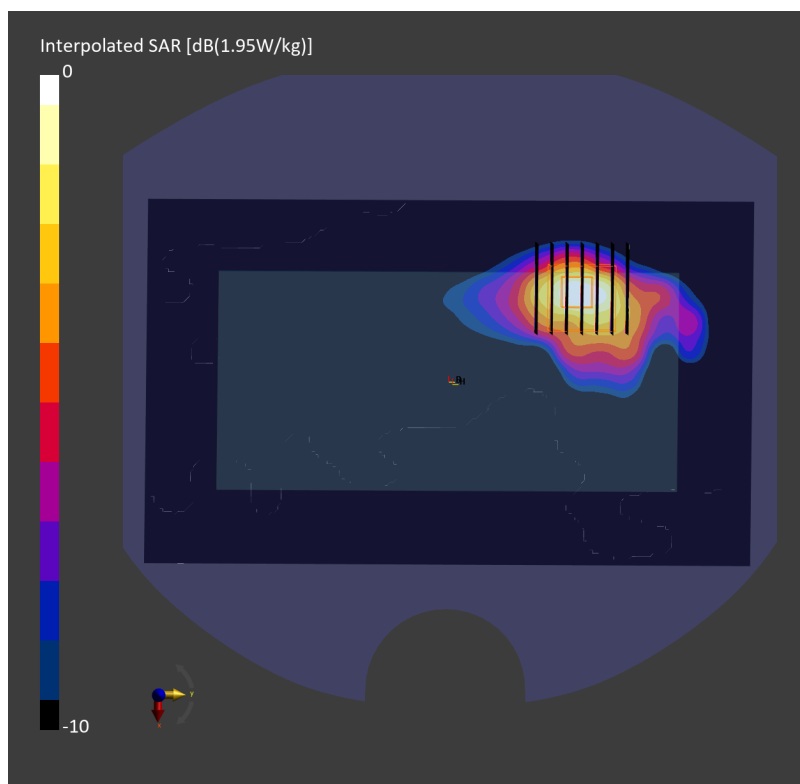

#67_WLAN2.4GHz_802.11b 1Mbps_Left Edge_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.80$ S/m; $\epsilon_r=39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.095 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.229 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.10 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

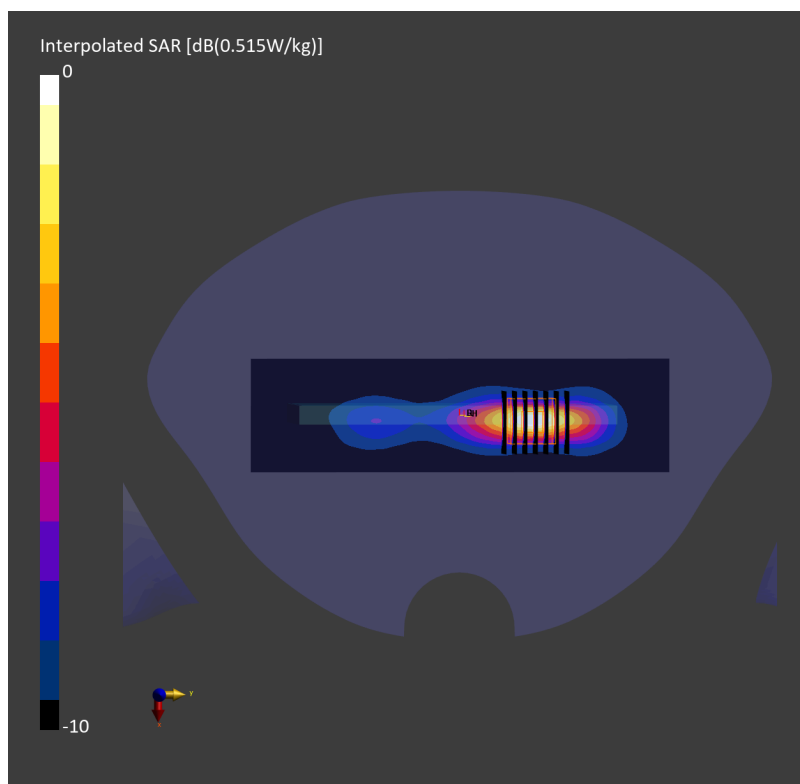

#68_WLAN5GHz_802.11ac-VHT80 MCS0_Top Edge_5mm_Ch42

Communication System: IEEE 802.11ac WiFi; Frequency: 5210.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.47$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.181 W/kg; SAR (10g) = 0.055 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 0.218 W/kg; SAR (8g) = 0.068 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.9 %

TSL Correction: Positive only

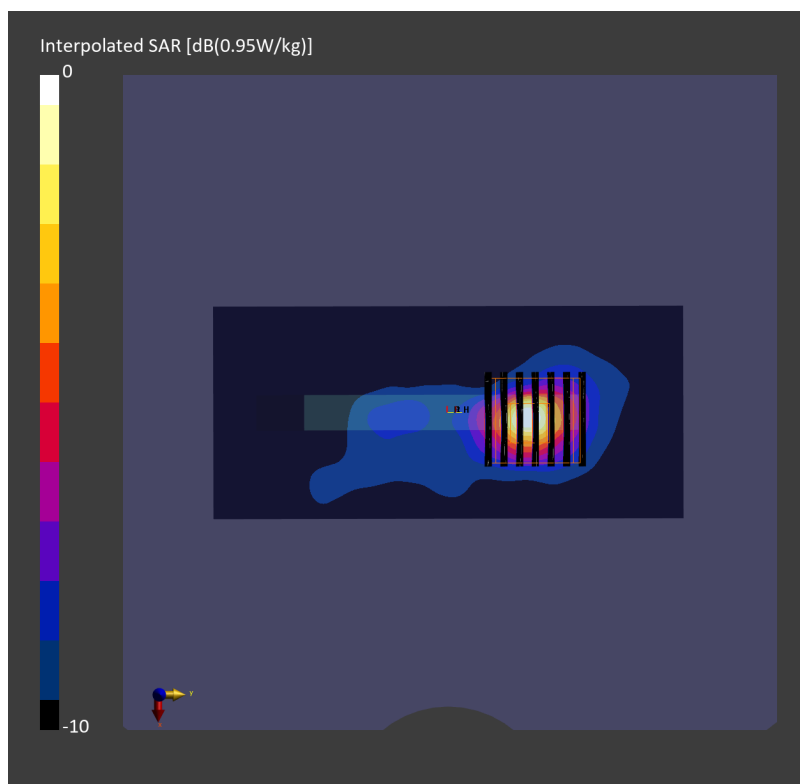

#69_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.212 W/kg; SAR (10g) = 0.064 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.145 W/kg; SAR (8g) = 0.048 W/kg; SAR (10g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.5 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.242 W/kg; SAR (8g) = 0.075 W/kg; SAR (10g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.5 %

TSL Correction: Positive only

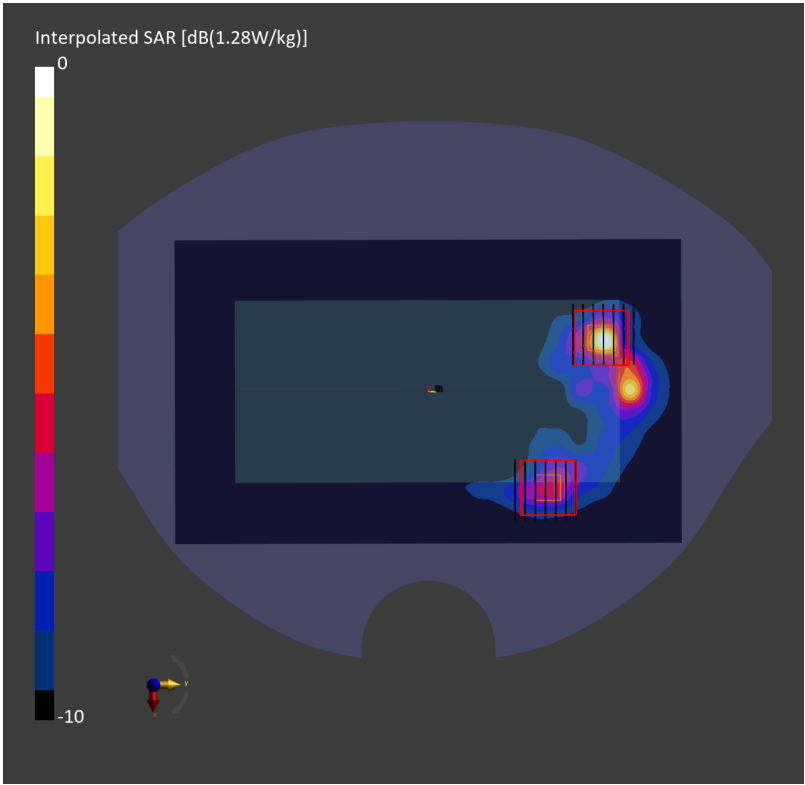

#70_WLAN6GHz_802.11ax-HE160 MCS0_Back_5mm_Ch207

Communication System: IEEE 802.11ax; Frequency: 6985.000 MHz

Medium: HSL_6G_260328 Medium parameters used: $f = 6985.000$ MHz; $\sigma = 6.7$ S/m; $\epsilon_r = 31.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.061 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.18 dB

SAR (1g) = 0.214 W/kg; SAR (8g) = 0.071 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.0 %

psAPD (1.0cm², sq) = 2.14 [W/m²]; psAPD (4.0cm², sq) = 1.42 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.18 dB


SAR (1g) = 0.067 W/kg; SAR (8g) = 0.020 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.0 %

psAPD (1.0cm², sq) = 0.671 [W/m²]; psAPD (4.0cm², sq) = 0.410 [W/m²]

TSL Correction: Positive only

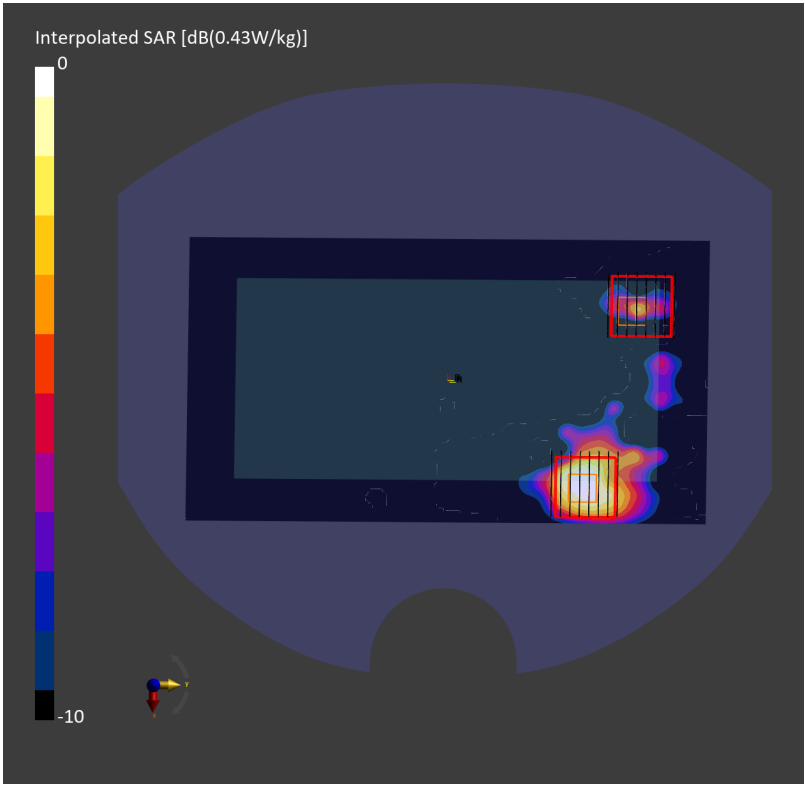

#71_Bluetooth_1Mbps_Top Edge_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.376 W/kg; SAR (10g) = 0.166 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.395 W/kg; SAR (8g) = 0.183 W/kg; SAR (10g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

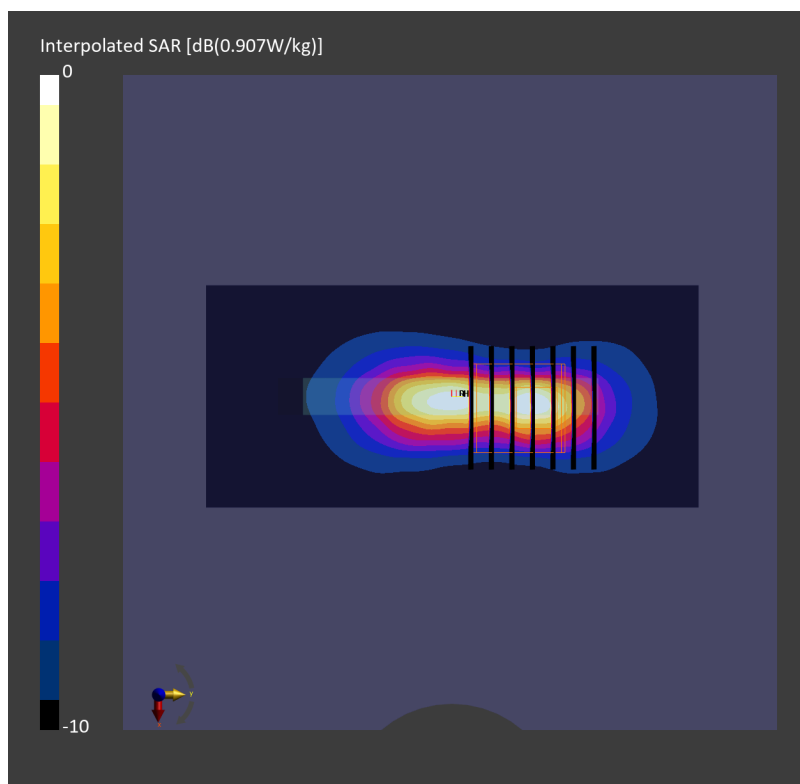

#72_Thread_250K_Left Edge_5mm_Ch26

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.172 W/kg; SAR (10g) = 0.077 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.186 W/kg; SAR (8g) = 0.088 W/kg; SAR (10g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

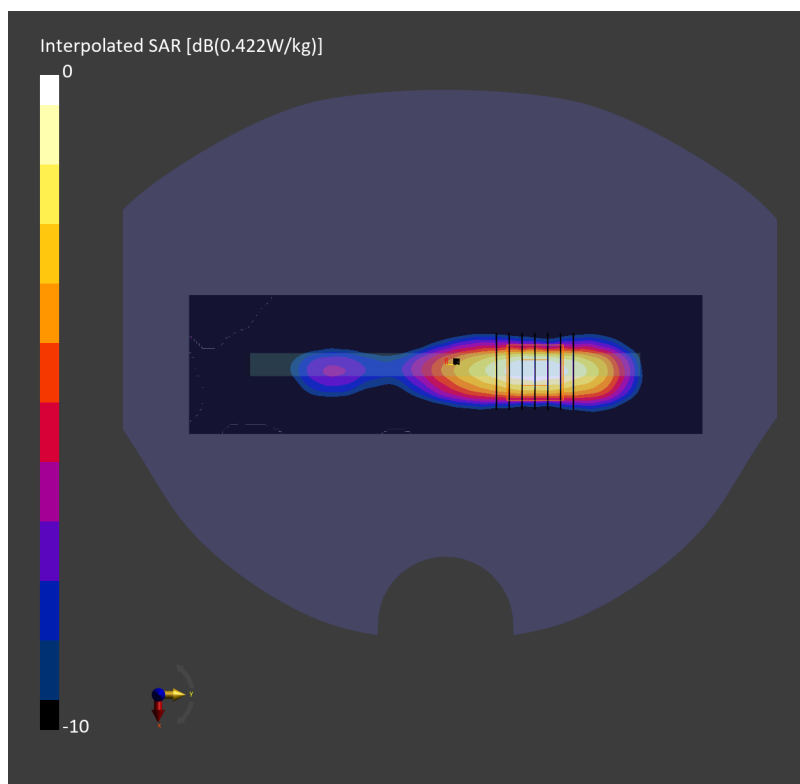

#73_GSM850_GPRS 4 Tx slots_Back_5mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.704 W/kg; SAR (10g) = 0.478 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.668 W/kg; SAR (8g) = 0.434 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

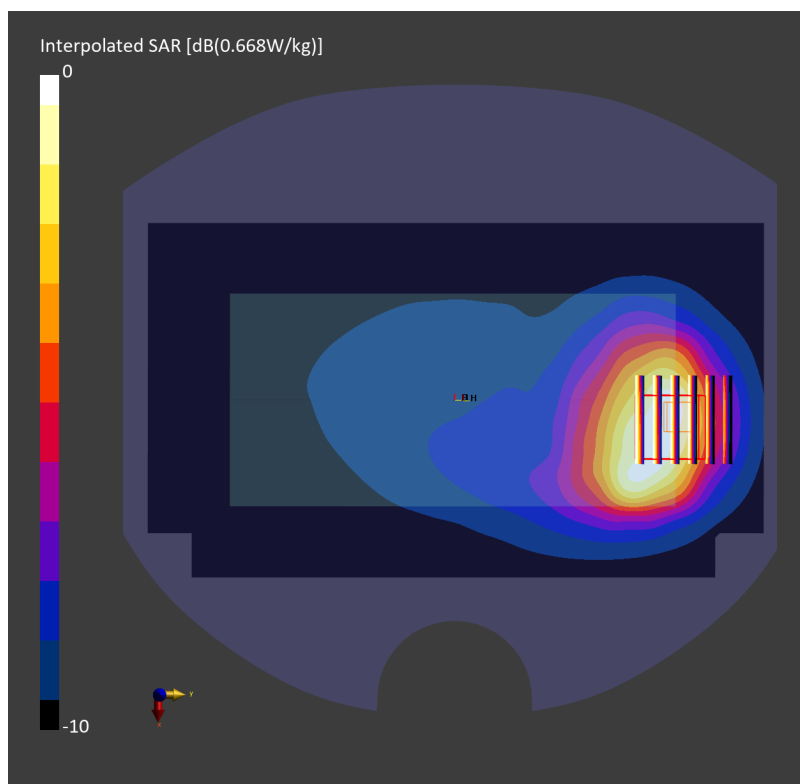

#74_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.247 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.521 W/kg; SAR (8g) = 0.275 W/kg; SAR (10g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

TSL Correction: Positive only

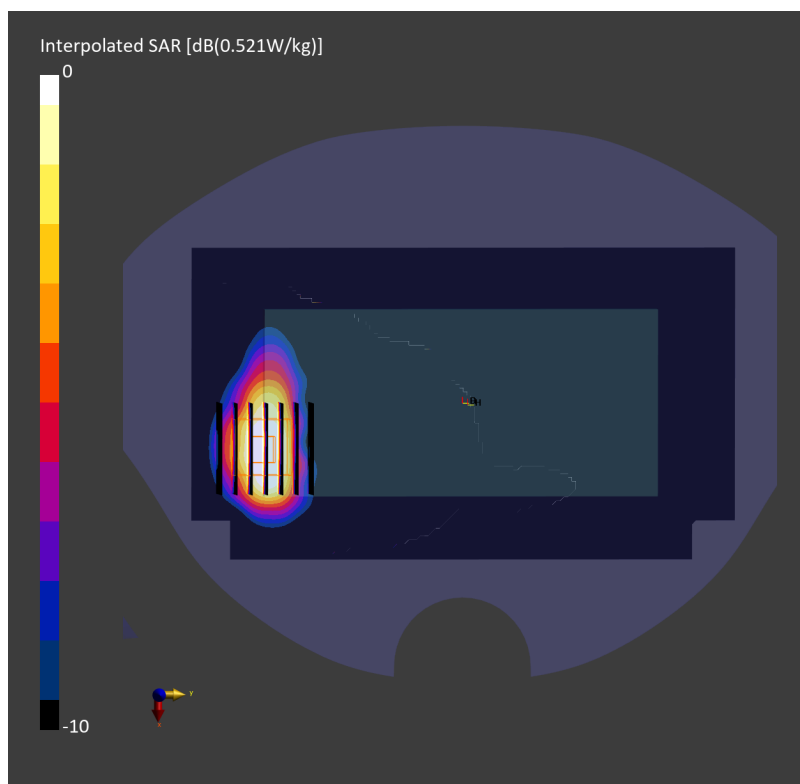

#75_WCDMA II_RMC 12.2Kbps_Front_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260120 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.583 W/kg; SAR (10g) = 0.338 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 0.545 W/kg; SAR (8g) = 0.327 W/kg; SAR (10g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

TSL Correction: Positive only

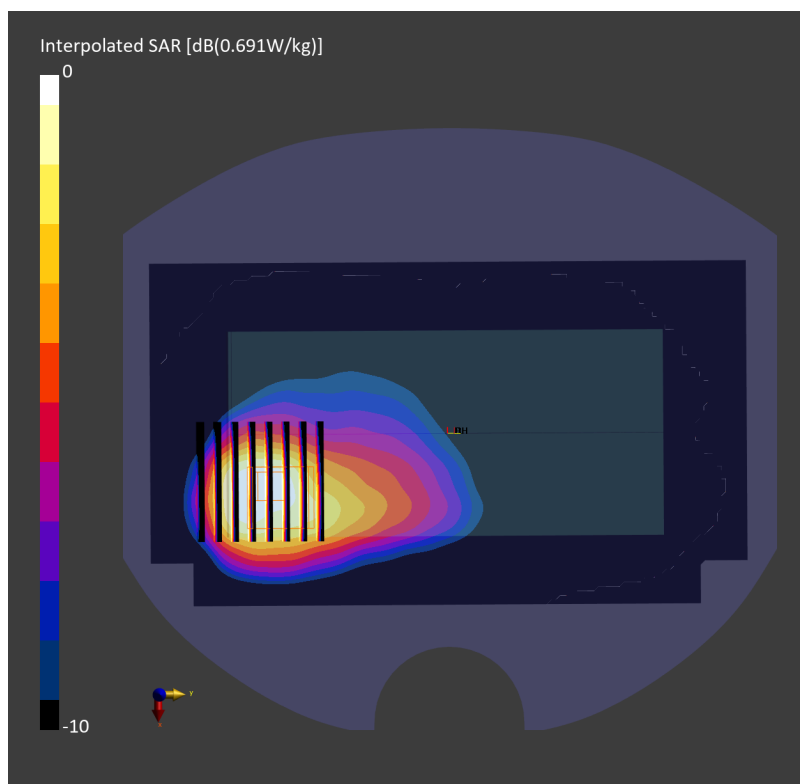

#76_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.380 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.353 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

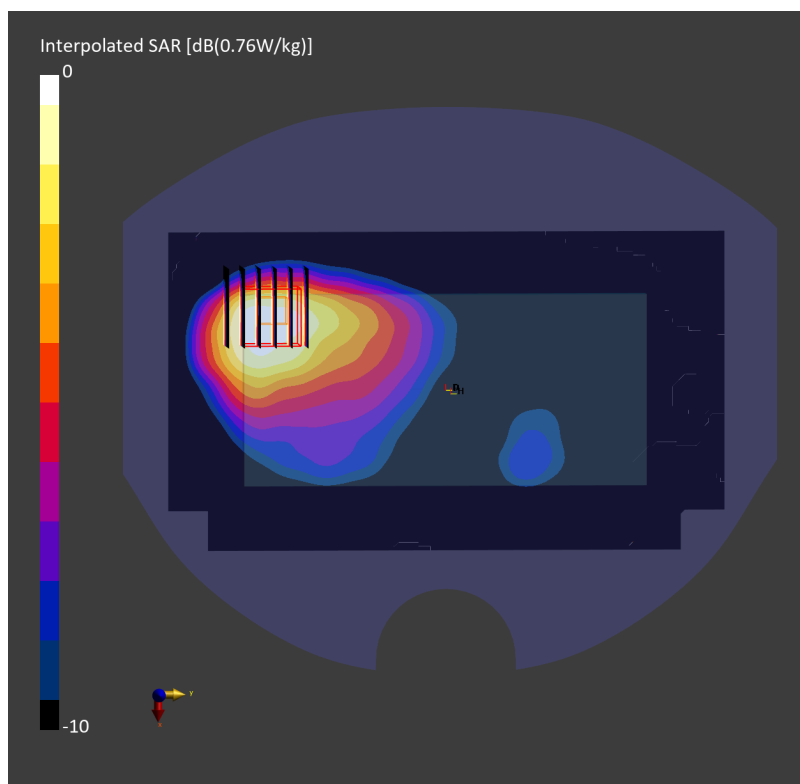

#77_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.563 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.562 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

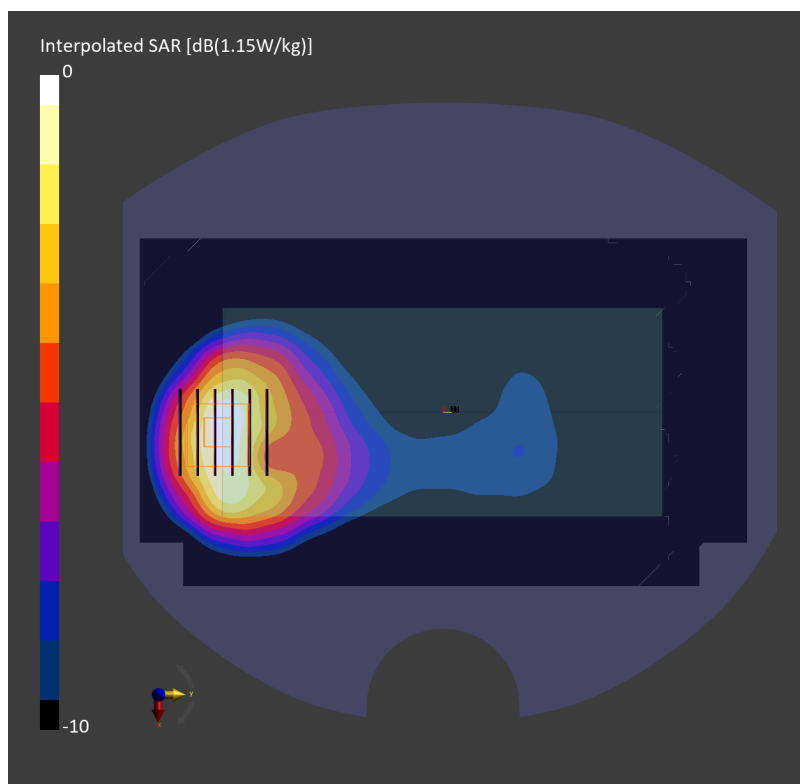

#78_LTE Band 7_20M_QPSK_50_0_Back_5mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.528 W/kg; SAR (10g) = 0.280 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.519 W/kg; SAR (8g) = 0.292 W/kg; SAR (10g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

TSL Correction: Positive only

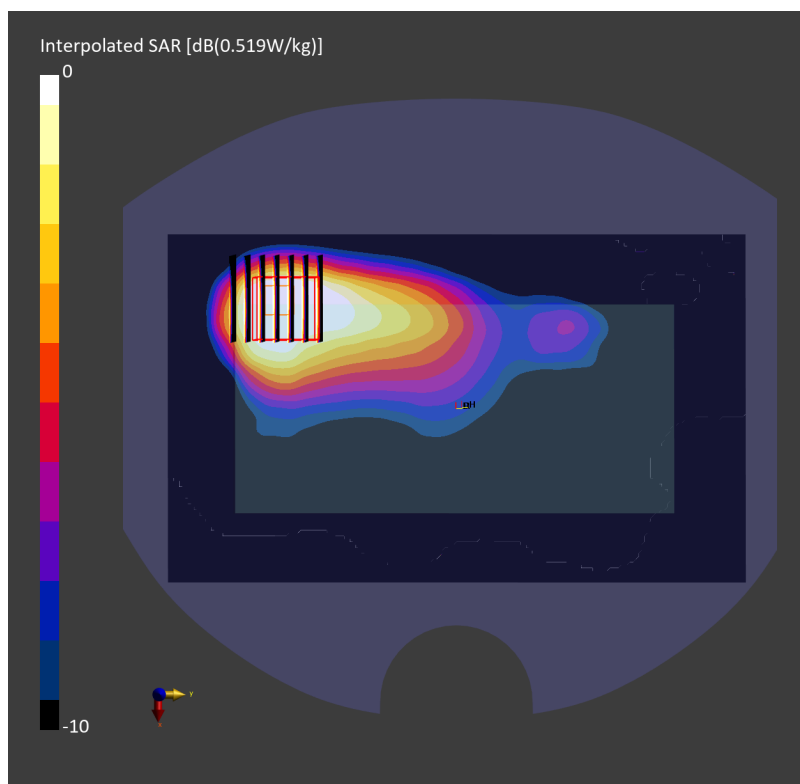

#79_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260202 Medium parameters used: $f=707.500$ MHz; $\sigma=0.871$ S/m; $\epsilon_r=44.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.458 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.737 W/kg; SAR (8g) = 0.419 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

TSL Correction: Positive only

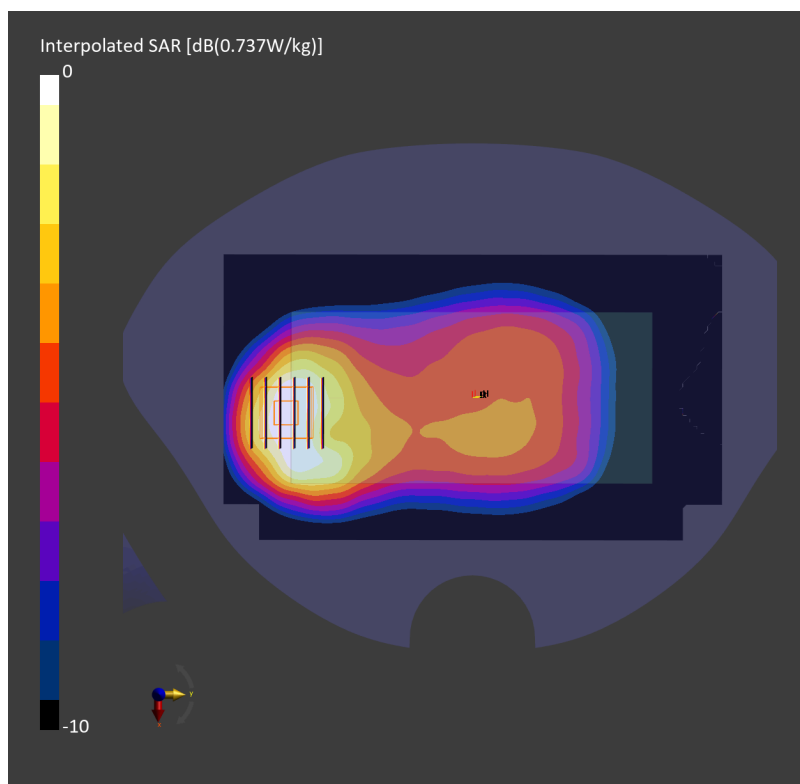

#80_LTE Band 13_10M_QPSK_25_12_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.562 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.320 W/kg; SAR (10g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

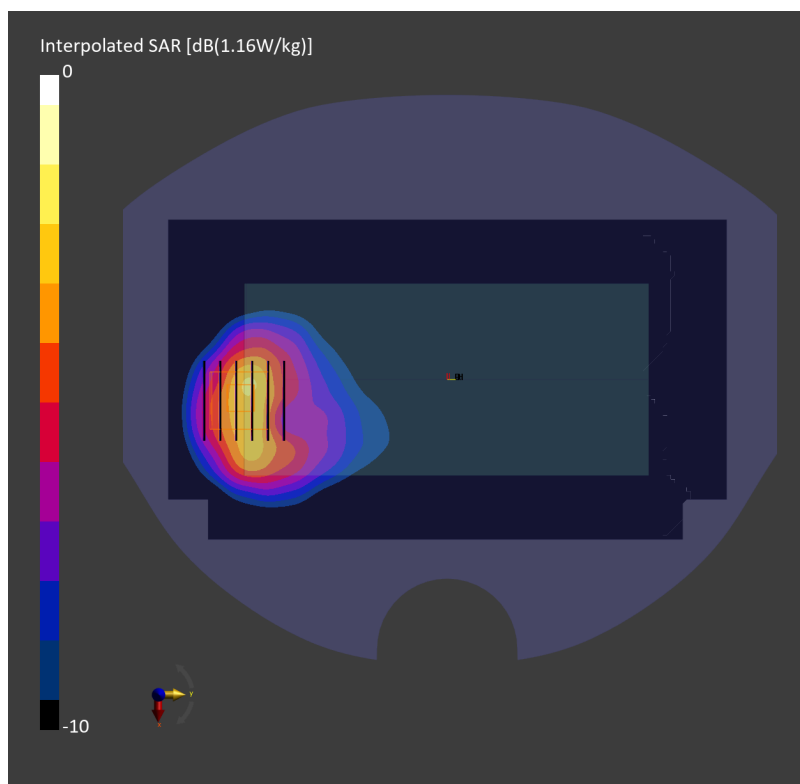

#81_LTE Band 14_10M_QPSK_25_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.452 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.780 W/kg; SAR (8g) = 0.437 W/kg; SAR (10g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

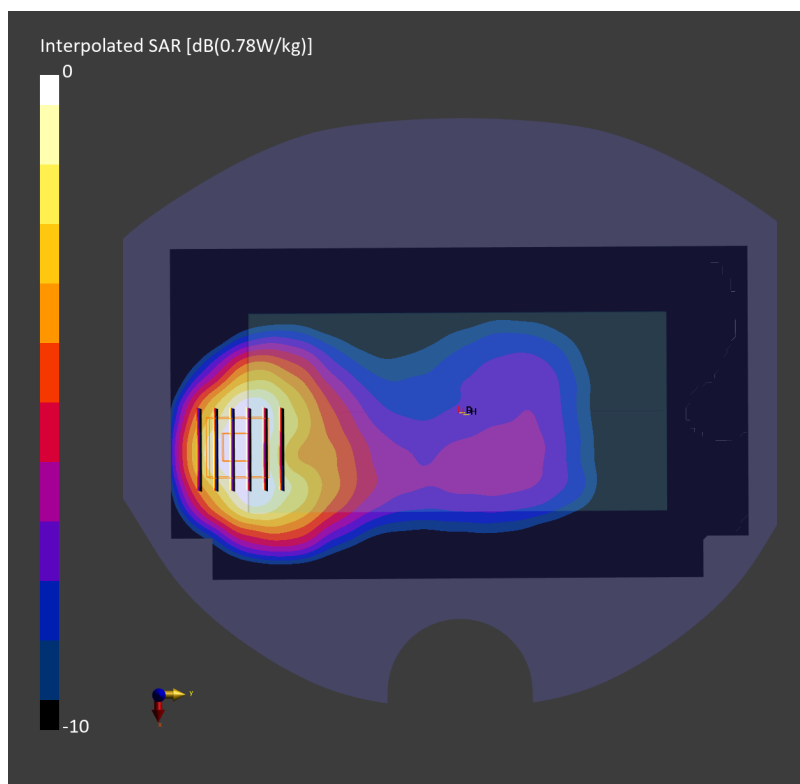

#82_LTE Band 25_20M_QPSK_50_0_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260117 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.848 W/kg; SAR (10g) = 0.467 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.698 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

TSL Correction: Positive only

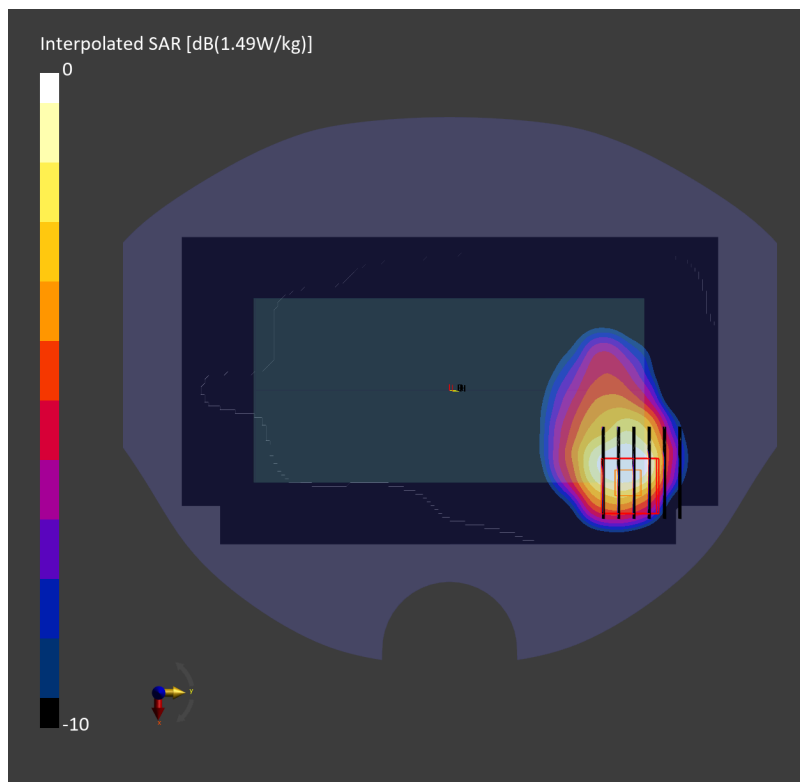

#83_LTE Band 26_15M_QPSK_36_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.652 W/kg; SAR (10g) = 0.421 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.740 W/kg; SAR (8g) = 0.414 W/kg; SAR (10g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

TSL Correction: Positive only

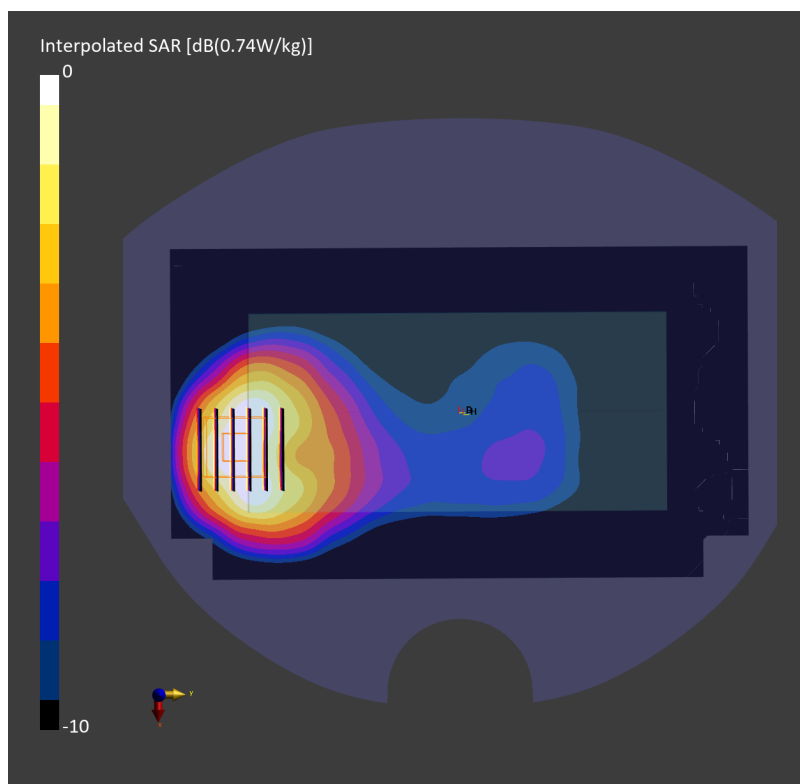

#84_LTE Band 30_10M_QPSK_1_0_Back_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.37, 7.25, 7.29); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.494 W/kg; SAR (10g) = 0.278 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.497 W/kg; SAR (8g) = 0.286 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

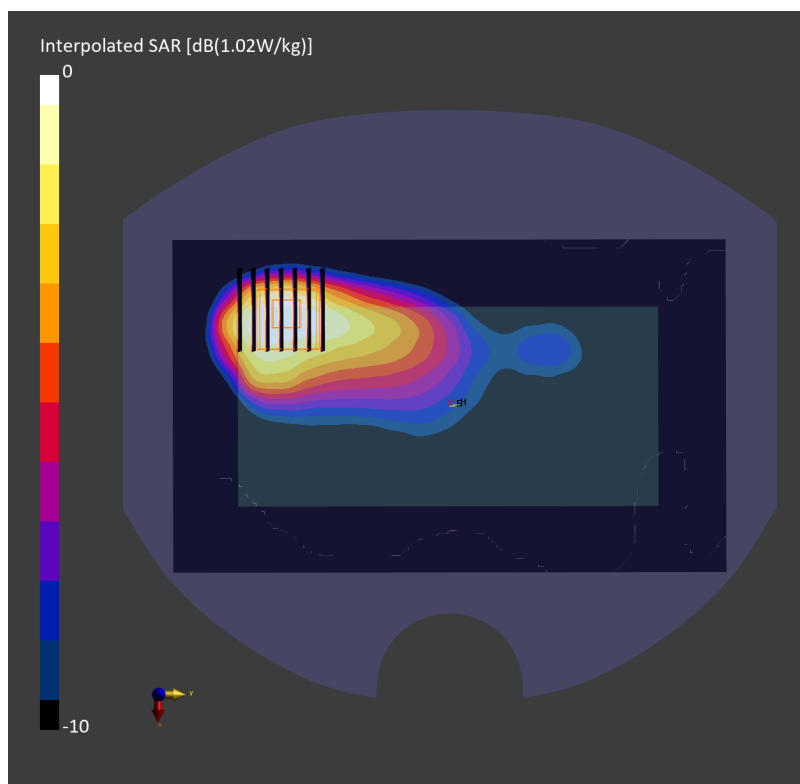

#85_LTE Band 66_20M_QPSK_1_99_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260311 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.884 W/kg; SAR (10g) = 0.483 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.806 W/kg; SAR (8g) = 0.458 W/kg; SAR (10g) = 0.426 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

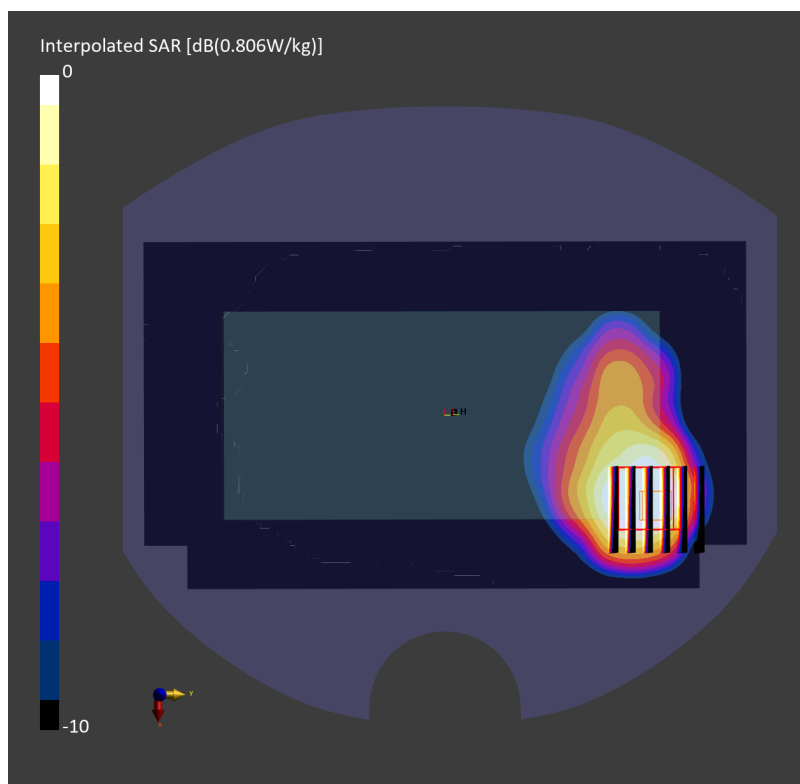

#86_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260205 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.625 W/kg; SAR (10g) = 0.410 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.688 W/kg; SAR (8g) = 0.391 W/kg; SAR (10g) = 0.365 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

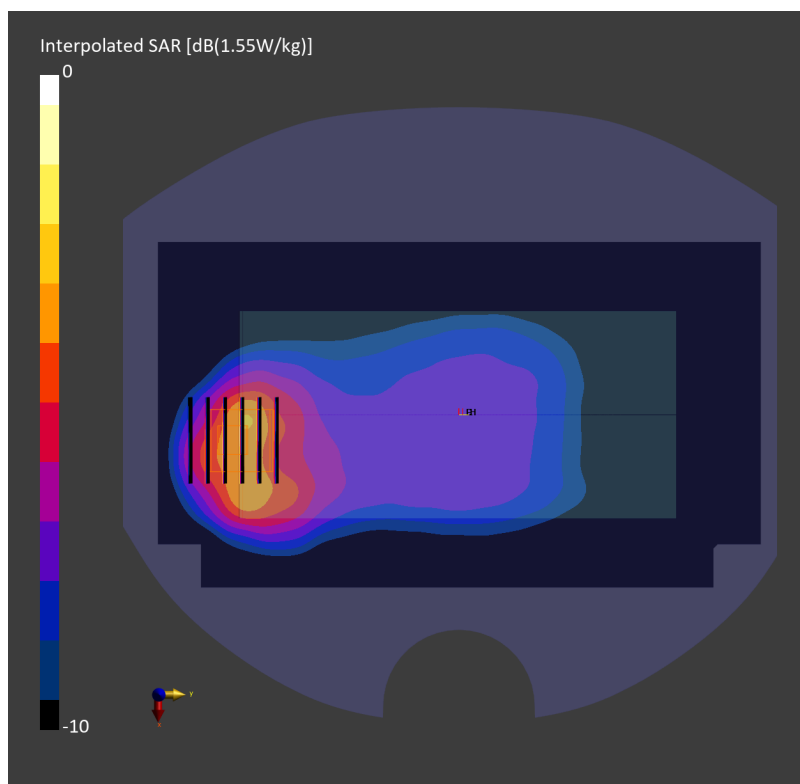

#87_LTE Band 41_20M_QPSK_50_0_Back_5mm_Ch41055

Communication System: LTE-TDD; Frequency: 2636.500 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 2.00$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.255 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.573 W/kg; SAR (8g) = 0.276 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

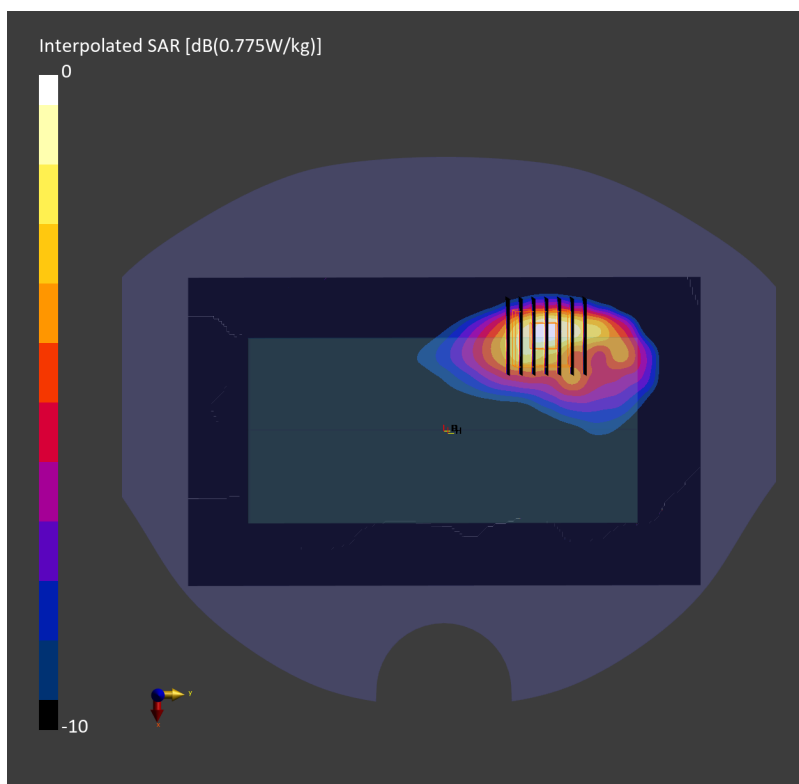

#88_LTE Band 48_20M_QPSK_50_50_Back_5mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.641 W/kg; SAR (10g) = 0.295 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.15 dB

SAR (1g) = 0.665 W/kg; SAR (8g) = 0.319 W/kg; SAR (10g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

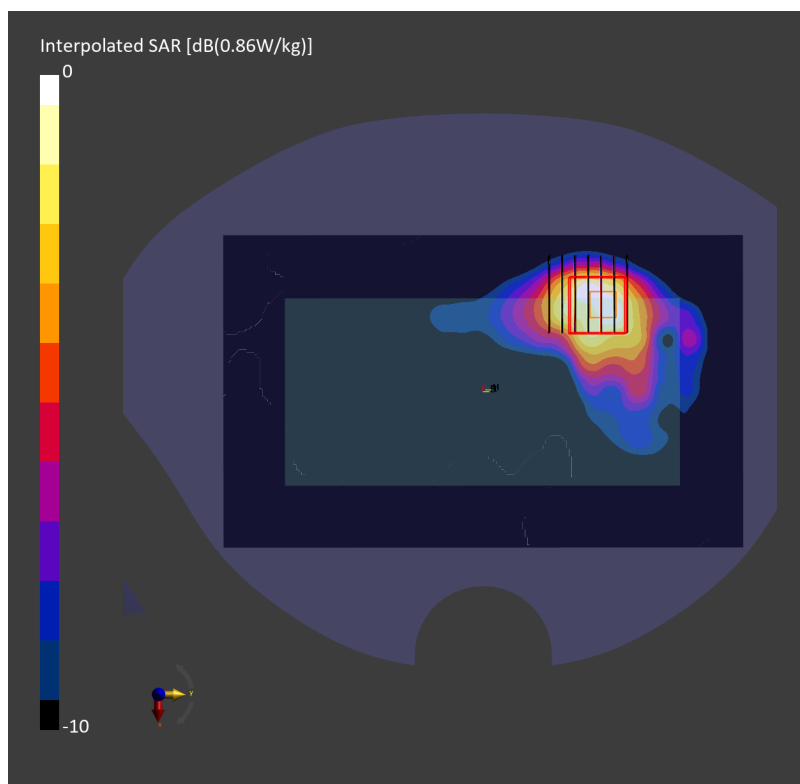

#89_FR1 n7_50M_BPSK_135_0_Back_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.540 W/kg; SAR (10g) = 0.297 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.573 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

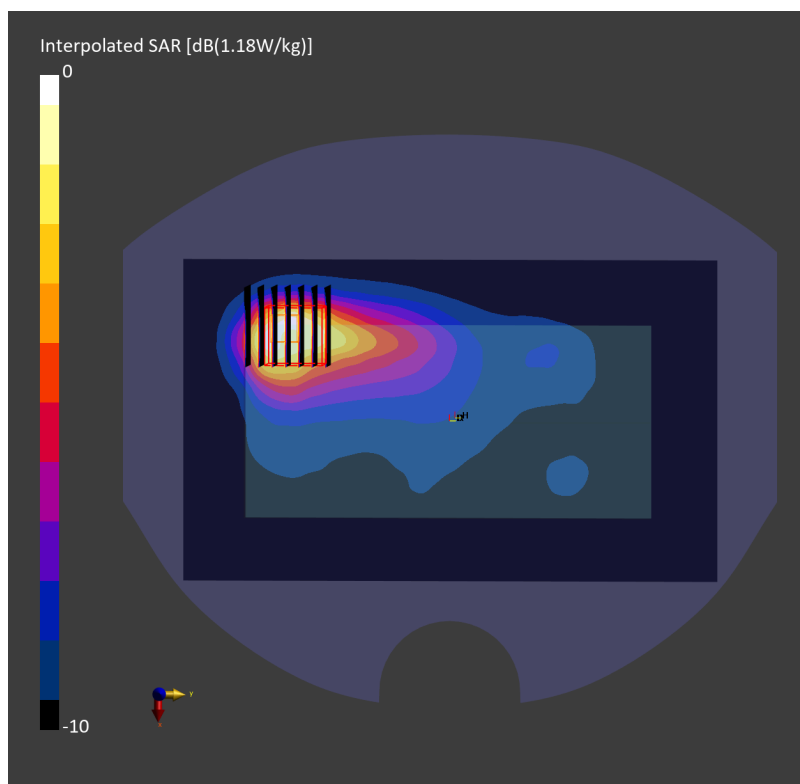

#90_FR1 n12_15M_BPSK_1_77_Back_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260402 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.356 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.566 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

TSL Correction: Positive only

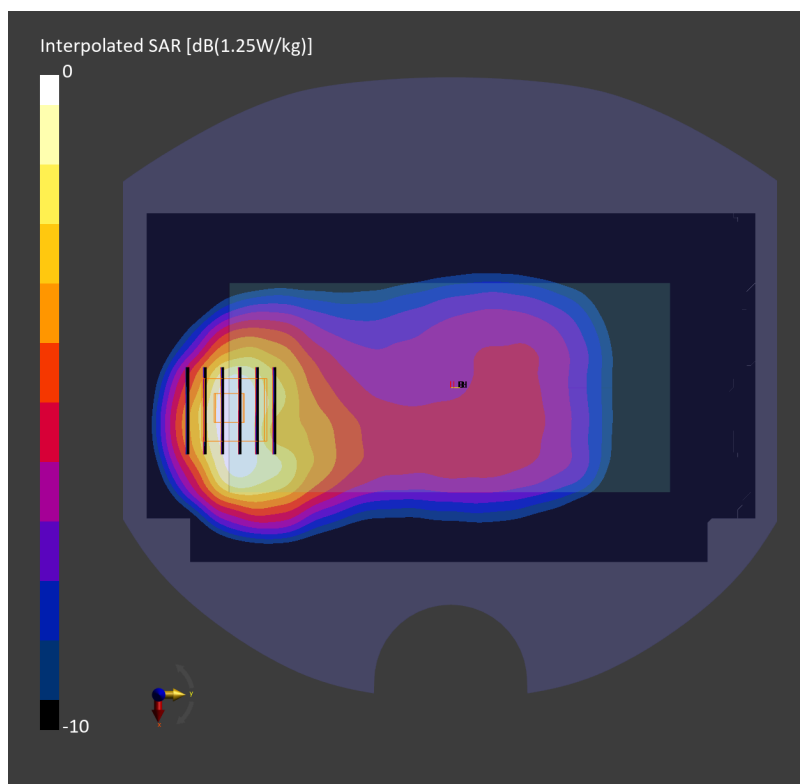

#91_FR1 n13_10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.446 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.765 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

TSL Correction: Positive only

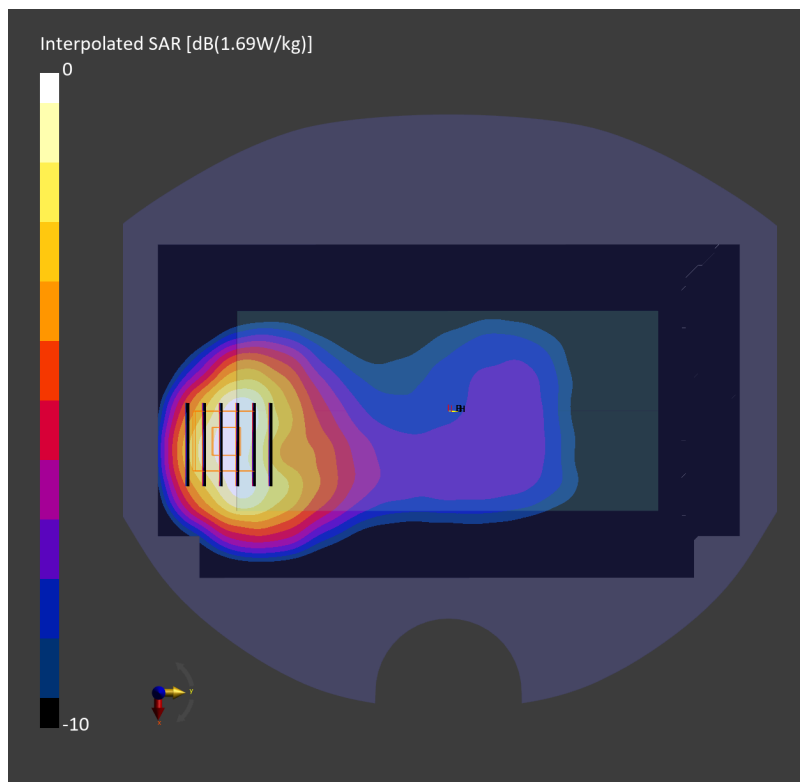

#92_FR1 n14_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.404 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.718 W/kg; SAR (8g) = 0.405 W/kg; SAR (10g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

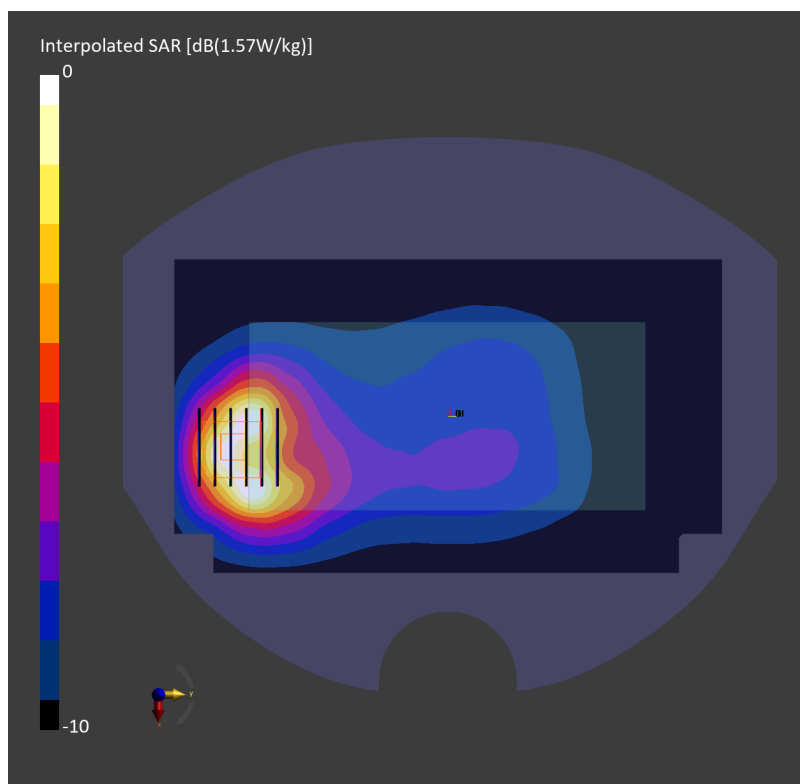

#93_FR1 n25_40M_BPSK_1_108_Back_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.460 W/kg; SAR (10g) = 0.257 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.625 W/kg; SAR (8g) = 0.325 W/kg; SAR (10g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

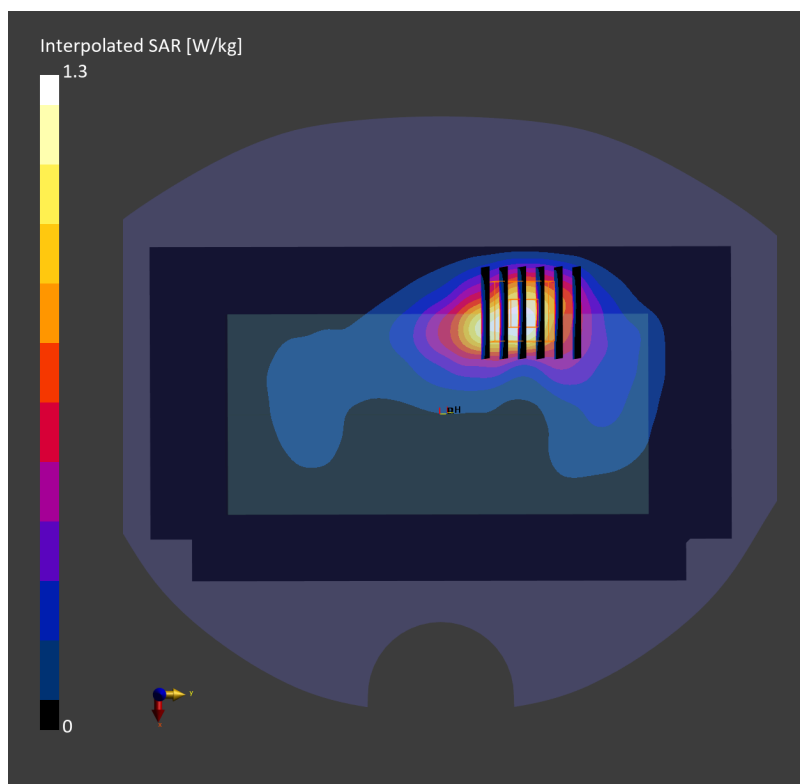

#94_FR1 n26_20M_BPSK_1_1_Back_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.447 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.771 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.398 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

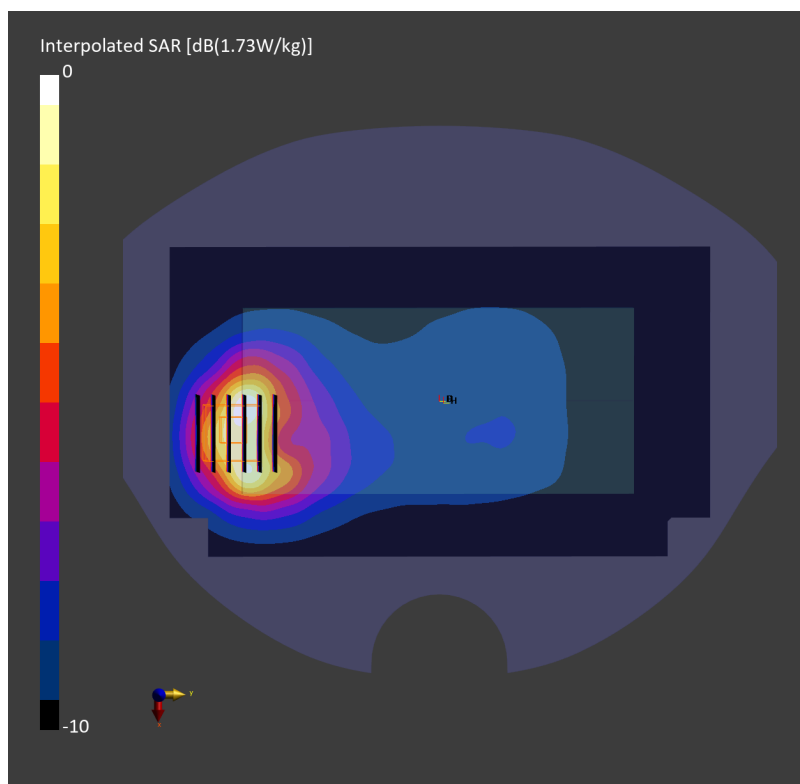

#95_FR1 n30_10M_BPSK_25_14_Back_5mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.37, 7.25, 7.29); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.449 W/kg; SAR (10g) = 0.211 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.09 dB

SAR (1g) = 0.454 W/kg; SAR (8g) = 0.232 W/kg; SAR (10g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

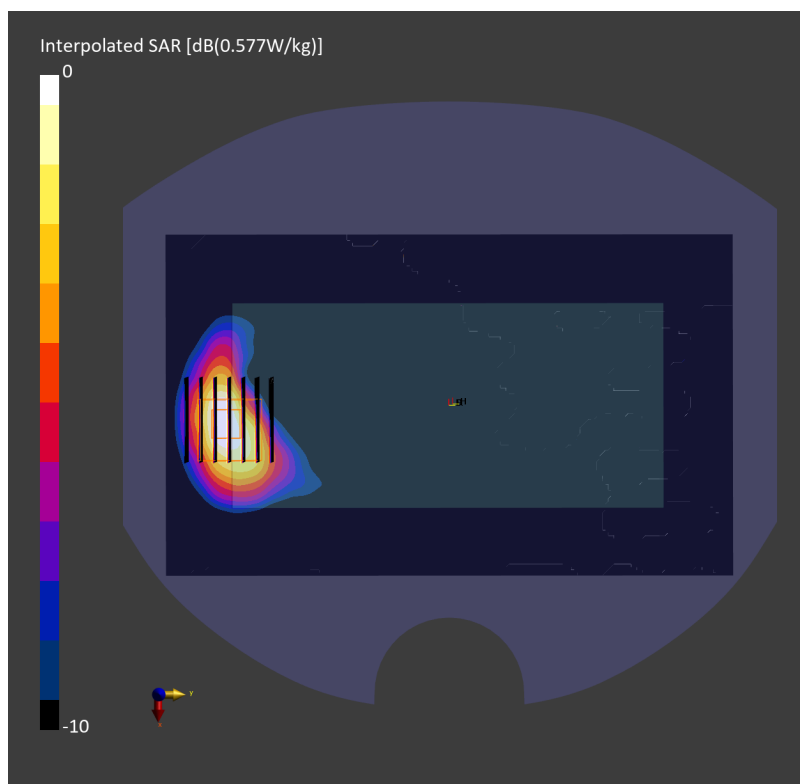

#96_FR1 n66_45M_BPSK_120_0_Back_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.466 W/kg; SAR (10g) = 0.259 W/kg;

TSL Correction: Positive only

Zoom Scan (39.2 mm x 39.2 mm x 31.2 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.620 W/kg; SAR (8g) = 0.321 W/kg; SAR (10g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

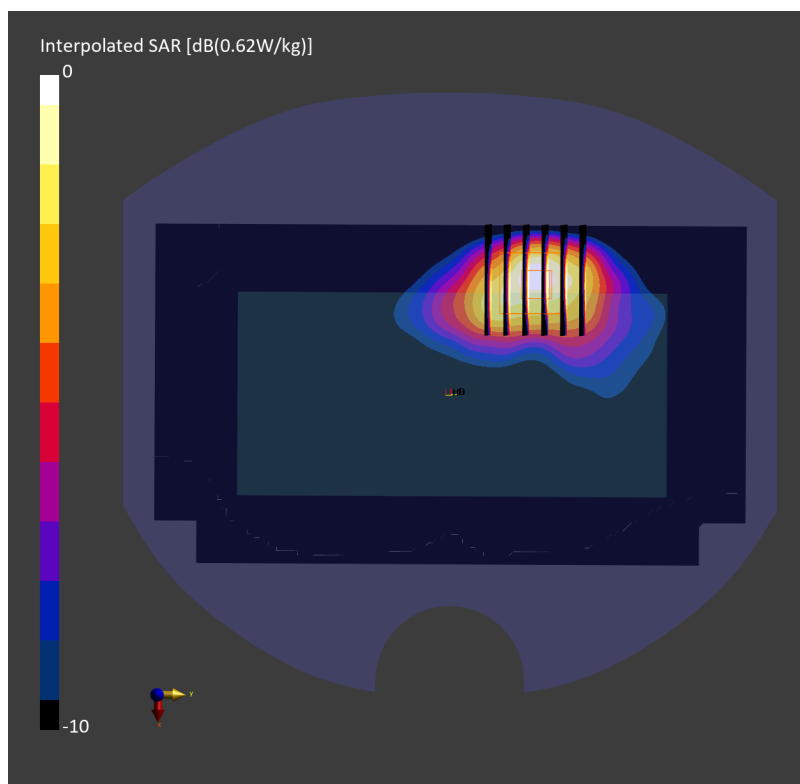

#97_FR1 n70_15M_BPSK_1_77_Back_5mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.413 W/kg; SAR (10g) = 0.237 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.573 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

TSL Correction: Positive only

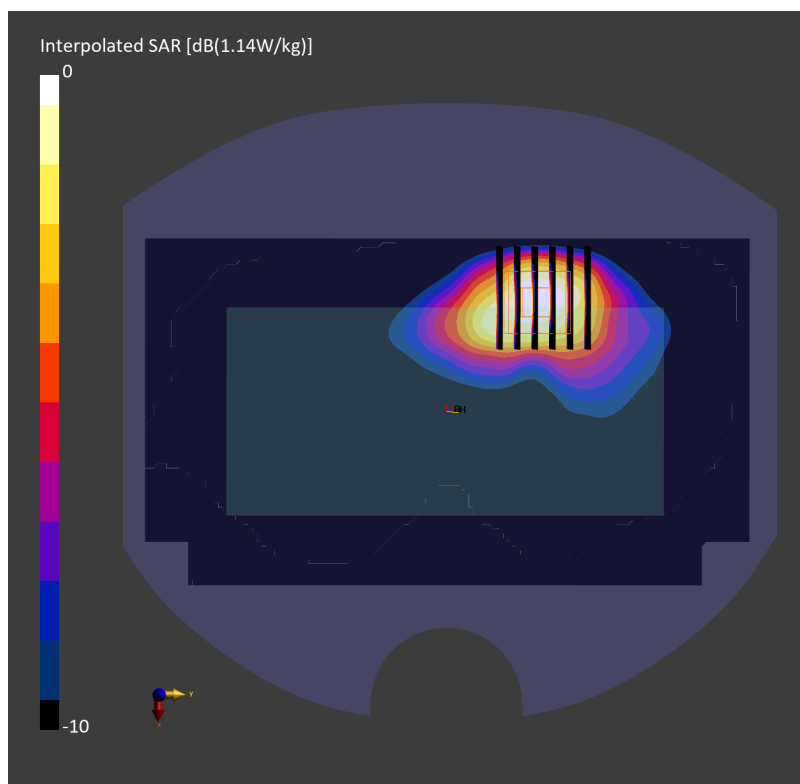

#98_FR1 n71_35M_BPSK_90_45_Back_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260219 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.793 W/kg; SAR (10g) = 0.496 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.768 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

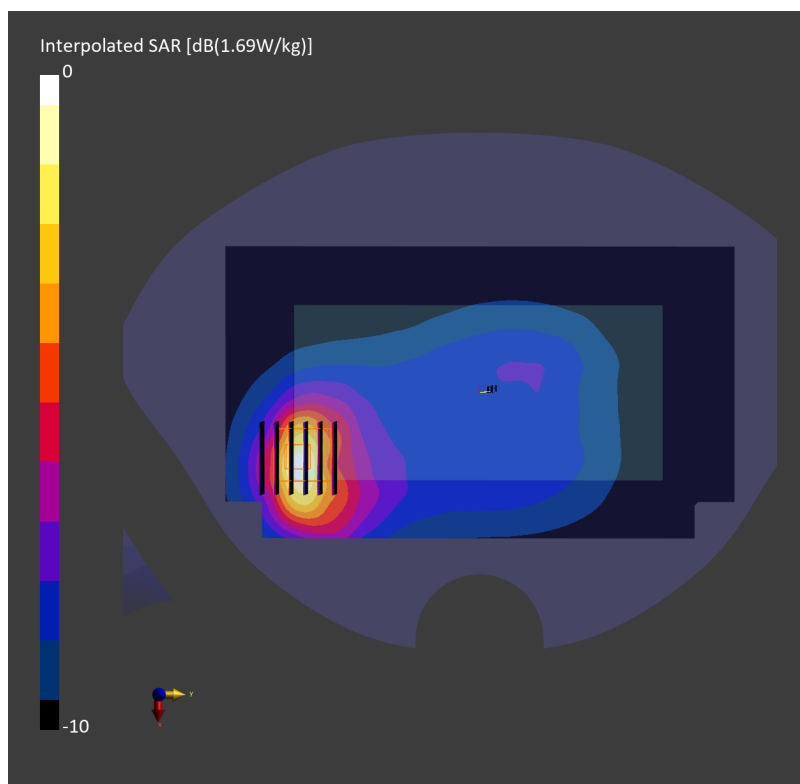

#99_FR1 n41_100M_BPSK_135_0_Back_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.659 W/kg; SAR (10g) = 0.271 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.743 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

TSL Correction: Positive only

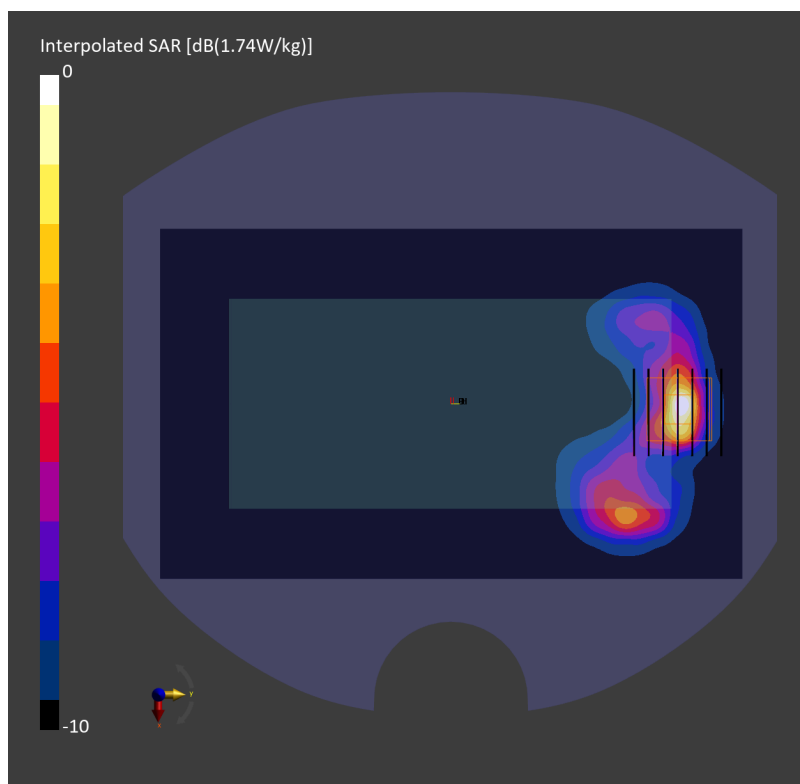

#100_FR1 n48_40M_BPSK_50_25_Back_5mm_Ch641666

Communication System: 5G NR; Frequency: 3624.985 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.96$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.637 W/kg; SAR (10g) = 0.236 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.266 W/kg; SAR (10g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

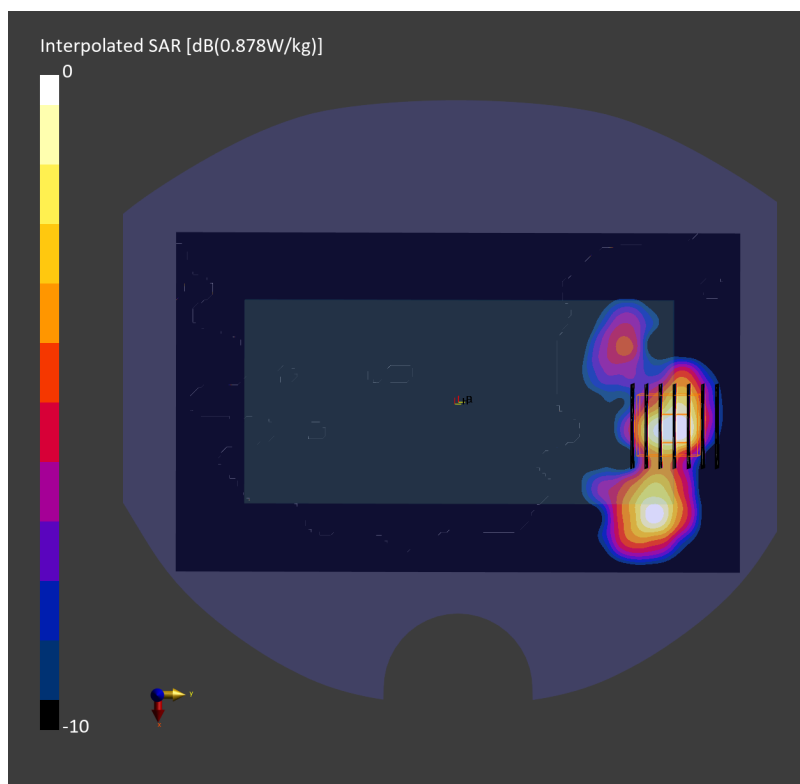

#101_FR1 n77_100M_BPSK_135_69_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.746 W/kg; SAR (10g) = 0.305 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.730 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

TSL Correction: Positive only

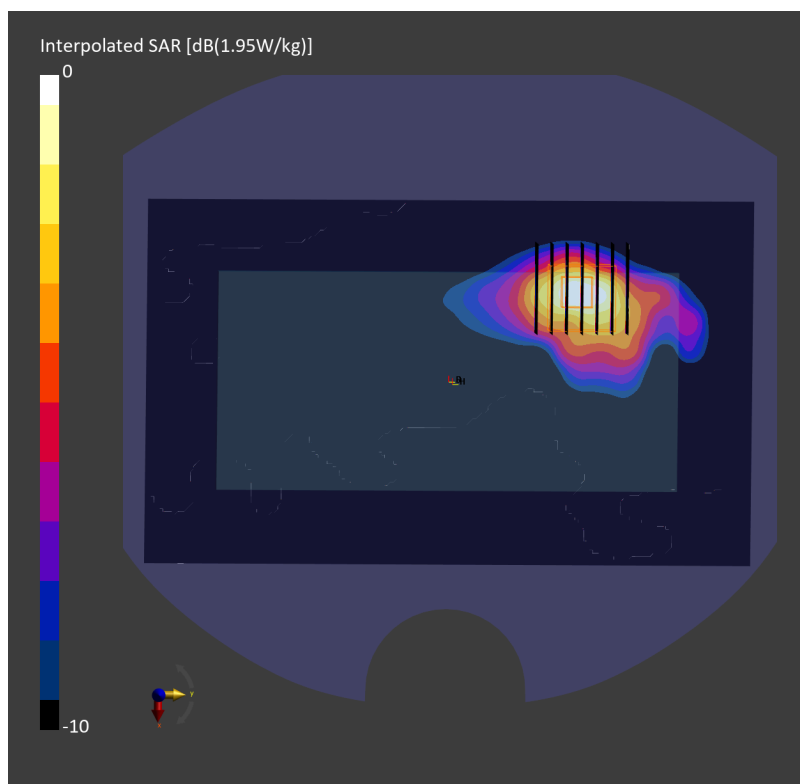

#102_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260318 Medium parameters used: $f=2412.000$ MHz; $\sigma=1.77$ S/m; $\epsilon_r=39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.517 W/kg; SAR (10g) = 0.229 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.531 W/kg; SAR (8g) = 0.261 W/kg; SAR (10g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.09 dB

SAR (1g) = 0.236 W/kg; SAR (8g) = 0.125 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

TSL Correction: Positive only

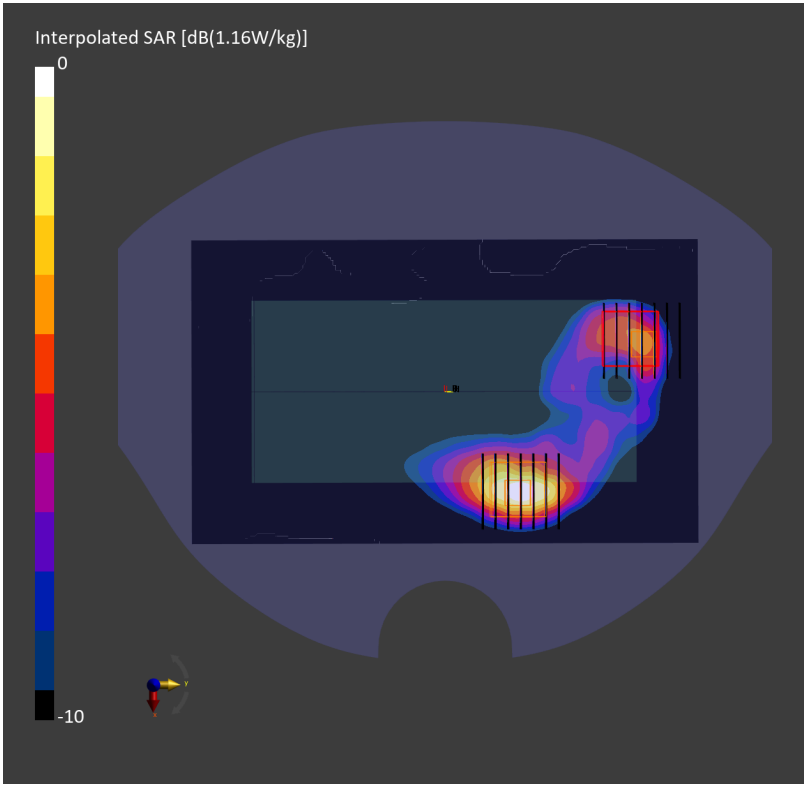

#103_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch54

Communication System: IEEE 802.11n; Frequency: 5270.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 34.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.98, 4.97, 4.75); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.263 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.707 W/kg; SAR (8g) = 0.301 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.198 W/kg; SAR (8g) = 0.076 W/kg; SAR (10g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

TSL Correction: Positive only

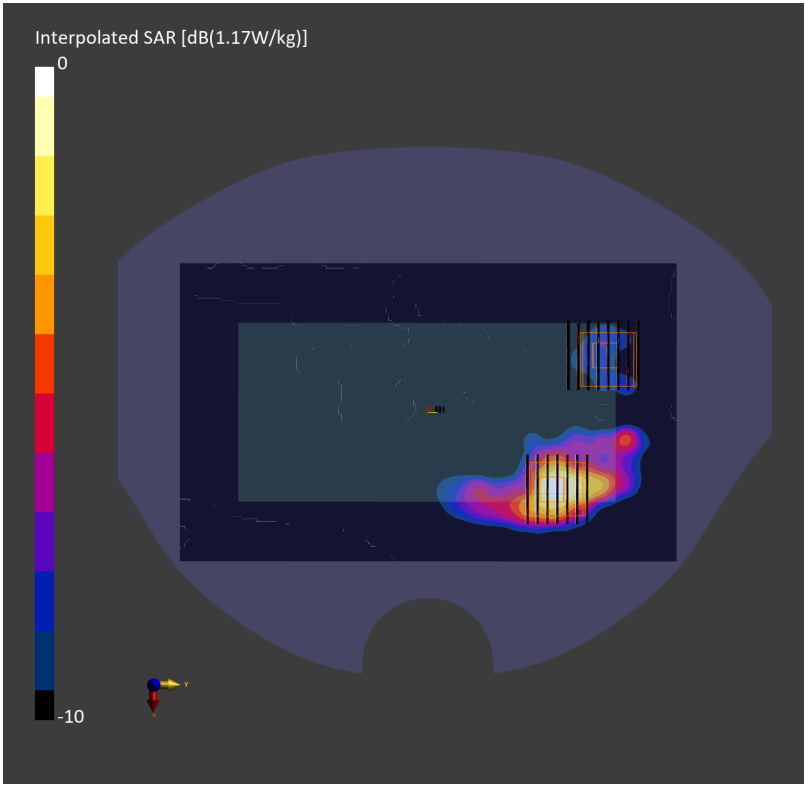

#104_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260315 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.05$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.413 W/kg; SAR (10g) = 0.118 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.15 dB

SAR (1g) = 0.211 W/kg; SAR (8g) = 0.063 W/kg; SAR (10g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.3 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.487 W/kg; SAR (8g) = 0.145 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.3 %

TSL Correction: Positive only

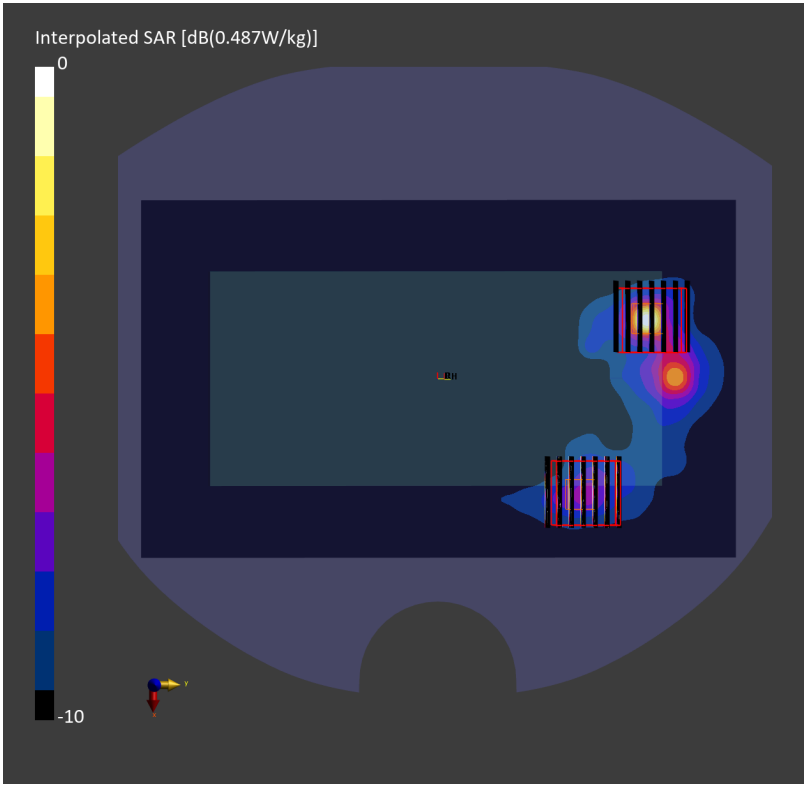

#105_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.08$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.55, 4.54, 4.34); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.413 W/kg; SAR (10g) = 0.128 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.12 dB

SAR (1g) = 0.417 W/kg; SAR (8g) = 0.147 W/kg; SAR (10g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.12 dB

SAR (1g) = 0.532 W/kg; SAR (8g) = 0.162 W/kg; SAR (10g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.4 %

TSL Correction: Positive only

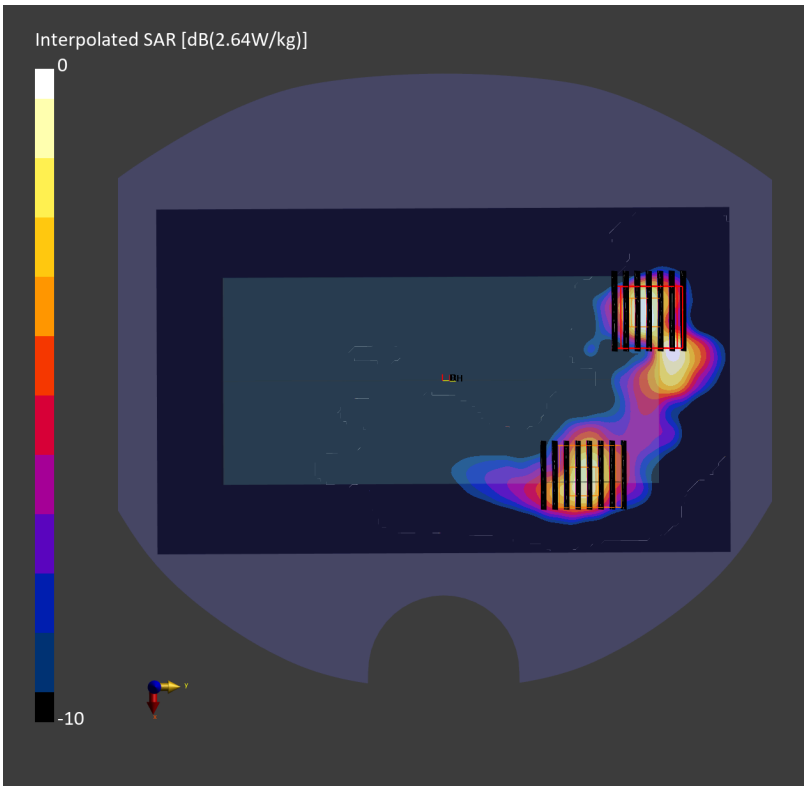

#106_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260315 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.464 W/kg; SAR (10g) = 0.145 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.408 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.3 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.17 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.173 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.3 %

TSL Correction: Positive only

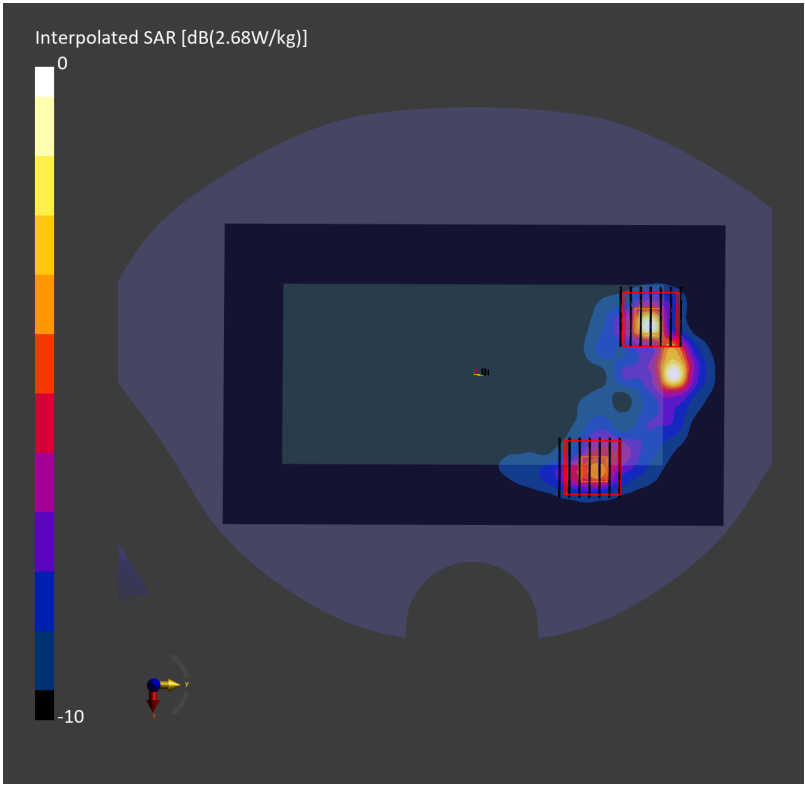

#107_WLAN6GHz_802.11ax-HE80 MCS0_Back_5mm_Ch215

Communication System: IEEE 802.11ax; Frequency: 7025.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 7025.000$ MHz; $\sigma = 6.48$ S/m; $\epsilon_r = 31.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (105.0 mm x 195.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 0.598 W/kg; SAR (10g) = 0.178 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.668 W/kg; SAR (8g) = 0.221 W/kg; SAR (10g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5 %

psAPD (1.0cm², sq) = 6.68 [W/m²]; psAPD (4.0cm², sq) = 4.42 [W/m²]

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.09 dB


SAR (1g) = 0.178 W/kg; SAR (8g) = 0.058 W/kg; SAR (10g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5 %

psAPD (1.0cm², sq) = 1.78 [W/m²]; psAPD (4.0cm², sq) = 1.17 [W/m²]

TSL Correction: Positive only

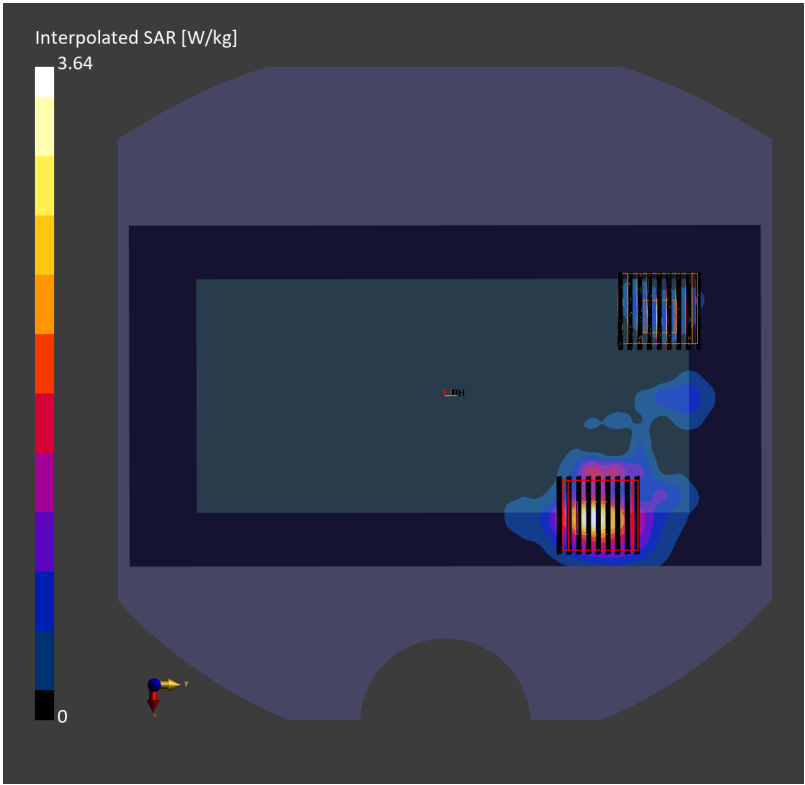

#108_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.906 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.933 W/kg; SAR (8g) = 0.459 W/kg; SAR (10g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

TSL Correction: Positive only

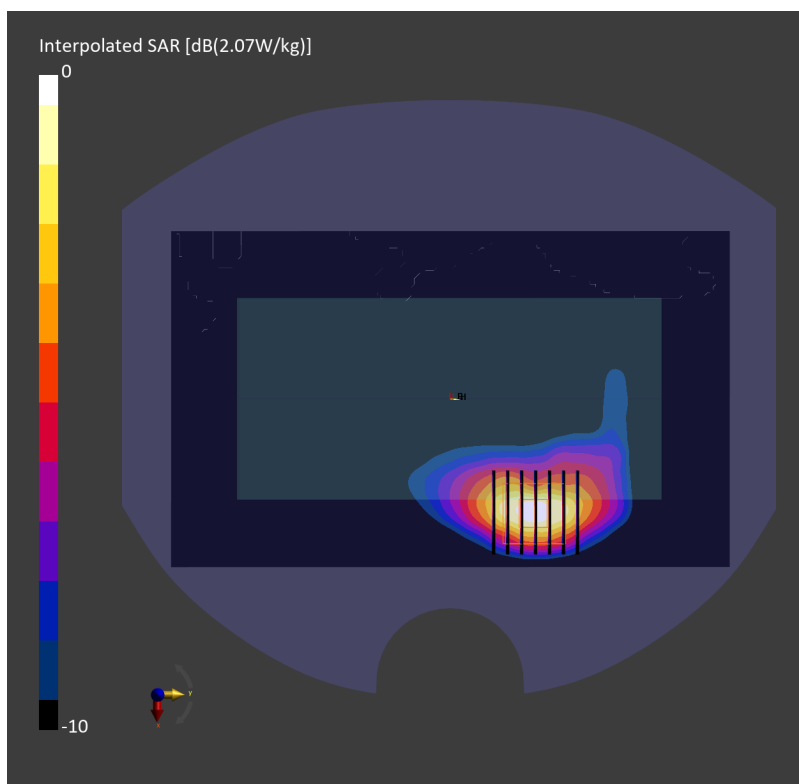

#109_Thread_250K_Back_5mm_Ch18

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2440.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2440.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.849 W/kg; SAR (10g) = 0.383 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.876 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

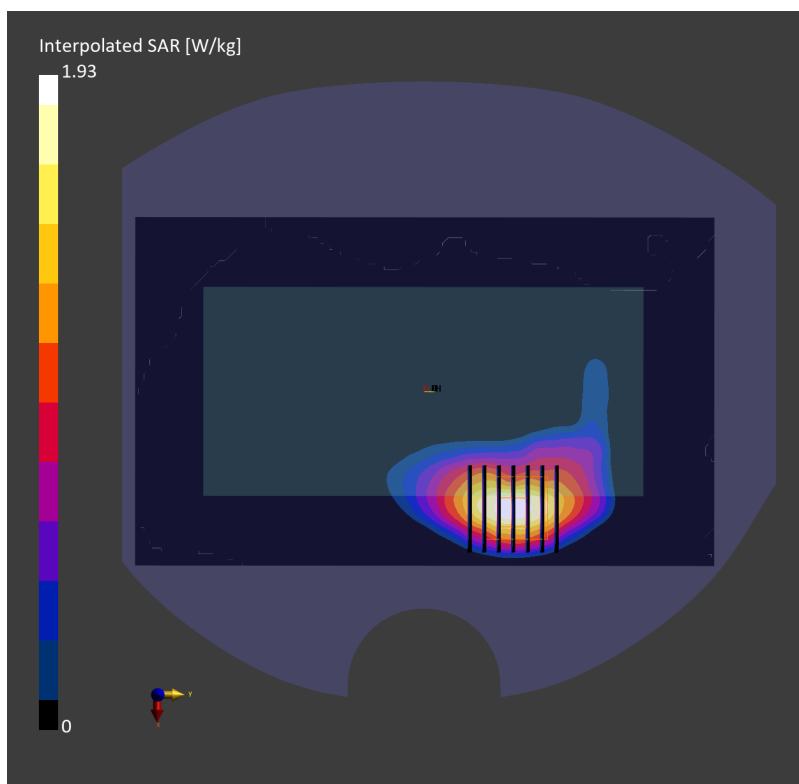

#110_LTE Band 7_20M_QPSK_50_0_Right Edge_0mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 3.09 W/kg; SAR (10g) = 1.18 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 3.36 W/kg; SAR (8g) = 1.27 W/kg; SAR (10g) = 1.11 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

TSL Correction: Positive only

