




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	15.4~19.3℃
		Relative Humidity :	42.1~48.8%

EUT Information

Report NO : 5N0813-01
Test Mode : Mode 3
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

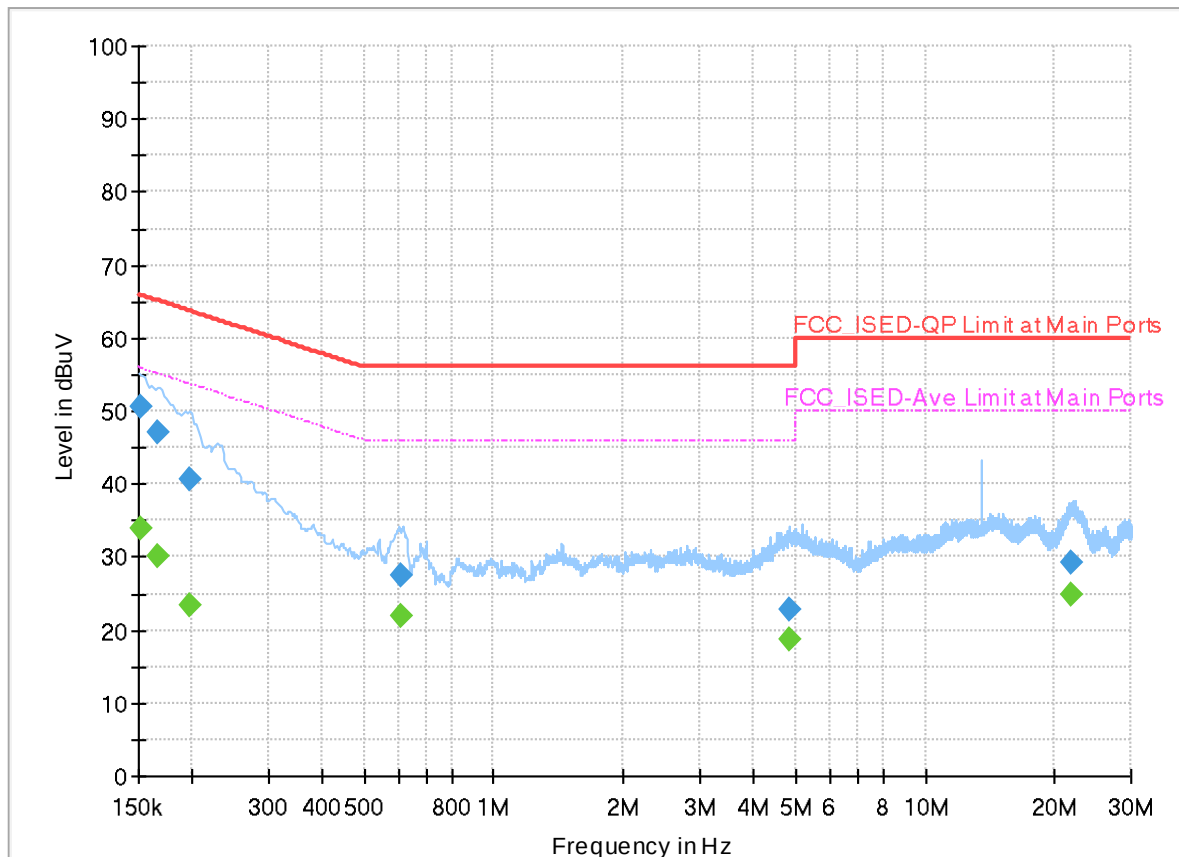


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151125	---	33.86	55.94	22.08	L1	ON	20.0
0.151125	50.51	---	65.94	15.43	L1	ON	20.0
0.166155	---	30.13	55.15	25.02	L1	ON	20.0
0.166155	47.10	---	65.15	18.05	L1	ON	20.0
0.198285	---	23.37	53.68	30.31	L1	ON	20.0
0.198285	40.70	---	63.68	22.98	L1	ON	20.0
0.607155	---	21.93	46.00	24.07	L1	ON	20.0
0.607155	27.50	---	56.00	28.50	L1	ON	20.0
4.836750	---	18.70	46.00	27.30	L1	ON	20.2
4.836750	22.90	---	56.00	33.10	L1	ON	20.2
21.727500	---	24.74	50.00	25.26	L1	ON	20.9
21.727500	29.33	---	60.00	30.67	L1	ON	20.9

EUT Information

Report NO : 5N0813-01
Test Mode : Mode 3
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

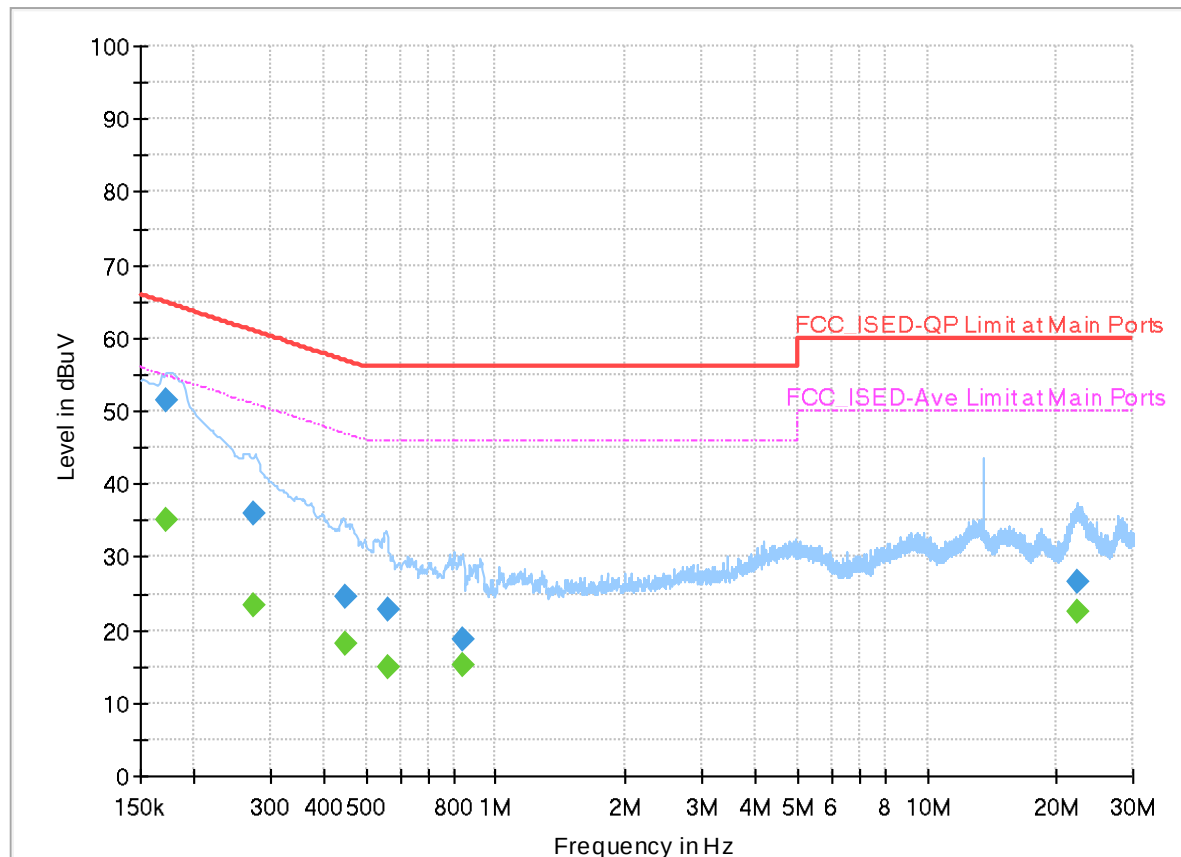

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.172275	---	35.22	54.85	19.63	N	ON	20.0
0.172275	51.48	---	64.85	13.37	N	ON	20.0
0.273750	---	23.38	51.00	27.62	N	ON	20.0
0.273750	35.87	---	61.00	25.13	N	ON	20.0
0.449250	---	17.99	46.89	28.90	N	ON	20.0
0.449250	24.66	---	56.89	32.23	N	ON	20.0
0.560670	---	14.96	46.00	31.04	N	ON	20.0
0.560670	22.86	---	56.00	33.14	N	ON	20.0
0.834990	---	15.10	46.00	30.90	N	ON	20.0
0.834990	18.72	---	56.00	37.28	N	ON	20.0
22.404300	---	22.54	50.00	27.46	N	ON	20.9
22.404300	26.69	---	60.00	33.31	N	ON	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen, Troye Hsieh	Temperature :	18.9~21.9°C
		Relative Humidity :	50.1~65.9%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	3+4	Bluetooth EDR_8-DPSK	00	2402	3Mbps	-	-
Mode 5	2400-2483.5	3+4	Bluetooth EDR_8-DPSK	39	2441	3Mbps	-	-
Mode 6	2400-2483.5	3+4	Bluetooth EDR_8-DPSK	78	2480	3Mbps	-	-
Mode 7	2400-2483.5	3+4	Bluetooth EDR_8-DPSK	78	2480	3Mbps	-	SHF
Mode 8	2400-2483.5	3+4	Bluetooth EDR_8-DPSK	78	2480	3Mbps	-	LF





C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth EDR_8-DPSK	00	2389.58	42.84	54.00	-11.16	H	Avg.	Pass	-	Band Edge
	Bluetooth EDR_8-DPSK	00	4804.00	42.61	74.00	-31.39	V	Peak	Pass	-	Harmonic
5	Bluetooth EDR_8-DPSK	39	2485.43	43.46	54.00	-10.54	H	Avg.	Pass	-	Band Edge
	Bluetooth EDR_8-DPSK	39	7323.00	42.91	74.00	-31.09	H	Peak	Pass	-	Harmonic
6	Bluetooth EDR_8-DPSK	78	2483.54	47.01	54.00	-6.99	H	Avg.	Pass	-	Band Edge
	Bluetooth EDR_8-DPSK	78	4960.00	43.39	74.00	-30.61	V	Peak	Pass	-	Harmonic
7	SHF	78	24921.80	41.40	74.00	-32.60	V	Peak	Pass	-	SHF
8	LF	78	30.00	31.78	40.00	-8.22	V	Peak	Pass	-	LF



Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																			
ANT	3+4																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2340.54</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>42.82</td><td>27.20</td><td>6.72</td><td>33.25</td><td>10.12</td><td>268</td><td>259</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2340.54	53.61	74.00	-20.39	42.82	27.20	6.72	33.25	10.12	268	259	Peak	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>114.46</td><td>-----</td><td>-----</td><td>103.39</td><td>27.32</td><td>6.82</td><td>33.19</td><td>10.12</td><td>268</td><td>259</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	114.46	-----	-----	103.39	27.32	6.82	33.19	10.12	268	259	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2340.54	53.61	74.00	-20.39	42.82	27.20	6.72	33.25	10.12	268	259	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	114.46	-----	-----	103.39	27.32	6.82	33.19	10.12	268	259	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.58</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>31.82</td><td>27.30</td><td>6.80</td><td>33.20</td><td>10.12</td><td>268</td><td>259</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.58	42.84	54.00	-11.16	31.82	27.30	6.80	33.20	10.12	268	259	Average	Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>111.32</td><td>-----</td><td>-----</td><td>100.25</td><td>27.32</td><td>6.82</td><td>33.19</td><td>10.12</td><td>268</td><td>259</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	111.32	-----	-----	100.25	27.32	6.82	33.19	10.12	268	259	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.58	42.84	54.00	-11.16	31.82	27.30	6.80	33.20	10.12	268	259	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	111.32	-----	-----	100.25	27.32	6.82	33.19	10.12	268	259	Average																																																																																								

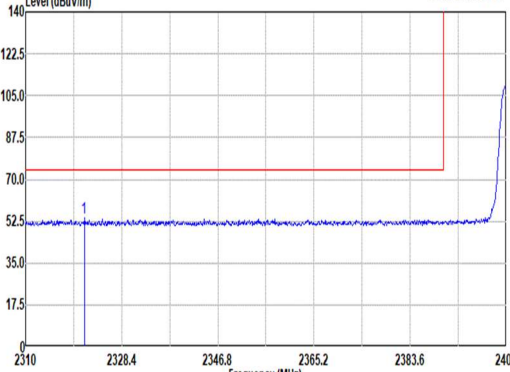
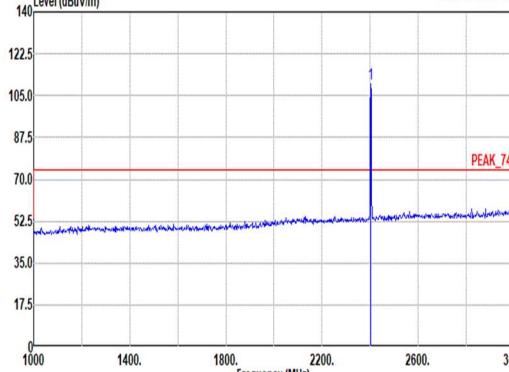
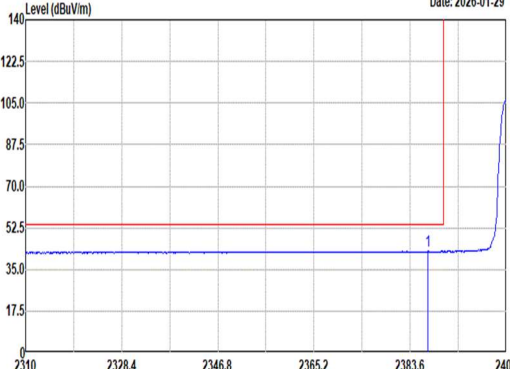
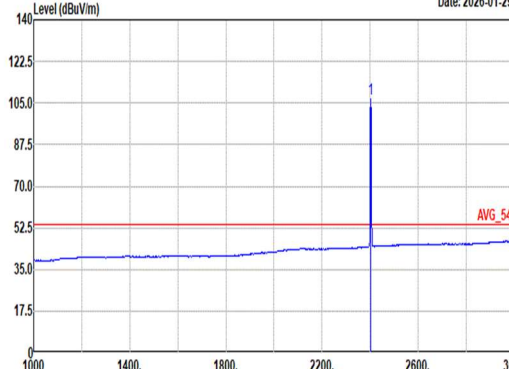


		4																																																																																																		
Mode	Band Edge																																																																																																			
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																																			
ANT	3+4																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-29  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2321.22</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>43.14</td><td>27.20</td><td>6.69</td><td>33.26</td><td>10.12</td><td>389</td><td>111</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2321.22	53.89	74.00	-20.11	43.14	27.20	6.69	33.26	10.12	389	111	Peak	Level (dBuV/m) Date: 2026-01-29  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>109.94</td><td>-----</td><td>-----</td><td>98.87</td><td>27.32</td><td>6.82</td><td>33.19</td><td>10.12</td><td>389</td><td>111</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	109.94	-----	-----	98.87	27.32	6.82	33.19	10.12	389	111	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2321.22	53.89	74.00	-20.11	43.14	27.20	6.69	33.26	10.12	389	111	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	109.94	-----	-----	98.87	27.32	6.82	33.19	10.12	389	111	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-01-29  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>31.62</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.12</td><td>389</td><td>111</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.00	42.61	54.00	-11.39	31.62	27.27	6.80	33.20	10.12	389	111	Average	Level (dBuV/m) Date: 2026-01-29  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>106.73</td><td>-----</td><td>-----</td><td>95.66</td><td>27.32</td><td>6.82</td><td>33.19</td><td>10.12</td><td>389</td><td>111</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.73	-----	-----	95.66	27.32	6.82	33.19	10.12	389	111	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2387.00	42.61	54.00	-11.39	31.62	27.27	6.80	33.20	10.12	389	111	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	106.73	-----	-----	95.66	27.32	6.82	33.19	10.12	389	111	Average																																																																																								



Mode	4																																																																																							
	Harmonic																																																																																							
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz																																																																																							
ANT	3+4																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-02-02 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.48</td><td>74.00</td><td>-33.52</td><td>64.04</td><td>32.32</td><td>10.34</td><td>67.17</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.48	74.00	-33.52	64.04	32.32	10.34	67.17	0.95	--	Peak	Level (dBuV/m) Date: 2026-02-02 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL Mode : 4 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.61</td><td>74.00</td><td>-31.39</td><td>66.17</td><td>32.32</td><td>10.34</td><td>67.17</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.61	74.00	-31.39	66.17	32.32	10.34	67.17	0.95	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	40.48	74.00	-33.52	64.04	32.32	10.34	67.17	0.95	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	42.61	74.00	-31.39	66.17	32.32	10.34	67.17	0.95	--	Peak																																																																													

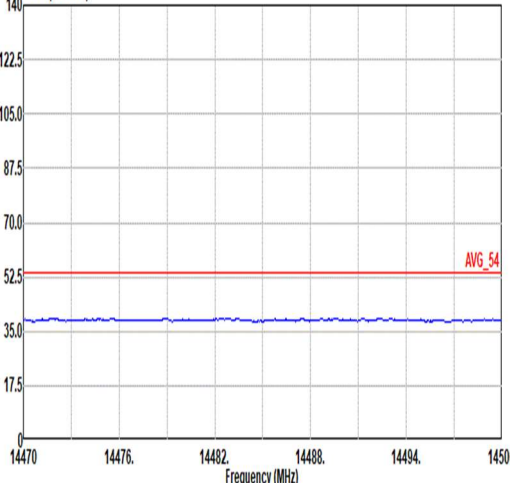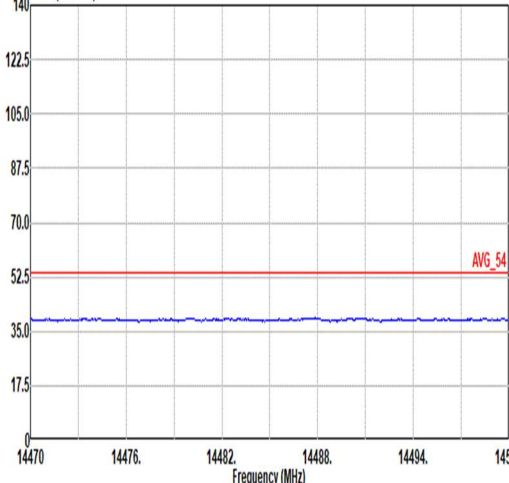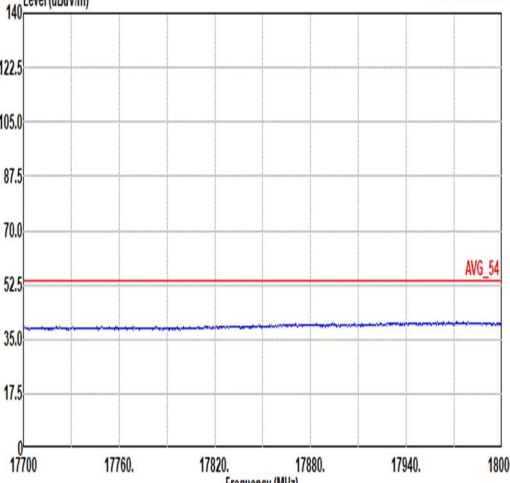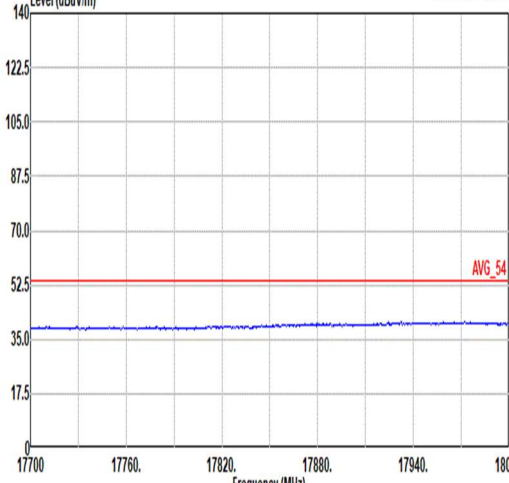

Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH00_2402MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 4 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 4 Setting : 22
	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 4 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 4 Setting : 22

Mode

ANT

Pol.

Peak

Avg

5

Band Edge - L

2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz

3+4

Horizontal

Fundamental

Level (dBuV/m)

Date: 2026-01-29

Site : 03CH11-HY
Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 22

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1 2375.37	53.61	74.00	-20.39	42.72	27.20	6.78	33.21	10.12	242 Peak

Level (dBuV/m)

Date: 2026-01-29

Site : 03CH11-HY
Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 22

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1 2441.00	116.69	-----	-----	105.37	27.50	6.85	33.15	10.12	242 Peak

Level (dBuV/m)

Date: 2026-01-29

Site : 03CH11-HY
Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 22

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1 2389.65	42.78	54.00	-11.22	31.76	27.30	6.80	33.20	10.12	242 Average

Level (dBuV/m)

Date: 2026-01-29

Site : 03CH11-HY
Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL
: RBW:1000.000kHz VBW:0.510kHz SMT:Auto
Detector : PEAK
Mode : 5
Setting : 22

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm
1 2441.00	113.43	-----	-----	102.11	27.50	6.85	33.15	10.12	242 Average



	5											
Mode	Band Edge - R											
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz											
ANT	3+4											
Pol.	Horizontal						Fundamental					
Peak	Level (dBuV/m)											



		5																																																																																																																																																																																																									
Mode		Band Edge - L																																																																																																																																																																																																									
		2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz																																																																																																																																																																																																									
ANT		3+4																																																																																																																																																																																																									
Pol.		Vertical					Fundamental																																																																																																																																																																																																				
Peak		Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2374.58</td><td>53.28</td><td>74.00</td><td>-20.72</td><td>42.40</td><td>27.20</td><td>6.78</td><td>33.22</td><td>10.12</td><td>290</td><td>101</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2441.00</td><td>109.82</td><td>-----</td><td>-----</td><td>98.50</td><td>27.50</td><td>6.85</td><td>33.15</td><td>10.12</td><td>290</td><td>101</td><td>Peak</td></tr></table> <tr><td colspan="2">Avg</td><td colspan="10"> Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2377.47</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>31.63</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2441.00</td><td>106.90</td><td>-----</td><td>-----</td><td>95.60</td><td>27.50</td><td>6.84</td><td>33.16</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table> </td></tr>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Peak	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2374.58	53.28	74.00	-20.72	42.40	27.20	6.78	33.22	10.12	290	101	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Peak	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2441.00	109.82	-----	-----	98.50	27.50	6.85	33.15	10.12	290	101	Peak	Avg		Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2377.47</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>31.63</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2441.00</td><td>106.90</td><td>-----</td><td>-----</td><td>95.60</td><td>27.50</td><td>6.84</td><td>33.16</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2377.47	42.52	54.00	-11.48	31.63	27.20	6.78	33.21	10.12	290	101	Average	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2441.00	106.90	-----	-----	95.60	27.50	6.84	33.16	10.12	290	101	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Peak																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																			
1 2374.58	53.28	74.00	-20.72	42.40	27.20	6.78	33.22	10.12	290	101	Peak																																																																																																																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Peak																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																			
1 2441.00	109.82	-----	-----	98.50	27.50	6.85	33.15	10.12	290	101	Peak																																																																																																																																																																																																
Avg		Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2377.47</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>31.63</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-01-29 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 5 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1 2441.00</td><td>106.90</td><td>-----</td><td>-----</td><td>95.60</td><td>27.50</td><td>6.84</td><td>33.16</td><td>10.12</td><td>290</td><td>101</td><td>Average</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2377.47	42.52	54.00	-11.48	31.63	27.20	6.78	33.21	10.12	290	101	Average	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1 2441.00	106.90	-----	-----	95.60	27.50	6.84	33.16	10.12	290	101	Average																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																			
1 2377.47	42.52	54.00	-11.48	31.63	27.20	6.78	33.21	10.12	290	101	Average																																																																																																																																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Average																																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																																																																			
1 2441.00	106.90	-----	-----	95.60	27.50	6.84	33.16	10.12	290	101	Average																																																																																																																																																																																																







	5											
Mode	Band Edge - R											
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz											
ANT	3+4											
Pol.	Vertical						Fundamental					
Peak												



Mode	5																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz																																																																																																															
ANT	3+4																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-02-02 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 HORIZONTAL Mode : 5 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>41.49</td><td>74.00</td><td>-32.51</td><td>64.35</td><td>32.63</td><td>10.67</td><td>67.11</td><td>0.95</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7323.00</td><td>42.91</td><td>74.00</td><td>-31.09</td><td>58.27</td><td>36.81</td><td>13.74</td><td>66.10</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	41.49	74.00	-32.51	64.35	32.63	10.67	67.11	0.95	--	Peak	2	7323.00	42.91	74.00	-31.09	58.27	36.81	13.74	66.10	0.19	--	Peak	Level (dBuV/m) Date: 2026-02-02 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_250915 VERTICAL Mode : 5 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4882.00</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>64.86</td><td>32.63</td><td>10.67</td><td>67.11</td><td>0.95</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7323.00</td><td>42.71</td><td>74.00</td><td>-31.29</td><td>58.07</td><td>36.81</td><td>13.74</td><td>66.10</td><td>0.19</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4882.00	42.00	74.00	-32.00	64.86	32.63	10.67	67.11	0.95	--	Peak	2	7323.00	42.71	74.00	-31.29	58.07	36.81	13.74	66.10	0.19	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4882.00	41.49	74.00	-32.51	64.35	32.63	10.67	67.11	0.95	--	Peak																																																																																																					
2	7323.00	42.91	74.00	-31.09	58.27	36.81	13.74	66.10	0.19	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4882.00	42.00	74.00	-32.00	64.86	32.63	10.67	67.11	0.95	--	Peak																																																																																																					
2	7323.00	42.71	74.00	-31.29	58.07	36.81	13.74	66.10	0.19	--	Peak																																																																																																					

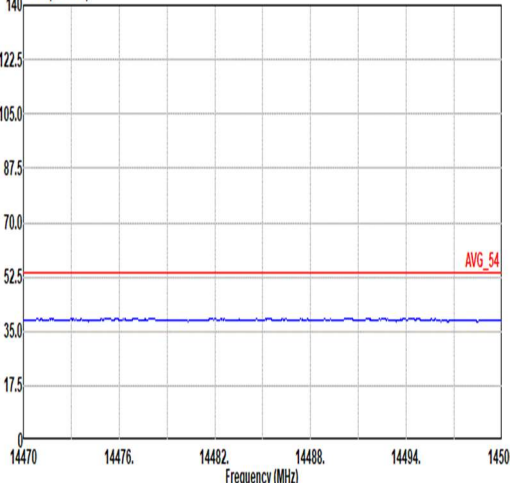
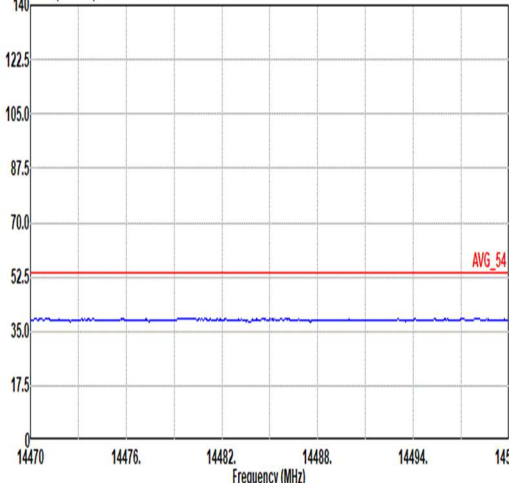
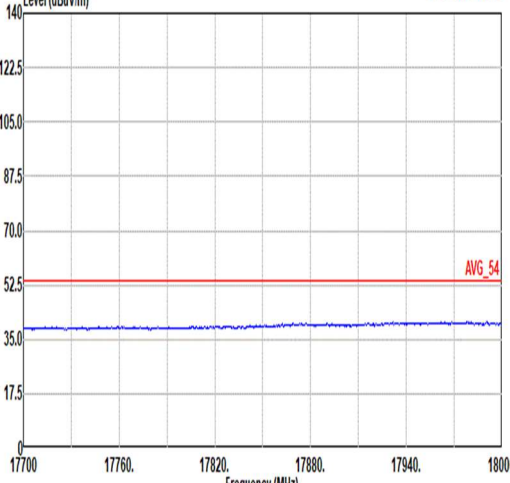
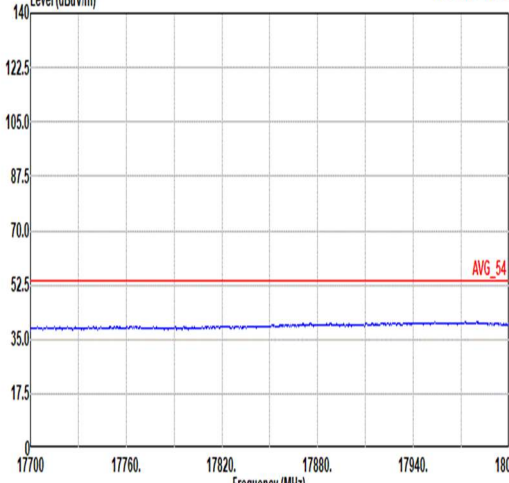


Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH39_2441MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 5 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 5 Setting : 22
	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 5 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 5 Setting : 22



Mode	6																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																									
ANT	3+4																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2026-01-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484. 2488. 2492. 2496. 2500 Frequency (MHz) PEAK_BE_74 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.56 56.59 74.00 -17.41 45.05 27.67 6.87 33.12 10.12 196 248 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2483.56 56.59 74.00 -17.41 45.05 27.67 6.87 33.12 10.12 196 248 Peak									Level (dBuV/m) Date: 2026-01-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400. 1800. 2200. 2600. 3000 Frequency (MHz) PEAK_74 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 116.67 ----- 105.20 27.60 6.87 33.12 10.12 196 248 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 116.67 ----- 105.20 27.60 6.87 33.12 10.12 196 248 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2483.56 56.59 74.00 -17.41 45.05 27.67 6.87 33.12 10.12 196 248 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 116.67 ----- 105.20 27.60 6.87 33.12 10.12 196 248 Peak																																																																										
Avg	Level (dBuV/m) Date: 2026-01-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484. 2488. 2492. 2496. 2500 Frequency (MHz) AVG_BE_54 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.54 47.01 54.00 -6.99 35.47 27.67 6.87 33.12 10.12 196 248 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2483.54 47.01 54.00 -6.99 35.47 27.67 6.87 33.12 10.12 196 248 Average									Level (dBuV/m) Date: 2026-01-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400. 1800. 2200. 2600. 3000 Frequency (MHz) AVG_54 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 HORIZONTAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 115.06 ----- 103.59 27.60 6.87 33.12 10.12 196 248 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 115.06 ----- 103.59 27.60 6.87 33.12 10.12 196 248 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2483.54 47.01 54.00 -6.99 35.47 27.67 6.87 33.12 10.12 196 248 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																						
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 115.06 ----- 103.59 27.60 6.87 33.12 10.12 196 248 Average																																																																										

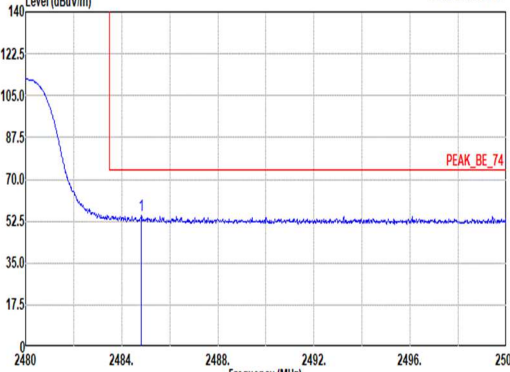
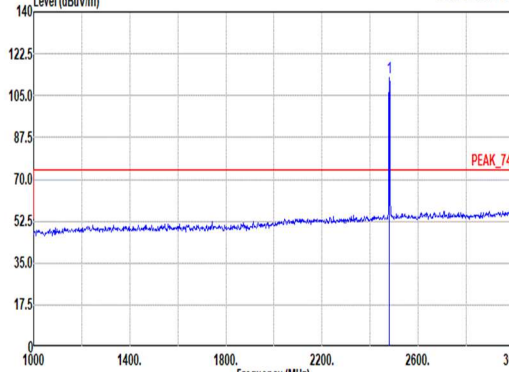
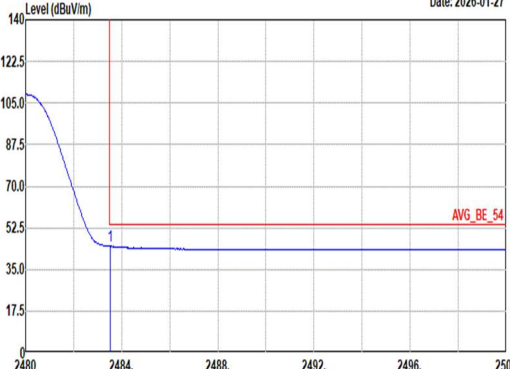
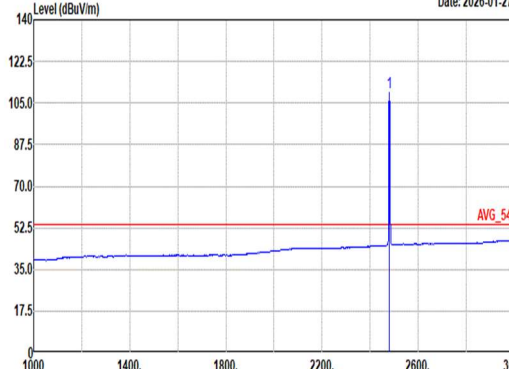


		6																																																																																																	
Mode	Band Edge																																																																																																		
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																		
ANT	3+4																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-01-27  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.82</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>43.11</td><td>27.70</td><td>6.87</td><td>33.11</td><td>10.12</td><td>400 88 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.82	54.69	74.00	-19.31	43.11	27.70	6.87	33.11	10.12	400 88 Peak	Level (dBuV/m) Date: 2026-01-27  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>112.63</td><td>-----</td><td>-----</td><td>101.16</td><td>27.60</td><td>6.87</td><td>33.12</td><td>10.12</td><td>400 88 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.63	-----	-----	101.16	27.60	6.87	33.12	10.12	400 88 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.82	54.69	74.00	-19.31	43.11	27.70	6.87	33.11	10.12	400 88 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	112.63	-----	-----	101.16	27.60	6.87	33.12	10.12	400 88 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2026-01-27  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>44.77</td><td>54.00</td><td>-9.23</td><td>33.23</td><td>27.67</td><td>6.87</td><td>33.12</td><td>10.12</td><td>400 88 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	44.77	54.00	-9.23	33.23	27.67	6.87	33.12	10.12	400 88 Average	Level (dBuV/m) Date: 2026-01-27  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_250915 VERTICAL : RBW:1000.000kHz VBW:0.510kHz SMT:Auto Detector : PEAK Mode : 6 Setting : 22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>109.38</td><td>-----</td><td>-----</td><td>97.91</td><td>27.60</td><td>6.87</td><td>33.12</td><td>10.12</td><td>400 88 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.38	-----	-----	97.91	27.60	6.87	33.12	10.12	400 88 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	44.77	54.00	-9.23	33.23	27.67	6.87	33.12	10.12	400 88 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	109.38	-----	-----	97.91	27.60	6.87	33.12	10.12	400 88 Average																																																																																									



	6											
Mode	Harmonic											
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz											
ANT	3+4											
Pol.	Horizontal						Vertical					
Peak Avg	<											

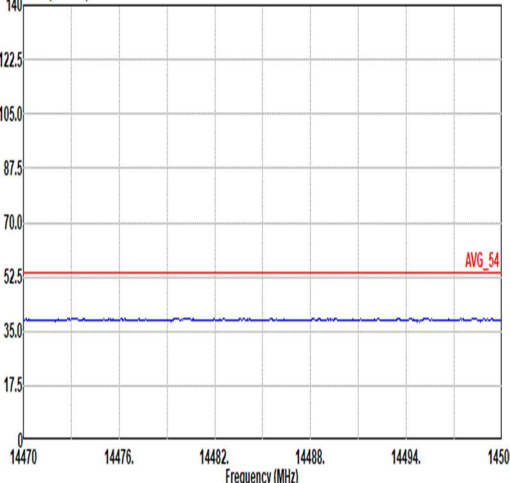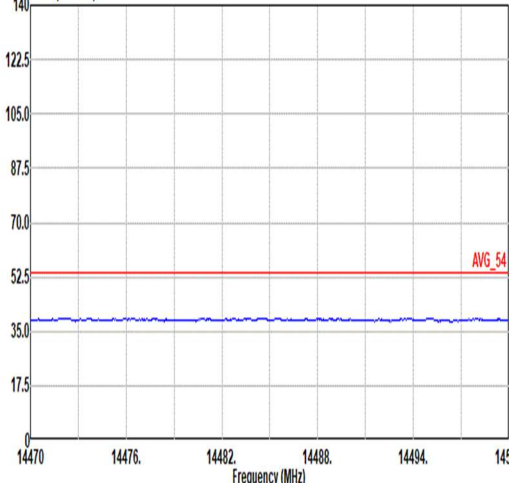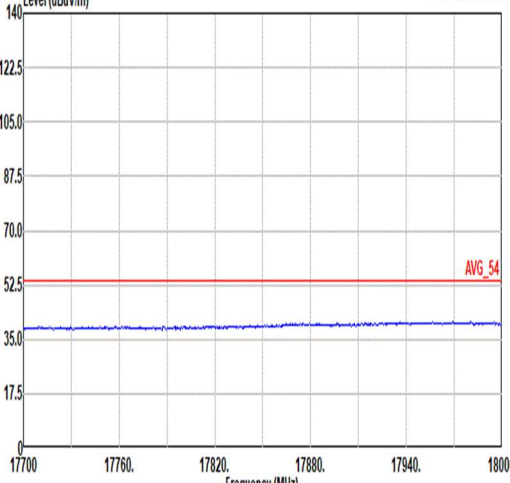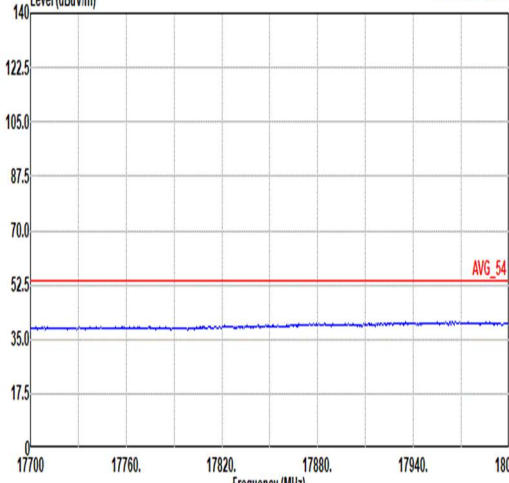

Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz	
ANT	3+4	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 6 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 6 Setting : 22
	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 HORIZONTAL Mode : 6 Setting : 22	Level (dBuV/m) Date: 2026-02-02  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_250915 VERTICAL Mode : 6 Setting : 22



Mode	7																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																							
ANT	3+4																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	Level (dBuV/m) Date: 2026-02-03 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_250702 HORIZONTAL Mode : 7 Setting : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24946.82</td><td>41.18</td><td>74.00</td><td>-32.82</td><td>37.74</td><td>39.70</td><td>26.58</td><td>53.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24946.82	41.18	74.00	-32.82	37.74	39.70	26.58	53.30	-9.54	--	PEAK	Level (dBuV/m) Date: 2026-02-03 Site : 03CH11-HY Condition: PEAK_74 1m SHF_1224_250702 VERTICAL Mode : 7 Setting : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24921.80</td><td>41.40</td><td>74.00</td><td>-32.60</td><td>37.97</td><td>39.70</td><td>26.57</td><td>53.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24921.80	41.40	74.00	-32.60	37.97	39.70	26.57	53.30	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24946.82	41.18	74.00	-32.82	37.74	39.70	26.58	53.30	-9.54	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	24921.80	41.40	74.00	-32.60	37.97	39.70	26.57	53.30	-9.54	--	PEAK																																																																													




Mode	8																																																																																																																																																																																																											
	LF																																																																																																																																																																																																											
	2400-2483.5_Bluetooth EDR_8-DPSK_CH78_2480MHz																																																																																																																																																																																																											
ANT	3+4																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
QP/ Peak	Level (dBuV/m) Date: 2026-02-03 Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_250219 HORIZONTAL Mode : 8 Setting : <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>31.31</td><td>40.00</td><td>-8.69</td><td>37.37</td><td>24.91</td><td>0.83</td><td>31.88</td><td>0.08</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>96.93</td><td>32.42</td><td>43.50</td><td>-11.08</td><td>47.17</td><td>15.89</td><td>1.42</td><td>32.08</td><td>0.02</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>261.83</td><td>18.32</td><td>46.00</td><td>-27.68</td><td>27.69</td><td>20.24</td><td>2.25</td><td>31.93</td><td>0.07</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>490.75</td><td>24.10</td><td>46.00</td><td>-21.90</td><td>29.03</td><td>23.92</td><td>3.09</td><td>32.01</td><td>0.07</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>755.56</td><td>29.58</td><td>46.00</td><td>-16.42</td><td>28.79</td><td>28.30</td><td>3.80</td><td>31.86</td><td>0.55</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>955.38</td><td>32.80</td><td>46.00</td><td>-13.20</td><td>27.35</td><td>31.41</td><td>4.29</td><td>30.66</td><td>0.41</td><td>--</td><td>-- Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.97	31.31	40.00	-8.69	37.37	24.91	0.83	31.88	0.08	--	-- Peak	2	96.93	32.42	43.50	-11.08	47.17	15.89	1.42	32.08	0.02	--	-- Peak	3	261.83	18.32	46.00	-27.68	27.69	20.24	2.25	31.93	0.07	--	-- Peak	4	490.75	24.10	46.00	-21.90	29.03	23.92	3.09	32.01	0.07	--	-- Peak	5	755.56	29.58	46.00	-16.42	28.79	28.30	3.80	31.86	0.55	--	-- Peak	6	955.38	32.80	46.00	-13.20	27.35	31.41	4.29	30.66	0.41	--	-- Peak	Level (dBuV/m) Date: 2026-02-03 Site : 03CH11-HY Condition: QP 3m Bilog_66925 & 24006_250219 VERTICAL Mode : 8 Setting : <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>31.78</td><td>40.00</td><td>-8.22</td><td>37.43</td><td>25.30</td><td>0.82</td><td>31.86</td><td>0.09</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>94.99</td><td>31.43</td><td>43.50</td><td>-12.07</td><td>46.69</td><td>15.40</td><td>1.40</td><td>32.08</td><td>0.02</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>261.83</td><td>18.58</td><td>46.00</td><td>-27.42</td><td>27.95</td><td>20.24</td><td>2.25</td><td>31.93</td><td>0.07</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>506.27</td><td>23.76</td><td>46.00</td><td>-22.24</td><td>28.35</td><td>24.20</td><td>3.14</td><td>32.01</td><td>0.08</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>755.56</td><td>29.21</td><td>46.00</td><td>-16.79</td><td>28.42</td><td>28.30</td><td>3.80</td><td>31.86</td><td>0.55</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>950.53</td><td>32.36</td><td>46.00</td><td>-13.64</td><td>27.16</td><td>31.22</td><td>4.28</td><td>30.70</td><td>0.40</td><td>--</td><td>-- Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	31.78	40.00	-8.22	37.43	25.30	0.82	31.86	0.09	--	-- Peak	2	94.99	31.43	43.50	-12.07	46.69	15.40	1.40	32.08	0.02	--	-- Peak	3	261.83	18.58	46.00	-27.42	27.95	20.24	2.25	31.93	0.07	--	-- Peak	4	506.27	23.76	46.00	-22.24	28.35	24.20	3.14	32.01	0.08	--	-- Peak	5	755.56	29.21	46.00	-16.79	28.42	28.30	3.80	31.86	0.55	--	-- Peak	6	950.53	32.36	46.00	-13.64	27.16	31.22	4.28	30.70	0.40	--	-- Peak
		Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																
1	30.97	31.31	40.00	-8.69	37.37	24.91	0.83	31.88	0.08	--	-- Peak																																																																																																																																																																																																	
2	96.93	32.42	43.50	-11.08	47.17	15.89	1.42	32.08	0.02	--	-- Peak																																																																																																																																																																																																	
3	261.83	18.32	46.00	-27.68	27.69	20.24	2.25	31.93	0.07	--	-- Peak																																																																																																																																																																																																	
4	490.75	24.10	46.00	-21.90	29.03	23.92	3.09	32.01	0.07	--	-- Peak																																																																																																																																																																																																	
5	755.56	29.58	46.00	-16.42	28.79	28.30	3.80	31.86	0.55	--	-- Peak																																																																																																																																																																																																	
6	955.38	32.80	46.00	-13.20	27.35	31.41	4.29	30.66	0.41	--	-- Peak																																																																																																																																																																																																	
	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																	
1	30.00	31.78	40.00	-8.22	37.43	25.30	0.82	31.86	0.09	--	-- Peak																																																																																																																																																																																																	
2	94.99	31.43	43.50	-12.07	46.69	15.40	1.40	32.08	0.02	--	-- Peak																																																																																																																																																																																																	
3	261.83	18.58	46.00	-27.42	27.95	20.24	2.25	31.93	0.07	--	-- Peak																																																																																																																																																																																																	
4	506.27	23.76	46.00	-22.24	28.35	24.20	3.14	32.01	0.08	--	-- Peak																																																																																																																																																																																																	
5	755.56	29.21	46.00	-16.79	28.42	28.30	3.80	31.86	0.55	--	-- Peak																																																																																																																																																																																																	
6	950.53	32.36	46.00	-13.64	27.16	31.22	4.28	30.70	0.40	--	-- Peak																																																																																																																																																																																																	



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
3+4	Bluetooth - EDR for 3Mbps	77.07	2890	0.35	510Hz

MIMO <Ant. 3+4>

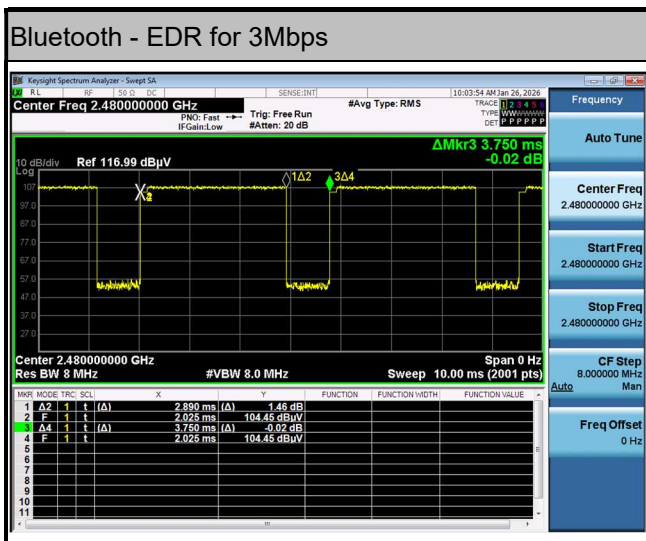

—THE END—