

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	152.0 x 72.0 x 10.0	3.0.0.841	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE TOP, 10.00	37000.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EUmmWV4 – SN9441_F1–55GHz, 2022–11–18	DAE4 Sn376, 2022–10–19

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	50.0 x 50.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Date	2023–08–31
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.03
psPDtot+ [W/m ²]	3.31
H _{max} [A/m]	0.164
E _{max} [V/m]	64.9
max(Stot) [W/m ²]	9.95
Power Drift [dB]	–0.10

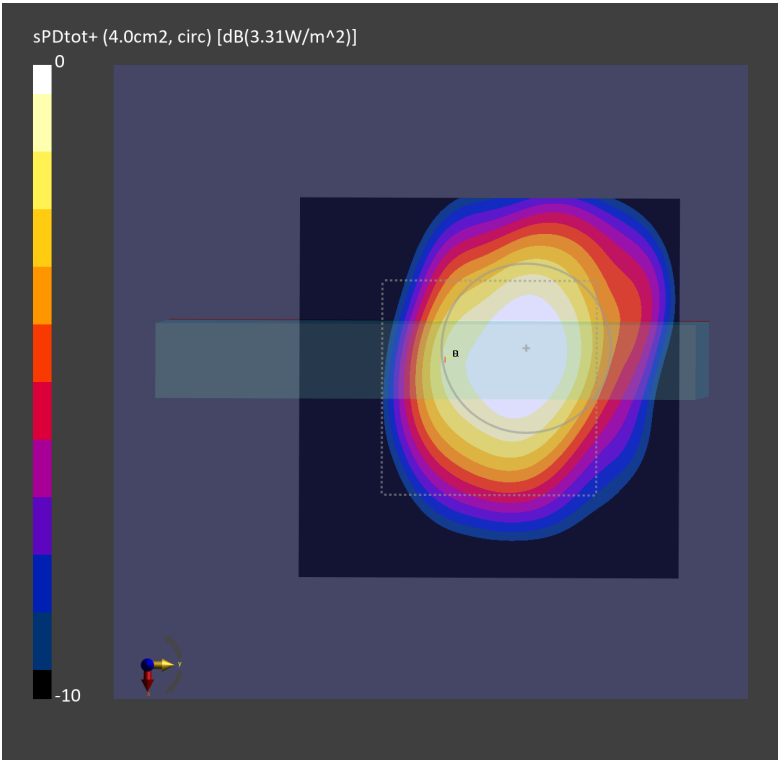

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	152.0 x 72.0 x 10.0	3.0.0.841	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE TOP, 10.00	27500.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – xxxx	Air –	EUmmWV4 – SN9441_F1–55GHz, 2022–11–18	DAE4 Sn376, 2022–10–19

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	50.0 x 50.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Date	2023–08–29
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.92
psPDtot+ [W/m ²]	3.25
H _{max} [A/m]	0.158
E _{max} [V/m]	66.3
max(Stot) [W/m ²]	10.2
Power Drift [dB]	0.15

