


FCC SAR TEST REPORT

FCC ID : A4RG9S9B
Equipment : Phone
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jun. 09, 2021 and testing was started from Nov. 08, 2022 and completed on Nov. 10, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. EMC & Wireless Communications Laboratory
No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan

**Table of Contents**

1. Statement of Compliance	4
2. Equipment Under Test (EUT) Information.....	5
2.1 General Information	5
3. Guidance Applied.....	16
4. RF Exposure Limits.....	16
4.1 Uncontrolled Environment.....	16
4.2 Controlled Environment.....	16
4.3 RF Exposure limit for above 6GHz	17
5. Specific Absorption Rate (SAR).....	17
5.1 Introduction	17
5.2 SAR Definition.....	17
6. System Description and Setup	18
6.1 Test Site Location	18
6.2 E-Field Probe	19
6.3 Data Acquisition Electronics (DAE)	19
6.4 Phantom.....	20
6.5 Device Holder.....	21
7. Measurement Procedures	22
7.1 Spatial Peak SAR Evaluation.....	22
7.2 Power Reference Measurement.....	23
7.3 Area Scan	23
7.4 Zoom Scan.....	24
7.5 Volume Scan Procedures	24
7.6 Power Drift Monitoring.....	24
8. Test Equipment List.....	25
9. System Verification	26
9.1 Tissue Verification.....	26
9.2 System Performance Check Results.....	26
10. RF Exposure Positions.....	27
10.1 Ear and handset reference point.....	27
10.2 Definition of the cheek position	28
10.3 Definition of the tilt position	29
10.4 Body Worn Accessory.....	29
10.5 Product Specific Exposure	30
10.6 Wireless Router.....	30
11. WiFi Output Power (Unit: dBm).....	31
12. RF Exposure position consideration.....	40
13. RF Exposure Test Results	40
13.1 Head SAR	41
13.2 Body Worn Accessory SAR.....	41
13.3 Product Specific SAR.....	42
13.4 Repeated SAR Measurement	43
14. Simultaneous Transmission Analysis for SAR	44
14.1 5G NR + LTE + WLAN + BT Sim-Tx analysis	46
14.2 Head Exposure Conditions	46
14.3 Body-Worn Accessory Exposure Conditions.....	55
14.4 Product Specific Exposure Conditions	64
15. Simultaneous Transmission Analysis for PD	66
15.1 5G FR2 + LTE + WLAN + BT Sim-Tx analysis.....	67
16. Uncertainty Assessment	72
17. References.....	72
Appendix A. Plots of SAR System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos and Antenna Location	

History of this test report

Report No.	Version	Description	Issued Date
FA0D2942-18B	01	Initial issue of report	Nov. 18, 2022

**1. Statement of Compliance**

The maximum results of Specific Absorption Rate and PD found during testing for Google LLC, Phone, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
			Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)		
			1g SAR (W/kg)			10g SAR (W/kg)		
NII	WLAN	5GHz WLAN	1.16	0.79	0.67	2.95	1.56	2.95
Date of Testing:			2022/11/8 ~ 2022/11/10					

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang

Report Producer: Paula Chen

2. Equipment Under Test (EUT) Information

2.1 General Information

Product Feature & Specification	
Equipment Name	Phone
FCC ID	A4RG9S9B
SN	15201FDF60009U
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n77 : 3450MHz ~ 3550MHz, 3700 MHz ~ 3980 MHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz WLAN 5.8G UNII4 Band: 5850 MHz ~ 5895 MHz WLAN 6E: 5925 MHz ~ 6425 MHz, 6425 MHz ~ 6525 MHz, 6525 MHz ~ 6875 MHz, 6875 MHz ~ 7125 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz NFC : 13.56 MHz WPT: 110KHz ~ 148.5KHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC:ASK WPT ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
Remark: 1. Variant report to enable WiFi 5.8G UNII4 operation, in this report only evaluation WiFi 5.8G UNII4 RF Exposure. 2. The other transmitter RF Exposure evaluation refers to Sporton SAR Report No.: FA0D2942-04C for GSM/MUTS/LTE/FR1/WLAN/BT and FA0D2942-04E for FR2. 3. The worst case WLAN SAR results between report no.: FA0D2942-04C and FA0D2942-18B are using for Sim-Tx analysis with other transmitters. Therefore, in report section 14 and 15 summations represent the absolute worst cases for Sim-Tx analysis for this device.	



<WLAN Maximum Power>

General Note:

1. The device implements the power management for WLAN SAR compliance for different exposure conditions and user cases. When the device is operated against the user's head, power index 1-4 are used; when the device is operated in the body-worn or extremity condition, power index 5-9 are used. In each exposure condition, the power selection is based on the user cases as described in Section 15 of this report. Full details about the proprietary power management decision are illustrated in the operational description.
2. 4+3(4): power level on antenna 4, when device operated in MIMO mode (4+3)

<Mobile Condition – Power Index 0>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
5.8GHz WLAN	802.11a 6Mbps	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	20.0	20.0	23.0
	802.11n-HT20 MCS0	169	5845	21.0	21.0	24.0
		173	5865	20.5	20.5	23.5
		177	5885	19.0	19.0	22.0
	802.11n-HT40 MCS0	167	5835	20.0	20.0	23.0
		175	5875	20.0	20.0	23.0
	802.11ac-VHT20 MCS0	169	5845	21.0	21.0	24.0
		173	5865	20.5	20.5	23.5
		177	5885	19.0	19.0	22.0
	802.11ac-VHT40 MCS0	167	5835	20.5	20.5	23.5
		175	5875	20.0	20.0	23.0
	802.11ac-VHT80 MCS0	171	5855	19.5	19.5	22.5
	802.11ax-HE20 MCS0	169	5845	21.0	21.0	24.0
		173	5865	20.5	20.5	23.5
		177	5885	19.0	19.0	22.0
	802.11ax-HE40 MCS0	167	5835	20.5	20.5	23.5
		175	5875	20.0	20.0	23.0
	802.11ax-HE80 MCS0	171	5855	19.5	19.5	22.5

**<Power Index 1>**

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	16.5	16.5	19.5
		173	5865	16.5	16.5	19.5
		177	5885	16.5	16.5	19.5
	802.11n-HT20 MCS0	169	5845	16.5	16.5	19.5
		173	5865	16.5	16.5	19.5
		177	5885	16.5	16.5	19.5
	802.11n-HT40 MCS0	167	5835	16.5	16.5	19.5
		175	5875	16.5	16.5	19.5
	802.11ac-VHT20 MCS0	169	5845	16.5	16.5	19.5
		173	5865	16.5	16.5	19.5
		177	5885	16.5	16.5	19.5
	802.11ac-VHT40 MCS0	167	5835	16.5	16.5	19.5
		175	5875	16.5	16.5	19.5
	802.11ac-VHT80 MCS0	171	5855	16.5	16.5	19.5
	802.11ax-HE20 MCS0	169	5845	16.5	16.5	19.5
		173	5865	16.5	16.5	19.5
		177	5885	16.5	16.5	19.5
	802.11ax-HE40 MCS0	167	5835	16.5	16.5	19.5
		175	5875	16.5	16.5	19.5
	802.11ax-HE80 MCS0	171	5855	16.5	16.5	19.5

<Power Index 2>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ac-VHT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT80 MCS0	171	5855	15.5	15.5	18.5
	802.11ax-HE20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ax-HE40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ax-HE80 MCS0	171	5855	15.5	15.5	18.5

**<Power Index 3>**

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	11.5	11.5	14.5
		173	5865	11.5	11.5	14.5
		177	5885	11.5	11.5	14.5
	802.11n-HT20 MCS0	169	5845	11.5	11.5	14.5
		173	5865	11.5	11.5	14.5
		177	5885	11.5	11.5	14.5
	802.11n-HT40 MCS0	167	5835	11.5	11.5	14.5
		175	5875	11.5	11.5	14.5
	802.11ac-VHT20 MCS0	169	5845	11.5	11.5	14.5
		173	5865	11.5	11.5	14.5
		177	5885	11.5	11.5	14.5
	802.11ac-VHT40 MCS0	167	5835	11.5	11.5	14.5
		175	5875	11.5	11.5	14.5
	802.11ac-VHT80 MCS0	171	5855	11.5	11.5	14.5
	802.11ax-HE20 MCS0	169	5845	11.5	11.5	14.5
		173	5865	11.5	11.5	14.5
		177	5885	11.5	11.5	14.5
	802.11ax-HE40 MCS0	167	5835	11.5	11.5	14.5
		175	5875	11.5	11.5	14.5
	802.11ax-HE80 MCS0	171	5855	11.5	11.5	14.5

<Power Index 4>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	12.5	12.5	15.5
		173	5865	12.5	12.5	15.5
		177	5885	12.5	12.5	15.5
	802.11n-HT20 MCS0	169	5845	12.5	12.5	15.5
		173	5865	12.5	12.5	15.5
		177	5885	12.5	12.5	15.5
	802.11n-HT40 MCS0	167	5835	12.5	12.5	15.5
		175	5875	12.5	12.5	15.5
	802.11ac-VHT20 MCS0	169	5845	12.5	12.5	15.5
		173	5865	12.5	12.5	15.5
		177	5885	12.5	12.5	15.5
	802.11ac-VHT40 MCS0	167	5835	12.5	12.5	15.5
		175	5875	12.5	12.5	15.5
	802.11ac-VHT80 MCS0	171	5855	12.5	12.5	15.5
	802.11ax-HE20 MCS0	169	5845	12.5	12.5	15.5
		173	5865	12.5	12.5	15.5
		177	5885	12.5	12.5	15.5
	802.11ax-HE40 MCS0	167	5835	12.5	12.5	15.5
		175	5875	12.5	12.5	15.5
	802.11ax-HE80 MCS0	171	5855	12.5	12.5	15.5



<Power Index 5>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	20.0	20.0	23.0
	802.11n-HT20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	19.0	19.0	22.0
	802.11n-HT40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ac-VHT20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	19.0	19.0	22.0
	802.11ac-VHT40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ac-VHT80 MCS0	171	5855	19.5	19.5	22.5
	802.11ax-HE20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	20.0	20.0	23.0
	802.11ax-HE40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ax-HE80 MCS0	171	5855	19.5	19.5	22.5

<Power Index 6>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	20.0	20.0	23.0
	802.11n-HT20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	19.0	19.0	22.0
	802.11n-HT40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ac-VHT20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	19.0	19.0	22.0
	802.11ac-VHT40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ac-VHT80 MCS0	171	5855	19.5	19.5	22.5
	802.11ax-HE20 MCS0	169	5845	20.0	20.0	23.0
		173	5865	20.0	20.0	23.0
		177	5885	20.0	20.0	23.0
	802.11ax-HE40 MCS0	167	5835	19.5	19.5	22.5
		175	5875	19.5	19.5	22.5
	802.11ax-HE80 MCS0	171	5855	19.5	19.5	22.5

**<Power Index 7>**

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	16.0	16.0	19.0
		173	5865	16.0	16.0	19.0
		177	5885	16.0	16.0	19.0
	802.11n-HT20 MCS0	169	5845	16.0	16.0	19.0
		173	5865	16.0	16.0	19.0
		177	5885	16.0	16.0	19.0
	802.11n-HT40 MCS0	167	5835	16.0	16.0	19.0
		175	5875	16.0	16.0	19.0
	802.11ac-VHT20 MCS0	169	5845	16.0	16.0	19.0
		173	5865	16.0	16.0	19.0
		177	5885	16.0	16.0	19.0
	802.11ac-VHT40 MCS0	167	5835	16.0	16.0	19.0
		175	5875	16.0	16.0	19.0
	802.11ac-VHT80 MCS0	171	5855	16.0	16.0	19.0
	802.11ax-HE20 MCS0	169	5845	16.0	16.0	19.0
		173	5865	16.0	16.0	19.0
		177	5885	16.0	16.0	19.0
	802.11ax-HE40 MCS0	167	5835	16.0	16.0	19.0
		175	5875	16.0	16.0	19.0
	802.11ax-HE80 MCS0	171	5855	16.0	16.0	19.0

<Power Index 8>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ac-VHT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT80 MCS0	171	5855	15.5	15.5	18.5
	802.11ax-HE20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ax-HE40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ax-HE80 MCS0	171	5855	15.5	15.5	18.5

<Power Index 9>

Burst Average Power (dBm)						
Transmit Antenna				MIMO		
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Ant 4+3(4) Tune-Up Limit	Ant 4+3(3) Tune-Up Limit	Ant 4+3 Tune-Up Limit
	802.11a 6Mbps	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11n-HT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ac-VHT40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ac-VHT80 MCS0	171	5855	15.5	15.5	18.5
	802.11ax-HE20 MCS0	169	5845	15.5	15.5	18.5
		173	5865	15.5	15.5	18.5
		177	5885	15.5	15.5	18.5
	802.11ax-HE40 MCS0	167	5835	15.5	15.5	18.5
		175	5875	15.5	15.5	18.5
	802.11ax-HE80 MCS0	171	5855	15.5	15.5	18.5

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

4.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

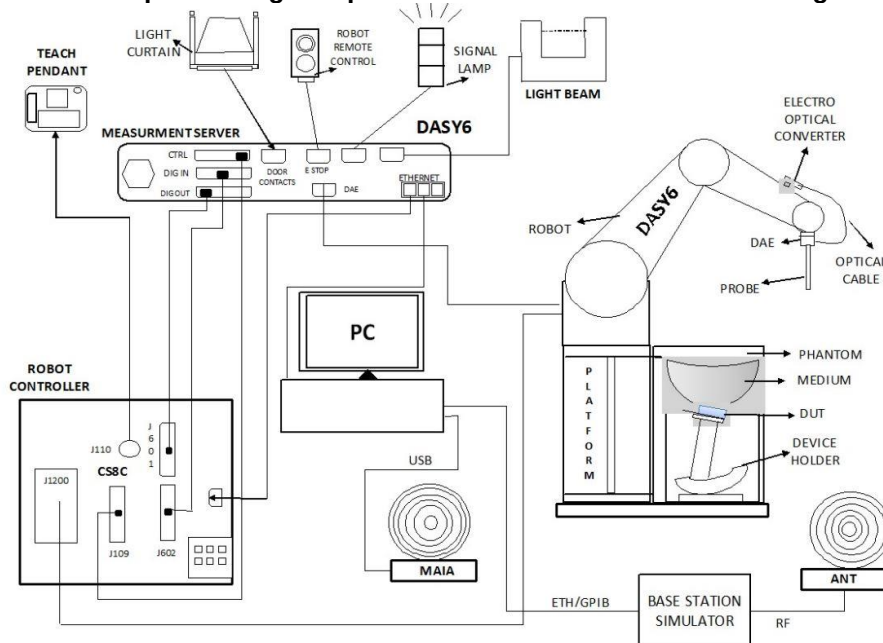

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. In system validation list test site number, if the test site number is include in the Wensan Laboratory, that's mean the test data are subcontracted to Sporton International Inc. Wensan Laboratory.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
Test Site Location	TW1190 No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		TW3786 No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm



<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

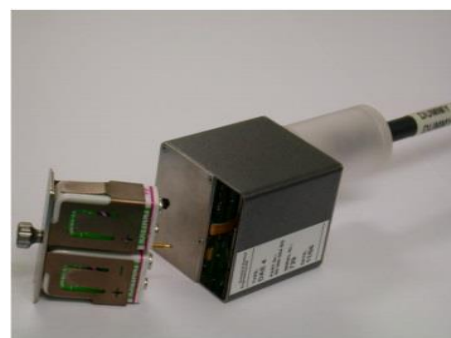


Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	5GHz System Validation Kit	D5GHzV2	1171	Apr. 20, 2021	Apr. 18, 2023
SPEAG	Data Acquisition Electronics	DAE4	1697	Nov. 09, 2021	Nov. 08, 2022
SPEAG	Data Acquisition Electronics	DAE4	1707	Jan. 12, 2022	Jan. 11, 2023
SPEAG	Dosimetric E-Field Probe	EX3DV4	7625	Jan. 27, 2022	Jan. 26, 2023
RCPTWN	Thermometer	HTC-1	TM560-2	Mar. 15, 2022	Mar. 14, 2023
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 12, 2022	Oct. 11, 2023
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 22, 2022	Sep. 21, 2023
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 28, 2022	Sep. 27, 2023
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 31, 2022	Oct. 30, 2023
Anritsu	Power Meter	ML2495A	1419002	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Sensor	MA2411B	1911176	Aug. 16, 2022	Aug. 15, 2023
Anritsu	Power Meter	ML2495A	1804003	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Power Sensor	MA2411B	1726150	Oct. 17, 2022	Oct. 16, 2023
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 12, 2022	Jan. 11, 2023
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 17, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 14, 2022	Oct. 13, 2023
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 15, 2022	Sep. 14, 2023
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
5850	22.3	5.334	35.551	5.32	35.25	0.26	0.85	± 5	2022/11/8
5850	22.2	5.405	35.783	5.32	35.25	1.60	1.51	± 5	2022/11/9
5850	22.5	5.373	35.802	5.32	35.25	1.00	1.57	± 5	2022/11/10

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
SAR09	2022/11/8	5850	100	D5GHzV2-1171-5850	EX3DV4 - SN7625	DAE4 Sn1697	8.420	82.300	84.2	2.31	2.360	23.100	23.6	2.16
SAR09	2022/11/9	5850	100	D5GHzV2-1171-5850	EX3DV4 - SN7625	DAE4 Sn1707	8.520	82.300	85.2	3.52	2.390	23.100	23.9	3.46
SAR09	2022/11/10	5850	50	D5GHzV2-1171-5850	EX3DV4 - SN7625	DAE4 Sn1707	4.060	82.300	81.2	-1.34	1.170	23.100	23.4	1.30

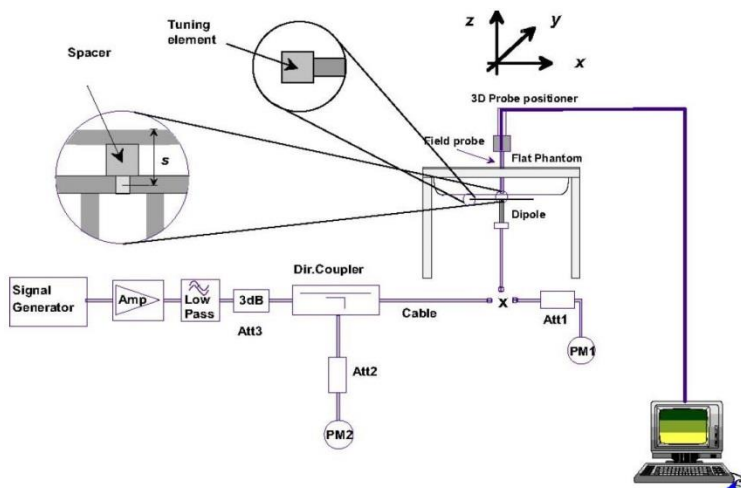


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. RF Exposure Positions

10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

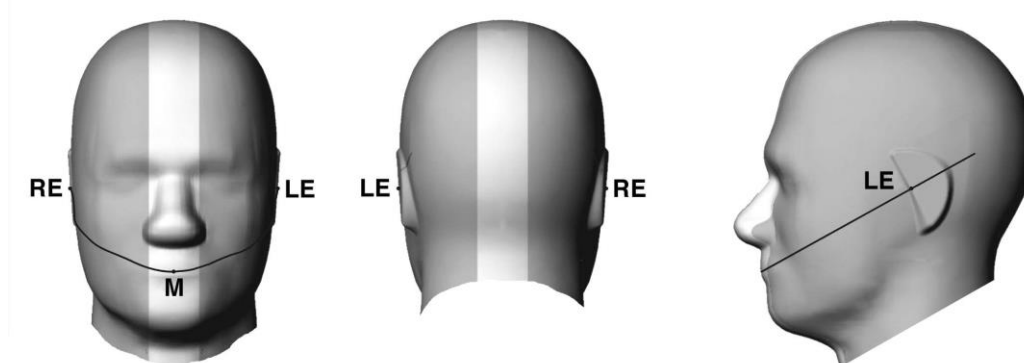


Fig 9.1.1 Front, back, and side views of SAM twin phantom

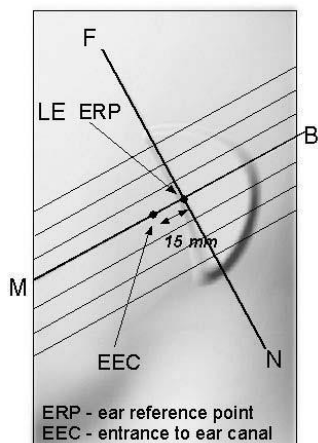


Fig 9.1.2 Close-up side view of phantom showing the ear region.

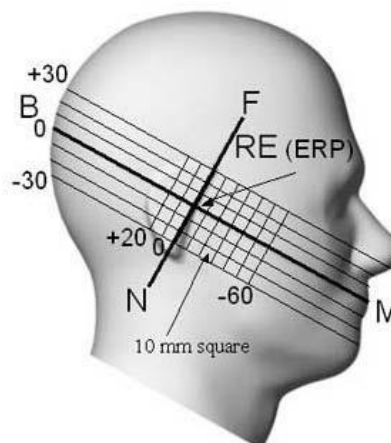


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

10.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

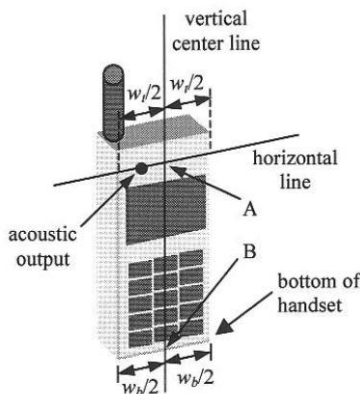


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

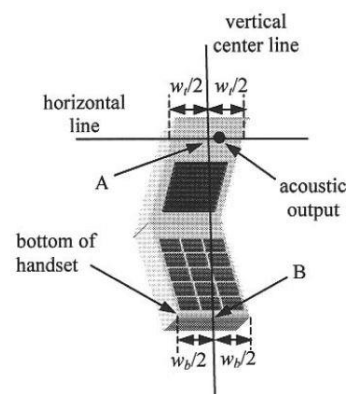


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

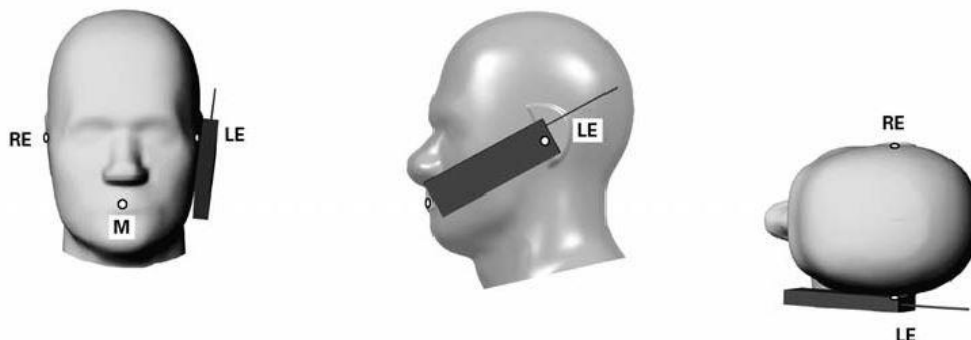


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

10.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

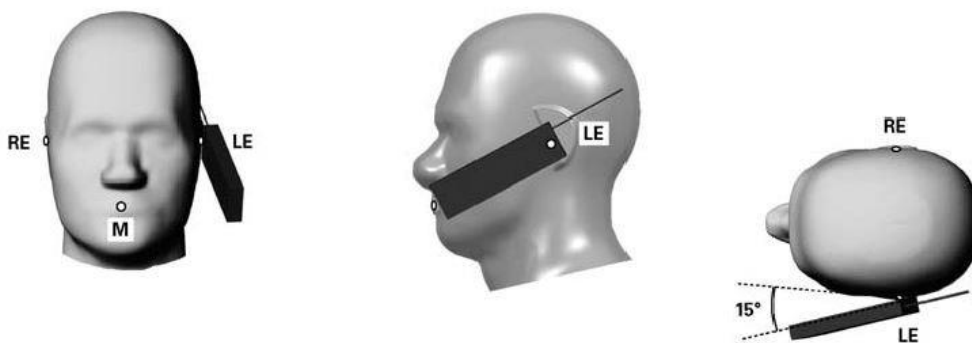


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

10.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

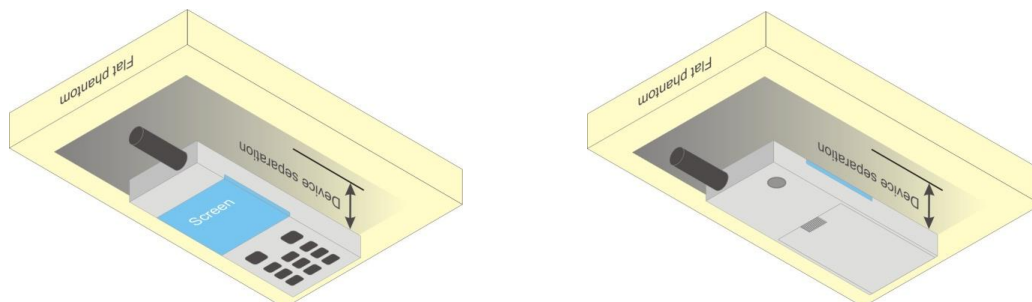


Fig 9.4 Body Worn Position

10.5 Product Specific Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

10.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

11. WiFi Output Power (Unit: dBm)

<WLAN Note>

1. All of the wireless technology of this device only supports MIMO mode operation.
2. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band additional output power measurements were not necessary.
3. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
7. Per 201904 TCBC workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
8. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
9. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
10. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing
 - c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel
11. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of antenna 3 and antenna 4 respectively to calculate sum of the power for MIMO mode

WLAN Default Power

				Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	20.0	not required	20.0	not required	23.0	not required
		173	5865		20.0		20.0		23.0	
		177	5885		20.0		20.0		23.0	
	802.11n-HT20 MCS0	169	5845		21.0		21.0		24.0	
		173	5865		20.5		20.5		23.5	
		177	5885		19.0		19.0		22.0	
	802.11n-HT40 MCS0	167	5835		20.5		20.5		23.5	
		175	5875		20.5		20.5		23.5	
	802.11ac-VHT20 MCS0	169	5845		21.0		21.0		24.0	
		173	5865		20.5		20.5		23.5	
		177	5885		19.0		19.0		22.0	
	802.11ac-VHT40 MCS0	167	5835		20.5		20.5		23.5	
		175	5875		20.5		20.5		23.5	
	802.11ac-VHT80 MCS0	171	5855		19.5		19.5		22.5	
		169	5845		21.0		21.0		24.0	
	802.11ax-HE20 MCS0	173	5865		20.5		20.5		23.5	
		177	5885		19.0		19.0		22.0	
	802.11ax-HE40 MCS0	167	5835		20.5		20.5		23.5	
		175	5875		20.5		20.5		23.5	
	802.11ax-HE80 MCS0	171	5855		19.5		19.5		22.5	

WLAN Power Index 1

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	16.5	not required	16.5	not required	19.5	not required
		173	5865		16.5		16.5		19.5	
		177	5885		16.5		16.5		19.5	
	802.11n-HT20 MCS0	169	5845	not required	16.5	not required	16.5	not required	19.5	not required
		173	5865		16.5		16.5		19.5	
		177	5885		16.5		16.5		19.5	
	802.11n-HT40 MCS0	167	5835	15.40	16.5	14.65	16.5	18.05	19.5	96.80
		175	5875	15.30	16.5	14.50	16.5	17.91	19.5	
	802.11ac-VHT20 MCS0	169	5845	not required	16.5	not required	16.5	not required	19.5	not required
		173	5865		16.5		16.5		19.5	
		177	5885		16.5		16.5		19.5	
	802.11ac-VHT40 MCS0	167	5835	not required	16.5	not required	16.5	not required	19.5	not required
		175	5875		16.5		16.5		19.5	
	802.11ac-VHT80 MCS0	171	5855	15.50	16.5	14.85	16.5	18.20	19.5	92.10
	802.11ax-HE20 MCS0	169	5845	not required	16.5	not required	16.5	not required	19.5	not required
		173	5865		16.5		16.5		19.5	
		177	5885		16.5		16.5		19.5	
	802.11ax-HE40 MCS0	167	5835	not required	16.5	not required	16.5	not required	19.5	not required
		175	5875		16.5		16.5		19.5	
	802.11ax-HE80 MCS0	171	5855	not required	16.5	not required	16.5	not required	19.5	not required

WLAN Power Index 2

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	15.5	not required	15.5	not required	18.5	not required
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11n-HT20 MCS0	169	5845		15.5		15.5		18.5	
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11n-HT40 MCS0	167	5835	15.40	15.5	14.65	15.5	18.05	18.5	96.80
		175	5875	15.30	15.5	14.50	15.5	17.91	18.5	
	802.11ac-VHT20 MCS0	169	5845	not required	15.5	not required	15.5	not required	18.5	not required
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11ac-VHT40 MCS0	167	5835		15.5		15.5		18.5	
		175	5875		15.5		15.5		18.5	
	802.11ac-VHT80 MCS0	171	5855	15.50	15.5	14.85	15.5	18.20	18.5	92.10
	802.11ax-HE20 MCS0	169	5845	not required	15.5	not required	15.5	not required	18.5	not required
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11ax-HE40 MCS0	167	5835		15.5		15.5		18.5	
		175	5875		15.5		15.5		18.5	
	802.11ax-HE80 MCS0	171	5855		15.5		15.5		18.5	

WLAN Power Index 3

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	11.5	not required	11.5	not required	14.5	not required
		173	5865		11.5		11.5		14.5	
		177	5885		11.5		11.5		14.5	
	802.11n-HT20 MCS0	169	5845		11.5		11.5		14.5	
		173	5865		11.5		11.5		14.5	
		177	5885		11.5		11.5		14.5	
	802.11n-HT40 MCS0	167	5835		11.5		11.5		14.5	
		175	5875		11.5		11.5		14.5	
		169	5845		11.5		11.5		14.5	
	802.11ac-VHT20 MCS0	173	5865		11.5		11.5		14.5	
		177	5885		11.5		11.5		14.5	
		167	5835		11.5		11.5		14.5	
	802.11ac-VHT40 MCS0	175	5875		11.5		11.5		14.5	
		171	5855	11.50	11.5	10.75	11.5	14.15	14.5	92.10
	802.11ax-HE20 MCS0	169	5845	not required	11.5	not required	11.5	not required	14.5	not required
		173	5865		11.5		11.5		14.5	
		177	5885		11.5		11.5		14.5	
	802.11ax-HE40 MCS0	167	5835		11.5		11.5		14.5	
		175	5875		11.5		11.5		14.5	
		171	5855		11.5		11.5		14.5	

WLAN Power Index 4

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	12.5	not required	12.5	not required	15.5	not required
		173	5865		12.5		12.5		15.5	
		177	5885		12.5		12.5		15.5	
	802.11n-HT20 MCS0	169	5845		12.5		12.5		15.5	
		173	5865		12.5		12.5		15.5	
		177	5885		12.5		12.5		15.5	
	802.11n-HT40 MCS0	167	5835		12.5		12.5		15.5	
		175	5875		12.5		12.5		15.5	
	802.11ac-VHT20 MCS0	169	5845		12.5		12.5		15.5	
		173	5865		12.5		12.5		15.5	
		177	5885		12.5		12.5		15.5	
	802.11ac-VHT40 MCS0	167	5835		12.5		12.5		15.5	
		175	5875		12.5		12.5		15.5	
	802.11ac-VHT80 MCS0	171	5855	11.50	12.5	10.75	12.5	14.15	15.5	92.10
	802.11ax-HE20 MCS0	169	5845	not required	12.5	not required	12.5	not required	15.5	not required
		173	5865		12.5		12.5		15.5	
		177	5885		12.5		12.5		15.5	
	802.11ax-HE40 MCS0	167	5835		12.5		12.5		15.5	
		175	5875		12.5		12.5		15.5	
	802.11ax-HE80 MCS0	171	5855		12.5		12.5		15.5	

WLAN Power Index 5/6

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	20.00	20.0	19.25	20.0	22.65	23.0	93.60
		173	5865	20.00	20.0	19.05	20.0	22.56	23.0	
		177	5885	20.00	20.0	19.55	20.0	22.79	23.0	
	802.11n-HT20 MCS0	169	5845	not required	20.0	not required	20.0	not required	23.0	not required
		173	5865		20.0		20.0		23.0	
		177	5885		19.0		19.0		22.0	
	802.11n-HT40 MCS0	167	5835		19.5		19.5		22.5	
		175	5875		19.5		19.5		22.5	
	802.11ac-VHT20 MCS0	169	5845		20.0		20.0		23.0	
		173	5865		20.0		20.0		23.0	
		177	5885		19.0		19.0		22.0	
	802.11ac-VHT40 MCS0	167	5835		19.5		19.5		22.5	
		175	5875		19.5		19.5		22.5	
	802.11ac-VHT80 MCS0	171	5855		19.5		19.5		22.5	
		169	5845		20.0		20.0		23.0	
		173	5865		20.0		20.0		23.0	
	802.11ax-HE20 MCS0	177	5885		20.0		20.0		23.0	
		167	5835		19.5		19.5		22.5	
		175	5875		19.5		19.5		22.5	
	802.11ax-HE40 MCS0	171	5855		19.5		19.5		22.5	
		169	5845		20.0		20.0		23.0	
		173	5865		20.0		20.0		23.0	
	802.11ax-HE80 MCS0	177	5885		20.0		20.0		23.0	
		167	5835		19.5		19.5		22.5	
		175	5875		19.5		19.5		22.5	

WLAN Power Index 7

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	16.0	not required	16.0	not required	19.0	not required
		173	5865		16.0		16.0		19.0	
		177	5885		16.0		16.0		19.0	
	802.11n-HT20 MCS0	169	5845		16.0		16.0		19.0	
		173	5865		16.0		16.0		19.0	
		177	5885		16.0		16.0		19.0	
	802.11n-HT40 MCS0	167	5835		16.0		16.0		19.0	
		175	5875		16.0		16.0		19.0	
	802.11ac-VHT20 MCS0	169	5845		16.0		16.0		19.0	
		173	5865		16.0		16.0		19.0	
		177	5885		16.0		16.0		19.0	
	802.11ac-VHT40 MCS0	167	5835		16.0		16.0		19.0	
		175	5875		16.0		16.0		19.0	
	802.11ac-VHT80 MCS0	171	5855	15.50	16.0	14.85	16.0	18.20	19.0	92.10
	802.11ax-HE20 MCS0	169	5845	not required	16.0	not required	16.0	not required	19.0	not required
		173	5865		16.0		16.0		19.0	
		177	5885		16.0		16.0		19.0	
	802.11ax-HE40 MCS0	167	5835		16.0		16.0		19.0	
		175	5875		16.0		16.0		19.0	
	802.11ax-HE80 MCS0	171	5855		16.0		16.0		19.0	

WLAN Power Index 8/9

	Mode	Channel	Frequency (MHz)	Ant 4+3(4)		Ant 4+3(3)		Ant 4+3		
				Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	169	5845	not required	15.5	not required	15.5	not required	18.5	not required
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11n-HT20 MCS0	169	5845		15.5		15.5		18.5	
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11n-HT40 MCS0	167	5835		15.5		15.5		18.5	
		175	5875		15.5		15.5		18.5	
	802.11ac-VHT20 MCS0	169	5845		15.5		15.5		18.5	
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11ac-VHT40 MCS0	167	5835		15.5		15.5		18.5	
		175	5875		15.5		15.5		18.5	
	802.11ac-VHT80 MCS0	171	5855	15.50	15.5	14.85	15.5	18.20	18.5	92.10
	802.11ax-HE20 MCS0	169	5845	not required	15.5	not required	15.5	not required	18.5	not required
		173	5865		15.5		15.5		18.5	
		177	5885		15.5		15.5		18.5	
	802.11ax-HE40 MCS0	167	5835		15.5		15.5		18.5	
		175	5875		15.5		15.5		18.5	
	802.11ax-HE80 MCS0	171	5855		15.5		15.5		18.5	

12. RF Exposure position consideration

Distance of the Antenna to the EUT surface/edge						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WLAN/BT Ant 4+3	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WLAN/BT Ant 4+3	Yes	Yes	Yes	No	Yes	Yes

General Note:

- According KDB 941225 D07, the devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna located at ≤ 25 mm from that surface or edge.
- The antenna location is illustrated in the Appendix D.

13. RF Exposure Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8W/kg.
- Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- For UNII-4 WLAN product specific SAR is required since it does not support hotspot operation and the overall diagonal distance is > 16cm.

WLAN Note:

- When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- WiFi 5.8G UNII4 does not support SISO mode, so standalone SAR was only tested in MIMO mode operation
- Per Oct 2022 TCB Workshop notes, since UNII-4 and UNII-3 maximum output powers are the same, they can be handled as a single band. UNII-3 worst case SAR configuration (refer to Sporton Report No.: FA0D2942-04C) was tested with UNII-4 channel and bandwidth for Head and Body-worn. The product specific SAR for UNII-4 was evaluated with all positions since it does not support hotspot operation.
- For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

13.1 Head SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Index	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	1	171	5855	15.50	16.50	1.259	92.1	1.086	-0.07	0.841	1.150
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	1	171	5855	14.85	16.50	1.462	92.1	1.086	-0.07	0.001	0.002
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	1	167	5835	15.40	16.50	1.288	96.80	1.033	-0.04	0.861	1.146
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	1	167	5835	14.65	16.50	1.531	96.80	1.033	-0.04	0.001	0.002
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	171	5855	15.50	15.50	1.000	92.1	1.086	-0.07	0.841	0.913
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	171	5855	14.85	15.50	1.161	92.1	1.086	-0.07	0.001	0.001
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	2	167	5835	15.40	15.50	1.023	96.80	1.033	-0.04	0.861	0.910
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	2	167	5835	14.65	15.50	1.216	96.80	1.033	-0.04	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	3	171	5855	11.50	11.50	1.000	92.1	1.086	-0.1	0.304	0.330
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	3	171	5855	10.75	11.50	1.189	92.1	1.086	-0.1	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(4)	4	171	5855	11.50	12.50	1.259	92.1	1.086	-0.1	0.304	0.416
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 4+3(3)	4	171	5855	10.75	12.50	1.496	92.1	1.086	-0.1	0.001	0.002

13.2 Body Worn Accessory SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Index	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
02	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.11	0.602	0.643
	WLAN5GHz	802.11a 6Mbps	Back	10mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.11	0.662	0.784
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	-0.13	0.229	0.279
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	-0.13	0.208	0.294
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	-0.13	0.229	0.249
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	-0.13	0.208	0.262

**13.3 Product Specific SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Index	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
03	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	0.1	1.580	1.687
	WLAN5GHz	802.11a 6Mbps	Front	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	0.1	1.490	1.765
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.1	1.490	1.591
	WLAN5GHz	802.11a 6Mbps	Back	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.1	1.140	1.350
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.19	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.19	2.470	2.926
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(4)	5/6	169	5845	20.00	20.00	1.000	93.6	1.068	0.12	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(3)	5/6	169	5845	19.25	20.00	1.189	93.6	1.068	0.12	2.250	2.856
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(4)	5/6	173	5865	20.00	20.00	1.000	93.6	1.068	0.11	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(3)	5/6	173	5865	19.05	20.00	1.245	93.6	1.068	0.11	2.220	2.951
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.09	1.480	1.581
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.09	0.001	0.001
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.16	2.120	2.264
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.16	0.670	0.794
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(4)	5/6	169	5845	20.00	20.00	1.000	93.6	1.068	-0.11	2.030	2.168
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(3)	5/6	169	5845	19.25	20.00	1.189	93.6	1.068	-0.11	0.631	0.801
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(4)	5/6	173	5865	20.00	20.00	1.000	93.6	1.068	-0.14	1.970	2.104
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	Ant 4+3(3)	5/6	173	5865	19.05	20.00	1.245	93.6	1.068	-0.14	0.577	0.767
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	-0.05	0.644	0.785
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	-0.05	0.492	0.696
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	-0.15	0.383	0.467
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	-0.15	0.379	0.536
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	0.1	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	0.1	0.851	1.204
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	-0.02	0.565	0.688
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	-0.02	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+3(4)	7	171	5855	15.50	16.00	1.122	92.1	1.086	0.12	0.694	0.846
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+3(3)	7	171	5855	14.85	16.00	1.303	92.1	1.086	0.12	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	-0.05	0.644	0.699
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	-0.05	0.492	0.621
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	-0.15	0.383	0.416
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	-0.15	0.379	0.478
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	0.1	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	0.1	0.851	1.073
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	-0.02	0.565	0.614
	WLAN5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	-0.02	0.001	0.001
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+3(4)	8/9	171	5855	15.50	15.50	1.000	92.1	1.086	0.12	0.694	0.754
	WLAN5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 4+3(3)	8/9	171	5855	14.85	15.50	1.161	92.1	1.086	0.12	0.001	0.001

13.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Index	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	1	167	5835	15.40	16.50	1.288	96.80	1.033	-0.04	0.861	-	1.146
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	1	167	5835	14.65	16.50	1.531	96.80	1.033	-0.04	0.001	-	0.002
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(4)	1	167	5835	15.40	16.50	1.288	96.80	1.033	0.04	0.859	1.002	1.143
	WLAN5GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 4+3(3)	1	167	5835	14.65	16.50	1.531	96.80	1.033	0.04	0.001	1.000	0.002

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power Index	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	-0.19	0.001	-	0.001
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	-0.19	2.470	-	2.926
2nd	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(4)	5/6	177	5885	20.00	20.00	1.000	93.6	1.068	0.1	0.001	1.000	0.001
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Ant 4+3(3)	5/6	177	5885	19.55	20.00	1.109	93.6	1.068	0.1	2.410	1.024	2.855

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis for SAR

Portable Condition	Tx mode	Capable TX Configurations	WWAN Power	WiFi	BT
				Power	Power
Head	WWAN standalone	WWAN	Index 2		
	WiFi standalone	WiFi 2.4G MIMO/CDD (Ant4+3)		Index 1	
		WiFi 5G MIMO (Ant4+3)			
		WiFi 6E MIMO (Ant4+3)		Index 2 (RSDB)	
		WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	BT standalone	Bluetooth (Ant4) (BDR/EDR Only)			Index 1
		Bluetooth (Ant3) (BDR/EDR Only)			
		Bluetooth (Ant4+3) (BDR/EDR Only)			
	WiFi +BT	WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)		Index 1	Index 1
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			
	WWAN + WiFi	WWAN + WiFi 2.4G MIMO/CDD (Ant4+3)	Index 3 / Index 7 (Hostpot on)	Index 3	
		WWAN + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3)		Index 4 (RSDB)	
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	WWAN + BT	WWAN + Bluetooth (Ant4) (BDR/EDR Only)	Index 3 / Index 7 (Hostpot on)		Index 1
		WWAN + Bluetooth (Ant3) (BDR/EDR Only)			
		WWAN + Bluetooth (Ant4+3) (BDR/EDR Only)			
	WWAN + WiFi + BT	WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)	Index 3 / Index 7 (Hostpot on)	Index 3	Index 1
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			

Portable Condition	Tx mode	Capable TX Configurations	WWAN Power	WiFi	BT
				Power	Power
Body	WWAN standalone	WWAN	Index 5		
	WiFi standalone	WiFi 2.4G MIMO/CDD (Ant4+3)		Index 5	
		WiFi 5G MIMO (Ant4+3)			
		WiFi 6E MIMO (Ant4+3)		Index 6 (RSDB)	
		WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	BT standalone	Bluetooth (Ant4) (BDR/EDR Only)			Index 2
		Bluetooth (Ant3) (BDR/EDR Only)			
		Bluetooth (Ant4+3) (BDR/EDR Only)			
	WiFi +BT	WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)		Index 5	Index 3
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			
	WWAN + WiFi	WWAN + WiFi 2.4G MIMO/CDD (Ant4+3)	Index 6 / Index 4 (Hostpot on)	Index 7	
		WWAN + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3)		Index 8 (RSDB)	
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 5G MIMO (Ant4+3)			
		WWAN + WiFi 2.4G MIMO (Ant4+3) + WiFi 6E MIMO (Ant4+3)			
	WWAN + BT	WWAN + Bluetooth (Ant4) (BDR/EDR Only)	Index 6 / Index 4 (Hostpot on)		Index 3
		WWAN + Bluetooth (Ant3) (BDR/EDR Only)			
		WWAN + Bluetooth (Ant4+3) (BDR/EDR Only)			
	WWAN + WiFi +BT	WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4)	Index 6 / Index 4 (Hostpot on)	Index 9	Index 4
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 5G MIMO (Ant4+3) + Bluetooth (Ant4+3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant3)			
		WWAN + WiFi 6E MIMO (Ant4+3) + Bluetooth (Ant4+3)			

General Note:

- Simultaneous operation at maximum power levels when the device is neither against the body nor the head (i.e. in a mobile RF exposure condition) is addressed in Sporton's RF Exposure report FA0D2942-18A
- The Sim-Tx configuration combination include in operation description will be match the title in the below Sum-Tx evaluation table.
- This device only WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
- The worst case WLAN SAR results between report no.: FA0D2942-04C and FA0D2942-18B are using for Sim-Tx analysis with other transmitters. Therefore, summations represent the absolute worst cases for Sim-Tx analysis for this device.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

14.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

The power ratio factors are g_1 and g_2 for LTE and NR respectively. The main purpose of these power ratio factors is to split the available SAR budget among different RATs, so $g_1 + g_2 \leq 1$. The value of g_1 is computed based on the need of the anchor (LTE) and can be changed if the anchor changes its power request. Based on the SAR Budget portion allocated to the anchor, the value of g_2 will be computed. At steady state (where all RATs are being on for a while), the allocated power ratio factors will guarantee that the total exposure ratio never exceeds the highest exposure of either one.

$$g_1 * LTE_{exposure} + g_2 * NR_{exposure} \leq 1.0,$$

$$\text{then, } g_1 * LTE_{exposure} + g_2 * NR_{exposure} \leq \max (LTE_{exposure}, NR_{exposure})$$

Compliance of simultaneous transmission of LTE+5GNR+WiFi+BT can be justified from the compliance of LTE+WiFi +BT and 5GNR+WiFi+BT

14.2 Head Exposure Conditions

<WLAN Index 1, BT Index 1>

Exposure Position	2 5/6GHz WLAN Ant 4+3 1g SAR (W/kg)	3 Bluetooth Ant 4 1g SAR (W/kg)	4 Bluetooth Ant 3 1g SAR (W/kg)	5 Bluetooth Ant 4+3 1g SAR (W/kg)	2+3 Summed 1g SAR (W/kg)	2+4 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)
Right Cheek	1.117	0.057	0.189	0.195	1.174	1.306	1.312
Right Tilted	0.731	0.075	0.161	0.184	0.806	0.892	0.915
Left Cheek	1.073	0.134	0.046	0.194	1.207	1.119	1.267
Left Tilted	1.158	0.115	0.047	0.185	1.273	1.205	1.343

<WLAN Index 2>

Exposure Position	1 2.4GHz WLAN Ant 4+3 1g SAR (W/kg)	2 5/6GHz WLAN Ant 4+3 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
Right Cheek	0.578	0.996	1.574
Right Tilted	0.629	0.651	1.280
Left Cheek	0.317	0.853	1.170
Left Tilted	0.366	0.920	1.286

**<WWAN Index 3, WLAN Index 3, BT Index 1>**

WWAN Band	Exposure Position	1	2	3	4	5	6	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM850_Ant 1	Right Cheek	0.827	0.649	0.408	0.057	0.189	0.195	1.292	1.424	1.430	1.235	1.476	0.884	1.016	1.022
	Right Tilted	0.821	0.705	0.239	0.075	0.161	0.184	1.135	1.221	1.244	1.060	1.526	0.896	0.982	1.005
	Left Cheek	0.396	0.356	0.335	0.134	0.046	0.194	0.865	0.777	0.925	0.731	0.752	0.530	0.442	0.590
	Left Tilted	0.333	0.411	0.355	0.115	0.047	0.185	0.803	0.735	0.873	0.688	0.744	0.448	0.380	0.518
GSM1900_Ant 0	Right Cheek	0.184	0.649	0.408	0.057	0.189	0.195	0.649	0.781	0.787	0.592	0.833	0.241	0.373	0.379
	Right Tilted	0.161	0.705	0.239	0.075	0.161	0.184	0.475	0.561	0.584	0.400	0.866	0.236	0.322	0.345
	Left Cheek	0.460	0.356	0.335	0.134	0.046	0.194	0.929	0.841	0.989	0.795	0.816	0.594	0.506	0.654
	Left Tilted	0.172	0.411	0.355	0.115	0.047	0.185	0.642	0.574	0.712	0.527	0.583	0.287	0.219	0.357
WCDMA II_Ant 0	Right Cheek	0.138	0.649	0.408	0.057	0.189	0.195	0.603	0.735	0.741	0.546	0.787	0.195	0.327	0.333
	Right Tilted	0.051	0.705	0.239	0.075	0.161	0.184	0.365	0.451	0.474	0.290	0.756	0.126	0.212	0.235
	Left Cheek	0.470	0.356	0.335	0.134	0.046	0.194	0.939	0.851	0.999	0.805	0.826	0.604	0.516	0.664
	Left Tilted	0.152	0.411	0.355	0.115	0.047	0.185	0.622	0.554	0.692	0.507	0.563	0.267	0.199	0.337
WCDMA IV_Ant 0	Right Cheek	0.180	0.649	0.408	0.057	0.189	0.195	0.645	0.777	0.783	0.588	0.829	0.237	0.369	0.375
	Right Tilted	0.144	0.705	0.239	0.075	0.161	0.184	0.458	0.544	0.567	0.383	0.849	0.219	0.305	0.328
	Left Cheek	0.359	0.356	0.335	0.134	0.046	0.194	0.828	0.740	0.888	0.694	0.715	0.493	0.405	0.553
	Left Tilted	0.168	0.411	0.355	0.115	0.047	0.185	0.638	0.570	0.708	0.523	0.579	0.283	0.215	0.353
WCDMA V_Ant 1	Right Cheek	0.480	0.649	0.408	0.057	0.189	0.195	0.945	1.077	1.083	0.888	1.129	0.537	0.669	0.675
	Right Tilted	0.298	0.705	0.239	0.075	0.161	0.184	0.612	0.698	0.721	0.537	1.003	0.373	0.459	0.482
	Left Cheek	0.198	0.356	0.335	0.134	0.046	0.194	0.667	0.579	0.727	0.533	0.554	0.332	0.244	0.392
	Left Tilted	0.186	0.411	0.355	0.115	0.047	0.185	0.656	0.588	0.726	0.541	0.597	0.301	0.233	0.371
LTE Band 7_Ant 0	Right Cheek	0.193	0.649	0.408	0.057	0.189	0.195	0.658	0.790	0.796	0.601	0.842	0.250	0.382	0.388
	Right Tilted	0.096	0.705	0.239	0.075	0.161	0.184	0.410	0.496	0.519	0.335	0.801	0.171	0.257	0.280
	Left Cheek	0.435	0.356	0.335	0.134	0.046	0.194	0.904	0.816	0.964	0.770	0.791	0.569	0.481	0.629
	Left Tilted	0.157	0.411	0.355	0.115	0.047	0.185	0.627	0.559	0.697	0.512	0.568	0.272	0.204	0.342
LTE Band 12_Ant 1	Right Cheek	0.684	0.649	0.408	0.057	0.189	0.195	1.149	1.281	1.287	1.092	1.333	0.741	0.873	0.879
	Right Tilted	0.559	0.705	0.239	0.075	0.161	0.184	0.873	0.959	0.982	0.798	1.264	0.634	0.720	0.743
	Left Cheek	0.296	0.356	0.335	0.134	0.046	0.194	0.765	0.677	0.825	0.631	0.652	0.430	0.342	0.490
	Left Tilted	0.290	0.411	0.355	0.115	0.047	0.185	0.760	0.692	0.830	0.645	0.701	0.405	0.337	0.475
LTE Band 13_Ant 1	Right Cheek	0.910	0.649	0.408	0.057	0.189	0.195	1.375	1.507	1.513	1.318	1.559	0.967	1.099	1.105
	Right Tilted	0.879	0.705	0.239	0.075	0.161	0.184	1.193	1.279	1.302	1.118	1.584	0.954	1.040	1.063
	Left Cheek	0.410	0.356	0.335	0.134	0.046	0.194	0.879	0.791	0.939	0.745	0.766	0.544	0.456	0.604
	Left Tilted	0.350	0.411	0.355	0.115	0.047	0.185	0.820	0.752	0.890	0.705	0.761	0.465	0.397	0.535
LTE Band 14_Ant 1	Right Cheek	0.856	0.649	0.408	0.057	0.189	0.195	1.321	1.453	1.459	1.264	1.505	0.913	1.045	1.051
	Right Tilted	0.792	0.705	0.239	0.075	0.161	0.184	1.106	1.192	1.215	1.031	1.497	0.867	0.953	0.976
	Left Cheek	0.358	0.356	0.335	0.134	0.046	0.194	0.827	0.739	0.887	0.693	0.714	0.492	0.404	0.552
	Left Tilted	0.306	0.411	0.355	0.115	0.047	0.185	0.776	0.708	0.846	0.661	0.717	0.421	0.353	0.491
LTE Band 25_Ant 0	Right Cheek	0.256	0.649	0.408	0.057	0.189	0.195	0.721	0.853	0.859	0.664	0.905	0.313	0.445	0.451
	Right Tilted	0.157	0.705	0.239	0.075	0.161	0.184	0.471	0.557	0.580	0.396	0.862	0.232	0.318	0.341
	Left Cheek	0.469	0.356	0.335	0.134	0.046	0.194	0.938	0.850	0.998	0.804	0.825	0.603	0.515	0.663
	Left Tilted	0.185	0.411	0.355	0.115	0.047	0.185	0.655	0.587	0.725	0.540	0.596	0.300	0.232	0.370
LTE Band 26_Ant 1	Right Cheek	0.888	0.649	0.408	0.057	0.189	0.195	1.353	1.485	1.491	1.296	1.537	0.945	1.077	1.083
	Right Tilted	0.843	0.705	0.239	0.075	0.161	0.184	1.157	1.243	1.266	1.082	1.548	0.918	1.004	1.027
	Left Cheek	0.437	0.356	0.335	0.134	0.046	0.194	0.906	0.818	0.966	0.772	0.793	0.571	0.483	0.631
	Left Tilted	0.377	0.411	0.355	0.115	0.047	0.185	0.847	0.779	0.917	0.732	0.788	0.492	0.424	0.562
LTE Band 30_Ant 0	Right Cheek	0.161	0.649	0.408	0.057	0.189	0.195	0.626	0.758	0.764	0.569	0.810	0.218	0.350	0.356
	Right Tilted	0.139	0.705	0.239	0.075	0.161	0.184	0.453	0.539	0.562	0.378	0.844	0.214	0.300	0.323
	Left Cheek	0.384	0.356	0.335	0.134	0.046	0.194	0.853	0.765	0.913	0.719	0.740	0.518	0.430	0.578
	Left Tilted	0.110	0.411	0.355	0.115	0.047	0.185	0.580	0.512	0.650	0.465	0.521	0.225	0.157	0.295
LTE Band 41_Ant 0	Right Cheek	0.073	0.649	0.408	0.057	0.189	0.195	0.538	0.670	0.676	0.481	0.722	0.130	0.262	0.268



FCC SAR TEST REPORT

Report No. : FA0D2942-18B

	Right Tilted	0.064	0.705	0.239	0.075	0.161	0.184	0.378	0.464	0.487	0.303	0.769	0.139	0.225	0.248
	Left Cheek	0.242	0.356	0.335	0.134	0.046	0.194	0.711	0.623	0.771	0.577	0.598	0.376	0.288	0.436
	Left Tilted	0.046	0.411	0.355	0.115	0.047	0.185	0.516	0.448	0.586	0.401	0.457	0.161	0.093	0.231
LTE Band 48_Ant 2	Right Cheek	0.410	0.649	0.408	0.057	0.189	0.195	0.875	1.007	1.013	0.818	1.059	0.467	0.599	0.605
	Right Tilted	0.139	0.705	0.239	0.075	0.161	0.184	0.453	0.539	0.562	0.378	0.844	0.214	0.300	0.323
	Left Cheek	0.177	0.356	0.335	0.134	0.046	0.194	0.646	0.558	0.706	0.512	0.533	0.311	0.223	0.371
	Left Tilted	0.086	0.411	0.355	0.115	0.047	0.185	0.556	0.488	0.626	0.441	0.497	0.201	0.133	0.271
LTE Band 66_Ant 0	Right Cheek	0.241	0.649	0.408	0.057	0.189	0.195	0.706	0.838	0.844	0.649	0.890	0.298	0.430	0.436
	Right Tilted	0.201	0.705	0.239	0.075	0.161	0.184	0.515	0.601	0.624	0.440	0.906	0.276	0.362	0.385
	Left Cheek	0.467	0.356	0.335	0.134	0.046	0.194	0.936	0.848	0.996	0.802	0.823	0.601	0.513	0.661
	Left Tilted	0.191	0.411	0.355	0.115	0.047	0.185	0.661	0.593	0.731	0.546	0.602	0.306	0.238	0.376
LTE Band 71_Ant 1	Right Cheek	0.852	0.649	0.408	0.057	0.189	0.195	1.317	1.449	1.455	1.260	1.501	0.909	1.041	1.047
	Right Tilted	0.614	0.705	0.239	0.075	0.161	0.184	0.928	1.014	1.037	0.853	1.319	0.689	0.775	0.798
	Left Cheek	0.209	0.356	0.335	0.134	0.046	0.194	0.678	0.590	0.738	0.544	0.565	0.343	0.255	0.403
	Left Tilted	0.169	0.411	0.355	0.115	0.047	0.185	0.639	0.571	0.709	0.524	0.580	0.284	0.216	0.354
FR1 n5_Ant 1	Right Cheek	0.899	0.649	0.408	0.057	0.189	0.195	1.364	1.496	1.502	1.307	1.548	0.956	1.088	1.094
	Right Tilted	0.651	0.705	0.239	0.075	0.161	0.184	0.965	1.051	1.074	0.890	1.356	0.726	0.812	0.835
	Left Cheek	0.301	0.356	0.335	0.134	0.046	0.194	0.770	0.682	0.830	0.636	0.657	0.435	0.347	0.495
	Left Tilted	0.243	0.411	0.355	0.115	0.047	0.185	0.713	0.645	0.783	0.598	0.654	0.358	0.290	0.428
FR1 n7_Ant 0	Right Cheek	0.134	0.649	0.408	0.057	0.189	0.195	0.599	0.731	0.737	0.542	0.783	0.191	0.323	0.329
	Right Tilted	0.085	0.705	0.239	0.075	0.161	0.184	0.399	0.485	0.508	0.324	0.790	0.160	0.246	0.269
	Left Cheek	0.363	0.356	0.335	0.134	0.046	0.194	0.832	0.744	0.892	0.698	0.719	0.497	0.409	0.557
	Left Tilted	0.150	0.411	0.355	0.115	0.047	0.185	0.620	0.552	0.690	0.505	0.561	0.265	0.197	0.335
FR1 n12_Ant 1	Right Cheek	0.668	0.649	0.408	0.057	0.189	0.195	1.133	1.265	1.271	1.076	1.317	0.725	0.857	0.863
	Right Tilted	0.576	0.705	0.239	0.075	0.161	0.184	0.890	0.976	0.999	0.815	1.281	0.651	0.737	0.760
	Left Cheek	0.298	0.356	0.335	0.134	0.046	0.194	0.767	0.679	0.827	0.633	0.654	0.432	0.344	0.492
	Left Tilted	0.330	0.411	0.355	0.115	0.047	0.185	0.800	0.732	0.870	0.685	0.741	0.445	0.377	0.515
FR1 n25_Ant 0	Right Cheek	0.192	0.649	0.408	0.057	0.189	0.195	0.657	0.789	0.795	0.600	0.841	0.249	0.381	0.387
	Right Tilted	0.160	0.705	0.239	0.075	0.161	0.184	0.474	0.560	0.583	0.399	0.865	0.235	0.321	0.344
	Left Cheek	0.485	0.356	0.335	0.134	0.046	0.194	0.954	0.866	1.014	0.820	0.841	0.619	0.531	0.679
	Left Tilted	0.192	0.411	0.355	0.115	0.047	0.185	0.662	0.594	0.732	0.547	0.603	0.307	0.239	0.377
FR1 n30_Ant 0	Right Cheek	0.155	0.649	0.408	0.057	0.189	0.195	0.620	0.752	0.758	0.563	0.804	0.212	0.344	0.350
	Right Tilted	0.129	0.705	0.239	0.075	0.161	0.184	0.443	0.529	0.552	0.368	0.834	0.204	0.290	0.313
	Left Cheek	0.313	0.356	0.335	0.134	0.046	0.194	0.782	0.694	0.842	0.648	0.669	0.447	0.359	0.507
	Left Tilted	0.095	0.411	0.355	0.115	0.047	0.185	0.565	0.497	0.635	0.450	0.506	0.210	0.142	0.280
FR1 n41_Ant 1	Right Cheek	0.827	0.649	0.408	0.057	0.189	0.195	1.292	1.424	1.430	1.235	1.476	0.884	1.016	1.022
	Right Tilted	0.641	0.705	0.239	0.075	0.161	0.184	0.955	1.041	1.064	0.880	1.346	0.716	0.802	0.825
	Left Cheek	0.135	0.356	0.335	0.134	0.046	0.194	0.604	0.516	0.664	0.470	0.491	0.269	0.181	0.329
	Left Tilted	0.128	0.411	0.355	0.115	0.047	0.185	0.598	0.530	0.668	0.483	0.539	0.243	0.175	0.313
FR1 n66_Ant 0	Right Cheek	0.180	0.649	0.408	0.057	0.189	0.195	0.645	0.777	0.783	0.588	0.829	0.237	0.369	0.375
	Right Tilted	0.175	0.705	0.239	0.075	0.161	0.184	0.489	0.575	0.598	0.414	0.880	0.250	0.336	0.359
	Left Cheek	0.391	0.356	0.335	0.134	0.046	0.194	0.860	0.772	0.920	0.726	0.747	0.525	0.437	0.585
	Left Tilted	0.195	0.411	0.355	0.115	0.047	0.185	0.665	0.597	0.735	0.550	0.606	0.310	0.242	0.380
FR1 n71_Ant 1	Right Cheek	0.876	0.649	0.408	0.057	0.189	0.195	1.341	1.473	1.479	1.284	1.525	0.933	1.065	1.071
	Right Tilted	0.728	0.705	0.239	0.075	0.161	0.184	1.042	1.128	1.151	0.967	1.433	0.803	0.889	0.912
	Left Cheek	0.203	0.356	0.335	0.134	0.046	0.194	0.672	0.584	0.732	0.538	0.559	0.337	0.249	0.397
	Left Tilted	0.165	0.411	0.355	0.115	0.047	0.185	0.635	0.567	0.705	0.520	0.576	0.280	0.212	0.350
FR1 n77_Ant 2	Right Cheek	0.884	0.649	0.408	0.057	0.189	0.195	1.349	1.481	1.487	1.292	1.533	0.941	1.073	1.079
	Right Tilted	0.393	0.705	0.239	0.075	0.161	0.184	0.707	0.793	0.816	0.632	1.098	0.468	0.554	0.577
	Left Cheek	0.583	0.356	0.335	0.134	0.046	0.194	1.052	0.964	1.112	0.918	0.939	0.717	0.629	0.777
	Left Tilted	0.599	0.411	0.355	0.115	0.047	0.185	1.069	1.001	1.139	0.954	1.010	0.714	0.646	0.784



FCC SAR TEST REPORT

Report No. : FA0D2942-18B

<WWAN Index 3, WLAN Index 3, BT Index 1>

WWAN Band	Exposure Position	1	2	3	4	5	6	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3								
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
GSM850_Ant 0	Right Cheek	0.251	0.649	0.408	0.057	0.189	0.195	0.716	0.848	0.854	0.659	0.900	0.308	0.440	0.446
	Right Tilted	0.163	0.705	0.239	0.075	0.161	0.184	0.477	0.563	0.586	0.402	0.868	0.238	0.324	0.347
	Left Cheek	0.403	0.356	0.335	0.134	0.046	0.194	0.872	0.784	0.932	0.738	0.759	0.537	0.449	0.597
	Left Tilted	0.251	0.411	0.355	0.115	0.047	0.185	0.721	0.653	0.791	0.606	0.662	0.366	0.298	0.436
GSM1900_Ant 2	Right Cheek	0.122	0.649	0.408	0.057	0.189	0.195	0.587	0.719	0.725	0.530	0.771	0.179	0.311	0.317
	Right Tilted	0.073	0.705	0.239	0.075	0.161	0.184	0.387	0.473	0.496	0.312	0.778	0.148	0.234	0.257
	Left Cheek	0.096	0.356	0.335	0.134	0.046	0.194	0.565	0.477	0.625	0.431	0.452	0.230	0.142	0.290
	Left Tilted	0.076	0.411	0.355	0.115	0.047	0.185	0.546	0.478	0.616	0.431	0.487	0.191	0.123	0.261
WCDMA II_Ant 2	Right Cheek	0.142	0.649	0.408	0.057	0.189	0.195	0.607	0.739	0.745	0.550	0.791	0.199	0.331	0.337
	Right Tilted	0.001	0.705	0.239	0.075	0.161	0.184	0.315	0.401	0.424	0.240	0.706	0.076	0.162	0.185
	Left Cheek	0.130	0.356	0.335	0.134	0.046	0.194	0.599	0.511	0.659	0.465	0.486	0.264	0.176	0.324
	Left Tilted	0.044	0.411	0.355	0.115	0.047	0.185	0.514	0.446	0.584	0.399	0.455	0.159	0.091	0.229
WCDMA IV_Ant 2	Right Cheek	0.280	0.649	0.408	0.057	0.189	0.195	0.745	0.877	0.883	0.688	0.929	0.337	0.469	0.475
	Right Tilted	0.001	0.705	0.239	0.075	0.161	0.184	0.315	0.401	0.424	0.240	0.706	0.076	0.162	0.185
	Left Cheek	0.137	0.356	0.335	0.134	0.046	0.194	0.606	0.518	0.666	0.472	0.493	0.271	0.183	0.331
	Left Tilted	0.001	0.411	0.355	0.115	0.047	0.185	0.471	0.403	0.541	0.356	0.412	0.116	0.048	0.186
WCDMA V_Ant 0	Right Cheek	0.229	0.649	0.408	0.057	0.189	0.195	0.694	0.826	0.832	0.637	0.878	0.286	0.418	0.424
	Right Tilted	0.064	0.705	0.239	0.075	0.161	0.184	0.378	0.464	0.487	0.303	0.769	0.139	0.225	0.248
	Left Cheek	0.321	0.356	0.335	0.134	0.046	0.194	0.790	0.702	0.850	0.656	0.677	0.455	0.367	0.515
	Left Tilted	0.122	0.411	0.355	0.115	0.047	0.185	0.592	0.524	0.662	0.477	0.533	0.237	0.169	0.307
LTE Band 7_Ant 2	Right Cheek	0.450	0.649	0.408	0.057	0.189	0.195	0.915	1.047	1.053	0.858	1.099	0.507	0.639	0.645
	Right Tilted	0.243	0.705	0.239	0.075	0.161	0.184	0.557	0.643	0.666	0.482	0.948	0.318	0.404	0.427
	Left Cheek	0.312	0.356	0.335	0.134	0.046	0.194	0.781	0.693	0.841	0.647	0.668	0.446	0.358	0.506
	Left Tilted	0.282	0.411	0.355	0.115	0.047	0.185	0.752	0.684	0.822	0.637	0.693	0.397	0.329	0.467
LTE Band 12_Ant 0	Right Cheek	0.208	0.649	0.408	0.057	0.189	0.195	0.673	0.805	0.811	0.616	0.857	0.265	0.397	0.403
	Right Tilted	0.123	0.705	0.239	0.075	0.161	0.184	0.437	0.523	0.546	0.362	0.828	0.198	0.284	0.307
	Left Cheek	0.289	0.356	0.335	0.134	0.046	0.194	0.758	0.670	0.818	0.624	0.645	0.423	0.335	0.483
	Left Tilted	0.158	0.411	0.355	0.115	0.047	0.185	0.628	0.560	0.698	0.513	0.569	0.273	0.205	0.343
LTE Band 13_Ant 0	Right Cheek	0.240	0.649	0.408	0.057	0.189	0.195	0.705	0.837	0.843	0.648	0.889	0.297	0.429	0.435
	Right Tilted	0.152	0.705	0.239	0.075	0.161	0.184	0.466	0.552	0.575	0.391	0.857	0.227	0.313	0.336
	Left Cheek	0.328	0.356	0.335	0.134	0.046	0.194	0.797	0.709	0.857	0.663	0.684	0.462	0.374	0.522
	Left Tilted	0.220	0.411	0.355	0.115	0.047	0.185	0.690	0.622	0.760	0.575	0.631	0.335	0.267	0.405
LTE Band 14_Ant 0	Right Cheek	0.254	0.649	0.408	0.057	0.189	0.195	0.719	0.851	0.857	0.662	0.903	0.311	0.443	0.449
	Right Tilted	0.154	0.705	0.239	0.075	0.161	0.184	0.468	0.554	0.577	0.393	0.859	0.229	0.315	0.338
	Left Cheek	0.344	0.356	0.335	0.134	0.046	0.194	0.813	0.725	0.873	0.679	0.700	0.478	0.390	0.538
	Left Tilted	0.211	0.411	0.355	0.115	0.047	0.185	0.681	0.613	0.751	0.566	0.622	0.326	0.258	0.396
LTE Band 25_Ant 2	Right Cheek	0.128	0.649	0.408	0.057	0.189	0.195	0.593	0.725	0.731	0.536	0.777	0.185	0.317	0.323
	Right Tilted	0.079	0.705	0.239	0.075	0.161	0.184	0.393	0.479	0.502	0.318	0.784	0.154	0.240	0.263
	Left Cheek	0.109	0.356	0.335	0.134	0.046	0.194	0.578	0.490	0.638	0.444	0.465	0.243	0.155	0.303
	Left Tilted	0.096	0.411	0.355	0.115	0.047	0.185	0.566	0.498	0.636	0.451	0.507	0.211	0.143	0.281
LTE Band 26_Ant 0	Right Cheek	0.214	0.649	0.408	0.057	0.189	0.195	0.679	0.811	0.817	0.622	0.863	0.271	0.403	0.409
	Right Tilted	0.141	0.705	0.239	0.075	0.161	0.184	0.455	0.541	0.564	0.380	0.846	0.216	0.302	0.325
	Left Cheek	0.309	0.356	0.335	0.134	0.046	0.194	0.778	0.690	0.838	0.644	0.665	0.443	0.355	0.503
	Left Tilted	0.158	0.411	0.355	0.115	0.047	0.185	0.628	0.560	0.698	0.513	0.569	0.273	0.205	0.343
LTE Band 30_Ant 2	Right Cheek	0.228	0.649	0.408	0.057	0.189	0.195	0.693	0.825	0.831	0.636	0.877	0.285	0.417	0.423
	Right Tilted	0.096	0.705	0.239	0.075	0.161	0.184	0.410	0.496	0.519	0.335	0.801	0.171	0.257	0.280
	Left Cheek	0.116	0.356	0.335	0.134	0.046	0.194	0.585	0.497	0.645	0.451	0.472	0.250	0.162	0.310
	Left Tilted	0.101	0.411	0.355	0.115	0.047	0.185	0.571	0.503	0.641	0.456	0.512	0.216	0.148	0.286
LTE Band 41_Ant 2	Right Cheek	0.272	0.649	0.408	0.057	0.189	0.195	0.737	0.869	0.875	0.680	0.921	0.329	0.461	0.467



FCC SAR TEST REPORT

Report No. : FA0D2942-18B

	Right Tilted	0.090	0.705	0.239	0.075	0.161	0.184	0.404	0.490	0.513	0.329	0.795	0.165	0.251	0.274
	Left Cheek	0.165	0.356	0.335	0.134	0.046	0.194	0.634	0.546	0.694	0.500	0.521	0.299	0.211	0.359
	Left Tilted	0.124	0.411	0.355	0.115	0.047	0.185	0.594	0.526	0.664	0.479	0.535	0.239	0.171	0.309
LTE Band 48_Ant 6	Right Cheek	0.280	0.649	0.408	0.057	0.189	0.195	0.745	0.877	0.883	0.688	0.929	0.337	0.469	0.475
	Right Tilted	0.233	0.705	0.239	0.075	0.161	0.184	0.547	0.633	0.656	0.472	0.938	0.308	0.394	0.417
	Left Cheek	0.450	0.356	0.335	0.134	0.046	0.194	0.919	0.831	0.979	0.785	0.806	0.584	0.496	0.644
	Left Tilted	0.161	0.411	0.355	0.115	0.047	0.185	0.631	0.563	0.701	0.516	0.572	0.276	0.208	0.346
LTE Band 66_Ant 2	Right Cheek	0.208	0.649	0.408	0.057	0.189	0.195	0.673	0.805	0.811	0.616	0.857	0.265	0.397	0.403
	Right Tilted	0.130	0.705	0.239	0.075	0.161	0.184	0.444	0.530	0.553	0.369	0.835	0.205	0.291	0.314
	Left Cheek	0.138	0.356	0.335	0.134	0.046	0.194	0.607	0.519	0.667	0.473	0.494	0.272	0.184	0.332
	Left Tilted	0.112	0.411	0.355	0.115	0.047	0.185	0.582	0.514	0.652	0.467	0.523	0.227	0.159	0.297
LTE Band 71_Ant 0	Right Cheek	0.204	0.649	0.408	0.057	0.189	0.195	0.669	0.801	0.807	0.612	0.853	0.261	0.393	0.399
	Right Tilted	0.113	0.705	0.239	0.075	0.161	0.184	0.427	0.513	0.536	0.352	0.818	0.188	0.274	0.297
	Left Cheek	0.276	0.356	0.335	0.134	0.046	0.194	0.745	0.657	0.805	0.611	0.632	0.410	0.322	0.470
	Left Tilted	0.149	0.411	0.355	0.115	0.047	0.185	0.619	0.551	0.689	0.504	0.560	0.264	0.196	0.334
FR1 n5_Ant 0	Right Cheek	0.208	0.649	0.408	0.057	0.189	0.195	0.673	0.805	0.811	0.616	0.857	0.265	0.397	0.403
	Right Tilted	0.127	0.705	0.239	0.075	0.161	0.184	0.441	0.527	0.550	0.366	0.832	0.202	0.288	0.311
	Left Cheek	0.281	0.356	0.335	0.134	0.046	0.194	0.750	0.662	0.810	0.616	0.637	0.415	0.327	0.475
	Left Tilted	0.168	0.411	0.355	0.115	0.047	0.185	0.638	0.570	0.708	0.523	0.579	0.283	0.215	0.353
FR1 n7_Ant 2	Right Cheek	0.356	0.649	0.408	0.057	0.189	0.195	0.821	0.953	0.959	0.764	1.005	0.413	0.545	0.551
	Right Tilted	0.164	0.705	0.239	0.075	0.161	0.184	0.478	0.564	0.587	0.403	0.869	0.239	0.325	0.348
	Left Cheek	0.076	0.356	0.335	0.134	0.046	0.194	0.545	0.457	0.605	0.411	0.432	0.210	0.122	0.270
	Left Tilted	0.067	0.411	0.355	0.115	0.047	0.185	0.537	0.469	0.607	0.422	0.478	0.182	0.114	0.252
FR1 n12_Ant 0	Right Cheek	0.177	0.649	0.408	0.057	0.189	0.195	0.642	0.774	0.780	0.585	0.826	0.234	0.366	0.372
	Right Tilted	0.113	0.705	0.239	0.075	0.161	0.184	0.427	0.513	0.536	0.352	0.818	0.188	0.274	0.297
	Left Cheek	0.242	0.356	0.335	0.134	0.046	0.194	0.711	0.623	0.771	0.577	0.598	0.376	0.288	0.436
	Left Tilted	0.153	0.411	0.355	0.115	0.047	0.185	0.623	0.555	0.693	0.508	0.564	0.268	0.200	0.338
FR1 n25_Ant 2	Right Cheek	0.101	0.649	0.408	0.057	0.189	0.195	0.566	0.698	0.704	0.509	0.750	0.158	0.290	0.296
	Right Tilted	0.067	0.705	0.239	0.075	0.161	0.184	0.381	0.467	0.490	0.306	0.772	0.142	0.228	0.251
	Left Cheek	0.121	0.356	0.335	0.134	0.046	0.194	0.590	0.502	0.650	0.456	0.477	0.255	0.167	0.315
	Left Tilted	0.098	0.411	0.355	0.115	0.047	0.185	0.568	0.500	0.638	0.453	0.509	0.213	0.145	0.283
FR1 n30_Ant 2	Right Cheek	0.200	0.649	0.408	0.057	0.189	0.195	0.665	0.797	0.803	0.608	0.849	0.257	0.389	0.395
	Right Tilted	0.084	0.705	0.239	0.075	0.161	0.184	0.398	0.484	0.507	0.323	0.789	0.159	0.245	0.268
	Left Cheek	0.117	0.356	0.335	0.134	0.046	0.194	0.586	0.498	0.646	0.452	0.473	0.251	0.163	0.311
	Left Tilted	0.119	0.411	0.355	0.115	0.047	0.185	0.589	0.521	0.659	0.474	0.530	0.234	0.166	0.304
FR1 n41_Ant 5	Right Cheek	0.318	0.649	0.408	0.057	0.189	0.195	0.783	0.915	0.921	0.726	0.967	0.375	0.507	0.513
	Right Tilted	0.085	0.705	0.239	0.075	0.161	0.184	0.399	0.485	0.508	0.324	0.790	0.160	0.246	0.269
	Left Cheek	0.898	0.356	0.335	0.134	0.046	0.194	1.367	1.279	1.427	1.233	1.254	1.032	0.944	1.092
	Left Tilted	0.214	0.411	0.355	0.115	0.047	0.185	0.684	0.616	0.754	0.569	0.625	0.329	0.261	0.399
FR1 n66_Ant 2	Right Cheek	0.225	0.649	0.408	0.057	0.189	0.195	0.690	0.822	0.828	0.633	0.874	0.282	0.414	0.420
	Right Tilted	0.157	0.705	0.239	0.075	0.161	0.184	0.471	0.557	0.580	0.396	0.862	0.232	0.318	0.341
	Left Cheek	0.160	0.356	0.335	0.134	0.046	0.194	0.629	0.541	0.689	0.495	0.516	0.294	0.206	0.354
	Left Tilted	0.118	0.411	0.355	0.115	0.047	0.185	0.588	0.520	0.658	0.473	0.529	0.233	0.165	0.303
FR1 n71_Ant 0	Right Cheek	0.184	0.649	0.408	0.057	0.189	0.195	0.649	0.781	0.787	0.592	0.833	0.241	0.373	0.379
	Right Tilted	0.106	0.705	0.239	0.075	0.161	0.184	0.420	0.506	0.529	0.345	0.811	0.181	0.267	0.290
	Left Cheek	0.244	0.356	0.335	0.134	0.046	0.194	0.713	0.625	0.773	0.579	0.600	0.378	0.290	0.438
	Left Tilted	0.146	0.411	0.355	0.115	0.047	0.185	0.616	0.548	0.686	0.501	0.557	0.261	0.193	0.331
FR1 n77_Ant 6	Right Cheek	0.546	0.649	0.408	0.057	0.189	0.195	1.011	1.143	1.149	0.954	1.195	0.603	0.735	0.741
	Right Tilted	0.395	0.705	0.239	0.075	0.161	0.184	0.709	0.795	0.818	0.634	1.100	0.470	0.556	0.579
	Left Cheek	0.846	0.356	0.335	0.134	0.046	0.194	1.315	1.227	1.375	1.181	1.202	0.980	0.892	1.040
	Left Tilted	0.300	0.411	0.355	0.115	0.047	0.185	0.770	0.702	0.840	0.655	0.711	0.415	0.347	0.485



<WWAN Index 3, WLAN Index 4>

WWAN Band	Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 4+3 1g SAR (W/kg)	5/6GHz WLAN Ant 4+3 1g SAR (W/kg)	
GSM850_Ant 1	Right Cheek	0.827	0.128	0.514	1.469
	Right Tilted	0.821	0.101	0.301	1.223
	Left Cheek	0.396	0.076	0.422	0.894
	Left Tilted	0.333	0.072	0.447	0.852
GSM1900_Ant 0	Right Cheek	0.184	0.128	0.514	0.826
	Right Tilted	0.161	0.101	0.301	0.563
	Left Cheek	0.460	0.076	0.422	0.958
	Left Tilted	0.172	0.072	0.447	0.691
WCDMA II_Ant 0	Right Cheek	0.138	0.128	0.514	0.780
	Right Tilted	0.051	0.101	0.301	0.453
	Left Cheek	0.470	0.076	0.422	0.968
	Left Tilted	0.152	0.072	0.447	0.671
WCDMA IV_Ant 0	Right Cheek	0.180	0.128	0.514	0.822
	Right Tilted	0.144	0.101	0.301	0.546
	Left Cheek	0.359	0.076	0.422	0.857
	Left Tilted	0.168	0.072	0.447	0.687
WCDMA V_Ant 1	Right Cheek	0.480	0.128	0.514	1.122
	Right Tilted	0.298	0.101	0.301	0.700
	Left Cheek	0.198	0.076	0.422	0.696
	Left Tilted	0.186	0.072	0.447	0.705
LTE Band 7_Ant 0	Right Cheek	0.193	0.128	0.514	0.835
	Right Tilted	0.096	0.101	0.301	0.498
	Left Cheek	0.435	0.076	0.422	0.933
	Left Tilted	0.157	0.072	0.447	0.676
LTE Band 12_Ant 1	Right Cheek	0.684	0.128	0.514	1.326
	Right Tilted	0.559	0.101	0.301	0.961
	Left Cheek	0.296	0.076	0.422	0.794
	Left Tilted	0.290	0.072	0.447	0.809
LTE Band 13_Ant 1	Right Cheek	0.910	0.128	0.514	1.552
	Right Tilted	0.879	0.101	0.301	1.281
	Left Cheek	0.410	0.076	0.422	0.908
	Left Tilted	0.350	0.072	0.447	0.869
LTE Band 14_Ant 1	Right Cheek	0.856	0.128	0.514	1.498
	Right Tilted	0.792	0.101	0.301	1.194
	Left Cheek	0.358	0.076	0.422	0.856
	Left Tilted	0.306	0.072	0.447	0.825
LTE Band 25_Ant 0	Right Cheek	0.256	0.128	0.514	0.898
	Right Tilted	0.157	0.101	0.301	0.559
	Left Cheek	0.469	0.076	0.422	0.967
	Left Tilted	0.185	0.072	0.447	0.704
LTE Band 26_Ant 1	Right Cheek	0.888	0.128	0.514	1.530
	Right Tilted	0.843	0.101	0.301	1.245
	Left Cheek	0.437	0.076	0.422	0.935
	Left Tilted	0.377	0.072	0.447	0.896
LTE Band 30_Ant 0	Right Cheek	0.161	0.128	0.514	0.803
	Right Tilted	0.139	0.101	0.301	0.541
	Left Cheek	0.384	0.076	0.422	0.882
	Left Tilted	0.110	0.072	0.447	0.629
LTE Band 41_Ant 0	Right Cheek	0.073	0.128	0.514	0.715
	Right Tilted	0.064	0.101	0.301	0.466
	Left Cheek	0.242	0.076	0.422	0.740

	Left Tilted	0.046	0.072	0.447	0.565
LTE Band 48_Ant 2	Right Cheek	0.410	0.128	0.514	1.052
	Right Tilted	0.139	0.101	0.301	0.541
	Left Cheek	0.177	0.076	0.422	0.675
	Left Tilted	0.086	0.072	0.447	0.605
LTE Band 66_Ant 0	Right Cheek	0.241	0.128	0.514	0.883
	Right Tilted	0.201	0.101	0.301	0.603
	Left Cheek	0.467	0.076	0.422	0.965
	Left Tilted	0.191	0.072	0.447	0.710
LTE Band 71_Ant 1	Right Cheek	0.852	0.128	0.514	1.494
	Right Tilted	0.614	0.101	0.301	1.016
	Left Cheek	0.209	0.076	0.422	0.707
	Left Tilted	0.169	0.072	0.447	0.688
FR1 n5_Ant 1	Right Cheek	0.899	0.128	0.514	1.541
	Right Tilted	0.651	0.101	0.301	1.053
	Left Cheek	0.301	0.076	0.422	0.799
	Left Tilted	0.243	0.072	0.447	0.762
FR1 n7_Ant 0	Right Cheek	0.134	0.128	0.514	0.776
	Right Tilted	0.085	0.101	0.301	0.487
	Left Cheek	0.363	0.076	0.422	0.861
	Left Tilted	0.150	0.072	0.447	0.669
FR1 n12_Ant 1	Right Cheek	0.668	0.128	0.514	1.310
	Right Tilted	0.576	0.101	0.301	0.978
	Left Cheek	0.298	0.076	0.422	0.796
	Left Tilted	0.330	0.072	0.447	0.849
FR1 n25_Ant 0	Right Cheek	0.192	0.128	0.514	0.834
	Right Tilted	0.160	0.101	0.301	0.562
	Left Cheek	0.485	0.076	0.422	0.983
	Left Tilted	0.192	0.072	0.447	0.711
FR1 n30_Ant 0	Right Cheek	0.155	0.128	0.514	0.797
	Right Tilted	0.129	0.101	0.301	0.531
	Left Cheek	0.313	0.076	0.422	0.811
	Left Tilted	0.095	0.072	0.447	0.614
FR1 n41_Ant 1	Right Cheek	0.827	0.128	0.514	1.469
	Right Tilted	0.641	0.101	0.301	1.043
	Left Cheek	0.135	0.076	0.422	0.633
	Left Tilted	0.128	0.072	0.447	0.647
FR1 n66_Ant 0	Right Cheek	0.180	0.128	0.514	0.822
	Right Tilted	0.175	0.101	0.301	0.577
	Left Cheek	0.391	0.076	0.422	0.889
	Left Tilted	0.195	0.072	0.447	0.714
FR1 n71_Ant 1	Right Cheek	0.876	0.128	0.514	1.518
	Right Tilted	0.728	0.101	0.301	1.130
	Left Cheek	0.203	0.076	0.422	0.701
	Left Tilted	0.165	0.072	0.447	0.684
FR1 n77_Ant 2	Right Cheek	0.884	0.128	0.514	1.526
	Right Tilted	0.393	0.101	0.301	0.795
	Left Cheek	0.583	0.076	0.422	1.081
	Left Tilted	0.599	0.072	0.447	1.118

**<WWAN Index 3, WLAN Index 4>**

WWAN Band	Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM850_Ant 0	Right Cheek	0.251	0.128	0.514	0.893
	Right Tilted	0.163	0.101	0.301	0.565
	Left Cheek	0.403	0.076	0.422	0.901
	Left Tilted	0.251	0.072	0.447	0.770
GSM1900_Ant 2	Right Cheek	0.122	0.128	0.514	0.764
	Right Tilted	0.073	0.101	0.301	0.475
	Left Cheek	0.096	0.076	0.422	0.594
	Left Tilted	0.076	0.072	0.447	0.595
WCDMA II_Ant 2	Right Cheek	0.142	0.128	0.514	0.784
	Right Tilted	0.001	0.101	0.301	0.403
	Left Cheek	0.130	0.076	0.422	0.628
	Left Tilted	0.044	0.072	0.447	0.563
WCDMA IV_Ant 2	Right Cheek	0.280	0.128	0.514	0.922
	Right Tilted	0.001	0.101	0.301	0.403
	Left Cheek	0.137	0.076	0.422	0.635
	Left Tilted	0.001	0.072	0.447	0.520
WCDMA V_Ant 0	Right Cheek	0.229	0.128	0.514	0.871
	Right Tilted	0.064	0.101	0.301	0.466
	Left Cheek	0.321	0.076	0.422	0.819
	Left Tilted	0.122	0.072	0.447	0.641
LTE Band 7_Ant 2	Right Cheek	0.450	0.128	0.514	1.092
	Right Tilted	0.243	0.101	0.301	0.645
	Left Cheek	0.312	0.076	0.422	0.810
	Left Tilted	0.282	0.072	0.447	0.801
LTE Band 12_Ant 0	Right Cheek	0.208	0.128	0.514	0.850
	Right Tilted	0.123	0.101	0.301	0.525
	Left Cheek	0.289	0.076	0.422	0.787
	Left Tilted	0.158	0.072	0.447	0.677
LTE Band 13_Ant 0	Right Cheek	0.240	0.128	0.514	0.882
	Right Tilted	0.152	0.101	0.301	0.554
	Left Cheek	0.328	0.076	0.422	0.826
	Left Tilted	0.220	0.072	0.447	0.739
LTE Band 14_Ant 0	Right Cheek	0.254	0.128	0.514	0.896
	Right Tilted	0.154	0.101	0.301	0.556
	Left Cheek	0.344	0.076	0.422	0.842
	Left Tilted	0.211	0.072	0.447	0.730
LTE Band 25_Ant 2	Right Cheek	0.128	0.128	0.514	0.770
	Right Tilted	0.079	0.101	0.301	0.481
	Left Cheek	0.109	0.076	0.422	0.607
	Left Tilted	0.096	0.072	0.447	0.615
LTE Band 26_Ant 0	Right Cheek	0.214	0.128	0.514	0.856
	Right Tilted	0.141	0.101	0.301	0.543
	Left Cheek	0.309	0.076	0.422	0.807
	Left Tilted	0.158	0.072	0.447	0.677
LTE Band 30_Ant 2	Right Cheek	0.228	0.128	0.514	0.870
	Right Tilted	0.096	0.101	0.301	0.498
	Left Cheek	0.116	0.076	0.422	0.614
	Left Tilted	0.101	0.072	0.447	0.620
LTE Band 41_Ant 2	Right Cheek	0.272	0.128	0.514	0.914
	Right Tilted	0.090	0.101	0.301	0.492
	Left Cheek	0.165	0.076	0.422	0.663

	Left Tilted	0.124	0.072	0.447	0.643
LTE Band 48_Ant 6	Right Cheek	0.280	0.128	0.514	0.922
	Right Tilted	0.233	0.101	0.301	0.635
	Left Cheek	0.450	0.076	0.422	0.948
	Left Tilted	0.161	0.072	0.447	0.680
LTE Band 66_Ant 2	Right Cheek	0.208	0.128	0.514	0.850
	Right Tilted	0.130	0.101	0.301	0.532
	Left Cheek	0.138	0.076	0.422	0.636
	Left Tilted	0.112	0.072	0.447	0.631
LTE Band 71_Ant 0	Right Cheek	0.204	0.128	0.514	0.846
	Right Tilted	0.113	0.101	0.301	0.515
	Left Cheek	0.276	0.076	0.422	0.774
	Left Tilted	0.149	0.072	0.447	0.668
FR1 n5_Ant 0	Right Cheek	0.208	0.128	0.514	0.850
	Right Tilted	0.127	0.101	0.301	0.529
	Left Cheek	0.281	0.076	0.422	0.779
	Left Tilted	0.168	0.072	0.447	0.687
FR1 n7_Ant 2	Right Cheek	0.356	0.128	0.514	0.998
	Right Tilted	0.164	0.101	0.301	0.566
	Left Cheek	0.076	0.076	0.422	0.574
	Left Tilted	0.067	0.072	0.447	0.586
FR1 n12_Ant 0	Right Cheek	0.177	0.128	0.514	0.819
	Right Tilted	0.113	0.101	0.301	0.515
	Left Cheek	0.242	0.076	0.422	0.740
	Left Tilted	0.153	0.072	0.447	0.672
FR1 n25_Ant 2	Right Cheek	0.101	0.128	0.514	0.743
	Right Tilted	0.067	0.101	0.301	0.469
	Left Cheek	0.121	0.076	0.422	0.619
	Left Tilted	0.098	0.072	0.447	0.617
FR1 n30_Ant 2	Right Cheek	0.200	0.128	0.514	0.842
	Right Tilted	0.084	0.101	0.301	0.486
	Left Cheek	0.117	0.076	0.422	0.615
	Left Tilted	0.119	0.072	0.447	0.638
FR1 n41_Ant 5	Right Cheek	0.318	0.128	0.514	0.960
	Right Tilted	0.085	0.101	0.301	0.487
	Left Cheek	0.898	0.076	0.422	1.396
	Left Tilted	0.214	0.072	0.447	0.733
FR1 n66_Ant 2	Right Cheek	0.225	0.128	0.514	0.867
	Right Tilted	0.157	0.101	0.301	0.559
	Left Cheek	0.160	0.076	0.422	0.658
	Left Tilted	0.118	0.072	0.447	0.637
FR1 n71_Ant 0	Right Cheek	0.184	0.128	0.514	0.826
	Right Tilted	0.106	0.101	0.301	0.508
	Left Cheek	0.244	0.076	0.422	0.742
	Left Tilted	0.146	0.072	0.447	0.665
FR1 n77_Ant 6	Right Cheek	0.546	0.128	0.514	1.188
	Right Tilted	0.395	0.101	0.301	0.797
	Left Cheek	0.846	0.076	0.422	1.344
	Left Tilted	0.300	0.072	0.447	0.819

14.3 Body-Worn Accessory Exposure Conditions

<WLAN Index 5, BT Index 3>

Exposure Position	2 5/6GHz WLAN Ant 4+3	3 Bluetooth Ant 4	4 Bluetooth Ant 3	5 Bluetooth Ant 4+3	2+3 Summed 1g SAR (W/kg)	2+4 Summed 1g SAR (W/kg)	2+5 Summed 1g SAR (W/kg)
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
Front	0.691	0.205	0.390	0.148	0.896	1.081	0.839
Back	0.787	0.255	0.409	0.352	1.042	1.196	1.139

<WLAN Index 6>

Exposure Position	1 2.4GHz WLAN Ant 4+3	2 5/6GHz WLAN Ant 4+3	1+2 Summed 1g SAR (W/kg)
	1g SAR (W/kg)	1g SAR (W/kg)	
Front	0.420	0.691	1.111
Back	0.571	0.787	1.358

<WWAN Index 6, WLAN Index 8>

WWAN Band	Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM850_Ant 1	Front	0.363	0.123	0.225	0.711
	Back	0.818	0.182	0.374	1.374
GSM1900_Ant 0	Front	0.701	0.123	0.225	1.049
	Back	0.894	0.182	0.374	1.450
WCDMA II_Ant 0	Front	0.590	0.123	0.225	0.938
	Back	0.907	0.182	0.374	1.463
WCDMA IV_Ant 0	Front	0.504	0.123	0.225	0.852
	Back	0.585	0.182	0.374	1.141
WCDMA V_Ant 1	Front	0.243	0.123	0.225	0.591
	Back	0.377	0.182	0.374	0.933
LTE Band 7_Ant 0	Front	0.426	0.123	0.225	0.774
	Back	0.500	0.182	0.374	1.056
LTE Band 12_Ant 1	Front	0.179	0.123	0.225	0.527
	Back	0.233	0.182	0.374	0.789
LTE Band 13_Ant 1	Front	0.267	0.123	0.225	0.615
	Back	0.332	0.182	0.374	0.888
LTE Band 14_Ant 1	Front	0.311	0.123	0.225	0.659
	Back	0.406	0.182	0.374	0.962
LTE Band 25_Ant 0	Front	0.474	0.123	0.225	0.822
	Back	0.634	0.182	0.374	1.190
LTE Band 26_Ant 1	Front	0.314	0.123	0.225	0.662
	Back	0.454	0.182	0.374	1.010
LTE Band 30_Ant 0	Front	0.483	0.123	0.225	0.831
	Back	0.567	0.182	0.374	1.123
LTE Band 41_Ant 0	Front	0.230	0.123	0.225	0.578
	Back	0.327	0.182	0.374	0.883
LTE Band 48_Ant 2	Front	0.439	0.123	0.225	0.787
	Back	0.448	0.182	0.374	1.004
LTE Band 66_Ant 0	Front	0.367	0.123	0.225	0.715
	Back	0.529	0.182	0.374	1.085
LTE Band 71_Ant 1	Front	0.173	0.123	0.225	0.521

	Back	0.198	0.182	0.374	0.754
FR1 n5_Ant 1	Front	0.180	0.123	0.225	0.528
	Back	0.233	0.182	0.374	0.789
FR1 n7_Ant 0	Front	0.407	0.123	0.225	0.755
	Back	0.266	0.182	0.374	0.822
FR1 n12_Ant 1	Front	0.141	0.123	0.225	0.489
	Back	0.183	0.182	0.374	0.739
FR1 n25_Ant 0	Front	0.545	0.123	0.225	0.893
	Back	0.799	0.182	0.374	1.355
FR1 n30_Ant 0	Front	0.403	0.123	0.225	0.751
	Back	0.456	0.182	0.374	1.012
FR1 n41_Ant 1	Front	0.667	0.123	0.225	1.015
	Back	0.723	0.182	0.374	1.279
FR1 n66_Ant 0	Front	0.429	0.123	0.225	0.777
	Back	0.553	0.182	0.374	1.109
FR1 n71_Ant 1	Front	0.185	0.123	0.225	0.533
	Back	0.230	0.182	0.374	0.786
FR1 n77_Ant 2	Front	0.734	0.123	0.225	1.082
	Back	0.633	0.182	0.374	1.189

<WWAN Index 6, WLAN Index 8>

WWAN Band	Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM850_Ant 0	Front	0.550	0.123	0.225	0.898
	Back	0.429	0.182	0.374	0.985
GSM1900_Ant 2	Front	0.853	0.123	0.225	1.201
	Back	0.908	0.182	0.374	1.464
WCDMA II_Ant 2	Front	0.758	0.123	0.225	1.106
	Back	0.889	0.182	0.374	1.445
WCDMA IV_Ant 2	Front	0.741	0.123	0.225	1.089
	Back	0.877	0.182	0.374	1.433
WCDMA V_Ant 0	Front	0.281	0.123	0.225	0.629
	Back	0.190	0.182	0.374	0.746
LTE Band 7_Ant 2	Front	0.708	0.123	0.225	1.056
	Back	0.908	0.182	0.374	1.464
LTE Band 12_Ant 0	Front	0.294	0.123	0.225	0.642
	Back	0.312	0.182	0.374	0.868
LTE Band 13_Ant 0	Front	0.386	0.123	0.225	0.734
	Back	0.382	0.182	0.374	0.938
LTE Band 14_Ant 0	Front	0.385	0.123	0.225	0.733
	Back	0.367	0.182	0.374	0.923
LTE Band 25_Ant 2	Front	0.858	0.123	0.225	1.206
	Back	0.908	0.182	0.374	1.464
LTE Band 26_Ant 0	Front	0.311	0.123	0.225	0.659
	Back	0.329	0.182	0.374	0.885
LTE Band 30_Ant 2	Front	0.752	0.123	0.225	1.100
	Back	0.863	0.182	0.374	1.419
LTE Band 41_Ant 2	Front	0.799	0.123	0.225	1.147
	Back	0.884	0.182	0.374	1.440
LTE Band 48_Ant 6	Front	0.506	0.123	0.225	0.854
	Back	0.517	0.182	0.374	1.073
LTE Band 66_Ant 2	Front	0.786	0.123	0.225	1.134
	Back	0.811	0.182	0.374	1.367



LTE Band 71_Ant 0	Front	0.341	0.123	0.225	0.689
	Back	0.333	0.182	0.374	0.889
FR1 n5_Ant 0	Front	0.258	0.123	0.225	0.606
	Back	0.230	0.182	0.374	0.786
FR1 n7_Ant 2	Front	0.680	0.123	0.225	1.028
	Back	0.909	0.182	0.374	1.465
FR1 n12_Ant 0	Front	0.316	0.123	0.225	0.664
	Back	0.293	0.182	0.374	0.849
FR1 n25_Ant 2	Front	0.775	0.123	0.225	1.123
	Back	0.910	0.182	0.374	1.466
FR1 n30_Ant 2	Front	0.710	0.123	0.225	1.058
	Back	0.906	0.182	0.374	1.462
FR1 n41 PC2_Ant 5	Front	0.505	0.123	0.225	0.853
	Back	0.632	0.182	0.374	1.188
FR1 n66_Ant 2	Front	0.766	0.123	0.225	1.114
	Back	0.821	0.182	0.374	1.377
FR1 n71_Ant 0	Front	0.225	0.123	0.225	0.573
	Back	0.215	0.182	0.374	0.771
FR1 n77_Ant 6	Front	0.719	0.123	0.225	1.067
	Back	0.685	0.182	0.374	1.241



<WWAN Index 6, WLAN Index 7>

WWAN Band	Exposure Position	1	2	3	1+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 4+3 1g SAR (W/kg)	5/6GHz WLAN Ant 4+3 1g SAR (W/kg)		
GSM850_Ant 1	Front	0.363	0.474	0.399	0.762	0.837
	Back	0.818	0.594	0.536	1.354	1.412
GSM1900_Ant 0	Front	0.701	0.474	0.399	1.100	1.175
	Back	0.894	0.594	0.536	1.430	1.488
WCDMA II_Ant 0	Front	0.590	0.474	0.399	0.989	1.064
	Back	0.907	0.594	0.536	1.443	1.501
WCDMA IV_Ant 0	Front	0.504	0.474	0.399	0.903	0.978
	Back	0.585	0.594	0.536	1.121	1.179
WCDMA V_Ant 1	Front	0.243	0.474	0.399	0.642	0.717
	Back	0.377	0.594	0.536	0.913	0.971
LTE Band 7_Ant 0	Front	0.426	0.474	0.399	0.825	0.900
	Back	0.500	0.594	0.536	1.036	1.094
LTE Band 12_Ant 1	Front	0.179	0.474	0.399	0.578	0.653
	Back	0.233	0.594	0.536	0.769	0.827
LTE Band 13_Ant 1	Front	0.267	0.474	0.399	0.666	0.741
	Back	0.332	0.594	0.536	0.868	0.926
LTE Band 14_Ant 1	Front	0.311	0.474	0.399	0.710	0.785
	Back	0.406	0.594	0.536	0.942	1.000
LTE Band 25_Ant 0	Front	0.474	0.474	0.399	0.873	0.948
	Back	0.634	0.594	0.536	1.170	1.228
LTE Band 26_Ant 1	Front	0.314	0.474	0.399	0.713	0.788
	Back	0.454	0.594	0.536	0.990	1.048
LTE Band 30_Ant 0	Front	0.483	0.474	0.399	0.882	0.957
	Back	0.567	0.594	0.536	1.103	1.161
LTE Band 41_Ant 0	Front	0.230	0.474	0.399	0.629	0.704
	Back	0.327	0.594	0.536	0.863	0.921
LTE Band 48_Ant 2	Front	0.439	0.474	0.399	0.838	0.913
	Back	0.448	0.594	0.536	0.984	1.042
LTE Band 66_Ant 0	Front	0.367	0.474	0.399	0.766	0.841
	Back	0.529	0.594	0.536	1.065	1.123
LTE Band 71_Ant 1	Front	0.173	0.474	0.399	0.572	0.647
	Back	0.198	0.594	0.536	0.734	0.792
FR1 n5_Ant 1	Front	0.180	0.474	0.399	0.579	0.654
	Back	0.233	0.594	0.536	0.769	0.827
FR1 n7_Ant 0	Front	0.407	0.474	0.399	0.806	0.881
	Back	0.266	0.594	0.536	0.802	0.860
FR1 n12_Ant 1	Front	0.141	0.474	0.399	0.540	0.615
	Back	0.183	0.594	0.536	0.719	0.777
FR1 n25_Ant 0	Front	0.545	0.474	0.399	0.944	1.019
	Back	0.799	0.594	0.536	1.335	1.393
FR1 n30_Ant 0	Front	0.403	0.474	0.399	0.802	0.877
	Back	0.456	0.594	0.536	0.992	1.050
FR1 n41_Ant 1	Front	0.667	0.474	0.399	1.066	1.141
	Back	0.723	0.594	0.536	1.259	1.317
FR1 n66_Ant 0	Front	0.429	0.474	0.399	0.828	0.903
	Back	0.553	0.594	0.536	1.089	1.147
FR1 n71_Ant 1	Front	0.185	0.474	0.399	0.584	0.659
	Back	0.230	0.594	0.536	0.766	0.824
FR1 n77_Ant 2	Front	0.734	0.474	0.399	1.133	1.208
	Back	0.633	0.594	0.536	1.169	1.227

**<WWAN Index 6, WLAN Index 7>**

WWAN Band	Exposure Position	1	2	3	1+3 Summed 1g SAR (W/kg)	1+2 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 4+3	5/6GHz WLAN Ant 4+3		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850_Ant 0	Front	0.550	0.474	0.399	0.949	1.024
	Back	0.429	0.594	0.536	0.965	1.023
GSM1900_Ant 2	Front	0.853	0.474	0.399	1.252	1.327
	Back	0.908	0.594	0.536	1.444	1.502
WCDMA II_Ant 2	Front	0.758	0.474	0.399	1.157	1.232
	Back	0.889	0.594	0.536	1.425	1.483
WCDMA IV_Ant 2	Front	0.741	0.474	0.399	1.140	1.215
	Back	0.877	0.594	0.536	1.413	1.471
WCDMA V_Ant 0	Front	0.281	0.474	0.399	0.680	0.755
	Back	0.190	0.594	0.536	0.726	0.784
LTE Band 7_Ant 2	Front	0.708	0.474	0.399	1.107	1.182
	Back	0.908	0.594	0.536	1.444	1.502
LTE Band 12_Ant 0	Front	0.294	0.474	0.399	0.693	0.768
	Back	0.312	0.594	0.536	0.848	0.906
LTE Band 13_Ant 0	Front	0.386	0.474	0.399	0.785	0.860
	Back	0.382	0.594	0.536	0.918	0.976
LTE Band 14_Ant 0	Front	0.385	0.474	0.399	0.784	0.859
	Back	0.367	0.594	0.536	0.903	0.961
LTE Band 25_Ant 2	Front	0.858	0.474	0.399	1.257	1.332
	Back	0.908	0.594	0.536	1.444	1.502
LTE Band 26_Ant 0	Front	0.311	0.474	0.399	0.710	0.785
	Back	0.329	0.594	0.536	0.865	0.923
LTE Band 30_Ant 2	Front	0.752	0.474	0.399	1.151	1.226
	Back	0.863	0.594	0.536	1.399	1.457
LTE Band 41_Ant 2	Front	0.799	0.474	0.399	1.198	1.273
	Back	0.884	0.594	0.536	1.420	1.478
LTE Band 48_Ant 6	Front	0.506	0.474	0.399	0.905	0.980
	Back	0.517	0.594	0.536	1.053	1.111
LTE Band 66_Ant 2	Front	0.786	0.474	0.399	1.185	1.260
	Back	0.811	0.594	0.536	1.347	1.405
LTE Band 71_Ant 0	Front	0.341	0.474	0.399	0.740	0.815
	Back	0.333	0.594	0.536	0.869	0.927
FR1 n5_Ant 0	Front	0.258	0.474	0.399	0.657	0.732
	Back	0.230	0.594	0.536	0.766	0.824
FR1 n7_Ant 2	Front	0.680	0.474	0.399	1.079	1.154
	Back	0.909	0.594	0.536	1.445	1.503
FR1 n12_Ant 0	Front	0.316	0.474	0.399	0.715	0.790
	Back	0.293	0.594	0.536	0.829	0.887
FR1 n25_Ant 2	Front	0.775	0.474	0.399	1.174	1.249
	Back	0.910	0.594	0.536	1.446	1.504
FR1 n30_Ant 2	Front	0.710	0.474	0.399	1.109	1.184
	Back	0.906	0.594	0.536	1.442	1.500
FR1 n41_PC2_Ant 5	Front	0.505	0.474	0.399	0.904	0.979
	Back	0.632	0.594	0.536	1.168	1.226
FR1 n66_Ant 2	Front	0.766	0.474	0.399	1.165	1.240
	Back	0.821	0.594	0.536	1.357	1.415
FR1 n71_Ant 0	Front	0.225	0.474	0.399	0.624	0.699
	Back	0.215	0.594	0.536	0.751	0.809
FR1 n77_Ant 6	Front	0.719	0.474	0.399	1.118	1.193
	Back	0.685	0.594	0.536	1.221	1.279

<WWAN Index 6, WLAN Index 9, BT Index 4>

WWAN Band	Exposure Position	1	3	4	5	6	1+3+4	1+3+5	1+3+6	1+3	1+4	1+5	1+6
		WWAN 1g SAR (W/kg)	5/6GHz WLAN Ant 4+3 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)	Bluetooth Ant 4+3 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)	Summed 1g SAR (W/kg)
GSM850_Ant 1	Front	0.363	0.289	0.091	0.141	0.152	0.743	0.793	0.804	0.652	0.454	0.504	0.515
	Back	0.818	0.431	0.113	0.149	0.203	1.362	1.398	1.452	1.249	0.931	0.967	1.021
GSM1900_Ant 0	Front	0.701	0.289	0.091	0.141	0.152	1.081	1.131	1.142	0.990	0.792	0.842	0.853
	Back	0.894	0.431	0.113	0.149	0.203	1.438	1.474	1.528	1.325	1.007	1.043	1.097
WCDMA II_Ant 0	Front	0.590	0.289	0.091	0.141	0.152	0.970	1.020	1.031	0.879	0.681	0.731	0.742
	Back	0.907	0.431	0.113	0.149	0.203	1.451	1.487	1.541	1.338	1.020	1.056	1.110
WCDMA IV_Ant 0	Front	0.504	0.289	0.091	0.141	0.152	0.884	0.934	0.945	0.793	0.595	0.645	0.656
	Back	0.585	0.431	0.113	0.149	0.203	1.129	1.165	1.219	1.016	0.698	0.734	0.788
WCDMA V_Ant 1	Front	0.243	0.289	0.091	0.141	0.152	0.623	0.673	0.684	0.532	0.334	0.384	0.395
	Back	0.377	0.431	0.113	0.149	0.203	0.921	0.957	1.011	0.808	0.490	0.526	0.580
LTE Band 7_Ant 0	Front	0.426	0.289	0.091	0.141	0.152	0.806	0.856	0.867	0.715	0.517	0.567	0.578
	Back	0.500	0.431	0.113	0.149	0.203	1.044	1.080	1.134	0.931	0.613	0.649	0.703
LTE Band 12_Ant 1	Front	0.179	0.289	0.091	0.141	0.152	0.559	0.609	0.620	0.468	0.270	0.320	0.331
	Back	0.233	0.431	0.113	0.149	0.203	0.777	0.813	0.867	0.664	0.346	0.382	0.436
LTE Band 13_Ant 1	Front	0.267	0.289	0.091	0.141	0.152	0.647	0.697	0.708	0.556	0.358	0.408	0.419
	Back	0.332	0.431	0.113	0.149	0.203	0.876	0.912	0.966	0.763	0.445	0.481	0.535
LTE Band 14_Ant 1	Front	0.311	0.289	0.091	0.141	0.152	0.691	0.741	0.752	0.600	0.402	0.452	0.463
	Back	0.406	0.431	0.113	0.149	0.203	0.950	0.986	1.040	0.837	0.519	0.555	0.609
LTE Band 25_Ant 0	Front	0.474	0.289	0.091	0.141	0.152	0.854	0.904	0.915	0.763	0.565	0.615	0.626
	Back	0.634	0.431	0.113	0.149	0.203	1.178	1.214	1.268	1.065	0.747	0.783	0.837
LTE Band 26_Ant 1	Front	0.314	0.289	0.091	0.141	0.152	0.694	0.744	0.755	0.603	0.405	0.455	0.466
	Back	0.454	0.431	0.113	0.149	0.203	0.998	1.034	1.088	0.885	0.567	0.603	0.657
LTE Band 30_Ant 0	Front	0.483	0.289	0.091	0.141	0.152	0.863	0.913	0.924	0.772	0.574	0.624	0.635
	Back	0.567	0.431	0.113	0.149	0.203	1.111	1.147	1.201	0.998	0.680	0.716	0.770
LTE Band 41_Ant 0	Front	0.230	0.289	0.091	0.141	0.152	0.610	0.660	0.671	0.519	0.321	0.371	0.382
	Back	0.327	0.431	0.113	0.149	0.203	0.871	0.907	0.961	0.758	0.440	0.476	0.530
LTE Band 48_Ant 2	Front	0.439	0.289	0.091	0.141	0.152	0.819	0.869	0.880	0.728	0.530	0.580	0.591
	Back	0.448	0.431	0.113	0.149	0.203	0.992	1.028	1.082	0.879	0.561	0.597	0.651
LTE Band 66_Ant 0	Front	0.367	0.289	0.091	0.141	0.152	0.747	0.797	0.808	0.656	0.458	0.508	0.519
	Back	0.529	0.431	0.113	0.149	0.203	1.073	1.109	1.163	0.960	0.642	0.678	0.732
LTE Band 71_Ant 1	Front	0.173	0.289	0.091	0.141	0.152	0.553	0.603	0.614	0.462	0.264	0.314	0.325
	Back	0.198	0.431	0.113	0.149	0.203	0.742	0.778	0.832	0.629	0.311	0.347	0.401
FR1 n5_Ant 1	Front	0.180	0.289	0.091	0.141	0.152	0.560	0.610	0.621	0.469	0.271	0.321	0.332
	Back	0.233	0.431	0.113	0.149	0.203	0.777	0.813	0.867	0.664	0.346	0.382	0.436
FR1 n7_Ant 0	Front	0.407	0.289	0.091	0.141	0.152	0.787	0.837	0.848	0.696	0.498	0.548	0.559
	Back	0.266	0.431	0.113	0.149	0.203	0.810	0.846	0.900	0.697	0.379	0.415	0.469
FR1 n12_Ant 1	Front	0.141	0.289	0.091	0.141	0.152	0.521	0.571	0.582	0.430	0.232	0.282	0.293
	Back	0.183	0.431	0.113	0.149	0.203	0.727	0.763	0.817	0.614	0.296	0.332	0.386
FR1 n25_Ant 0	Front	0.545	0.289	0.091	0.141	0.152	0.925	0.975	0.986	0.834	0.636	0.686	0.697
	Back	0.799	0.431	0.113	0.149	0.203	1.343	1.379	1.433	1.230	0.912	0.948	1.002
FR1 n30_Ant 0	Front	0.403	0.289	0.091	0.141	0.152	0.783	0.833	0.844	0.692	0.494	0.544	0.555
	Back	0.456	0.431	0.113	0.149	0.203	1.000	1.036	1.090	0.887	0.569	0.605	0.659
FR1 n41_Ant 1	Front	0.667	0.289	0.091	0.141	0.152	1.047	1.097	1.108	0.956	0.758	0.808	0.819
	Back	0.723	0.431	0.113	0.149	0.203	1.267	1.303	1.357	1.154	0.836	0.872	0.926
FR1 n66_Ant 0	Front	0.429	0.289	0.091	0.141	0.152	0.809	0.859	0.870	0.718	0.520	0.570	0.581
	Back	0.553	0.431	0.113	0.149	0.203	1.097	1.133	1.187	0.984	0.666	0.702	0.756
FR1 n71_Ant 1	Front	0.185	0.289	0.091	0.141	0.152	0.565	0.615	0.626	0.474	0.276	0.326	0.337
	Back	0.230	0.431	0.113	0.149	0.203	0.774	0.810	0.864	0.661	0.343	0.379	0.433
FR1 n77_Ant 2	Front	0.734	0.289	0.091	0.141	0.152	1.114	1.164	1.175	1.023	0.825	0.875	0.886
	Back	0.633	0.431	0.113	0.149	0.203	1.177	1.213	1.267	1.064	0.746	0.782	0.836

**<WWAN Index 6, WLAN Index 9, BT Index 4>**

WWAN Band	Exposure Position	1	3	4	5	6	1+3+4 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+3+6 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	5/6GHz WLAN Ant 4+3 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)	Bluetooth Ant 4+3 1g SAR (W/kg)							
GSM850_Ant 0	Front	0.550	0.289	0.091	0.141	0.152	0.930	0.980	0.991	0.839	0.641	0.691	0.702
	Back	0.429	0.431	0.113	0.149	0.203	0.973	1.009	1.063	0.860	0.542	0.578	0.632
GSM1900_Ant 2	Front	0.853	0.289	0.091	0.141	0.152	1.233	1.283	1.294	1.142	0.944	0.994	1.005
	Back	0.908	0.431	0.113	0.149	0.203	1.452	1.488	1.542	1.339	1.021	1.057	1.111
WCDMA II_Ant 2	Front	0.758	0.289	0.091	0.141	0.152	1.138	1.188	1.199	1.047	0.849	0.899	0.910
	Back	0.889	0.431	0.113	0.149	0.203	1.433	1.469	1.523	1.320	1.002	1.038	1.092
WCDMA IV_Ant 2	Front	0.741	0.289	0.091	0.141	0.152	1.121	1.171	1.182	1.030	0.832	0.882	0.893
	Back	0.877	0.431	0.113	0.149	0.203	1.421	1.457	1.511	1.308	0.990	1.026	1.080
WCDMA V_Ant 0	Front	0.281	0.289	0.091	0.141	0.152	0.661	0.711	0.722	0.570	0.372	0.422	0.433
	Back	0.190	0.431	0.113	0.149	0.203	0.734	0.770	0.824	0.621	0.303	0.339	0.393
LTE Band 7_Ant 2	Front	0.708	0.289	0.091	0.141	0.152	1.088	1.138	1.149	0.997	0.799	0.849	0.860
	Back	0.908	0.431	0.113	0.149	0.203	1.452	1.488	1.542	1.339	1.021	1.057	1.111
LTE Band 12_Ant 0	Front	0.294	0.289	0.091	0.141	0.152	0.674	0.724	0.735	0.583	0.385	0.435	0.446
	Back	0.312	0.431	0.113	0.149	0.203	0.856	0.892	0.946	0.743	0.425	0.461	0.515
LTE Band 13_Ant 0	Front	0.386	0.289	0.091	0.141	0.152	0.766	0.816	0.827	0.675	0.477	0.527	0.538
	Back	0.382	0.431	0.113	0.149	0.203	0.926	0.962	1.016	0.813	0.495	0.531	0.585
LTE Band 14_Ant 0	Front	0.385	0.289	0.091	0.141	0.152	0.765	0.815	0.826	0.674	0.476	0.526	0.537
	Back	0.367	0.431	0.113	0.149	0.203	0.911	0.947	1.001	0.798	0.480	0.516	0.570
LTE Band 25_Ant 2	Front	0.858	0.289	0.091	0.141	0.152	1.238	1.288	1.299	1.147	0.949	0.999	1.010
	Back	0.908	0.431	0.113	0.149	0.203	1.452	1.488	1.542	1.339	1.021	1.057	1.111
LTE Band 26_Ant 0	Front	0.311	0.289	0.091	0.141	0.152	0.691	0.741	0.752	0.600	0.402	0.452	0.463
	Back	0.329	0.431	0.113	0.149	0.203	0.873	0.909	0.963	0.760	0.442	0.478	0.532
LTE Band 30_Ant 2	Front	0.752	0.289	0.091	0.141	0.152	1.132	1.182	1.193	1.041	0.843	0.893	0.904
	Back	0.863	0.431	0.113	0.149	0.203	1.407	1.443	1.497	1.294	0.976	1.012	1.066
LTE Band 41_Ant 2	Front	0.799	0.289	0.091	0.141	0.152	1.179	1.229	1.240	1.088	0.890	0.940	0.951
	Back	0.884	0.431	0.113	0.149	0.203	1.428	1.464	1.518	1.315	0.997	1.033	1.087
LTE Band 48_Ant 6	Front	0.506	0.289	0.091	0.141	0.152	0.886	0.936	0.947	0.795	0.597	0.647	0.658
	Back	0.517	0.431	0.113	0.149	0.203	1.061	1.097	1.151	0.948	0.630	0.666	0.720
LTE Band 66_Ant 2	Front	0.786	0.289	0.091	0.141	0.152	1.166	1.216	1.227	1.075	0.877	0.927	0.938
	Back	0.811	0.431	0.113	0.149	0.203	1.355	1.391	1.445	1.242	0.924	0.960	1.014
LTE Band 71_Ant 0	Front	0.341	0.289	0.091	0.141	0.152	0.721	0.771	0.782	0.630	0.432	0.482	0.493
	Back	0.333	0.431	0.113	0.149	0.203	0.877	0.913	0.967	0.764	0.446	0.482	0.536
FR1 n5_Ant 0	Front	0.258	0.289	0.091	0.141	0.152	0.638	0.688	0.699	0.547	0.349	0.399	0.410
	Back	0.230	0.431	0.113	0.149	0.203	0.774	0.810	0.864	0.661	0.343	0.379	0.433
FR1 n7_Ant 2	Front	0.680	0.289	0.091	0.141	0.152	1.060	1.110	1.121	0.969	0.771	0.821	0.832
	Back	0.909	0.431	0.113	0.149	0.203	1.453	1.489	1.543	1.340	1.022	1.058	1.112
FR1 n12_Ant 0	Front	0.316	0.289	0.091	0.141	0.152	0.696	0.746	0.757	0.605	0.407	0.457	0.468
	Back	0.293	0.431	0.113	0.149	0.203	0.837	0.873	0.927	0.724	0.406	0.442	0.496
FR1 n25_Ant 2	Front	0.775	0.289	0.091	0.141	0.152	1.155	1.205	1.216	1.064	0.866	0.916	0.927
	Back	0.910	0.431	0.113	0.149	0.203	1.454	1.490	1.544	1.341	1.023	1.059	1.113
FR1 n30_Ant 2	Front	0.710	0.289	0.091	0.141	0.152	1.090	1.140	1.151	0.999	0.801	0.851	0.862
	Back	0.906	0.431	0.113	0.149	0.203	1.450	1.486	1.540	1.337	1.019	1.055	1.109
FR1 n41_PC2_Ant 5	Front	0.505	0.289	0.091	0.141	0.152	0.885	0.935	0.946	0.794	0.596	0.646	0.657
	Back	0.632	0.431	0.113	0.149	0.203	1.176	1.212	1.266	1.063	0.745	0.781	0.835
FR1 n66_Ant 2	Front	0.766	0.289	0.091	0.141	0.152	1.146	1.196	1.207	1.055	0.857	0.907	0.918
	Back	0.821	0.431	0.113	0.149	0.203	1.365	1.401	1.455	1.252	0.934	0.970	1.024
FR1 n71_Ant 0	Front	0.225	0.289	0.091	0.141	0.152	0.605	0.655	0.666	0.514	0.316	0.366	0.377
	Back	0.215	0.431	0.113	0.149	0.203	0.759	0.795	0.849	0.646	0.328	0.364	0.418
FR1 n77_Ant 6	Front	0.719	0.289	0.091	0.141	0.152	1.099	1.149	1.160	1.008	0.810	0.860	0.871
	Back	0.685	0.431	0.113	0.149	0.203	1.229	1.265	1.319	1.116	0.798	0.834	0.888

<WWAN Index 6, BT Index 3>

WWAN Band	Exposure Position	1	4	5	6	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)	Bluetooth Ant 4+3 1g SAR (W/kg)			
GSM850_Ant 1	Front	0.363	0.205	0.390	0.148	0.568	0.753	0.511
	Back	0.818	0.255	0.409	0.352	1.073	1.227	1.170
GSM1900_Ant 0	Front	0.701	0.205	0.390	0.148	0.906	1.091	0.849
	Back	0.894	0.255	0.409	0.352	1.149	1.303	1.246
WCDMA II_Ant 0	Front	0.590	0.205	0.390	0.148	0.795	0.980	0.738
	Back	0.907	0.255	0.409	0.352	1.162	1.316	1.259
WCDMA IV_Ant 0	Front	0.504	0.205	0.390	0.148	0.709	0.894	0.652
	Back	0.585	0.255	0.409	0.352	0.840	0.994	0.937
WCDMA V_Ant 1	Front	0.243	0.205	0.390	0.148	0.448	0.633	0.391
	Back	0.377	0.255	0.409	0.352	0.632	0.786	0.729
LTE Band 7_Ant 0	Front	0.426	0.205	0.390	0.148	0.631	0.816	0.574
	Back	0.500	0.255	0.409	0.352	0.755	0.909	0.852
LTE Band 12_Ant 1	Front	0.179	0.205	0.390	0.148	0.384	0.569	0.327
	Back	0.233	0.255	0.409	0.352	0.488	0.642	0.585
LTE Band 13_Ant 1	Front	0.267	0.205	0.390	0.148	0.472	0.657	0.415
	Back	0.332	0.255	0.409	0.352	0.587	0.741	0.684
LTE Band 14_Ant 1	Front	0.311	0.205	0.390	0.148	0.516	0.701	0.459
	Back	0.406	0.255	0.409	0.352	0.661	0.815	0.758
LTE Band 25_Ant 0	Front	0.474	0.205	0.390	0.148	0.679	0.864	0.622
	Back	0.634	0.255	0.409	0.352	0.889	1.043	0.986
LTE Band 26_Ant 1	Front	0.314	0.205	0.390	0.148	0.519	0.704	0.462
	Back	0.454	0.255	0.409	0.352	0.709	0.863	0.806
LTE Band 30_Ant 0	Front	0.483	0.205	0.390	0.148	0.688	0.873	0.631
	Back	0.567	0.255	0.409	0.352	0.822	0.976	0.919
LTE Band 41_Ant 0	Front	0.230	0.205	0.390	0.148	0.435	0.620	0.378
	Back	0.327	0.255	0.409	0.352	0.582	0.736	0.679
LTE Band 48_Ant 2	Front	0.439	0.205	0.390	0.148	0.644	0.829	0.587
	Back	0.448	0.255	0.409	0.352	0.703	0.857	0.800
LTE Band 66_Ant 0	Front	0.367	0.205	0.390	0.148	0.572	0.757	0.515
	Back	0.529	0.255	0.409	0.352	0.784	0.938	0.881
LTE Band 71_Ant 1	Front	0.173	0.205	0.390	0.148	0.378	0.563	0.321
	Back	0.198	0.255	0.409	0.352	0.453	0.607	0.550
FR1 n5_Ant 1	Front	0.180	0.205	0.390	0.148	0.385	0.570	0.328
	Back	0.233	0.255	0.409	0.352	0.488	0.642	0.585
FR1 n7_Ant 0	Front	0.407	0.205	0.390	0.148	0.612	0.797	0.555
	Back	0.266	0.255	0.409	0.352	0.521	0.675	0.618
FR1 n12_Ant 1	Front	0.141	0.205	0.390	0.148	0.346	0.531	0.289
	Back	0.183	0.255	0.409	0.352	0.438	0.592	0.535
FR1 n25_Ant 0	Front	0.545	0.205	0.390	0.148	0.750	0.935	0.693
	Back	0.799	0.255	0.409	0.352	1.054	1.208	1.151
FR1 n30_Ant 0	Front	0.403	0.205	0.390	0.148	0.608	0.793	0.551
	Back	0.456	0.255	0.409	0.352	0.711	0.865	0.808
FR1 n41_Ant 1	Front	0.667	0.205	0.390	0.148	0.872	1.057	0.815
	Back	0.723	0.255	0.409	0.352	0.978	1.132	1.075
FR1 n66_Ant 0	Front	0.429	0.205	0.390	0.148	0.634	0.819	0.577
	Back	0.553	0.255	0.409	0.352	0.808	0.962	0.905
FR1 n71_Ant 1	Front	0.185	0.205	0.390	0.148	0.390	0.575	0.333
	Back	0.230	0.255	0.409	0.352	0.485	0.639	0.582
FR1 n77_Ant 2	Front	0.734	0.205	0.390	0.148	0.939	1.124	0.882
	Back	0.633	0.255	0.409	0.352	0.888	1.042	0.985



<WWAN Index 6, BT Index 3>

WWAN Band	Exposure Position	1	4	5	6	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 3 1g SAR (W/kg)	Bluetooth Ant 4+3 1g SAR (W/kg)			
GSM850_Ant 0	Front	0.550	0.205	0.390	0.148	0.755	0.940	0.698
	Back	0.429	0.255	0.409	0.352	0.684	0.838	0.781
GSM1900_Ant 2	Front	0.853	0.205	0.390	0.148	1.058	1.243	1.001
	Back	0.908	0.255	0.409	0.352	1.163	1.317	1.260
WCDMA II_Ant 2	Front	0.758	0.205	0.390	0.148	0.963	1.148	0.906
	Back	0.889	0.255	0.409	0.352	1.144	1.298	1.241
WCDMA IV_Ant 2	Front	0.741	0.205	0.390	0.148	0.946	1.131	0.889
	Back	0.877	0.255	0.409	0.352	1.132	1.286	1.229
WCDMA V_Ant 0	Front	0.281	0.205	0.390	0.148	0.486	0.671	0.429
	Back	0.190	0.255	0.409	0.352	0.445	0.599	0.542
LTE Band 7_Ant 2	Front	0.708	0.205	0.390	0.148	0.913	1.098	0.856
	Back	0.908	0.255	0.409	0.352	1.163	1.317	1.260
LTE Band 12_Ant 0	Front	0.294	0.205	0.390	0.148	0.499	0.684	0.442
	Back	0.312	0.255	0.409	0.352	0.567	0.721	0.664
LTE Band 13_Ant 0	Front	0.386	0.205	0.390	0.148	0.591	0.776	0.534
	Back	0.382	0.255	0.409	0.352	0.637	0.791	0.734
LTE Band 14_Ant 0	Front	0.385	0.205	0.390	0.148	0.590	0.775	0.533
	Back	0.367	0.255	0.409	0.352	0.622	0.776	0.719
LTE Band 25_Ant 2	Front	0.858	0.205	0.390	0.148	1.063	1.248	1.006
	Back	0.908	0.255	0.409	0.352	1.163	1.317	1.260
LTE Band 26_Ant 0	Front	0.311	0.205	0.390	0.148	0.516	0.701	0.459
	Back	0.329	0.255	0.409	0.352	0.584	0.738	0.681
LTE Band 30_Ant 2	Front	0.752	0.205	0.390	0.148	0.957	1.142	0.900
	Back	0.863	0.255	0.409	0.352	1.118	1.272	1.215
LTE Band 41_Ant 2	Front	0.799	0.205	0.390	0.148	1.004	1.189	0.947
	Back	0.884	0.255	0.409	0.352	1.139	1.293	1.236
LTE Band 48_Ant 6	Front	0.506	0.205	0.390	0.148	0.711	0.896	0.654
	Back	0.517	0.255	0.409	0.352	0.772	0.926	0.869
LTE Band 66_Ant 2	Front	0.786	0.205	0.390	0.148	0.991	1.176	0.934
	Back	0.811	0.255	0.409	0.352	1.066	1.220	1.163
LTE Band 71_Ant 0	Front	0.341	0.205	0.390	0.148	0.546	0.731	0.489
	Back	0.333	0.255	0.409	0.352	0.588	0.742	0.685
FR1 n5_Ant 0	Front	0.258	0.205	0.390	0.148	0.463	0.648	0.406
	Back	0.230	0.255	0.409	0.352	0.485	0.639	0.582
FR1 n7_Ant 2	Front	0.680	0.205	0.390	0.148	0.885	1.070	0.828
	Back	0.909	0.255	0.409	0.352	1.164	1.318	1.261
FR1 n12_Ant 0	Front	0.316	0.205	0.390	0.148	0.521	0.706	0.464
	Back	0.293	0.255	0.409	0.352	0.548	0.702	0.645
FR1 n25_Ant 2	Front	0.775	0.205	0.390	0.148	0.980	1.165	0.923
	Back	0.910	0.255	0.409	0.352	1.165	1.319	1.262
FR1 n30_Ant 2	Front	0.710	0.205	0.390	0.148	0.915	1.100	0.858
	Back	0.906	0.255	0.409	0.352	1.161	1.315	1.258
FR1 n41 PC2_Ant 5	Front	0.505	0.205	0.390	0.148	0.710	0.895	0.653
	Back	0.632	0.255	0.409	0.352	0.887	1.041	0.984
FR1 n66_Ant 2	Front	0.766	0.205	0.390	0.148	0.971	1.156	0.914
	Back	0.821	0.255	0.409	0.352	1.076	1.230	1.173
FR1 n71_Ant 0	Front	0.225	0.205	0.390	0.148	0.430	0.615	0.373
	Back	0.215	0.255	0.409	0.352	0.470	0.624	0.567
FR1 n77_Ant 6	Front	0.719	0.205	0.390	0.148	0.924	1.109	0.867
	Back	0.685	0.255	0.409	0.352	0.940	1.094	1.037

14.4 Product Specific Exposure Conditions

WWAN Band	Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
		WWAN	5GHz WLAN Ant 4+3	
		10g SAR (W/kg)	10g SAR (W/kg)	
GSM1900_Ant 0TX1	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 10mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	0.951		0.951
WCDMA II_Ant 0TX1	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 10mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	0.999		0.999

WWAN Band	Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
		WWAN	5GHz WLAN Ant 4+3	
		10g SAR (W/kg)	10g SAR (W/kg)	
WCDMA II_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	1.965		1.965
WCDMA IV_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.544		2.544
LTE Band 7_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.821		2.821
LTE Band 25_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.046		2.046
LTE Band 30_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.498		2.498
LTE Band 66_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591

	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.478		2.478
FR1 n7_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.485		2.485
FR1 n25_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	1.834		1.834
FR1 n30_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.416		2.416
FR1 n66_Ant 2TX0	Front at 0mm		1.765	1.765
	Back at 0mm		1.591	1.591
	Left side at 0mm		2.951	2.951
	Right side at 0mm		1.581	1.581
	Top side at 0mm		2.264	2.264
	Bottom side at 0mm	2.810		2.810

15. Simultaneous Transmission Analysis for PD

Config	TX Mode	Capable simultaneous TX Configurations
1	WWAN ON + FR2 (Cellular on)	WiFi 5GHz/6E MIMO (Ant 3+Ant 4) + Bluetooth(Ant 4)
2		WiFi 5GHz/6E MIMO (Ant 3+Ant 4) + Bluetooth(Ant 3)
3		WiFi 5GHz/6E MIMO (Ant 3+Ant 4) + Bluetooth(Ant 4+3)
4		WiFi 5GHz/6E MIMO (Ant 3+Ant 4)
5		WiFi 2.4GHz MIMO/CDD (Ant 4+3)
6		Bluetooth(Ant 4) (BDR/EDR/BLE)
7		Bluetooth(Ant 3) (BDR/EDR/BLE)
8		Bluetooth(Ant 4+3) (BDR/EDR)
9		WiFi 2.4GHz MIMO (Ant 4+3) + WiFi 5GHz/6E MIMO (Ant 3+Ant 4)

General Note:

1. The FR2 PD results refer to Sporton Report No.: FA0D2942-04E are using for Sim-Tx analysis
2. The worst case WLAN/BT SAR results between report no.: FA0D2942-04C and FA0D2942-18B are using for Sim-Tx analysis with other transmitters. Therefore, summations represent the absolute worst cases for Sim-Tx analysis for this device.
3. For LTE+5G NR+WiFi+BT, due to the TAS control, simultaneous transmission compliance can be assessed on LTE+WiFi/BT and 5G NR+WiFi/BT, and the validation of the time-averaging algorithm and compliance under the Tx varying transmission scenario for WWAN technologies are reported in Part 2 report. For 5G NR FR2 with WiFi, total exposure ratio is calculated

The $\left[\sum \text{of (the highest measured or estimated SAR for each standalone antenna configuration, adjusted for maximum tune-up tolerance)} / 1.6 \text{ W/kg} \right] + \left[\sum \text{of MPE ratios} \right] \leq 1.0$.

15.1 5G FR2 + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Samsung S.LSI TAS feature, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

TAS managed and controlled for Multi-RATs (5GNR + LTE)

The power ratio factors are g_1 and g_2 for LTE and NR respectively. The main purpose of these power ratio factors is to split the available SAR budget among different RATs, so $g_1 + g_2 \leq 1$. The value of g_1 is computed based on the need of the anchor (LTE) and can be changed if the anchor changes its power request. Based on the SAR Budget portion allocated to the anchor, the value of g_2 will be computed. At steady state (where all RATs are being on for a while), the allocated power ratio factors will guarantee that the total exposure ratio never exceeds the highest exposure of either one.

The reported time-averaged PD is applicable for the worst-surface of the device, and for other surfaces the reported PD is determined as below

1. Calculate ratio of simulated PD for desired surface to simulated PD of worst surface for a given beam
 2. Repeat 1 to obtain ratios for all supported beams, and determine maximum ratio
 3. Repeat 1~2 to obtain the corresponding worst-case PD for other surfaces which are needed for TER analysis.
- *For body-worn and hotspot scenario, if SAR was measured at 15mm and 10mm, respectively, then the worst-case PD at 15mm and 10mm separation distance should be determined per surface as*
 - $15\text{mm_worst-case_PD} = \text{PD_ratio_15mm_to_2mm} * \text{reported time-averaged PD}$
 - $10\text{mm_worst-case_PD} = \text{PD_ratio_10mm_to_2mm} * \text{reported time-averaged PD}$

<Head Exposure Condition>
<WWAN with WLAN Index 4>

FR2 Frequency band /Antenna module	Exposure Position	1	2	3	Reported 1g SAR/1.6 + PD/10 Summation Total Exposure ratio
		Power density	2.4GHz WLAN Ant 4+3	5GHz/WIFI6E WLAN Ant 4+3	1+2+3
		W/m ²	1g SAR (W/kg)	1g SAR (W/kg)	
n260_Plane A sub-module	Right Cheek	4.100	0.128	0.514	0.811
	Right Tilted	4.100	0.101	0.301	0.661
	Left Cheek	4.100	0.076	0.422	0.721
	Left Tilted	4.100	0.072	0.447	0.734
	Right Cheek	4.100	0.128	0.514	0.811
	Right Tilted	4.100	0.101	0.301	0.661
n260_Plane B sub-module	Left Cheek	1.100	0.076	0.422	0.421
	Left Tilted	1.100	0.072	0.447	0.434
	Right Cheek	1.100	0.128	0.514	0.511
	Right Tilted	1.100	0.101	0.301	0.361
	Left Cheek	1.100	0.076	0.422	0.421
	Left Tilted	1.100	0.072	0.447	0.434
n261_Plane A sub-module	Right Cheek	3.600	0.128	0.514	0.761
	Right Tilted	3.600	0.101	0.301	0.611
	Left Cheek	3.600	0.076	0.422	0.671
	Left Tilted	3.600	0.072	0.447	0.684
	Right Cheek	3.600	0.128	0.514	0.761
	Right Tilted	3.600	0.101	0.301	0.611
n261_Plane B sub-module	Left Cheek	1.400	0.076	0.422	0.451
	Left Tilted	1.400	0.072	0.447	0.464
	Right Cheek	1.400	0.128	0.514	0.541
	Right Tilted	1.400	0.101	0.301	0.391
	Left Cheek	1.400	0.076	0.422	0.451
	Left Tilted	1.400	0.072	0.447	0.464

<WWAN with WLAN Index 3, BT Index 1>

FR2 Frequency band /Antenna module	Exposure Position	1	2	3	4	5	6	Reported 1g SAR/1.6 + PD/10 Summation Total Exposure ratio							
		Power density	2.4GHz WLAN Ant 4+3	5GHz/WIFI6E WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	1+3+4	1+3+5	1+3+6	1+3	1+2	1+4	1+5	1+6
		W/m^2	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)								
n260_Plane A sub-module	Right Cheek	4.100	0.649	0.408	0.057	0.189	0.195	0.701	0.783	0.787	0.665	0.816	0.446	0.528	0.532
	Right Tilted	4.100	0.705	0.239	0.075	0.161	0.184	0.606	0.660	0.674	0.559	0.851	0.457	0.511	0.525
	Left Cheek	4.100	0.356	0.335	0.134	0.046	0.194	0.703	0.648	0.741	0.619	0.633	0.494	0.439	0.531
	Left Tilted	4.100	0.411	0.355	0.115	0.047	0.185	0.704	0.661	0.748	0.632	0.667	0.482	0.439	0.526
n260_Plane B sub-module	Right Cheek	1.100	0.649	0.408	0.057	0.189	0.195	0.401	0.483	0.487	0.365	0.516	0.146	0.228	0.232
	Right Tilted	1.100	0.705	0.239	0.075	0.161	0.184	0.306	0.360	0.374	0.259	0.551	0.157	0.211	0.225
	Left Cheek	1.100	0.356	0.335	0.134	0.046	0.194	0.403	0.348	0.441	0.319	0.333	0.194	0.139	0.231
	Left Tilted	1.100	0.411	0.355	0.115	0.047	0.185	0.404	0.361	0.448	0.332	0.367	0.182	0.139	0.226
n261_Plane A sub-module	Right Cheek	3.600	0.649	0.408	0.057	0.189	0.195	0.651	0.733	0.737	0.615	0.766	0.396	0.478	0.482
	Right Tilted	3.600	0.705	0.239	0.075	0.161	0.184	0.556	0.610	0.624	0.509	0.801	0.407	0.461	0.475
	Left Cheek	3.600	0.356	0.335	0.134	0.046	0.194	0.653	0.598	0.691	0.569	0.583	0.444	0.389	0.481
	Left Tilted	3.600	0.411	0.355	0.115	0.047	0.185	0.654	0.611	0.698	0.582	0.617	0.432	0.389	0.476
n261_Plane B sub	Right Cheek	1.400	0.649	0.408	0.057	0.189	0.195	0.431	0.513	0.517	0.395	0.546	0.176	0.258	0.262
	Right Tilted	1.400	0.705	0.239	0.075	0.161	0.184	0.336	0.390	0.404	0.289	0.581	0.187	0.241	0.255
	Left Cheek	1.400	0.356	0.335	0.134	0.046	0.194	0.433	0.378	0.471	0.349	0.363	0.224	0.169	0.261
	Left Tilted	1.400	0.411	0.355	0.115	0.047	0.185	0.434	0.391	0.478	0.362	0.397	0.212	0.169	0.256

<Body-Worn Exposure Condition>
<WWAN with WLAN Index 9, BT Index 4>

FR2 Frequency band /Antenna module	Exposure Position	1	3	4	5	6	Reported 1g SAR/1.6 + PD/10 Summation Total Exposure ratio						
		Power density	5GHz /WIFI6E WLAN Ant 4+3	Bluetooth Ant 4	Bluetooth Ant 3	Bluetooth Ant 4+3	1+3+4	1+3+5	1+3+6	1+3	1+4	1+5	1+6
		W/m ²	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)							
n260_Plane A sub-module	Front	5.025	0.289	0.091	0.141	0.152	0.740	0.771	0.778	0.683	0.559	0.591	0.598
	Back	5.025	0.431	0.113	0.149	0.203	0.843	0.865	0.899	0.772	0.573	0.596	0.629
n260_Plane B sub-module	Front	4.425	0.289	0.091	0.141	0.152	0.680	0.711	0.718	0.623	0.499	0.531	0.538
	Back	4.425	0.431	0.113	0.149	0.203	0.783	0.805	0.839	0.712	0.513	0.536	0.569
n261_Plane A sub-module	Front	4.650	0.289	0.091	0.141	0.152	0.703	0.734	0.741	0.646	0.522	0.553	0.560
	Back	4.650	0.431	0.113	0.149	0.203	0.805	0.828	0.861	0.734	0.536	0.558	0.592
n261_Plane B sub-module	Front	3.750	0.289	0.091	0.141	0.152	0.613	0.644	0.651	0.556	0.432	0.463	0.470
	Back	3.750	0.431	0.113	0.149	0.203	0.715	0.738	0.771	0.644	0.446	0.468	0.502

<WWAN with WLAN Index 7>

FR2 Frequency band /Antenna module	Exposure Position	1	2	3	Reported 1g SAR/1.6 + PD/10 Summation Total Exposure ratio	
		Power density	2.4GHz WLAN Ant 4+3	5GHz /WIFI6E WLAN Ant 4+3	1+3	1+2
		W/m ²	1g SAR (W/kg)	1g SAR (W/kg)		
n260_Plane A sub-module	Front	5.025	0.474	0.399	0.752	0.799
	Back	5.025	0.594	0.536	0.838	0.874
n260_Plane B sub-module	Front	4.425	0.474	0.399	0.692	0.739
	Back	4.425	0.594	0.536	0.778	0.814
n261_Plane A sub-module	Front	4.650	0.474	0.399	0.714	0.761
	Back	4.650	0.594	0.536	0.800	0.836
n261_Plane B sub-module	Front	3.750	0.474	0.399	0.624	0.671
	Back	3.750	0.594	0.536	0.710	0.746

<WWAN with WLAN Index 8>

FR2 Frequency band /Antenna module	Exposure Position	1	2	3	Reported 1g SAR/1.6 + PD/10 Summation Total Exposure ratio
		WWAN	2.4GHz WLAN Ant 4+3	5GHz/ WIFI6E WLAN Ant 4+3	1+2+3
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
n260_Plane A sub-module	Front	5.025	0.123	0.225	0.720
	Back	5.025	0.182	0.374	0.850
n260_Plane B sub-module	Front	4.425	0.123	0.225	0.660
	Back	4.425	0.182	0.374	0.790
n261_Plane A sub-module	Front	4.650	0.123	0.225	0.683
	Back	4.650	0.182	0.374	0.813
n261_Plane B sub-module	Front	3.750	0.123	0.225	0.593
	Back	3.750	0.182	0.374	0.723

<Product Specific Exposure Condition>

FR2	Exposure Position	1	2	Reported 10g SAR/4.0 + PD/10 Summation Total Exposure ratio
		Power density	5GHz WLAN Ant 4+3	
		W/m ²	10g SAR (W/kg)	1+2
n260_Plane A sub-module	Front at 0mm	4.125	1.164	0.704
	Back at 0mm	4.275	0.764	0.619
	Left side at 0mm		1.713	0.428
	Right side at 0mm	2.325	0.715	0.411
	Top side at 0mm	7.500	0.846	0.962
	Bottom side at 0mm			0.000
n260_Plane B sub-module	Front at 0mm	1.050	1.164	0.396
	Back at 0mm	7.500	0.764	0.941
	Left side at 0mm		1.713	0.428
	Right side at 0mm	2.025	0.715	0.381
	Top side at 0mm	3.975	0.846	0.609
	Bottom side at 0mm			0.000
n261_Plane A sub-module	Front at 0mm	3.600	1.164	0.651
	Back at 0mm	4.350	0.764	0.626
	Left side at 0mm		1.713	0.428
	Right side at 0mm	1.800	0.715	0.359
	Top side at 0mm	7.500	0.846	0.962
	Bottom side at 0mm			0.000
n261_Plane B sub-module	Front at 0mm	1.350	1.164	0.426
	Back at 0mm	7.500	0.764	0.941
	Left side at 0mm		1.713	0.428
	Right side at 0mm	2.025	0.715	0.381
	Top side at 0mm	4.350	0.846	0.647
	Bottom side at 0mm			0.000

Test Engineer : White Huang, Tommy Chen and Kells Chen

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.