

#01_GSM850_GPRS 4 Tx slots_Right Cheek_0mm_Ch251

Communication System: GPRS-FDD; Frequency: 848.800 MHz

Medium: HSL_600-7200_260307 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.652 W/kg; SAR (10g) = 0.430 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.700 W/kg; SAR (8g) = 0.470 W/kg; SAR (10g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

TSL Correction: Positive only

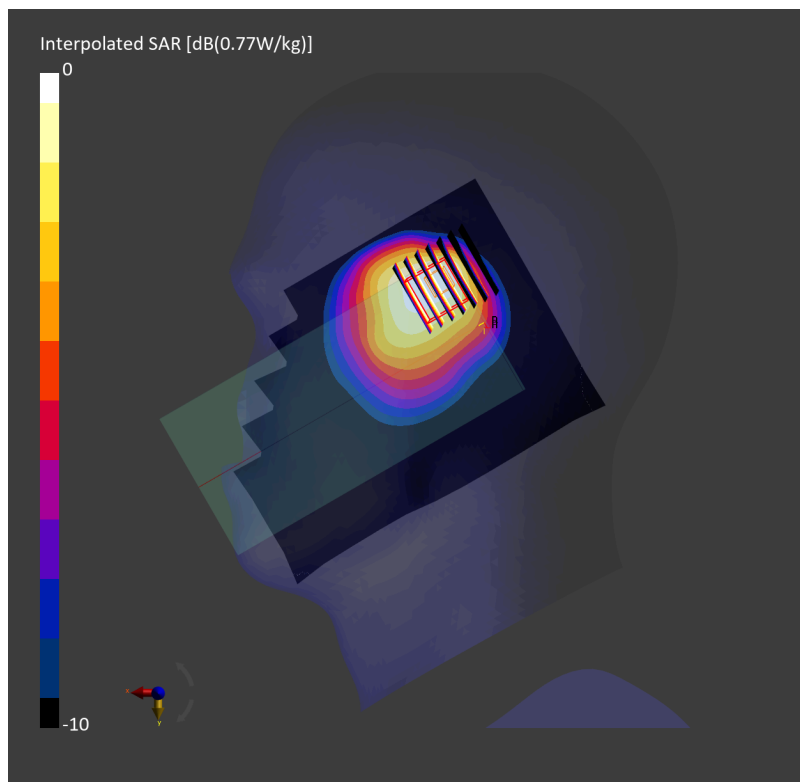

#02_GSM1900_GPRS 4 Tx slots_Right Cheek_0mm_Ch512

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.185 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.347 W/kg; SAR (8g) = 0.230 W/kg; SAR (10g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 89.6 %

TSL Correction: Positive only

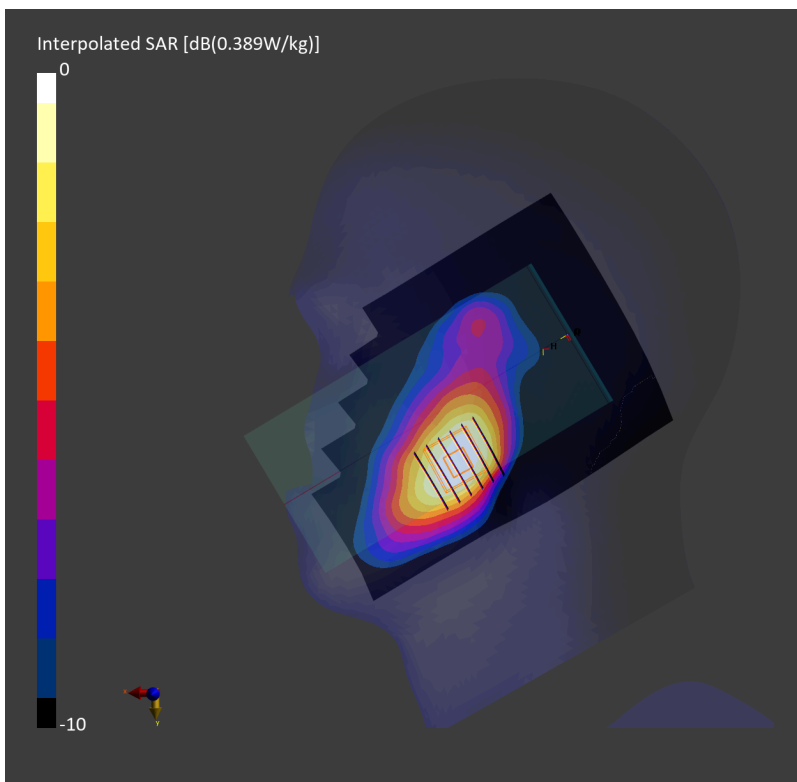

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260125 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.515 W/kg; SAR (10g) = 0.296 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.567 W/kg; SAR (8g) = 0.373 W/kg; SAR (10g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

TSL Correction: Positive only

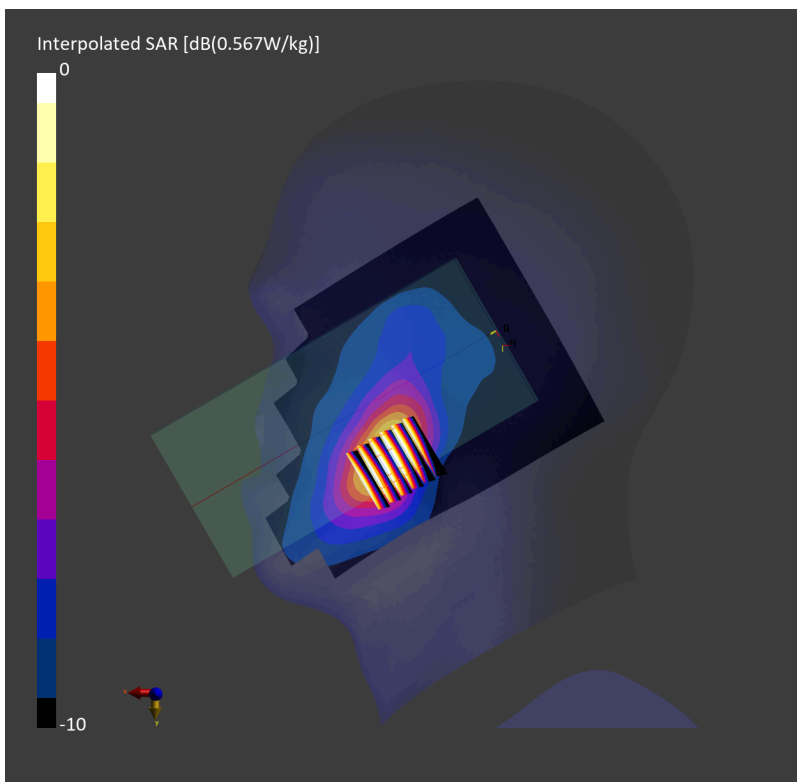

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260102 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126_0mm; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.165 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.293 W/kg; SAR (8g) = 0.199 W/kg; SAR (10g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 89.4 %

TSL Correction: Positive only

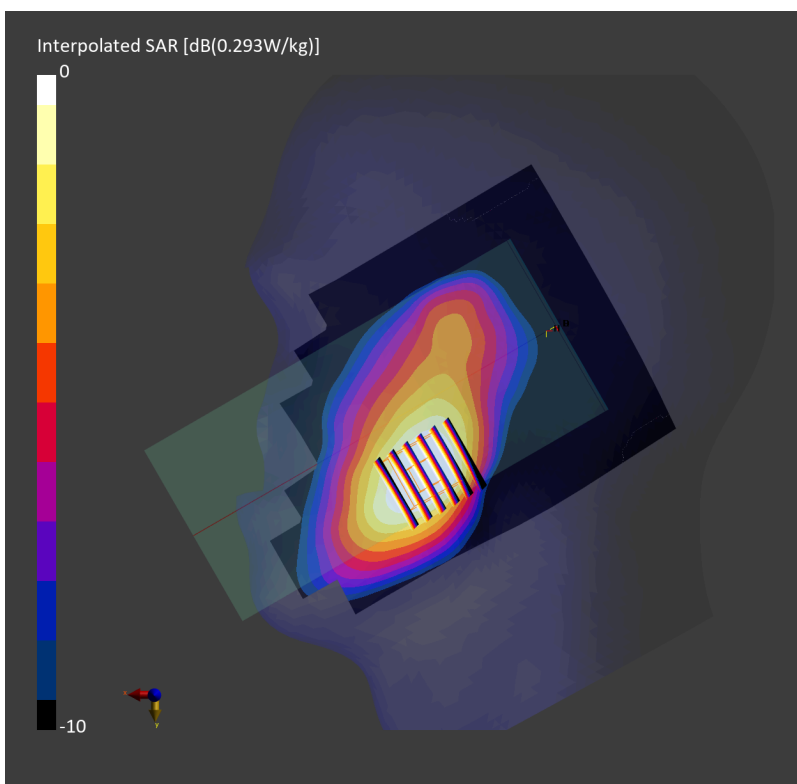

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260127 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.946$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.370 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.573 W/kg; SAR (8g) = 0.387 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.3 %

TSL Correction: Positive only

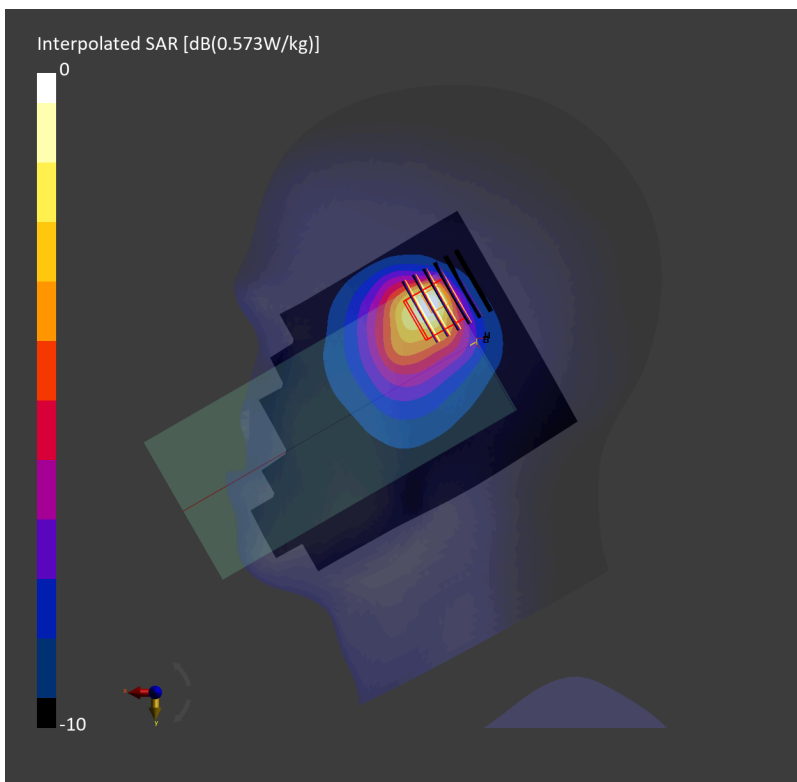

#06_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.331 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 0.706 W/kg; SAR (8g) = 0.411 W/kg; SAR (10g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

TSL Correction: Positive only

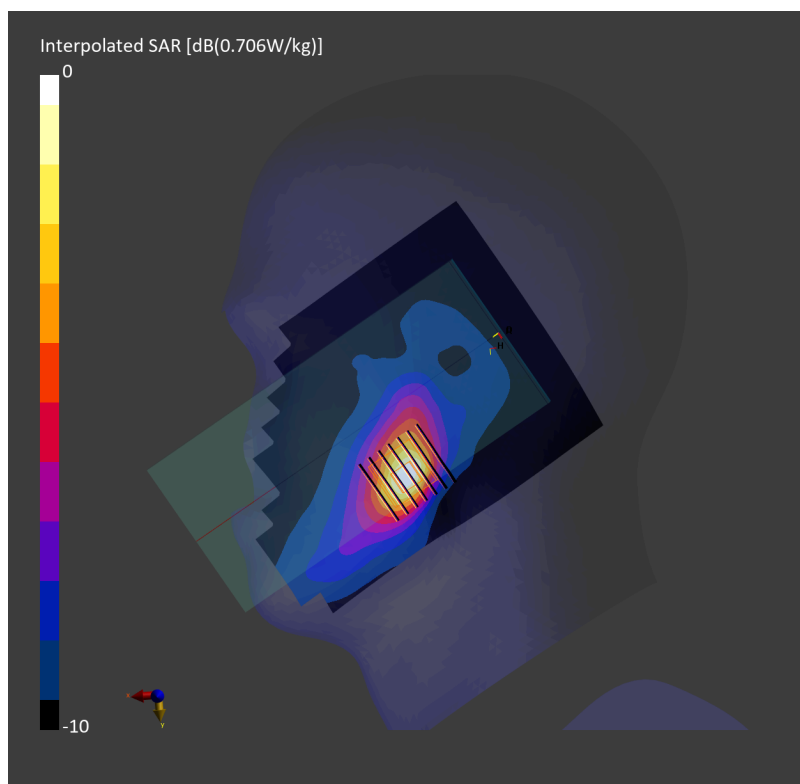

#07_LTE Band 12_10M_QPSK_1_49_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260126 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.543 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.830 W/kg; SAR (8g) = 0.569 W/kg; SAR (10g) = 0.539 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.5 %

TSL Correction: Positive only

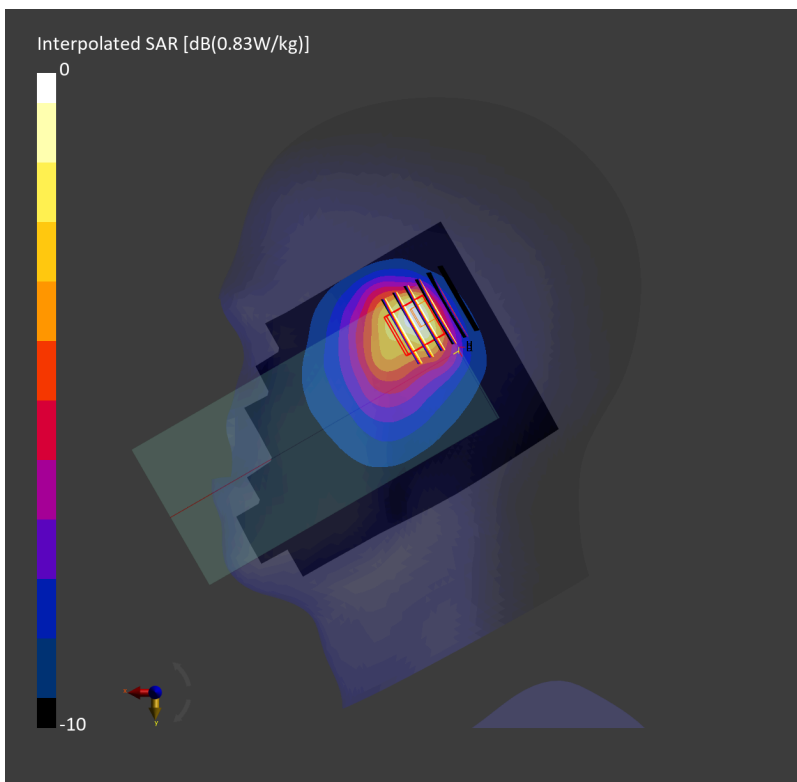

#08_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260126 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.775 W/kg; SAR (10g) = 0.495 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.771 W/kg; SAR (8g) = 0.534 W/kg; SAR (10g) = 0.502 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.3 %

TSL Correction: Positive only

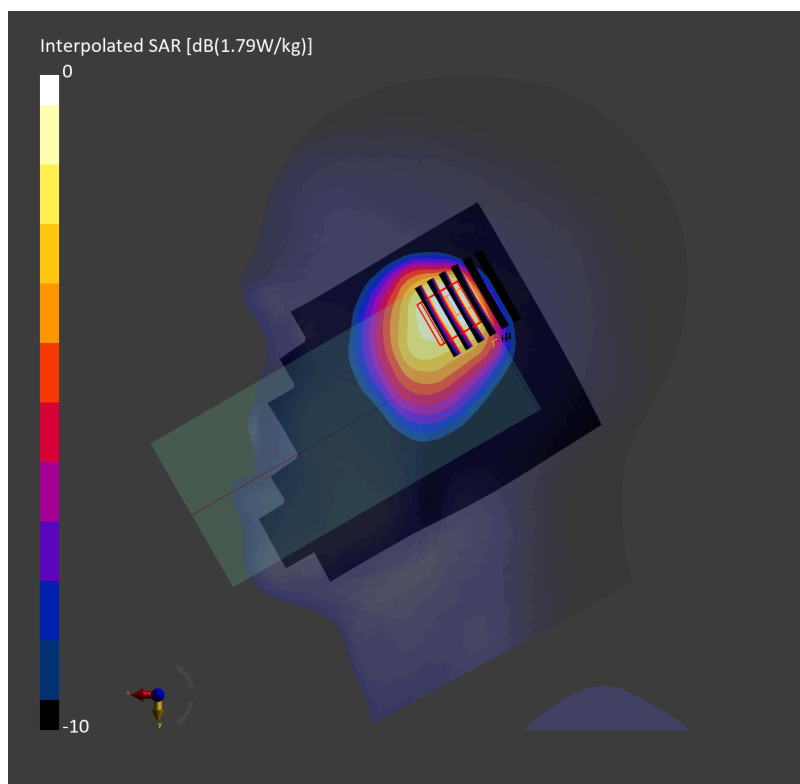

#09_LTE Band 14_10M_QPSK_1_0_Right Cheek_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.813 W/kg; SAR (10g) = 0.521 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.784 W/kg; SAR (8g) = 0.516 W/kg; SAR (10g) = 0.474 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.9 %

TSL Correction: Positive only

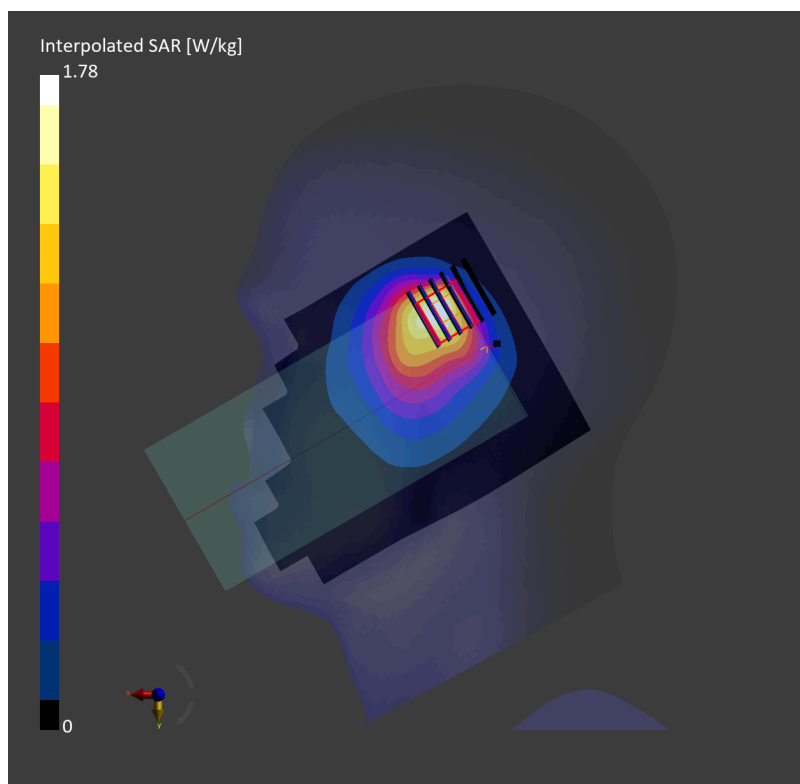

#10_LTE Band 25_20M_QPSK_1_99_Left Cheek_0mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260130 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.277 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.621 W/kg; SAR (8g) = 0.309 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

TSL Correction: Positive only

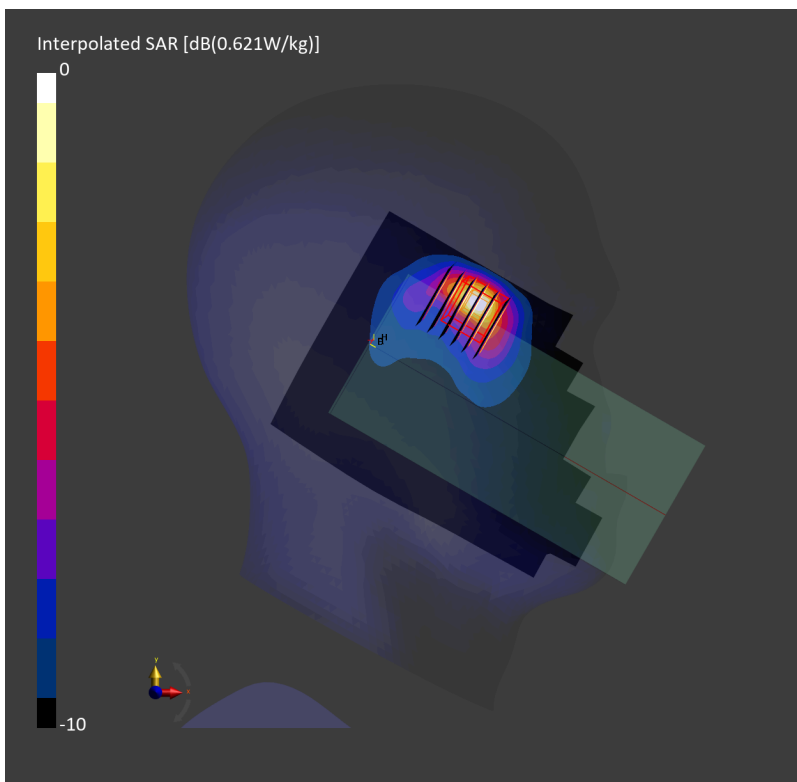

#11_LTE Band 26_15M_QPSK_36_39_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260201 Medium parameters used: $f=831.500$ MHz; $\sigma=0.915$ S/m; $\epsilon_r=44.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.417 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 33.4 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.659 W/kg; SAR (8g) = 0.429 W/kg; SAR (10g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

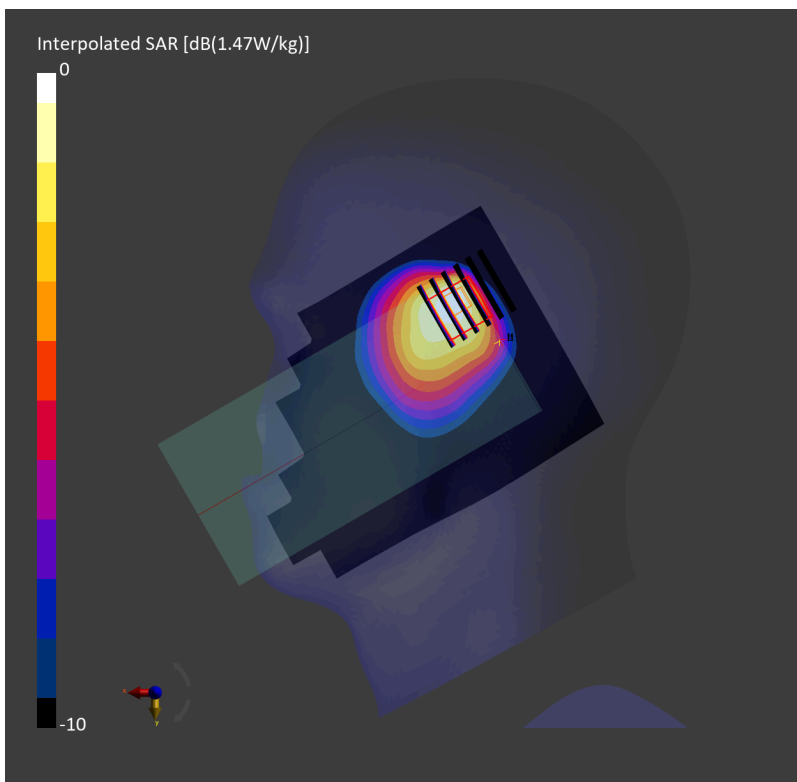

#12_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260129 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.21, 6.9, 7.67); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.325 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 0.663 W/kg; SAR (8g) = 0.402 W/kg; SAR (10g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 86.9 %

TSL Correction: Positive only

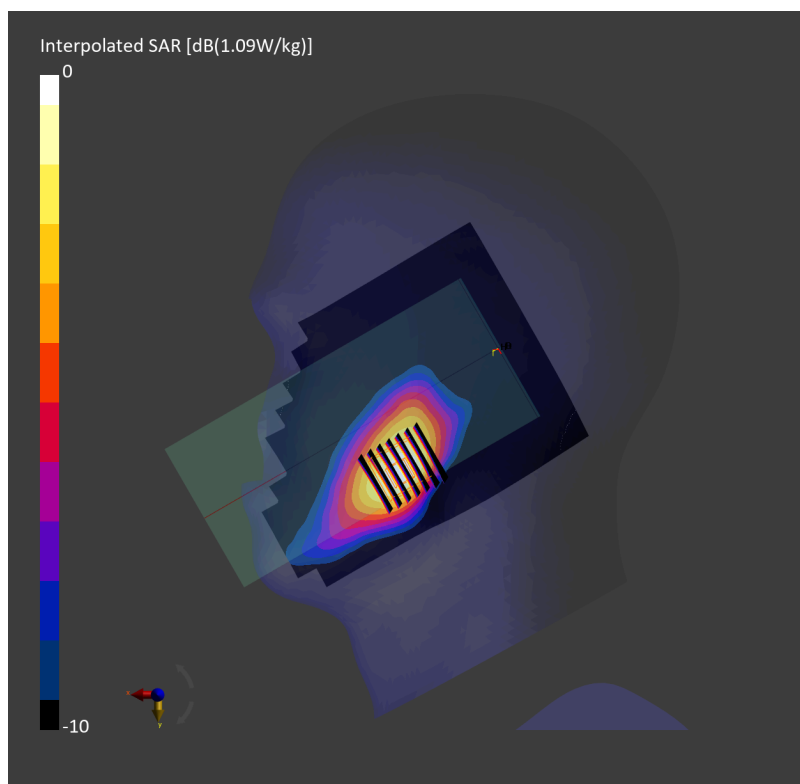

#13_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260222 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.695 W/kg; SAR (8g) = 0.414 W/kg; SAR (10g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 90.2 %

TSL Correction: Positive only

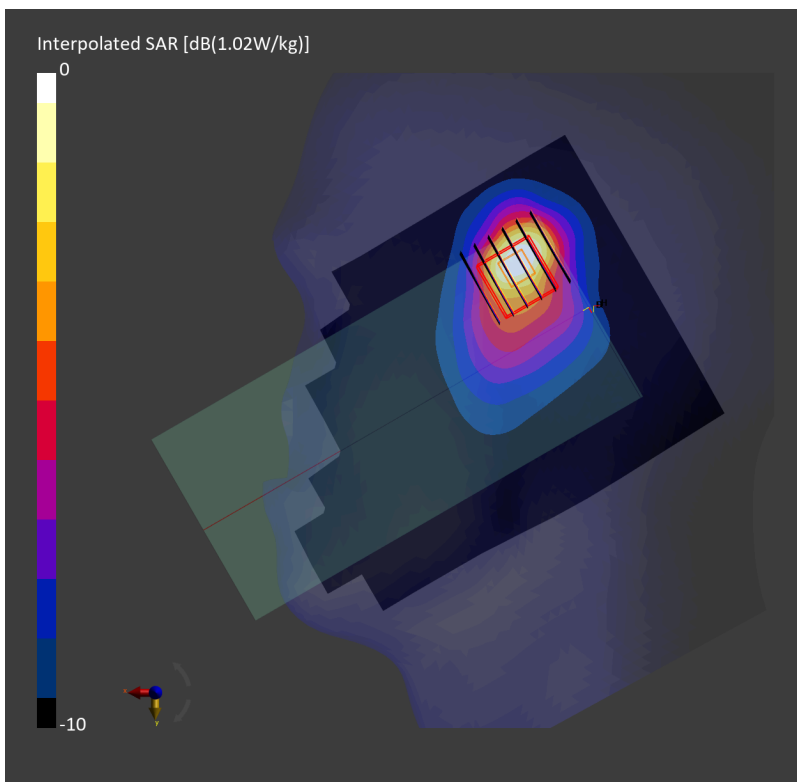

#14_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.405 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.639 W/kg; SAR (8g) = 0.424 W/kg; SAR (10g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

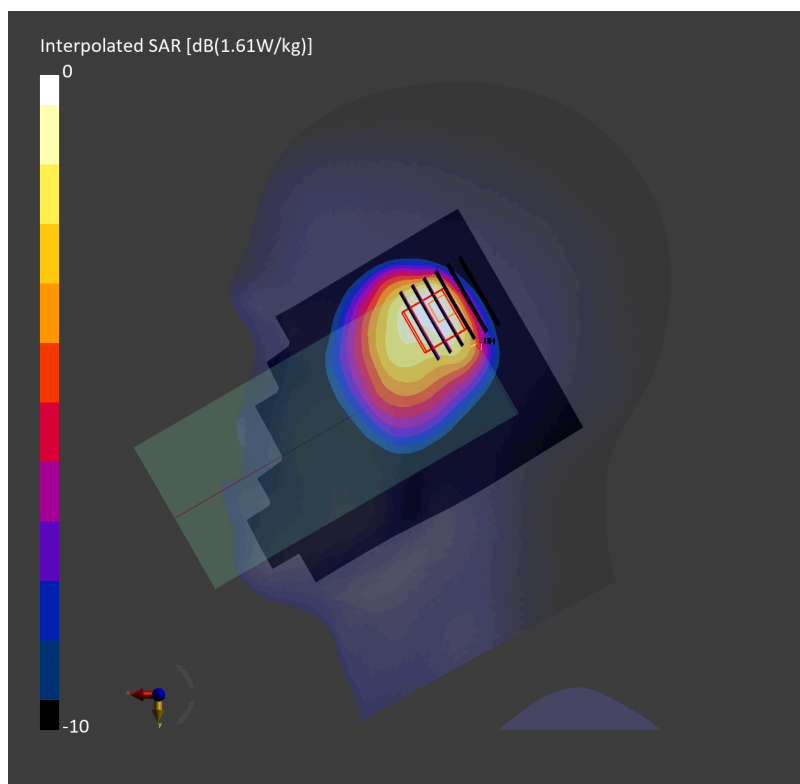

#15_LTE Band 41_20M_QPSK_50_0_Left Cheek_0mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.85, 7.06, 6.83); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1823; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (40.7 mm x 40.7 mm x 33.4 mm): Measurement Grid: 3.7 mm x 3.7 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.757 W/kg; SAR (8g) = 0.367 W/kg; SAR (10g) = 0.333 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

TSL Correction: Positive only

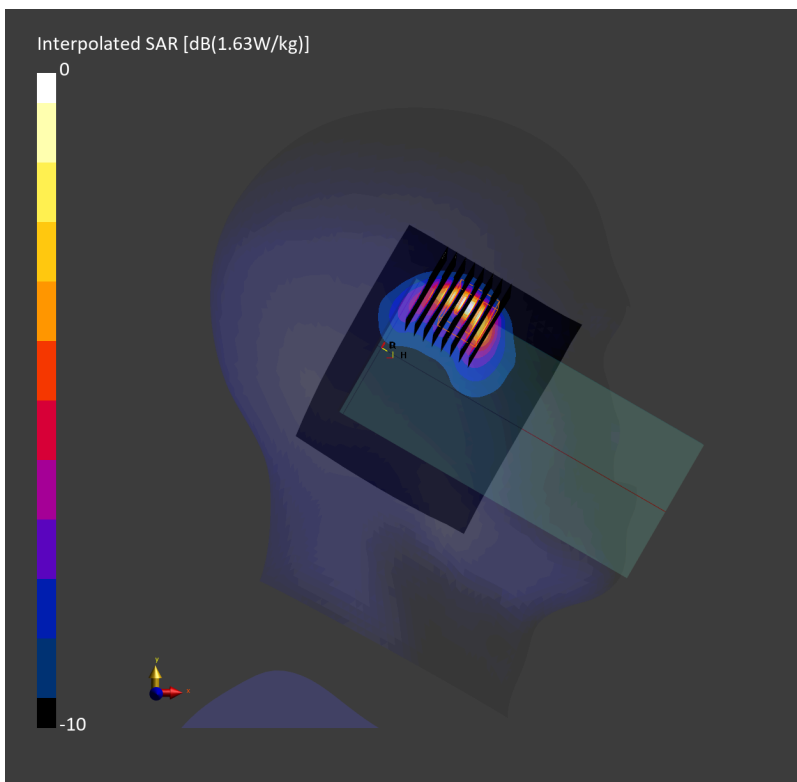

#16_LTE Band 48_20M_QPSK_50_0_Left Cheek_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.80$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.272 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.13 dB

SAR (1g) = 0.714 W/kg; SAR (8g) = 0.296 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

TSL Correction: Positive only

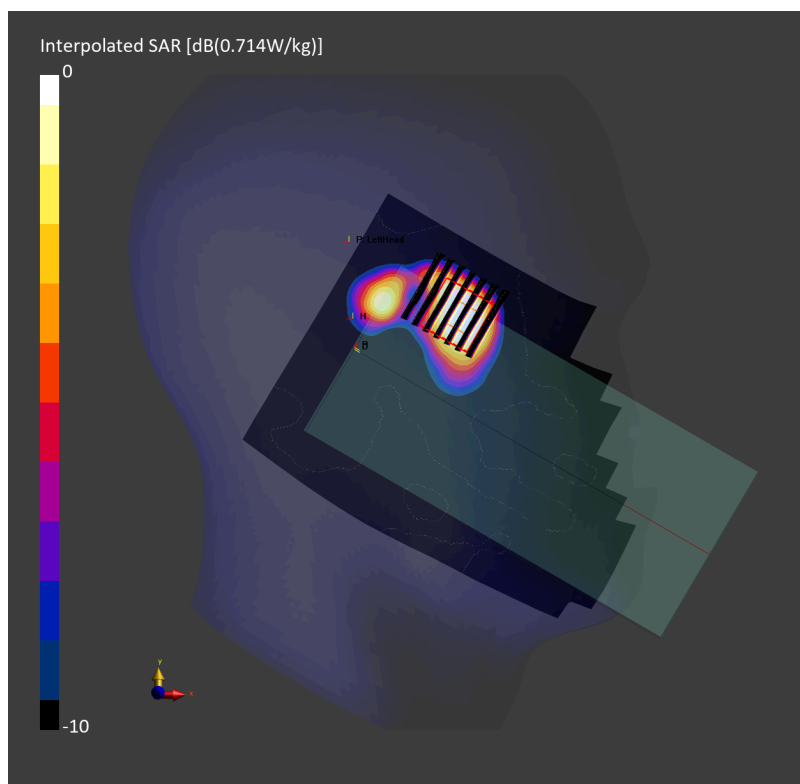

#17_FR1 n7_50M_BPSK_1_135_Right Cheek_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.04, 7.16, 6.86); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.361 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.759 W/kg; SAR (8g) = 0.447 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

TSL Correction: Positive only

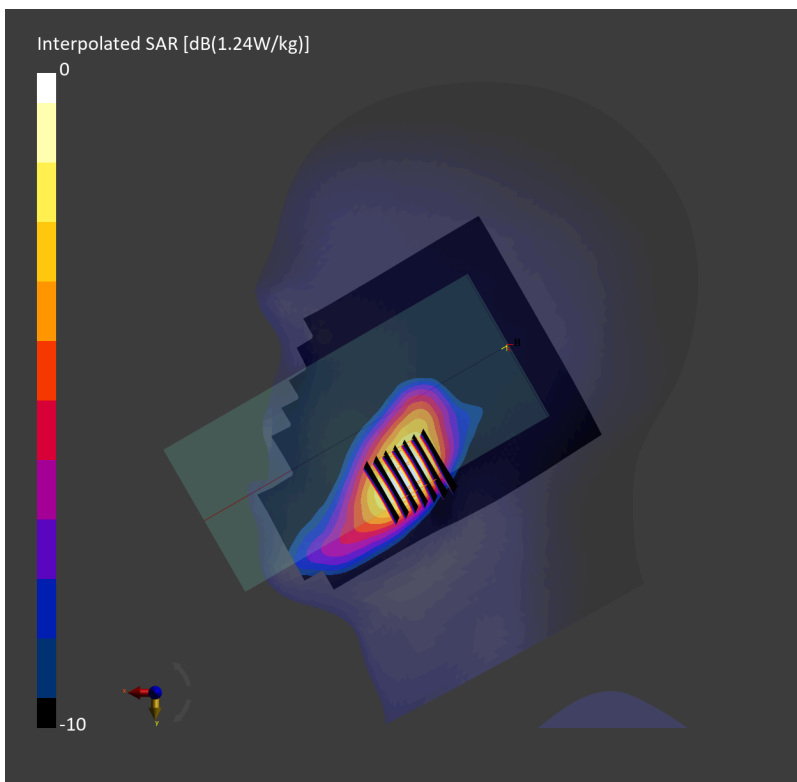

#18_FR1 n12_15M_BPSK_1_1_Right Cheek_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.383 W/kg;

TSL Correction: Positive only

Zoom Scan (30.8 mm x 30.8 mm x 33.4 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 0.601 W/kg; SAR (8g) = 0.369 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.6 %

TSL Correction: Positive only

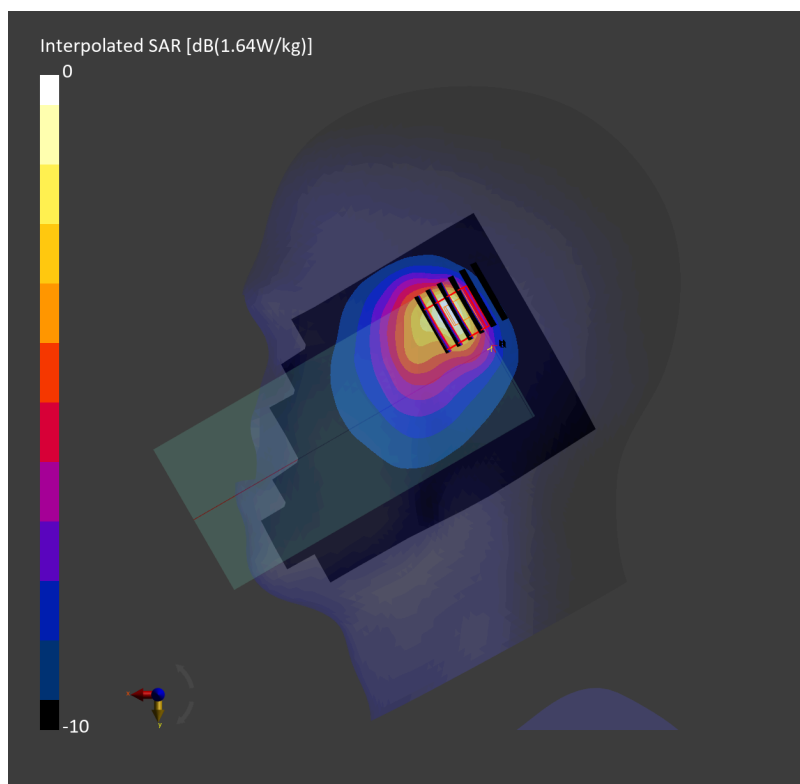

#19_FR1 n13_10M_BPSK_25_14_Right Cheek_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.406 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.667 W/kg; SAR (8g) = 0.416 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

TSL Correction: Positive only

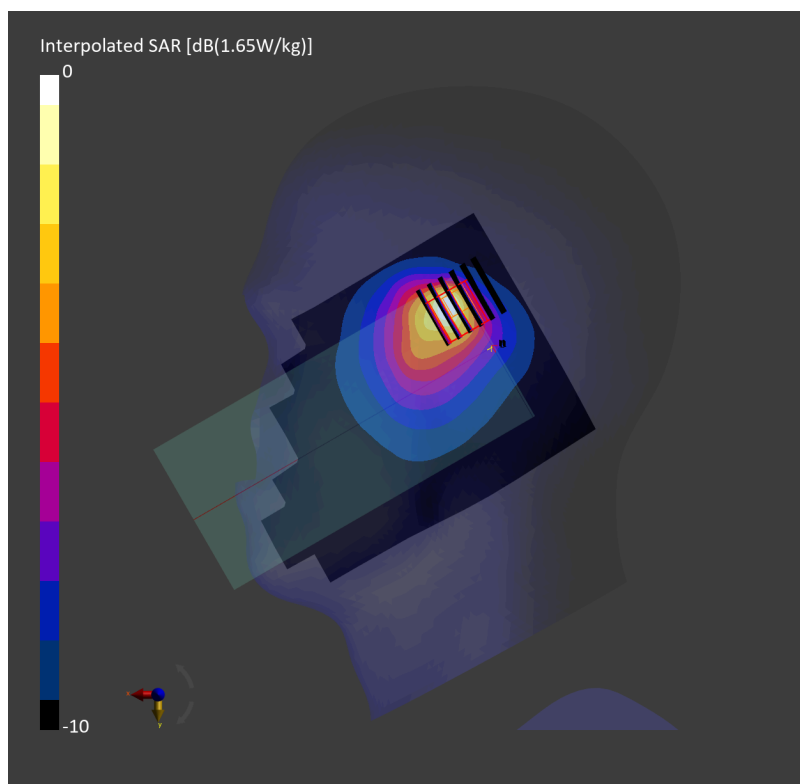

#20_FR1 n14_10M_BPSK_25_14_Right Cheek_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.449 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.712 W/kg; SAR (8g) = 0.460 W/kg; SAR (10g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

TSL Correction: Positive only

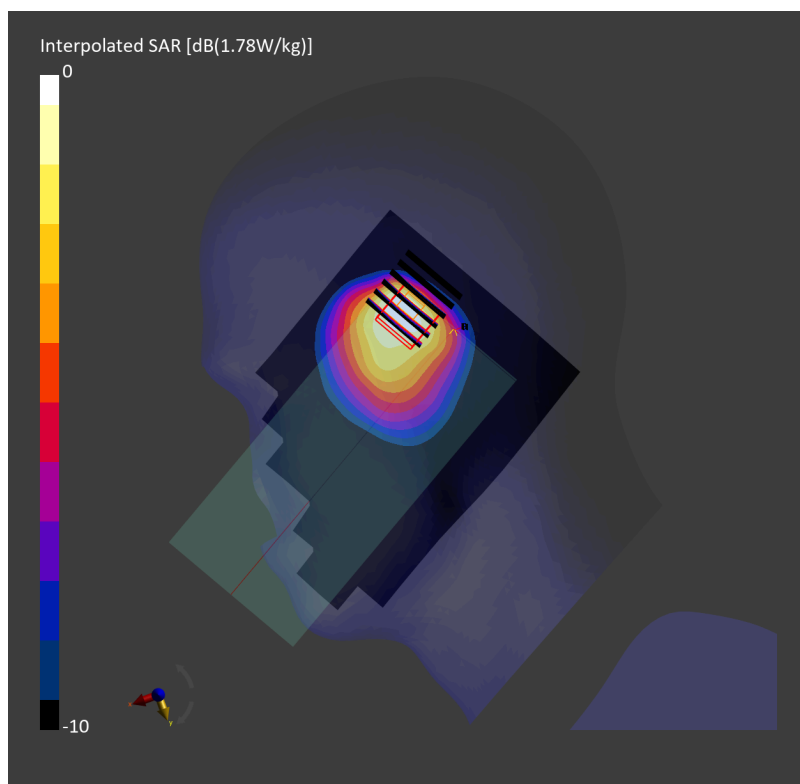

#21_FR1 n25_40M_BPSK_108_54_Left Cheek_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.615 W/kg; SAR (10g) = 0.315 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 0.777 W/kg; SAR (8g) = 0.381 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

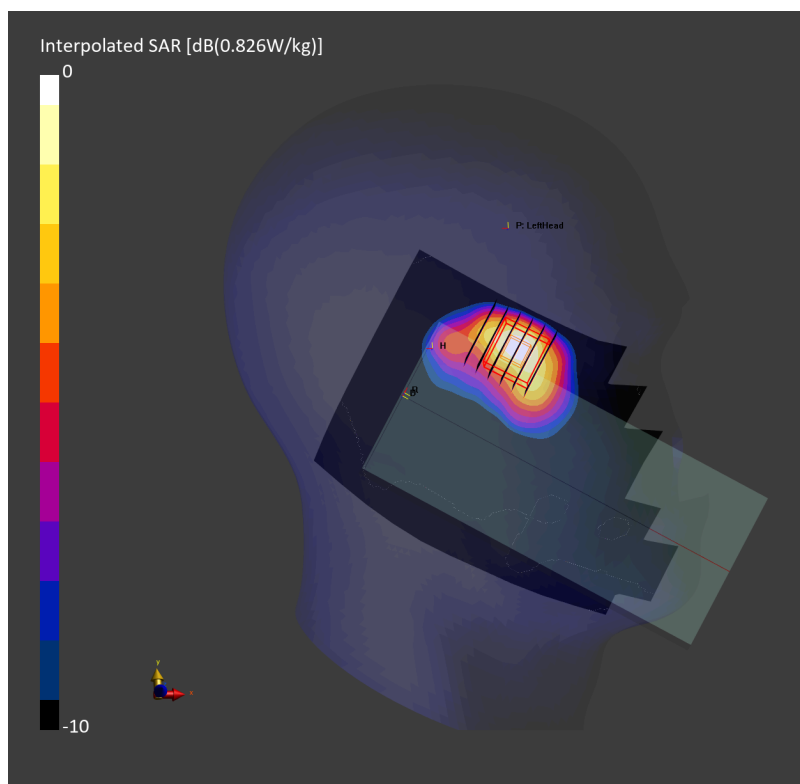

#22_FR1 n26_20M_BPSK_50_28_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.804 W/kg; SAR (10g) = 0.508 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.781 W/kg; SAR (8g) = 0.501 W/kg; SAR (10g) = 0.458 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

TSL Correction: Positive only

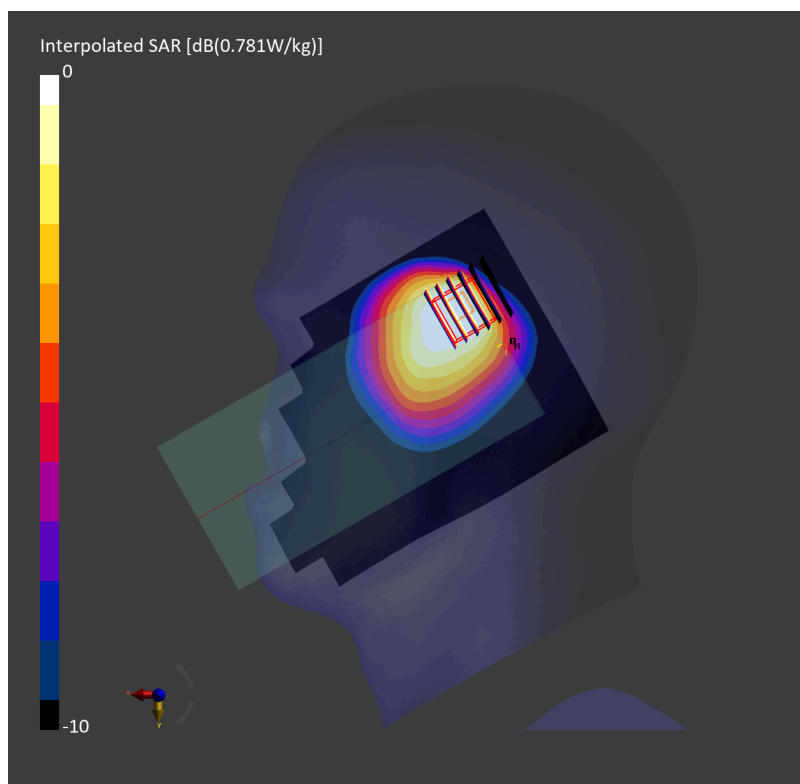

#23_FR1 n30_10M_BPSK_25_14_Right Cheek_0mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.70$ S/m; $\epsilon_r=40.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.37, 7.25, 7.29); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.308 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.351 W/kg; SAR (10g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.3 %

TSL Correction: Positive only

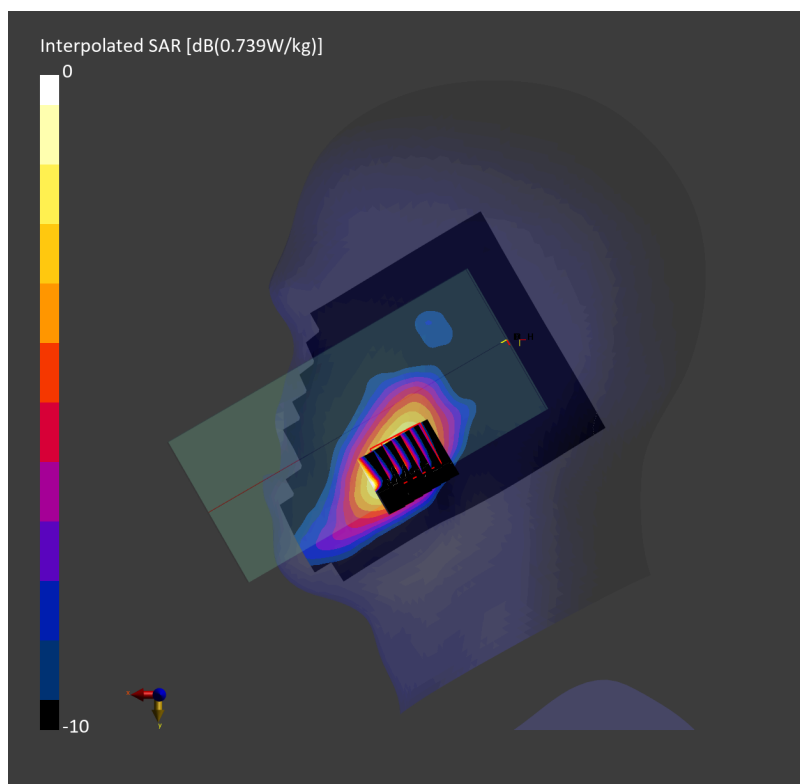

#24_FR1 n66_45M_BPSK_120_0_Left Cheek_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260217 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.350 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.733 W/kg; SAR (8g) = 0.375 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

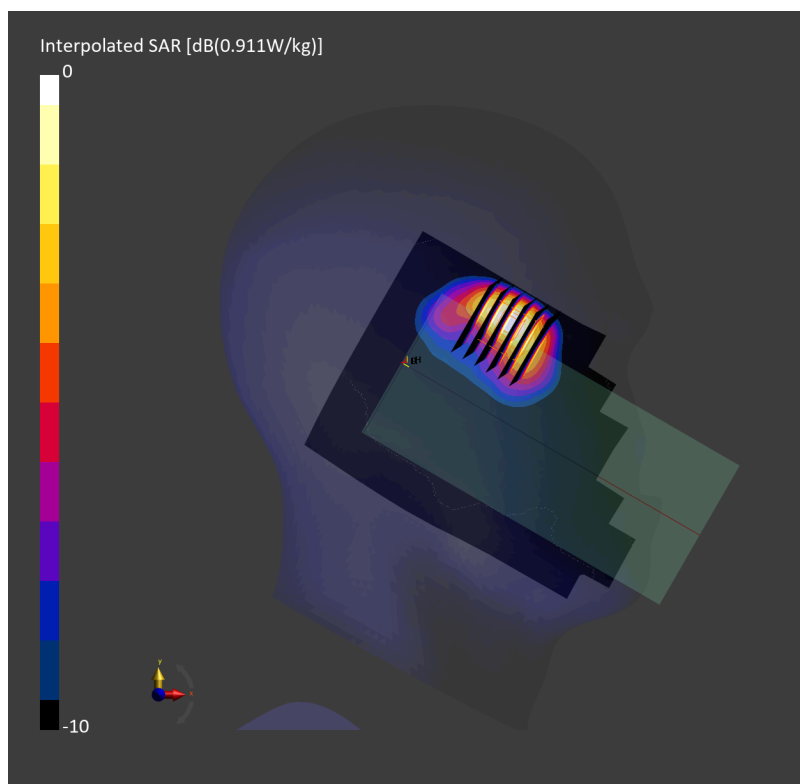

#25_FR1 n70_15M_BPSK_36_0_Left Cheek_0mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.335 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.719 W/kg; SAR (8g) = 0.359 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

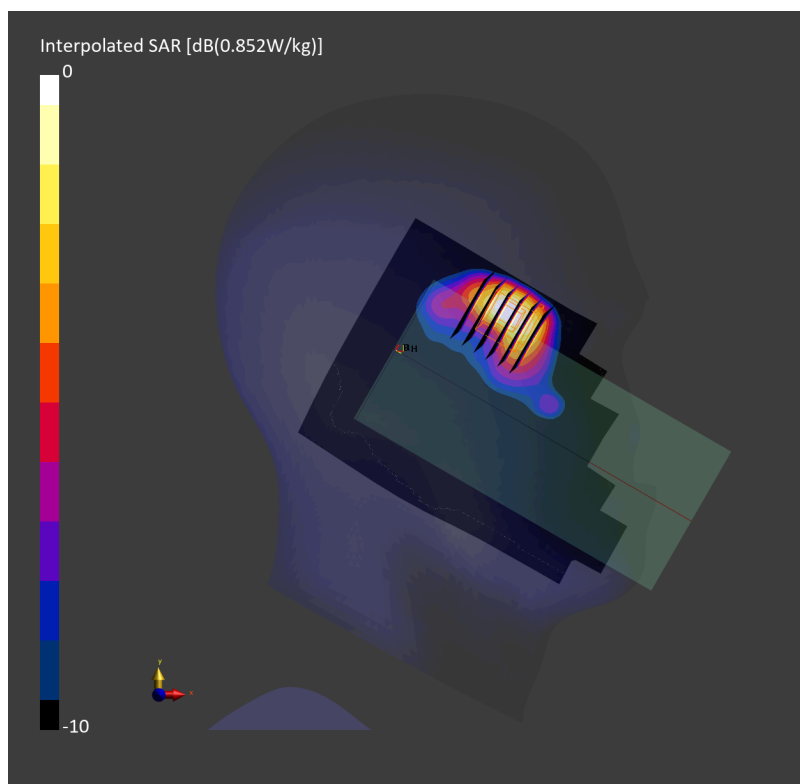

#26_FR1 n71_35M_BPSK_1_90_Right Cheek_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: CW, 10933-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.796 W/kg; SAR (10g) = 0.518 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.762 W/kg; SAR (8g) = 0.537 W/kg; SAR (10g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

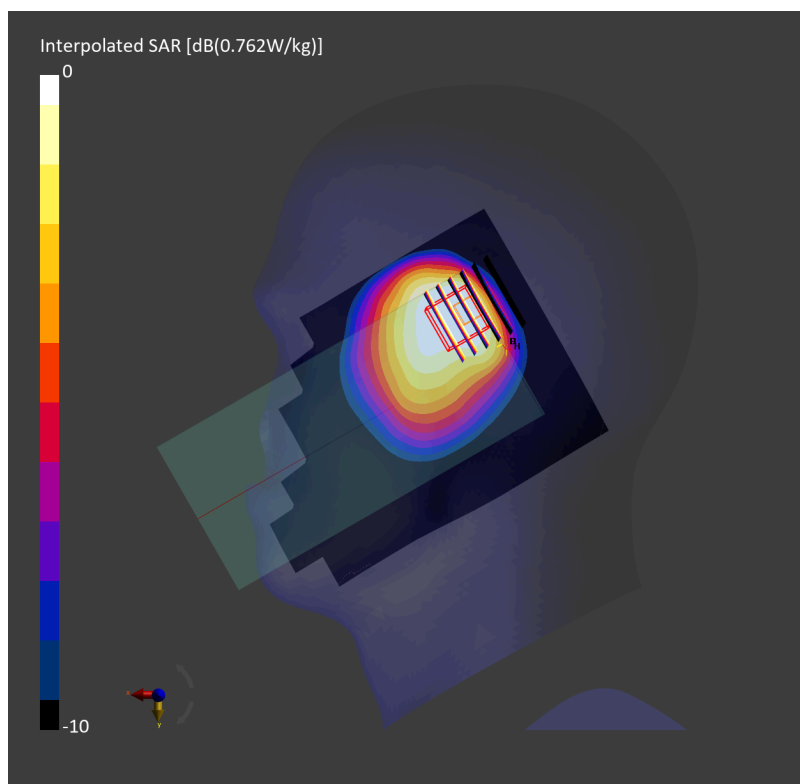

#27_FR1 n41_100M_BPSK_1_137_Right Cheek_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260228 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.754 W/kg; SAR (10g) = 0.390 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.791 W/kg; SAR (8g) = 0.460 W/kg; SAR (10g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

TSL Correction: Positive only

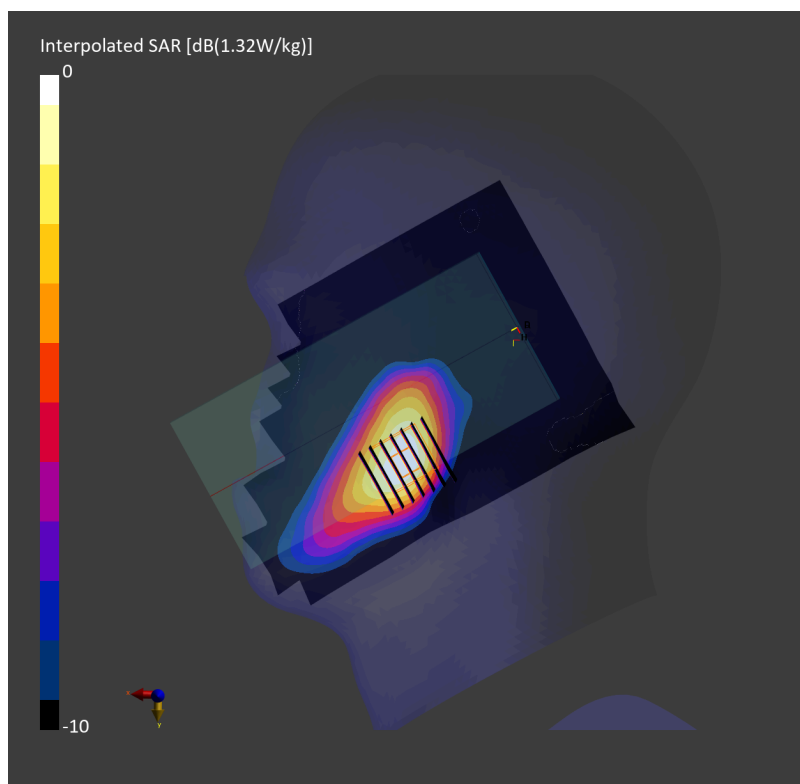

#28_FR1 n48_20M_BPSK_25_12_Left Cheek_0mm_Ch637334

Communication System: 5G NR; Frequency: 3560.005 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 3560.005$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.301 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.11 dB

SAR (1g) = 0.790 W/kg; SAR (8g) = 0.330 W/kg; SAR (10g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

TSL Correction: Positive only

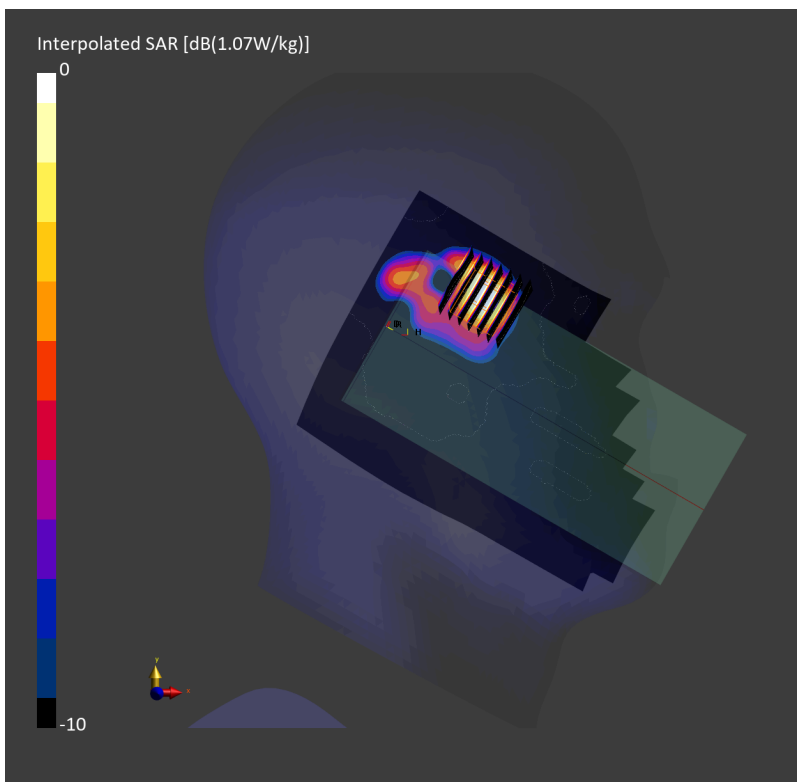

#29_FR1 n77_100M_BPSK_135_0_Left Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.65$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.638 W/kg; SAR (10g) = 0.261 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 0.686 W/kg; SAR (8g) = 0.295 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

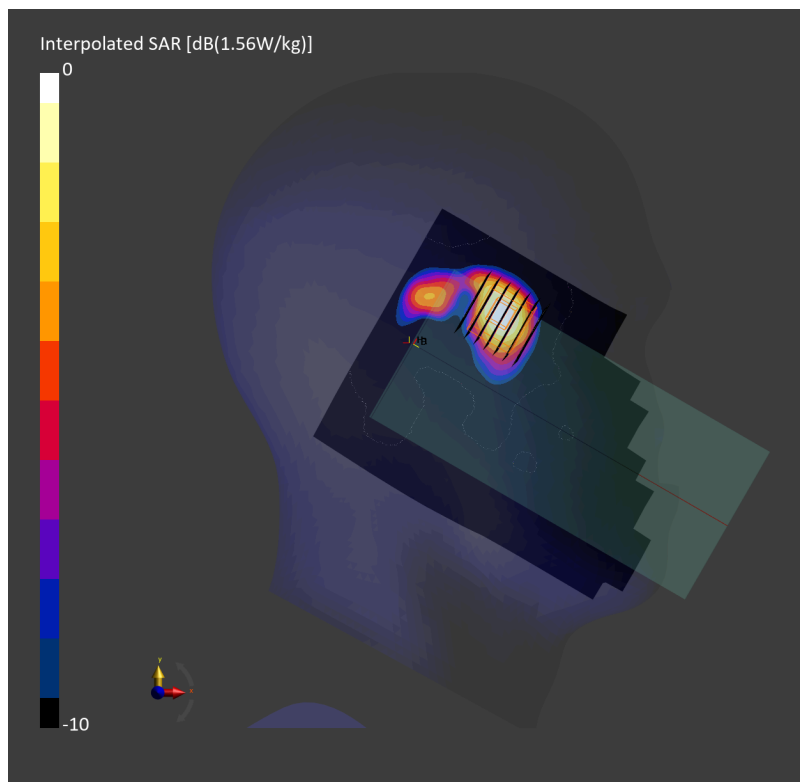

#30_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260108 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.54, 6.53, 6.24); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126_0mm; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.468 W/kg; SAR (10g) = 0.213 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.525 W/kg; SAR (8g) = 0.244 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.324 W/kg; SAR (8g) = 0.146 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

TSL Correction: Positive only

