Date: 2025-02-14

#28_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi; Frequency: 5290.000 MHz
Medium: HSL_5G_250214 Medium parameters used: f= 5290.000 MHz; σ= 4.78 S/m; ε_r = 35.8
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN3931; ConvF(5.49, 5.29, 5.21); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2024-04-22
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.588 W/kg; SAR (10g) = 0.185 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.686 W/kg; SAR (8g) = 0.213 W/kg; SAR (10g) = 0.180 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 65.2 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm
Power Drift = -0.01 dB
SAR (1g) = 0.235 W/kg; SAR (8g) = 0.073 W/kg; SAR (10g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 65.2 %

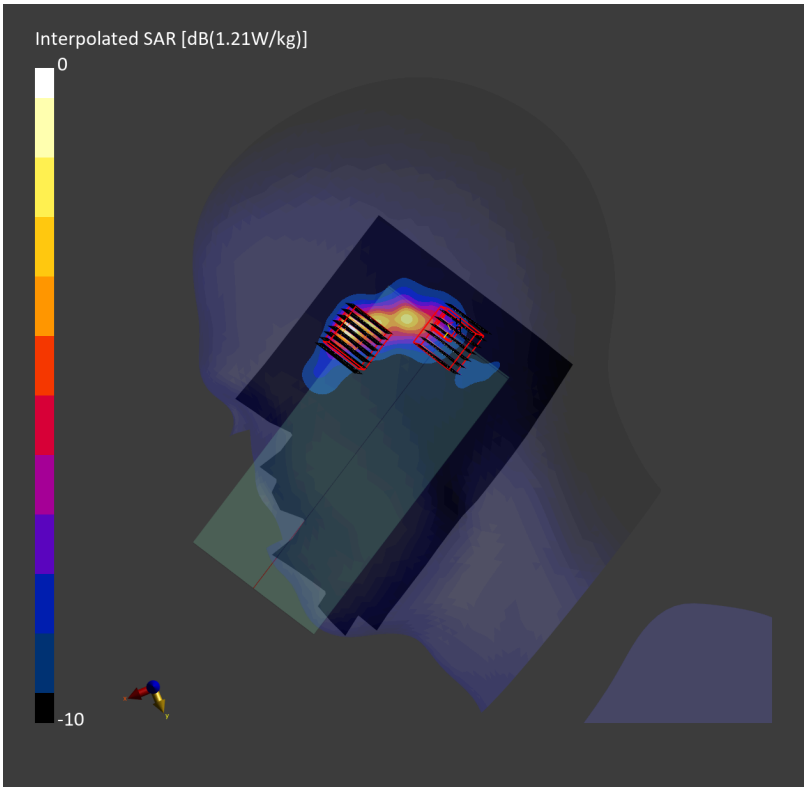

Date: 2025-02-14

#29_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz
Medium: HSL_5G_250214 Medium parameters used: f= 5610.000 MHz; σ= 5.14 S/m; ε_r = 35.3
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN3931; ConvF(5.11, 4.92, 4.85); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2024-04-22
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.611 W/kg; SAR (10g) = 0.205 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.10 dB
SAR (1g) = 0.733 W/kg; SAR (8g) = 0.222 W/kg; SAR (10g) = 0.189 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.2 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.10 dB
SAR (1g) = 0.124 W/kg; SAR (8g) = 0.041 W/kg; SAR (10g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.2 %

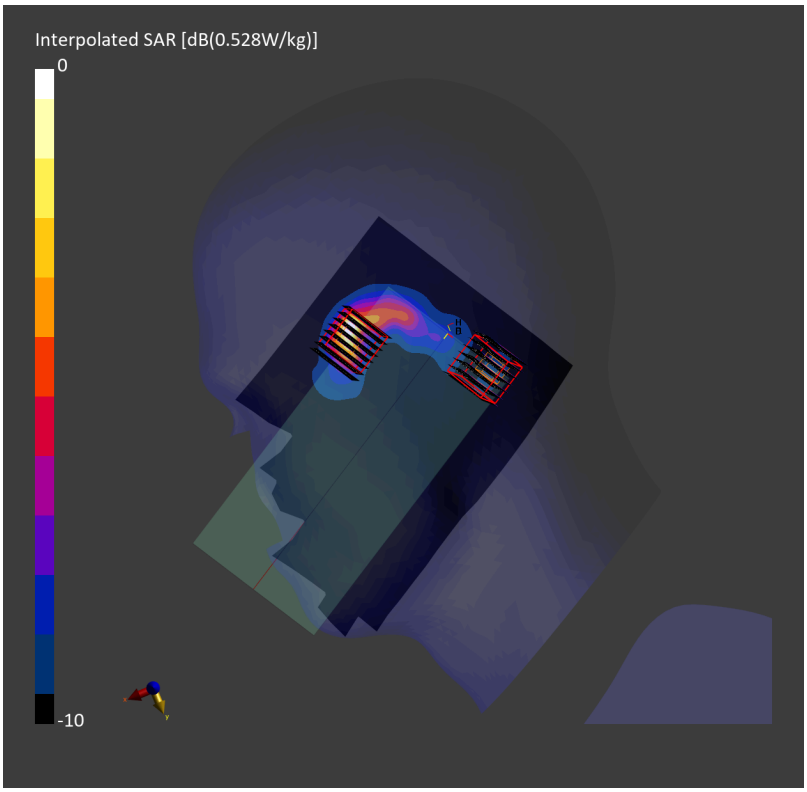

Date: 2025-01-26

#30_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz
Medium: HSL_5G_250126 Medium parameters used: f= 5775.000 MHz; σ= 5.41 S/m; ε_r = 35.9
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7625; ConvF(4.92, 4.81, 5.2); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.564 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.13 dB
SAR (1g) = 0.667 W/kg; SAR (8g) = 0.196 W/kg; SAR (10g) = 0.167 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 60.0 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.13 dB
SAR (1g) = 0.179 W/kg; SAR (8g) = 0.061 W/kg; SAR (10g) = 0.053 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 60.0 %

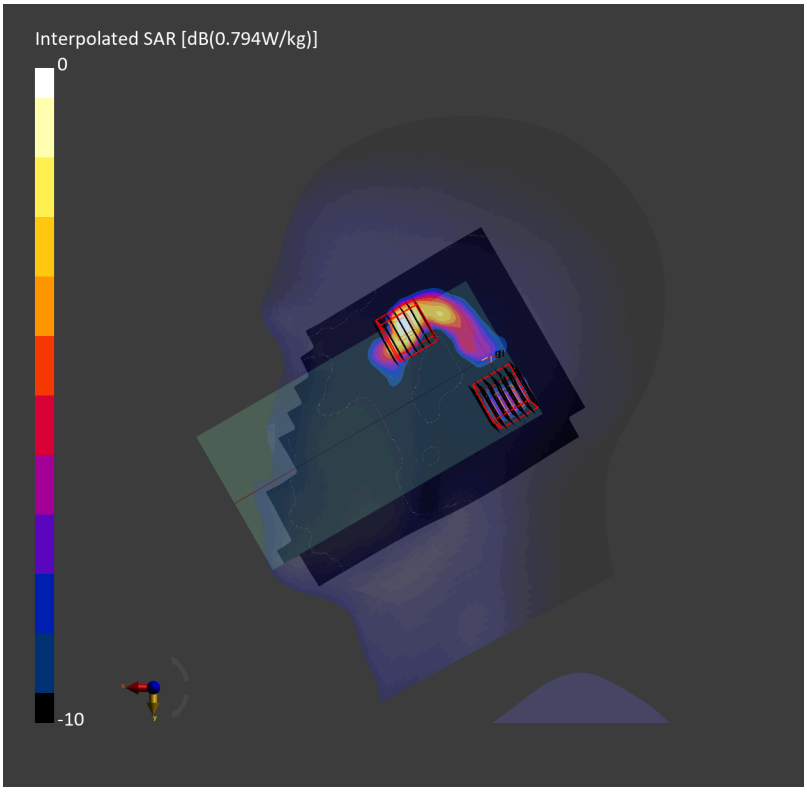

Date: 2025-01-25

#31_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz
Medium: HSL_5G_250125 Medium parameters used: f= 5815.000 MHz; σ= 5.27 S/m; ε_r = 34.9
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7625; ConvF(4.92, 4.81, 5.2); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: CW, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.398 W/kg; SAR (10g) = 0.137 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.584 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.141 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 59.9 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.06 dB
SAR (1g) = 0.116 W/kg; SAR (8g) = 0.040 W/kg; SAR (10g) = 0.034 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 59.9 %

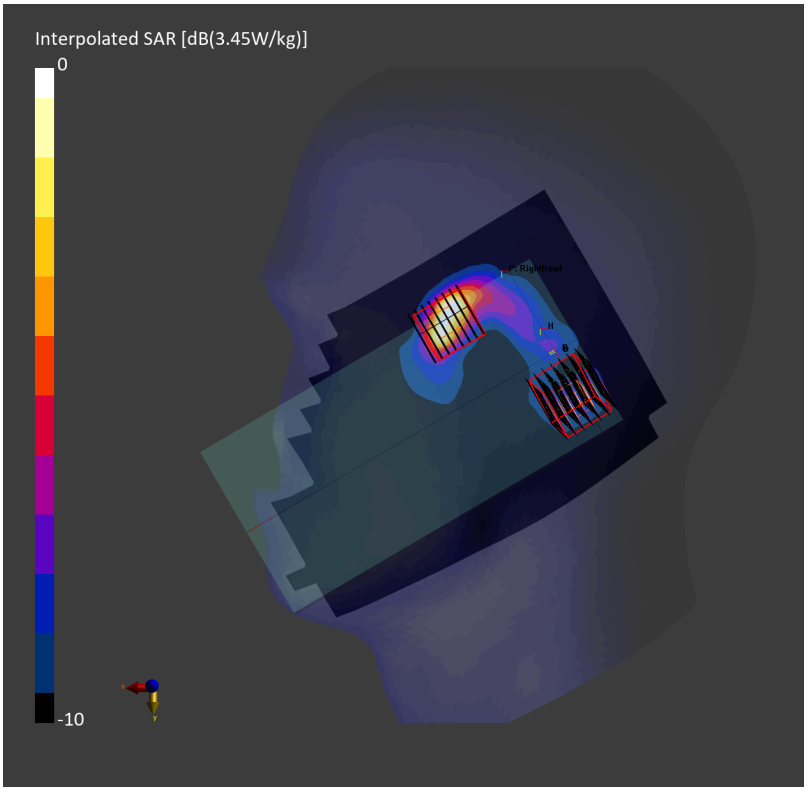

Date: 2025-02-26

#32_Bluetooth_1Mbps_Right Cheek_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz
Medium: HSL_2450_250226 Medium parameters used: f= 2480.000 MHz; σ= 1.89 S/m; ε_r = 38.7
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.188 W/kg; SAR (10g) = 0.085 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 0.207 W/kg; SAR (8g) = 0.099 W/kg; SAR (10g) = 0.089 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 91.3 %

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 0.053 W/kg; SAR (8g) = 0.031 W/kg; SAR (10g) = 0.028 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 91.3 %

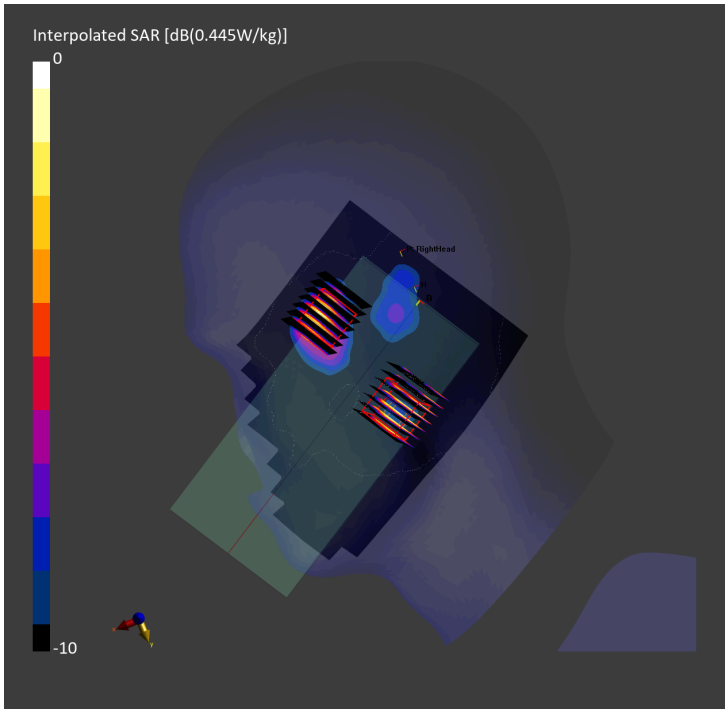

Date: 2025-02-26

#33_Thread_250K_Right Cheek_0mm_Ch26

Communication System: IEEE 802.15.1 Thread; Frequency: 2480.000 MHz
Medium: HSL_2450_250226 Medium parameters used: f= 2480.000 MHz; σ= 1.89 S/m; ε_r = 38.7
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.25, 6.58, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: CW, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.067 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB
SAR (1g) = 0.156 W/kg; SAR (8g) = 0.076 W/kg; SAR (10g) = 0.068 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 80.2 %

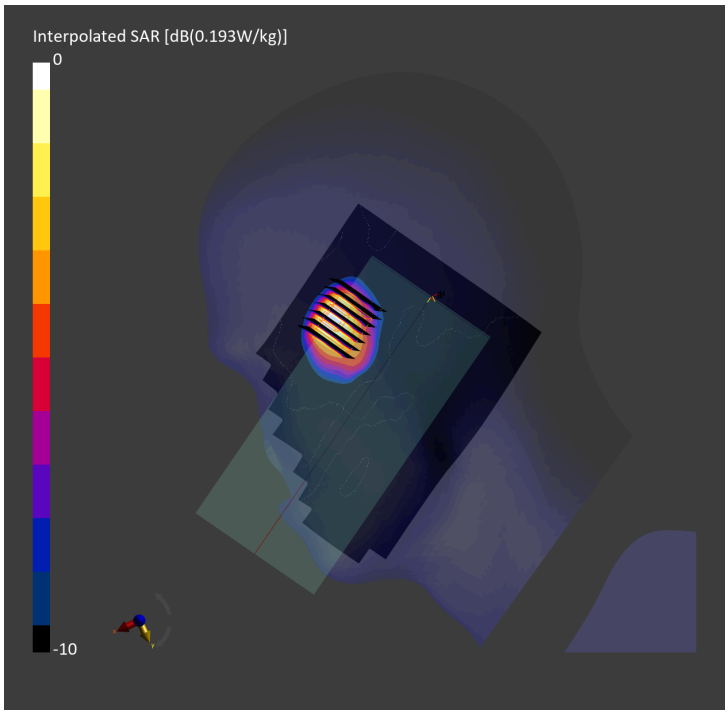

Date: 2025-02-04

#34_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz
Medium: HSL_850_250204 Medium parameters used: f= 836.400 MHz; σ= 0.928 S/m; ε_r = 41.8
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.415 W/kg; SAR (10g) = 0.282 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.09 dB
SAR (1g) = 0.447 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.280 W/kg
Smallest distance from peaks to all points 3 dB below = 24.8 mm
Ratio of SAR at M2 to SAR at M1 = 88.1 %

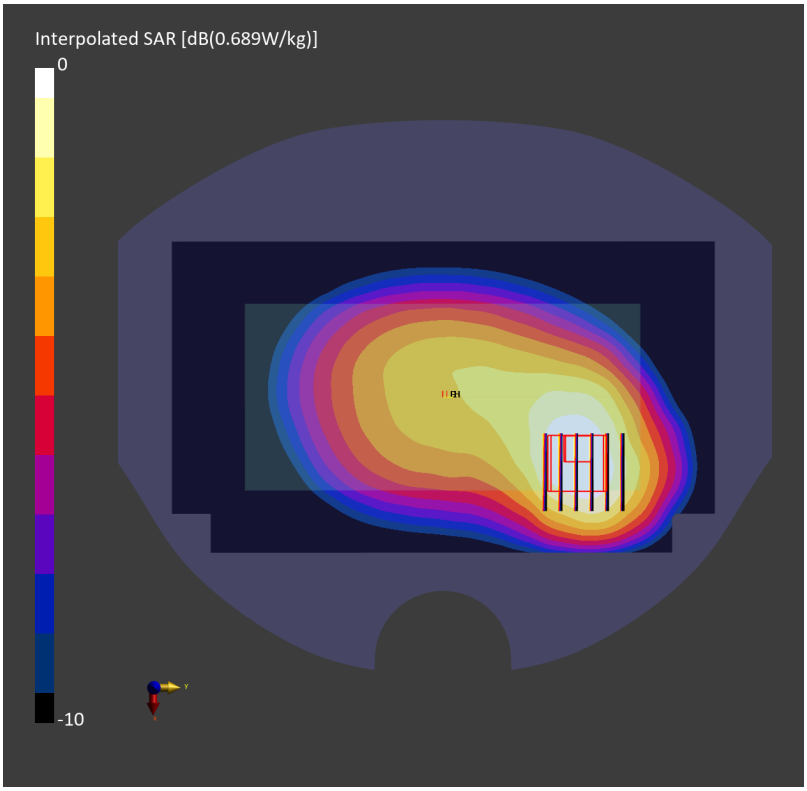

Date: 2025-02-03

#35_GSM1900_GPRS (4 Tx slots)_Bottom Edge_10mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250203 Medium parameters used: f= 1880.000 MHz; σ= 1.41 S/m; ε_r = 39.2
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.44, 8.32); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.590 W/kg; SAR (10g) = 0.299 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 0.610 W/kg; SAR (8g) = 0.341 W/kg; SAR (10g) = 0.312 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 84.2 %

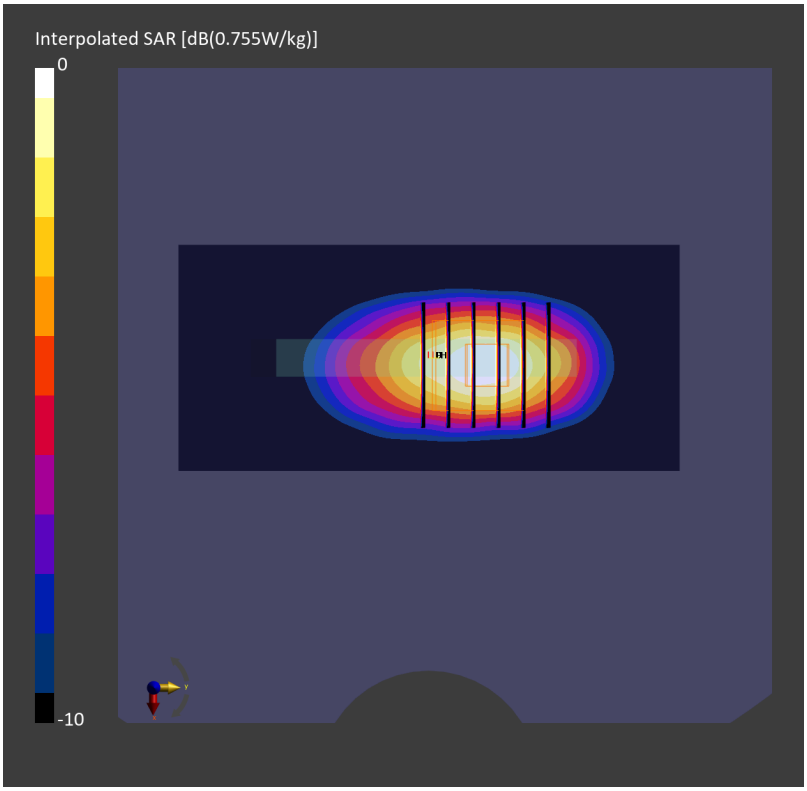

Date: 2025-02-08

#36_WCDMA II_RMC 12.2Kbps_Bottom Edge_10mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250208 Medium parameters used: f= 1880.000 MHz; σ= 1.41 S/m; ε_r = 39.1
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.44, 8.32); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.645 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.655 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.340 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 84.0 %

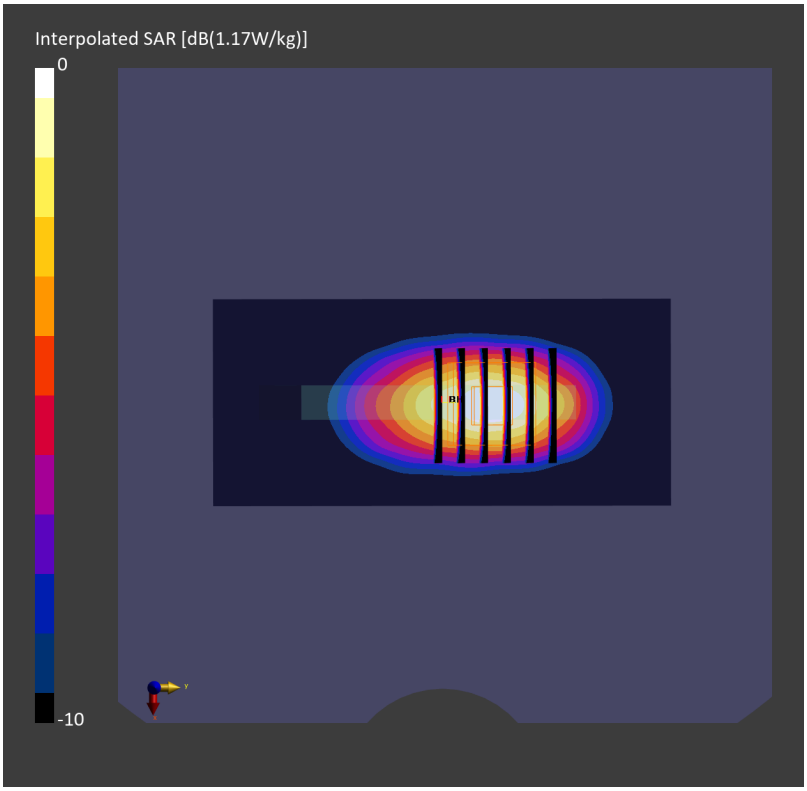

Date: 2025-02-08

#37_WCDMA IV_RMC 12.2Kbps_Bottom Edge_10mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz
Medium: HSL_1750_250208 Medium parameters used: f= 1732.600 MHz; σ= 1.34 S/m; ε_r = 40.6
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.86, 7.67, 8.57); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.690 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.710 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.370 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 84.8 %

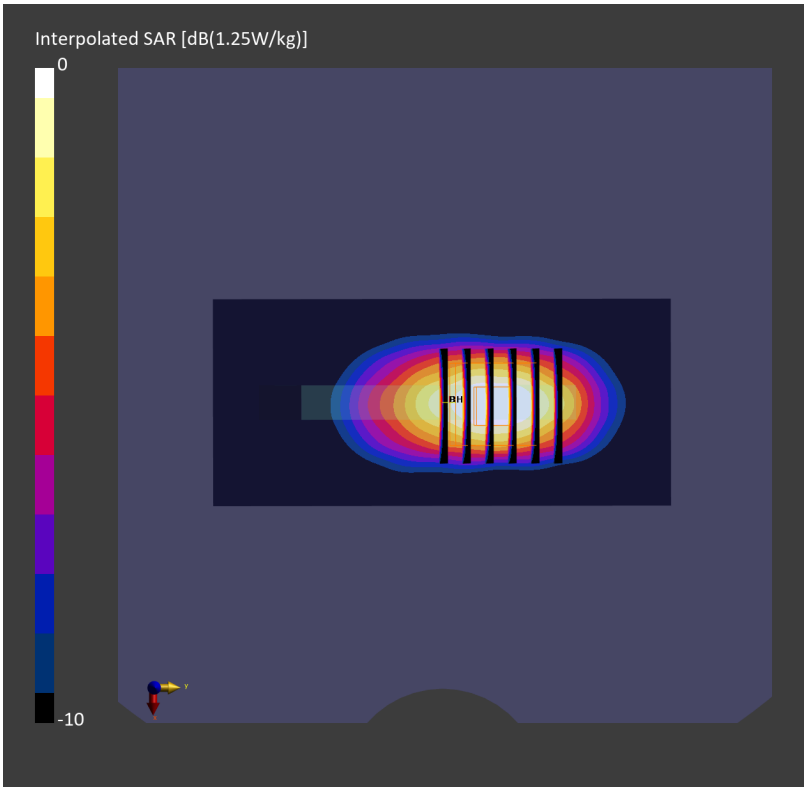

Date: 2025-01-30

#38_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD ; Frequency: 836.400 MHz
Medium: HSL_850_250130 Medium parameters used: f= 836.400 MHz; σ= 0.935 S/m; ε_r = 43.0
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(7.92, 8.34, 8.16); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.477 W/kg; SAR (10g) = 0.321 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.542 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.305 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

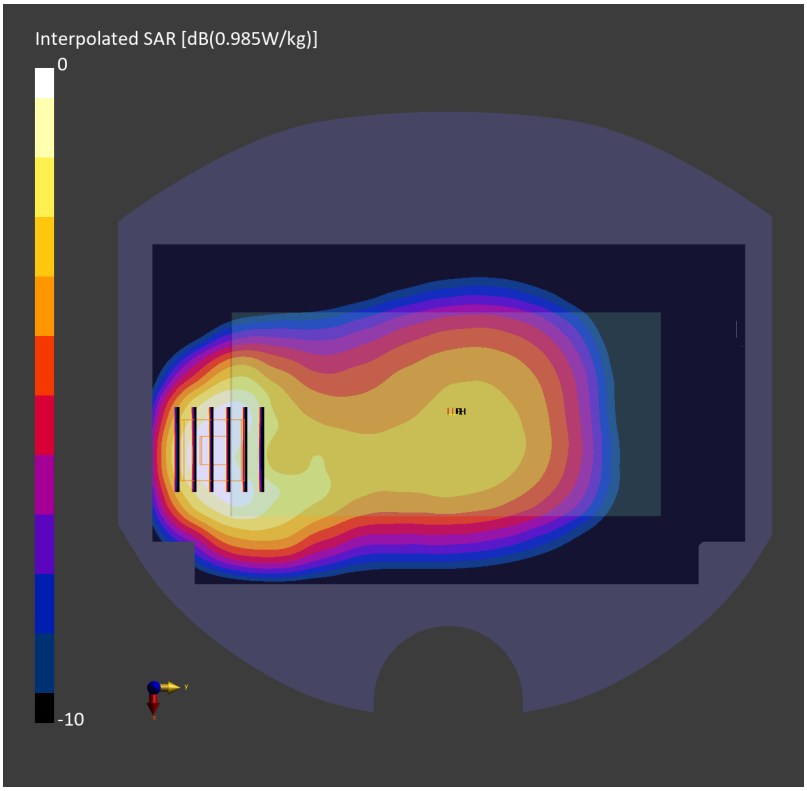

Date: 2025-02-11

#39_LTE Band 7_20M_QPSK_1_0_Bottom Edge_10mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz
Medium: HSL_2600_250211 Medium parameters used: f= 2535.000 MHz; σ= 1.91 S/m; ε_r = 38.6
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.24, 6.57, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.536 W/kg; SAR (10g) = 0.257 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.551 W/kg; SAR (8g) = 0.299 W/kg; SAR (10g) = 0.272 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 82.6 %

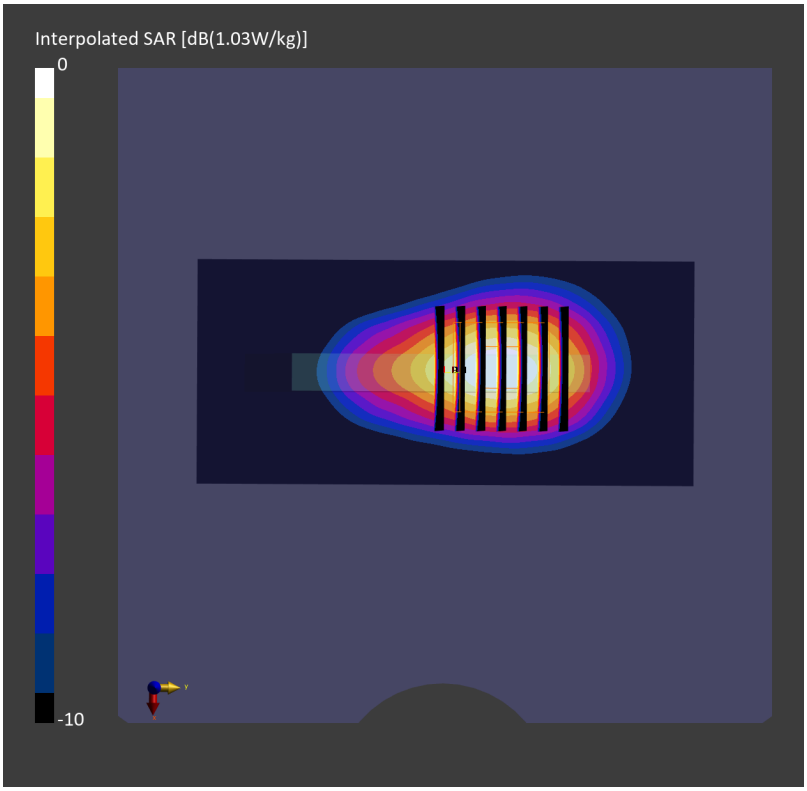

Date: 2025-02-05

#40_LTE Band 12_10M_QPSK_1_0_Left Edge_10mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz
Medium: HSL_750_250205 Medium parameters used: f= 707.500 MHz; σ= 0.883 S/m; ε_r = 43.4
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.482 W/kg; SAR (10g) = 0.330 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.06 dB
SAR (1g) = 0.485 W/kg; SAR (8g) = 0.357 W/kg; SAR (10g) = 0.341 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.8 %

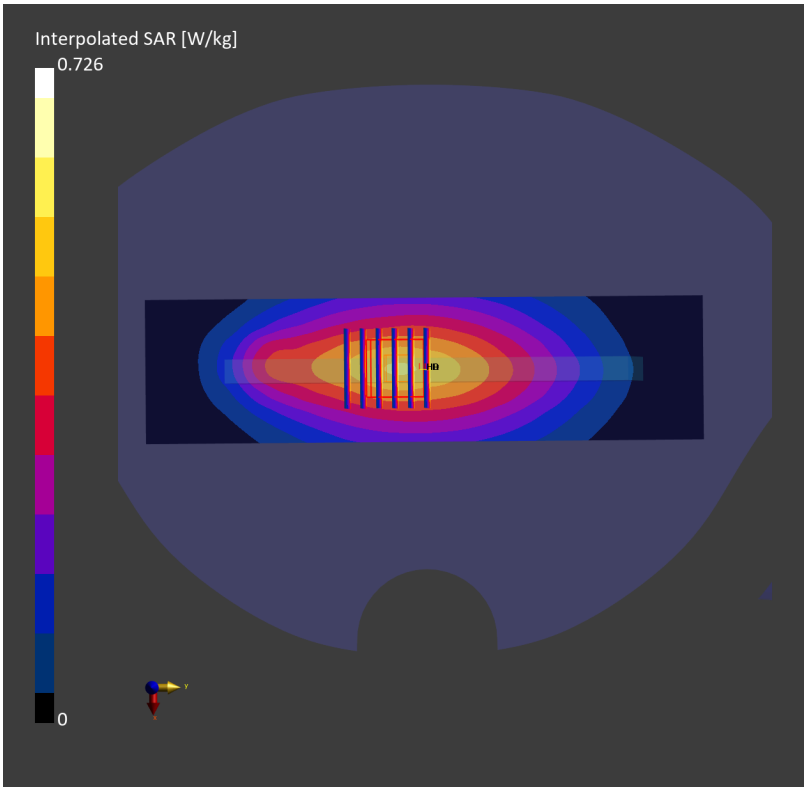

Date: 2025-02-05

#41_LTE Band 13_10M_QPSK_1_0_Left Edge_10mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz
Medium: HSL_750_250205 Medium parameters used: f= 782.000 MHz; σ= 0.911 S/m; ε_r = 42.1
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.396 W/kg; SAR (10g) = 0.270 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.408 W/kg; SAR (8g) = 0.298 W/kg; SAR (10g) = 0.284 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.4 %

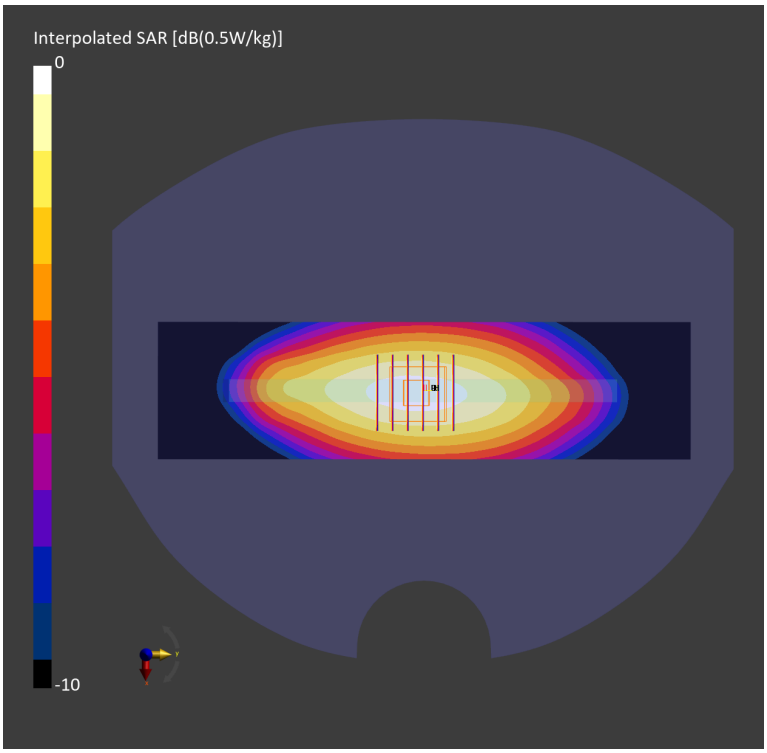

Date: 2025-02-05

#42_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz
Medium: HSL_750_250205 Medium parameters used: f= 793.000 MHz; σ= 0.913 S/m; ε_r = 42.9
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.457 W/kg; SAR (10g) = 0.303 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.487 W/kg; SAR (8g) = 0.301 W/kg; SAR (10g) = 0.281 W/kg
Smallest distance from peaks to all points 3 dB below = 12.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.0 %

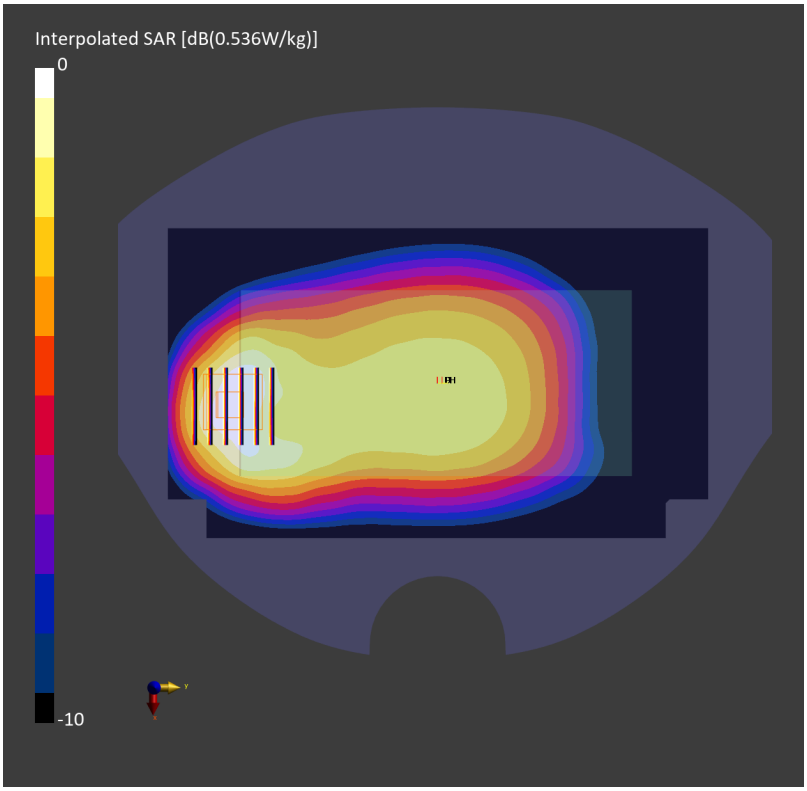

Date: 2025-02-15

#43_LTE Band 25_20M_QPSK_1_0_Right Edge_10mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250215 Medium parameters used: f= 1880.000 MHz; σ= 1.41 S/m; ε_r = 39.5
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.72, 7.08, 6.92); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.627 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.652 W/kg; SAR (8g) = 0.377 W/kg; SAR (10g) = 0.347 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.1 %

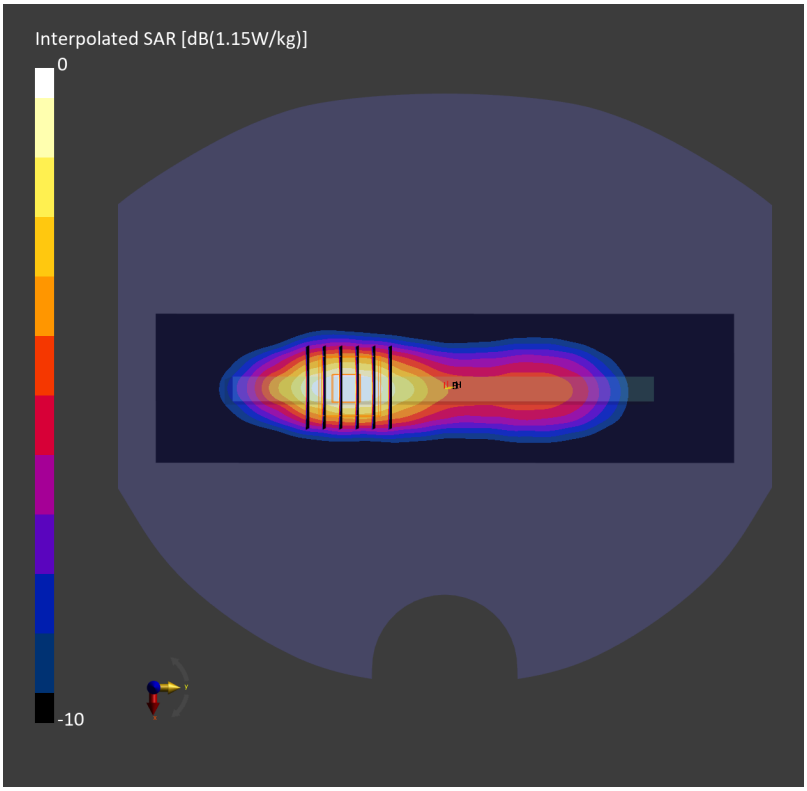

Date: 2025-02-03

#44_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz
Medium: HSL_850_250203 Medium parameters used: f= 831.500 MHz; σ= 0.927 S/m; ε_r = 42.9
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(7.92, 8.34, 8.16); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.325 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.18 dB
SAR (1g) = 0.531 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.302 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

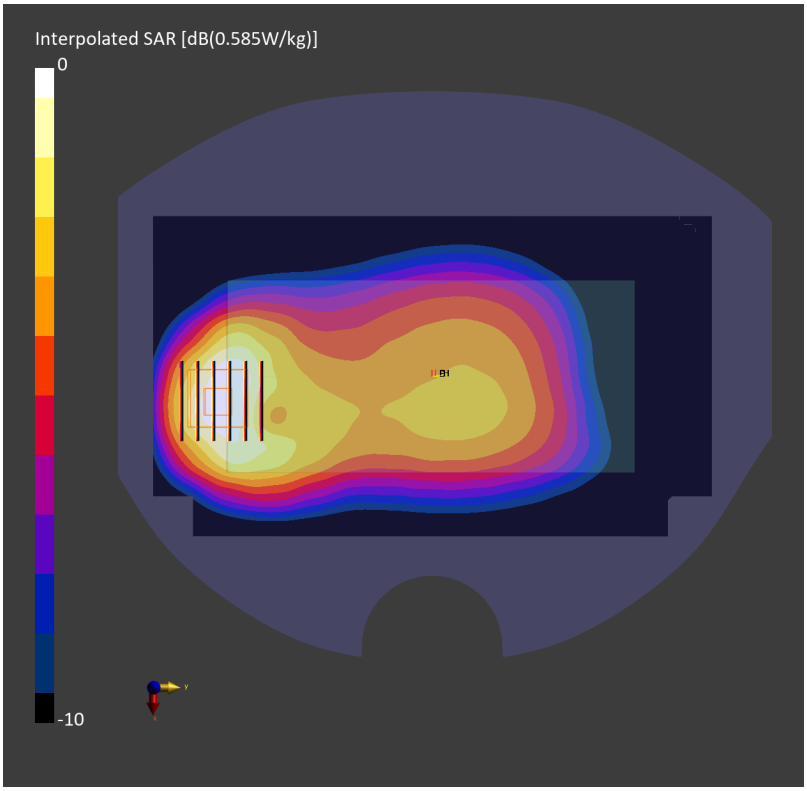

Date: 2025-02-11

#45_LTE Band 30_10M_QPSK_25_0_Bottom Edge_10mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz
Medium: HSL_2300_250211 Medium parameters used: f= 2310.000 MHz; σ= 1.65 S/m; ε_r = 39.5
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.55, 6.9, 6.76); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10154-CAH

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.515 W/kg; SAR (10g) = 0.254 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.527 W/kg; SAR (8g) = 0.293 W/kg; SAR (10g) = 0.268 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.3 %

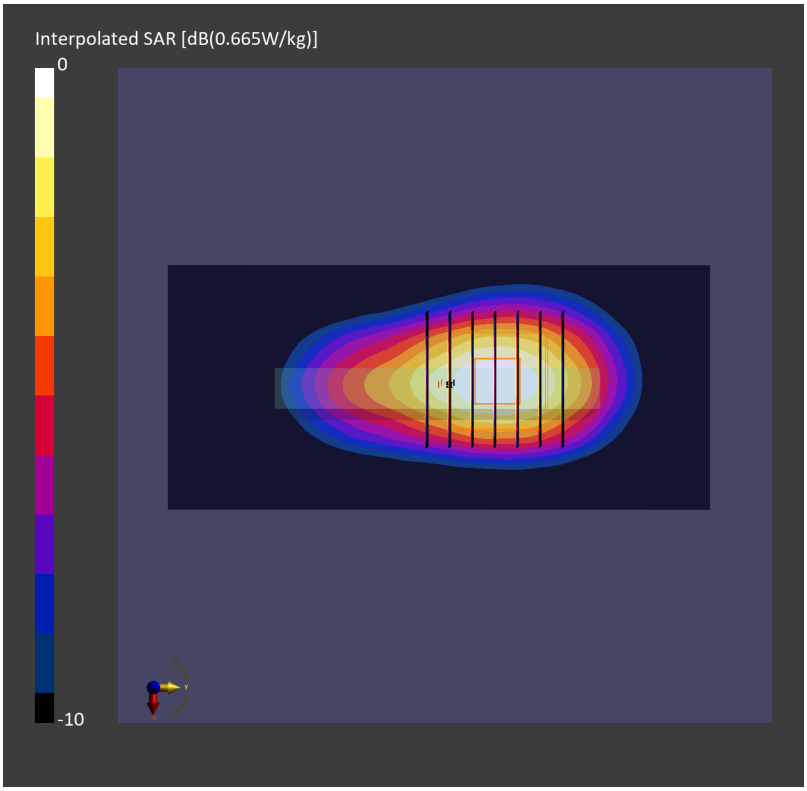

Date: 2025-02-12

#46_LTE Band 41_20M_QPSK_1_0_Bottom Edge_10mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz
Medium: HSL_2600_250212 Medium parameters used: f= 2593.000 MHz; σ= 1.95 S/m; ε_r = 38.0
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.12, 6.95, 7.76); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.460 W/kg; SAR (10g) = 0.219 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.472 W/kg; SAR (8g) = 0.250 W/kg; SAR (10g) = 0.227 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.6 %

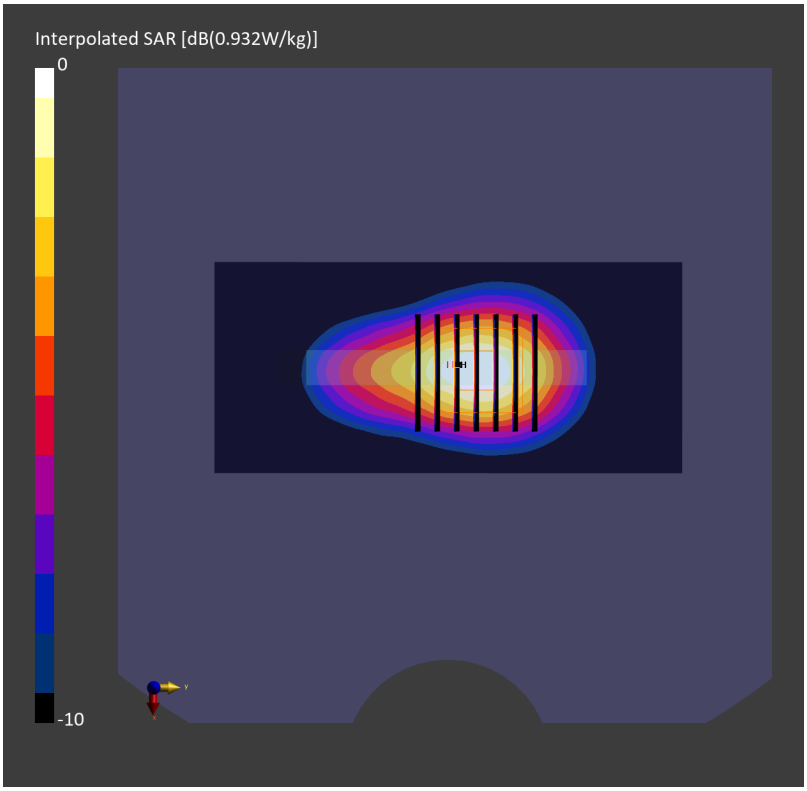

Date: 2025-03-01

#47_LTE Band 48_20M_QPSK_50_0_Right Edge_10mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz
Medium: HSL_3700_250301 Medium parameters used: f= 3641.000 MHz; σ= 3.07 S/m; ε_r = 38.0
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(6.24, 6.09, 6.81); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.291 W/kg; SAR (10g) = 0.128 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.10 dB
SAR (1g) = 0.298 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.128 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 75.6 %

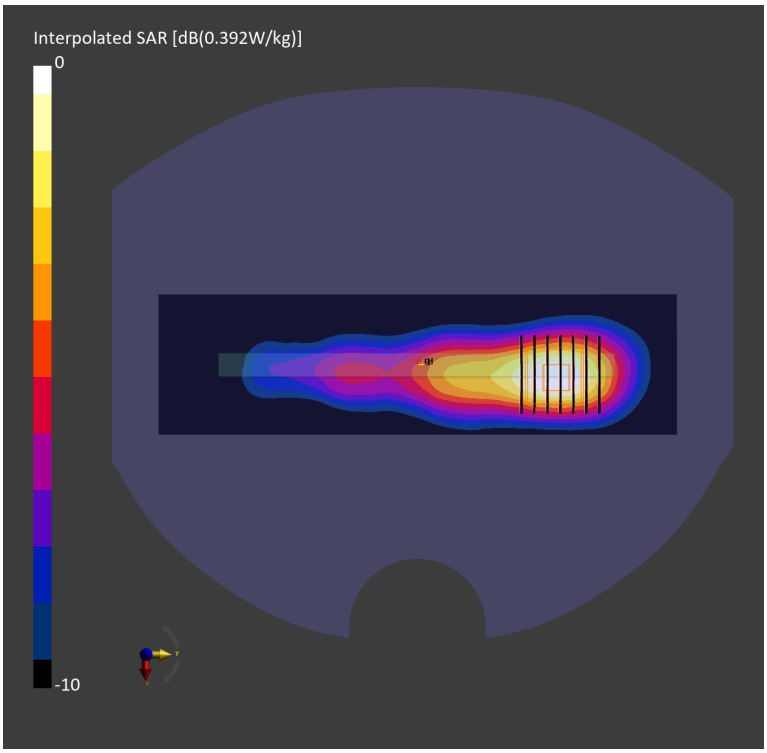

Date: 2025-02-11

#48_LTE Band 66_20M_QPSK_1_0_Bottom Edge_10mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz
Medium: HSL_1750_250211 Medium parameters used: f= 1745.000 MHz; σ= 1.35 S/m; ε_r = 40.7
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.82, 7.18, 7.03); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.516 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.273 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 85.9 %

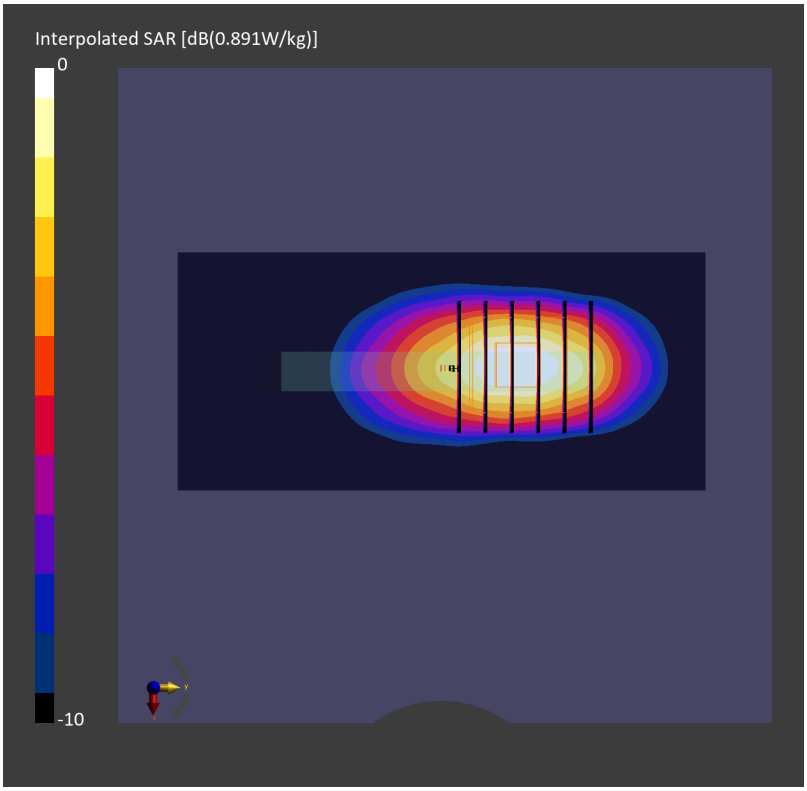

Date: 2025-02-03

#49_LTE Band 71_20M_QPSK_1_0_Left Edge_10mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz
Medium: HSL_750_250203 Medium parameters used: f= 680.500 MHz; σ= 0.871 S/m; ε_r = 43.6
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.344 W/kg; SAR (10g) = 0.238 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.14 dB
SAR (1g) = 0.384 W/kg; SAR (8g) = 0.278 W/kg; SAR (10g) = 0.266 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 87.8 %

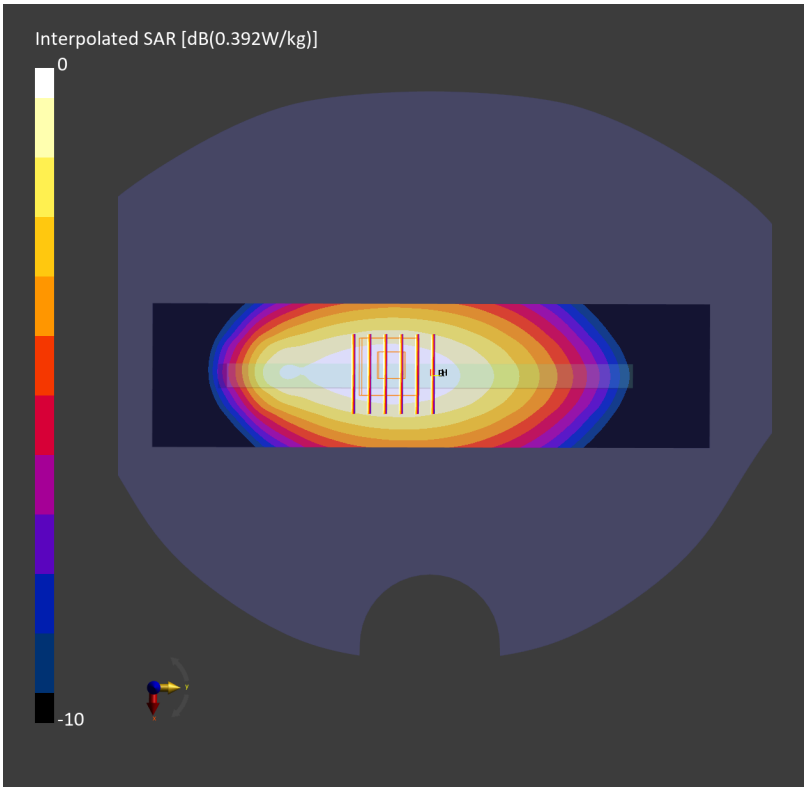

Date: 2025-02-14

#50_FR1 n7_50M_BPSK_1_1_Bottom Edge_10mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz
Medium: HSL_2600_250214 Medium parameters used: f= 2535.000 MHz; σ= 1.90 S/m; ε_r = 39.5
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.12, 6.95, 7.76); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.464 W/kg; SAR (10g) = 0.224 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.475 W/kg; SAR (8g) = 0.257 W/kg; SAR (10g) = 0.234 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 81.7 %

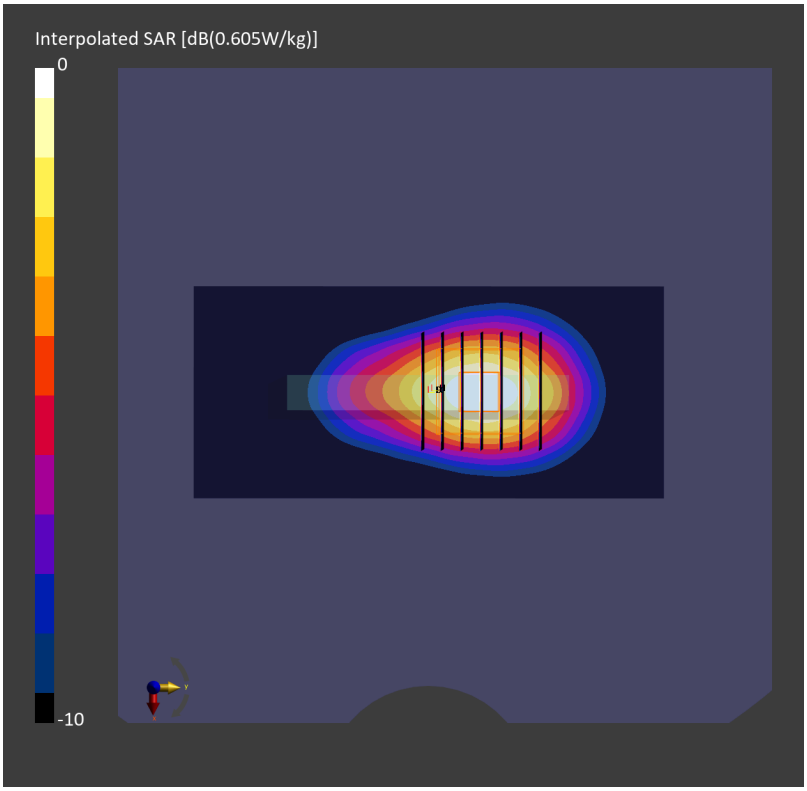

Date: 2025-02-07

#51_FR1 n12_15M_BPSK_36_22_Left Edge_10mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz
Medium: HSL_750_250207 Medium parameters used: f= 707.500 MHz; σ= 0.878 S/m; ε_r = 43.3
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.416 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.429 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.303 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 87.5 %

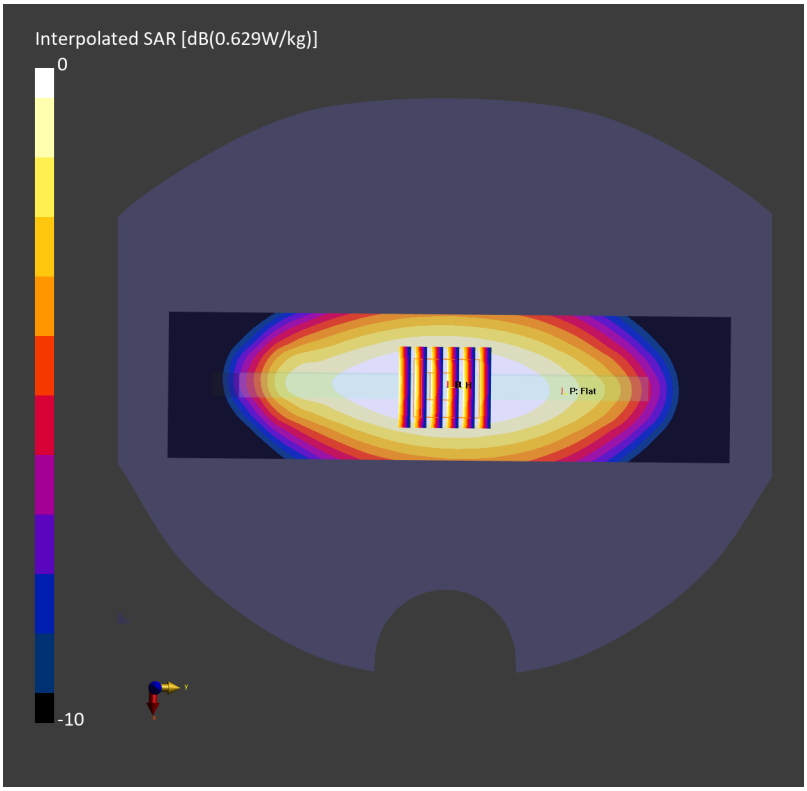

Date: 2025-02-07

#52_FR1 n14_10M_BPSK_1_1_Back_10mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz
Medium: HSL_750_250207 Medium parameters used: f= 793.000 MHz; σ= 0.906 S/m; ε_r = 42.8
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.476 W/kg; SAR (10g) = 0.313 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.498 W/kg; SAR (8g) = 0.308 W/kg; SAR (10g) = 0.288 W/kg
Smallest distance from peaks to all points 3 dB below = 12.3 mm
Ratio of SAR at M2 to SAR at M1 = 80.3 %

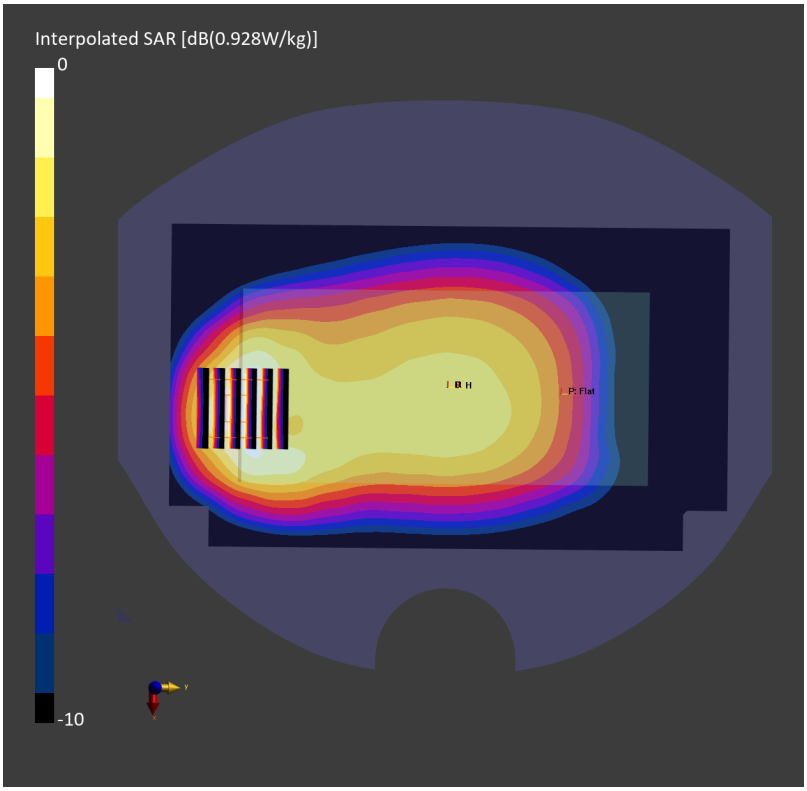

Date: 2025-02-17

#53_FR1 n25_40M_BPSK_1_1_Bottom Edge_10mm_Ch376500

Communication System: 5G NR ; Frequency: 1882.500 MHz
Medium: HSL_1900_250217 Medium parameters used: f= 1882.500 MHz; σ= 1.43 S/m; ε_r = 39.0
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.72, 7.08, 6.92); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.545 W/kg; SAR (10g) = 0.275 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.562 W/kg; SAR (8g) = 0.320 W/kg; SAR (10g) = 0.293 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 84.9 %

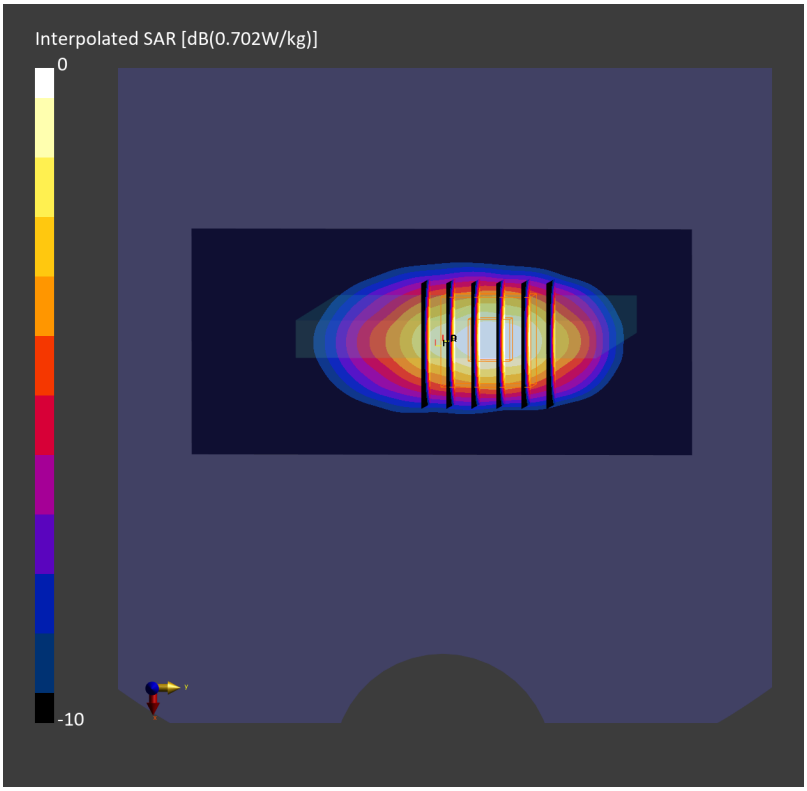

Date: 2025-02-08

#54_FR1 n26_20M_QPSK_1_53_Back_10mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz
Medium: HSL_850_250208 Medium parameters used: f= 831.500 MHz; σ= 0.928 S/m; ε_r = 42.9
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(7.92, 8.34, 8.16); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.503 W/kg; SAR (10g) = 0.330 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.543 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.309 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %

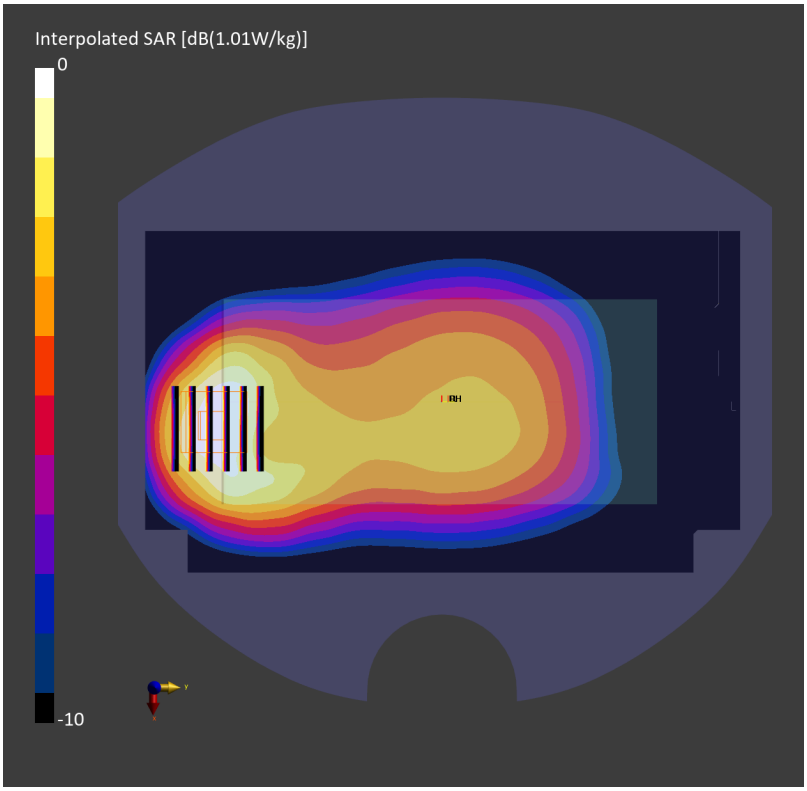

Date: 2025-02-28

#55_FR1 n30_10M_BPSK_1_1_Bottom Edge_10mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz
Medium: HSL_2300_250228 Medium parameters used: f= 2310.000 MHz; σ= 1.60 S/m; ε_r = 40.2
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.4, 7.22, 8.07); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.549 W/kg; SAR (10g) = 0.267 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.563 W/kg; SAR (8g) = 0.308 W/kg; SAR (10g) = 0.281 W/kg
Smallest distance from peaks to all points 3 dB below = 10.1 mm
Ratio of SAR at M2 to SAR at M1 = 82.5 %

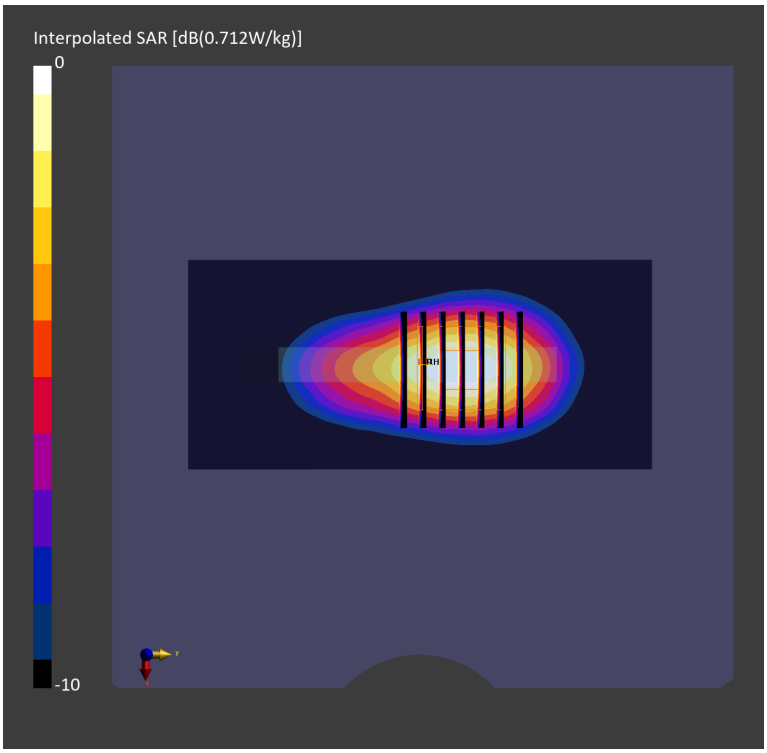

Date: 2025-02-06

#56_FR1 n41_100M_BPSK_1_1_Top Edge_10mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz
Medium: HSL_2600_250206 Medium parameters used: f= 2592.990 MHz; σ= 1.98 S/m; ε_r = 38.9
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.12, 6.95, 7.76); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.685 W/kg; SAR (10g) = 0.297 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.705 W/kg; SAR (8g) = 0.346 W/kg; SAR (10g) = 0.310 W/kg
Smallest distance from peaks to all points 3 dB below = 8.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.7 %

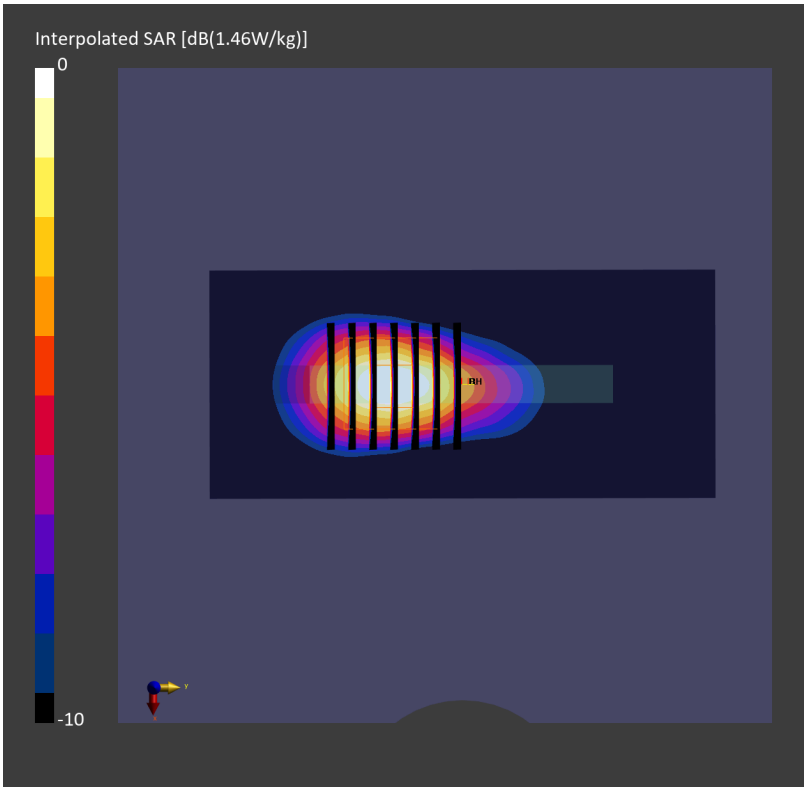

Date: 2025-02-15

#57_FR1 n66_40M_BPSK_108_54_Right Edge_10mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz
Medium: HSL_1750_250215 Medium parameters used: f= 1745.000 MHz; σ= 1.36 S/m; ε_r = 41.0
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.82, 7.18, 7.03); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.520 W/kg; SAR (10g) = 0.271 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.547 W/kg; SAR (8g) = 0.313 W/kg; SAR (10g) = 0.288 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 85.3 %

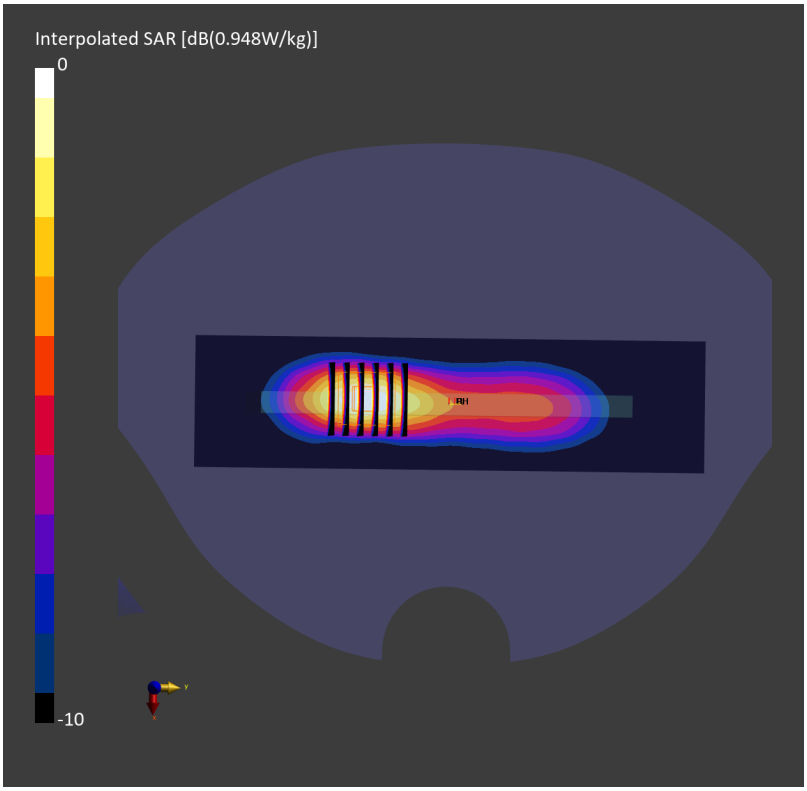

Date: 2025-02-07

#58_FR1 n71_20M_BPSK_50_28_Left Edge_10mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz
Medium: HSL_750_250207 Medium parameters used: f= 680.500 MHz; σ= 0.867 S/m; ε_r = 43.5
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm
SAR (1g) = 0.370 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.373 W/kg; SAR (8g) = 0.276 W/kg; SAR (10g) = 0.265 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 88.4 %

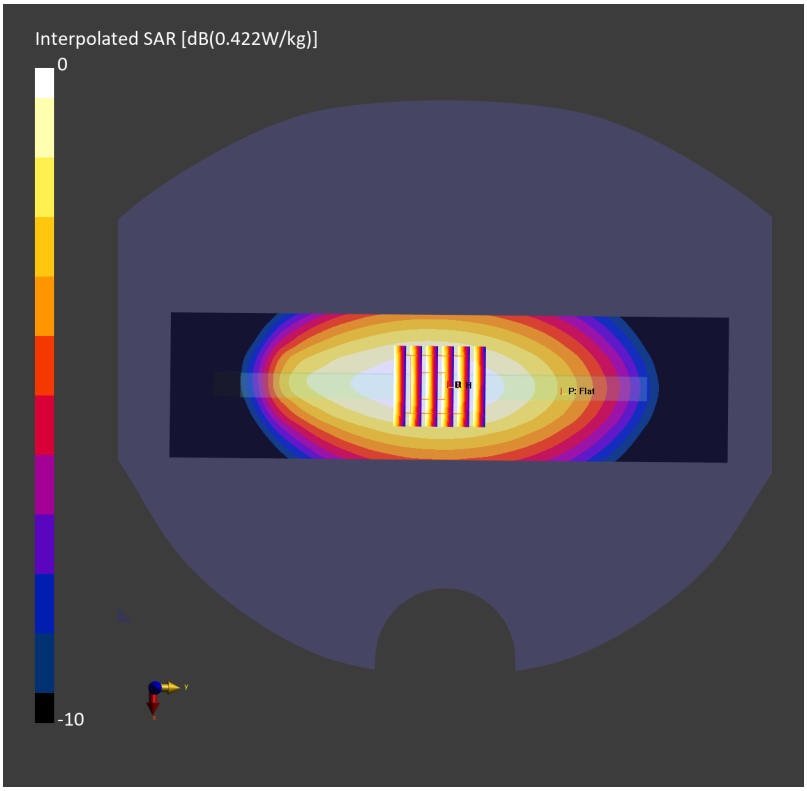

Date: 2025-02-09

#59_FR1 n77_100M_BPSK_1_137_Left Edge_10mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz
Medium: HSL_3500_250209 Medium parameters used: f= 3499.980 MHz; σ= 2.99 S/m; ε_r = 38.8
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(6.36, 6.21, 6.93); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.571 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.576 W/kg; SAR (8g) = 0.278 W/kg; SAR (10g) = 0.251 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 76.2 %

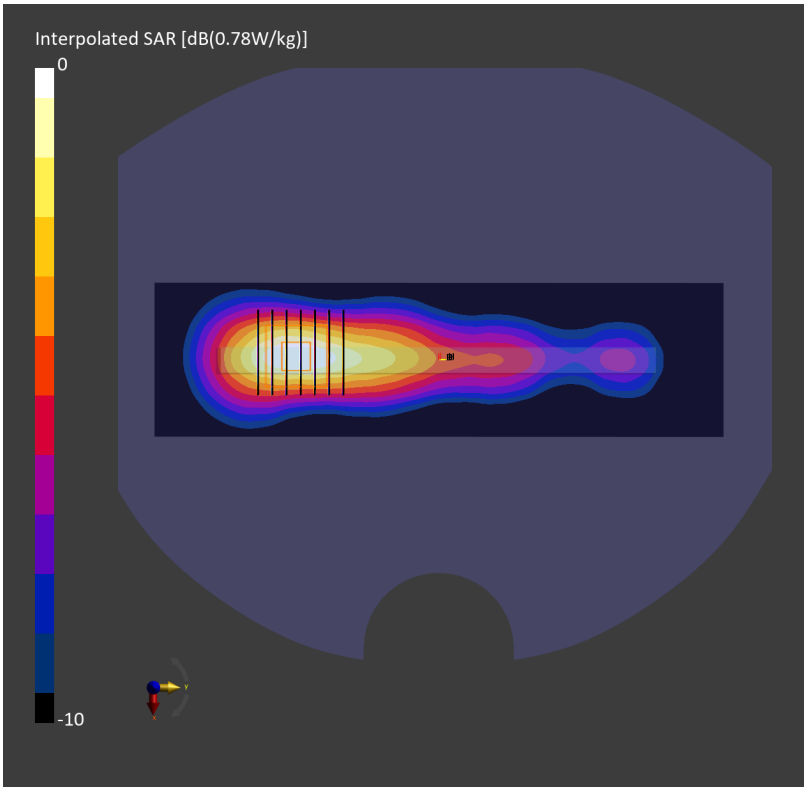

Date: 2025-01-24

#60_WLAN2.4GHz_802.11b 1Mbps_Left Edge_10mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2462.000 MHz
Medium: HSL_2450_250124 Medium parameters used: f= 2462.000 MHz; σ= 1.82 S/m; ε_r = 38.9
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7625; ConvF(7.0, 6.83, 7.4); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2024-06-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.182 W/kg; SAR (10g) = 0.090 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.188 W/kg; SAR (8g) = 0.102 W/kg; SAR (10g) = 0.093 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.4 %

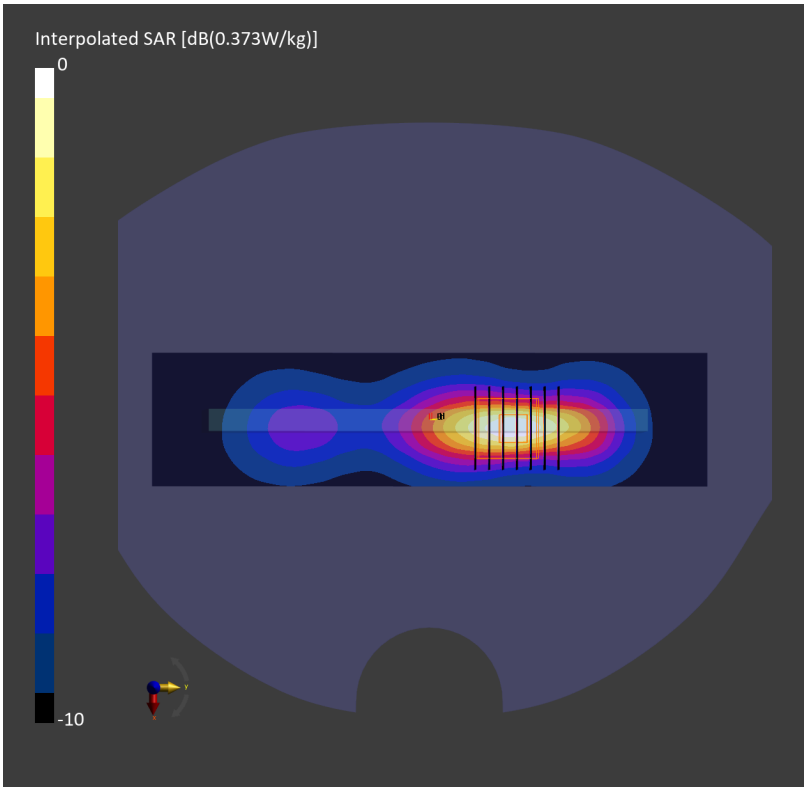

Date: 2025-02-11

#61_WLAN5GHz_802.11n-HT40 MCS0_Left Edge_10mm_Ch46

Communication System: IEEE 802.11n; Frequency: 5230.000 MHz
Medium: HSL_5G_250211 Medium parameters used: f= 5230.000 MHz; σ= 4.53 S/m; ε_r = 35.3
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7814; ConvF(5.59, 5.35, 5.48); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2024-10-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10599-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.239 W/kg; SAR (10g) = 0.088 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.04 dB
SAR (1g) = 0.238 W/kg; SAR (8g) = 0.103 W/kg; SAR (10g) = 0.091 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 61.4 %

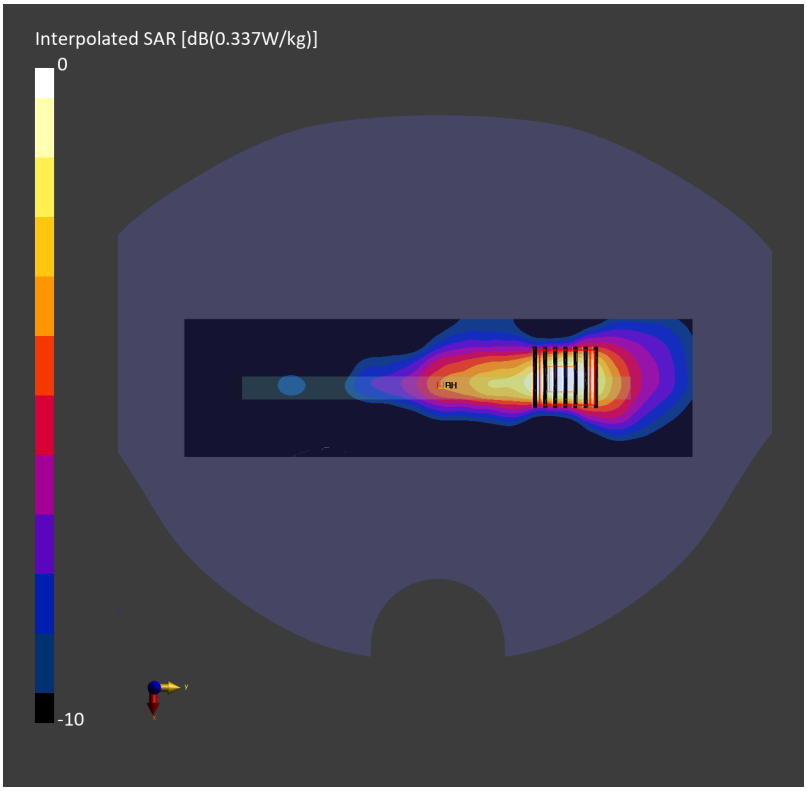

Date: 2025-02-25

#62_WLAN5GHz_802.11ac-VHT80 MCS0_Left Edge_10mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz
Medium: HSL_5G_250225 Medium parameters used: f= 5775.000 MHz; σ= 5.25 S/m; ε_r = 35.9
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(4.37, 4.6, 4.5); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.167 W/kg; SAR (10g) = 0.060 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.07 dB
SAR (1g) = 0.181 W/kg; SAR (8g) = 0.072 W/kg; SAR (10g) = 0.063 W/kg
Smallest distance from peaks to all points 3 dB below = 8.7 mm
Ratio of SAR at M2 to SAR at M1 = 58.9 %

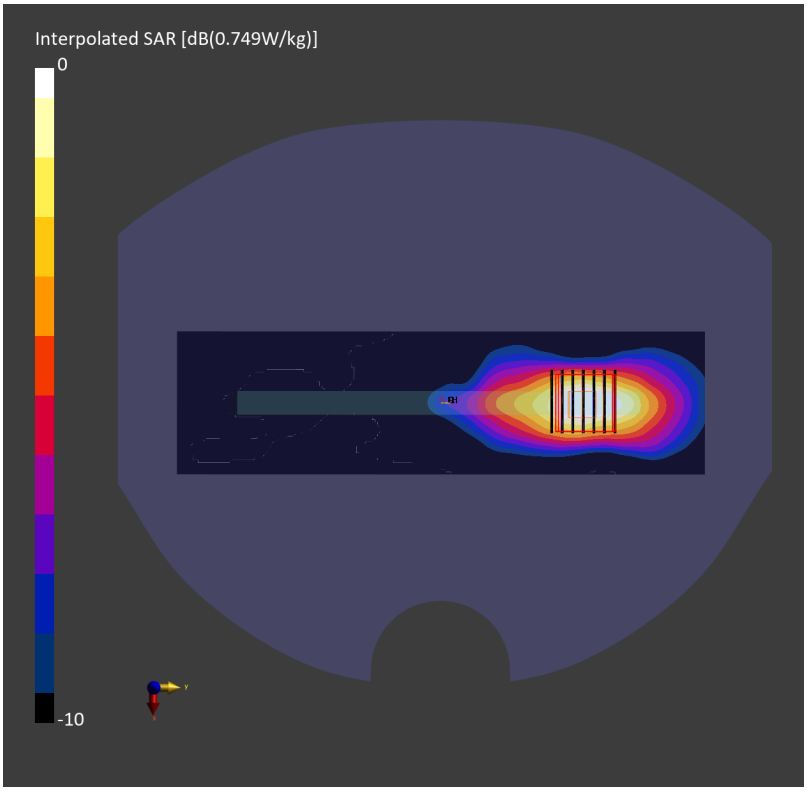

Date: 2025-02-04

#63_Bluetooth_1Mbps_Right Edge_10mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth ; Frequency: 2480.000 MHz
Medium: HSL_2450_250204 Medium parameters used: f= 2480.000 MHz; σ= 1.90 S/m; ε_r = 38.5
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7814; ConvF(7.01, 6.71, 6.88); Calibrated: 2024-06-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2024-05-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm
SAR (1g) = 0.252 W/kg; SAR (10g) = 0.123 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.244 W/kg; SAR (8g) = 0.130 W/kg; SAR (10g) = 0.118 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 83.1 %

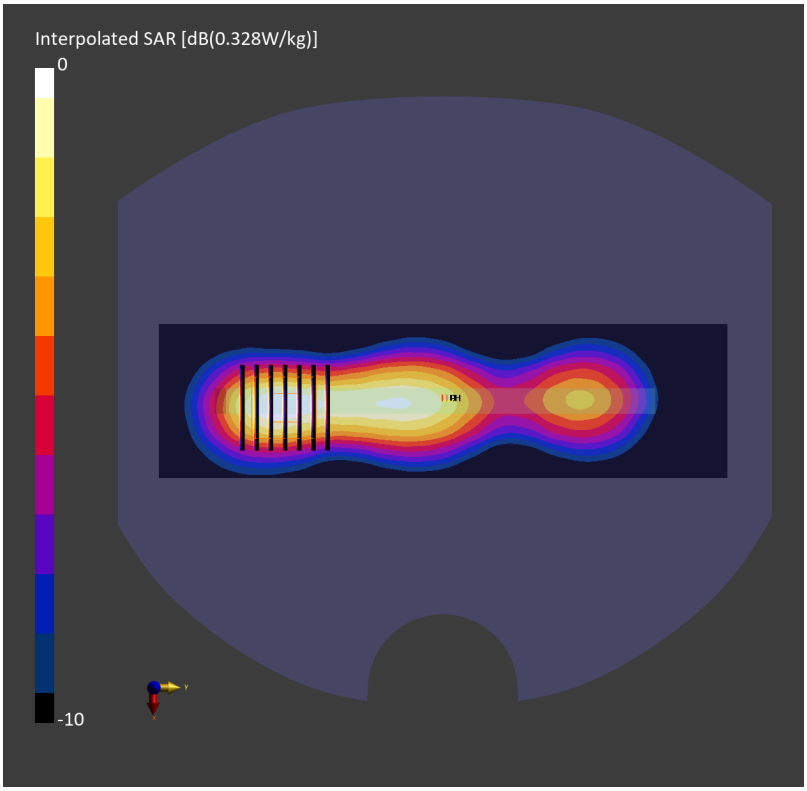

Date: 2025-02-15

#64_Thread_250K_Left Edge_10mm_Ch25

Communication System: IEEE 802.15.1 Thread; Frequency: 2475.000 MHz
Medium: HSL_2450_250215 Medium parameters used: f= 2475.000 MHz; σ= 1.89 S/m; ε_r = 39.1
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:
- Probe: EX3DV4 - SN3931; ConvF(7.2, 6.94, 6.84); Calibrated: 2024-11-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn703; Calibrated: 2024-04-22
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.159 W/kg; SAR (10g) = 0.080 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB
SAR (1g) = 0.166 W/kg; SAR (8g) = 0.091 W/kg; SAR (10g) = 0.084 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 83.1 %

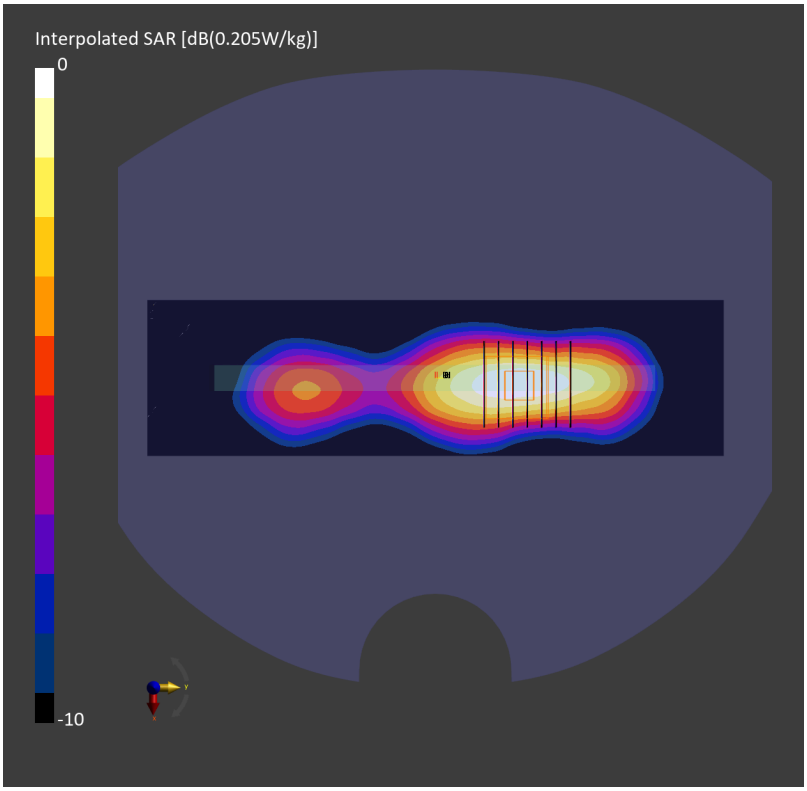

Date: 2025-02-04

#65_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch251

Communication System: GPRS-FDD; Frequency: 848.800 MHz
Medium: HSL_850_250204 Medium parameters used: f= 848.800 MHz; σ= 0.932 S/m; ε_r = 41.8
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.526 W/kg; SAR (10g) = 0.346 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.552 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.315 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 81.6 %

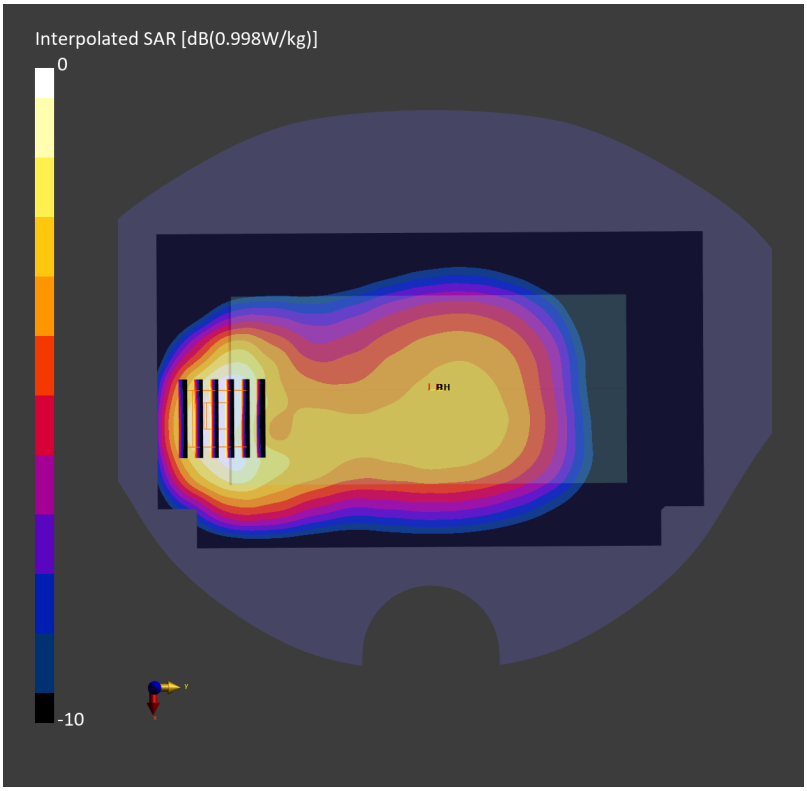

Date: 2025-02-03

#66_GSM1900_GPRS (4 Tx slots)_Back_10mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250203 Medium parameters used: f= 1880.000 MHz; σ= 1.41 S/m; ε_r = 39.2
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.44, 8.32); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.539 W/kg; SAR (10g) = 0.284 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.610 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.319 W/kg
Smallest distance from peaks to all points 3 dB below = 8.4 mm
Ratio of SAR at M2 to SAR at M1 = 85.2 %

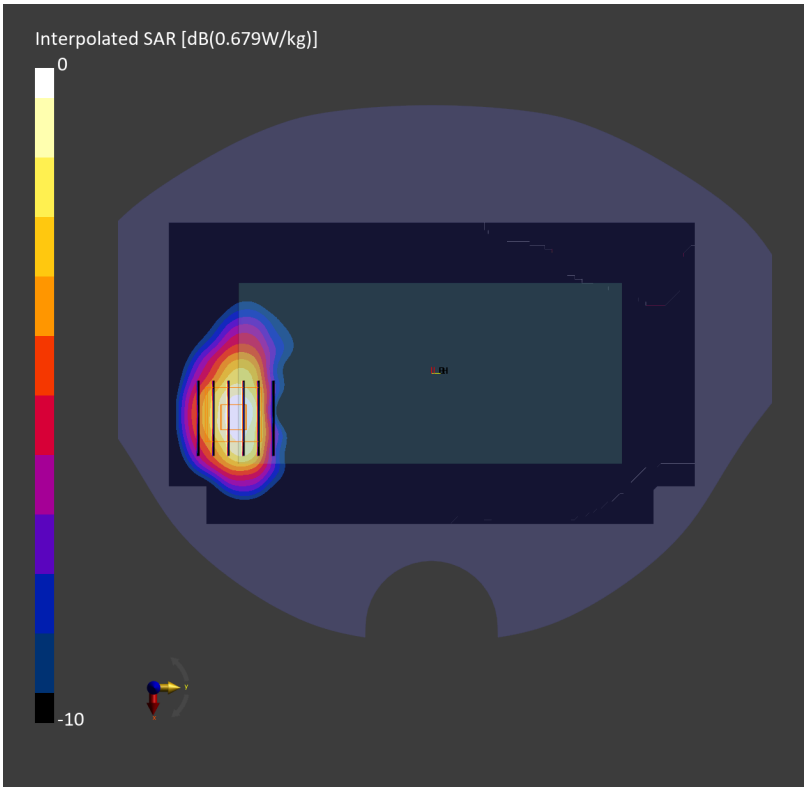

Date: 2025-02-08

#67_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250208 Medium parameters used: f= 1880.000 MHz; σ= 1.41 S/m; ε_r = 39.1
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.62, 7.44, 8.32); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.640 W/kg; SAR (10g) = 0.360 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.774 W/kg; SAR (8g) = 0.447 W/kg; SAR (10g) = 0.412 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 85.4 %

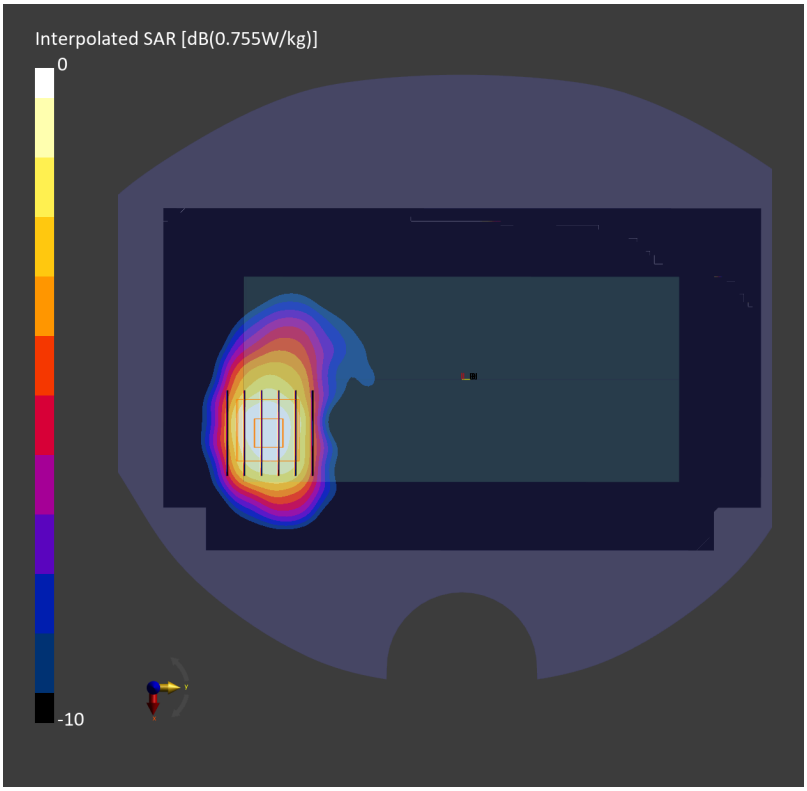

Date: 2025-02-08

#68_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz
Medium: HSL_1750_250208 Medium parameters used: f= 1732.600 MHz; σ= 1.34 S/m; ε_r = 40.6
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(7.86, 7.67, 8.57); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.583 W/kg; SAR (10g) = 0.330 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.04 dB
SAR (1g) = 0.677 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.366 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 87.5 %

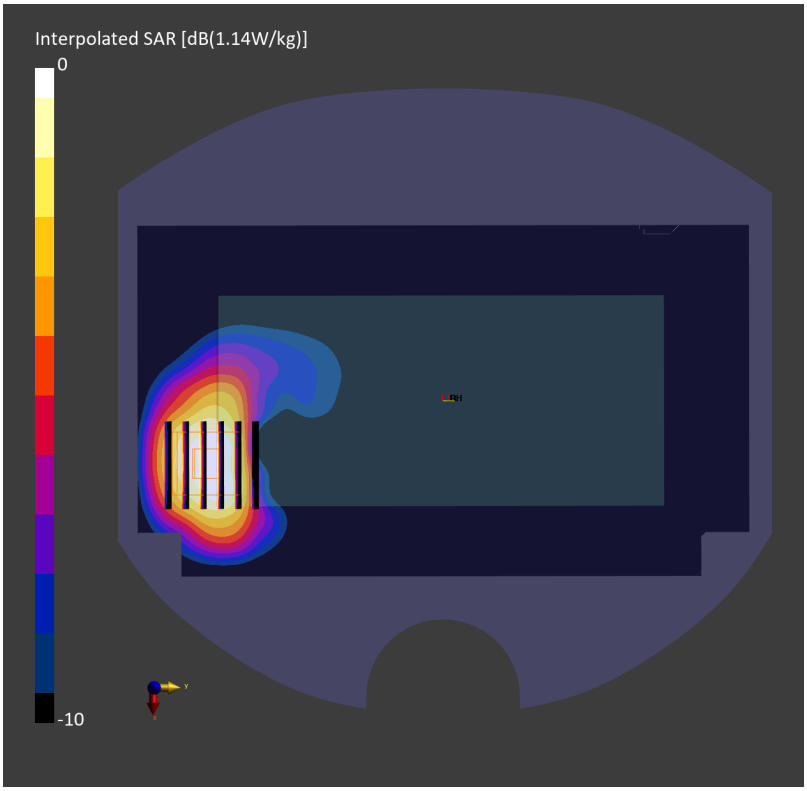

Date: 2025-01-30

#69_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD ; Frequency: 836.400 MHz
Medium: HSL_850_250130 Medium parameters used: f= 836.400 MHz; σ= 0.935 S/m; ε_r = 43.0
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(7.92, 8.34, 8.16); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.477 W/kg; SAR (10g) = 0.321 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.542 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.305 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

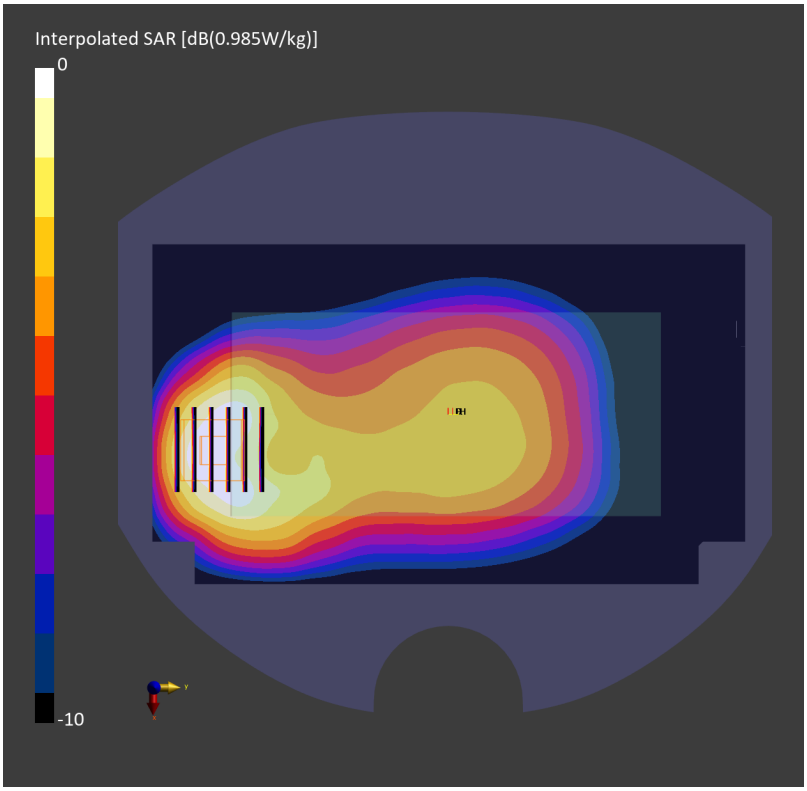

Date: 2025-02-11

#70_LTE Band 7_20M_QPSK_1_0_Back_10mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz
Medium: HSL_2600_250211 Medium parameters used: f= 2535.000 MHz; σ= 1.91 S/m; ε_r = 38.6
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.24, 6.57, 6.44); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.563 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.19 dB
SAR (1g) = 0.577 W/kg; SAR (8g) = 0.328 W/kg; SAR (10g) = 0.301 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 83.9 %

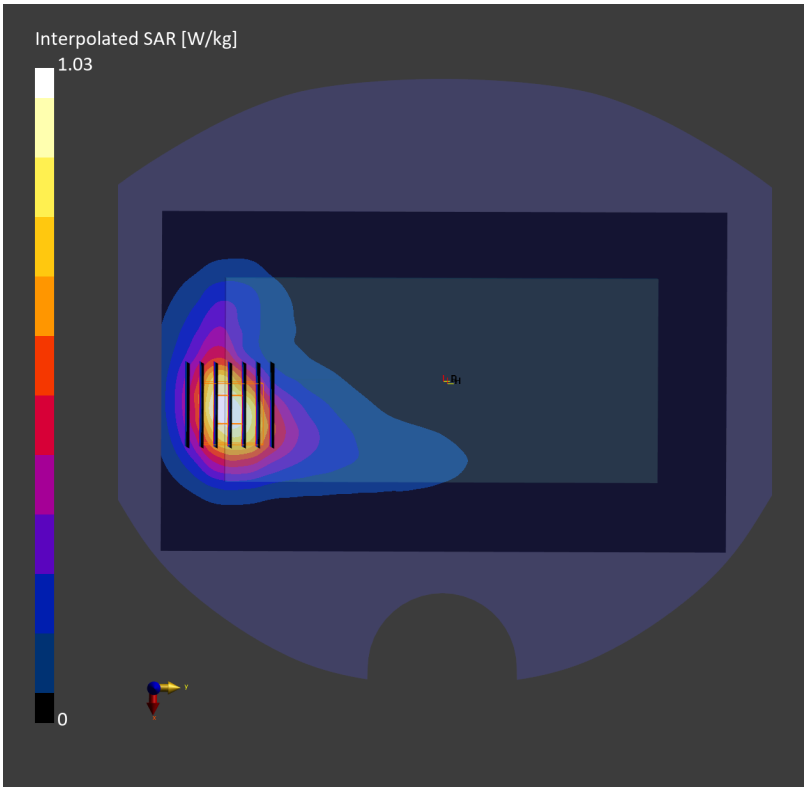

Date: 2025-02-12

#71_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz
Medium: HSL_750_250212 Medium parameters used: f= 707.500 MHz; σ= 0.879 S/m; ε_r = 41.7
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.328 W/kg; SAR (10g) = 0.236 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.00 dB
SAR (1g) = 0.353 W/kg; SAR (8g) = 0.291 W/kg; SAR (10g) = 0.283 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 89.9 %

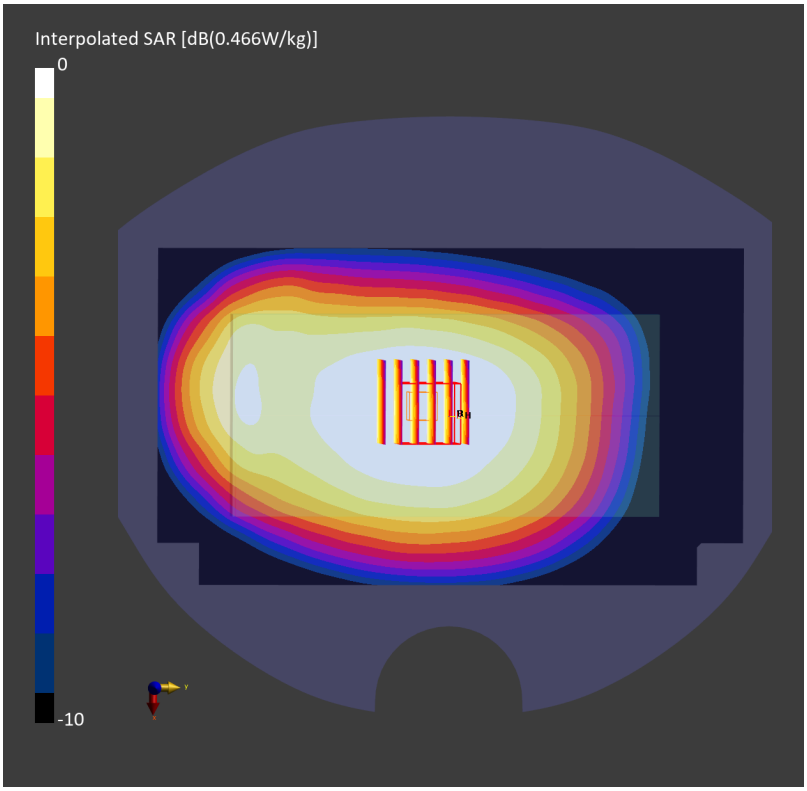

Date: 2025-02-05

#72_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz
Medium: HSL_750_250205 Medium parameters used: f= 782.000 MHz; σ= 0.909 S/m; ε_r = 43.0
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.431 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.460 W/kg; SAR (8g) = 0.285 W/kg; SAR (10g) = 0.267 W/kg
Smallest distance from peaks to all points 3 dB below = 13.5 mm
Ratio of SAR at M2 to SAR at M1 = 80.6 %

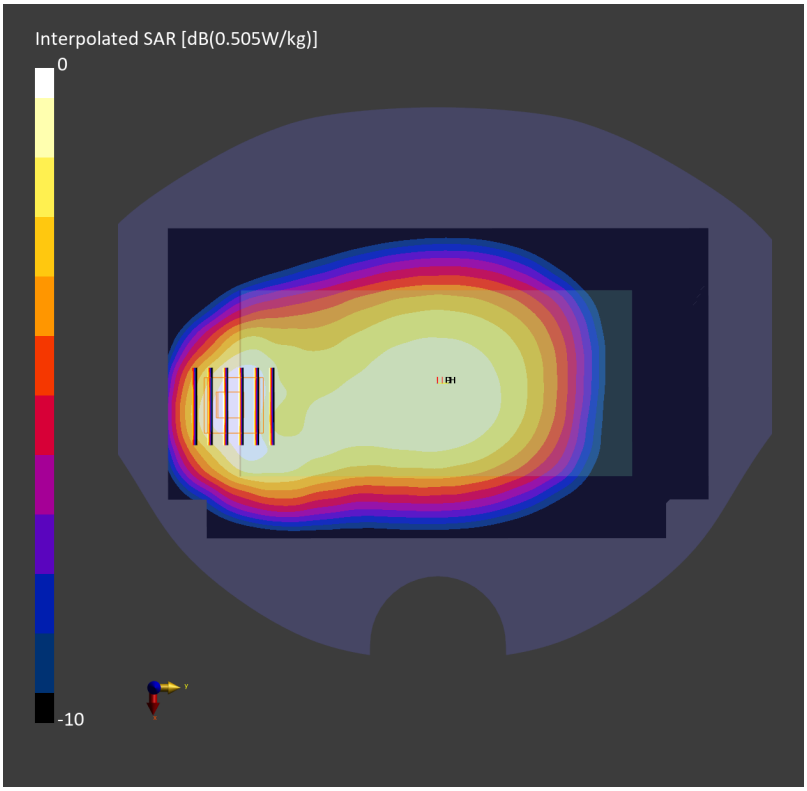

Date: 2025-02-05

#73_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz
Medium: HSL_750_250205 Medium parameters used: f= 793.000 MHz; σ= 0.913 S/m; ε_r = 42.9
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(8.06, 8.49, 8.31); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.457 W/kg; SAR (10g) = 0.303 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.487 W/kg; SAR (8g) = 0.301 W/kg; SAR (10g) = 0.281 W/kg
Smallest distance from peaks to all points 3 dB below = 12.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.0 %

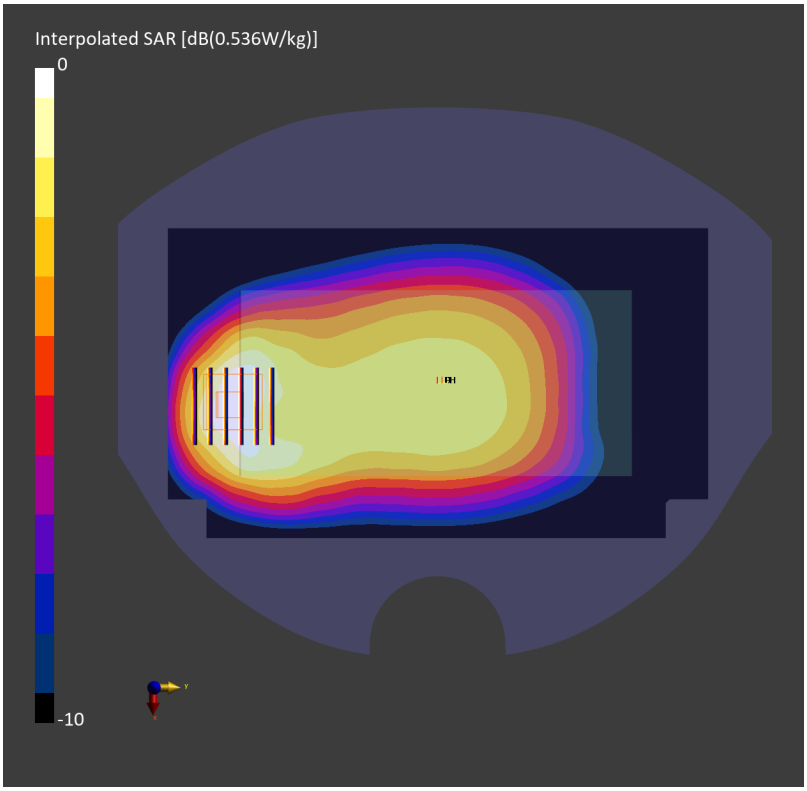

Date: 2025-02-12

#74_LTE Band 25_20M_QPSK_50_0_Back_10mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz
Medium: HSL_1900_250212 Medium parameters used: f= 1880.000 MHz; σ= 1.37 S/m; ε_r = 40.6
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(6.72, 7.08, 6.92); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.542 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.605 W/kg; SAR (8g) = 0.352 W/kg; SAR (10g) = 0.324 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 87.3 %

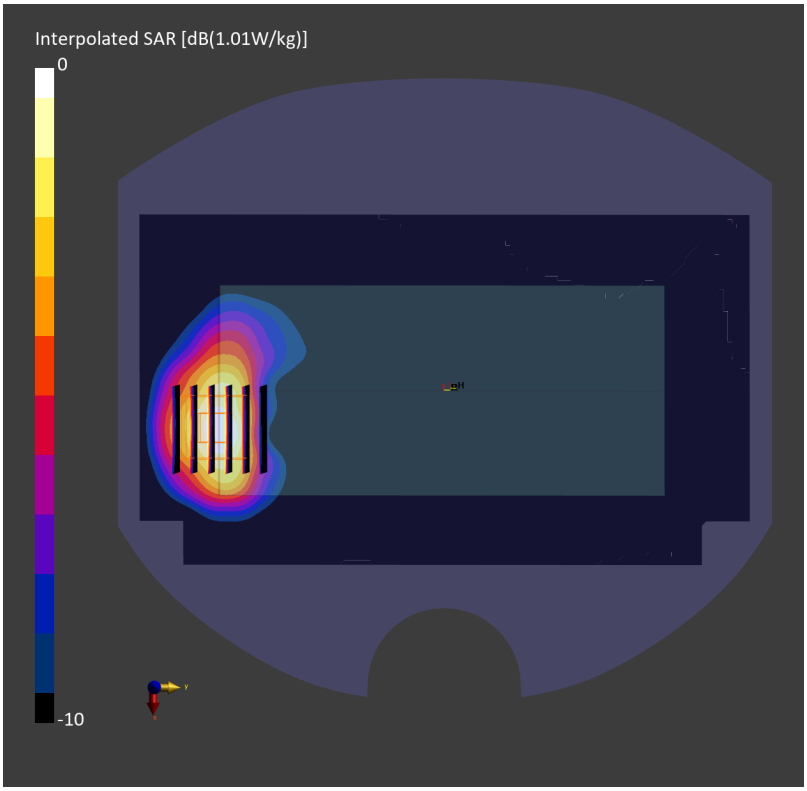

Date: 2025-02-03

#75_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz
Medium: HSL_850_250203 Medium parameters used: f= 831.500 MHz; σ= 0.927 S/m; ε_r = 42.9
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:
- Probe: EX3DV4 - SN7785; ConvF(7.92, 8.34, 8.16); Calibrated: 2024-11-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2024-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.498 W/kg; SAR (10g) = 0.325 W/kg;
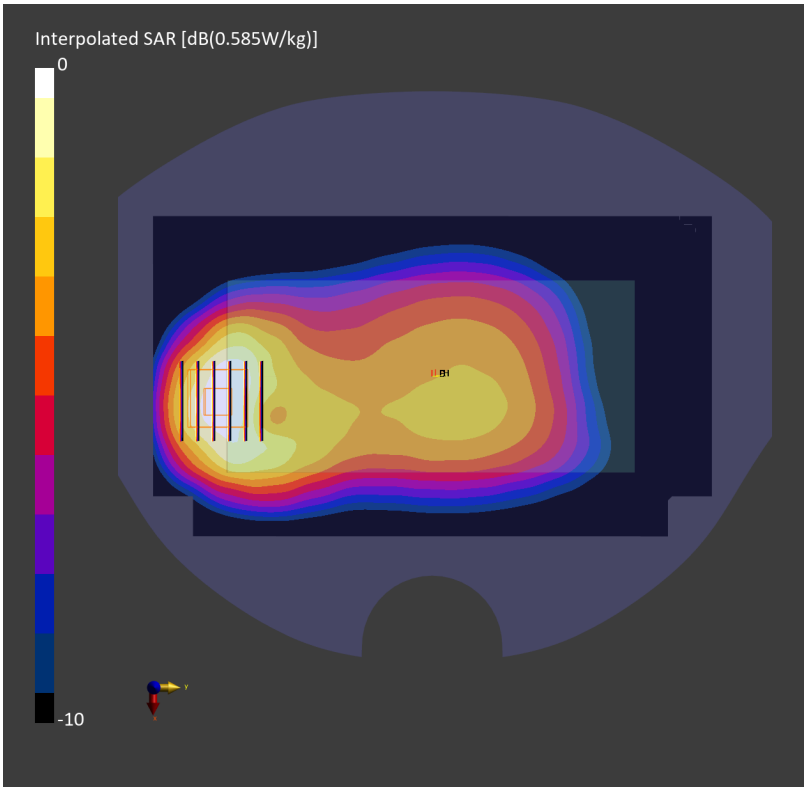
Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.18 dB
SAR (1g) = 0.531 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.302 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 80.9 %