

Date: 2025-02-06

#29_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz
Medium: HSL_2450_250206 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.74, 7.6, 7.6); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.730 W/kg; SAR (10g) = 0.336 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 0.749 W/kg; SAR (8g) = 0.388 W/kg; SAR (10g) = 0.351 W/kg
Smallest distance from peaks to all points 3 dB below = 9.8 mm
Ratio of SAR at M2 to SAR at M1 = 86.3 %

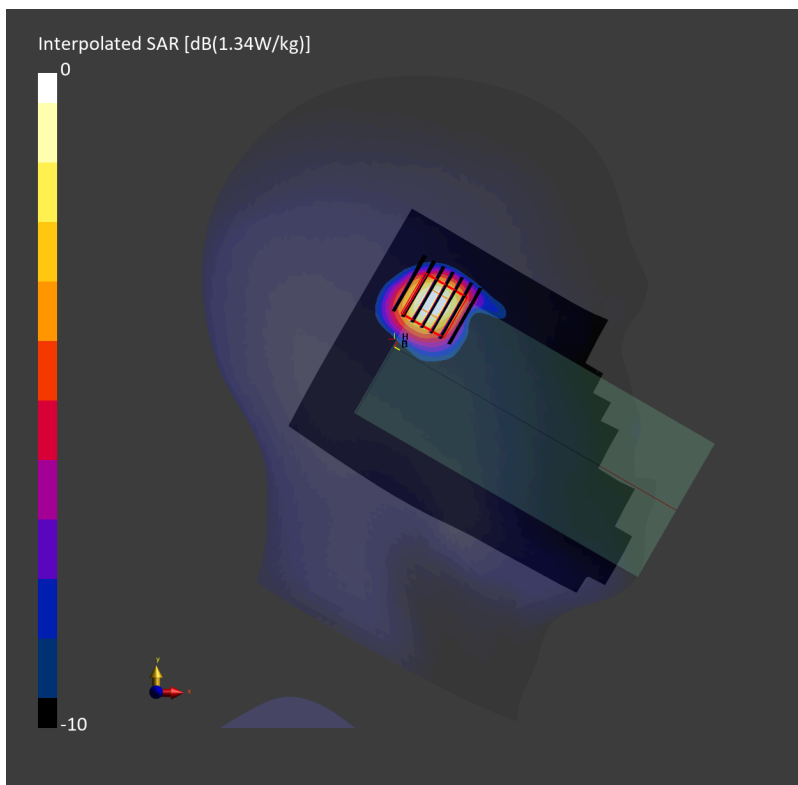

Date: 2025-02-26

#30_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch60

Communication System: IEEE 802.11a WiFi 5 GHz ; Frequency: 5300.000 MHz

Medium: HSL_5G_250226 Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.82, 5.53, 5.73); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10317-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.671 W/kg; SAR (10g) = 0.238 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.172 W/kg; SAR (8g) = 0.058 W/kg; SAR (10g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.5 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.836 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.259 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.5 %

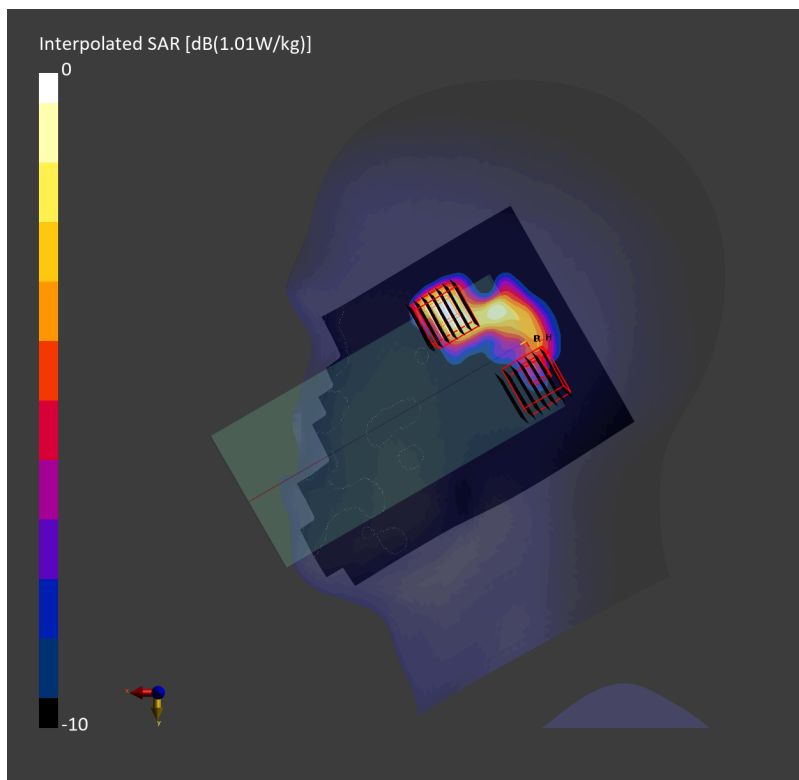

Date: 2025-02-26

#31_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_5G_250226 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.96$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(4.86, 4.69, 4.82); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.160 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.606 W/kg; SAR (8g) = 0.183 W/kg; SAR (10g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.3 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.128 W/kg; SAR (8g) = 0.056 W/kg; SAR (10g) = 0.051 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.3 %

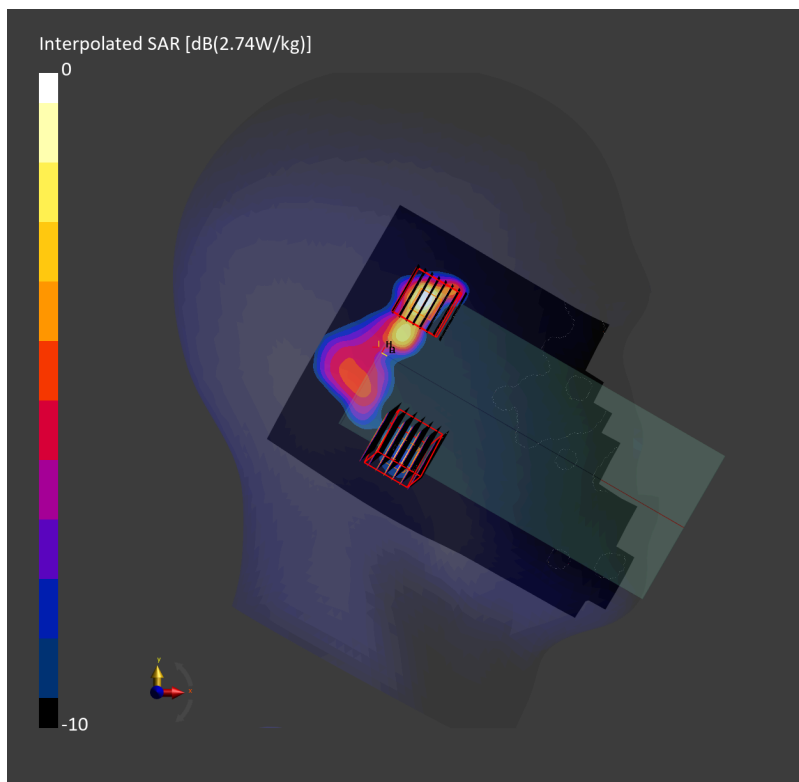

Date: 2025-02-26

#32_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi ; Frequency: 5775.000 MHz

Medium: HSL_5G_250226 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.05, 4.92, 5.06); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.721 W/kg; SAR (10g) = 0.238 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.249 W/kg; SAR (8g) = 0.103 W/kg; SAR (10g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.7 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.918 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.7 %

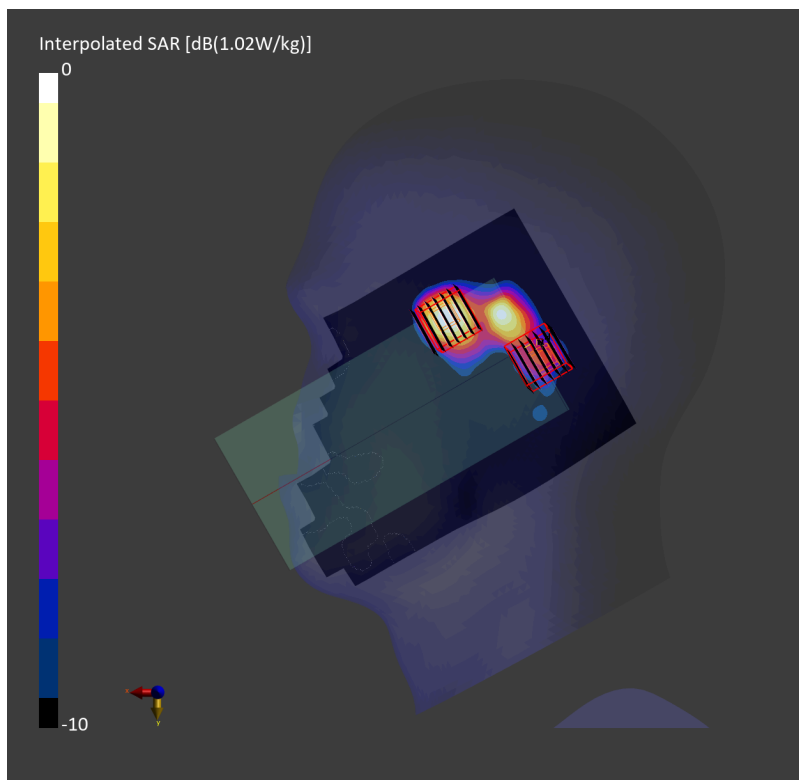

Date: 2025-02-26

#33_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch171

Communication System: IEEE 802.11ac WiFi ; Frequency: 5855.000 MHz

Medium: HSL_5G_250226 Medium parameters used: $f = 5855.000$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.05, 4.92, 5.06); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.658 W/kg; SAR (10g) = 0.219 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.249 W/kg; SAR (8g) = 0.093 W/kg; SAR (10g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.6 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.803 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.6 %

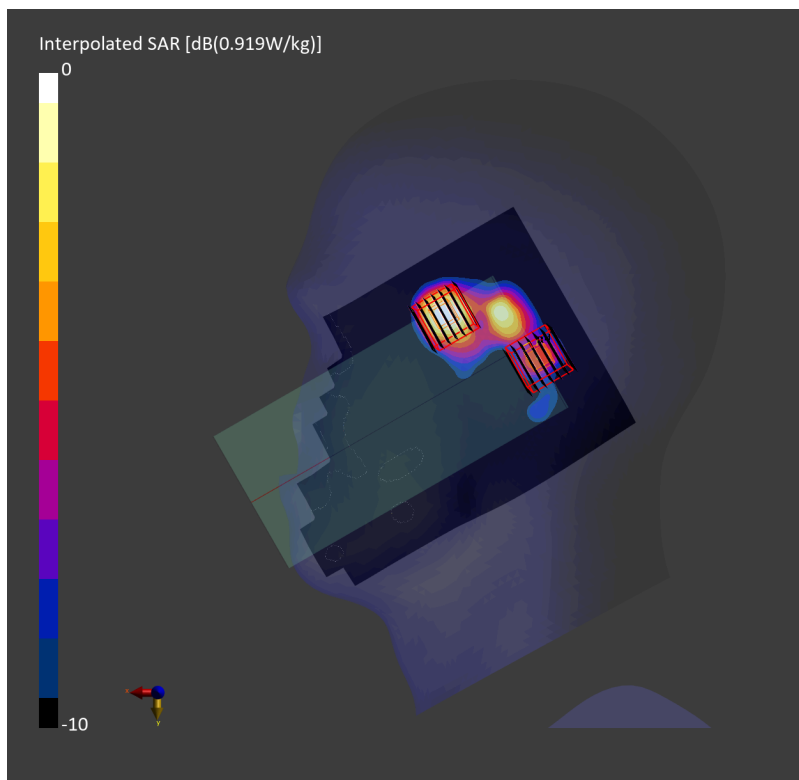

Date: 2025-02-06

#34_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth ; Frequency: 2441.000 MHz

Medium: HSL_2450_250206 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.74, 7.6, 7.6); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.261 W/kg; SAR (10g) = 0.120 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.267 W/kg; SAR (8g) = 0.139 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

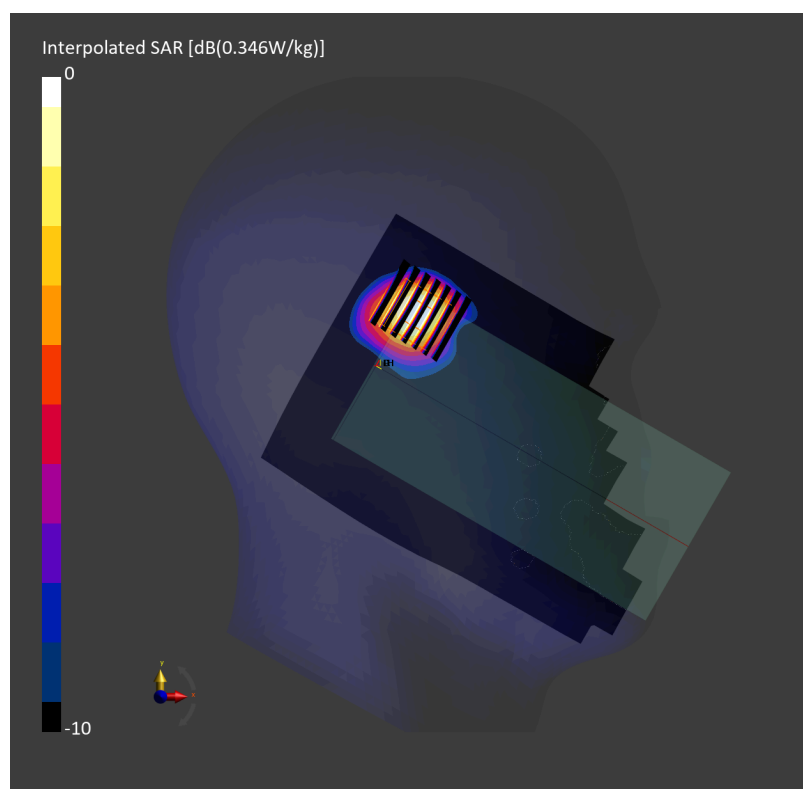

Date: 2025-02-21

#35_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch189

Communication System: GPRS-FDD ; Frequency: 836.400 MHz

Medium: HSL_850_250221 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.337 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.550 W/kg; SAR (8g) = 0.332 W/kg; SAR (10g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

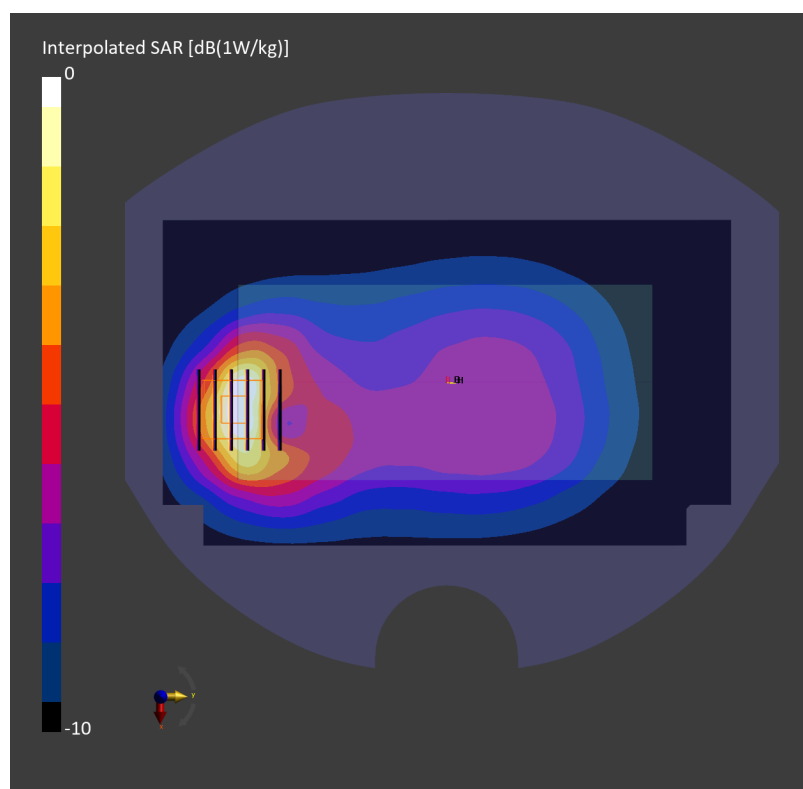

Date: 2025-02-20

#36_GSM1900_GPRS (4 Tx slots)_Bottom Edge_10mm_Ch661

Communication System: GPRS-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250220 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.458 W/kg; SAR (10g) = 0.235 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.483 W/kg; SAR (8g) = 0.272 W/kg; SAR (10g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

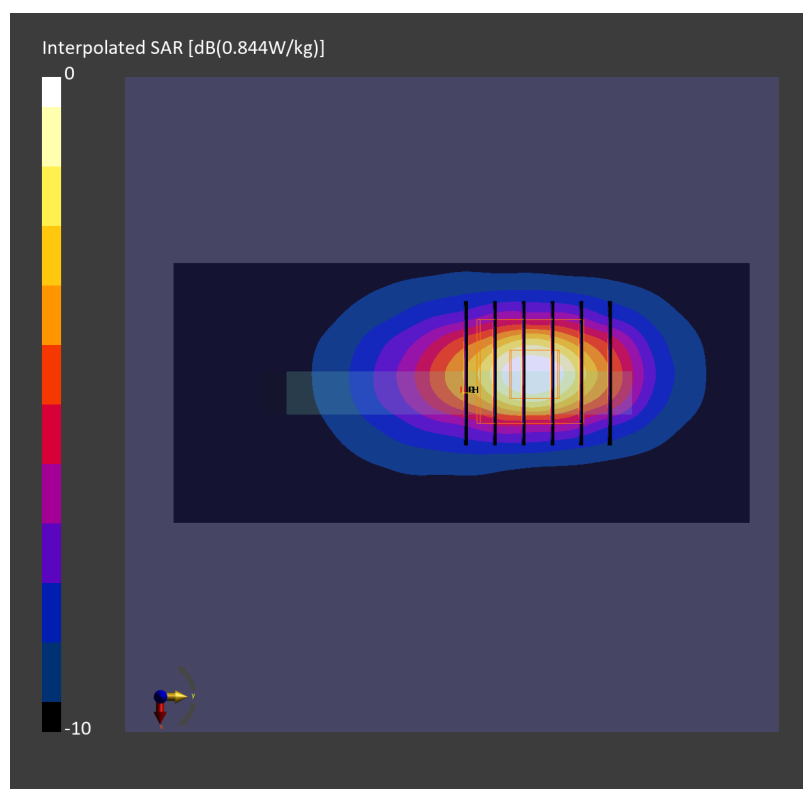

Date: 2025-02-20

#37_WCDMA II_RMC 12.2Kbps_Bottom Edge_10mm_Ch9400

Communication System: UMTS-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250220 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.230 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.471 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

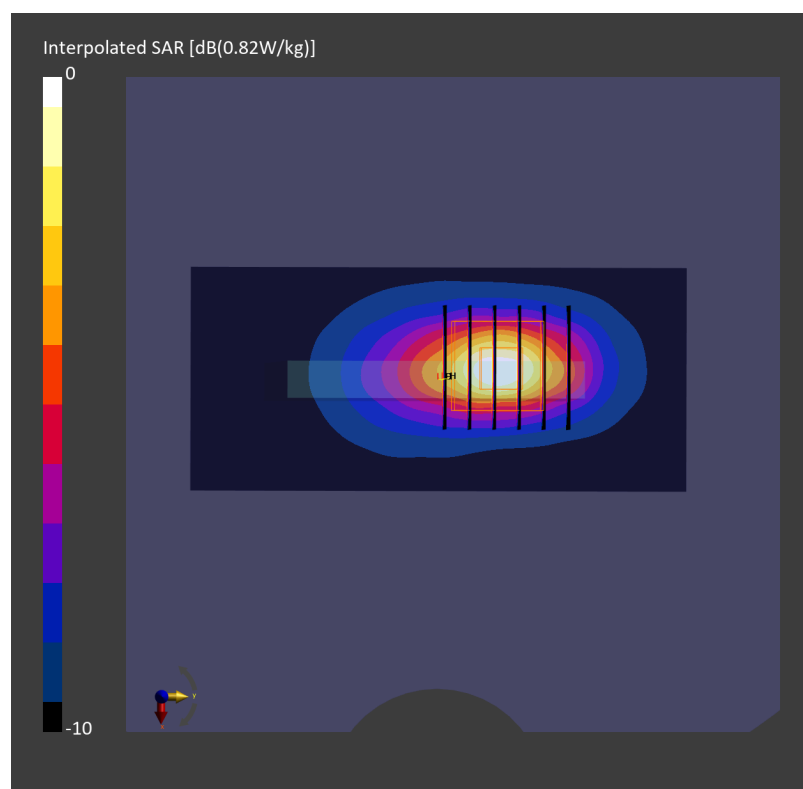

Date: 2025-02-22

#38_WCDMA IV_RMC 12.2Kbps_Bottom Edge_10mm_Ch1413

Communication System: UMTS-FDD ; Frequency: 1732.600 MHz

Medium: HSL_1750_250222 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.21, 8.13, 8.86); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.820 W/kg; SAR (10g) = 0.409 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.825 W/kg; SAR (8g) = 0.455 W/kg; SAR (10g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

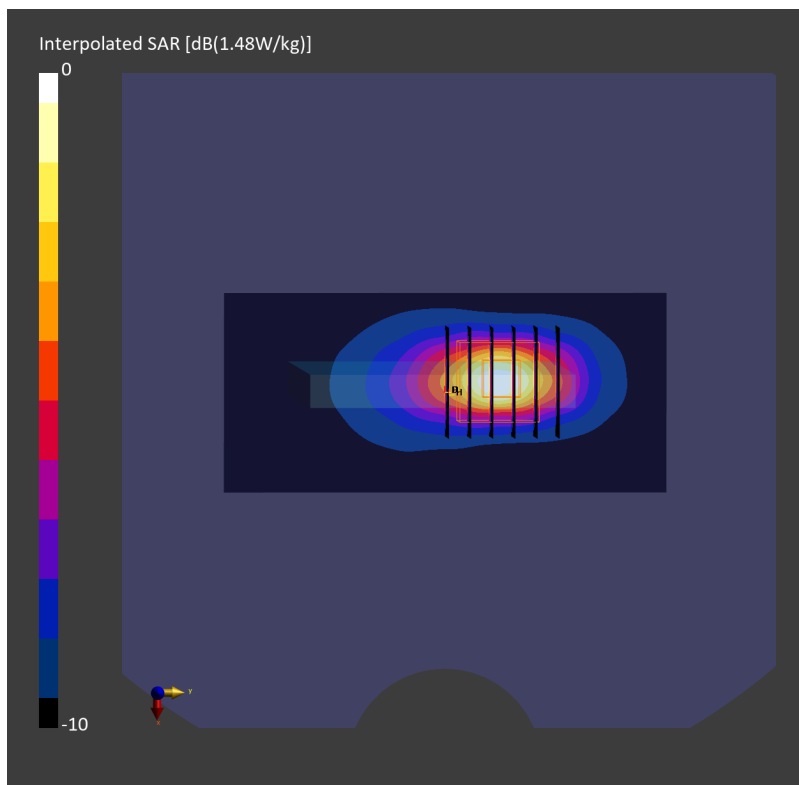

Date: 2025-02-01

#39_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD ; Frequency: 836.400 MHz

Medium: HSL_850_250201 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.940$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.541 W/kg; SAR (10g) = 0.357 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.574 W/kg; SAR (8g) = 0.352 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

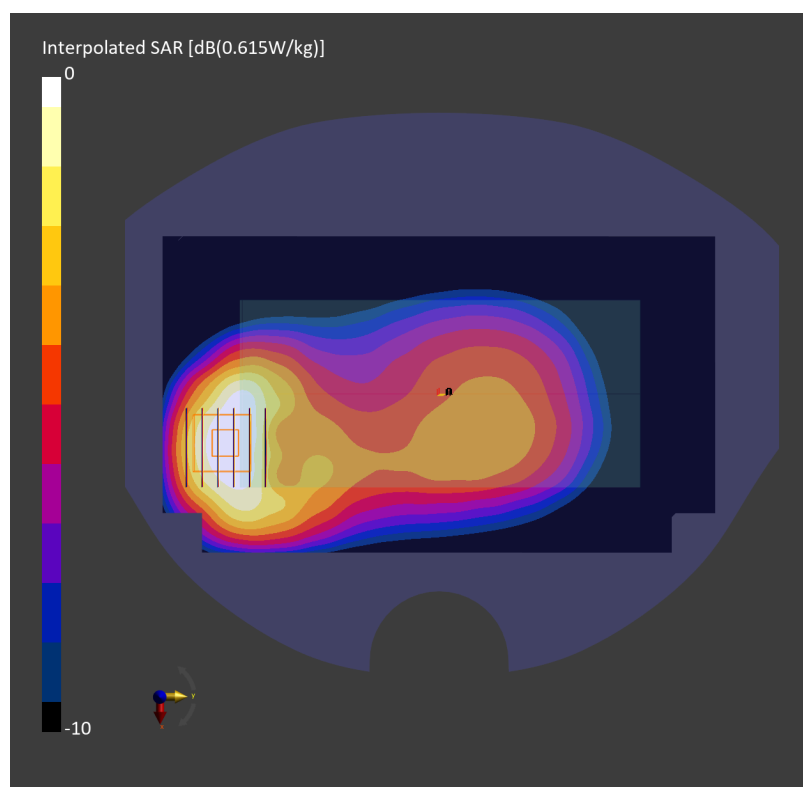

Date: 2025-02-21

#40_LTE Band 7_20M_QPSK_1_0_Bottom Edge_10mm_Ch21350

Communication System: LTE-FDD ; Frequency: 2560.000 MHz

Medium: HSL_2600_250221 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.8, 7.64, 7.66); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.498 W/kg; SAR (10g) = 0.241 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.517 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

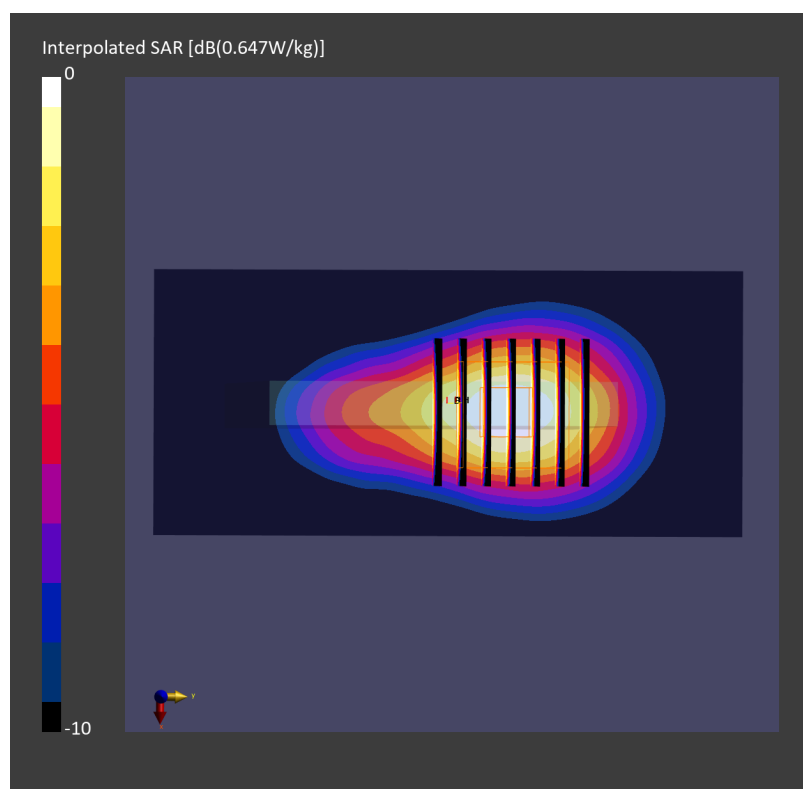

Date: 2025-02-06

#41_LTE Band 12_10M_QPSK_1_0_Left Edge_10mm_Ch23095

Communication System: LTE-FDD ; Frequency: 707.500 MHz

Medium: HSL_750_250206 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.265 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.357 W/kg; SAR (8g) = 0.259 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

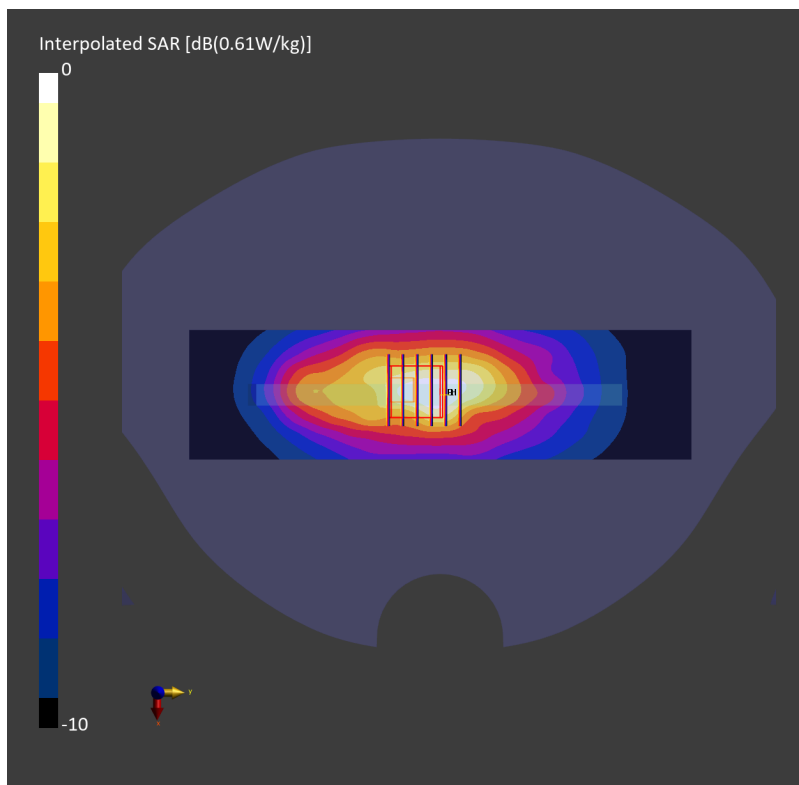

Date: 2025-02-06

#42_LTE Band 13_10M_QPSK_1_0_Left Edge_10mm_Ch23230

Communication System: LTE-FDD ; Frequency: 782.000 MHz

Medium: HSL_750_250206 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.397 W/kg; SAR (10g) = 0.269 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.407 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

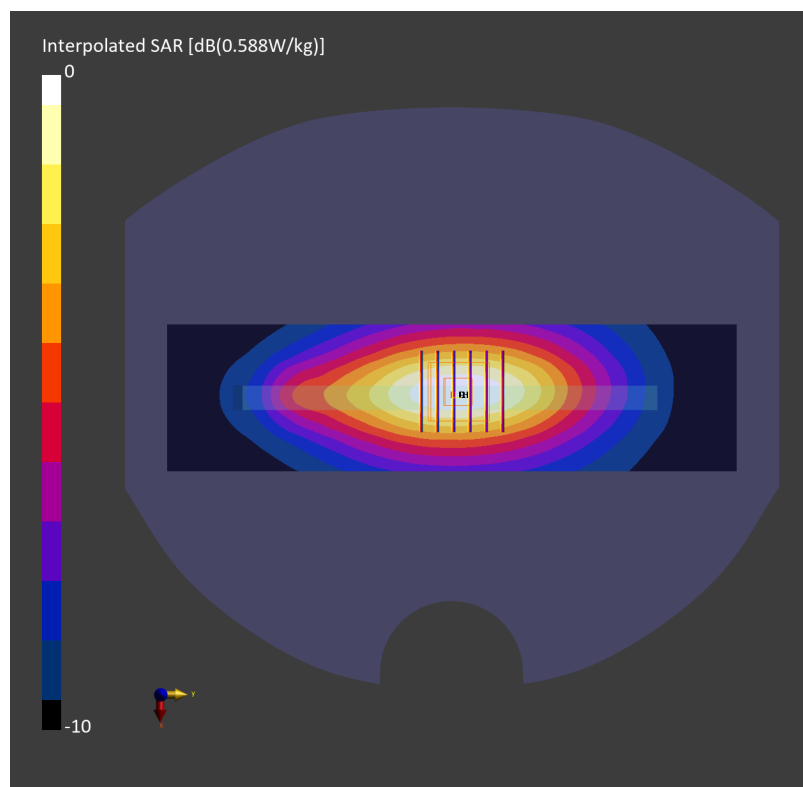

Date: 2025-02-06

#43_LTE Band 14_10M_QPSK_1_0_Left Edge_10mm_Ch23330

Communication System: LTE-FDD ; Frequency: 793.000 MHz

Medium: HSL_750_250206 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.364 W/kg; SAR (10g) = 0.246 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.372 W/kg; SAR (8g) = 0.271 W/kg; SAR (10g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.1 %

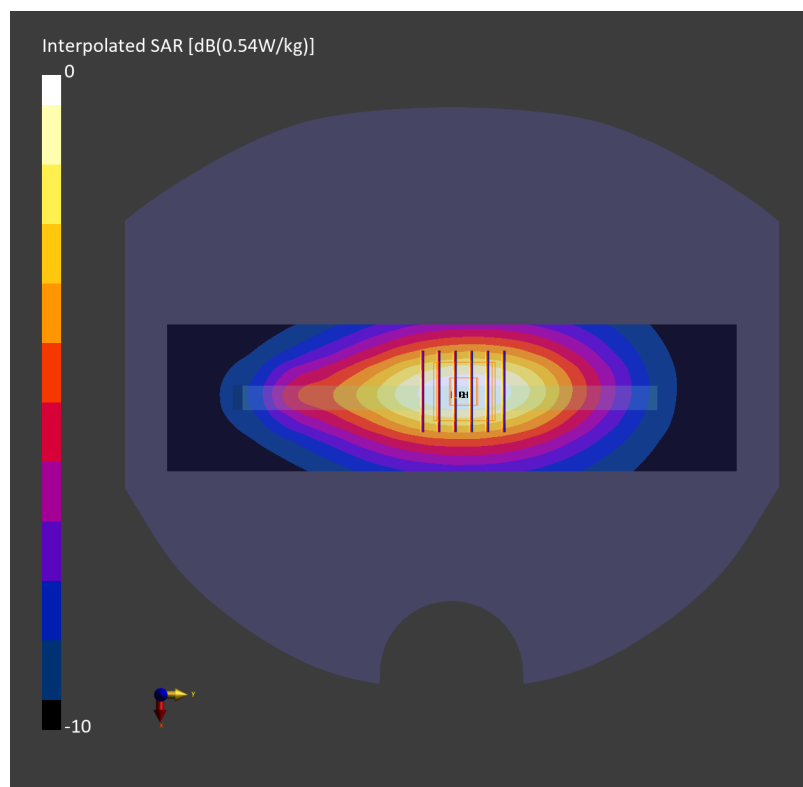

Date: 2025-02-25

#44_LTE Band 25_20M_QPSK_1_0_Bottom Edge_10mm_Ch26340

Communication System: LTE-FDD ; Frequency: 1880.000 MHz

Medium: HSL_1900_250225 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(8.08, 7.98, 7.92); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.240 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.486 W/kg; SAR (8g) = 0.278 W/kg; SAR (10g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

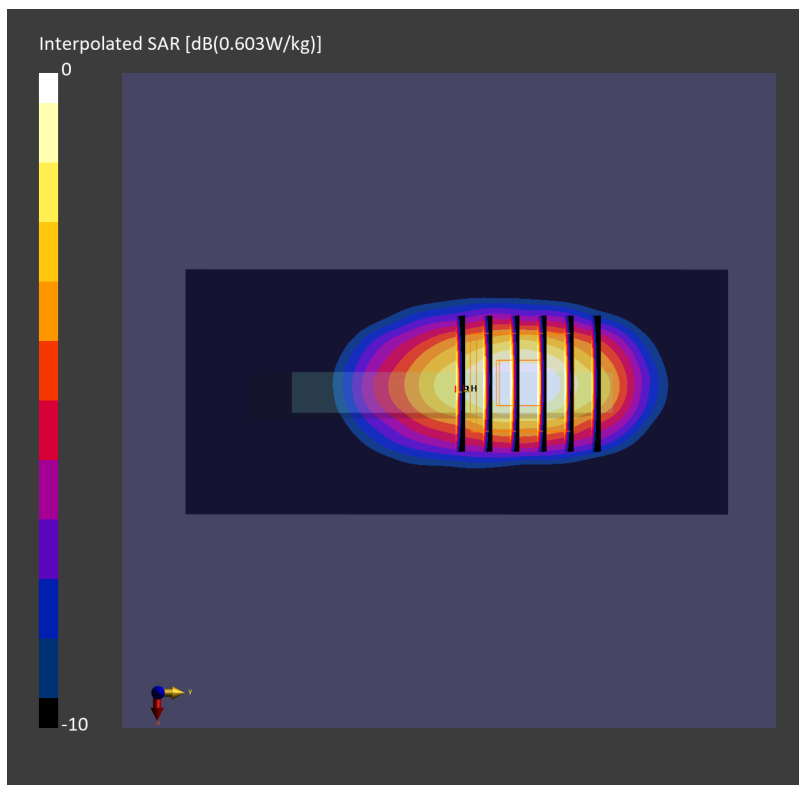

Date: 2025-02-06

#45_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_850_250206 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.418 W/kg; SAR (10g) = 0.277 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.460 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

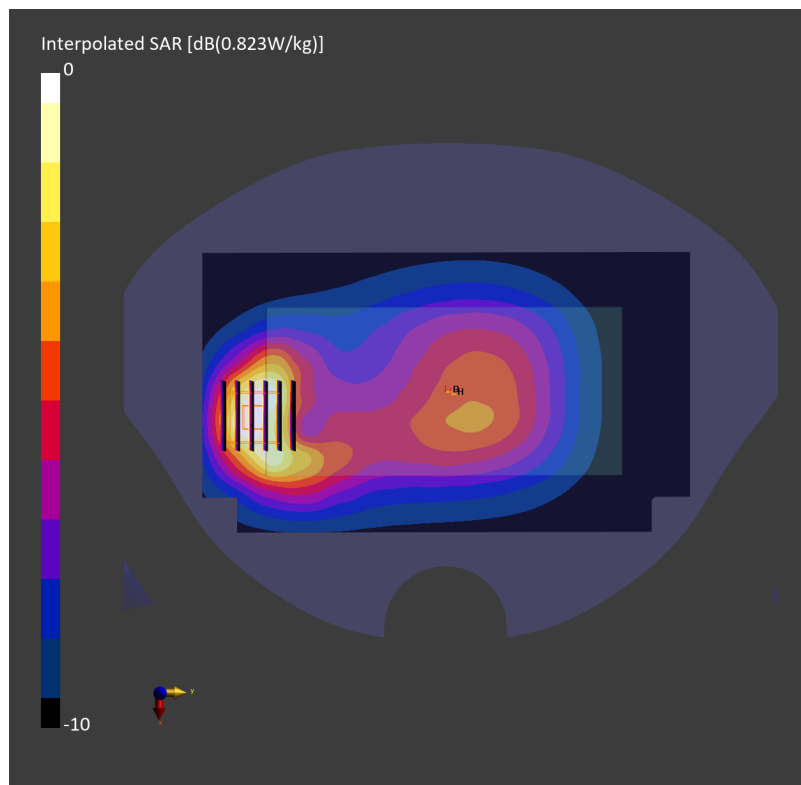

Date: 2025-03-02

#46_LTE Band 30_10M_QPSK_1_0_Bottom Edge_10mm_Ch27710

Communication System: LTE-FDD ; Frequency: 2310.000 MHz

Medium: HSL_2300_250302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.48, 7.42, 8.08); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.696 W/kg; SAR (10g) = 0.330 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.711 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

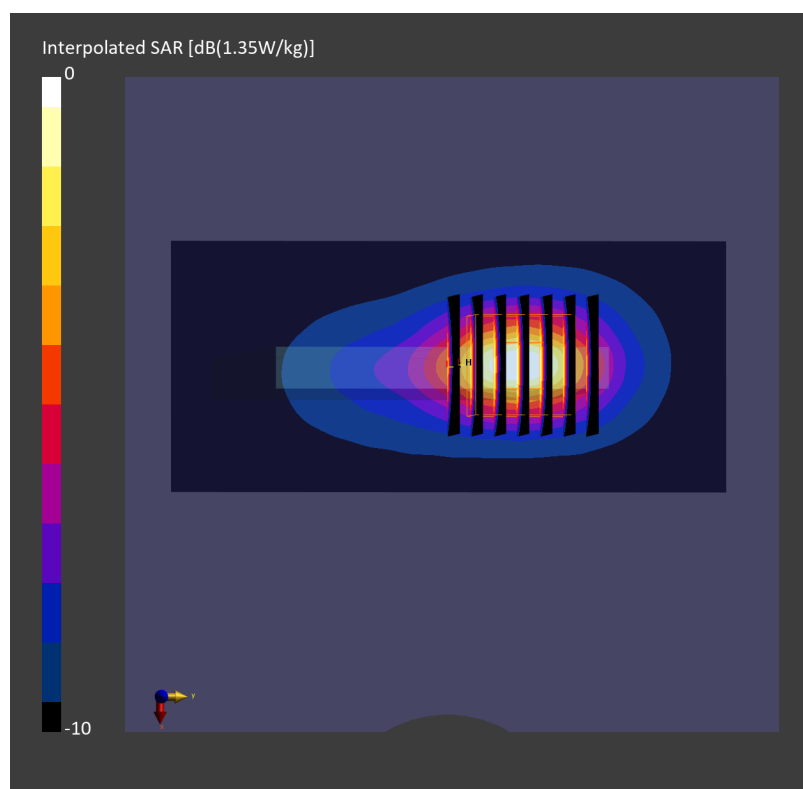

Date: 2025-03-05

#47_LTE Band 38_20M_QPSK_1_0_Right Edge_10mm_Ch38000

Communication System: LTE-TDD ; Frequency: 2595.000 MHz

Medium: HSL_2600_250305 Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.242 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.487 W/kg; SAR (8g) = 0.271 W/kg; SAR (10g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

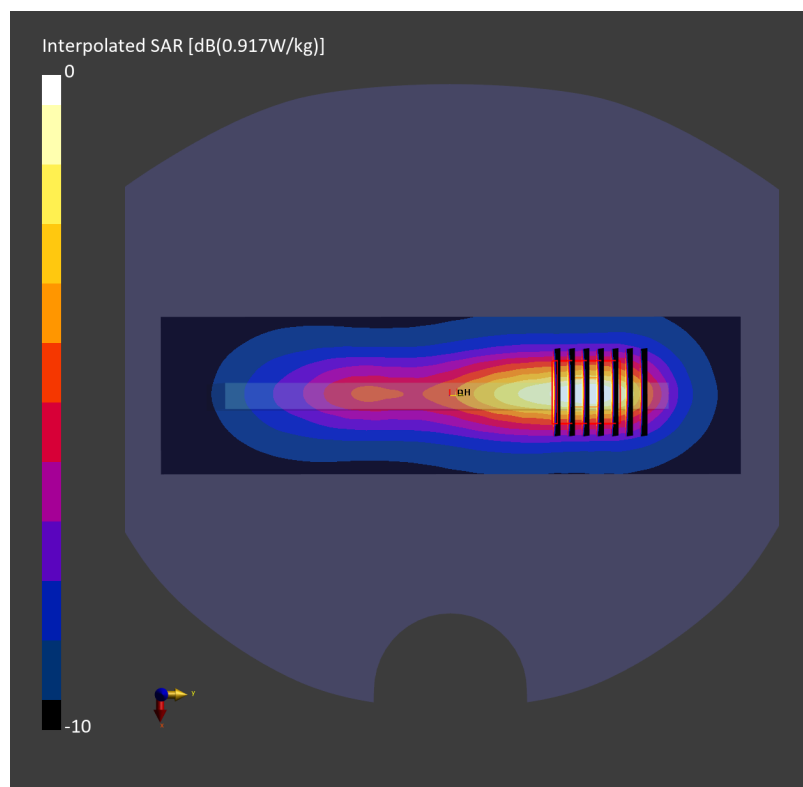

Date: 2025-02-24

#48_LTE Band 41_20M_QPSK_50_0_Bottom Edge_10mm_Ch40620

Communication System: LTE-TDD ; Frequency: 2593.000 MHz

Medium: HSL_2600_250224 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.8, 7.64, 7.66); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.343 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.731 W/kg; SAR (8g) = 0.392 W/kg; SAR (10g) = 0.357 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

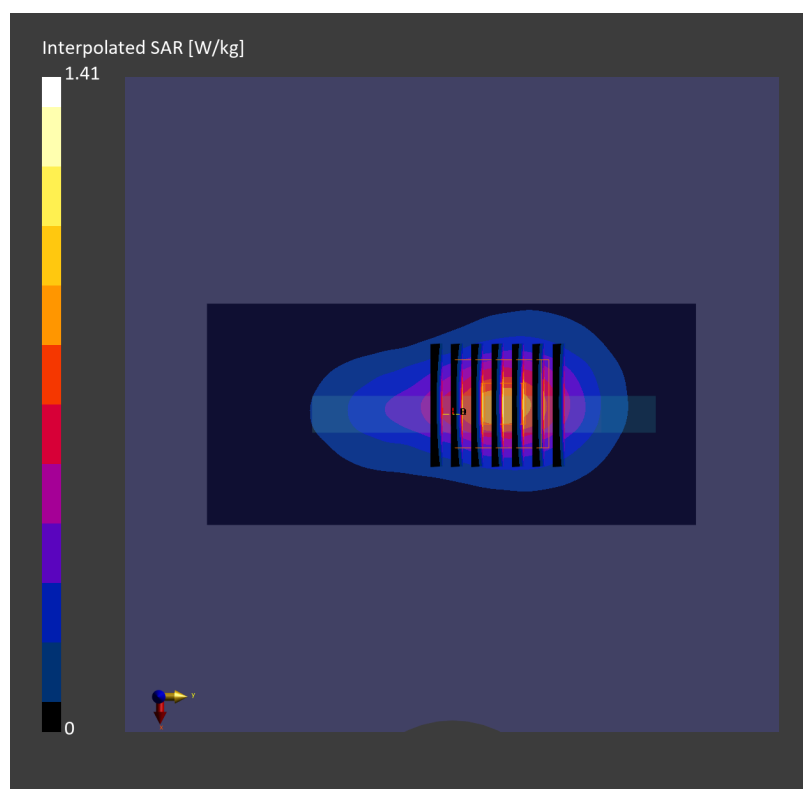

Date: 2025-03-03

#49_LTE Band 48_20M_QPSK_50_0_Left Edge_10mm_Ch55340

Communication System: LTE-TDD ; Frequency: 3560.000 MHz

Medium: HSL_3500_250303 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.61, 6.55, 7.14); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.399 W/kg; SAR (10g) = 0.173 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.402 W/kg; SAR (8g) = 0.193 W/kg; SAR (10g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.6 %

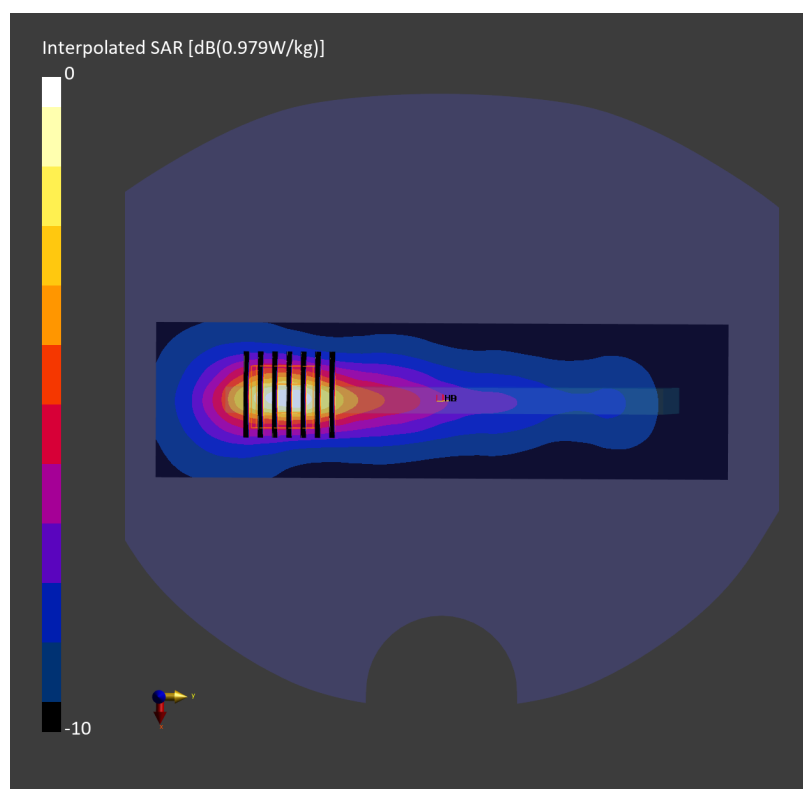

Date: 2025-02-25

#50_LTE Band 66_20M_QPSK_1_0_Bottom Edge_10mm_Ch132572

Communication System: LTE-FDD ; Frequency: 1770.000 MHz

Medium: HSL_1750_250225 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(8.3, 8.28, 8.24); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.682 W/kg; SAR (10g) = 0.345 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.718 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

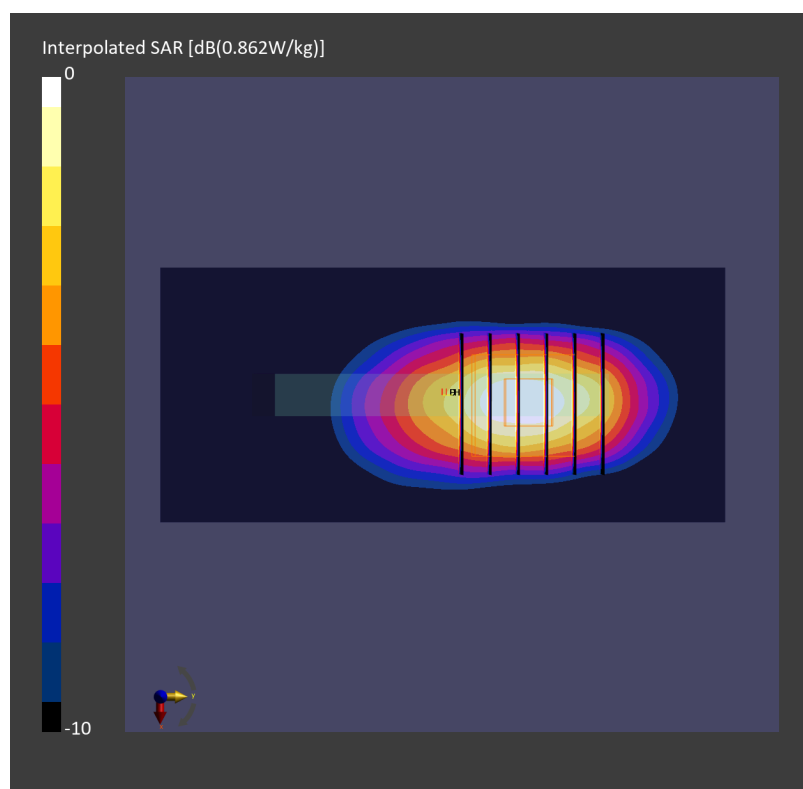

Date: 2025-02-07

#51_LTE Band 71_20M_QPSK_1_0_Left Edge_10mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_750_250207 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.358 W/kg; SAR (10g) = 0.248 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.366 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

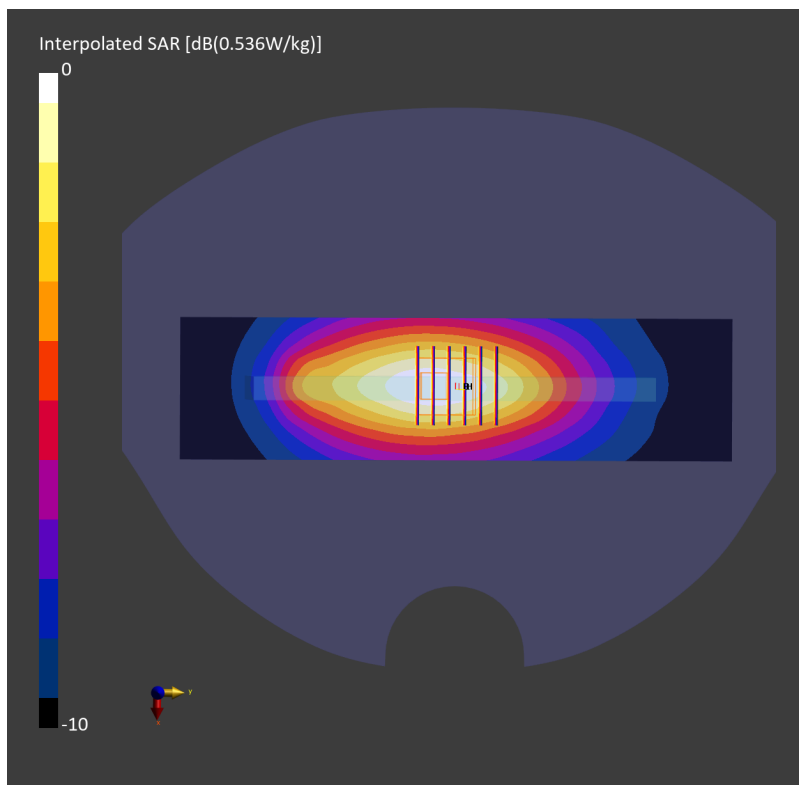

Date: 2025-02-23

#52_FR1 n7_50M_BPSK_135_68_Right Edge_10mm_Ch507000

Communication System: 5G NR ; Frequency: 2535.000 MHz

Medium: HSL_2600_250223 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.725 W/kg; SAR (10g) = 0.374 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.738 W/kg; SAR (8g) = 0.424 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

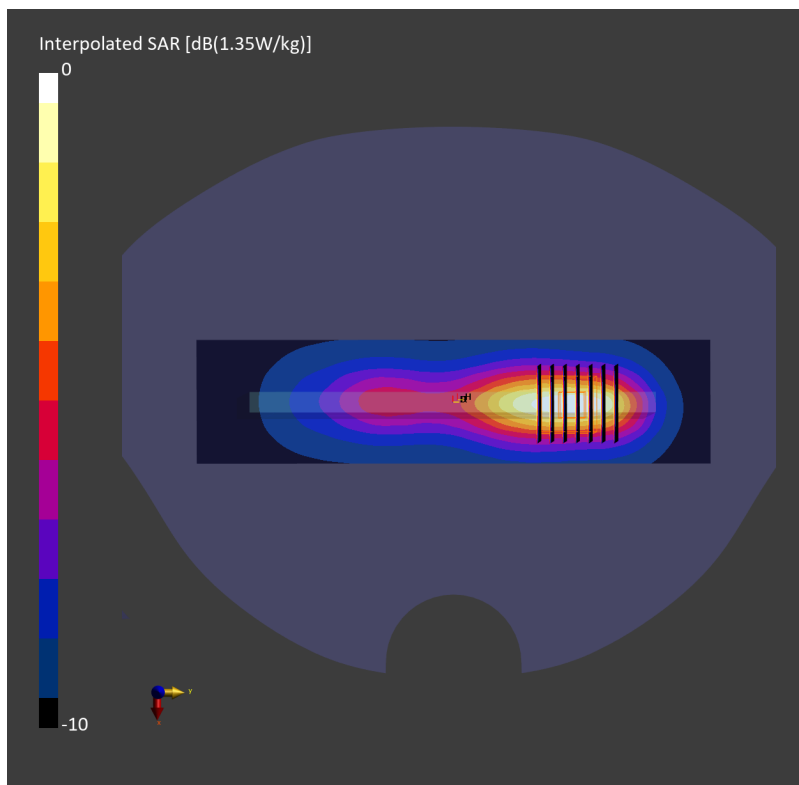

Date: 2025-02-19

#53_FR1 n12_15M_BPSK_36_22_Left Edge_10mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_750_250219 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.455 W/kg; SAR (10g) = 0.312 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.462 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

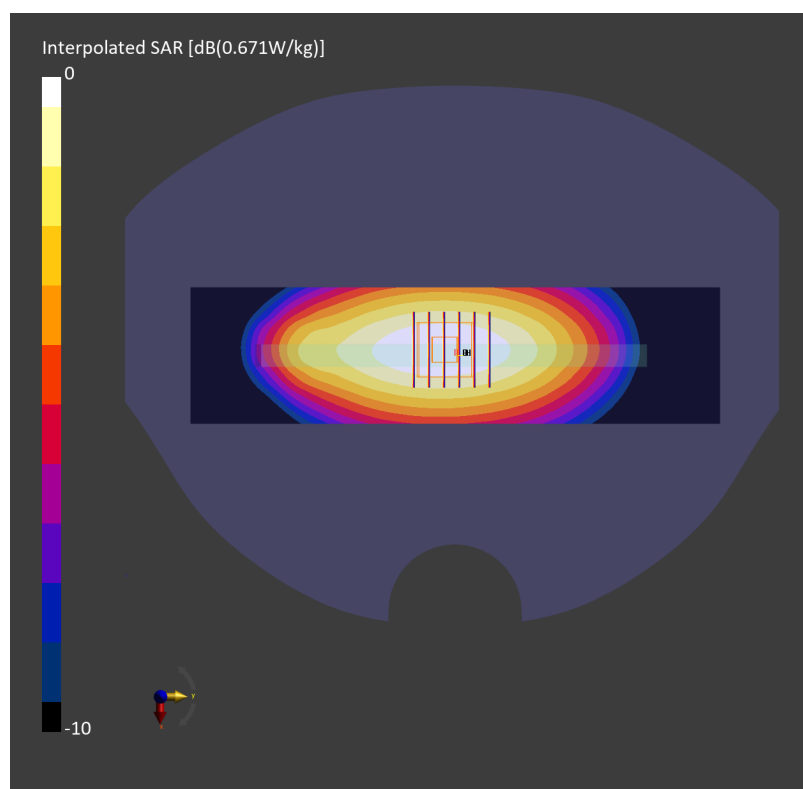

Date: 2025-02-19

#54_FR1 n14_10M_BPSK_1_1_Left Edge_10mm_Ch158600

Communication System: 5G NR ; Frequency: 793.000 MHz

Medium: HSL_750_250219 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.373 W/kg; SAR (10g) = 0.254 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.384 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

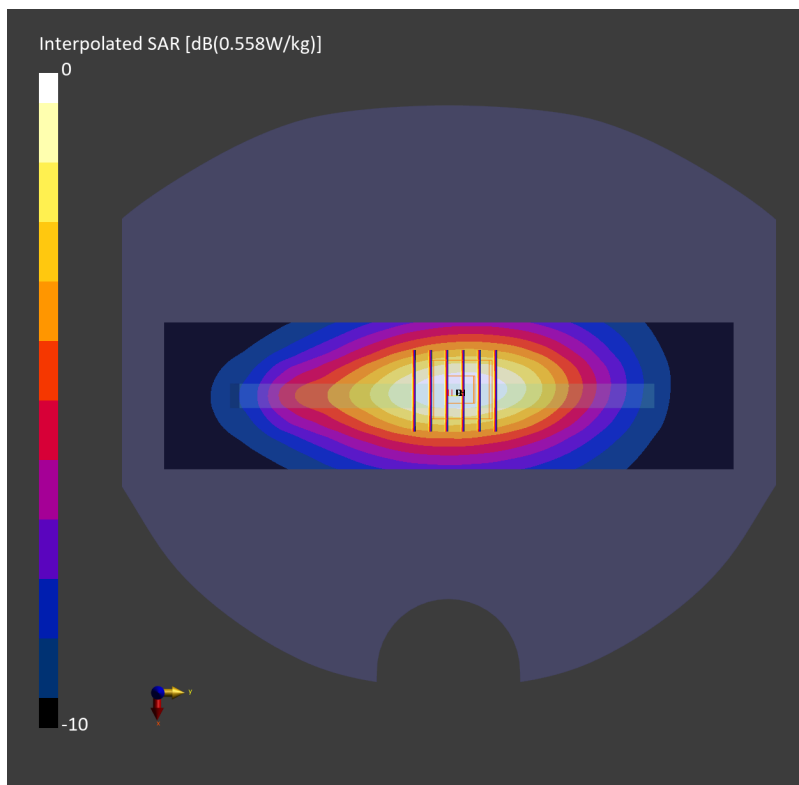

Date: 2025-02-25

#55_FR1 n25_40M_BPSK_108_54_Right Edge_10mm_Ch376500

Communication System: 5G NR ; Frequency: 1882.500 MHz

Medium: HSL_1900_250225 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.672 W/kg; SAR (10g) = 0.345 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.693 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

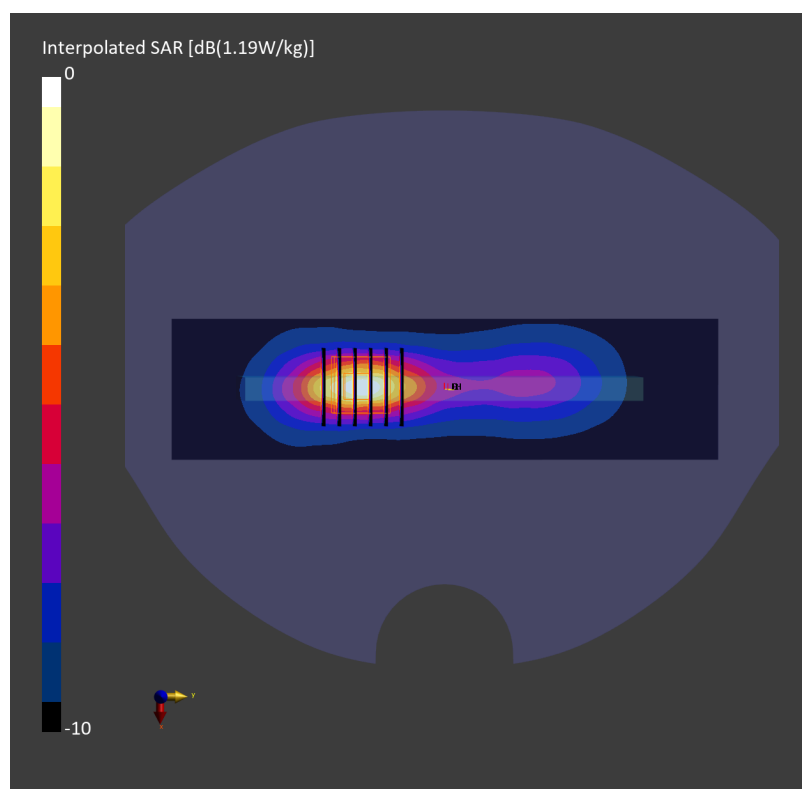

Date: 2025-02-19

#56_FR1 n26_20M_BPSK_50_28_Back_10mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_850_250219 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.414 W/kg; SAR (10g) = 0.278 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.463 W/kg; SAR (8g) = 0.280 W/kg; SAR (10g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

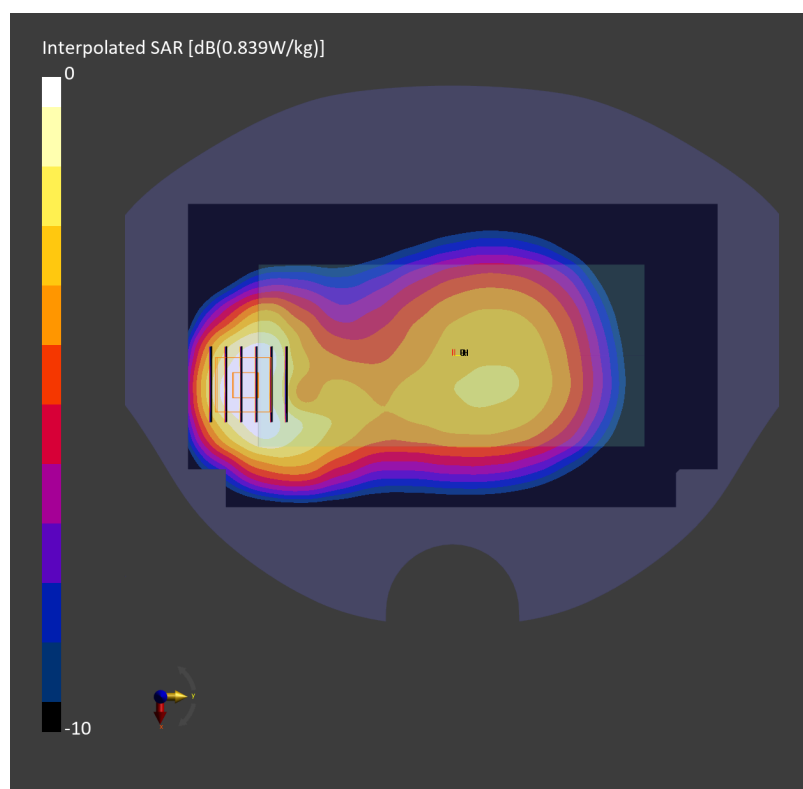

Date: 2025-03-02

#57_FR1 n30_10M_BPSK_1_1_Bottom Edge_10mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_2300_250302 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.63$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.48, 7.42, 8.08); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.491 W/kg; SAR (10g) = 0.234 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.498 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

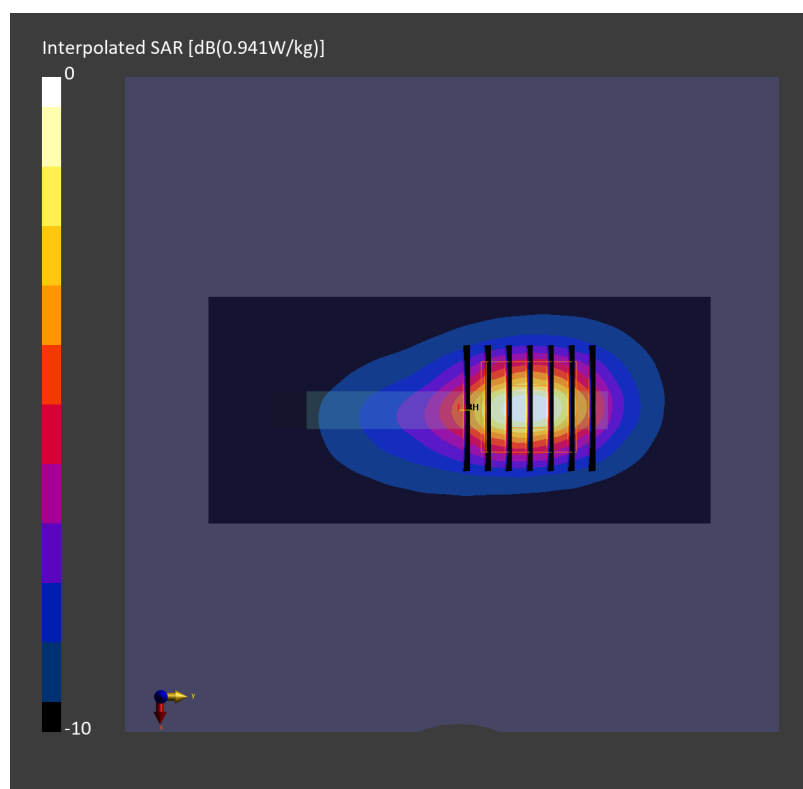

Date: 2025-03-05

#58_FR1 n38_40M_BPSK_1_1_Right Edge_10mm_Ch519000

Communication System: 5G NR ; Frequency: 2595.000 MHz

Medium: HSL_2600_250305 Medium parameters used: $f = 2595.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.584 W/kg; SAR (10g) = 0.300 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.602 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.310 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

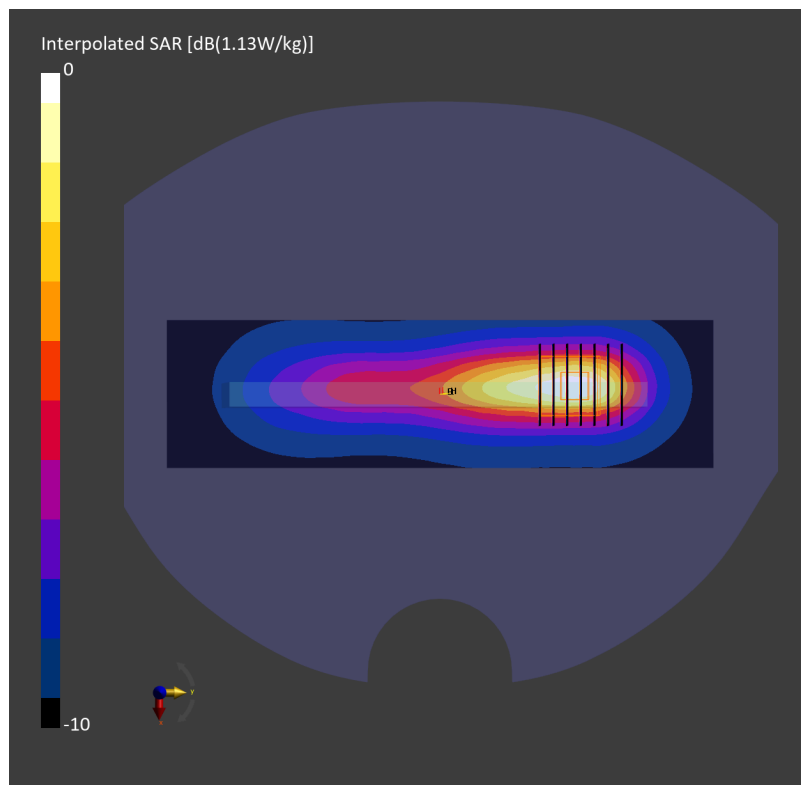

Date: 2025-02-09

#59_FR1 n41_100M_BPSK_1_1_Bottom Edge_10mm_Ch518598

Communication System: 5G NR ; Frequency: 2592.990 MHz

Medium: HSL_2600_250209 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.12, 7.06, 7.69); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.586 W/kg; SAR (10g) = 0.282 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.605 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

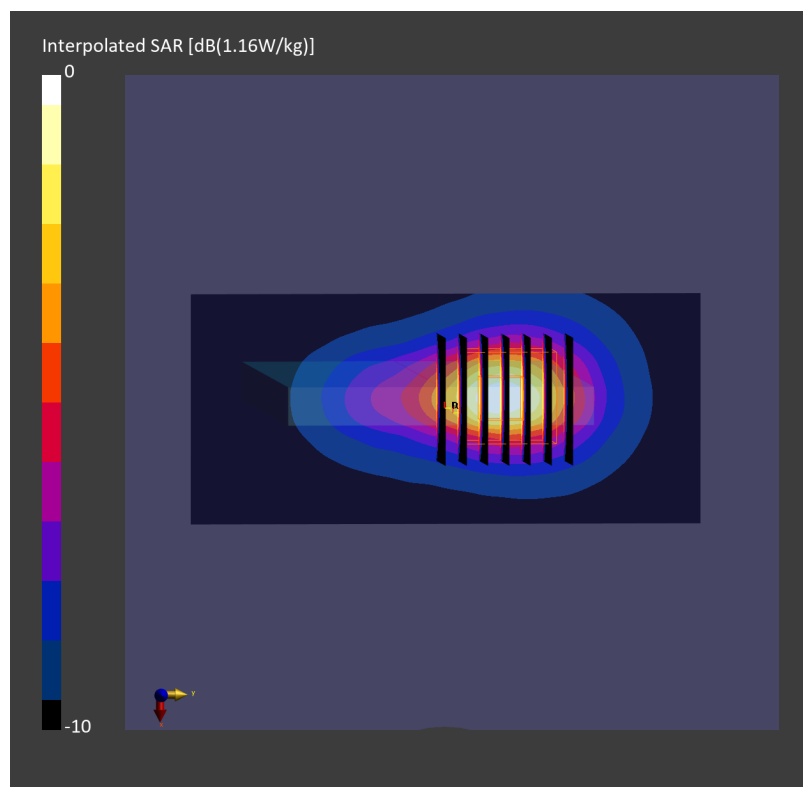

Date: 2025-02-25

#60_FR1 n66_40M_BPSK_108_54_Back_10mm_Ch349000

Communication System: 5G NR ; Frequency: 1745.000 MHz

Medium: HSL_1750_250225 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.21, 8.13, 8.86); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.690 W/kg; SAR (10g) = 0.374 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.769 W/kg; SAR (8g) = 0.434 W/kg; SAR (10g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

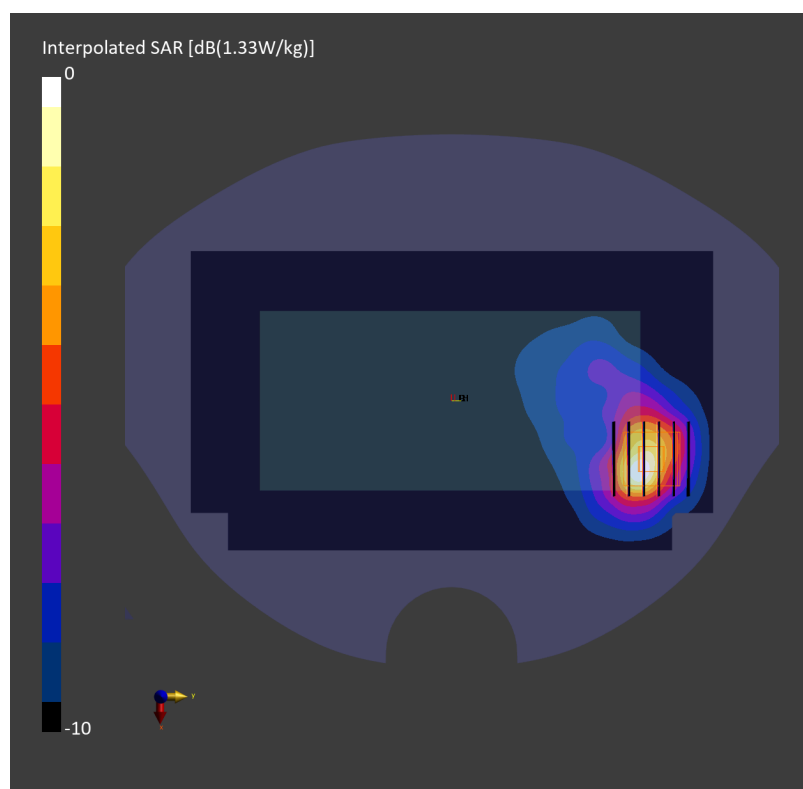

Date: 2025-02-12

#61_FR1 n71_20M_BPSK_1_1_Left Edge_10mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_750_250212 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.393 W/kg; SAR (10g) = 0.270 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.397 W/kg; SAR (8g) = 0.290 W/kg; SAR (10g) = 0.277 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

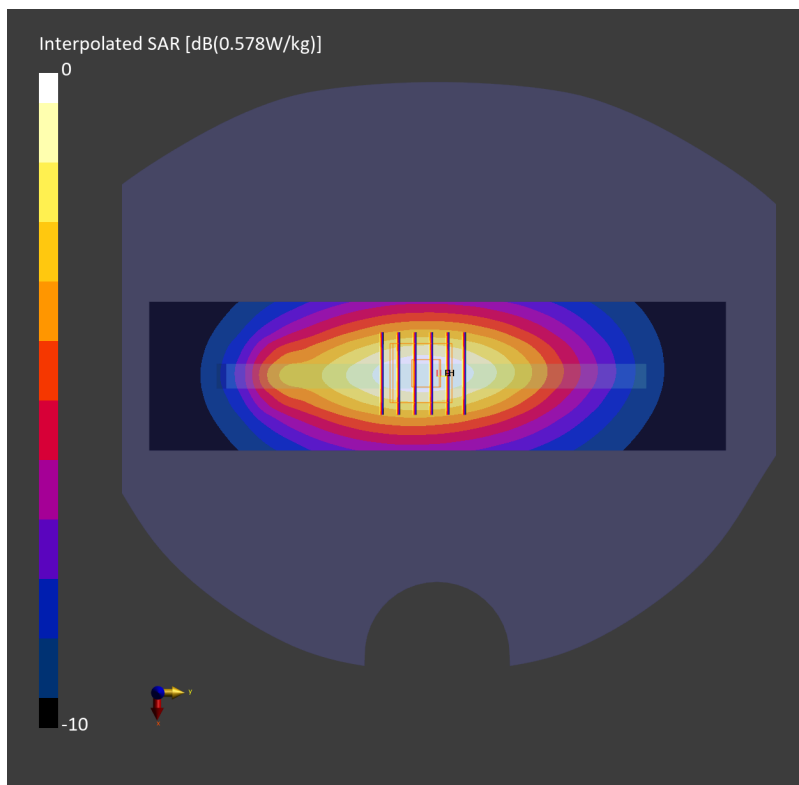

Date: 2025-02-16

#62_FR1 n77_100M_BPSK_1_1_Left Edge_10mm_Ch633332

Communication System: 5G NR ; Frequency: 3499.980 MHz

Medium: HSL_3500_250216 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(6.61, 6.55, 7.14); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.572 W/kg; SAR (10g) = 0.254 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.580 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

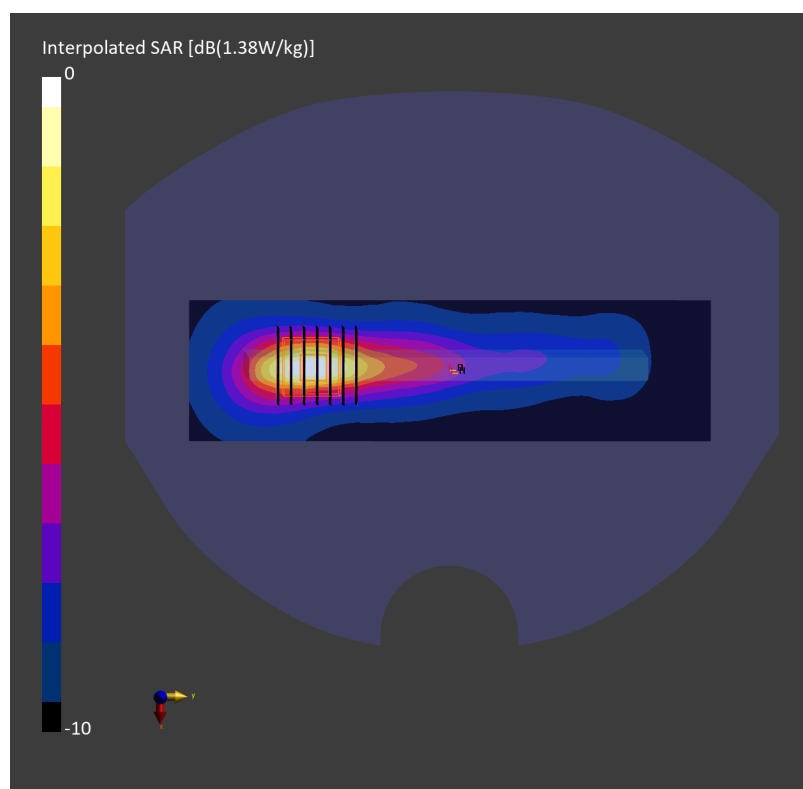

Date: 2025-02-09

#63_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz ; Frequency: 2462.000 MHz

Medium: HSL_2450_250209 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.74, 7.6, 7.6); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.237 W/kg; SAR (10g) = 0.118 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.133 W/kg; SAR (10g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

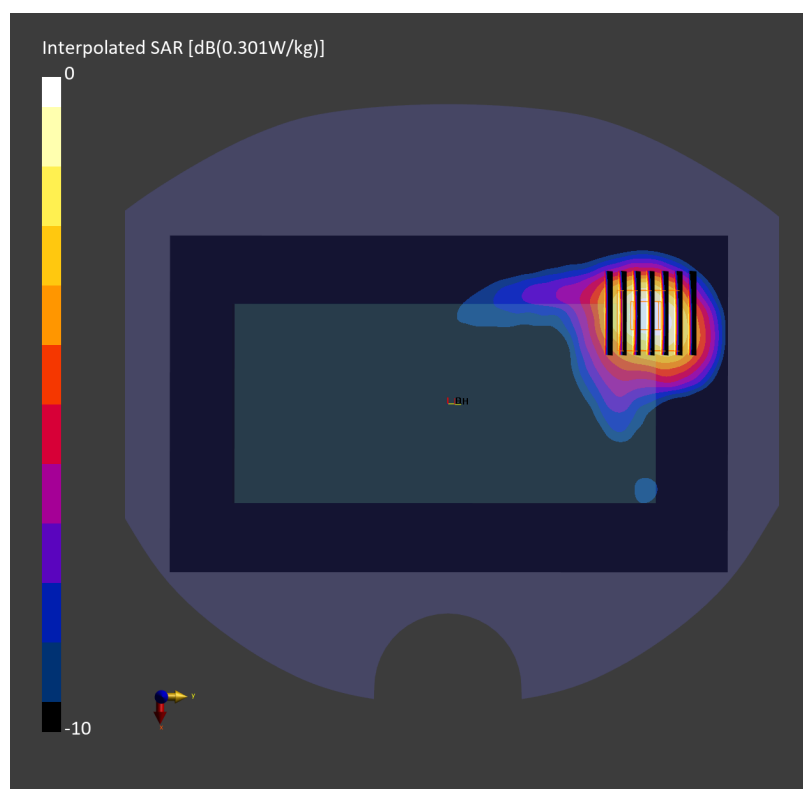

Date: 2025-02-10

#64_WLAN5GHz_802.11a 6Mbps_Left Edge_10mm_Ch44

Communication System: IEEE 802.11a/h WiFi 5 GHz ; Frequency: 5220.000 MHz

Medium: HSL_5G_250210 Medium parameters used: $f = 5220.000$ MHz; $\sigma = 4.80$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.82, 5.53, 5.73); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10417-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.234 W/kg; SAR (10g) = 0.088 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.239 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 65.4 %

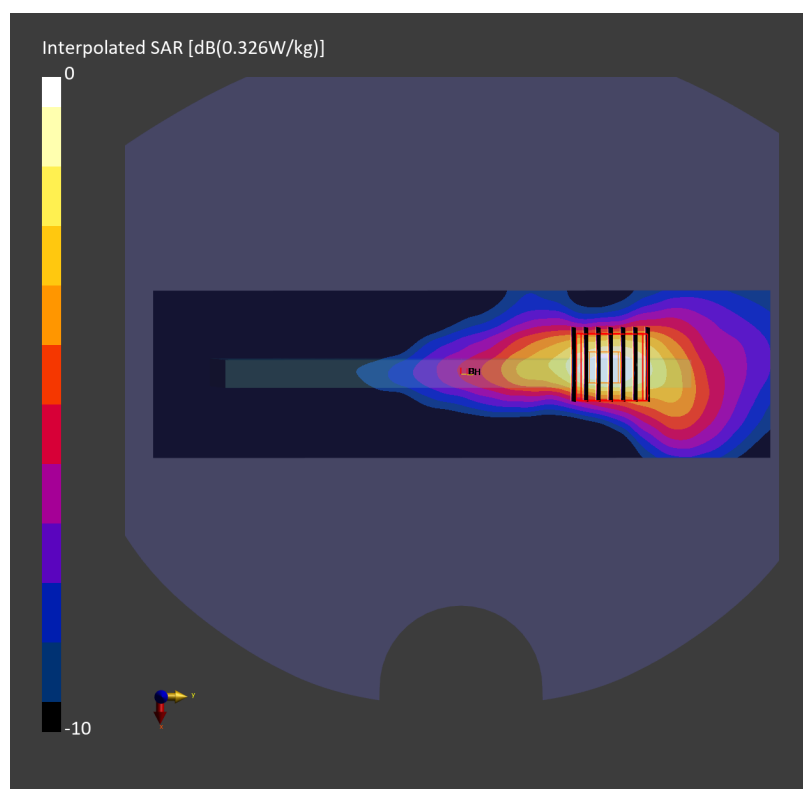

Date: 2025-02-10

#65_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155;Ant 4+3

Communication System: IEEE 802.11ac WiFi ; Frequency: 5775.000 MHz

Medium: HSL_5G_250210 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.05, 4.92, 5.06); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.184 W/kg; SAR (10g) = 0.076 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.059 W/kg; SAR (8g) = 0.027 W/kg; SAR (10g) = 0.025 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.1 %


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.194 W/kg; SAR (8g) = 0.090 W/kg; SAR (10g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.1 %

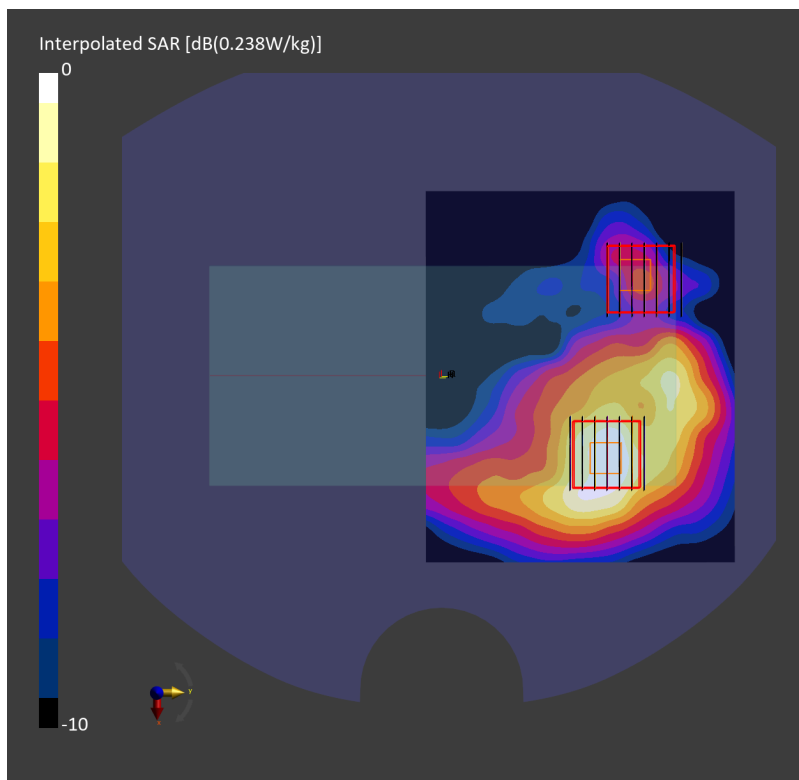

Date: 2025-02-15

#66_Bluetooth_1Mbps_Left Edge_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth ; Frequency: 2441.000 MHz

Medium: HSL_2450_250215 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.74, 7.6, 7.6); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.279 W/kg; SAR (10g) = 0.140 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.281 W/kg; SAR (8g) = 0.156 W/kg; SAR (10g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

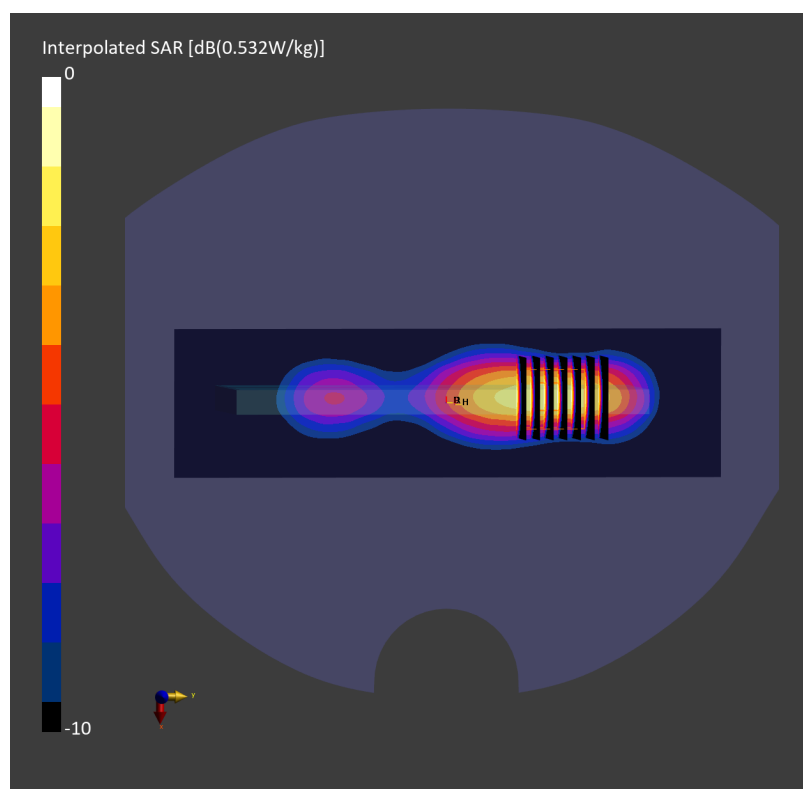

Date: 2025-02-21

#67_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch189

Communication System: GPRS-FDD ; Frequency: 836.400 MHz

Medium: HSL_850_250221 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.337 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.550 W/kg; SAR (8g) = 0.332 W/kg; SAR (10g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

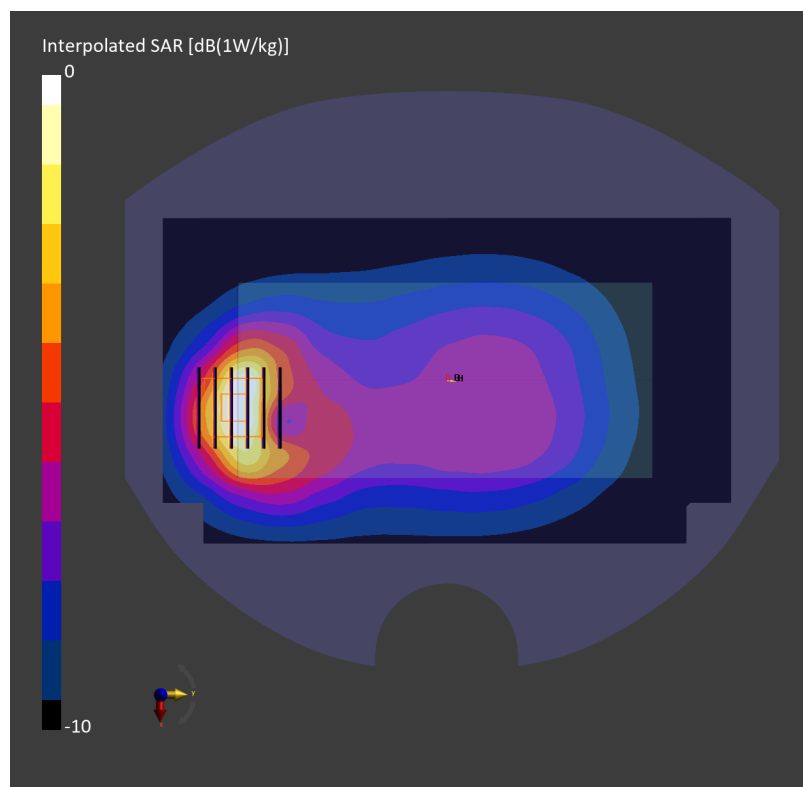

Date: 2025-02-20

#68_GSM1900_GPRS (4 Tx slots)_Back_10mm_Ch810

Communication System: GPRS-FDD ; Frequency: 1909.800 MHz

Medium: HSL_1900_250220 Medium parameters used: $f = 1909.800$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.536 W/kg; SAR (10g) = 0.293 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.627 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

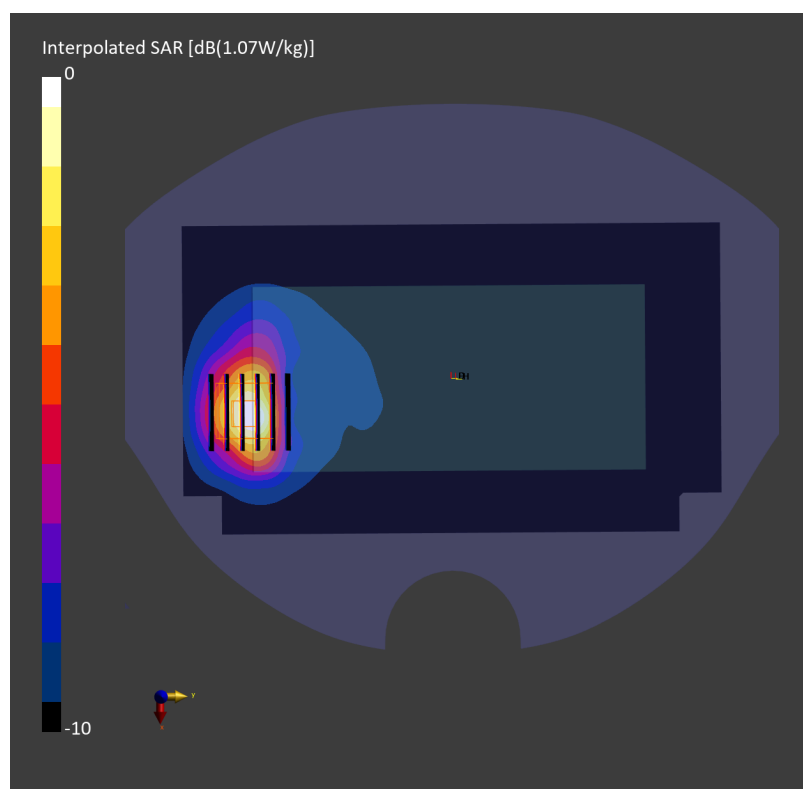

Date: 2025-02-20

#69_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9538

Communication System: UMTS-FDD ; Frequency: 1907.600 MHz

Medium: HSL_1900_250220 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(7.84, 7.77, 8.46); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.532 W/kg; SAR (10g) = 0.272 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.552 W/kg; SAR (8g) = 0.322 W/kg; SAR (10g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

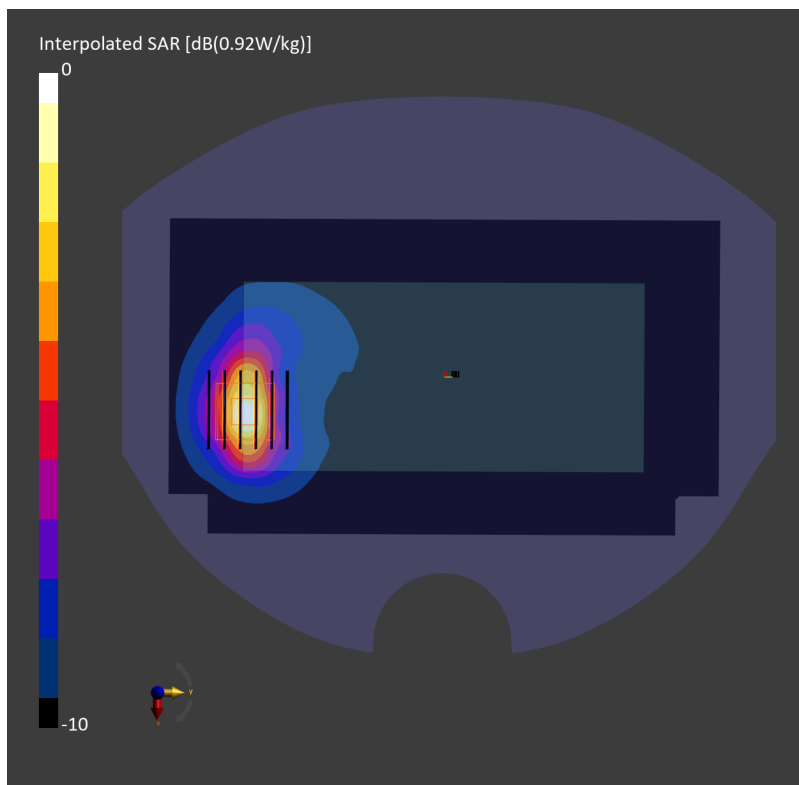

Date: 2025-02-22

#70_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_1750_250222 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(8.21, 8.13, 8.86); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.483 W/kg; SAR (10g) = 0.246 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.511 W/kg; SAR (8g) = 0.288 W/kg; SAR (10g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

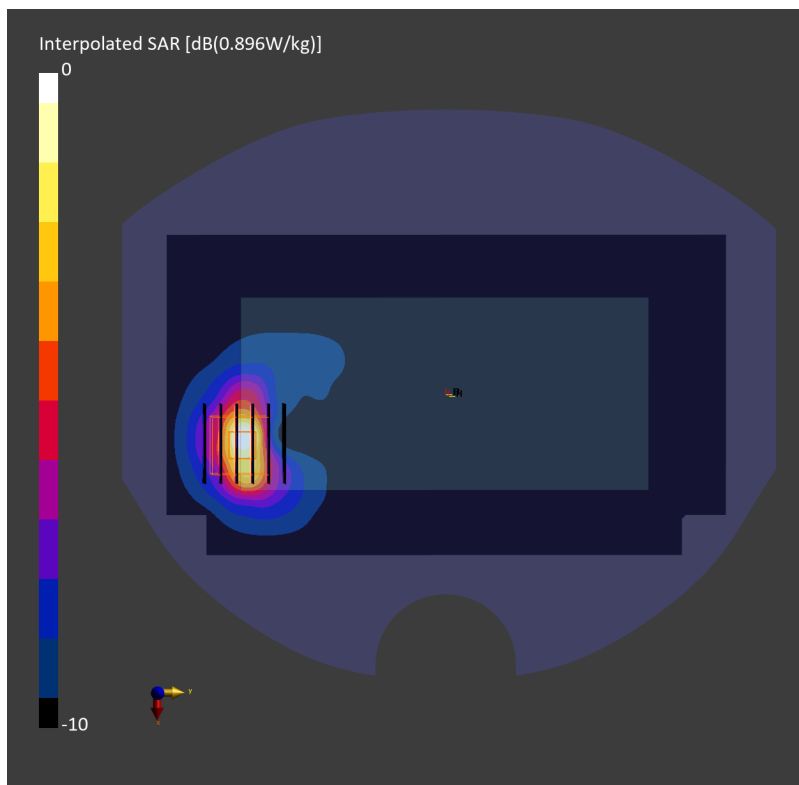

Date: 2025-02-01

#71_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD ; Frequency: 836.400 MHz

Medium: HSL_850_250201 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.940$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.87, 8.66, 9.68); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.541 W/kg; SAR (10g) = 0.357 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.574 W/kg; SAR (8g) = 0.352 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

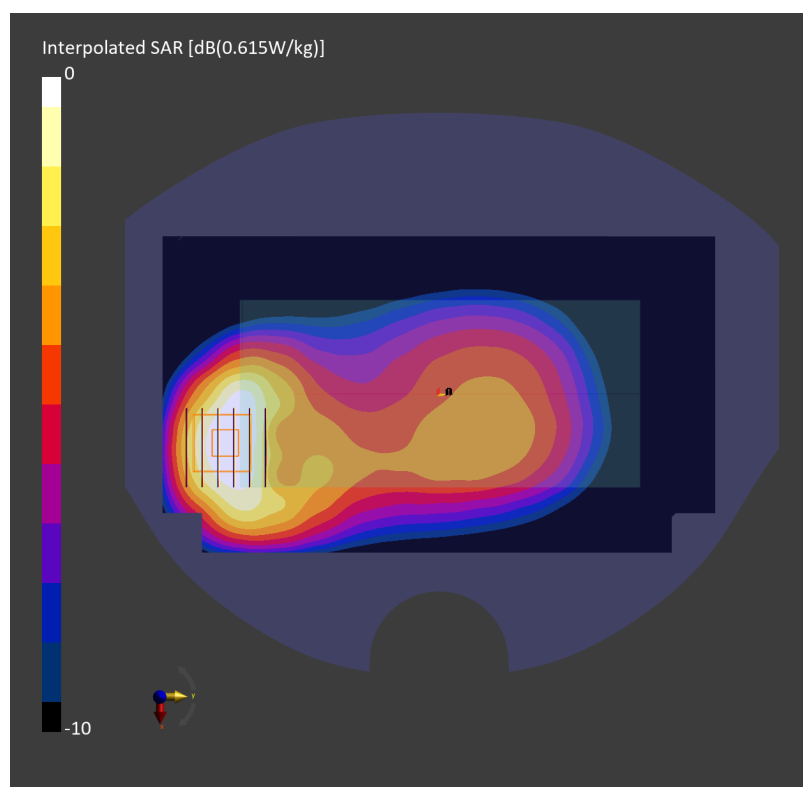

Date: 2025-02-21

#72_LTE Band 7_20M_QPSK_1_0_Back_10mm_Ch21350

Communication System: LTE-FDD ; Frequency: 2560.000 MHz

Medium: HSL_2600_250221 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(7.8, 7.64, 7.66); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.561 W/kg; SAR (10g) = 0.279 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.570 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

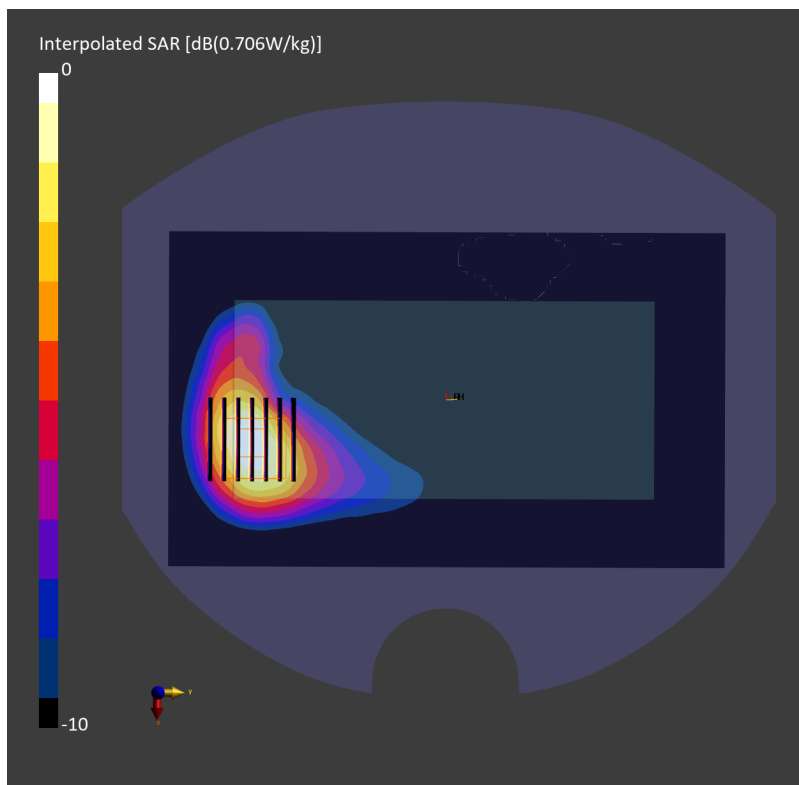

Date: 2025-02-01

#73_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_750_250201 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.17, 8.96, 10.01); Calibrated: 2024-11-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2024-11-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.288 W/kg; SAR (10g) = 0.208 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.309 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.3 %

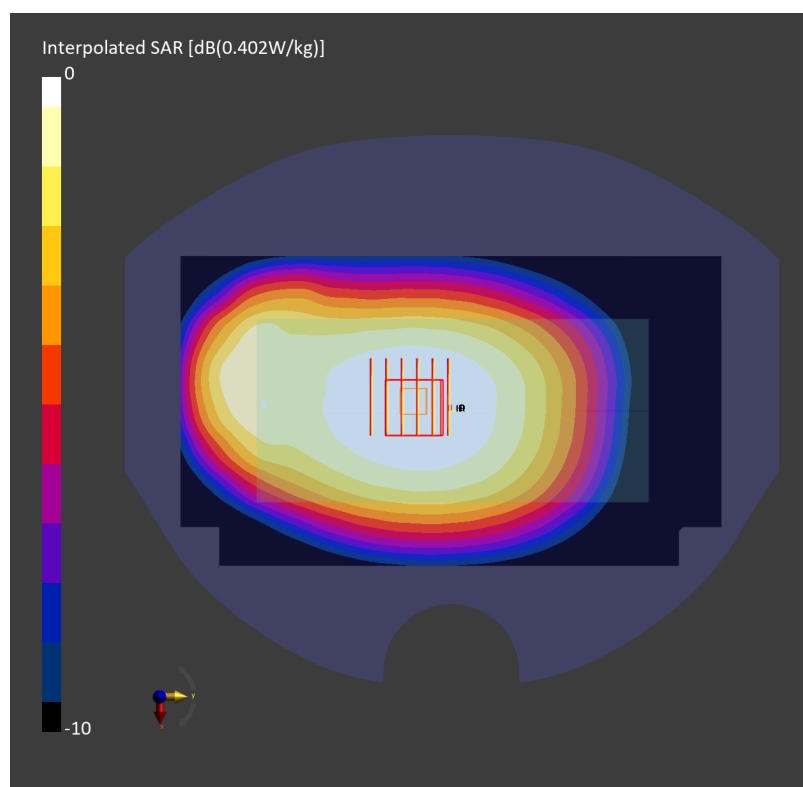

Date: 2025-03-09

#74_LTE Band 13_10M_QPSK_1_0_Front_10mm_Ch23230

Communication System: LTE-FDD ; Frequency: 782.000 MHz

Medium: HSL_750_250309 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.75, 9.37, 9.43); Calibrated: 2025-01-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn656; Calibrated: 2025-01-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.214 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.319 W/kg; SAR (8g) = 0.260 W/kg; SAR (10g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 92.0 %

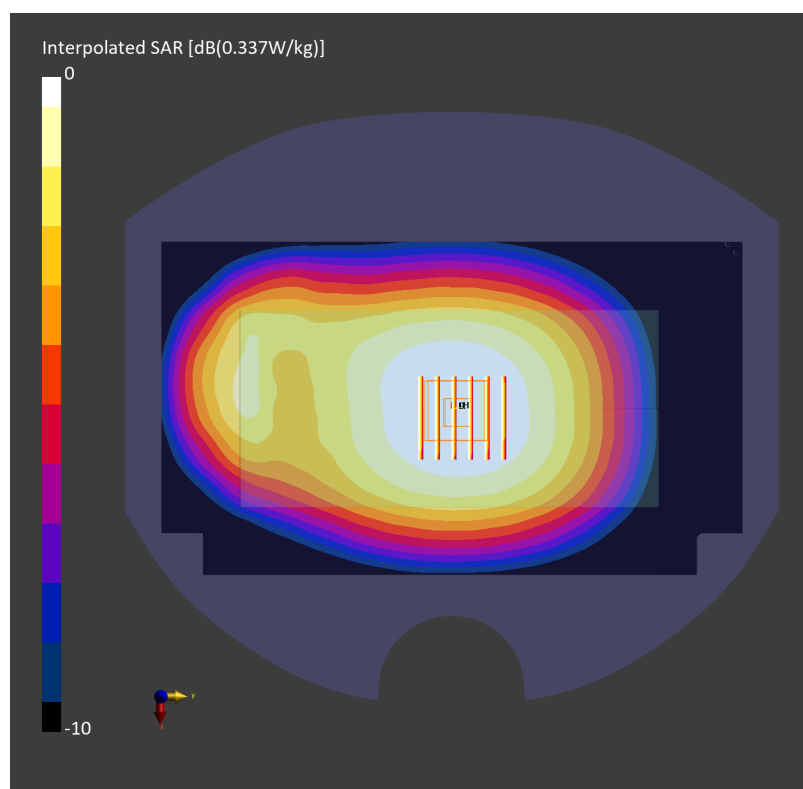

Date: 2025-02-06

#75_LTE Band 14_10M_QPSK_1_0_Back_10mm_Ch23330

Communication System: LTE-FDD ; Frequency: 793.000 MHz

Medium: HSL_750_250206 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(10.08, 9.99, 10.88); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.311 W/kg; SAR (10g) = 0.204 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.315 W/kg; SAR (8g) = 0.192 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

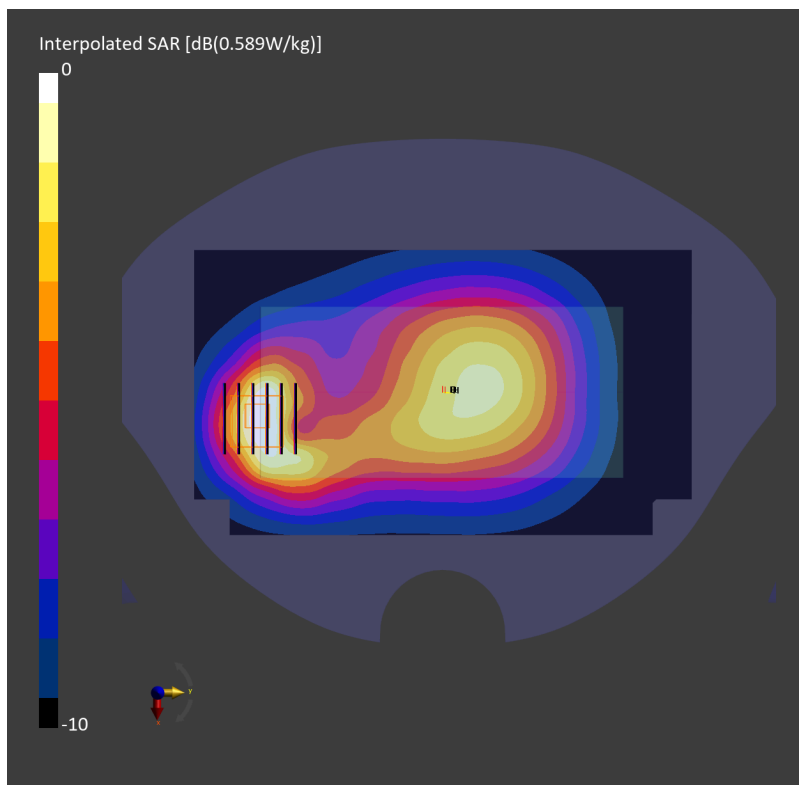

Date: 2025-02-25

#76_LTE Band 25_20M_QPSK_1_0_Back_10mm_Ch26590

Communication System: LTE-FDD ; Frequency: 1905.000 MHz

Medium: HSL_1900_250225 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(8.08, 7.98, 7.92); Calibrated: 2024-03-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2024-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.596 W/kg; SAR (10g) = 0.304 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.614 W/kg; SAR (8g) = 0.357 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.9 %

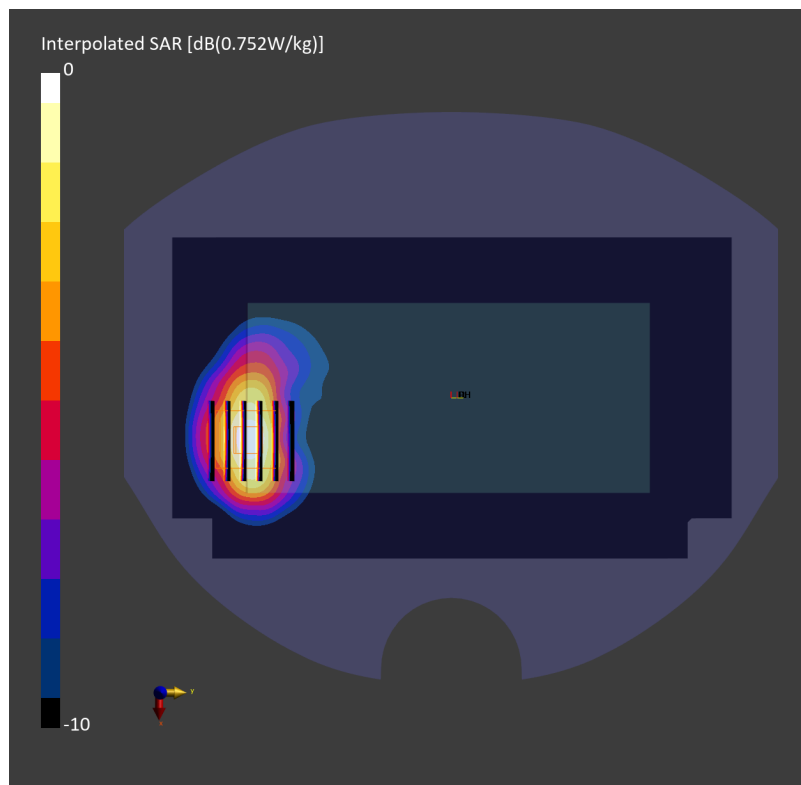

Date: 2025-02-06

#77_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_850_250206 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(9.78, 9.7, 10.56); Calibrated: 2024-12-02
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2024-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.418 W/kg; SAR (10g) = 0.277 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.460 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

