

#01_LTE Band 26_15M_QPSK_1_0_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260203 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 44.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.27, 9.12, 9.17); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.348 W/kg; SAR (10g) = 0.238 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.367 W/kg; SAR (8g) = 0.292 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.2 %

TSL Correction: Positive only

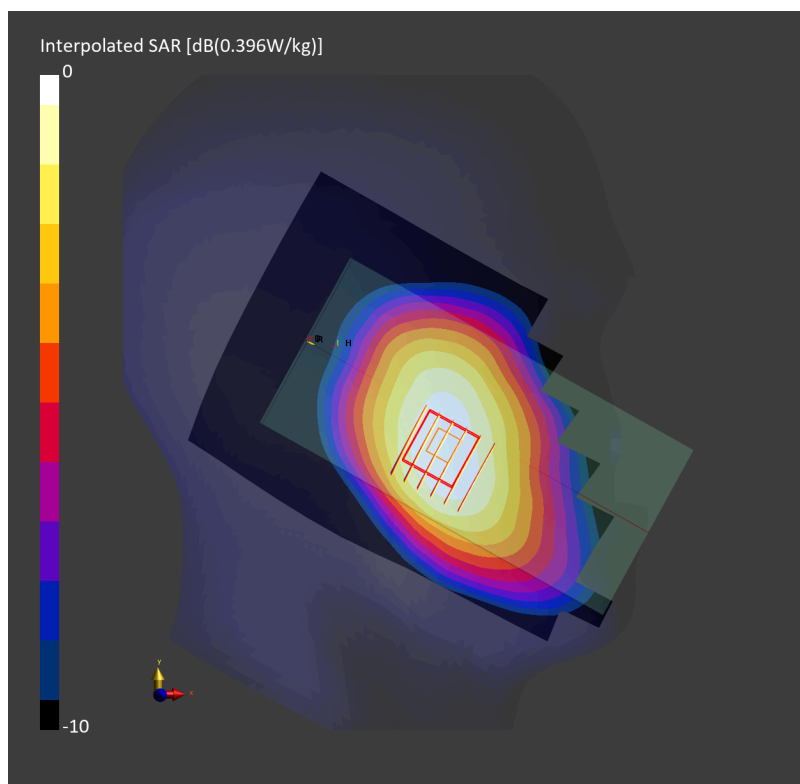

#02_LTE Band 48_20M_QPSK_50_50_Right Cheek_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260122 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.47, 6.37, 6.41); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.434 W/kg; SAR (10g) = 0.161 W/kg;

TSL Correction: Positive only

Zoom Scan (28.2 mm x 28.2 mm x 29.1 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.507 W/kg; SAR (8g) = 0.189 W/kg; SAR (10g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

TSL Correction: Positive only

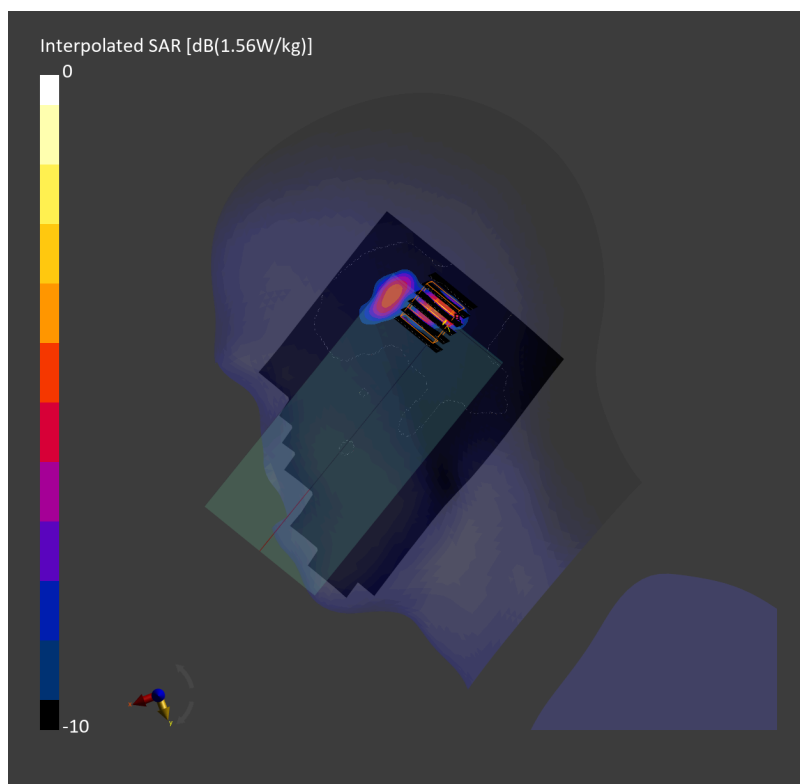

#03_FR1 n13_10M_BPSK_25_27_Right Cheek_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.469 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.754 W/kg; SAR (8g) = 0.452 W/kg; SAR (10g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

TSL Correction: Positive only

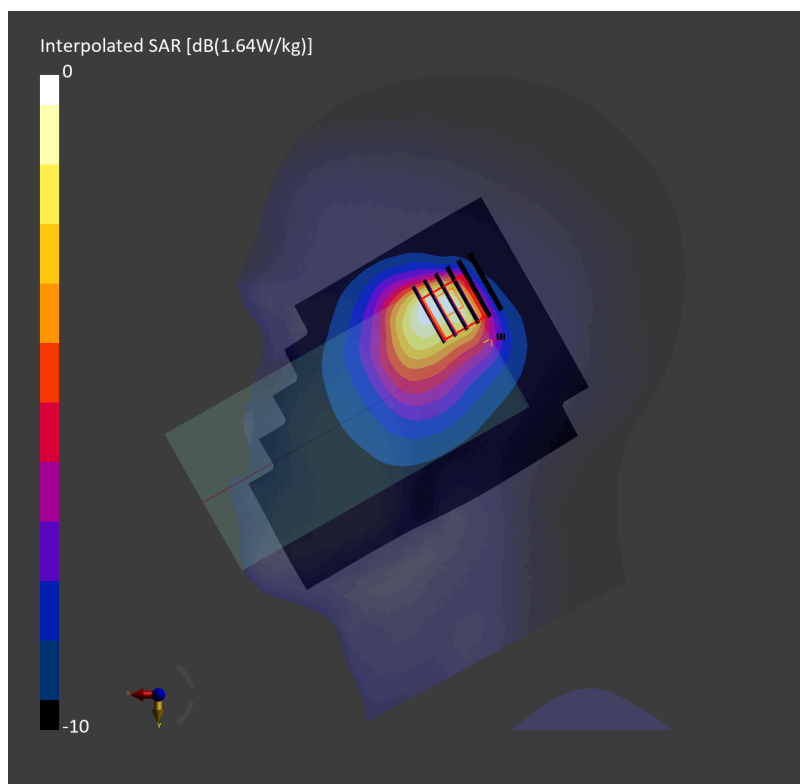

#04_FR1 n77_100M_BPSK_135_138_Right Tilted_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.75$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.471 W/kg; SAR (10g) = 0.173 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.502 W/kg; SAR (8g) = 0.193 W/kg; SAR (10g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

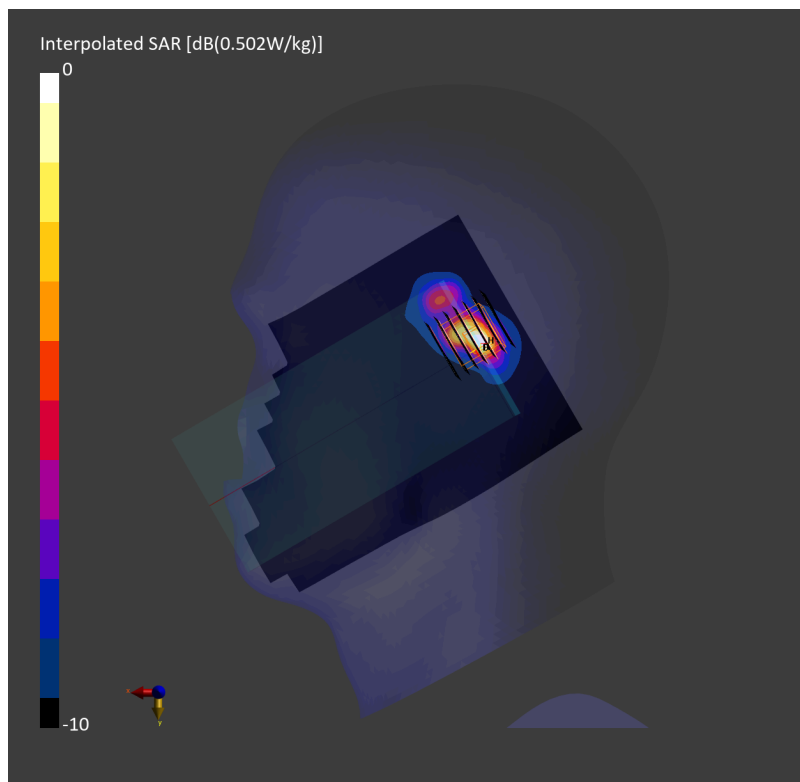

#05_FR1 n7_50M_BPSK_1_135_Right Cheek_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.577 W/kg; SAR (10g) = 0.299 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.633 W/kg; SAR (8g) = 0.376 W/kg; SAR (10g) = 0.348 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

TSL Correction: Positive only

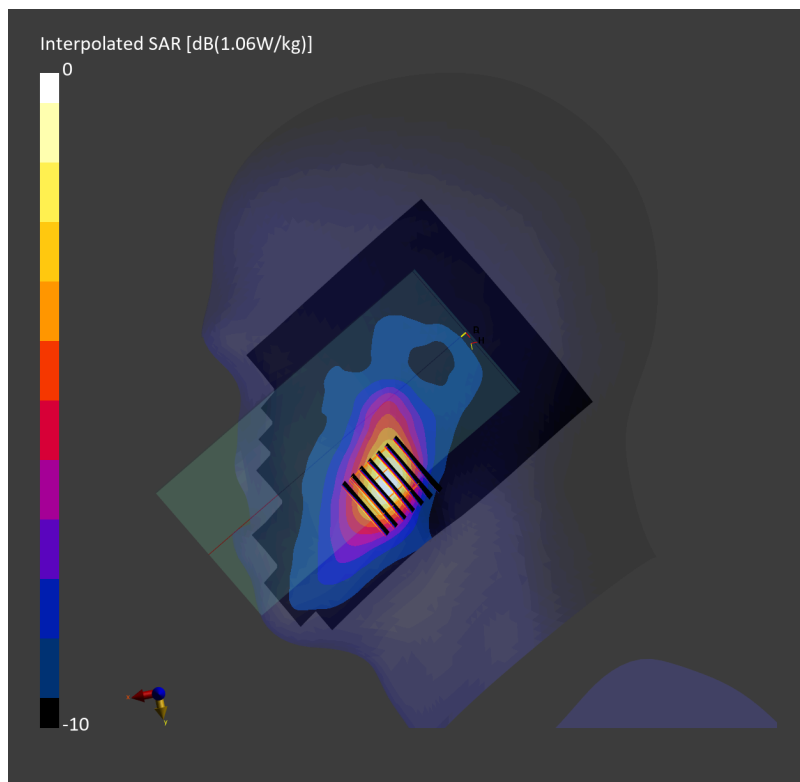

#06_LTE Band 25_20M_QPSK_1_0_Left Cheek_0mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260121 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.266 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 31.2 mm): Measurement Grid: 5.4 mm x 5.4 mm x 1.5 mm


Power Drift = 0.17 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

TSL Correction: Positive only

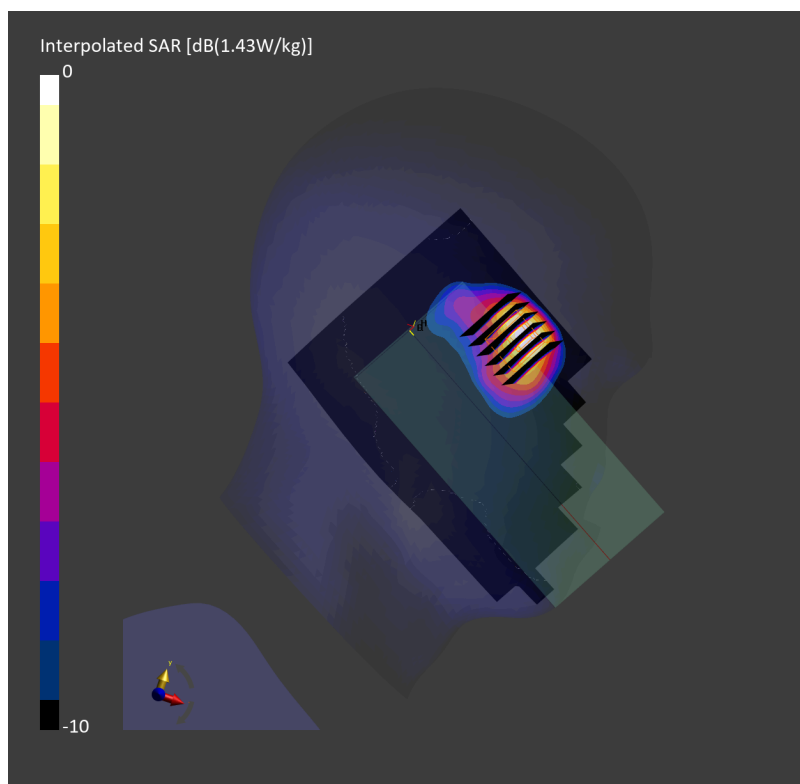

#07_LTE Band 48_20M_QPSK_50_50_Left Cheek_0mm_Ch55990

Communication System: LTE-TDD; Frequency: 3625.000 MHz

Medium: HSL_600-7200_260122 Medium parameters used: $f = 3625.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.521 W/kg; SAR (10g) = 0.213 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.14 dB

SAR (1g) = 0.527 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.3 %

TSL Correction: Positive only

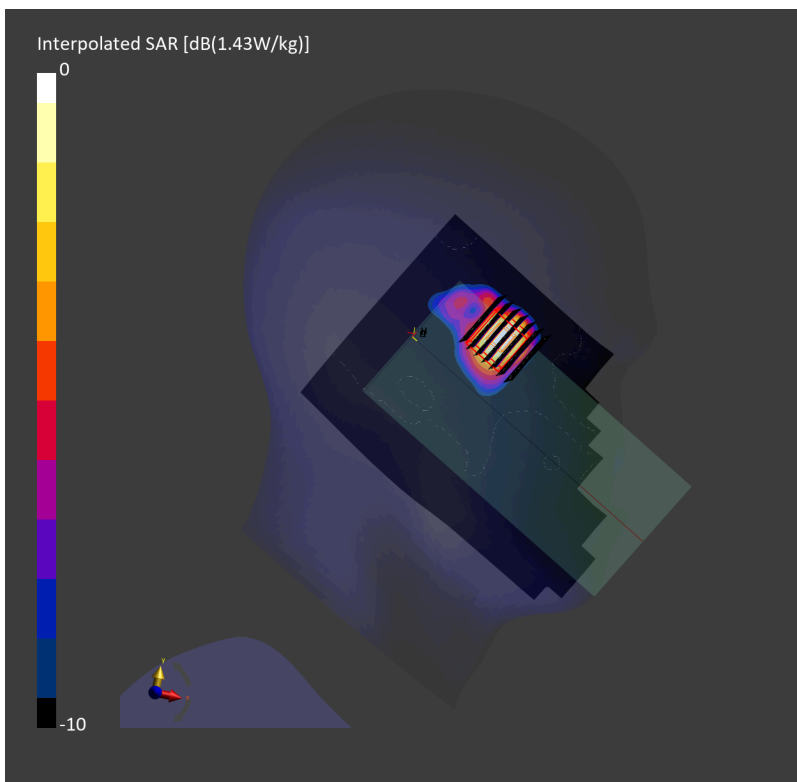

#08_FR1 n77_100M_BPSK_135_0_Left Cheek_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260309 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.15$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.37, 6.27, 6.31); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.485 W/kg; SAR (10g) = 0.186 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.472 W/kg; SAR (8g) = 0.205 W/kg; SAR (10g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

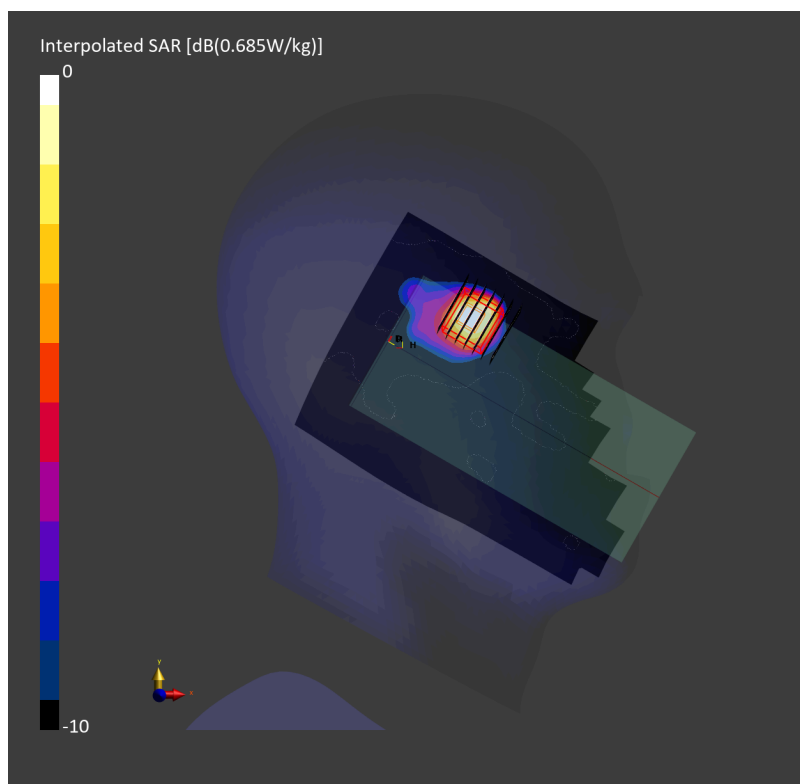

#09_LTE Band 48_20M_QPSK_1_0_Left Cheek_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.177 W/kg; SAR (10g) = 0.080 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.187 W/kg; SAR (8g) = 0.091 W/kg; SAR (10g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

TSL Correction: Positive only

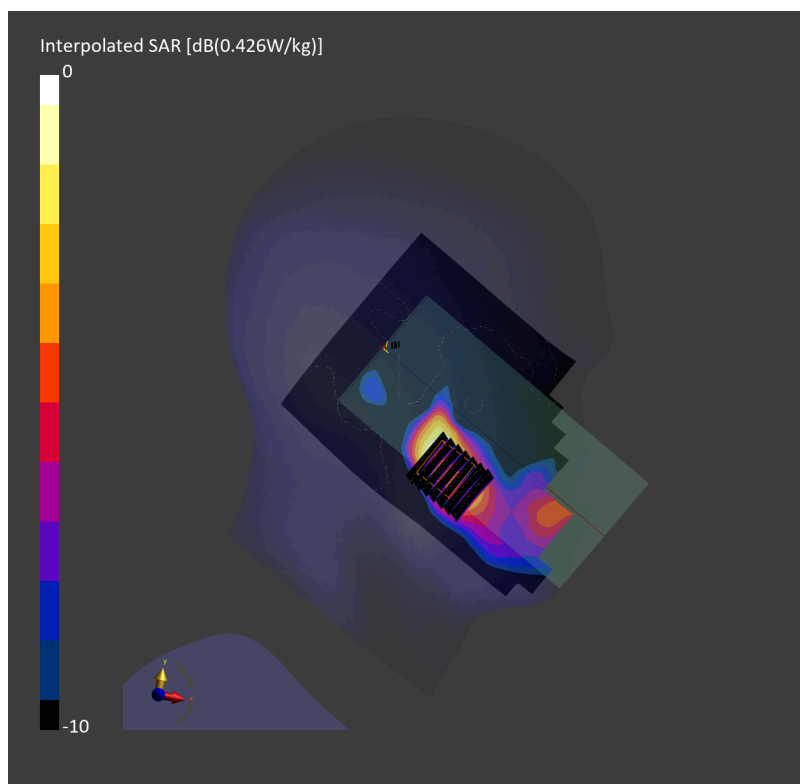

#10_FR1 n77_100M_BPSK_135_69_Left Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.535 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 0.405 W/kg; SAR (8g) = 0.202 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

TSL Correction: Positive only

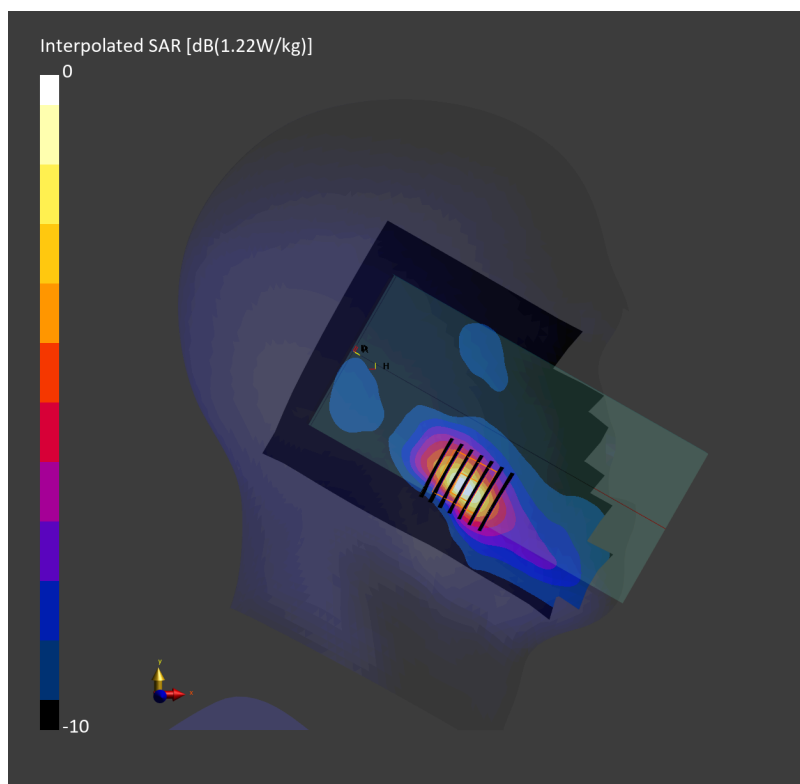

#11_LTE Band 48_20M_QPSK_1_0_Right Cheek_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260103 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.13 dB

SAR (1g) = 0.210 W/kg; SAR (8g) = 0.099 W/kg; SAR (10g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

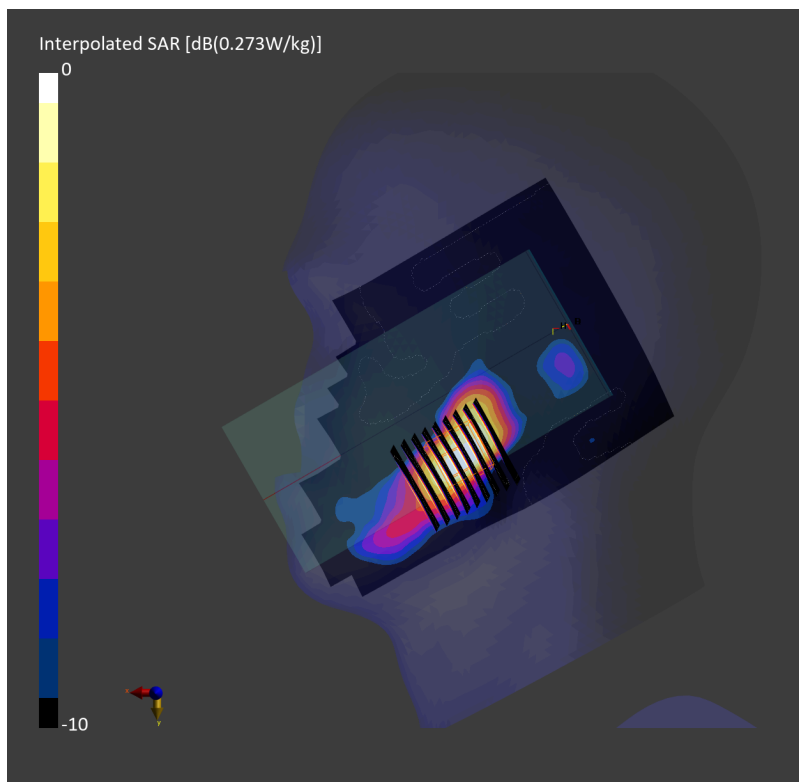

#12_FR1 n77_100M_QPSK_135_69_Right Cheek_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.75$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.61, 6.32, 7.03); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.500 W/kg; SAR (10g) = 0.220 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.510 W/kg; SAR (8g) = 0.257 W/kg; SAR (10g) = 0.233 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

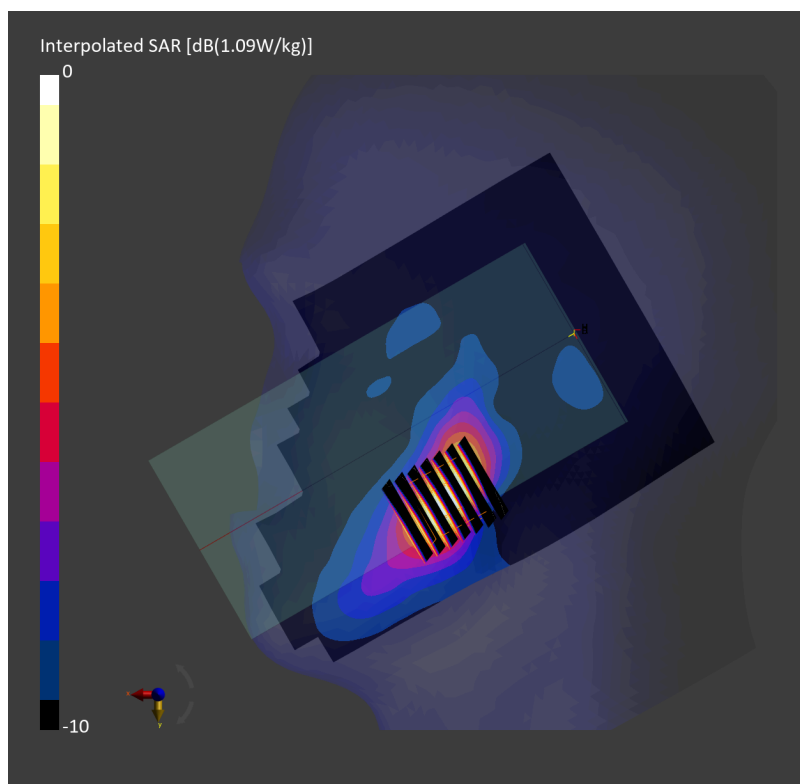

#13_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260315 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.226 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.515 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.344 W/kg; SAR (8g) = 0.158 W/kg; SAR (10g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

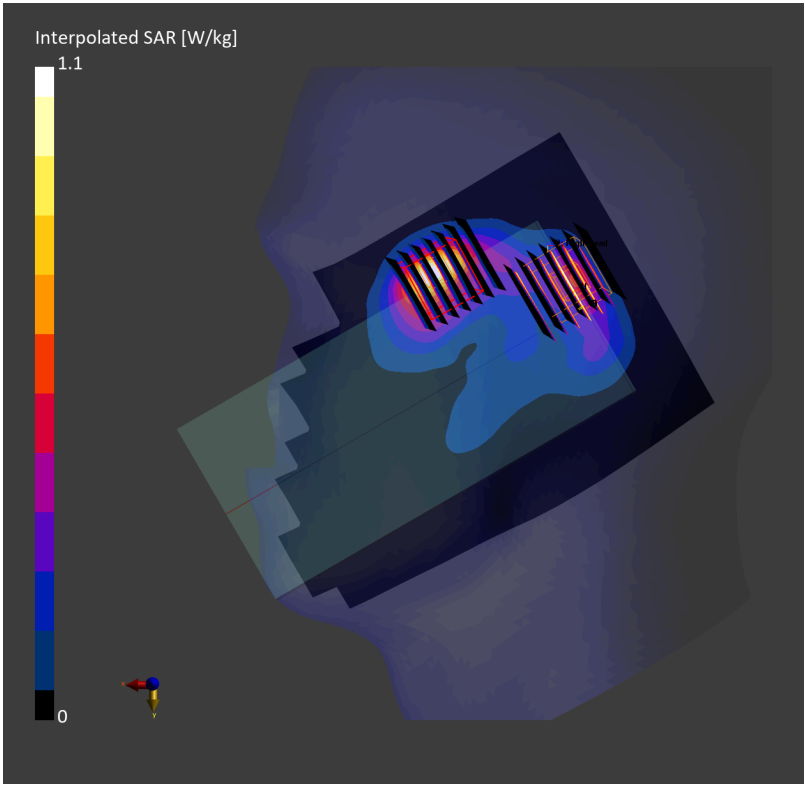

#14_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.579 W/kg; SAR (10g) = 0.191 W/kg;

TSL Correction: Positive only

Zoom Scan (26.6 mm x 26.6 mm x 22.9 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.723 W/kg; SAR (8g) = 0.249 W/kg; SAR (10g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

TSL Correction: Positive only

Zoom Scan (26.6 mm x 26.6 mm x 22.9 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 0.372 W/kg; SAR (8g) = 0.135 W/kg; SAR (10g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

TSL Correction: Positive only

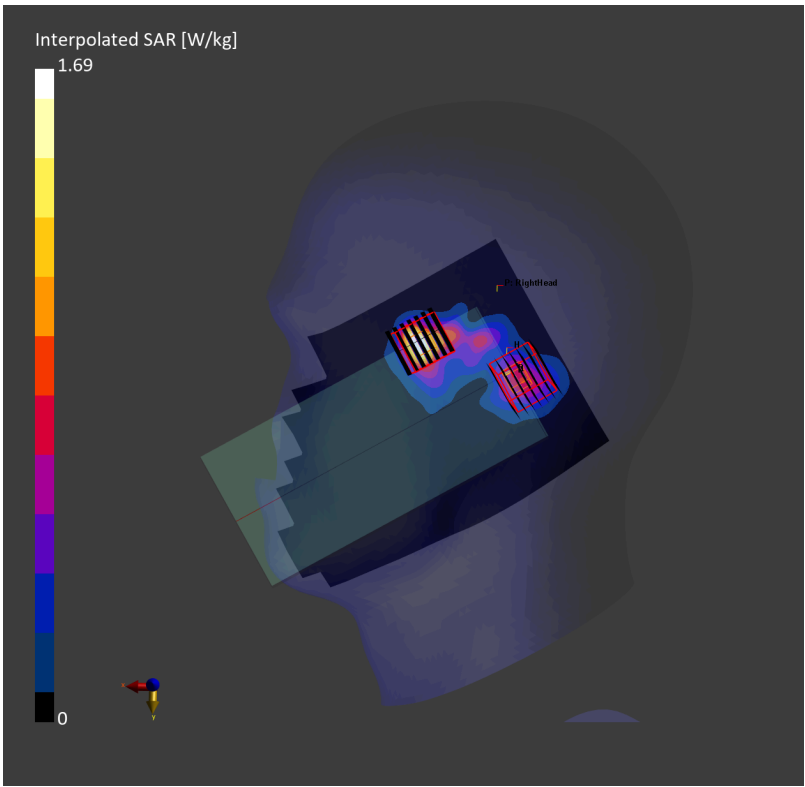

#15_Bluetooth_1Mbps_Right Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.124 W/kg; SAR (10g) = 0.060 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.131 W/kg; SAR (8g) = 0.066 W/kg; SAR (10g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

TSL Correction: Positive only

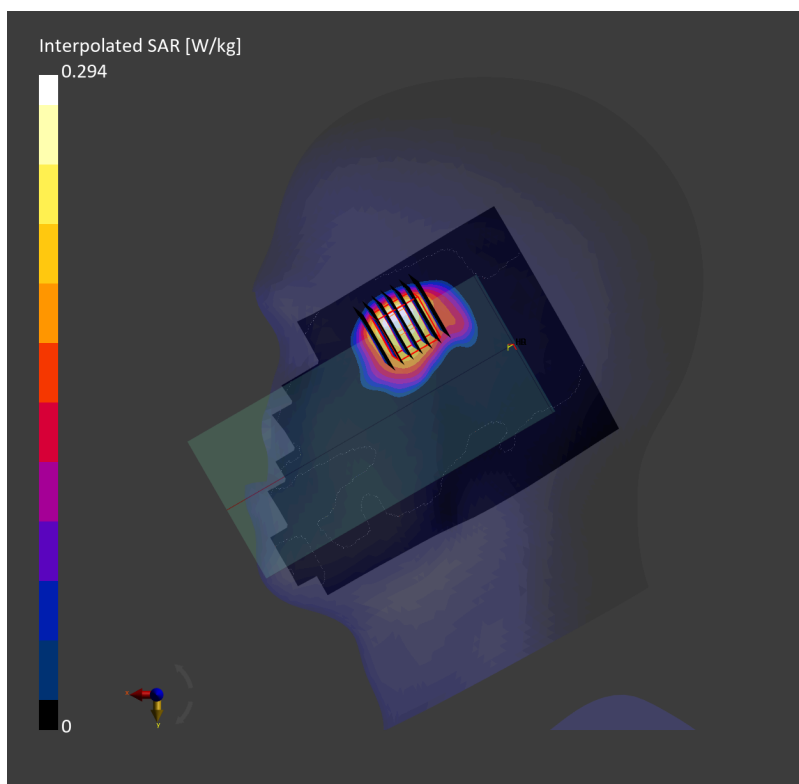

#16_Thread_250K_Right Cheek_0mm_Ch26

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.068 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.147 W/kg; SAR (8g) = 0.074 W/kg; SAR (10g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

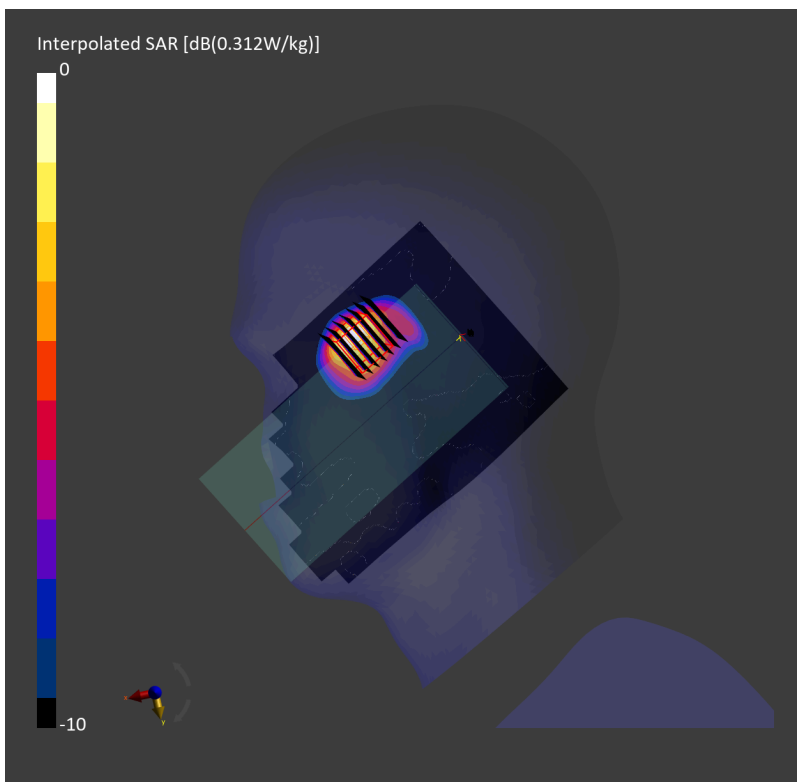

#17_LTE Band 66_20M_QPSK_50_0_Bottom Edge_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.805 W/kg; SAR (10g) = 0.391 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.821 W/kg; SAR (8g) = 0.436 W/kg; SAR (10g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

TSL Correction: Positive only

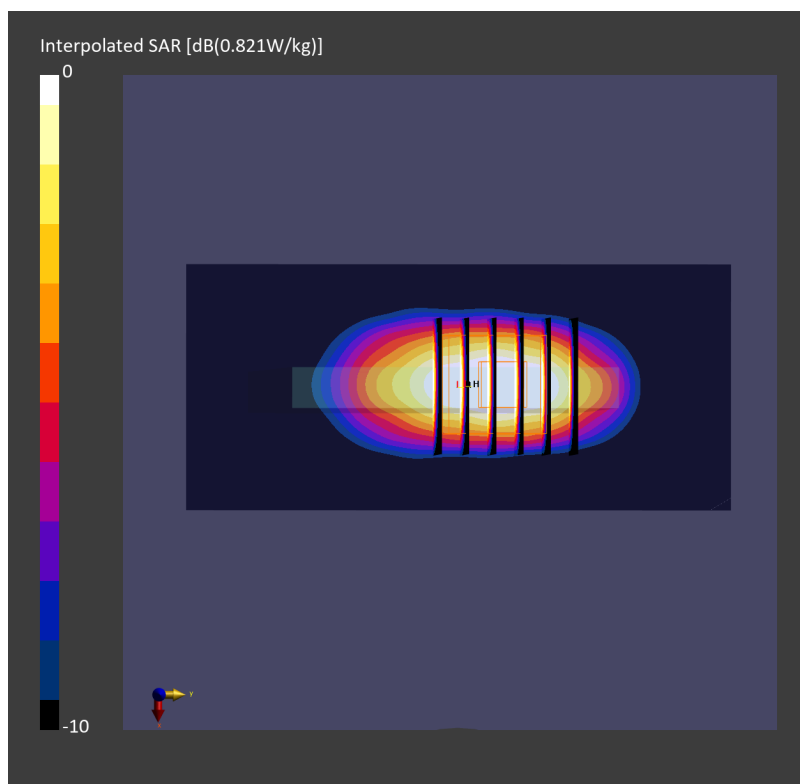

#18_LTE Band 66_20M_QPSK_1_99_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.460 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.785 W/kg; SAR (8g) = 0.460 W/kg; SAR (10g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

TSL Correction: Positive only

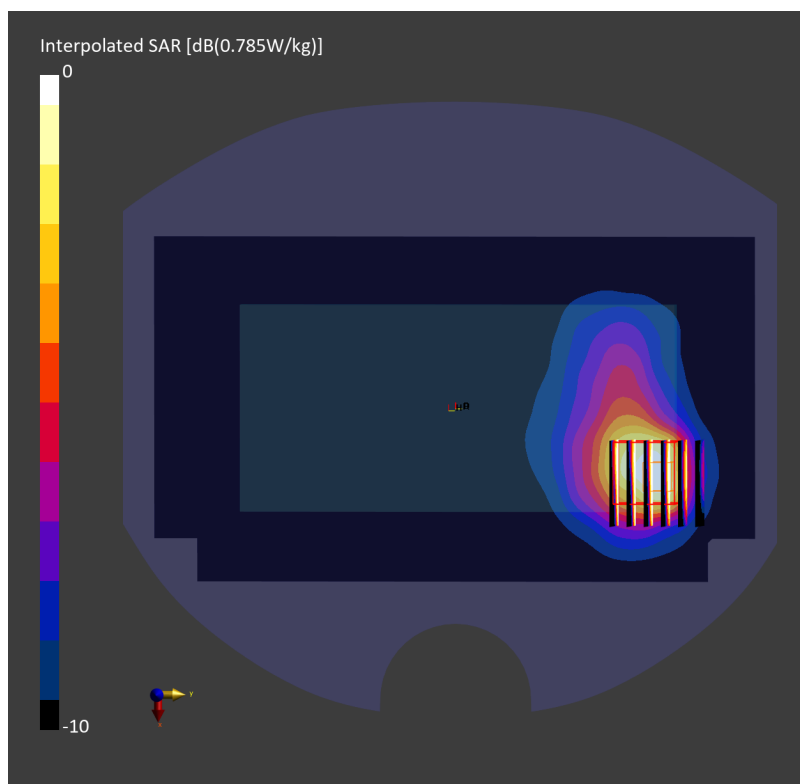

#19_LTE Band 48_20M_QPSK_50_50_Left Edge_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.53, 6.24, 6.94); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.514 W/kg; SAR (10g) = 0.161 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.186 W/kg; SAR (10g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 3.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.4 %

TSL Correction: Positive only

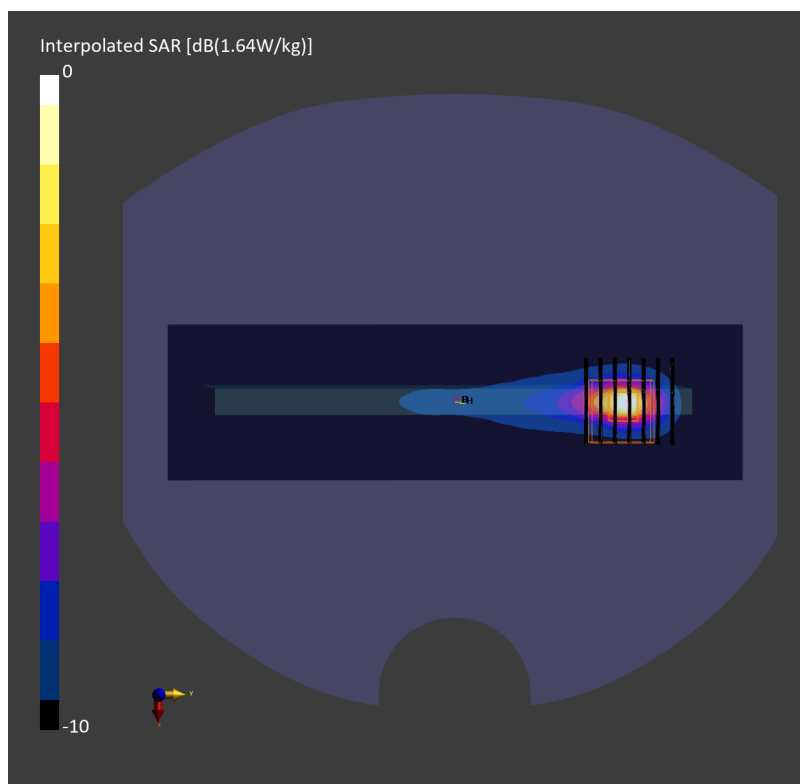

#20_FR1 n77_100M_BPSK_135_138_Left Edge_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.06$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.488 W/kg; SAR (10g) = 0.161 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.489 W/kg; SAR (8g) = 0.179 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

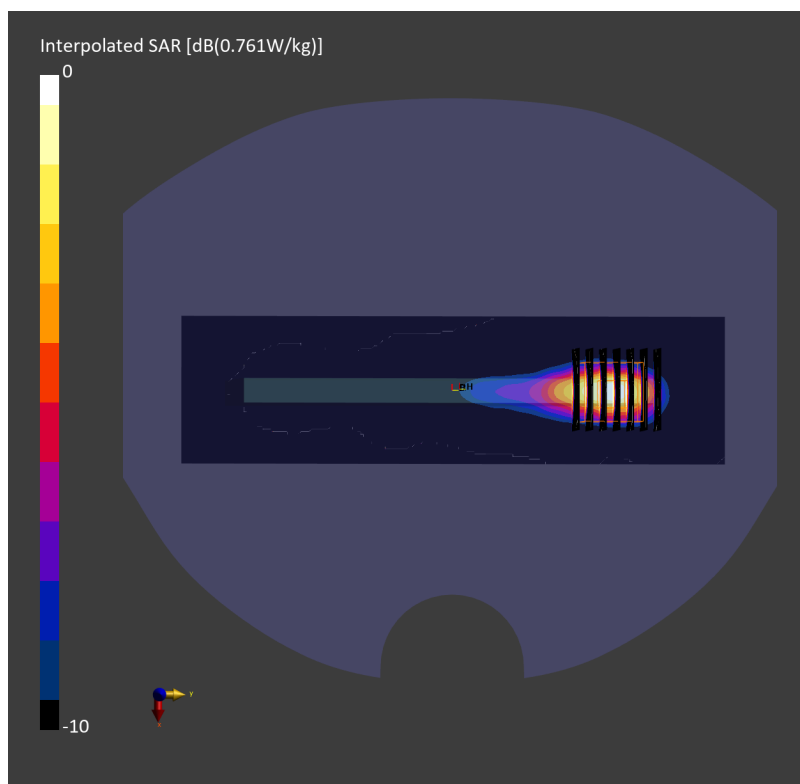

#21_LTE Band 41_20M_QPSK_1_0_Right Edge_5mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260124 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.356 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.788 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

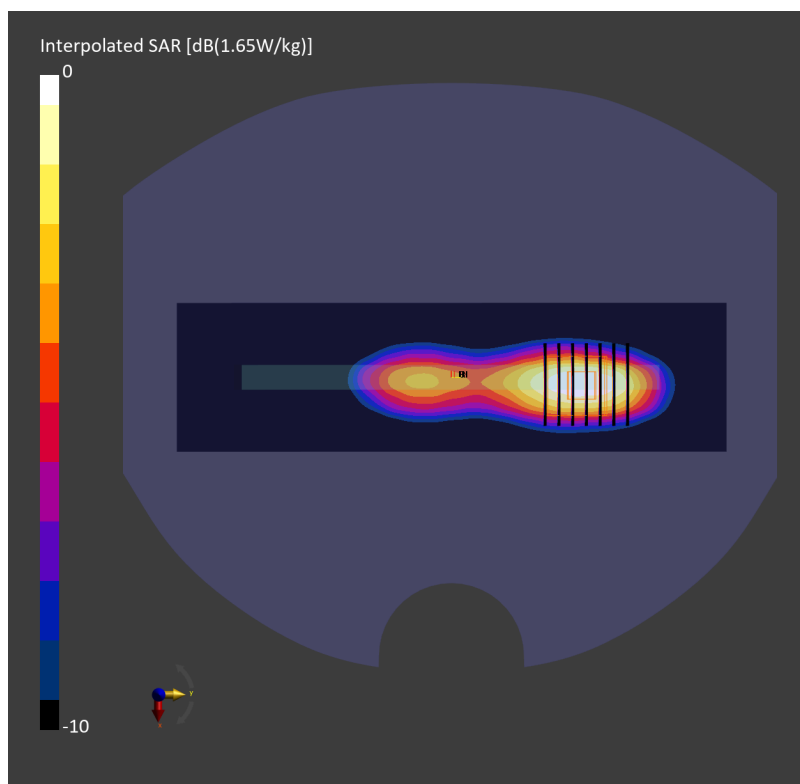

#22_LTE Band 48_20M_QPSK_50_50_Right Edge_5mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.544 W/kg; SAR (10g) = 0.222 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.615 W/kg; SAR (8g) = 0.253 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.2 %

TSL Correction: Positive only

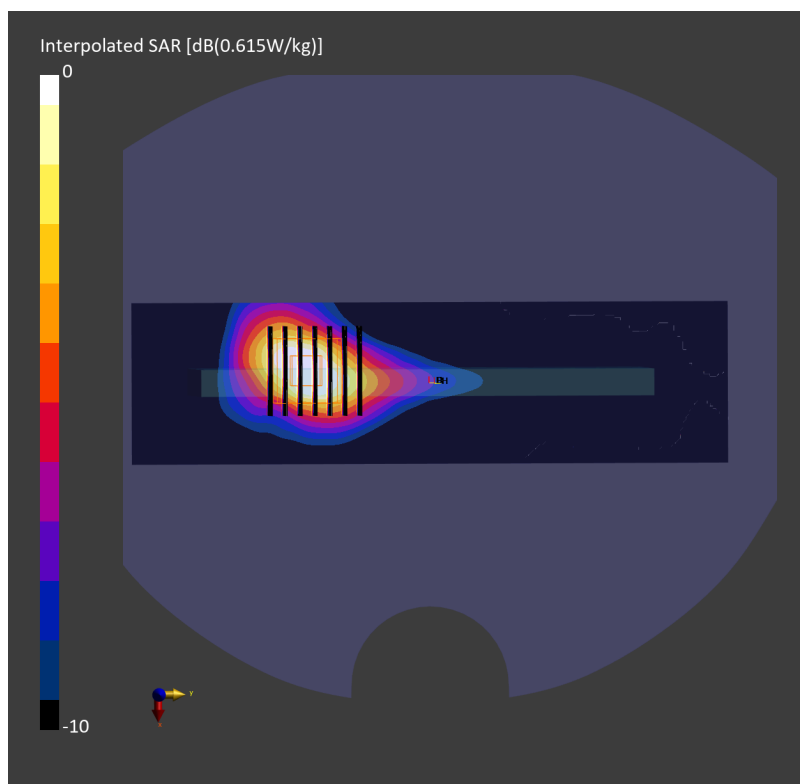

#23_FR1 n25_40M_BPSK_108_0_Right Edge_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.749 W/kg; SAR (10g) = 0.354 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.769 W/kg; SAR (8g) = 0.394 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

TSL Correction: Positive only

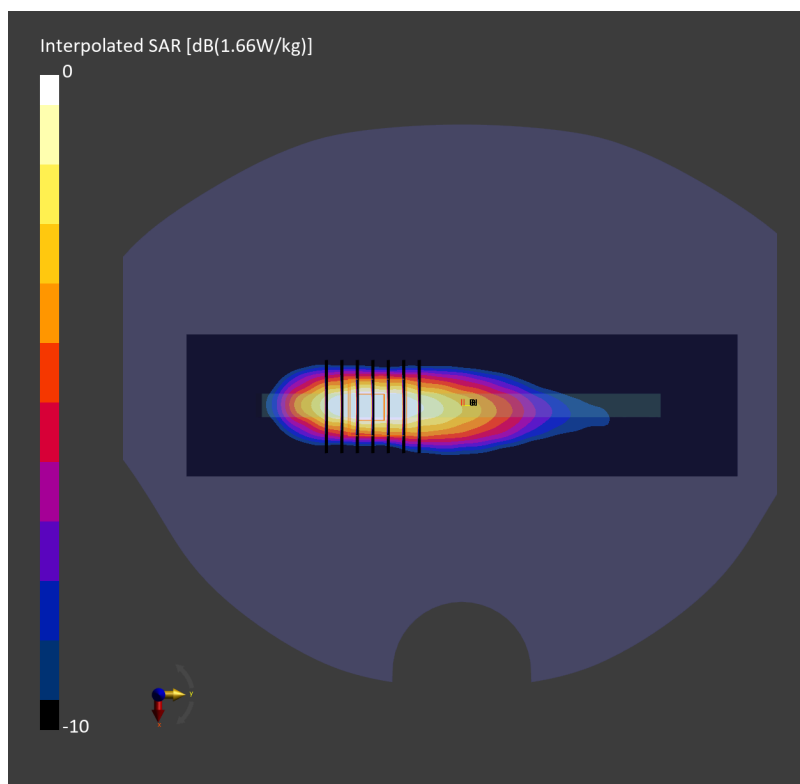

#24_FR1 n77_100M_BPSK_135_69_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.280 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.652 W/kg; SAR (8g) = 0.310 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

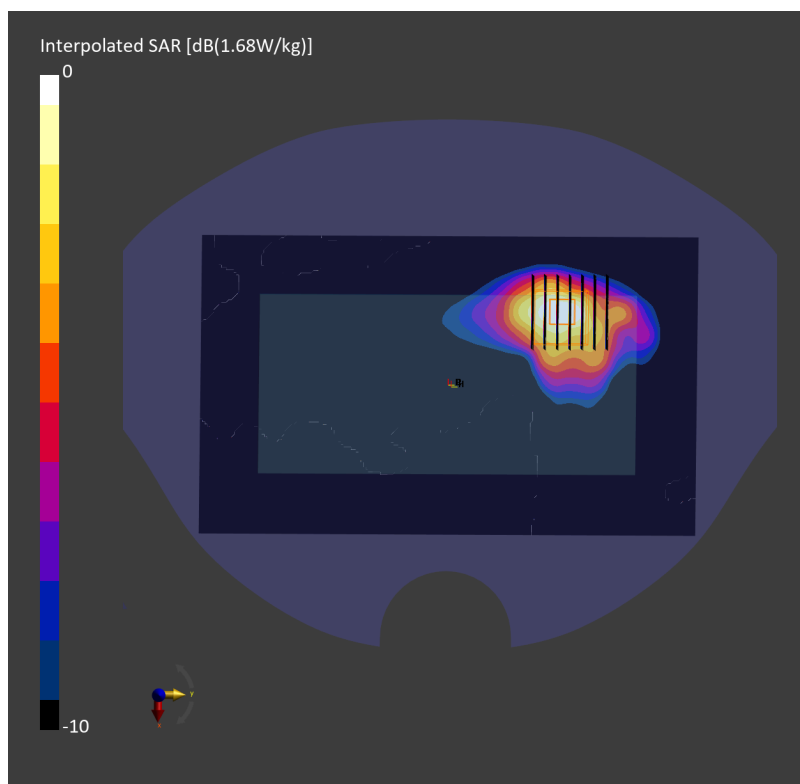

#25_LTE Band 48_20M_QPSK_50_50_Left Edge_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.74$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.599 W/kg; SAR (10g) = 0.224 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

TSL Correction: Positive only

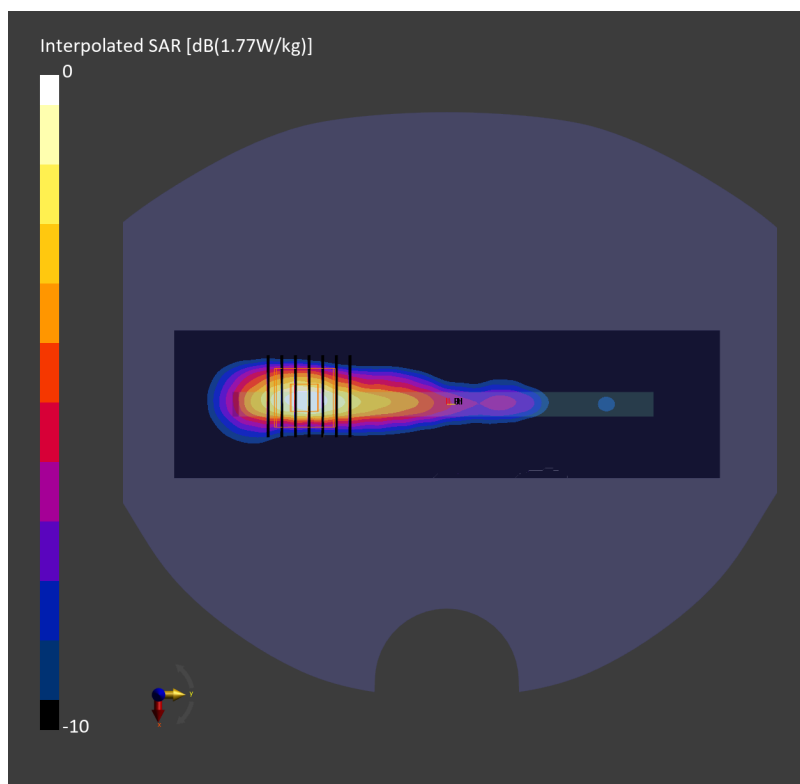

#26_FR1 n77_100M_QPSK_135_69_Left Edge_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.576 W/kg; SAR (10g) = 0.227 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.628 W/kg; SAR (8g) = 0.257 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

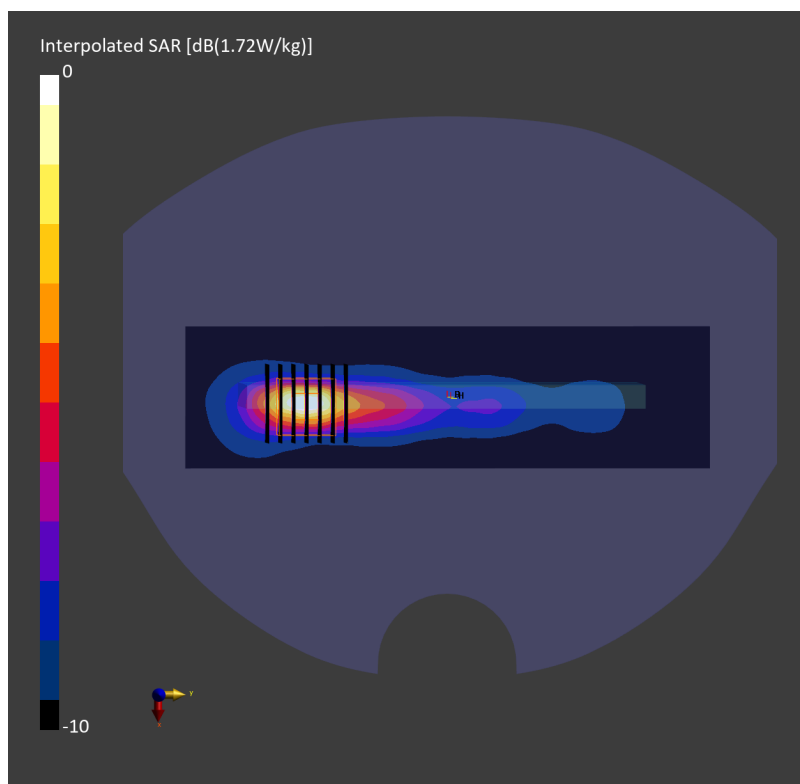

#27_LTE Band 48_20M_QPSK_1_99_Right Edge_5mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260122 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.247 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.688 W/kg; SAR (8g) = 0.280 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

TSL Correction: Positive only

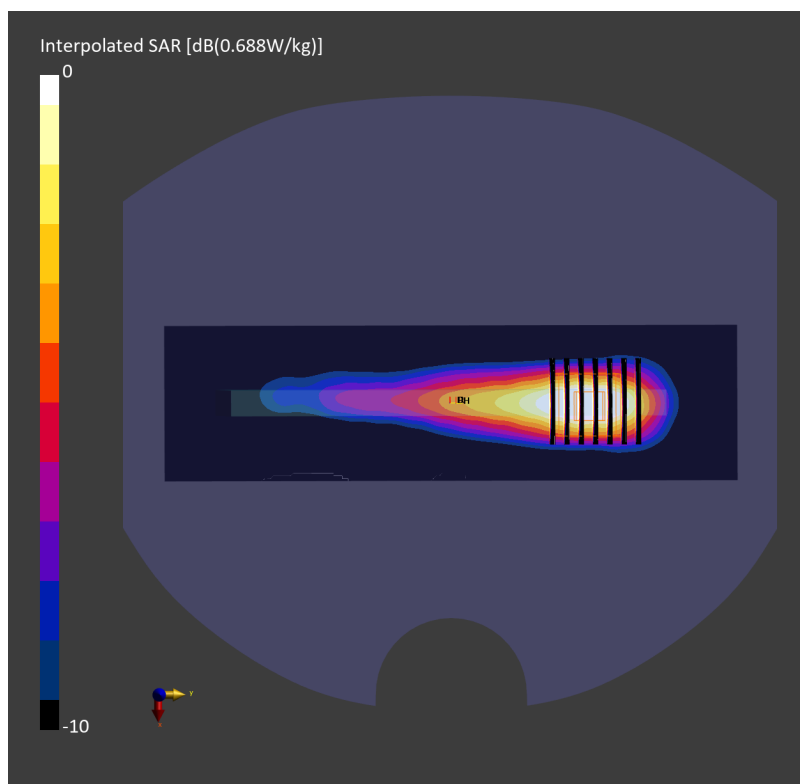

#28_FR1 n77_100M_BPSK_1_271_Right Edge_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.475 W/kg; SAR (10g) = 0.178 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.508 W/kg; SAR (8g) = 0.206 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

TSL Correction: Positive only

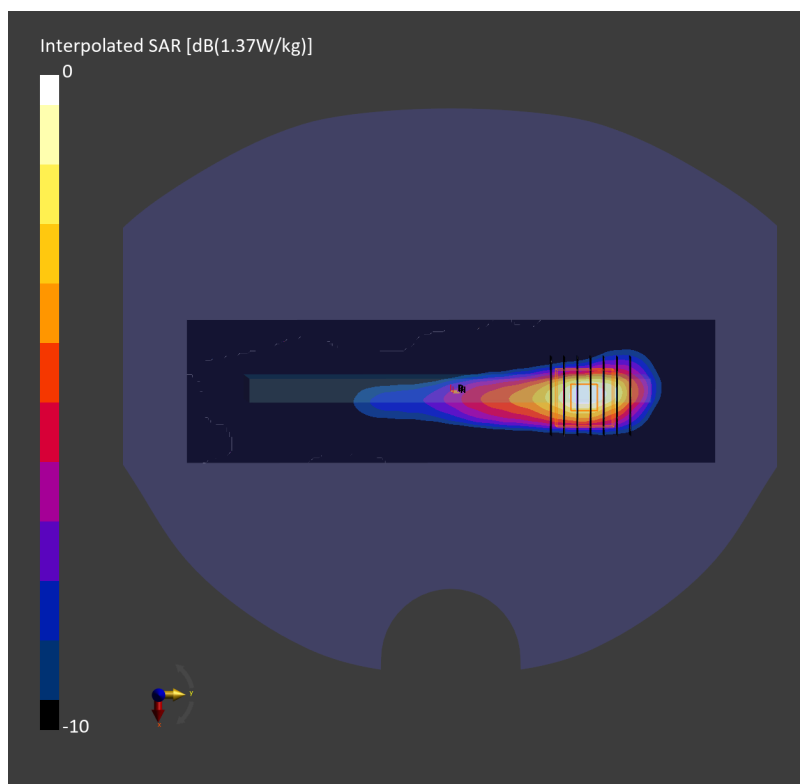

#29_WLAN2.4GHz_802.11b 1Mbps_Left Edge_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.081 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.202 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

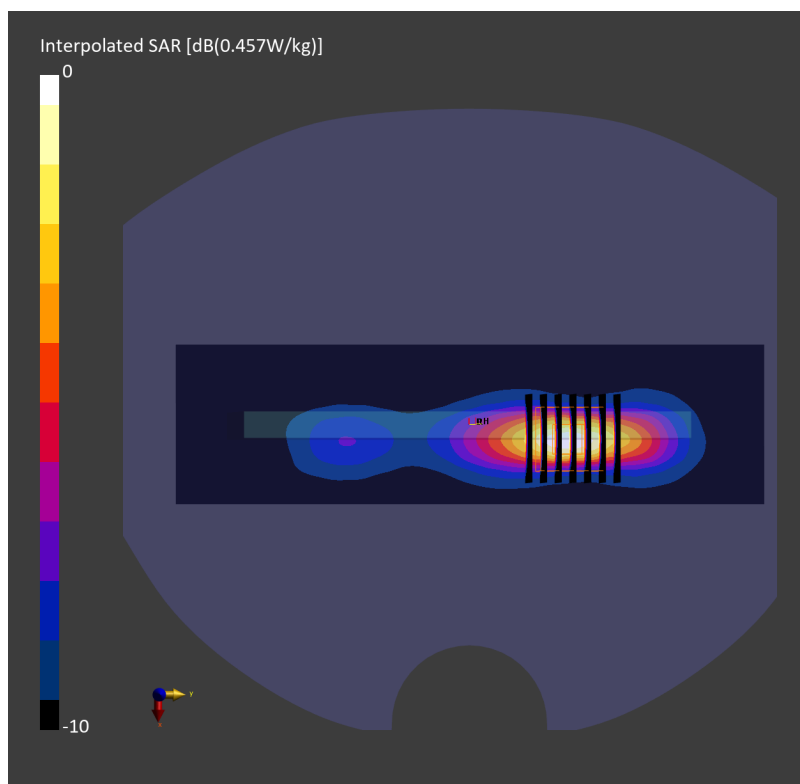

#30_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.034 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.111 W/kg; SAR (8g) = 0.033 W/kg; SAR (10g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.2 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.16 dB

SAR (1g) = 0.124 W/kg; SAR (8g) = 0.038 W/kg; SAR (10g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.2 %

TSL Correction: Positive only

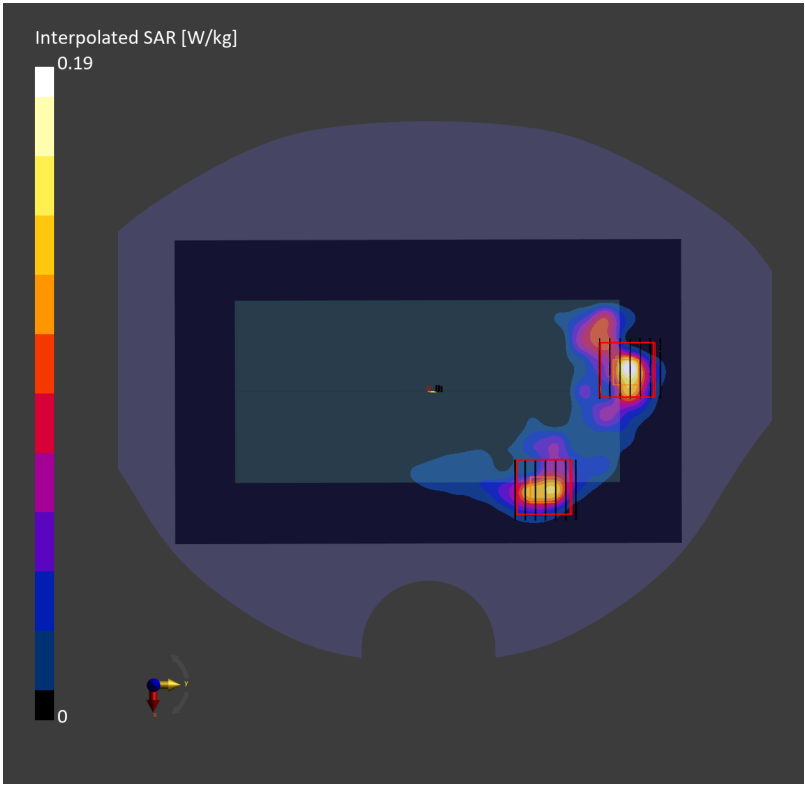

#31_Bluetooth_1Mbps_Top Edge_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.362 W/kg; SAR (10g) = 0.162 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.386 W/kg; SAR (8g) = 0.178 W/kg; SAR (10g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

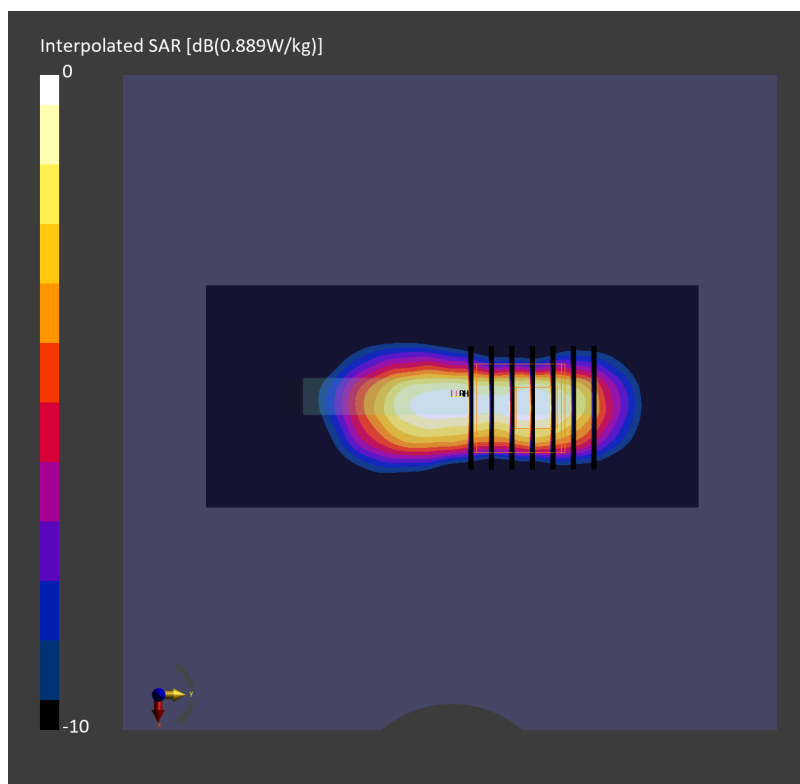

#32_Thread_250K_Left Edge_5mm_Ch26

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.148 W/kg; SAR (10g) = 0.066 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.158 W/kg; SAR (8g) = 0.075 W/kg; SAR (10g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

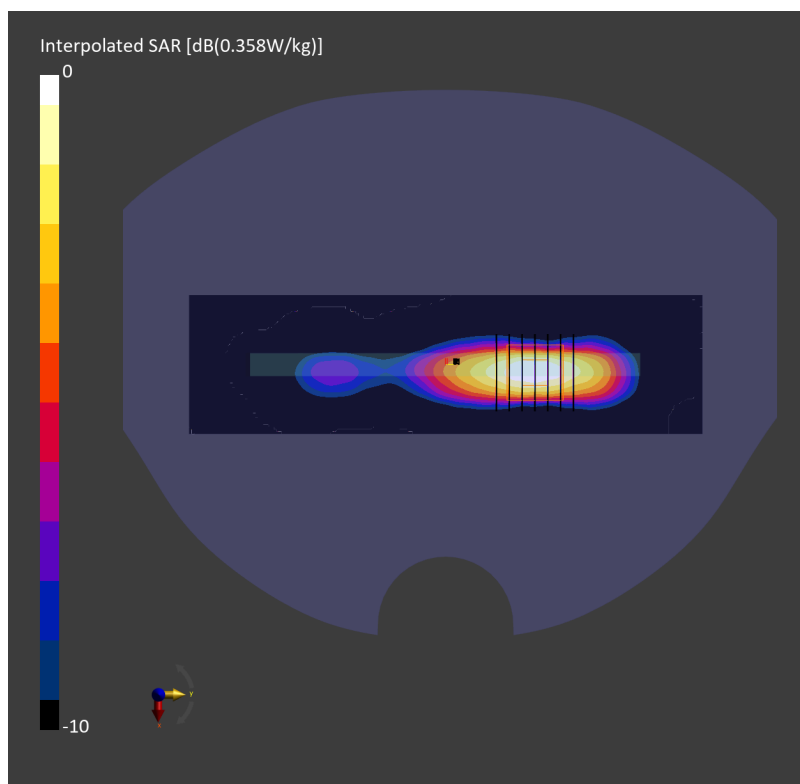

#33_LTE Band 25_20M_QPSK_50_24_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260201 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.509 W/kg; SAR (10g) = 0.257 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.577 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

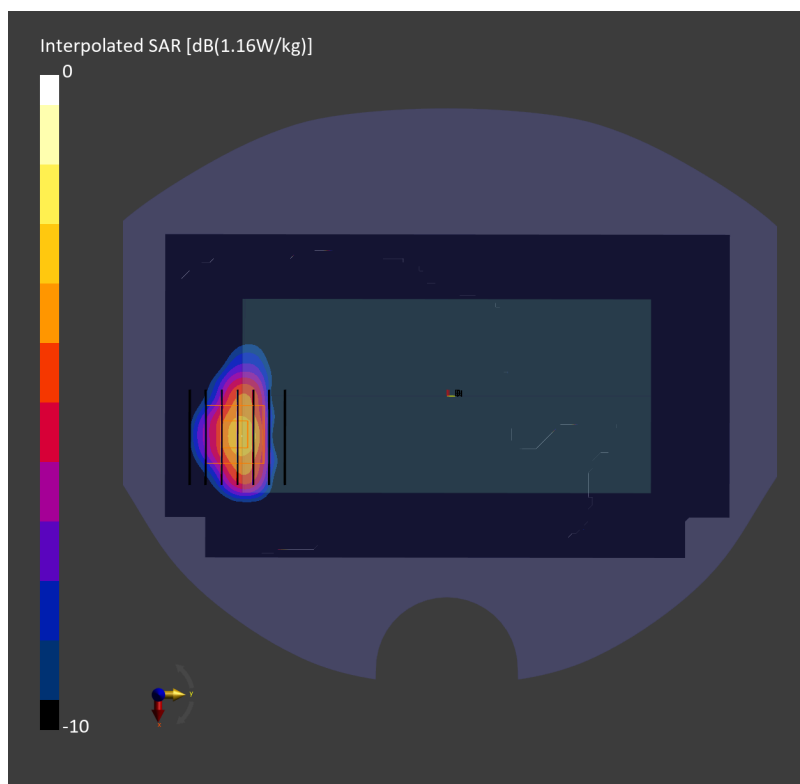

#34_LTE Band 66_20M_QPSK_1_99_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.801 W/kg; SAR (10g) = 0.460 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.785 W/kg; SAR (8g) = 0.460 W/kg; SAR (10g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

TSL Correction: Positive only

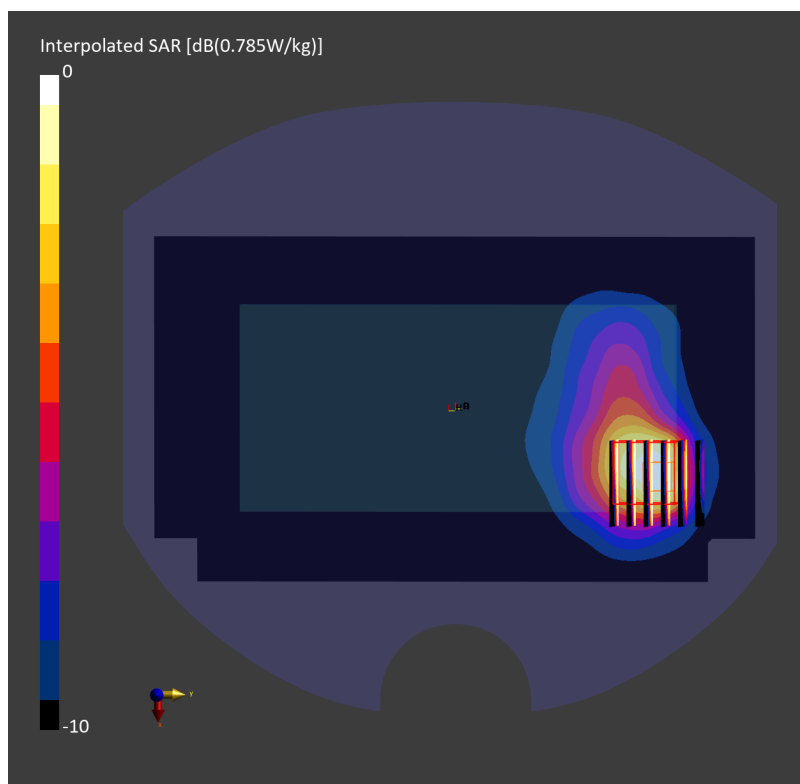

#35_LTE Band 48_20M_QPSK_50_50_Back_5mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260204 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.352 W/kg; SAR (10g) = 0.139 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.355 W/kg; SAR (8g) = 0.148 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.4 %

TSL Correction: Positive only

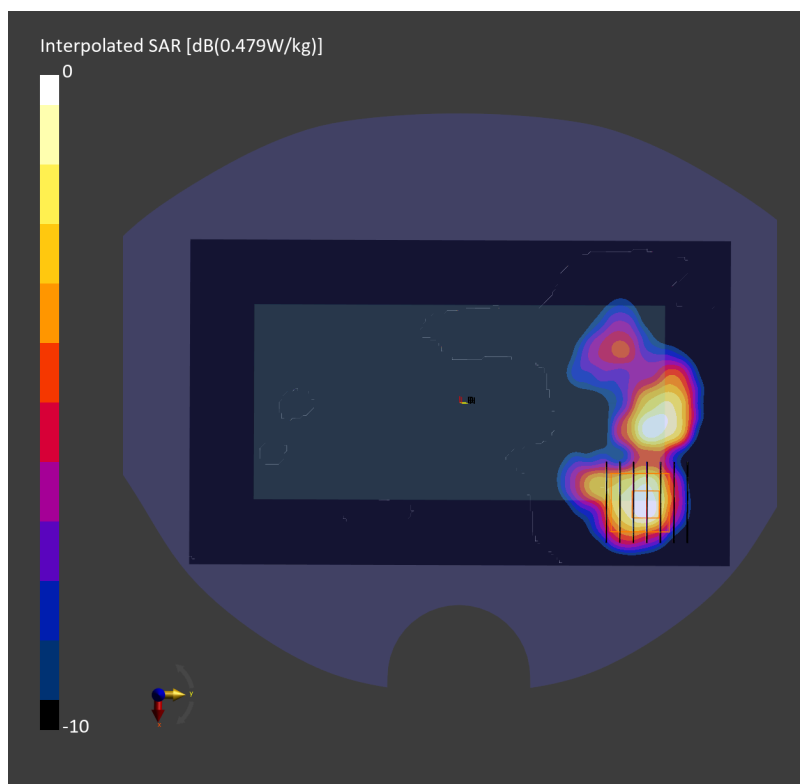

#36_FR1 n77_100M_BPSK_135_138_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.131 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.17 dB

SAR (1g) = 0.416 W/kg; SAR (8g) = 0.159 W/kg; SAR (10g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.7 %

TSL Correction: Positive only

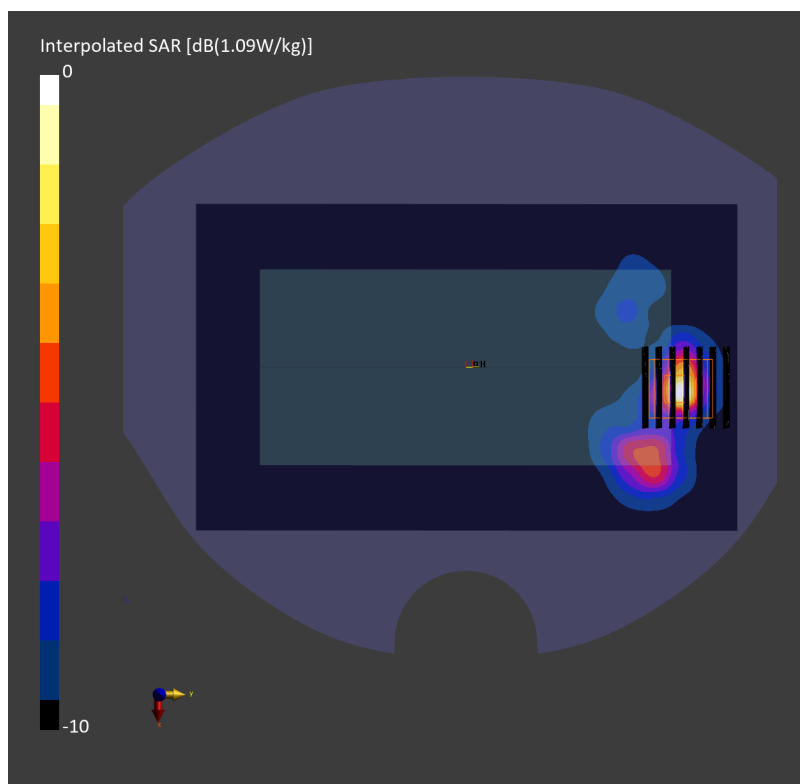

#37_FR1 n66_45M_BPSK_1_120_Front_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260226 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.646 W/kg; SAR (10g) = 0.372 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.639 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

TSL Correction: Positive only

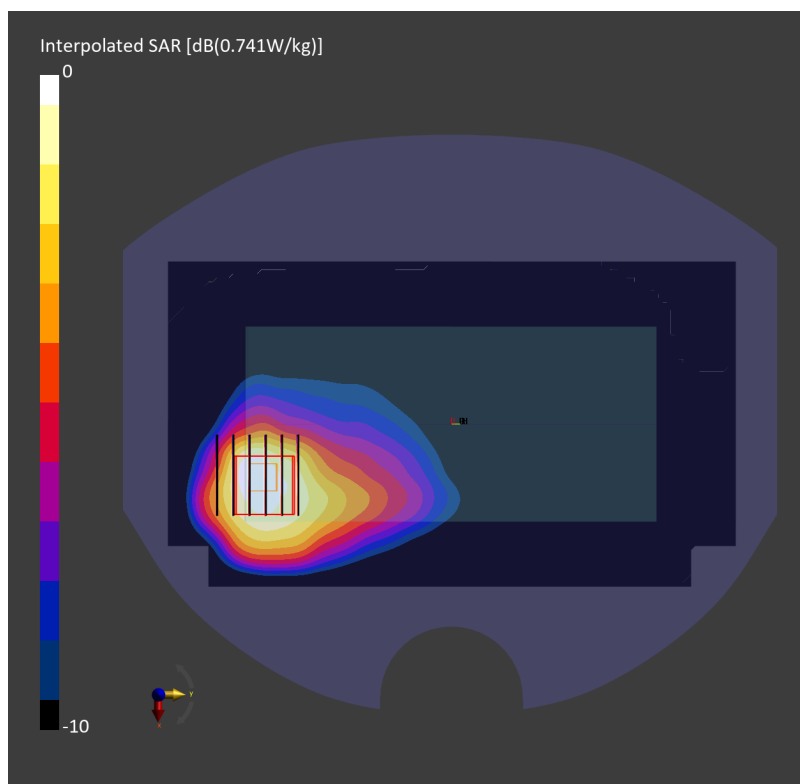

#38_LTE Band 48_20M_QPSK_50_50_Back_5mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260319 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.284 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.305 W/kg; SAR (10g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

TSL Correction: Positive only

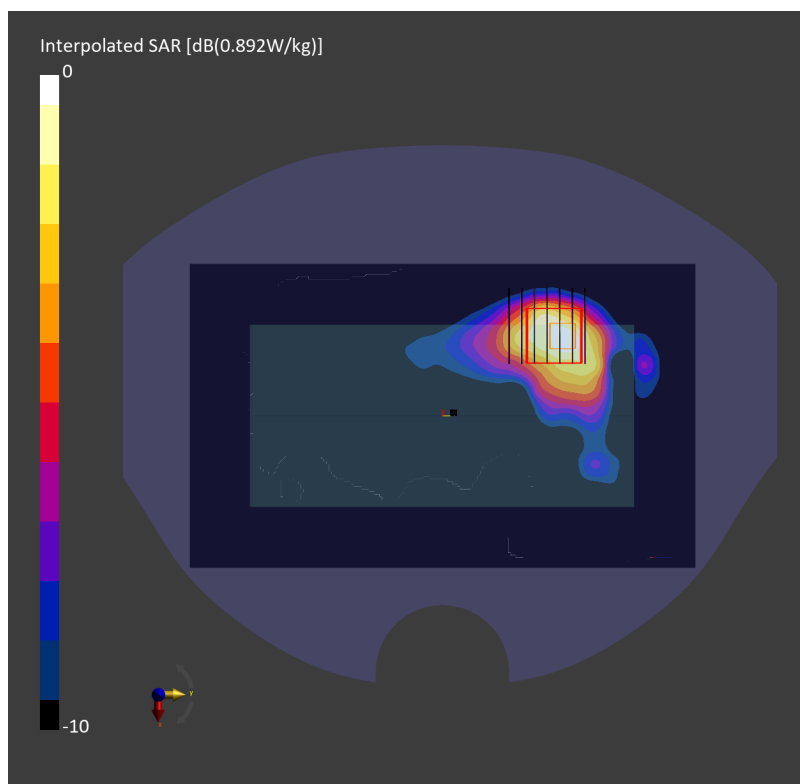

#39_FR1 n25_40M_BPSK_1_108_Back_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260301 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.404 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.570 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.270 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

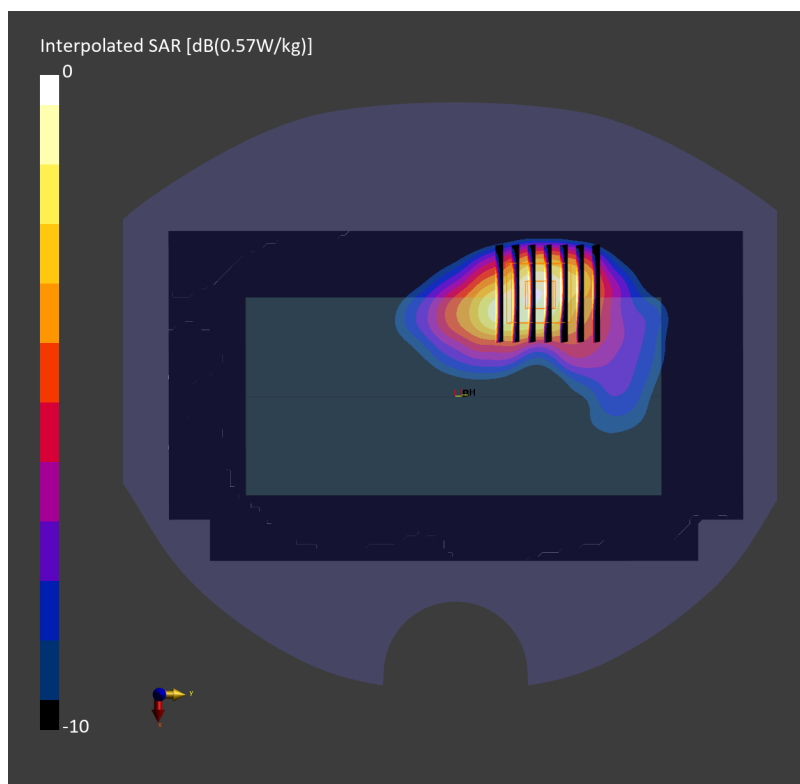

#40_FR1 n77_100M_BPSK_135_69_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260213 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.280 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.652 W/kg; SAR (8g) = 0.310 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

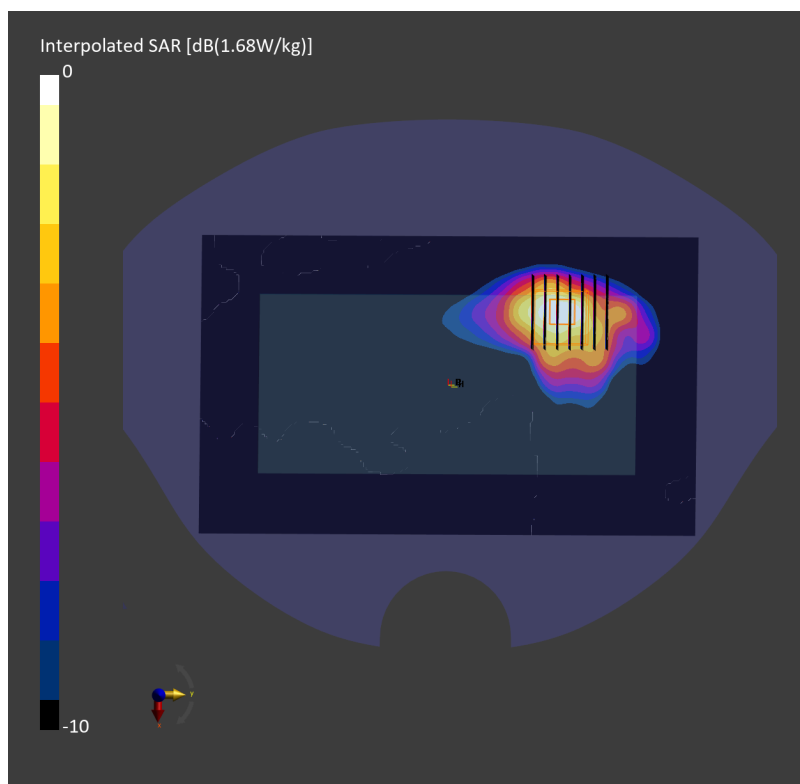

#41_LTE Band 48_20M_QPSK_50_50_Front_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 37.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.389 W/kg; SAR (10g) = 0.156 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 0.447 W/kg; SAR (8g) = 0.187 W/kg; SAR (10g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

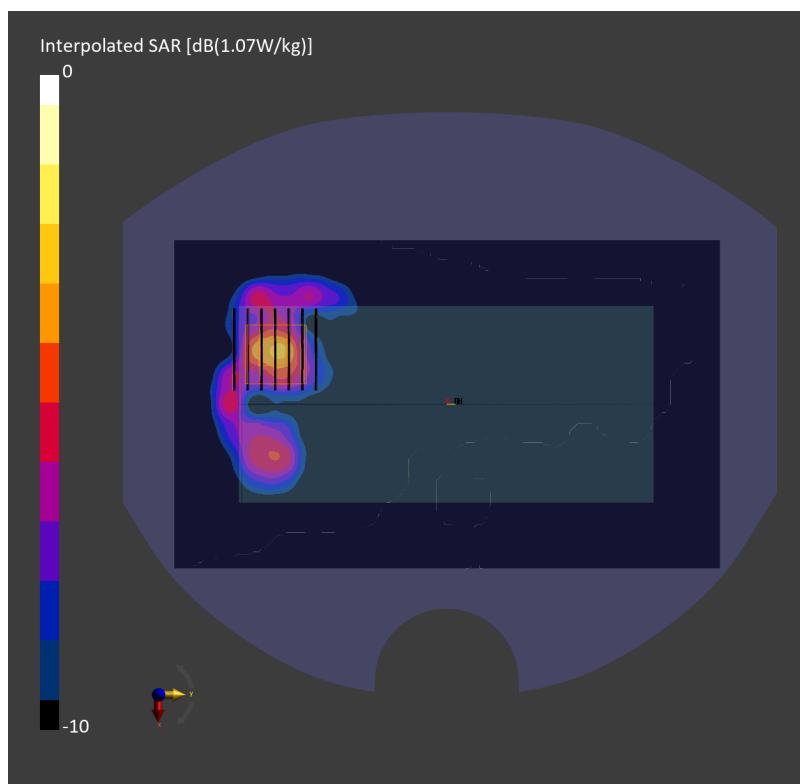

#42_FR1 n77_100M_BPSK_1_137_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.199 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 0.511 W/kg; SAR (8g) = 0.223 W/kg; SAR (10g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.3 %

TSL Correction: Positive only

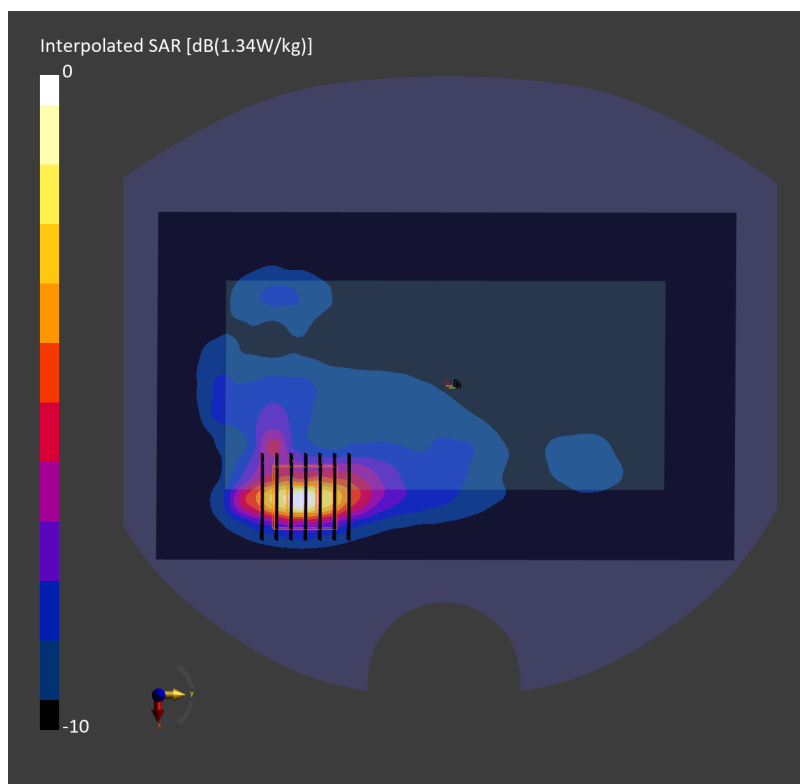

#43_LTE Band 48_20M_QPSK_1_99_Back_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260122 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.93$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.34, 6.24, 6.28); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.320 W/kg; SAR (10g) = 0.145 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.344 W/kg; SAR (8g) = 0.155 W/kg; SAR (10g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

TSL Correction: Positive only

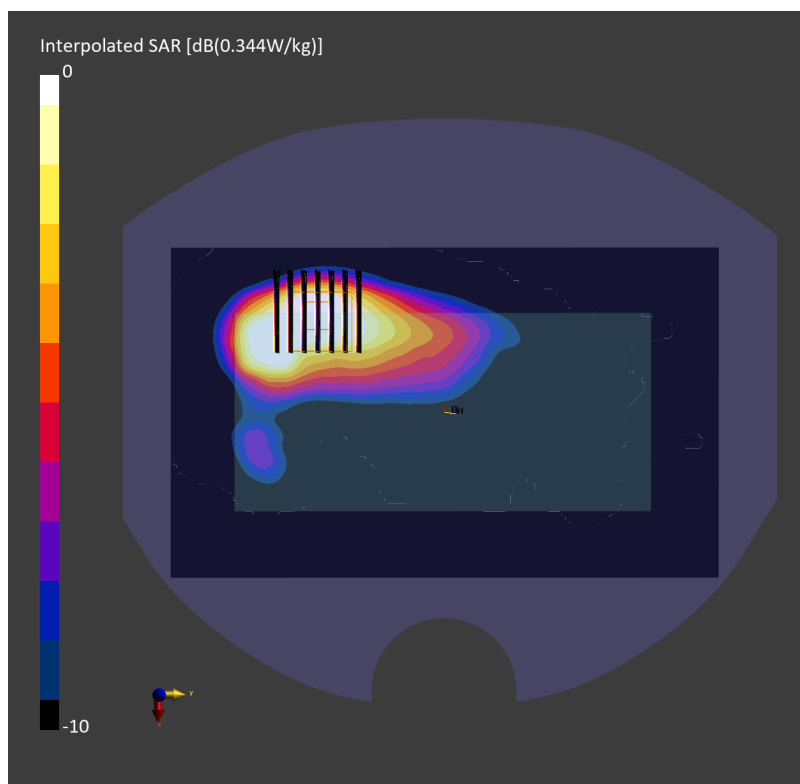

#44_FR1 n77_100M_BPSK_1_271_Back_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260210 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.67, 6.78, 6.49); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.386 W/kg; SAR (10g) = 0.167 W/kg;

TSL Correction: Positive only

Zoom Scan (40.0 mm x 40.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.410 W/kg; SAR (8g) = 0.179 W/kg; SAR (10g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

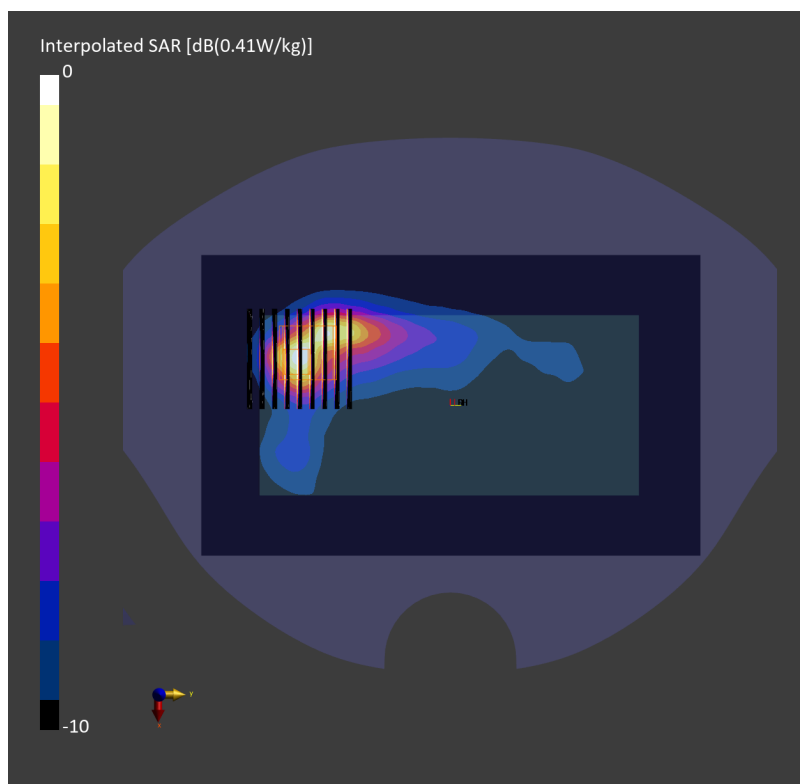

#45_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.438 W/kg; SAR (10g) = 0.199 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.463 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.16 dB

SAR (1g) = 0.372 W/kg; SAR (8g) = 0.192 W/kg; SAR (10g) = 0.175 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

TSL Correction: Positive only

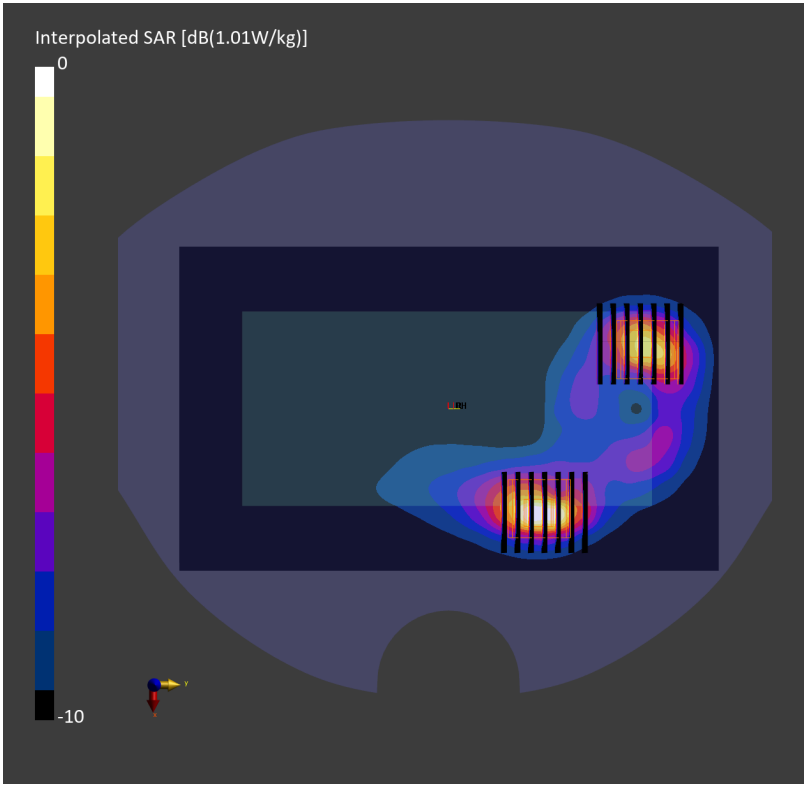

#46_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260305 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.407 W/kg; SAR (10g) = 0.135 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.478 W/kg; SAR (8g) = 0.161 W/kg; SAR (10g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.2 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.13 dB

SAR (1g) = 0.228 W/kg; SAR (8g) = 0.085 W/kg; SAR (10g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.2 %

TSL Correction: Positive only

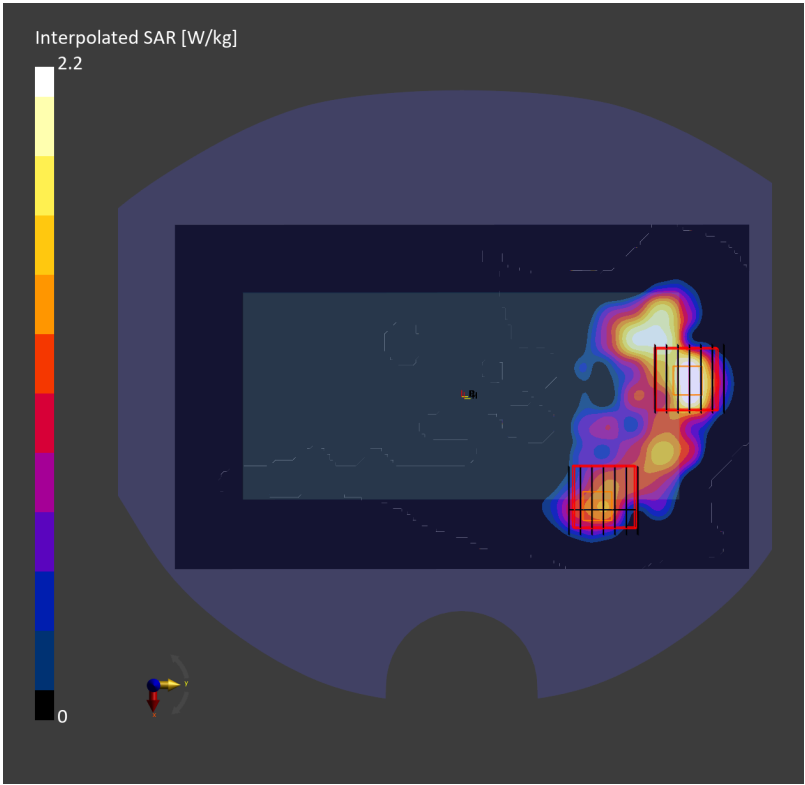

#47_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.804 W/kg; SAR (8g) = 0.398 W/kg; SAR (10g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

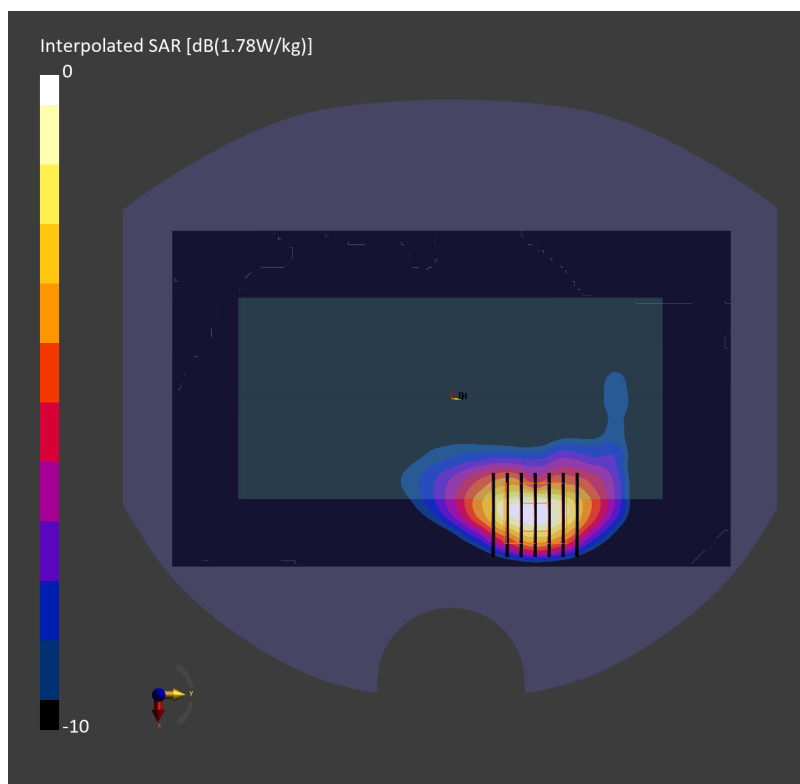

#48_Thread_250K_Back_5mm_Ch18

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2440.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 2440.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.784 W/kg; SAR (10g) = 0.357 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.808 W/kg; SAR (8g) = 0.401 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

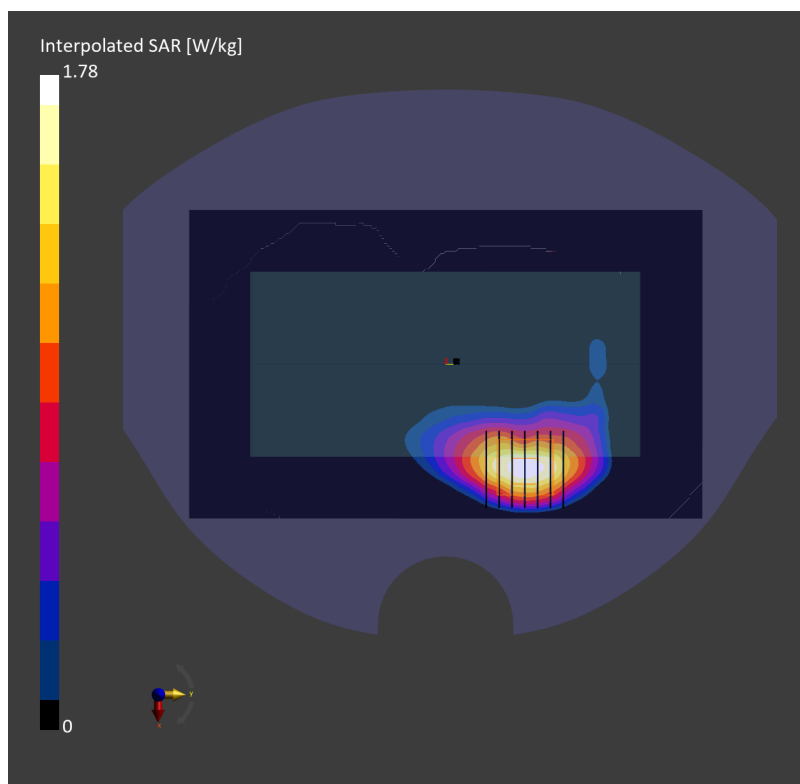

#49_FR1 n41_100M_BPSK_1_137_Bottom Edge_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.34 W/kg; SAR (10g) = 0.963 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 2.46 W/kg; SAR (8g) = 1.05 W/kg; SAR (10g) = 0.930 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.6 %

TSL Correction: Positive only

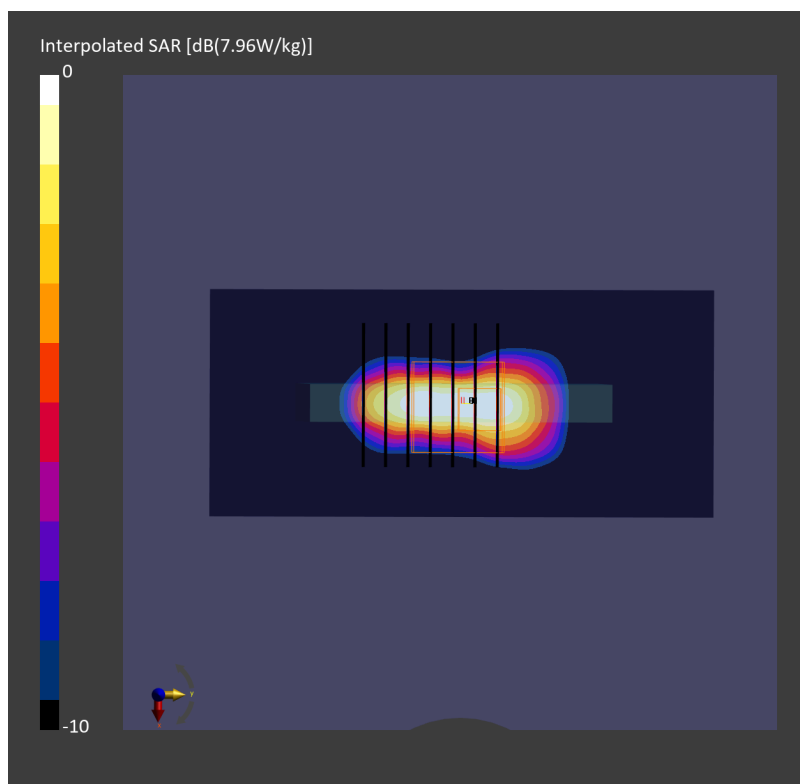

#50_FR1 n41_100M_BPSK_135_0_Top Edge_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.94 W/kg; SAR (10g) = 1.03 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.01 dB

SAR (1g) = 3.09 W/kg; SAR (8g) = 1.13 W/kg; SAR (10g) = 0.988 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

TSL Correction: Positive only

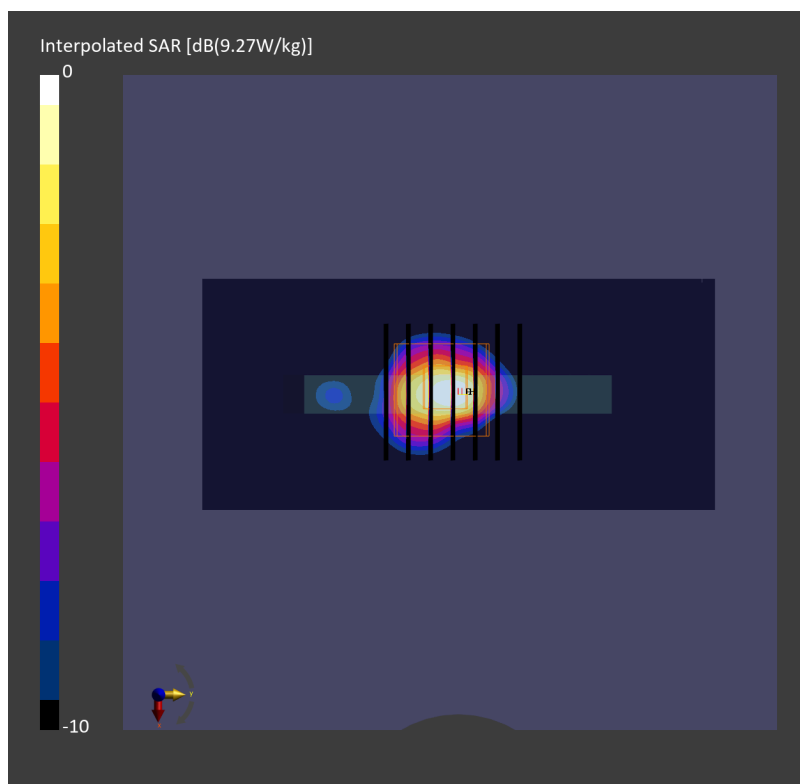

#51_LTE Band 7_20M_QPSK_50_0_Right Edge_0mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260114 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 3.05 W/kg; SAR (10g) = 1.12 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 31.2 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 2.99 W/kg; SAR (8g) = 1.21 W/kg; SAR (10g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

TSL Correction: Positive only

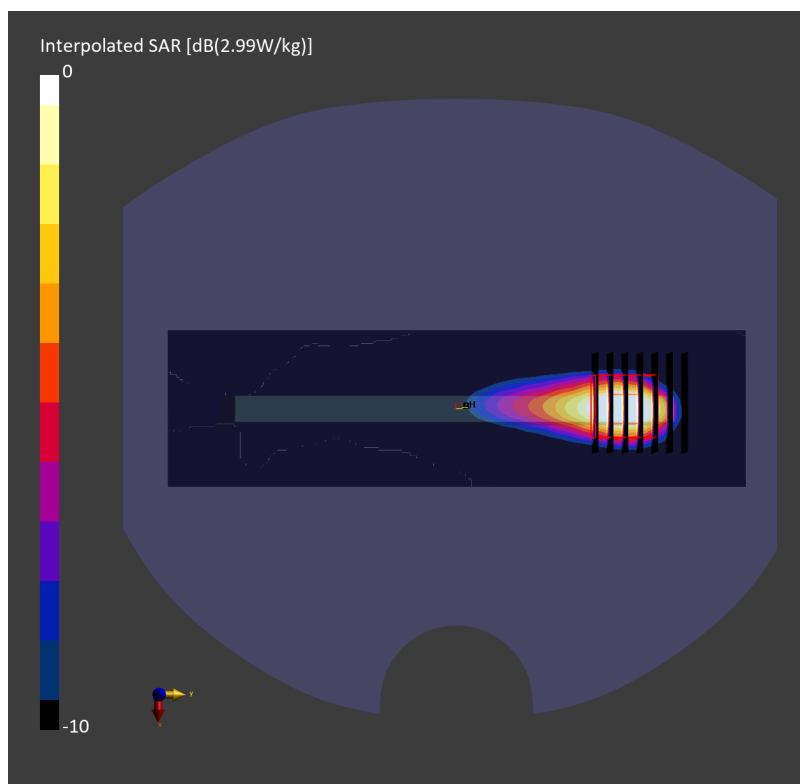

#52_LTE Band 41_20M_QPSK_50_0_Right Edge_0mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.29 W/kg; SAR (10g) = 0.865 W/kg;

TSL Correction: Positive only

Zoom Scan (36.9 mm x 36.9 mm x 33.4 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 2.39 W/kg; SAR (8g) = 0.972 W/kg; SAR (10g) = 0.858 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

TSL Correction: Positive only

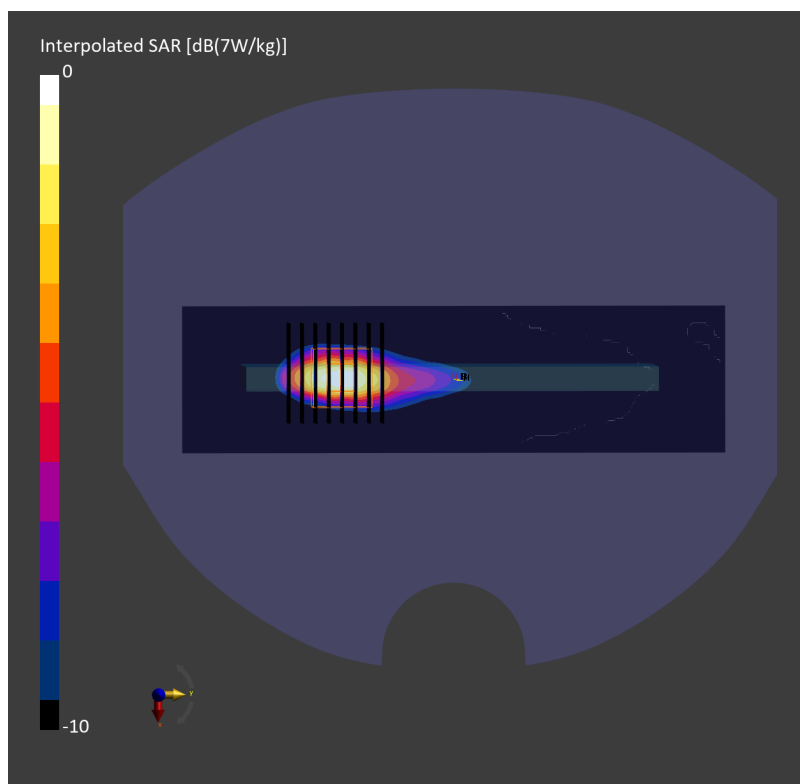

#53_NTN Band 23_3.75K_BPSK_1_46_Front_0mm_Ch25501

Communication System: CW; Frequency: 2000.100 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2000.100$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.85, 6.84, 6.53); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.45 W/kg; SAR (10g) = 2.02 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 4.72 W/kg; SAR (8g) = 2.17 W/kg; SAR (10g) = 1.95 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.8 %

TSL Correction: Positive only

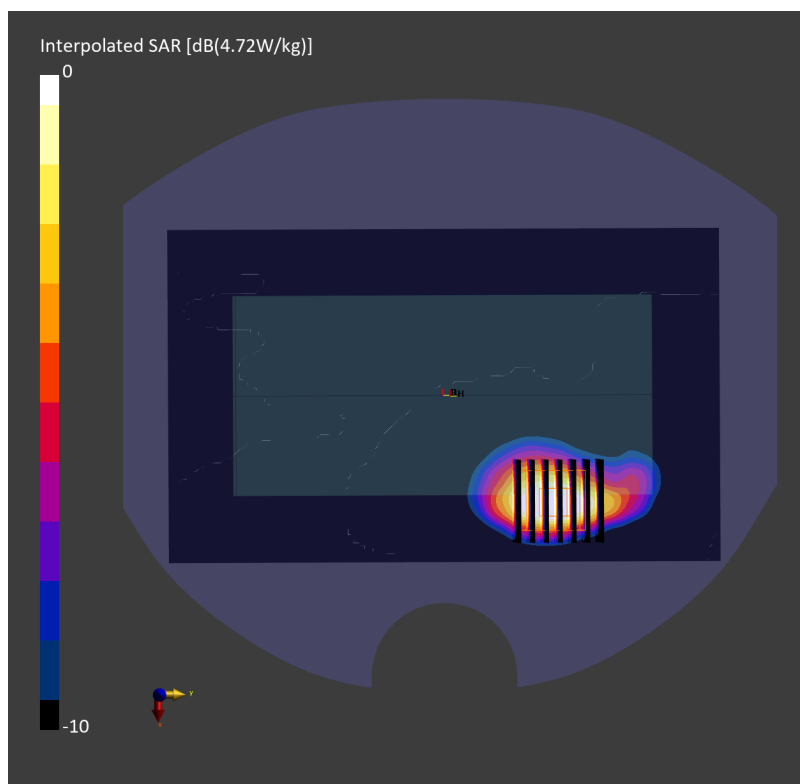

#54_WLAN5GHz_802.11n-HT40 MCS0_Left Edge_0mm_Ch54

Communication System: IEEE 802.11n; Frequency: 5270.000 MHz

Medium: HSL_600-7200_260323 Medium parameters used: $f=5270.000$ MHz; $\sigma=4.46$ S/m; $\epsilon_r=34.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.57 W/kg; SAR (10g) = 0.807 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 3.36 W/kg; SAR (8g) = 1.04 W/kg; SAR (10g) = 0.895 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.5 %

TSL Correction: Positive only

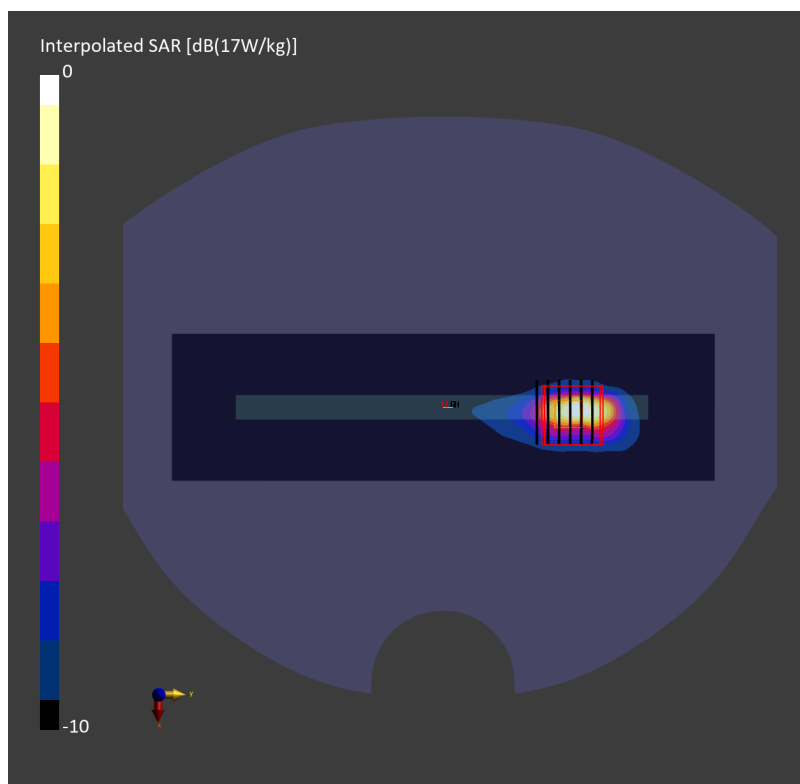

#55_NFC_ASK_Top Edge_0mm

Communication System: CW; Frequency: 13.56 MHz

Medium: HSL_600-7200_260410 Medium parameters used: $f = 13.6$ MHz; $\sigma = 0.723$ S/m; $\epsilon_r = 53.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2204_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.024 W/kg; SAR (10g) = 0.013 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.022 W/kg; SAR (8g) = 0.009 W/kg; SAR (10g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 62.2 %

TSL Correction: Positive only

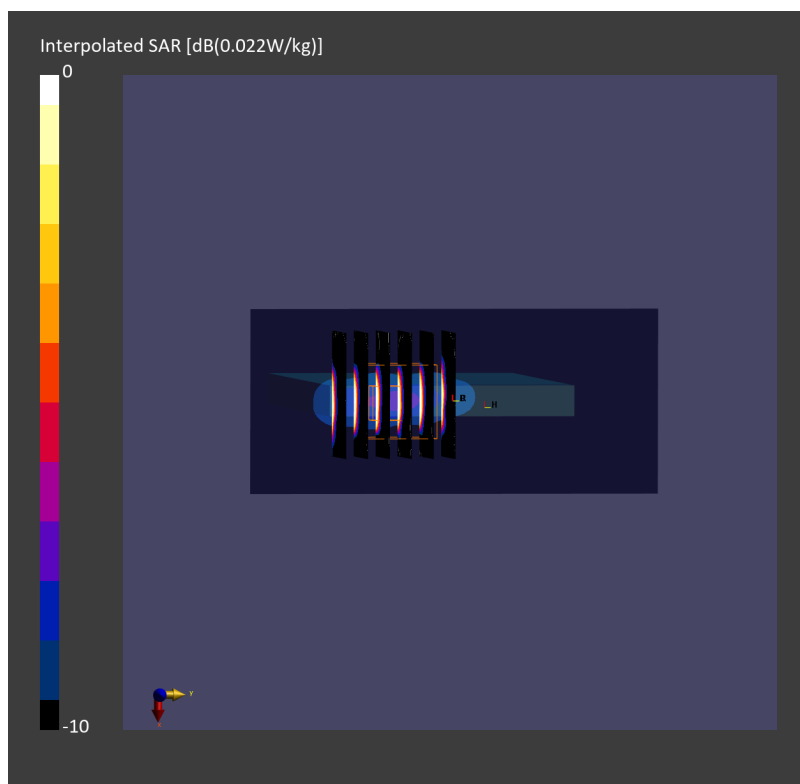

#56_WLAN6GHz_802.11ax-HE160 MCS0_Right Cheek_0mm_Ch15

Communication System: IEEE 802.11ax; Frequency: 6025.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 6025.000$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 33.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(5.3, 5.07, 5.63); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.488 W/kg; SAR (10g) = 0.140 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.605 W/kg; SAR (8g) = 0.188 W/kg; SAR (10g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.0 %

psAPD (1.0cm², sq) = 6.05 [W/m²]; psAPD (4.0cm², sq) = 3.76 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.408 W/kg; SAR (8g) = 0.144 W/kg; SAR (10g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.0 %

psAPD (1.0cm², sq) = 4.08 [W/m²]; psAPD (4.0cm², sq) = 2.89 [W/m²]

TSL Correction: Positive only