

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	24250.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026-01-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.06
psPDtot+ [W/m ²]	2.34
H _{max} [A/m]	0.154
E _{max} [V/m]	63.3
max _(Stot) [W/m ²]	7.65
Power Drift [dB]	0.19

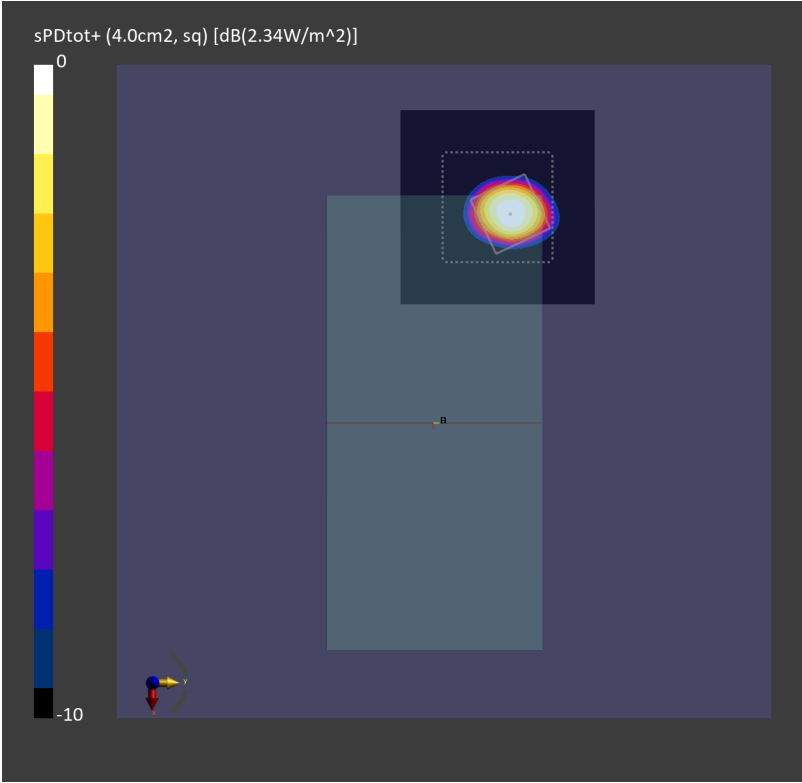

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	24250.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–01–30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.06
psPDtot+ [W/m ²]	2.34
H _{max} [A/m]	0.154
E _{max} [V/m]	63.3
max _(Stot) [W/m ²]	7.65
Power Drift [dB]	0.19

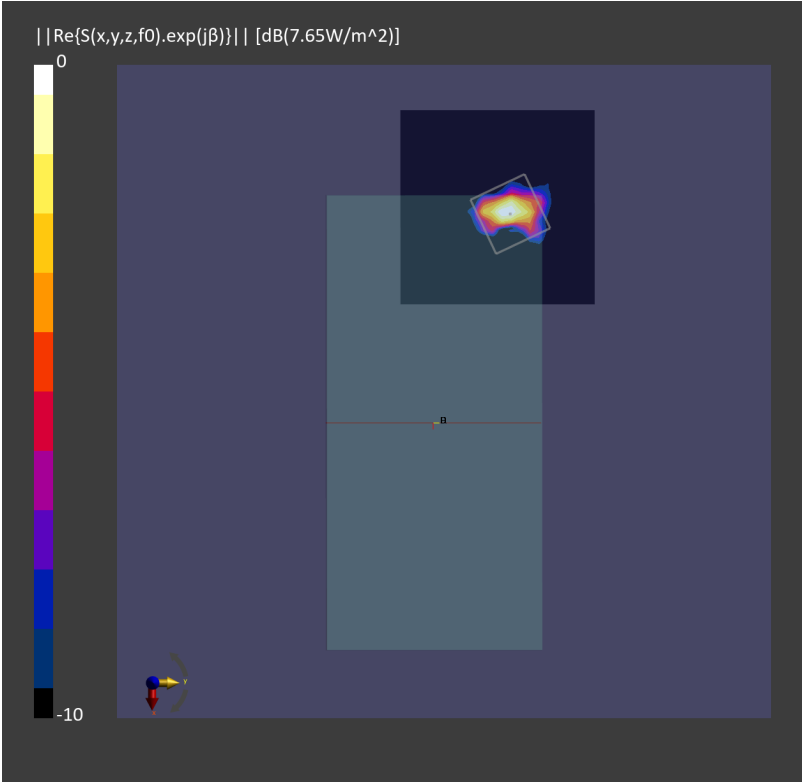

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	39999.9	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026-01-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.48
psPDtot+ [W/m ²]	2.17
H _{max} [A/m]	0.169
E _{max} [V/m]	71.9
max _(Stot) [W/m ²]	7.78
Power Drift [dB]	0.01

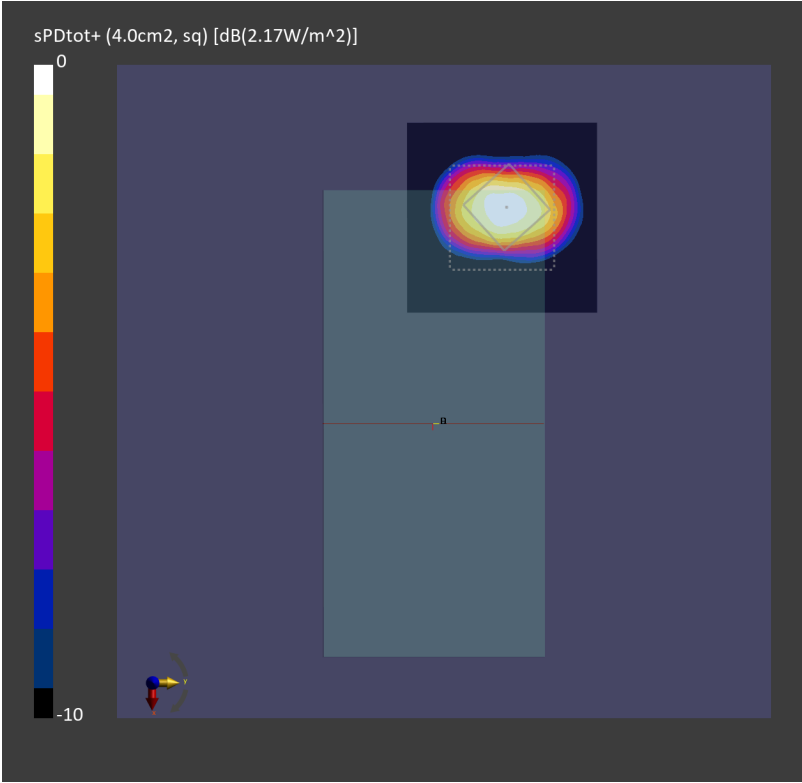

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	39999.9	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026-01-29
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.48
psPDtot+ [W/m ²]	2.17
H _{max} [A/m]	0.169
E _{max} [V/m]	71.9
max _(Stot) [W/m ²]	7.78
Power Drift [dB]	0.01

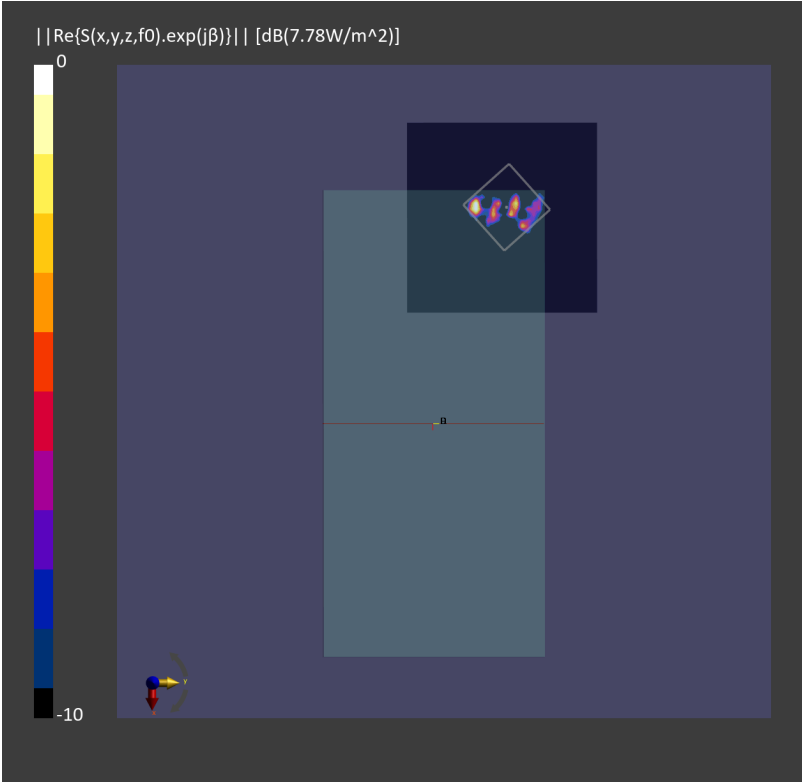

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	28350.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–01–29
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.63
psPDtot+ [W/m ²]	3.02
H _{max} [A/m]	0.157
E _{max} [V/m]	53.2
max _(Stot) [W/m ²]	7.21
Power Drift [dB]	–0.14

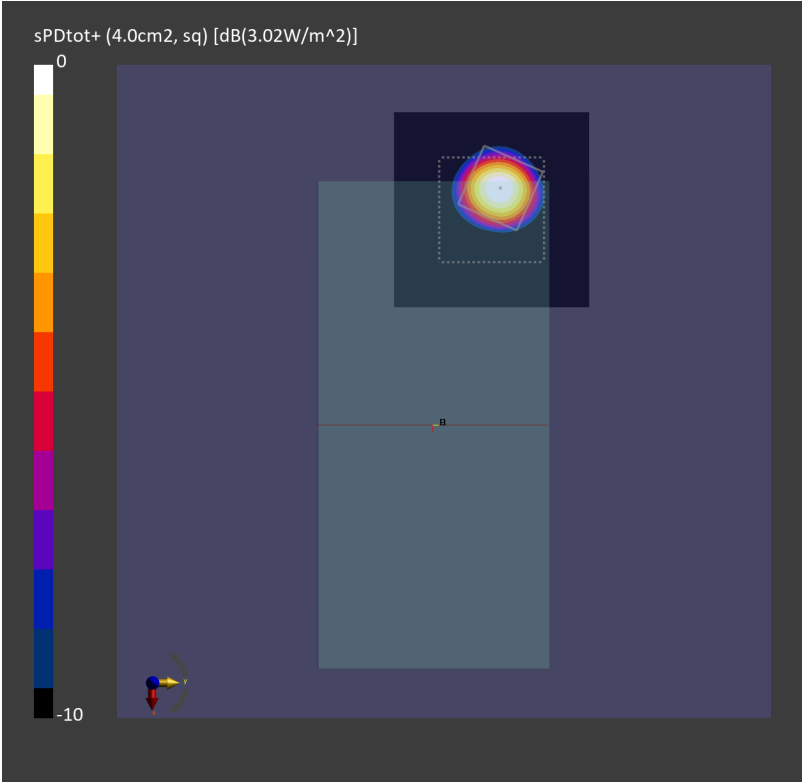

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Google	72.0 x 152.0 x 9.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	28350.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn699, 2025–02–18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–01–29
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.63
psPDtot+ [W/m ²]	3.02
H _{max} [A/m]	0.157
E _{max} [V/m]	53.2
max _(Stot) [W/m ²]	7.21
Power Drift [dB]	–0.14

