


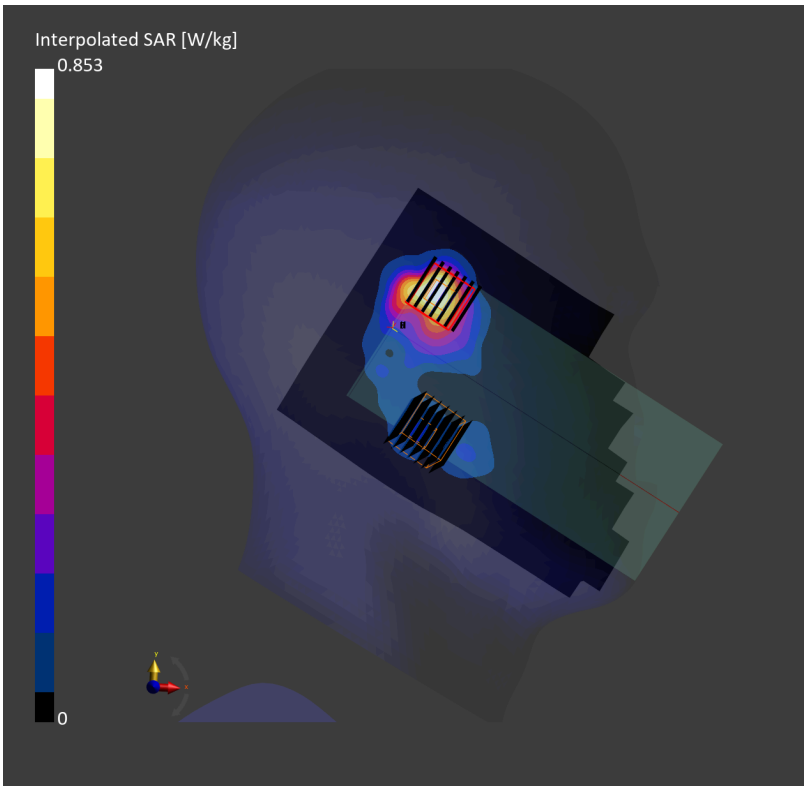

#32_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 33.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.607 W/kg; SAR (10g) = 0.212 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.706 W/kg; SAR (8g) = 0.273 W/kg; SAR (10g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5 %

TSL Correction: Positive only

Zoom Scan (32.0 mm x 36.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.15 dB

SAR (1g) = 0.296 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5 %

TSL Correction: Positive only

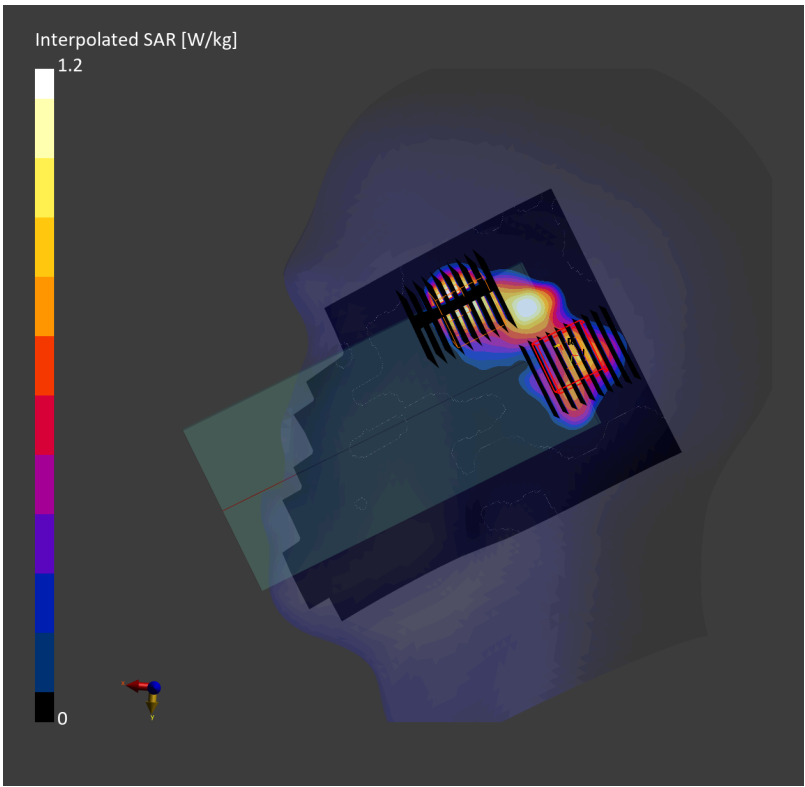

#33_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.725 W/kg; SAR (10g) = 0.247 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.820 W/kg; SAR (8g) = 0.267 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.8 %

TSL Correction: Positive only

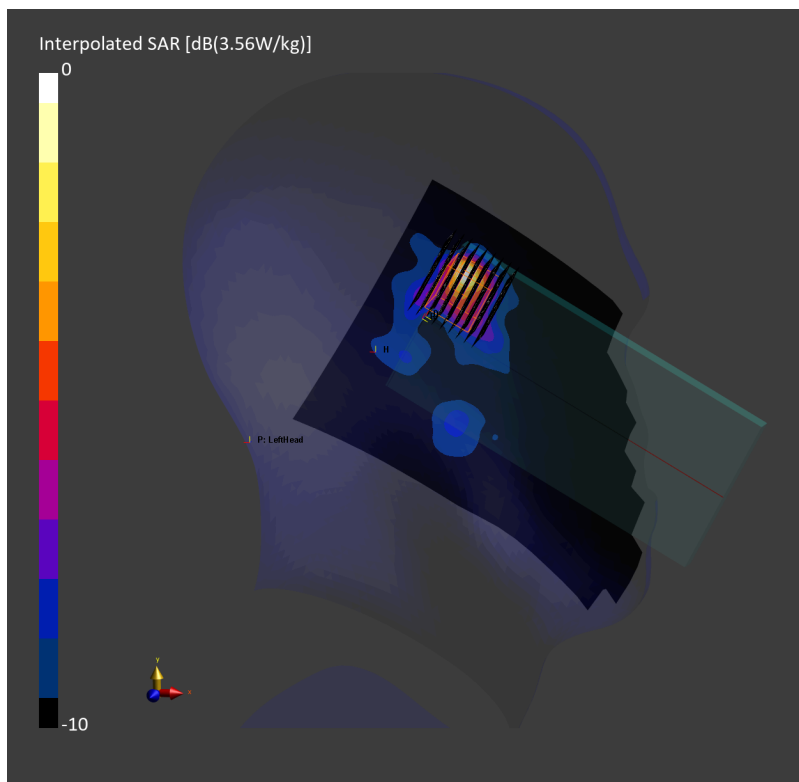

#34_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch171

Communication System: IEEE 802.11ac WiFi; Frequency: 5855.000 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5855.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.834 W/kg; SAR (10g) = 0.286 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 1.06 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.8 %

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.151 W/kg; SAR (8g) = 0.052 W/kg; SAR (10g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 55.8 %

TSL Correction: Positive only

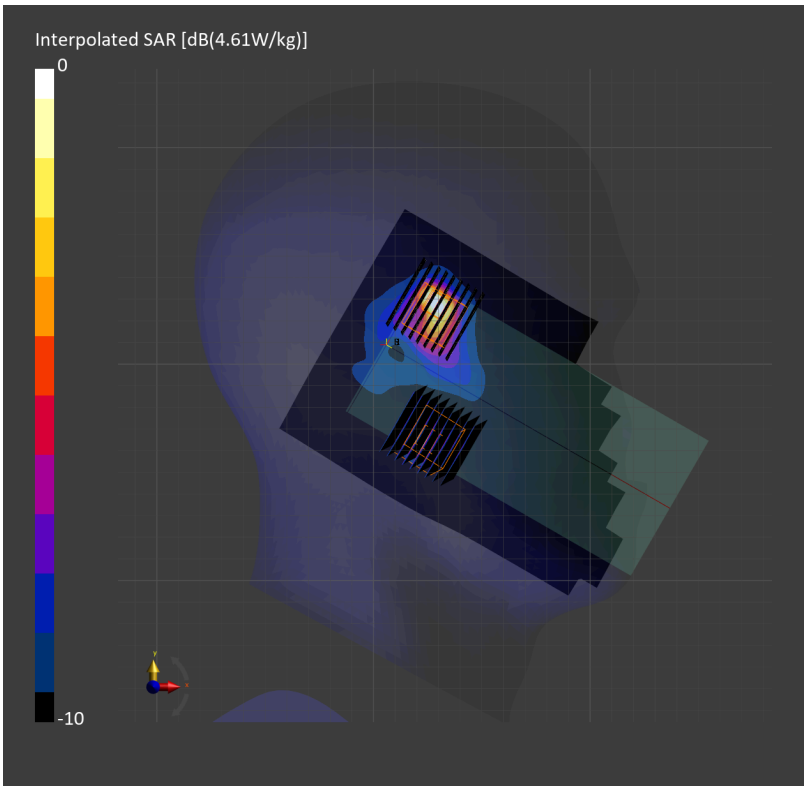

#35_WLAN6GHz_802.11ax-HE80 MCS0_Left Tilted_0mm_Ch167

Communication System: IEEE 802.11ax; Frequency: 6785.000 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 6785.000$ MHz; $\sigma = 6.41$ S/m; $\epsilon_r = 32.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.206 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.220 W/kg; SAR (10g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.8 %

psAPD (1.0cm², sq) = 5.93 [W/m²]; psAPD (4.0cm², sq) = 4.41 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.15 dB


SAR (1g) = 0.084 W/kg; SAR (8g) = 0.035 W/kg; SAR (10g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.8 %

psAPD (1.0cm², sq) = 0.842 [W/m²]; psAPD (4.0cm², sq) = 0.706 [W/m²]

TSL Correction: Positive only

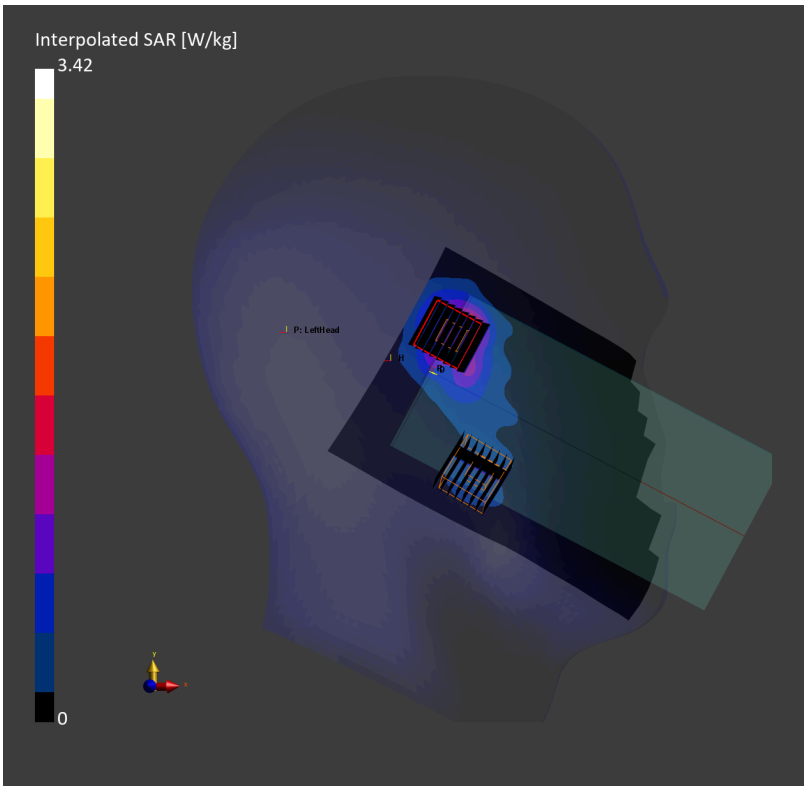

#36_Bluetooth_1Mbps_Left Cheek_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2480.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.092 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.210 W/kg; SAR (8g) = 0.107 W/kg; SAR (10g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

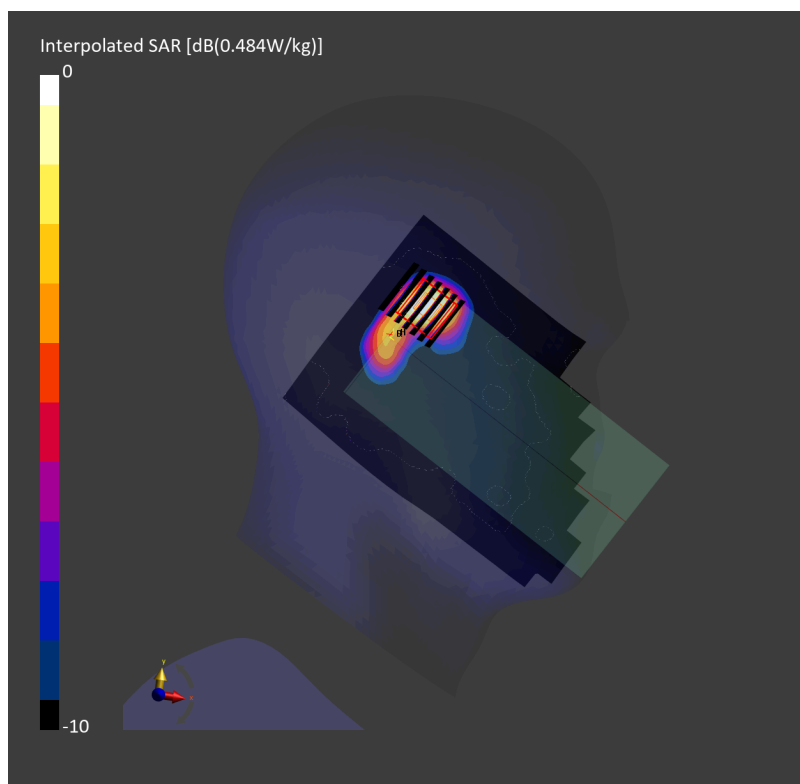

#37_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251

Communication System: GPRS-FDD; Frequency: 848.800 MHz

Medium: HSL_600-7200_260324 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 44.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.709 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

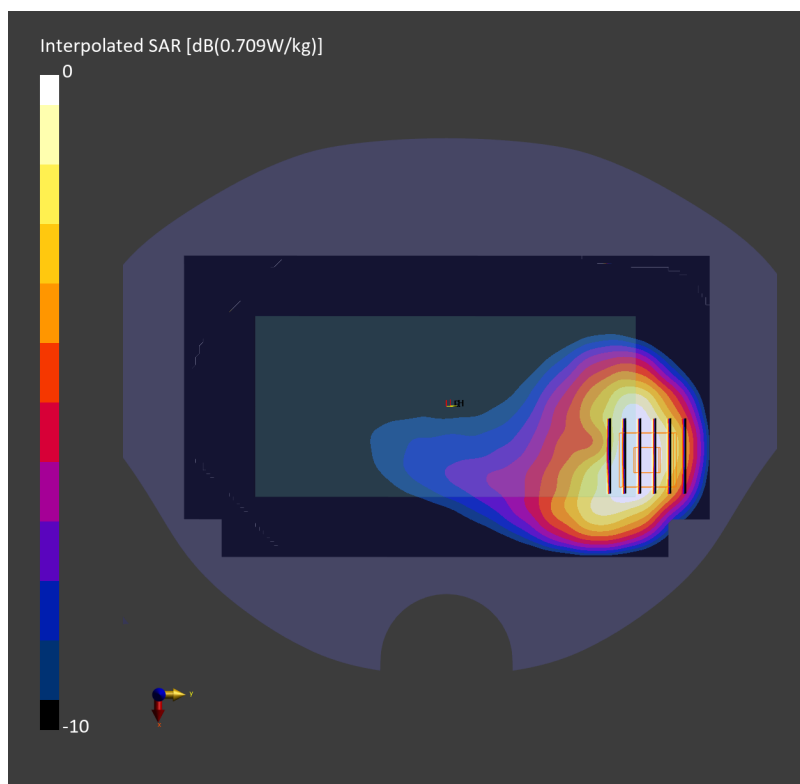

#38_GSM1900_GPRS 4 Tx slots_Bottom Edge_5mm_Ch512

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.736 W/kg; SAR (8g) = 0.374 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

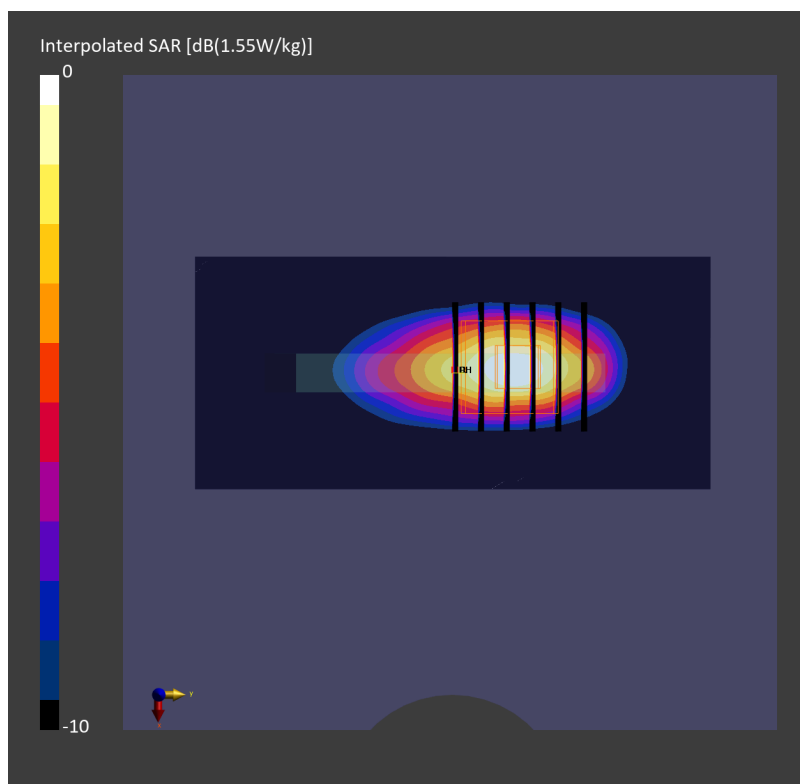

#39_WCDMA II_RMC 12.2Kbps_Right Edge_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.407 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.766 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

TSL Correction: Positive only

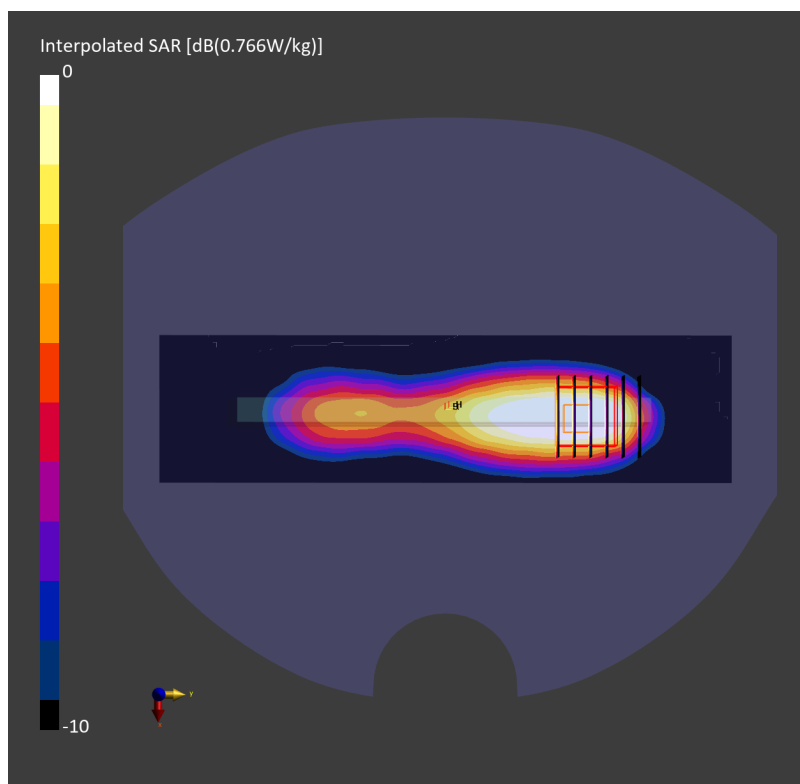

#40_WCDMA IV_RMC 12.2Kbps_Right Edge_5mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.96, 7.83, 7.88); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.796 W/kg; SAR (10g) = 0.429 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.813 W/kg; SAR (8g) = 0.454 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

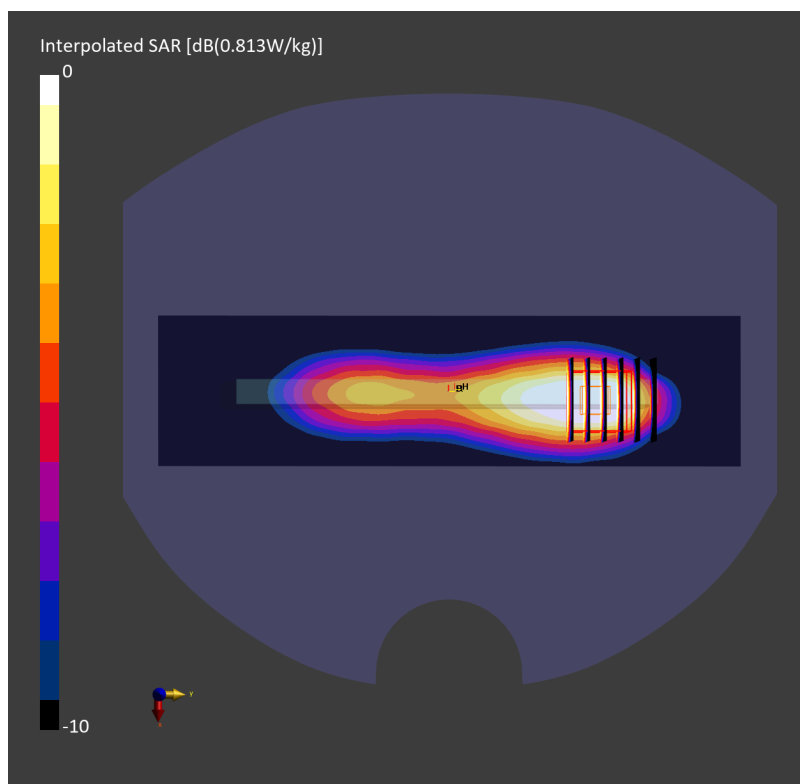

#41_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.497 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.816 W/kg; SAR (8g) = 0.458 W/kg; SAR (10g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

TSL Correction: Positive only

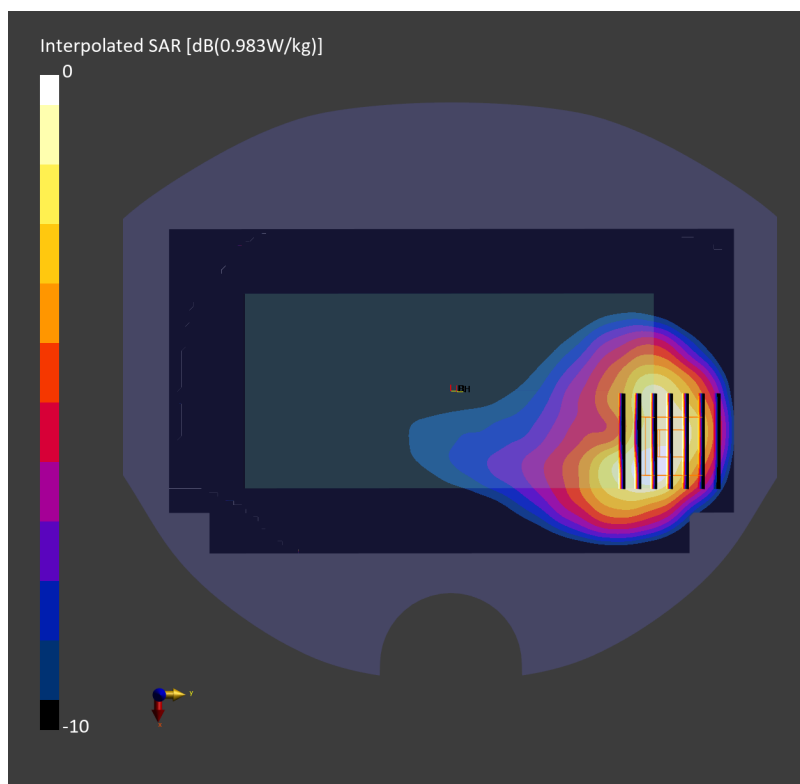

#42_LTE Band 7_20M_QPSK_50_0_Right Edge_5mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260112 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.351 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.751 W/kg; SAR (8g) = 0.382 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

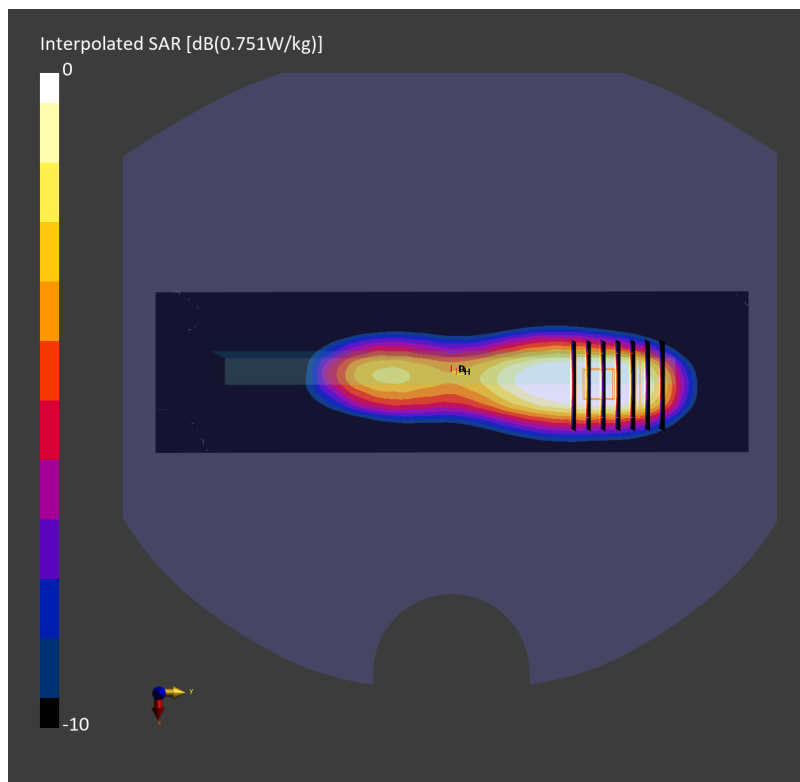

#43_LTE Band 12_10M_QPSK_1_0_Left Edge_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260118 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.587 W/kg; SAR (10g) = 0.380 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.624 W/kg; SAR (8g) = 0.361 W/kg; SAR (10g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.9 %

TSL Correction: Positive only

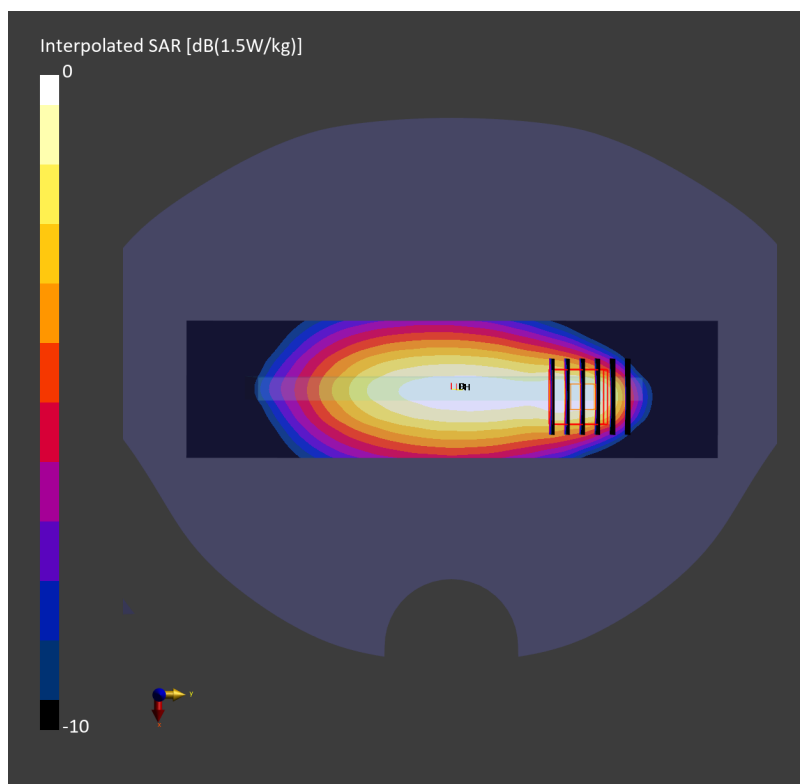

#44_LTE Band 13_10M_QPSK_1_0_Left Edge_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260118 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.705 W/kg; SAR (10g) = 0.463 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.721 W/kg; SAR (8g) = 0.449 W/kg; SAR (10g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

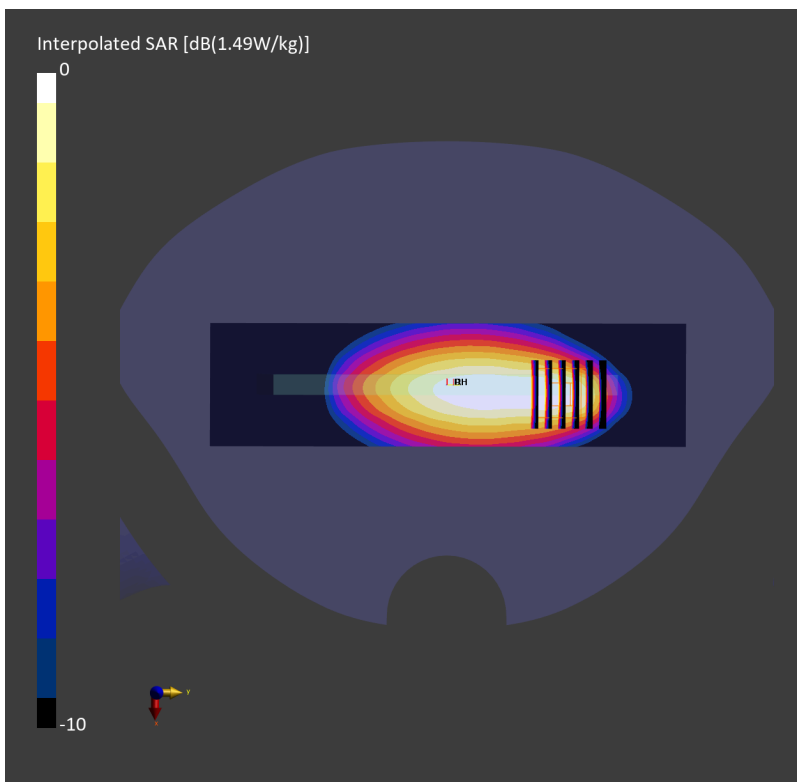

#45_LTE Band 14_10M_QPSK_25_0_Left Edge_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.460 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.726 W/kg; SAR (8g) = 0.504 W/kg; SAR (10g) = 0.478 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.6 %

TSL Correction: Positive only

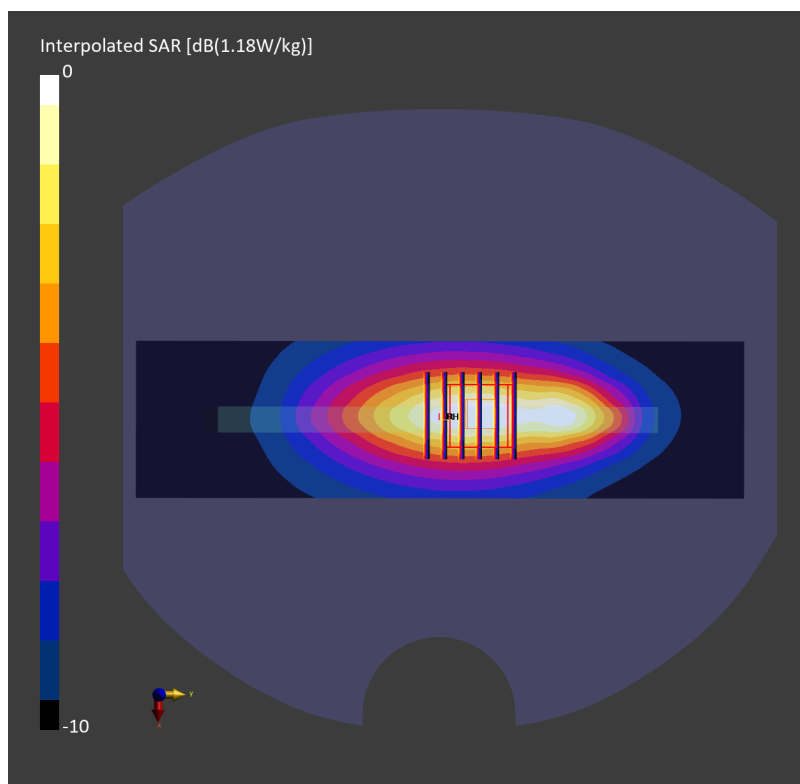

#46_LTE Band 25_20M_QPSK_1_99_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.816 W/kg; SAR (10g) = 0.427 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.791 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

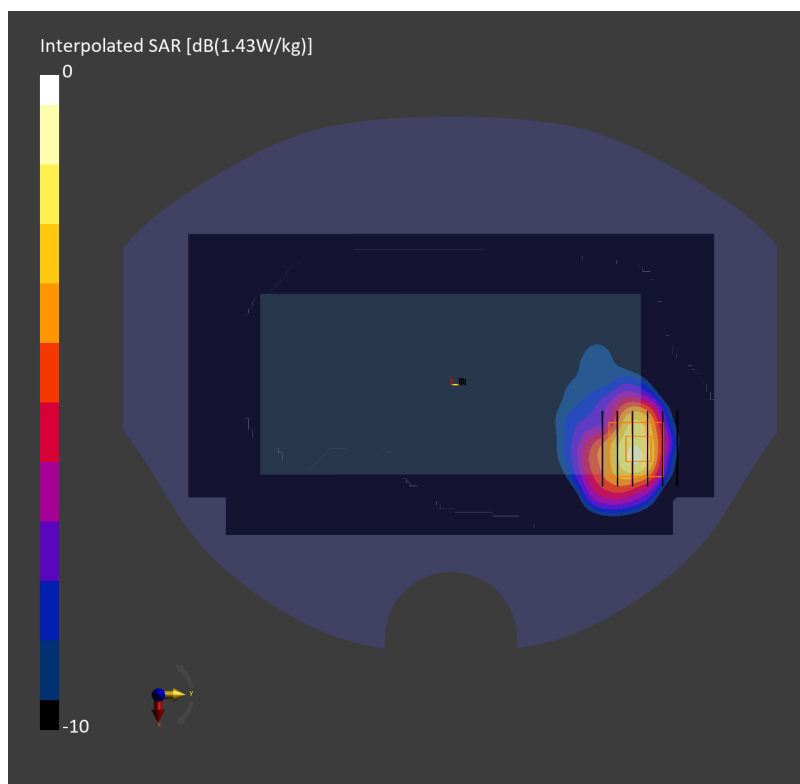

#47_LTE Band 26_15M_QPSK_36_39_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10160-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.419 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.774 W/kg; SAR (8g) = 0.447 W/kg; SAR (10g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

TSL Correction: Positive only

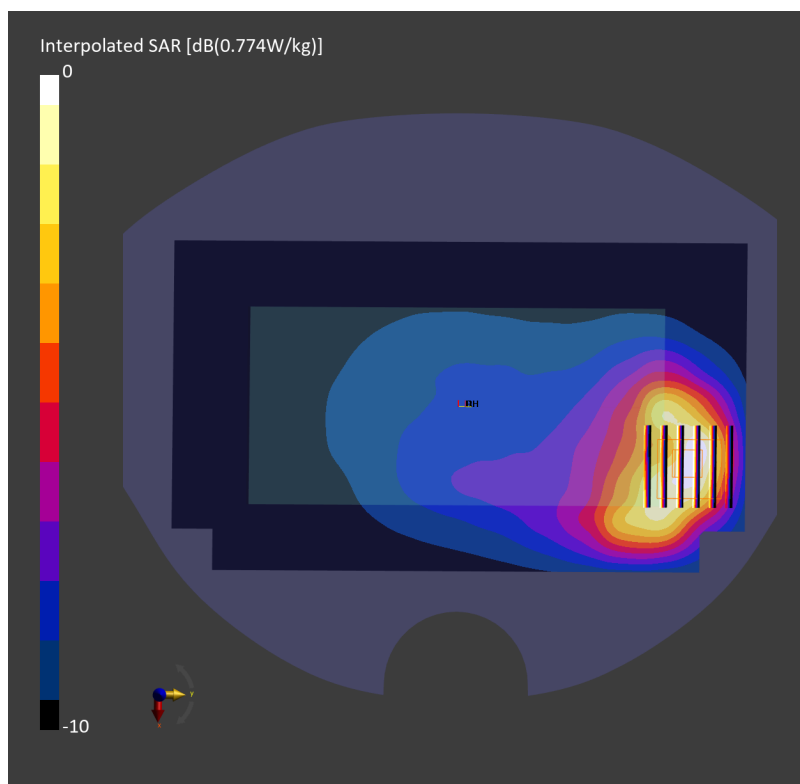

#48_LTE Band 30_10M_QPSK_25_0_Bottom Edge_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f=2310.000$ MHz; $\sigma=1.72$ S/m; $\epsilon_r=41.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.21, 6.9, 7.67); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.332 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.778 W/kg; SAR (8g) = 0.390 W/kg; SAR (10g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

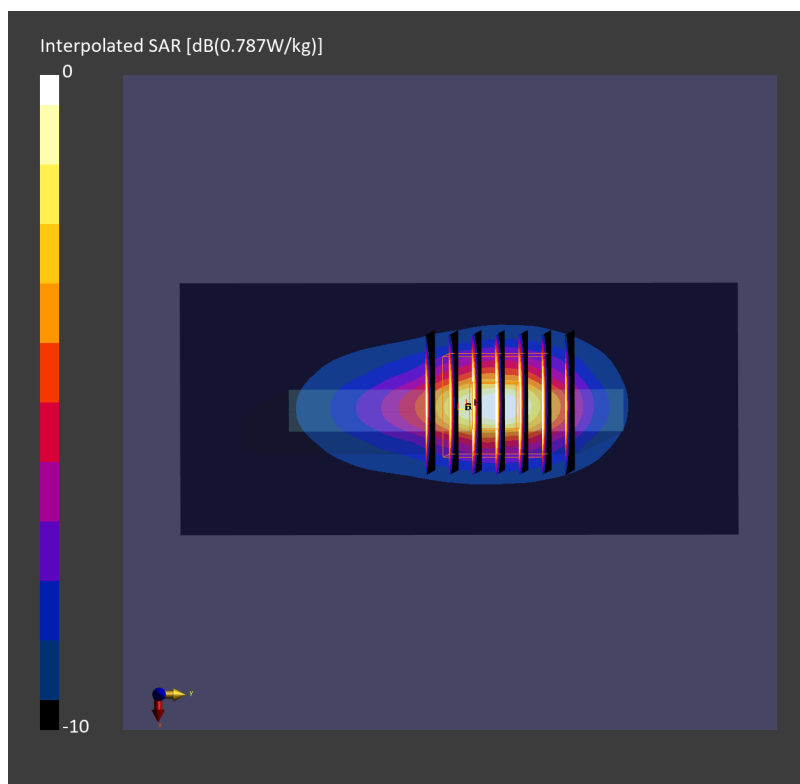

#49_LTE Band 66_20M_QPSK_50_0_Back_5mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.671 W/kg; SAR (10g) = 0.398 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.733 W/kg; SAR (8g) = 0.457 W/kg; SAR (10g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 90.7 %

TSL Correction: Positive only

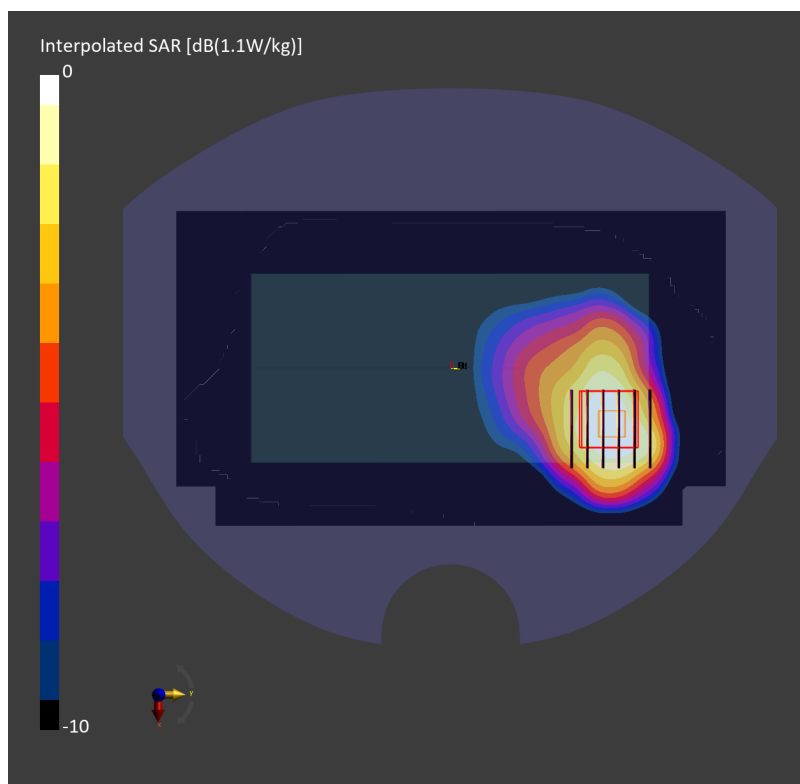

#50_LTE Band 71_20M_QPSK_1_0_Left Edge_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260119 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.387 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.630 W/kg; SAR (8g) = 0.376 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.8 %

TSL Correction: Positive only

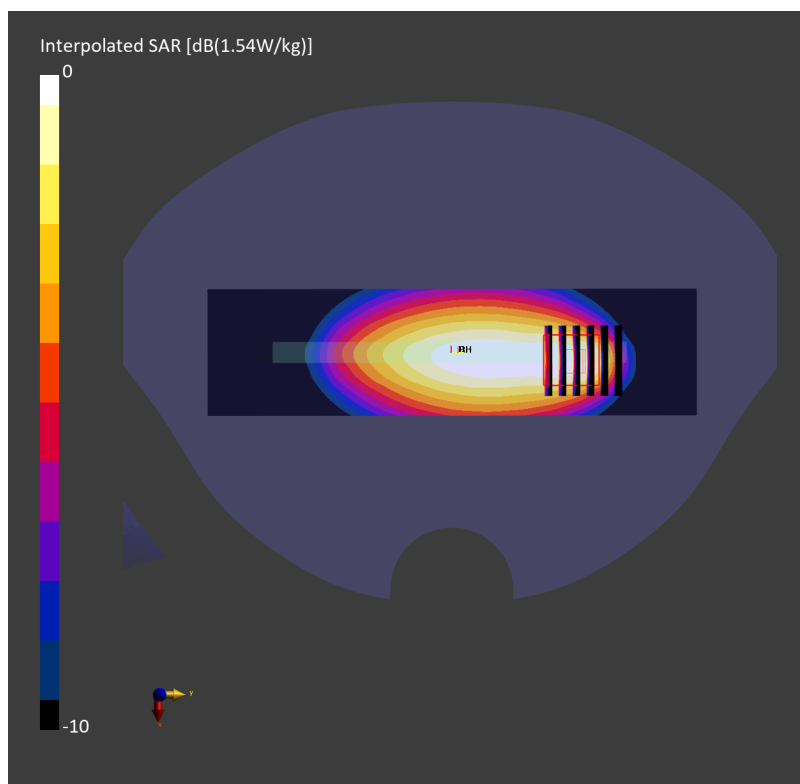

#51_LTE Band 41_20M_QPSK_1_0_Bottom Edge_5mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260116 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.802 W/kg; SAR (10g) = 0.348 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.820 W/kg; SAR (8g) = 0.395 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

TSL Correction: Positive only

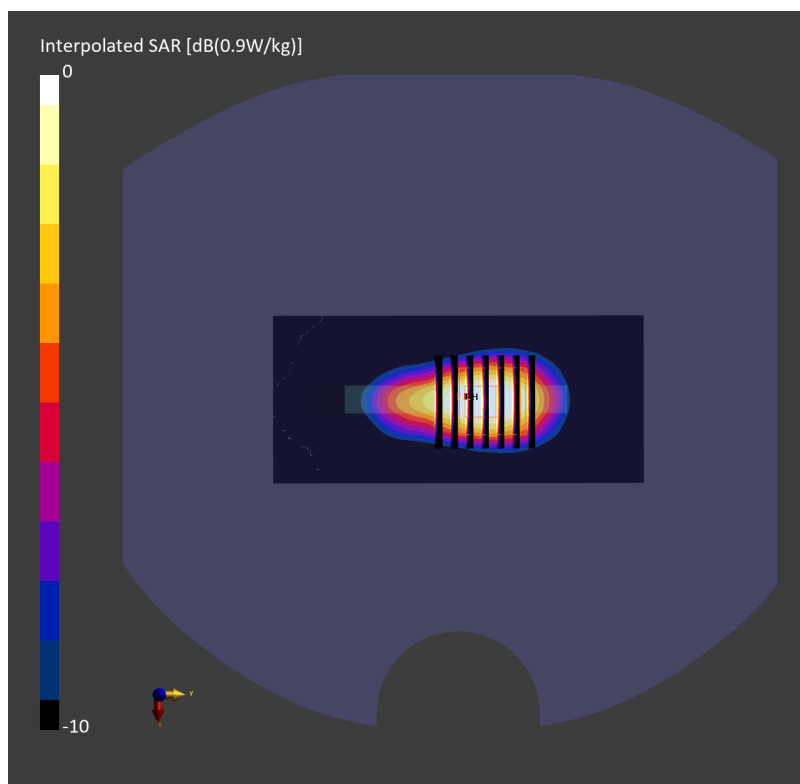

#52_LTE Band 48_20M_QPSK_50_0_Right Edge_5mm_Ch56150

Communication System: LTE-TDD; Frequency: 3641.000 MHz

Medium: HSL_600-7200_260318 Medium parameters used: $f = 3641.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 36.9$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.9, 5.89, 5.63); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.758 W/kg; SAR (10g) = 0.278 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.777 W/kg; SAR (8g) = 0.315 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

TSL Correction: Positive only

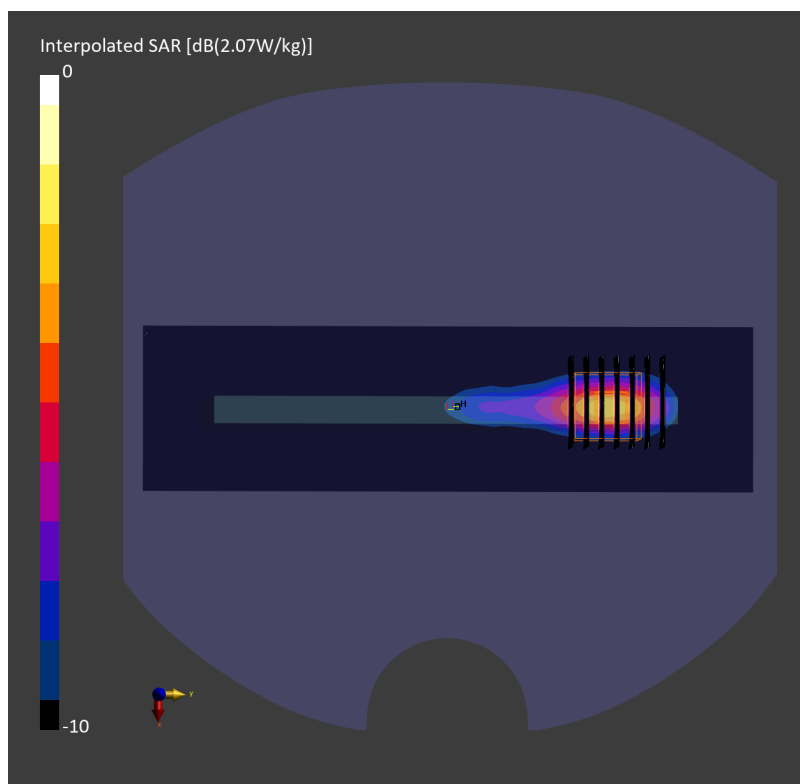

#53_FR1 n7_50M_BPSK_135_0_Bottom Edge_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260214 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.812 W/kg; SAR (10g) = 0.352 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.815 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

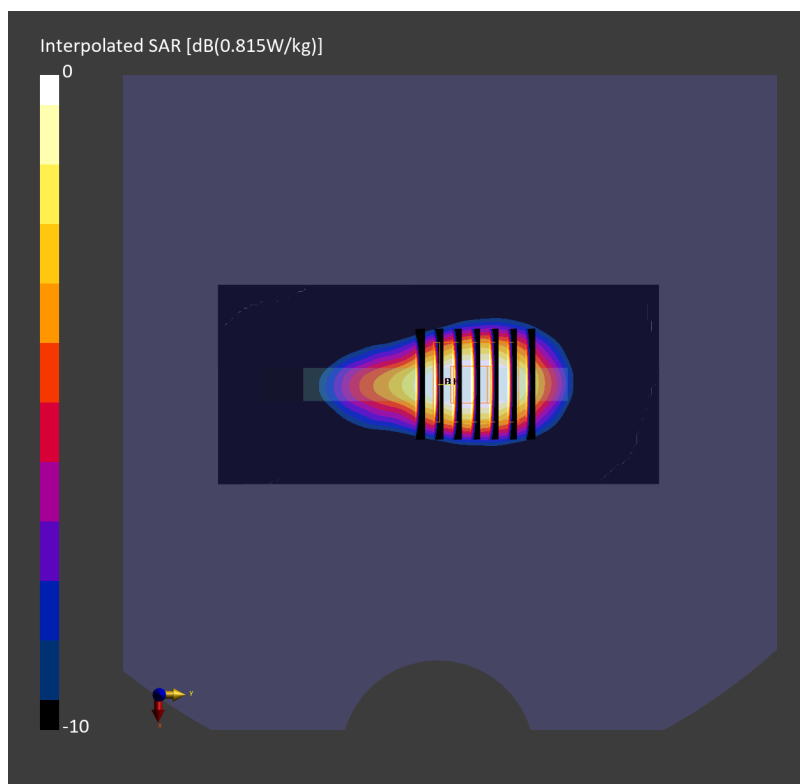

#54_FR1 n12_15M_BPSK_1_1_Left Edge_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.646 W/kg; SAR (8g) = 0.383 W/kg; SAR (10g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

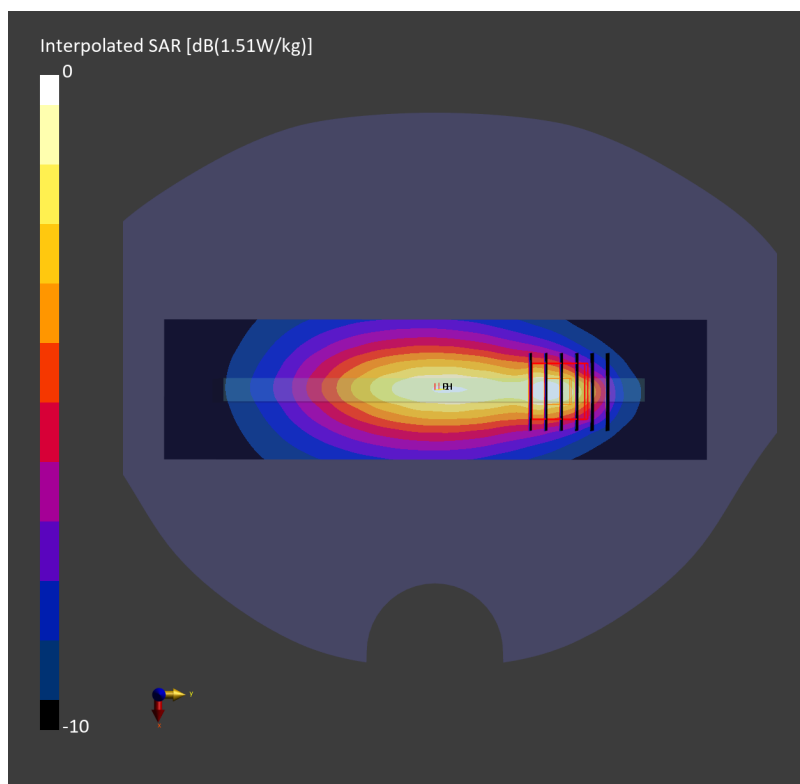

#55_FR1 n13_10M_BPSK_25_14_Left Edge_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260405 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.646 W/kg; SAR (10g) = 0.420 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.651 W/kg; SAR (8g) = 0.446 W/kg; SAR (10g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.6 %

TSL Correction: Positive only

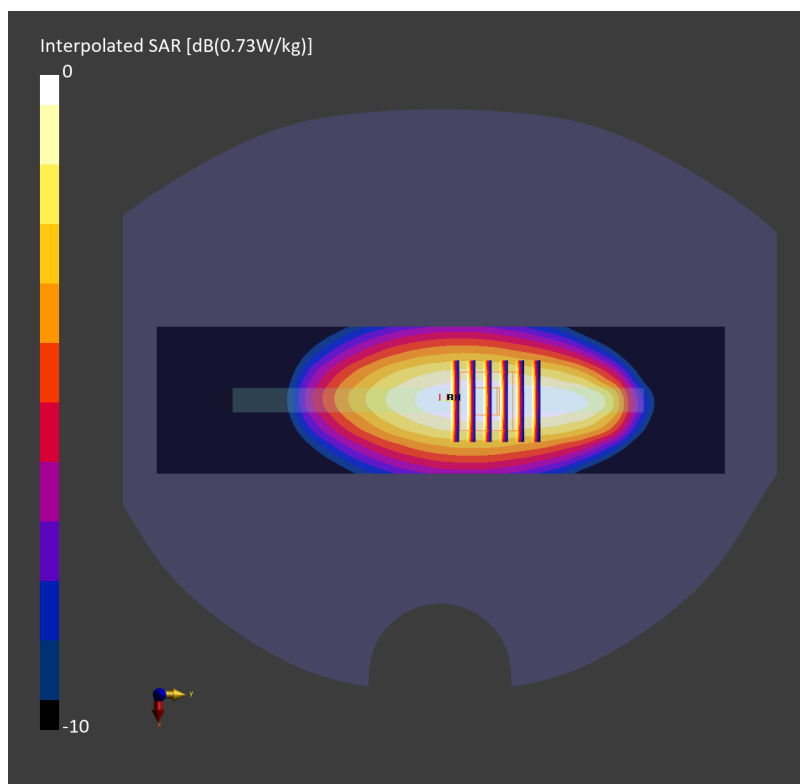

#56_FR1 n14_10M_BPSK_25_0_Back_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260316 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.599 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.638 W/kg; SAR (8g) = 0.358 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

TSL Correction: Positive only

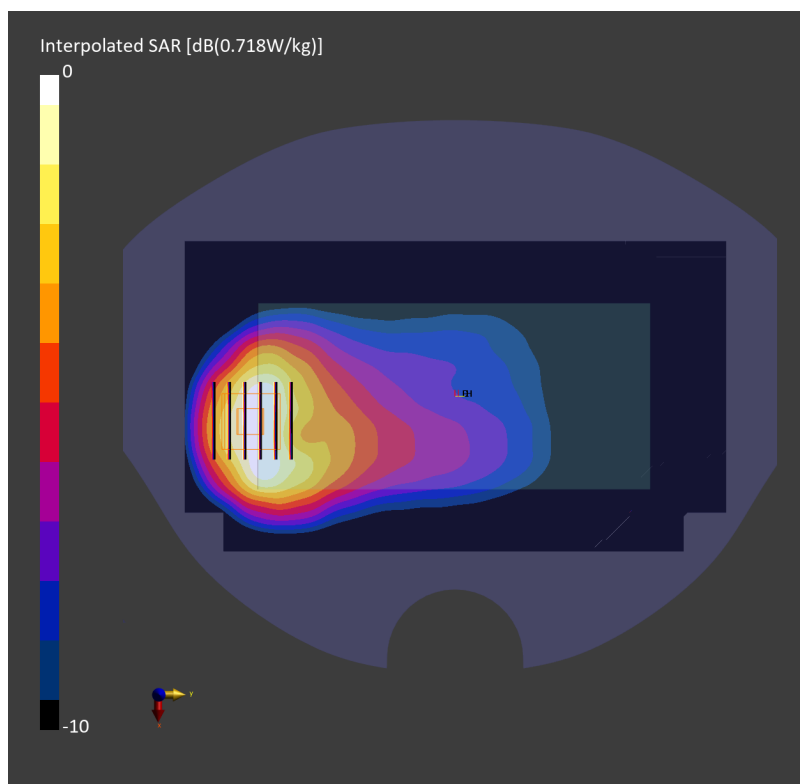

#57_FR1 n25_40M_BPSK_108_54_Right Edge_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.797 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.827 W/kg; SAR (8g) = 0.427 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

TSL Correction: Positive only

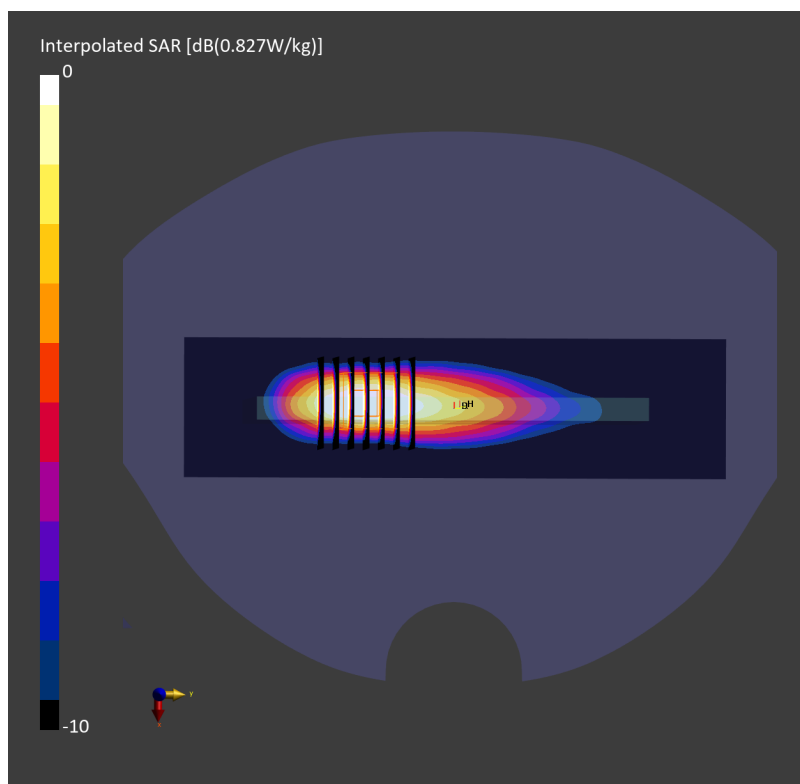

#58_FR1 n26_20M_BPSK_50_28_Back_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260311 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.706 W/kg; SAR (10g) = 0.450 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.720 W/kg; SAR (8g) = 0.413 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

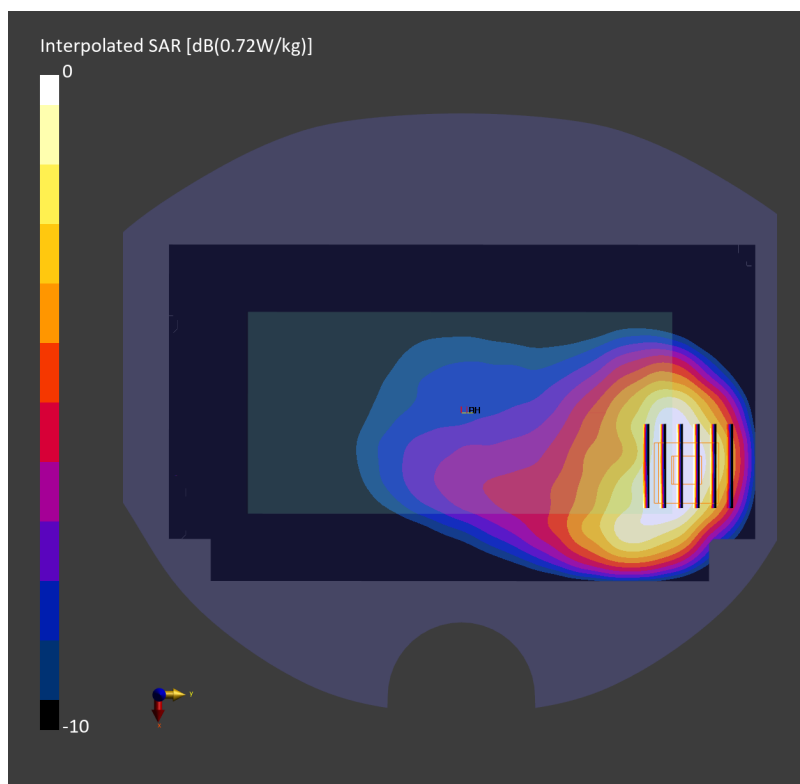

#59_FR1 n30_10M_BPSK_25_14_Bottom Edge_5mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.21, 6.9, 7.67); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.729 W/kg; SAR (10g) = 0.329 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.752 W/kg; SAR (8g) = 0.374 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

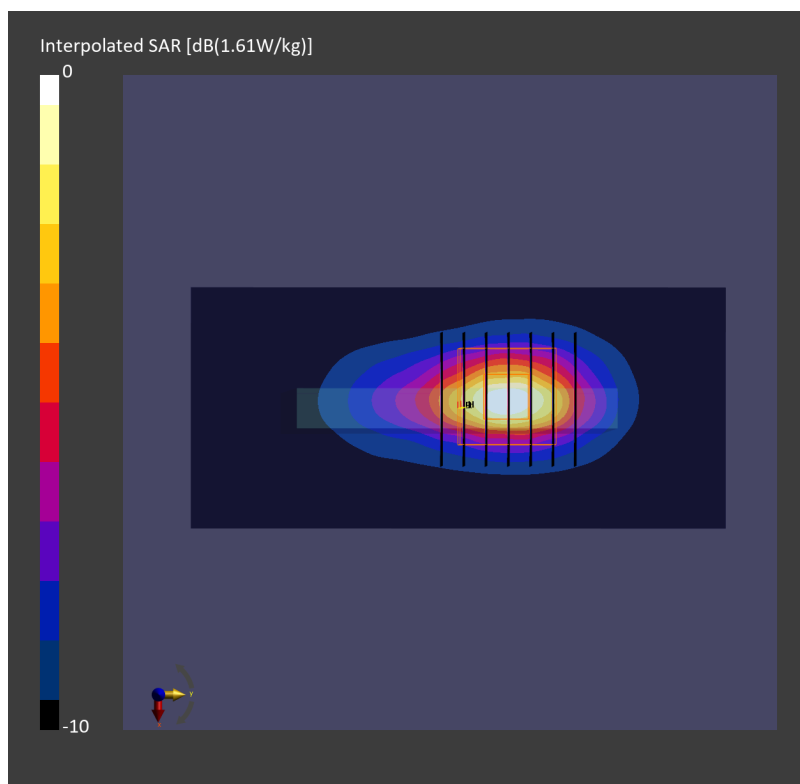

#60_FR1 n66_45M_BPSK_1_120_Right Edge_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.448 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.07 dB

SAR (1g) = 0.822 W/kg; SAR (8g) = 0.466 W/kg; SAR (10g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

TSL Correction: Positive only

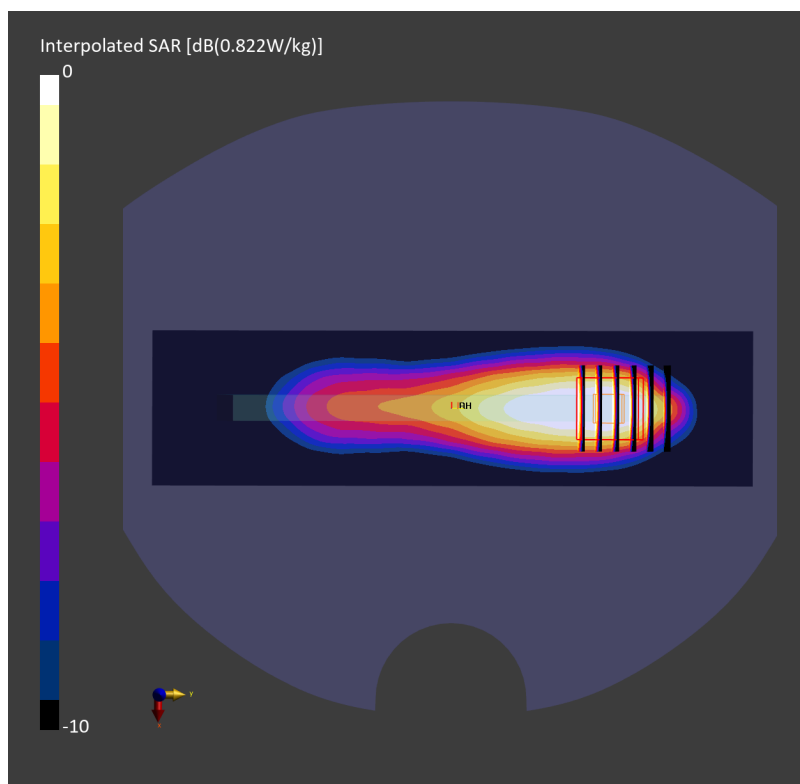

#61_FR1 n70_ 15M_BPSK_75_0_Bottom Edge_5mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10946-AAC

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.722 W/kg; SAR (10g) = 0.336 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.725 W/kg; SAR (8g) = 0.372 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

TSL Correction: Positive only

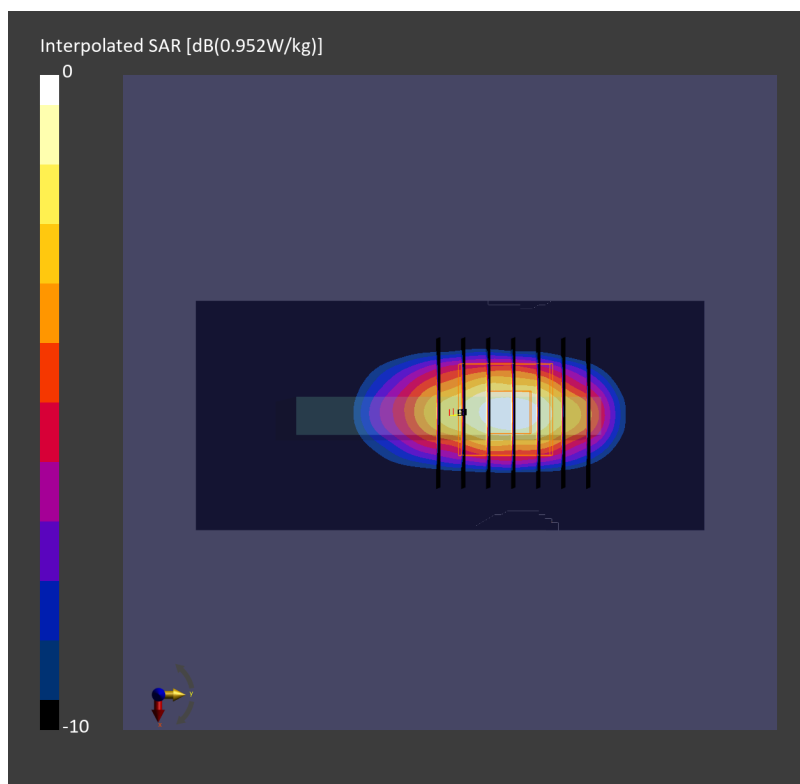

#62_FR1 n71_35M_BPSK_90_45_Left Edge_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260311 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10941-AAC

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.406 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.630 W/kg; SAR (8g) = 0.387 W/kg; SAR (10g) = 0.360 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

TSL Correction: Positive only

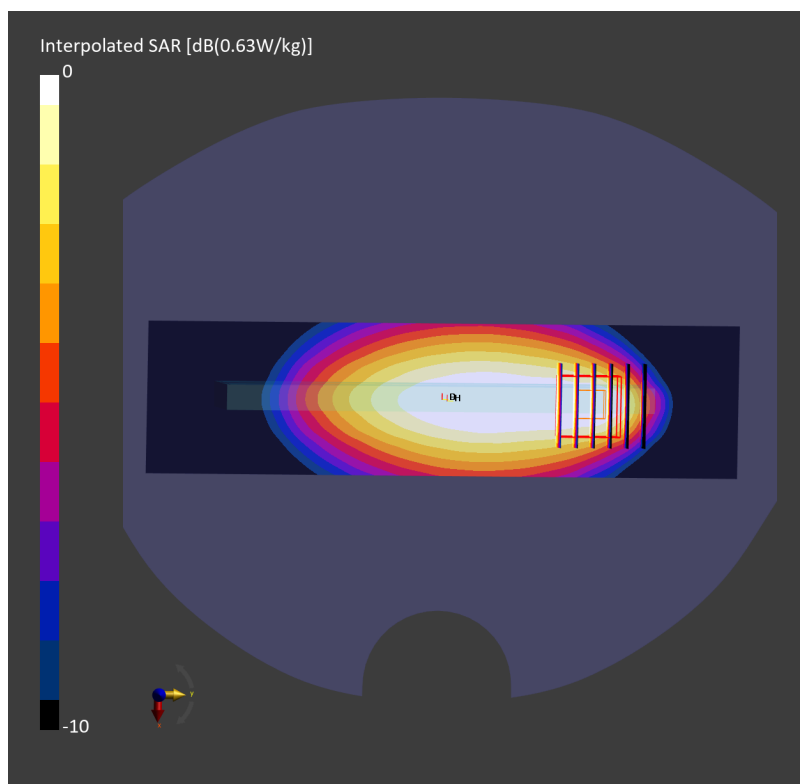

#63_FR1 n41_100M_BPSK_135_0_Bottom Edge_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260212 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.11, 6.99, 7.04); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.771 W/kg; SAR (10g) = 0.330 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.796 W/kg; SAR (8g) = 0.382 W/kg; SAR (10g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

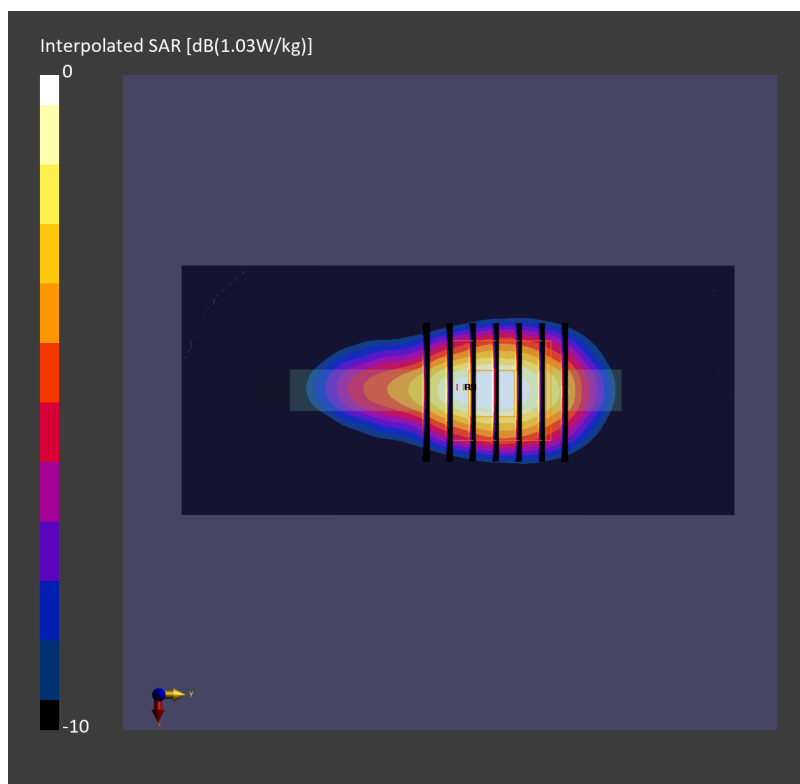

#64_FR1 n48_40M_BPSK_50_25_Left Edge_5mm_Ch641666

Communication System: 5G NR; Frequency: 3624.985 MHz

Medium: HSL_600-7200_260416 Medium parameters used: $f = 3624.985$ MHz; $\sigma = 2.84$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.61, 6.72, 6.43); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.469 W/kg; SAR (10g) = 0.177 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.18 dB

SAR (1g) = 0.602 W/kg; SAR (8g) = 0.249 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

TSL Correction: Positive only

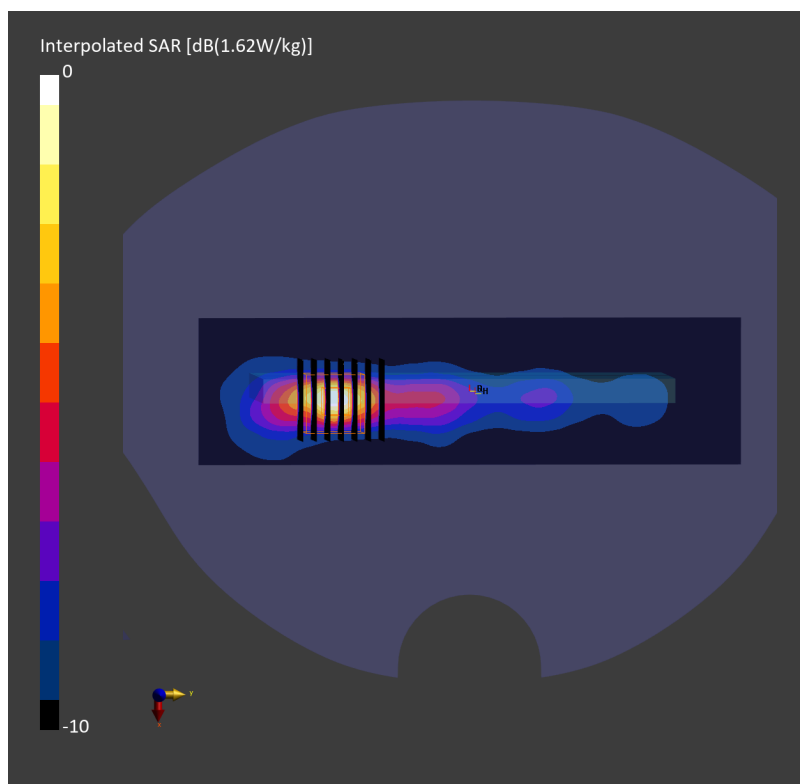

#65_FR1 n77_100M_BPSK_1_137_Right Edge_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260224 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.47, 6.37, 6.41); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.245 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.691 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

TSL Correction: Positive only

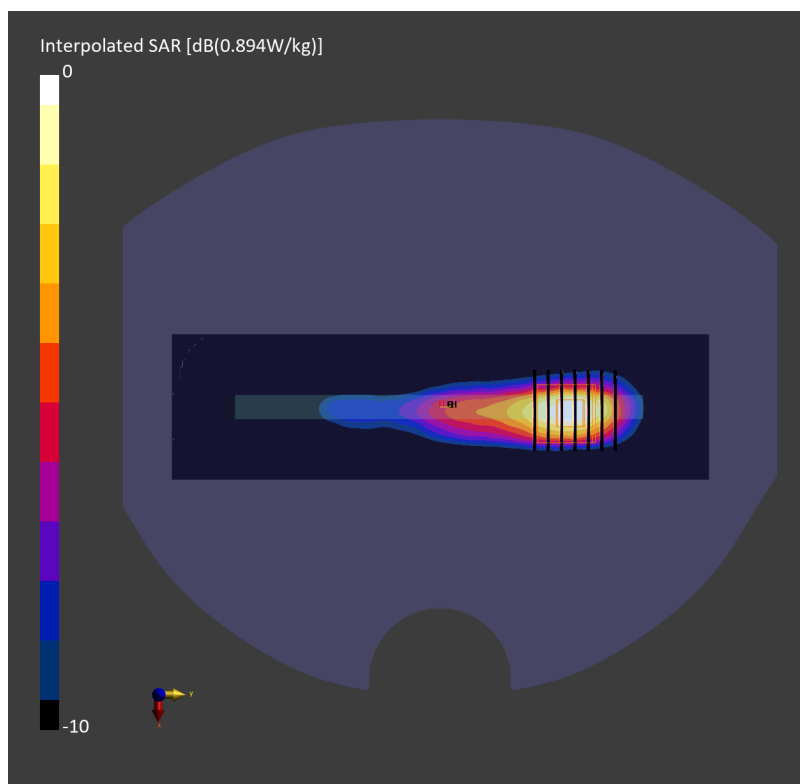

#66_WLAN2.4GHz_802.11g 6Mbps_Left Edge_5mm_Ch6

Communication System: IEEE 802.11g WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.81$ S/m; $\epsilon_r=39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10416-AAA

Area Scan (54.0 mm x 200.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.265 W/kg; SAR (10g) = 0.110 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.14 dB

SAR (1g) = 0.283 W/kg; SAR (8g) = 0.120 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

TSL Correction: Positive only

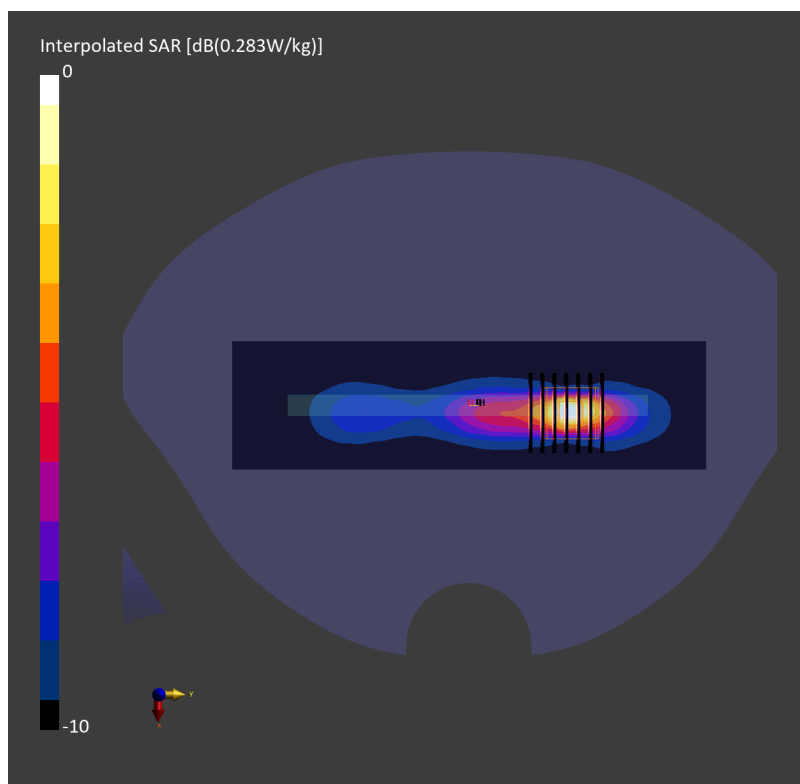

#67_WLAN5GHz_802.11a 6Mbps_Front_5mm_Ch44

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5220.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5220.000$ MHz; $\sigma = 4.44$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.329 W/kg; SAR (10g) = 0.113 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.419 W/kg; SAR (8g) = 0.140 W/kg; SAR (10g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

TSL Correction: Positive only

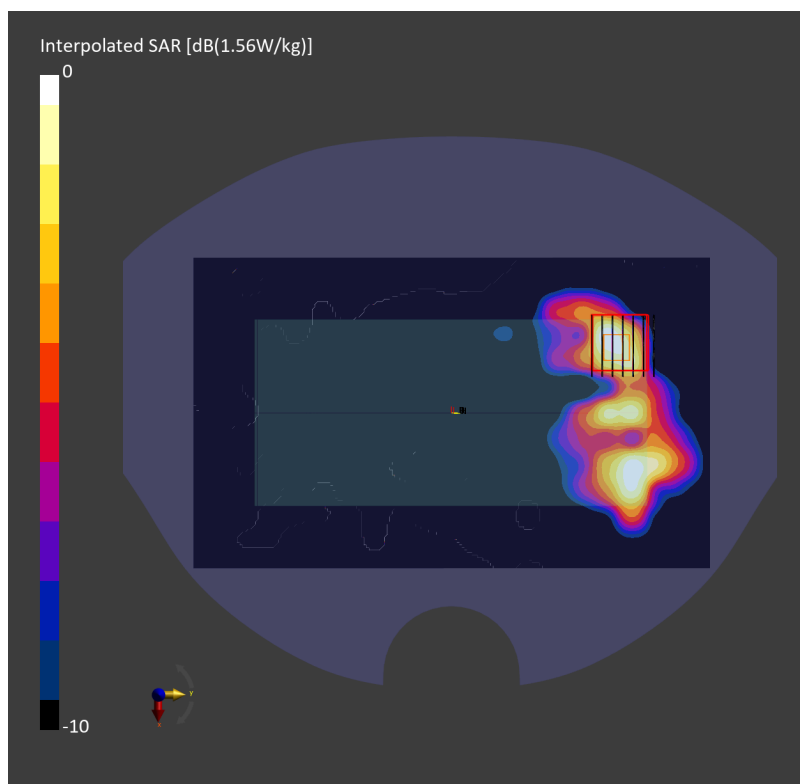

#68_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 33.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.280 W/kg; SAR (10g) = 0.090 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.325 W/kg; SAR (8g) = 0.109 W/kg; SAR (10g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.2 %

TSL Correction: Positive only

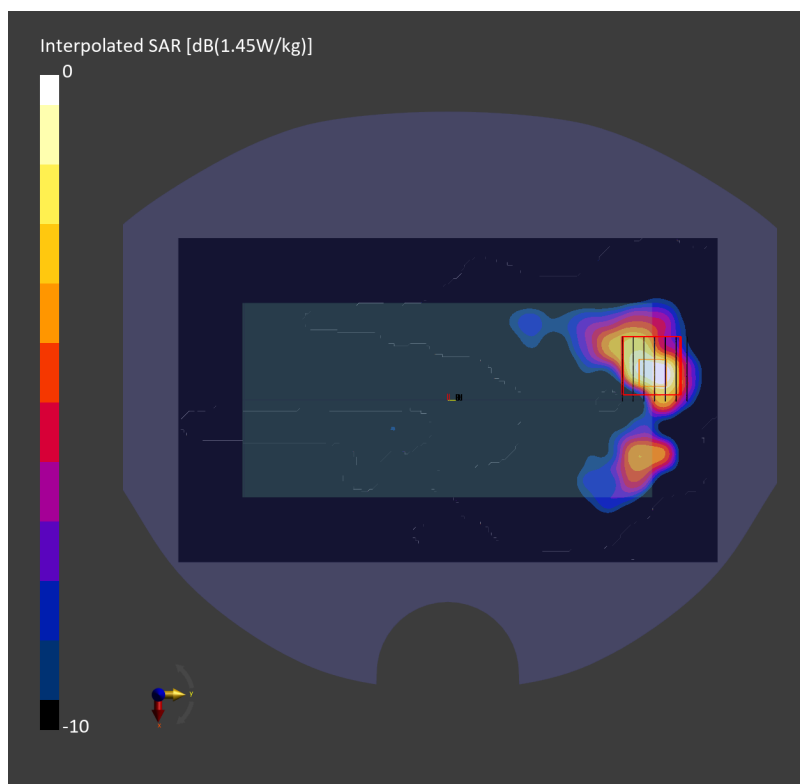

#69_WLAN6GHz_802.11ax-HE80 MCS0_Back_5mm_Ch215

Communication System: IEEE 802.11ax; Frequency: 7025.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 7025.000$ MHz; $\sigma = 6.57$ S/m; $\epsilon_r = 32.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (105.0 mm x 195.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 0.167 W/kg; SAR (10g) = 0.054 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.179 W/kg; SAR (8g) = 0.065 W/kg; SAR (10g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.8 %

psAPD (1.0cm², sq) = 1.79 [W/m²]; psAPD (4.0cm², sq) = 1.29 [W/m²]

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.14 dB


SAR (1g) = 0.141 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.8 %

psAPD (1.0cm², sq) = 1.41 [W/m²]; psAPD (4.0cm², sq) = 0.935 [W/m²]

TSL Correction: Positive only

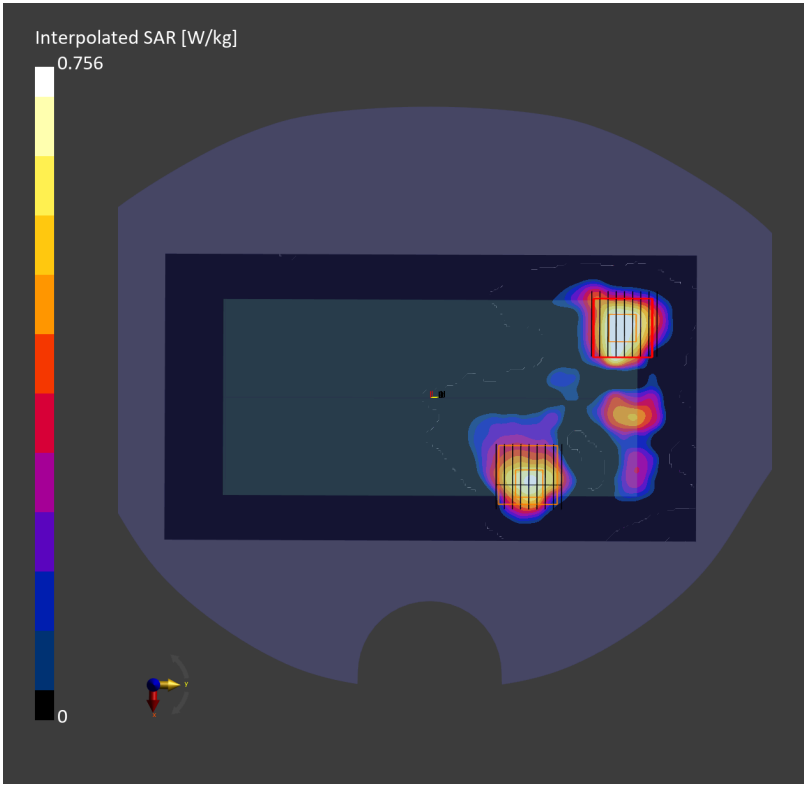

#70_Bluetooth_1Mbps_Top Edge_5mm_Ch0

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2402.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 2402.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.416 W/kg; SAR (10g) = 0.185 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.436 W/kg; SAR (8g) = 0.219 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

TSL Correction: Positive only

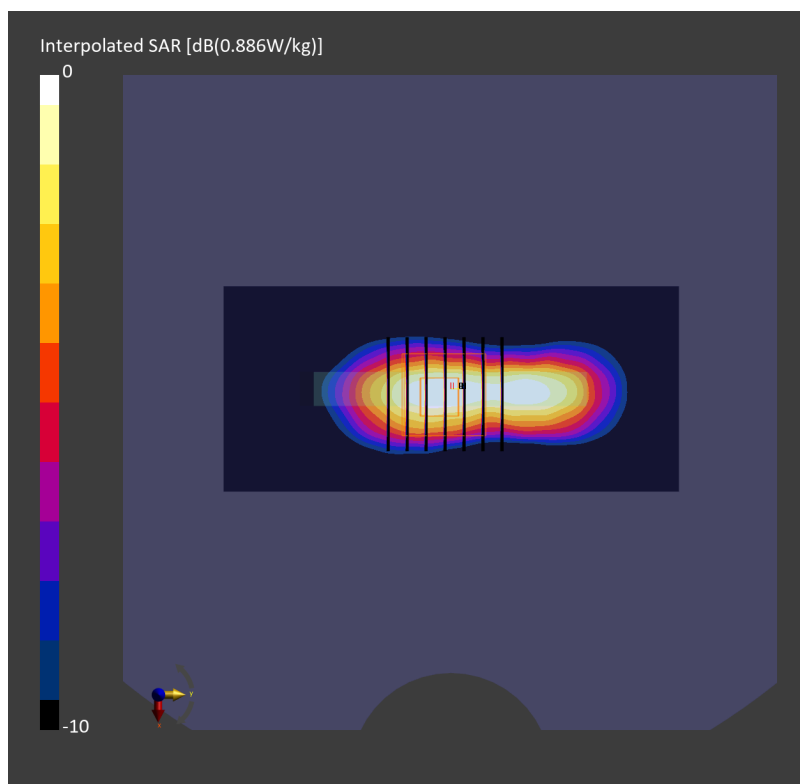

#71_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251

Communication System: GPRS-FDD; Frequency: 848.800 MHz

Medium: HSL_600-7200_260324 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 44.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.709 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

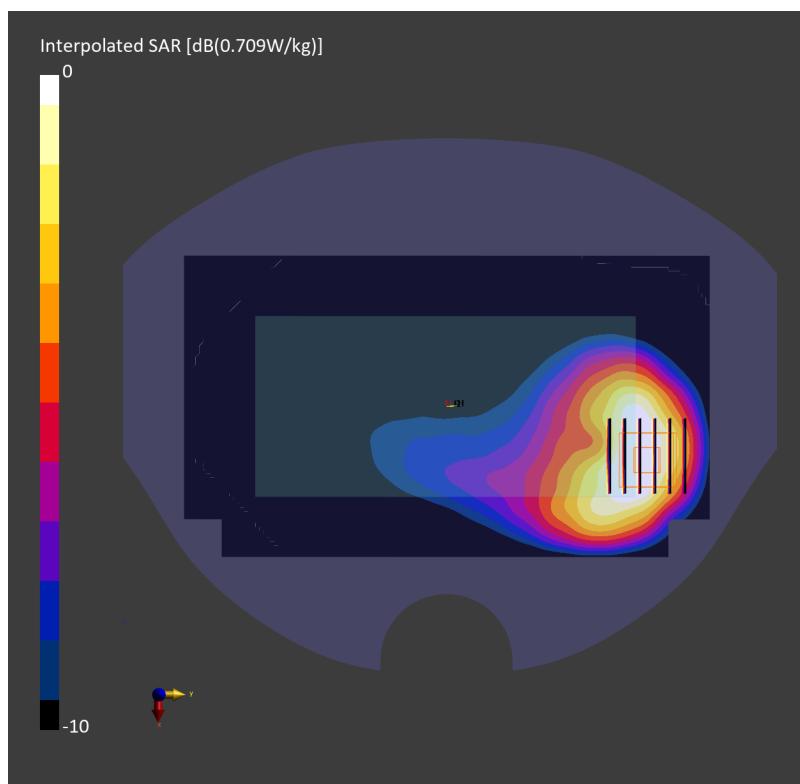

#72_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch512

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260306 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.54, 7.21, 8.01); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.313 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.516 W/kg; SAR (8g) = 0.326 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

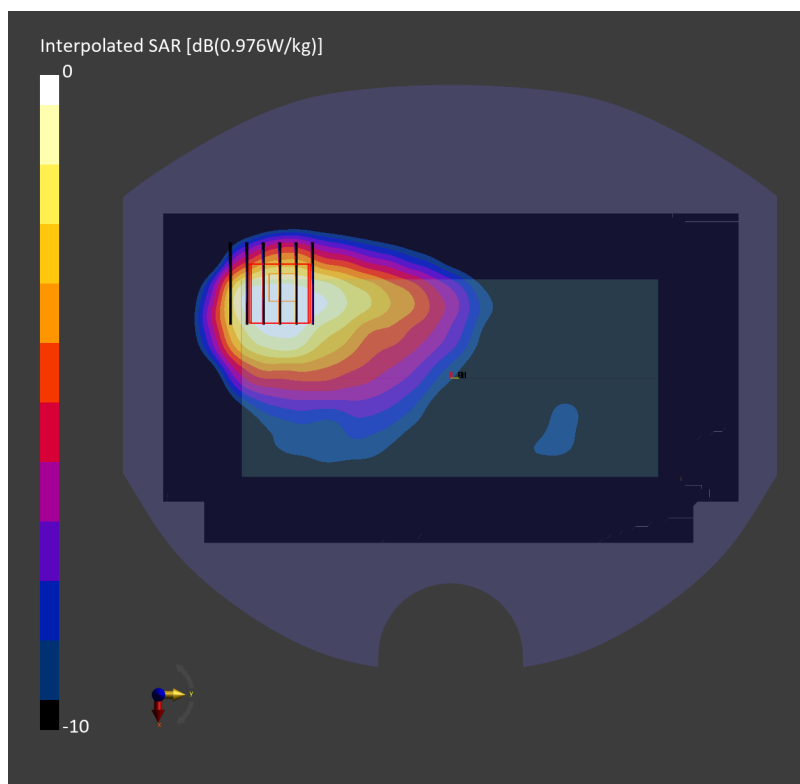

#73_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260113 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(7.64, 7.52, 7.56); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.363 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.563 W/kg; SAR (8g) = 0.354 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.4 %

TSL Correction: Positive only

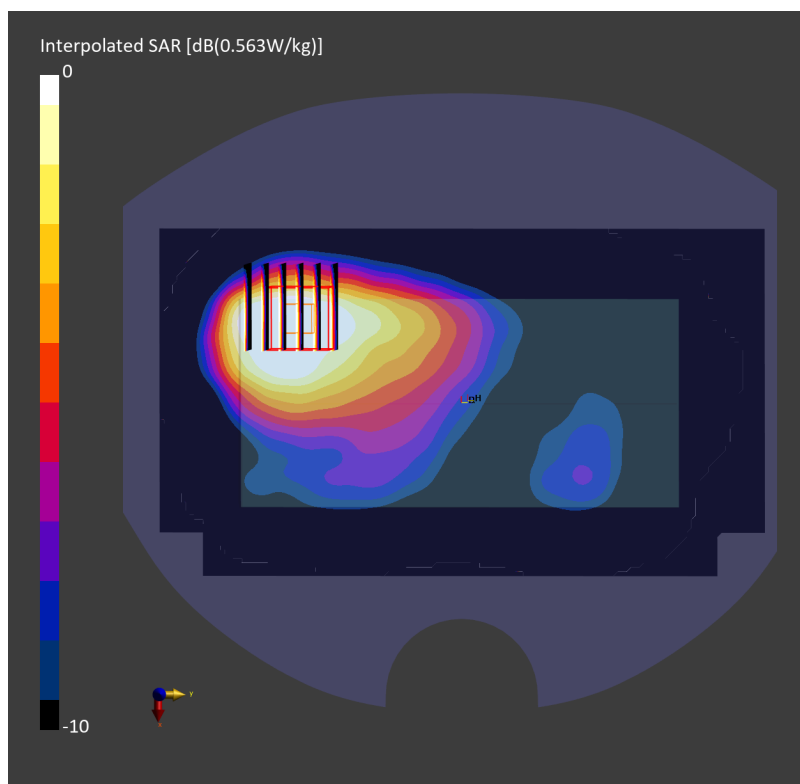

#74_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.242 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.544 W/kg; SAR (8g) = 0.287 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

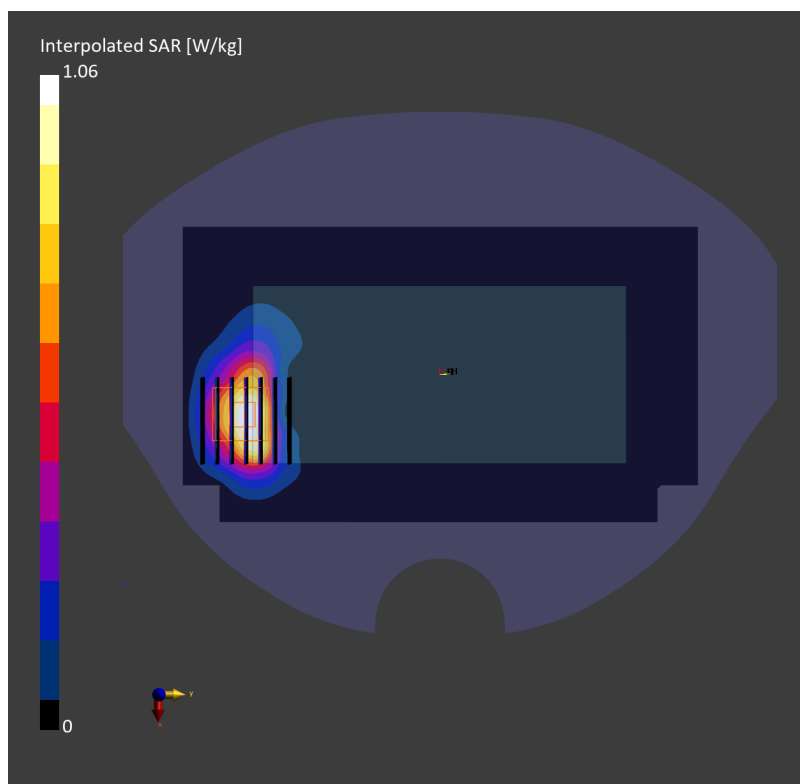

#75_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260211 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.497 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.816 W/kg; SAR (8g) = 0.458 W/kg; SAR (10g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

TSL Correction: Positive only

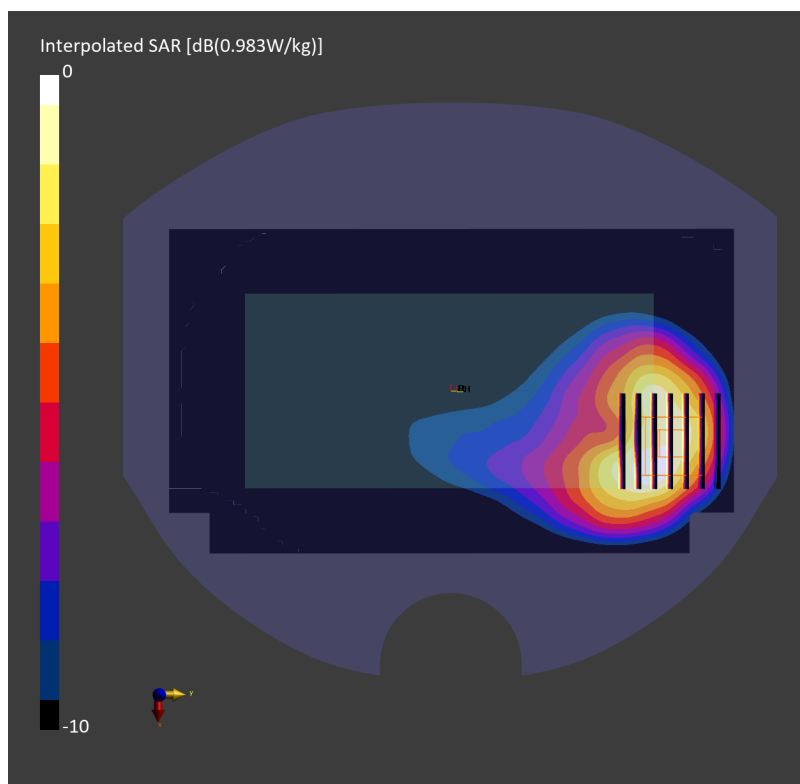

#76_LTE Band 7_20M_QPSK_50_0_Back_5mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.511 W/kg; SAR (10g) = 0.246 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.281 W/kg; SAR (10g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

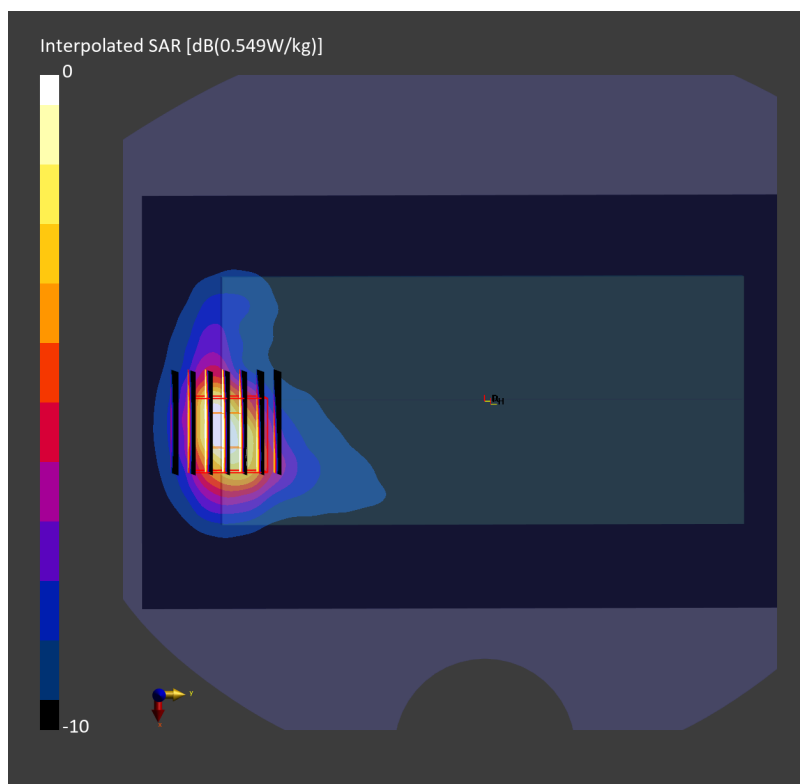

#77_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260206 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.586 W/kg; SAR (10g) = 0.387 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

TSL Correction: Positive only

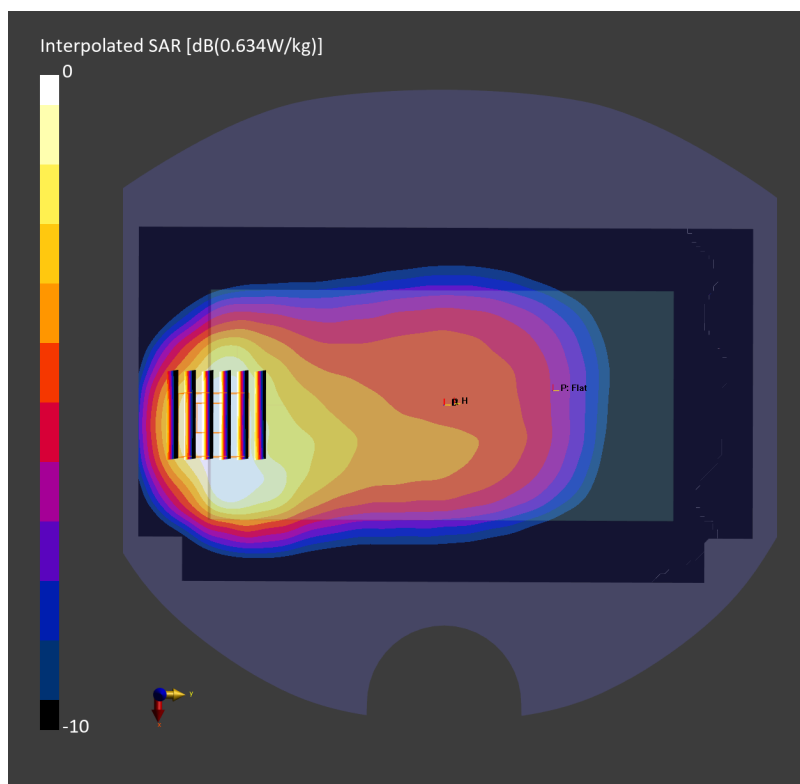

#78_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260118 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(9.6, 9.44, 9.5); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2025-02-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.652 W/kg; SAR (10g) = 0.418 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.673 W/kg; SAR (8g) = 0.387 W/kg; SAR (10g) = 0.359 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

TSL Correction: Positive only

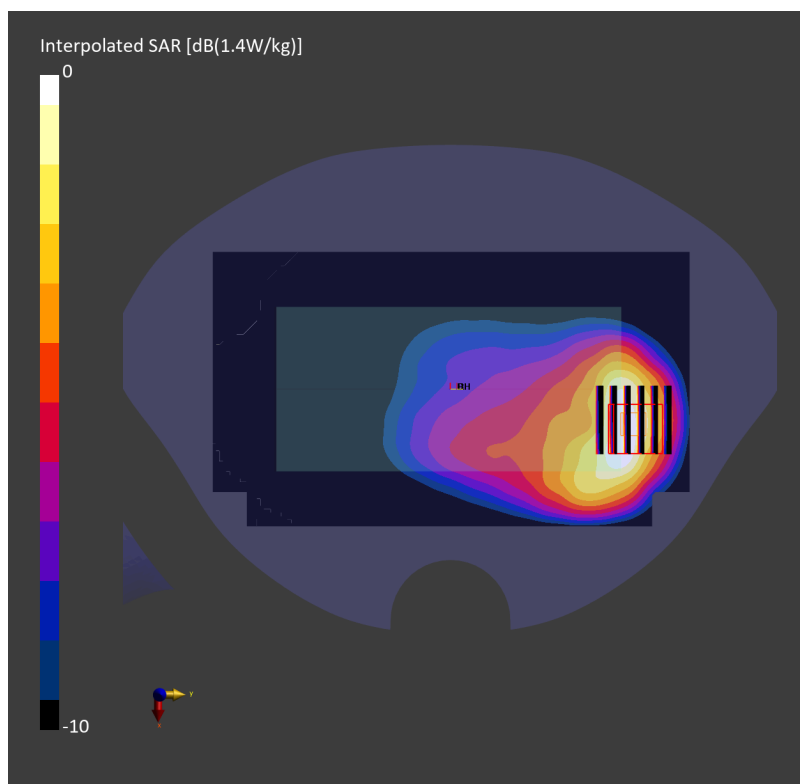

#79_LTE Band 14_10M_QPSK_25_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.363 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.571 W/kg; SAR (8g) = 0.336 W/kg; SAR (10g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

TSL Correction: Positive only

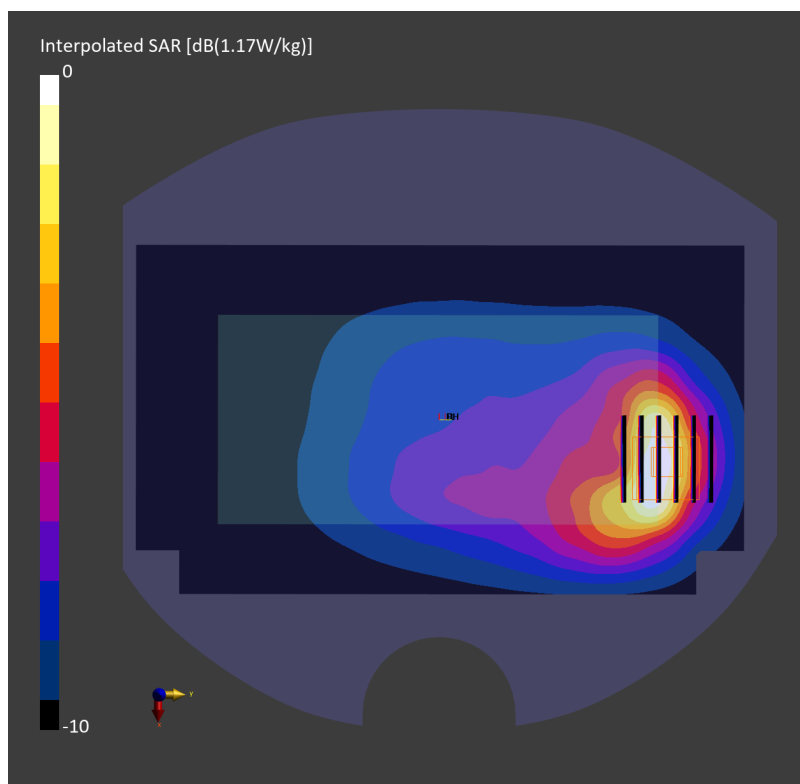

#80_LTE Band 25_20M_QPSK_1_99_Back_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260317 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.816 W/kg; SAR (10g) = 0.427 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.791 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.392 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

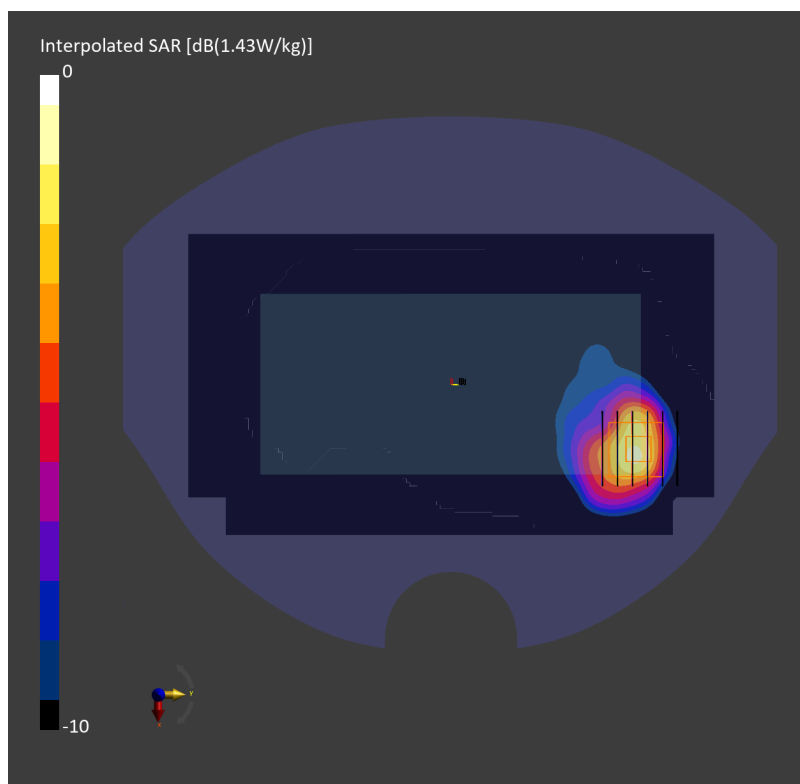

#81_LTE Band 26_15M_QPSK_1_74_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f=831.500$ MHz; $\sigma=0.913$ S/m; $\epsilon_r=42.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.56, 9.14, 10.17); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.657 W/kg; SAR (10g) = 0.437 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.806 W/kg; SAR (8g) = 0.465 W/kg; SAR (10g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

TSL Correction: Positive only

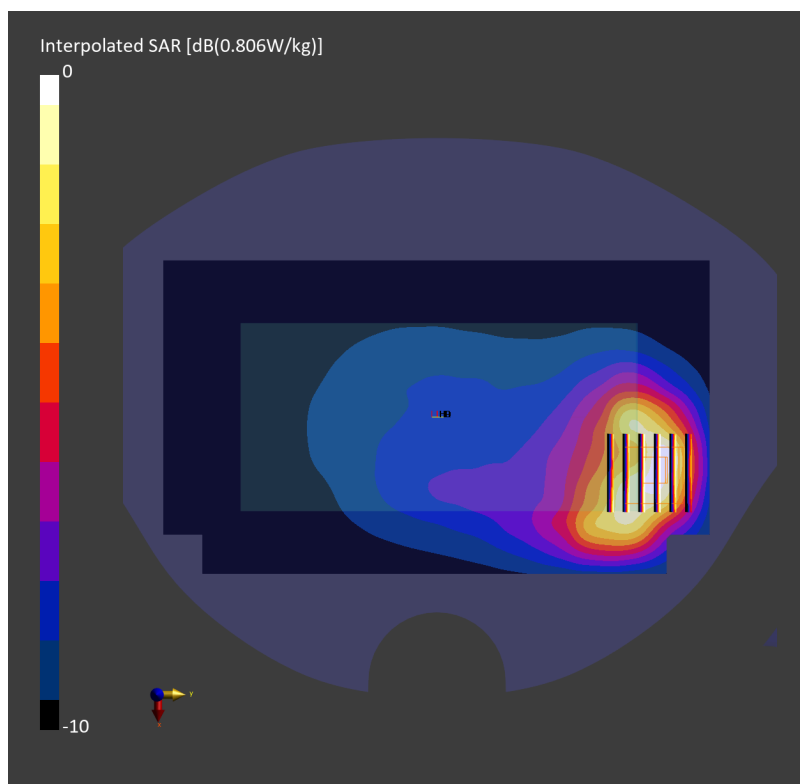

#82_LTE Band 30_10M_QPSK_25_0_Back_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.21, 6.9, 7.67); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.501 W/kg; SAR (8g) = 0.259 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

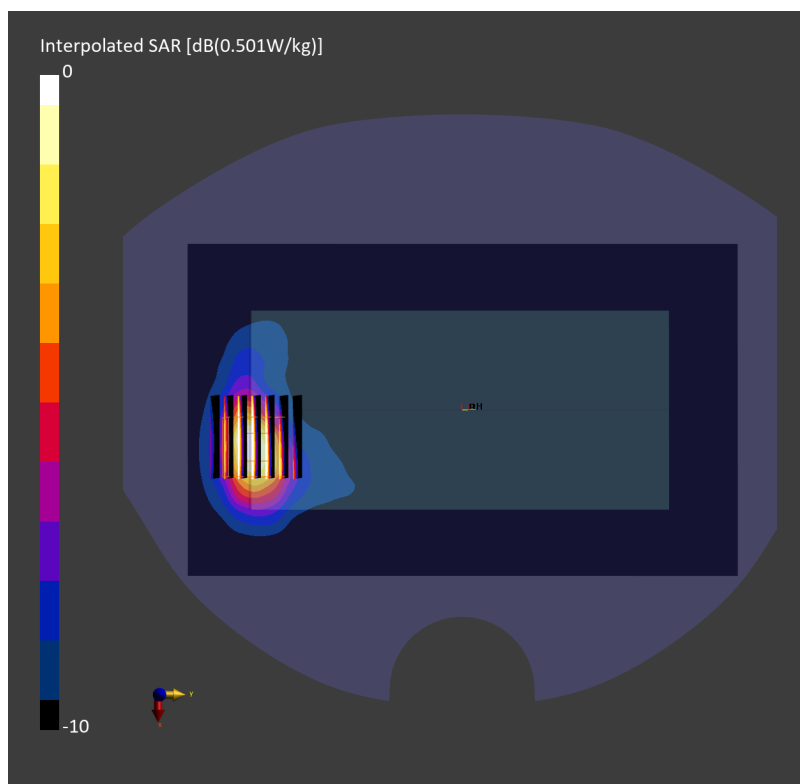

#83_LTE Band 66_20M_QPSK_50_0_Back_5mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.671 W/kg; SAR (10g) = 0.398 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.733 W/kg; SAR (8g) = 0.457 W/kg; SAR (10g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 90.7 %

TSL Correction: Positive only

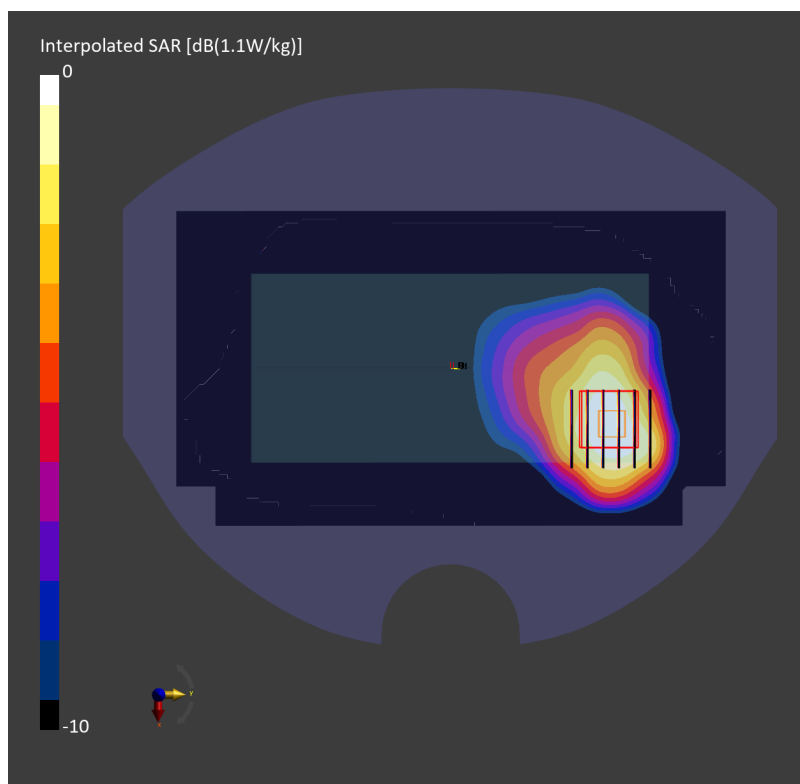

#84_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260208 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.616 W/kg; SAR (10g) = 0.402 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.643 W/kg; SAR (8g) = 0.368 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

TSL Correction: Positive only

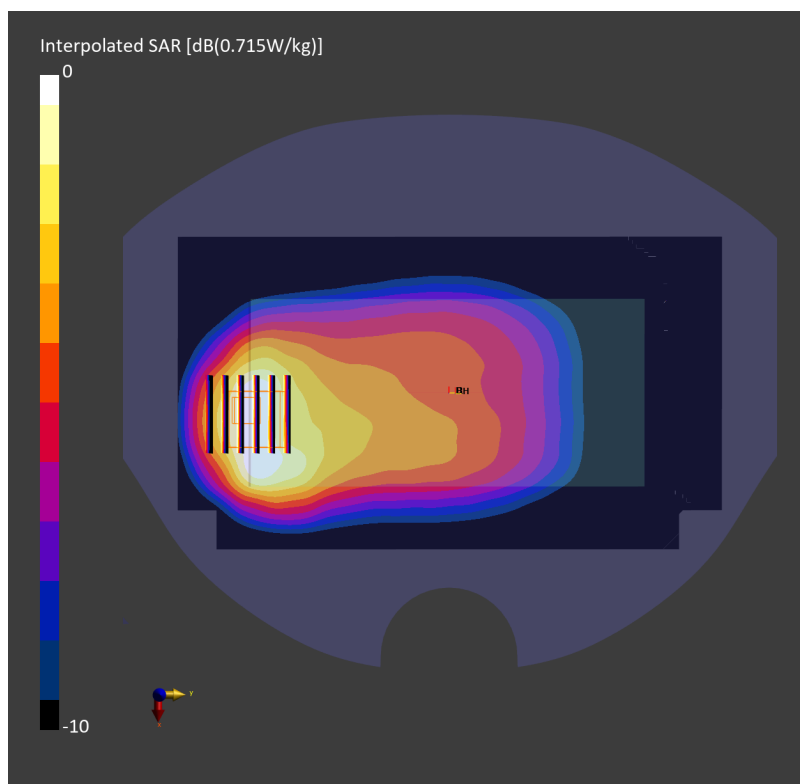

#85_LTE Band 41_20M_QPSK_50_0_Back_5mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10494-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.728 W/kg; SAR (10g) = 0.357 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.787 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

TSL Correction: Positive only

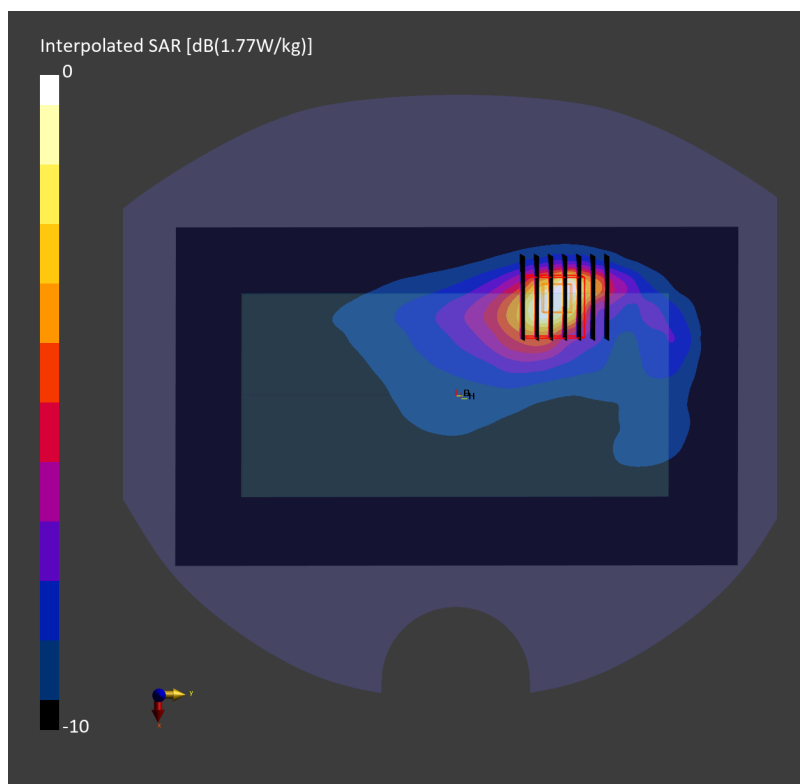

#86_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260318 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.78$ S/m; $\epsilon_r = 37.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.94, 5.93, 5.67); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.272 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.13 dB

SAR (1g) = 0.652 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

TSL Correction: Positive only

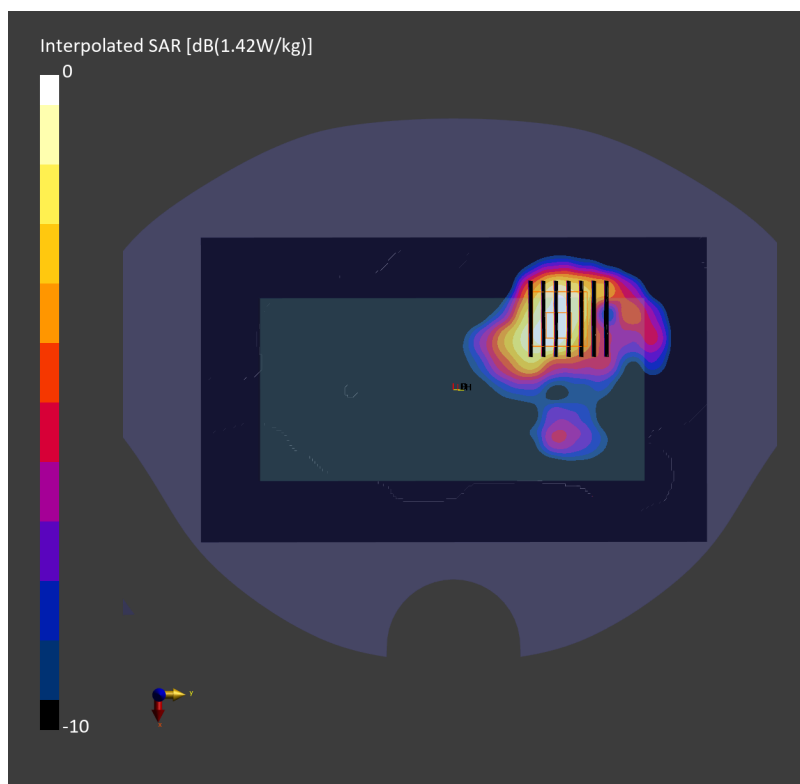

#87_FR1 n7_50M_BPSK_135_0_Back_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260303 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.74, 6.73, 6.43); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.472 W/kg; SAR (10g) = 0.245 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.500 W/kg; SAR (8g) = 0.265 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

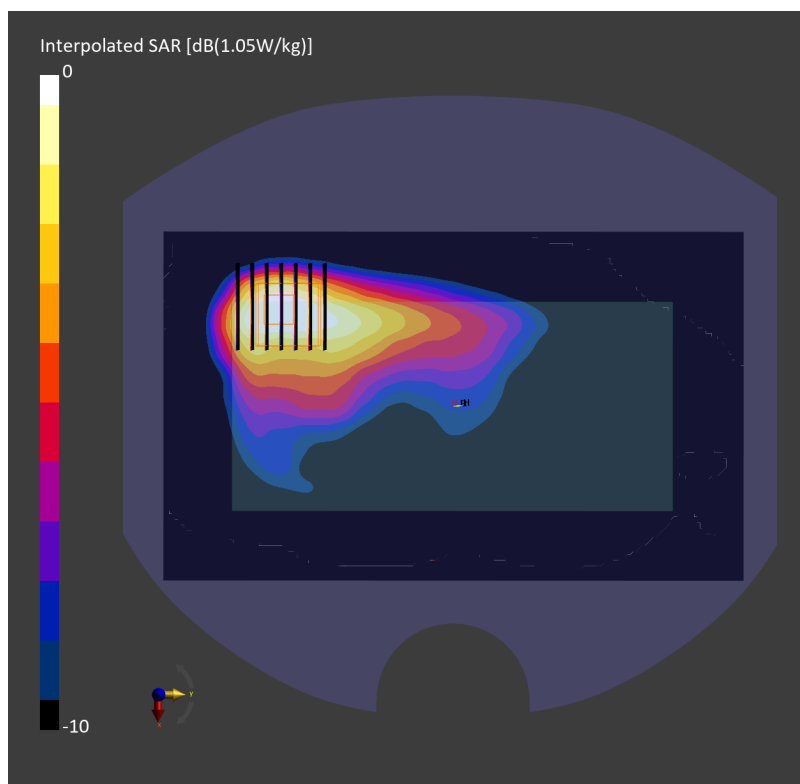

#88_FR1 n12_15M_BPSK_36_22_Back_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.446 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.710 W/kg; SAR (8g) = 0.402 W/kg; SAR (10g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

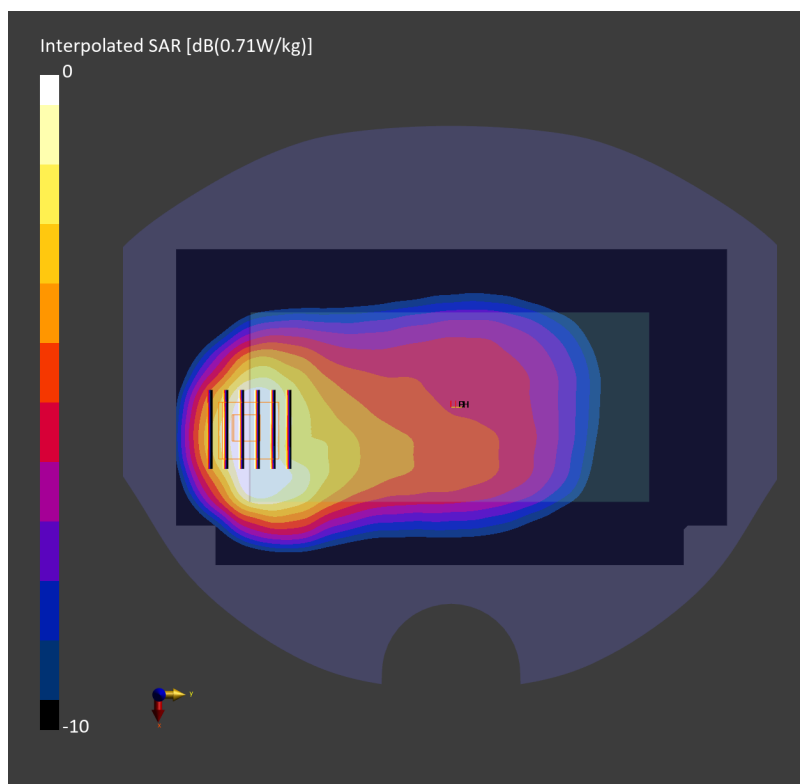

#89_FR1 n13_10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260316 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.547 W/kg; SAR (10g) = 0.351 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.586 W/kg; SAR (8g) = 0.329 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

TSL Correction: Positive only

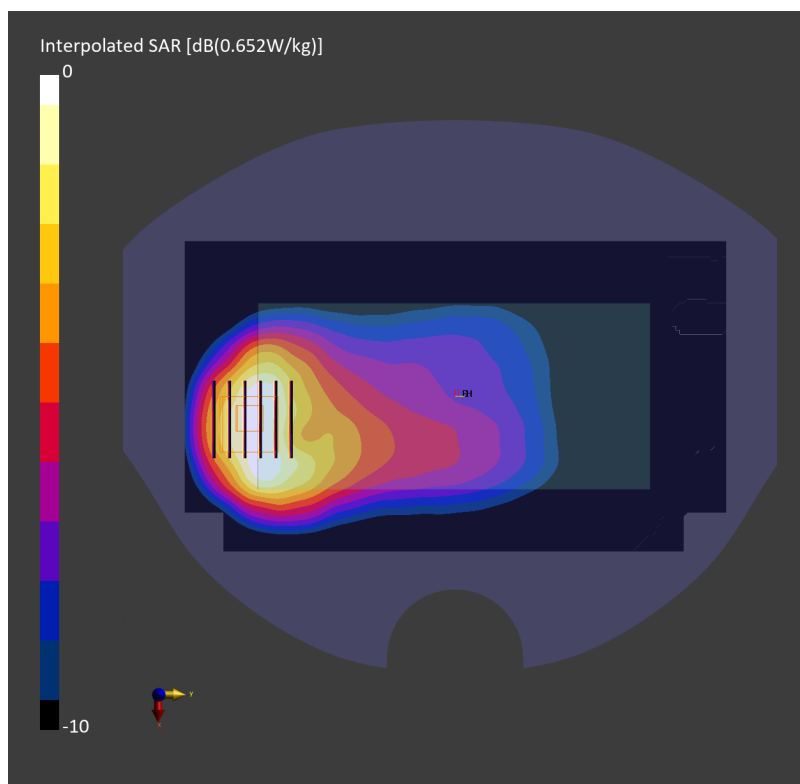

#90_FR1 n14_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.686 W/kg; SAR (10g) = 0.438 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.687 W/kg; SAR (8g) = 0.398 W/kg; SAR (10g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

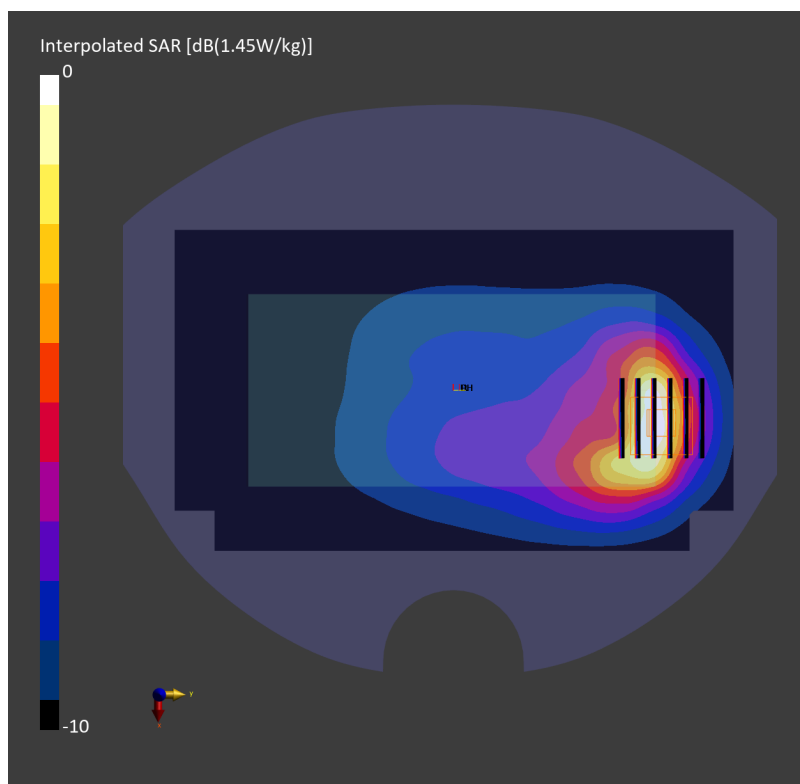

#91_FR1 n25_40M_BPSK_108_54_Back_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260310 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.93, 6.92, 6.61); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.422 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.787 W/kg; SAR (8g) = 0.431 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

TSL Correction: Positive only

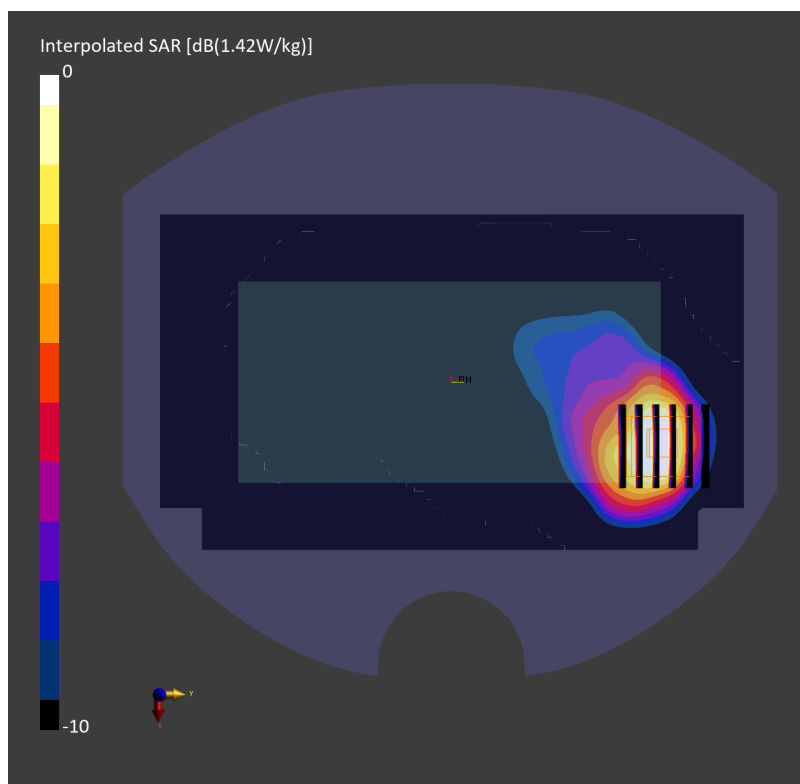

#92_FR1 n26_20M_BPSK_50_28_Back_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260311 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.81, 8.79, 8.4); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.706 W/kg; SAR (10g) = 0.450 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.720 W/kg; SAR (8g) = 0.413 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

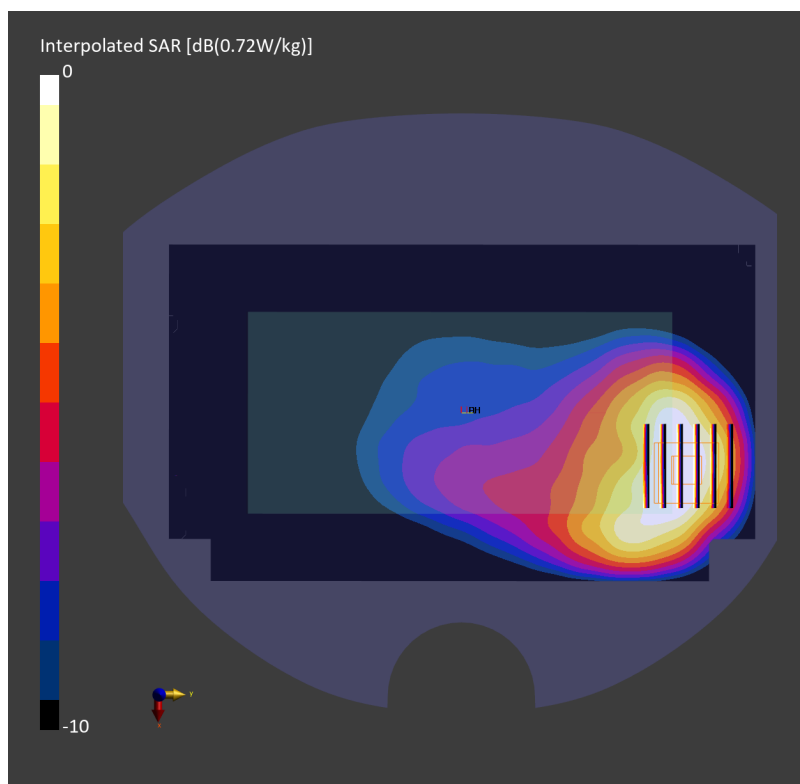

#93_FR1 n30_10M_BPSK_25_14_Back_5mm_Ch462000

Communication System: 5G NR; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260314 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.21, 6.9, 7.67); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.235 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.16 dB

SAR (1g) = 0.506 W/kg; SAR (8g) = 0.262 W/kg; SAR (10g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

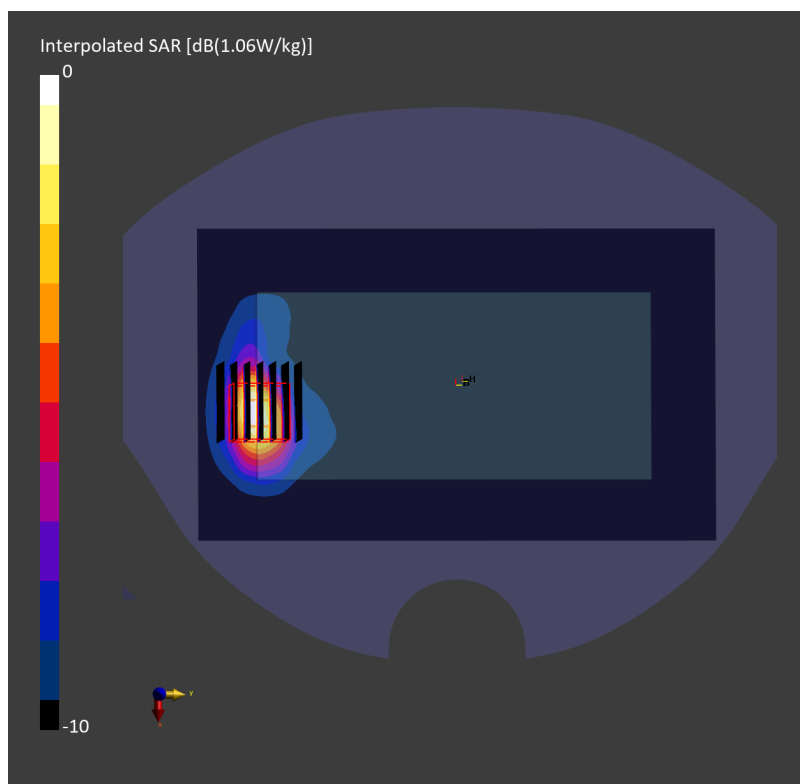

#94_FR1 n66_45M_BPSK_240_0_Back_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.773 W/kg; SAR (10g) = 0.455 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.817 W/kg; SAR (8g) = 0.503 W/kg; SAR (10g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 85.8 %

TSL Correction: Positive only

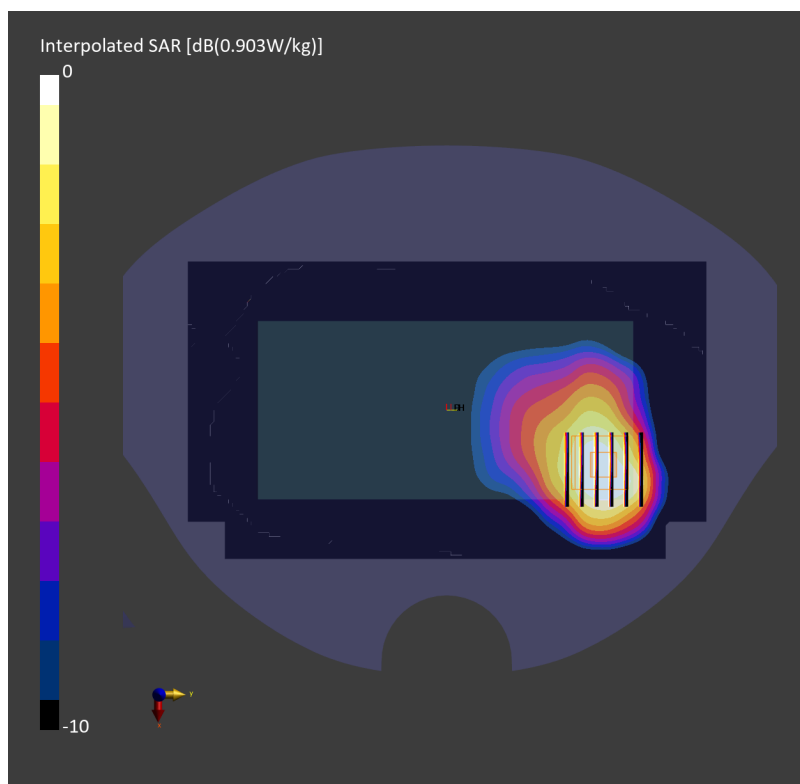

#95_FR1 n70_15M_BPSK_1_77_Back_5mm_Ch340500

Communication System: 5G NR; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260218 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(7.39, 7.38, 7.05); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.491 W/kg; SAR (10g) = 0.289 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.359 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 90.1 %

TSL Correction: Positive only

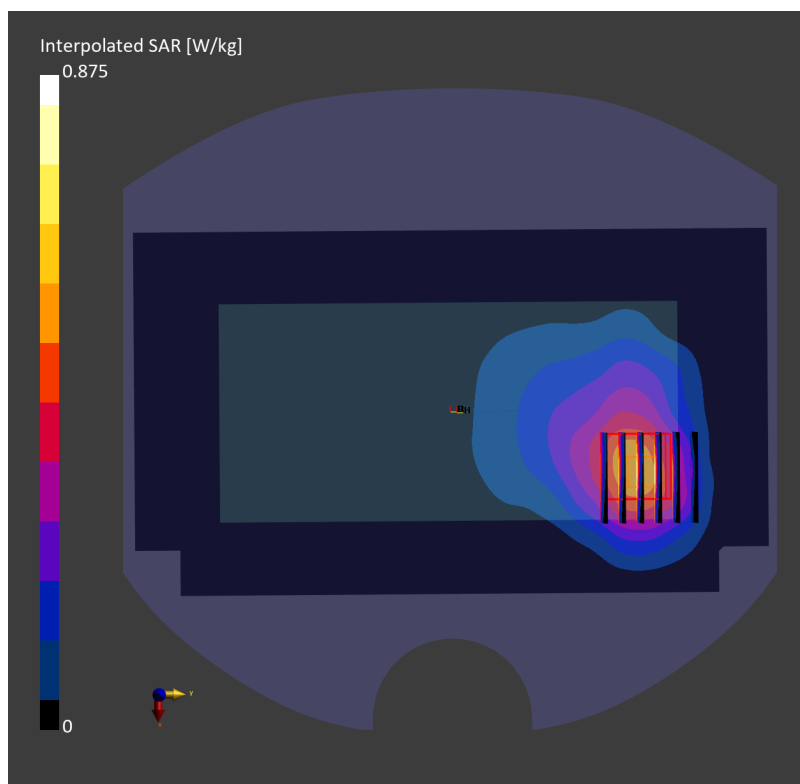

#96_FR1 n71_35M_BPSK_90_45_Back_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(8.96, 8.94, 8.55); Calibrated: 2025-11-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2025-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 10941-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.442 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.685 W/kg; SAR (8g) = 0.390 W/kg; SAR (10g) = 0.364 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

TSL Correction: Positive only

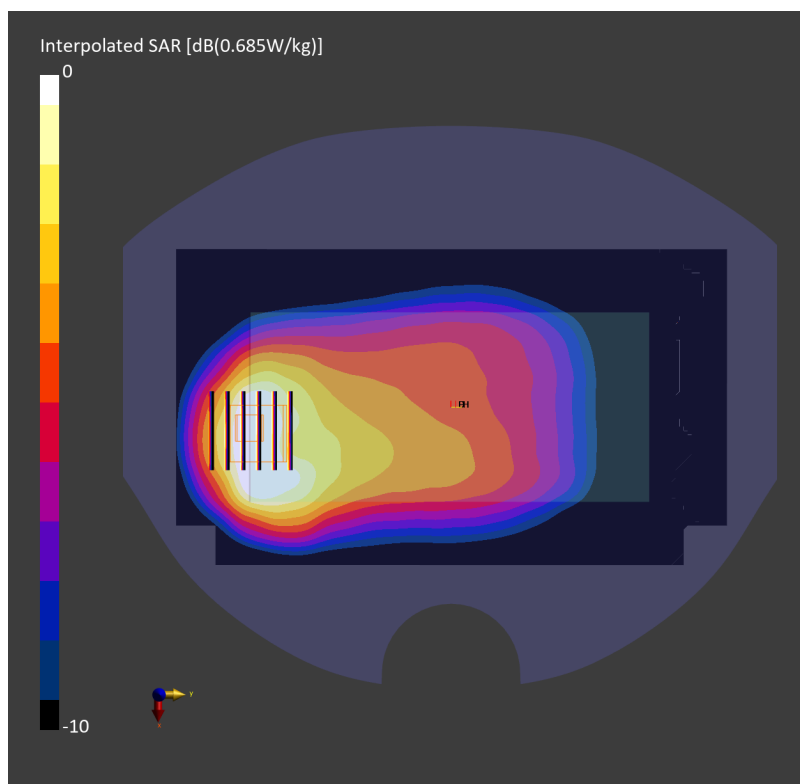

#97_FR1 n41_100M_BPSK_135_0_Back_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.666 W/kg; SAR (10g) = 0.294 W/kg;

TSL Correction: Positive only

Zoom Scan (38.4 mm x 38.4 mm x 31.2 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.773 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

TSL Correction: Positive only

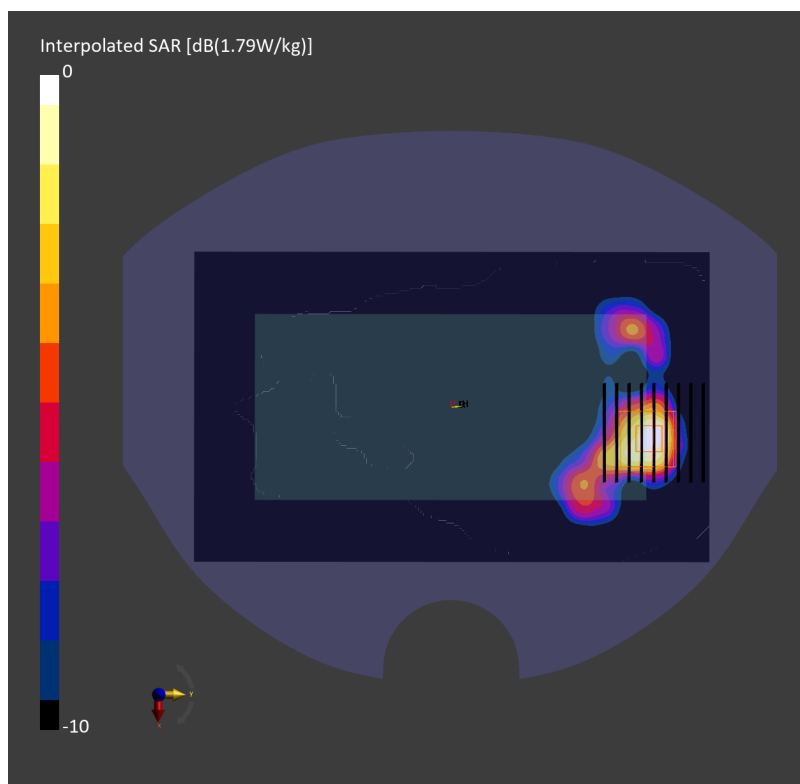

#98_FR1 n48_20M_BPSK_1_1_Back_5mm_Ch646000

Communication System: 5G NR; Frequency: 3689.995 MHz

Medium: HSL_600-7200_260416 Medium parameters used: $f = 3689.995$ MHz; $\sigma = 2.89$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.61, 6.72, 6.43); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10900-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.241 W/kg;

TSL Correction: Positive only

Zoom Scan (28.2 mm x 28.2 mm x 29.1 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.829 W/kg; SAR (8g) = 0.322 W/kg; SAR (10g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.0 %

TSL Correction: Positive only

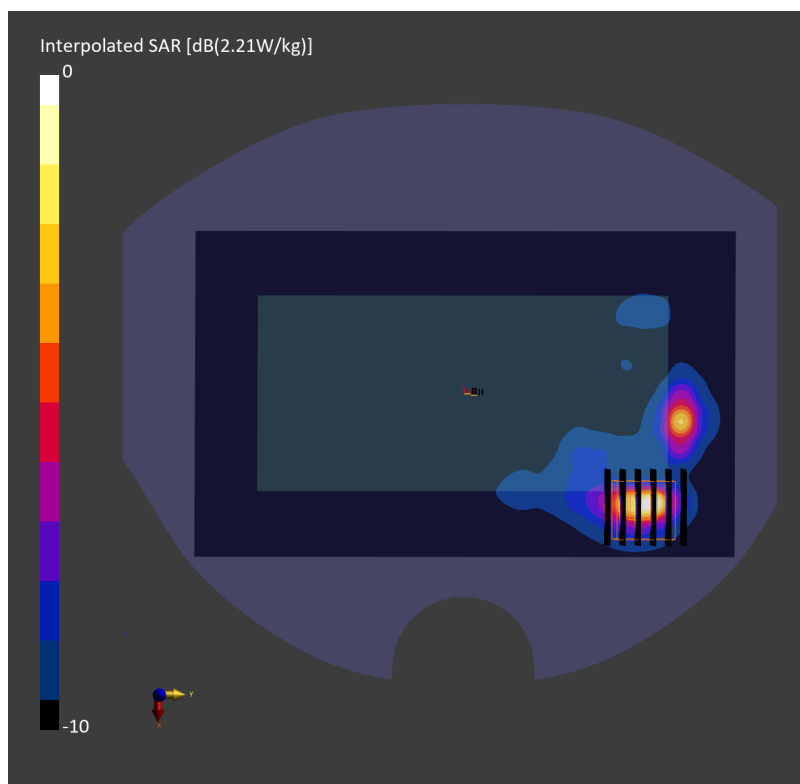

#99_FR1 n77_100M_BPSK_1_1_Back_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260223 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.00$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7814; ConvF(6.37, 6.27, 6.31); Calibrated: 2025-06-19
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn778; Calibrated: 2026-01-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.155 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.19 dB

SAR (1g) = 0.502 W/kg; SAR (8g) = 0.191 W/kg; SAR (10g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 73.1 %

TSL Correction: Positive only

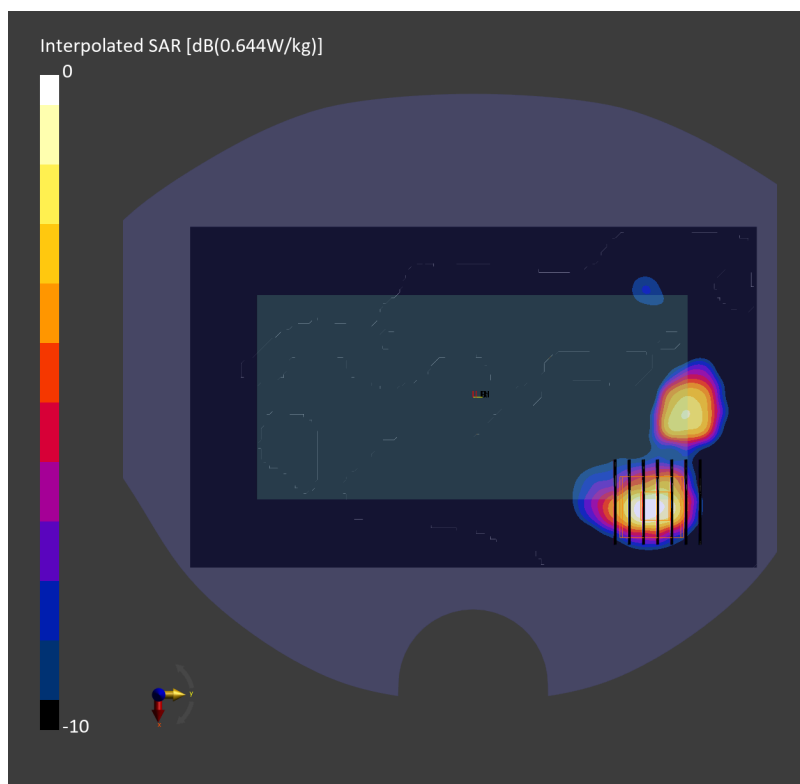

#100_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch13

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2472.000 MHz

Medium: HSL_600-7200_260220 Medium parameters used: $f = 2472.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.331 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.807 W/kg; SAR (8g) = 0.364 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

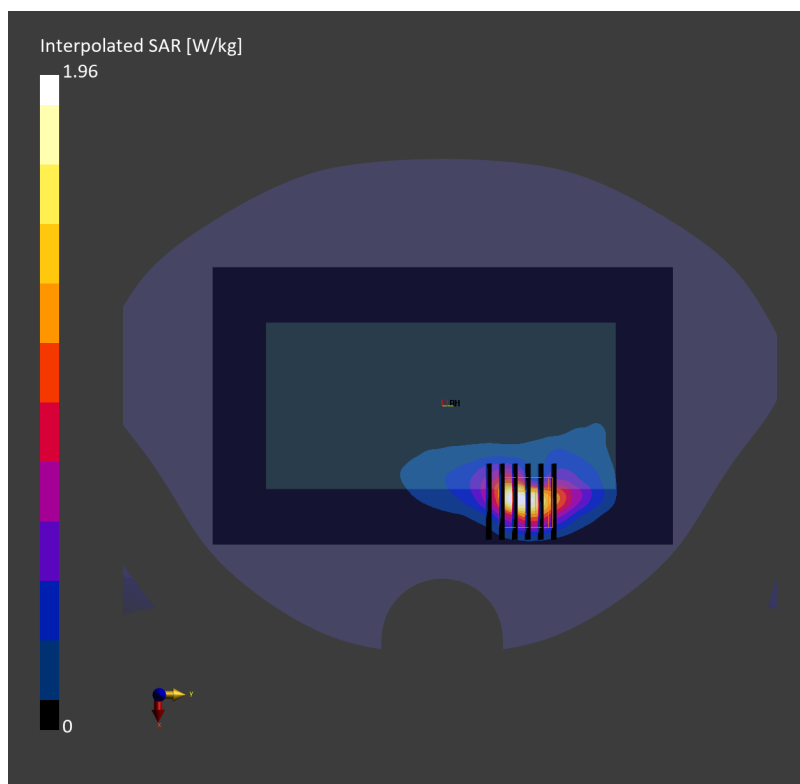

#101_WLAN5GHz_802.11a 6Mbps_Back_5mm_Ch52

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5260.000 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.52, 5.62, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.896 W/kg; SAR (10g) = 0.369 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.500 W/kg; SAR (8g) = 0.172 W/kg; SAR (10g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.8 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 0.972 W/kg; SAR (8g) = 0.402 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.8 %

TSL Correction: Positive only

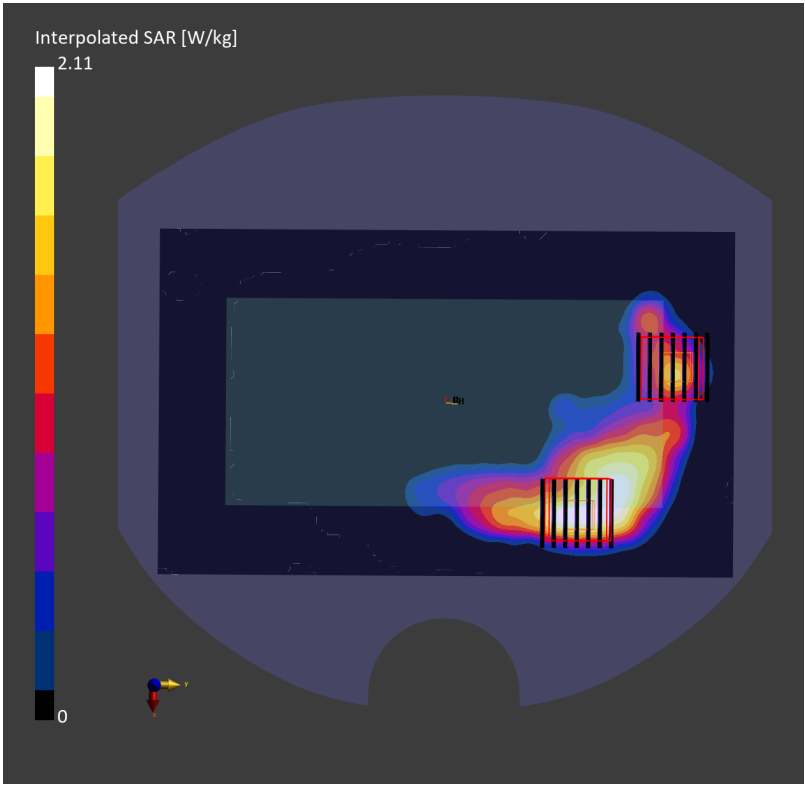

#102_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260221 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.00$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.15, 5.24, 5.01); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.239 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.199 W/kg; SAR (10g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.3 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.649 W/kg; SAR (8g) = 0.279 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.3 %

TSL Correction: Positive only

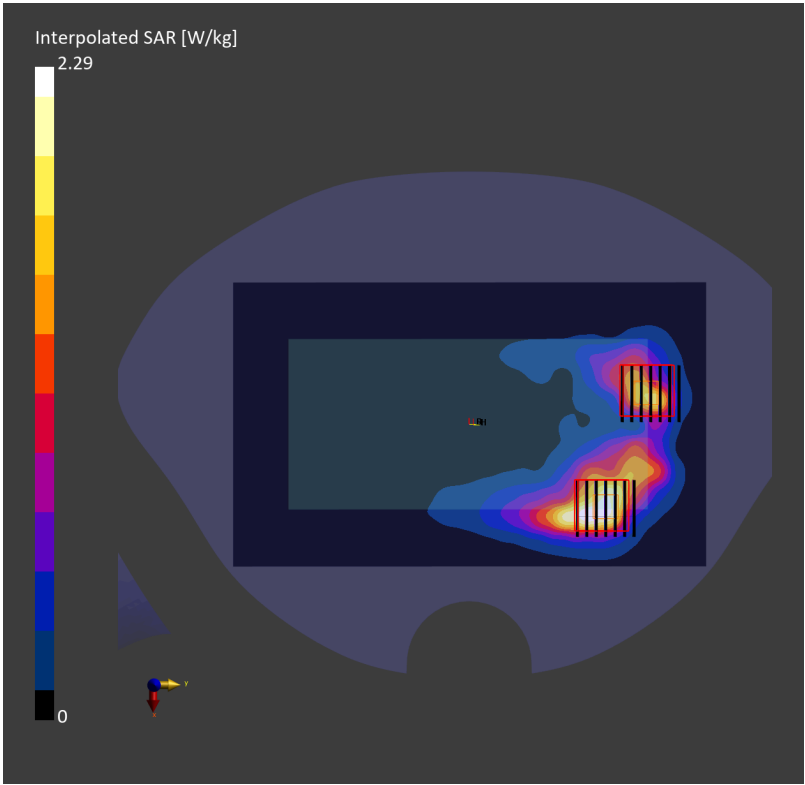

#103_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch159

Communication System: IEEE 802.11n; Frequency: 5795.000 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 5795.000$ MHz; $\sigma = 5.16$ S/m; $\epsilon_r = 33.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.935 W/kg; SAR (10g) = 0.312 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.11 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.9 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.11 dB

SAR (1g) = 0.645 W/kg; SAR (8g) = 0.265 W/kg; SAR (10g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.9 %

TSL Correction: Positive only

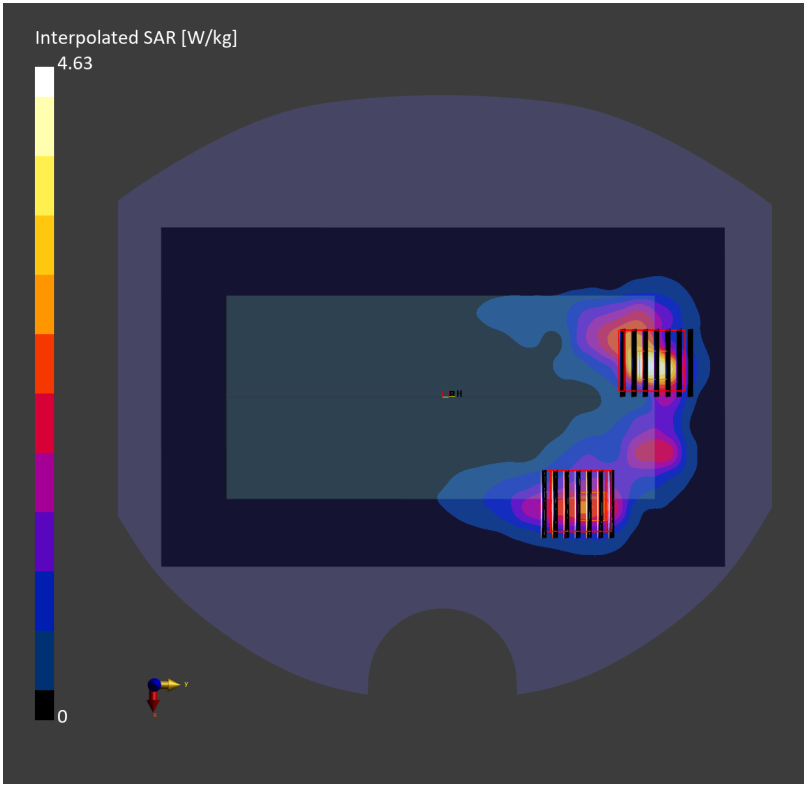

#104_WLAN5GHz_802.11a 6Mbps_Back_5mm_Ch169

Communication System: IEEE 802.11a/h WiFi 5 GHz; Frequency: 5845.000 MHz

Medium: HSL_600-7200_260227 Medium parameters used: $f = 5845.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.03, 5.12, 4.9); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10417-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.995 W/kg; SAR (10g) = 0.318 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.13 dB

SAR (1g) = 1.04 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.6 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.13 dB

SAR (1g) = 0.474 W/kg; SAR (8g) = 0.188 W/kg; SAR (10g) = 0.168 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.6 %

TSL Correction: Positive only

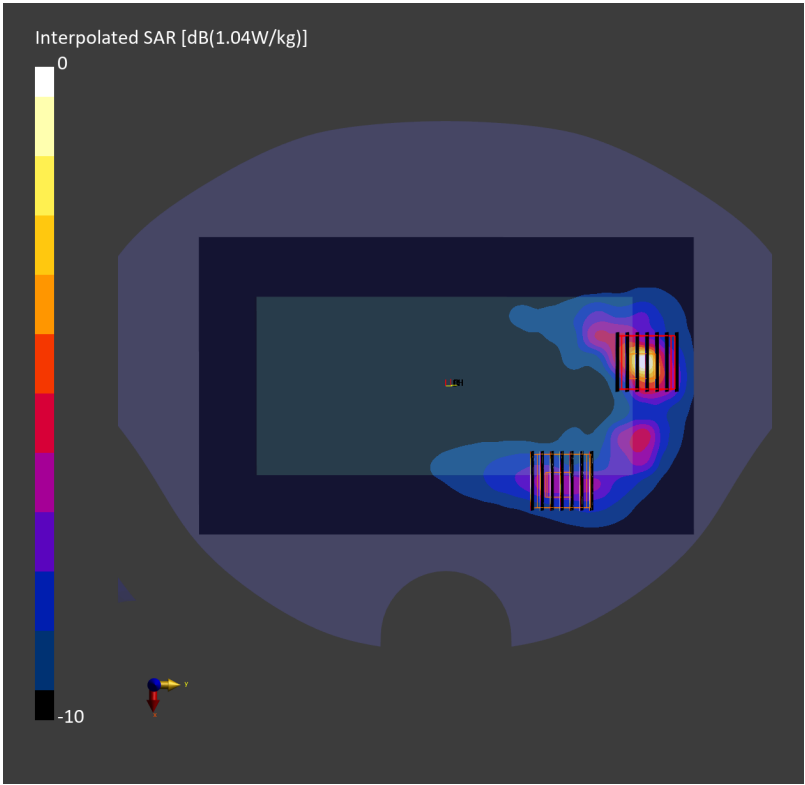

#105_WLAN6GHz_802.11ax-HE80 MCS0_Back_5mm_Ch167

Communication System: IEEE 802.11ax; Frequency: 6785.000 MHz

Medium: HSL_600-7200_260328 Medium parameters used: $f = 6785.000$ MHz; $\sigma = 6.41$ S/m; $\epsilon_r = 32.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.51, 5.61, 5.37); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10731-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.346 W/kg; SAR (10g) = 0.104 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.12 dB


SAR (1g) = 0.366 W/kg; SAR (8g) = 0.129 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.4 %

psAPD (1.0cm², sq) = 3.66 [W/m²]; psAPD (4.0cm², sq) = 2.58 [W/m²]

TSL Correction: Positive only

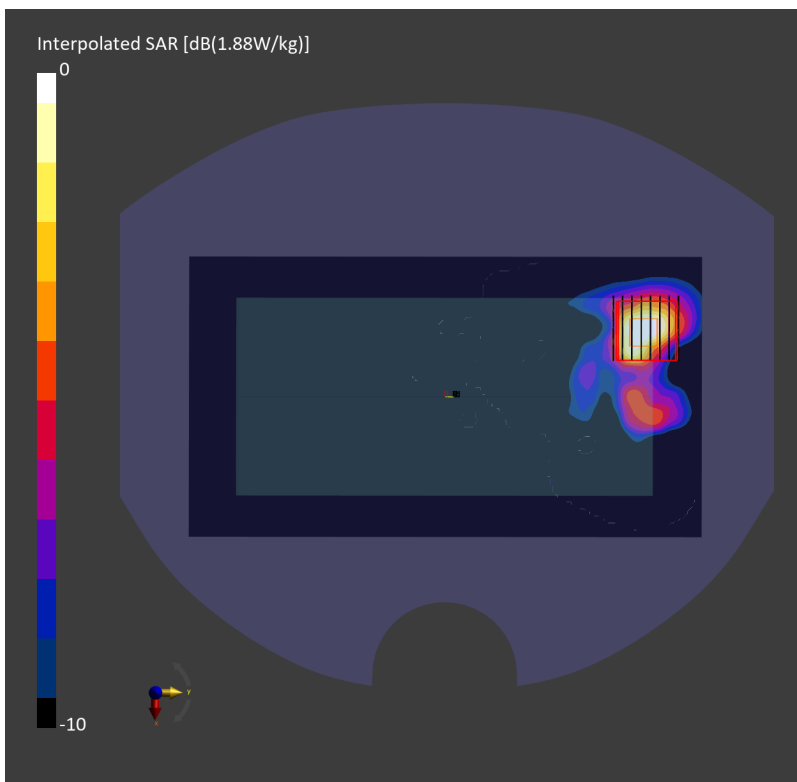

#106_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.16, 7.29, 6.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2025-11-19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.805 W/kg; SAR (10g) = 0.346 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.849 W/kg; SAR (8g) = 0.389 W/kg; SAR (10g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

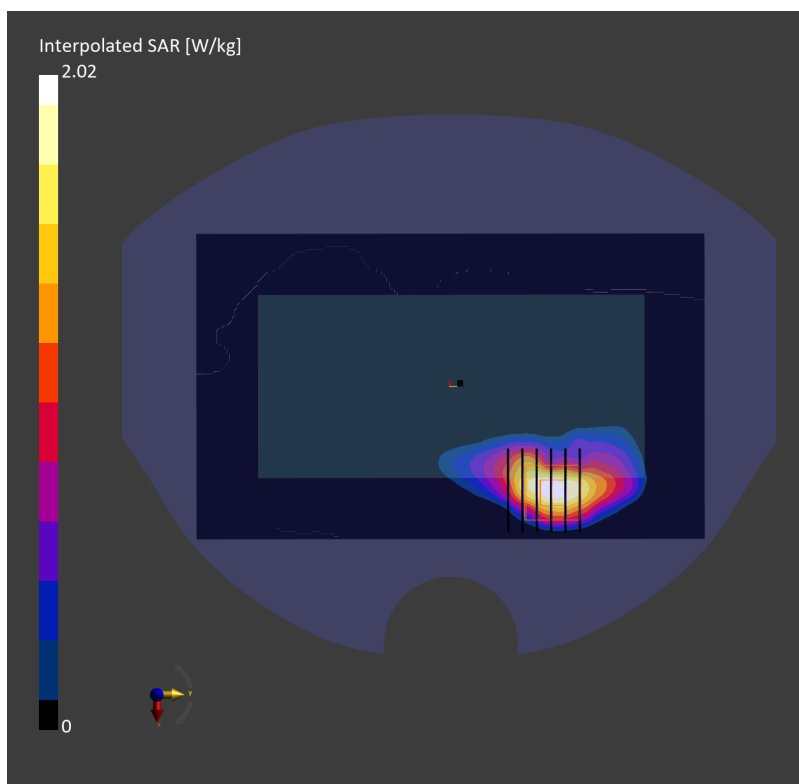

#107_LTE Band 66_20M_QPSK_50_50_Right Edge_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260312 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.34$ S/m; $\epsilon_r=40.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.9, 7.56, 8.41); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 2.96 W/kg; SAR (10g) = 1.31 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 3.15 W/kg; SAR (8g) = 1.46 W/kg; SAR (10g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

TSL Correction: Positive only

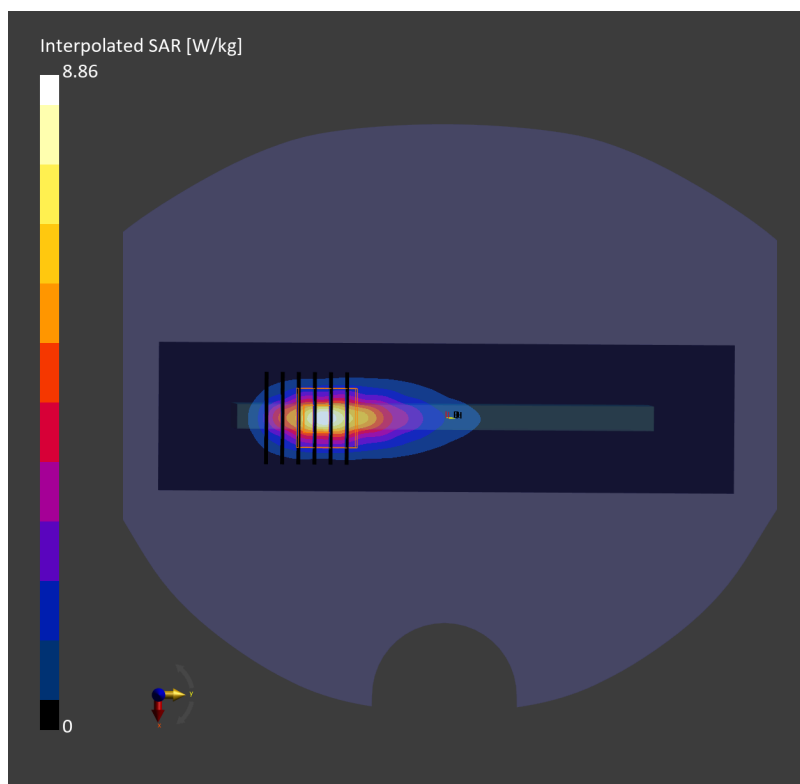

#108_LTE Band 41_20M_QPSK_1_0_Top Edge_0mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260408 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(6.95, 6.65, 7.39); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 2.66 W/kg; SAR (10g) = 1.05 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 31.2 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 2.86 W/kg; SAR (8g) = 1.19 W/kg; SAR (10g) = 1.06 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.8 %

TSL Correction: Positive only

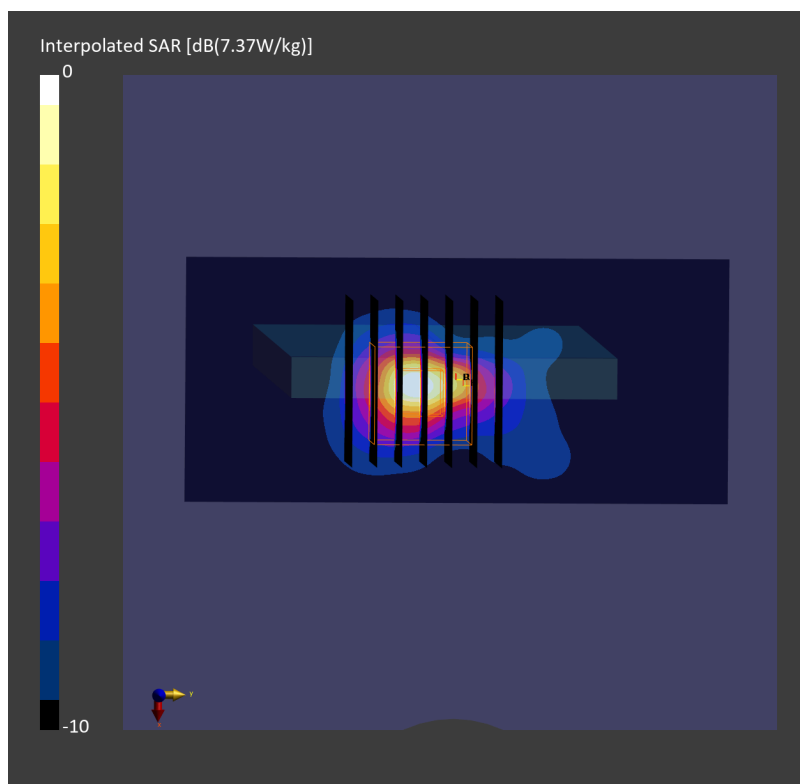

#109_FR1 n14_10M_BPSK_1_1_Left Edge_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260302 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(9.69, 9.27, 10.31); Calibrated: 2025-12-09
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1800; Calibrated: 2025-06-16
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (54.0 mm x 210.0 mm): Measurement Grid: 9.0 mm x 15.0 mm

SAR (1g) = 3.34 W/kg; SAR (10g) = 1.65 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 3.98 W/kg; SAR (8g) = 1.62 W/kg; SAR (10g) = 1.46 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.8 %

TSL Correction: Positive only

