Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	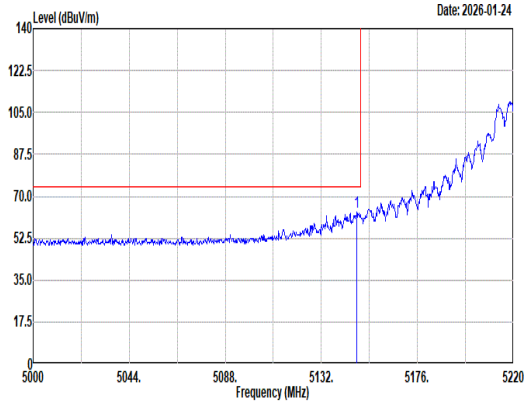 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5148.28 63.20 74.00 -10.80 54.68 33.29 11.42 36.19 0.00 150 360 Peak	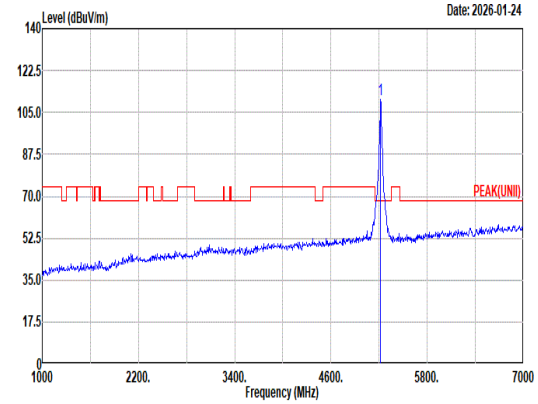 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5220.00 110.40 ------ ------ 101.96 33.16 11.48 36.20 0.00 150 360 Peak
Avg	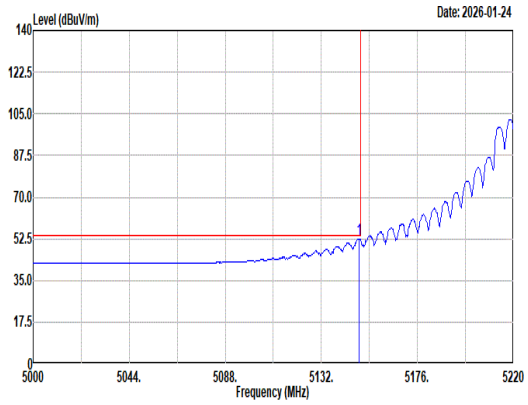 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.16 52.38 54.00 -1.62 43.85 33.30 11.42 36.19 0.00 150 360 Average	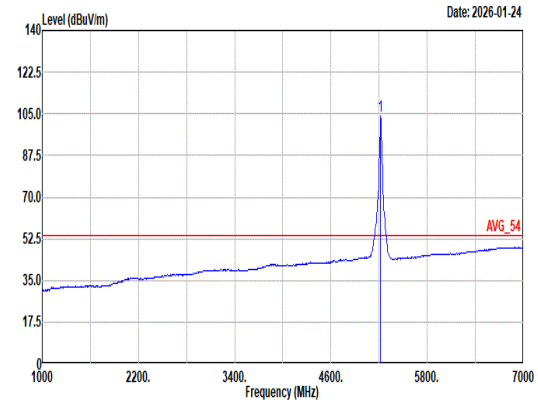 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5220.00 104.18 ------ ------ 95.74 33.16 11.48 36.20 0.00 150 360 Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	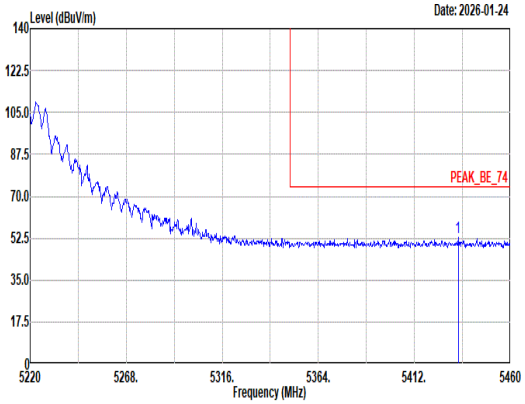 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5433.84 52.67 74.00 -21.33 44.11 33.03 11.75 36.22 0.00 150 360 Peak	Blank
Avg	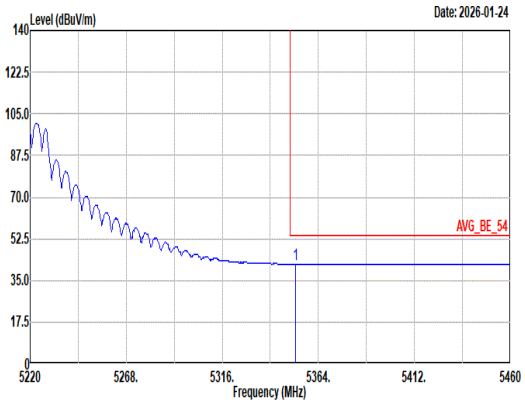 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.48 41.94 54.00 -12.06 33.49 33.00 11.66 36.21 0.00 150 360 Average	Blank

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	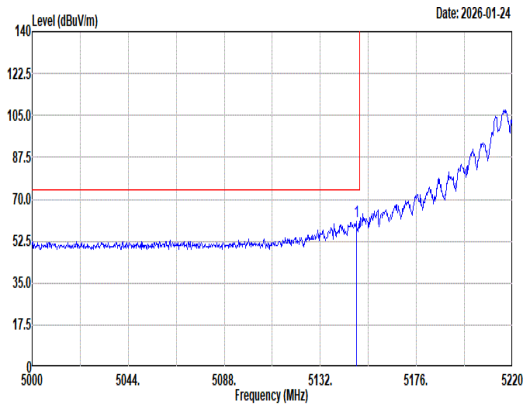 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.50 60.85 74.00 -13.15 52.33 33.29 11.42 36.19 0.00 389 84 Peak	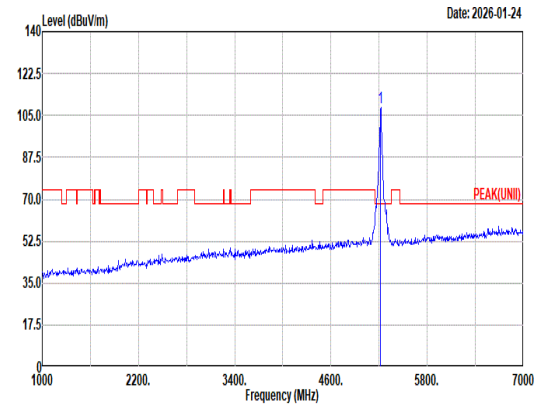 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 108.43 ------ ------ 99.99 33.15 11.49 36.20 0.00 389 84 Peak
Avg	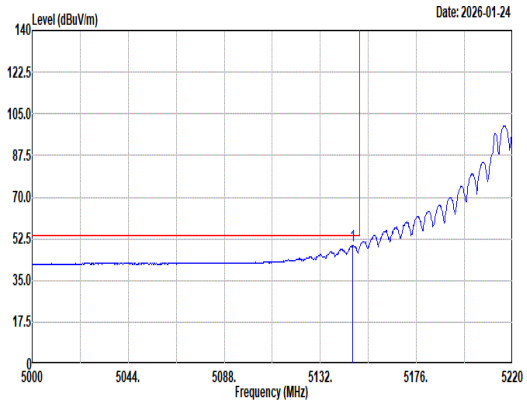 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.96 49.78 54.00 -4.22 41.26 33.29 11.42 36.19 0.00 389 84 Average	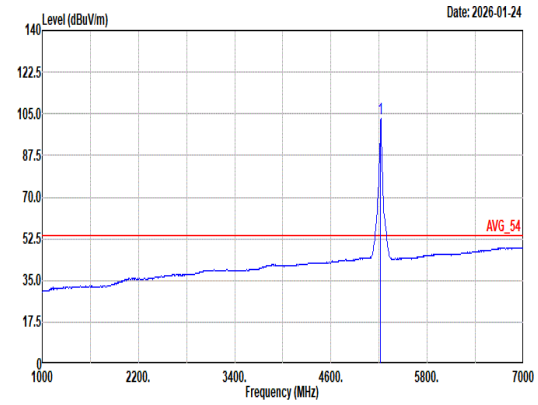 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 103.03 ------ ------ 94.59 33.15 11.49 36.20 0.00 389 84 Average

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	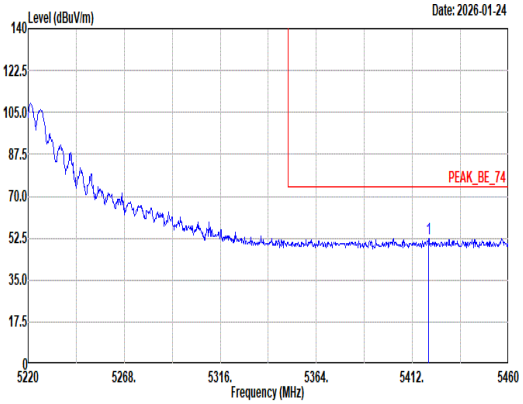 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5420.16 52.56 74.00 -21.44 43.98 33.06 11.74 36.22 0.00 389 84 Peak	Blank
Avg	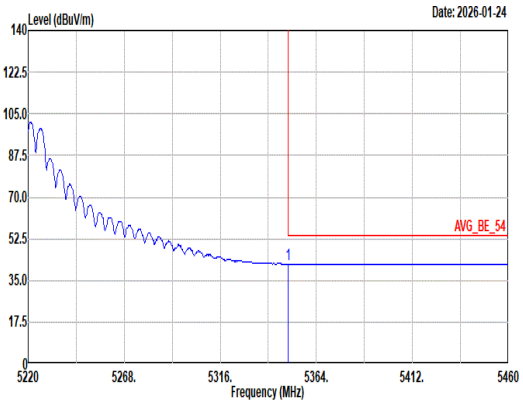 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 41.95 54.00 -12.05 33.50 33.00 11.66 36.21 0.00 389 84 Average	Blank

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	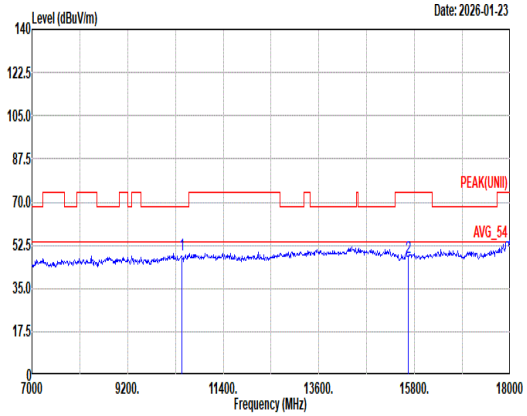 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.34 68.20 -19.86 59.29 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.34 74.00 -26.66 55.51 37.73 19.95 66.52 0.67 -- -- Peak	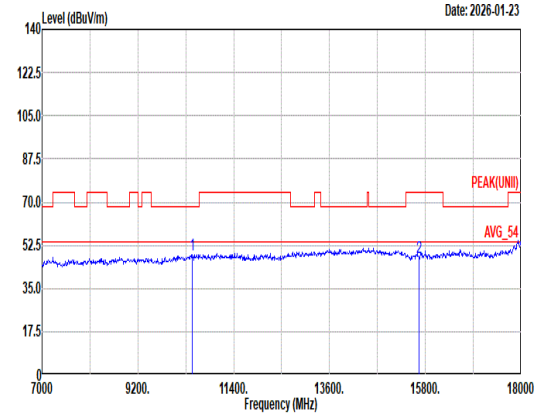 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.65 68.20 -19.55 59.60 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.35 74.00 -26.65 55.52 37.73 19.95 66.52 0.67 -- -- Peak

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	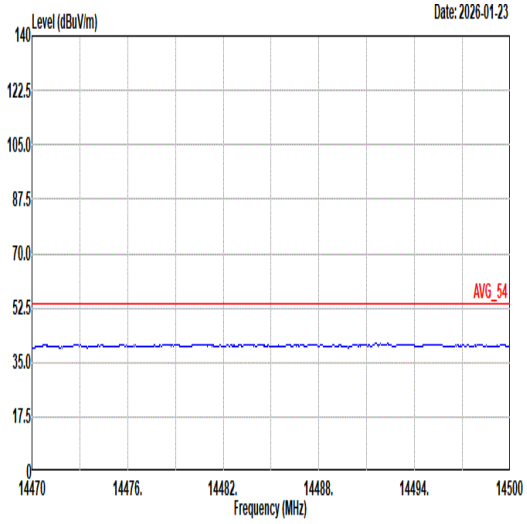 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	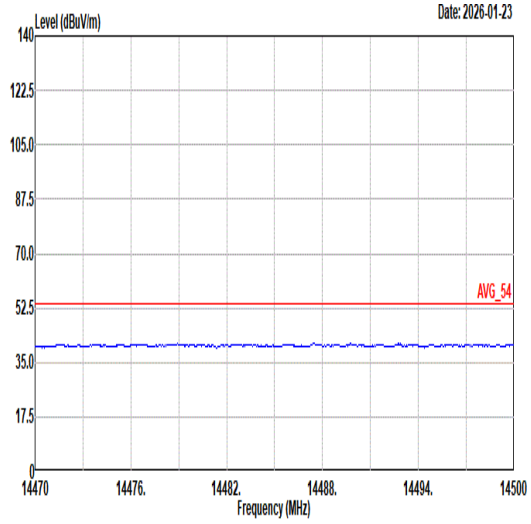 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	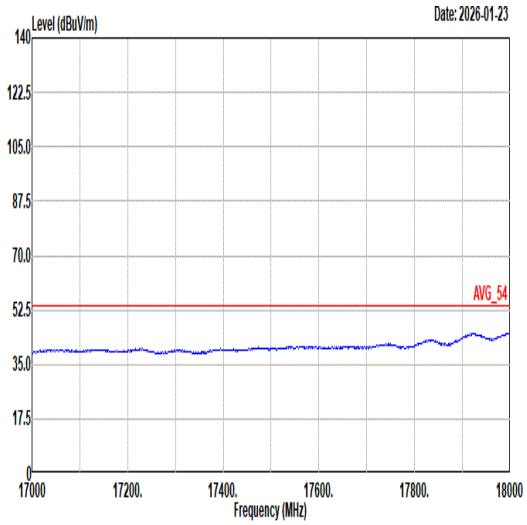 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	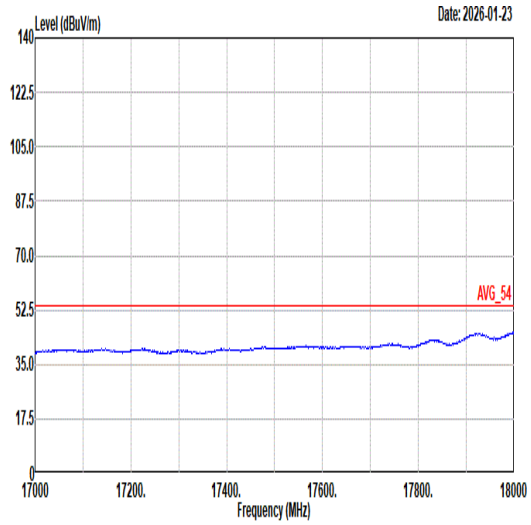 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	4	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	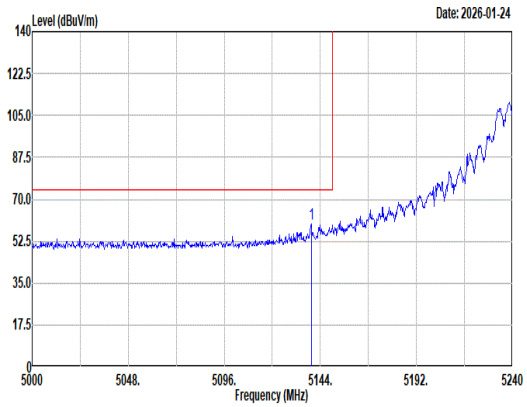 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5139.44 59.50 74.00 -14.50 51.02 33.26 11.41 36.19 0.00 119 360 Peak	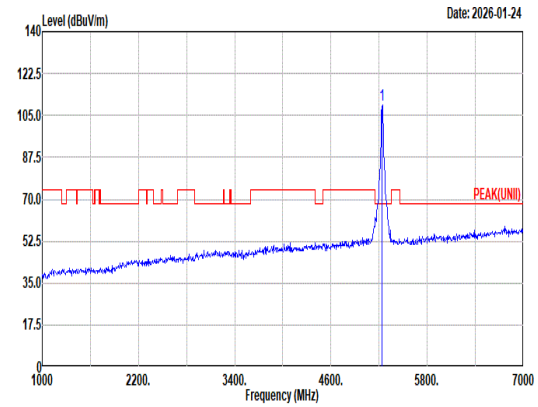 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 109.17 ------ ------ 100.74 33.12 11.51 36.20 0.00 119 360 Peak
Avg	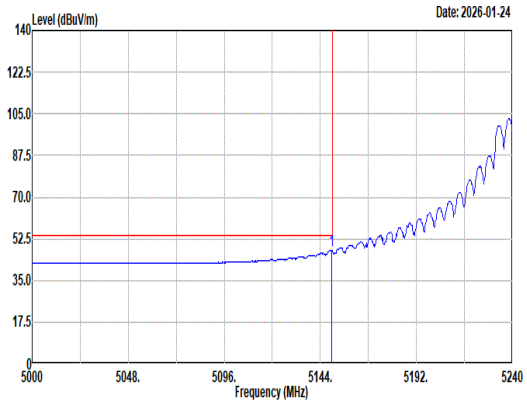 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.52 47.69 54.00 -6.31 39.16 33.30 11.42 36.19 0.00 119 360 Average	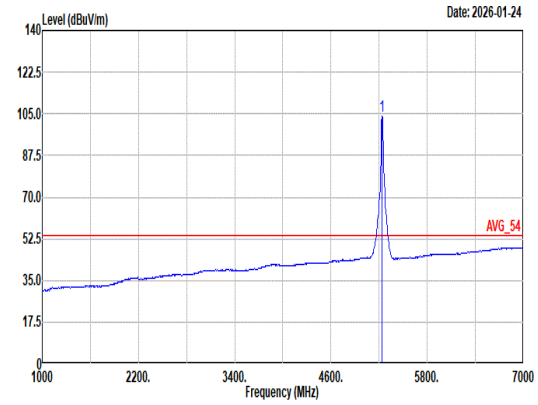 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 104.32 ------ ------ 95.88 33.13 11.51 36.20 0.00 119 360 Average

Mode	4	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	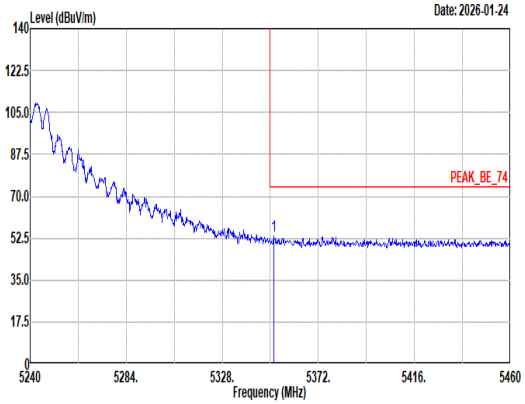 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.54 53.11 74.00 -20.89 44.66 33.00 11.66 36.21 0.00 119 360 Peak	Blank
Avg	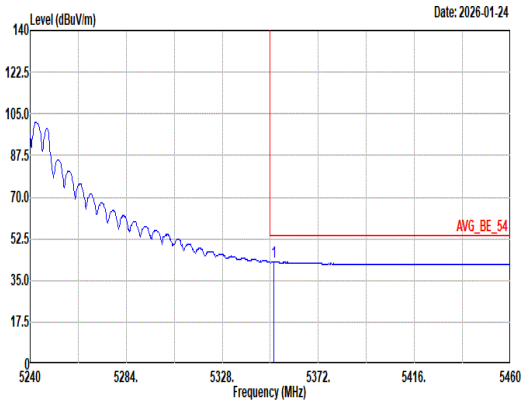 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.54 42.83 54.00 -11.17 34.38 33.00 11.66 36.21 0.00 119 360 Average	Blank

Mode	4	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	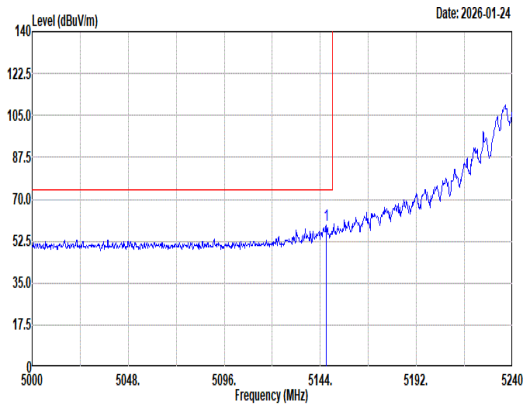 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.88 59.02 74.00 -14.98 50.50 33.29 11.42 36.19 0.00 300 89 Peak	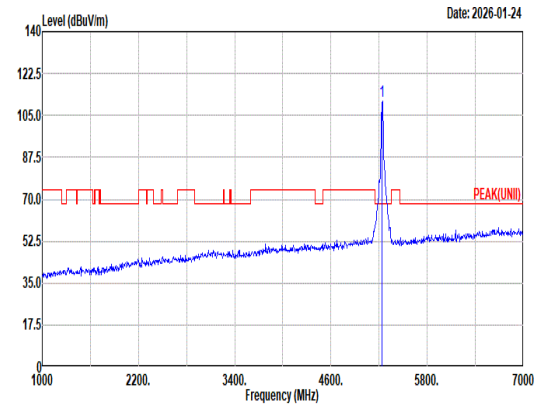 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 110.73 ------ ------ 102.30 33.12 11.51 36.20 0.00 300 89 Peak
Avg	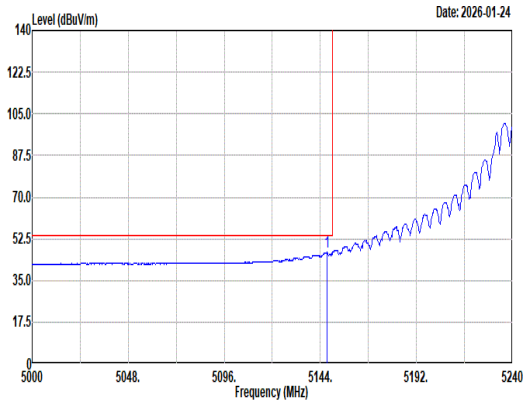 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.36 46.81 54.00 -7.19 38.29 33.29 11.42 36.19 0.00 300 89 Average	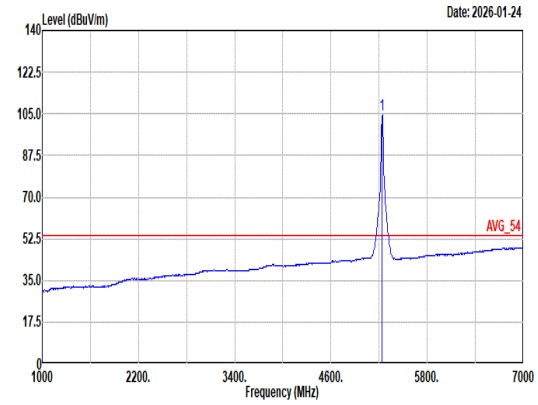 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 104.54 ------ ------ 96.11 33.12 11.51 36.20 0.00 300 89 Average

Mode	4	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	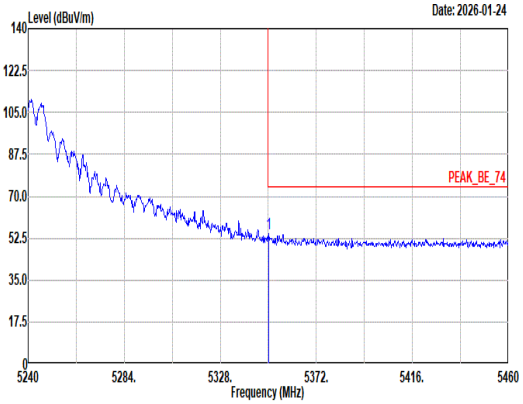 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.22 54.24 74.00 -19.76 45.79 33.00 11.66 36.21 0.00 300 89 Peak	Blank
Avg	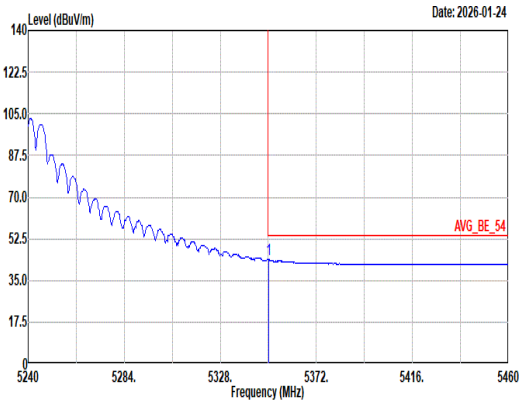 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.22 43.67 54.00 -10.33 35.22 33.00 11.66 36.21 0.00 300 89 Average	Blank

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	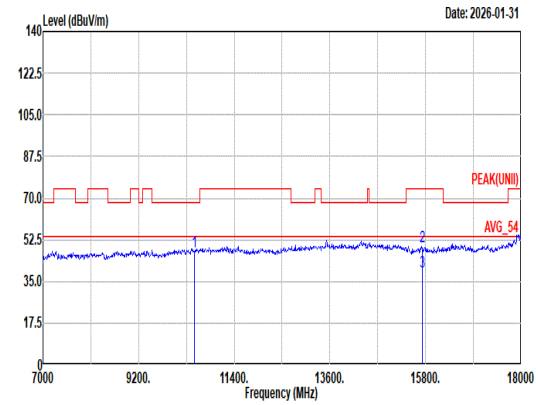 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 47.81 68.20 -20.39 58.71 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 49.44 74.00 -24.56 57.41 37.95 19.99 66.58 0.67 200 215 Peak 3 15720.00 39.34 54.00 -14.66 47.31 37.94 19.99 66.57 0.67 200 215 Average	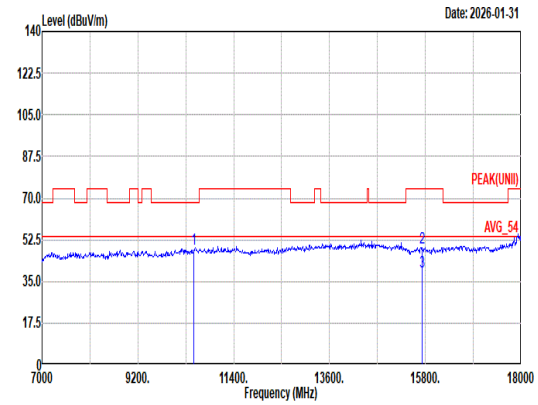 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 48.66 68.20 -19.54 59.56 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 48.95 74.00 -25.05 56.92 37.95 19.99 66.58 0.67 100 177 Peak 3 15720.00 39.28 54.00 -14.72 47.25 37.94 19.99 66.57 0.67 100 177 Average

Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	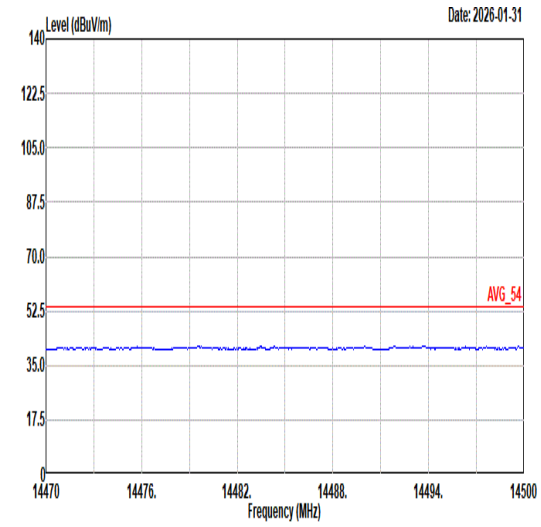 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	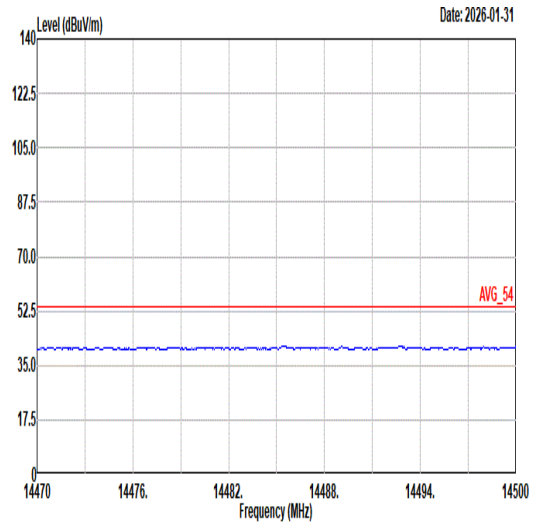 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	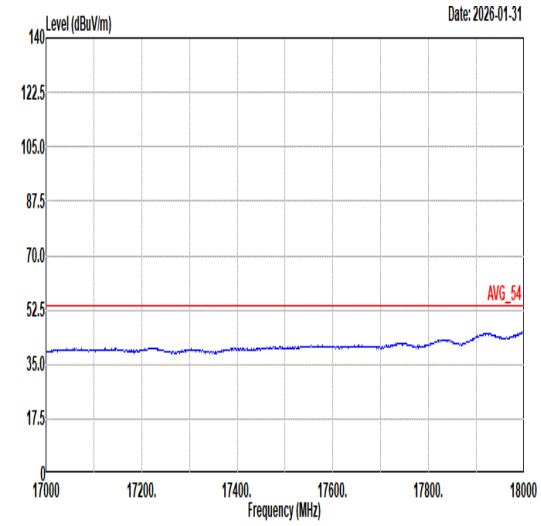 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	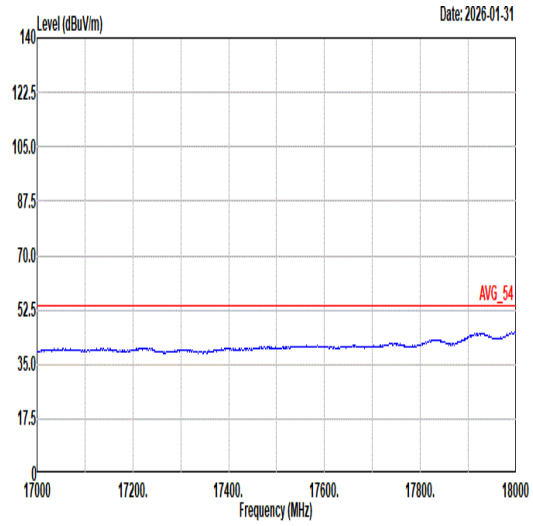 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	5	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	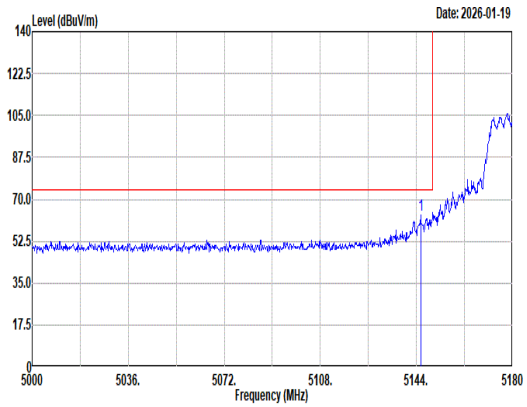 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 63.39 74.00 -10.61 54.88 33.28 11.42 36.19 0.00 202 333 Peak	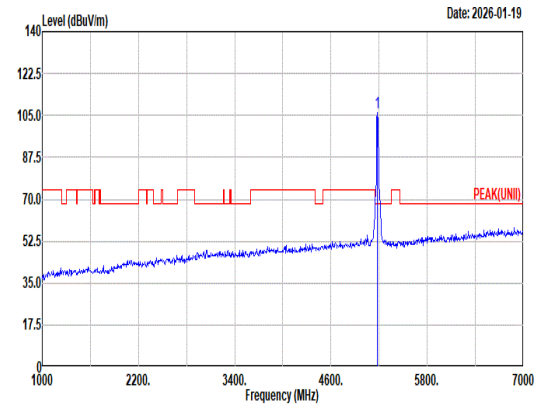 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.09 ------ ------ 97.59 33.25 11.44 36.19 0.00 202 333 Peak
Avg	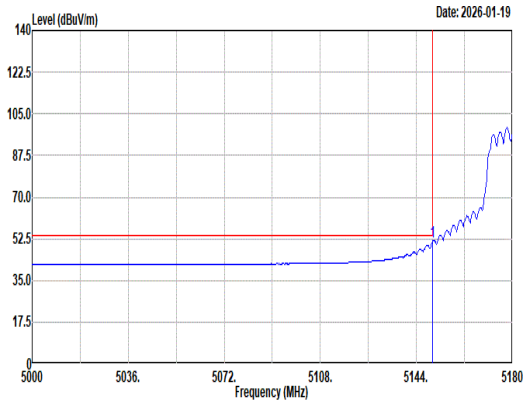 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 51.20 54.00 -2.80 42.67 33.30 11.42 36.19 0.00 202 333 Average	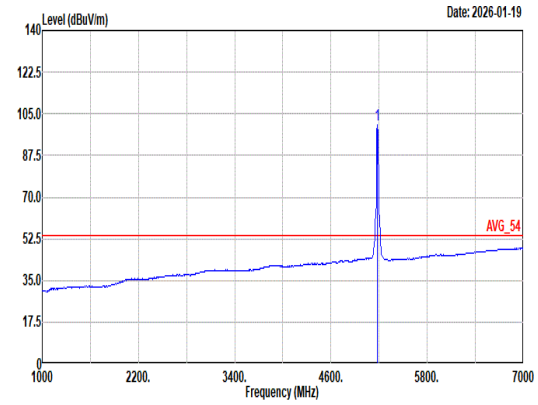 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 100.60 ------ ------ 92.10 33.25 11.44 36.19 0.00 202 333 Average

Mode	5	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	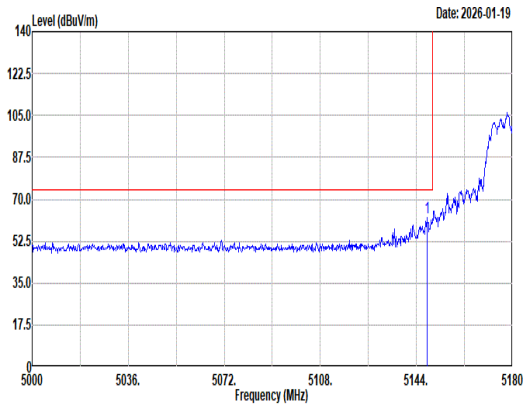 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.96 62.14 74.00 -11.86 53.62 33.29 11.42 36.19 0.00 300 92 Peak	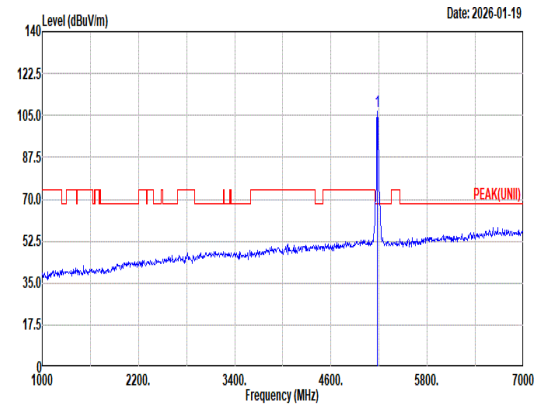 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 106.65 ------ ------ 98.15 33.25 11.44 36.19 0.00 300 92 Peak
Avg	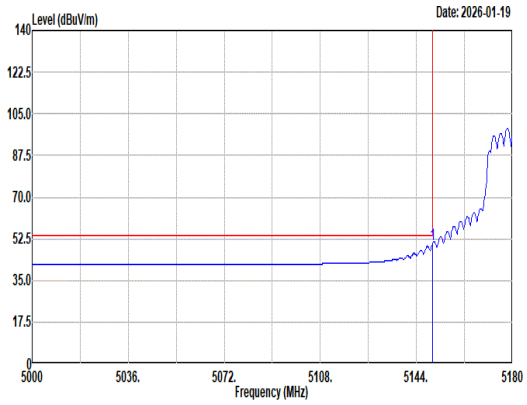 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 50.08 54.00 -3.92 41.55 33.30 11.42 36.19 0.00 300 92 Average	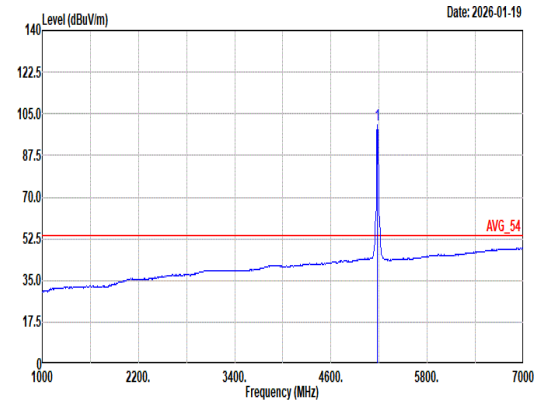 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 100.14 ------ ------ 91.64 33.25 11.44 36.19 0.00 300 92 Average

Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	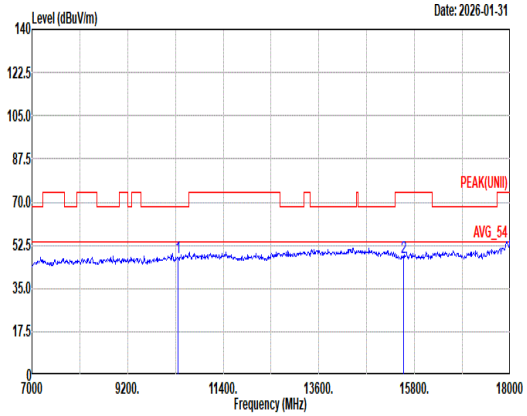 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.71 68.20 -20.49 58.77 38.70 16.14 66.88 0.98 -- -- Peak 2 15540.00 47.52 74.00 -26.48 55.16 38.23 19.88 66.41 0.66 -- -- Peak	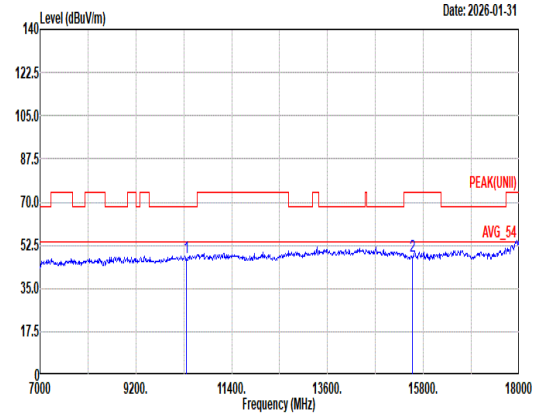 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.48 68.20 -20.72 58.54 38.70 16.14 66.88 0.98 -- -- Peak 2 15540.00 47.88 74.00 -26.12 55.52 38.23 19.88 66.41 0.66 -- -- Peak

Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	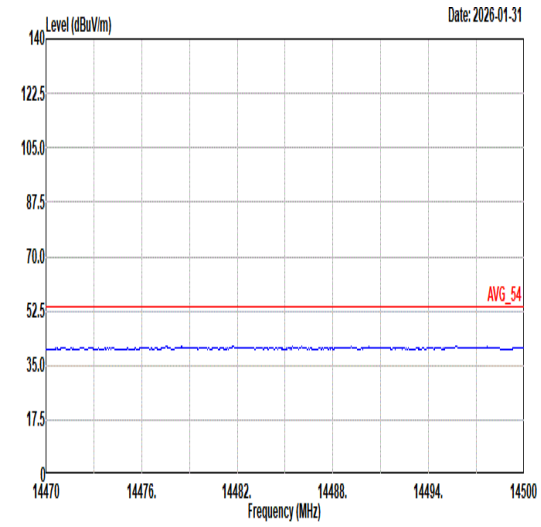 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	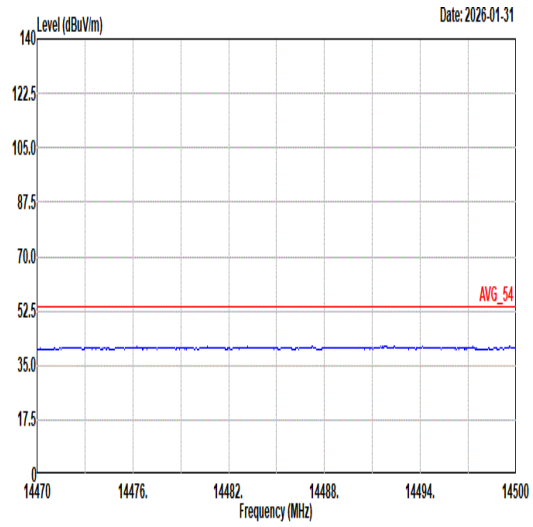 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	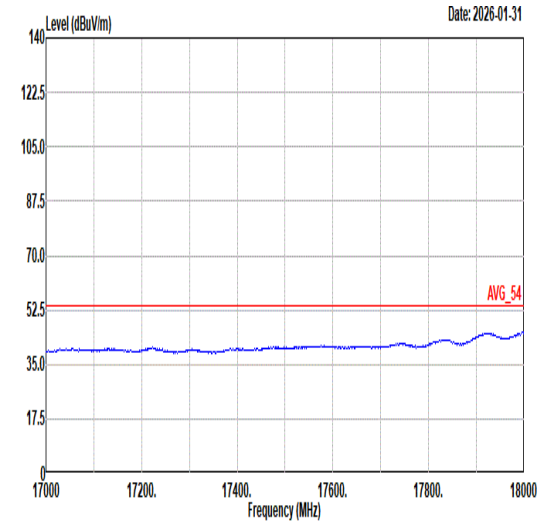 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	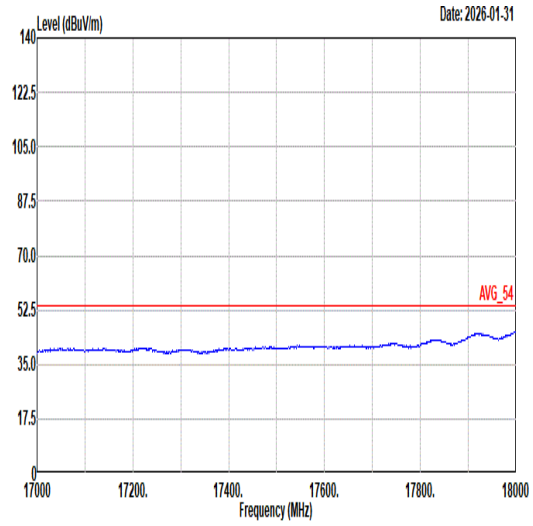 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	6	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	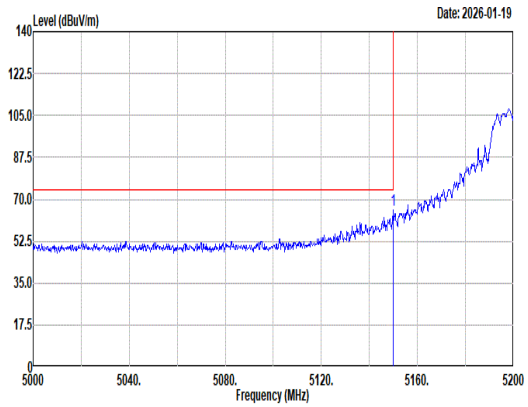 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.80 65.30 74.00 -8.70 56.77 33.30 11.42 36.19 0.00 200 325 Peak	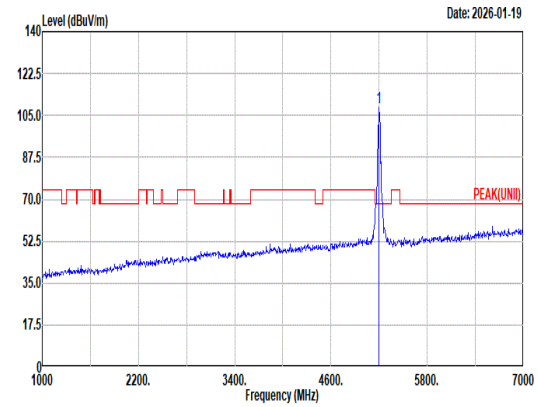 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5200.00 108.22 ------ ------ 99.75 33.20 11.46 36.19 0.00 200 325 Peak
Avg	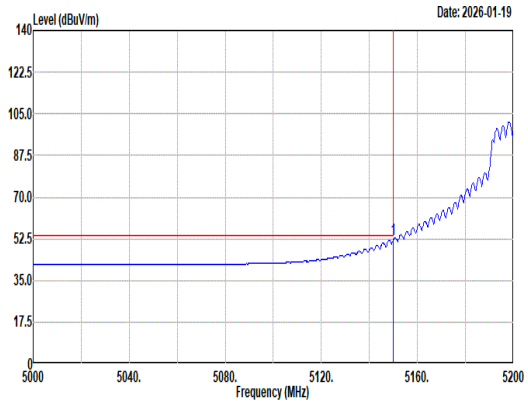 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5150.00 52.11 54.00 -1.89 43.58 33.30 11.42 36.19 0.00 200 325 Average	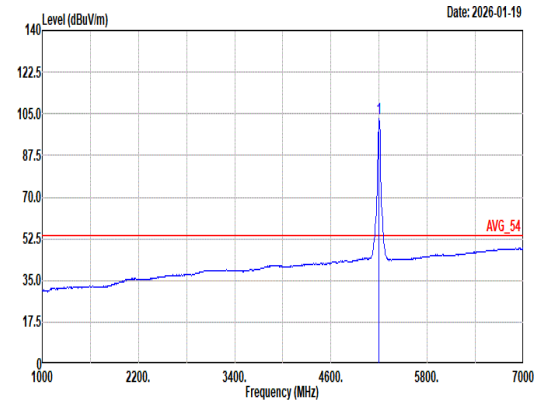 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5200.00 103.05 ------ ------ 94.58 33.20 11.46 36.19 0.00 200 325 Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	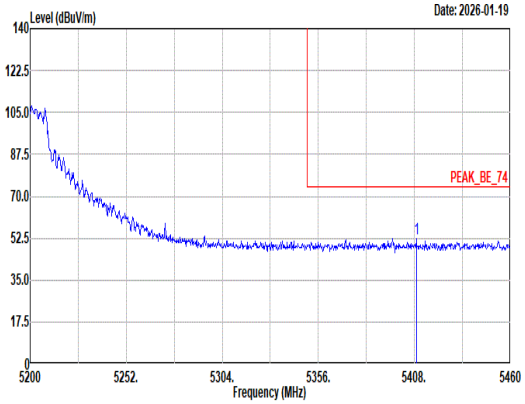 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5409.04 52.53 74.00 -21.47 43.94 33.08 11.73 36.22 0.00 200 325 Peak	Blank
Avg	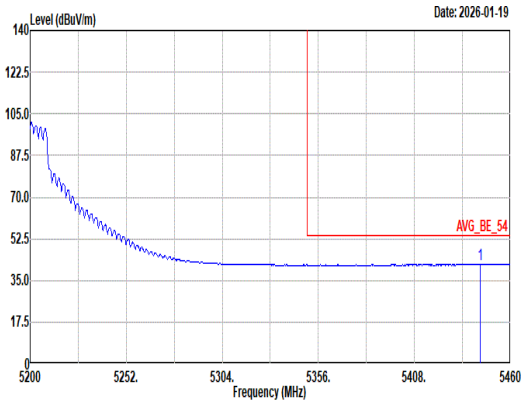 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.62 41.57 54.00 -12.43 33.02 33.01 11.76 36.22 0.00 200 325 Average	Blank

Mode	6	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	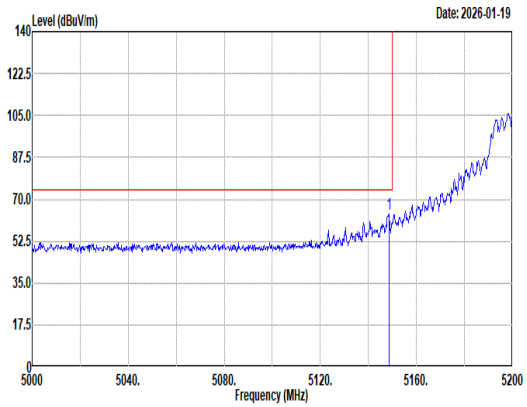 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.60 63.71 74.00 -10.29 55.19 33.29 11.42 36.19 0.00 375 89 Peak	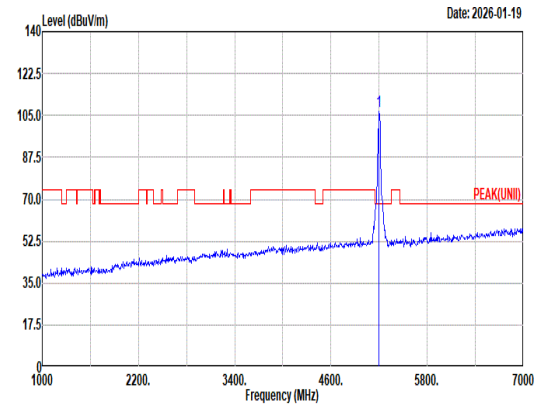 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 106.84 ------ ------ 98.37 33.20 11.46 36.19 0.00 375 89 Peak
Avg	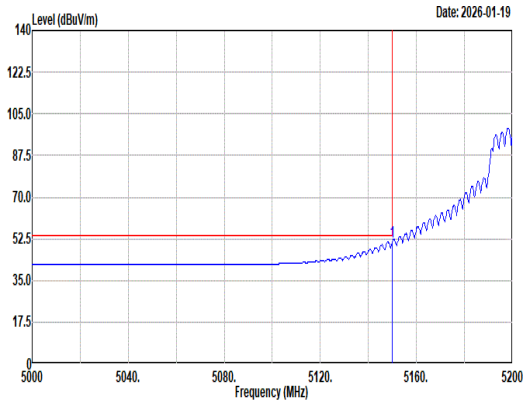 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5150.00 51.38 54.00 -2.62 42.85 33.30 11.42 36.19 0.00 375 89 Average	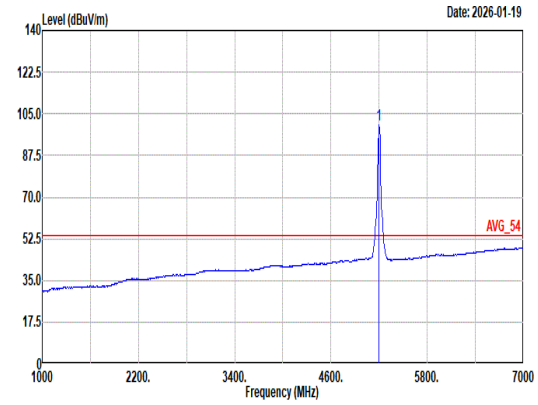 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 100.32 ------ ------ 91.85 33.20 11.46 36.19 0.00 375 89 Average

Mode	6	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	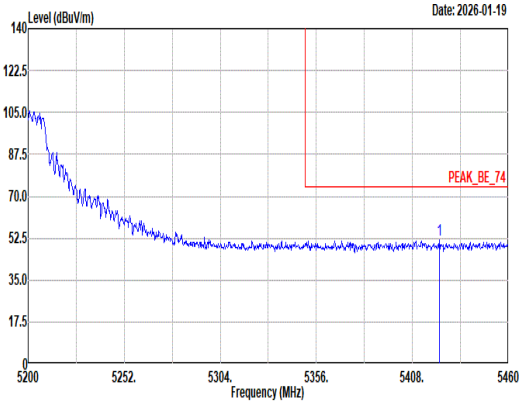 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5422.82 51.79 74.00 -22.21 43.22 33.05 11.74 36.22 0.00 375 89 Peak	Blank
Avg	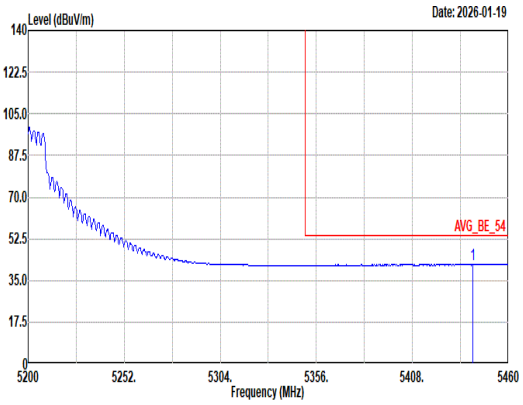 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5440.76 41.58 54.00 -12.42 33.02 33.02 11.76 36.22 0.00 375 89 Average	Blank

Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	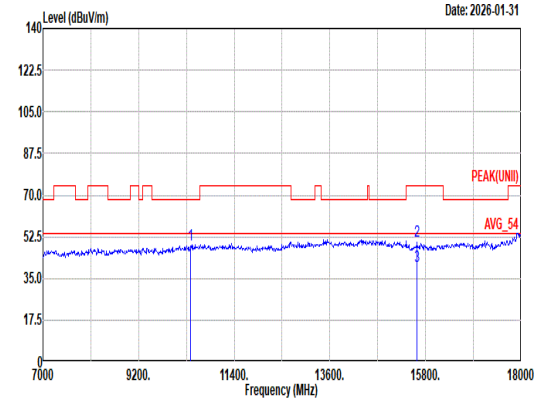 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.91 68.20 -19.29 59.91 38.70 16.17 66.84 0.97 -- -- Peak 2 15600.00 50.47 74.00 -23.53 58.37 37.99 19.92 66.47 0.66 105 359 Peak 3 15600.00 40.31 54.00 -13.69 48.20 38.00 19.92 66.47 0.66 105 359 Average	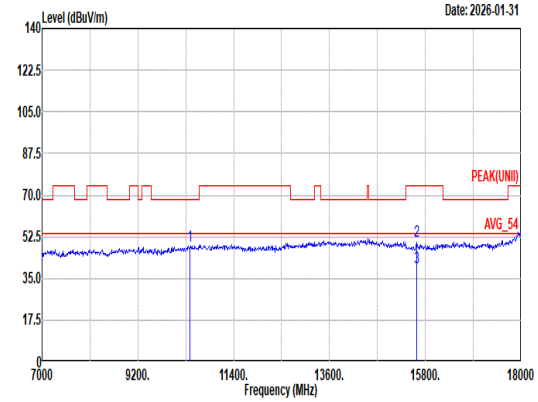 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.47 68.20 -19.73 59.47 38.70 16.17 66.84 0.97 -- -- Peak 2 15600.00 50.48 74.00 -23.52 58.38 37.99 19.92 66.47 0.66 100 343 Peak 3 15600.00 39.54 54.00 -14.46 47.43 38.00 19.92 66.47 0.66 100 343 Average

Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH40_5200MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	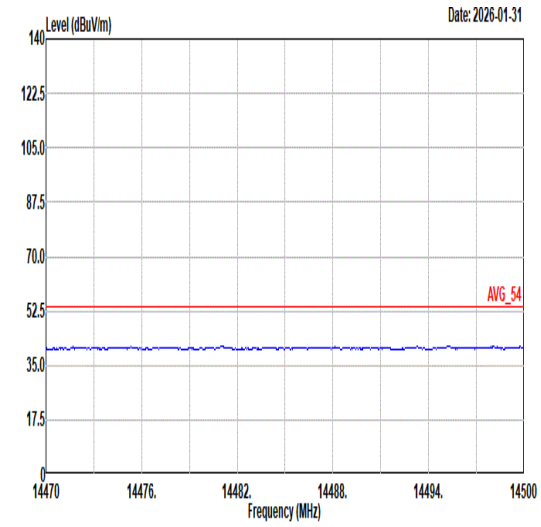 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	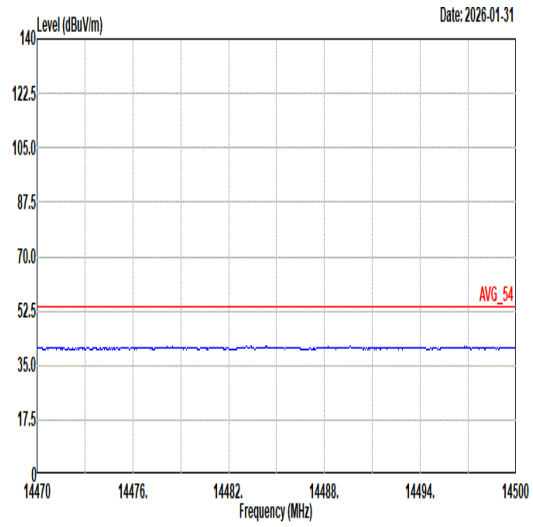 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	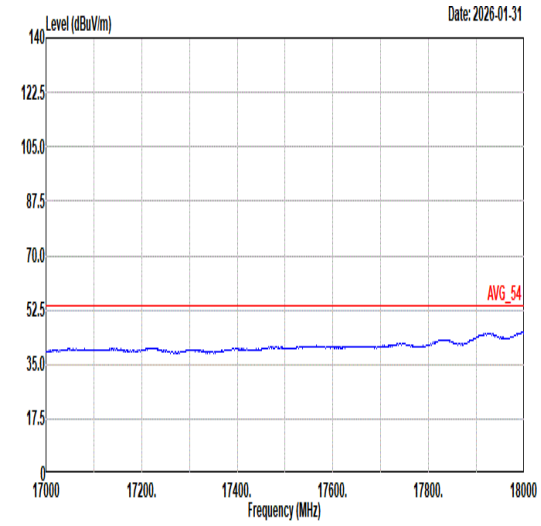 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	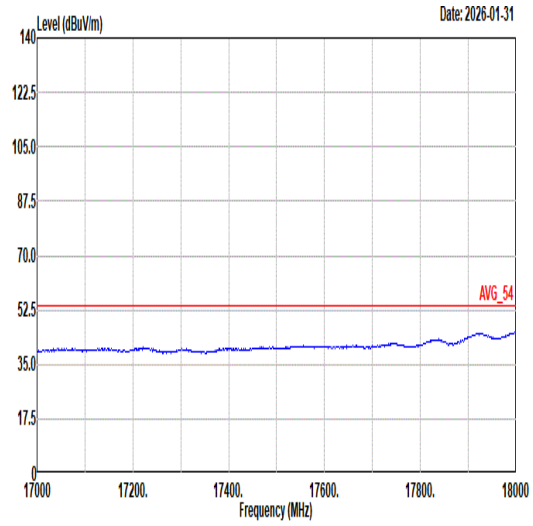 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	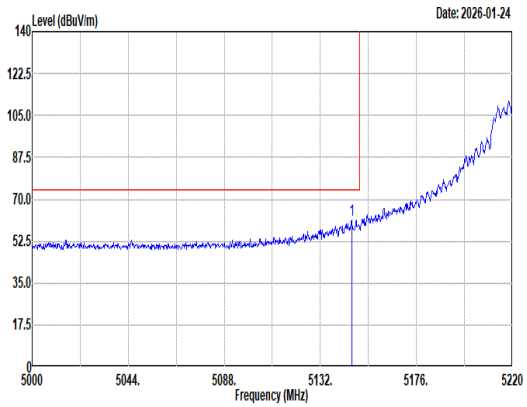 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5146.30 61.53 74.00 -12.47 53.01 33.29 11.42 36.19 0.00 167 325 Peak	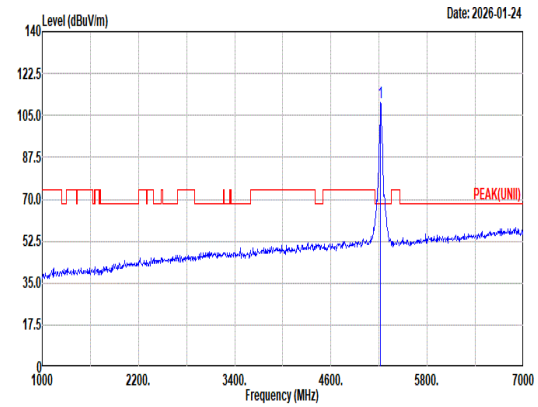 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5220.00 110.43 ------ ------ 101.99 33.16 11.48 36.20 0.00 167 325 Peak
Avg	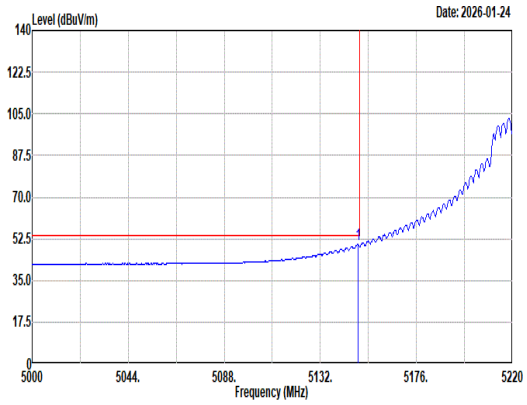 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.16 49.98 54.00 -4.02 41.45 33.30 11.42 36.19 0.00 167 325 Average	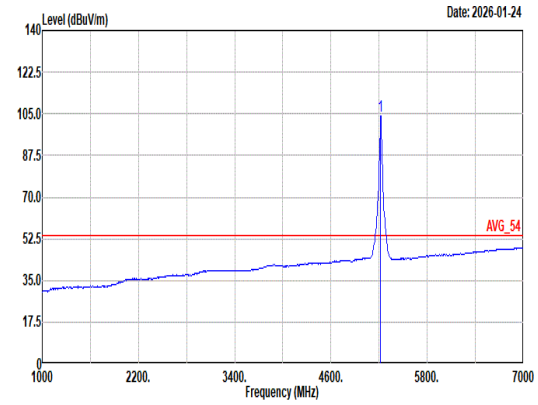 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5220.00 104.18 ------ ------ 95.74 33.16 11.48 36.20 0.00 167 325 Average

Mode	7	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	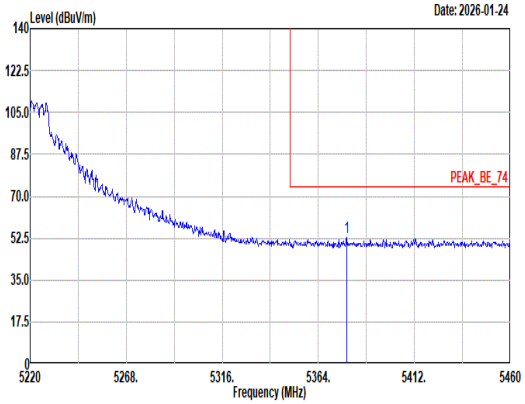 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5378.16 52.73 74.00 -21.27 44.20 33.06 11.69 36.22 0.00 167 325 Peak	Blank
Avg	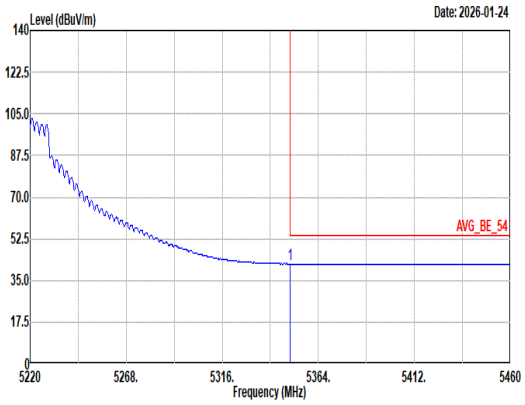 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 41.93 54.00 -12.07 33.48 33.00 11.66 36.21 0.00 167 325 Average	Blank

Mode	7	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	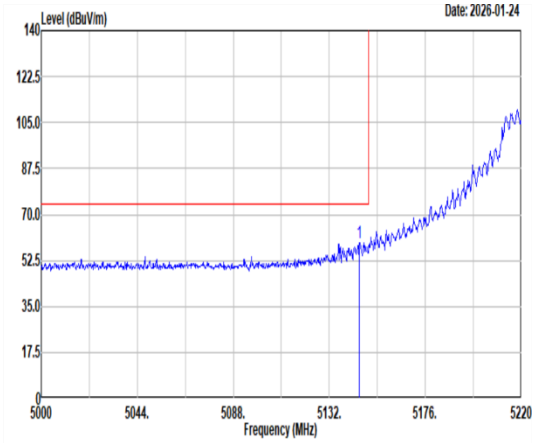 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.86 59.31 74.00 -14.69 50.80 33.28 11.42 36.19 0.00 300 85 Peak	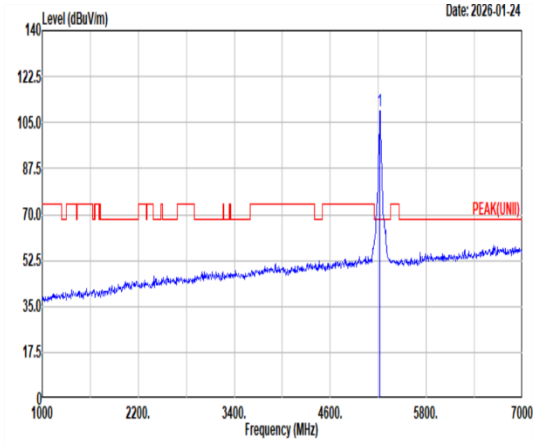 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 109.46 ------ ------ 101.02 33.16 11.48 36.20 0.00 300 85 Peak
Avg	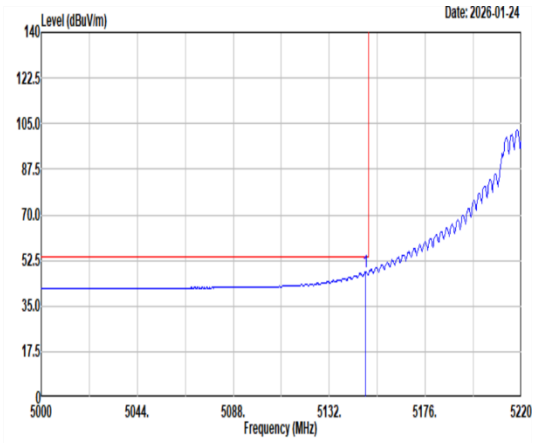 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.72 48.30 54.00 -5.70 39.78 33.29 11.42 36.19 0.00 300 85 Average	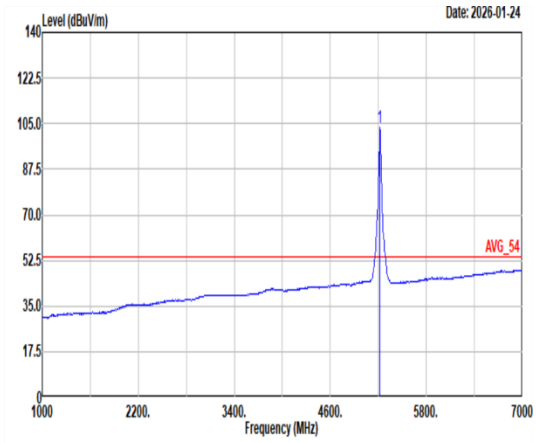 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 103.79 ------ ------ 95.35 33.16 11.48 36.20 0.00 300 85 Average

Mode	7	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	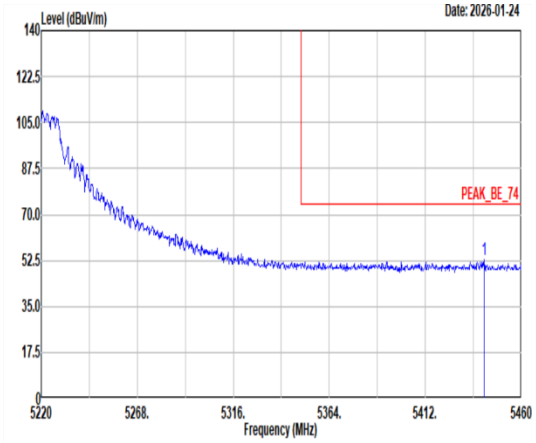 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5441.28 52.76 74.00 -21.24 44.20 33.02 11.76 36.22 0.00 300 85 Peak	Blank
Avg	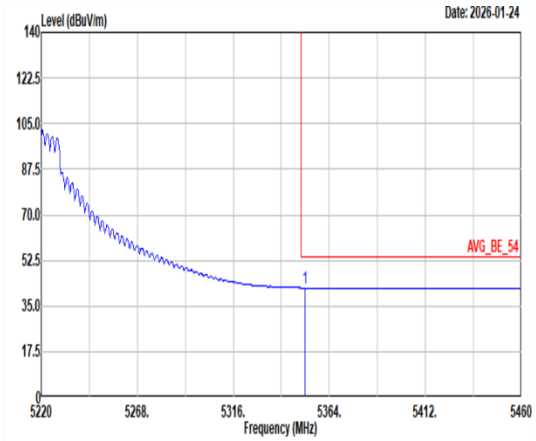 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.00 41.97 54.00 -12.03 33.52 33.00 11.66 36.21 0.00 300 85 Average	Blank

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	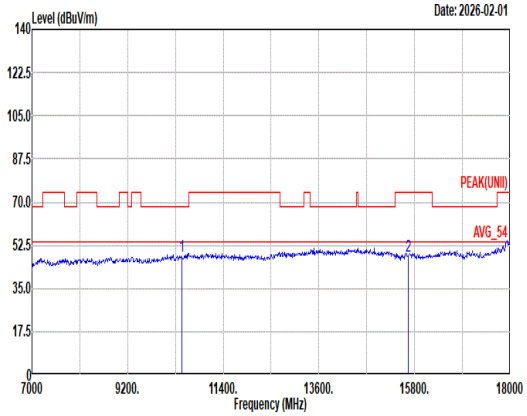 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 47.95 68.20 -20.25 58.90 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.89 74.00 -26.11 56.05 37.74 19.95 66.52 0.67 -- -- Peak	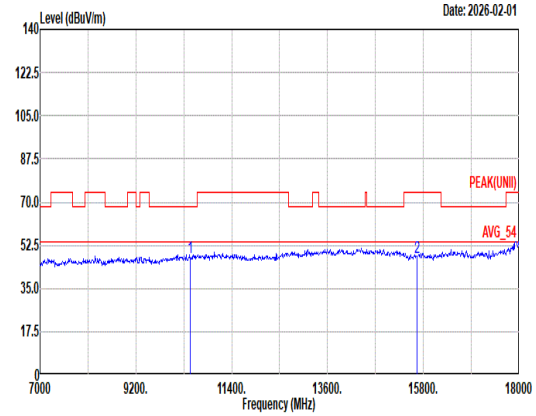 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 47.33 68.20 -20.87 58.28 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.41 74.00 -26.59 55.58 37.73 19.95 66.52 0.67 -- -- Peak

Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	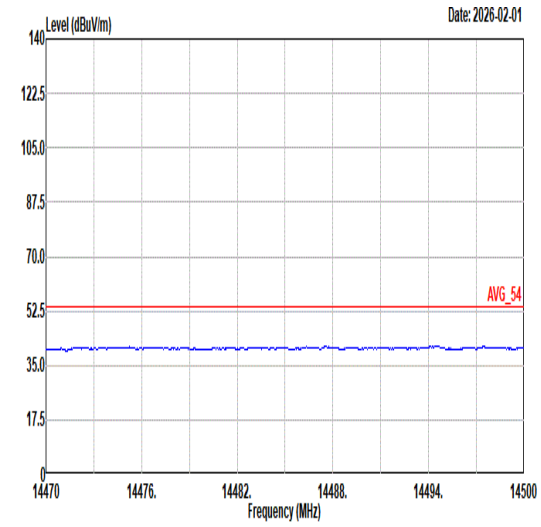 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	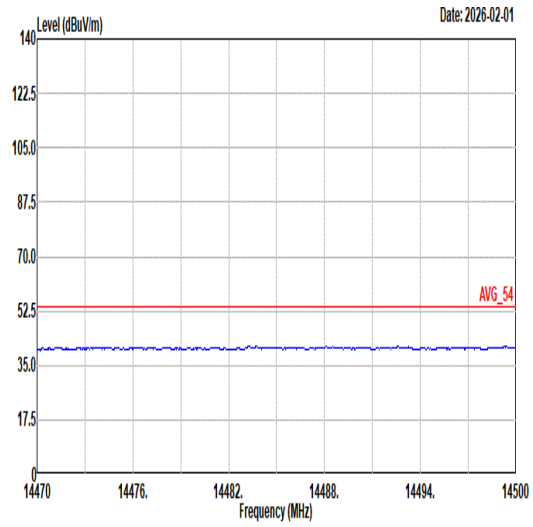 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	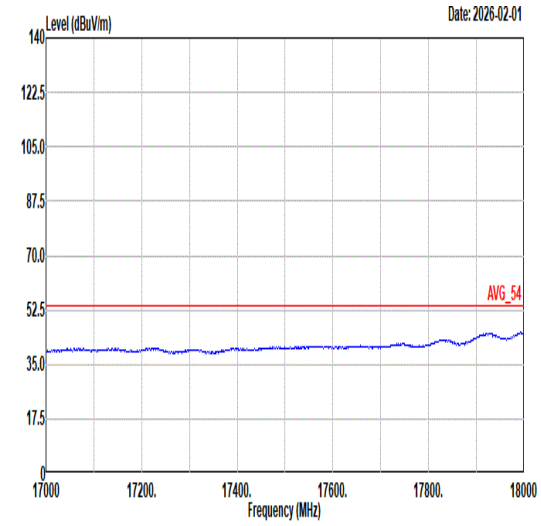 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	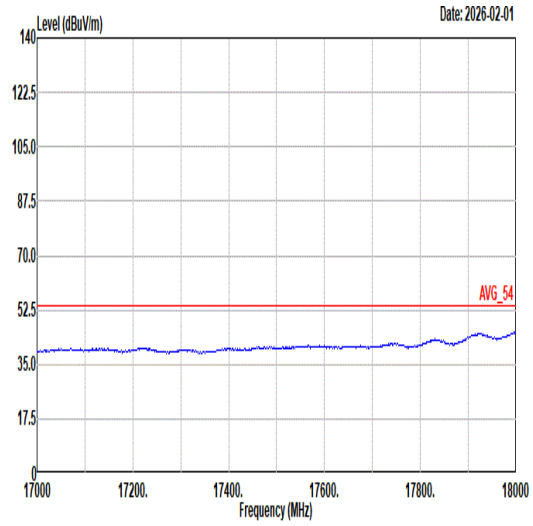 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	8	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	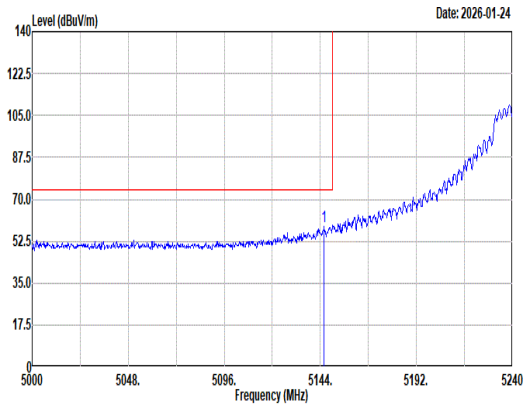 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5145.92 58.63 74.00 -15.37 50.12 33.28 11.42 36.19 0.00 189 321 Peak	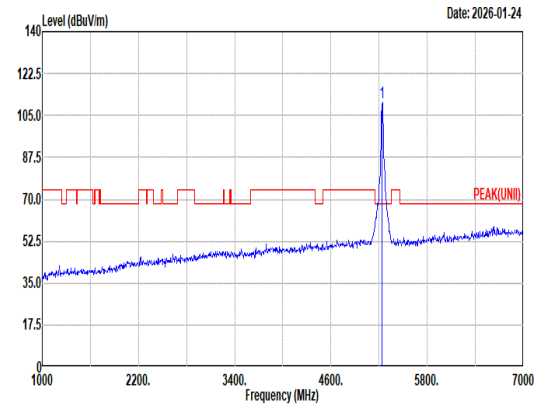 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5240.00 110.64 ------ ------ 102.21 33.12 11.51 36.20 0.00 189 321 Peak
Avg	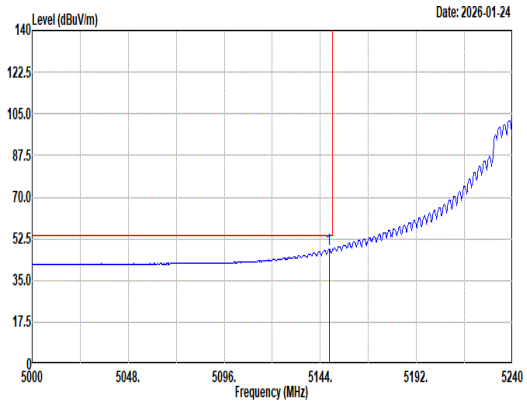 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.32 48.04 54.00 -5.96 39.52 33.29 11.42 36.19 0.00 189 321 Average	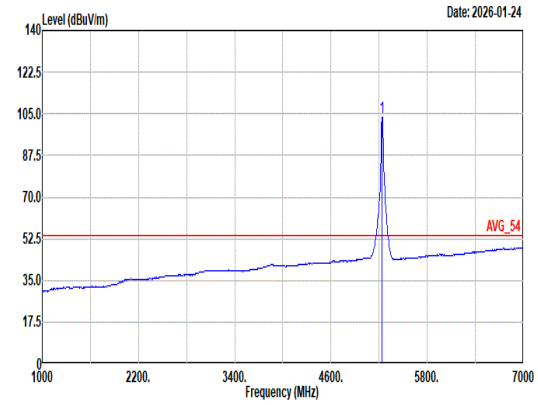 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5240.00 103.58 ------ ------ 95.15 33.12 11.51 36.20 0.00 189 321 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	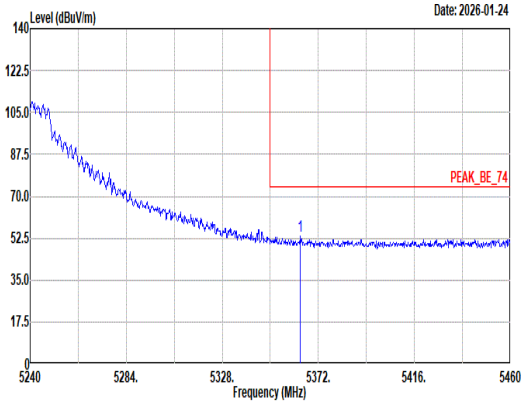 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5363.86 53.38 74.00 -20.62 44.89 33.03 11.67 36.21 0.00 189 321 Peak	Blank
Avg	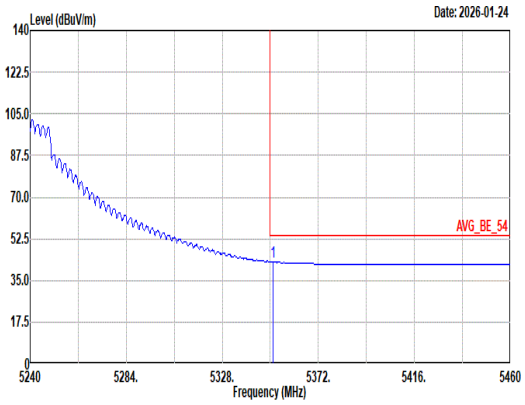 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.32 42.87 54.00 -11.13 34.42 33.00 11.66 36.21 0.00 189 321 Average	Blank

Mode	8	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	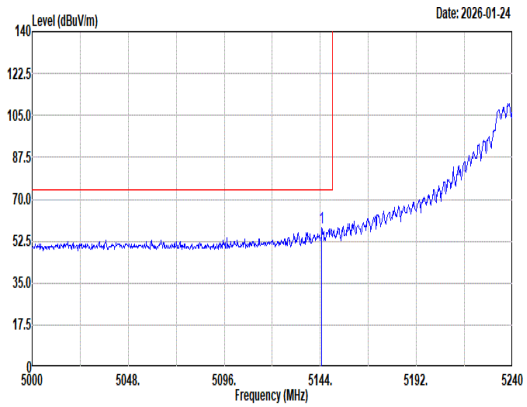 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5144.72 57.91 74.00 -16.09 49.40 33.28 11.42 36.19 0.00 310 96 Peak	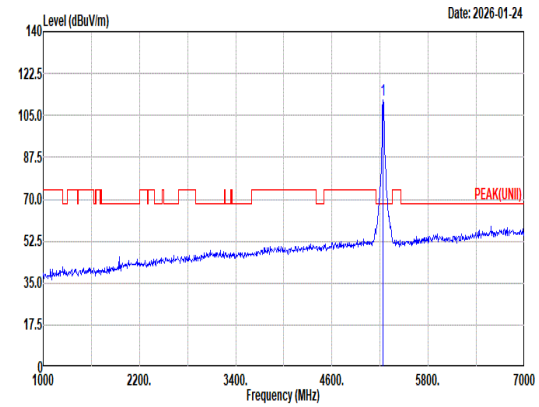 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 111.33 ------ ------ 102.89 33.13 11.51 36.20 0.00 310 96 Peak
Avg	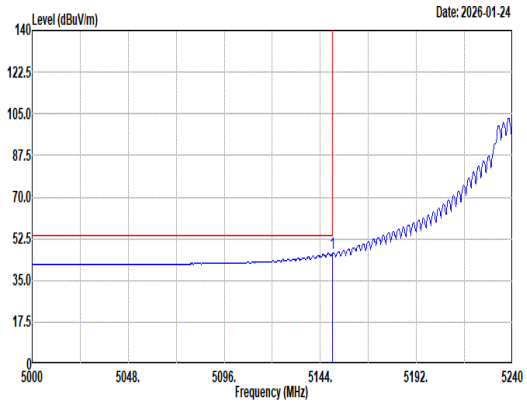 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5150.00 46.39 54.00 -7.61 37.86 33.30 11.42 36.19 0.00 310 96 Average	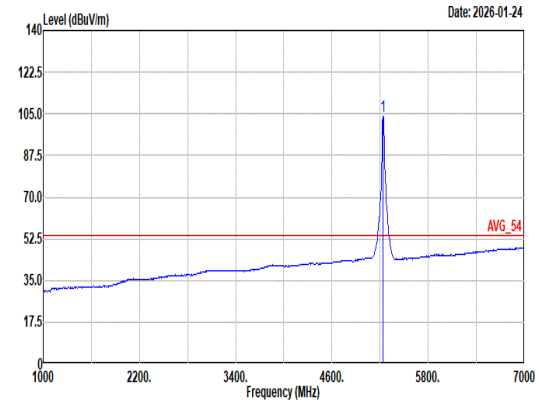 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 104.02 ------ ------ 95.58 33.13 11.51 36.20 0.00 310 96 Average

Mode	8	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	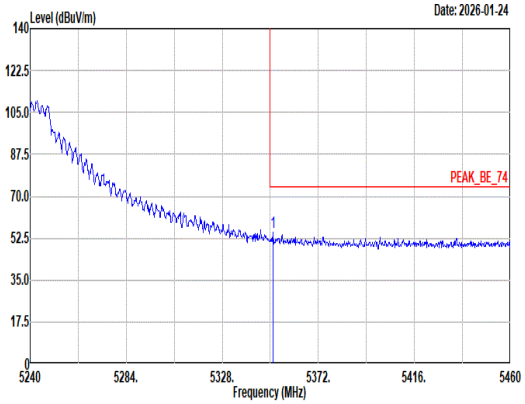 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.10 54.70 74.00 -19.30 46.25 33.00 11.66 36.21 0.00 310 96 Peak	Blank
Avg	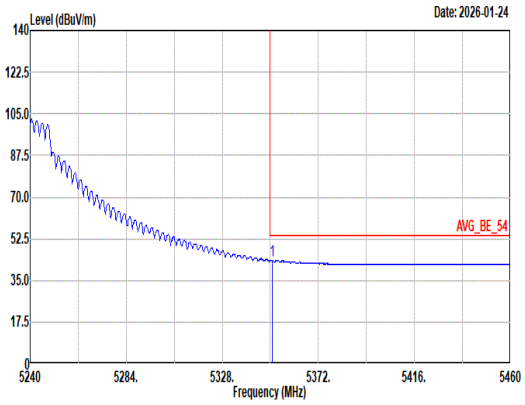 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.88 43.54 54.00 -10.46 35.09 33.00 11.66 36.21 0.00 310 96 Average	Blank

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	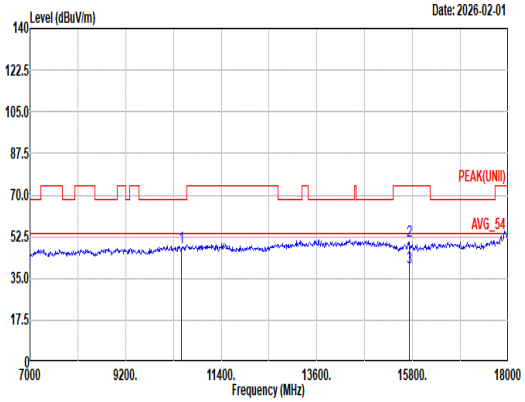 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 47.95 68.20 -20.25 58.85 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 50.51 74.00 -23.49 58.48 37.95 19.99 66.58 0.67 202 141 Peak 3 15720.00 39.78 54.00 -14.22 47.75 37.94 19.99 66.57 0.67 202 141 Average	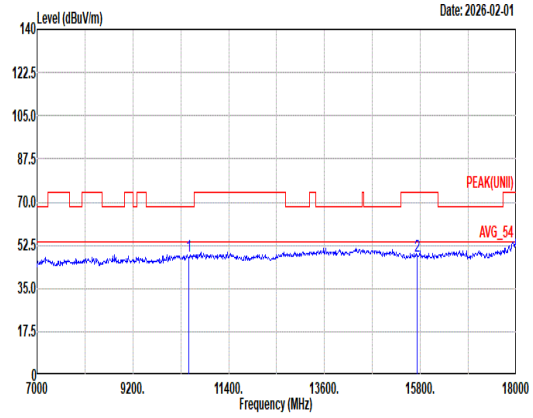 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10480.00 47.99 68.20 -20.21 58.89 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 47.82 74.00 -26.18 55.79 37.95 19.99 66.58 0.67 -- -- Peak

Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	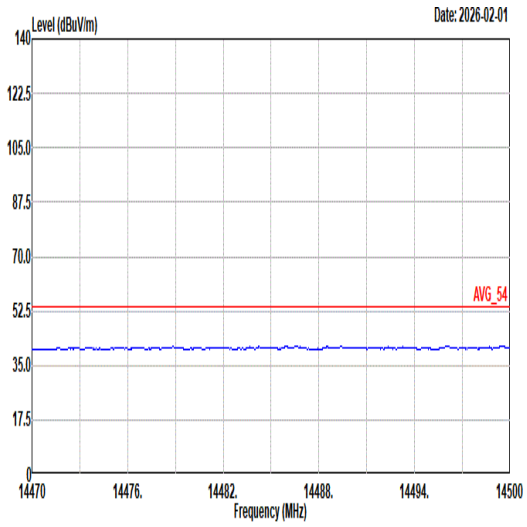 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	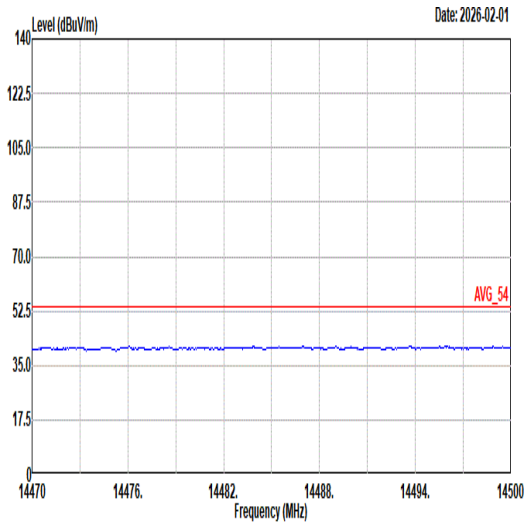 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	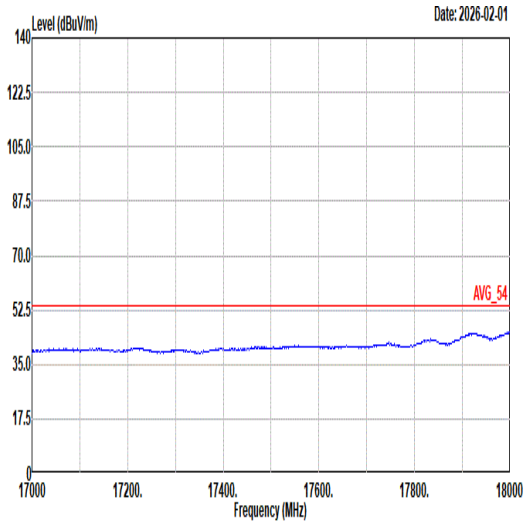 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	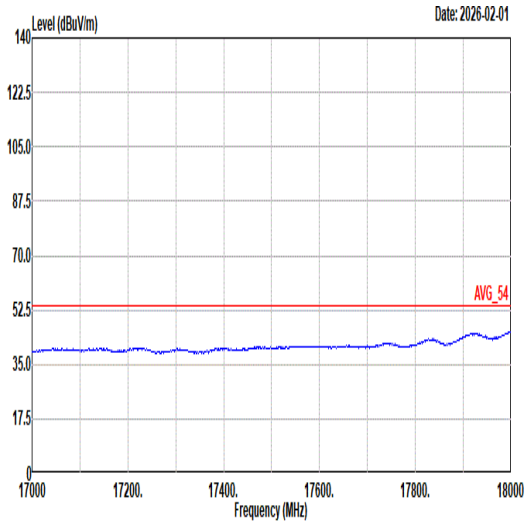 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	9	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	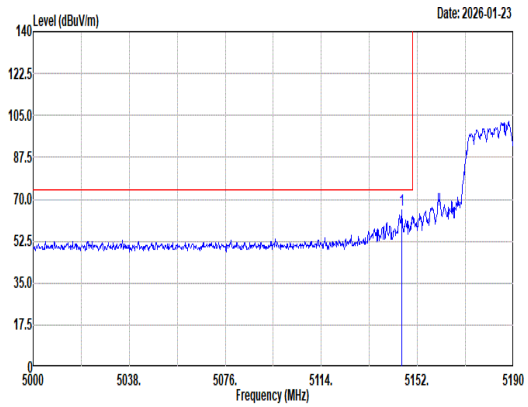 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5145.73 65.53 74.00 -8.47 57.02 33.28 11.42 36.19 0.00 148 330 Peak	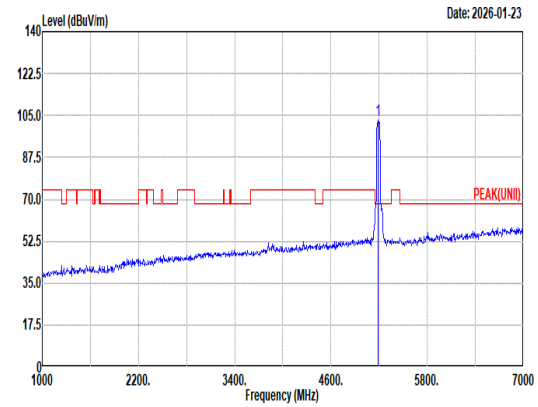 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 102.99 ------ ------ 94.51 33.22 11.45 36.19 0.00 148 330 Peak
Avg	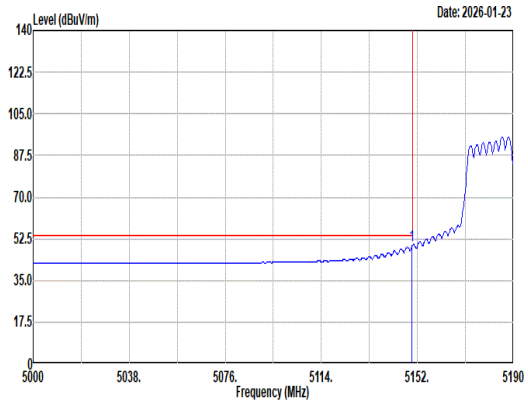 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.91 49.42 54.00 -4.58 40.89 33.30 11.42 36.19 0.00 148 330 Average	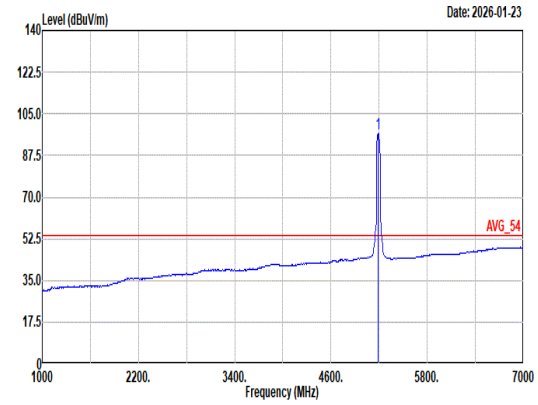 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 96.64 ------ ------ 88.16 33.22 11.45 36.19 0.00 148 330 Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	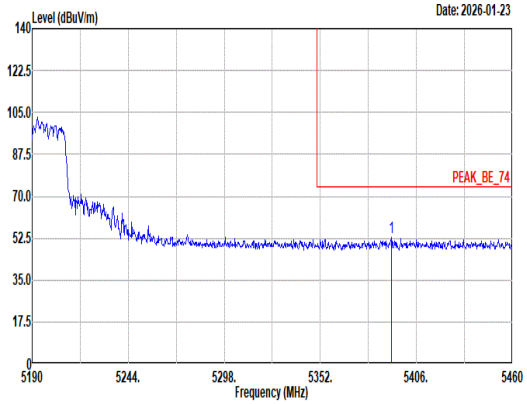 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.96 52.77 74.00 -21.23 44.20 33.08 11.71 36.22 0.00 148 330 Peak	Blank
Avg	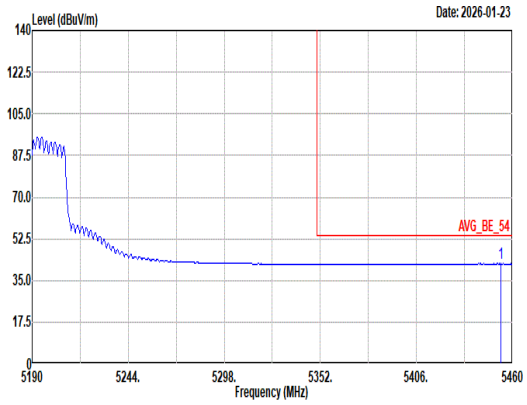 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.52 42.04 54.00 -11.96 33.48 33.01 11.77 36.22 0.00 148 330 Average	Blank

Mode	9	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	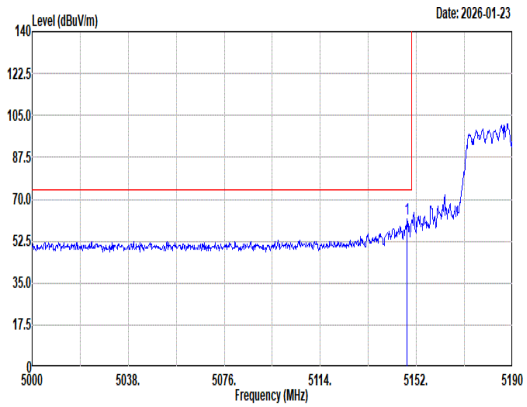 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.39 62.06 74.00 -11.94 53.54 33.29 11.42 36.19 0.00 322 90 Peak	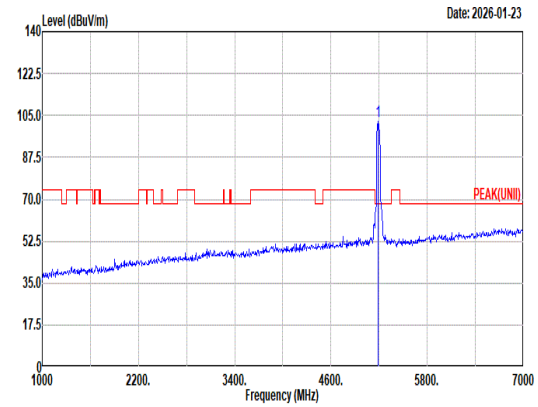 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 102.31 ------ ------ 93.83 33.22 11.45 36.19 0.00 322 90 Peak
Avg	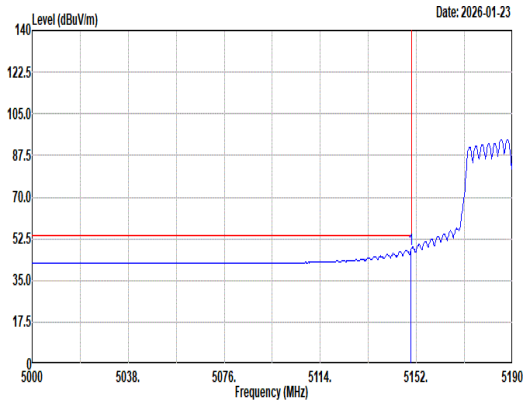 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.91 48.05 54.00 -5.95 39.52 33.30 11.42 36.19 0.00 322 90 Average	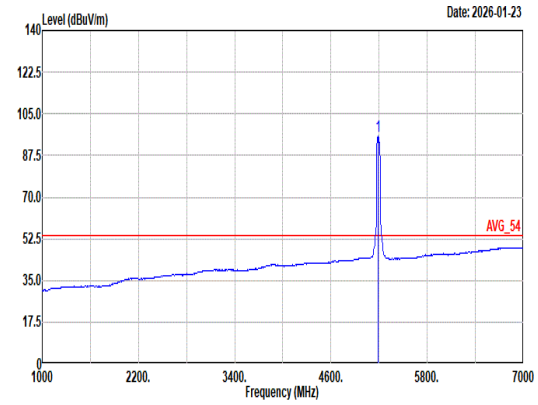 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 95.45 ------ ------ 86.97 33.22 11.45 36.19 0.00 322 90 Average

Mode	9	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	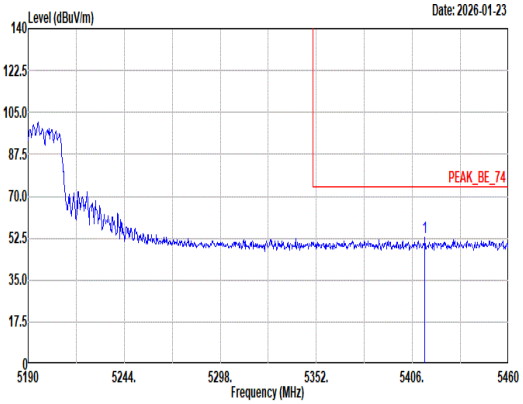 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5413.02 52.82 74.00 -21.18 44.24 33.07 11.73 36.22 0.00 322 90 Peak	Blank
Avg	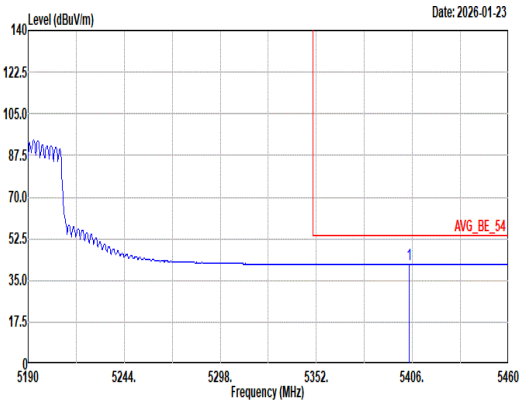 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5404.11 41.96 54.00 -12.04 33.37 33.09 11.72 36.22 0.00 322 90 Average	Blank

Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	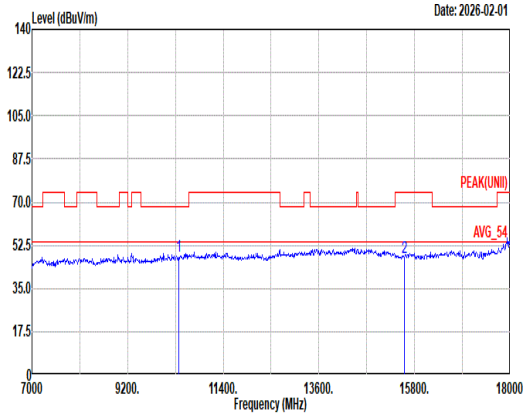 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 48.07 68.20 -20.13 59.11 38.70 16.15 66.86 0.97 -- -- Peak 2 15570.00 47.58 74.00 -26.42 55.34 38.12 19.90 66.44 0.66 -- -- Peak	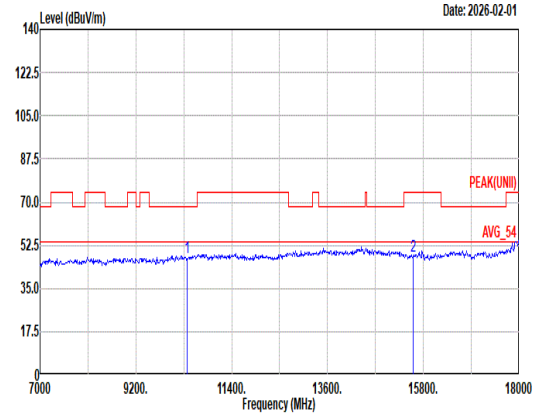 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 47.70 68.20 -20.50 58.74 38.70 16.15 66.86 0.97 -- -- Peak 2 15570.00 47.86 74.00 -26.14 55.62 38.12 19.90 66.44 0.66 -- -- Peak

Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	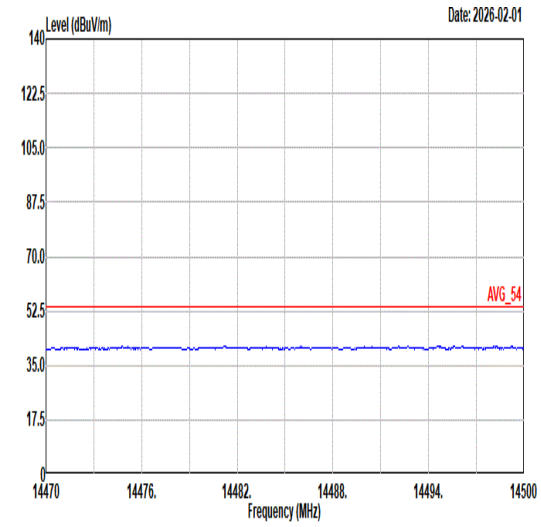 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	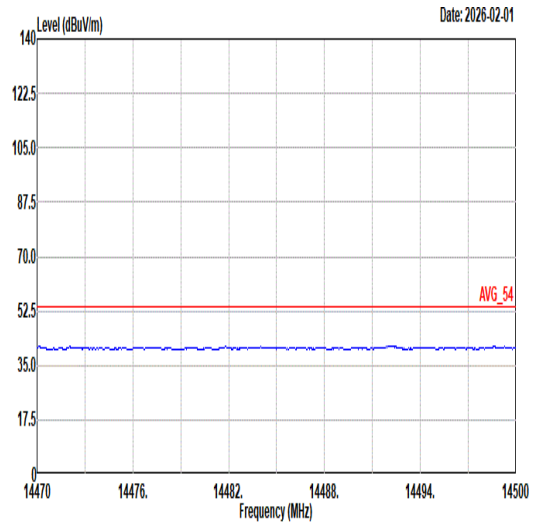 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	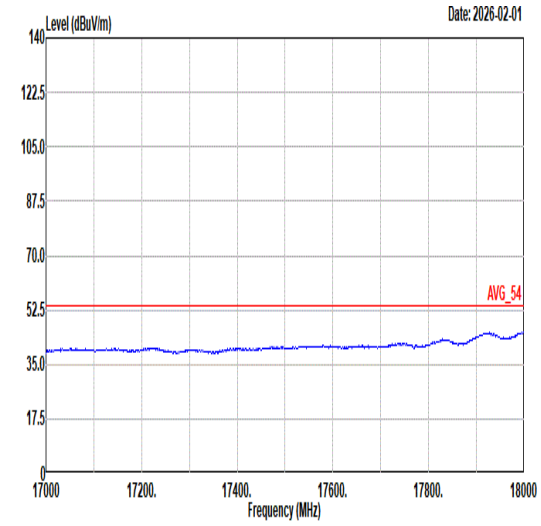 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	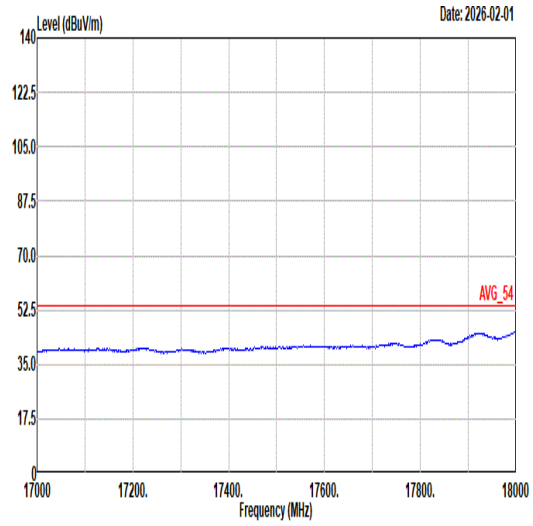 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	10	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	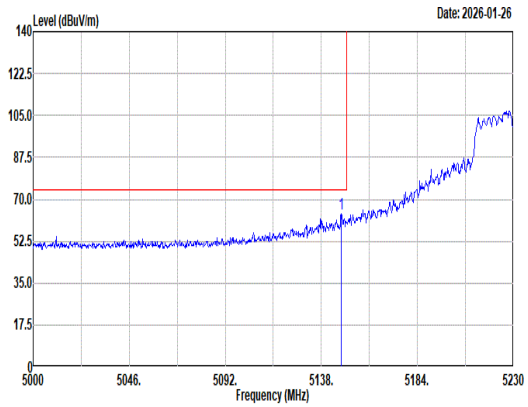 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5147.66 63.88 74.00 -10.12 55.36 33.29 11.42 36.19 0.00 186 324 Peak	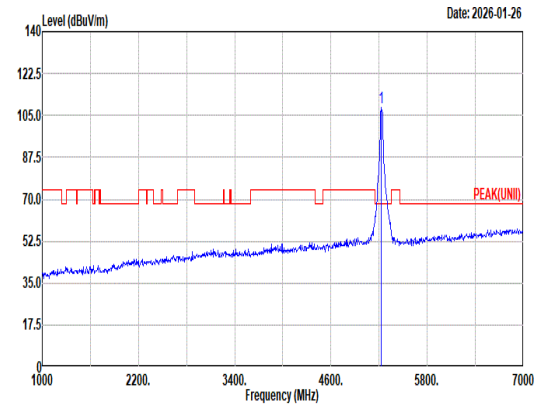 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5230.00 108.05 ------ ------ 99.61 33.15 11.49 36.20 0.00 186 324 Peak
Avg	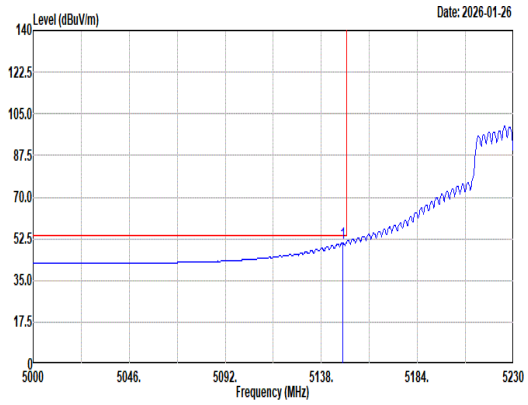 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.12 50.94 54.00 -3.06 42.42 33.29 11.42 36.19 0.00 186 324 Average	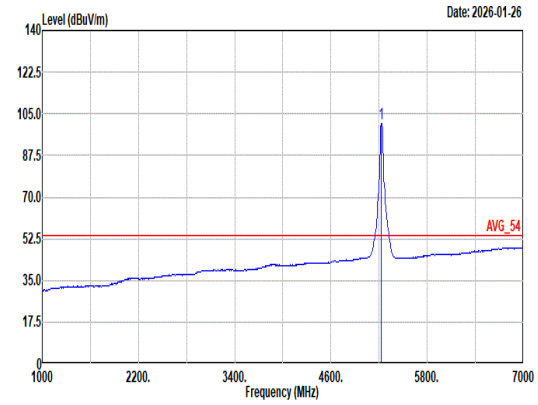 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5230.00 101.03 ------ ------ 92.59 33.13 11.51 36.20 0.00 186 324 Average

Mode	10	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	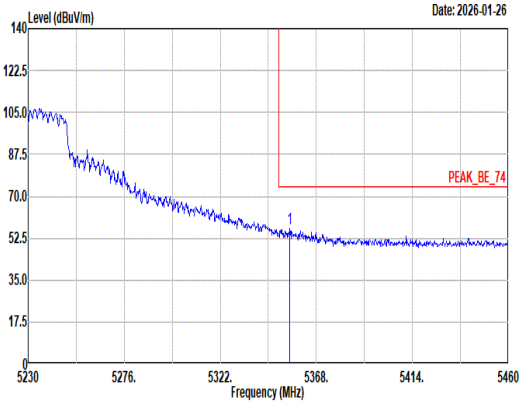 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.35 56.71 74.00 -17.29 48.25 33.01 11.66 36.21 0.00 186 324 Peak	Blank
Avg	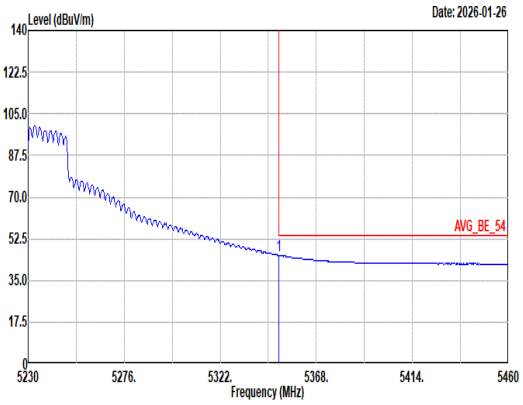 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.06 45.67 54.00 -8.33 37.22 33.00 11.66 36.21 0.00 186 324 Average	Blank

Mode	10	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	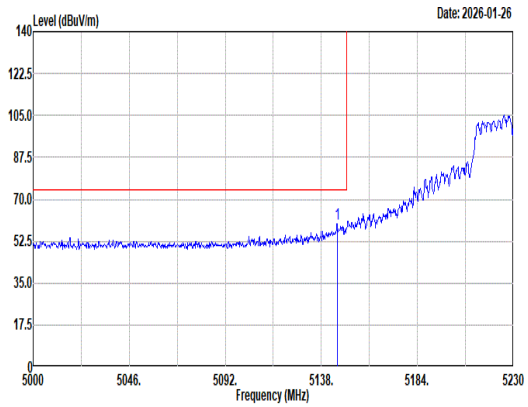 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.59 59.91 74.00 -14.09 51.40 33.28 11.42 36.19 0.00 300 82 Peak	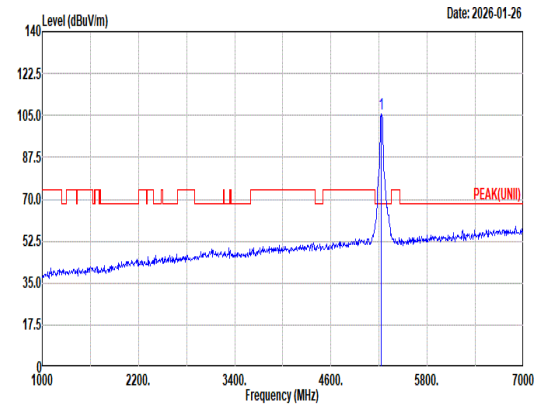 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 105.41 ------ ------ 96.97 33.15 11.49 36.20 0.00 300 82 Peak
Avg	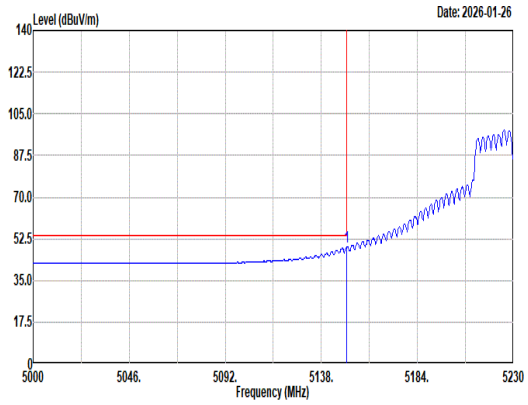 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.96 48.94 54.00 -5.06 40.41 33.30 11.42 36.19 0.00 300 82 Average	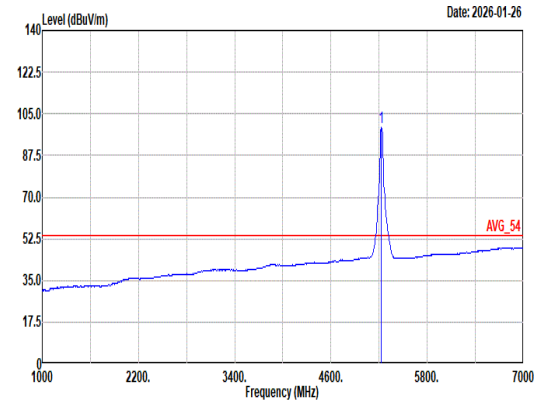 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 99.37 ------ ------ 90.93 33.15 11.49 36.20 0.00 300 82 Average

Mode	10	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	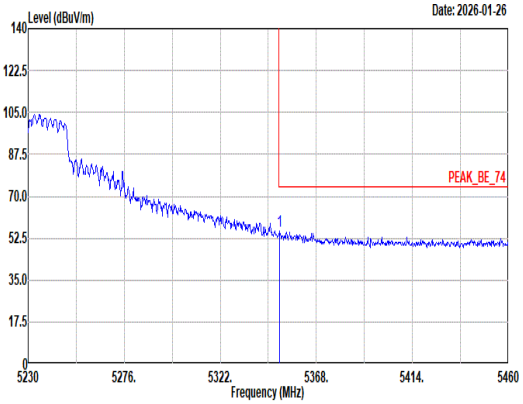 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 55.55 74.00 -18.45 47.10 33.00 11.66 36.21 0.00 300 82 Peak	Blank
Avg	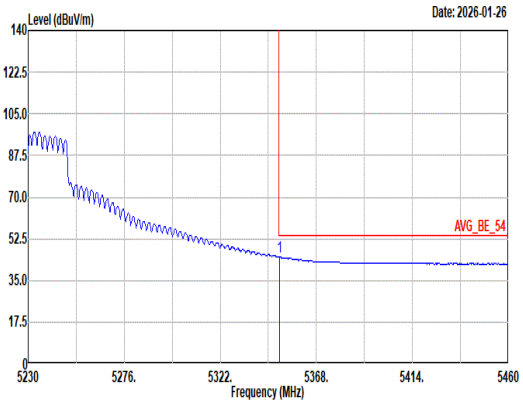 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.29 44.97 54.00 -9.03 36.52 33.00 11.66 36.21 0.00 300 82 Average	Blank

Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	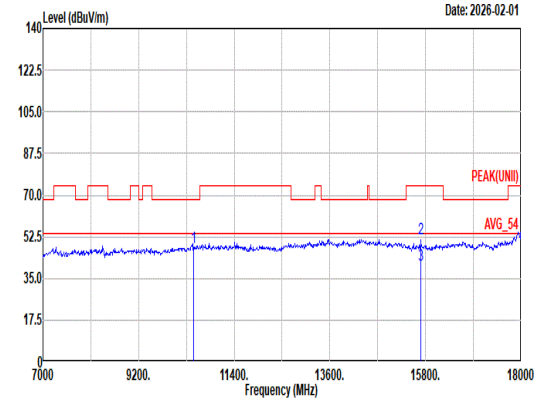 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 47.90 68.20 -20.30 58.82 38.70 16.21 66.79 0.96 -- -- Peak 2 15690.00 51.64 74.00 -22.36 59.69 37.86 19.97 66.55 0.67 129 110 Peak 3 15690.00 40.90 54.00 -13.10 48.95 37.86 19.97 66.55 0.67 129 110 Average	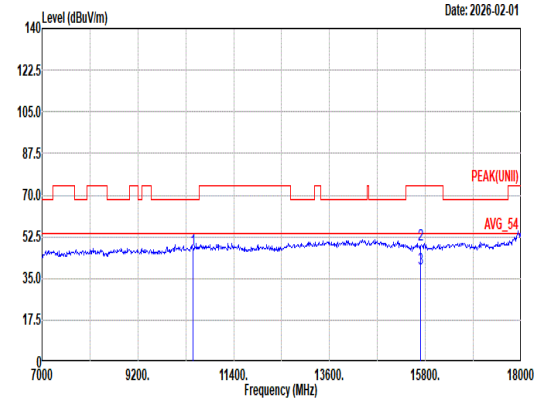 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 47.16 68.20 -21.04 58.08 38.70 16.21 66.79 0.96 -- -- Peak 2 15690.00 49.06 74.00 -24.94 57.11 37.86 19.97 66.55 0.67 100 218 Peak 3 15690.00 39.30 54.00 -14.70 47.35 37.86 19.97 66.55 0.67 100 218 Average

Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	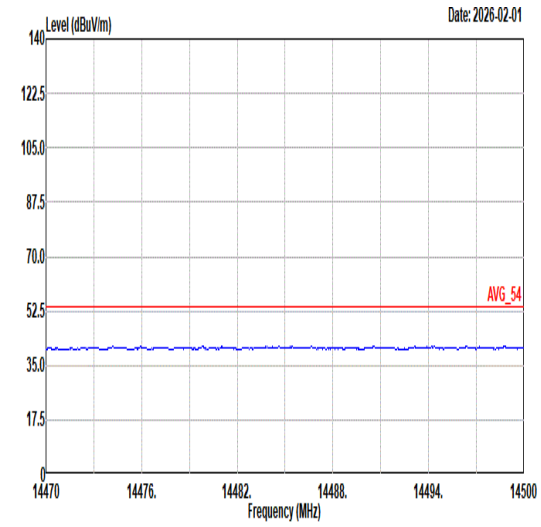 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	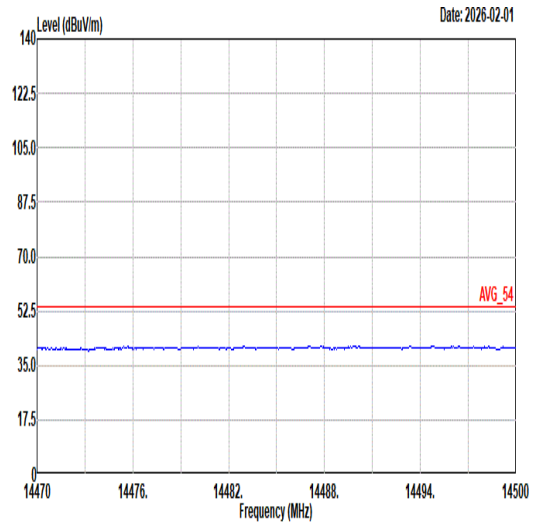 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	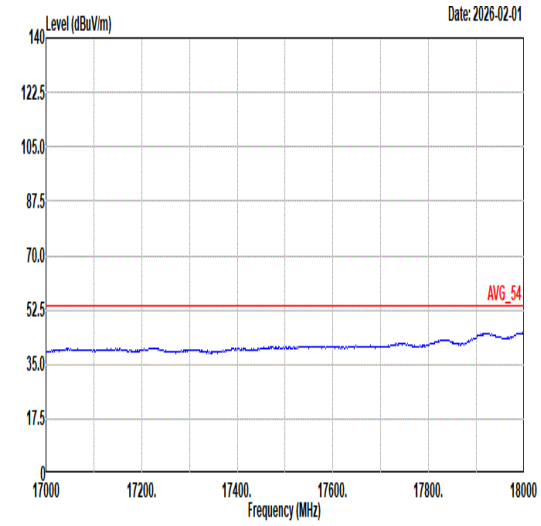 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	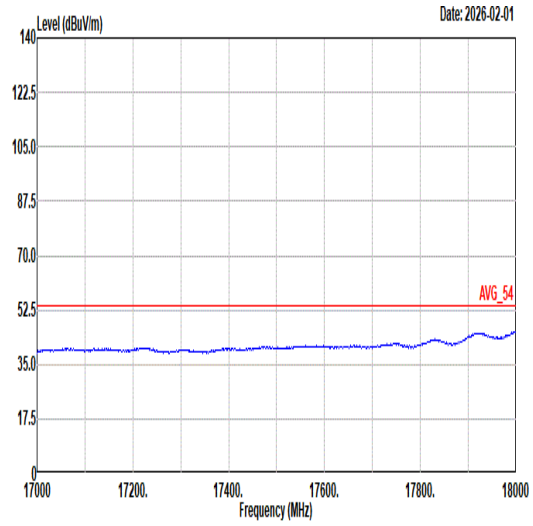 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	11	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	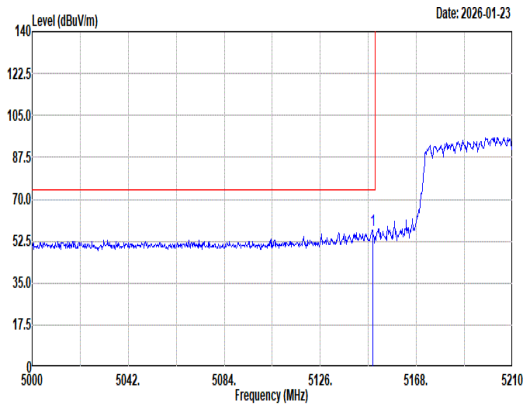 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.89 57.05 74.00 -16.95 48.52 33.30 11.42 36.19 0.00 178 311 Peak	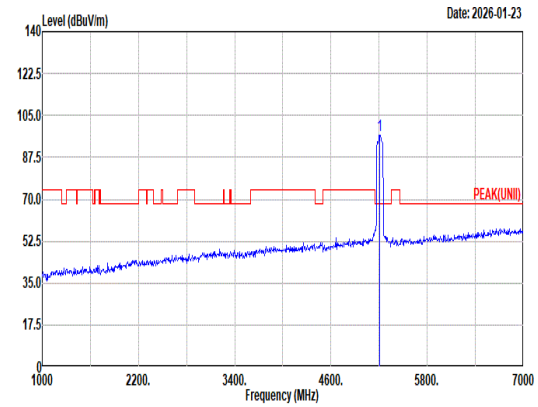 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 96.79 ------ ------ 88.35 33.16 11.48 36.20 0.00 178 311 Peak
Avg	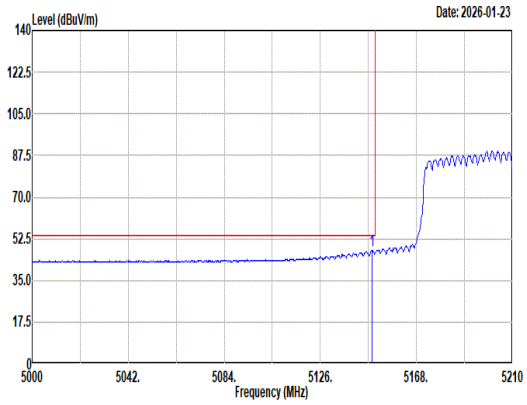 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.47 47.60 54.00 -6.40 39.08 33.29 11.42 36.19 0.00 178 311 Average	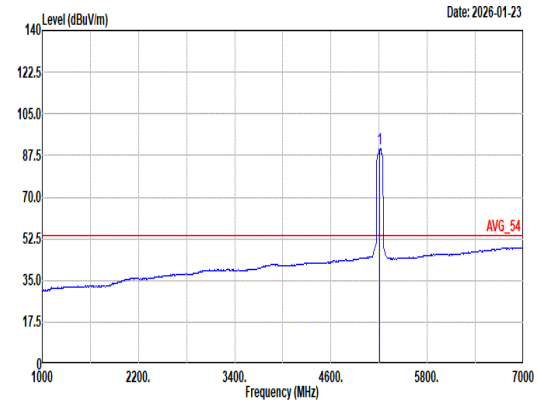 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 90.31 ------ ------ 81.87 33.15 11.49 36.20 0.00 178 311 Average

Mode	11	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	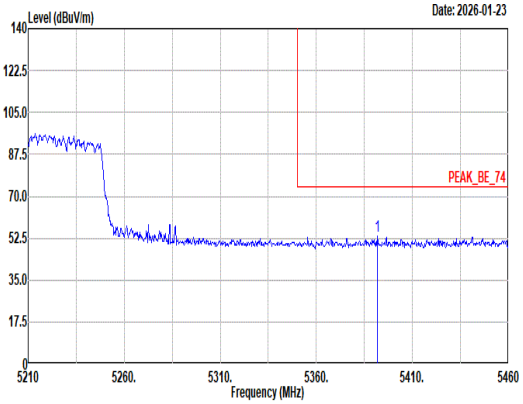 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5391.75 53.12 74.00 -20.88 44.55 33.08 11.71 36.22 0.00 178 311 Peak	Blank
Avg	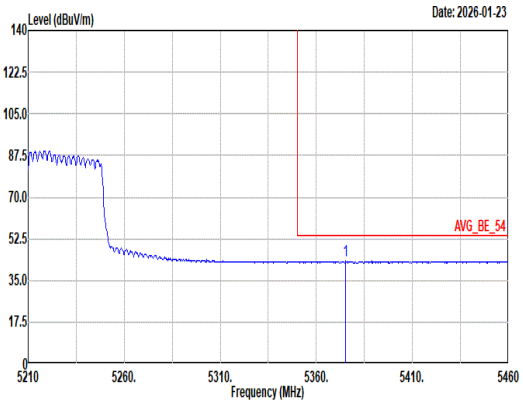 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5375.25 43.12 54.00 -10.88 34.60 33.05 11.69 36.22 0.00 178 311 Average	Blank

Mode	11	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	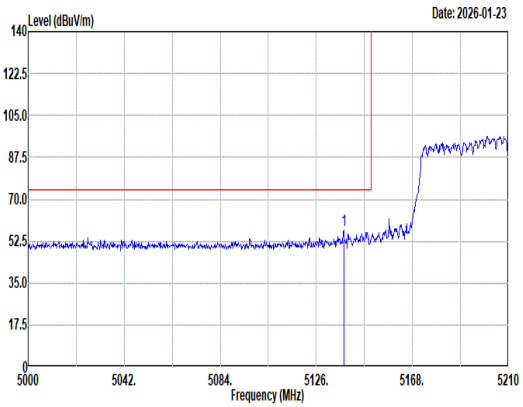 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.97 56.93 74.00 -17.07 48.46 33.25 11.41 36.19 0.00 300 115 Peak	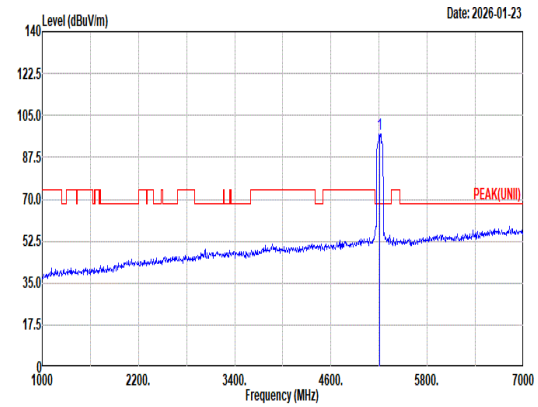 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 97.25 ------ ------ 88.78 33.20 11.46 36.19 0.00 300 115 Peak
Avg	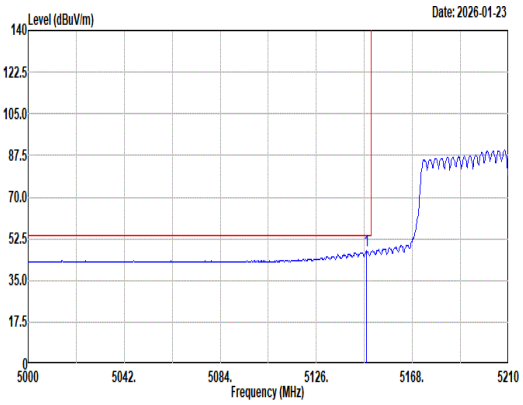 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.84 47.32 54.00 -6.68 38.80 33.29 11.42 36.19 0.00 300 115 Average	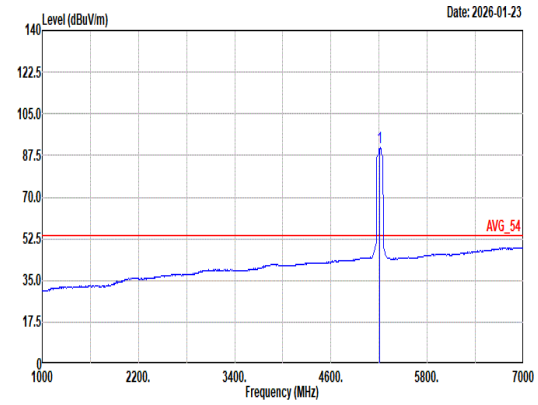 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5210.00 90.67 ------ ------ 82.23 33.16 11.48 36.20 0.00 300 115 Average

Mode	11	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	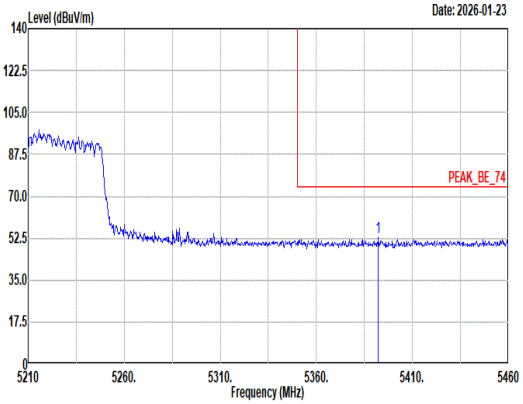 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5392.25 52.74 74.00 -21.26 44.17 33.08 11.71 36.22 0.00 300 115 Peak	Blank
Avg	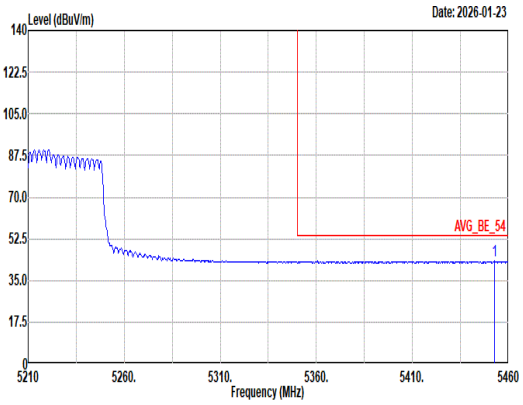 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.75 43.09 54.00 -10.91 34.53 33.01 11.77 36.22 0.00 300 115 Average	Blank

Mode	11	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	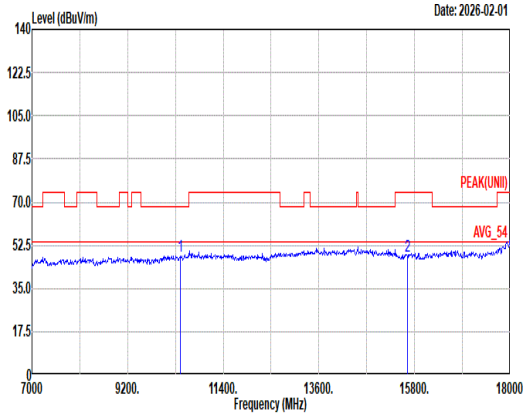 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 48.19 68.20 -20.01 59.18 38.70 16.18 66.83 0.96 -- -- Peak 2 15630.00 47.88 74.00 -26.12 55.98 37.79 19.94 66.50 0.67 -- -- Peak	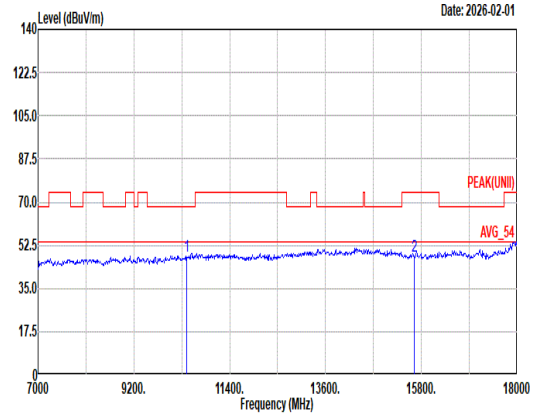 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 48.04 68.20 -20.16 59.03 38.70 16.18 66.83 0.96 -- -- Peak 2 15630.00 47.93 74.00 -26.07 56.00 37.82 19.93 66.49 0.67 -- -- Peak

Mode	11	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	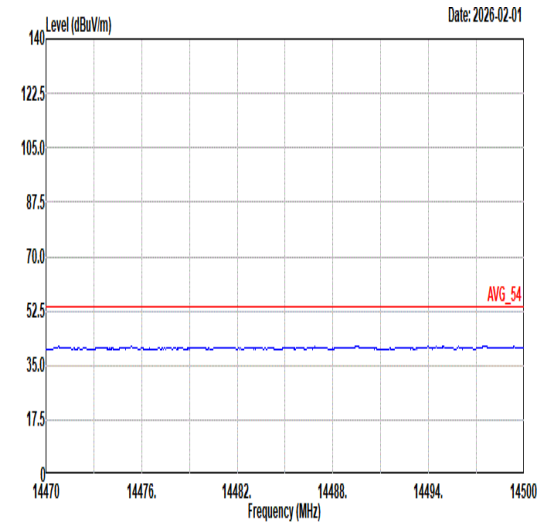 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	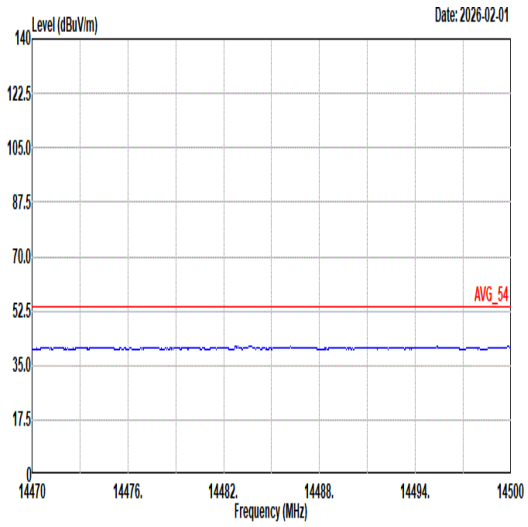 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	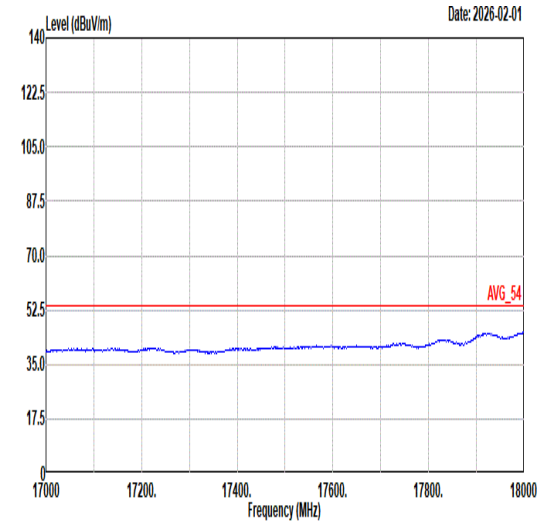 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	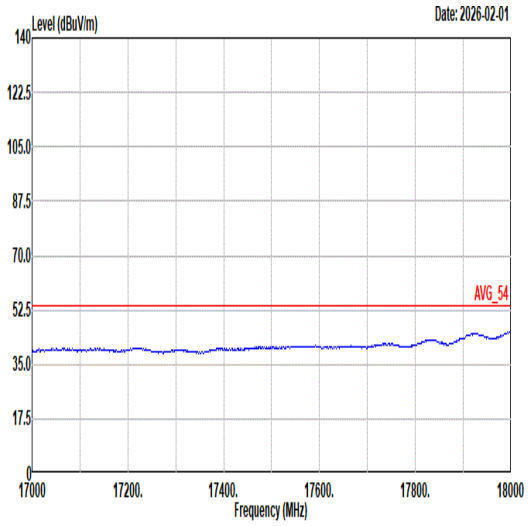 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	12	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	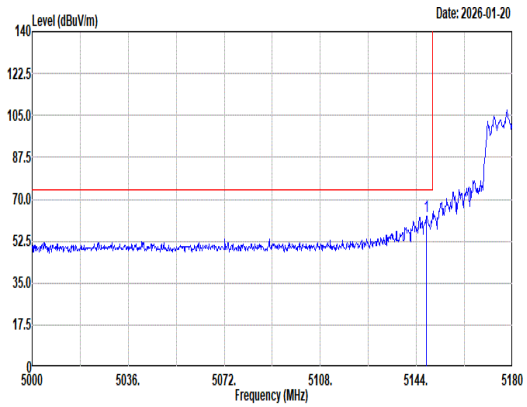 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.78 63.12 74.00 -10.88 54.60 33.29 11.42 36.19 0.00 200 330 Peak	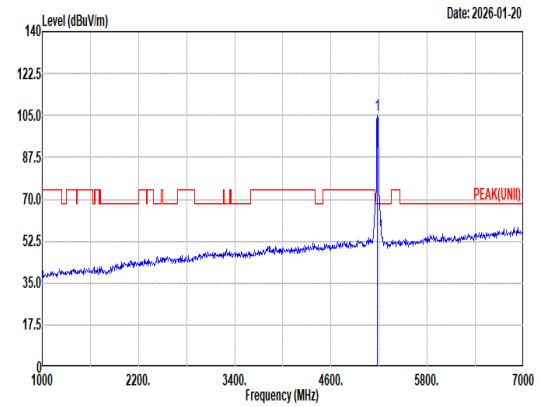 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 105.36 ------ ------ 96.86 33.24 11.45 36.19 0.00 200 330 Peak
Avg	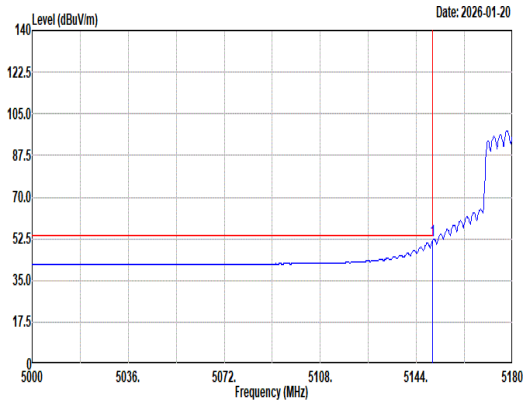 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 51.70 54.00 -2.30 43.17 33.30 11.42 36.19 0.00 200 330 Average	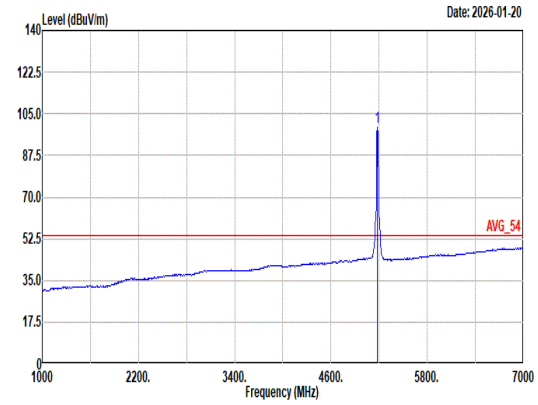 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 99.26 ------ ------ 90.76 33.25 11.44 36.19 0.00 200 330 Average

Mode	12	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	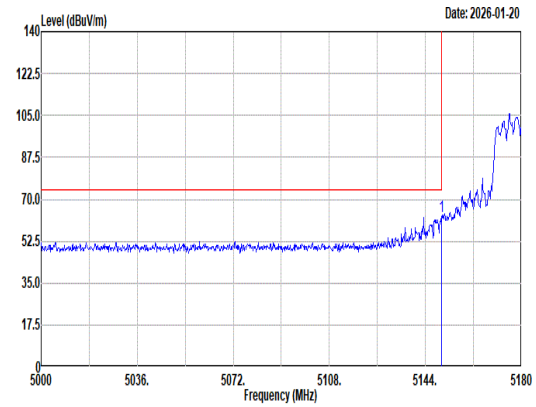 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 62.68 74.00 -11.32 54.15 33.30 11.42 36.19 0.00 339 99 Peak	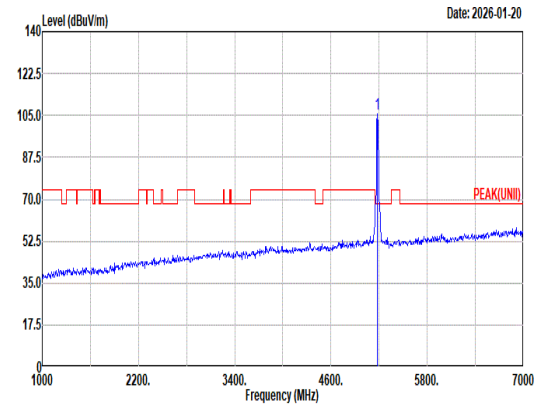 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 105.68 ------ ------ 97.18 33.25 11.44 36.19 0.00 339 99 Peak
Avg	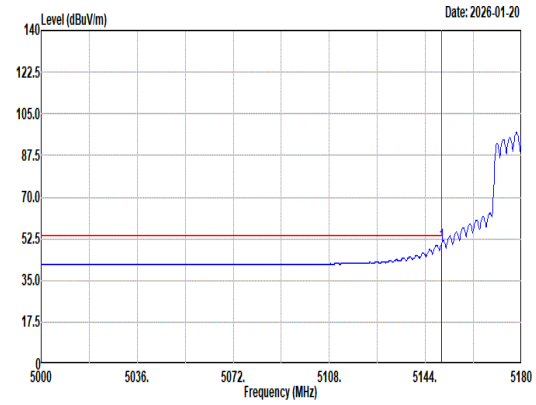 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 50.39 54.00 -3.61 41.86 33.30 11.42 36.19 0.00 339 99 Average	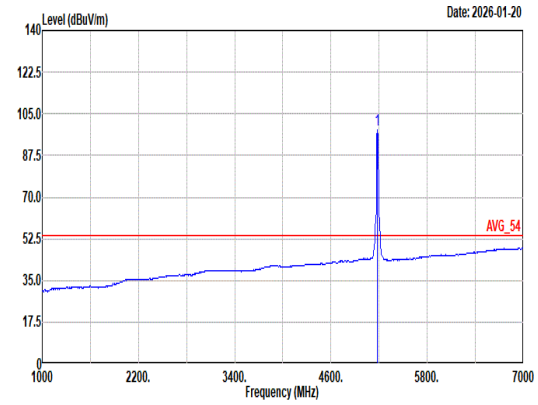 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 98.39 ------ ------ 89.89 33.25 11.44 36.19 0.00 339 99 Average

Mode	12	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	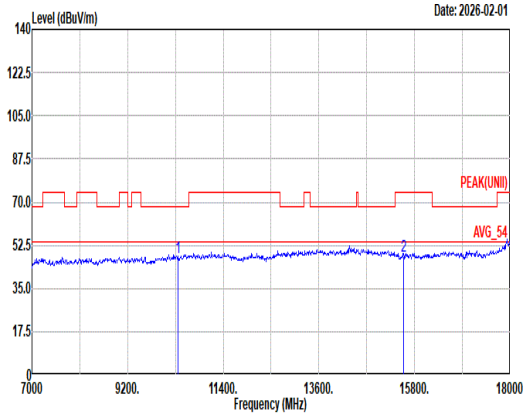 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 47.46 68.20 -20.74 58.52 38.70 16.14 66.88 0.98 -- -- Peak 2 15540.00 47.82 74.00 -26.18 55.46 38.23 19.88 66.41 0.66 -- -- Peak	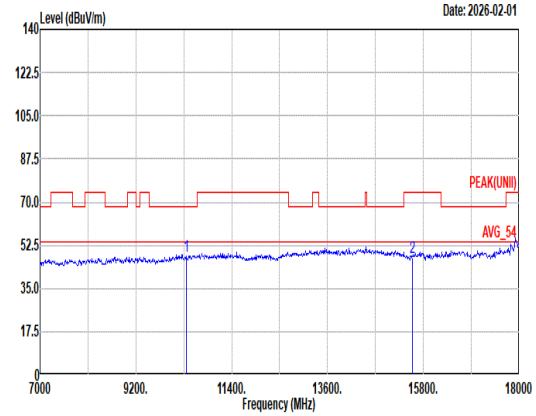 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10360.00 48.03 68.20 -20.17 59.09 38.70 16.14 66.88 0.98 -- -- Peak 2 15540.00 47.40 74.00 -26.60 55.04 38.23 19.88 66.41 0.66 -- -- Peak

Mode	12	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	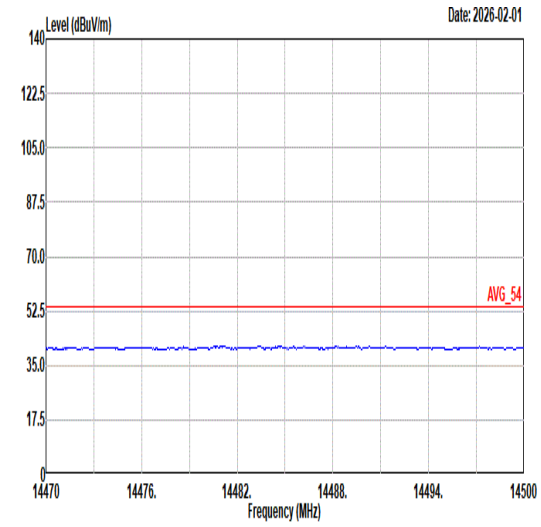 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	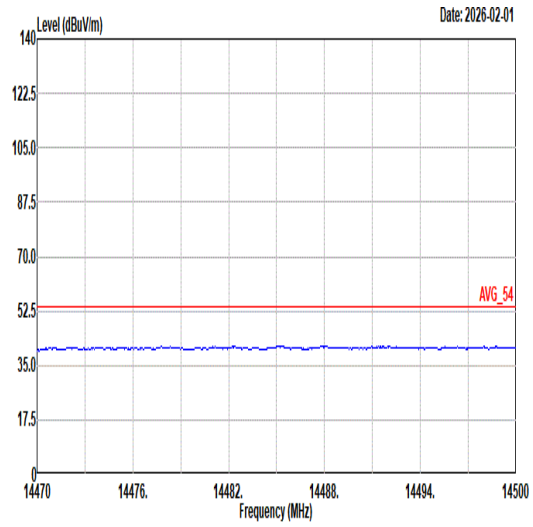 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	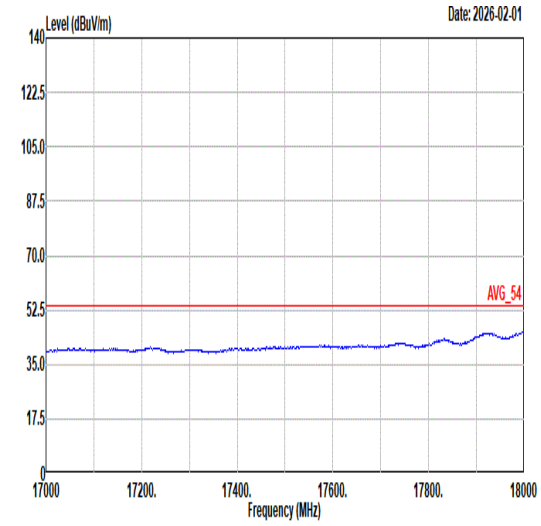 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	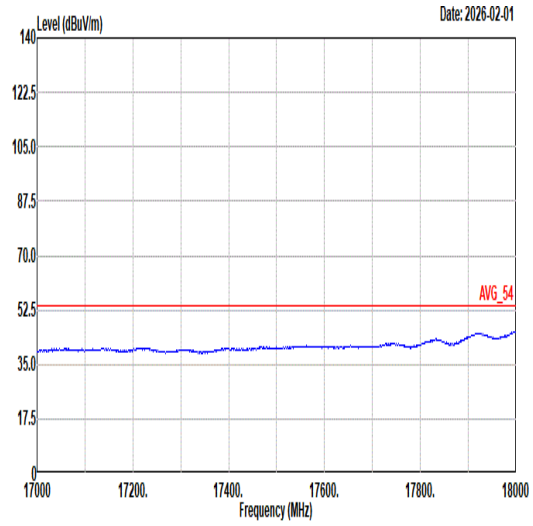 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	13	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_26/0 RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	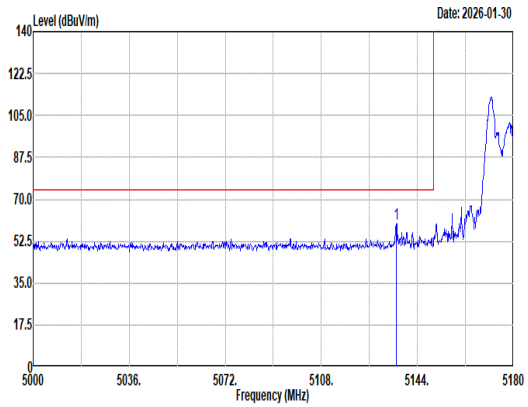 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5136.08 59.92 74.00 -14.08 51.46 33.24 11.41 36.19 0.00 142 360 Peak	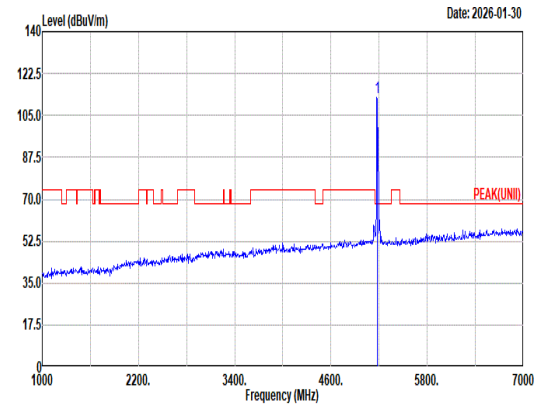 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5180.00 112.79 ------ ------ 104.28 33.26 11.44 36.19 0.00 142 360 Peak
Avg	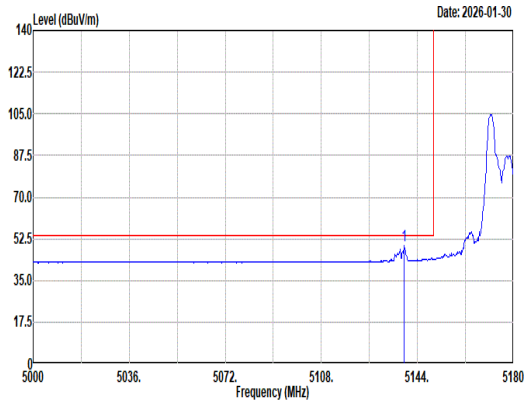 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto 1 5139.14 49.47 54.00 -4.53 40.99 33.26 11.41 36.19 0.00 142 360 Average	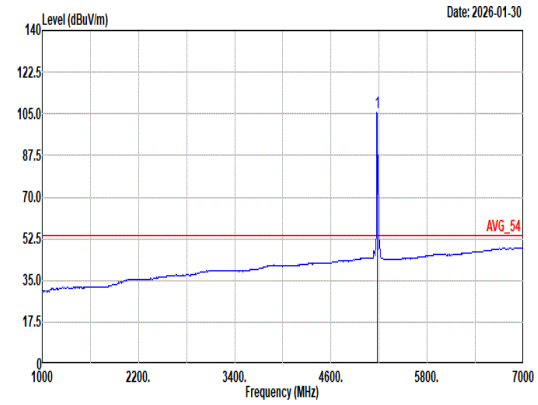 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto 1 5180.00 105.66 ------ ------ 97.15 33.26 11.44 36.19 0.00 142 360 Average

Mode	13	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_26/0 RU_5180MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	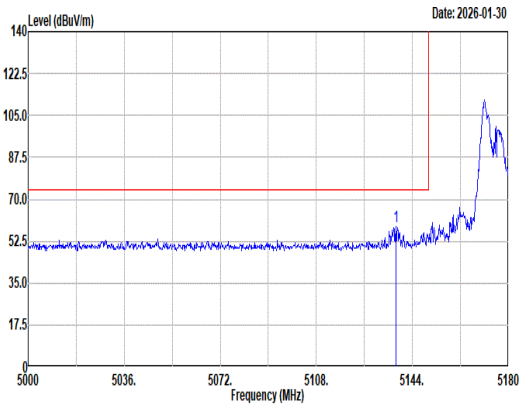 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5137.88 58.42 74.00 -15.58 49.95 33.25 11.41 36.19 0.00 300 84 Peak	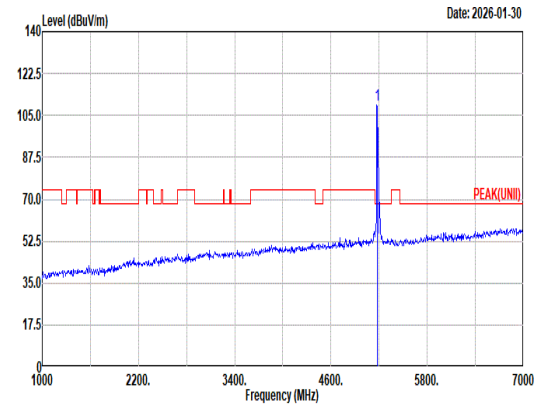 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.49 ------ ------ 100.98 33.26 11.44 36.19 0.00 300 84 Peak
Avg	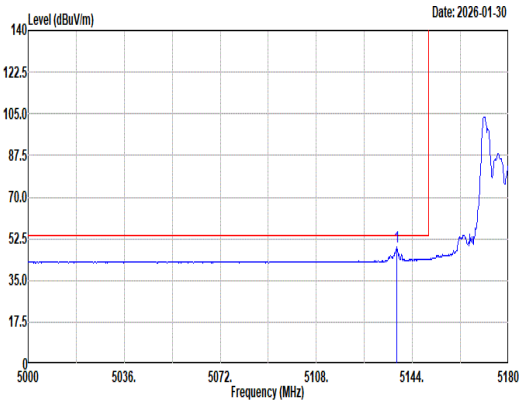 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.24 49.33 54.00 -4.67 40.86 33.25 11.41 36.19 0.00 300 84 Average	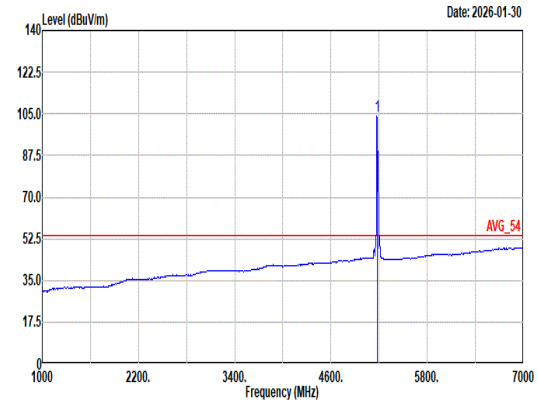 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 104.01 ------ ------ 95.50 33.26 11.44 36.19 0.00 300 84 Average

Mode	14	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_52/37 RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	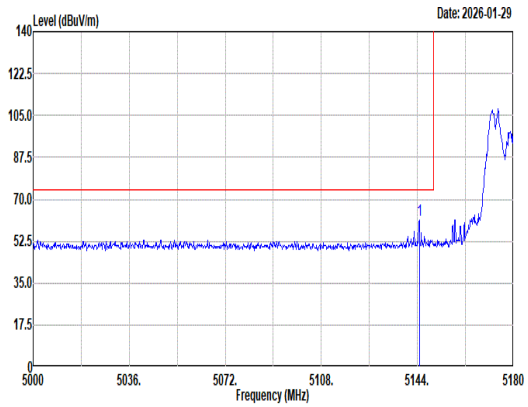 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5144.72 61.06 74.00 -12.94 52.55 33.28 11.42 36.19 0.00 184 355 Peak	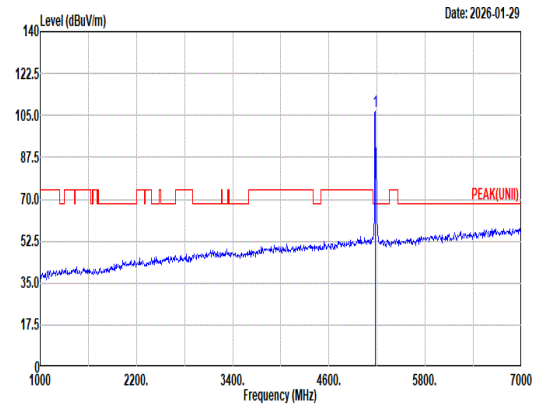 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5180.00 106.80 ------ ------ 98.30 33.25 11.44 36.19 0.00 184 355 Peak
Avg	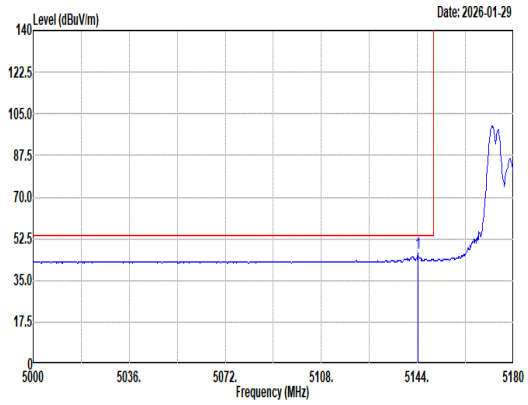 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto 1 5144.18 46.42 54.00 -7.58 37.91 33.28 11.42 36.19 0.00 184 355 Average	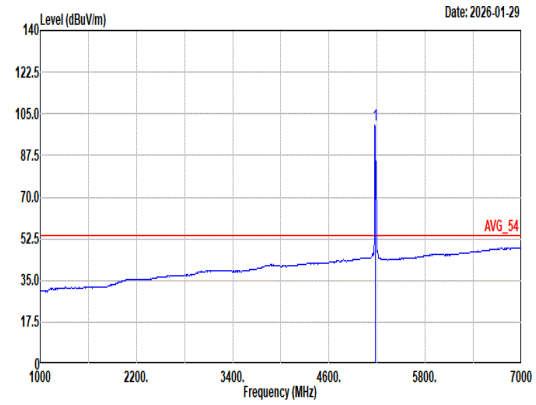 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto 1 5180.00 100.57 ------ ------ 92.06 33.26 11.44 36.19 0.00 184 355 Average

Mode	14	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_52/37 RU_5180MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	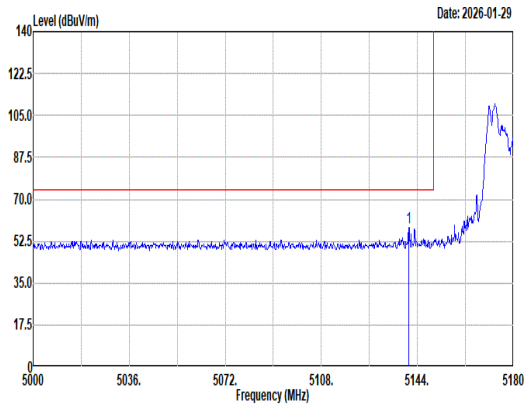 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5140.76 58.04 74.00 -15.96 49.56 33.26 11.41 36.19 0.00 302 89 Peak	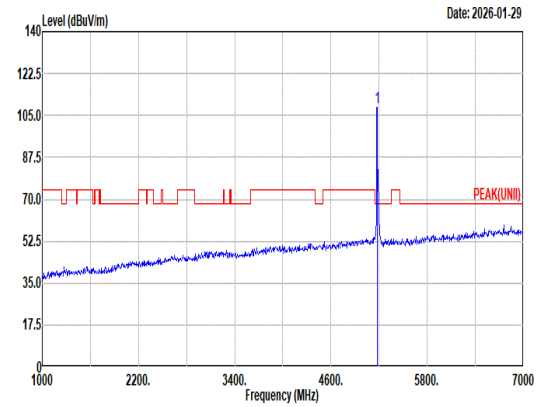 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 108.28 ------ ------ 99.78 33.25 11.44 36.19 0.00 302 89 Peak
Avg	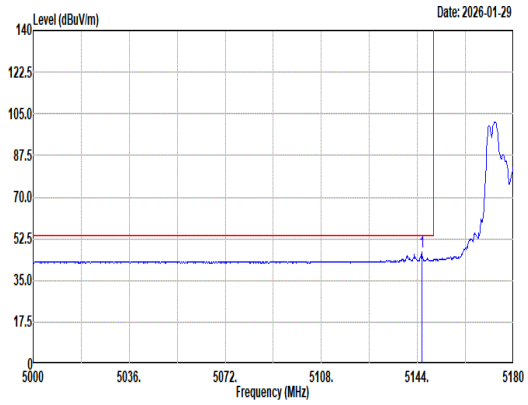 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.62 46.78 54.00 -7.22 38.27 33.28 11.42 36.19 0.00 302 89 Average	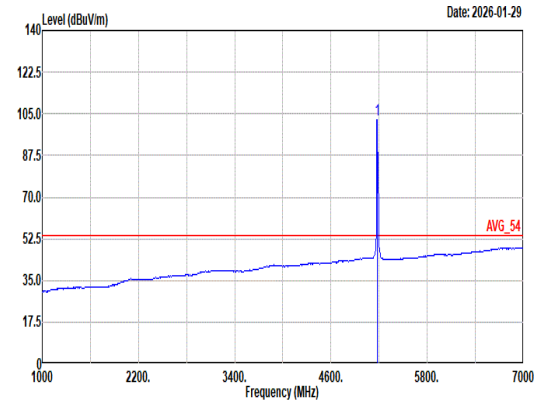 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 102.58 ------ ------ 94.07 33.26 11.44 36.19 0.00 302 89 Average

Mode	15	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_106/53 RU_5180MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	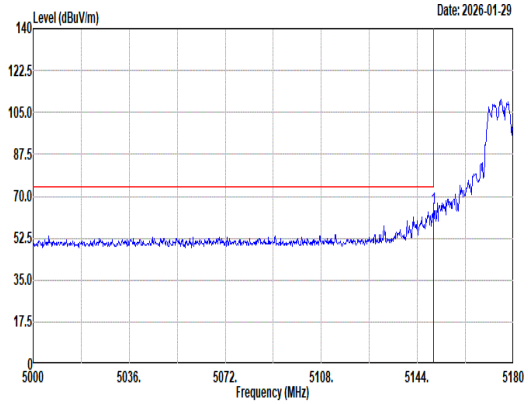 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.94 64.93 74.00 -9.07 56.40 33.30 11.42 36.19 0.00 148 335 Peak	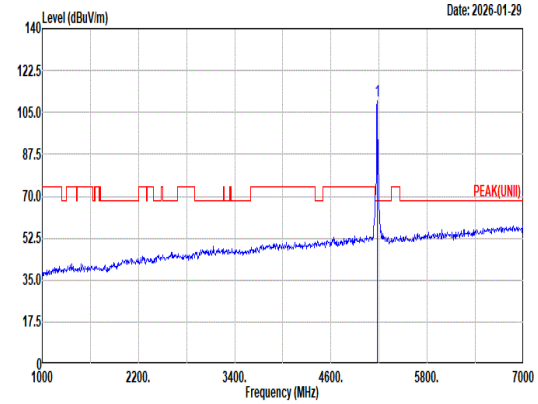 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5180.00 110.11 ------ ------ 101.61 33.25 11.44 36.19 0.00 148 335 Peak
Avg	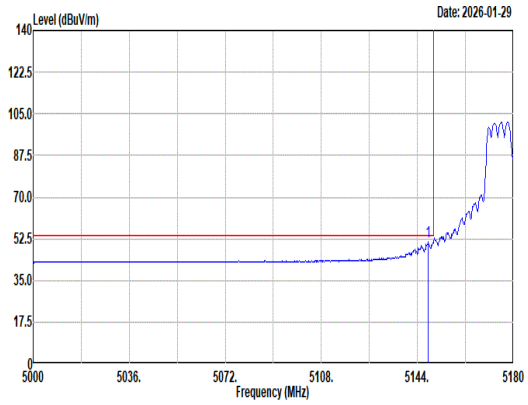 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5148.14 51.40 54.00 -2.60 42.88 33.29 11.42 36.19 0.00 148 335 Average	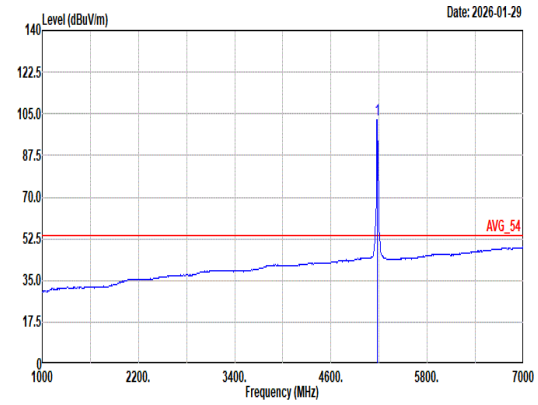 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5180.00 102.45 ------ ------ 93.95 33.25 11.44 36.19 0.00 148 335 Average

Mode	15	
	Band Edge	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_106/53 RU_5180MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	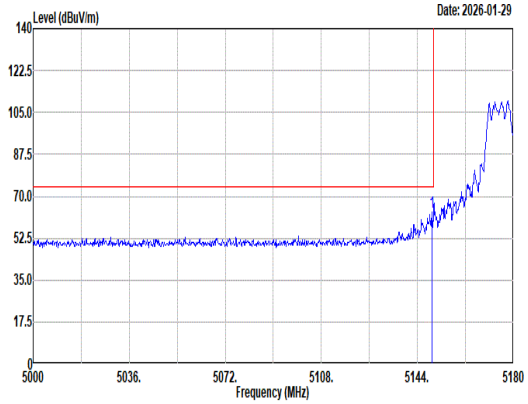 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.40 63.53 74.00 -10.47 55.00 33.30 11.42 36.19 0.00 299 89 Peak	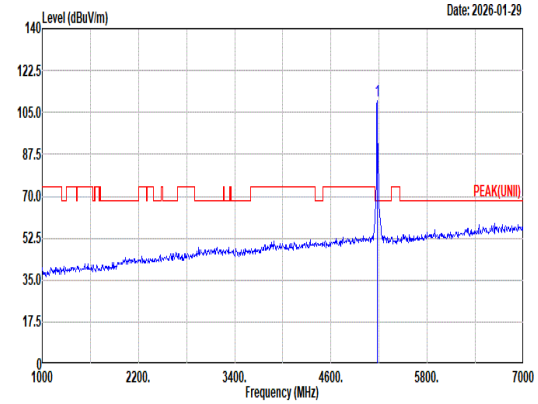 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 109.98 ------ ------ 101.48 33.25 11.44 36.19 0.00 299 89 Peak
Avg	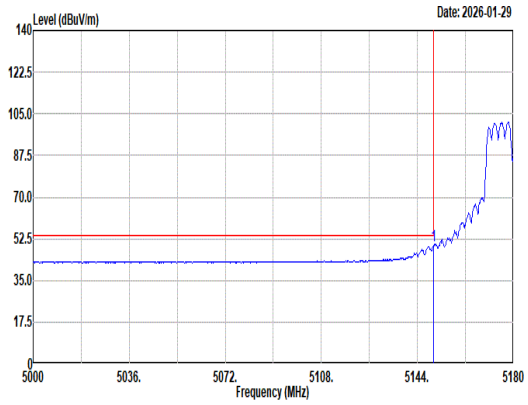 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.94 49.45 54.00 -4.55 40.92 33.30 11.42 36.19 0.00 299 89 Average	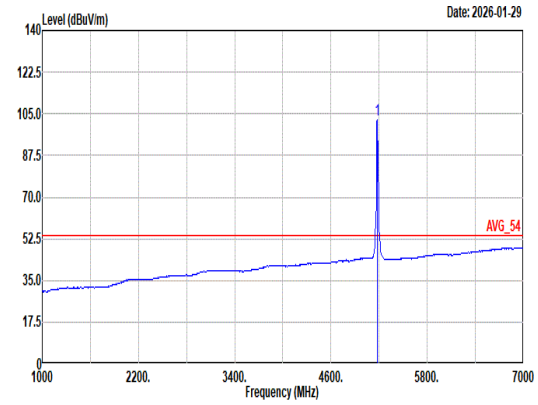 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5180.00 102.33 ------ ------ 93.83 33.25 11.44 36.19 0.00 299 89 Average

Mode	16	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	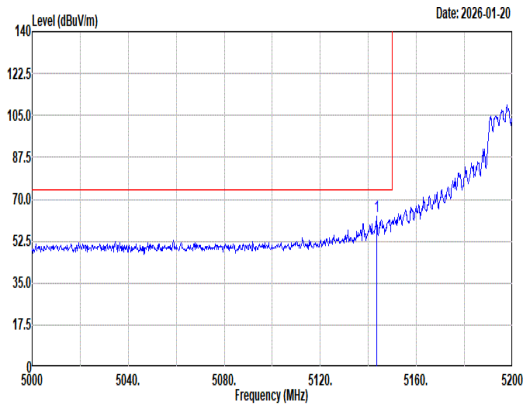 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5143.40 62.79 74.00 -11.21 54.30 33.27 11.41 36.19 0.00 200 330 Peak	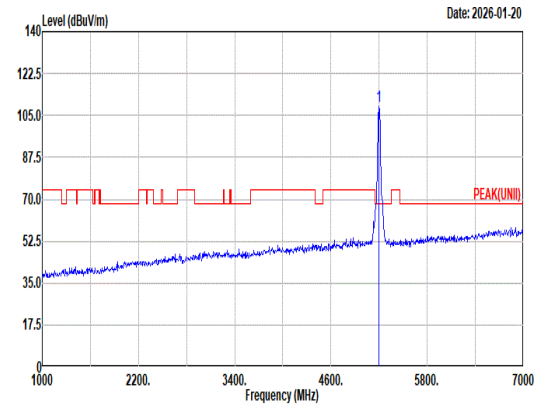 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5200.00 108.77 ------ ------ 100.30 33.20 11.46 36.19 0.00 200 330 Peak
Avg	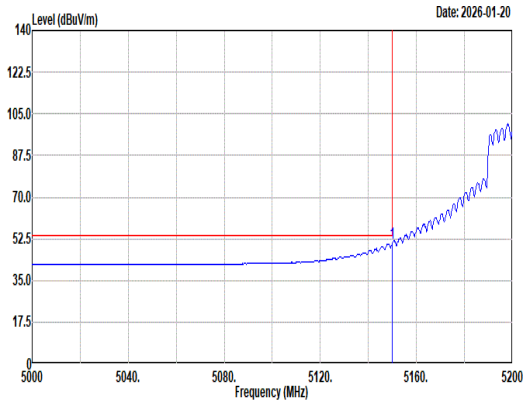 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5150.00 50.80 54.00 -3.20 42.27 33.30 11.42 36.19 0.00 200 330 Average	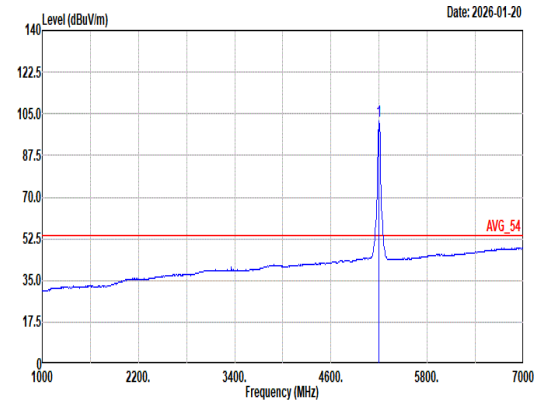 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5200.00 101.92 ------ ------ 93.45 33.20 11.46 36.19 0.00 200 330 Average

Mode	16	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	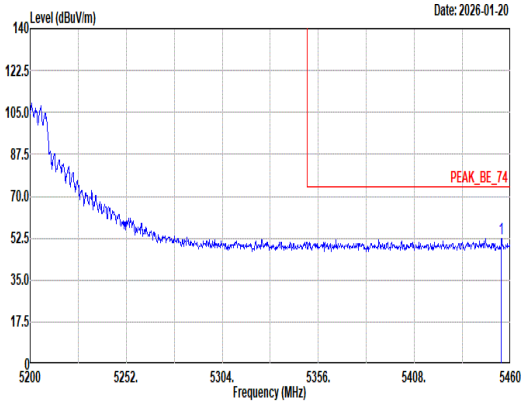 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.06 52.29 74.00 -21.71 43.73 33.01 11.77 36.22 0.00 200 330 Peak	Blank
Avg	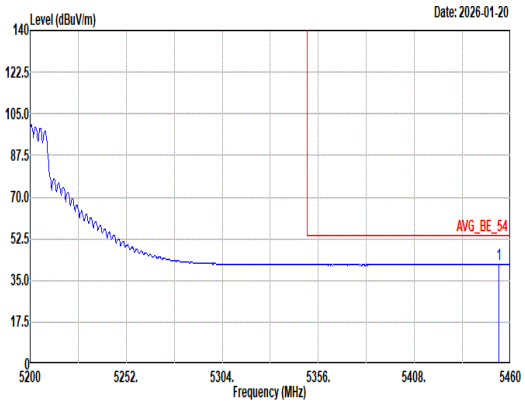 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5453.76 41.64 54.00 -12.36 33.08 33.01 11.77 36.22 0.00 200 330 Average	Blank

Mode	16	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	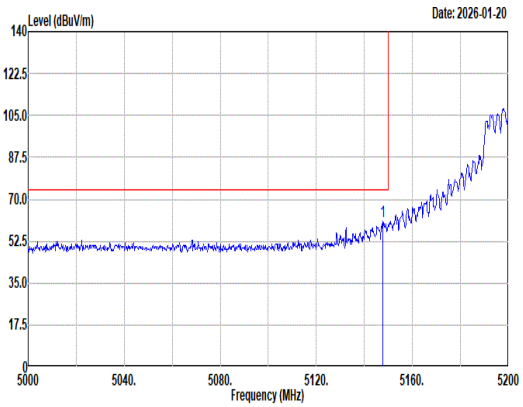 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.60 60.59 74.00 -13.41 52.07 33.29 11.42 36.19 0.00 283 91 Peak	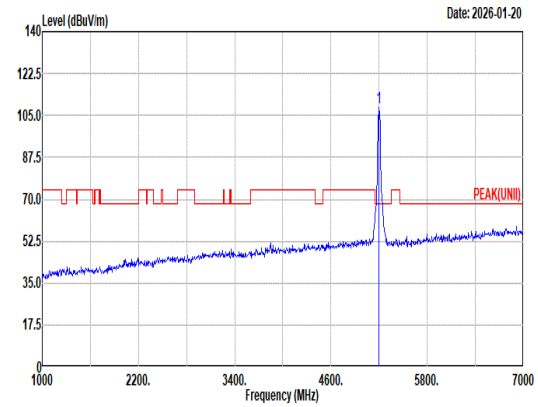 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 108.32 ------ ------ 99.85 33.20 11.46 36.19 0.00 283 91 Peak
Avg	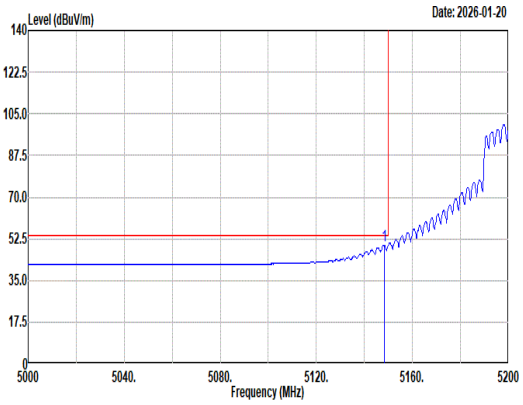 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.20 49.78 54.00 -4.22 41.26 33.29 11.42 36.19 0.00 283 91 Average	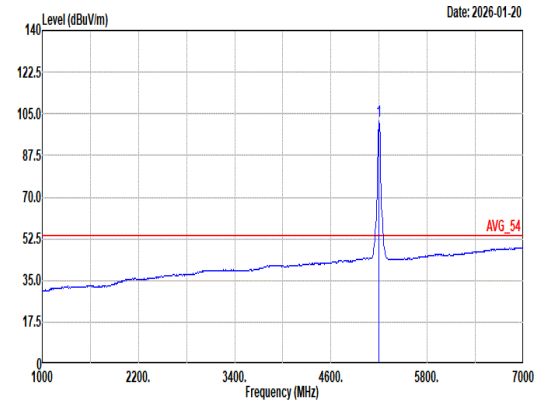 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5200.00 102.21 ------ ------ 93.74 33.20 11.46 36.19 0.00 283 91 Average

Mode	16	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	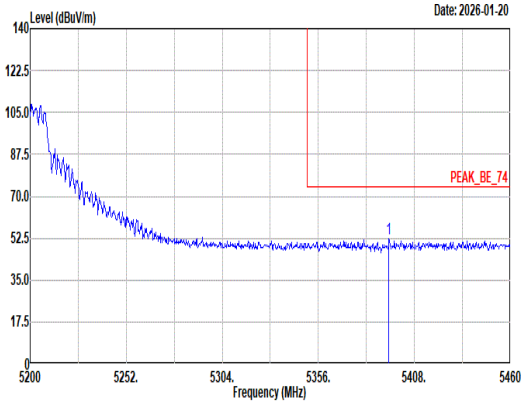 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5394.22 52.10 74.00 -21.90 43.52 33.09 11.71 36.22 0.00 283 91 Peak	Blank
Avg	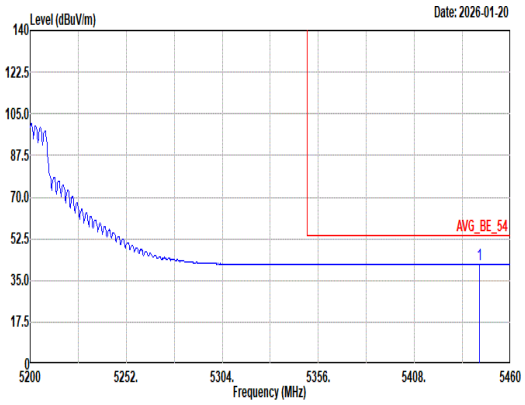 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.10 41.70 54.00 -12.30 33.15 33.01 11.76 36.22 0.00 283 91 Average	Blank

Mode	16	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	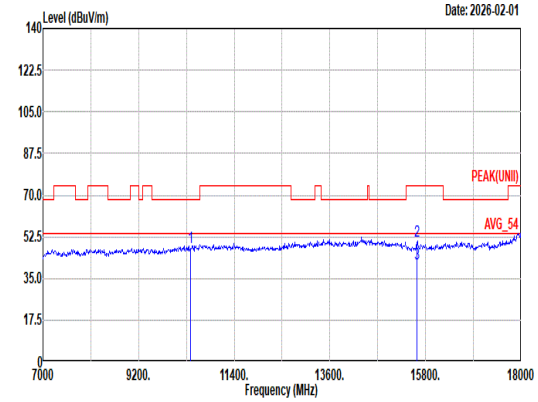 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.03 68.20 -20.17 59.03 38.70 16.17 66.84 0.97 -- -- Peak 2 15600.00 50.86 74.00 -23.14 58.76 37.99 19.92 66.47 0.66 146 108 Peak 3 15600.00 41.32 54.00 -12.68 49.21 38.00 19.92 66.47 0.66 146 108 Average	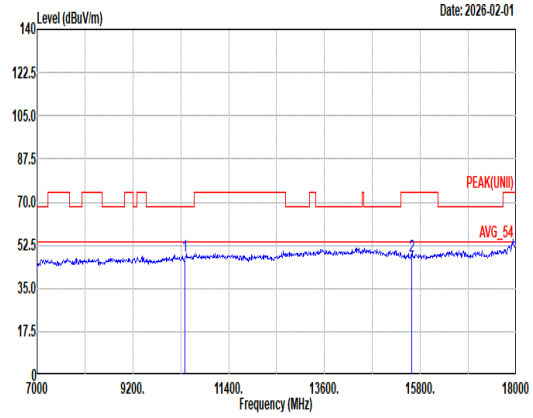 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10400.00 48.15 68.20 -20.05 59.15 38.70 16.17 66.84 0.97 -- -- Peak 2 15600.00 47.92 74.00 -26.08 55.82 37.99 19.92 66.47 0.66 -- -- Peak

Mode	16	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	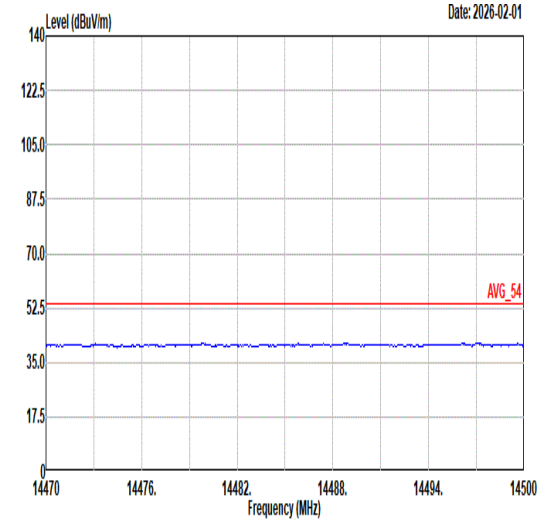 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	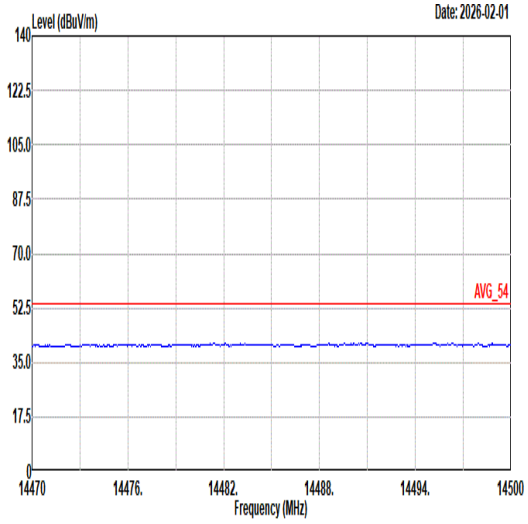 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	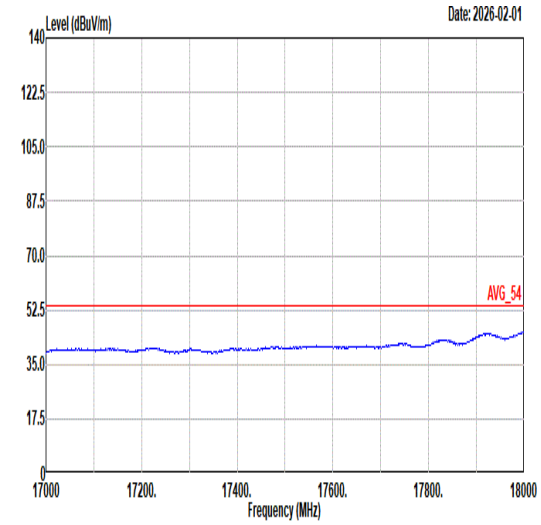 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	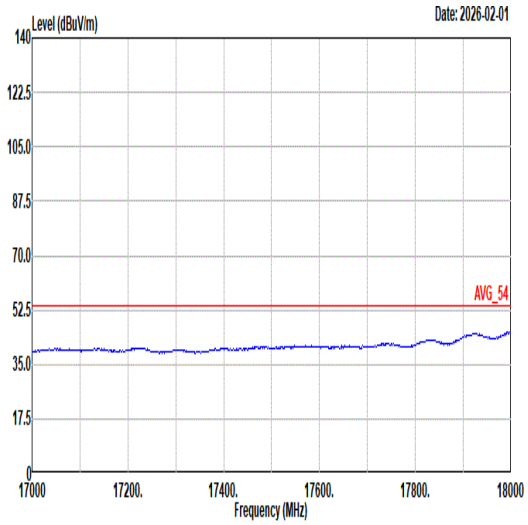 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	17	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	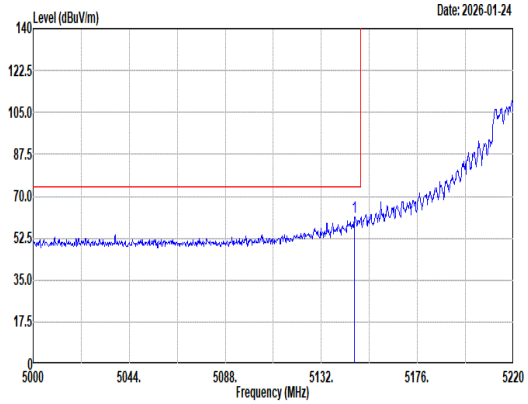 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.18 61.16 74.00 -12.84 52.64 33.29 11.42 36.19 0.00 147 360 Peak	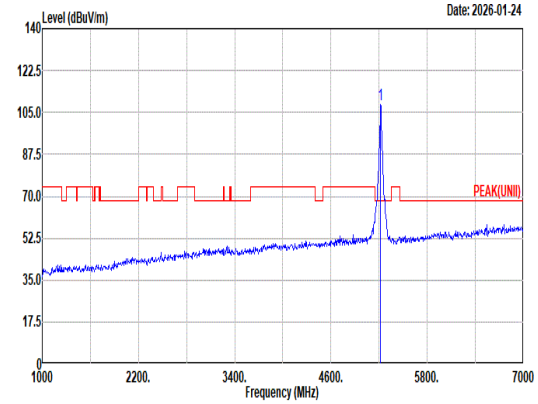 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 108.24 ------ ------ 99.80 33.16 11.48 36.20 0.00 147 360 Peak
Avg	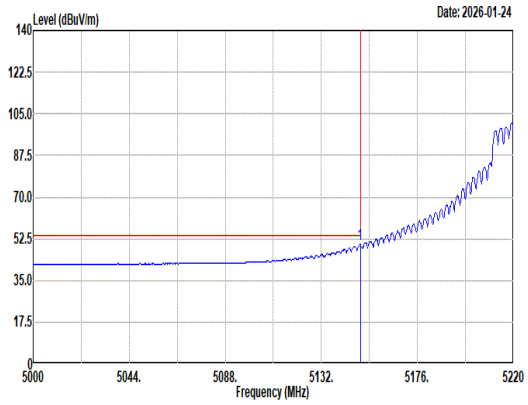 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.82 50.12 54.00 -3.88 41.59 33.30 11.42 36.19 0.00 147 360 Average	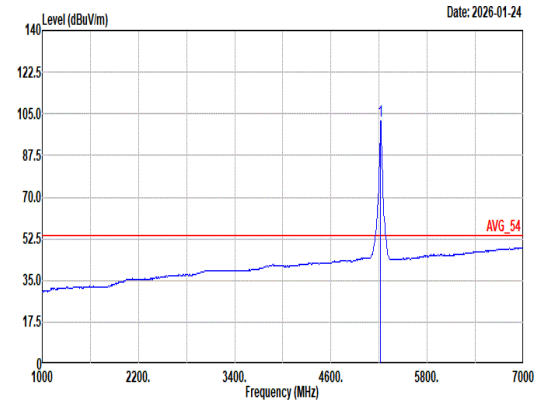 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 102.14 ------ ------ 93.70 33.16 11.48 36.20 0.00 147 360 Average

Mode	17	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	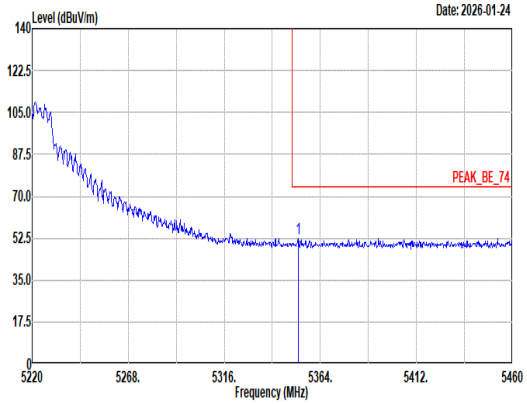 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.96 52.21 74.00 -21.79 43.75 33.01 11.66 36.21 0.00 147 360 Peak	Blank
Avg	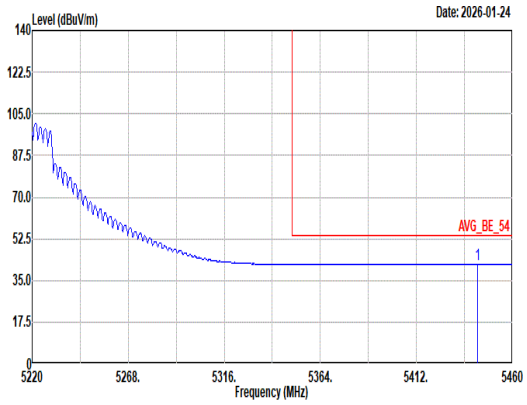 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5442.48 41.71 54.00 -12.29 33.15 33.02 11.76 36.22 0.00 147 360 Average	Blank

Mode	17	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	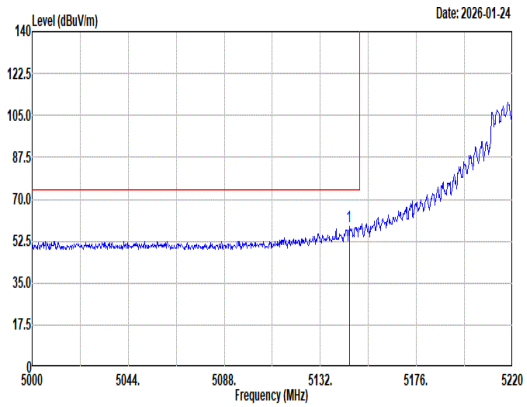 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5145.20 58.53 74.00 -15.47 50.02 33.28 11.42 36.19 0.00 312 85 Peak	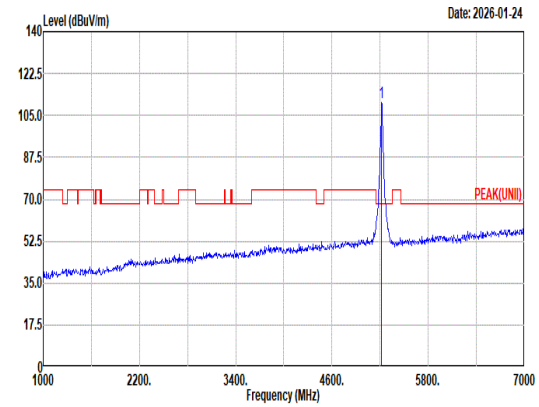 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 110.66 ------ ------ 102.22 33.16 11.48 36.20 0.00 312 85 Peak
Avg	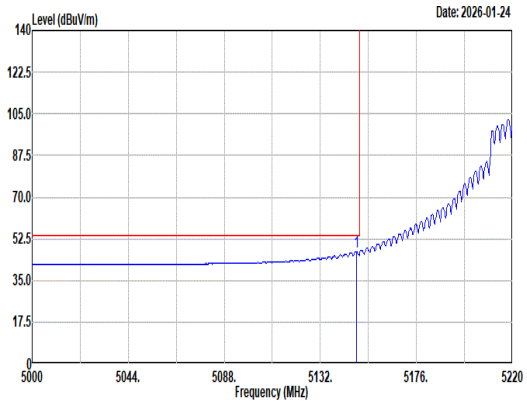 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.50 47.28 54.00 -6.72 38.76 33.29 11.42 36.19 0.00 312 85 Average	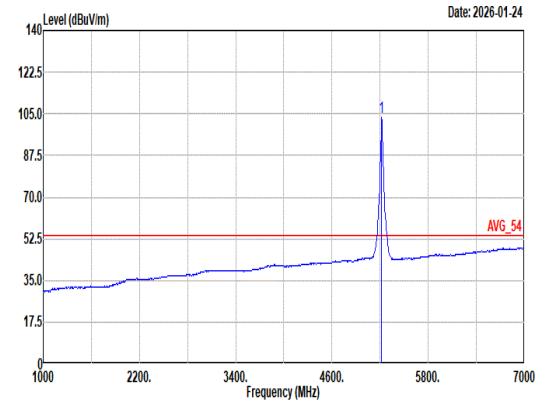 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5220.00 103.66 ------ ------ 95.22 33.16 11.48 36.20 0.00 312 85 Average

Mode	17	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	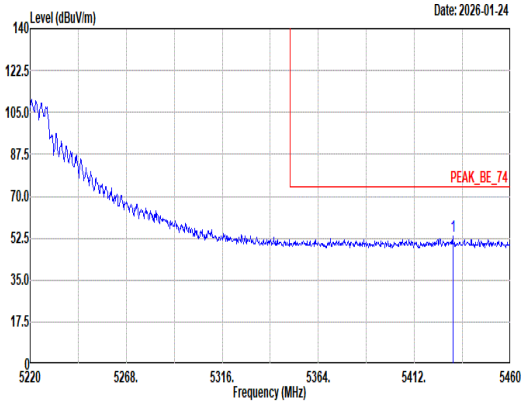 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5431.20 53.20 74.00 -20.80 44.63 33.04 11.75 36.22 0.00 312 85 Peak	Blank
Avg	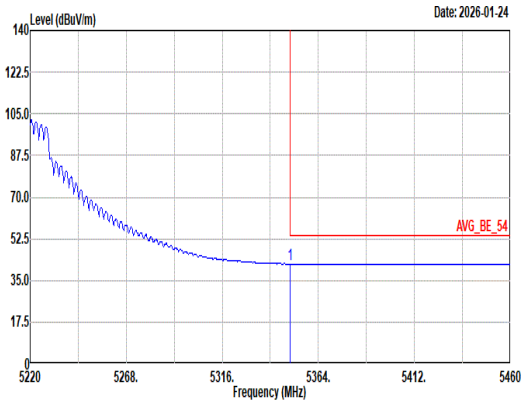 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 41.91 54.00 -12.09 33.46 33.00 11.66 36.21 0.00 312 85 Average	Blank

Mode	17	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	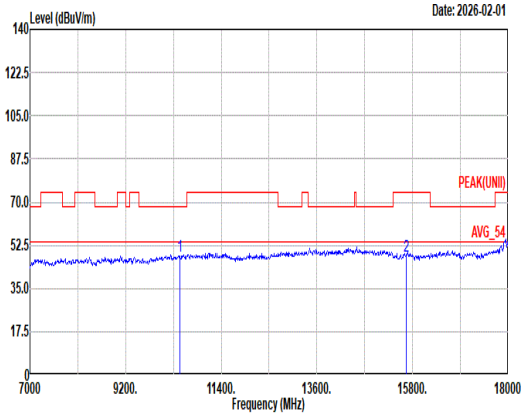 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.12 68.20 -20.08 59.07 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.89 74.00 -26.11 56.06 37.73 19.95 66.52 0.67 -- -- Peak	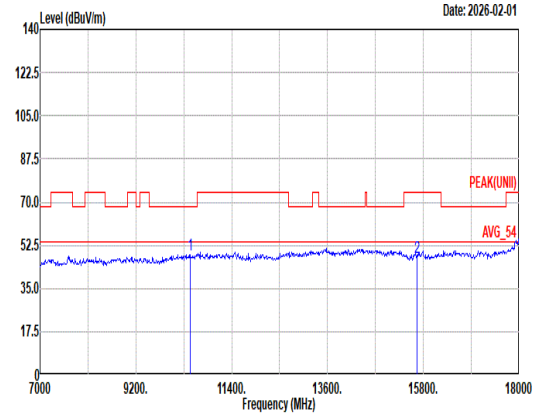 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10440.00 48.53 68.20 -19.67 59.48 38.70 16.20 66.81 0.96 -- -- Peak 2 15660.00 47.78 74.00 -26.22 55.95 37.73 19.95 66.52 0.67 -- -- Peak

Mode	17	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	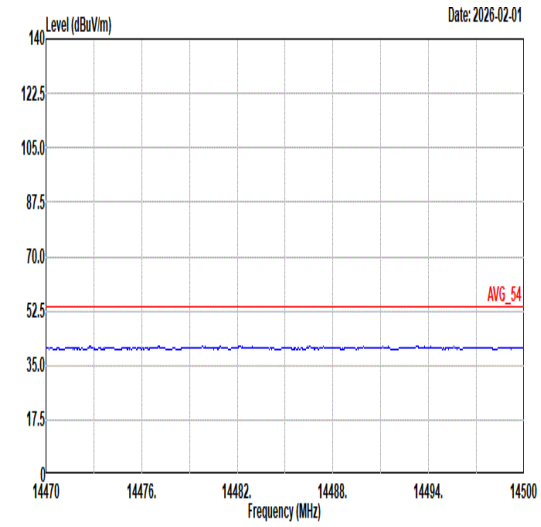 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	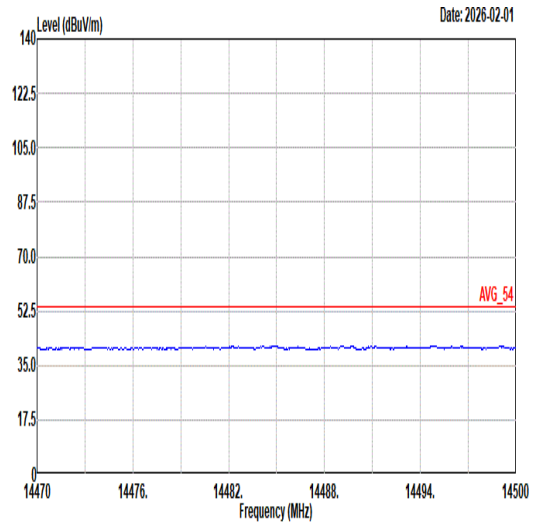 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	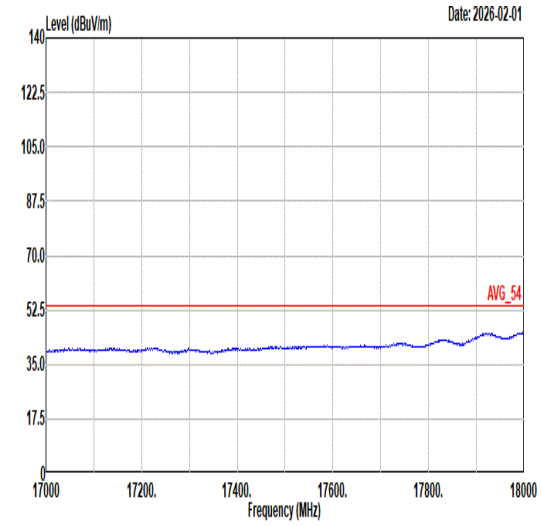 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	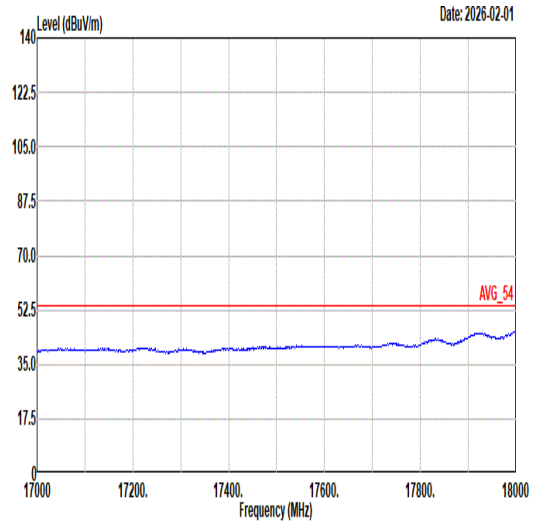 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	18	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	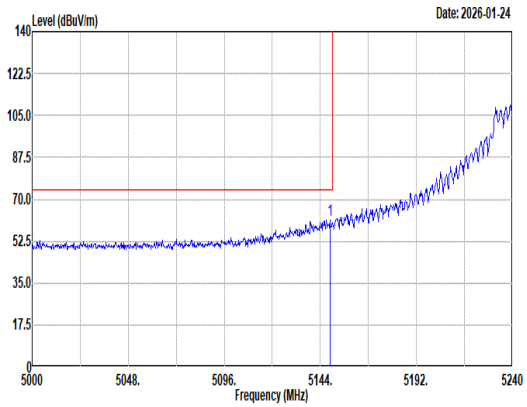 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5148.80 61.30 74.00 -12.70 52.77 33.30 11.42 36.19 0.00 149 360 Peak	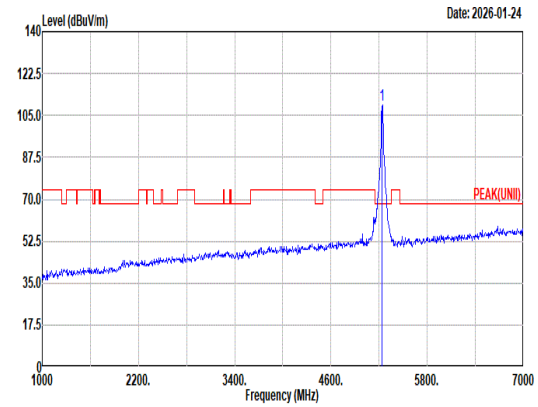 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5240.00 109.24 ------ ------ 100.81 33.12 11.51 36.20 0.00 149 360 Peak
Avg	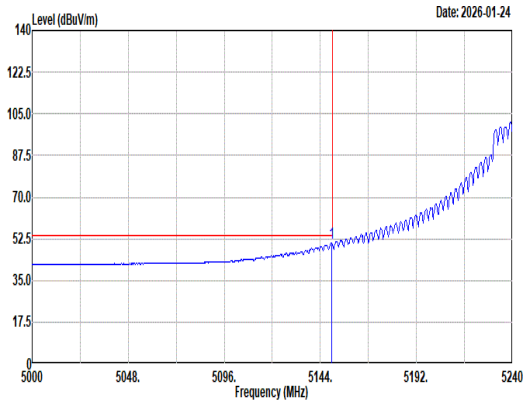 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.52 50.81 54.00 -3.19 42.28 33.30 11.42 36.19 0.00 149 360 Average	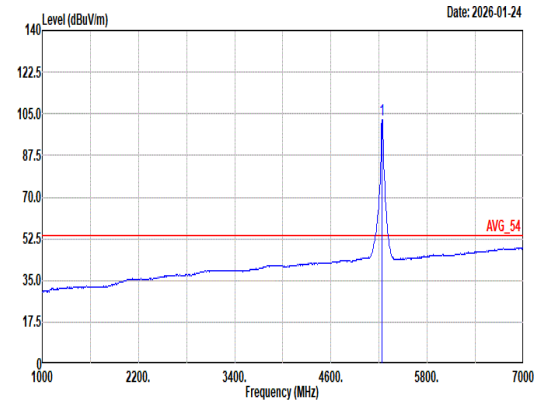 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5240.00 102.35 ------ ------ 93.92 33.12 11.51 36.20 0.00 149 360 Average

Mode	18	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	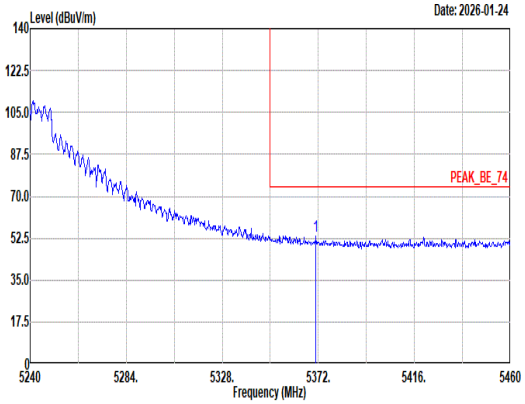 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5370.90 53.39 74.00 -20.61 44.88 33.04 11.68 36.21 0.00 149 360 Peak	Blank
Avg	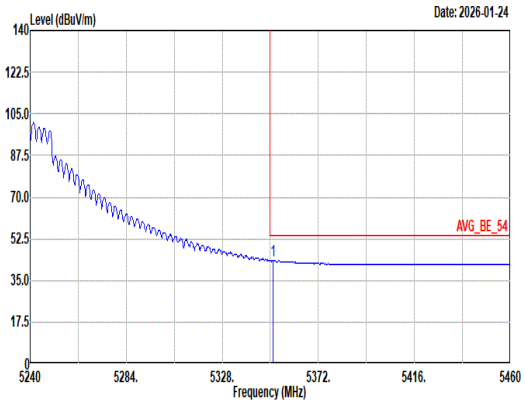 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.32 43.39 54.00 -10.61 34.94 33.00 11.66 36.21 0.00 149 360 Average	Blank

Mode	18	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	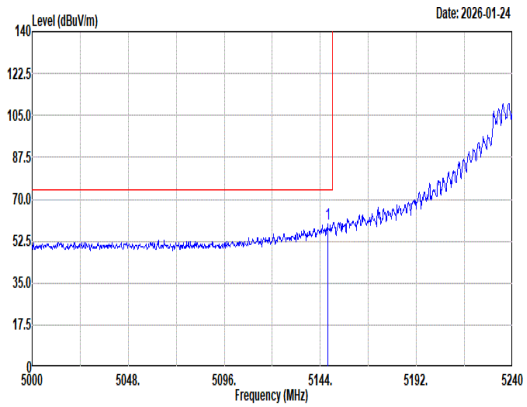 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.60 59.45 74.00 -14.55 50.93 33.29 11.42 36.19 0.00 400 81 Peak	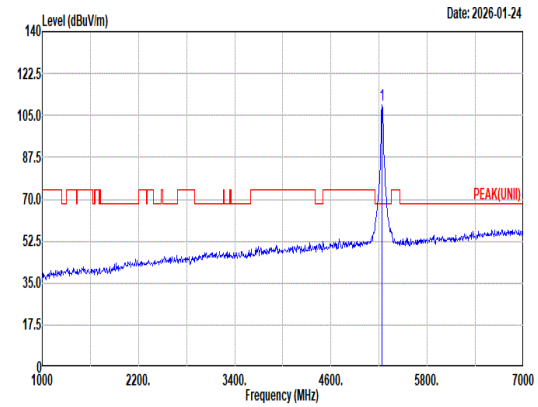 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 109.56 ------ ------ 101.12 33.13 11.51 36.20 0.00 400 81 Peak
Avg	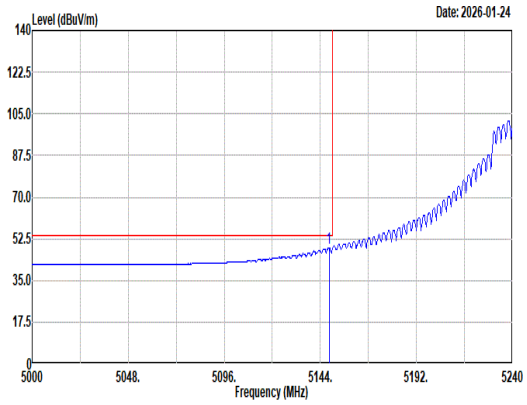 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.32 48.69 54.00 -5.31 40.17 33.29 11.42 36.19 0.00 400 81 Average	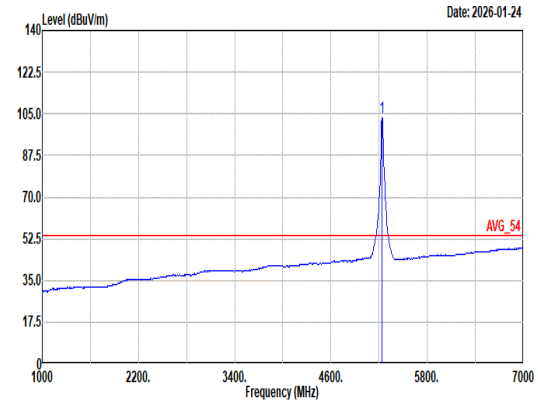 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5240.00 103.44 ------ ------ 95.00 33.13 11.51 36.20 0.00 400 81 Average

Mode	18	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	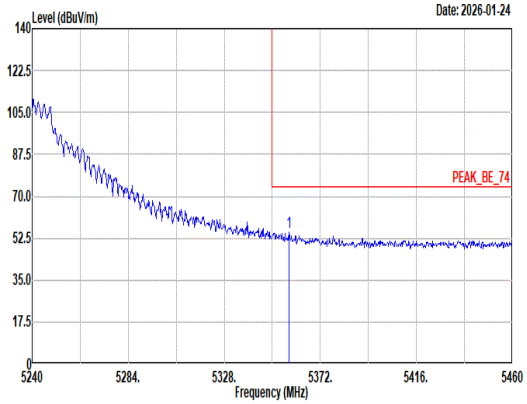 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5357.48 54.77 74.00 -19.23 46.31 33.01 11.66 36.21 0.00 400 81 Peak	Blank
Avg	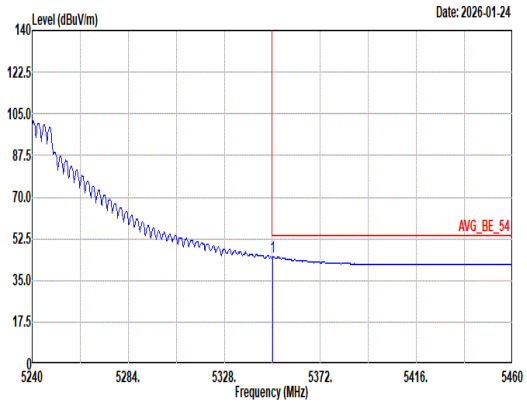 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.22 45.06 54.00 -8.94 36.61 33.00 11.66 36.21 0.00 400 81 Average	Blank

Mode	18	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	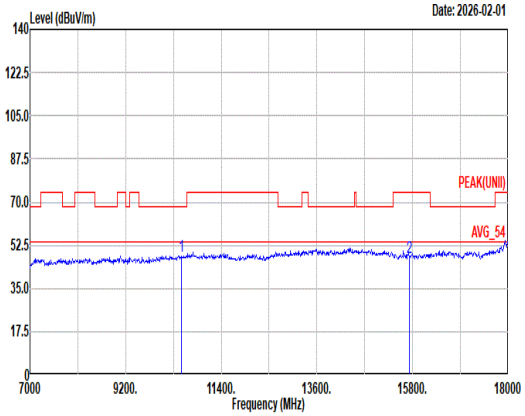 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL 1 10480.00 48.02 68.20 -20.18 58.92 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 47.79 74.00 -26.21 55.76 37.95 19.99 66.58 0.67 -- -- Peak	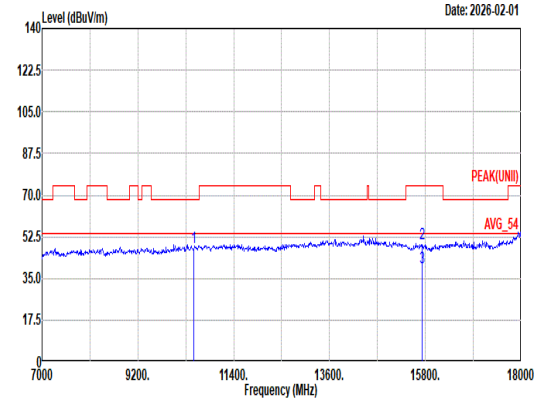 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL 1 10480.00 48.09 68.20 -20.11 58.99 38.70 16.23 66.78 0.95 -- -- Peak 2 15720.00 49.74 74.00 -24.26 57.71 37.95 19.99 66.58 0.67 194 346 Peak 3 15720.00 39.37 54.00 -14.63 47.34 37.94 19.99 66.57 0.67 194 346 Average

Mode	18	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	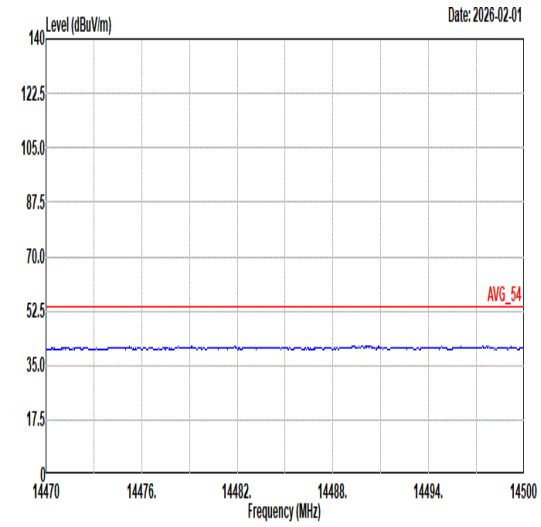 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	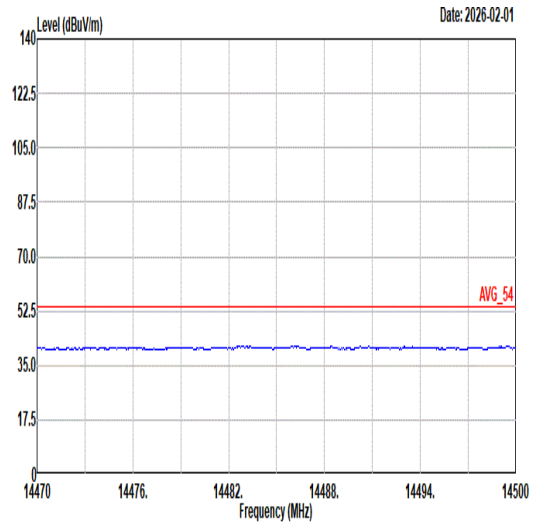 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	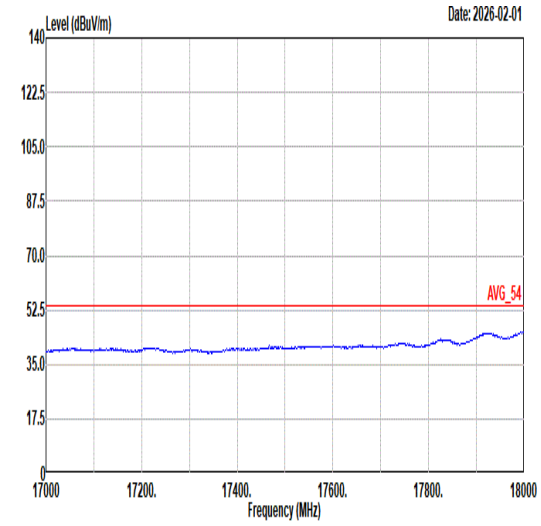 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	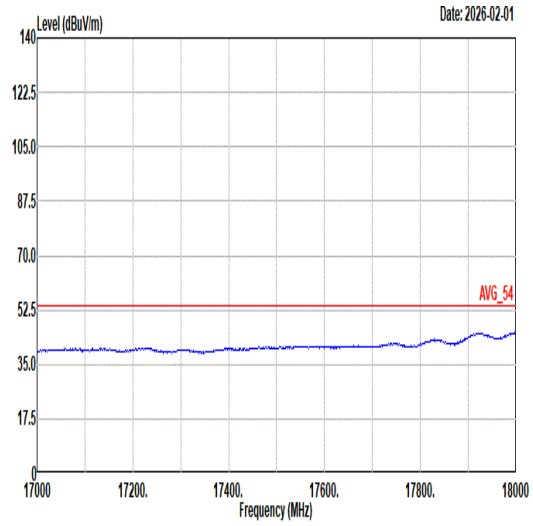 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL