Mode	19	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	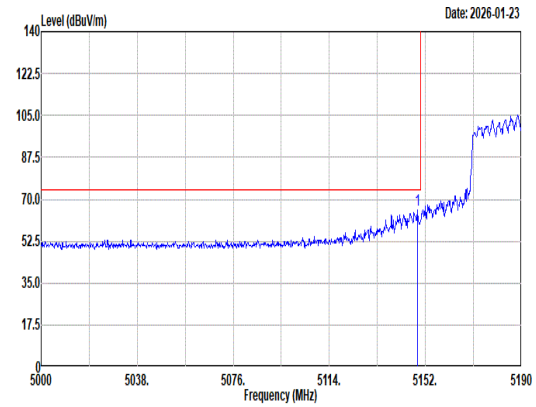 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5148.77 65.49 74.00 -8.51 56.96 33.30 11.42 36.19 0.00 177 316 Peak	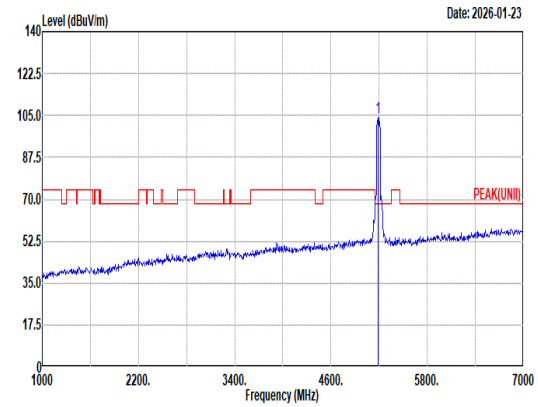 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5190.00 103.98 ------ ------ 95.50 33.21 11.46 36.19 0.00 177 316 Peak
Avg	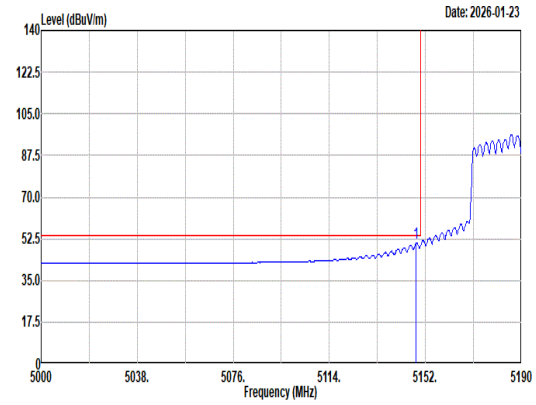 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.39 50.63 54.00 -3.37 42.11 33.29 11.42 36.19 0.00 177 316 Average	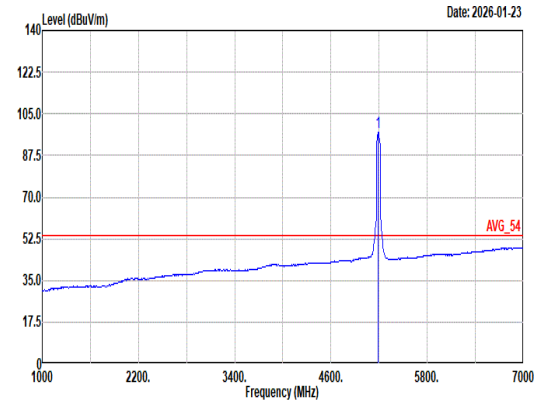 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5190.00 97.28 ------ ------ 88.80 33.22 11.45 36.19 0.00 177 316 Average

Mode	19	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	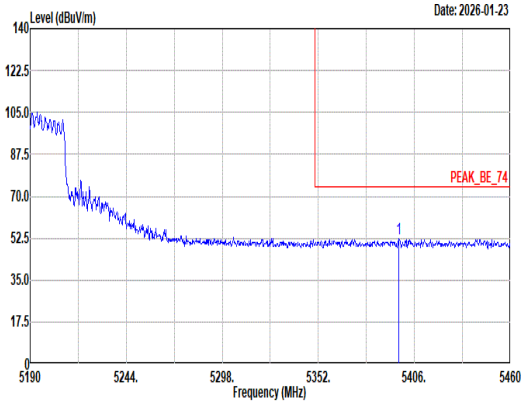 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5397.36 52.39 74.00 -21.61 43.80 33.09 11.72 36.22 0.00 177 316 Peak	Blank
Avg	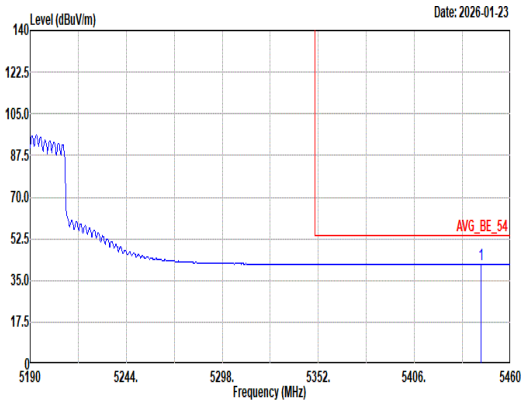 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.53 41.92 54.00 -12.08 33.37 33.01 11.76 36.22 0.00 177 316 Average	Blank

Mode	19	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	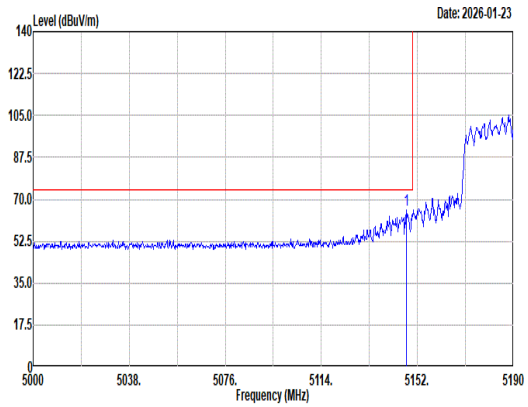 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.63 65.54 74.00 -8.46 57.02 33.29 11.42 36.19 0.00 336 89 Peak	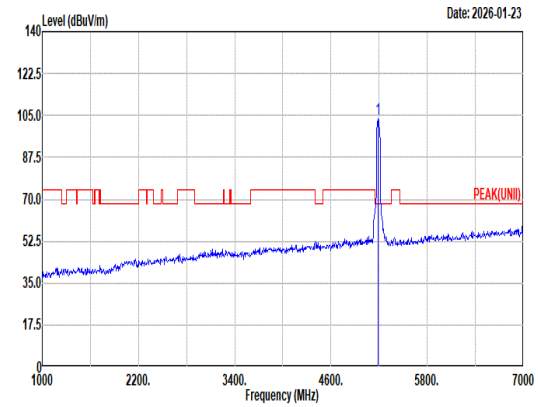 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 103.51 ------ ------ 95.03 33.22 11.45 36.19 0.00 336 89 Peak
Avg	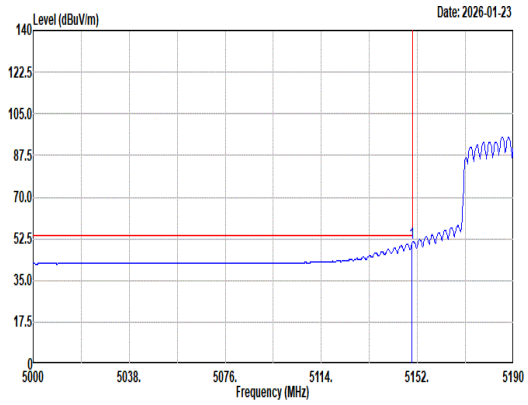 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.91 50.78 54.00 -3.22 42.25 33.30 11.42 36.19 0.00 336 89 Average	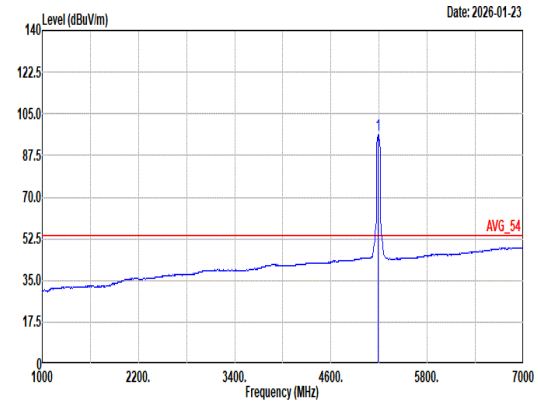 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5190.00 96.16 ------ ------ 87.68 33.22 11.45 36.19 0.00 336 89 Average

Mode	19	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	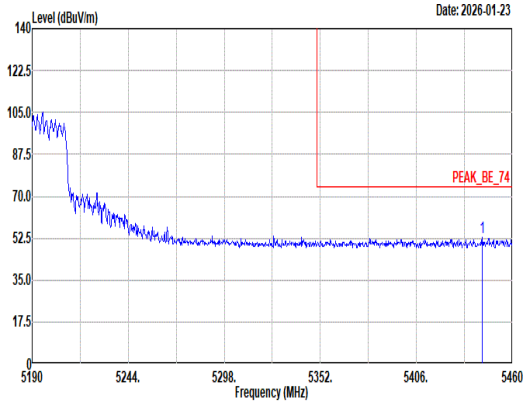 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5442.99 52.81 74.00 -21.19 44.26 33.01 11.76 36.22 0.00 336 89 Peak	Blank
Avg	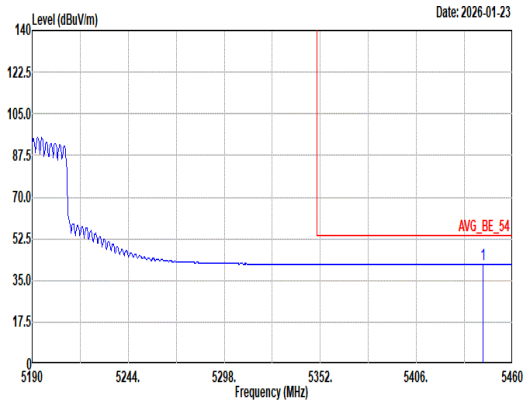 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5443.53 41.92 54.00 -12.08 33.37 33.01 11.76 36.22 0.00 336 89 Average	Blank

Mode	19	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	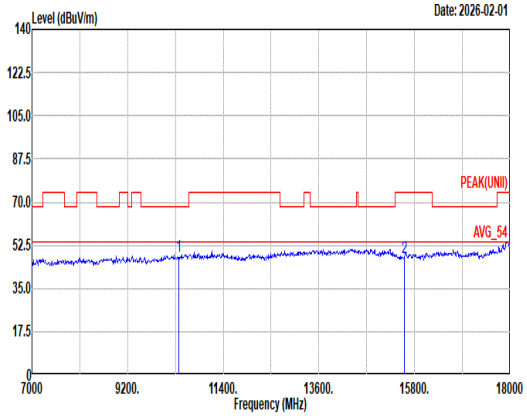 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 48.24 68.20 -19.96 59.28 38.70 16.15 66.86 0.97 -- -- Peak 2 15570.00 47.31 74.00 -26.69 55.07 38.12 19.90 66.44 0.66 -- -- Peak	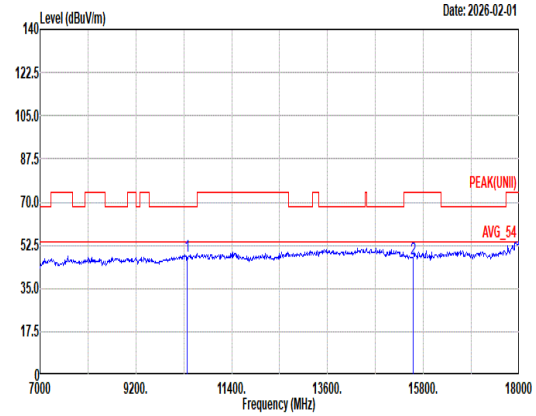 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10380.00 48.25 68.20 -19.95 59.29 38.70 16.15 66.86 0.97 -- -- Peak 2 15570.00 47.22 74.00 -26.78 54.98 38.12 19.90 66.44 0.66 -- -- Peak

Mode	19	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	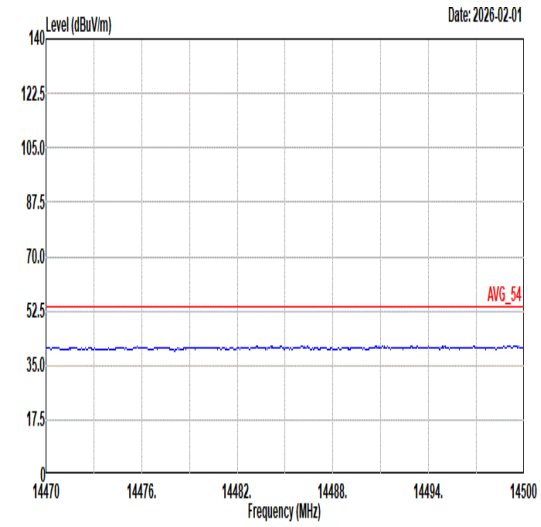 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	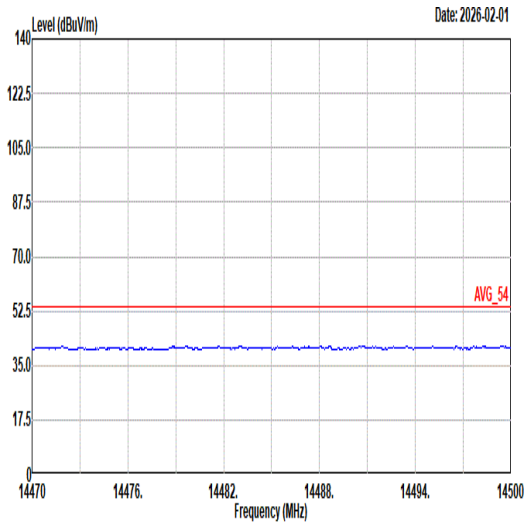 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	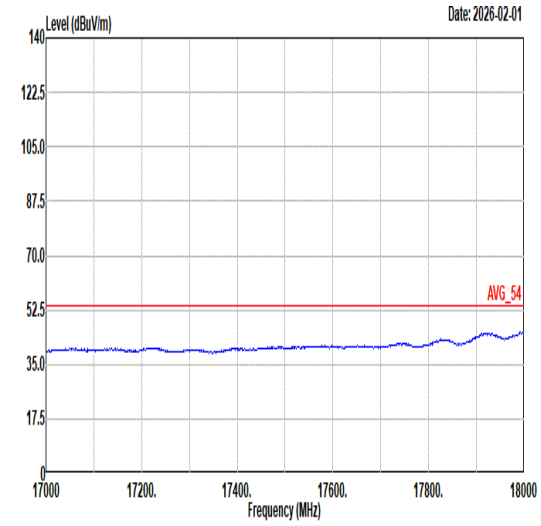 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	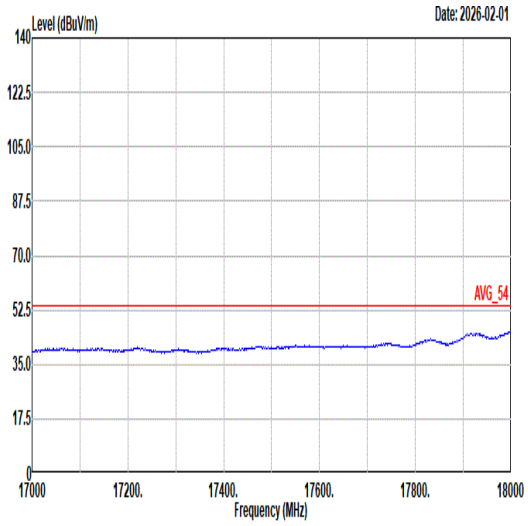 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	20	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	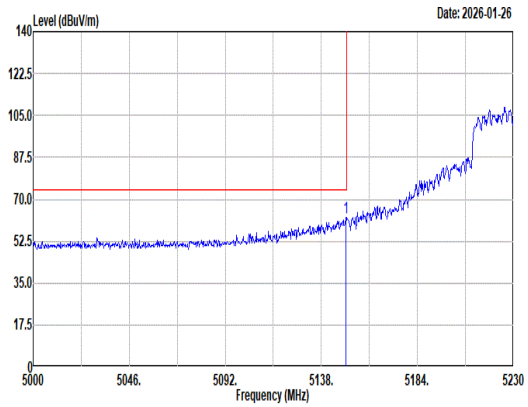 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.73 62.55 74.00 -11.45 54.02 33.30 11.42 36.19 0.00 188 324 Peak	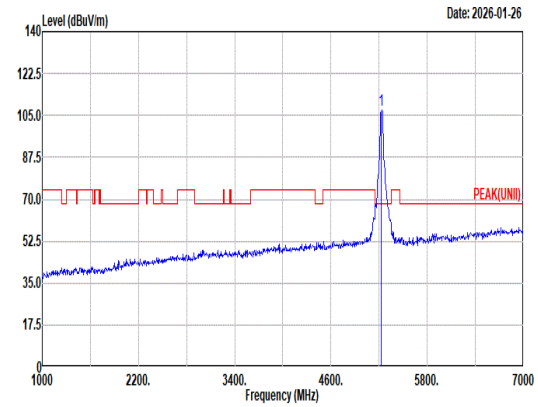 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 107.51 ------ ------ 99.07 33.13 11.51 36.20 0.00 188 324 Peak
Avg	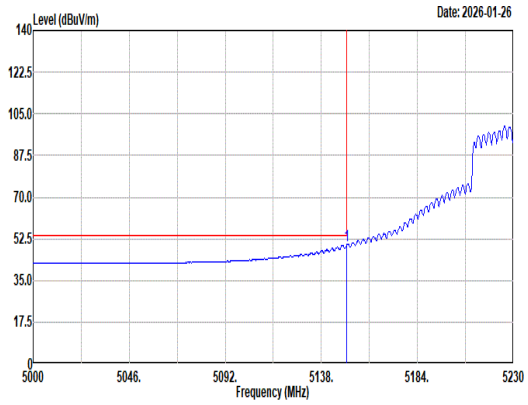 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.96 49.62 54.00 -4.38 41.09 33.30 11.42 36.19 0.00 188 324 Average	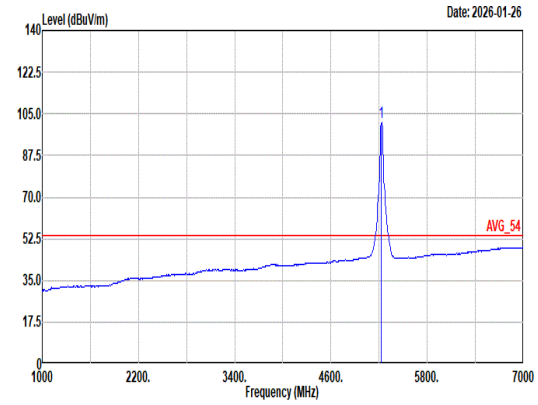 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 101.22 ------ ------ 92.78 33.13 11.51 36.20 0.00 188 324 Average

Mode	20	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	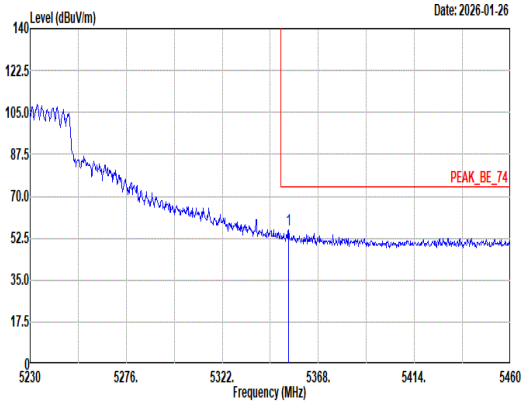 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.74 56.07 74.00 -17.93 47.61 33.01 11.66 36.21 0.00 188 324 Peak	Blank
Avg	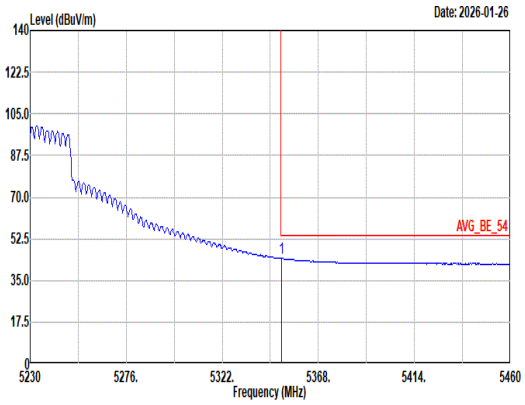 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.29 44.34 54.00 -9.66 35.89 33.00 11.66 36.21 0.00 188 324 Average	Blank

Mode	20	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	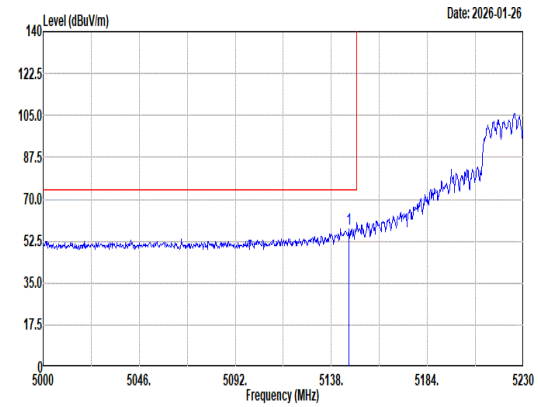 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5146.51 57.71 74.00 -16.29 49.19 33.29 11.42 36.19 0.00 300 73 Peak	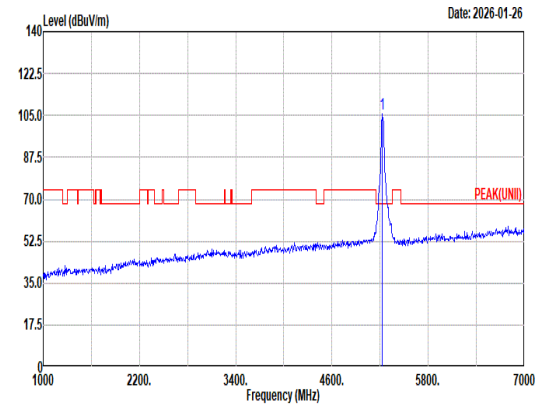 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 105.62 ------ ------ 97.18 33.14 11.50 36.20 0.00 300 73 Peak
Avg	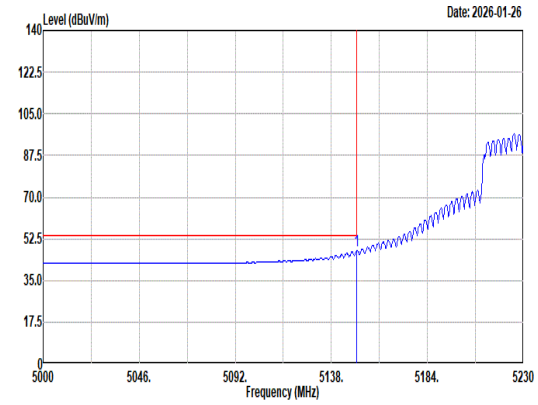 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.96 47.37 54.00 -6.63 38.84 33.30 11.42 36.19 0.00 300 73 Average	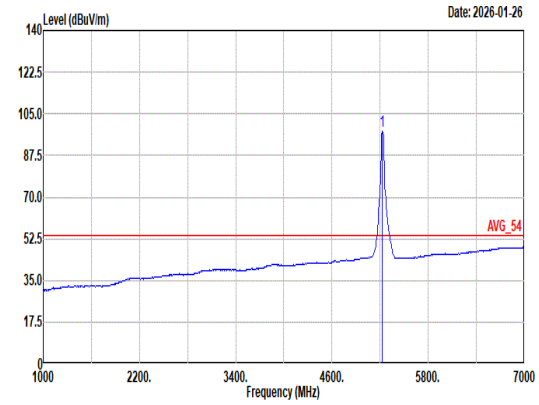 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5230.00 98.00 ------ ------ 89.56 33.15 11.49 36.20 0.00 300 73 Average

Mode	20	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	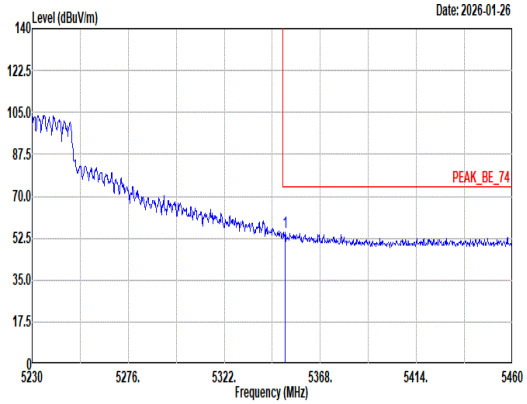 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.21 55.18 74.00 -18.82 46.73 33.00 11.66 36.21 0.00 300 73 Peak	Blank
Avg	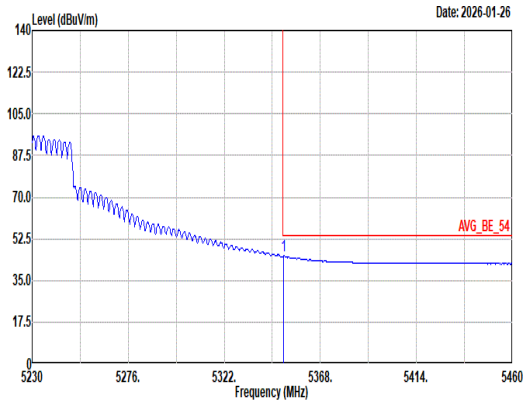 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 45.30 54.00 -8.70 36.85 33.00 11.66 36.21 0.00 300 73 Average	Blank

Mode	20	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	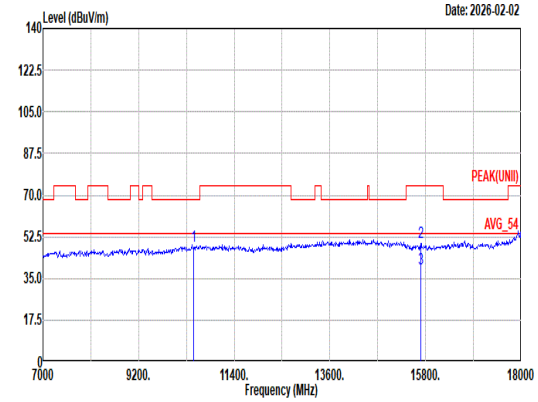 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 48.66 68.20 -19.54 59.58 38.70 16.21 66.79 0.96 -- -- Peak 2 15690.00 50.05 74.00 -23.95 58.10 37.86 19.97 66.55 0.67 100 359 Peak 3 15690.00 39.07 54.00 -14.93 47.12 37.86 19.97 66.55 0.67 100 359 Average	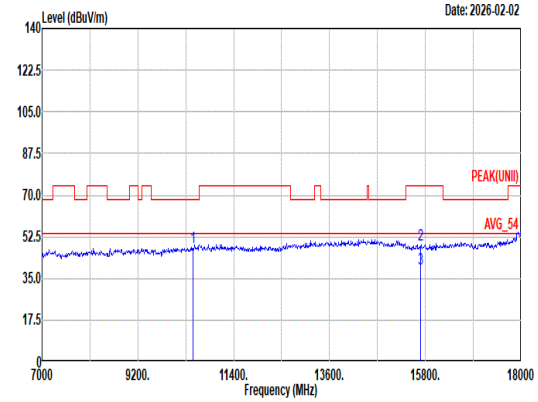 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10460.00 48.12 68.20 -20.08 59.04 38.70 16.21 66.79 0.96 -- -- Peak 2 15690.00 49.36 74.00 -24.64 57.41 37.86 19.97 66.55 0.67 200 107 Peak 3 15690.00 38.90 54.00 -15.10 46.95 37.86 19.97 66.55 0.67 200 107 Average

Mode	20	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	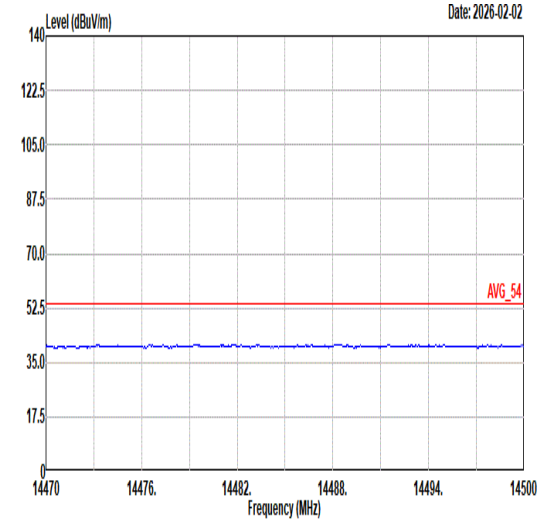 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	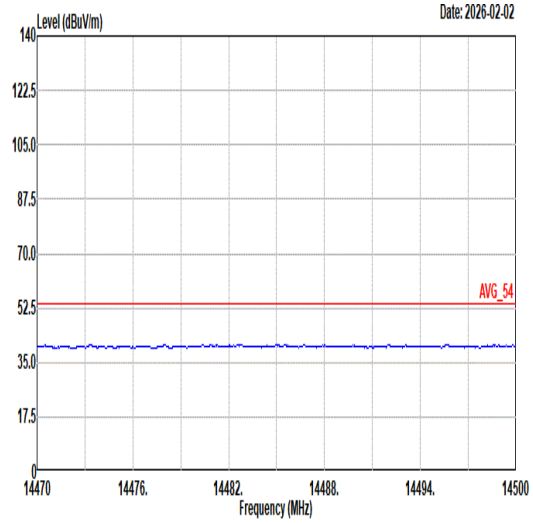 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	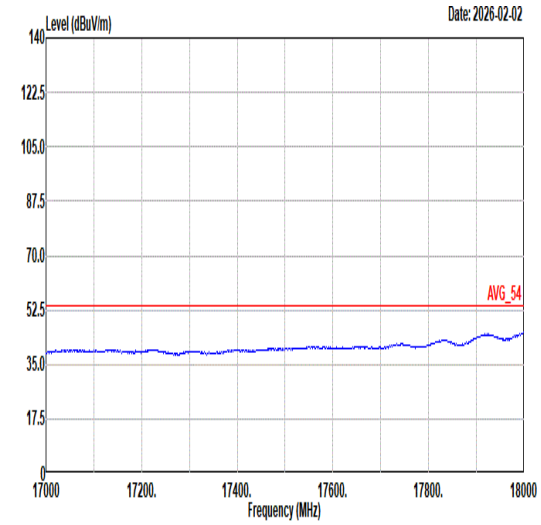 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	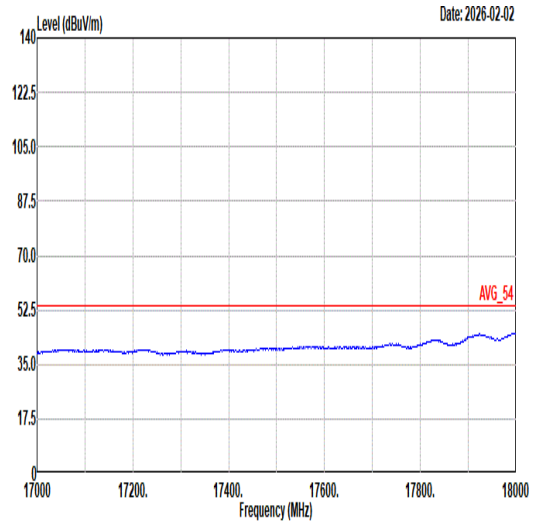 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	21	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	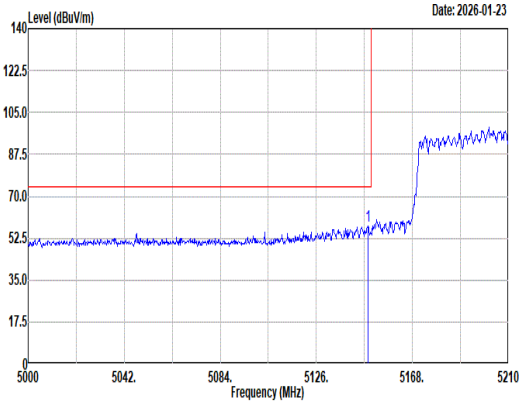 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5148.47 57.34 74.00 -16.66 48.82 33.29 11.42 36.19 0.00 177 313 Peak	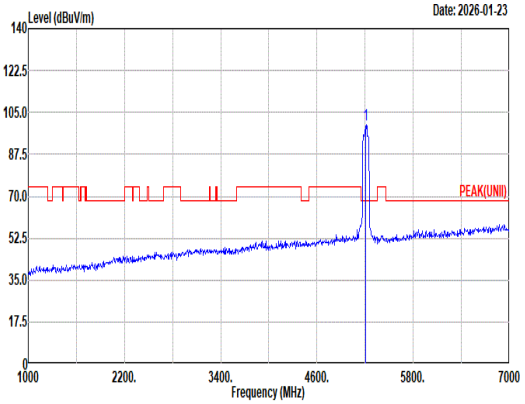 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5210.00 99.77 ------ ------ 91.31 33.18 11.48 36.20 0.00 177 313 Peak
Avg	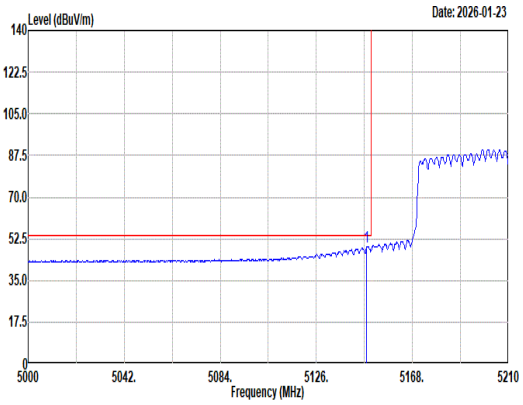 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5148.05 49.05 54.00 -4.95 40.53 33.29 11.42 36.19 0.00 177 313 Average	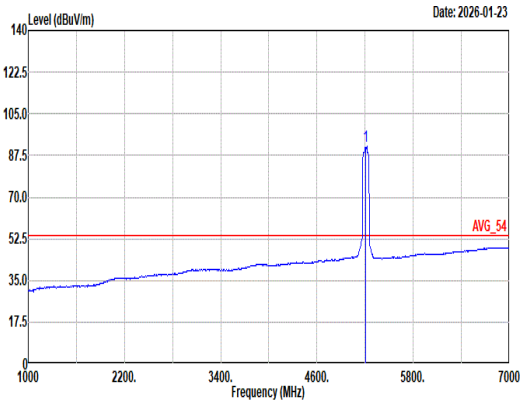 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5210.00 91.17 ------ ------ 82.73 33.15 11.49 36.20 0.00 177 313 Average

Mode	21	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	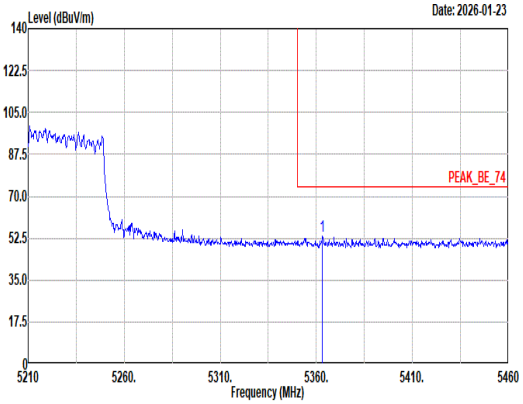 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5363.25 53.20 74.00 -20.80 44.71 33.03 11.67 36.21 0.00 177 313 Peak	Blank
Avg	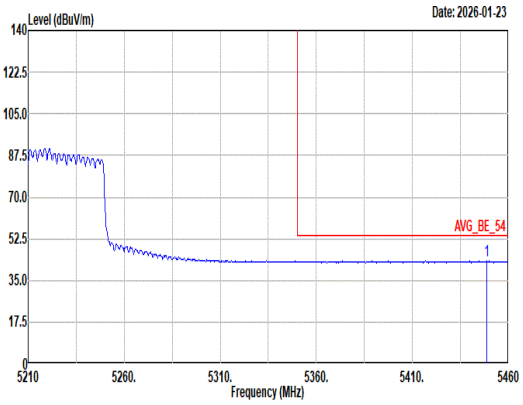 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5448.75 43.55 54.00 -10.45 35.00 33.00 11.77 36.22 0.00 177 313 Average	Blank

Mode	21	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	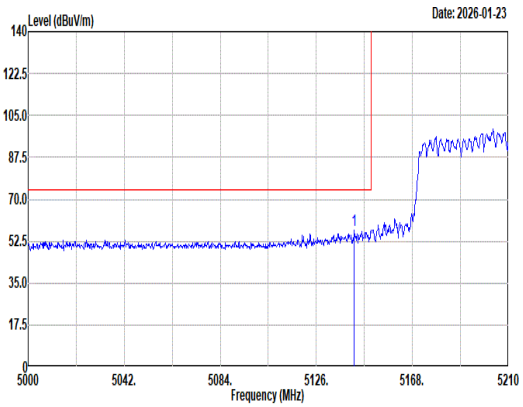 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5142.59 57.04 74.00 -16.96 48.55 33.27 11.41 36.19 0.00 301 91 Peak	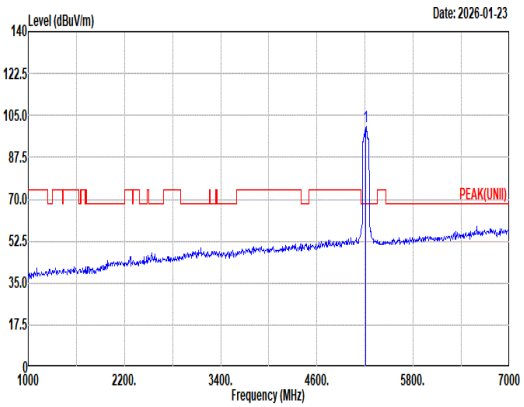 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5210.00 100.41 ------ ------ 91.95 33.18 11.48 36.20 0.00 301 91 Peak
Avg	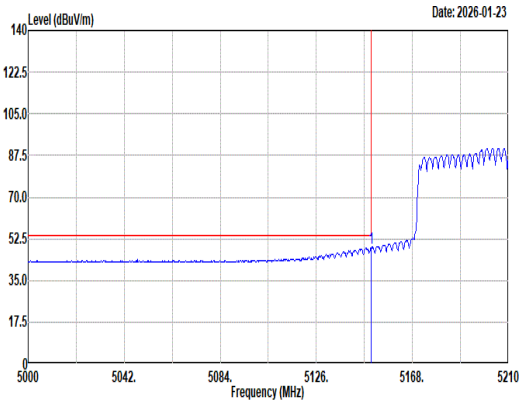 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5149.94 48.54 54.00 -5.46 40.01 33.30 11.42 36.19 0.00 301 91 Average	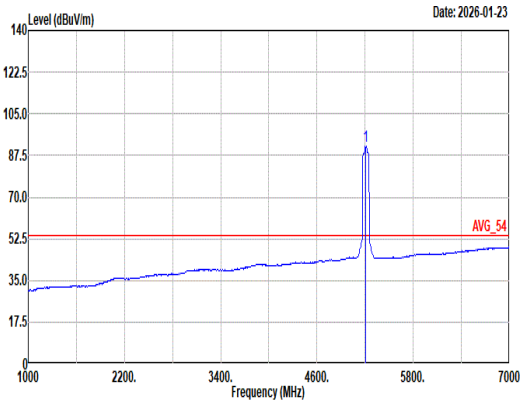 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto 1 5210.00 91.28 ------ ------ 82.84 33.16 11.48 36.20 0.00 301 91 Average

Mode	21	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	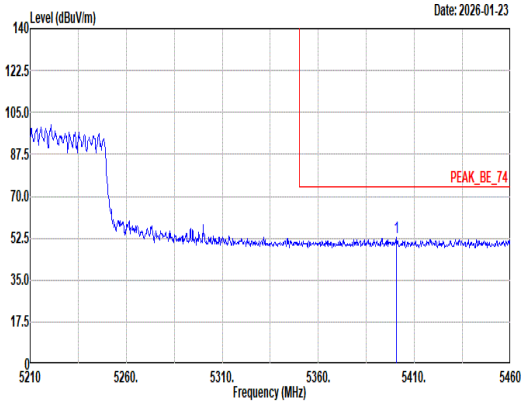 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5400.50 53.02 74.00 -20.98 44.42 33.10 11.72 36.22 0.00 301 91 Peak	Blank
Avg	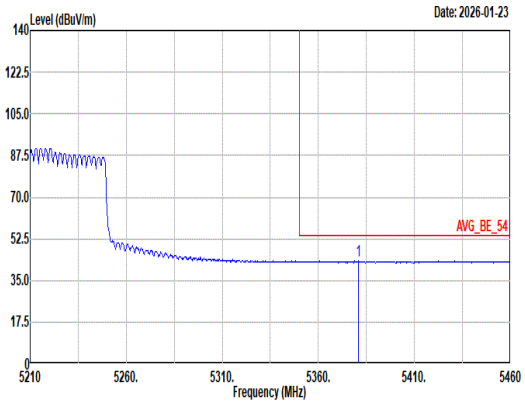 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5380.75 43.19 54.00 -10.81 34.66 33.06 11.69 36.22 0.00 301 91 Average	Blank

Mode	21	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	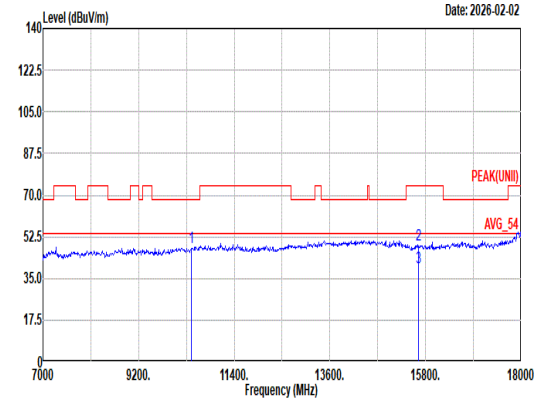 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 48.23 68.20 -19.97 59.22 38.70 16.18 66.83 0.96 -- -- Peak 2 15630.00 49.23 74.00 -24.77 57.30 37.82 19.93 66.49 0.67 100 260 Peak 3 15630.00 39.53 54.00 -14.47 47.60 37.82 19.93 66.49 0.67 100 260 Average	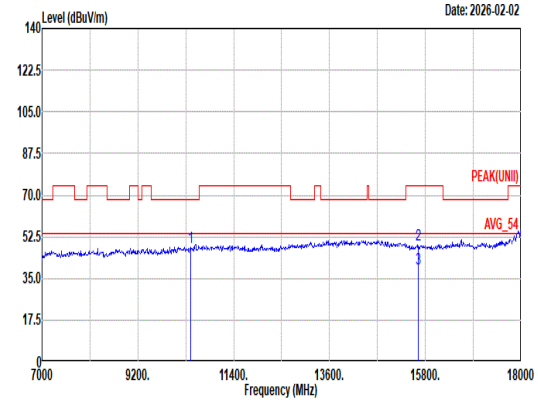 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10420.00 47.94 68.20 -20.26 58.93 38.70 16.18 66.83 0.96 -- -- Peak 2 15630.00 48.93 74.00 -25.07 57.00 37.82 19.93 66.49 0.67 300 256 Peak 3 15630.00 39.33 54.00 -14.67 47.40 37.82 19.93 66.49 0.67 300 256 Average

Mode	21	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	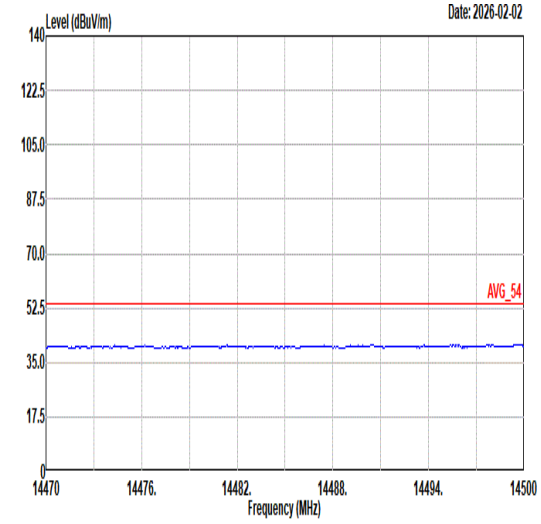 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	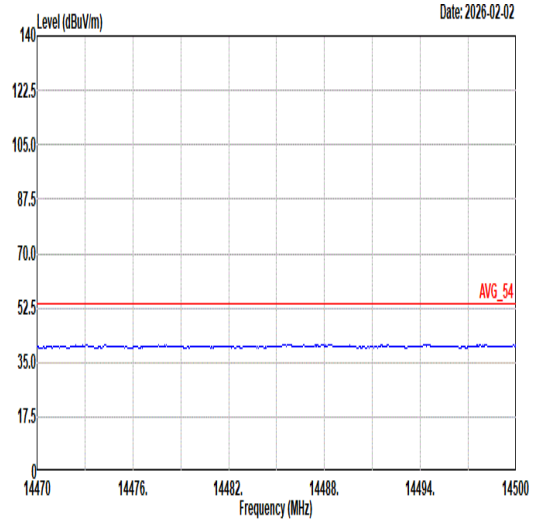 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	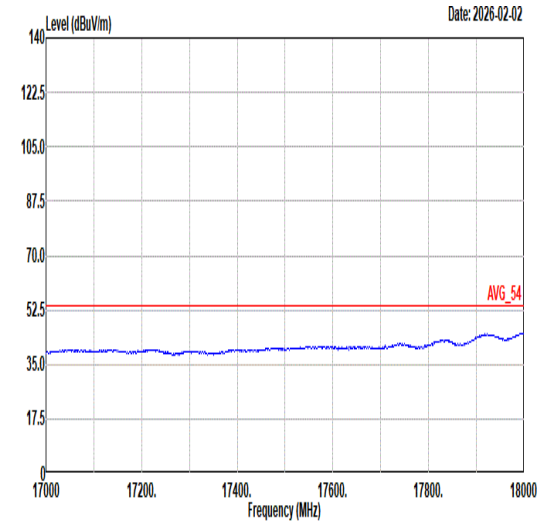 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	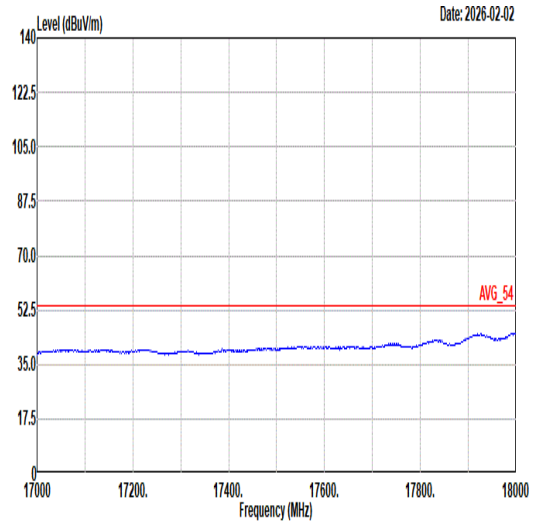 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	22	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	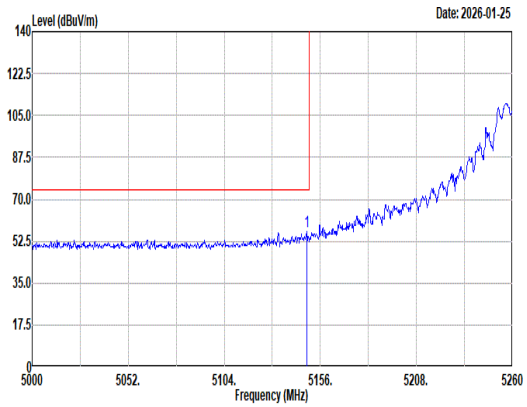 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5148.72 56.59 74.00 -17.41 48.07 33.29 11.42 36.19 0.00 176 325 Peak	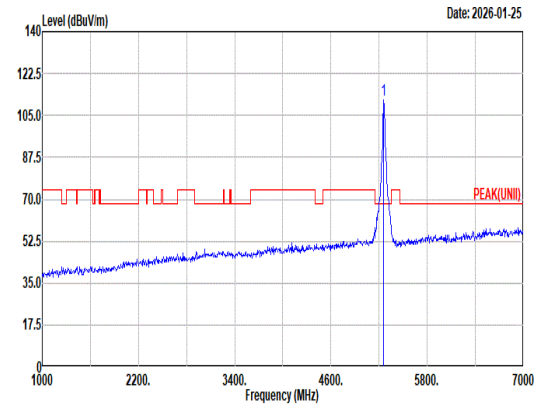 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5260.00 111.57 ------ ------ 103.15 33.08 11.54 36.20 0.00 176 325 Peak
Avg	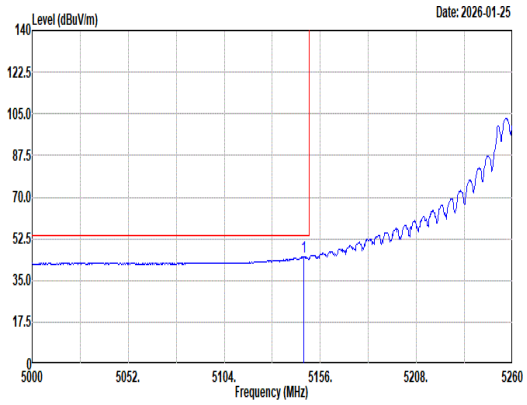 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5147.16 44.95 54.00 -9.05 36.43 33.29 11.42 36.19 0.00 176 325 Average	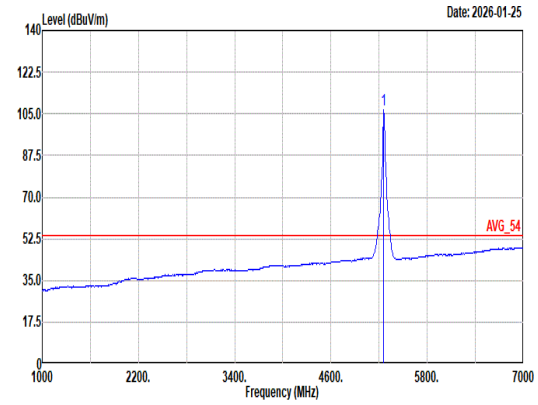 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5260.00 106.53 ------ ------ 98.11 33.08 11.54 36.20 0.00 176 325 Average

Mode	22	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	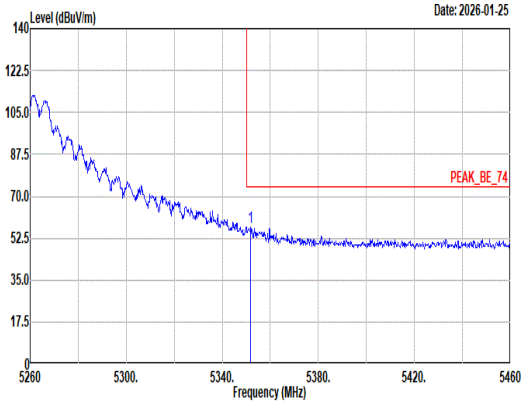 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.80 56.91 74.00 -17.09 48.46 33.00 11.66 36.21 0.00 176 325 Peak	Blank
Avg	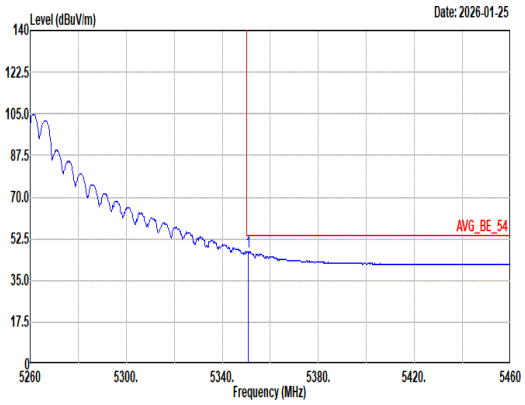 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.80 47.12 54.00 -6.88 38.67 33.00 11.66 36.21 0.00 176 325 Average	Blank

Mode	22	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	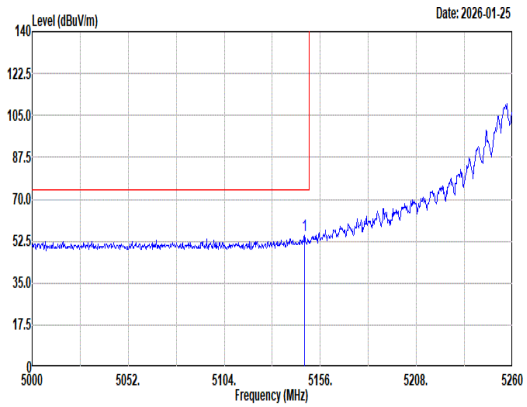 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.42 55.04 74.00 -18.96 46.52 33.29 11.42 36.19 0.00 282 92 Peak	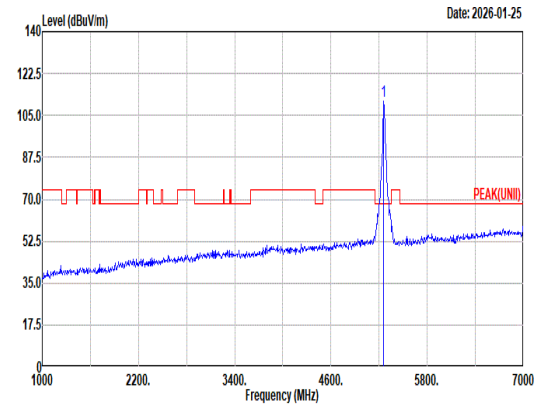 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 111.16 ------ ------ 102.74 33.08 11.54 36.20 0.00 282 92 Peak
Avg	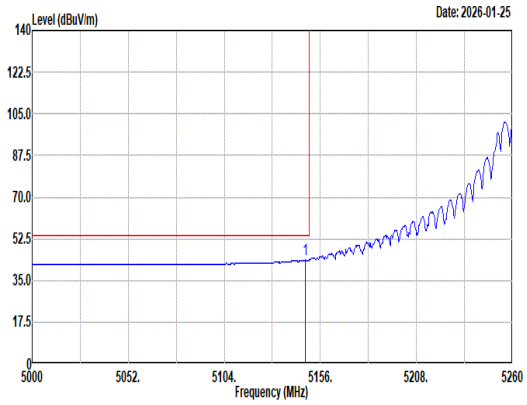 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.94 43.63 54.00 -10.37 35.11 33.29 11.42 36.19 0.00 282 92 Average	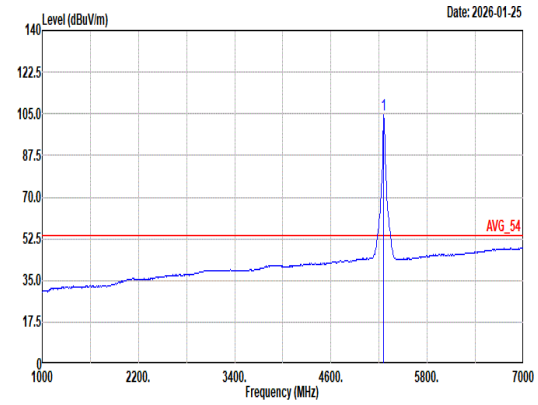 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 104.80 ------ ------ 96.38 33.08 11.54 36.20 0.00 282 92 Average

Mode	22	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	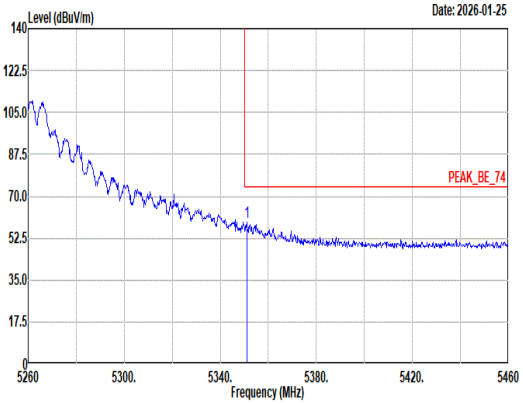 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.00 59.00 74.00 -15.00 50.55 33.00 11.66 36.21 0.00 282 92 Peak	Blank
Avg	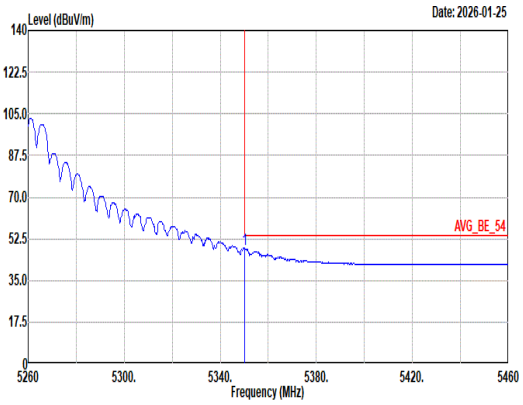 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.20 48.24 54.00 -5.76 39.79 33.00 11.66 36.21 0.00 282 92 Average	Blank

Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	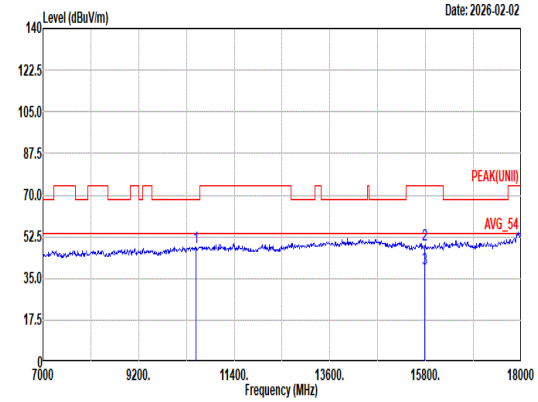 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 48.12 68.20 -20.08 58.90 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 48.91 74.00 -25.09 57.02 37.82 20.03 66.63 0.67 200 104 Peak 3 15780.00 39.27 54.00 -14.73 47.38 37.82 20.03 66.63 0.67 200 104 Average	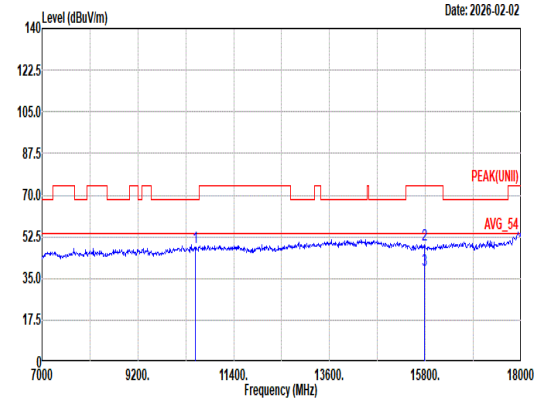 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 48.04 68.20 -20.16 58.82 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 48.94 74.00 -25.06 57.05 37.82 20.03 66.63 0.67 400 87 Peak 3 15780.00 38.65 54.00 -15.35 46.76 37.82 20.03 66.63 0.67 400 87 Average

Mode	22	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	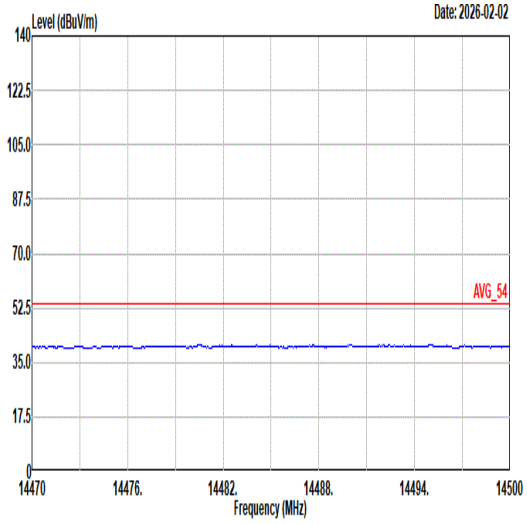 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	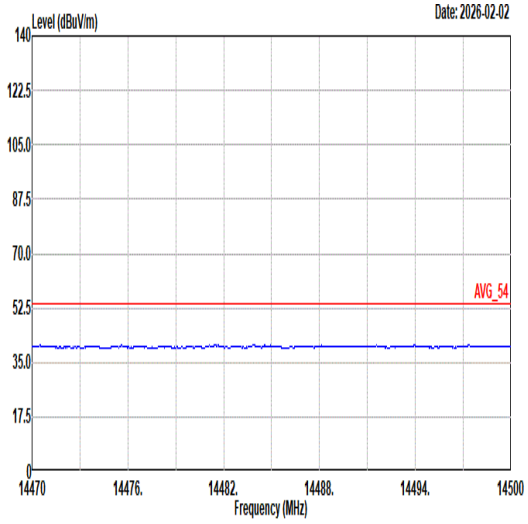 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	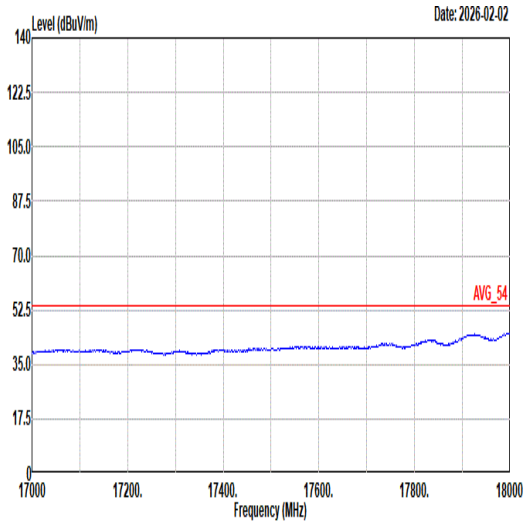 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	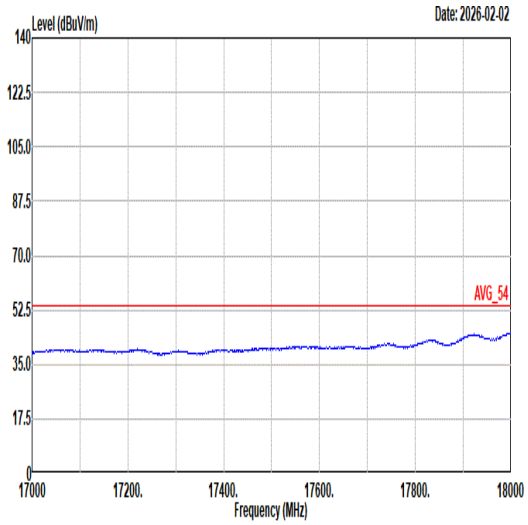 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	23	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	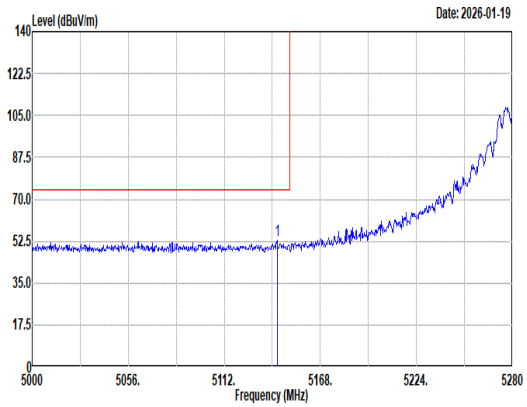 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5142.80 52.57 74.00 -21.43 44.08 33.27 11.41 36.19 0.00 161 324 Peak	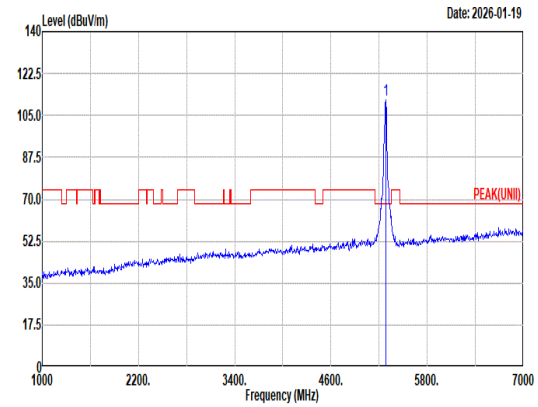 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5280.00 111.26 ------ ------ 102.86 33.03 11.57 36.20 0.00 161 324 Peak
Avg	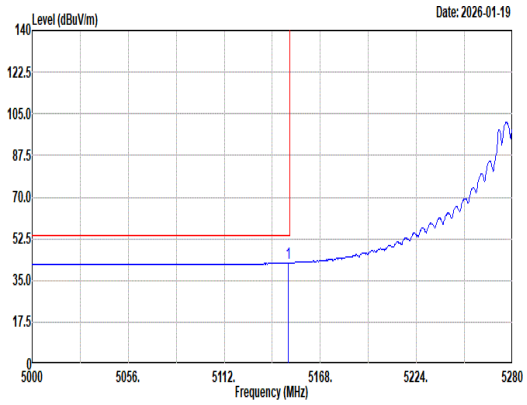 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.24 42.42 54.00 -11.58 33.89 33.30 11.42 36.19 0.00 161 324 Average	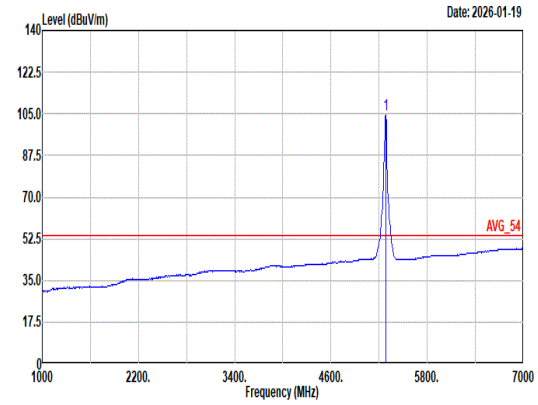 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5280.00 104.74 ------ ------ 96.34 33.03 11.57 36.20 0.00 161 324 Average

Mode	23	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	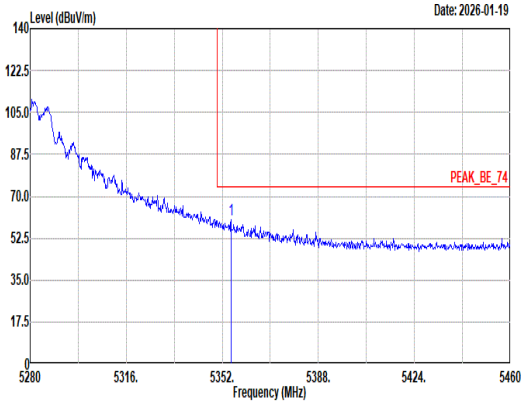 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.24 60.01 74.00 -13.99 51.55 33.01 11.66 36.21 0.00 161 324 Peak	Blank
Avg	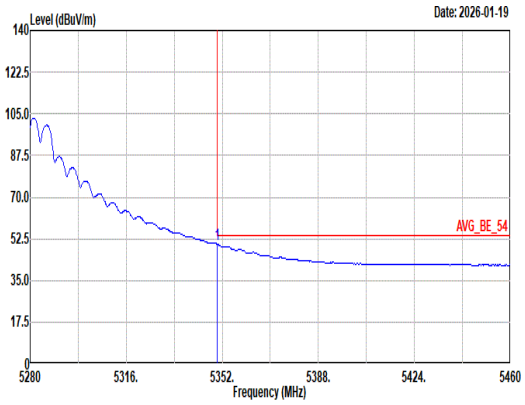 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 50.25 54.00 -3.75 41.80 33.00 11.66 36.21 0.00 161 324 Average	Blank

Mode	23	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	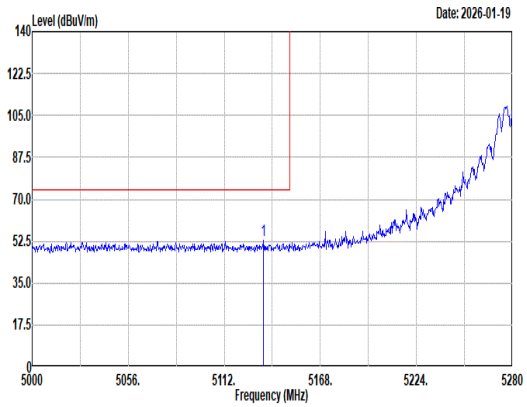 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5134.96 52.66 74.00 -21.34 44.20 33.24 11.41 36.19 0.00 288 97 Peak	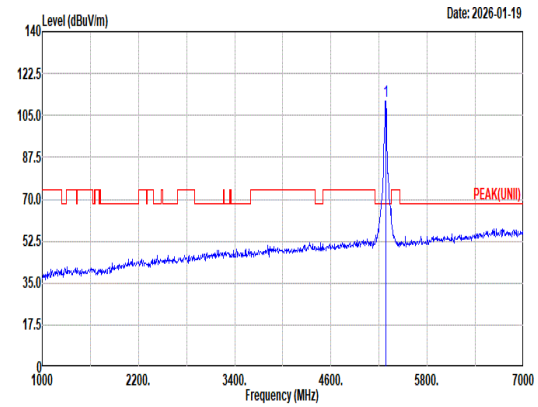 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5280.00 111.10 ------ ------ 102.70 33.04 11.56 36.20 0.00 288 97 Peak
Avg	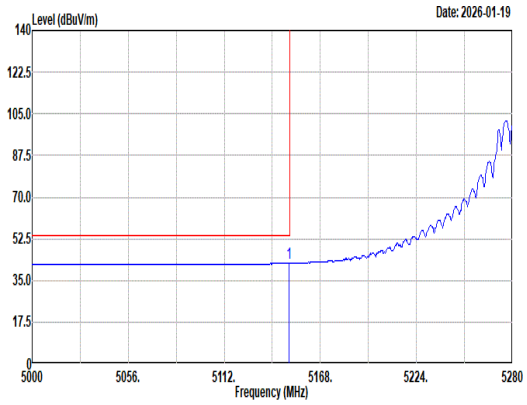 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5149.52 42.18 54.00 -11.82 33.65 33.30 11.42 36.19 0.00 288 97 Average	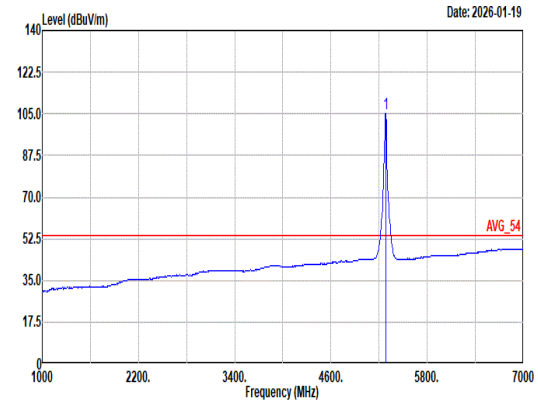 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5280.00 105.29 ------ ------ 96.89 33.03 11.57 36.20 0.00 288 97 Average

Mode	23	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	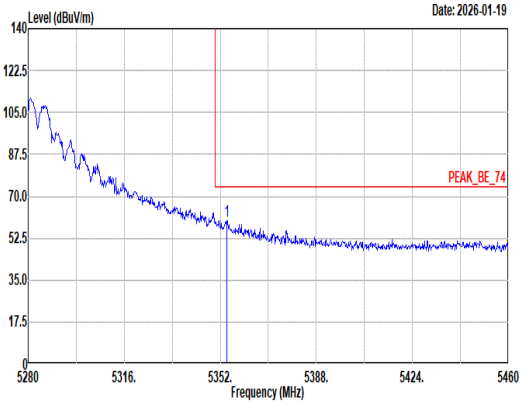 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5354.34 59.74 74.00 -14.26 51.28 33.01 11.66 36.21 0.00 288 97 Peak	Blank
Avg	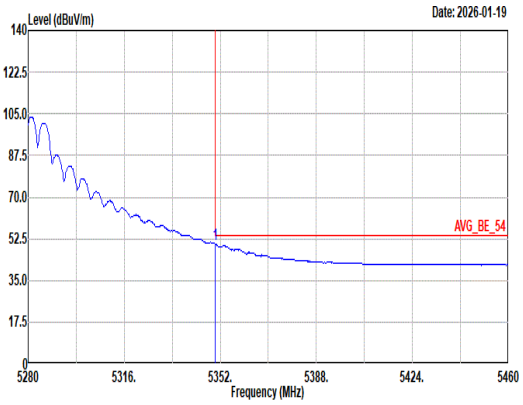 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 50.38 54.00 -3.62 41.93 33.00 11.66 36.21 0.00 288 97 Average	Blank

Mode	23	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	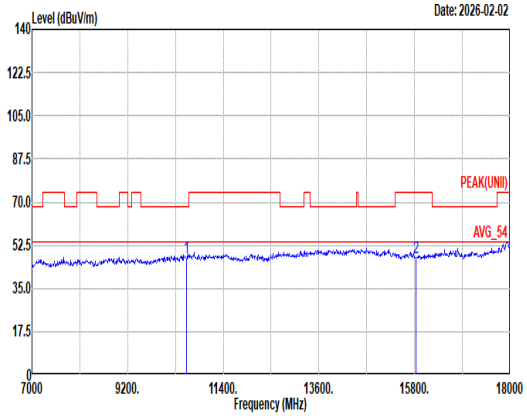 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10560.00 47.37 68.20 -20.83 57.94 38.86 16.28 66.65 0.94 -- -- Peak 2 15840.00 47.72 74.00 -26.28 56.05 37.62 20.06 66.68 0.67 -- -- Peak	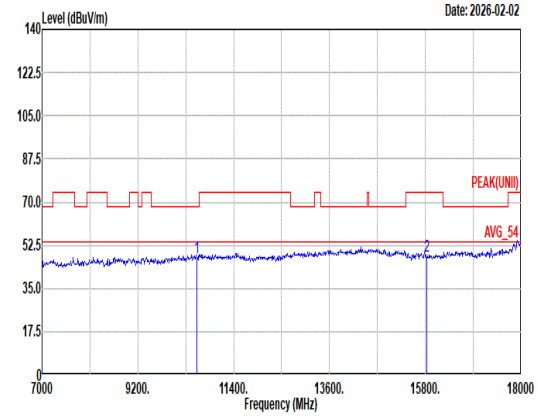 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10560.00 47.77 68.20 -20.43 58.34 38.86 16.28 66.65 0.94 -- -- Peak 2 15840.00 47.88 74.00 -26.12 56.21 37.62 20.06 66.68 0.67 -- -- Peak

Mode	23	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	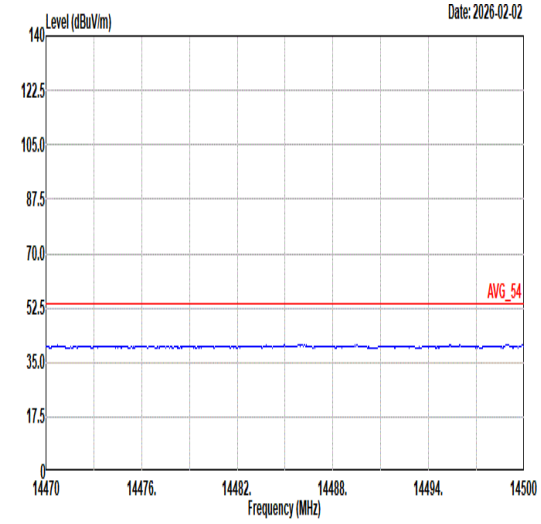 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	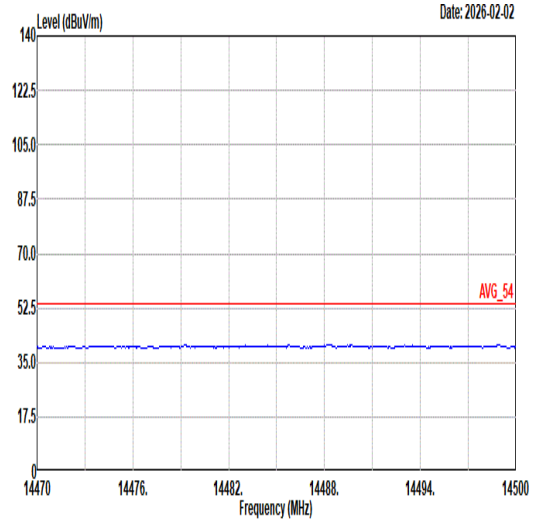 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	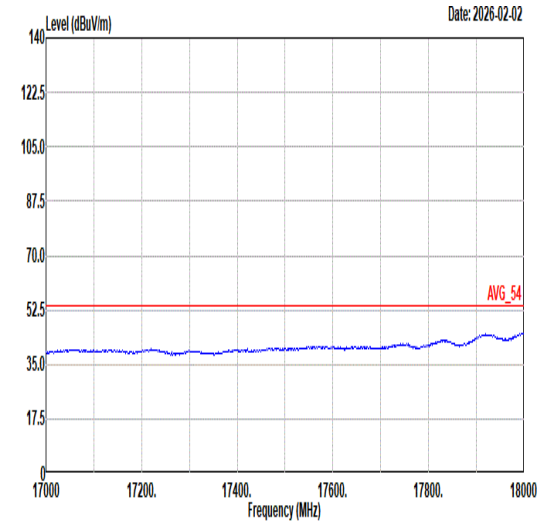 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	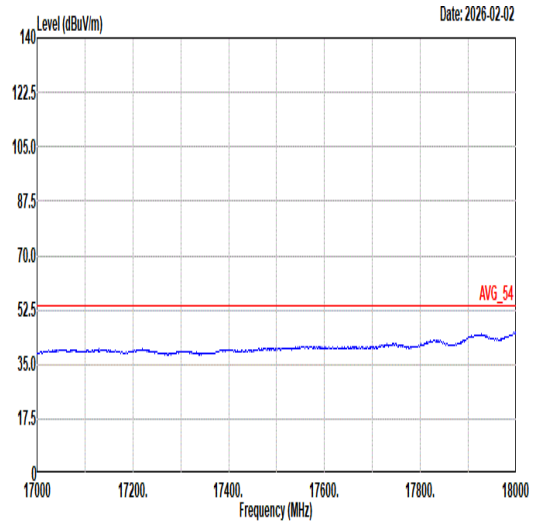 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	24	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	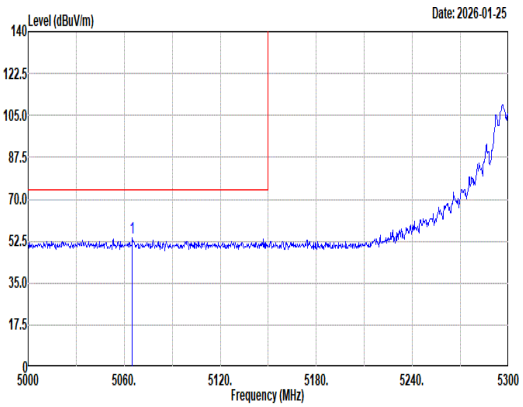 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5065.10 53.89 74.00 -20.11 45.55 33.17 11.35 36.18 0.00 166 327 Peak	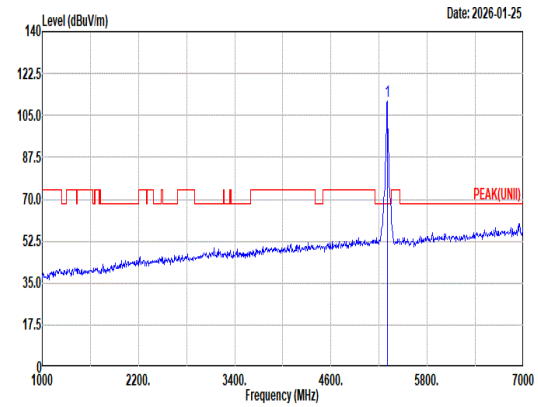 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 111.14 ------ ------ 102.76 33.00 11.59 36.21 0.00 166 327 Peak
Avg	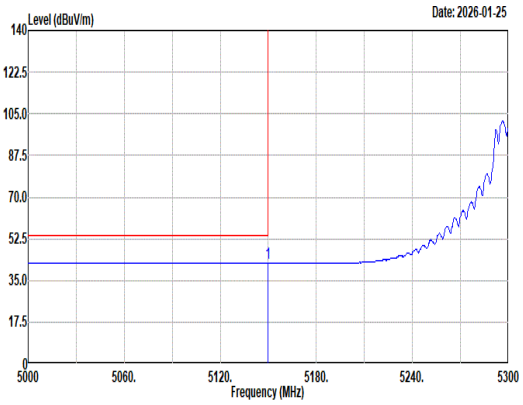 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5150.00 42.29 54.00 -11.71 33.76 33.30 11.42 36.19 0.00 166 327 Average	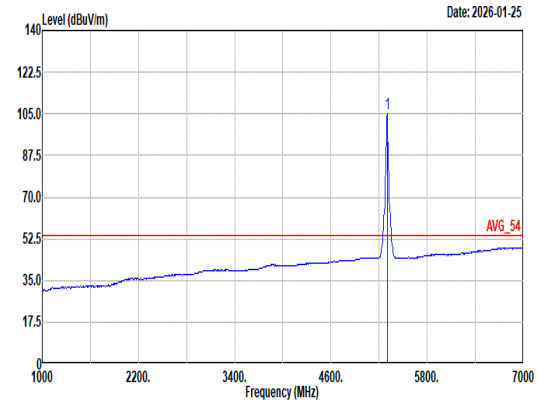 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 105.26 ------ ------ 96.88 33.00 11.59 36.21 0.00 166 327 Average

Mode	24	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	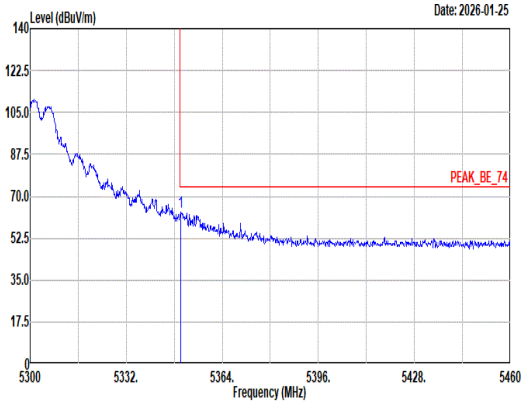 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 63.36 74.00 -10.64 54.91 33.00 11.66 36.21 0.00 166 327 Peak	Blank
Avg	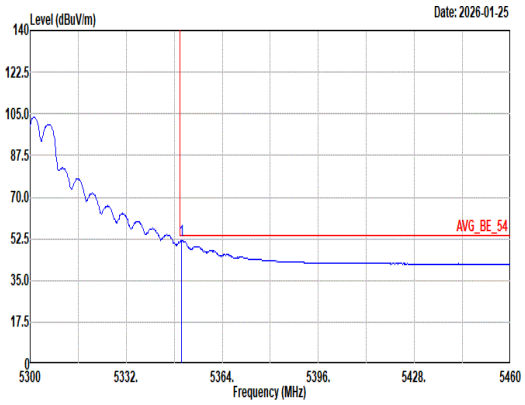 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.40 51.70 54.00 -2.30 43.25 33.00 11.66 36.21 0.00 166 327 Average	Blank

Mode	24	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	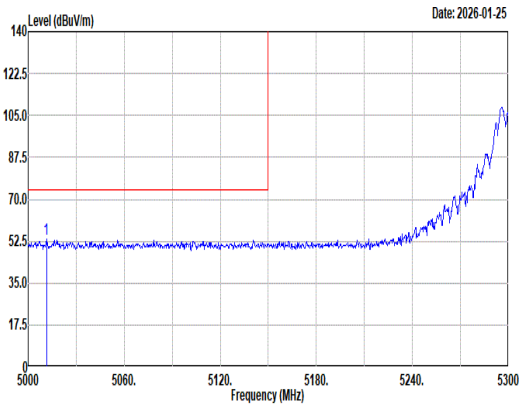 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5011.40 53.25 74.00 -20.75 44.83 33.28 11.31 36.17 0.00 300 82 Peak	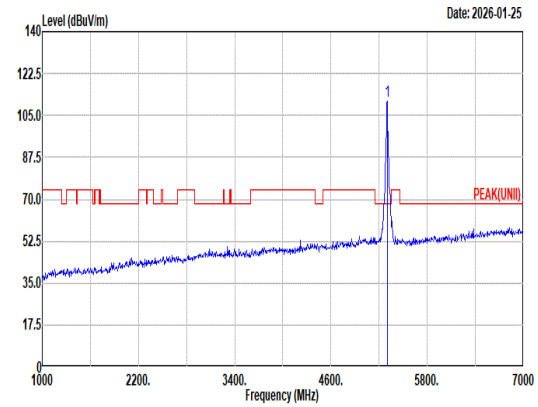 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 111.09 ------ ------ 102.71 33.00 11.59 36.21 0.00 300 82 Peak
Avg	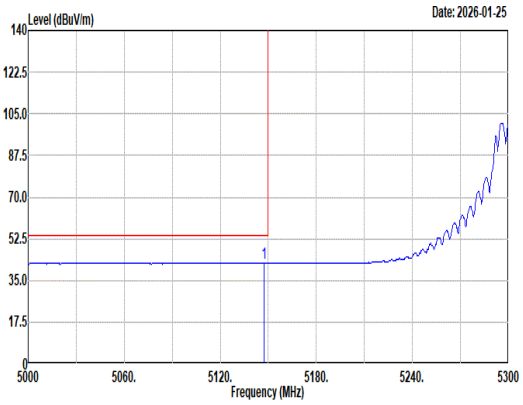 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.30 42.23 54.00 -11.77 33.71 33.29 11.42 36.19 0.00 300 82 Average	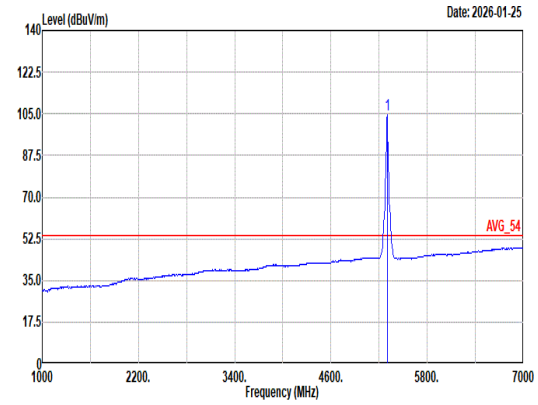 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 104.45 ------ ------ 96.07 33.00 11.59 36.21 0.00 300 82 Average

Mode	24	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	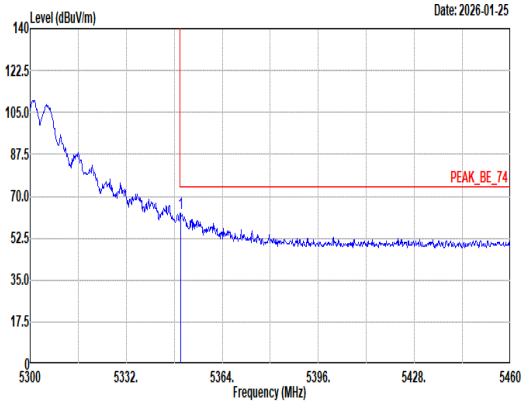 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.08 63.04 74.00 -10.96 54.59 33.00 11.66 36.21 0.00 300 82 Peak	Blank
Avg	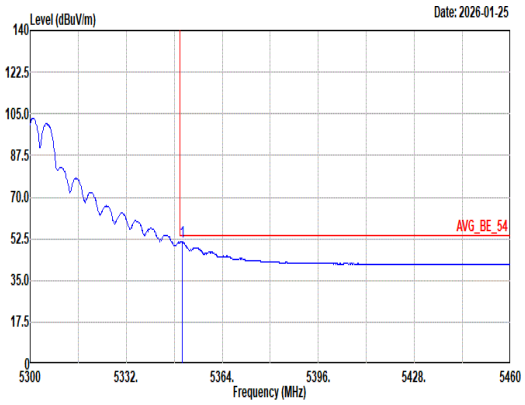 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.56 51.22 54.00 -2.78 42.77 33.00 11.66 36.21 0.00 300 82 Average	Blank

Mode	24	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	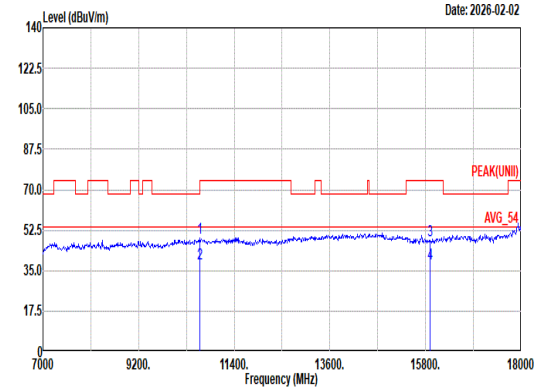 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 49.38 74.00 -24.62 59.62 39.10 16.31 66.58 0.93 200 33 Peak 2 10600.00 38.19 54.00 -15.81 48.43 39.10 16.31 66.58 0.93 200 33 Average 3 15900.00 48.13 74.00 -25.87 56.28 37.80 20.10 66.73 0.68 400 341 Peak 4 15900.00 37.86 54.00 -16.14 46.01 37.80 20.10 66.73 0.68 400 341 Average	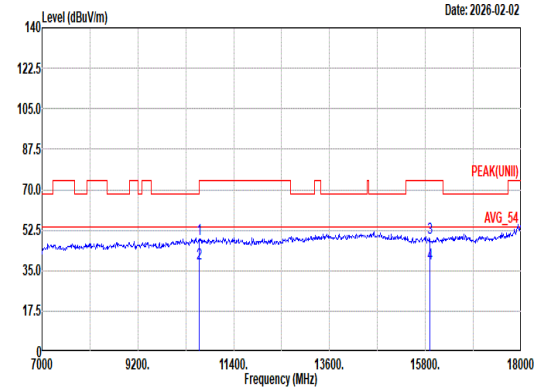 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 48.77 74.00 -25.23 59.01 39.10 16.31 66.58 0.93 300 202 Peak 2 10600.00 38.16 54.00 -15.84 48.40 39.10 16.31 66.58 0.93 300 202 Average 3 15900.00 49.05 74.00 -24.95 57.20 37.80 20.10 66.73 0.68 200 71 Peak 4 15900.00 37.89 54.00 -16.11 46.04 37.80 20.10 66.73 0.68 200 71 Average

Mode	24	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	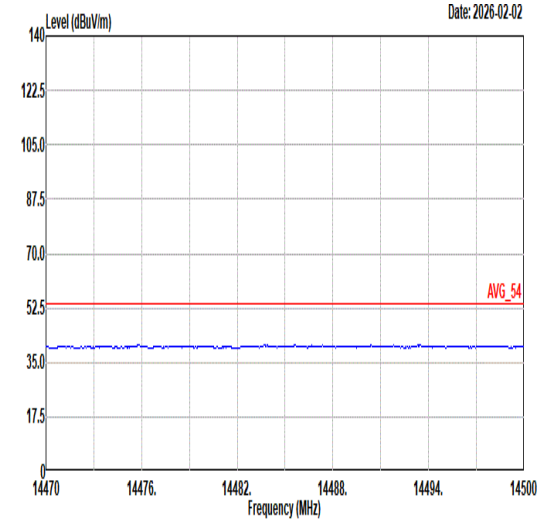 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	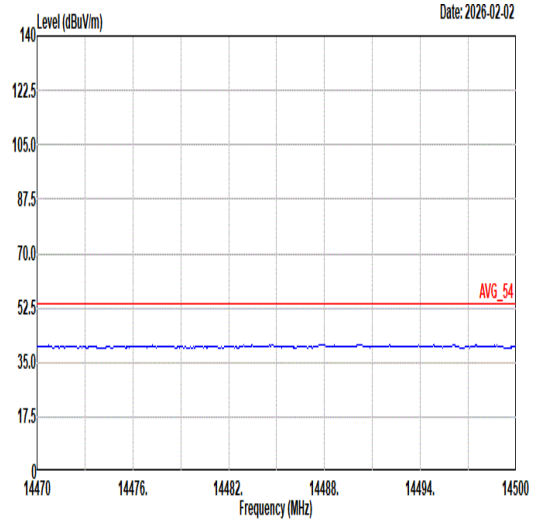 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	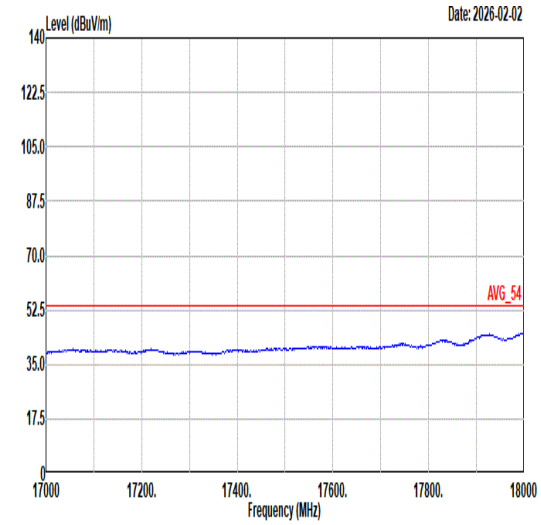 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	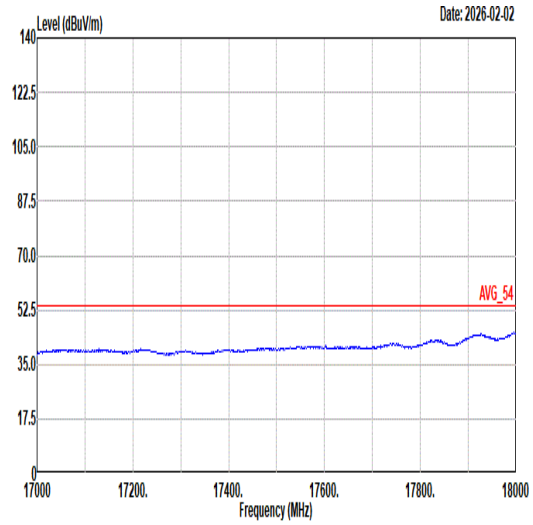 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	25	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	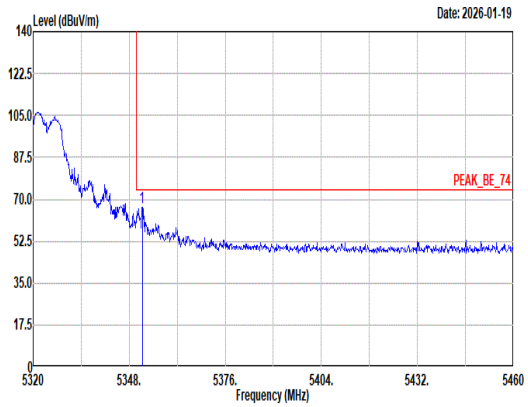 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.78 66.51 74.00 -7.49 58.06 33.00 11.66 36.21 0.00 178 318 Peak	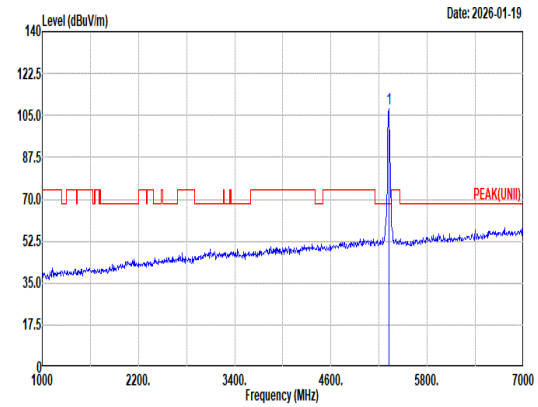 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 107.59 ------ ------ 99.18 33.00 11.62 36.21 0.00 178 318 Peak
Avg	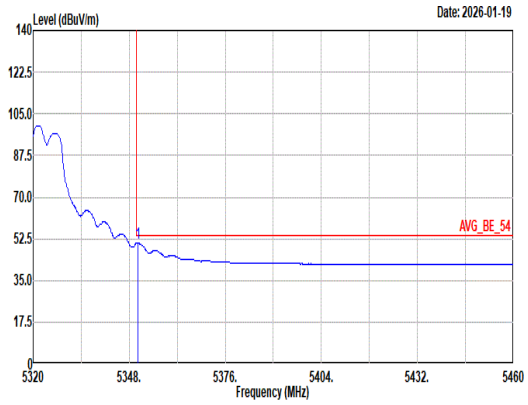 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.52 50.64 54.00 -3.36 42.19 33.00 11.66 36.21 0.00 178 318 Average	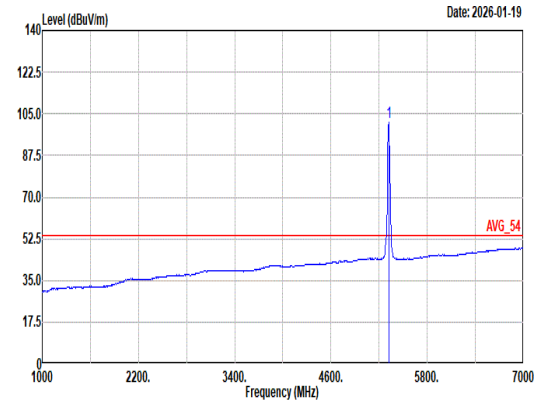 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 101.58 ------ ------ 93.17 33.00 11.62 36.21 0.00 178 318 Average

Mode	25	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	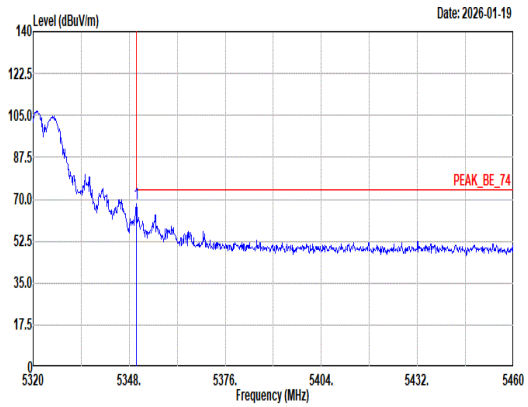 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 68.32 74.00 -5.68 59.87 33.00 11.66 36.21 0.00 313 87 Peak	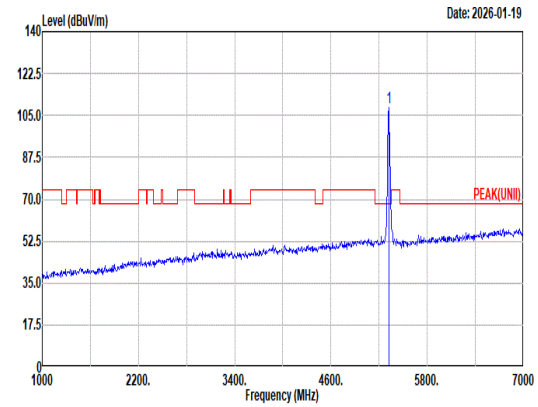 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 108.52 ------ ------ 100.11 33.00 11.62 36.21 0.00 313 87 Peak
Avg	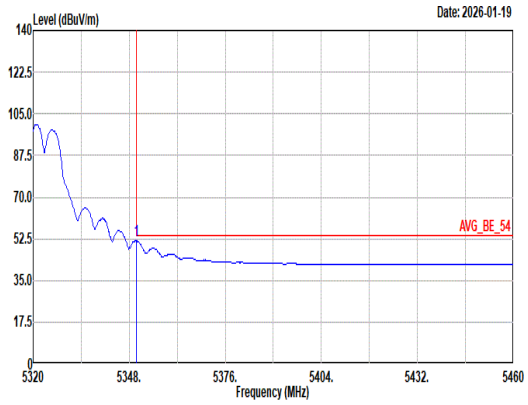 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.10 51.65 54.00 -2.35 43.20 33.00 11.66 36.21 0.00 313 87 Average	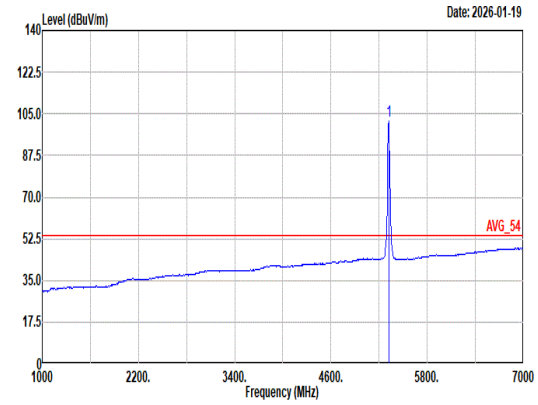 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 102.03 ------ ------ 93.62 33.00 11.62 36.21 0.00 313 87 Average

Mode	25	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	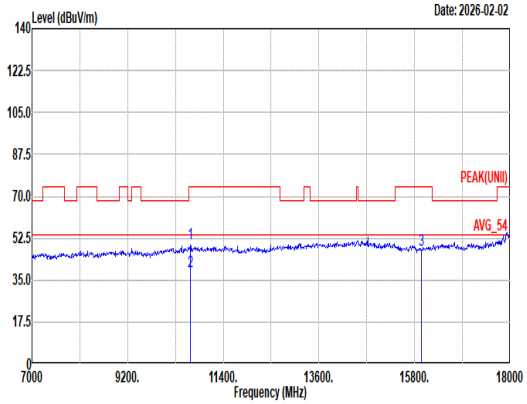 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 50.44 74.00 -23.56 60.51 39.18 16.34 66.51 0.92 100 45 Peak 2 10640.00 38.37 54.00 -15.63 48.44 39.18 16.34 66.51 0.92 100 45 Average 3 15960.00 47.73 74.00 -26.27 56.11 37.58 20.14 66.78 0.68 -- -- Peak	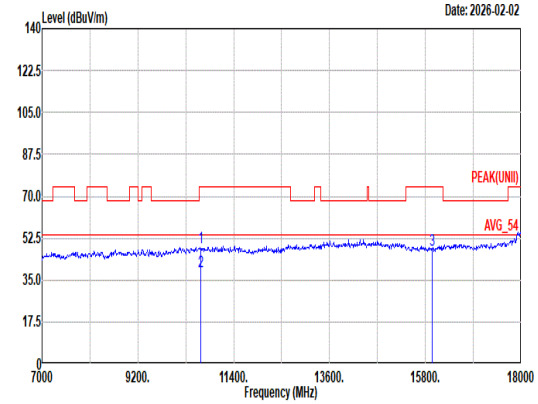 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 48.79 74.00 -25.21 58.86 39.18 16.34 66.51 0.92 300 286 Peak 2 10640.00 38.34 54.00 -15.66 48.41 39.18 16.34 66.51 0.92 300 286 Average 3 15960.00 47.77 74.00 -26.23 56.17 37.57 20.14 66.79 0.68 -- -- Peak

Mode	25	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	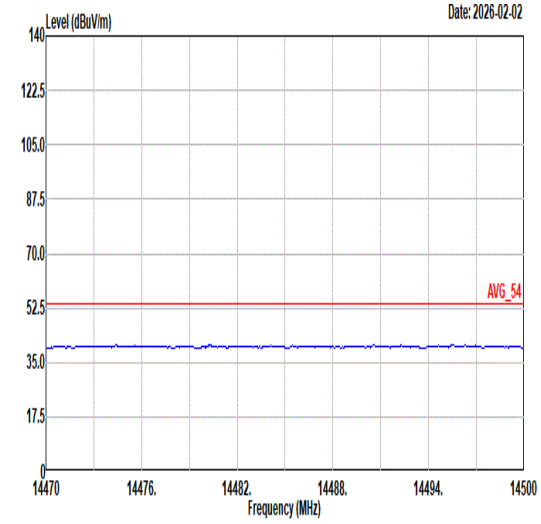 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	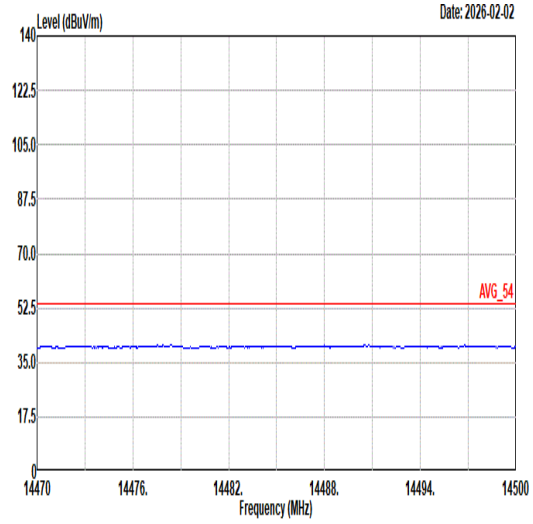 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	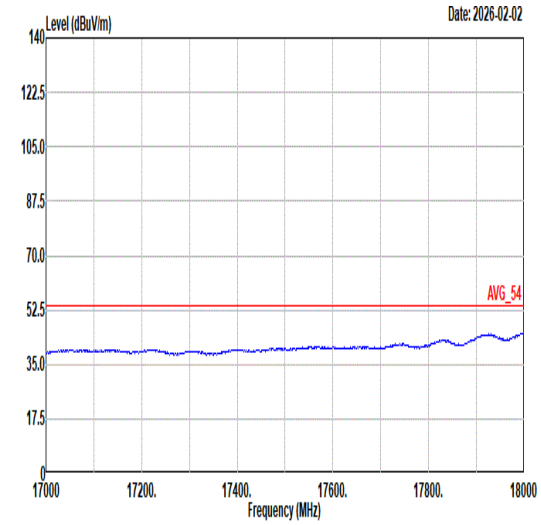 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	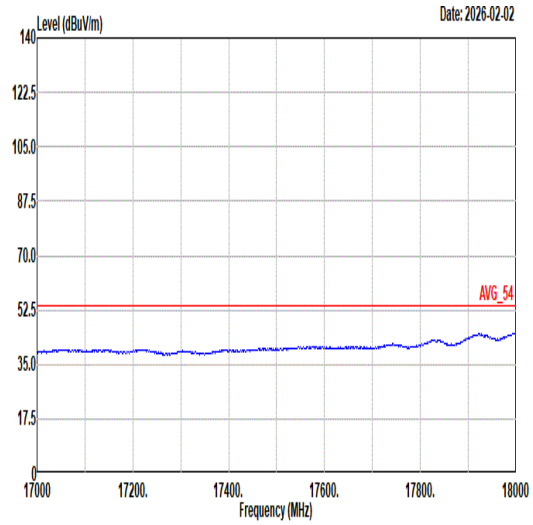 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	26	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	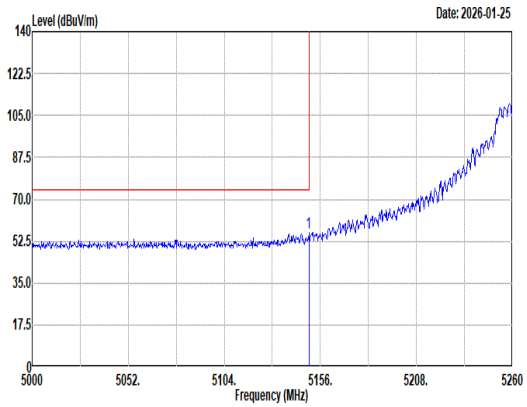 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.76 55.90 74.00 -18.10 47.37 33.30 11.42 36.19 0.00 149 323 Peak	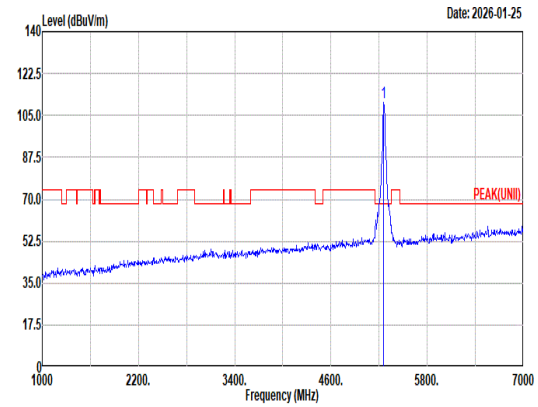 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 110.17 ------ ------ 101.75 33.08 11.54 36.20 0.00 149 323 Peak
Avg	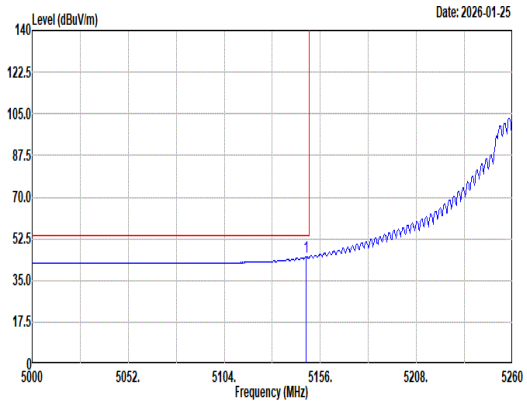 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.20 45.01 54.00 -8.99 36.49 33.29 11.42 36.19 0.00 149 323 Average	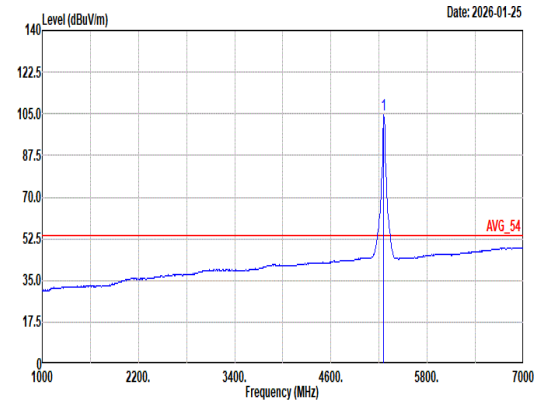 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 104.38 ------ ------ 95.96 33.08 11.54 36.20 0.00 149 323 Average

Mode	26	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	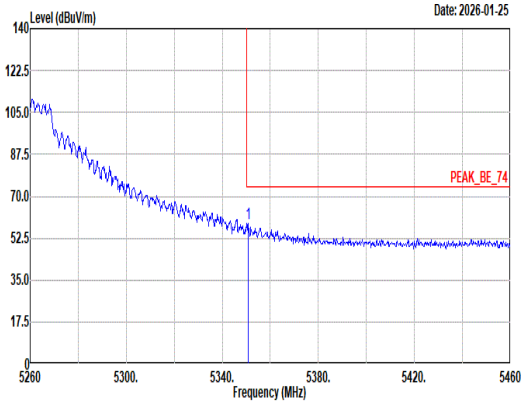 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.80 58.62 74.00 -15.38 50.17 33.00 11.66 36.21 0.00 149 323 Peak	Blank
Avg	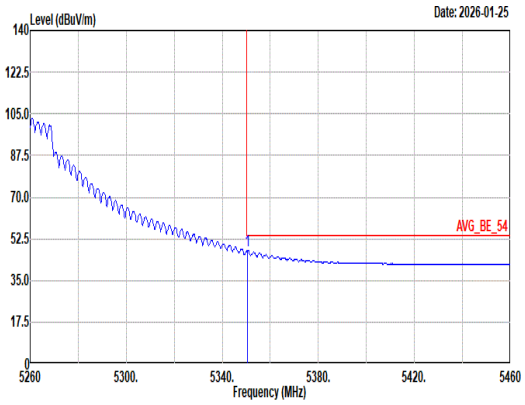 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.60 47.53 54.00 -6.47 39.08 33.00 11.66 36.21 0.00 149 323 Average	Blank

Mode	26	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	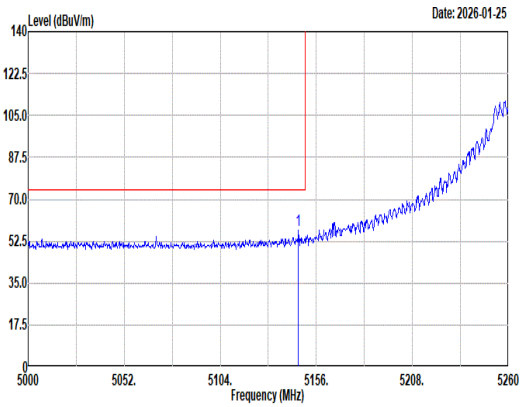 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5146.38 57.01 74.00 -16.99 48.49 33.29 11.42 36.19 0.00 263 83 Peak	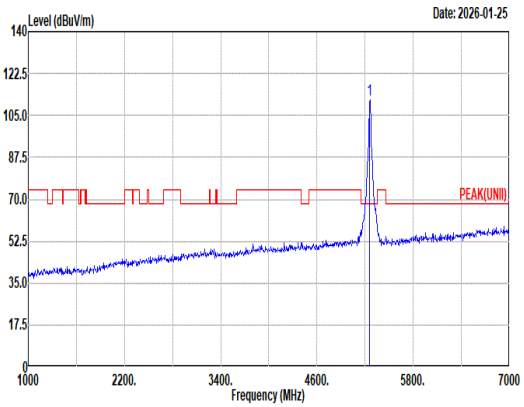 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5260.00 111.41 ------ ------ 102.99 33.07 11.55 36.20 0.00 263 83 Peak
Avg	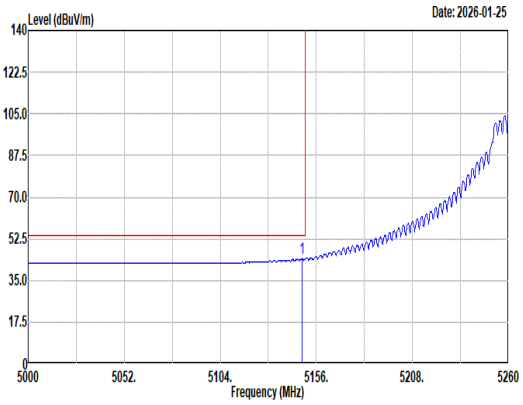 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.20 44.14 54.00 -9.86 35.62 33.29 11.42 36.19 0.00 263 83 Average	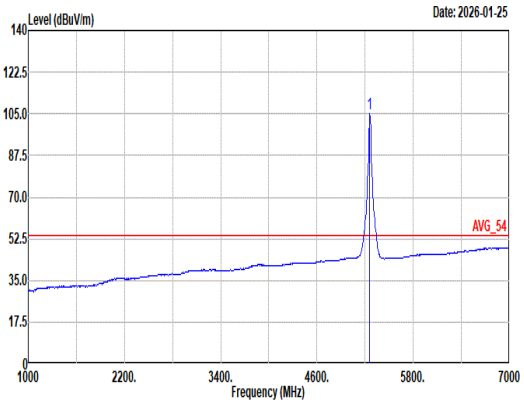 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5260.00 105.02 ------ ------ 96.60 33.08 11.54 36.20 0.00 263 83 Average

Mode	26	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	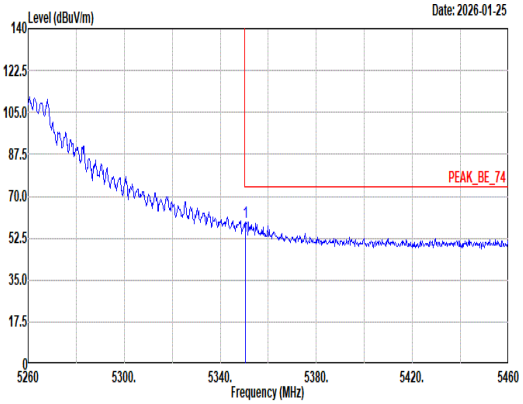 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.40 59.05 74.00 -14.95 50.60 33.00 11.66 36.21 0.00 263 83 Peak	Blank
Avg	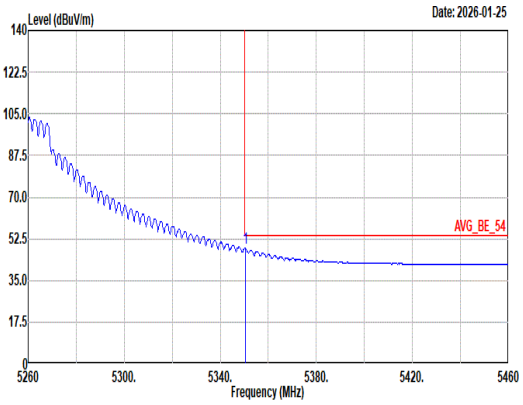 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.40 48.46 54.00 -5.54 40.01 33.00 11.66 36.21 0.00 263 83 Average	Blank

Mode	26	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	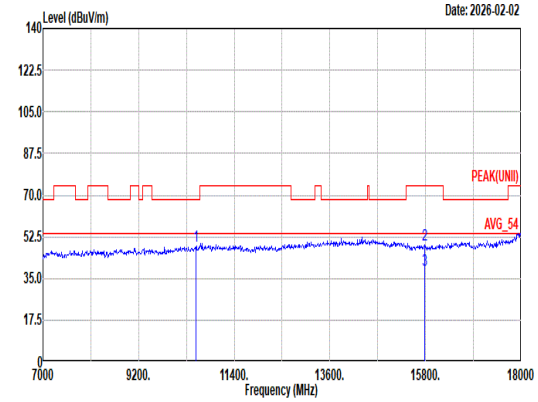 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 48.55 68.20 -19.65 59.33 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 49.39 74.00 -24.61 57.50 37.82 20.03 66.63 0.67 100 186 Peak 3 15780.00 38.70 54.00 -15.30 46.81 37.82 20.03 66.63 0.67 100 186 Average	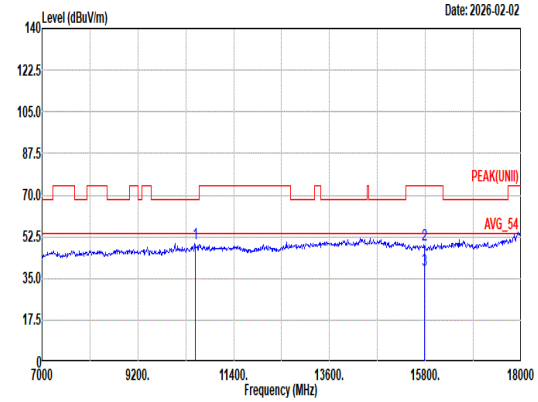 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 49.54 68.20 -18.66 60.32 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 48.98 74.00 -25.02 57.09 37.82 20.03 66.63 0.67 100 212 Peak 3 15780.00 38.73 54.00 -15.27 46.84 37.82 20.03 66.63 0.67 100 212 Average

Mode	26	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	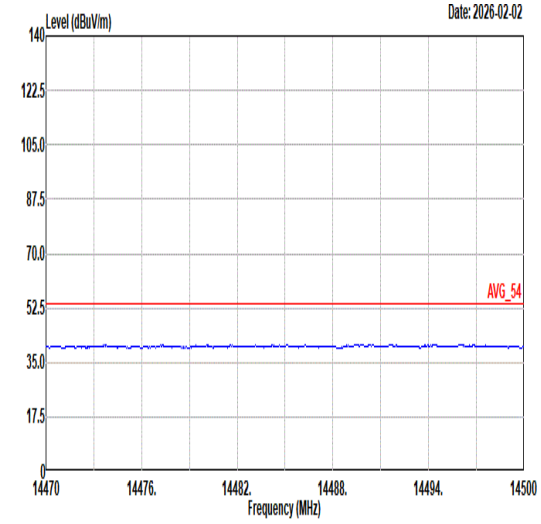 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	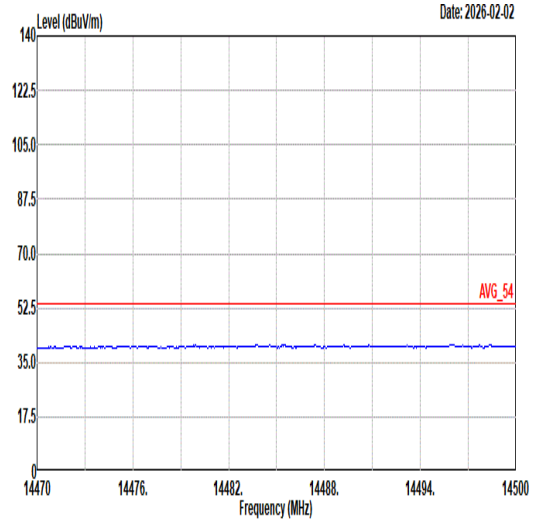 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	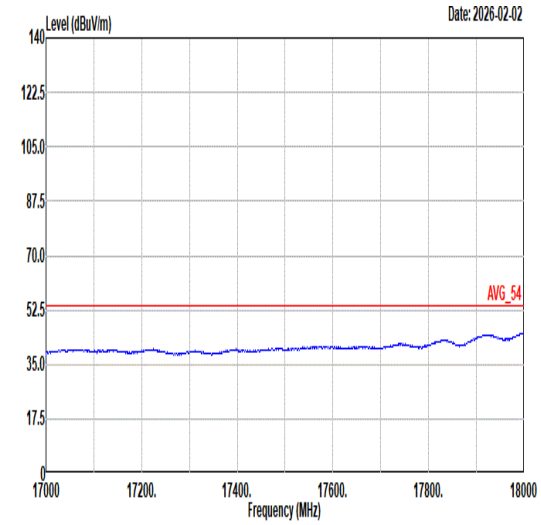 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	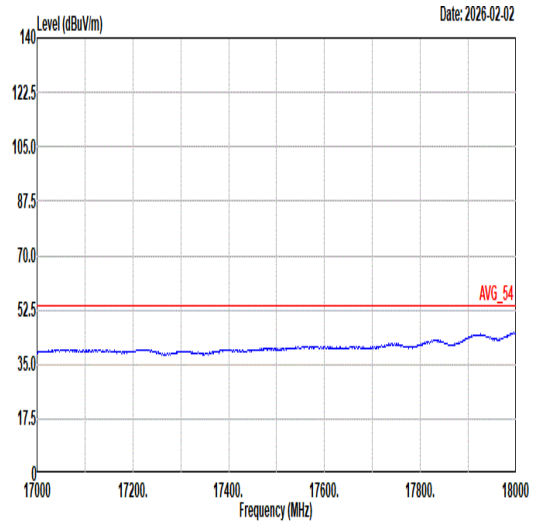 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	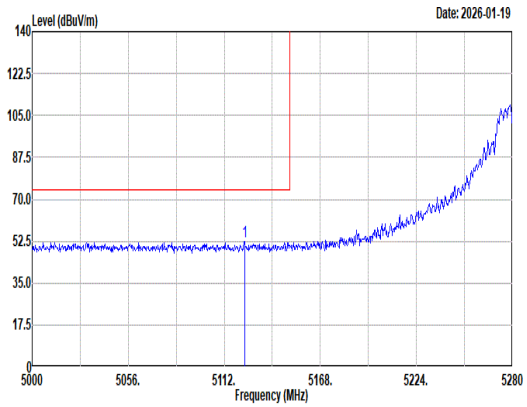 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5123.76 52.42 74.00 -21.58 44.00 33.20 11.40 36.18 0.00 180 319 Peak	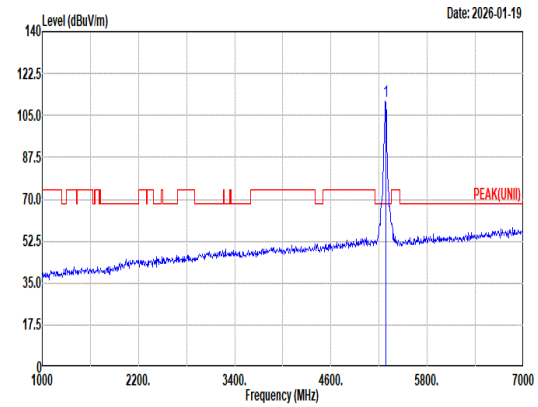 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5280.00 110.79 ------ ------ 102.39 33.04 11.56 36.20 0.00 180 319 Peak
Avg	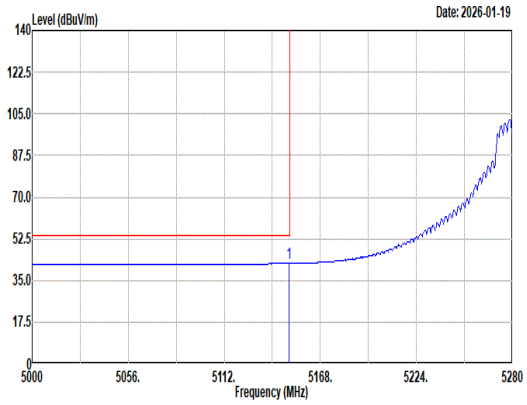 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.52 42.20 54.00 -11.80 33.67 33.30 11.42 36.19 0.00 180 319 Average	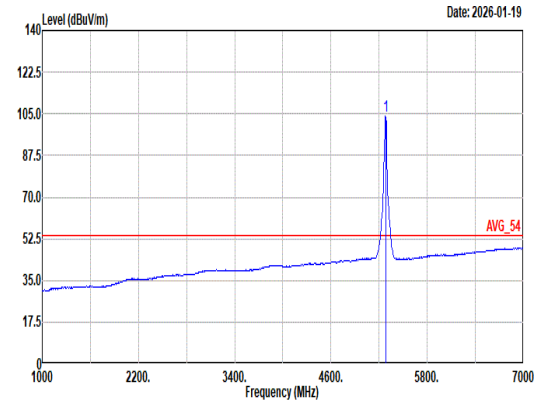 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5280.00 104.22 ------ ------ 95.82 33.04 11.56 36.20 0.00 180 319 Average

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	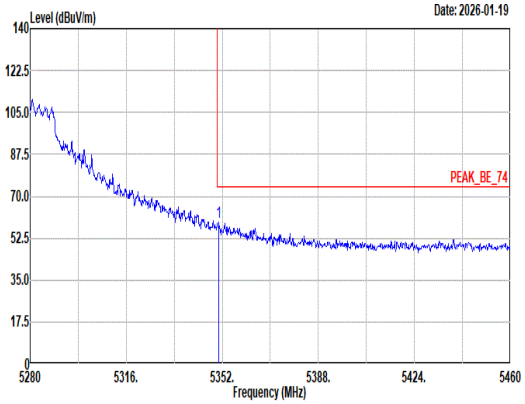 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.74 59.21 74.00 -14.79 50.76 33.00 11.66 36.21 0.00 180 319 Peak	Blank
Avg	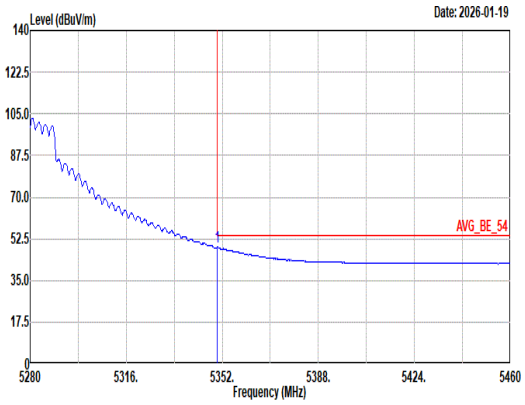 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 49.03 54.00 -4.97 40.58 33.00 11.66 36.21 0.00 180 319 Average	Blank

Mode	27	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	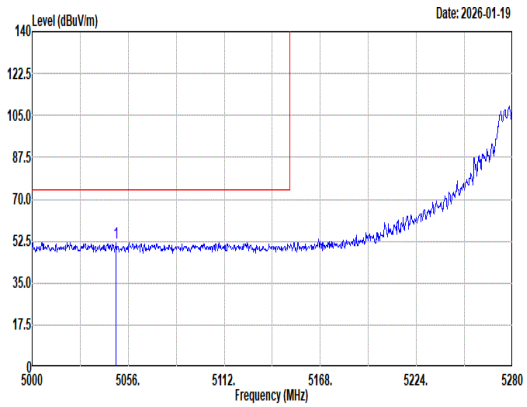 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5049.00 51.98 74.00 -22.02 43.62 33.20 11.34 36.18 0.00 309 82 Peak	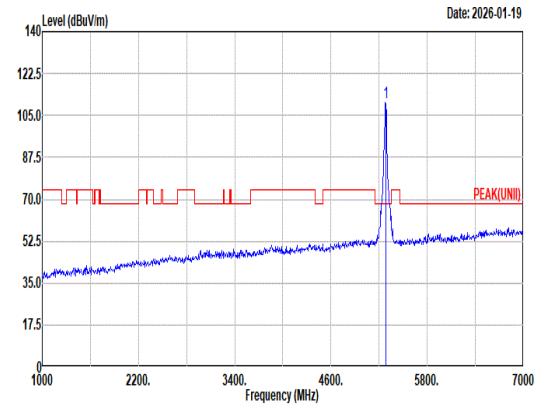 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5280.00 110.37 ------ ------ 101.97 33.04 11.56 36.20 0.00 309 82 Peak
Avg	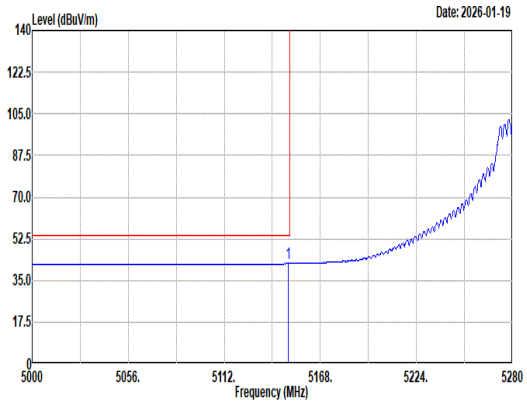 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.24 42.06 54.00 -11.94 33.53 33.30 11.42 36.19 0.00 309 82 Average	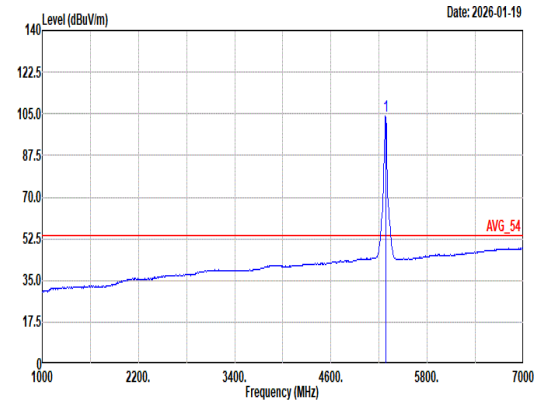 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5280.00 103.92 ------ ------ 95.52 33.04 11.56 36.20 0.00 309 82 Average

Mode	27	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	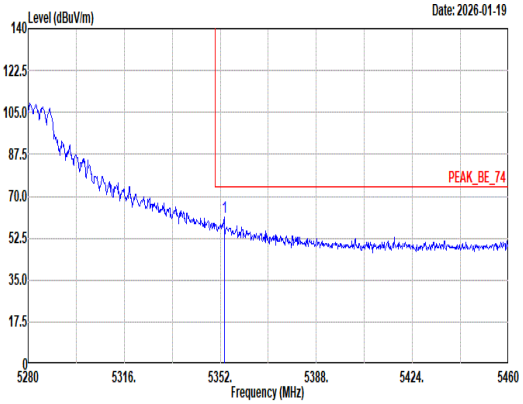 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.44 61.47 74.00 -12.53 53.01 33.01 11.66 36.21 0.00 309 82 Peak	Blank
Avg	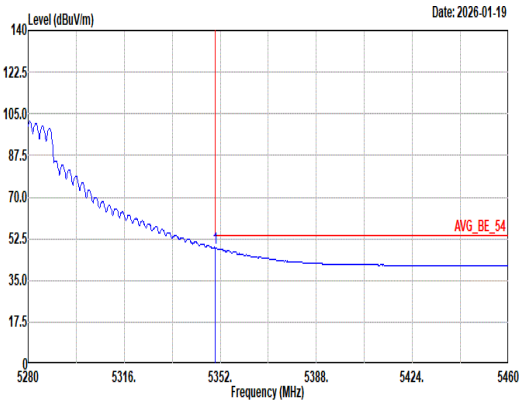 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 48.84 54.00 -5.16 40.39 33.00 11.66 36.21 0.00 309 82 Average	Blank

Mode	27	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	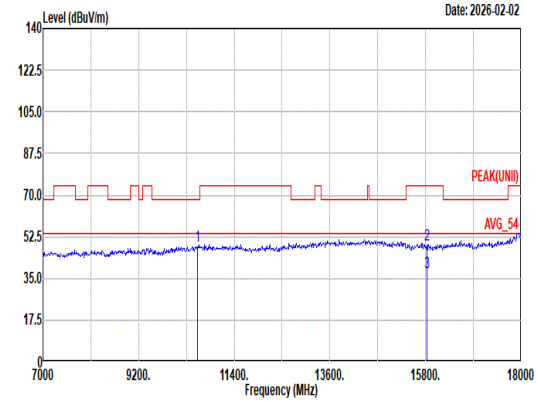 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10560.00 48.45 68.20 -19.75 59.02 38.86 16.28 66.65 0.94 -- -- Peak 2 15840.00 48.90 74.00 -25.10 57.23 37.62 20.06 66.68 0.67 200 315 Peak 3 15840.00 37.64 54.00 -16.36 45.97 37.62 20.06 66.68 0.67 200 315 Average	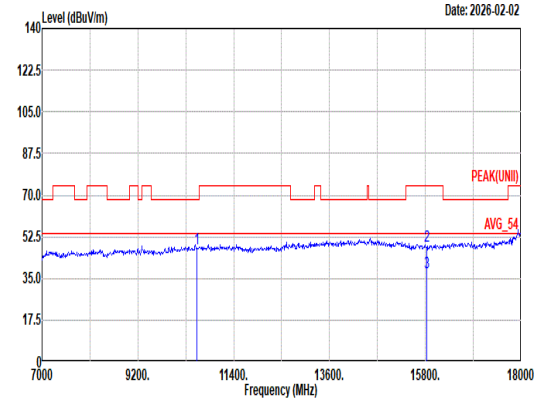 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10560.00 47.70 68.20 -20.50 58.27 38.86 16.28 66.65 0.94 -- -- Peak 2 15840.00 48.72 74.00 -25.28 57.05 37.62 20.06 66.68 0.67 300 273 Peak 3 15840.00 37.68 54.00 -16.32 46.01 37.62 20.06 66.68 0.67 300 273 Average

Mode	27	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH56_5280MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	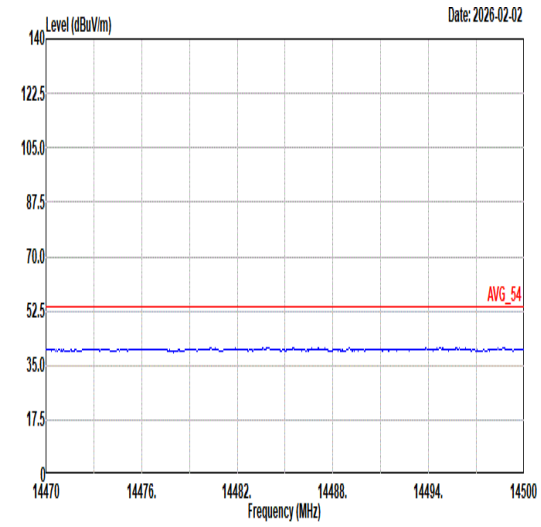 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	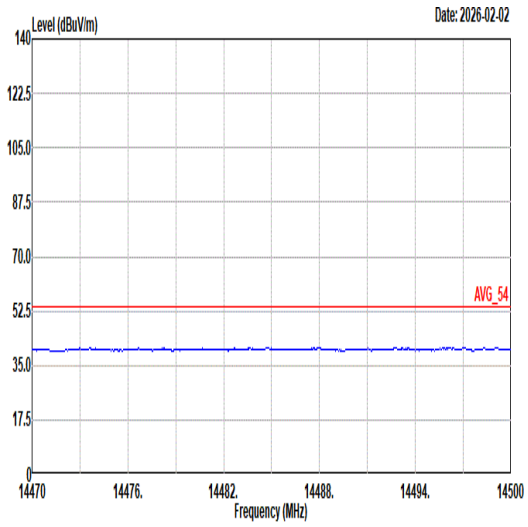 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	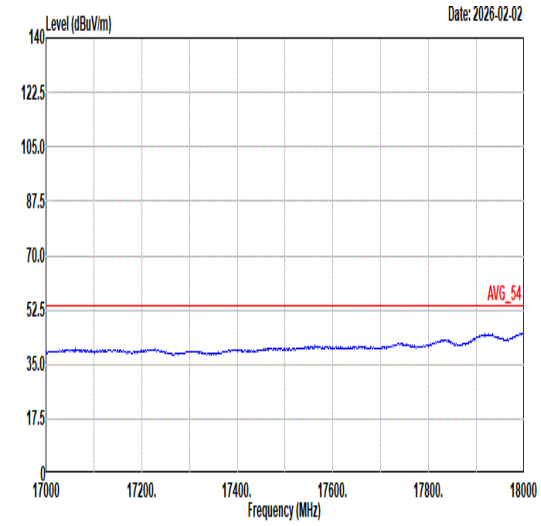 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	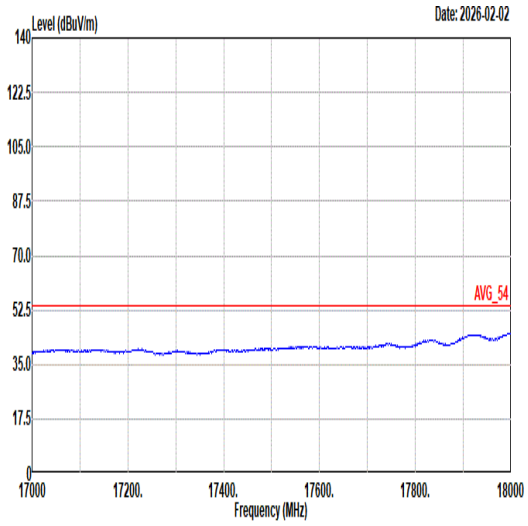 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	28	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	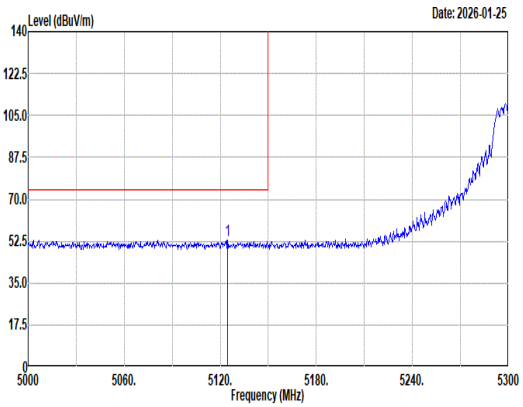 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5124.50 53.00 74.00 -21.00 44.58 33.20 11.40 36.18 0.00 184 325 Peak	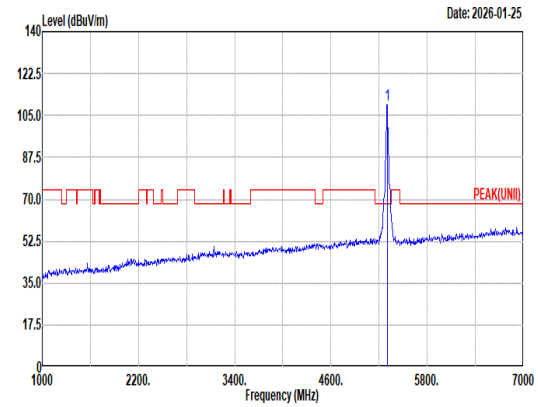 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5300.00 109.47 ------ ------ 101.09 33.01 11.58 36.21 0.00 184 325 Peak
Avg	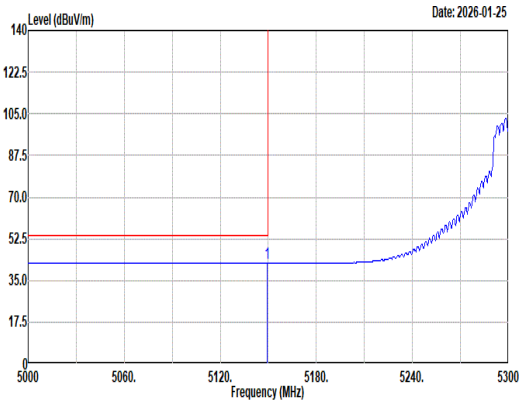 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.10 42.37 54.00 -11.63 33.84 33.30 11.42 36.19 0.00 184 325 Average	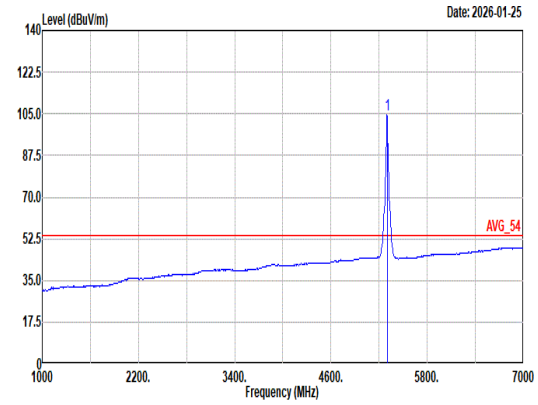 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5300.00 104.34 ------ ------ 95.96 33.01 11.58 36.21 0.00 184 325 Average

Mode	28	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	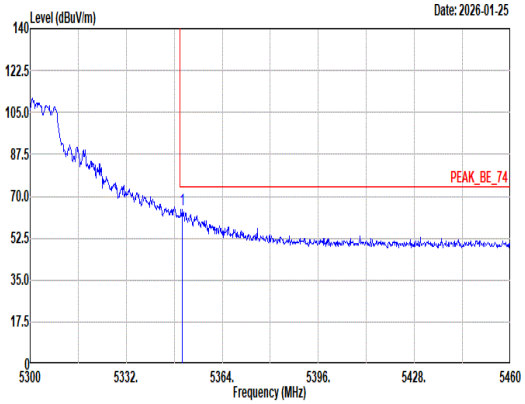 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.56 64.68 74.00 -9.32 56.23 33.00 11.66 36.21 0.00 184 325 Peak	Blank
Avg	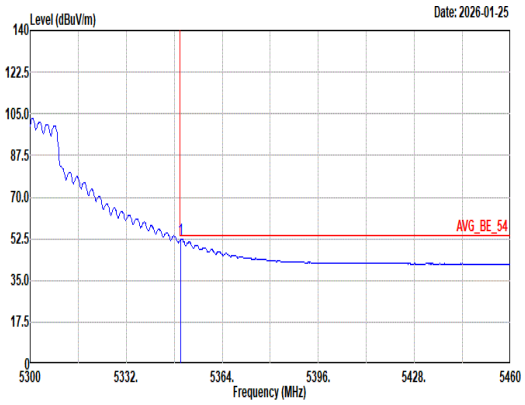 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 52.34 54.00 -1.66 43.89 33.00 11.66 36.21 0.00 184 325 Average	Blank

Mode	28	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	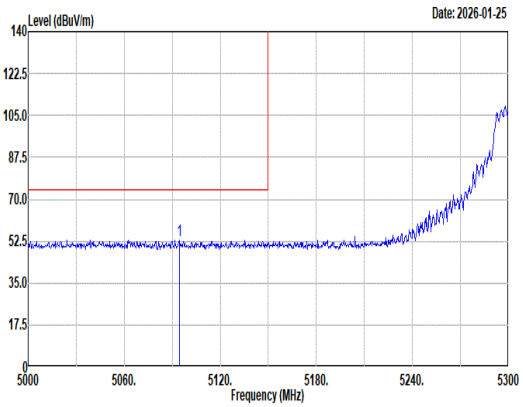 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5094.50 52.88 74.00 -21.12 44.57 33.11 11.38 36.18 0.00 300 82 Peak	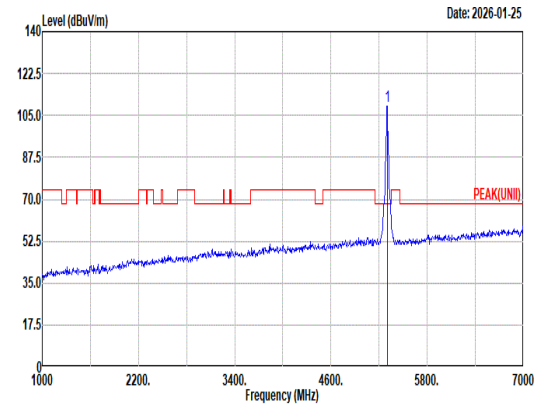 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 108.77 ------ ------ 100.39 33.01 11.58 36.21 0.00 300 82 Peak
Avg	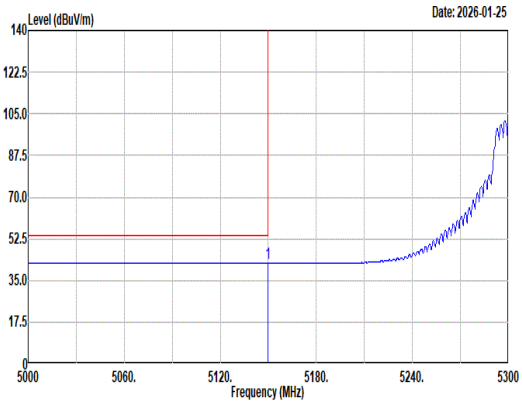 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.70 42.30 54.00 -11.70 33.77 33.30 11.42 36.19 0.00 300 82 Average	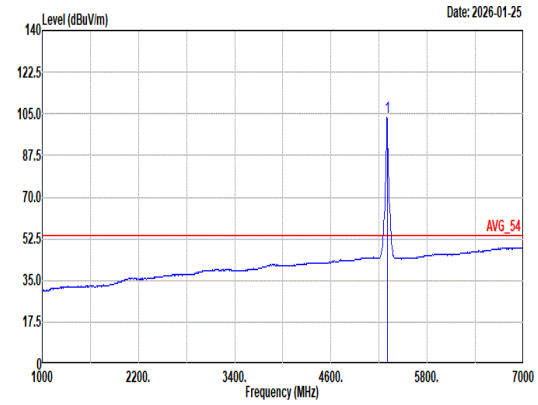 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5300.00 103.30 ------ ------ 94.92 33.01 11.58 36.21 0.00 300 82 Average

Mode	28	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	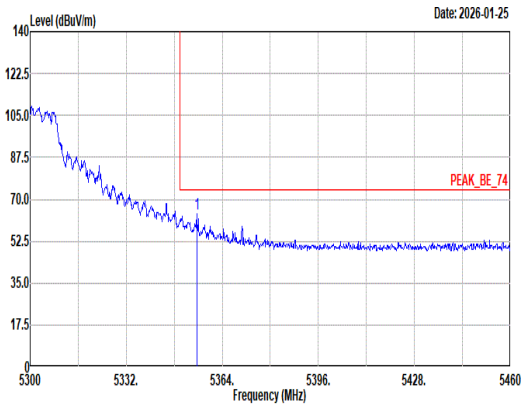 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.52 63.93 74.00 -10.07 55.47 33.01 11.66 36.21 0.00 300 82 Peak	Blank
Avg	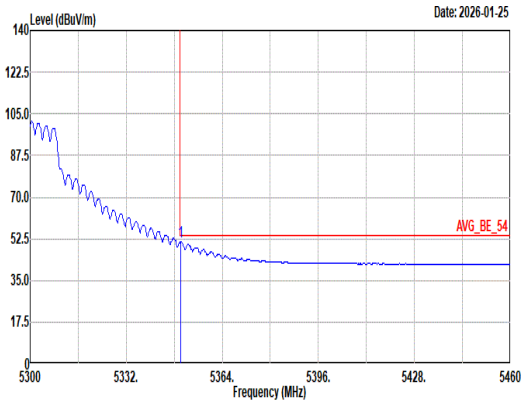 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 51.27 54.00 -2.73 42.82 33.00 11.66 36.21 0.00 300 82 Average	Blank

Mode	28	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	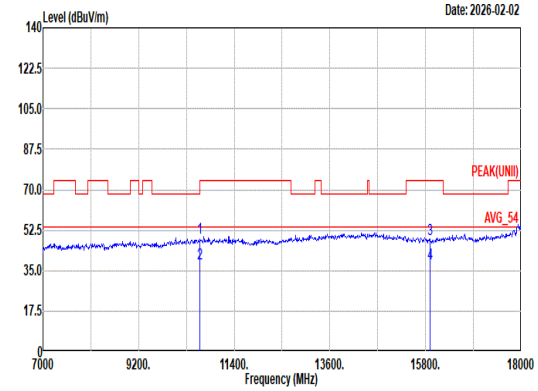 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 49.24 74.00 -24.76 59.48 39.10 16.31 66.58 0.93 200 76 Peak 2 10600.00 38.22 54.00 -15.78 48.46 39.10 16.31 66.58 0.93 200 76 Average 3 15900.00 48.40 74.00 -25.60 56.55 37.80 20.10 66.73 0.68 200 207 Peak 4 15900.00 37.91 54.00 -16.09 46.06 37.80 20.10 66.73 0.68 200 207 Average	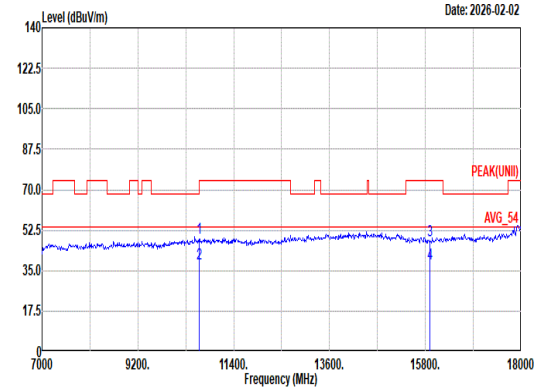 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10600.00 48.96 74.00 -25.04 59.20 39.10 16.31 66.58 0.93 400 301 Peak 2 10600.00 38.20 54.00 -15.80 48.44 39.10 16.31 66.58 0.93 400 301 Average 3 15900.00 48.29 74.00 -25.71 56.44 37.80 20.10 66.73 0.68 100 31 Peak 4 15900.00 37.93 54.00 -16.07 46.08 37.80 20.10 66.73 0.68 100 31 Average

Mode	28	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	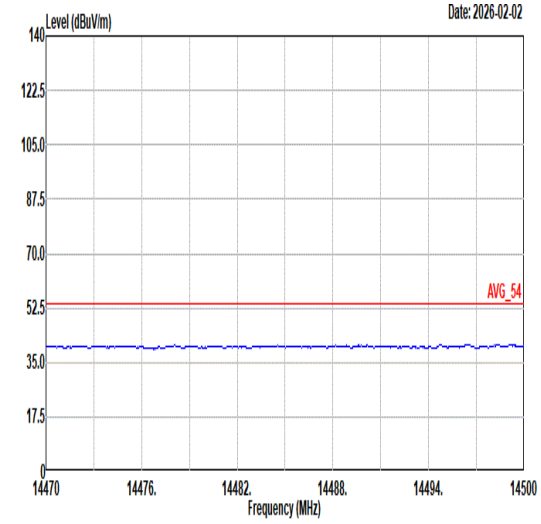 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	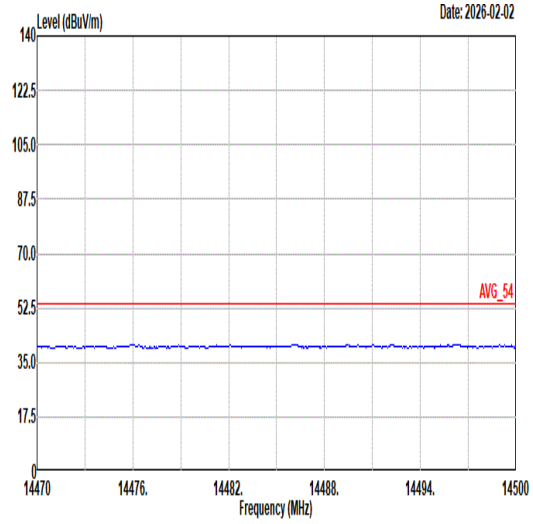 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	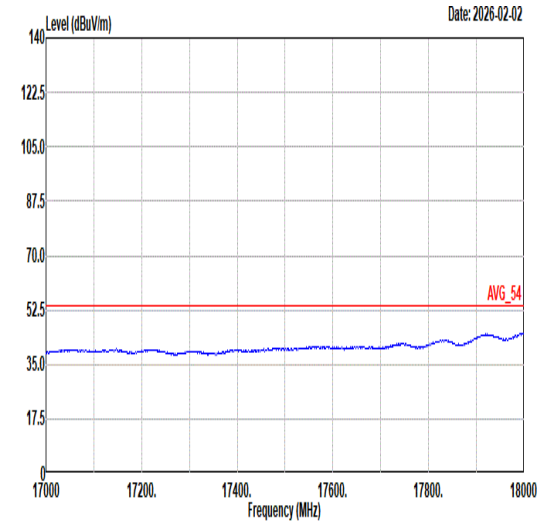 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	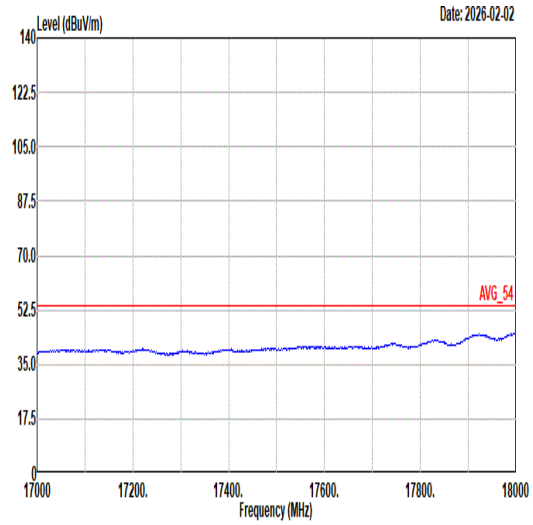 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	29	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	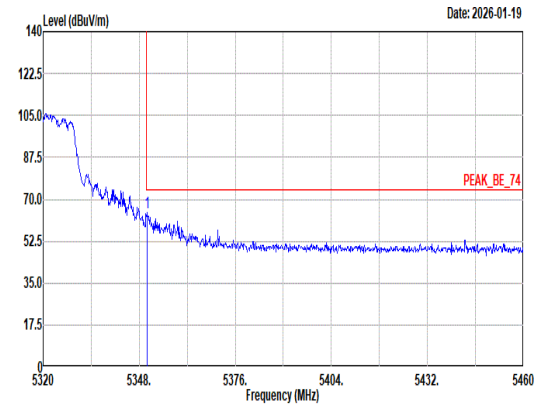 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.24 64.47 74.00 -9.53 56.02 33.00 11.66 36.21 0.00 195 318 Peak	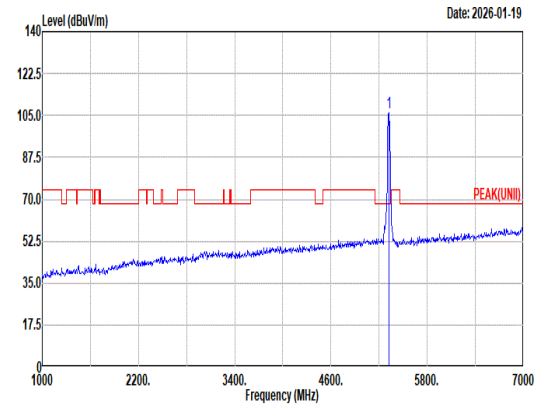 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 106.36 ------ ------ 97.95 33.00 11.62 36.21 0.00 195 318 Peak
Avg	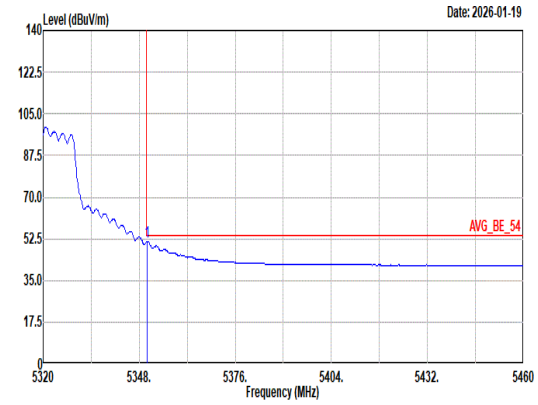 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.38 51.31 54.00 -2.69 42.86 33.00 11.66 36.21 0.00 195 318 Average	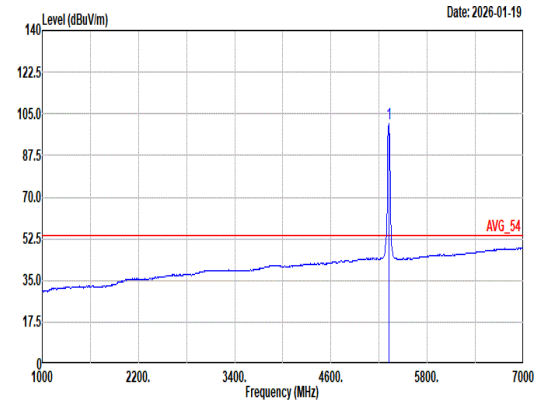 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5320.00 100.92 ------ ------ 92.51 33.00 11.62 36.21 0.00 195 318 Average

Mode	29	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	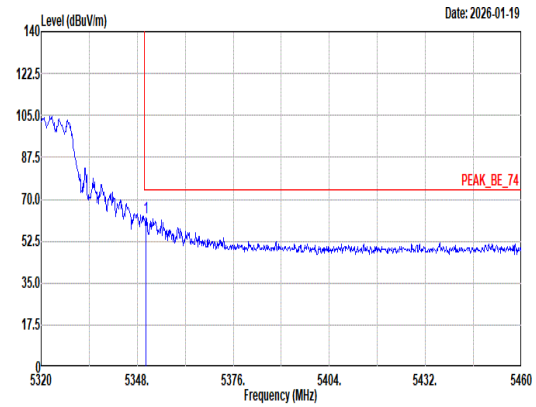 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5350.52 62.35 74.00 -11.65 53.90 33.00 11.66 36.21 0.00 327 79 Peak	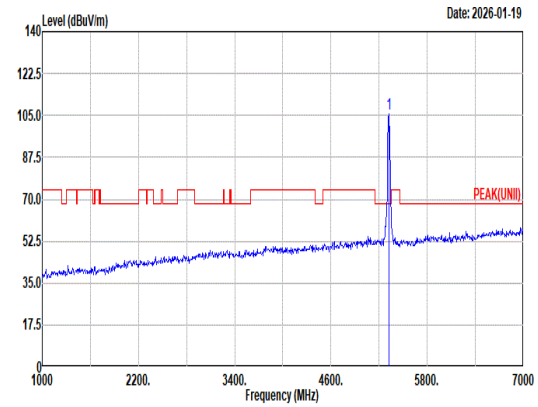 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5320.00 105.71 ------ ------ 97.30 33.00 11.62 36.21 0.00 327 79 Peak
Avg	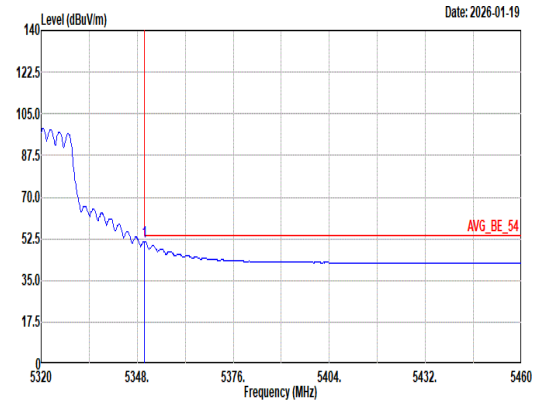 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5350.10 51.50 54.00 -2.50 43.05 33.00 11.66 36.21 0.00 327 79 Average	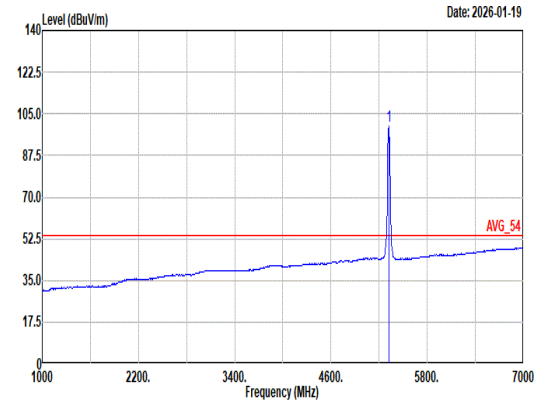 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5320.00 99.91 ------ ------ 91.50 33.00 11.62 36.21 0.00 327 79 Average

Mode	29	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	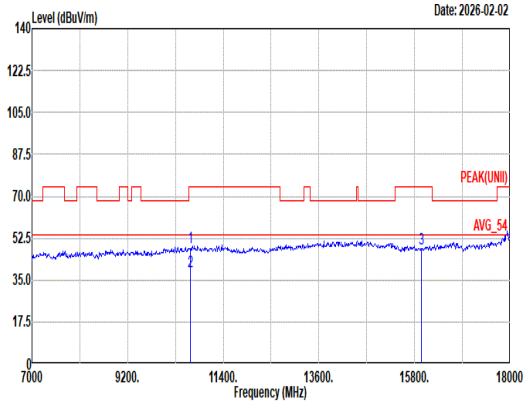 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 48.79 74.00 -25.21 58.86 39.18 16.34 66.51 0.92 400 43 Peak 2 10640.00 38.34 54.00 -15.66 48.41 39.18 16.34 66.51 0.92 400 43 Average 3 15960.00 47.84 74.00 -26.16 56.22 37.58 20.14 66.78 0.68 -- -- Peak	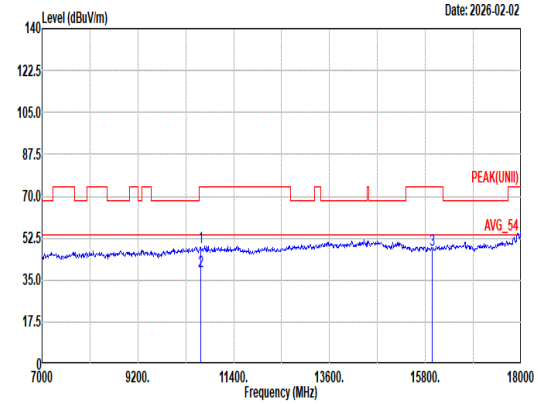 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10640.00 48.51 74.00 -25.49 58.58 39.18 16.34 66.51 0.92 400 259 Peak 2 10640.00 38.32 54.00 -15.68 48.39 39.18 16.34 66.51 0.92 400 259 Average 3 15960.00 47.81 74.00 -26.19 56.21 37.57 20.14 66.79 0.68 -- -- Peak

Mode	29	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	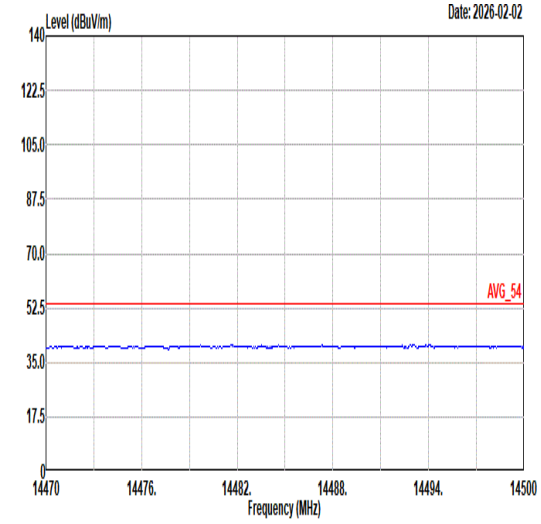 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	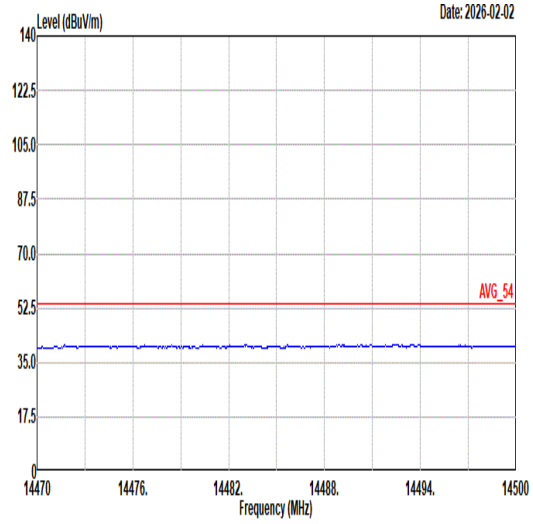 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	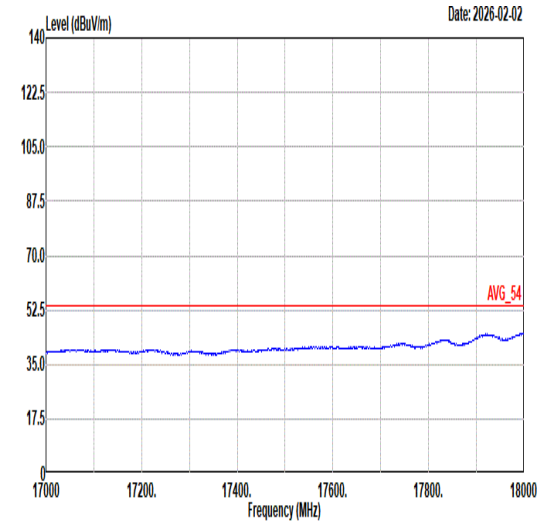 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	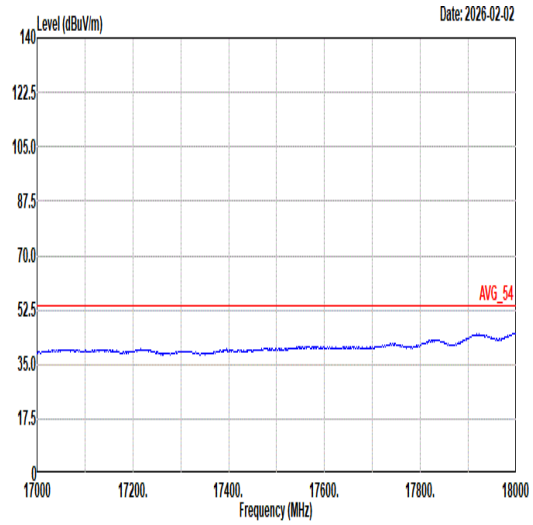 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	30	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	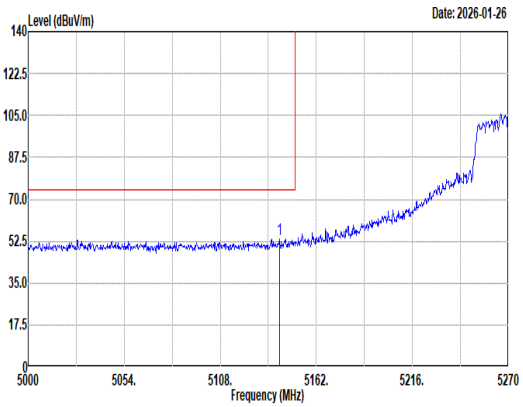 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5141.21 53.38 74.00 -20.62 44.90 33.26 11.41 36.19 0.00 196 326 Peak	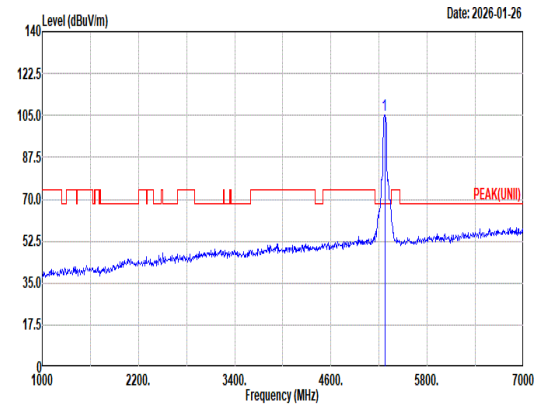 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5270.00 105.29 ------ ------ 96.88 33.06 11.55 36.20 0.00 196 326 Peak
Avg	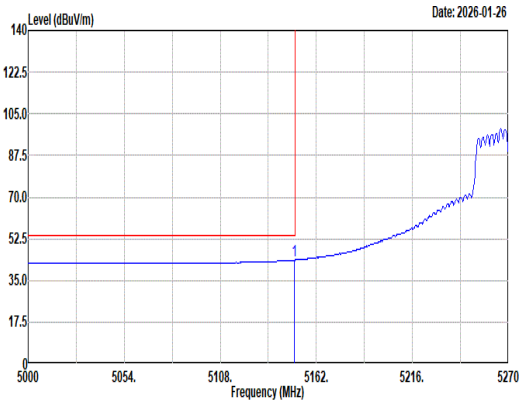 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.58 43.56 54.00 -10.44 35.03 33.30 11.42 36.19 0.00 196 326 Average	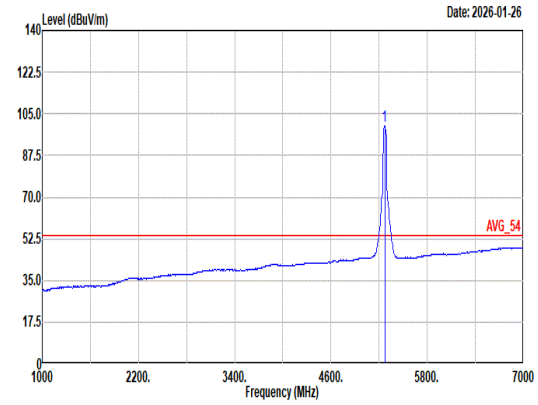 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5270.00 99.92 ------ ------ 91.51 33.06 11.55 36.20 0.00 196 326 Average

Mode	30	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	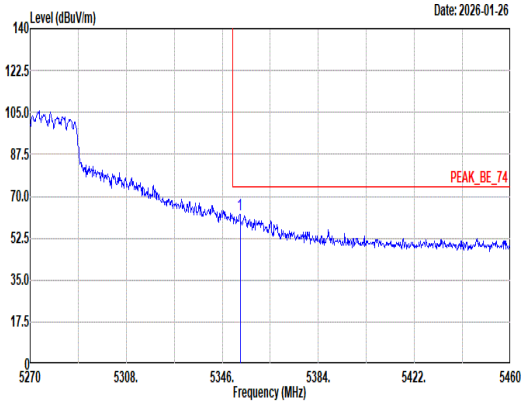 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5353.03 62.36 74.00 -11.64 53.90 33.01 11.66 36.21 0.00 196 326 Peak	Blank
Avg	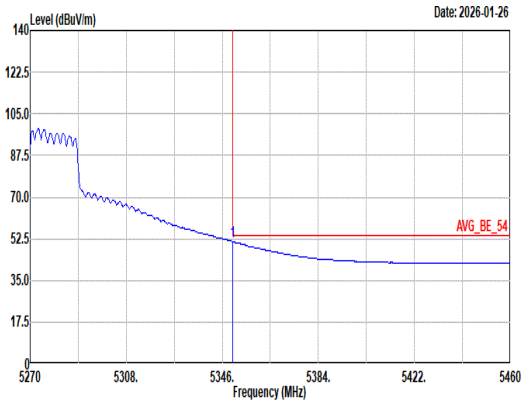 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.18 51.38 54.00 -2.62 42.93 33.00 11.66 36.21 0.00 196 326 Average	Blank

Mode	30	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	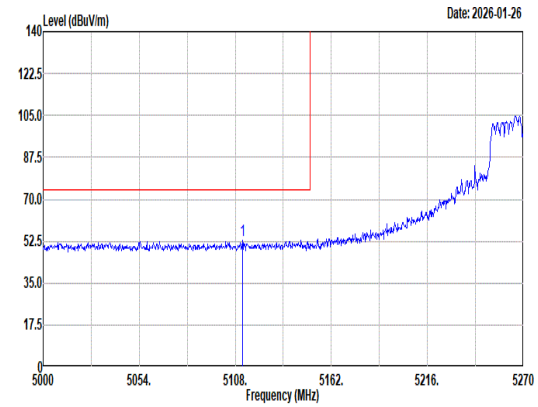 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5112.05 52.90 74.00 -21.10 44.54 33.15 11.39 36.18 0.00 263 83 Peak	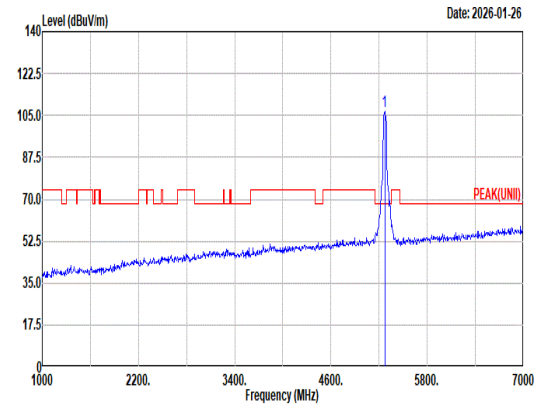 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 106.68 ------ ------ 98.28 33.04 11.56 36.20 0.00 263 83 Peak
Avg	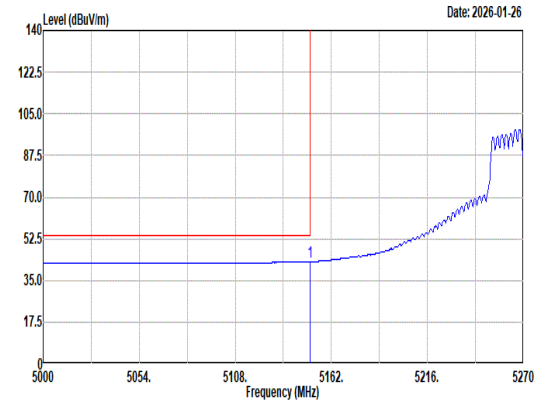 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.85 42.90 54.00 -11.10 34.37 33.30 11.42 36.19 0.00 263 83 Average	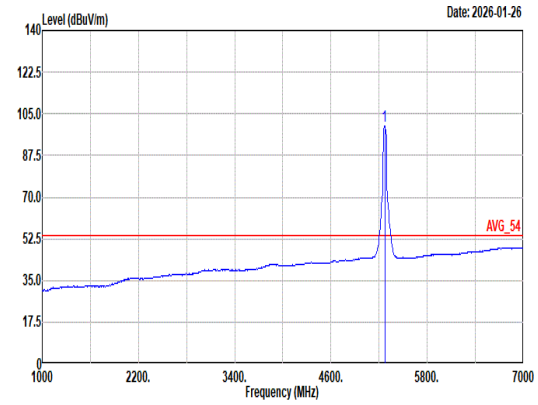 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5270.00 99.91 ------ ------ 91.50 33.06 11.55 36.20 0.00 263 83 Average

Mode	30	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	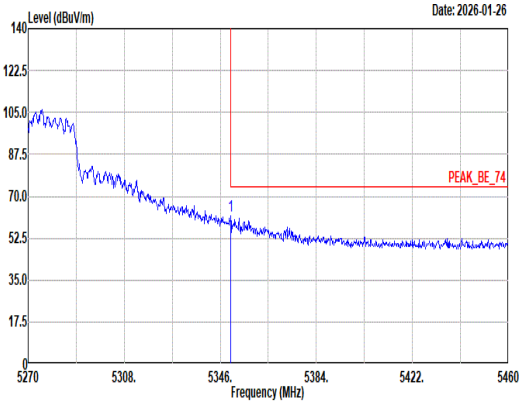 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.18 62.05 74.00 -11.95 53.60 33.00 11.66 36.21 0.00 263 83 Peak	Blank
Avg	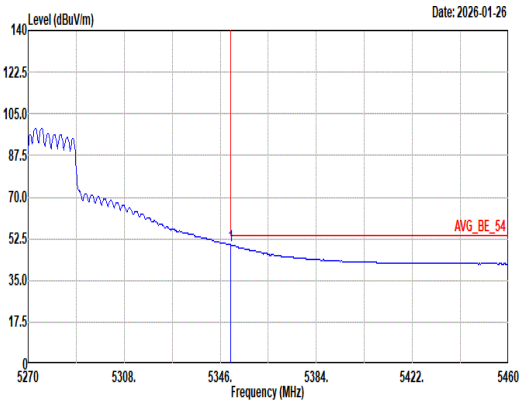 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.18 49.86 54.00 -4.14 41.41 33.00 11.66 36.21 0.00 263 83 Average	Blank

Mode	30	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	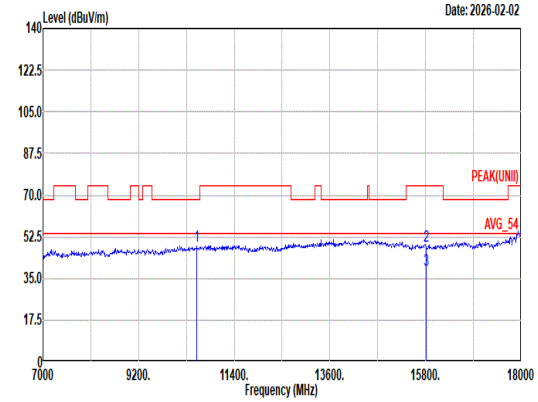 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10540.00 48.48 68.20 -19.72 59.18 38.78 16.27 66.69 0.94 -- -- Peak 2 15811.00 48.72 74.00 -25.28 56.98 37.68 20.04 66.65 0.67 100 21 Peak 3 15811.00 38.50 54.00 -15.50 46.76 37.68 20.04 66.65 0.67 100 21 Average	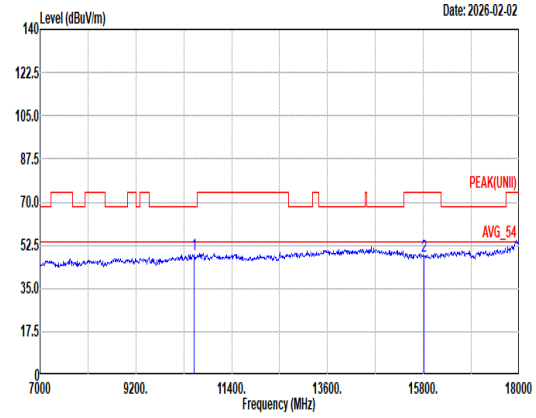 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10540.00 48.59 68.20 -19.61 59.29 38.78 16.27 66.69 0.94 -- -- Peak 2 15810.00 47.89 74.00 -26.11 56.15 37.68 20.04 66.65 0.67 -- -- Peak

Mode	30	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	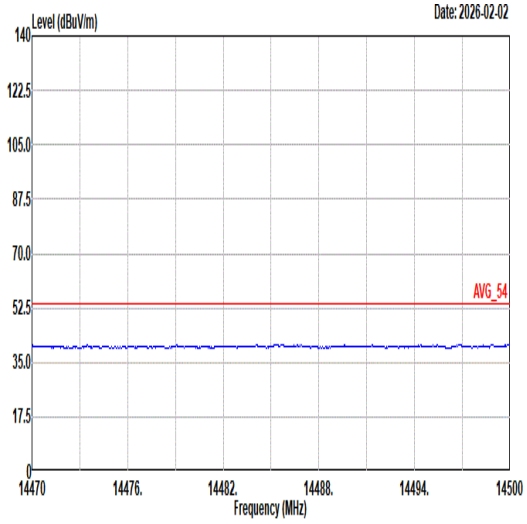 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	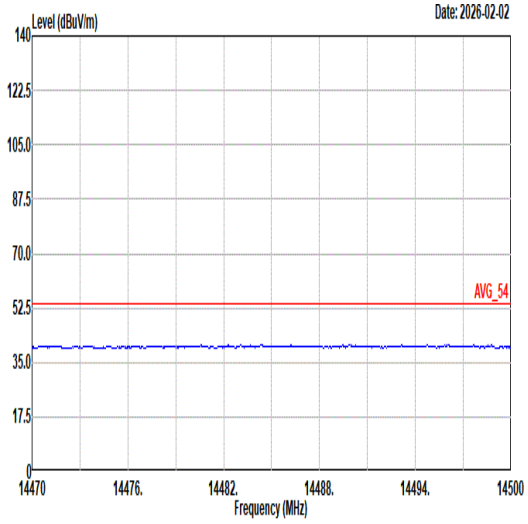 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	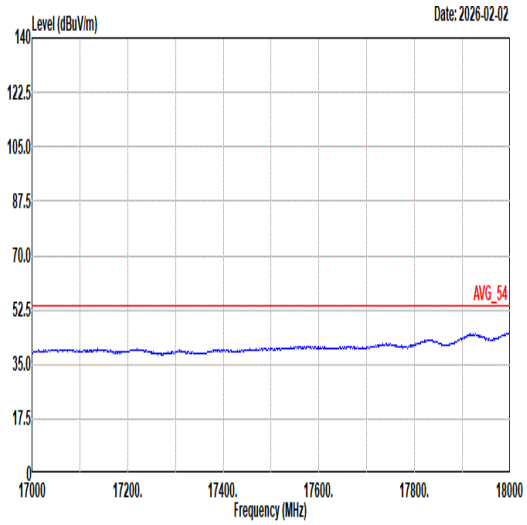 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	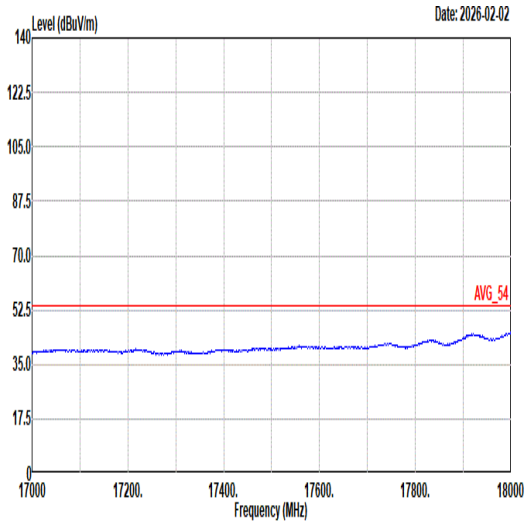 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	31	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	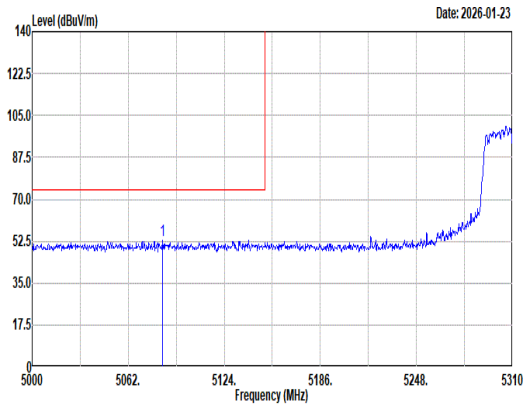 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5084.01 52.82 74.00 -21.18 44.50 33.13 11.37 36.18 0.00 177 319 Peak	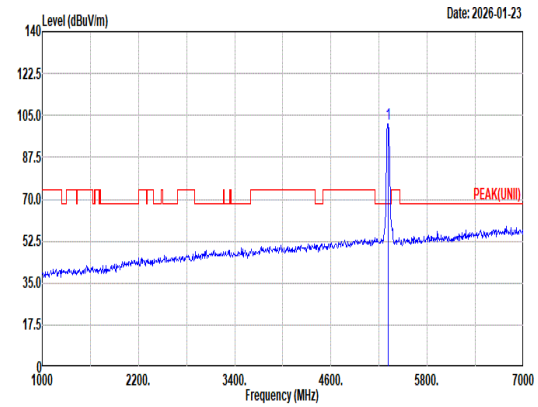 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5310.00 101.66 ------ ------ 93.27 33.00 11.60 36.21 0.00 177 319 Peak
Avg	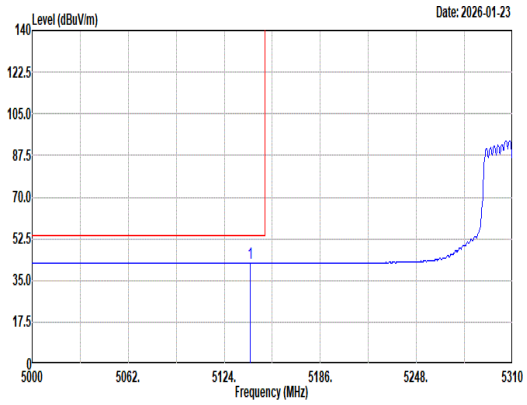 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5140.74 42.34 54.00 -11.66 33.86 33.26 11.41 36.19 0.00 177 319 Average	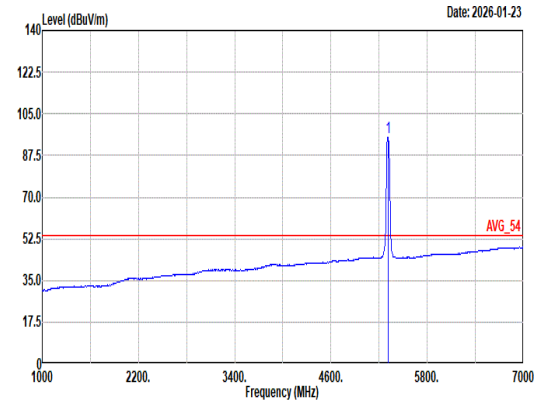 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5310.00 95.07 ------ ------ 86.68 33.00 11.60 36.21 0.00 177 319 Average

Mode	31	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	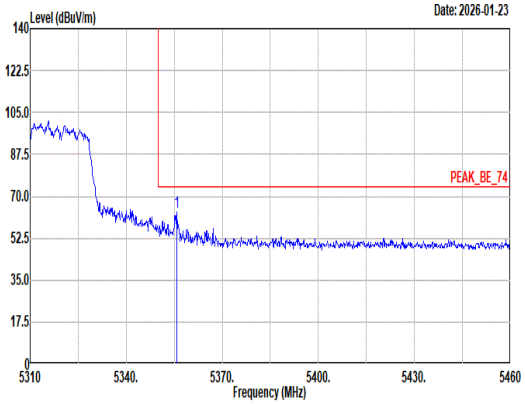 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5355.90 63.20 74.00 -10.80 54.74 33.01 11.66 36.21 0.00 177 319 Peak	Blank
Avg	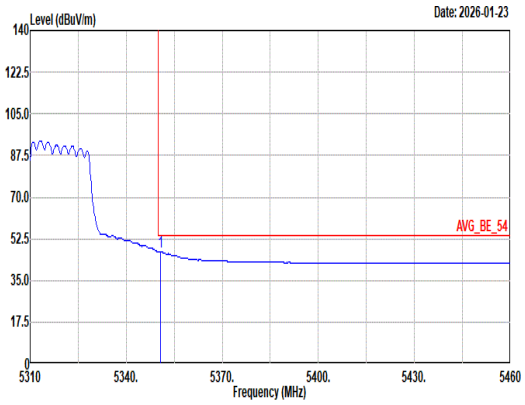 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.65 47.20 54.00 -6.80 38.75 33.00 11.66 36.21 0.00 177 319 Average	Blank

Mode	31	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	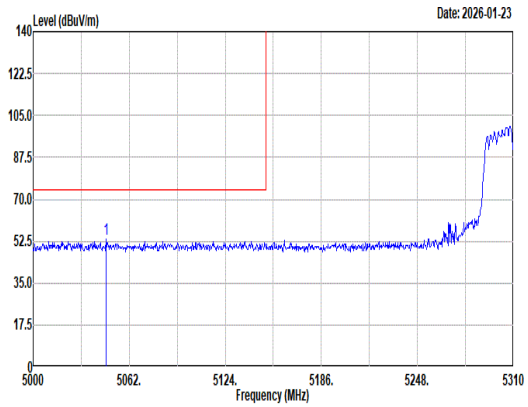 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5047.12 53.20 74.00 -20.80 44.83 33.21 11.34 36.18 0.00 332 88 Peak	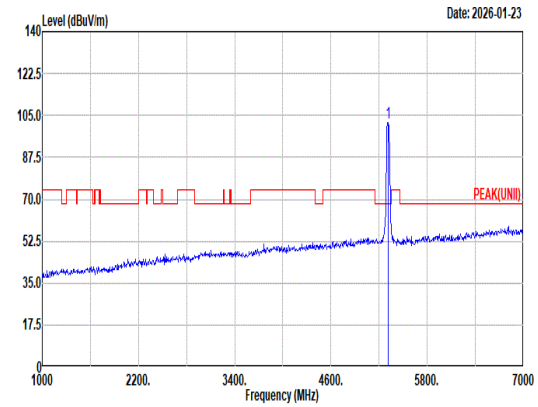 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 102.22 ------ ------ 93.84 33.00 11.59 36.21 0.00 332 88 Peak
Avg	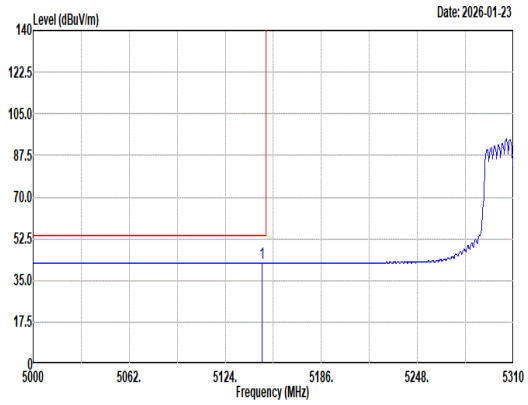 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.56 42.35 54.00 -11.65 33.83 33.29 11.42 36.19 0.00 332 88 Average	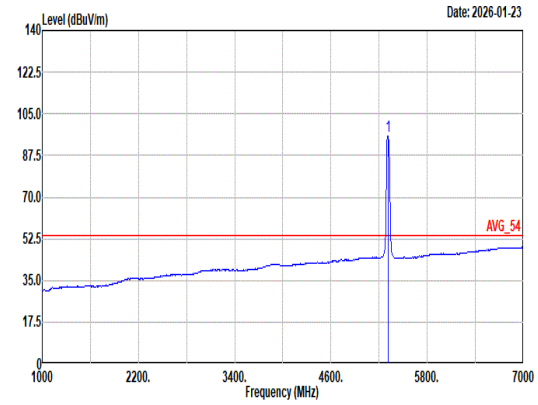 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5310.00 95.50 ------ ------ 87.11 33.00 11.60 36.21 0.00 332 88 Average

Mode	31	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	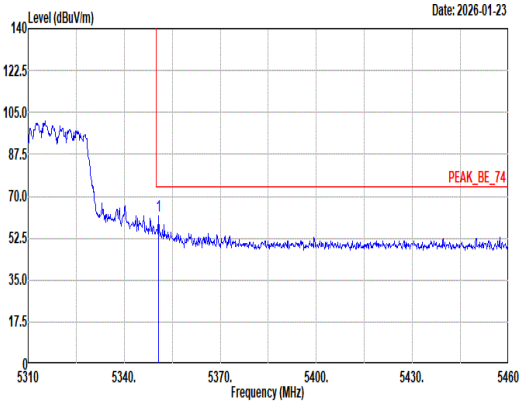 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.65 61.91 74.00 -12.09 53.46 33.00 11.66 36.21 0.00 332 88 Peak	Blank
Avg	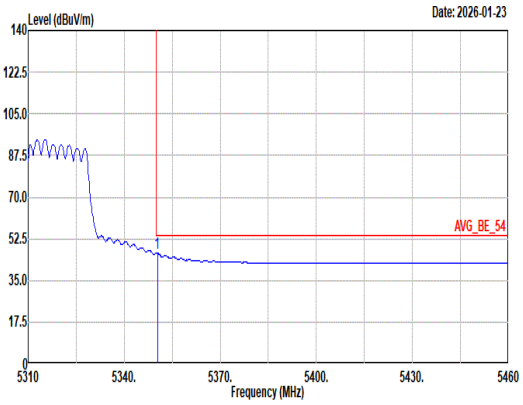 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.35 46.44 54.00 -7.56 37.99 33.00 11.66 36.21 0.00 332 88 Average	Blank

Mode	31	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	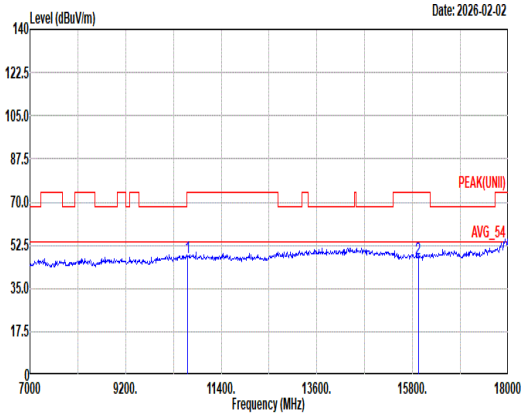 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL 1 10620.00 47.81 74.00 -26.19 57.96 39.14 16.33 66.55 0.93 -- -- Peak 2 15930.00 46.94 74.00 -27.06 55.23 37.67 20.12 66.76 0.68 -- -- Peak	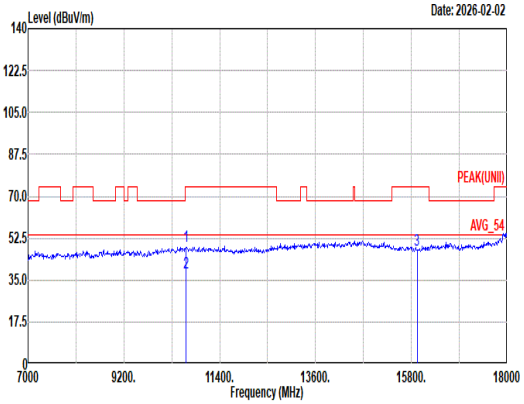 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL 1 10620.00 49.06 74.00 -24.94 59.21 39.14 16.33 66.55 0.93 100 65 Peak 2 10620.00 38.29 54.00 -15.71 48.44 39.14 16.33 66.55 0.93 100 65 Average 3 15930.00 47.52 74.00 -26.48 55.81 37.67 20.12 66.76 0.68 -- -- Peak

Mode	31	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	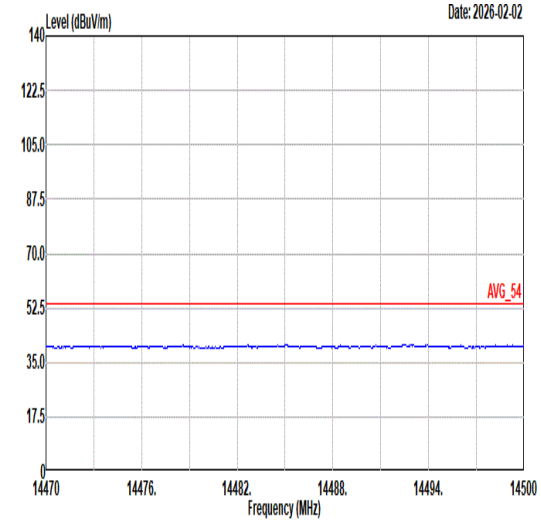 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	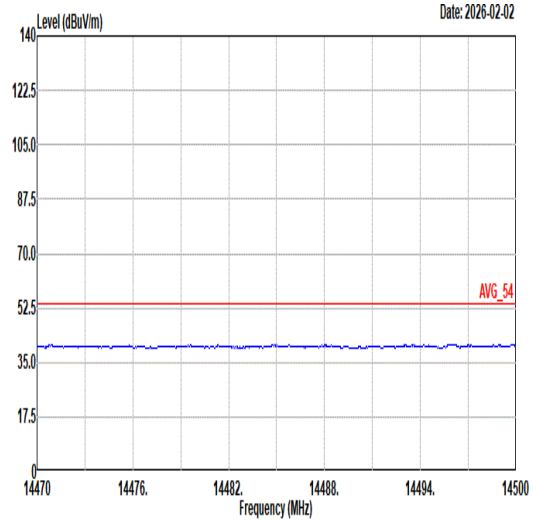 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	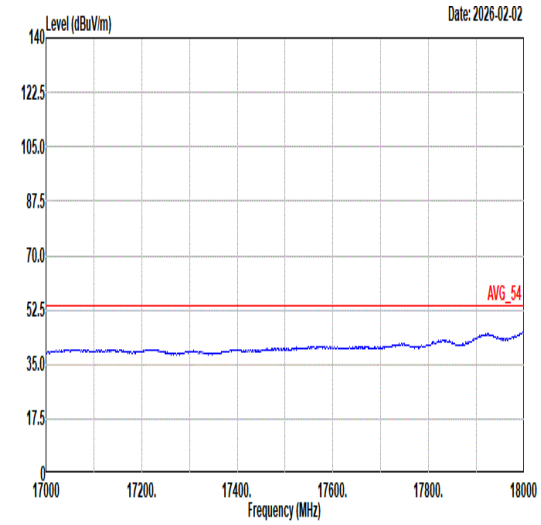 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	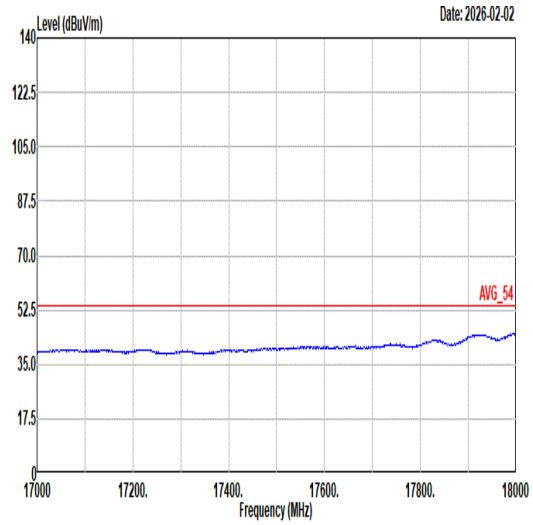 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	32	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	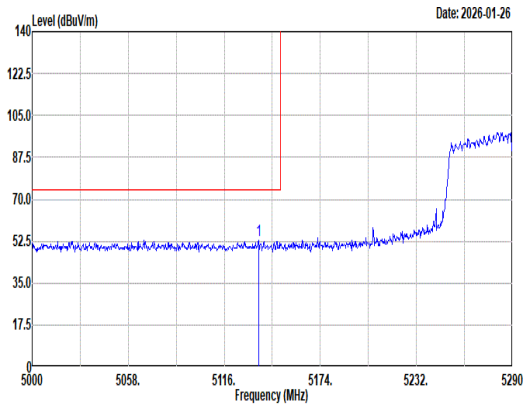 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5136.59 52.80 74.00 -21.20 44.33 33.25 11.41 36.19 0.00 200 316 Peak	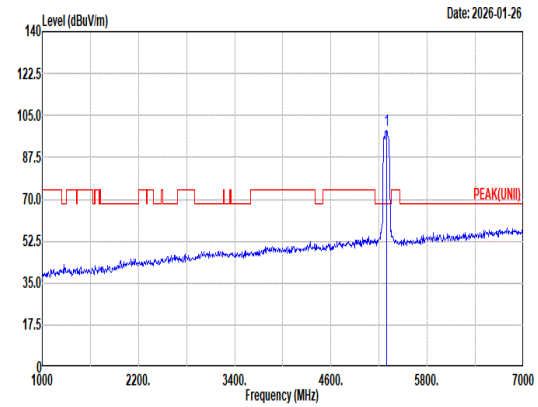 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 98.61 ------ ------ 90.23 33.01 11.58 36.21 0.00 200 316 Peak
Avg	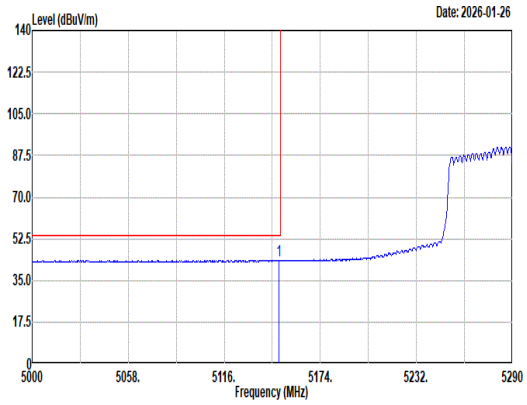 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.06 43.44 54.00 -10.56 34.91 33.30 11.42 36.19 0.00 200 316 Average	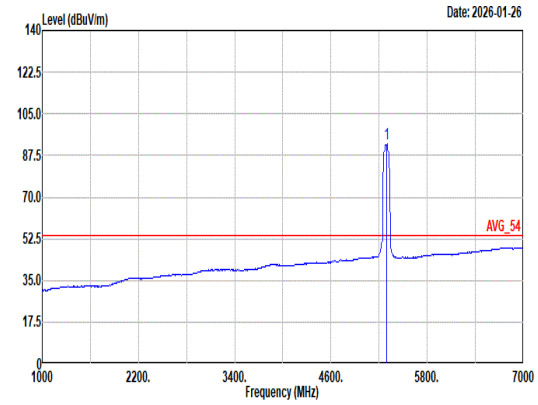 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 92.20 ------ ------ 83.82 33.00 11.59 36.21 0.00 200 316 Average

Mode	32	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	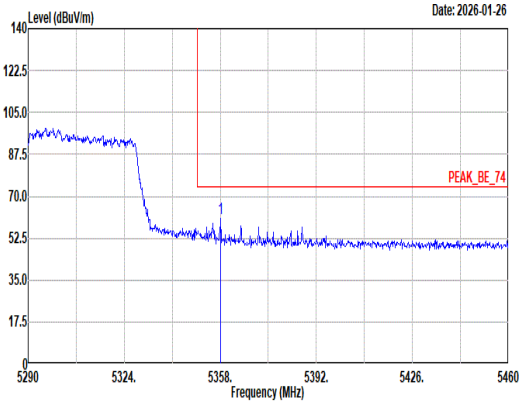 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5358.17 60.65 74.00 -13.35 52.17 33.02 11.67 36.21 0.00 200 316 Peak	Blank
Avg	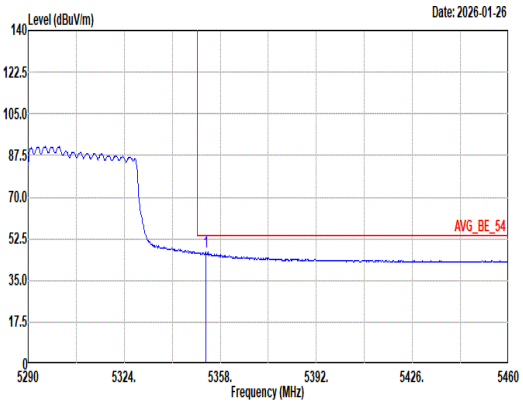 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5352.90 47.05 54.00 -6.95 38.59 33.01 11.66 36.21 0.00 200 316 Average	Blank

Mode	32	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	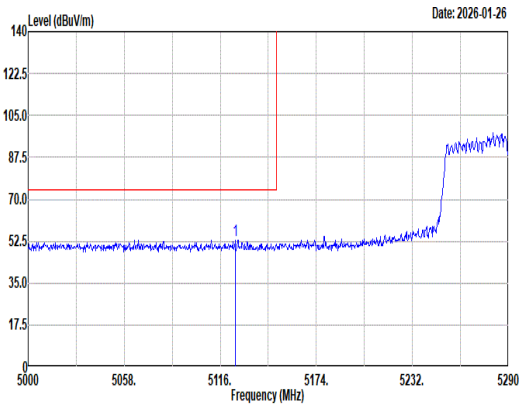 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5124.99 52.95 74.00 -21.05 44.53 33.20 11.40 36.18 0.00 267 103 Peak	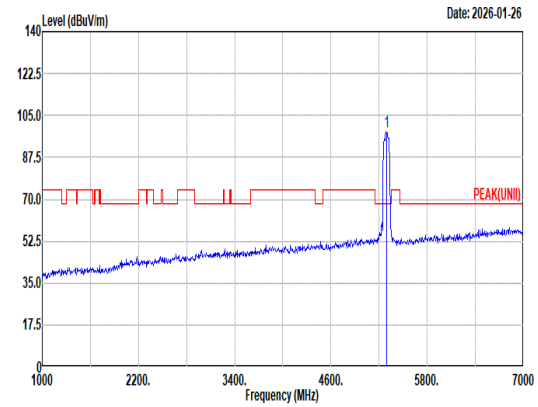 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 98.25 ------ ------ 89.85 33.03 11.57 36.20 0.00 267 103 Peak
Avg	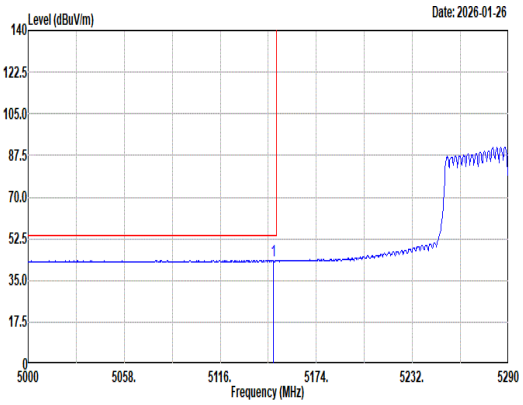 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5147.90 43.49 54.00 -10.51 34.97 33.29 11.42 36.19 0.00 267 103 Average	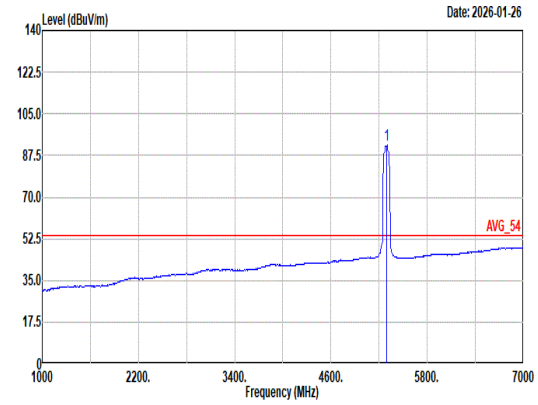 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5290.00 91.96 ------ ------ 83.58 33.00 11.59 36.21 0.00 267 103 Average

Mode	32	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	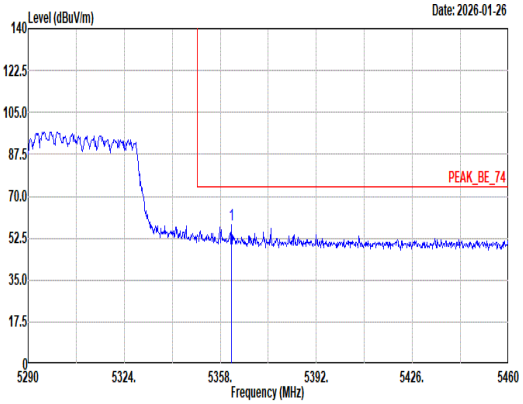 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5362.08 58.33 74.00 -15.67 49.85 33.02 11.67 36.21 0.00 267 103 Peak	Blank
Avg	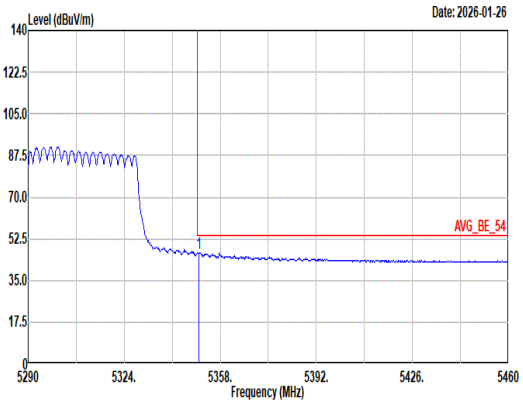 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.35 46.64 54.00 -7.36 38.19 33.00 11.66 36.21 0.00 267 103 Average	Blank

Mode	32	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	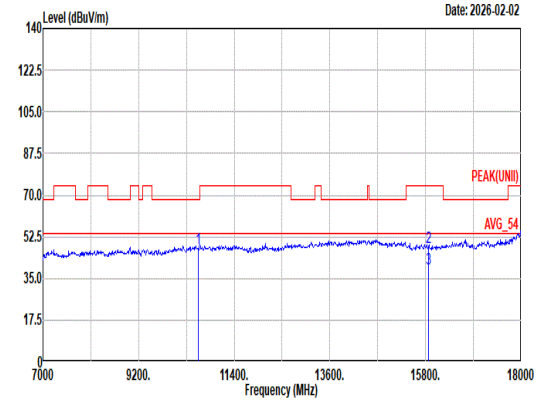 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 47.52 68.20 -20.68 57.92 38.98 16.30 66.62 0.94 -- -- Peak 2 15870.00 48.16 74.00 -25.84 56.45 37.66 20.08 66.70 0.67 300 230 Peak 3 15870.00 39.24 54.00 -14.76 47.53 37.66 20.08 66.70 0.67 300 230 Average	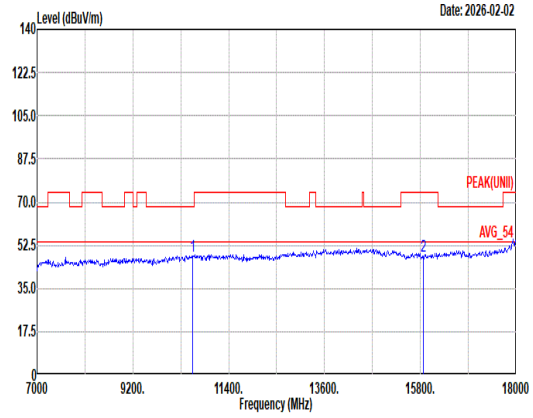 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10580.00 47.96 68.20 -20.24 58.36 38.98 16.30 66.62 0.94 -- -- Peak 2 15870.00 47.82 74.00 -26.18 56.11 37.66 20.08 66.70 0.67 -- -- Peak

Mode	32	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	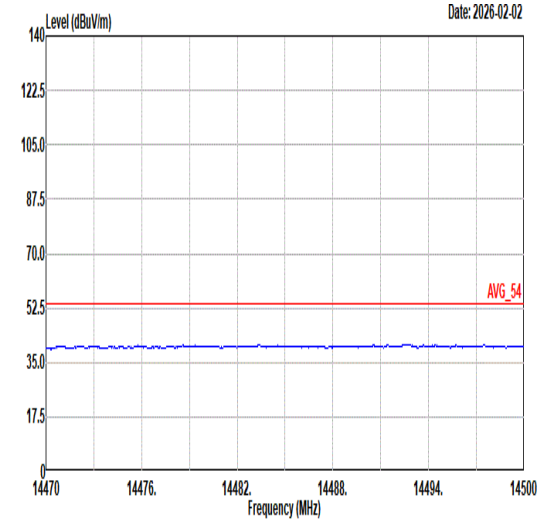 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	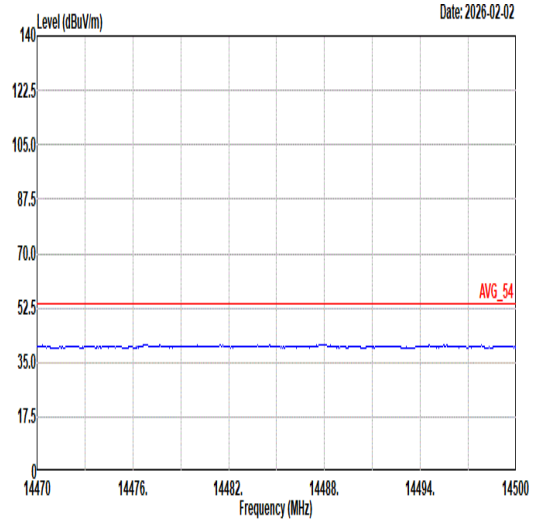 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	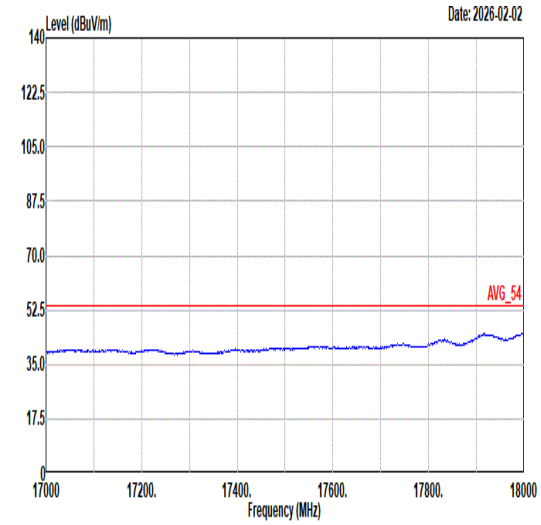 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	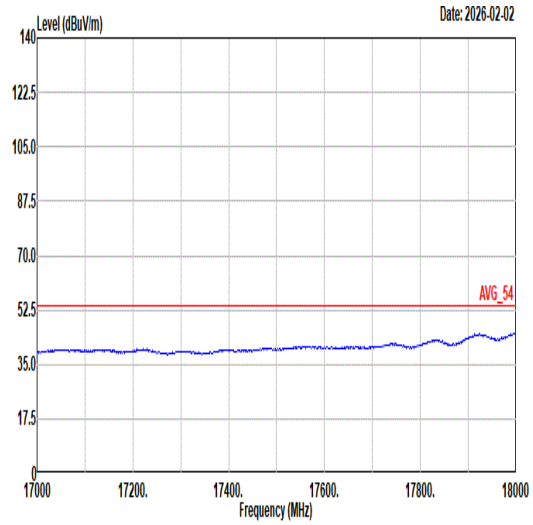 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	33	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	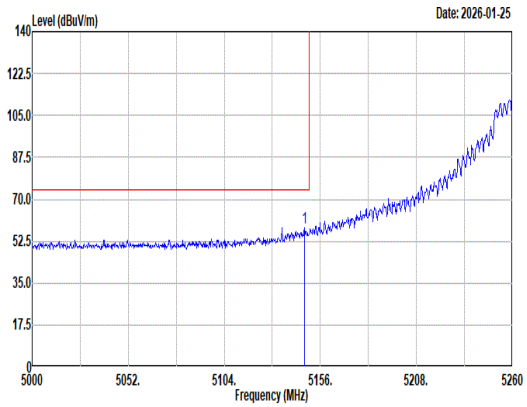 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5147.42 58.13 74.00 -15.87 49.61 33.29 11.42 36.19 0.00 180 325 Peak	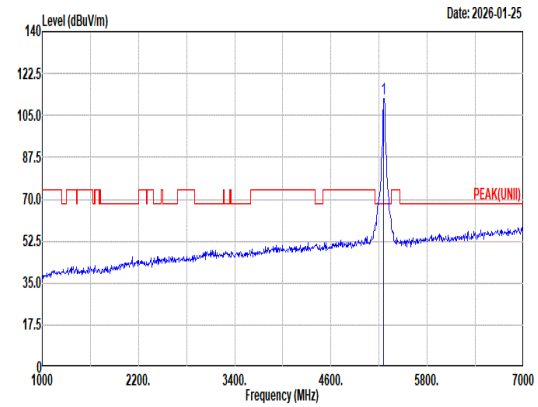 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5260.00 112.20 ------ ------ 103.78 33.07 11.55 36.20 0.00 180 325 Peak
Avg	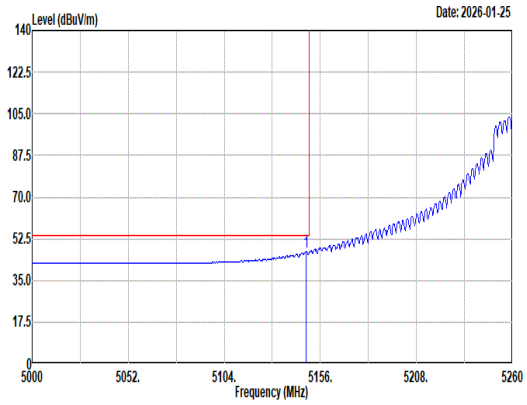 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5148.46 47.02 54.00 -6.98 38.50 33.29 11.42 36.19 0.00 180 325 Average	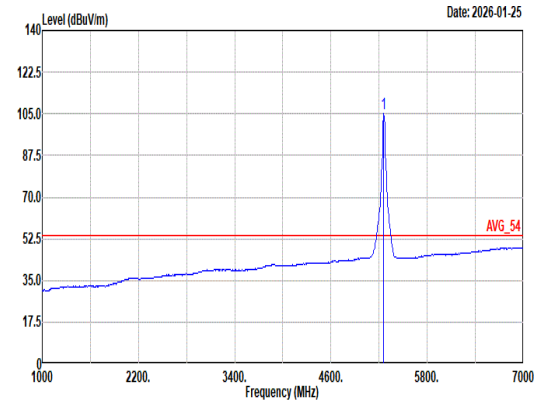 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5260.00 105.17 ------ ------ 96.75 33.08 11.54 36.20 0.00 180 325 Average

Mode	33	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	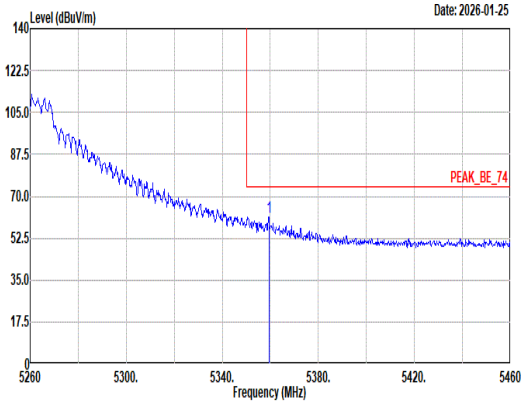 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5359.40 61.55 74.00 -12.45 53.07 33.02 11.67 36.21 0.00 180 325 Peak	Blank
Avg	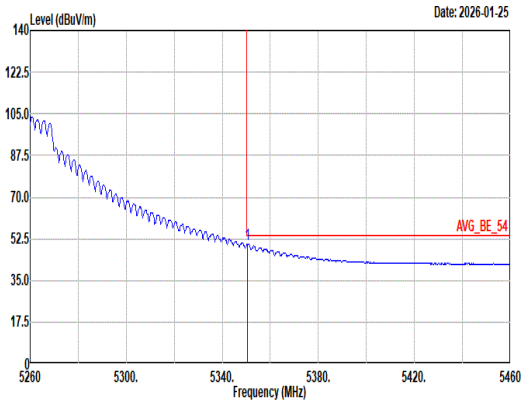 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.60 50.21 54.00 -3.79 41.76 33.00 11.66 36.21 0.00 180 325 Average	Blank

Mode	33	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	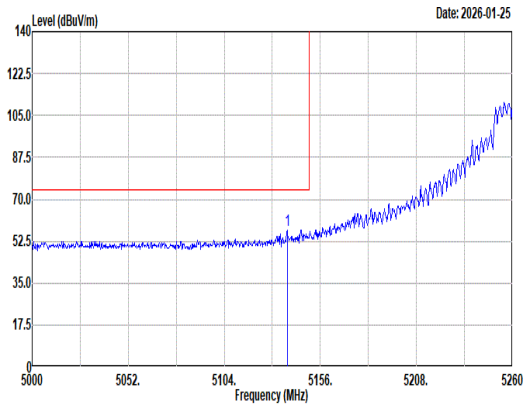 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5138.06 56.94 74.00 -17.06 48.47 33.25 11.41 36.19 0.00 278 82 Peak	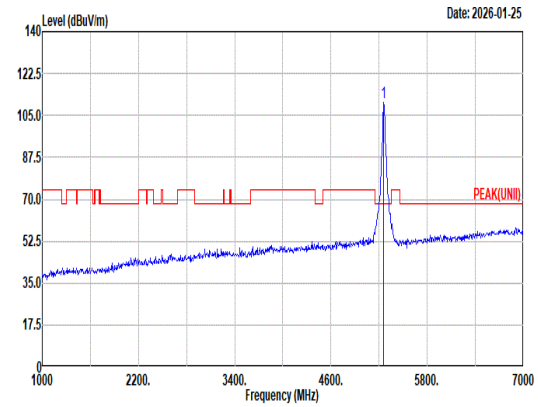 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 110.50 ------ ------ 102.08 33.08 11.54 36.20 0.00 278 82 Peak
Avg	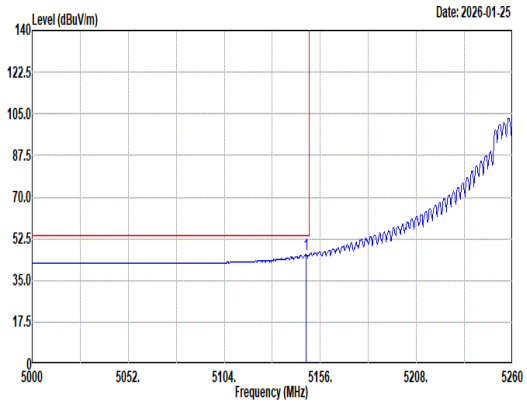 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5148.20 45.79 54.00 -8.21 37.27 33.29 11.42 36.19 0.00 278 82 Average	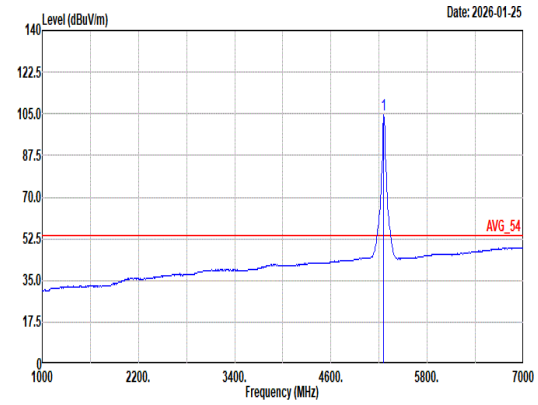 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5260.00 104.47 ------ ------ 96.05 33.08 11.54 36.20 0.00 278 82 Average

Mode	33	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	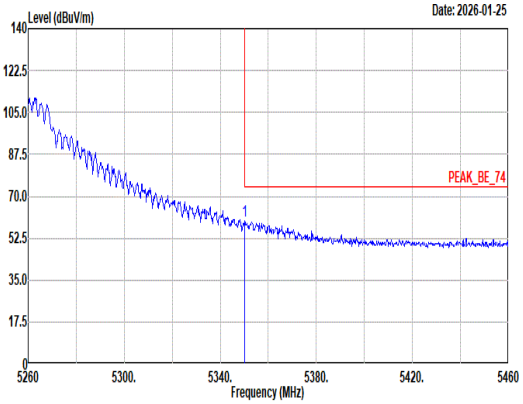 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.20 59.53 74.00 -14.47 51.08 33.00 11.66 36.21 0.00 278 82 Peak	Blank
Avg	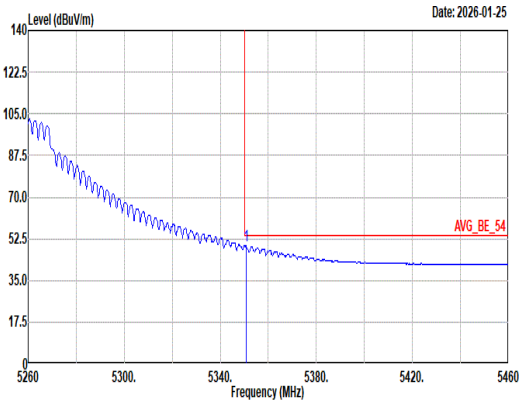 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.80 49.72 54.00 -4.28 41.27 33.00 11.66 36.21 0.00 278 82 Average	Blank

Mode	33	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	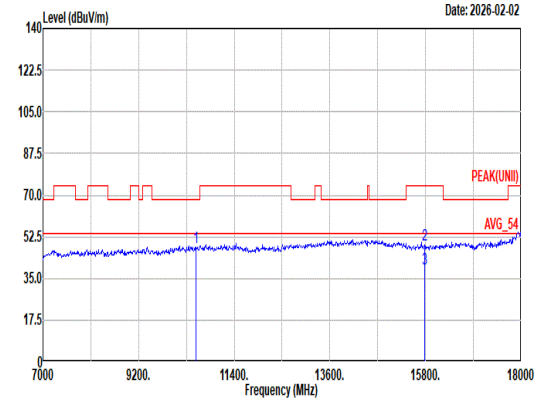 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 47.88 68.20 -20.32 58.66 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 49.18 74.00 -24.82 57.28 37.83 20.02 66.62 0.67 213 137 Peak 3 15780.00 38.88 54.00 -15.12 46.99 37.82 20.03 66.63 0.67 213 137 Average	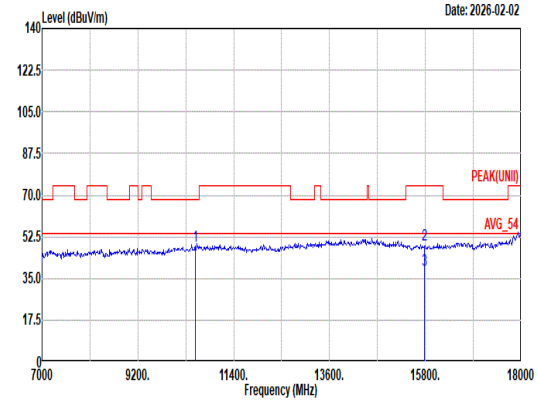 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 10520.00 48.62 68.20 -19.58 59.40 38.74 16.25 66.72 0.95 -- -- Peak 2 15780.00 49.32 74.00 -24.68 57.42 37.83 20.02 66.62 0.67 299 183 Peak 3 15780.00 38.72 54.00 -15.28 46.83 37.82 20.03 66.63 0.67 299 183 Average

Mode	33	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	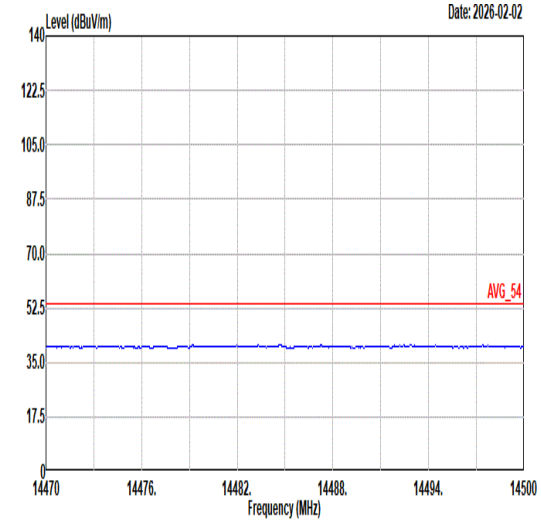 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	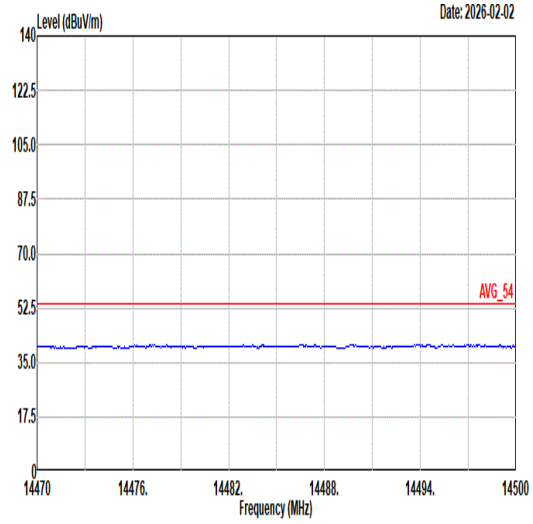 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	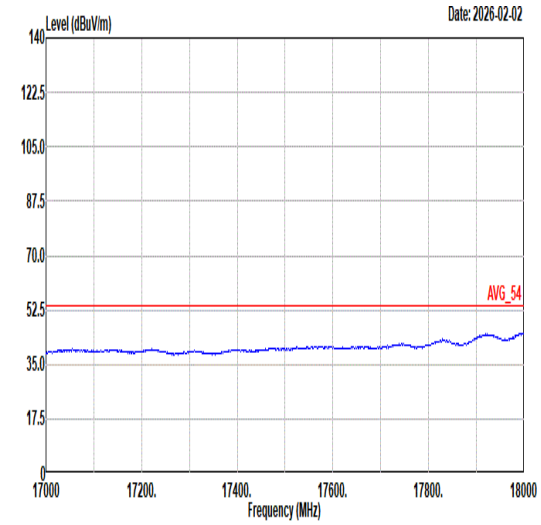 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	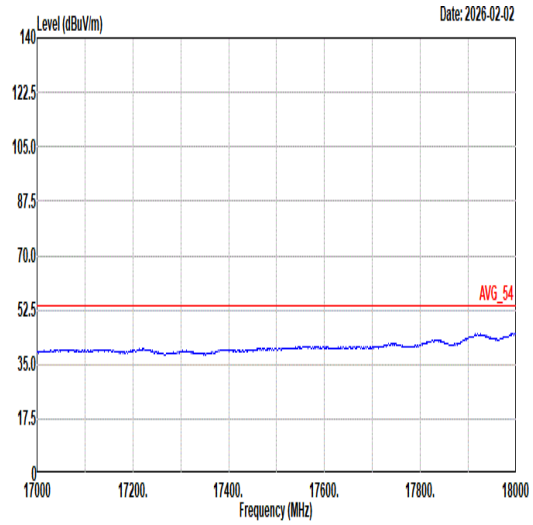 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	34	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH56_Full RU_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	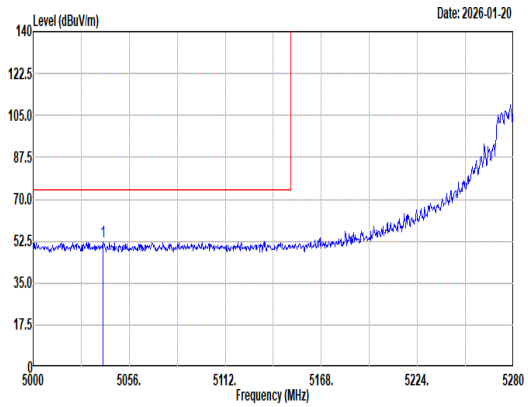 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5040.88 52.36 74.00 -21.64 43.98 33.22 11.33 36.17 0.00 139 325 Peak	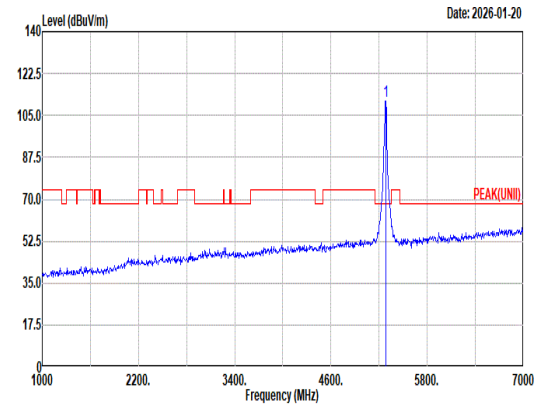 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5280.00 110.88 ------ ------ 102.48 33.03 11.57 36.20 0.00 139 325 Peak
Avg	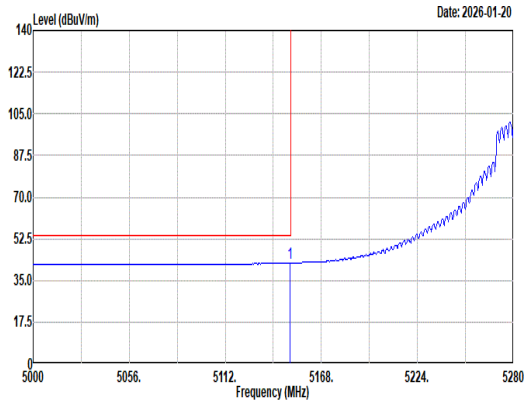 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5149.52 42.35 54.00 -11.65 33.82 33.30 11.42 36.19 0.00 139 325 Average	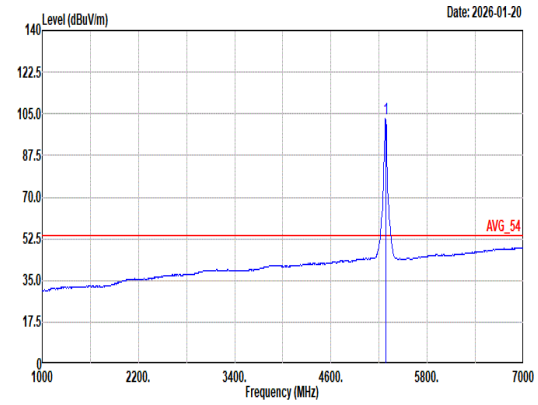 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5280.00 103.02 ------ ------ 94.62 33.04 11.56 36.20 0.00 139 325 Average

Mode	34	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH56_Full RU_5280MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	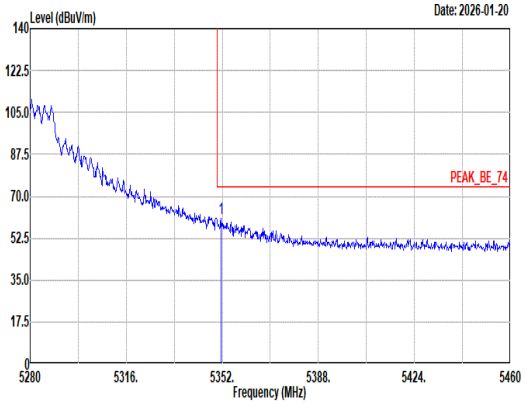 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5351.64 60.81 74.00 -13.19 52.36 33.00 11.66 36.21 0.00 139 325 Peak	Blank
Avg	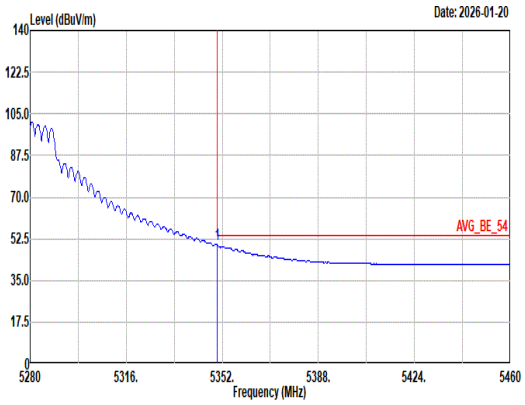 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 50.04 54.00 -3.96 41.59 33.00 11.66 36.21 0.00 139 325 Average	Blank

Mode	34	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH56_Full RU_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	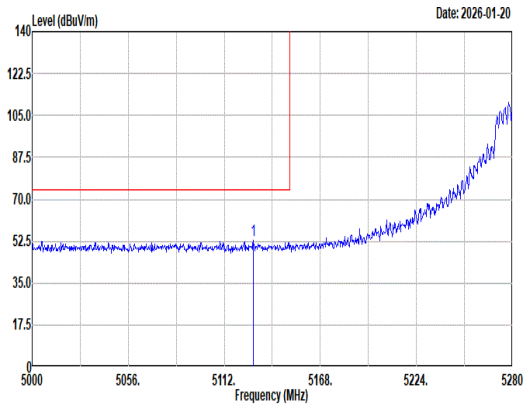 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5128.80 52.92 74.00 -21.08 44.49 33.22 11.40 36.19 0.00 285 90 Peak	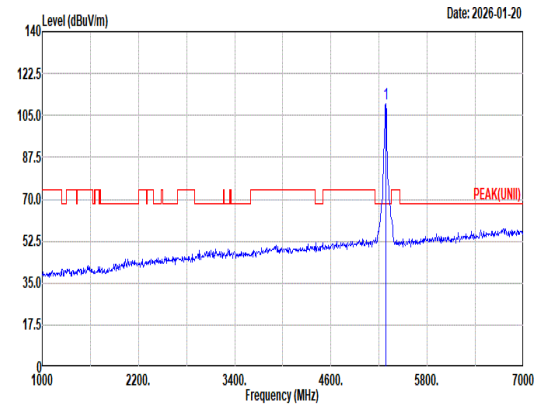 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5280.00 110.14 ------ ------ 101.74 33.03 11.57 36.20 0.00 285 90 Peak
Avg	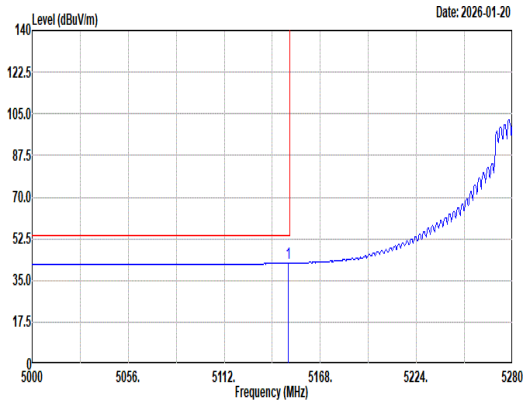 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5149.24 42.26 54.00 -11.74 33.73 33.30 11.42 36.19 0.00 285 90 Average	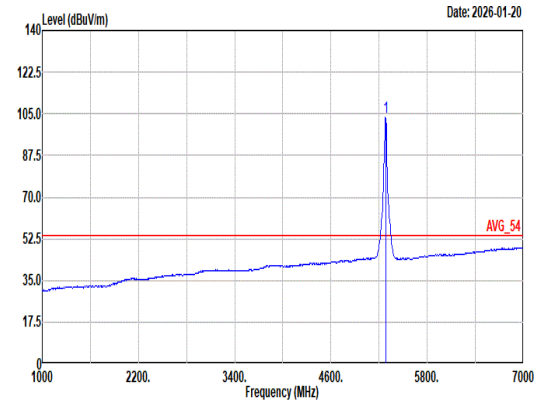 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5280.00 103.68 ------ ------ 95.28 33.04 11.56 36.20 0.00 285 90 Average

Mode	34	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH56_Full RU_5280MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	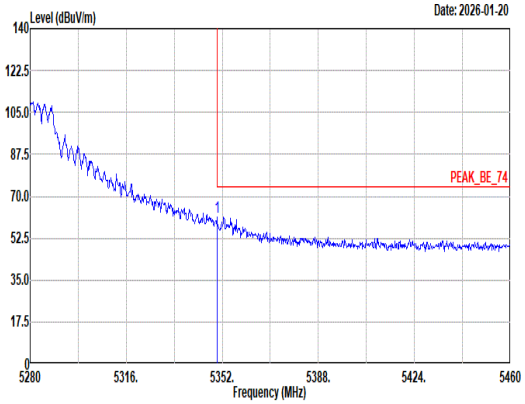 Site : 03CH16-HY Condition: PEAK_BE_74 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 61.29 74.00 -12.71 52.84 33.00 11.66 36.21 0.00 285 90 Peak	Blank
Avg	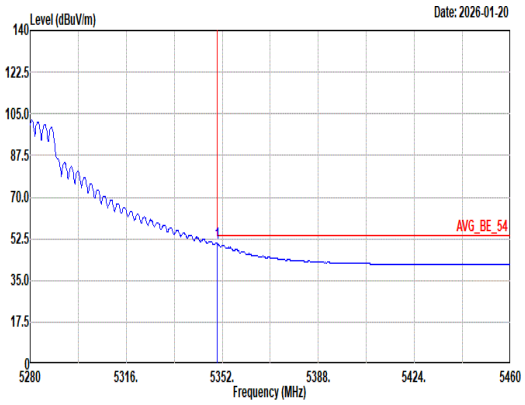 Site : 03CH16-HY Condition: AVG_BE_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5350.02 50.64 54.00 -3.36 42.19 33.00 11.66 36.21 0.00 285 90 Average	Blank