Mode	54	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	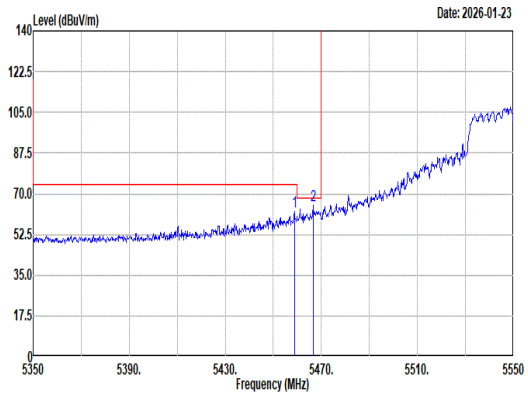 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5458.80 62.17 74.00 -11.83 53.60 33.02 11.78 36.23 0.00 200 317 Peak 2 5466.60 64.79 68.20 -3.41 56.21 33.03 11.78 36.23 0.00 200 317 Peak	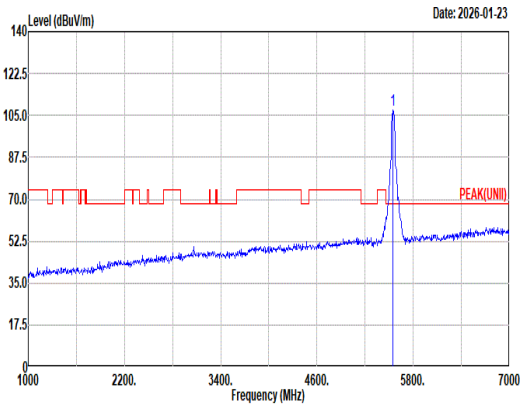 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5550.00 107.43 ------ ------ 98.71 33.10 11.86 36.24 0.00 200 317 Peak
Avg	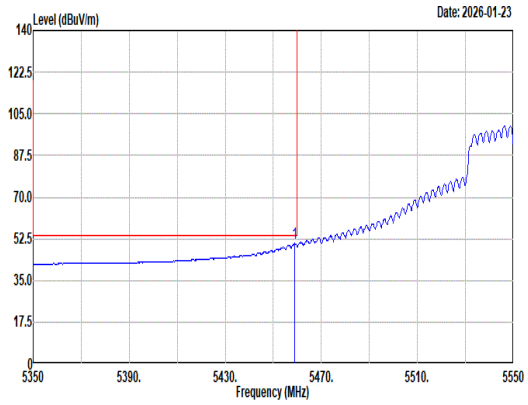 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5458.80 50.47 54.00 -3.53 41.90 33.02 11.78 36.23 0.00 200 317 Average	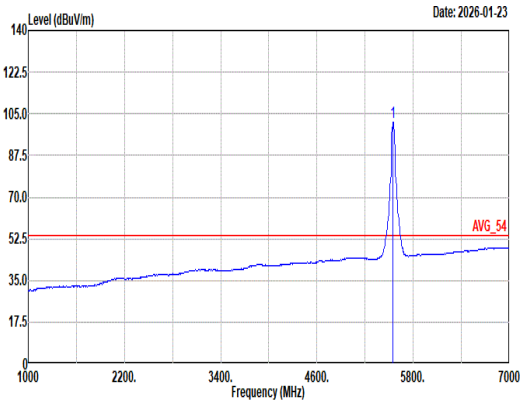 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5550.00 101.24 ------ ------ 92.52 33.10 11.86 36.24 0.00 200 317 Average

Mode	54	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	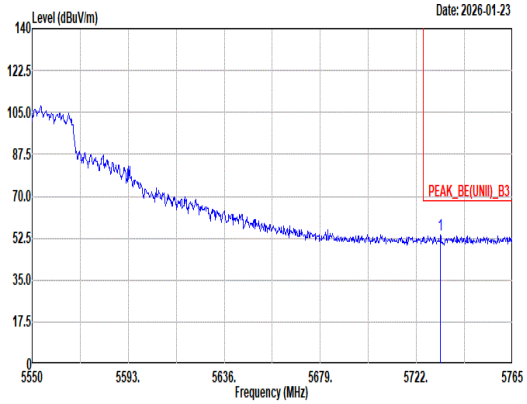 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5732.75 53.88 68.20 -14.32 44.40 33.73 12.04 36.29 0.00 200 317 Peak	Blank

Mode	54	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	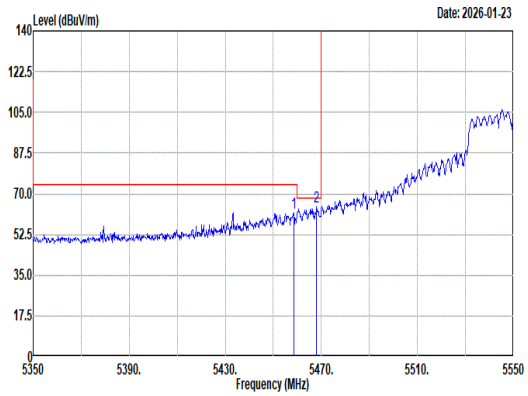 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.60 62.04 74.00 -11.96 53.47 33.02 11.78 36.23 0.00 254 66 Peak 2 5468.00 64.60 68.20 -3.60 56.01 33.04 11.78 36.23 0.00 254 66 Peak	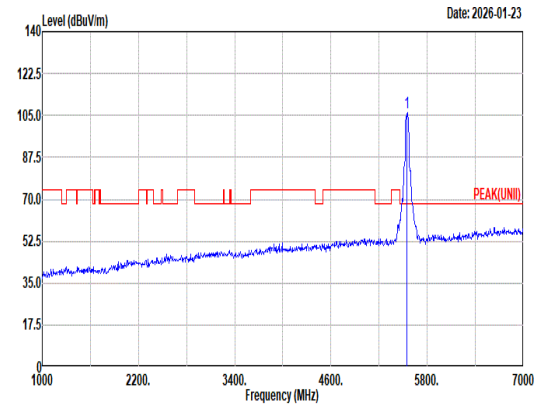 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 106.24 ------ ------ 97.52 33.09 11.87 36.24 0.00 254 66 Peak
Avg	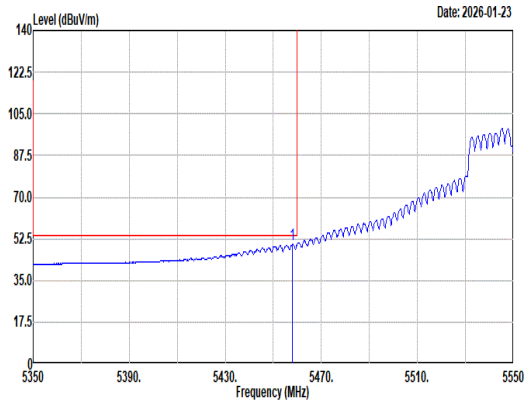 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.00 50.33 54.00 -3.67 41.75 33.02 11.78 36.22 0.00 254 66 Average	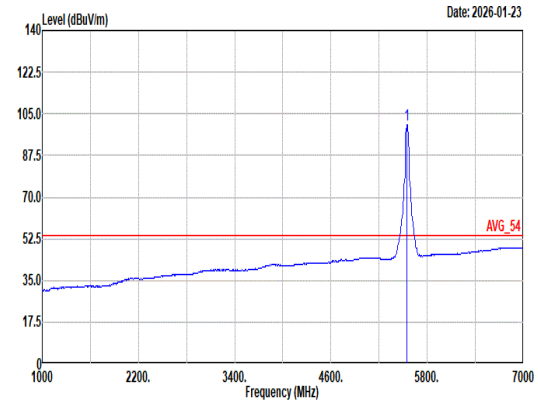 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 100.30 ------ ------ 91.58 33.09 11.87 36.24 0.00 254 66 Average

Mode	54	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	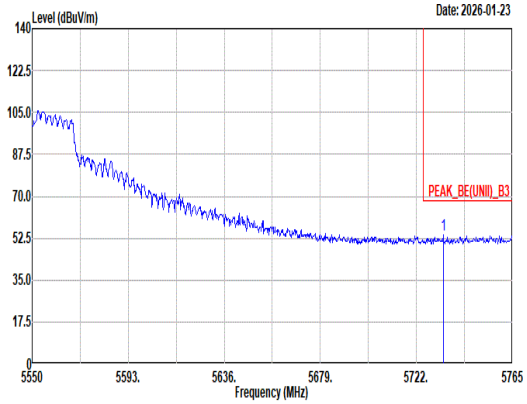 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5734.04 53.70 68.20 -14.50 44.21 33.74 12.04 36.29 0.00 254 66 Peak	Blank

Mode	54	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	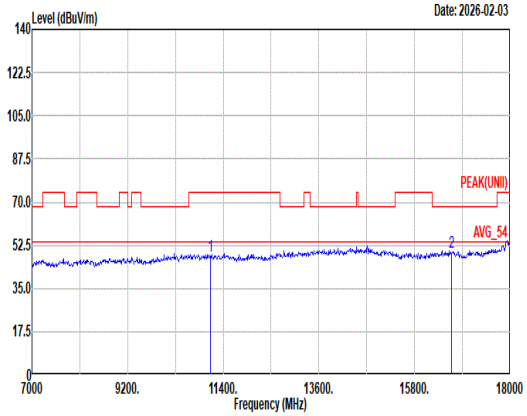 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 47.98 74.00 -26.02 57.35 39.00 16.69 65.90 0.84 -- -- Peak 2 16650.00 49.77 68.20 -18.43 57.03 38.30 20.60 66.90 0.74 -- -- Peak	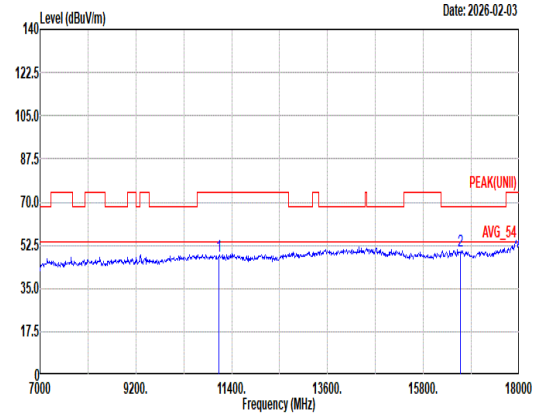 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 47.91 74.00 -26.09 57.28 39.00 16.69 65.90 0.84 -- -- Peak 2 16650.00 49.94 68.20 -18.26 57.20 38.30 20.60 66.90 0.74 -- -- Peak

Mode	54	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	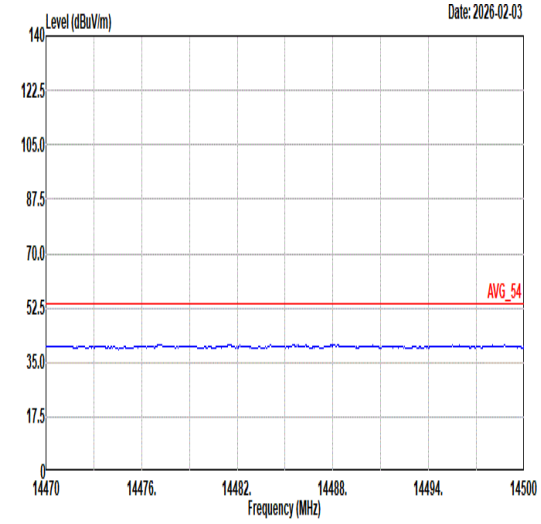 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	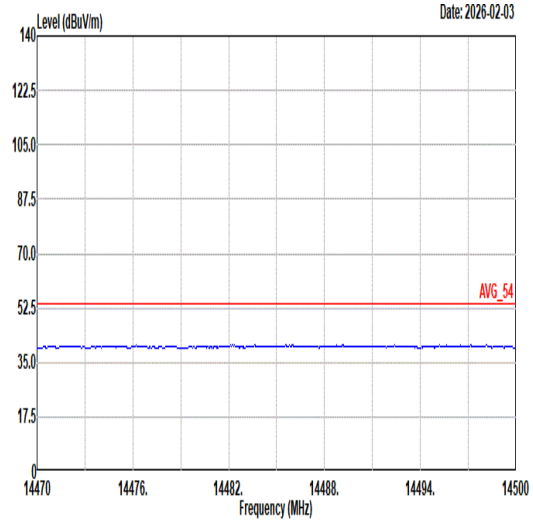 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	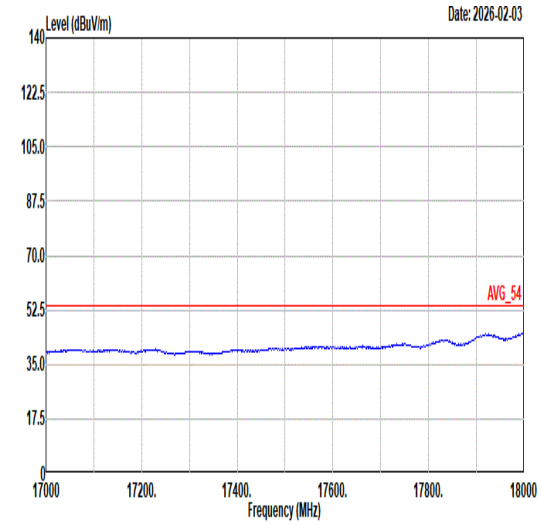 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	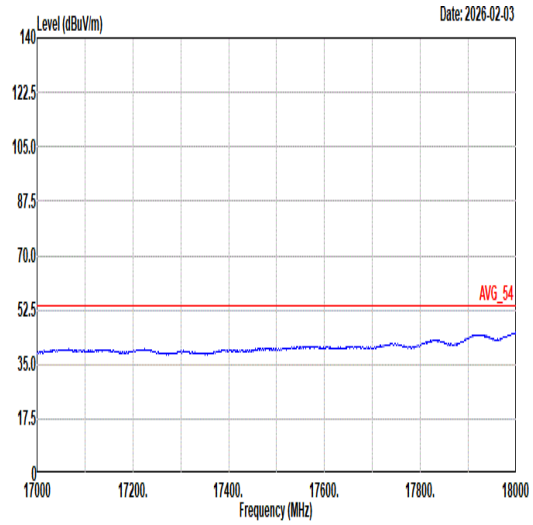 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	55
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	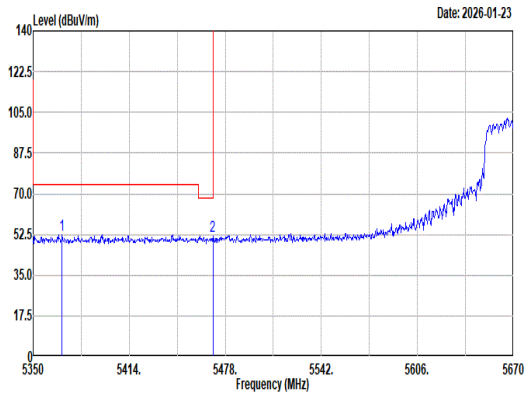 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5369.20 52.55 74.00 -21.45 44.04 33.04 11.68 36.21 0.00 174 360 Peak 2 5469.68 51.95 68.20 -16.25 43.35 33.04 11.79 36.23 0.00 174 360 Peak	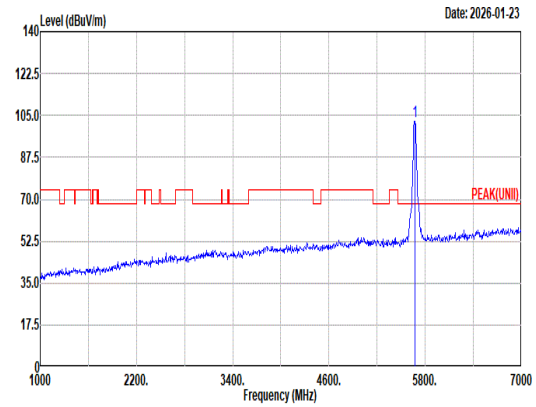 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 102.57 ------ ------ 93.48 33.39 11.98 36.28 0.00 174 360 Peak
Avg	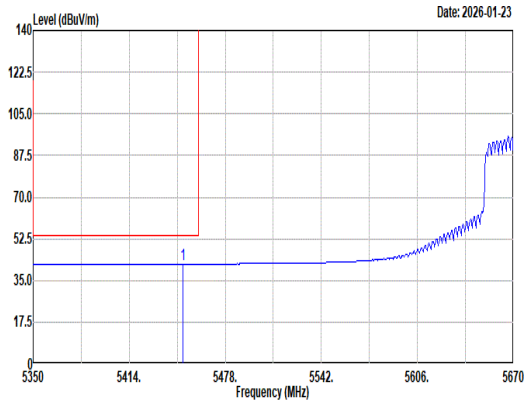 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5449.84 41.88 54.00 -12.12 33.33 33.00 11.77 36.22 0.00 174 360 Average	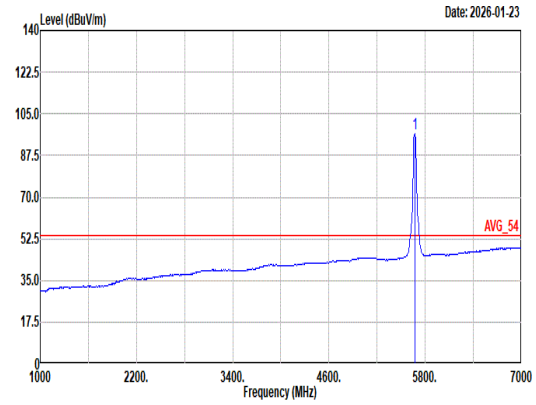 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 96.65 ------ ------ 87.60 33.34 11.98 36.27 0.00 174 360 Average

Mode	55	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	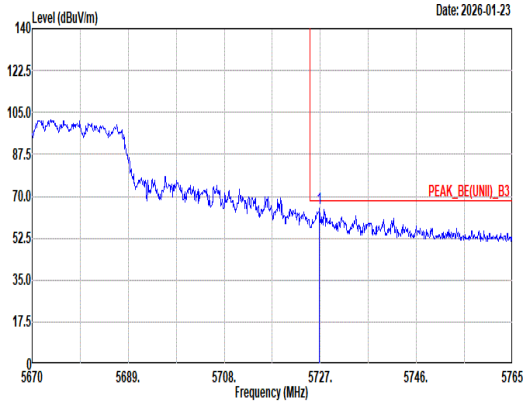 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.81 65.23 68.20 -2.97 55.77 33.71 12.04 36.29 0.00 174 360 Peak	Blank

Mode	55
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	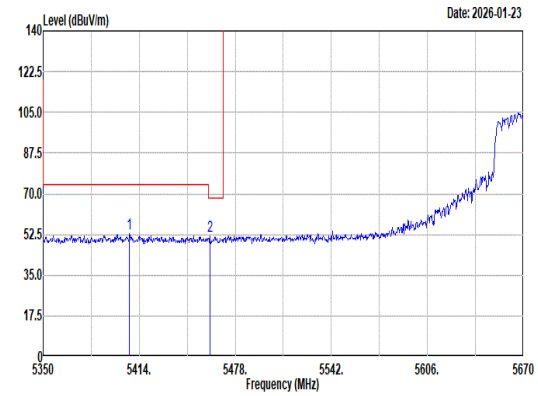 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5407.60 52.64 74.00 -21.36 44.05 33.08 11.73 36.22 0.00 172 316 Peak 2 5461.04 51.58 68.20 -16.62 43.01 33.02 11.78 36.23 0.00 172 316 Peak	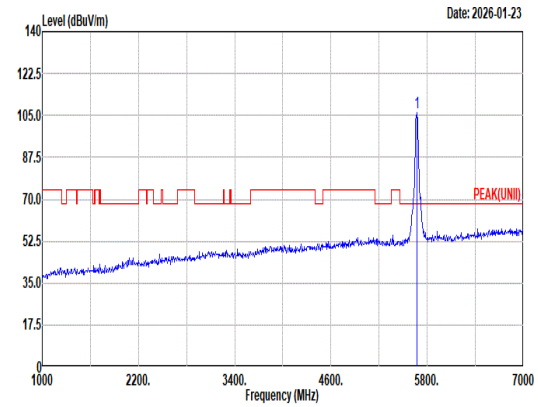 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 106.18 ------ ------ 97.13 33.34 11.98 36.27 0.00 172 316 Peak
Avg	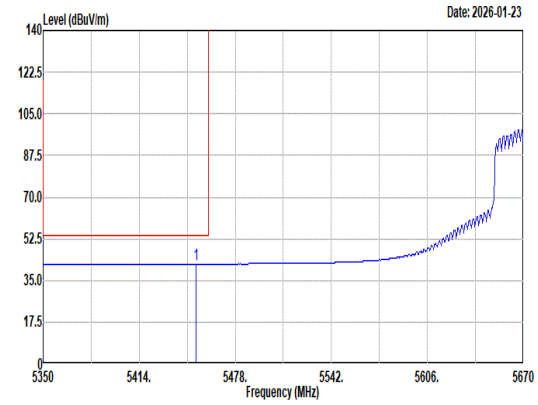 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.08 41.90 54.00 -12.10 33.35 33.00 11.77 36.22 0.00 172 316 Average	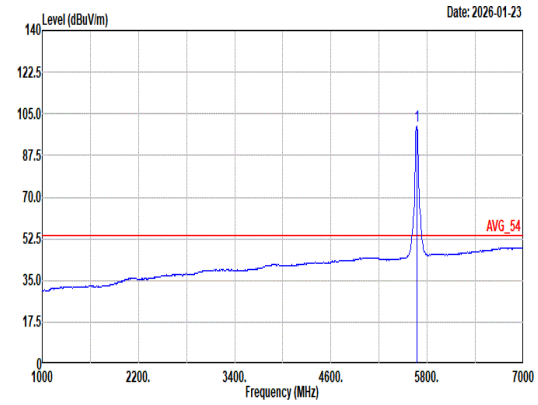 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 99.80 ------ ------ 90.71 33.39 11.98 36.28 0.00 172 316 Average

Mode	55	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	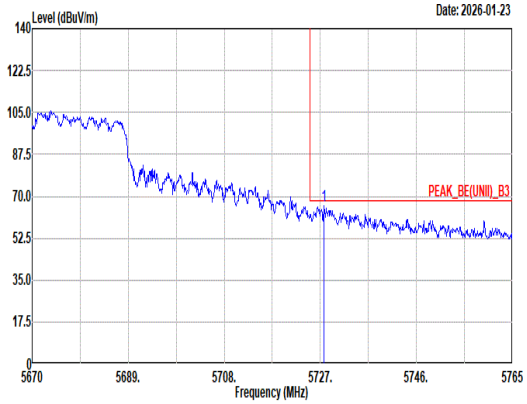 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.76 66.16 68.20 -2.04 56.70 33.71 12.04 36.29 0.00 172 316 Peak	Blank

Mode	55	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	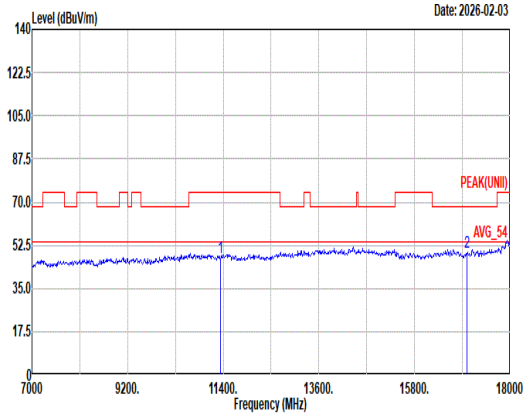 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.34 74.00 -26.66 56.46 39.18 16.88 65.98 0.80 -- -- Peak 2 17010.00 49.52 68.20 -18.68 55.99 38.26 20.85 66.36 0.78 -- -- Peak	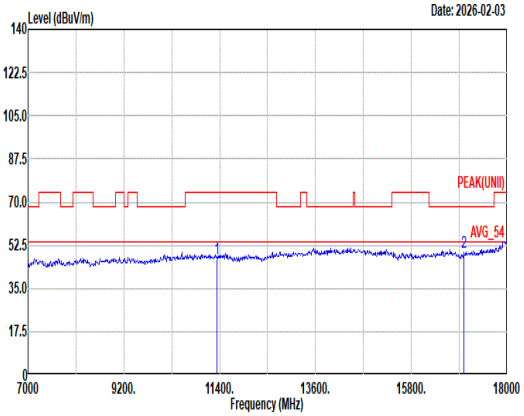 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 47.16 74.00 -26.84 56.28 39.18 16.88 65.98 0.80 -- -- Peak 2 17010.00 49.58 68.20 -18.62 56.05 38.26 20.85 66.36 0.78 -- -- Peak

Mode	55	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	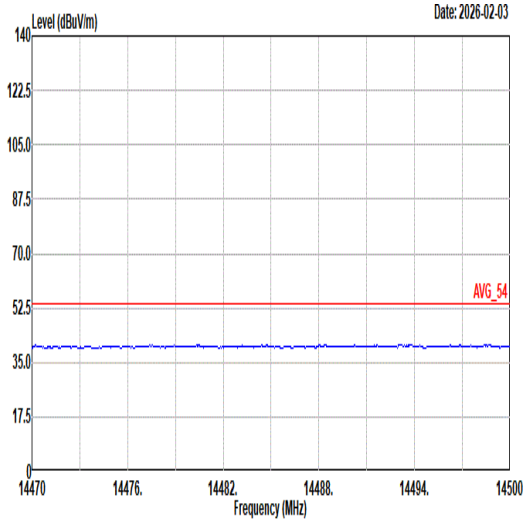 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	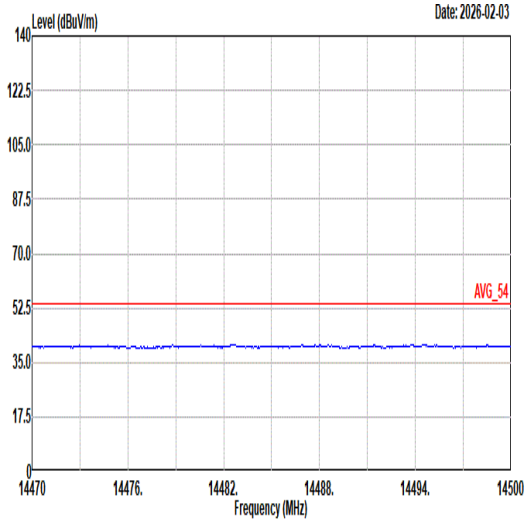 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	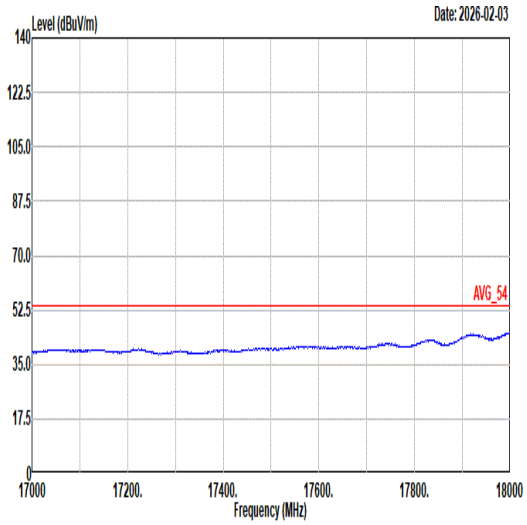 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	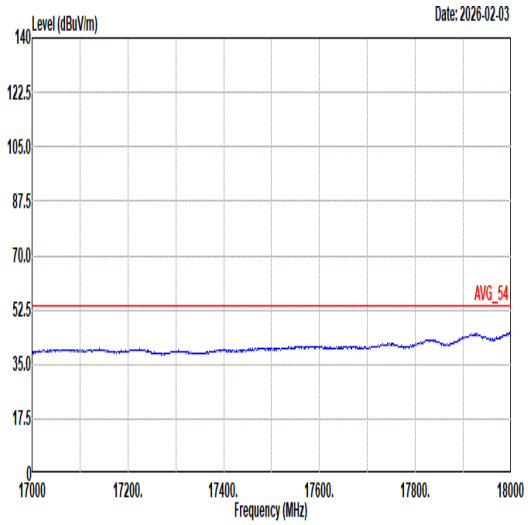 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	56
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	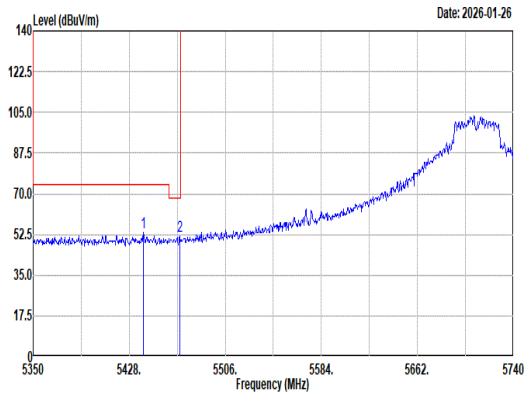 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5439.70 53.55 74.00 -20.45 44.99 33.02 11.76 36.22 0.00 200 33 Peak 2 5469.34 51.73 68.20 -16.47 43.13 33.04 11.79 36.23 0.00 200 33 Peak	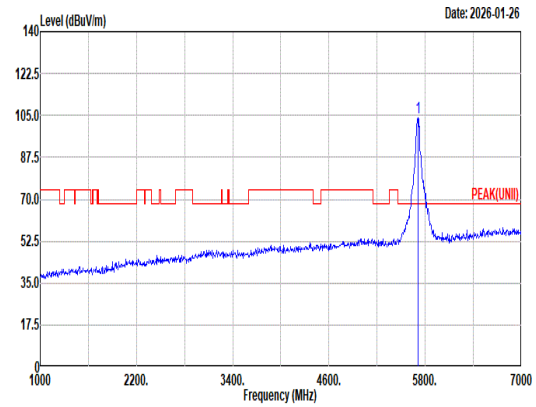 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 104.31 ------ ------ 94.93 33.64 12.02 36.28 0.00 200 33 Peak
Avg	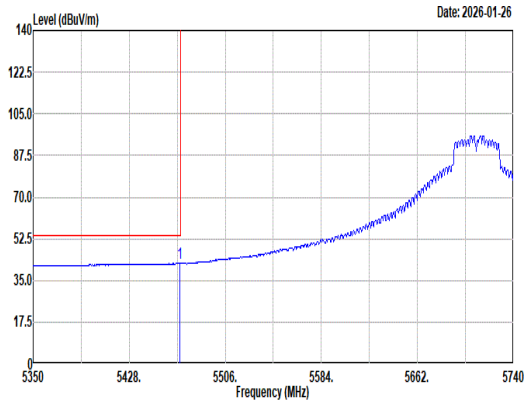 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5468.95 42.14 54.00 -11.86 33.54 33.04 11.79 36.23 0.00 200 33 Average	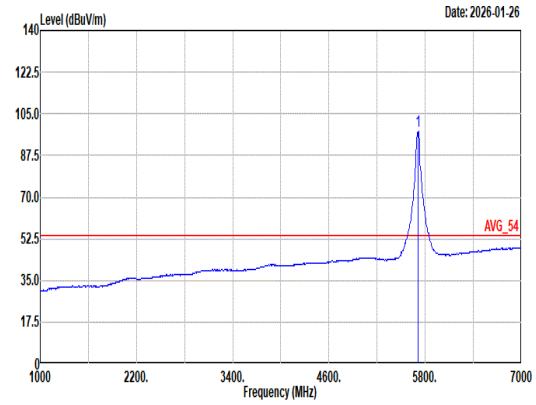 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 97.55 ------ ------ 88.15 33.66 12.03 36.29 0.00 200 33 Average

Mode	56	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	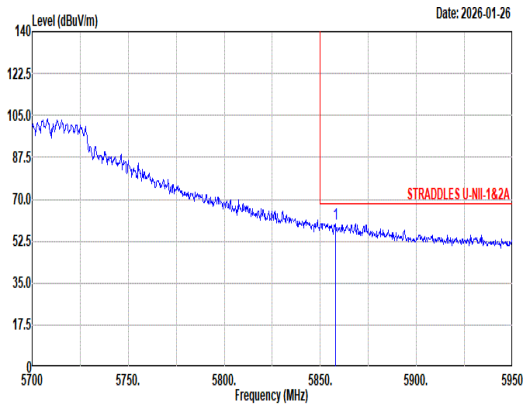 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5857.75 59.76 68.20 -8.44 49.68 34.22 12.18 36.32 0.00 200 33 Peak	Blank

Mode	56	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	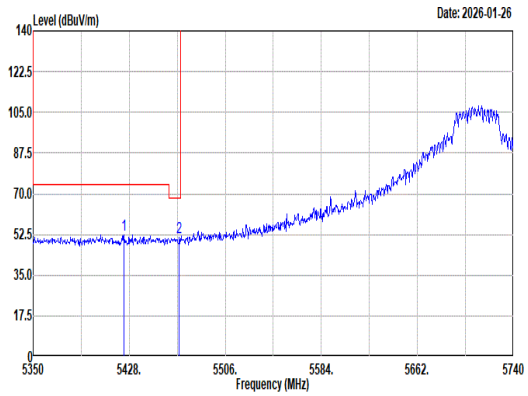 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5423.71 52.38 74.00 -21.62 43.81 33.05 11.74 36.22 0.00 228 330 Peak 2 5468.56 51.15 68.20 -17.05 42.55 33.04 11.79 36.23 0.00 228 330 Peak	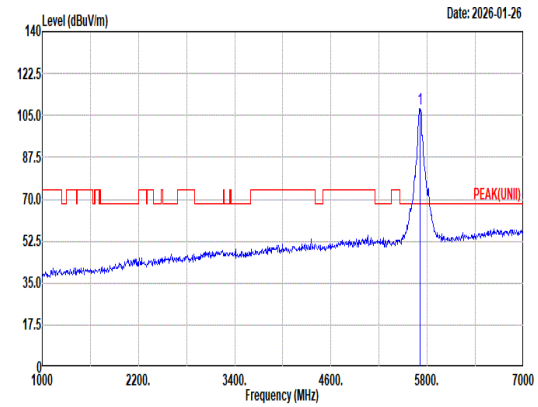 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 107.77 ------ ------ 98.42 33.62 12.01 36.28 0.00 228 330 Peak
Avg	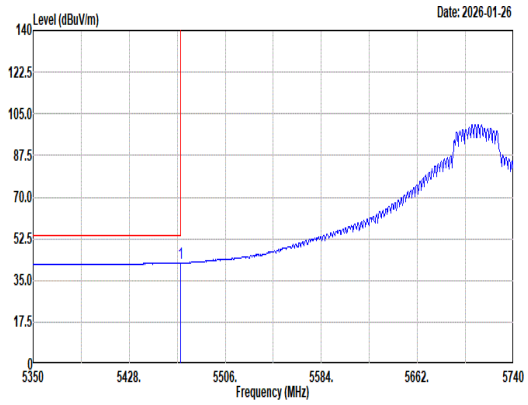 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5469.73 42.38 54.00 -11.62 33.78 33.04 11.79 36.23 0.00 228 330 Average	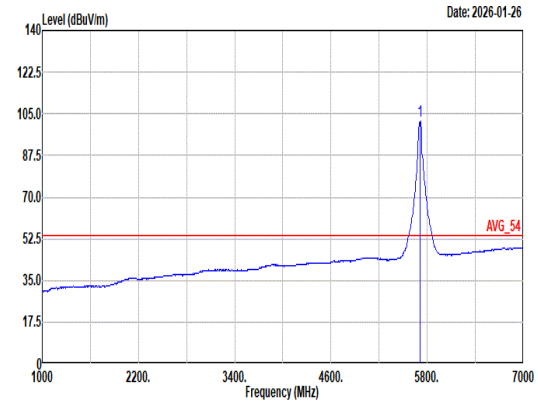 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 101.73 ------ ------ 92.33 33.66 12.03 36.29 0.00 228 330 Average

Mode	56	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	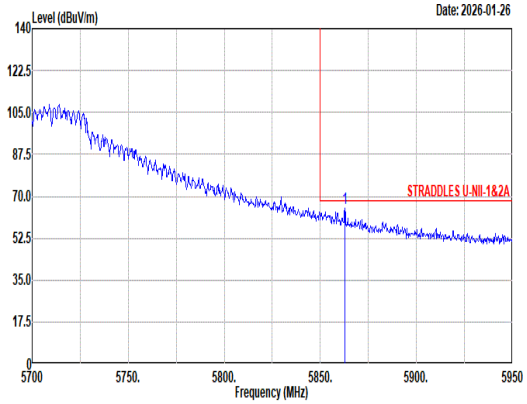 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5862.75 64.90 68.20 -3.30 54.81 34.23 12.18 36.32 0.00 228 330 Peak	Blank

Mode	56	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	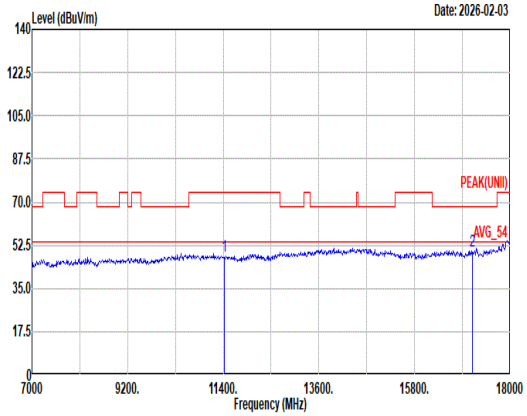 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 47.97 74.00 -26.03 57.05 39.20 16.94 66.00 0.78 -- -- Peak 2 17130.00 50.00 68.20 -18.20 56.10 38.40 20.92 66.21 0.79 -- -- Peak	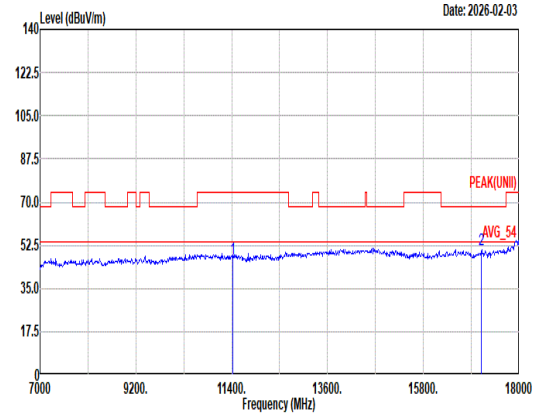 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 46.99 74.00 -27.01 56.07 39.20 16.94 66.00 0.78 -- -- Peak 2 17130.00 50.96 68.20 -17.24 57.06 38.40 20.92 66.21 0.79 -- -- Peak

Mode	56	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	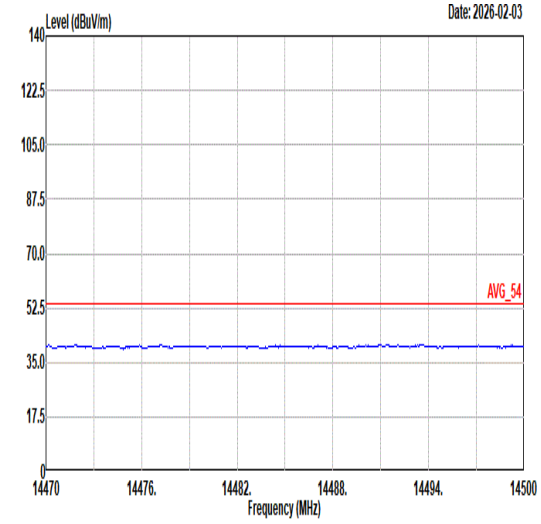 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	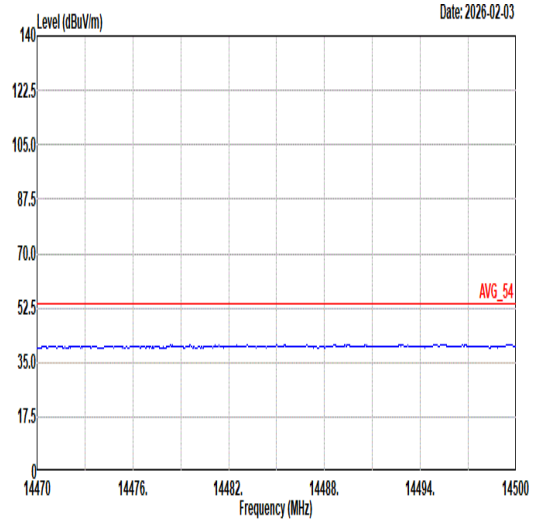 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	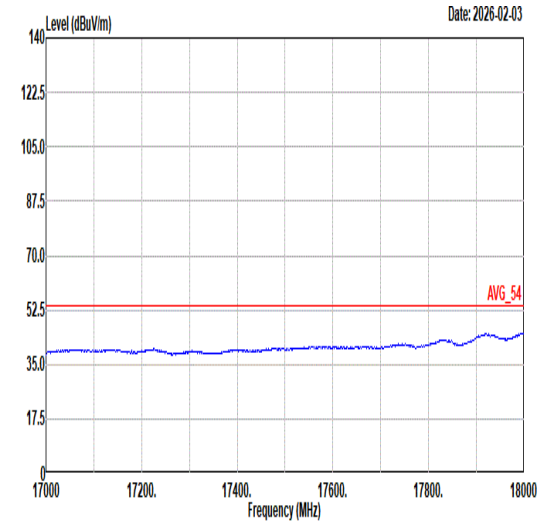 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	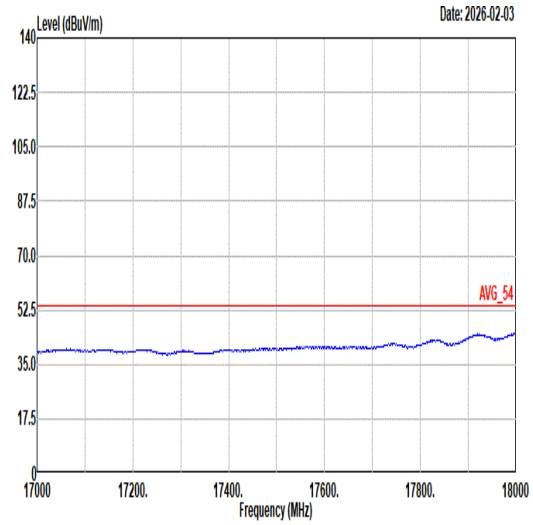 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	57	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	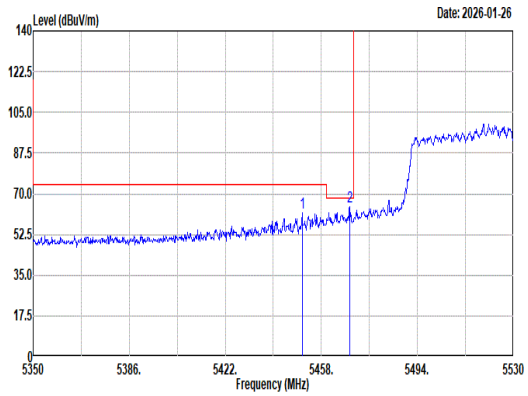 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5450.80 61.56 74.00 -12.44 53.01 33.00 11.77 36.22 0.00 200 319 Peak 2 5468.62 64.67 68.20 -3.53 56.07 33.04 11.79 36.23 0.00 200 319 Peak	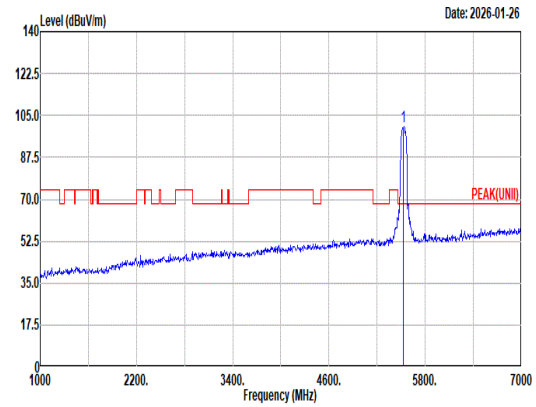 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 100.26 ------ ------ 91.55 33.10 11.85 36.24 0.00 200 319 Peak
Avg	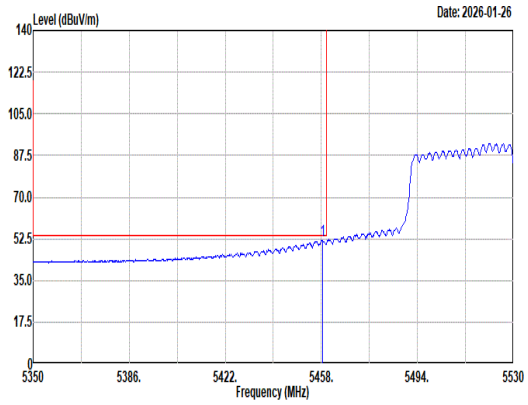 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.36 51.63 54.00 -2.37 43.06 33.02 11.78 36.23 0.00 200 319 Average	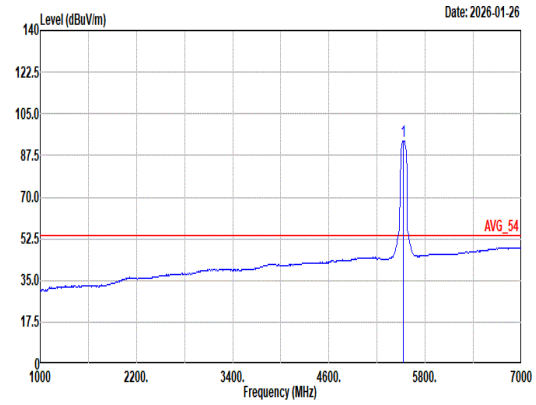 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 93.70 ------ ------ 84.99 33.10 11.85 36.24 0.00 200 319 Average

Mode	57	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	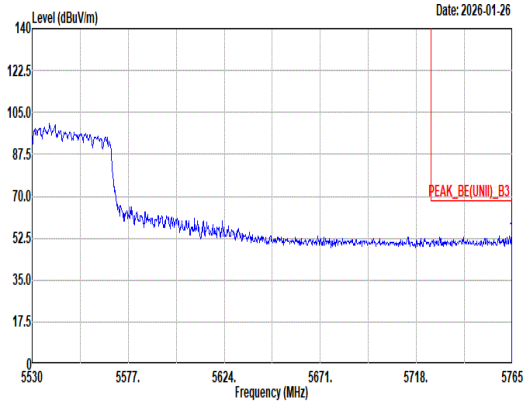 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5764.53 53.38 68.20 -14.82 43.75 33.86 12.07 36.30 0.00 200 319 Peak	Blank

Mode	57	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	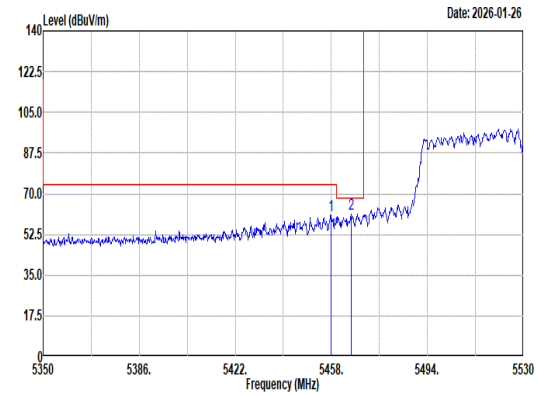 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.00 60.75 74.00 -13.25 52.17 33.02 11.78 36.22 0.00 318 75 Peak 2 5465.38 61.25 68.20 -6.95 52.67 33.03 11.78 36.23 0.00 318 75 Peak	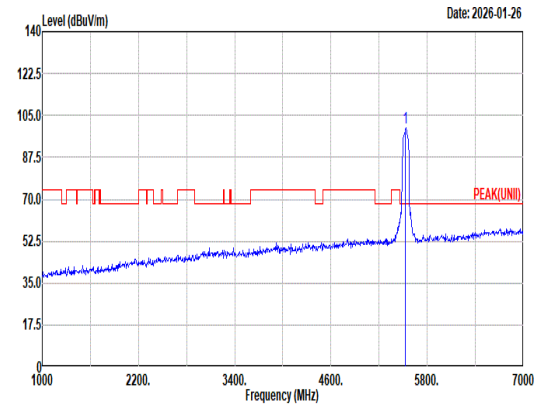 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 99.62 ------ ------ 90.91 33.10 11.85 36.24 0.00 318 75 Peak
Avg	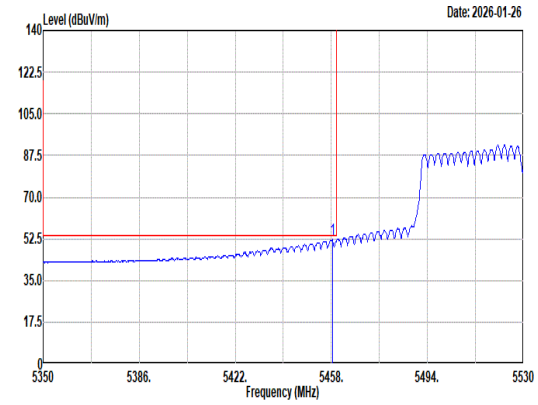 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.36 52.10 54.00 -1.90 43.53 33.02 11.78 36.23 0.00 318 75 Average	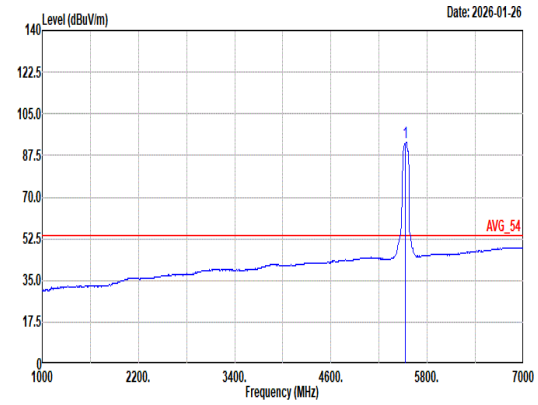 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5530.00 92.83 ------ ------ 84.12 33.10 11.85 36.24 0.00 318 75 Average

Mode	57	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	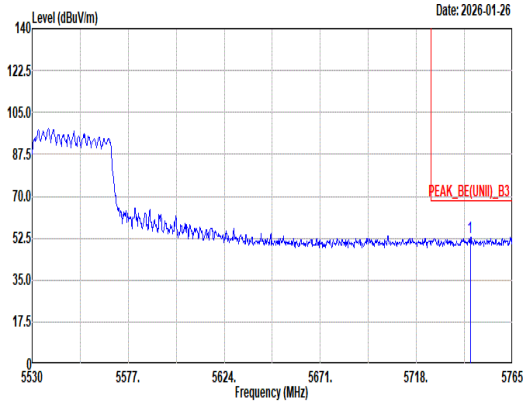 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5744.32 52.70 68.20 -15.50 43.16 33.78 12.05 36.29 0.00 318 75 Peak	Blank

Mode	57	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	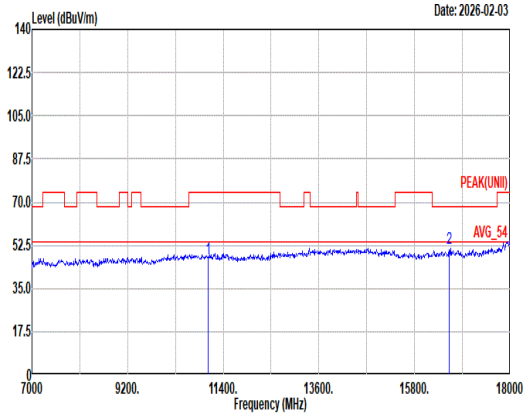 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.26 74.00 -26.74 56.72 38.92 16.66 65.89 0.85 -- -- Peak 2 16590.00 51.37 68.20 -16.83 59.00 38.06 20.56 66.99 0.74 -- -- Peak	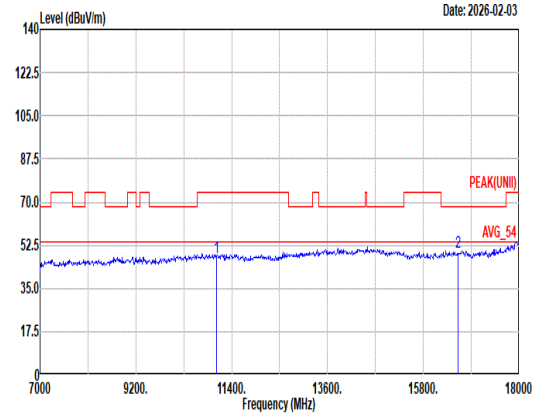 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11060.00 47.47 74.00 -26.53 56.93 38.92 16.66 65.89 0.85 -- -- Peak 2 16590.00 49.79 68.20 -18.41 57.42 38.06 20.56 66.99 0.74 -- -- Peak

Mode	57	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	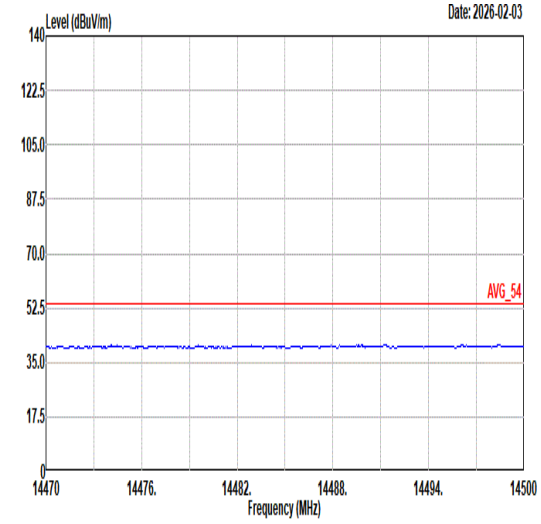 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	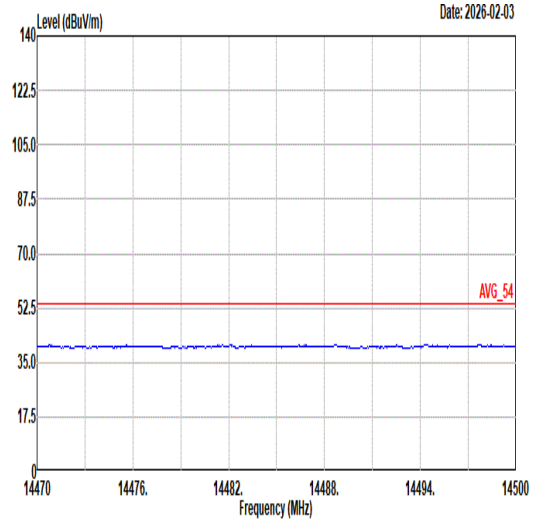 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	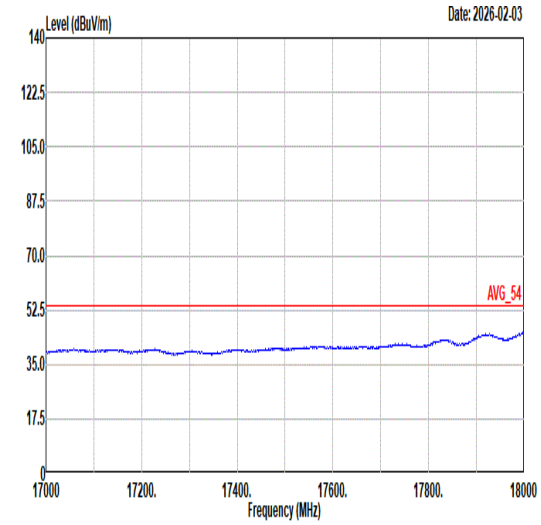 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	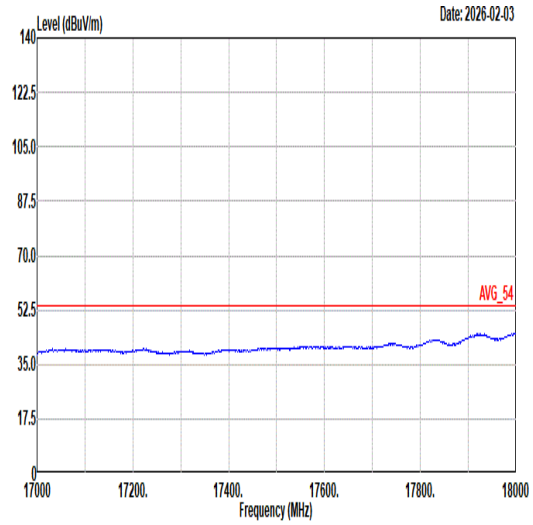 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	58	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	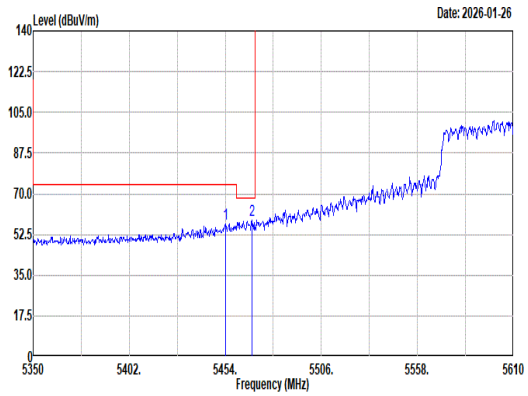 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.00 57.09 74.00 -16.91 48.53 33.01 11.77 36.22 0.00 180 360 Peak 2 5468.30 58.51 68.20 -9.69 49.92 33.04 11.78 36.23 0.00 180 360 Peak	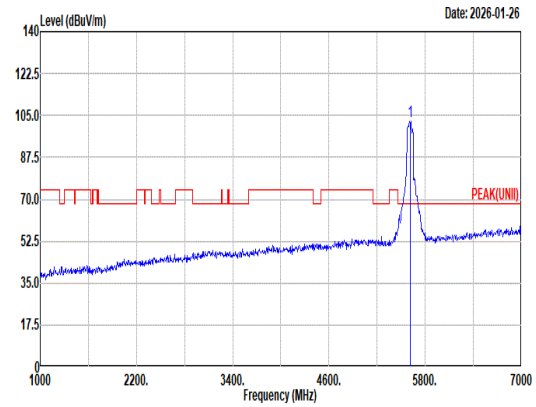 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 102.65 ------ ------ 93.99 33.01 11.91 36.26 0.00 180 360 Peak
Avg	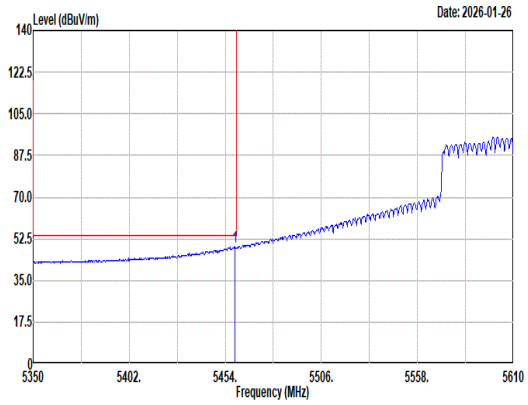 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.20 49.24 54.00 -4.76 40.67 33.02 11.78 36.23 0.00 180 360 Average	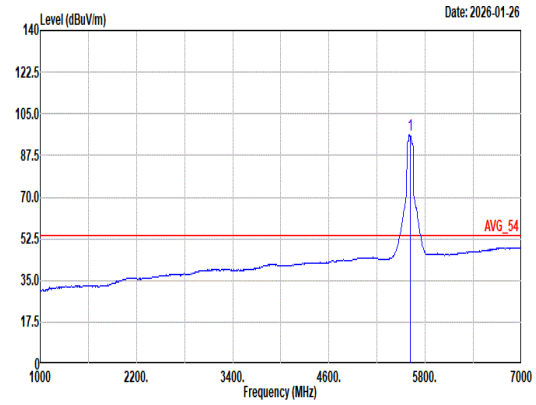 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 95.99 ------ ------ 87.33 33.01 11.91 36.26 0.00 180 360 Average

Mode	58	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	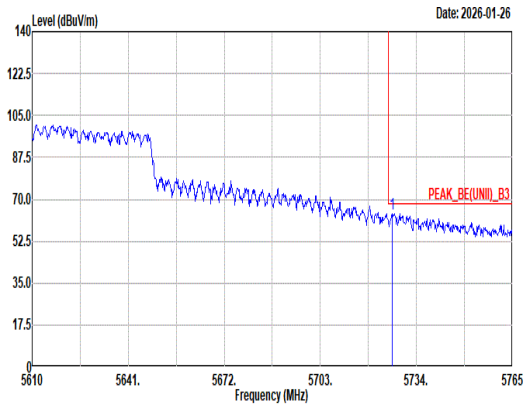 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.10 64.16 68.20 -4.04 54.71 33.70 12.04 36.29 0.00 180 360 Peak	Blank

Mode	58
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	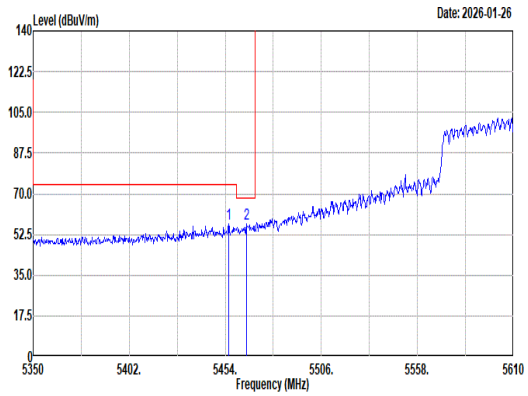 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.82 57.01 74.00 -16.99 48.45 33.01 11.77 36.22 0.00 181 321 Peak 2 5465.70 57.32 68.20 -10.88 48.74 33.03 11.78 36.23 0.00 181 321 Peak	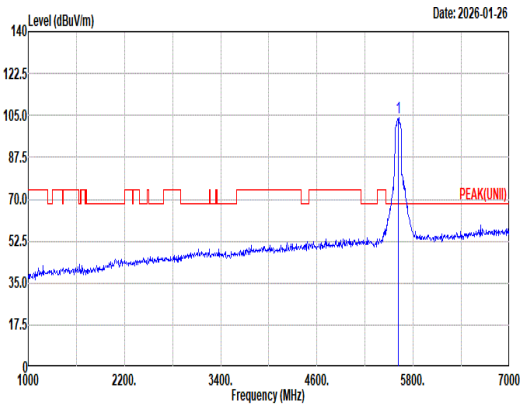 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 104.03 ------ ------ 95.28 33.08 11.93 36.26 0.00 181 321 Peak
Avg	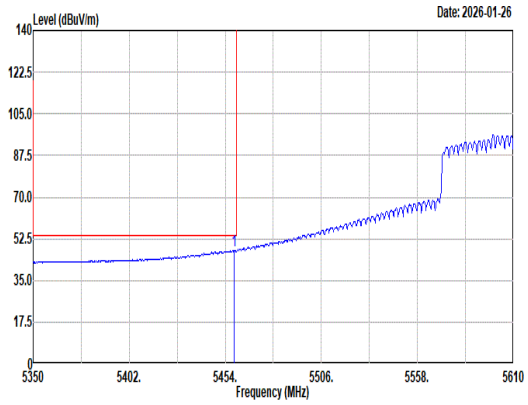 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.94 47.55 54.00 -6.45 38.98 33.02 11.78 36.23 0.00 181 321 Average	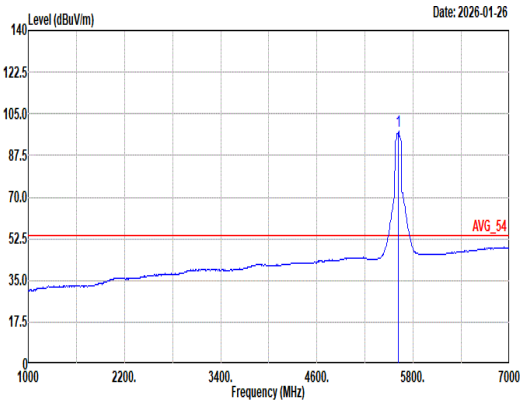 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5610.00 97.49 ------ ------ 88.74 33.08 11.93 36.26 0.00 181 321 Average

Mode	58	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	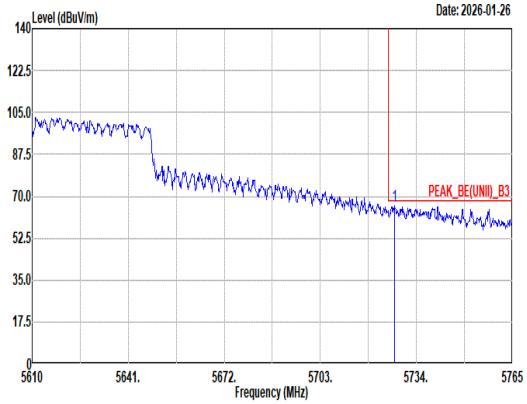 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.87 66.12 68.20 -2.08 56.66 33.71 12.04 36.29 0.00 181 321 Peak	Blank

Mode	58	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	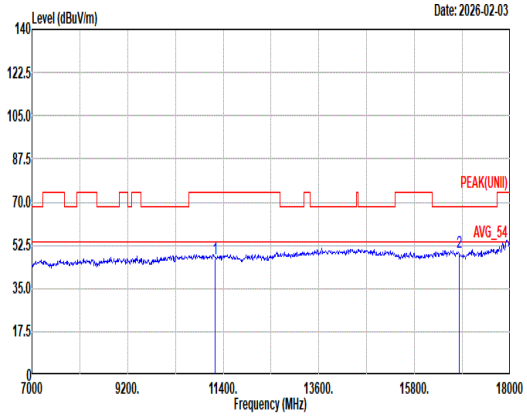 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 47.07 74.00 -26.93 56.46 38.95 16.78 65.94 0.82 -- -- Peak 2 16830.00 49.69 68.20 -18.51 56.53 38.30 20.72 66.62 0.76 -- -- Peak	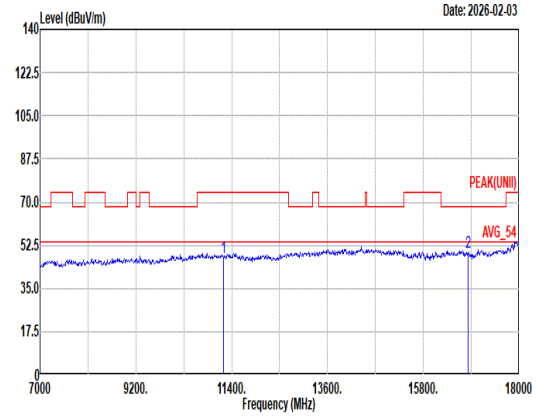 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11220.00 47.71 74.00 -26.29 57.10 38.95 16.78 65.94 0.82 -- -- Peak 2 16830.00 49.42 68.20 -18.78 56.26 38.30 20.72 66.62 0.76 -- -- Peak

Mode	58	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	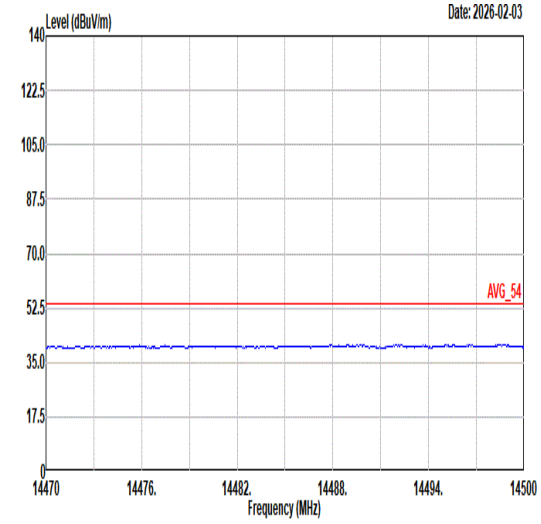 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	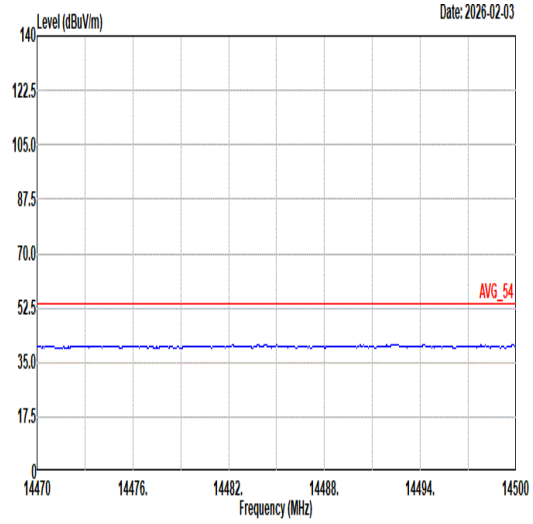 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	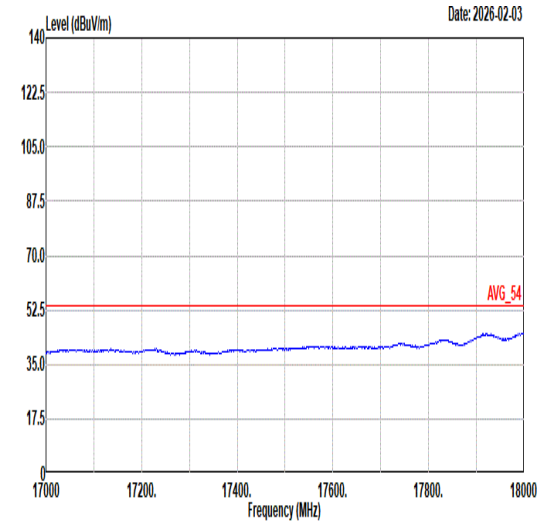 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	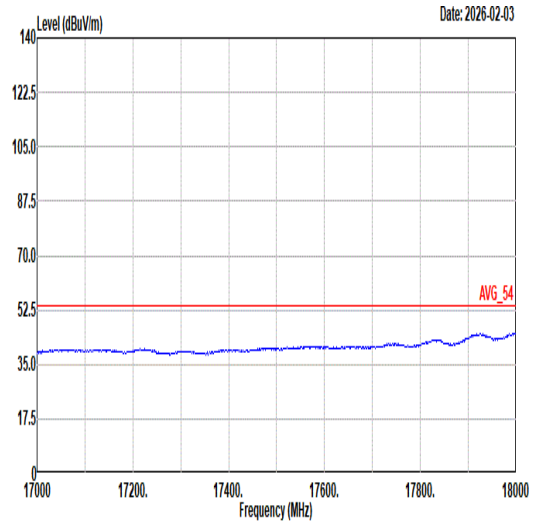 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	59	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	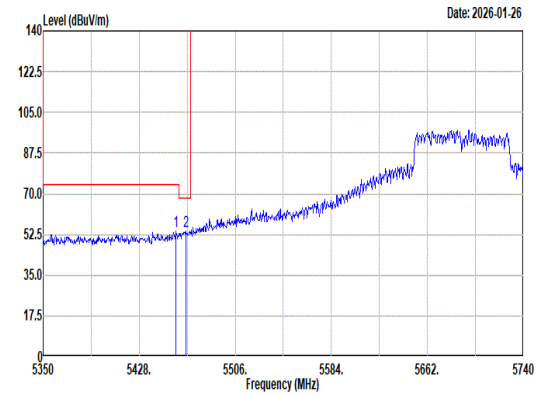 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.03 54.09 74.00 -19.91 45.51 33.02 11.78 36.22 0.00 400 232 Peak 2 5465.83 53.87 68.20 -14.33 45.29 33.03 11.78 36.23 0.00 400 232 Peak	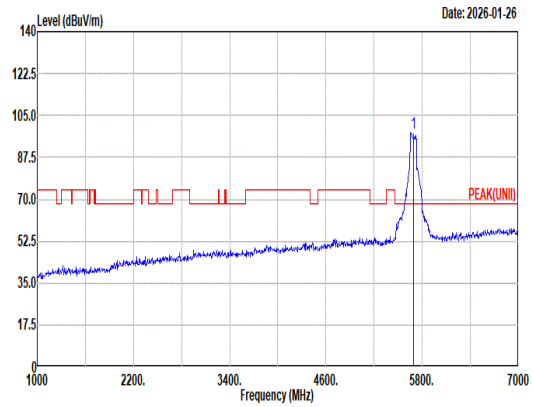 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 97.75 ------ ------ 88.75 33.30 11.97 36.27 0.00 400 232 Peak
Avg	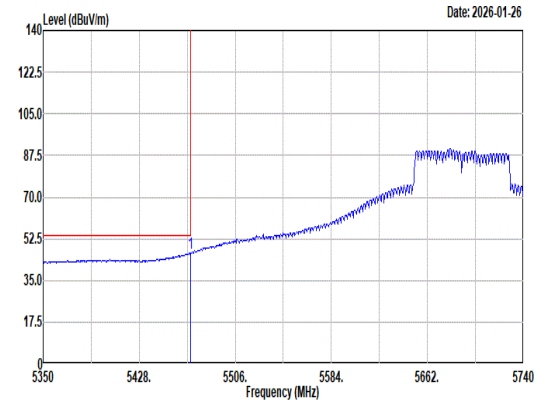 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5469.73 46.43 54.00 -7.57 37.83 33.04 11.79 36.23 0.00 400 232 Average	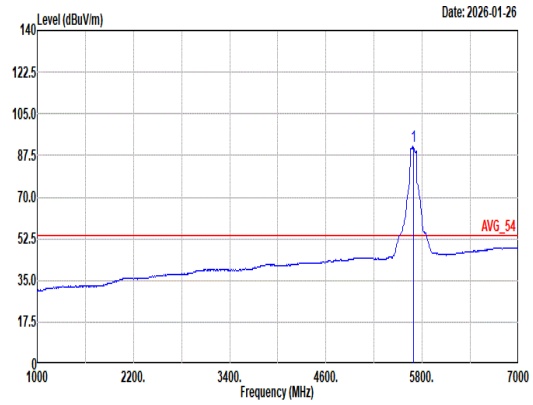 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 91.13 ------ ------ 81.98 33.44 11.99 36.28 0.00 400 232 Average

Mode	59	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	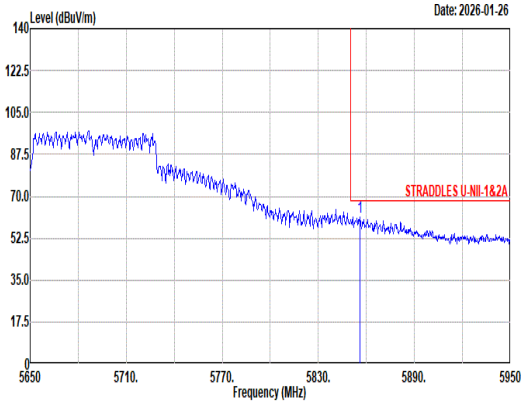 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5856.10 61.16 68.20 -7.04 51.10 34.21 12.17 36.32 0.00 400 232 Peak	Blank

Mode	59
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	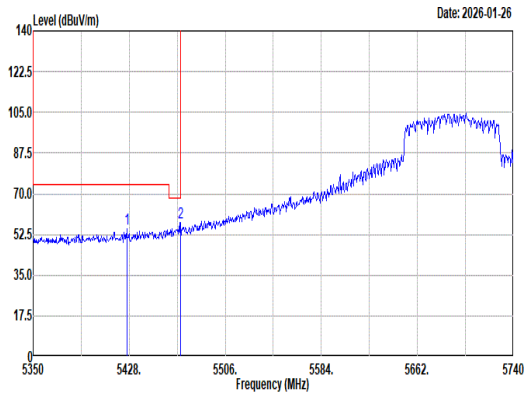 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5426.05 54.82 74.00 -19.18 46.25 33.05 11.74 36.22 0.00 152 322 Peak 2 5469.73 57.58 68.20 -10.62 48.98 33.04 11.79 36.23 0.00 152 322 Peak	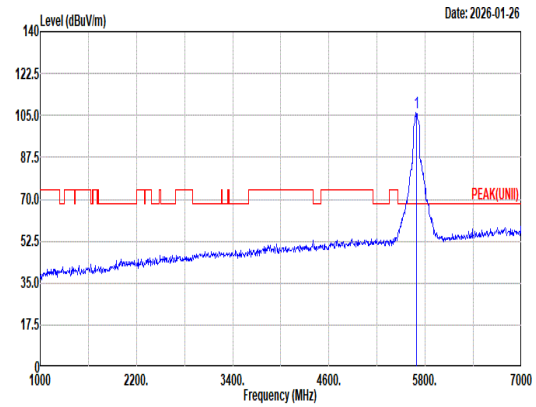 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 105.95 ------ ------ 96.74 33.49 12.00 36.28 0.00 152 322 Peak
Avg	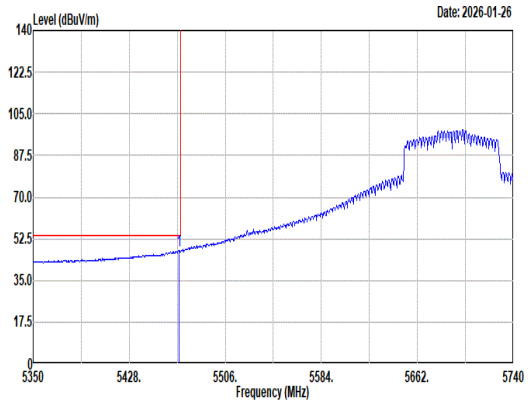 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5468.56 47.59 54.00 -6.41 38.99 33.04 11.79 36.23 0.00 152 322 Average	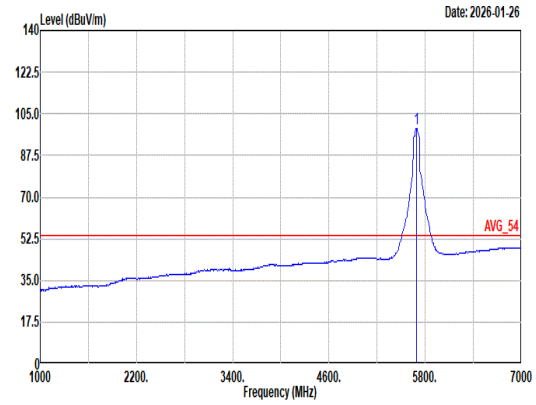 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5690.00 98.87 ------ ------ 89.56 33.58 12.01 36.28 0.00 152 322 Average

Mode	59	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	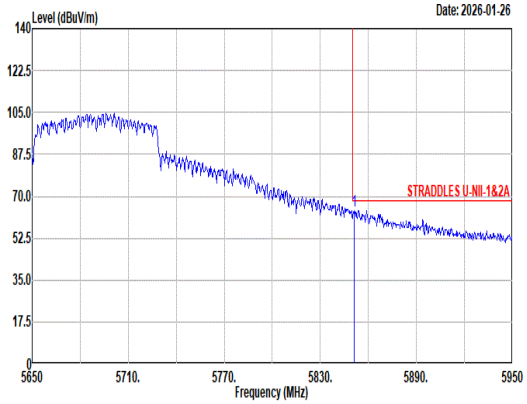 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5851.00 63.85 68.20 -4.35 53.80 34.20 12.17 36.32 0.00 152 322 Peak	Blank

Mode	59	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	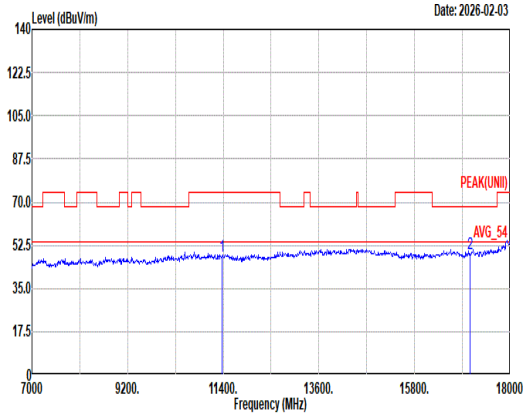 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.87 74.00 -26.13 56.97 39.20 16.90 65.99 0.79 -- -- Peak 2 17070.00 48.95 68.20 -19.25 55.11 38.46 20.88 66.28 0.78 -- -- Peak	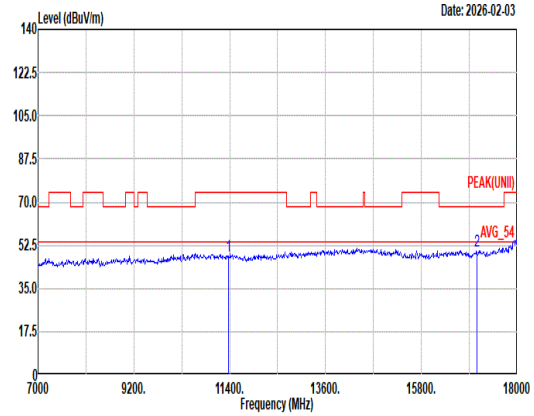 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11380.00 47.83 74.00 -26.17 56.93 39.20 16.90 65.99 0.79 -- -- Peak 2 17070.00 50.41 68.20 -17.79 56.57 38.46 20.88 66.28 0.78 -- -- Peak

Mode	59	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH138_5690MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	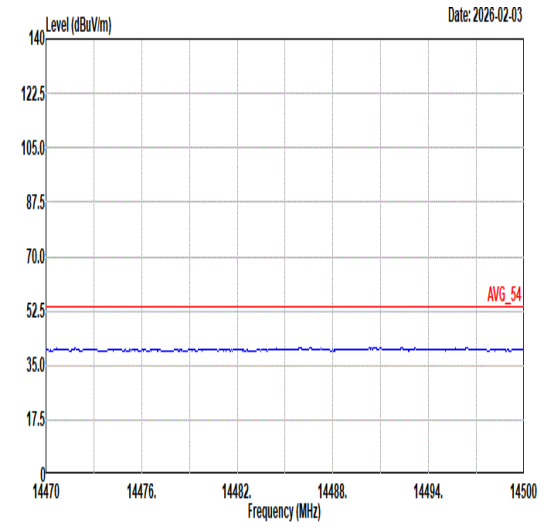 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	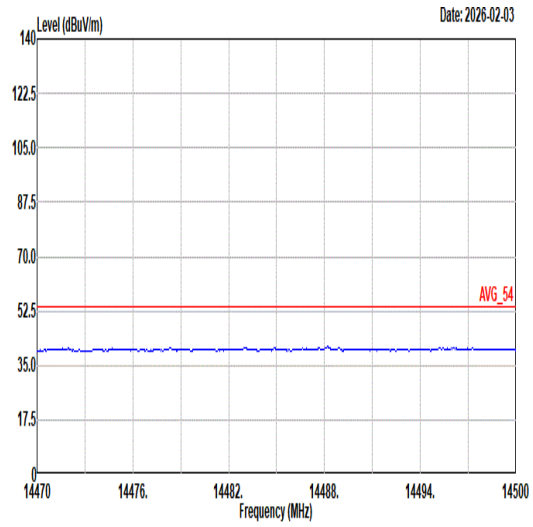 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	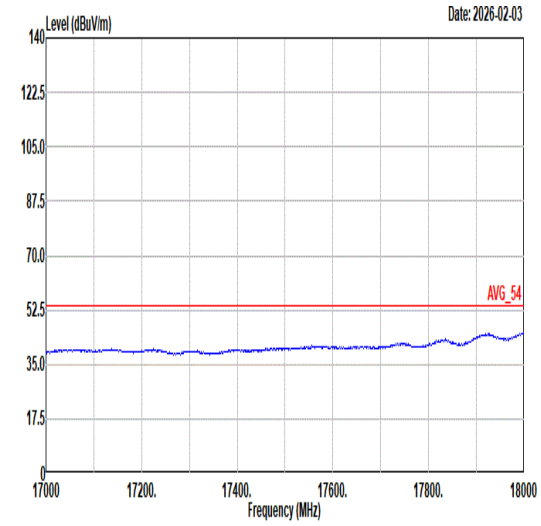 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	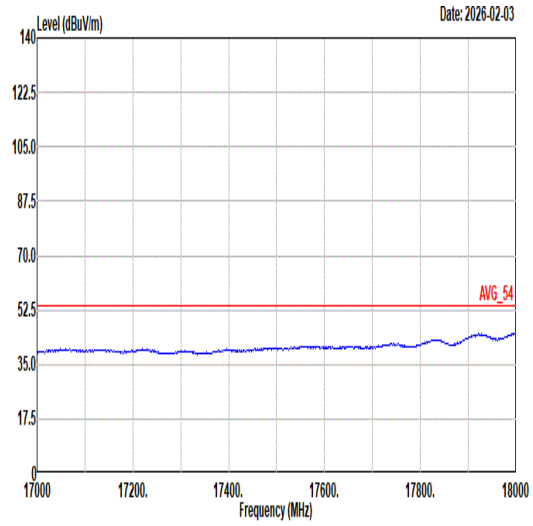 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	60	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	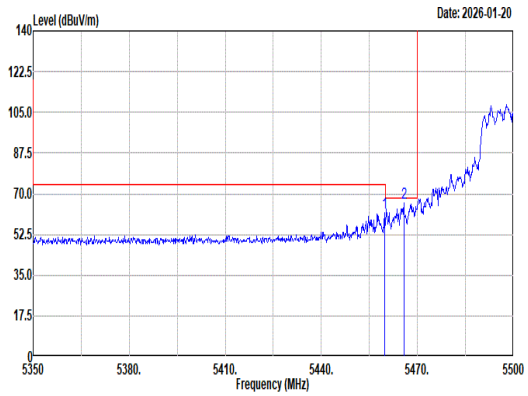 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.80 61.62 74.00 -12.38 53.05 33.02 11.78 36.23 0.00 183 328 Peak 2 5465.80 66.15 68.20 -2.05 57.57 33.03 11.78 36.23 0.00 183 328 Peak	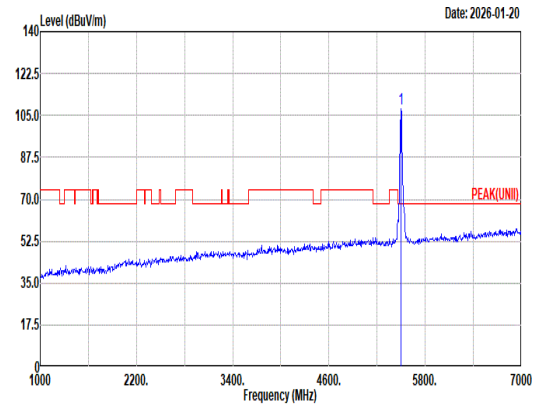 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 107.88 ------ ------ 99.20 33.10 11.81 36.23 0.00 183 328 Peak
Avg	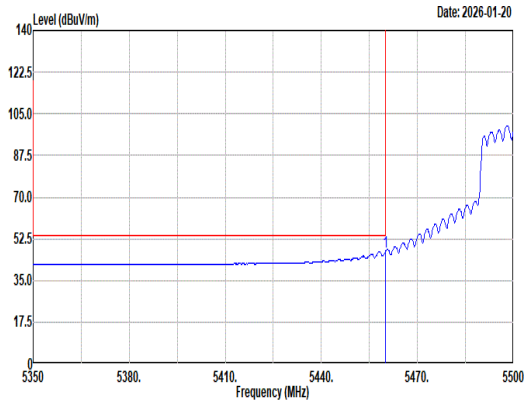 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 47.04 54.00 -6.96 38.47 33.02 11.78 36.23 0.00 183 328 Average	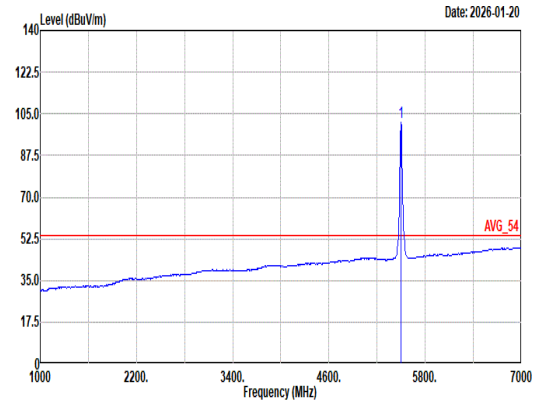 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 101.35 ------ ------ 92.67 33.10 11.81 36.23 0.00 183 328 Average

Mode	60	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	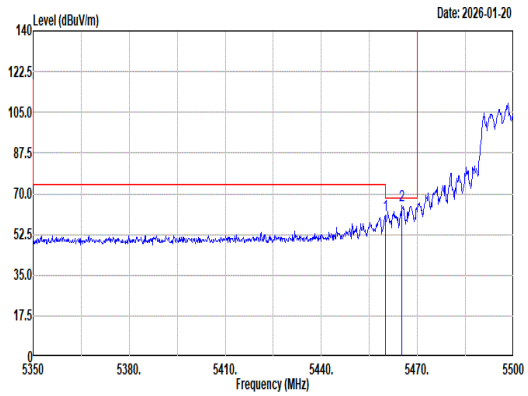 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 60.61 74.00 -13.39 52.04 33.02 11.78 36.23 0.00 300 80 Peak 2 5465.20 64.79 68.20 -3.41 56.21 33.03 11.78 36.23 0.00 300 80 Peak	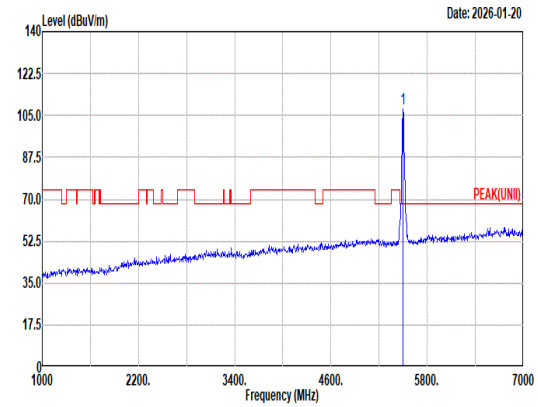 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 107.54 ------ ------ 98.86 33.10 11.81 36.23 0.00 300 80 Peak
Avg	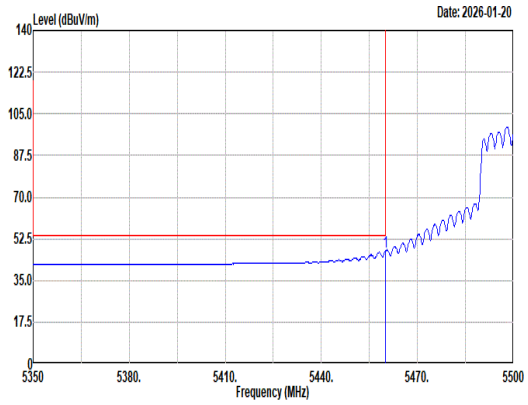 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 47.18 54.00 -6.82 38.61 33.02 11.78 36.23 0.00 300 80 Average	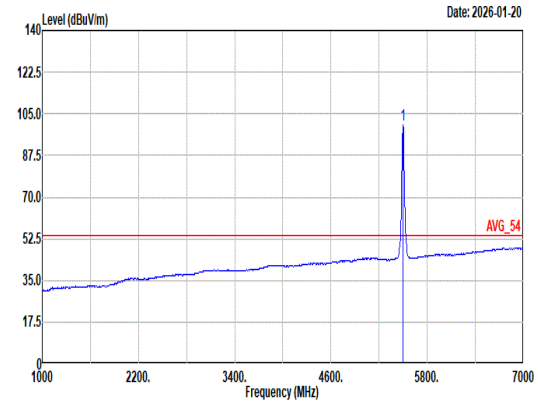 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 100.45 ------ ------ 91.77 33.10 11.81 36.23 0.00 300 80 Average

Mode	60	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	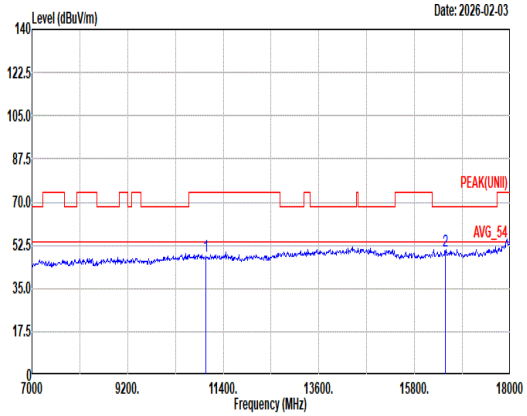 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 47.85 74.00 -26.15 57.35 38.90 16.61 65.87 0.86 -- -- Peak 2 16500.00 50.07 68.20 -18.13 57.36 38.60 20.50 67.12 0.73 -- -- Peak	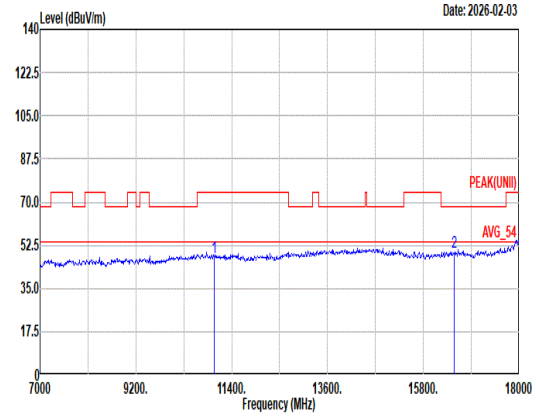 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11000.00 47.67 74.00 -26.33 57.17 38.90 16.61 65.87 0.86 -- -- Peak 2 16500.00 49.70 68.20 -18.50 56.99 38.60 20.50 67.12 0.73 -- -- Peak

Mode	60	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	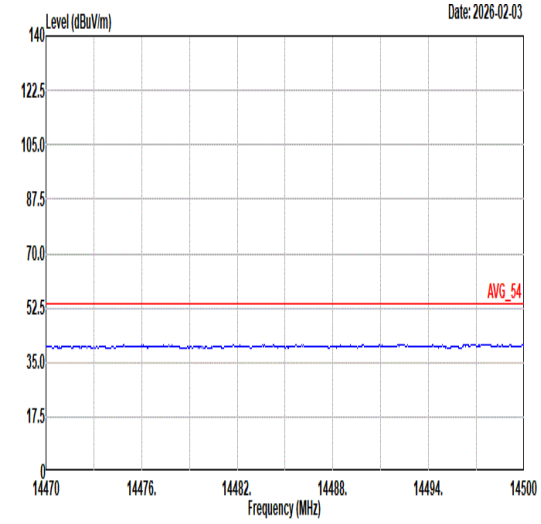 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	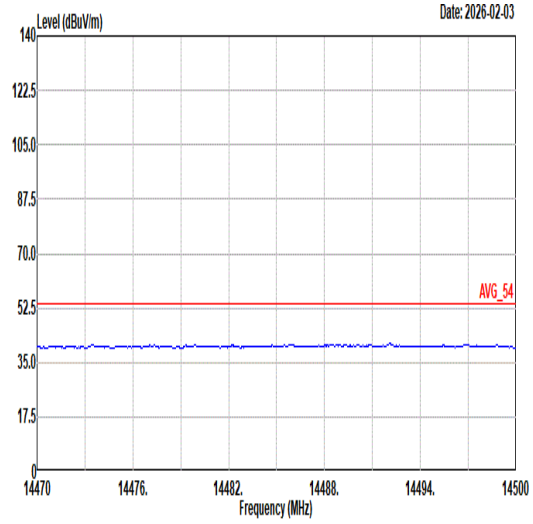 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	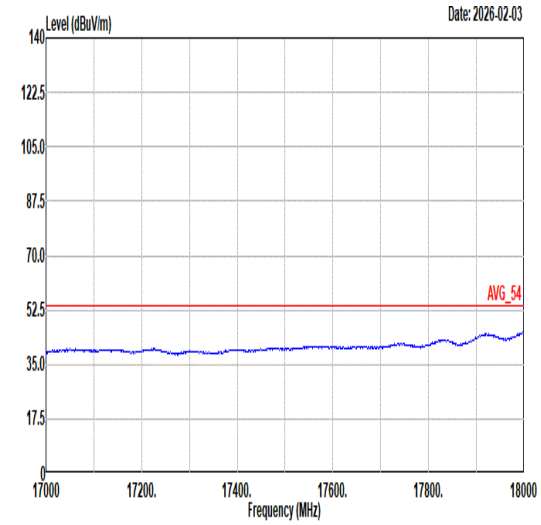 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	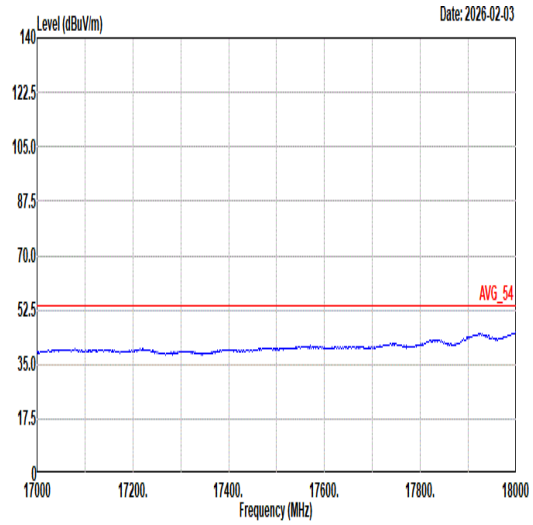 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	61	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	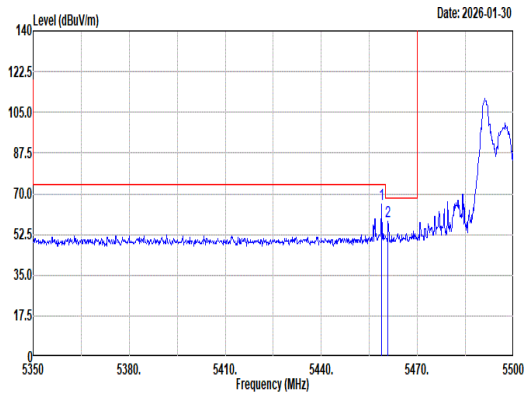 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.75 65.50 74.00 -8.50 56.93 33.02 11.78 36.23 0.00 200 13 Peak 2 5460.85 58.34 68.20 -9.86 49.77 33.02 11.78 36.23 0.00 200 13 Peak	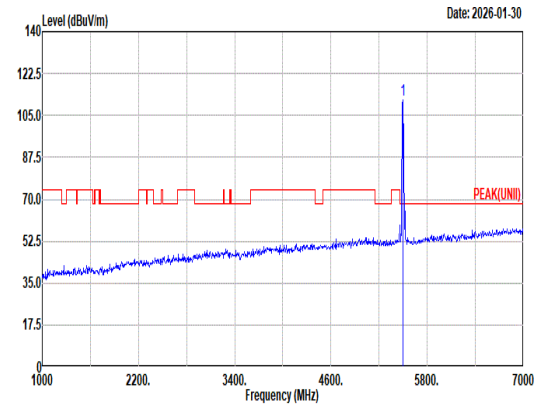 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 111.44 ------ ------ 102.77 33.09 11.81 36.23 0.00 200 13 Peak
Avg	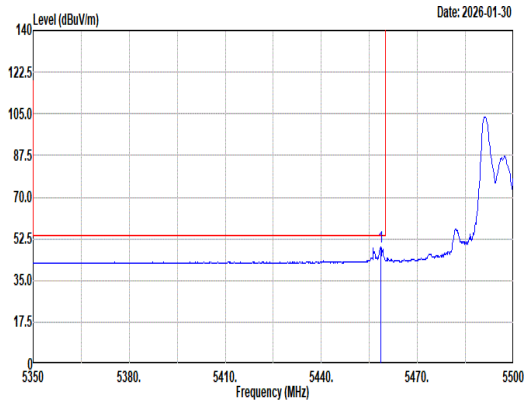 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.60 48.92 54.00 -5.08 40.35 33.02 11.78 36.23 0.00 200 13 Average	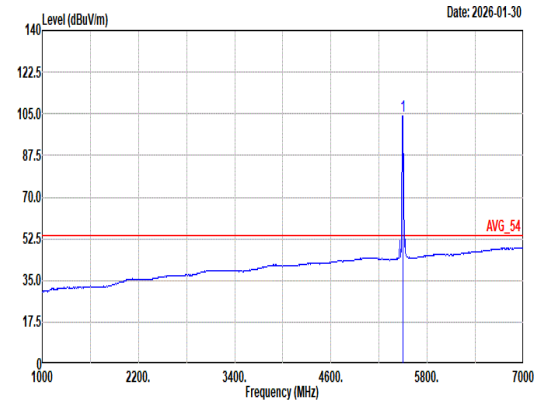 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 104.33 ------ ------ 95.66 33.09 11.81 36.23 0.00 200 13 Average

Mode	61	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_26/0 RU_5500MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	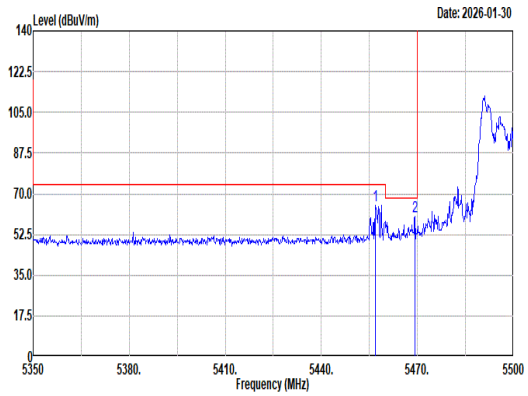 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.95 65.22 74.00 -8.78 56.66 33.01 11.77 36.22 0.00 315 93 Peak 2 5469.25 60.05 68.20 -8.15 51.45 33.04 11.79 36.23 0.00 315 93 Peak	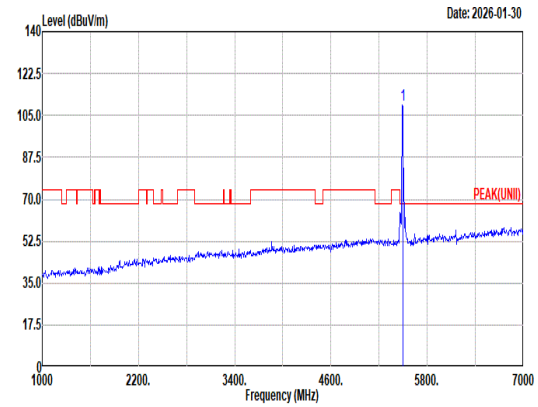 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 109.57 ------ ------ 100.92 33.08 11.80 36.23 0.00 315 93 Peak
Avg	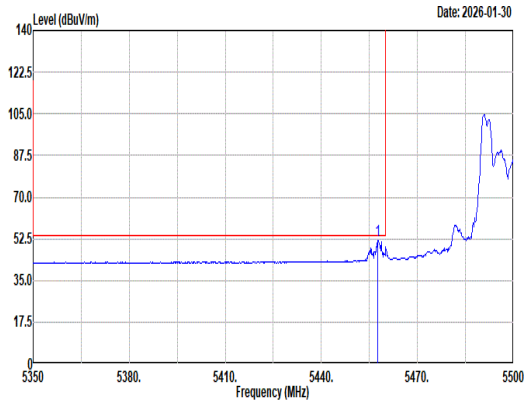 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5457.70 52.03 54.00 -1.97 43.46 33.02 11.77 36.22 0.00 315 93 Average	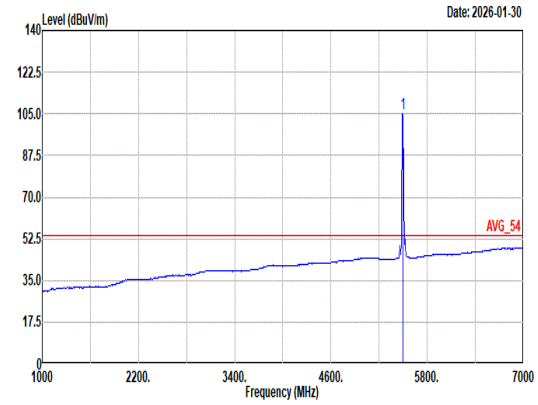 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 105.25 ------ ------ 96.60 33.08 11.80 36.23 0.00 315 93 Average

Mode	62
	Band Edge
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz
ANT	4+3

Pol. Horizontal

Peak

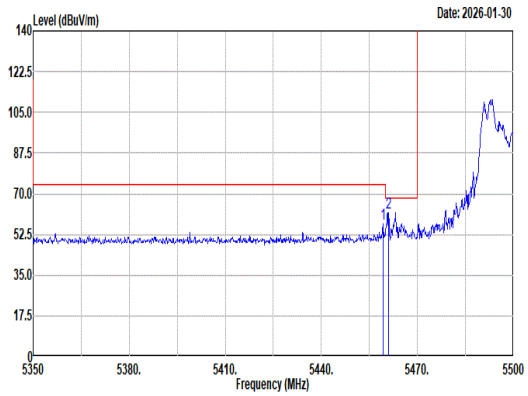

Site : 03CH16-HY
Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5459.20	57.18	74.00	-16.82	48.61	33.02	11.78	36.23	0.00	200	232	Peak
2	5461.00	62.07	68.20	-6.13	53.50	33.02	11.78	36.23	0.00	200	232	Peak

Avg

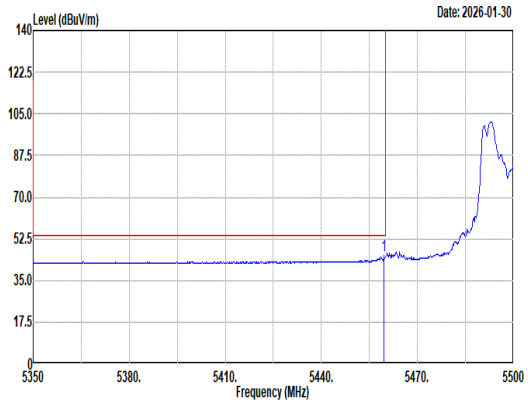

Site : 03CH16-HY
Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5459.65	45.33	54.00	-8.67	36.76	33.02	11.78	36.23	0.00	200	232	Average

Pol. Fundamental

Peak

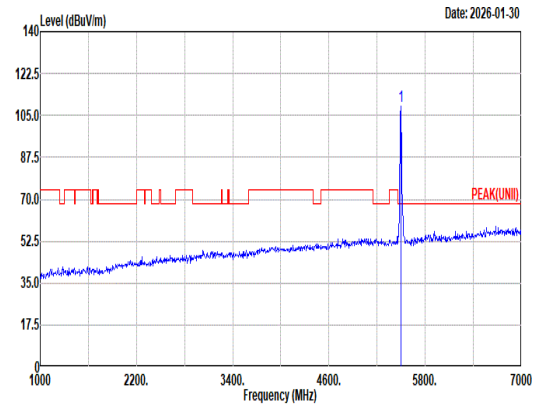

Site : 03CH16-HY
Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5500.00	108.80	------	------	100.13	33.09	11.81	36.23	0.00	200	232	Peak

Avg

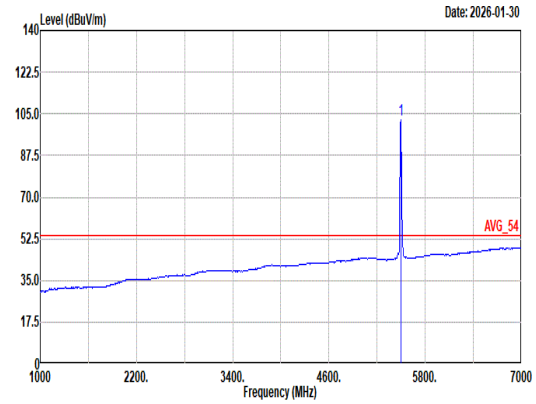

Site : 03CH16-HY
Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL
: RBW:1000.000kHz VBW:0.750kHz SWT:Auto

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	5500.00	102.51	------	------	93.84	33.09	11.81	36.23	0.00	200	232	Average

Mode	62	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_52/37 RU_5500MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	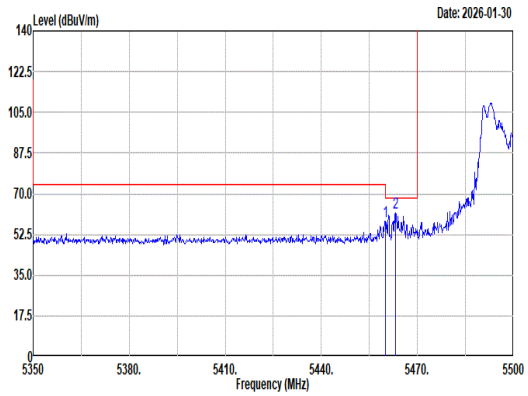 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 58.14 74.00 -15.86 49.57 33.02 11.78 36.23 0.00 300 64 Peak 2 5463.10 61.56 68.20 -6.64 52.98 33.03 11.78 36.23 0.00 300 64 Peak	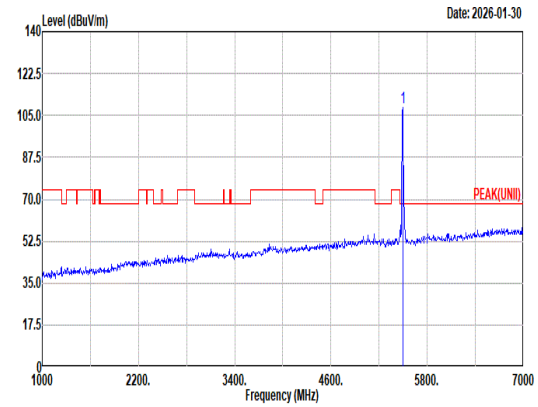 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 108.48 ------ ------ 99.81 33.09 11.81 36.23 0.00 300 64 Peak
Avg	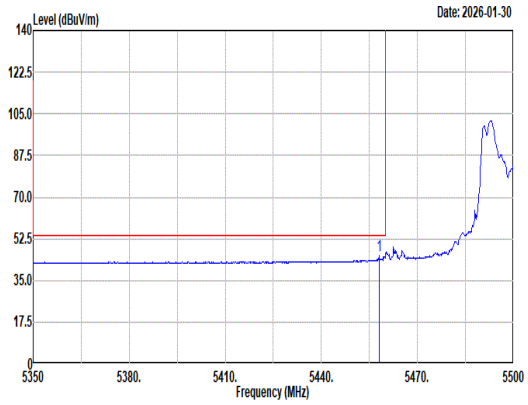 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.00 45.19 54.00 -8.81 36.61 33.02 11.78 36.22 0.00 300 64 Average	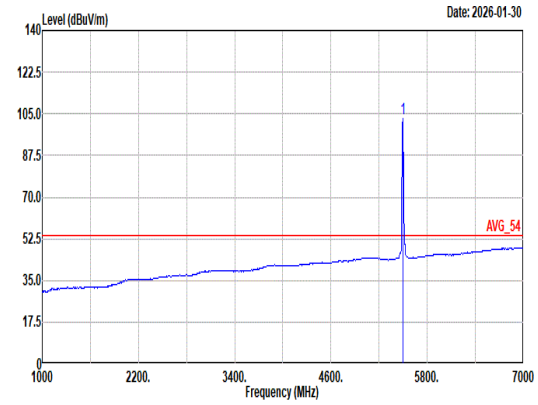 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 102.92 ------ ------ 94.25 33.09 11.81 36.23 0.00 300 64 Average

Mode	63	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	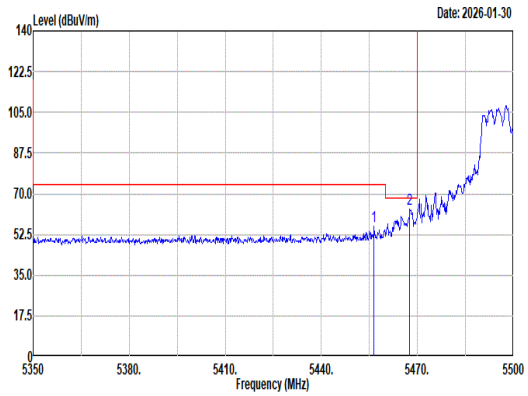 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5456.50 55.82 74.00 -18.18 47.26 33.01 11.77 36.22 0.00 200 221 Peak 2 5467.60 63.21 68.20 -4.99 54.62 33.04 11.78 36.23 0.00 200 221 Peak	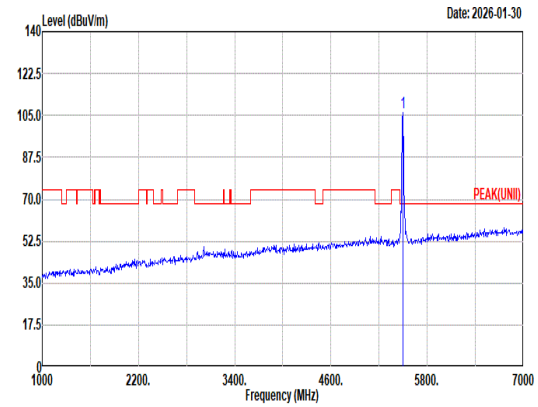 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 106.02 ------ ------ 97.34 33.10 11.81 36.23 0.00 200 221 Peak
Avg	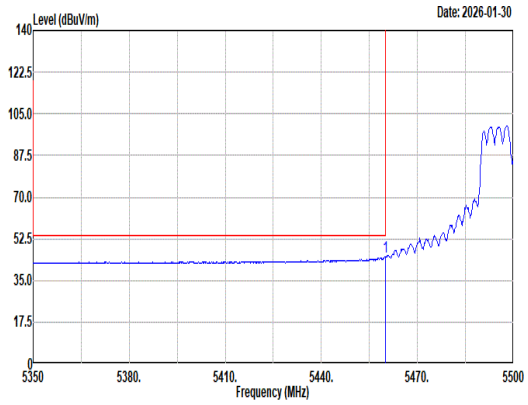 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 45.11 54.00 -8.89 36.54 33.02 11.78 36.23 0.00 200 221 Average	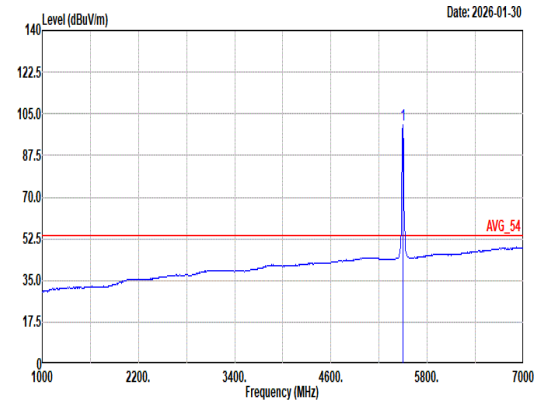 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 100.45 ------ ------ 91.77 33.10 11.81 36.23 0.00 200 221 Average

Mode	63
	Band Edge
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_106/53 RU_5500MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	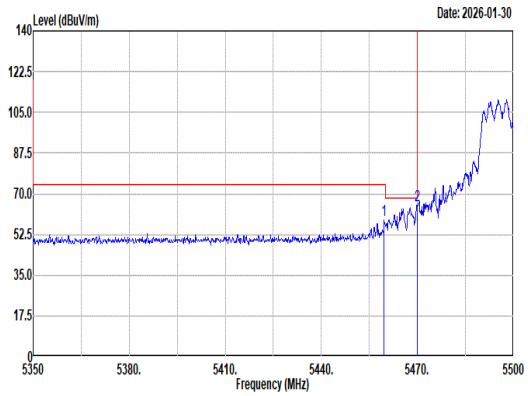 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.65 58.63 74.00 -15.37 50.06 33.02 11.78 36.23 0.00 200 95 Peak 2 5469.85 64.96 68.20 -3.24 56.36 33.04 11.79 36.23 0.00 200 95 Peak	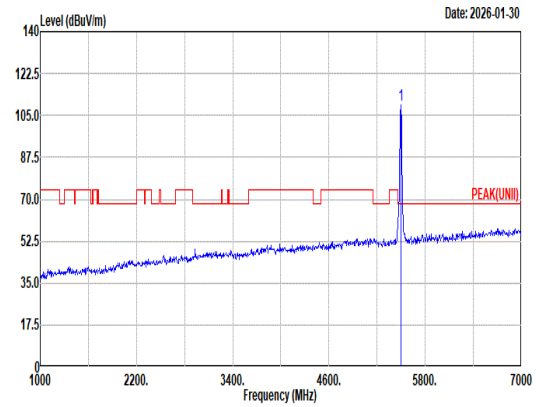 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 109.22 ------ ------ 100.55 33.09 11.81 36.23 0.00 200 95 Peak
Avg	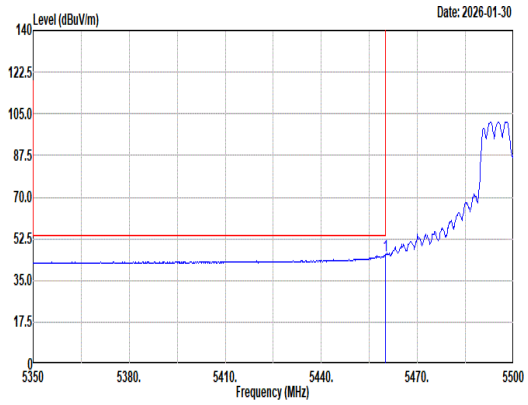 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.95 45.68 54.00 -8.32 37.11 33.02 11.78 36.23 0.00 200 95 Average	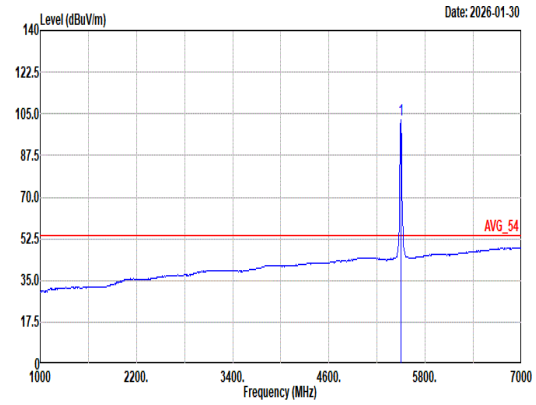 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5500.00 102.74 ------ ------ 94.06 33.10 11.81 36.23 0.00 200 95 Average

Mode	64	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	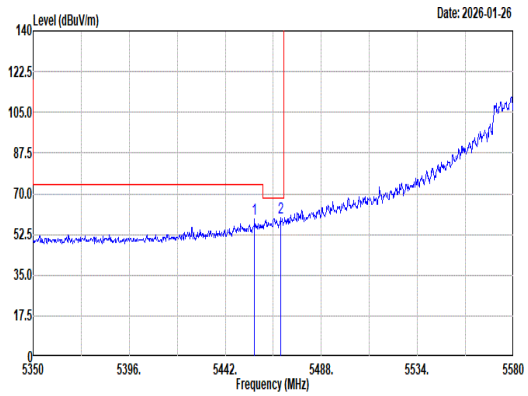 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5456.03 59.01 74.00 -14.99 50.45 33.01 11.77 36.22 0.00 200 318 Peak 2 5468.45 59.61 68.20 -8.59 51.01 33.04 11.79 36.23 0.00 200 318 Peak	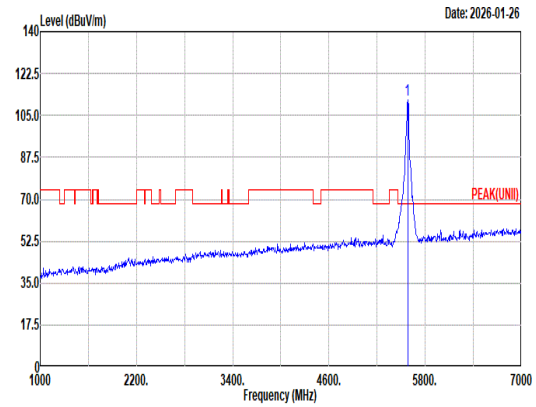 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5580.00 111.24 ------ ------ 102.57 33.03 11.89 36.25 0.00 200 318 Peak
Avg	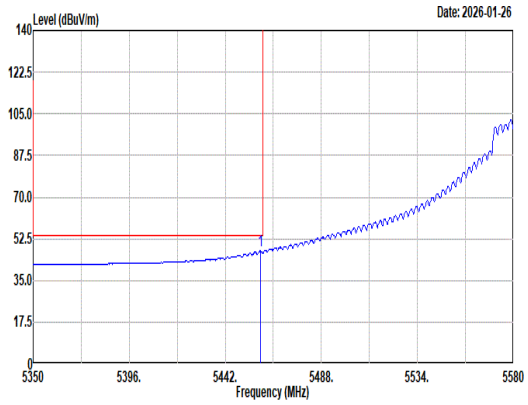 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5458.79 47.38 54.00 -6.62 38.81 33.02 11.78 36.23 0.00 200 318 Average	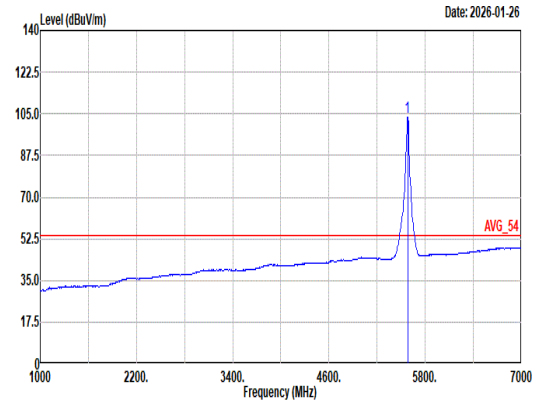 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5580.00 103.81 ------ ------ 95.13 33.04 11.89 36.25 0.00 200 318 Average

Mode	64	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	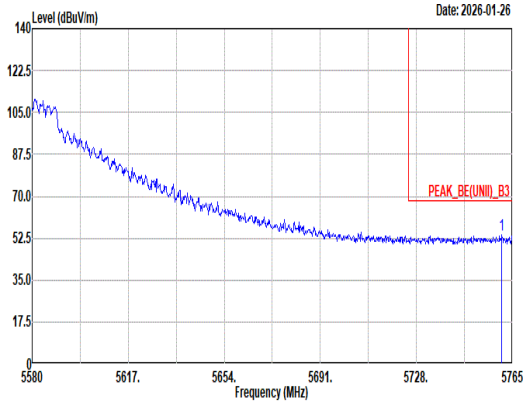 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5760.93 54.03 68.20 -14.17 44.42 33.84 12.07 36.30 0.00 200 318 Peak	Blank

Mode	64	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	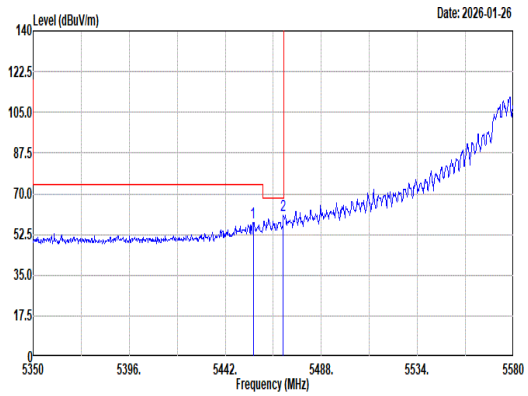 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5455.34 57.47 74.00 -16.53 48.91 33.01 11.77 36.22 0.00 300 88 Peak 2 5469.83 60.86 68.20 -7.34 52.26 33.04 11.79 36.23 0.00 300 88 Peak	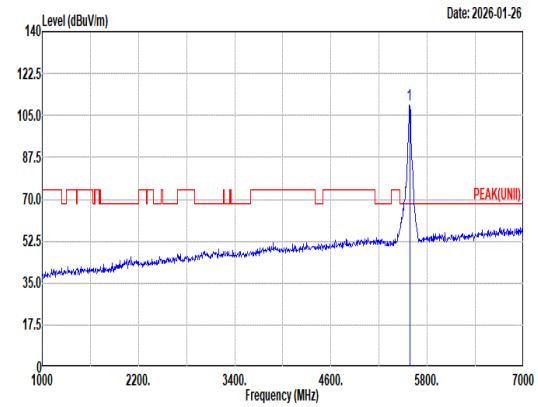 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 109.18 ------ ------ 100.50 33.04 11.89 36.25 0.00 300 88 Peak
Avg	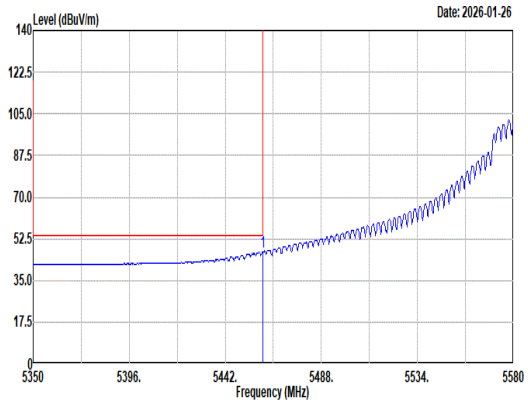 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.94 47.14 54.00 -6.86 38.57 33.02 11.78 36.23 0.00 300 88 Average	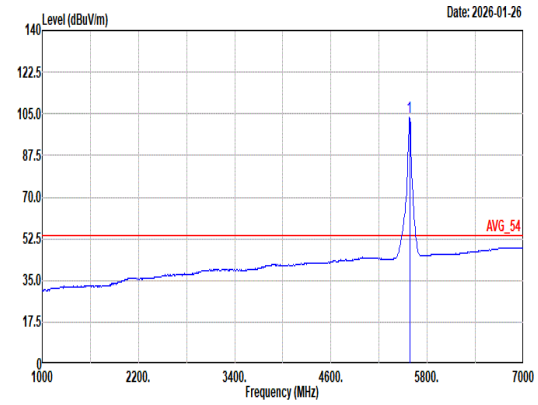 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5580.00 103.63 ------ ------ 94.95 33.04 11.89 36.25 0.00 300 88 Average

Mode	64	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	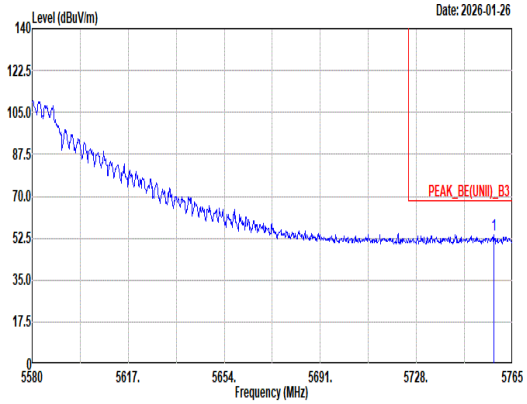 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5757.79 54.11 68.20 -14.09 44.51 33.83 12.07 36.30 0.00 300 88 Peak	Blank

Mode	64	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	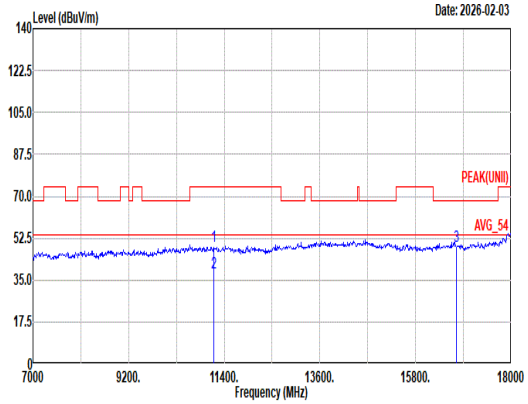 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11160.00 48.96 74.00 -25.04 58.42 38.90 16.73 65.92 0.83 200 260 Peak 2 11160.00 37.82 54.00 -16.18 47.28 38.90 16.73 65.92 0.83 200 260 Average 3 16740.00 49.34 68.20 -18.86 56.39 38.30 20.66 66.76 0.75 -- -- Peak	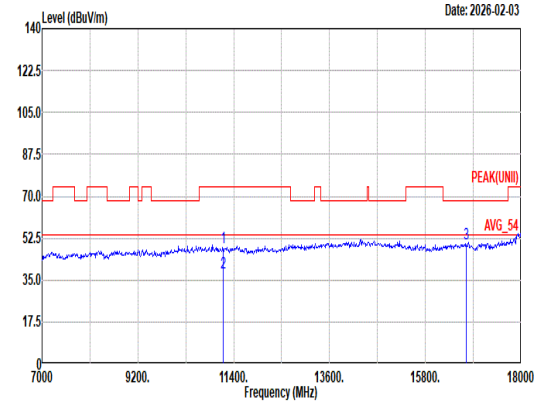 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11160.00 48.46 74.00 -25.54 57.92 38.90 16.73 65.92 0.83 300 45 Peak 2 11160.00 37.80 54.00 -16.20 47.26 38.90 16.73 65.92 0.83 300 45 Average 3 16740.00 49.94 68.20 -18.26 56.99 38.30 20.66 66.76 0.75 -- -- Peak

Mode	64	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	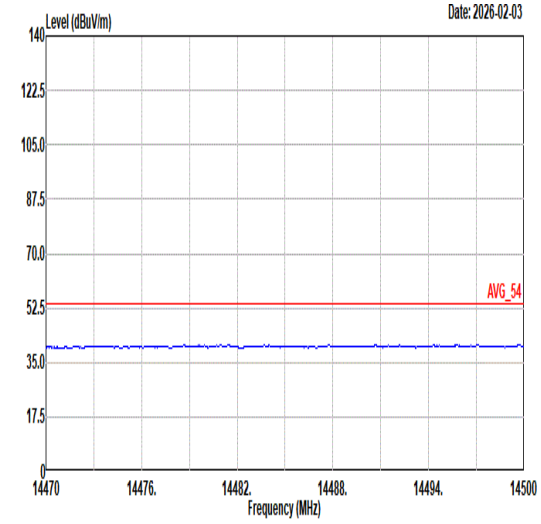 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	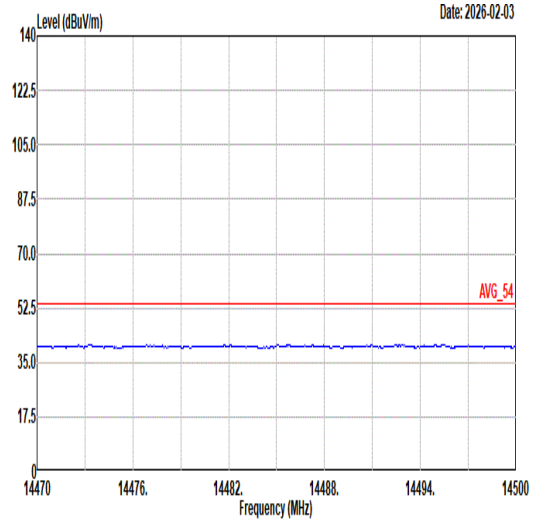 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	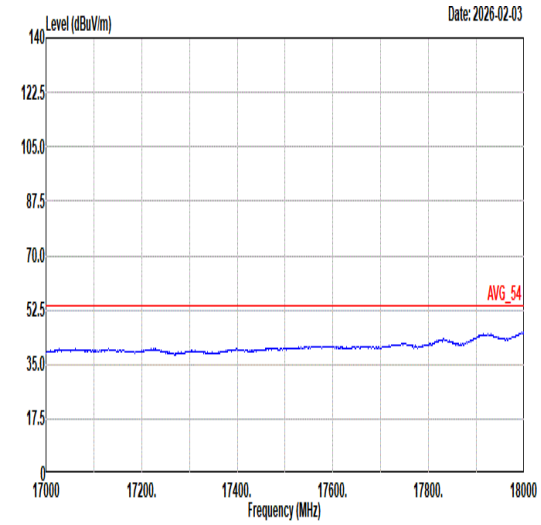 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	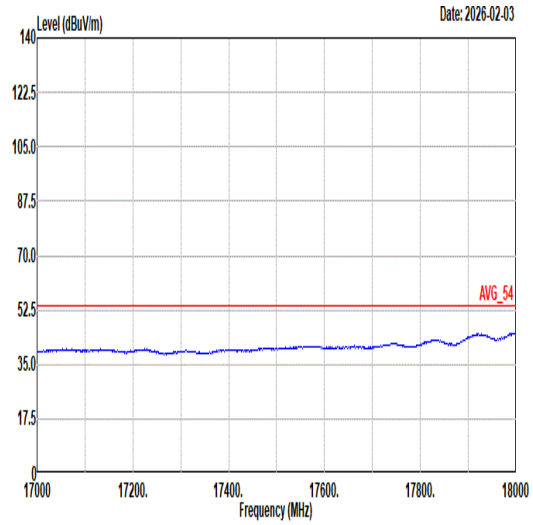 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	65	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH136_Full RU_5680MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	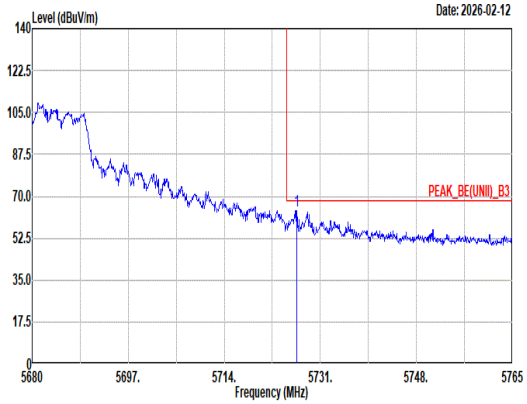 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.84 63.91 68.20 -4.29 54.45 33.71 12.04 36.29 0.00 200 312 Peak	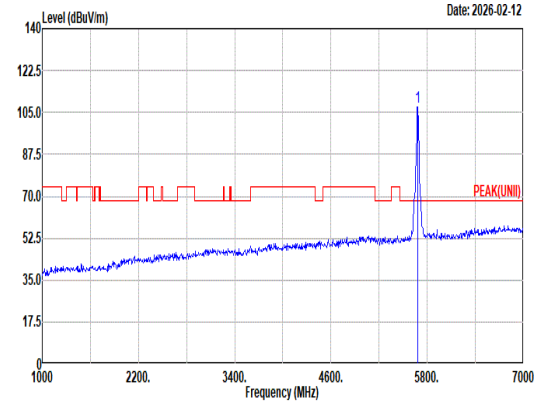 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 107.28 ------ ------ 98.13 33.44 11.99 36.28 0.00 200 312 Peak
Avg	Blank	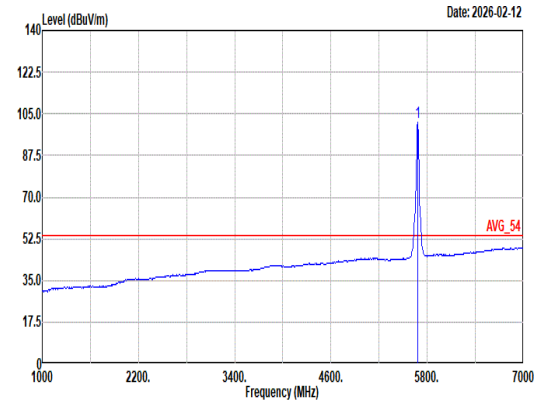 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 101.38 ------ ------ 92.23 33.44 11.99 36.28 0.00 200 312 Average

Mode	65	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH136_Full RU_5680MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	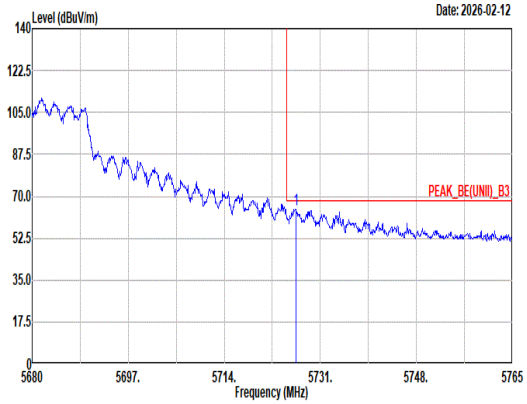 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.75 64.64 68.20 -3.56 55.18 33.71 12.04 36.29 0.00 201 322 Peak	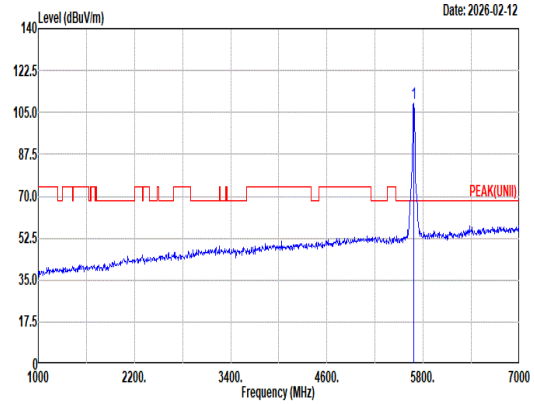 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 108.66 ------ ------ 99.51 33.44 11.99 36.28 0.00 201 322 Peak
Avg	Blank	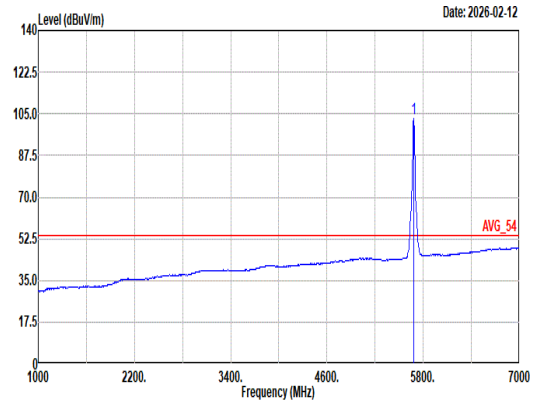 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5680.00 102.79 ------ ------ 93.64 33.44 11.99 36.28 0.00 201 322 Average

Mode	65	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH136_Full RU_5680MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	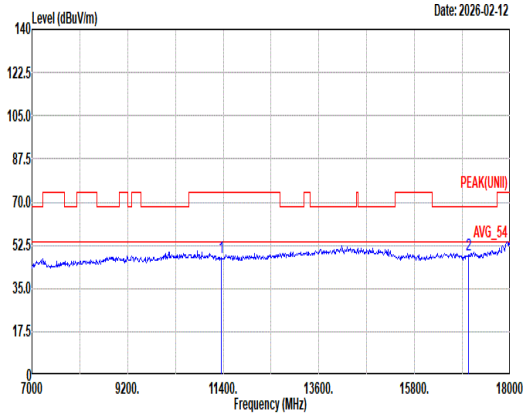 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11360.00 47.30 74.00 -26.70 56.40 39.20 16.89 65.99 0.80 -- -- Peak 2 17040.00 48.66 68.20 -19.54 54.90 38.44 20.86 66.32 0.78 -- -- Peak	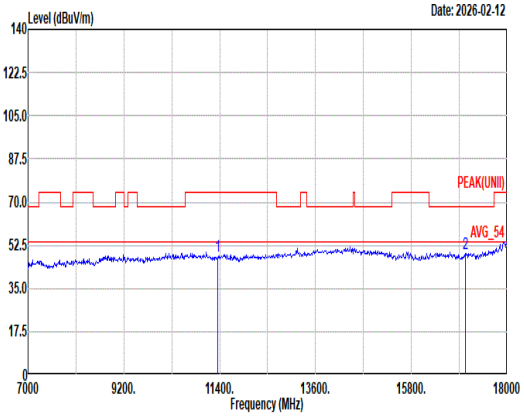 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11360.00 47.96 74.00 -26.04 57.06 39.20 16.89 65.99 0.80 -- -- Peak 2 17040.00 49.38 68.20 -18.82 55.62 38.44 20.86 66.32 0.78 -- -- Peak

Mode	65	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH136_Full RU_5680MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	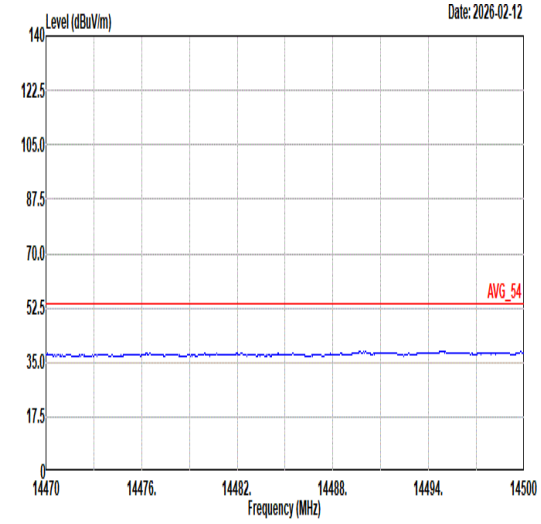 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	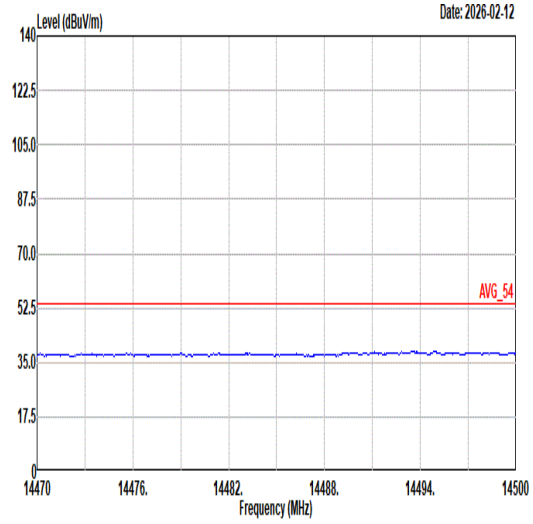 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	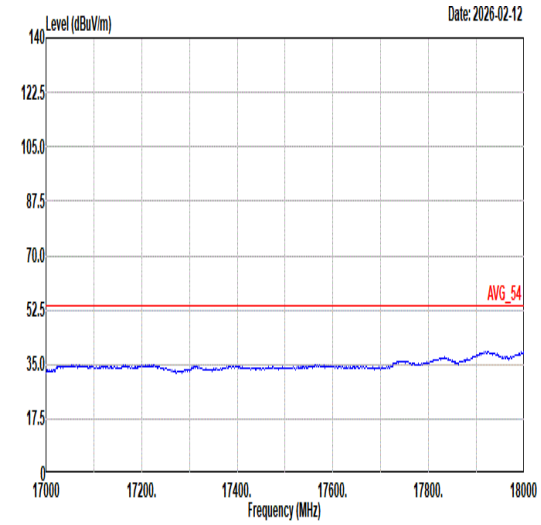 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	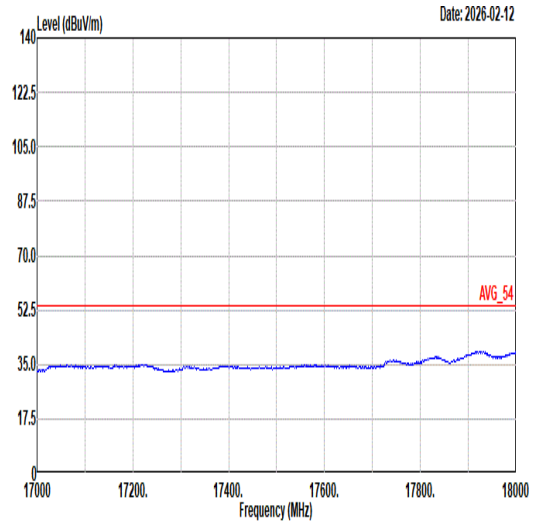 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	66	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	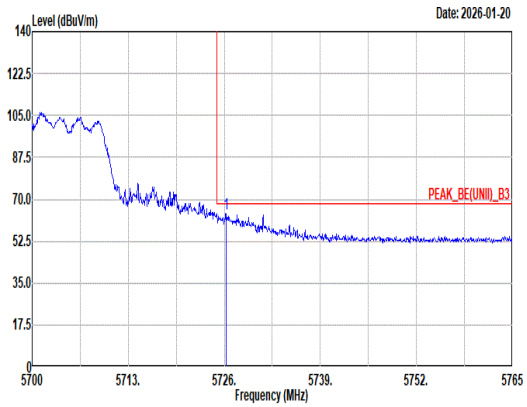 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.26 63.86 68.20 -4.34 54.40 33.71 12.04 36.29 0.00 196 4 Peak	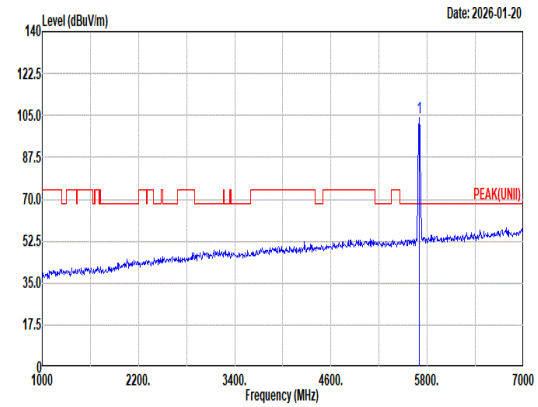 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.16 ------ ------ 94.81 33.62 12.01 36.28 0.00 196 4 Peak
Avg	Blank	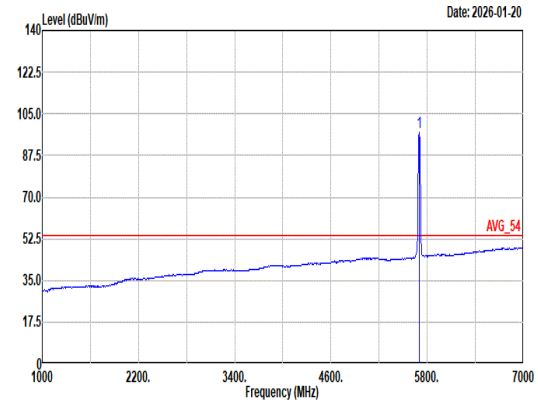 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 97.17 ------ ------ 87.82 33.62 12.01 36.28 0.00 196 4 Average

Mode	66	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	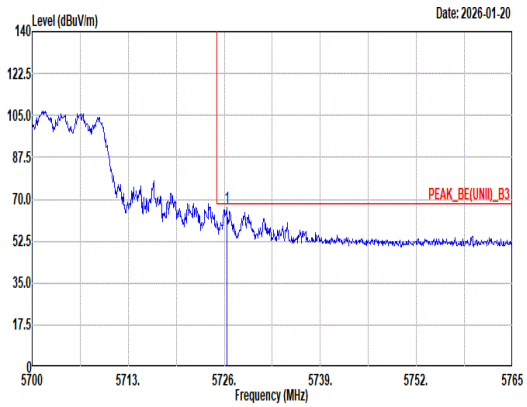 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.33 66.44 68.20 -1.76 56.98 33.71 12.04 36.29 0.00 178 317 Peak	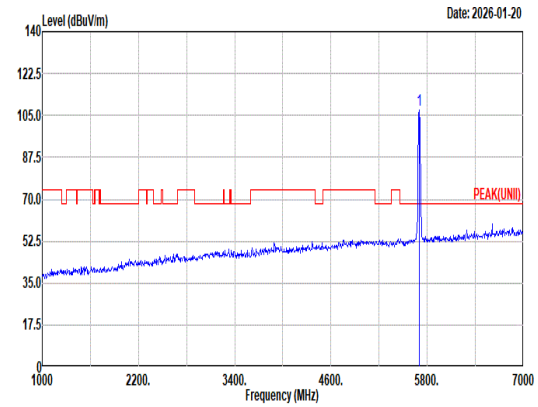 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 107.11 ------ ------ 97.80 33.58 12.01 36.28 0.00 178 317 Peak
Avg	Blank	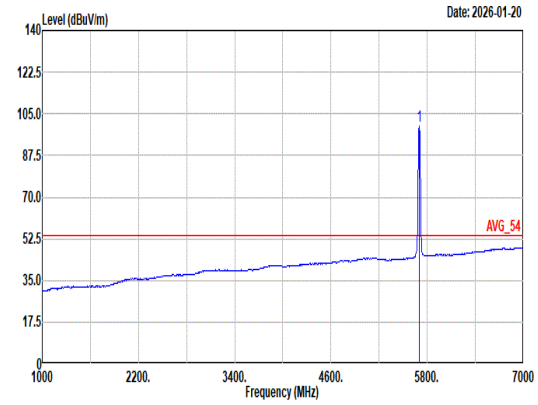 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 99.91 ------ ------ 90.56 33.62 12.01 36.28 0.00 178 317 Average

Mode	66	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	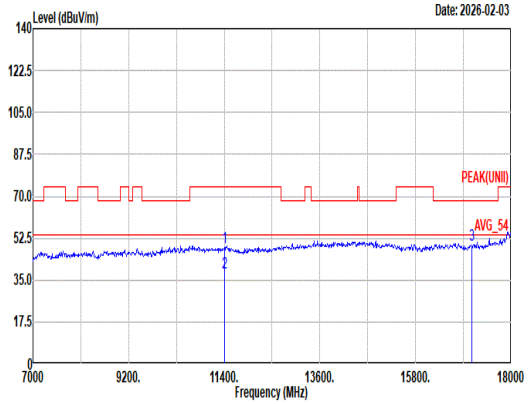 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.79 74.00 -25.21 57.88 39.20 16.92 66.00 0.79 300 140 Peak 2 11400.00 37.82 54.00 -16.18 46.91 39.20 16.92 66.00 0.79 300 140 Average 3 17100.00 49.44 68.20 -18.76 55.61 38.40 20.90 66.25 0.78 -- -- Peak	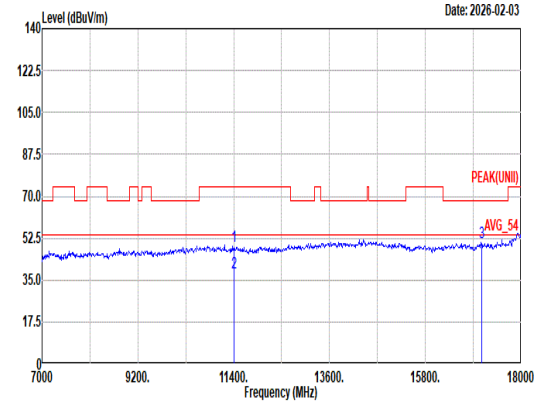 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11400.00 48.99 74.00 -25.01 58.08 39.20 16.92 66.00 0.79 400 360 Peak 2 11400.00 37.79 54.00 -16.21 46.88 39.20 16.92 66.00 0.79 400 360 Average 3 17100.00 50.48 68.20 -17.72 56.65 38.40 20.90 66.25 0.78 -- -- Peak

Mode	66	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	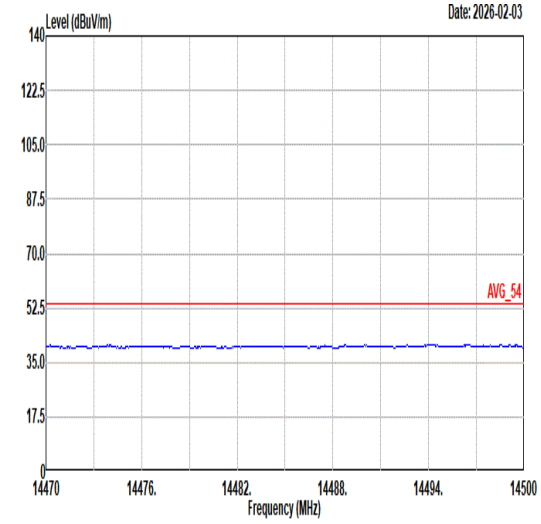 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	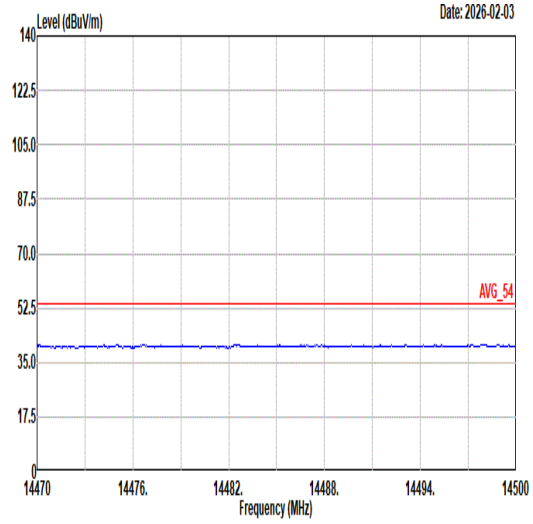 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	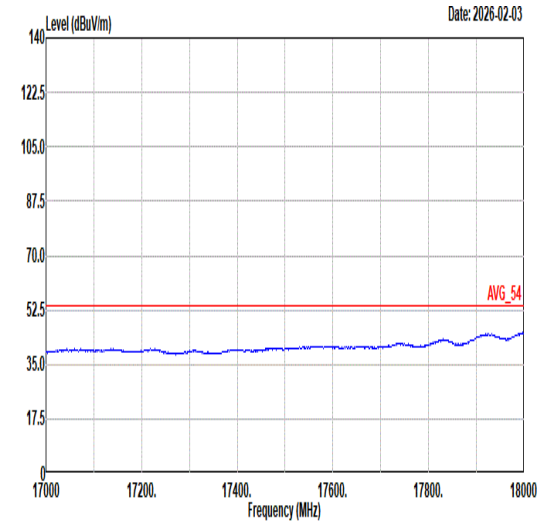 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	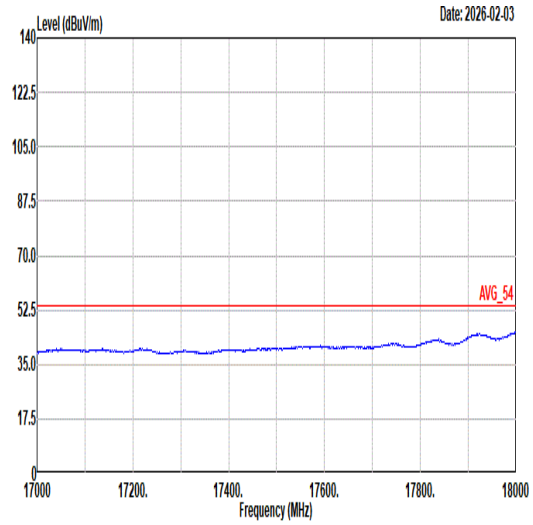 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	67	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	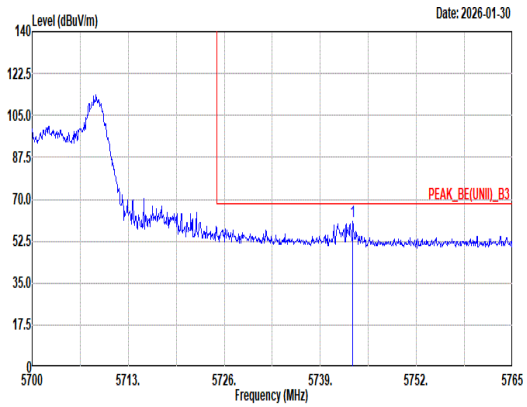 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5743.42 60.78 68.20 -7.42 51.25 33.77 12.05 36.29 0.00 300 312 Peak	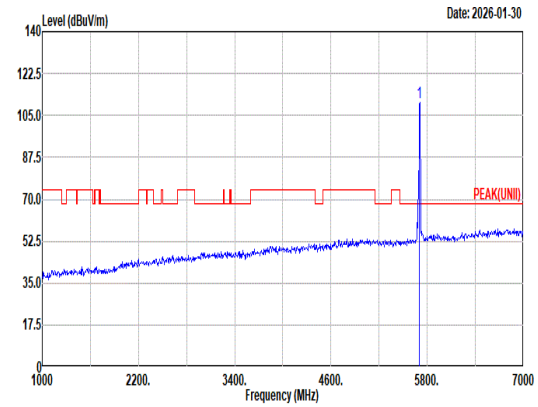 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 110.37 ------ ------ 100.99 33.64 12.02 36.28 0.00 300 312 Peak
Avg	Blank	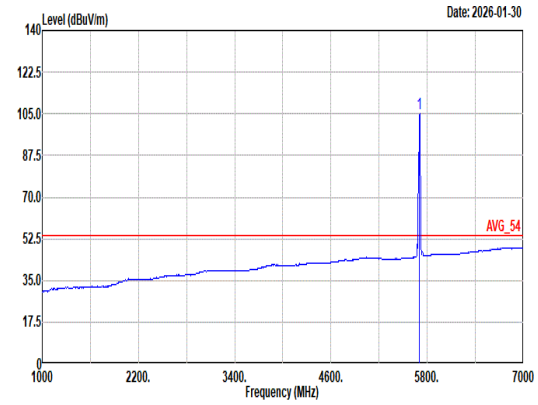 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.87 ------ ------ 95.49 33.64 12.02 36.28 0.00 300 312 Average

Mode	67	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_26/8 RU_5700MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	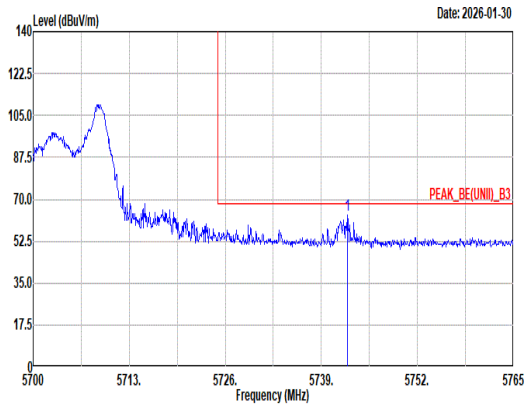 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5742.58 63.62 68.20 -4.58 54.09 33.77 12.05 36.29 0.00 100 304 Peak	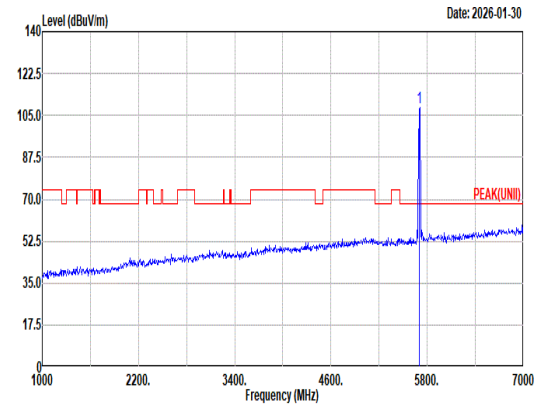 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 108.15 ------ ------ 98.77 33.64 12.02 36.28 0.00 100 304 Peak
Avg	Blank	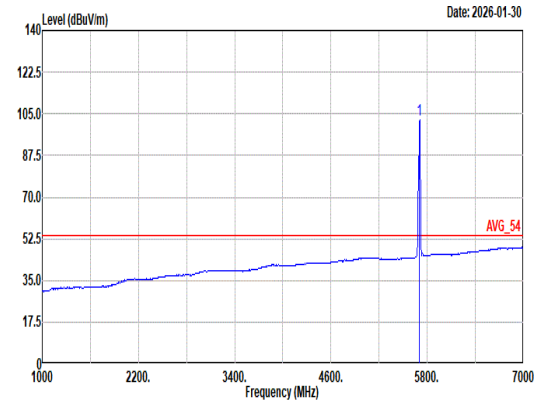 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 102.60 ------ ------ 93.22 33.64 12.02 36.28 0.00 100 304 Average

Mode	68	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	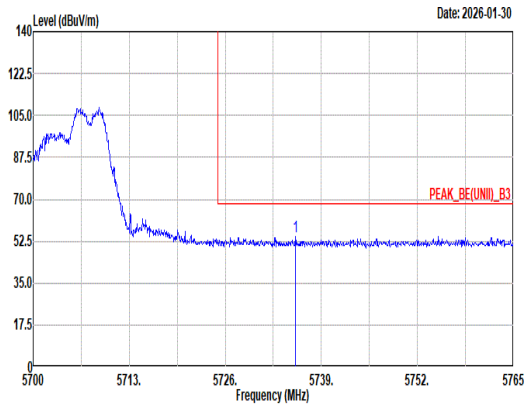 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5735.49 54.27 68.20 -13.93 44.77 33.74 12.05 36.29 0.00 351 306 Peak	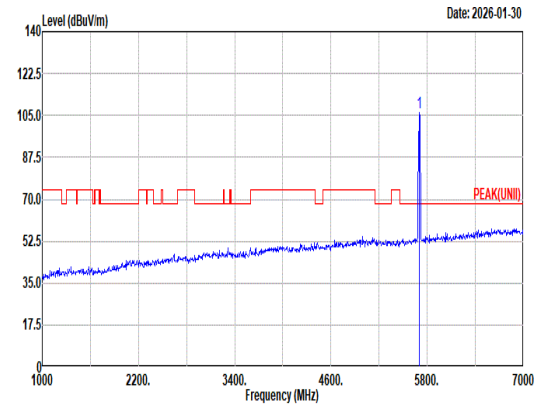 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 106.13 ------ ------ 96.78 33.62 12.01 36.28 0.00 351 306 Peak
Avg	Blank	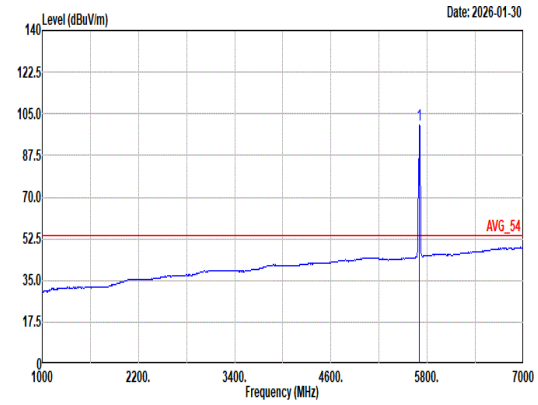 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 100.24 ------ ------ 90.89 33.62 12.01 36.28 0.00 351 306 Average

Mode	68	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_52/40 RU_5700MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	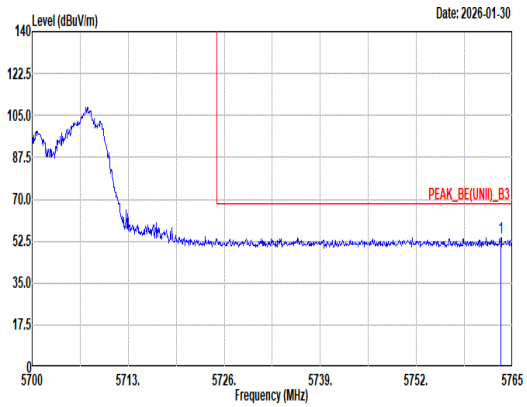 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5763.44 54.14 68.20 -14.06 44.52 33.85 12.07 36.30 0.00 151 0 Peak	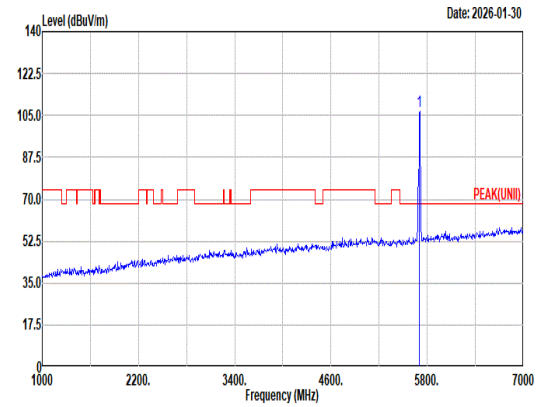 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 106.79 ------ ------ 97.41 33.64 12.02 36.28 0.00 151 0 Peak
Avg	Blank	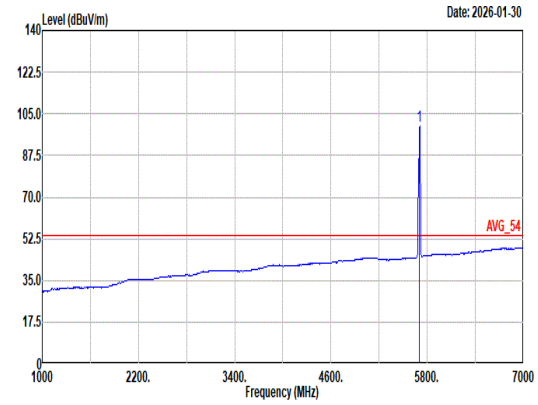 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark 1 5700.00 100.03 ------ ------ 90.65 33.64 12.02 36.28 0.00 151 0 Average

Mode	69	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	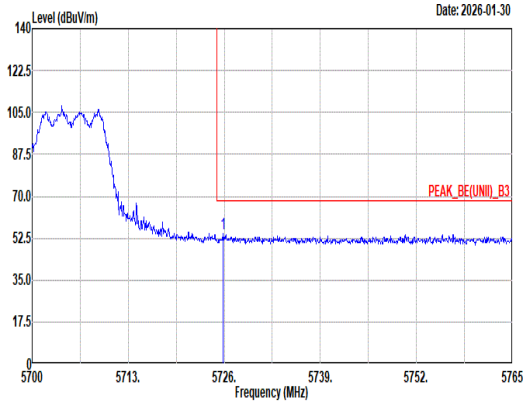 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.87 54.35 68.20 -13.85 44.90 33.70 12.04 36.29 0.00 356 307 Peak	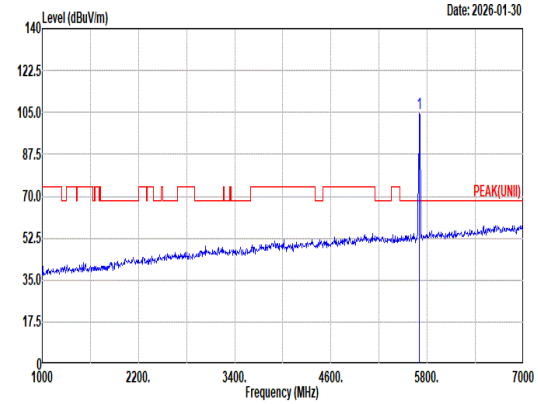 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 104.77 ------ ------ 95.42 33.62 12.01 36.28 0.00 356 307 Peak
Avg	Blank	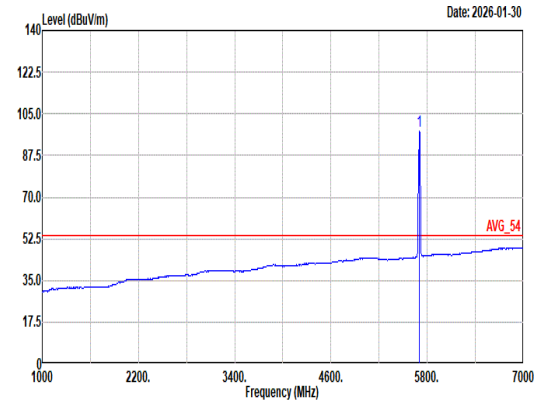 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 97.90 ------ ------ 88.55 33.62 12.01 36.28 0.00 356 307 Average

Mode	69	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_106/54 RU_5700MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	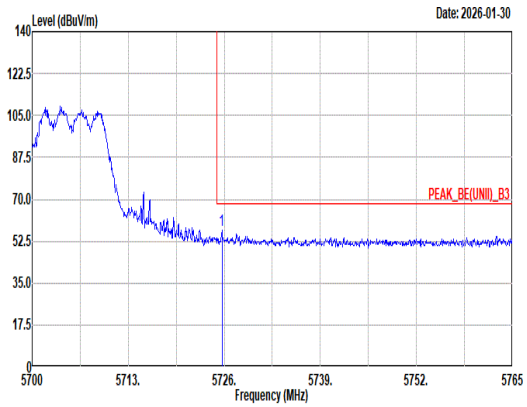 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5725.68 57.10 68.20 -11.10 47.65 33.70 12.04 36.29 0.00 200 321 Peak	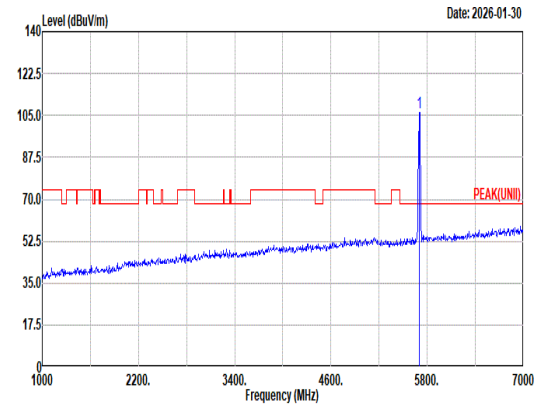 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 105.99 ------ ------ 96.64 33.62 12.01 36.28 0.00 200 321 Peak
Avg	Blank	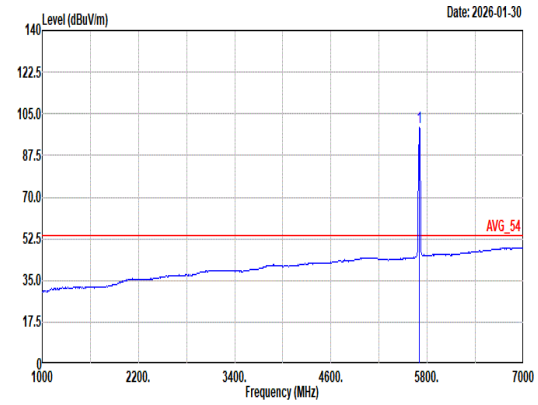 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5700.00 99.52 ------ ------ 90.17 33.62 12.01 36.28 0.00 200 321 Average

Mode	70
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	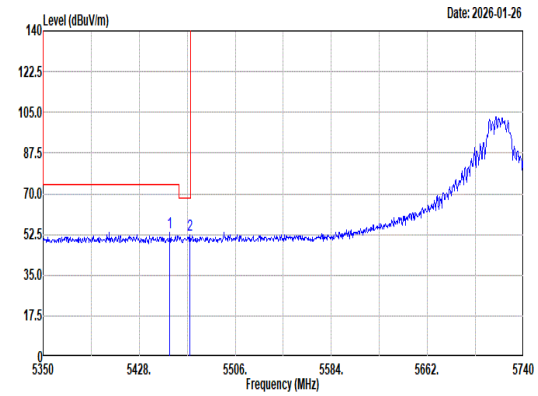 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5452.96 53.22 74.00 -20.78 44.66 33.01 11.77 36.22 0.00 300 159 Peak 2 5469.34 52.55 68.20 -15.65 43.95 33.04 11.79 36.23 0.00 300 159 Peak	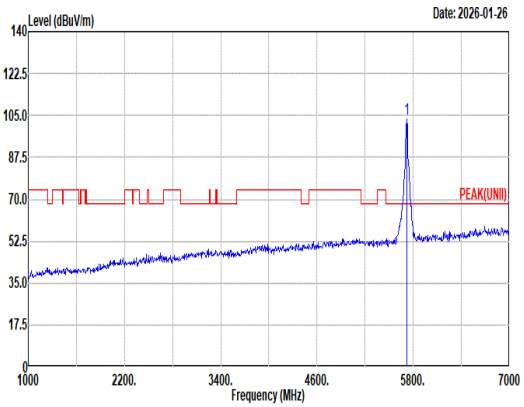 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 103.46 ------ ------ 94.03 33.69 12.03 36.29 0.00 300 159 Peak
Avg	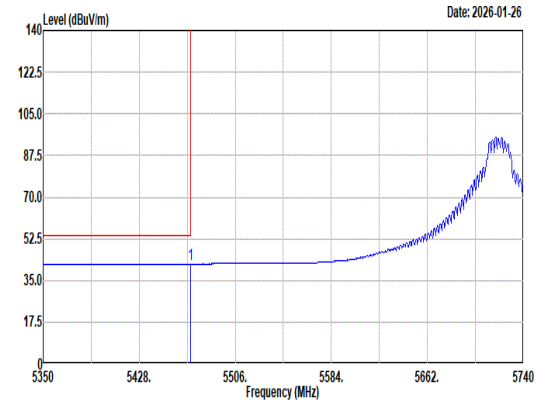 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5469.73 41.94 54.00 -12.06 33.34 33.04 11.79 36.23 0.00 300 159 Average	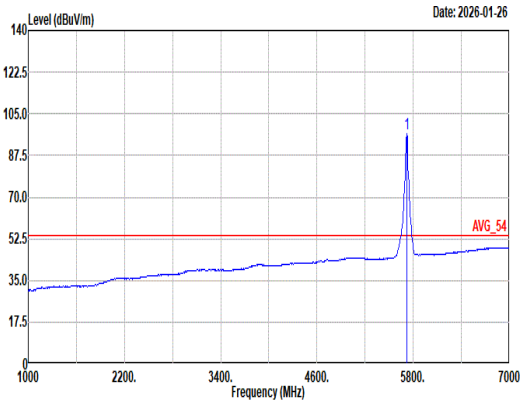 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 96.63 ------ ------ 87.20 33.69 12.03 36.29 0.00 300 159 Average

Mode	70	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	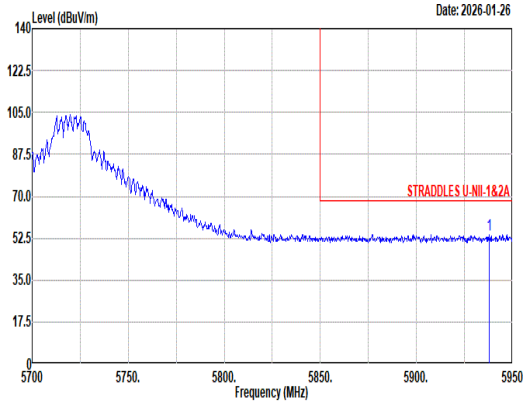 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5938.00 54.12 68.20 -14.08 43.89 34.30 12.27 36.34 0.00 300 159 Peak	Blank

Mode	70
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	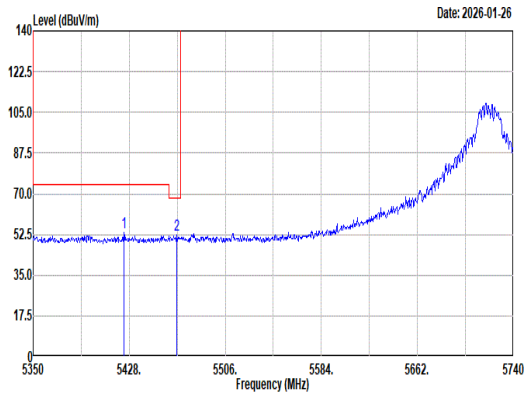 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5423.71 53.14 74.00 -20.86 44.57 33.05 11.74 36.22 0.00 279 360 Peak 2 5466.61 52.21 68.20 -15.99 43.63 33.03 11.78 36.23 0.00 279 360 Peak	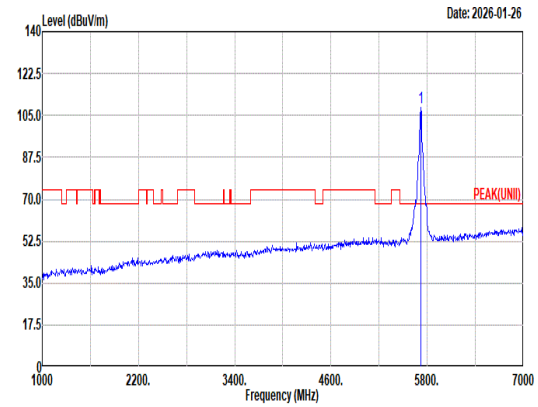 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 108.54 ------ ------ 99.14 33.66 12.03 36.29 0.00 279 360 Peak
Avg	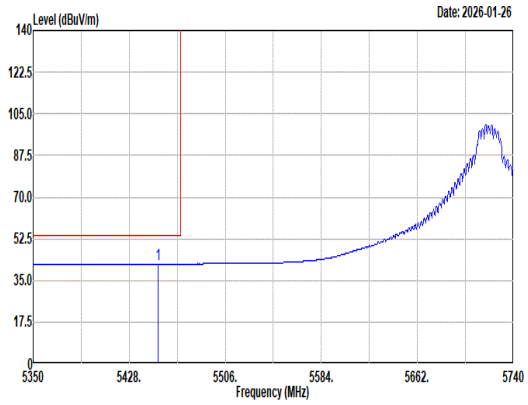 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.40 41.92 54.00 -12.08 33.37 33.00 11.77 36.22 0.00 279 360 Average	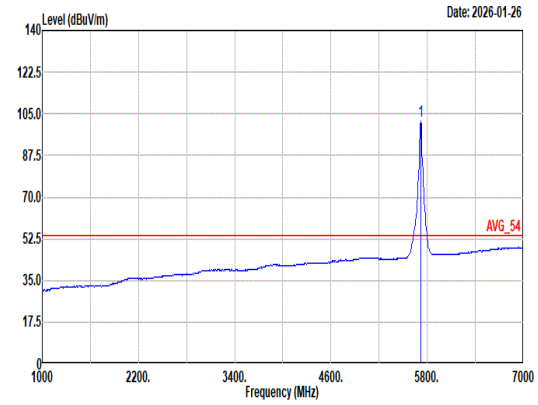 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5720.00 101.83 ------ ------ 92.40 33.69 12.03 36.29 0.00 279 360 Average

Mode	70	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	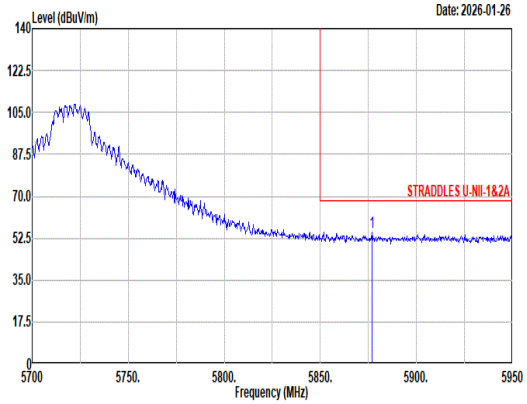 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5877.00 54.97 68.20 -13.23 44.85 34.25 12.20 36.33 0.00 279 360 Peak	Blank

Mode	70	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	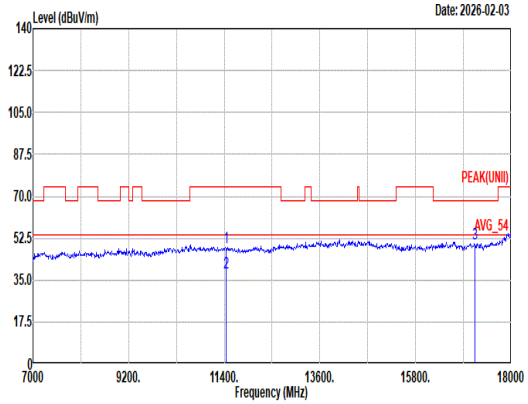 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 48.54 74.00 -25.46 57.62 39.20 16.95 66.01 0.78 200 327 Peak 2 11440.00 38.19 54.00 -15.81 47.27 39.20 16.95 66.01 0.78 200 327 Average 3 17160.00 49.99 68.20 -18.21 55.99 38.44 20.94 66.17 0.79 -- -- Peak	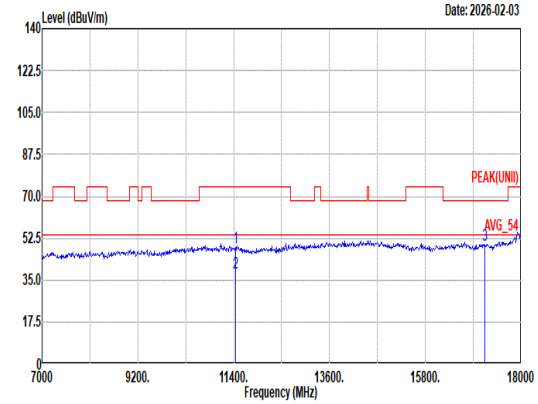 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11440.00 48.57 74.00 -25.43 57.65 39.20 16.95 66.01 0.78 100 112 Peak 2 11440.00 38.21 54.00 -15.79 47.29 39.20 16.95 66.01 0.78 100 112 Average 3 17160.00 49.41 68.20 -18.79 55.41 38.44 20.94 66.17 0.79 -- -- Peak

Mode	70	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	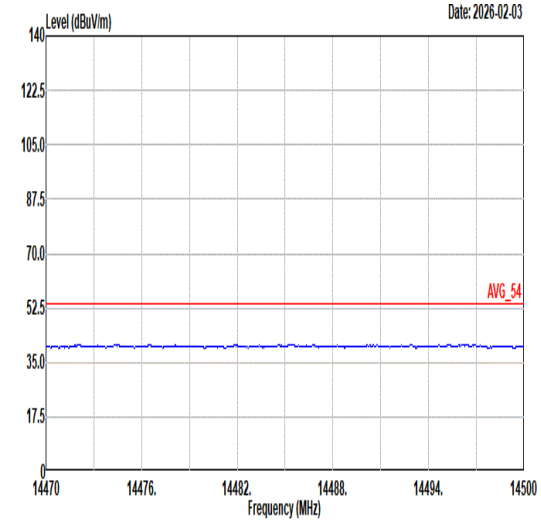 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	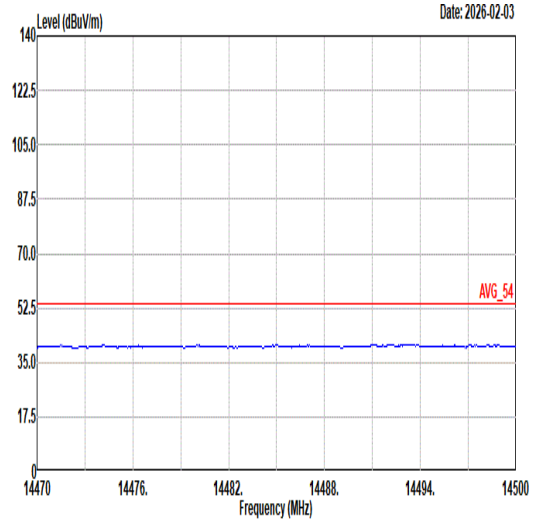 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	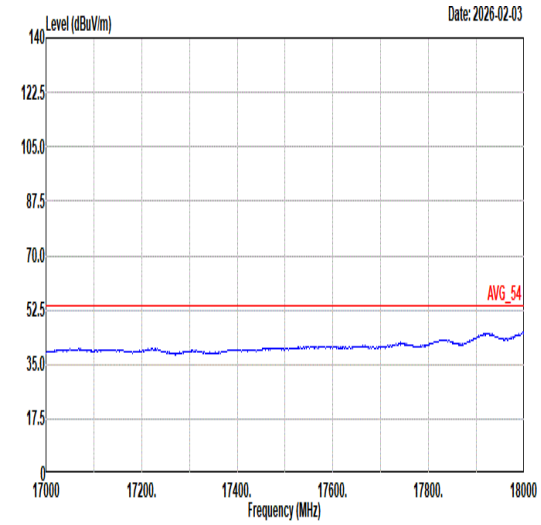 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	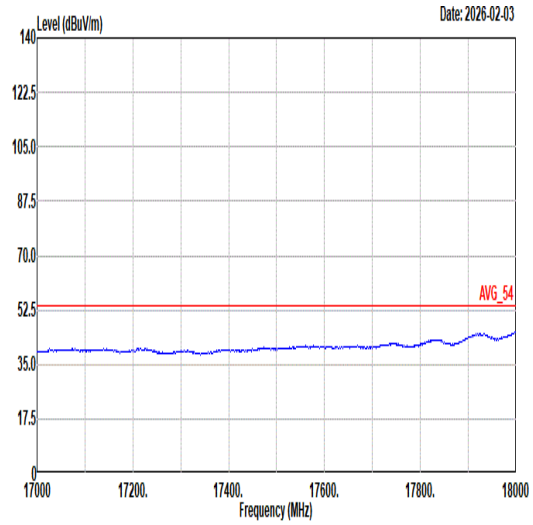 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	71	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	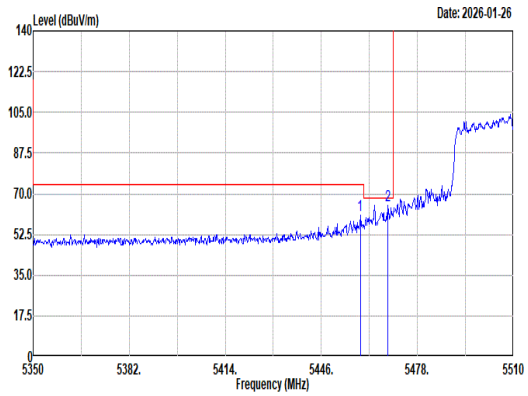 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5458.96 60.82 74.00 -13.18 52.25 33.02 11.78 36.23 0.00 200 316 Peak 2 5468.24 65.19 68.20 -3.01 56.60 33.04 11.78 36.23 0.00 200 316 Peak	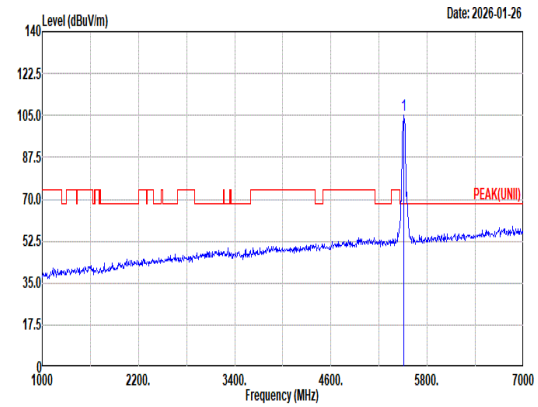 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5510.00 105.20 ------ ------ 96.50 33.10 11.83 36.23 0.00 200 316 Peak
Avg	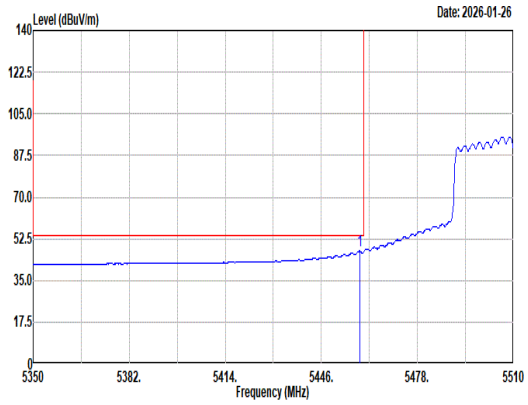 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5458.80 47.35 54.00 -6.65 38.78 33.02 11.78 36.23 0.00 200 316 Average	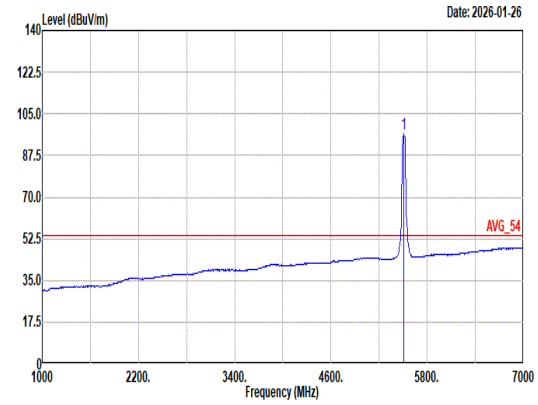 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5510.00 96.90 ------ ------ 88.20 33.10 11.83 36.23 0.00 200 316 Average

Mode	71	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	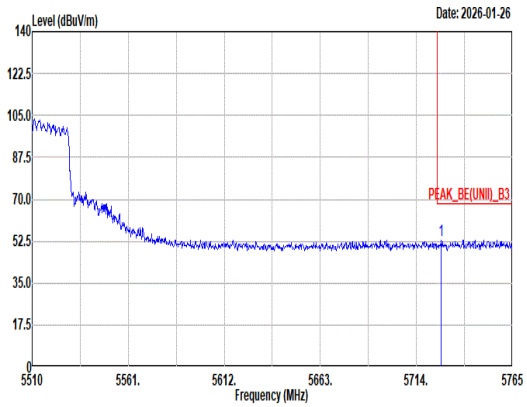 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5727.26 52.96 68.20 -15.24 43.50 33.71 12.04 36.29 0.00 200 316 Peak	Blank

Mode	71	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	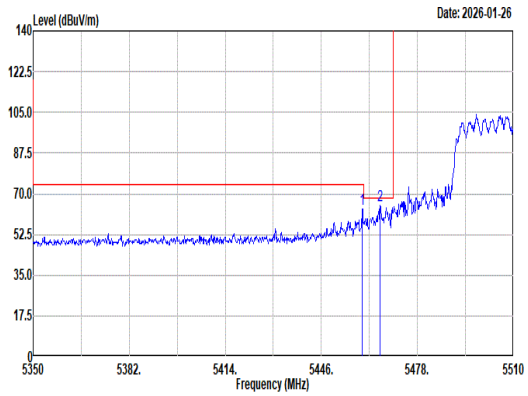 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.60 63.40 74.00 -10.60 54.83 33.02 11.78 36.23 0.00 315 75 Peak 2 5465.52 65.20 68.20 -3.00 56.62 33.03 11.78 36.23 0.00 315 75 Peak	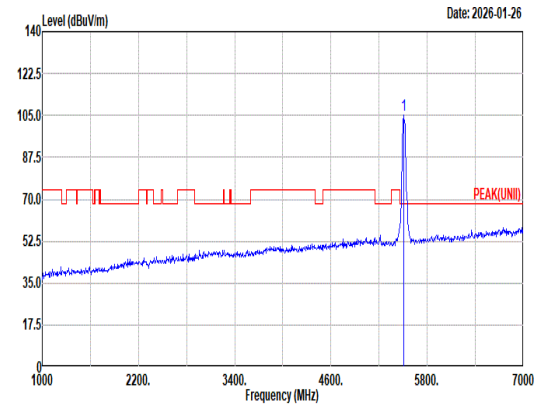 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 105.12 ------ ------ 96.43 33.10 11.82 36.23 0.00 315 75 Peak
Avg	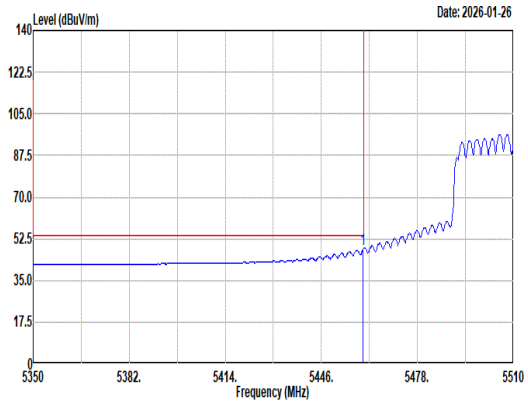 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5459.92 48.16 54.00 -5.84 39.59 33.02 11.78 36.23 0.00 315 75 Average	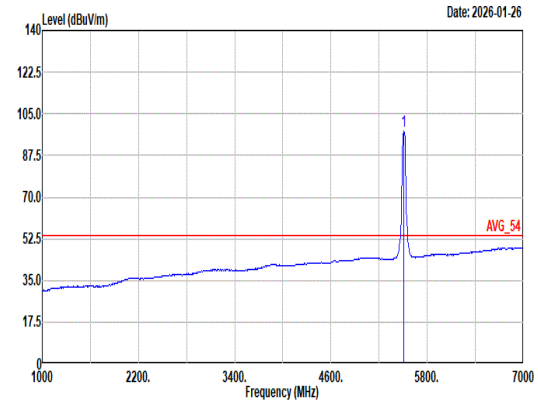 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5510.00 97.72 ------ ------ 89.03 33.10 11.82 36.23 0.00 315 75 Average

Mode	71	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	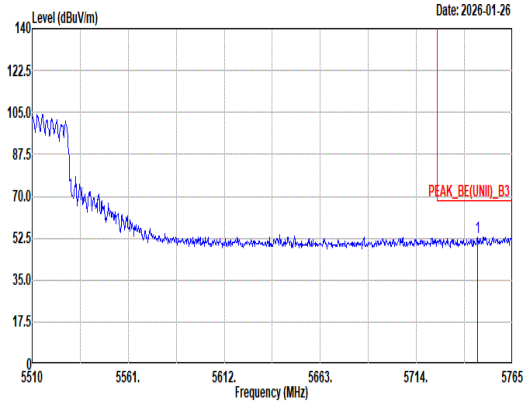 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5746.64 53.02 68.20 -15.18 43.46 33.79 12.06 36.29 0.00 315 75 Peak	Blank

Mode	71	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	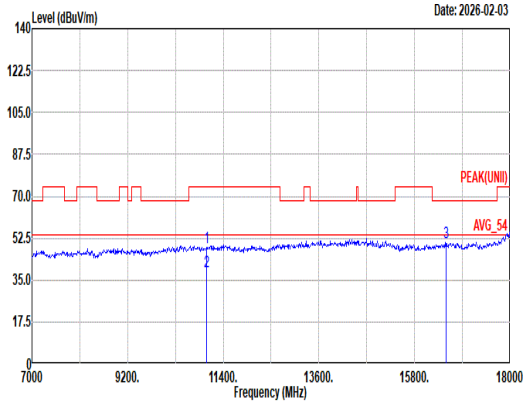 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 48.81 74.00 -25.19 58.30 38.90 16.63 65.88 0.86 100 66 Peak 2 11020.00 38.66 54.00 -15.34 48.15 38.90 16.63 65.88 0.86 100 66 Average 3 16530.00 50.76 68.20 -17.44 58.17 38.42 20.52 67.08 0.73 -- -- Peak	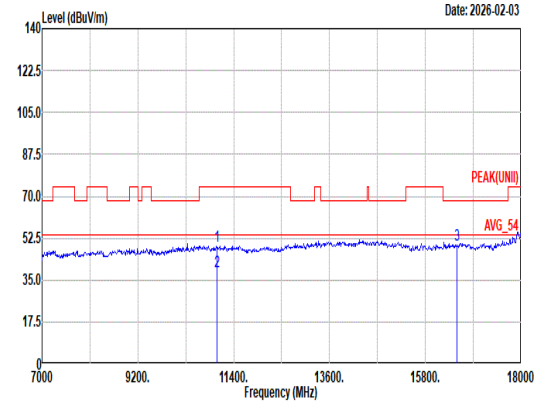 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11020.00 49.01 74.00 -24.99 58.50 38.90 16.63 65.88 0.86 200 330 Peak 2 11020.00 38.70 54.00 -15.30 48.19 38.90 16.63 65.88 0.86 200 330 Average 3 16530.00 49.92 68.20 -18.28 57.33 38.42 20.52 67.08 0.73 -- -- Peak

Mode	71	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	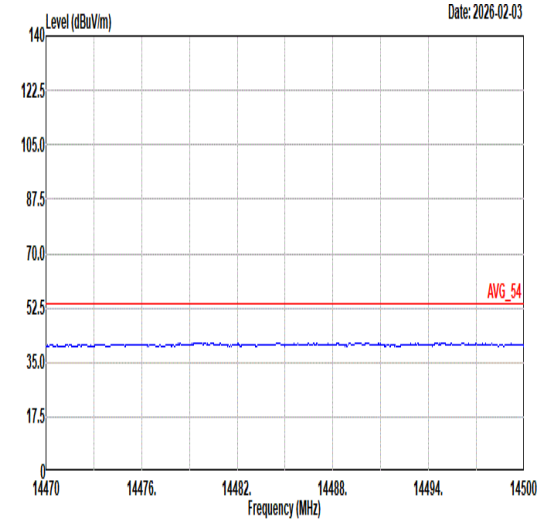 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	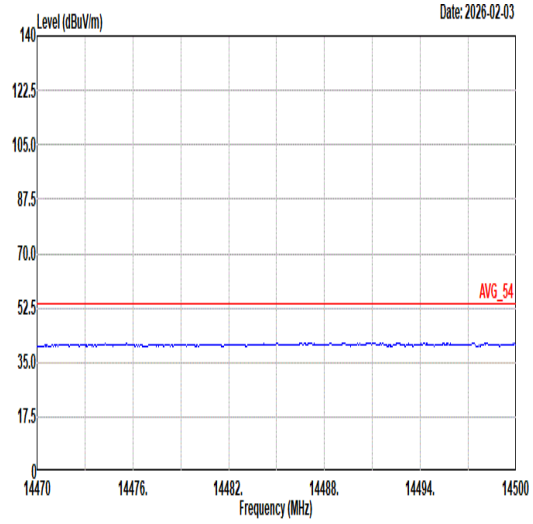 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	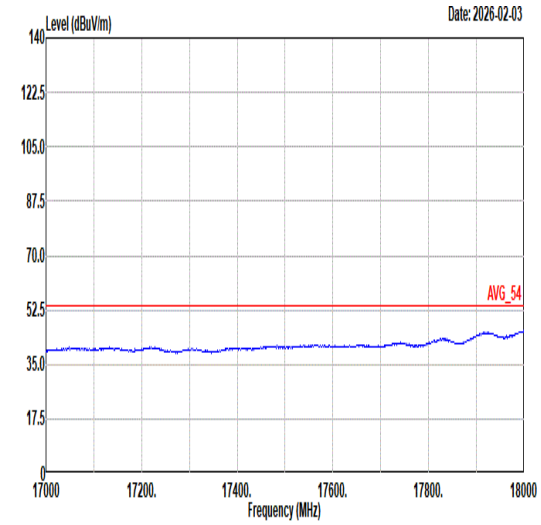 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	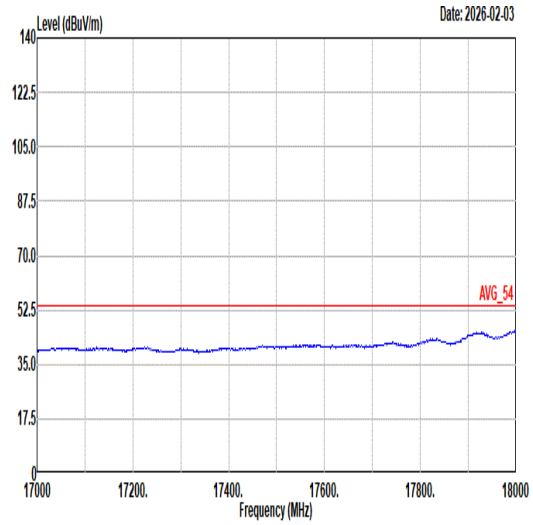 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	72
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	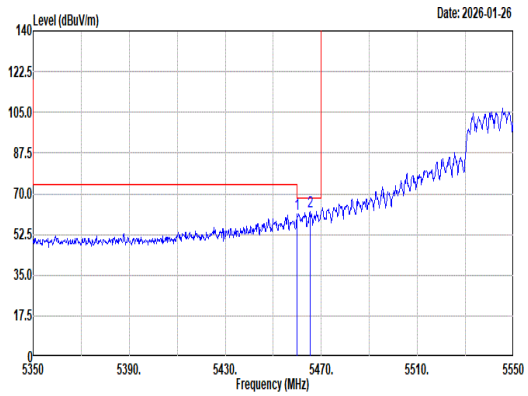 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5460.00 61.08 68.20 -7.12 52.51 33.02 11.78 36.23 0.00 300 336 Peak 2 5465.20 62.54 68.20 -5.66 53.96 33.03 11.78 36.23 0.00 300 336 Peak	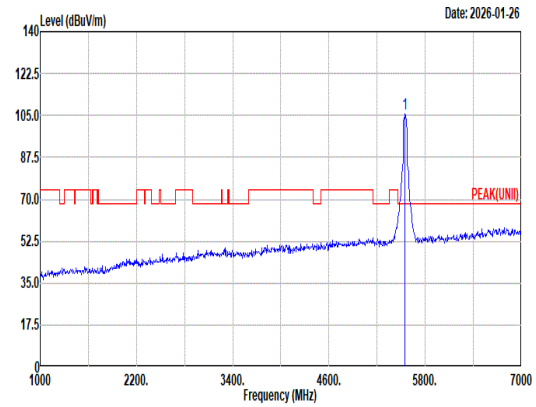 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 105.86 ------ ------ 97.14 33.10 11.86 36.24 0.00 300 336 Peak
Avg	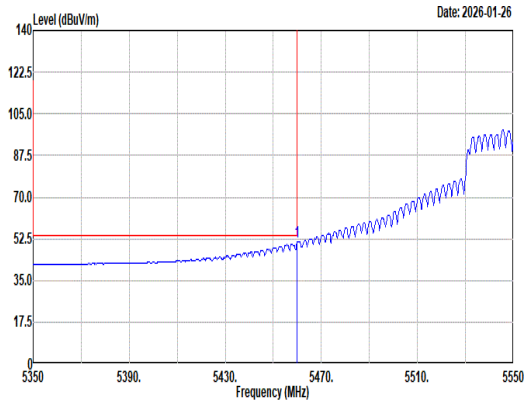 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5460.00 51.09 54.00 -2.91 42.52 33.02 11.78 36.23 0.00 300 336 Average	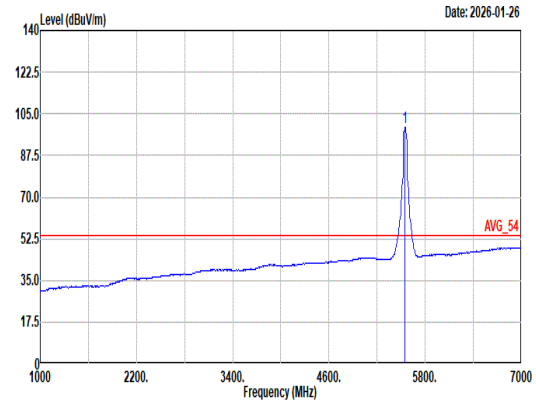 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 99.56 ------ ------ 90.84 33.10 11.86 36.24 0.00 300 336 Average

Mode	72	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	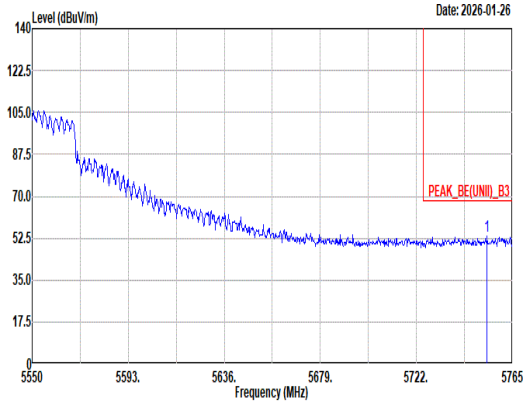 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5753.61 53.35 68.20 -14.85 43.78 33.81 12.06 36.30 0.00 300 336 Peak	Blank

Mode	72
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	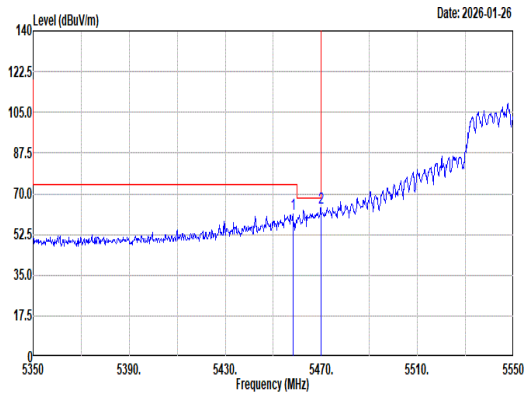 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5458.20 61.36 74.00 -12.64 52.78 33.02 11.78 36.22 0.00 320 75 Peak 2 5469.80 64.02 68.20 -4.18 55.42 33.04 11.79 36.23 0.00 320 75 Peak	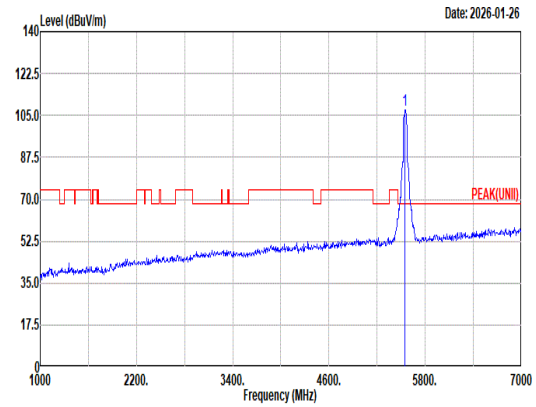 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 107.31 ------ ------ 98.59 33.09 11.87 36.24 0.00 320 75 Peak
Avg	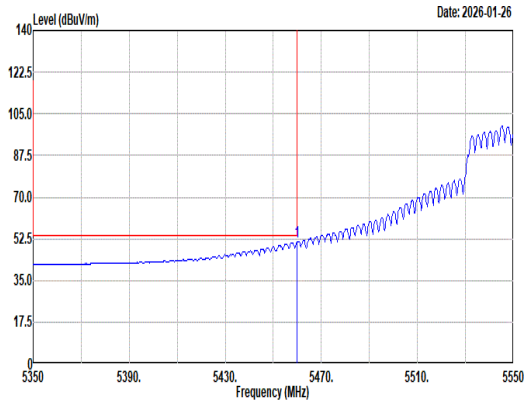 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5460.00 51.17 54.00 -2.83 42.60 33.02 11.78 36.23 0.00 320 75 Average	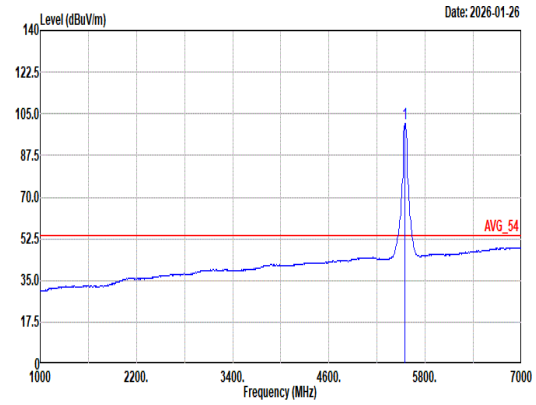 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5550.00 101.14 ------ ------ 92.42 33.09 11.87 36.24 0.00 320 75 Average

Mode	72	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	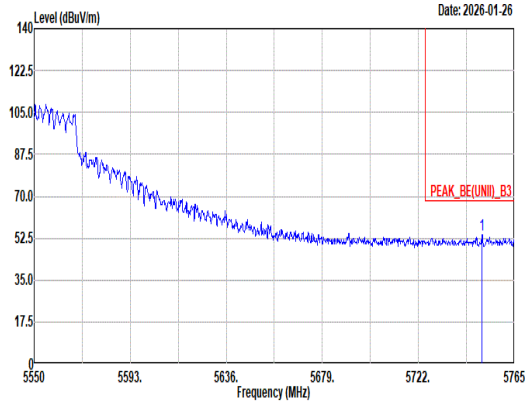 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level / Limit Line / Margin / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5750.38 53.78 68.20 -14.42 44.22 33.80 12.06 36.30 0.00 320 75 Peak	Blank

Mode	72	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	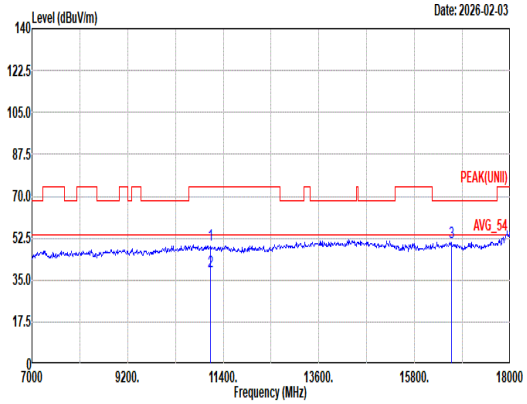 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 49.84 74.00 -24.16 59.21 39.00 16.69 65.90 0.84 200 127 Peak 2 11100.00 38.81 54.00 -15.19 48.18 39.00 16.69 65.90 0.84 200 127 Average 3 16650.00 50.70 68.20 -17.50 57.96 38.30 20.60 66.90 0.74 -- -- Peak	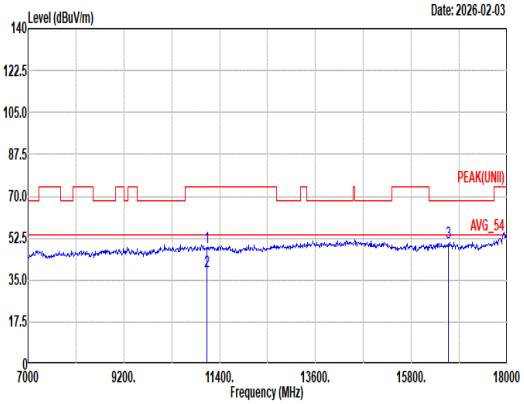 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11100.00 48.81 74.00 -25.19 58.18 39.00 16.69 65.90 0.84 400 103 Peak 2 11100.00 38.76 54.00 -15.24 48.13 39.00 16.69 65.90 0.84 400 103 Average 3 16650.00 50.49 68.20 -17.71 57.75 38.30 20.60 66.90 0.74 -- -- Peak

Mode	72	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	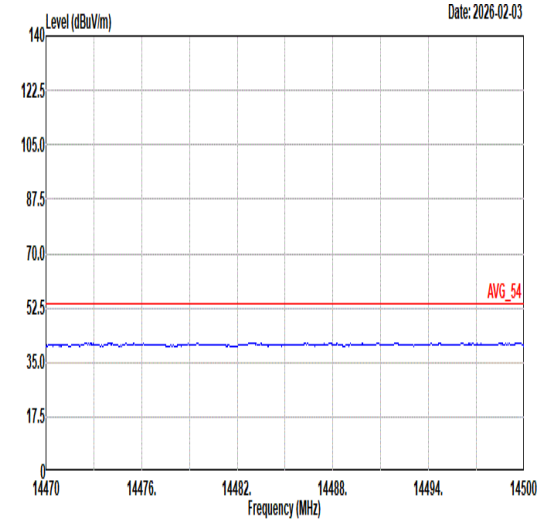 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	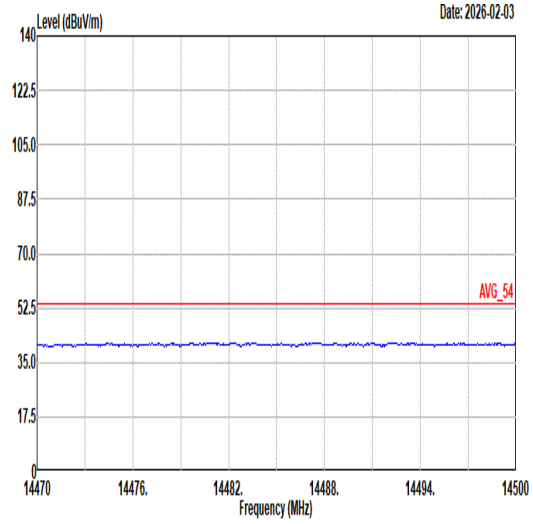 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	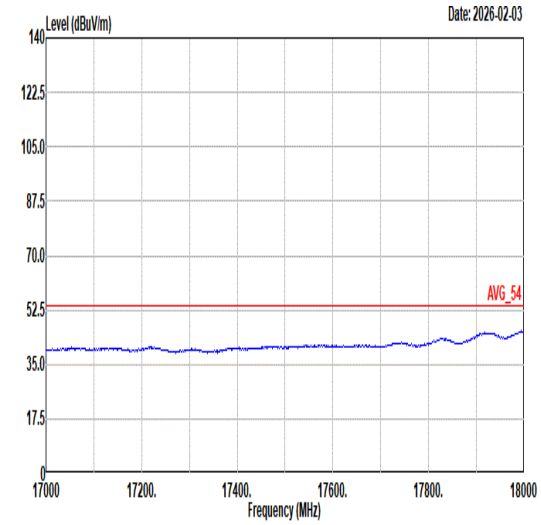 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	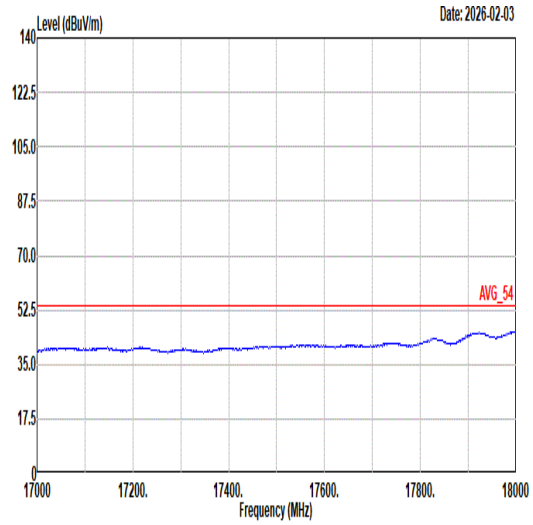 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	73
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	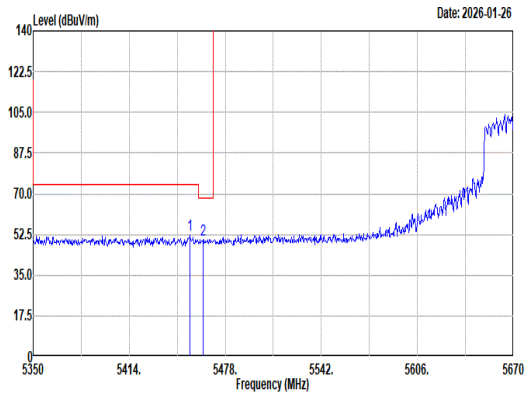 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5454.64 52.42 74.00 -21.58 43.86 33.01 11.77 36.22 0.00 171 360 Peak 2 5463.28 50.42 68.20 -17.78 41.84 33.03 11.78 36.23 0.00 171 360 Peak	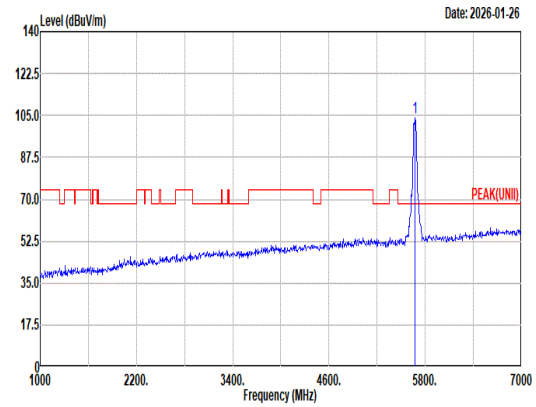 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 103.82 ------ ------ 94.73 33.39 11.98 36.28 0.00 171 360 Peak
Avg	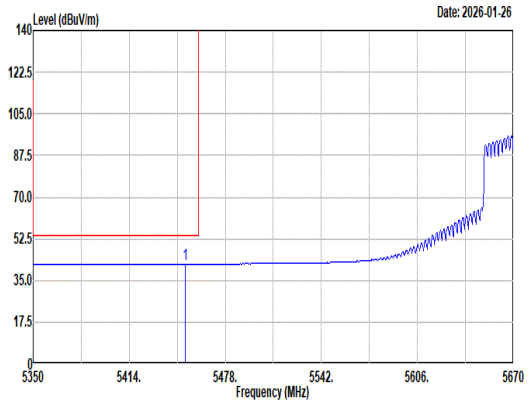 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5451.44 41.85 54.00 -12.15 33.30 33.00 11.77 36.22 0.00 171 360 Average	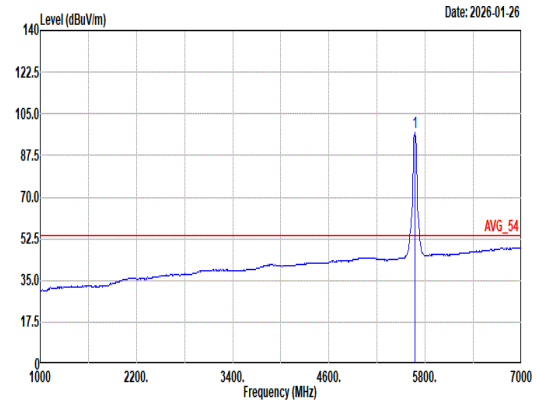 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 97.01 ------ ------ 87.92 33.39 11.98 36.28 0.00 171 360 Average

Mode	73	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	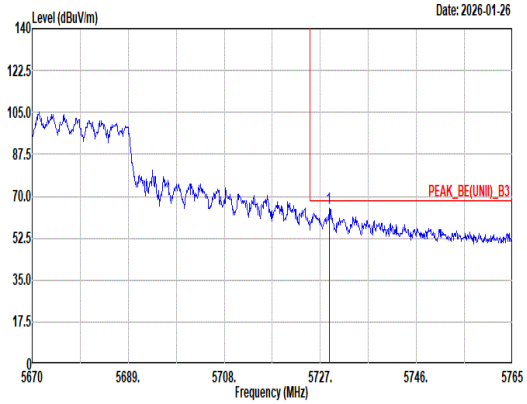 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq / Level / Limit Line / Margin / Read Level / Ant Factor / Cable Loss / Preamp Factor / Aux Factor / APos / TPos / Remark MHz / dBuV/m / dBuV/m / dB / dBuV / dB/m / dB / dB / dB / cm / deg 1 5728.71 64.79 68.20 -3.41 55.33 33.71 12.04 36.29 0.00 171 360 Peak	Blank

Mode	73
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	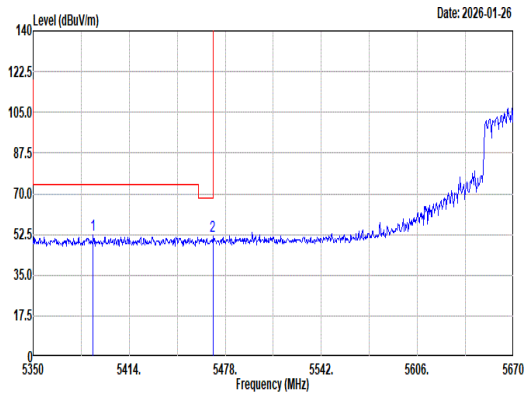 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5390.00 52.11 74.00 -21.89 43.54 33.08 11.71 36.22 0.00 176 323 Peak 2 5469.68 51.59 68.20 -16.61 42.99 33.04 11.79 36.23 0.00 176 323 Peak	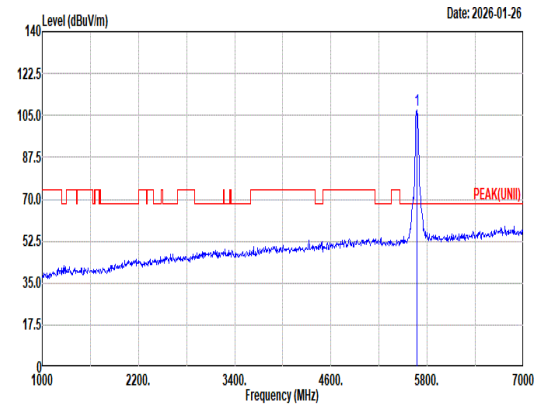 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 107.44 ------ ------ 98.35 33.39 11.98 36.28 0.00 176 323 Peak
Avg	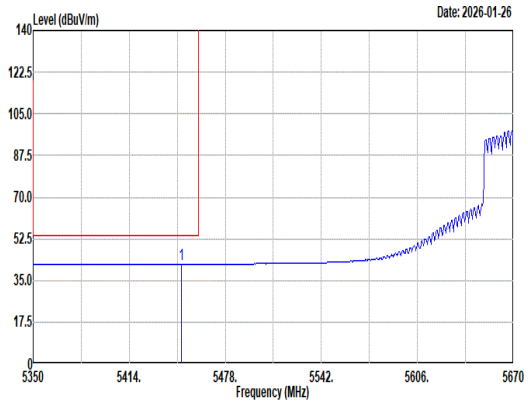 Site : 03CH16-HY Condition: AVG_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5448.56 41.80 54.00 -12.20 33.25 33.00 11.77 36.22 0.00 176 323 Average	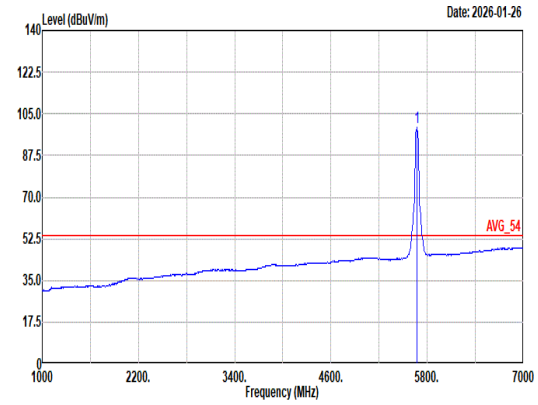 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5670.00 99.17 ------ ------ 90.08 33.39 11.98 36.28 0.00 176 323 Average

Mode	73	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	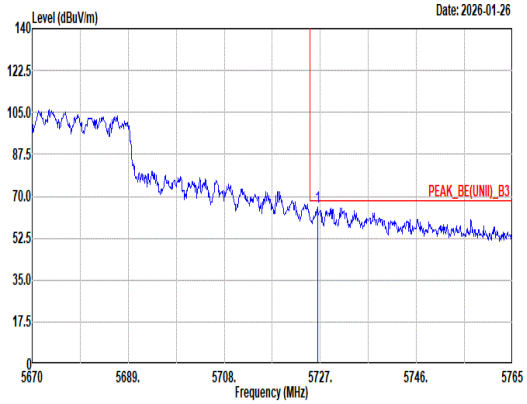 Site : 03CH16-HY Condition: PEAK_BE(UNII)_B3 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5726.43 65.45 68.20 -2.75 55.99 33.71 12.04 36.29 0.00 176 323 Peak	Blank

Mode	73	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	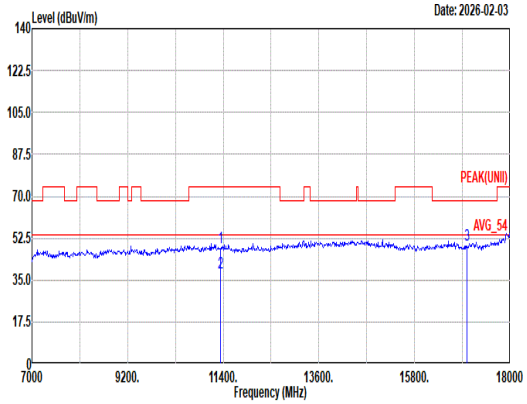 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 48.68 74.00 -25.32 57.80 39.18 16.88 65.98 0.80 200 308 Peak 2 11340.00 38.20 54.00 -15.80 47.32 39.18 16.88 65.98 0.80 200 308 Average 3 17010.00 49.64 68.20 -18.56 56.11 38.26 20.85 66.36 0.78 -- -- Peak	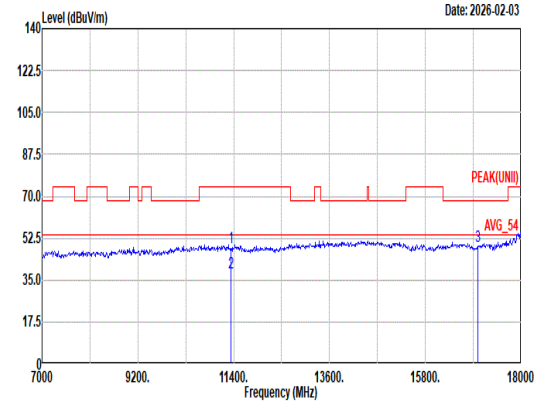 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11340.00 48.41 74.00 -25.59 57.53 39.18 16.88 65.98 0.80 200 202 Peak 2 11340.00 38.22 54.00 -15.78 47.34 39.18 16.88 65.98 0.80 200 202 Average 3 17010.00 49.21 68.20 -18.99 55.68 38.26 20.85 66.36 0.78 -- -- Peak

Mode	73	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	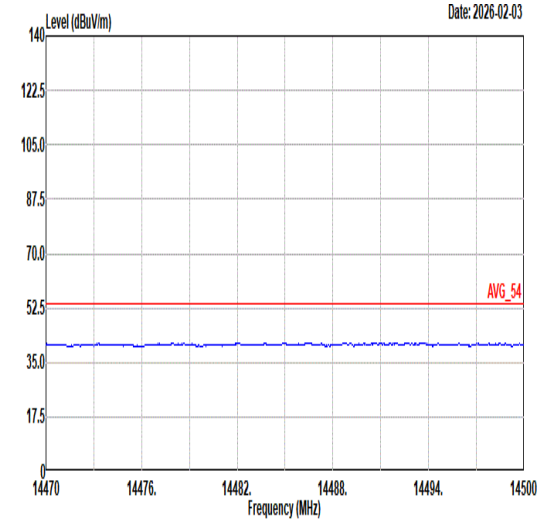 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	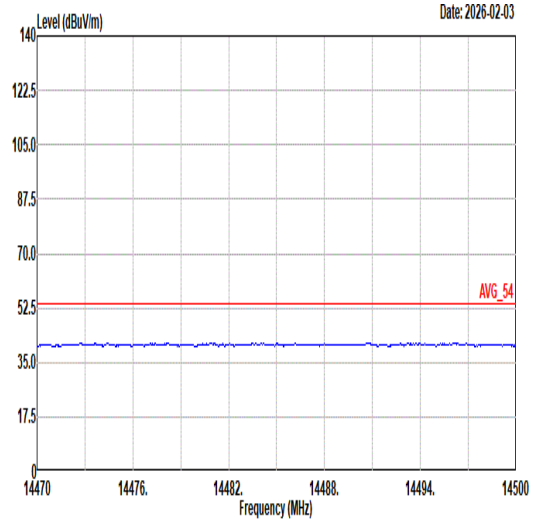 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	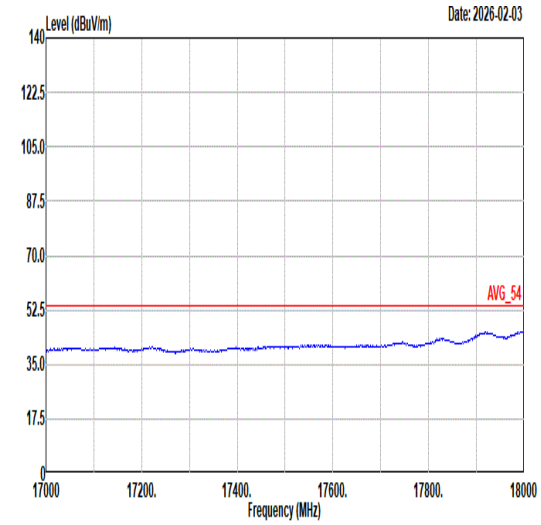 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	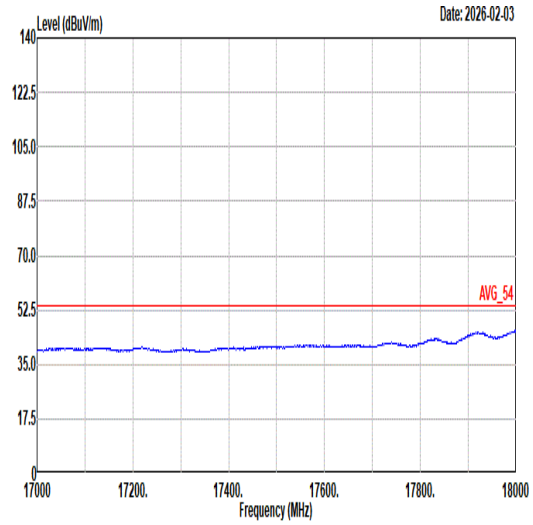 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL

Mode	74
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	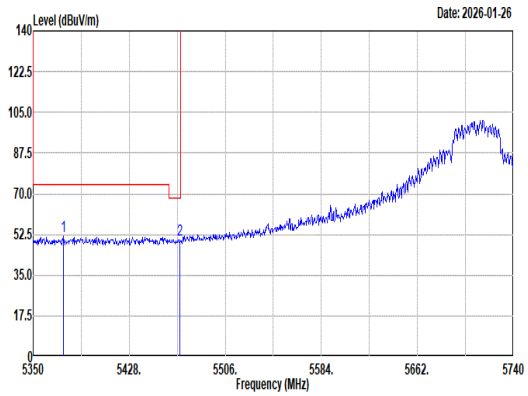 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5374.57 51.59 74.00 -22.41 43.06 33.05 11.69 36.21 0.00 200 40 Peak 2 5469.34 50.45 68.20 -17.75 41.85 33.04 11.79 36.23 0.00 200 40 Peak	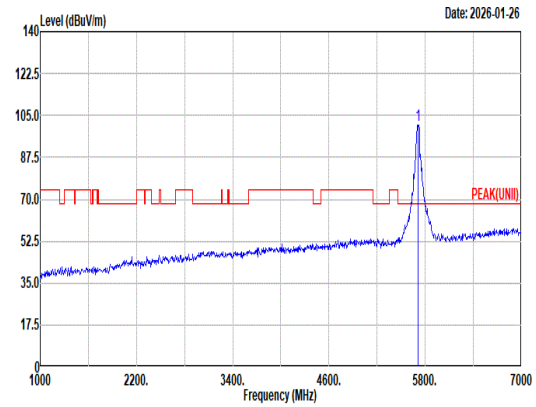 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 101.02 ------ ------ 91.62 33.66 12.03 36.29 0.00 200 40 Peak
Avg	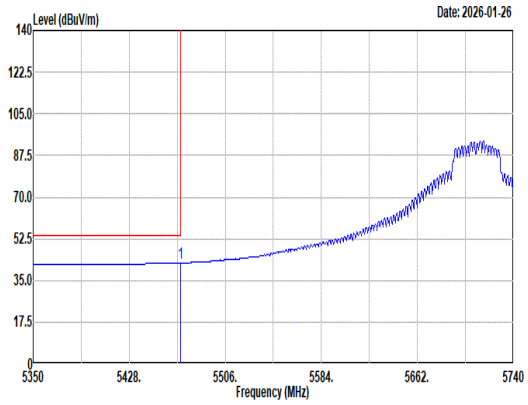 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5469.73 42.30 54.00 -11.70 33.70 33.04 11.79 36.23 0.00 200 40 Average	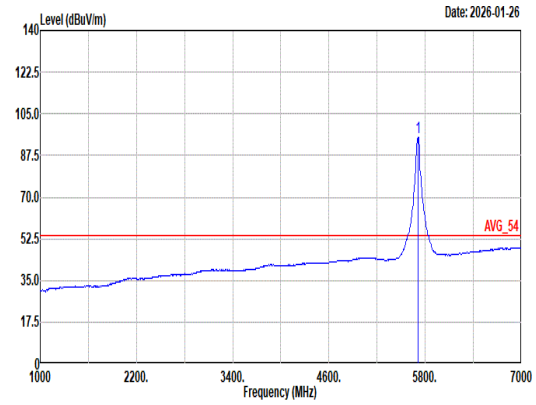 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 95.06 ------ ------ 85.66 33.66 12.03 36.29 0.00 200 40 Average

Mode	74	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	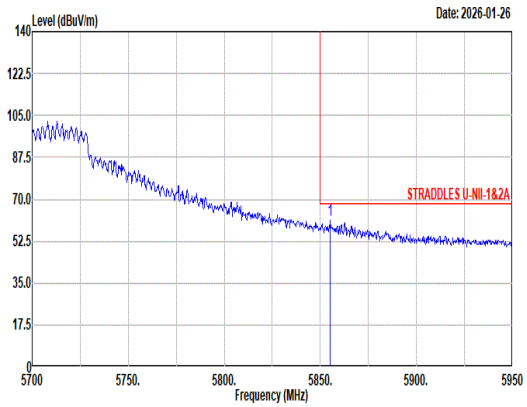 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.25 61.10 68.20 -7.10 51.04 34.21 12.17 36.32 0.00 200 40 Peak	Blank

Mode	74
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	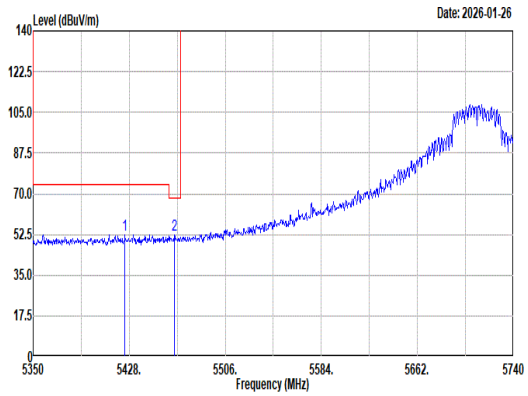 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5424.49 52.33 74.00 -21.67 43.76 33.05 11.74 36.22 0.00 205 327 Peak 2 5464.66 52.15 68.20 -16.05 43.57 33.03 11.78 36.23 0.00 205 327 Peak	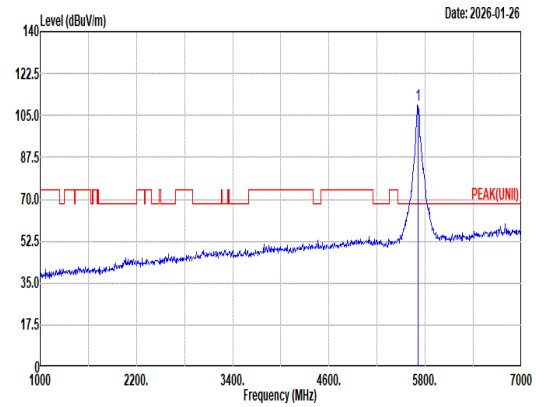 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 109.57 ------ ------ 100.22 33.62 12.01 36.28 0.00 205 327 Peak
Avg	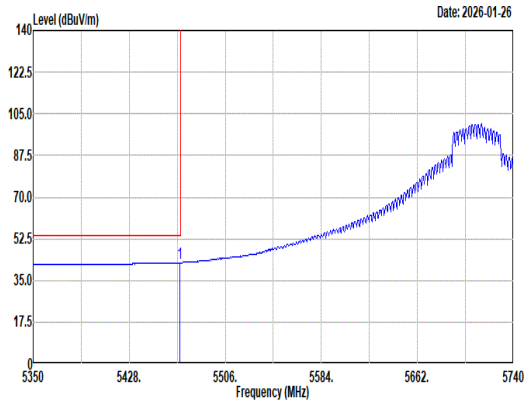 Site : 03CH16-HY Condition: U-NII-1&2A AVERAGE 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5469.34 42.52 54.00 -11.48 33.92 33.04 11.79 36.23 0.00 205 327 Average	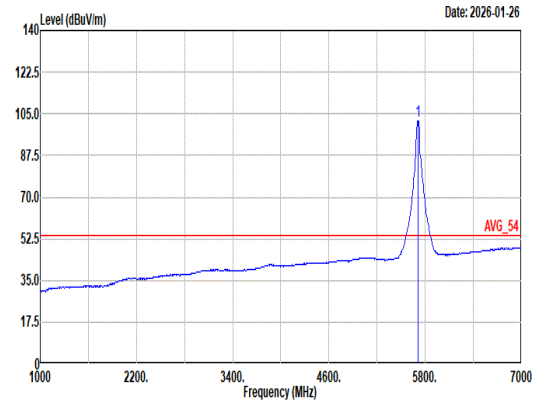 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5710.00 102.07 ------ ------ 92.67 33.66 12.03 36.29 0.00 205 327 Average

Mode	74	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	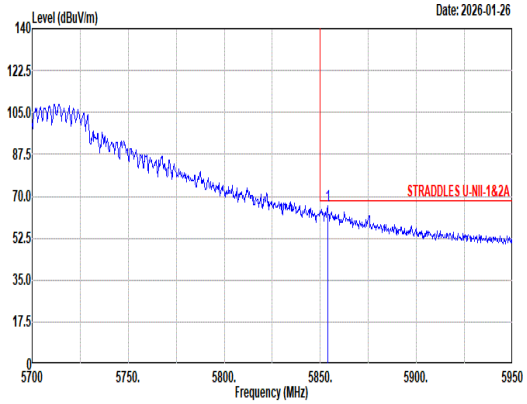 Site : 03CH16-HY Condition: STRADDLES U-NII-1&2A 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5853.75 65.92 68.20 -2.28 55.86 34.21 12.17 36.32 0.00 205 327 Peak	Blank

Mode	74	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	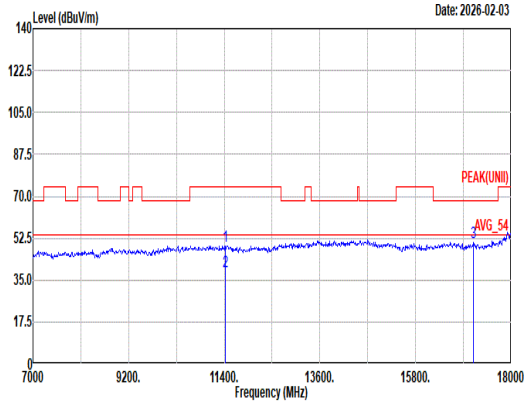 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 49.32 74.00 -24.68 58.40 39.20 16.94 66.00 0.78 200 98 Peak 2 11420.00 38.65 54.00 -15.35 47.73 39.20 16.94 66.00 0.78 200 98 Average 3 17130.00 50.56 68.20 -17.64 56.66 38.40 20.92 66.21 0.79 -- -- Peak	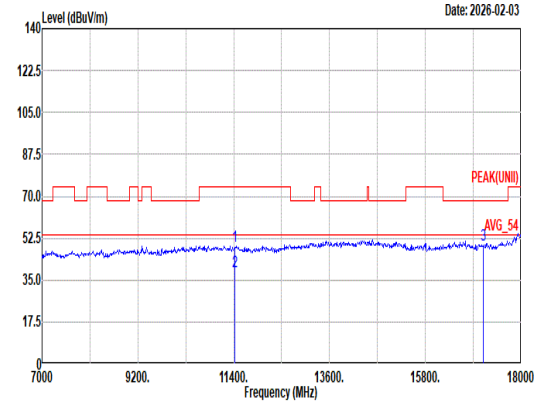 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11420.00 49.14 74.00 -24.86 58.22 39.20 16.94 66.00 0.78 400 272 Peak 2 11420.00 38.60 54.00 -15.40 47.68 39.20 16.94 66.00 0.78 400 272 Average 3 17130.00 49.74 68.20 -18.46 55.84 38.40 20.92 66.21 0.79 -- -- Peak

Mode	74	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_5710MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	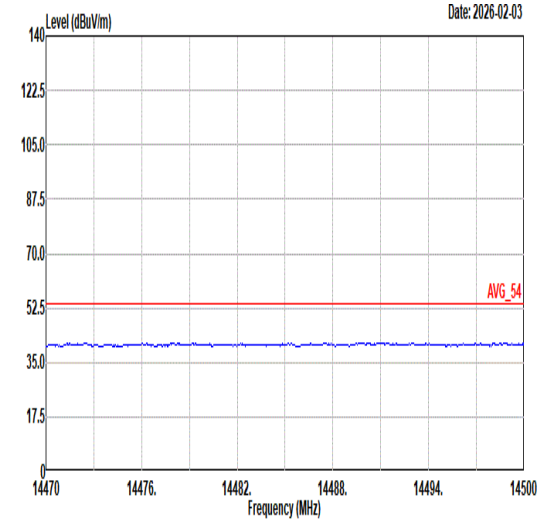 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	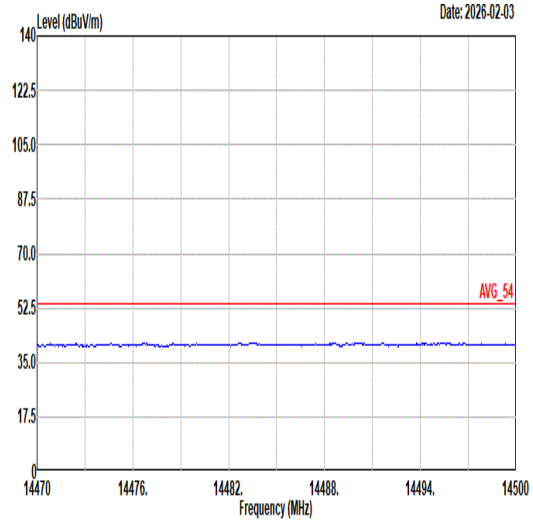 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	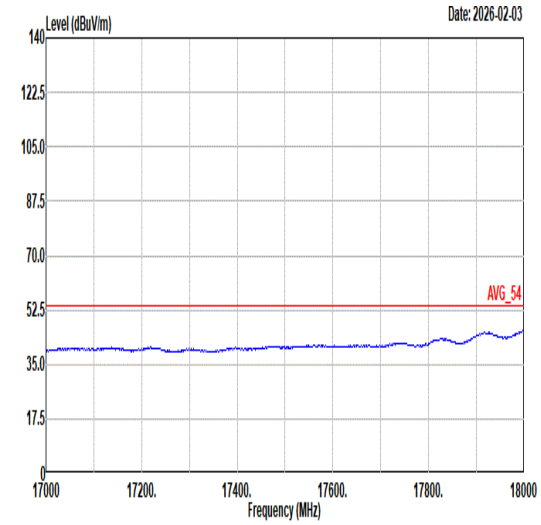 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 HORIZONTAL	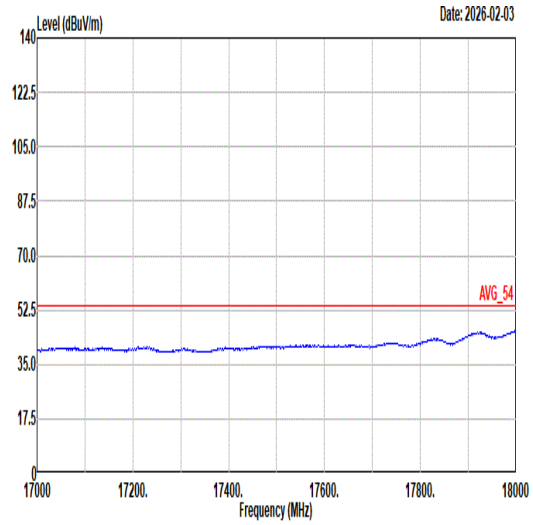 Site : 03CH16-HY Condition: AVG_54 3m 9120D-1522_250327 VERTICAL