

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6) Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

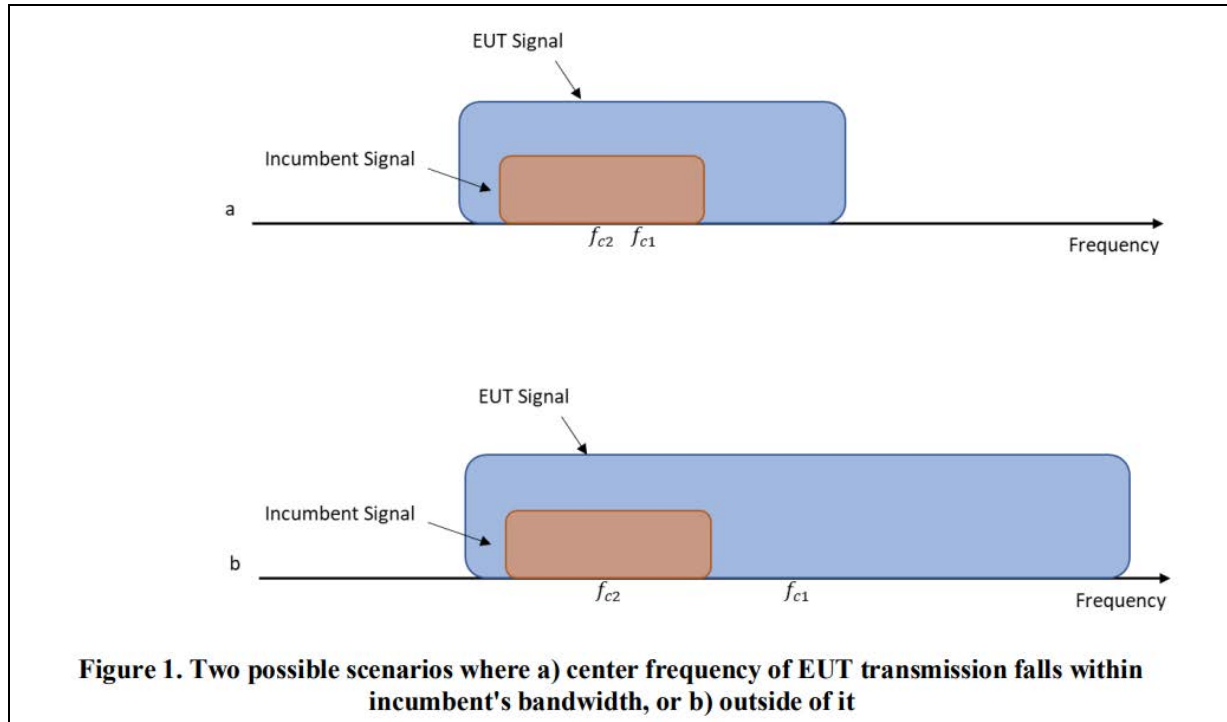

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.


Section I) Contention Based Protocol

Conducted method Step-by-Step Procedure, Conducted Setup

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in test setup Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in test setup Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.

9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
12. For the contention-based protocol test where only one channel in each supported sub-band needs to be tested. The narrowest and widest bandwidth in each channel shall be measured EUT was driven in MIMO mode, the interferer level was injected to both chains to monitor the performance, while the interferer level is determined according the lowest antenna gain among both antennas (i.e, lower interferer level).

3.5.4 Test Setup

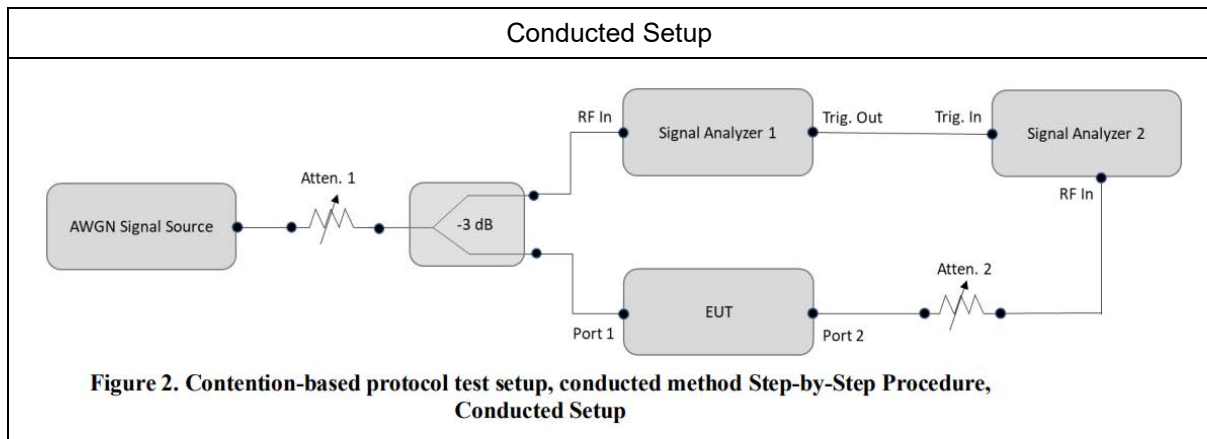

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
Notebook	Acer	N15C1	LAN

3.5.6 Minimum Antenna gain for Contention Based Protocol Test

Antenna Gain	<UNII-5>: -3.7 dBi <UNII-6>: -3.9 dBi <UNII-7>: -2.9 dBi <UNII-8>: -5.3 dBi
--------------	--



3.5.7 Test Summary of Contention Based Protocol Test

Test Engineer :	Kai Liao	Temperature :	20.2~22.2℃
		Relative Humidity :	48.6~53.6%

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-71.66	100	-62	-67.96	5.96
				Result: Stop Transmission				
				-79.66	< 90	-62	-75.96	13.96
				Result: Minimal Operation				
				-80.66	0	-62	-76.96	14.96
				Result: Normal Operation				
	6145	80	6110	-73.36	100	-62	-69.66	7.66
				Result: Stop Transmission				
				-80.36	< 90	-62	-76.66	14.66
				Result: Minimal Operation				
				-81.36	0	-62	-77.66	15.66
				Result: Normal Operation				
			6145	-72.68	100	-62	-68.98	6.98
				Result: Stop Transmission				
				-79.68	< 90	-62	-75.98	13.98
				Result: Minimal Operation				
				-80.68	0	-62	-76.98	14.98
				Result: Normal Operation				
			6180	-75.65	100	-62	-71.95	9.95
				Result: Stop Transmission				
				-77.65	< 90	-62	-73.95	11.95
				Result: Minimal Operation				
				-78.65	0	-62	-74.95	12.95
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - Minimum antenna gain (-3.7 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-72.06	100	-62	-68.16	6.16
					Result: Stop Transmission			
				-79.06	< 90	-62	-75.16	13.16
					Result: Minimal Operation			
				-80.06	0	-62	-76.16	14.16
					Result: Normal Operation			
	6465	80	6430	-75.08	100	-62	-71.18	9.18
					Result: Stop Transmission			
				-80.08	< 90	-62	-76.18	14.18
					Result: Minimal Operation			
				-81.08	0	-62	-77.18	15.18
					Result: Normal Operation			
			6465	-70.01	100	-62	-66.11	4.11
					Result: Stop Transmission			
				-80.01	< 90	-62	-76.11	14.11
					Result: Minimal Operation			
				-81.01	0	-62	-77.11	15.11
					Result: Normal Operation			
			6500	-76.04	100	-62	-72.14	10.14
					Result: Stop Transmission			
				-79.04	< 90	-62	-75.14	13.14
					Result: Minimal Operation			
				-80.04	0	-62	-76.14	14.14
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - Minimum antenna gain (-3.9 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-70.27	100	-62	-67.37	5.37
					Result: Stop Transmission			
				-79.27	< 90	-62	-76.37	14.37
					Result: Minimal Operation			
				-80.27	0	-62	-77.37	15.37
					Result: Normal Operation			
	6705	80	6670	-74.47	100	-62	-71.57	9.57
					Result: Stop Transmission			
				-80.47	< 90	-62	-77.57	15.57
					Result: Minimal Operation			
				-81.47	0	-62	-78.57	16.57
					Result: Normal Operation			
			6705	-73.19	100	-62	-70.29	8.29
					Result: Stop Transmission			
				-80.19	< 90	-62	-77.29	15.29
					Result: Minimal Operation			
				-81.19	0	-62	-78.29	16.29
					Result: Normal Operation			
			6740	-72.37	100	-62	-69.47	7.47
					Result: Stop Transmission			
				-78.37	< 90	-62	-75.47	13.47
					Result: Minimal Operation			
				-79.37	0	-62	-76.47	14.47
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - Minimum antenna gain (-2.9 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-75.09	100	-62	-69.79	7.79
					Result: Stop Transmission			
				-80.09	< 90	-62	-74.79	12.79
					Result: Minimal Operation			
				-81.09	0	-62	-75.79	13.79
					Result: Normal Operation			
	7025	80	6990	-74.27	100	-62	-68.97	6.97
					Result: Stop Transmission			
				-79.27	< 90	-62	-73.97	11.97
					Result: Minimal Operation			
				-80.27	0	-62	-74.97	12.97
					Result: Normal Operation			
			7025	-69.17	100	-62	-63.87	1.87
					Result: Stop Transmission			
				-79.17	< 90	-62	-73.87	11.87
					Result: Minimal Operation			
				-80.17	0	-62	-74.87	12.87
					Result: Normal Operation			
			7060	-73.97	100	-62	-68.67	6.67
					Result: Stop Transmission			
				-77.97	< 90	-62	-72.67	10.67
					Result: Minimal Operation			
				-78.97	0	-62	-73.67	11.67
					Result: Normal Operation			





Note 1: Adjusted Power = Injected AWGN Level - Minimum antenna gain (-5.3 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



3.5.8 Test Plots of Contention Based Protocol Test

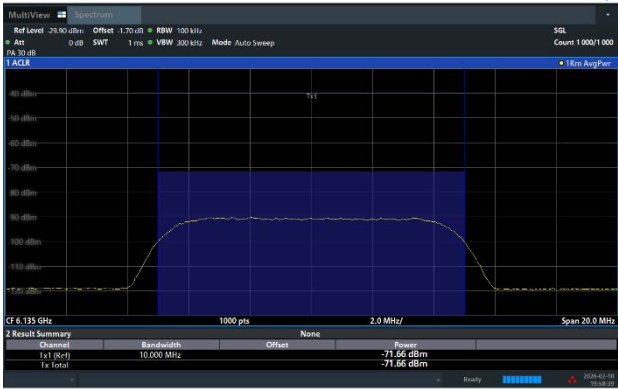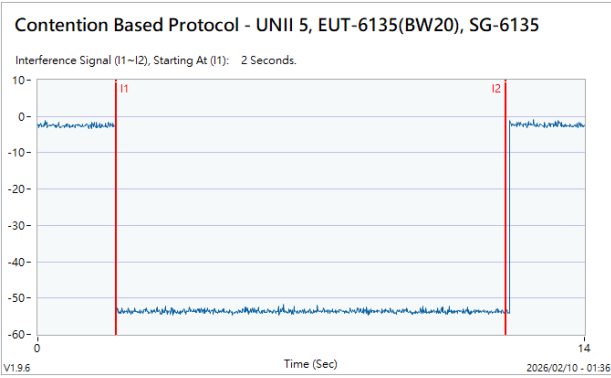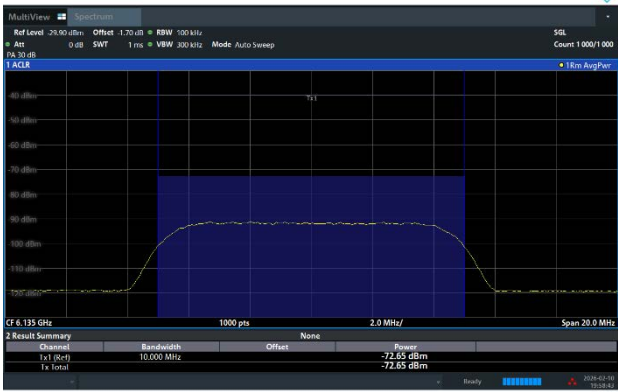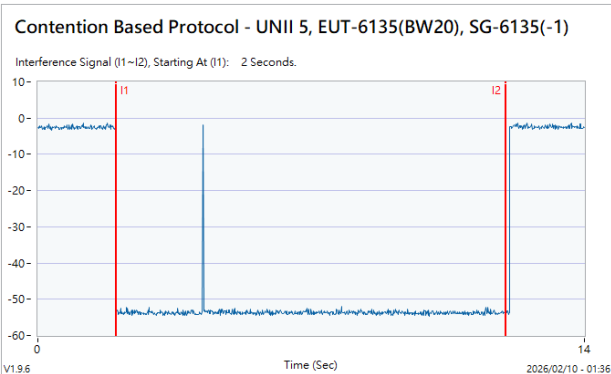
Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)	
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -71.66dBm 	802.11ax (HE20) / CH37 Test result is pass due to no transmission occur. 
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -72.65dBm 	802.11ax (HE20) / CH37 Transmit when the interferer is 1dB lower. 



Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE80) / 6110MHz (Lower edge)

Threshold Level (TL) = -73.36dBm

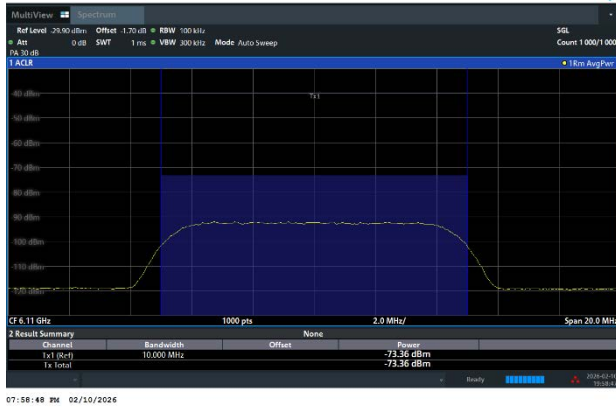


802.11ax (HE80) / CH39 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6110

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

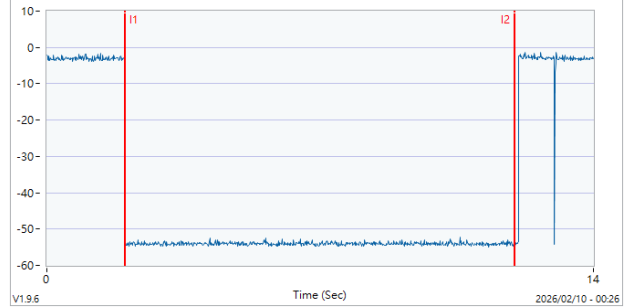

802.11ax (HE80) / 6110MHz (Lower edge)

Threshold Level (TL) = -74.37dBm

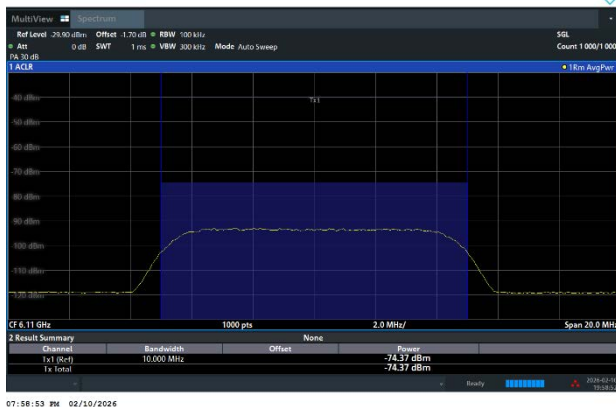


802.11ax (HE80) / CH39 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6110(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

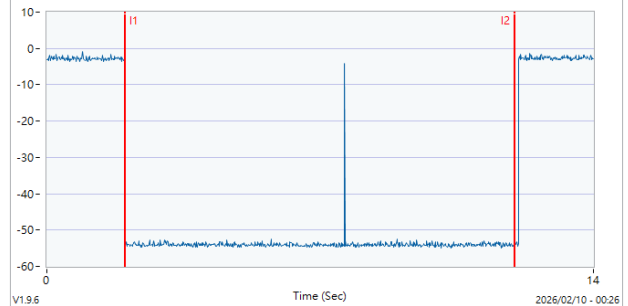




Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE80) / 6145MHz (Middle)

Threshold Level (TL) = -72.68dBm

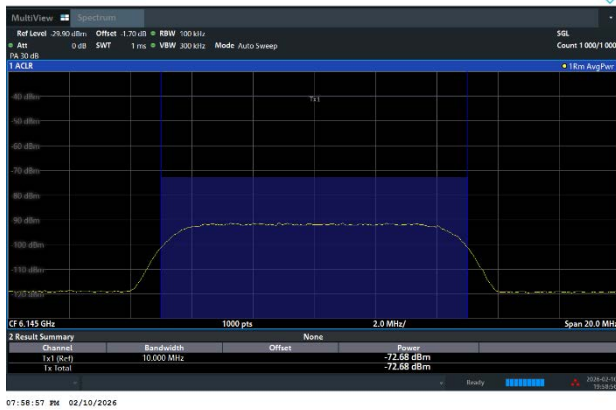


802.11ax (HE80) / CH39 (Middle)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6145

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

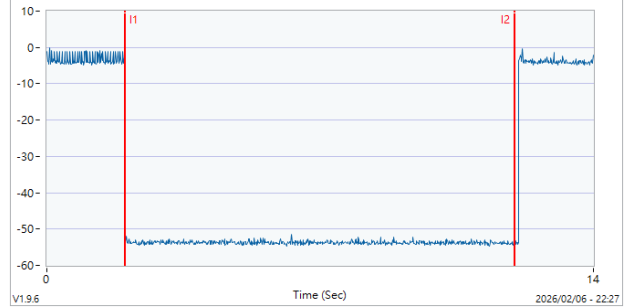

802.11ax (HE80) / 6145MHz (Middle)

Threshold Level (TL) = -73.71dBm

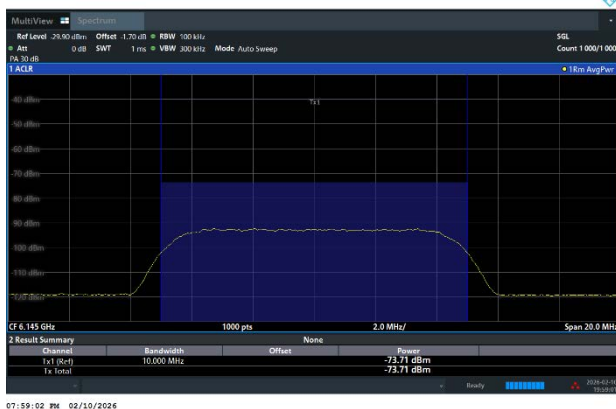


802.11ax (HE80) / CH39 (Middle)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6145(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

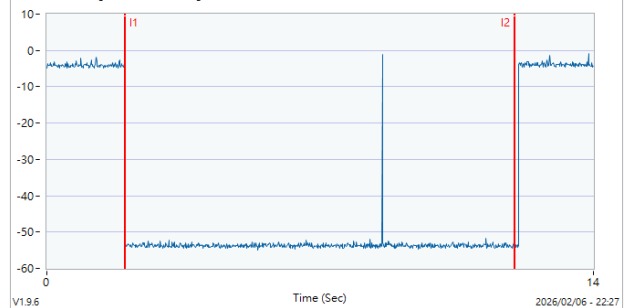



Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE80) / 6180MHz (Upper edge)

Threshold Level (TL) = -75.65dBm




802.11ax (HE80) / CH39 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6180

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

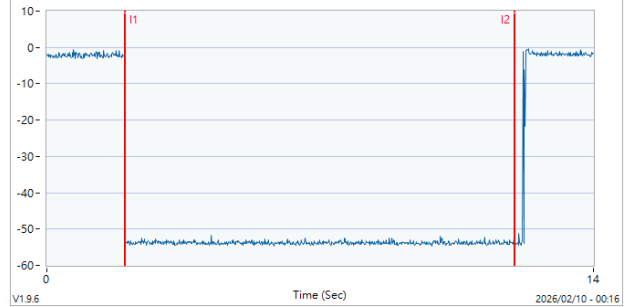

802.11ax (HE80) / 6180MHz (Upper edge)

Threshold Level (TL) = -76.62dBm

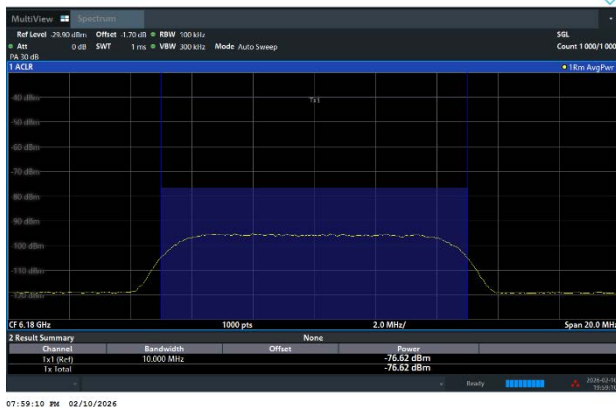


802.11ax (HE80) / CH39 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 5, EUT-6145(BW80), SG-6180(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

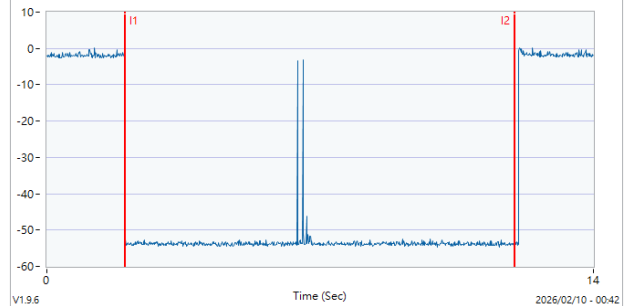




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)


802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -72.06dBm

802.11ax (HE20) / CH101
Test result is pass due to no transmission occur.

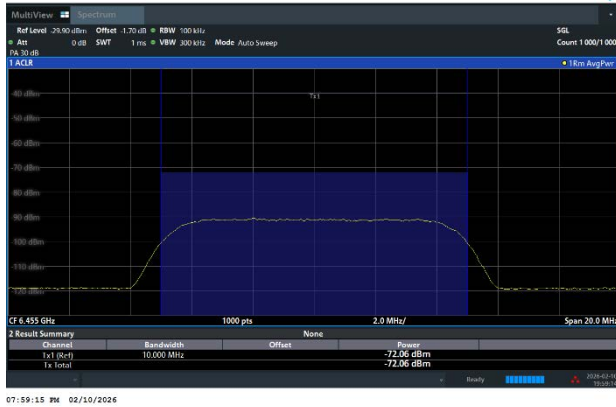


Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

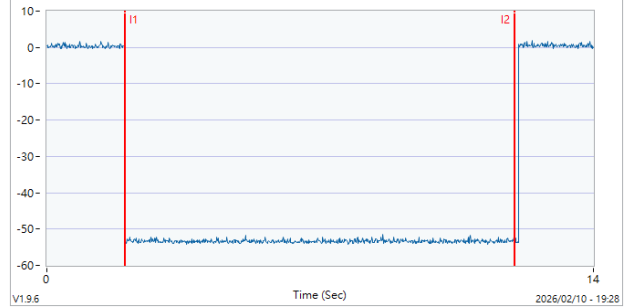


802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -73.03dBm

802.11ax (HE20) / CH101
Transmit when the interferer is 1dB lower.

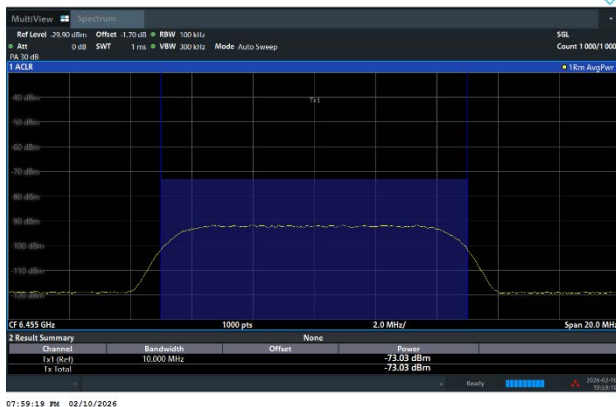

Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

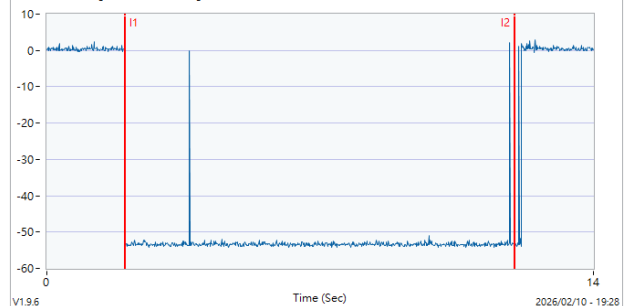



Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE80) / 6430MHz (Lower edge)

Threshold Level (TL) = -75.08dBm




802.11ax (HE80) / CH103 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6430

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

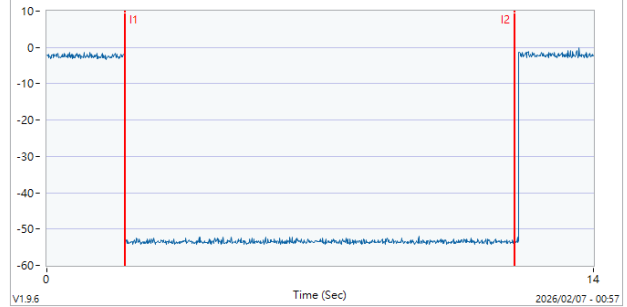

802.11ax (HE80) / 6430MHz (Lower edge)

Threshold Level (TL) = -76.10dBm

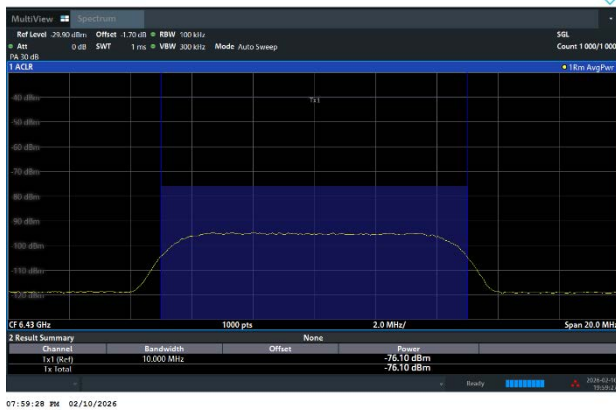


802.11ax (HE80) / CH103 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6430(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

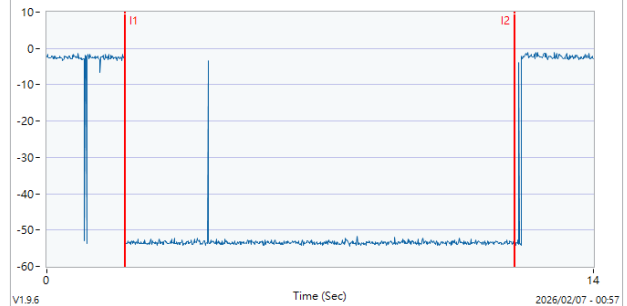




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE80) / 6465MHz (Middle)

Threshold Level (TL) = -70.01dBm

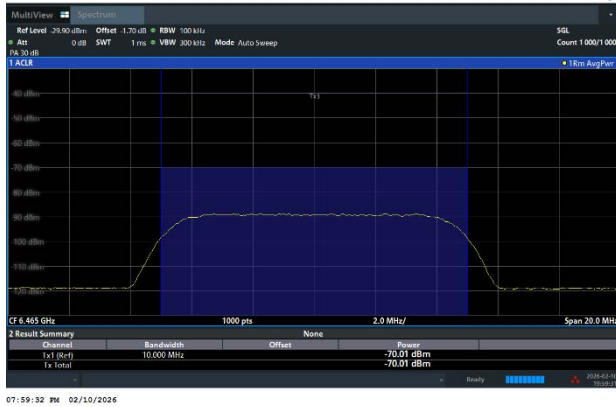


802.11ax (HE80) / CH103 (Middle)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6465

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

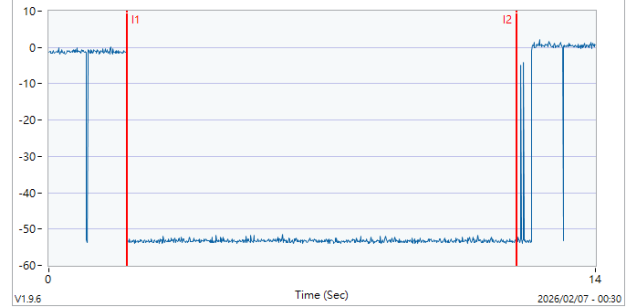

802.11ax (HE80) / 6465MHz (Middle)

Threshold Level (TL) = -71.00dBm

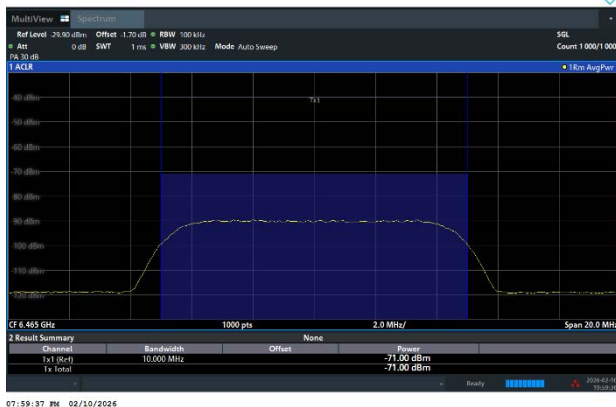


802.11ax (HE80) / CH103 (Middle)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6465(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

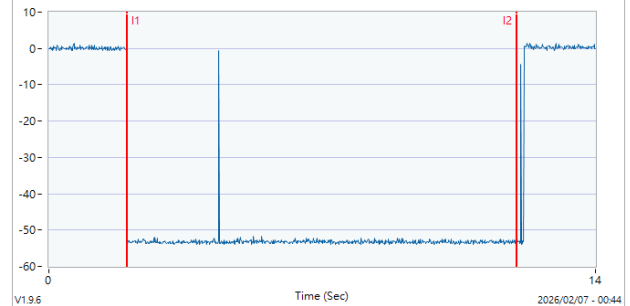



Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE80) / 6500MHz (Upper edge)

Threshold Level (TL) = -76.04dBm




802.11ax (HE80) / CH103 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6500

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

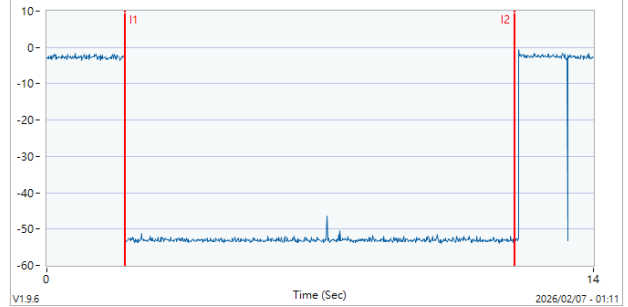

802.11ax (HE80) / 6500MHz (Upper edge)

Threshold Level (TL) = -77.07dBm

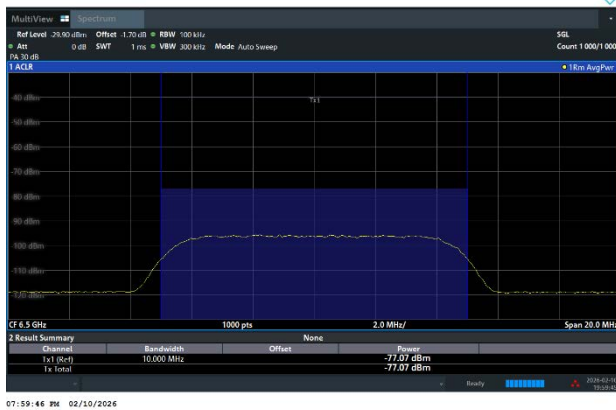


802.11ax (HE80) / CH103 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 6, EUT-6465(BW80), SG-6500(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

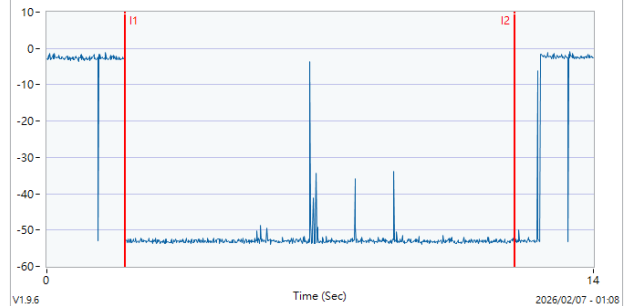



Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)


802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -70.27dBm

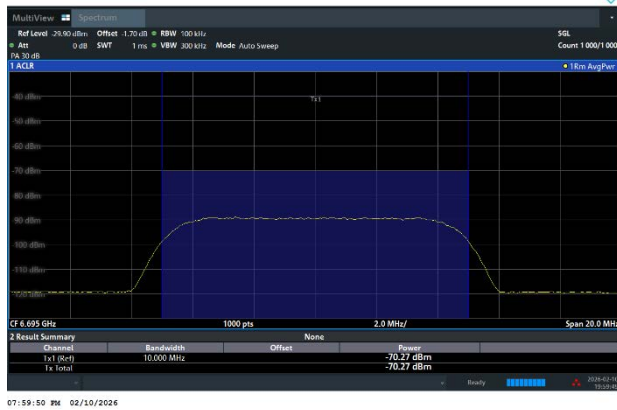


802.11ax (HE20) / CH149
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 7, EUT-6695(BW20), SG-6695

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

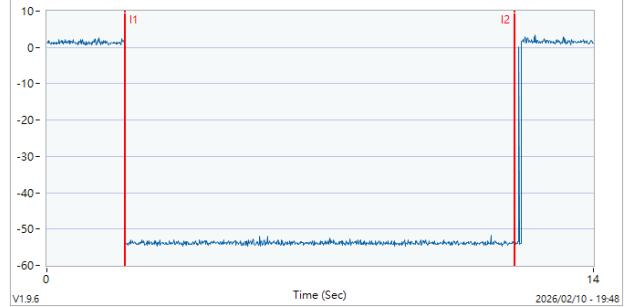

802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -71.30dBm

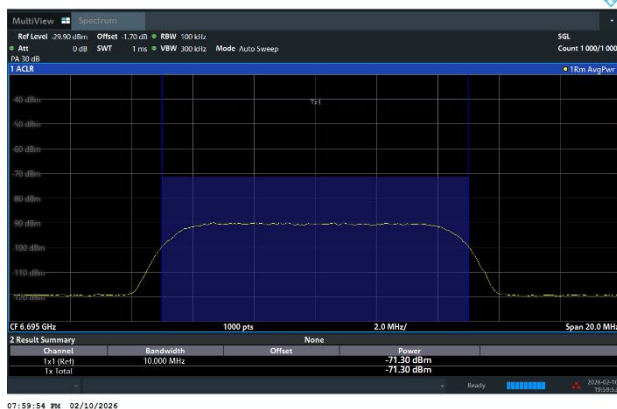


802.11ax (HE20) / CH149

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7, EUT-6695(BW20), SG-6695(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

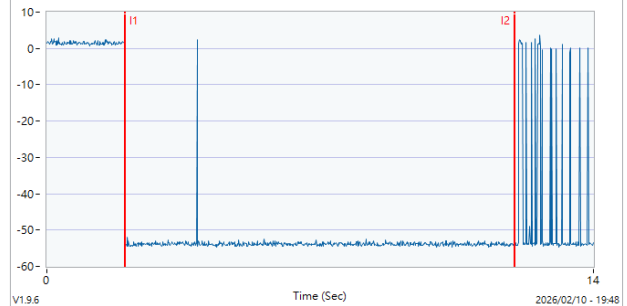




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE80) / 6670MHz (Lower edge)

Threshold Level (TL) = -74.47dBm

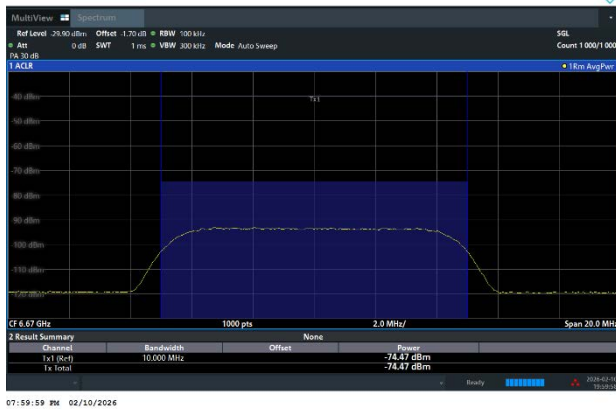


802.11ax (HE80) / CH151 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6670

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

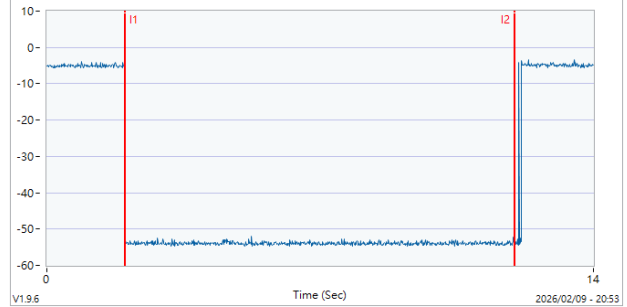

802.11ax (HE80) / 6670MHz (Lower edge)

Threshold Level (TL) = -75.44dBm

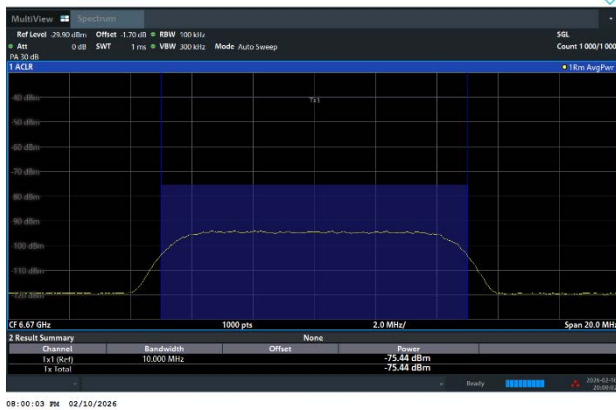


802.11ax (HE80) / CH151 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6670(-1)


Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

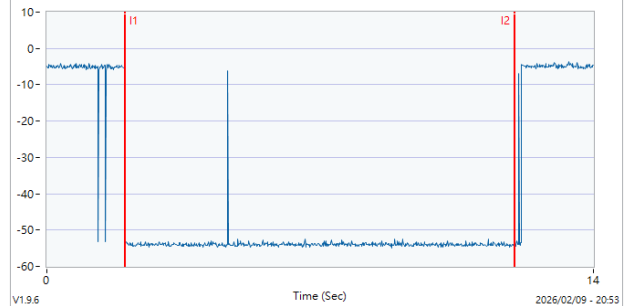

Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE80) / 6705MHz (Middle)


Threshold Level (TL) = -73.19dBm

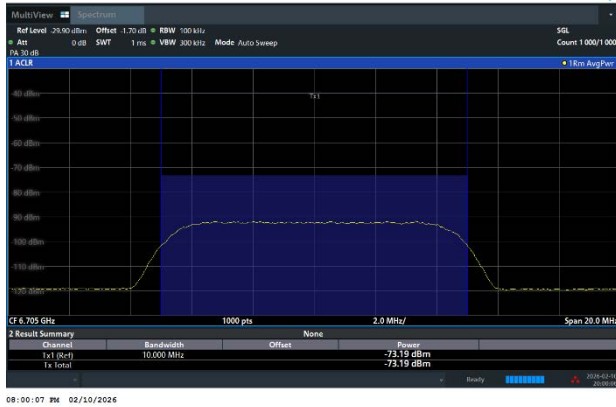

802.11ax (HE80) / CH143 (Middle)


Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6705

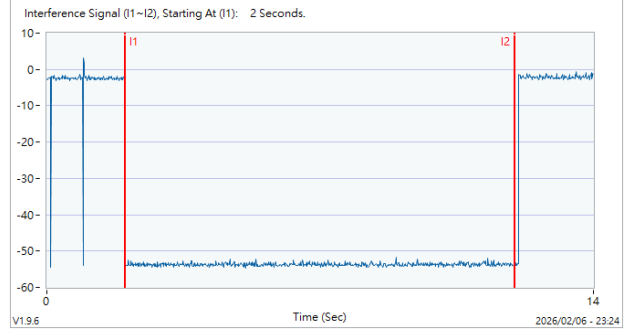

802.11ax (HE80) / 6705MHz (Middle)


Threshold Level (TL) = -74.18dBm

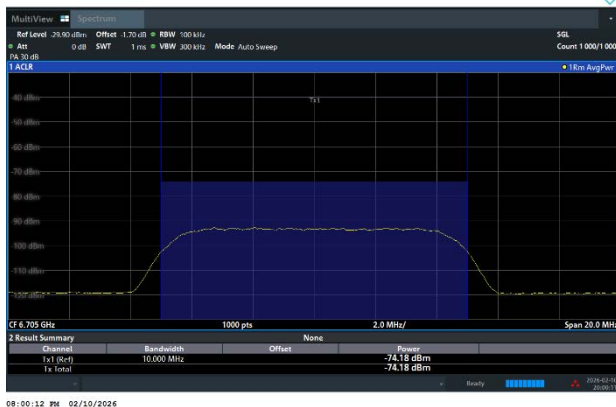

802.11ax (HE80) / CH143 (Middle)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6705(-1)

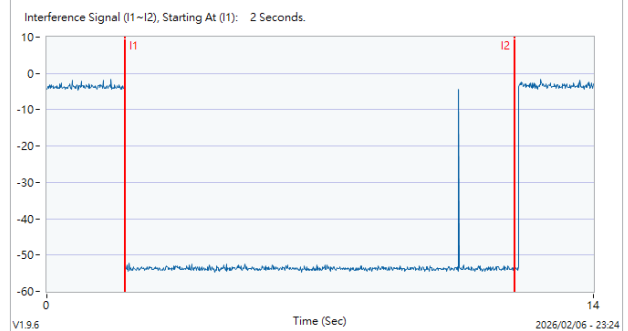




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE80) / 6740MHz (Upper edge)

Threshold Level (TL) = -72.37dBm

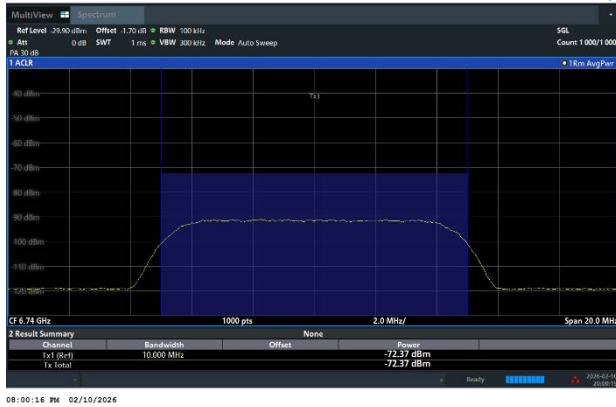


802.11ax (HE80) / CH151 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6740

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

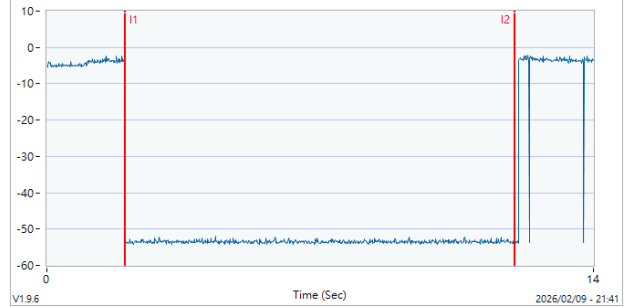

802.11ax (HE80) / 6740MHz (Upper edge)

Threshold Level (TL) = -73.36dBm

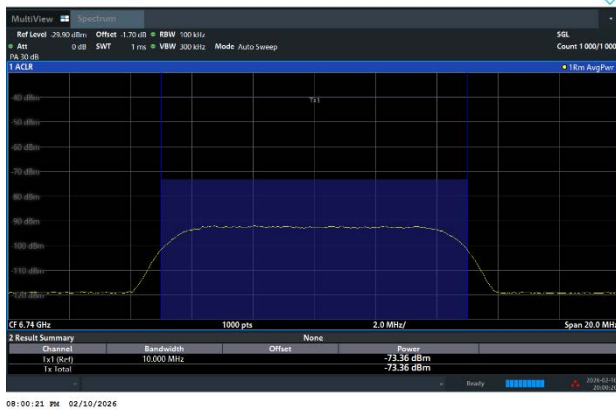


802.11ax (HE80) / CH151 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 7, EUT-6705(BW80), SG-6740(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

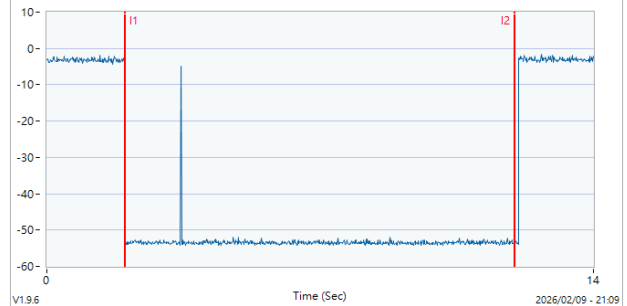



Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)


802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -75.09dBm




802.11ax (HE20) / CH213
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

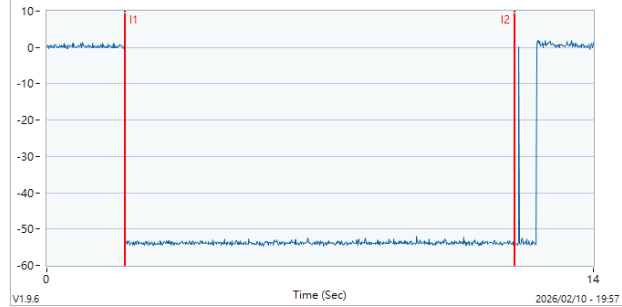


802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -76.06dBm

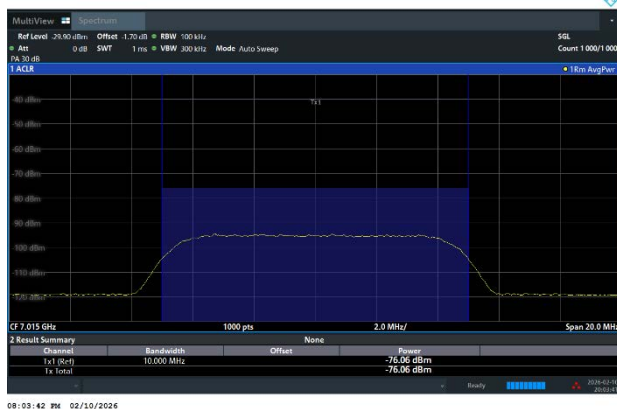

802.11ax (HE20) / CH213
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

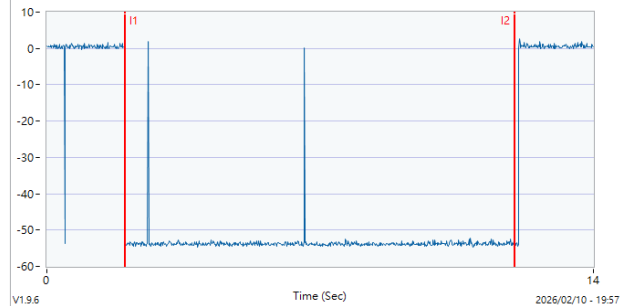




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE80) / 6990MHz (Lower edge)

Threshold Level (TL) = -74.27dBm

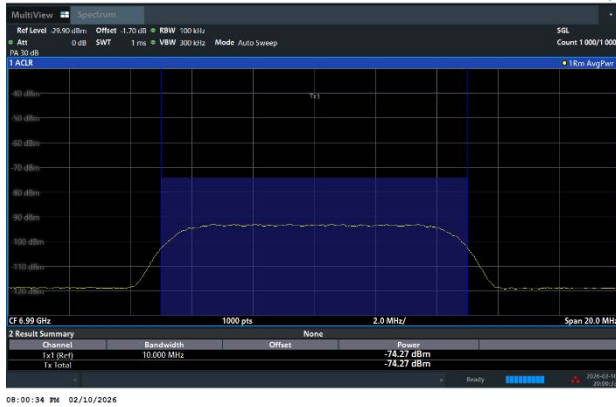


802.11ax (HE80) / CH215 (Lower edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-6990

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

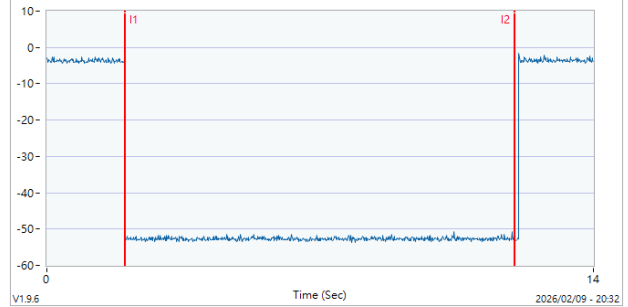

802.11ax (HE80) / 6990MHz (Lower edge)

Threshold Level (TL) = -75.28dBm

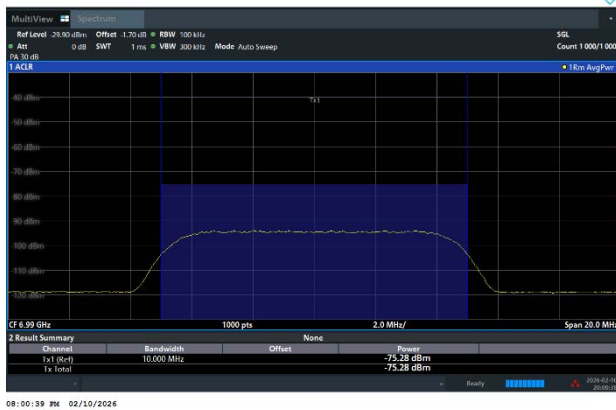


802.11ax (HE80) / CH215 (Lower edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-6990(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

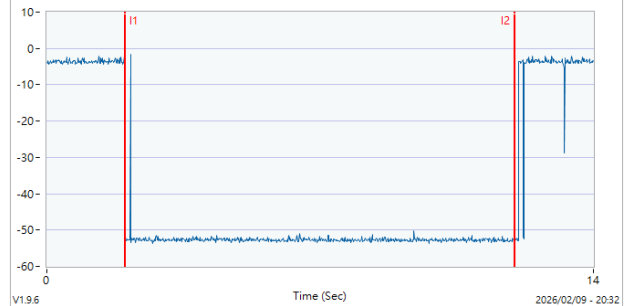




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE80) / 7025MHz (Middle)

Threshold Level (TL) = -69.17dBm

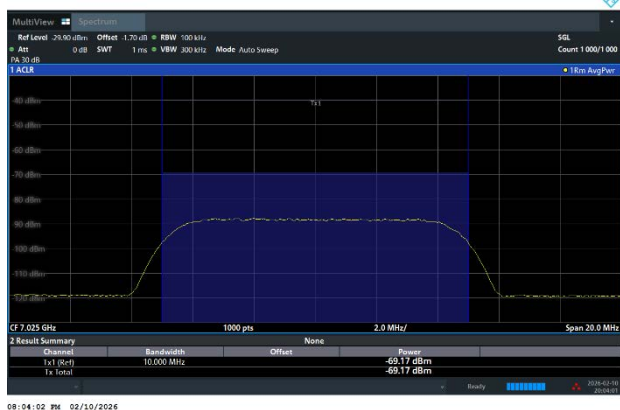


802.11ax (HE80) / CH215 (Middle)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-7025

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

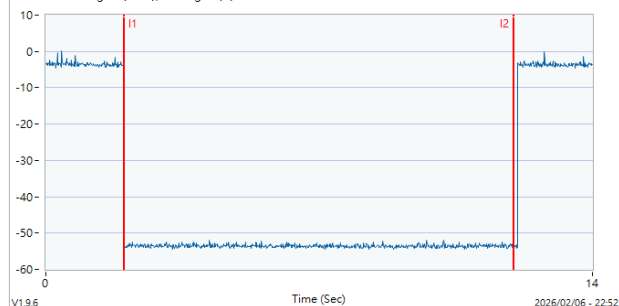

802.11ax (HE80) / 7025MHz (Middle)

Threshold Level (TL) = -70.12dBm

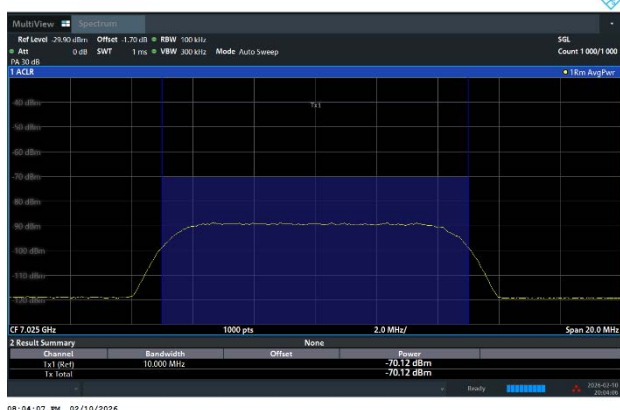


802.11ax (HE80) / CH215 (Middle)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-7025(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

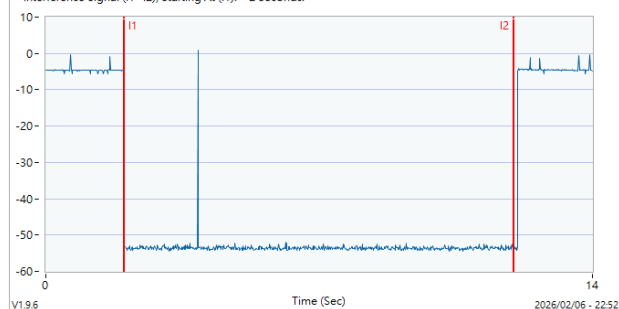




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE80) / 7060MHz (Upper edge)

Threshold Level (TL) = -73.97dBm

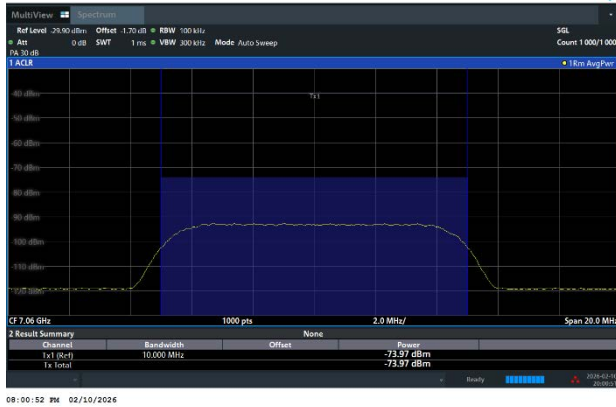


802.11ax (HE80) / CH215 (Upper edge)

Test result is pass due to no transmission occur.


Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-7060

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

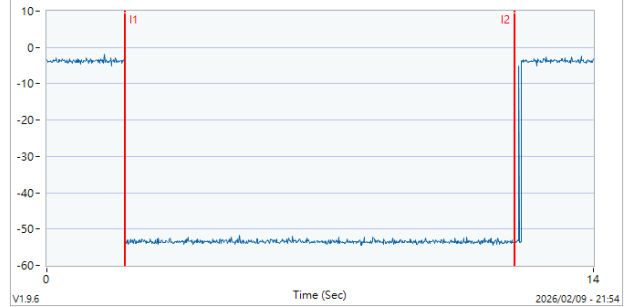

802.11ax (HE80) / 7060MHz (Upper edge)

Threshold Level (TL) = -74.98dBm

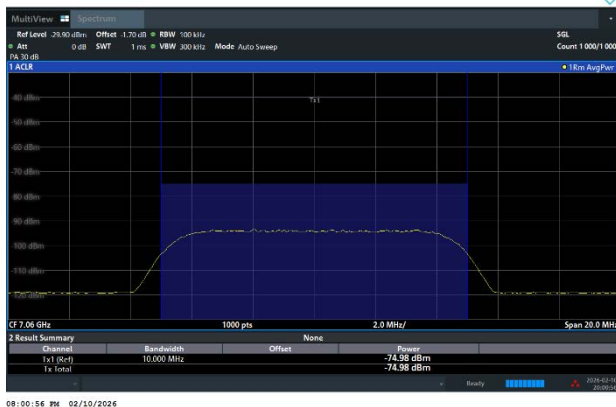


802.11ax (HE80) / CH215 (Upper edge)

Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7025(BW80), SG-7060(-1)

Interference Signal (I1~I2), Starting At (I1): 2 Seconds.

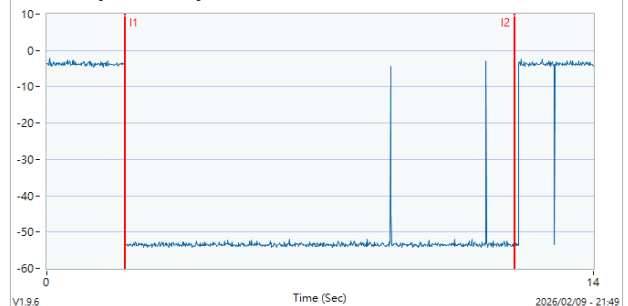


**CBP verify with frequency domain plots**

The device does not support channel puncturing with regards to Contention Based Protocol.

The device does not support bandwidth reduction with regards to Contention Based Protocol.

The entire bandwidth 80MHz stops transmission after the incumbent signal appears.

Before incumbent injected on 80MHz channel

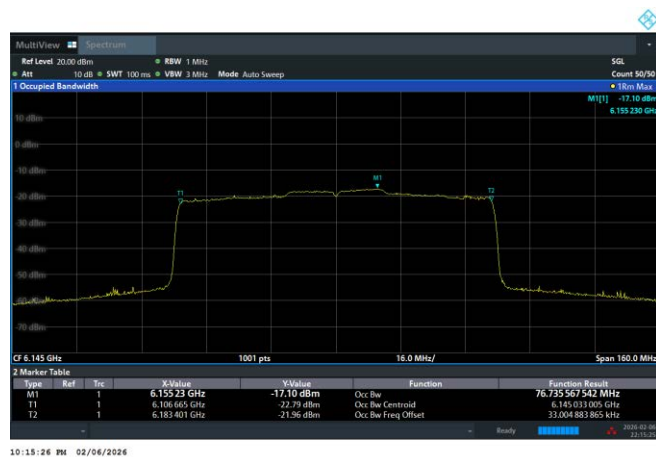

After 10MHz incumbent injected on center of channel, the entire 80MHz bandwidth stops transmission.



After 10MHz incumbent injected on bottom of channel, the entire 80MHz bandwidth stops transmission.



After 10MHz incumbent injected on top of channel, the entire 80MHz bandwidth stops transmission.



3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

According 987594 D02 U-NII 6GHz EMC Measurement v01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.6.4 Test Setup


For radiated emissions below 30MHz

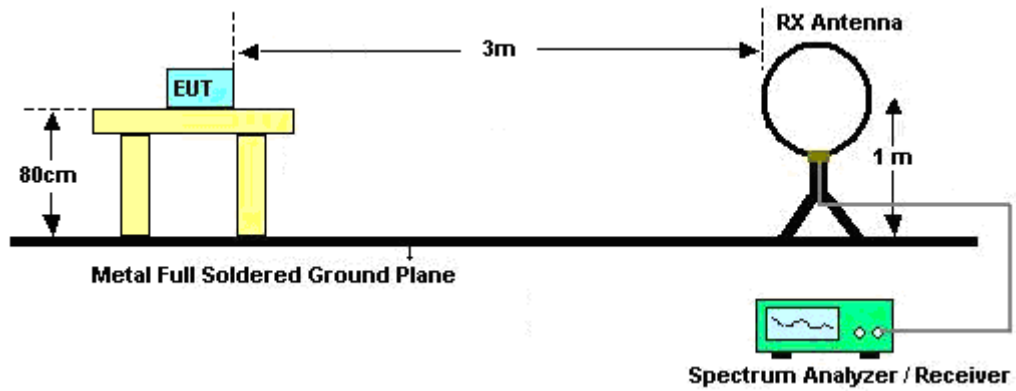


For radiated emissions from 30MHz to 1GHz

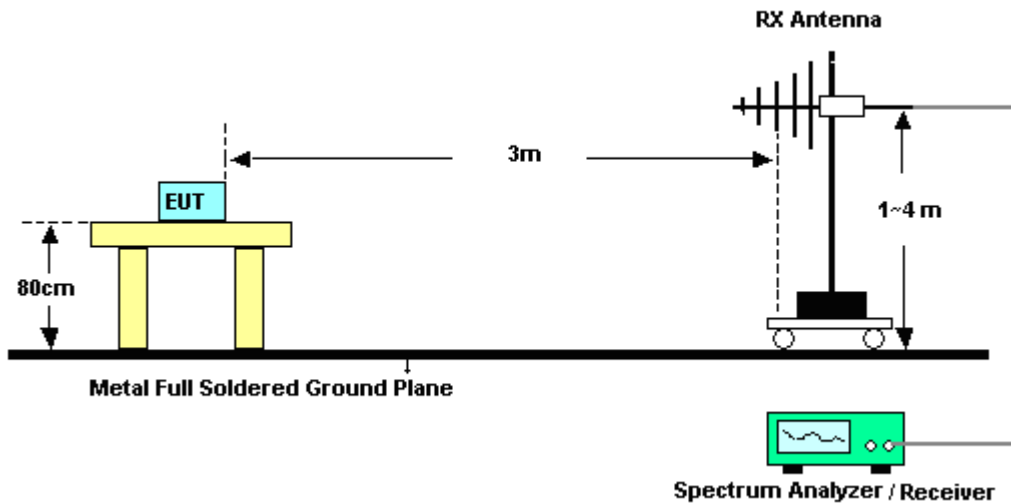

For radiated test from 1GHz to 18GHz

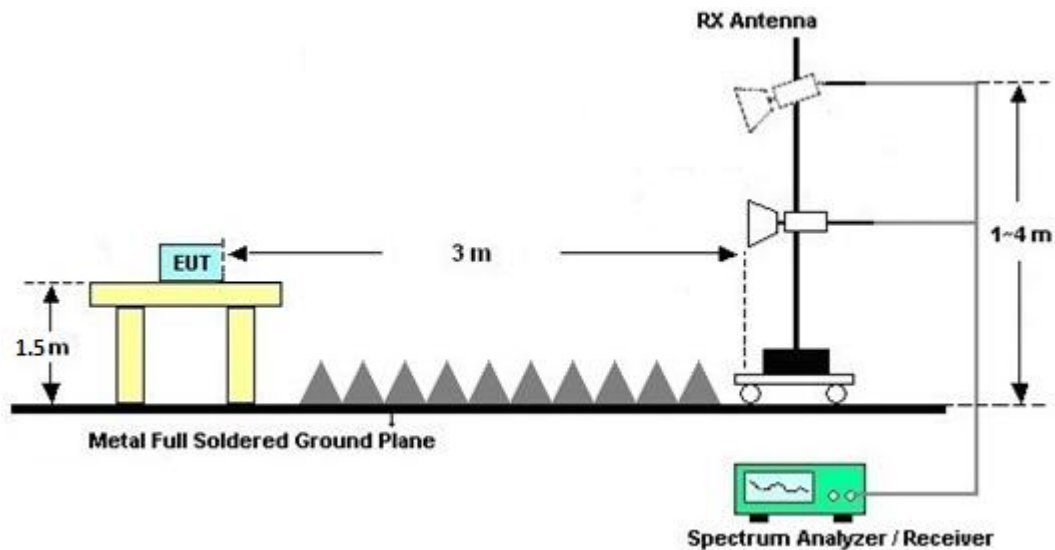

For radiated test above 18GHz

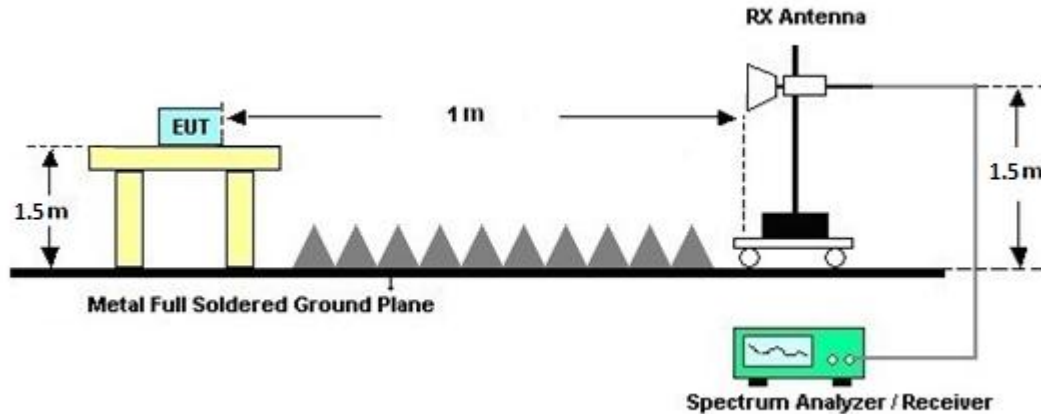

3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.6.7 Duty Cycle

Please refer to Appendix C.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

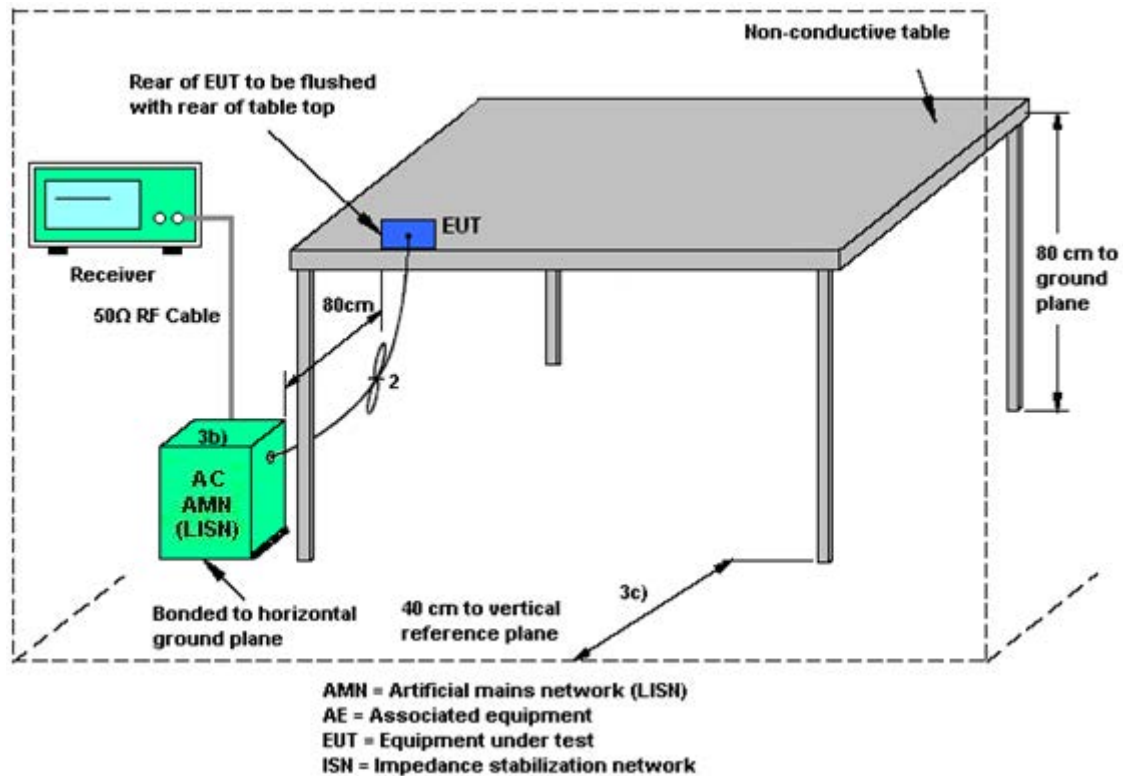

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.8 Antenna Requirements

3.8.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

(3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 18, 2024	Nov. 18, 2025~ Dec. 10, 2025	Dec. 17, 2025	Radiation (03CH16-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 11, 2025	Dec. 11, 2025~ Feb. 24, 2026	Dec. 10, 2026	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 04, 2025	Nov. 18, 2025~ Feb. 24, 2026	Oct. 03, 2026	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 27, 2025	Nov. 18, 2025~ Feb. 24, 2026	Mar. 26, 2026	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	1225	18GHz-40GHz	Jul. 02, 2025	Nov. 18, 2025~ Feb. 24, 2026	Jul. 01, 2026	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Nov. 18, 2025	Nov. 18, 2025~ Feb. 24, 2026	Nov. 17, 2026	Radiation (03CH16-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 08, 2025	Nov. 18, 2025~ Nov. 25, 2025	Sep. 07, 2026	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 26, 2025	Nov. 26, 2025~ Feb. 24, 2026	Nov. 25, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jun. 30, 2025	Nov. 18, 2025~ Feb. 24, 2026	Jun. 29, 2026	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Sep. 12, 2025	Nov. 18, 2025~ Feb. 24, 2026	Sep. 11, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Nov. 18, 2025~ Dec. 21, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 22, 2025	Dec. 22, 2025~ Feb. 24, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 26, 2025	Nov. 18, 2025~ Feb. 24, 2026	May 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 14, 2025	Nov. 18, 2025~ Jan. 12, 2026	Jan. 13, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 13, 2026	Jan. 13, 2026~ Feb. 24, 2026	Jan. 12, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Dec. 26, 2024	Nov. 18, 2025~ Dec. 21, 2025	Dec. 25, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Dec. 22, 2025	Dec. 22, 2025~ Feb. 24, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9kHz ~ 40GHz	Apr. 23, 2025	Nov. 18, 2025~ Feb. 24, 2026	Apr. 22, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 06, 2025	Nov. 18, 2025~ Feb. 24, 2026	Aug. 05, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Dec. 31, 2024	Nov. 18, 2025~ Dec. 17, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Dec. 18, 2025	Dec. 18, 2025~ Feb. 24, 2026	Dec. 17, 2026	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Nov. 18, 2025~ Feb. 24, 2026	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303B	TP200881	N/A	Aug. 26, 2025	Nov. 18, 2025~ Jan. 22, 2026	Aug. 25, 2026	Radiation (03CH16-HY)
Hygrometer	TECEPEL	DTM-303A	TP250716	N/A	Jan. 23, 2026	Jan. 23, 2026~ Feb. 24, 2026	Jan. 22, 2027	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Nov. 18, 2025~ Feb. 24, 2026	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 18, 2025~ Feb. 24, 2026	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 18, 2025~ Feb. 24, 2026	N/A	Radiation (03CH16-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 30, 2025~ Feb. 25, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-2301 0013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Dec. 30, 2025~ Feb. 25, 2026	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 30, 2025~ Feb. 25, 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Dec. 30, 2025~ Feb. 25, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Dec. 30, 2025~ Feb. 25, 2026	N/A	Conducted (TH05-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2025	Feb. 10, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Feb. 10, 2026	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Feb. 10, 2026	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Feb. 10, 2026	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Feb. 10, 2026	Oct. 20, 2026	Conduction (CO07-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 10, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 10, 2026	N/A	Conduction (CO07-HY)
Signal Generator	Rohde & Schwarz	SMW200A	111391	100kHz~7.5GH z	Dec. 31, 2025	Feb. 06, 2026~ Feb. 10, 2026	Dec. 30, 2026	CBP (DF02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Dec. 18, 2025	Feb. 06, 2026~ Feb. 10, 2026	Dec. 17, 2026	CBP (DF02-HY)
Power Divider	Woken	3Way SMA Power Divider Rated to 20W	STI08-0010(# 4)	2GHz~8GHz	Jul. 15, 2025	Feb. 06, 2026~ Feb. 10, 2026	Jul. 14, 2026	CBP (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A 1	0.5GHz~18GHz	Jul. 15, 2025	Feb. 06, 2026~ Feb. 10, 2026	Jul. 14, 2026	CBP (DF02-HY)
Coupler	Woken	10dB 30W SMA	DOM5CIW3A 1	0.5~18GHz	Jul. 15, 2025	Feb. 06, 2026~ Feb. 10, 2026	Jul. 14, 2026	CBP (DF02-HY)
Software	Sporton	Test Tools	N/A	Ver 1.9.6	N/A	Feb. 06, 2026~ Feb. 10, 2026	N/A	CBP (DF02-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
--	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 5N0809-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

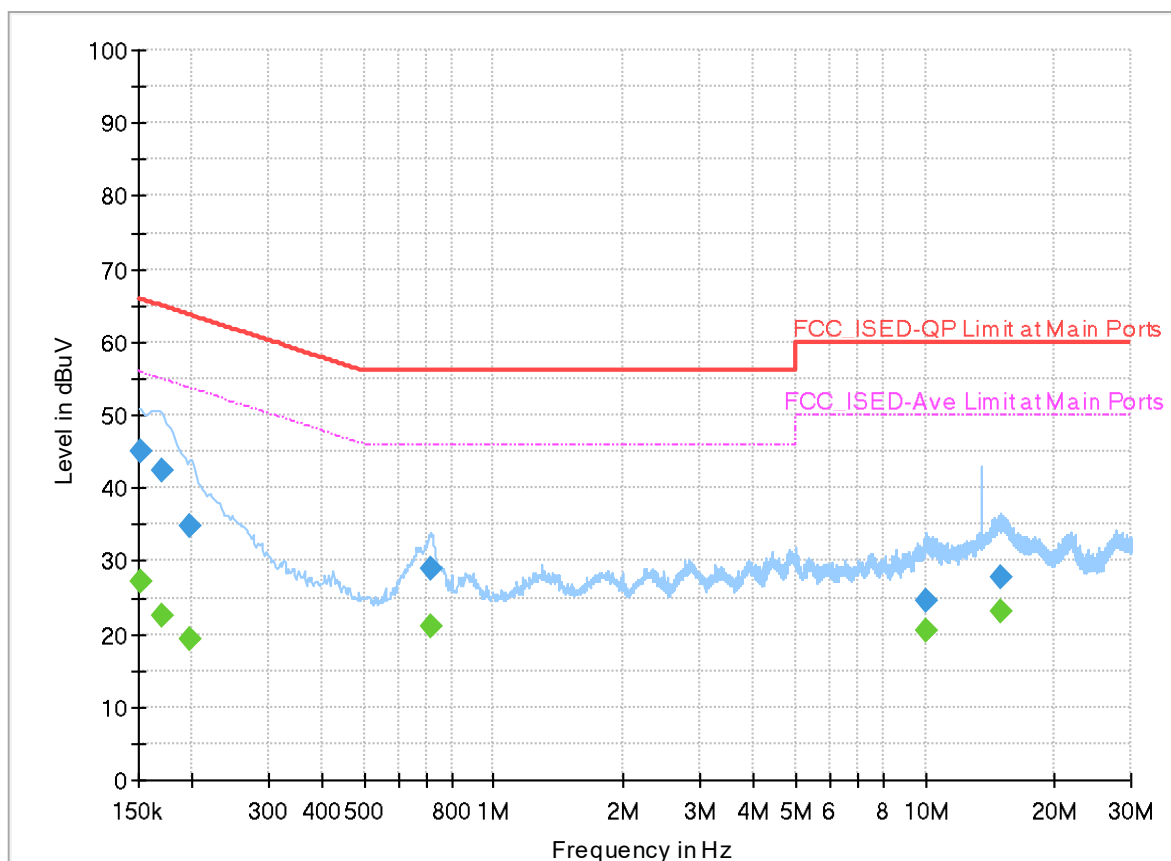


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	27.12	55.88	28.76	L1	ON	20.1
0.152250	44.90	---	65.88	20.98	L1	ON	20.1
0.170250	---	22.63	54.95	32.32	L1	ON	20.1
0.170250	42.44	---	64.95	22.51	L1	ON	20.1
0.197250	---	19.29	53.73	34.44	L1	ON	20.1
0.197250	34.80	---	63.73	28.93	L1	ON	20.1
0.714750	---	21.04	46.00	24.96	L1	ON	20.0
0.714750	28.83	---	56.00	27.17	L1	ON	20.0
10.074750	---	20.61	50.00	29.39	L1	ON	20.4
10.074750	24.54	---	60.00	35.46	L1	ON	20.4
14.968500	---	23.01	50.00	26.99	L1	ON	20.6
14.968500	27.88	---	60.00	32.12	L1	ON	20.6

EUT Information

Report NO : 5N0809-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

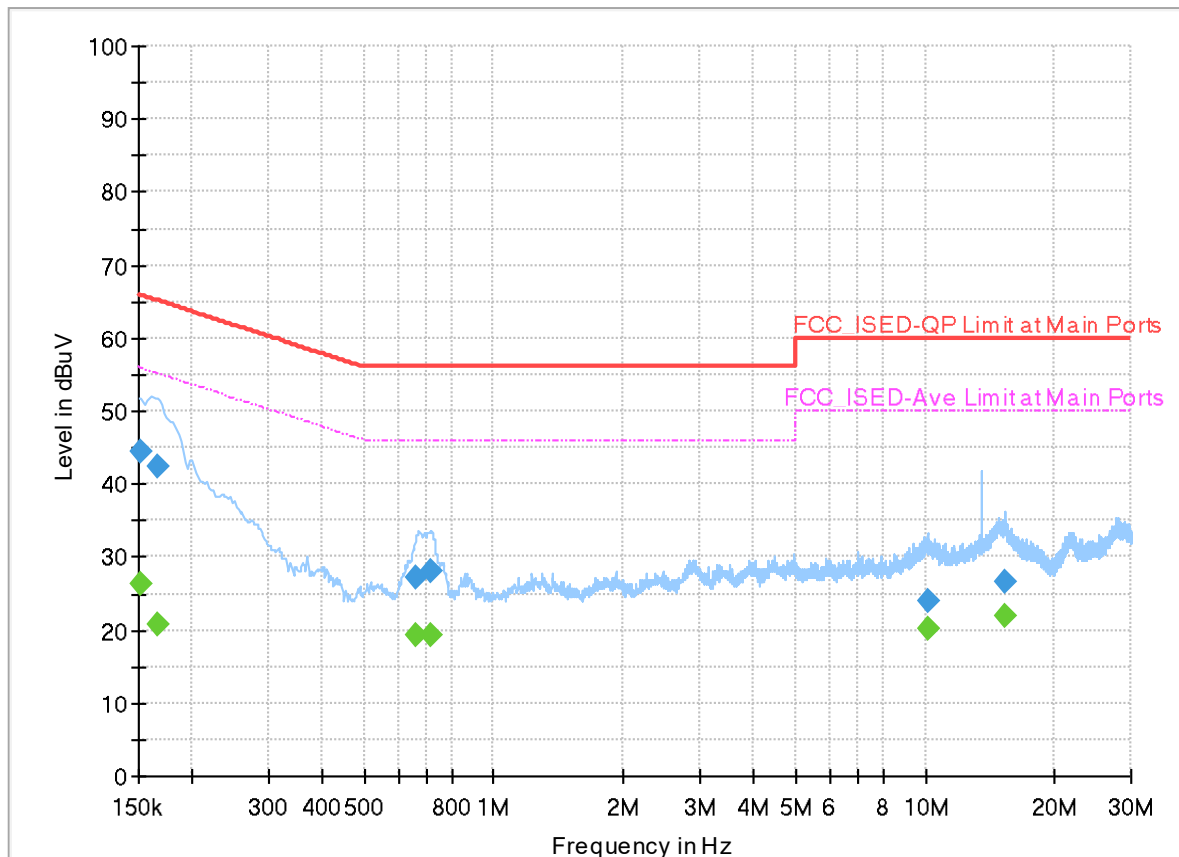

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	26.22	55.88	29.66	N	ON	20.1
0.152250	44.30	---	65.88	21.58	N	ON	20.1
0.165750	---	20.66	55.17	34.51	N	ON	20.1
0.165750	42.29	---	65.17	22.88	N	ON	20.1
0.660750	---	19.20	46.00	26.80	N	ON	20.0
0.660750	27.05	---	56.00	28.95	N	ON	20.0
0.717000	---	19.36	46.00	26.64	N	ON	20.0
0.717000	28.12	---	56.00	27.88	N	ON	20.0
10.106250	---	20.32	50.00	29.68	N	ON	20.4
10.106250	24.09	---	60.00	35.91	N	ON	20.4
15.330750	---	21.80	50.00	28.20	N	ON	20.7
15.330750	26.70	---	60.00	33.30	N	ON	20.7



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan 、 Gary Guo 、 Steven Wu	Temperature :	22.8~25.2°C
		Relative Humidity :	48.2~54.3%

Note symbol

-L	Low channel location
-R	High channel location

B1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-6	6.425-6.525	4+3	802.11ax HE80	103	6465	MCS0	Full RU	-
Mode 2	U-NII-6	6.425-6.525	4+3	802.11ax HE80	119	6545	MCS0	Full RU	-
Mode 3	U-NII-8	6.875-7.125	4+3	802.11a	229	7095	MCS0	-	-
Mode 4	U-NII-8	6.875-7.125	4+3	802.11ax HE20	229	7095	MCS0	Full RU	-
Mode 5	U-NII-8	6.875-7.125	4+3	802.11ax HE20	229	7095	MCS0	26/8 RU	-
Mode 6	U-NII-8	6.875-7.125	4+3	802.11ax HE20	229	7095	MCS0	52/40 RU	-
Mode 7	U-NII-8	6.875-7.125	4+3	802.11ax HE20	229	7095	MCS0	106/40 RU	-
Mode 8	U-NII-8	6.875-7.125	4+3	802.11ax HE40	227	7085	MCS0	Full RU	-
Mode 9	U-NII-7 Straddle channel	6.525-6.875	4+3	802.11ax HE80	183	6865	MCS0	Full RU	-
Mode 10	U-NII-8	6.875-7.125	4+3	802.11ax HE80	199	6945	MCS0	Full RU	-
Mode 11	U-NII-8	6.875-7.125	4+3	802.11ax HE80	215	7025	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-8	6.875-7.125	4+3	802.11ax HE40	227	7085	MCS0	Full RU	LF
Mode 13	U-NII-8	6.875-7.125	4+3	802.11ax HE40	227	7085	MCS0	Full RU	SHF



B2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11ax HE80	103	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	103	19395.00	38.31	74.00	-35.69	H	Peak	Pass	Full RU	Harmonic
2	802.11ax HE80	119	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	119	19635.00	38.52	74.00	-35.48	V	Peak	Pass	Full RU	Harmonic
3	802.11a	229	7125.45	51.88	68.20	-16.32	V	Avg.	Pass	-	Band Edge
	802.11a	229	-	-	-	-	-	-	-	-	Harmonic
4	802.11ax HE20	229	7126.50	56.17	68.20	-12.03	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	229	-	-	-	-	-	-	-	Full RU	Harmonic
5	802.11ax HE20	229	7241.70	47.71	68.20	-20.49	H	Avg.	Pass	26/8 RU	Band Edge
	802.11ax HE20	229	-	-	-	-	-	-	-	26/8 RU	Harmonic
6	802.11ax HE20	229	7241.70	48.54	68.20	-19.66	H	Avg.	Pass	52/40 RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11ax HE20	229	-	-	-	-	-	-	-	52/40 RU	Harmonic
7	802.11ax HE20	229	7211.55	48.52	68.20	-19.68	V	Avg.	Pass	106/40 RU	Band Edge
	802.11ax HE20	229	-	-	-	-	-	-	-	106/40 RU	Harmonic
8	802.11ax HE40	227	7125.64	66.23	68.20	-1.97	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	227	-	-	-	-	-	-	-	Full RU	Harmonic
9	802.11ax HE80	183	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	183	20595.00	37.24	74.00	-36.76	V	Peak	Pass	Full RU	Harmonic
10	802.11ax HE80	199	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11ax HE80	199	20835.00	38.38	74.00	-35.62	H	Peak	Pass	Full RU	Harmonic
11	802.11ax HE80	215	7126.86	65.02	68.20	-3.18	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	215	5270.00	57.79	88.20	-30.41	H	Peak	Pass	Full RU	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11ax HE40	227	38.73	32.33	40.00	-7.67	V	QP	Pass	Full RU	LF
13	802.11ax HE40	227	38944.00	47.94	74.00	-26.06	V	Peak	Pass	Full RU	SHF



Mode	1																																					
	Band Edge																																					
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full RU_6465MHz																																					
ANT	4+3																																					
Pol.	Horizontal	Fundamental																																				
Peak	Blank	Level (dBuV/m) Date: 2026-02-17 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6465.00</td><td>101.60</td><td>-----</td><td>-----</td><td>90.19</td><td>35.14</td><td>12.80</td><td>36.53</td><td>0.00</td><td>101</td><td>300</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 6465.00	101.60	-----	-----	90.19	35.14	12.80	36.53	0.00	101	300	Peak
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1 6465.00	101.60	-----	-----	90.19	35.14	12.80	36.53	0.00	101	300	Peak																											
Avg	Blank	Level (dBuV/m) Date: 2026-02-17 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6465.00</td><td>93.60</td><td>-----</td><td>-----</td><td>82.19</td><td>35.14</td><td>12.80</td><td>36.53</td><td>0.00</td><td>101</td><td>300</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 6465.00	93.60	-----	-----	82.19	35.14	12.80	36.53	0.00	101	300	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1 6465.00	93.60	-----	-----	82.19	35.14	12.80	36.53	0.00	101	300	Average																											







Mode	1																																					
	Band Edge																																					
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full RU_6465MHz																																					
ANT	4+3																																					
Pol.	Vertical	Fundamental																																				
Peak	Blank	Date: 2026-02-17 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6465.00</td><td>102.13</td><td>-----</td><td>90.65</td><td>35.20</td><td>12.82</td><td>36.54</td><td>0.00</td><td>294</td><td>190</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6465.00	102.13	-----	90.65	35.20	12.82	36.54	0.00	294	190	Peak
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1	6465.00	102.13	-----	90.65	35.20	12.82	36.54	0.00	294	190	Peak																											
Avg	Blank	Date: 2026-02-17 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6465.00</td><td>93.57</td><td>-----</td><td>82.09</td><td>35.20</td><td>12.82</td><td>36.54</td><td>0.00</td><td>294</td><td>190</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6465.00	93.57	-----	82.09	35.20	12.82	36.54	0.00	294	190	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1	6465.00	93.57	-----	82.09	35.20	12.82	36.54	0.00	294	190	Average																											





Mode	1																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full RU_6465MHz																																																																																																																								
ANT	4+3																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>49.66</td><td>88.20</td><td>-38.54</td><td>57.23</td><td>39.96</td><td>18.05</td><td>66.01</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19395.00</td><td>38.31</td><td>74.00</td><td>-35.69</td><td>59.41</td><td>38.00</td><td>5.82</td><td>55.38</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12930.00	49.66	88.20	-38.54	57.23	39.96	18.05	66.01	0.43	--	Peak	2	19395.00	38.31	74.00	-35.69	59.41	38.00	5.82	55.38	-9.54	--	Peak	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>12930.00</td><td>49.64</td><td>88.20</td><td>-38.56</td><td>57.21</td><td>39.96</td><td>18.05</td><td>66.01</td><td>0.43</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19395.00</td><td>38.09</td><td>74.00</td><td>-35.91</td><td>59.19</td><td>38.00</td><td>5.82</td><td>55.38</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	12930.00	49.64	88.20	-38.56	57.21	39.96	18.05	66.01	0.43	--	Peak	2	19395.00	38.09	74.00	-35.91	59.19	38.00	5.82	55.38	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	12930.00	49.66	88.20	-38.54	57.23	39.96	18.05	66.01	0.43	--	Peak																																																																																																														
2	19395.00	38.31	74.00	-35.69	59.41	38.00	5.82	55.38	-9.54	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	12930.00	49.64	88.20	-38.56	57.21	39.96	18.05	66.01	0.43	--	Peak																																																																																																														
2	19395.00	38.09	74.00	-35.91	59.19	38.00	5.82	55.38	-9.54	--	Peak																																																																																																														

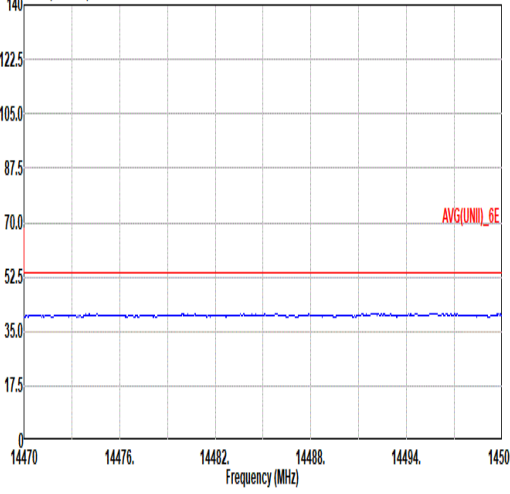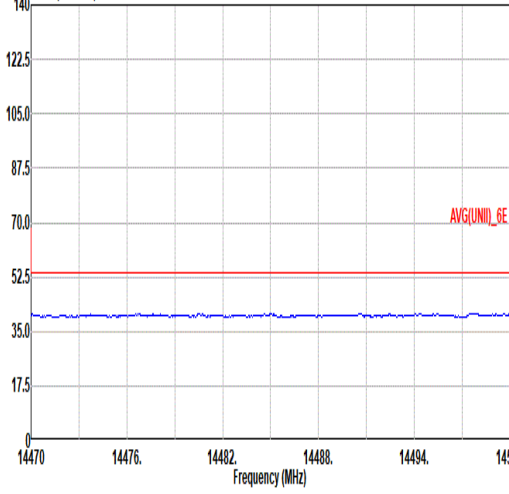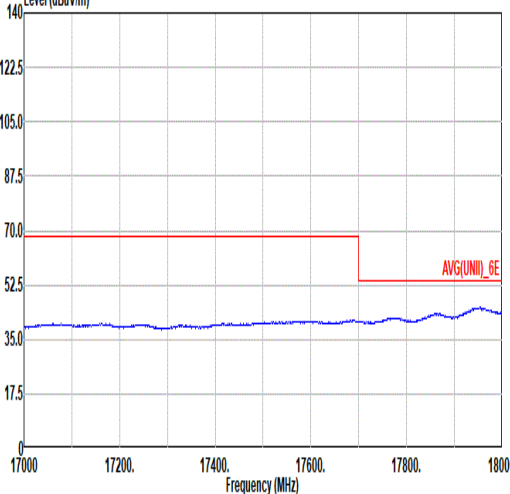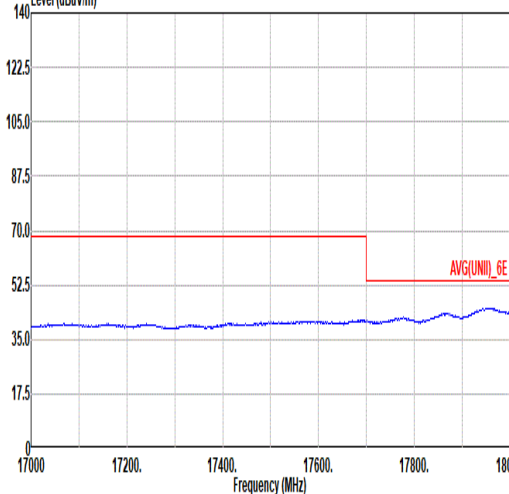

Mode	1	
	Harmonic	
	U-NII-6_6.425-6.525_802.11ax HE80_CH103_Full RU_6465MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL
	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL

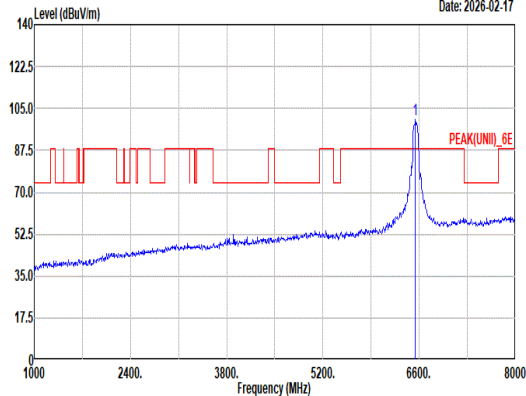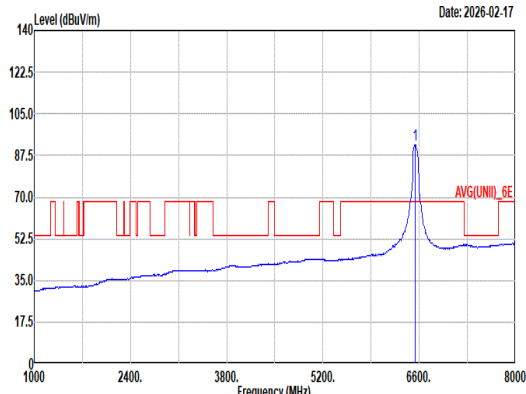

Mode	2																																								
	Band Edge																																								
	U-NII-6_6.425-6.525_802.11ax HE80_CH119_Full RU_6545MHz																																								
ANT	4+3																																								
Pol.	Horizontal	Fundamental																																							
Peak	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6545.00</td><td>100.48</td><td>-----</td><td>-----</td><td>88.51</td><td>35.65</td><td>12.89</td><td>36.57</td><td>0.00</td><td>101</td><td>239</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6545.00	100.48	-----	-----	88.51	35.65	12.89	36.57	0.00	101	239	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																													
1	6545.00	100.48	-----	-----	88.51	35.65	12.89	36.57	0.00	101	239	Peak																													
Avg	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6545.00</td><td>92.12</td><td>-----</td><td>-----</td><td>80.21</td><td>35.60</td><td>12.88</td><td>36.57</td><td>0.00</td><td>101</td><td>239</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6545.00	92.12	-----	-----	80.21	35.60	12.88	36.57	0.00	101	239	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																													
1	6545.00	92.12	-----	-----	80.21	35.60	12.88	36.57	0.00	101	239	Average																													







Mode	2	
	Band Edge	
	U-NII-6_6.425-6.525_802.11ax HE80_CH119_Full RU_6545MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	Blank	<



Mode	2																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-6_6.425-6.525_802.11ax HE80_CH119_Full RU_6545MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13090.00</td><td>49.35</td><td>88.20</td><td>-38.85</td><td>56.83</td><td>39.90</td><td>18.16</td><td>65.96</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19635.00</td><td>37.65</td><td>74.00</td><td>-36.35</td><td>58.70</td><td>37.90</td><td>5.83</td><td>55.24</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13090.00	49.35	88.20	-38.85	56.83	39.90	18.16	65.96	0.42	--	Peak	2	19635.00	37.65	74.00	-36.35	58.70	37.90	5.83	55.24	-9.54	--	Peak	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13090.00</td><td>49.33</td><td>88.20</td><td>-38.87</td><td>56.81</td><td>39.90</td><td>18.16</td><td>65.96</td><td>0.42</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>19635.00</td><td>38.52</td><td>74.00</td><td>-35.48</td><td>59.57</td><td>37.90</td><td>5.83</td><td>55.24</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13090.00	49.33	88.20	-38.87	56.81	39.90	18.16	65.96	0.42	--	Peak	2	19635.00	38.52	74.00	-35.48	59.57	37.90	5.83	55.24	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13090.00	49.35	88.20	-38.85	56.83	39.90	18.16	65.96	0.42	--	Peak																																																																																																															
2	19635.00	37.65	74.00	-36.35	58.70	37.90	5.83	55.24	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13090.00	49.33	88.20	-38.87	56.81	39.90	18.16	65.96	0.42	--	Peak																																																																																																															
2	19635.00	38.52	74.00	-35.48	59.57	37.90	5.83	55.24	-9.54	--	Peak																																																																																																															

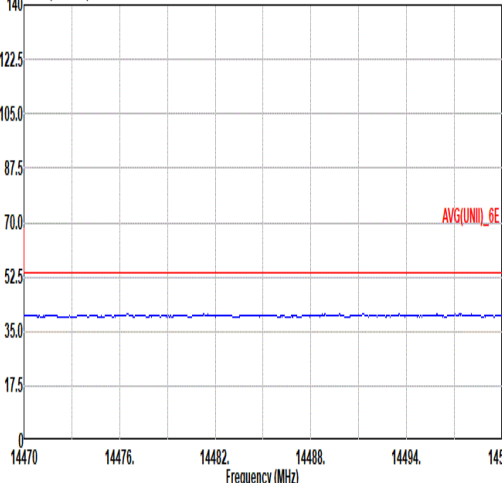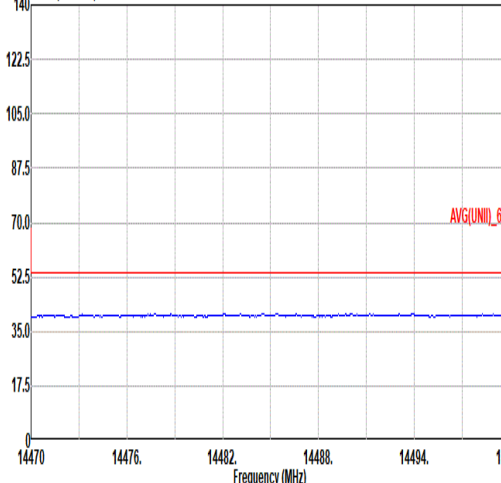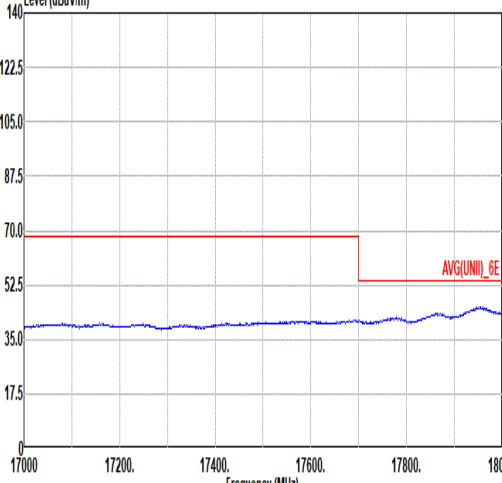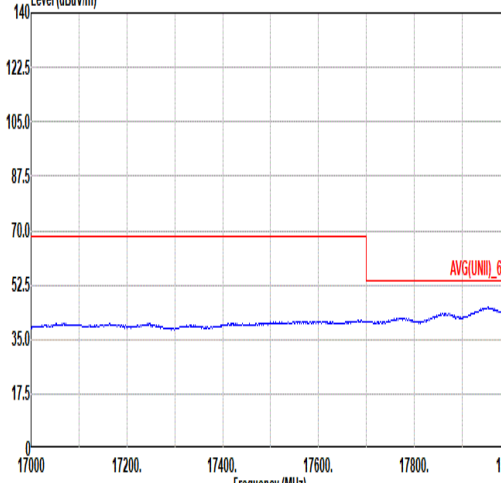

Mode	2	
	Harmonic	
	U-NII-6_6.425-6.525_802.11ax HE80_CH119_Full RU_6545MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL
	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL



Mode	3																																																																																														
	Band Edge																																																																																														
	U-NII-8_6.875-7.125_802.11a_CH229_7095MHz																																																																																														
ANT	4+3																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.15</td><td>61.38</td><td>88.20</td><td>-26.82</td><td>48.07</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>304</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.15	61.38	88.20	-26.82	48.07	36.70	13.44	36.83	0.00	100	304	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5319.00</td><td>62.19</td><td>-----</td><td>-----</td><td>53.79</td><td>33.00</td><td>11.61</td><td>36.21</td><td>0.00</td><td>100</td><td>335</td><td>Peak</td></tr><tr><td>2 7095.00</td><td>101.17</td><td>-----</td><td>-----</td><td>88.00</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>304</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5319.00	62.19	-----	-----	53.79	33.00	11.61	36.21	0.00	100	335	Peak	2 7095.00	101.17	-----	-----	88.00	36.58	13.41	36.82	0.00	100	304	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7125.15	61.38	88.20	-26.82	48.07	36.70	13.44	36.83	0.00	100	304	Peak																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5319.00	62.19	-----	-----	53.79	33.00	11.61	36.21	0.00	100	335	Peak																																																																																				
2 7095.00	101.17	-----	-----	88.00	36.58	13.41	36.82	0.00	100	304	Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.15</td><td>50.38</td><td>68.20</td><td>-17.82</td><td>37.07</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>304</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.15	50.38	68.20	-17.82	37.07	36.70	13.44	36.83	0.00	100	304	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>94.74</td><td>-----</td><td>-----</td><td>81.57</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>304</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	94.74	-----	-----	81.57	36.58	13.41	36.82	0.00	100	304	Average												
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7125.15	50.38	68.20	-17.82	37.07	36.70	13.44	36.83	0.00	100	304	Average																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7095.00	94.74	-----	-----	81.57	36.58	13.41	36.82	0.00	100	304	Average																																																																																				



Mode	3																																																																																			
	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11a_CH229_7095MHz																																																																																			
ANT	4+3																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.90</td><td>62.86</td><td>88.20</td><td>-25.34</td><td>49.55</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>297</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.90	62.86	88.20	-25.34	49.55	36.70	13.44	36.83	0.00	100	297	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>103.20</td><td>-----</td><td>-----</td><td>90.03</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>297</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	103.20	-----	-----	90.03	36.58	13.41	36.82	0.00	100	297	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7125.90	62.86	88.20	-25.34	49.55	36.70	13.44	36.83	0.00	100	297	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	103.20	-----	-----	90.03	36.58	13.41	36.82	0.00	100	297	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.45</td><td>51.88</td><td>68.20</td><td>-16.32</td><td>38.57</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>297</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.45	51.88	68.20	-16.32	38.57	36.70	13.44	36.83	0.00	100	297	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>96.33</td><td>-----</td><td>-----</td><td>83.16</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>297</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	96.33	-----	-----	83.16	36.58	13.41	36.82	0.00	100	297	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7125.45	51.88	68.20	-16.32	38.57	36.70	13.44	36.83	0.00	100	297	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	96.33	-----	-----	83.16	36.58	13.41	36.82	0.00	100	297	Average																																																																									



Mode	4																																																																																												
	Band Edge																																																																																												
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full RU_7095MHz																																																																																												
ANT	4+3																																																																																												
Pol.	Horizontal	Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7127.10</td><td>61.81</td><td>88.20</td><td>-26.39</td><td>48.49</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>306</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7127.10	61.81	88.20	-26.39	48.49	36.71	13.44	36.83	0.00	100	306	Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5326.00</td><td>61.73</td><td>-----</td><td>-----</td><td>53.32</td><td>33.00</td><td>11.62</td><td>36.21</td><td>0.00</td><td>100</td><td>61</td><td>Peak</td></tr><tr><td>2</td><td>7095.00</td><td>101.42</td><td>-----</td><td>-----</td><td>88.25</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>306</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5326.00	61.73	-----	-----	53.32	33.00	11.62	36.21	0.00	100	61	Peak	2	7095.00	101.42	-----	-----	88.25	36.58	13.41	36.82	0.00	100	306	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7127.10	61.81	88.20	-26.39	48.49	36.71	13.44	36.83	0.00	100	306	Peak																																																																																	
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	5326.00	61.73	-----	-----	53.32	33.00	11.62	36.21	0.00	100	61	Peak																																																																																	
2	7095.00	101.42	-----	-----	88.25	36.58	13.41	36.82	0.00	100	306	Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7125.15</td><td>53.02</td><td>68.20</td><td>-15.18</td><td>39.71</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>306</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7125.15	53.02	68.20	-15.18	39.71	36.70	13.44	36.83	0.00	100	306	Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7095.00</td><td>94.32</td><td>-----</td><td>-----</td><td>81.15</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>100</td><td>306</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7095.00	94.32	-----	-----	81.15	36.58	13.41	36.82	0.00	100	306	Average													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7125.15	53.02	68.20	-15.18	39.71	36.70	13.44	36.83	0.00	100	306	Average																																																																																	
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	7095.00	94.32	-----	-----	81.15	36.58	13.41	36.82	0.00	100	306	Average																																																																																	



Mode	4																																																																																											
	Band Edge																																																																																											
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_Full RU_7095MHz																																																																																											
ANT	4+3																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7126.35</td><td>68.27</td><td>88.20 -19.93</td><td>54.95</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>336</td><td>159 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7126.35	68.27	88.20 -19.93	54.95	36.71	13.44	36.83	0.00	336	159 Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5326.00</td><td>58.55</td><td>-----</td><td>50.14</td><td>33.00</td><td>11.62</td><td>36.21</td><td>0.00</td><td>399</td><td>158 Peak</td></tr><tr><td>2 7095.00</td><td>105.01</td><td>-----</td><td>91.84</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>336</td><td>159 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5326.00	58.55	-----	50.14	33.00	11.62	36.21	0.00	399	158 Peak	2 7095.00	105.01	-----	91.84	36.58	13.41	36.82	0.00	336	159 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 7126.35	68.27	88.20 -19.93	54.95	36.71	13.44	36.83	0.00	336	159 Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 5326.00	58.55	-----	50.14	33.00	11.62	36.21	0.00	399	158 Peak																																																																																			
2 7095.00	105.01	-----	91.84	36.58	13.41	36.82	0.00	336	159 Peak																																																																																			
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7126.50</td><td>56.17</td><td>68.20 -12.03</td><td>42.85</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>336</td><td>159 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7126.50	56.17	68.20 -12.03	42.85	36.71	13.44	36.83	0.00	336	159 Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 7095.00</td><td>96.98</td><td>-----</td><td>83.81</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>336</td><td>159 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 7095.00	96.98	-----	83.81	36.58	13.41	36.82	0.00	336	159 Average										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 7126.50	56.17	68.20 -12.03	42.85	36.71	13.44	36.83	0.00	336	159 Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 7095.00	96.98	-----	83.81	36.58	13.41	36.82	0.00	336	159 Average																																																																																			



Mode	5																																																																																			
	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_26/8 RU_7095MHz																																																																																			
ANT	4+3																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7170.00</td><td>58.22</td><td>88.20</td><td>-29.98</td><td>44.71</td><td>36.88</td><td>13.47</td><td>36.84</td><td>0.00</td><td>300</td><td>191</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7170.00	58.22	88.20	-29.98	44.71	36.88	13.47	36.84	0.00	300	191	Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>90.39</td><td>-----</td><td>-----</td><td>77.17</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>300</td><td>191</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	90.39	-----	-----	77.17	36.62	13.42	36.82	0.00	300	191	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7170.00	58.22	88.20	-29.98	44.71	36.88	13.47	36.84	0.00	300	191	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	90.39	-----	-----	77.17	36.62	13.42	36.82	0.00	300	191	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7241.70</td><td>47.71</td><td>68.20</td><td>-20.49</td><td>33.87</td><td>37.17</td><td>13.54</td><td>36.87</td><td>0.00</td><td>300</td><td>191</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7241.70	47.71	68.20	-20.49	33.87	37.17	13.54	36.87	0.00	300	191	Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>84.32</td><td>-----</td><td>-----</td><td>71.10</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>300</td><td>191</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	84.32	-----	-----	71.10	36.62	13.42	36.82	0.00	300	191	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7241.70	47.71	68.20	-20.49	33.87	37.17	13.54	36.87	0.00	300	191	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	84.32	-----	-----	71.10	36.62	13.42	36.82	0.00	300	191	Average																																																																									



Mode	5																																																																																			
	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_26/8 RU_7095MHz																																																																																			
ANT	4+3																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.30</td><td>58.06</td><td>88.20</td><td>-30.14</td><td>44.75</td><td>36.70</td><td>13.44</td><td>36.63</td><td>0.00</td><td>227</td><td></td><td>0 Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.30	58.06	88.20	-30.14	44.75	36.70	13.44	36.63	0.00	227		0 Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>93.68</td><td>-----</td><td>-----</td><td>80.46</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>227</td><td></td><td>0 Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	93.68	-----	-----	80.46	36.62	13.42	36.82	0.00	227		0 Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7125.30	58.06	88.20	-30.14	44.75	36.70	13.44	36.63	0.00	227		0 Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	93.68	-----	-----	80.46	36.62	13.42	36.82	0.00	227		0 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7244.40</td><td>47.70</td><td>68.20</td><td>-20.50</td><td>33.85</td><td>37.18</td><td>13.54</td><td>36.87</td><td>0.00</td><td>227</td><td></td><td>0 Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7244.40	47.70	68.20	-20.50	33.85	37.18	13.54	36.87	0.00	227		0 Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.600kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>87.12</td><td>-----</td><td>-----</td><td>73.90</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>227</td><td></td><td>0 Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	87.12	-----	-----	73.90	36.62	13.42	36.82	0.00	227		0 Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7244.40	47.70	68.20	-20.50	33.85	37.18	13.54	36.87	0.00	227		0 Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	87.12	-----	-----	73.90	36.62	13.42	36.82	0.00	227		0 Average																																																																									



Mode	6																																																																																														
	Band Edge																																																																																														
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_52/40 RU_7095MHz																																																																																														
ANT	4+3																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7219.00</td><td>57.45</td><td>88.20</td><td>-30.75</td><td>43.71</td><td>37.00</td><td>13.52</td><td>36.86</td><td>0.00</td><td>286</td><td>0</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7219.00	57.45	88.20	-30.75	43.71	37.00	13.52	36.86	0.00	286	0	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5326.00</td><td>58.50</td><td>-----</td><td>-----</td><td>50.09</td><td>33.00</td><td>11.62</td><td>36.21</td><td>0.00</td><td>100</td><td>335</td><td>Peak</td></tr><tr><td>2 7095.00</td><td>89.32</td><td>-----</td><td>-----</td><td>76.10</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>286</td><td>0</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5326.00	58.50	-----	-----	50.09	33.00	11.62	36.21	0.00	100	335	Peak	2 7095.00	89.32	-----	-----	76.10	36.62	13.42	36.82	0.00	286	0	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7219.00	57.45	88.20	-30.75	43.71	37.00	13.52	36.86	0.00	286	0	Peak																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5326.00	58.50	-----	-----	50.09	33.00	11.62	36.21	0.00	100	335	Peak																																																																																				
2 7095.00	89.32	-----	-----	76.10	36.62	13.42	36.82	0.00	286	0	Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7241.70</td><td>48.54</td><td>68.20</td><td>-19.66</td><td>34.70</td><td>37.17</td><td>13.54</td><td>36.87</td><td>0.00</td><td>286</td><td>0</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7241.70	48.54	68.20	-19.66	34.70	37.17	13.54	36.87	0.00	286	0	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>82.08</td><td>-----</td><td>-----</td><td>68.86</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>286</td><td>0</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	82.08	-----	-----	68.86	36.62	13.42	36.82	0.00	286	0	Average												
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7241.70	48.54	68.20	-19.66	34.70	37.17	13.54	36.87	0.00	286	0	Average																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7095.00	82.08	-----	-----	68.86	36.62	13.42	36.82	0.00	286	0	Average																																																																																				



Mode	6																																																																																														
	Band Edge																																																																																														
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_52/40 RU_7095MHz																																																																																														
ANT	4+3																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Loss</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7198.20</td><td>57.55</td><td>88.20</td><td>-30.65</td><td>43.91</td><td>36.99</td><td>13.50</td><td>36.85</td><td>0.00</td><td>327</td><td>164</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7198.20	57.55	88.20	-30.65	43.91	36.99	13.50	36.85	0.00	327	164	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Loss</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5326.00</td><td>57.04</td><td>-----</td><td>-----</td><td>48.63</td><td>33.00</td><td>11.62</td><td>36.21</td><td>0.00</td><td>383</td><td>103</td><td>Peak</td></tr><tr><td>2 7095.00</td><td>102.40</td><td>-----</td><td>-----</td><td>89.18</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>327</td><td>164</td><td>Peak</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5326.00	57.04	-----	-----	48.63	33.00	11.62	36.21	0.00	383	103	Peak	2 7095.00	102.40	-----	-----	89.18	36.62	13.42	36.82	0.00	327	164	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7198.20	57.55	88.20	-30.65	43.91	36.99	13.50	36.85	0.00	327	164	Peak																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 5326.00	57.04	-----	-----	48.63	33.00	11.62	36.21	0.00	383	103	Peak																																																																																				
2 7095.00	102.40	-----	-----	89.18	36.62	13.42	36.82	0.00	327	164	Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Loss</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7234.65</td><td>48.53</td><td>68.20</td><td>-19.67</td><td>34.73</td><td>37.14</td><td>13.53</td><td>36.87</td><td>0.00</td><td>327</td><td>164</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7234.65	48.53	68.20	-19.67	34.73	37.14	13.53	36.87	0.00	327	164	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Loss</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>95.41</td><td>-----</td><td>-----</td><td>82.19</td><td>36.62</td><td>13.42</td><td>36.82</td><td>0.00</td><td>327</td><td>164</td><td>Average</td></tr></table>					Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	95.41	-----	-----	82.19	36.62	13.42	36.82	0.00	327	164	Average												
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7234.65	48.53	68.20	-19.67	34.73	37.14	13.53	36.87	0.00	327	164	Average																																																																																				
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																					
1 7095.00	95.41	-----	-----	82.19	36.62	13.42	36.82	0.00	327	164	Average																																																																																				







Mode	7																																																																																			
	Band Edge																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_106/40 RU_7095MHz																																																																																			
ANT	4+3																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91280-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7221.75</td><td>57.76</td><td>88.20</td><td>-30.44</td><td>44.01</td><td>37.09</td><td>13.52</td><td>36.86</td><td>0.00</td><td>187</td><td>308</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7221.75	57.76	88.20	-30.44	44.01	37.09	13.52	36.86	0.00	187	308	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91280-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>96.47</td><td>-----</td><td>-----</td><td>83.30</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>187</td><td>308</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	96.47	-----	-----	83.30	36.58	13.41	36.82	0.00	187	308	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7221.75	57.76	88.20	-30.44	44.01	37.09	13.52	36.86	0.00	187	308	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	96.47	-----	-----	83.30	36.58	13.41	36.82	0.00	187	308	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91280-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7224.30</td><td>48.51</td><td>68.20</td><td>-19.69</td><td>34.75</td><td>37.10</td><td>13.52</td><td>36.86</td><td>0.00</td><td>187</td><td>308</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7224.30	48.51	68.20	-19.69	34.75	37.10	13.52	36.86	0.00	187	308	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7095.00</td><td>89.14</td><td>-----</td><td>-----</td><td>75.97</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>187</td><td>308</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7095.00	89.14	-----	-----	75.97	36.58	13.41	36.82	0.00	187	308	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7224.30	48.51	68.20	-19.69	34.75	37.10	13.52	36.86	0.00	187	308	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 7095.00	89.14	-----	-----	75.97	36.58	13.41	36.82	0.00	187	308	Average																																																																									



Mode	7																																																																																																																
	Band Edge																																																																																																																
	U-NII-8_6.875-7.125_802.11ax HE20_CH229_106/40 RU_7095MHz																																																																																																																
ANT	4+3																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.15</td><td>59.88</td><td>88.20</td><td>-28.32</td><td>46.57</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>301</td><td>161</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.15	59.88	88.20	-28.32	46.57	36.70	13.44	36.83	0.00	301	161	Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5326.00</td><td>58.16</td><td>-----</td><td>-----</td><td>49.75</td><td>33.00</td><td>11.62</td><td>36.21</td><td>0.00</td><td>198</td><td>177</td><td>Peak</td></tr><tr><td>2</td><td>7095.00</td><td>103.18</td><td>-----</td><td>-----</td><td>90.01</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>301</td><td>161</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5326.00	58.16	-----	-----	49.75	33.00	11.62	36.21	0.00	198	177	Peak	2	7095.00	103.18	-----	-----	90.01	36.58	13.41	36.82	0.00	301	161	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	7125.15	59.88	88.20	-28.32	46.57	36.70	13.44	36.83	0.00	301	161	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5326.00	58.16	-----	-----	49.75	33.00	11.62	36.21	0.00	198	177	Peak																																																																																																					
2	7095.00	103.18	-----	-----	90.01	36.58	13.41	36.82	0.00	301	161	Peak																																																																																																					
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7211.55</td><td>48.52</td><td>68.20</td><td>-19.68</td><td>34.82</td><td>37.05</td><td>13.51</td><td>36.86</td><td>0.00</td><td>301</td><td>161</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7211.55	48.52	68.20	-19.68	34.82	37.05	13.51	36.86	0.00	301	161	Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7095.00</td><td>96.13</td><td>-----</td><td>-----</td><td>82.96</td><td>36.58</td><td>13.41</td><td>36.82</td><td>0.00</td><td>301</td><td>161</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7095.00	96.13	-----	-----	82.96	36.58	13.41	36.82	0.00	301	161	Average													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	7211.55	48.52	68.20	-19.68	34.82	37.05	13.51	36.86	0.00	301	161	Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	7095.00	96.13	-----	-----	82.96	36.58	13.41	36.82	0.00	301	161	Average																																																																																																					

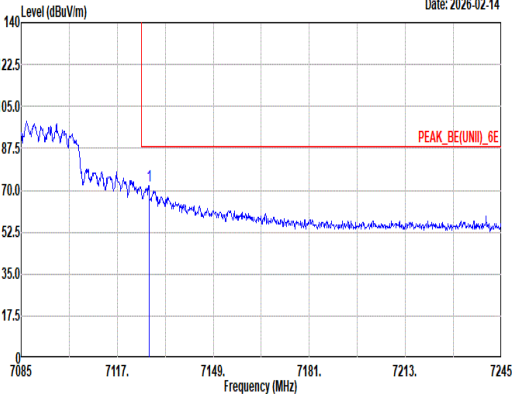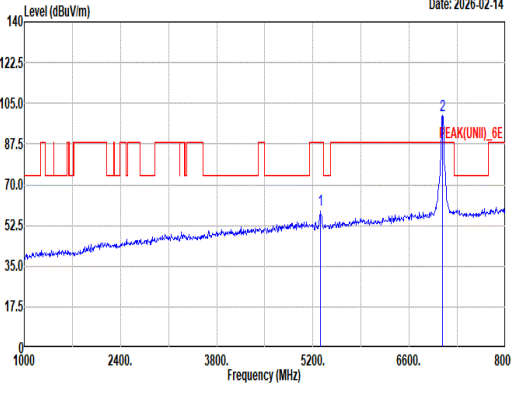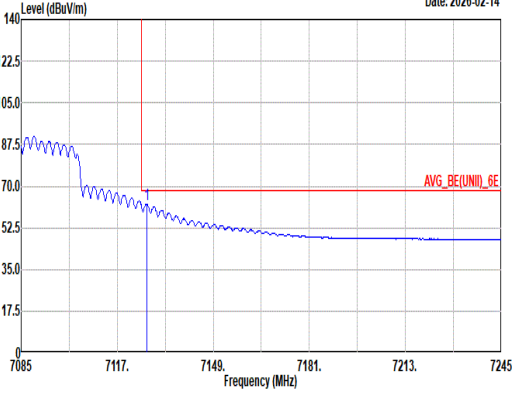
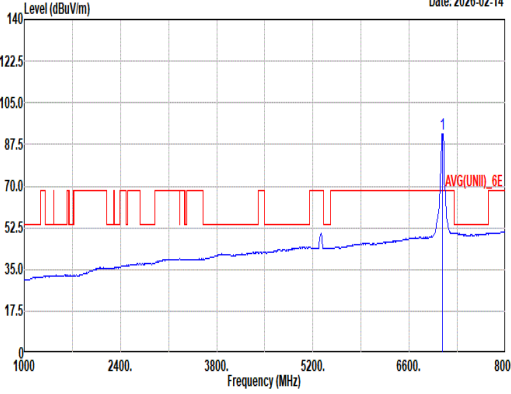


Mode	8																																																																																																																	
	Band Edge																																																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full RU_7085MHz																																																																																																																	
ANT	4+3																																																																																																																	
Pol.	Horizontal						Fundamental																																																																																																											
Peak	Level (dBuV/m) Date: 2026-02-14  PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7127.56</td><td>71.73</td><td>88.20</td><td>-16.47</td><td>58.41</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>320</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	7127.56	71.73	88.20	-16.47	58.41	36.71	13.44	36.83	0.00	100	320	Peak	Level (dBuV/m) Date: 2026-02-14  PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5305.00</td><td>59.34</td><td>-----</td><td>-----</td><td>50.95</td><td>33.00</td><td>11.60</td><td>36.21</td><td>0.00</td><td>100</td><td>335</td><td>Peak</td></tr><tr><td>2</td><td>7085.00</td><td>100.00</td><td>-----</td><td>-----</td><td>86.96</td><td>36.46</td><td>13.40</td><td>36.82</td><td>0.00</td><td>100</td><td>320</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5305.00	59.34	-----	-----	50.95	33.00	11.60	36.21	0.00	100	335	Peak	2	7085.00	100.00	-----	-----	86.96	36.46	13.40	36.82	0.00	100	320	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	7127.56	71.73	88.20	-16.47	58.41	36.71	13.44	36.83	0.00	100	320	Peak																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	5305.00	59.34	-----	-----	50.95	33.00	11.60	36.21	0.00	100	335	Peak																																																																																																						
2	7085.00	100.00	-----	-----	86.96	36.46	13.40	36.82	0.00	100	320	Peak																																																																																																						
Avg	Level (dBuV/m) Date: 2026-02-14  AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7126.76</td><td>62.42</td><td>68.20</td><td>-5.78</td><td>49.10</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>320</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7126.76	62.42	68.20	-5.78	49.10	36.71	13.44	36.83	0.00	100	320	Average	Level (dBuV/m) Date: 2026-02-14  AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7085.00</td><td>92.18</td><td>-----</td><td>-----</td><td>79.14</td><td>36.46</td><td>13.40</td><td>36.82</td><td>0.00</td><td>100</td><td>320</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	7085.00	92.18	-----	-----	79.14	36.46	13.40	36.82	0.00	100	320	Average												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	7126.76	62.42	68.20	-5.78	49.10	36.71	13.44	36.83	0.00	100	320	Average																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1	7085.00	92.18	-----	-----	79.14	36.46	13.40	36.82	0.00	100	320	Average																																																																																																						





Mode	8																																																																																																			
	Band Edge																																																																																																			
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full RU_7085MHz																																																																																																			
ANT	4+3																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7128.36</td><td>76.58</td><td>88.20</td><td>-11.62</td><td>63.26</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>292</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	7128.36	76.58	88.20	-11.62	63.26	36.71	13.44	36.83	0.00	100	292	Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7085.00</td><td>102.21</td><td>-----</td><td>-----</td><td>89.17</td><td>36.46</td><td>13.40</td><td>36.82</td><td>0.00</td><td>100</td><td>292</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	7085.00	102.21	-----	-----	89.17	36.46	13.40	36.82	0.00	100	292	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	7128.36	76.58	88.20	-11.62	63.26	36.71	13.44	36.83	0.00	100	292	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	7085.00	102.21	-----	-----	89.17	36.46	13.40	36.82	0.00	100	292	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.64</td><td>66.23</td><td>68.20</td><td>-1.97</td><td>52.92</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>292</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	7125.64	66.23	68.20	-1.97	52.92	36.70	13.44	36.83	0.00	100	292	Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7085.00</td><td>95.16</td><td>-----</td><td>-----</td><td>82.12</td><td>36.46</td><td>13.40</td><td>36.82</td><td>0.00</td><td>100</td><td>292</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	7085.00	95.16	-----	-----	82.12	36.46	13.40	36.82	0.00	100	292	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	7125.64	66.23	68.20	-1.97	52.92	36.70	13.44	36.83	0.00	100	292	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																										
1	7085.00	95.16	-----	-----	82.12	36.46	13.40	36.82	0.00	100	292	Average																																																																																								

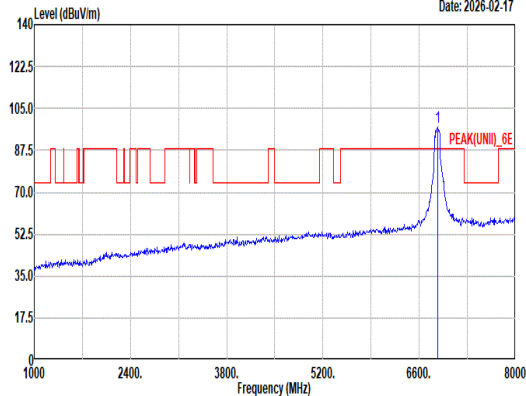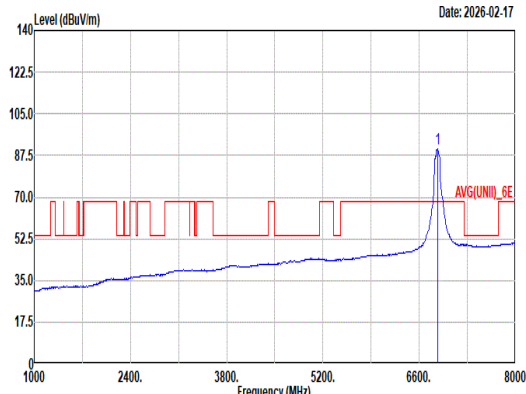

Mode	9																																								
	Band Edge																																								
	U-NII-7 Straddle channel_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz																																								
ANT	4+3																																								
Pol.	Horizontal	Fundamental																																							
Peak	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Loss Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6865.00</td><td>97.12</td><td>-----</td><td>-----</td><td>84.62</td><td>36.03</td><td>13.20</td><td>36.73</td><td>0.00</td><td>100</td><td></td><td>311 Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6865.00	97.12	-----	-----	84.62	36.03	13.20	36.73	0.00	100		311 Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																													
1	6865.00	97.12	-----	-----	84.62	36.03	13.20	36.73	0.00	100		311 Peak																													
Avg	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Loss Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6865.00</td><td>90.21</td><td>-----</td><td>-----</td><td>77.69</td><td>36.05</td><td>13.20</td><td>36.73</td><td>0.00</td><td>100</td><td></td><td>311 Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	6865.00	90.21	-----	-----	77.69	36.05	13.20	36.73	0.00	100		311 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																													
1	6865.00	90.21	-----	-----	77.69	36.05	13.20	36.73	0.00	100		311 Average																													



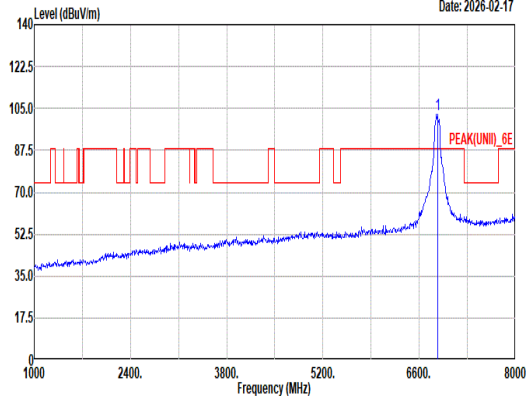
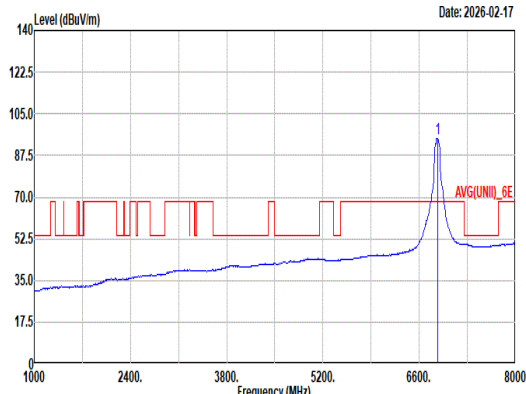


Mode	9																																					
	Band Edge																																					
	U-NII-7 Straddle channel_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz																																					
ANT	4+3																																					
Pol.	Vertical	Fundamental																																				
Peak	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Loss Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6865.00</td><td>102.70</td><td>-----</td><td>-----</td><td>90.24</td><td>36.00</td><td>13.18</td><td>36.72</td><td>0.00</td><td>101</td><td>278</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 6865.00	102.70	-----	-----	90.24	36.00	13.18	36.72	0.00	101	278	Peak
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Loss Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1 6865.00	102.70	-----	-----	90.24	36.00	13.18	36.72	0.00	101	278	Peak																											
Avg	Blank	Date: 2026-02-17  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Loss Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 6865.00</td><td>94.65</td><td>-----</td><td>-----</td><td>82.16</td><td>36.02</td><td>13.19</td><td>36.72</td><td>0.00</td><td>101</td><td>278</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1 6865.00	94.65	-----	-----	82.16	36.02	13.19	36.72	0.00	101	278	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Loss Factor	APos	TPos	Remark																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																											
1 6865.00	94.65	-----	-----	82.16	36.02	13.19	36.72	0.00	101	278	Average																											



Mode	9																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-7 Straddle channel_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13730.00</td><td>50.20</td><td>88.20</td><td>-38.00</td><td>56.35</td><td>40.58</td><td>18.60</td><td>65.72</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20595.00</td><td>36.68</td><td>74.00</td><td>-37.32</td><td>57.60</td><td>38.00</td><td>5.81</td><td>55.19</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13730.00	50.20	88.20	-38.00	56.35	40.58	18.60	65.72	0.39	--	Peak	2	20595.00	36.68	74.00	-37.32	57.60	38.00	5.81	55.19	-9.54	--	Peak	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13730.00</td><td>50.00</td><td>88.20</td><td>-38.12</td><td>56.23</td><td>40.58</td><td>18.60</td><td>65.72</td><td>0.39</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20595.00</td><td>37.24</td><td>74.00</td><td>-36.76</td><td>58.16</td><td>38.00</td><td>5.81</td><td>55.19</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13730.00	50.00	88.20	-38.12	56.23	40.58	18.60	65.72	0.39	--	Peak	2	20595.00	37.24	74.00	-36.76	58.16	38.00	5.81	55.19	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13730.00	50.20	88.20	-38.00	56.35	40.58	18.60	65.72	0.39	--	Peak																																																																																																															
2	20595.00	36.68	74.00	-37.32	57.60	38.00	5.81	55.19	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13730.00	50.00	88.20	-38.12	56.23	40.58	18.60	65.72	0.39	--	Peak																																																																																																															
2	20595.00	37.24	74.00	-36.76	58.16	38.00	5.81	55.19	-9.54	--	Peak																																																																																																															

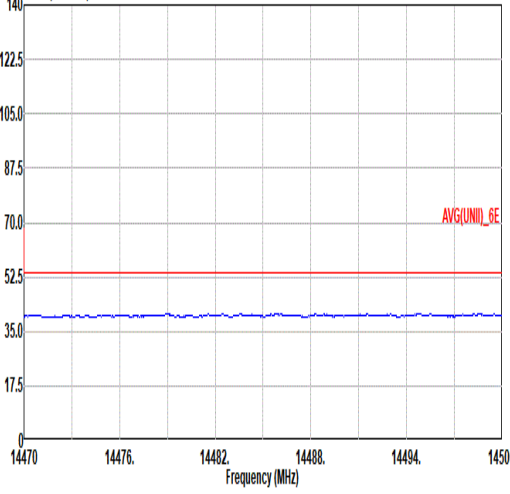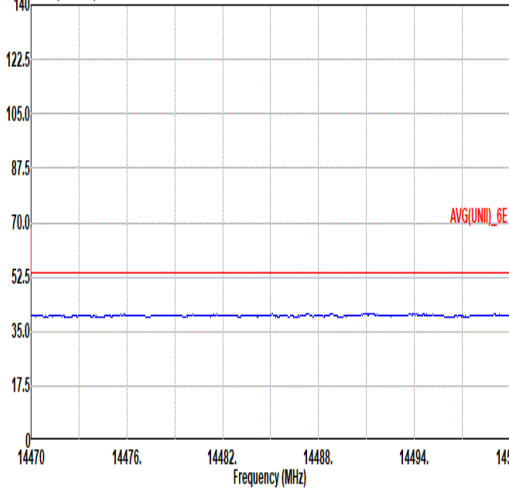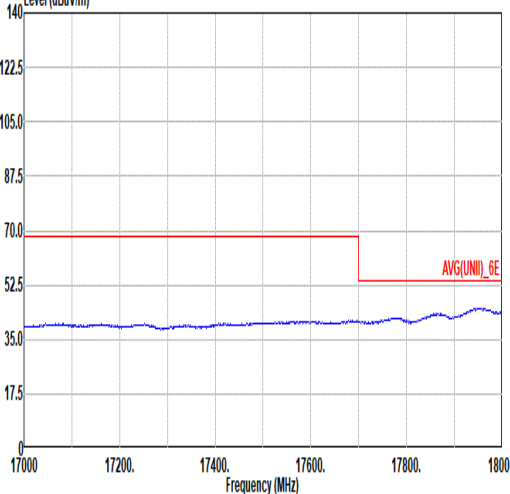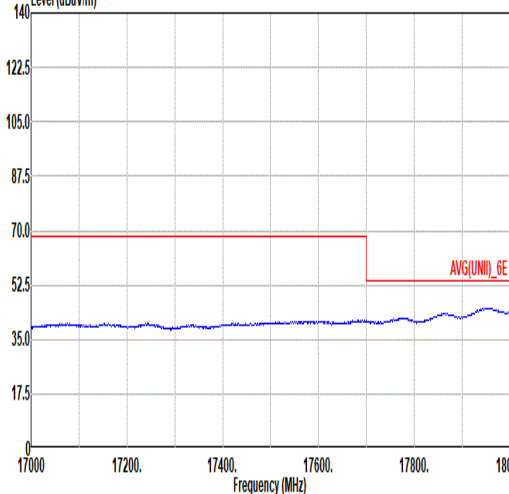

Mode	9	
	Harmonic	
	U-NII-7 Straddle channel_6.525-6.875_802.11ax HE80_CH183_Full RU_6865MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL
	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL



Mode	10									
	Band Edge									
	U-NII-8_6.875-7.125_802.11ax HE80_CH199_Full RU_6945MHz									
ANT	4+3									
Pol.	Horizontal					Fundamental				
Peak	Blank					Level (dBuV/m) </				







Mode	10	
	Band Edge	
	U-NII-8_6.875-7.125_802.11ax HE80_CH199_Full RU_6945MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	Blank	Level (dBuV/m) <



Mode	10																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE80_CH199_Full RU_6945MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13890.00</td><td>50.21</td><td>88.20</td><td>-37.99</td><td>56.19</td><td>40.56</td><td>18.71</td><td>65.63</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20835.00</td><td>38.38</td><td>74.00</td><td>-35.62</td><td>58.86</td><td>38.07</td><td>5.89</td><td>54.90</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13890.00	50.21	88.20	-37.99	56.19	40.56	18.71	65.63	0.38	--	Peak	2	20835.00	38.38	74.00	-35.62	58.86	38.07	5.89	54.90	-9.54	--	Peak	Level (dBuV/m) Date: 2026-02-15 Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>13890.00</td><td>50.54</td><td>88.20</td><td>-37.66</td><td>56.52</td><td>40.56</td><td>18.71</td><td>65.63</td><td>0.38</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>20835.00</td><td>37.65</td><td>74.00</td><td>-36.35</td><td>58.13</td><td>38.07</td><td>5.89</td><td>54.90</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	13890.00	50.54	88.20	-37.66	56.52	40.56	18.71	65.63	0.38	--	Peak	2	20835.00	37.65	74.00	-36.35	58.13	38.07	5.89	54.90	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13890.00	50.21	88.20	-37.99	56.19	40.56	18.71	65.63	0.38	--	Peak																																																																																																															
2	20835.00	38.38	74.00	-35.62	58.86	38.07	5.89	54.90	-9.54	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	13890.00	50.54	88.20	-37.66	56.52	40.56	18.71	65.63	0.38	--	Peak																																																																																																															
2	20835.00	37.65	74.00	-36.35	58.13	38.07	5.89	54.90	-9.54	--	Peak																																																																																																															

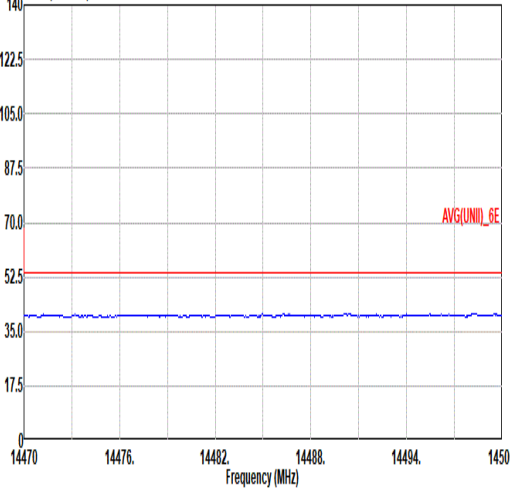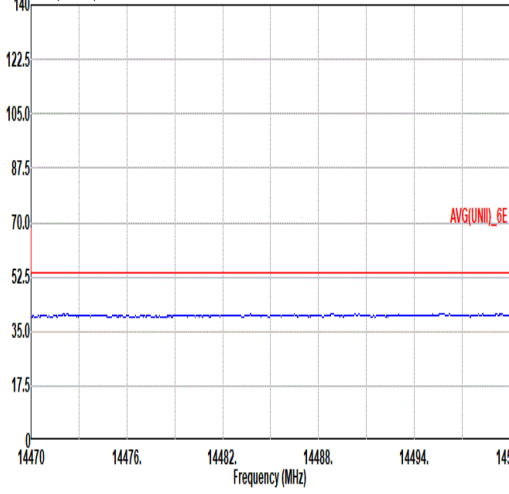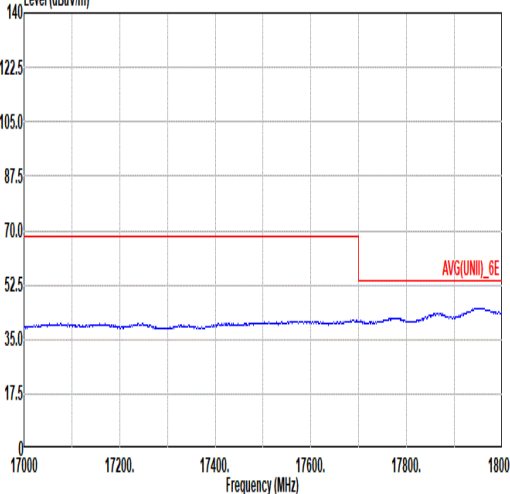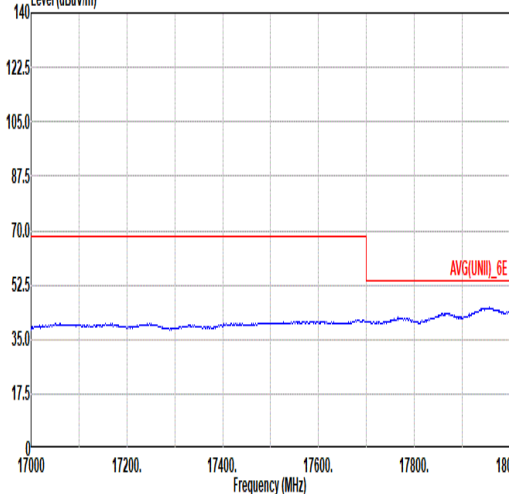

Mode	10	
	Harmonic	
	U-NII-8_6.875-7.125_802.11ax HE80_CH199_Full RU_6945MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL
	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL





		11																																																																																																												
Mode		Band Edge																																																																																																												
		U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full RU_7025MHz																																																																																																												
ANT		4+3																																																																																																												
Pol.	Horizontal											Fundamental																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.10</td><td>71.84</td><td>88.20</td><td>-16.36</td><td>58.53</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>305</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.10	71.84	88.20	-16.36	58.53	36.70	13.44	36.83	0.00	100	305	Peak	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7025.00</td><td>98.70</td><td>88.20</td><td>10.50</td><td>86.00</td><td>36.15</td><td>13.35</td><td>36.80</td><td>0.00</td><td>100</td><td>305</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	98.70	88.20	10.50	86.00	36.15	13.35	36.80	0.00	100	305	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7125.10	71.84	88.20	-16.36	58.53	36.70	13.44	36.83	0.00	100	305	Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7025.00	98.70	88.20	10.50	86.00	36.15	13.35	36.80	0.00	100	305	Peak																																																																																																		
Avg	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7125.10</td><td>62.42</td><td>68.20</td><td>-5.78</td><td>49.11</td><td>36.70</td><td>13.44</td><td>36.83</td><td>0.00</td><td>100</td><td>305</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.10	62.42	68.20	-5.78	49.11	36.70	13.44	36.83	0.00	100	305	Average	Level (dBuV/m) Date: 2026-02-14 Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>7025.00</td><td>91.01</td><td>68.20</td><td>22.81</td><td>78.31</td><td>36.15</td><td>13.35</td><td>36.80</td><td>0.00</td><td>100</td><td>305</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	91.01	68.20	22.81	78.31	36.15	13.35	36.80	0.00	100	305	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7125.10	62.42	68.20	-5.78	49.11	36.70	13.44	36.83	0.00	100	305	Average																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	7025.00	91.01	68.20	22.81	78.31	36.15	13.35	36.80	0.00	100	305	Average																																																																																																		







		11																																																																																																															
Mode		Band Edge																																																																																																															
		U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full RU_7025MHz																																																																																																															
ANT		4+3																																																																																																															
Pol.		Vertical											Fundamental																																																																																																				
Peak		Level (dBuV/m) Date: 2026-02-14 PEAK_BE(UNII)_6E Site : 03CH16-HY Condition: PEAK_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><td>1 7129.06</td><td>73.99</td><td>88.20</td><td>-14.21</td><td>60.66</td><td>36.72</td><td>13.44</td><td>36.83</td><td>0.00</td><td>338</td><td>164</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Peak	1 7129.06	73.99	88.20	-14.21	60.66	36.72	13.44	36.83	0.00	338	164	Peak	Level (dBuV/m) Date: 2026-02-14 PEAK(UNII)_6E Site : 03CH16-HY Condition: PEAK(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><td>1 7025.00</td><td>101.44</td><td>88.20</td><td>13.24</td><td>88.74</td><td>36.15</td><td>13.35</td><td>36.80</td><td>0.00</td><td>338</td><td>164</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Peak	1 7025.00	101.44	88.20	13.24	88.74	36.15	13.35	36.80	0.00	338	164	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Peak																																																																																																						
1 7129.06	73.99	88.20	-14.21	60.66	36.72	13.44	36.83	0.00	338	164	Peak																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Peak																																																																																																						
1 7025.00	101.44	88.20	13.24	88.74	36.15	13.35	36.80	0.00	338	164	Peak																																																																																																						
Avg		Level (dBuV/m) Date: 2026-02-14 AVG_BE(UNII)_6E Site : 03CH16-HY Condition: AVG_BE(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><td>1 7126.86</td><td>65.02</td><td>68.20</td><td>-3.18</td><td>51.70</td><td>36.71</td><td>13.44</td><td>36.83</td><td>0.00</td><td>338</td><td>164</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Average	1 7126.86	65.02	68.20	-3.18	51.70	36.71	13.44	36.83	0.00	338	164	Average	Level (dBuV/m) Date: 2026-02-14 AVG(UNII)_6E Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><td>1 7025.00</td><td>93.74</td><td>-----</td><td>-----</td><td>81.06</td><td>36.13</td><td>13.34</td><td>36.79</td><td>0.00</td><td>338</td><td>164</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Average	1 7025.00	93.74	-----	-----	81.06	36.13	13.34	36.79	0.00	338	164	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Average																																																																																																						
1 7126.86	65.02	68.20	-3.18	51.70	36.71	13.44	36.83	0.00	338	164	Average																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Average																																																																																																						
1 7025.00	93.74	-----	-----	81.06	36.13	13.34	36.79	0.00	338	164	Average																																																																																																						

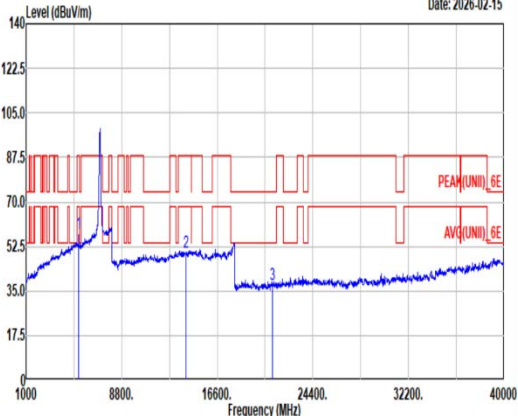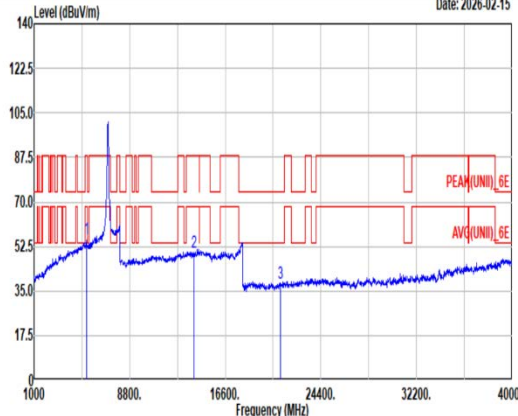

Mode	11																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full RU_7025MHz																																																																																																																									
ANT	4+3																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-15  Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m 88HA9170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5270.00</td><td>57.79</td><td>88.20</td><td>-30.41</td><td>67.33</td><td>--</td><td>0.00</td><td>0.00</td><td>-9.54</td><td>100 334 Peak</td></tr><tr><td>2 14050.00</td><td>50.35</td><td>88.20</td><td>-37.85</td><td>59.89</td><td>--</td><td>0.00</td><td>0.00</td><td>-9.54</td><td>-- -- Peak</td></tr><tr><td>3 21075.00</td><td>37.63</td><td>74.00</td><td>-36.37</td><td>57.95</td><td>38.00</td><td>5.96</td><td>54.74</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5270.00	57.79	88.20	-30.41	67.33	--	0.00	0.00	-9.54	100 334 Peak	2 14050.00	50.35	88.20	-37.85	59.89	--	0.00	0.00	-9.54	-- -- Peak	3 21075.00	37.63	74.00	-36.37	57.95	38.00	5.96	54.74	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-02-15  Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m 88HA9170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5270.00</td><td>55.36</td><td>88.20</td><td>-32.84</td><td>64.90</td><td>--</td><td>0.00</td><td>0.00</td><td>-9.54</td><td>300 106 Peak</td></tr><tr><td>2 14050.00</td><td>50.26</td><td>88.20</td><td>-37.94</td><td>59.80</td><td>--</td><td>0.00</td><td>0.00</td><td>-9.54</td><td>-- -- Peak</td></tr><tr><td>3 21075.00</td><td>37.85</td><td>74.00</td><td>-36.15</td><td>58.17</td><td>38.00</td><td>5.96</td><td>54.74</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5270.00	55.36	88.20	-32.84	64.90	--	0.00	0.00	-9.54	300 106 Peak	2 14050.00	50.26	88.20	-37.94	59.80	--	0.00	0.00	-9.54	-- -- Peak	3 21075.00	37.85	74.00	-36.15	58.17	38.00	5.96	54.74	-9.54	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 5270.00	57.79	88.20	-30.41	67.33	--	0.00	0.00	-9.54	100 334 Peak																																																																																																																	
2 14050.00	50.35	88.20	-37.85	59.89	--	0.00	0.00	-9.54	-- -- Peak																																																																																																																	
3 21075.00	37.63	74.00	-36.37	57.95	38.00	5.96	54.74	-9.54	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 5270.00	55.36	88.20	-32.84	64.90	--	0.00	0.00	-9.54	300 106 Peak																																																																																																																	
2 14050.00	50.26	88.20	-37.94	59.80	--	0.00	0.00	-9.54	-- -- Peak																																																																																																																	
3 21075.00	37.85	74.00	-36.15	58.17	38.00	5.96	54.74	-9.54	-- -- Peak																																																																																																																	

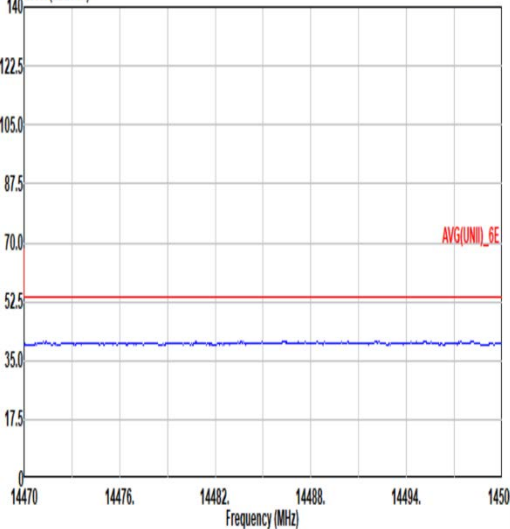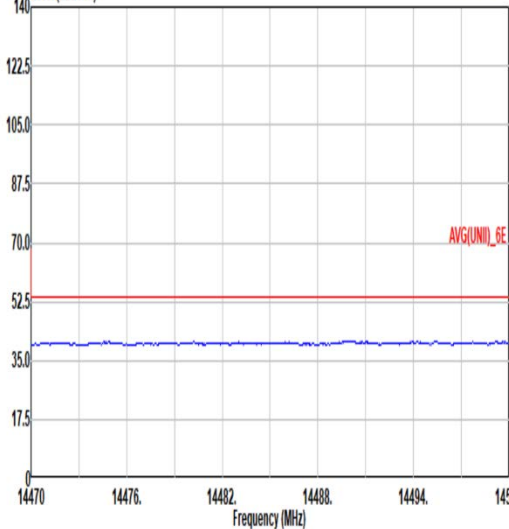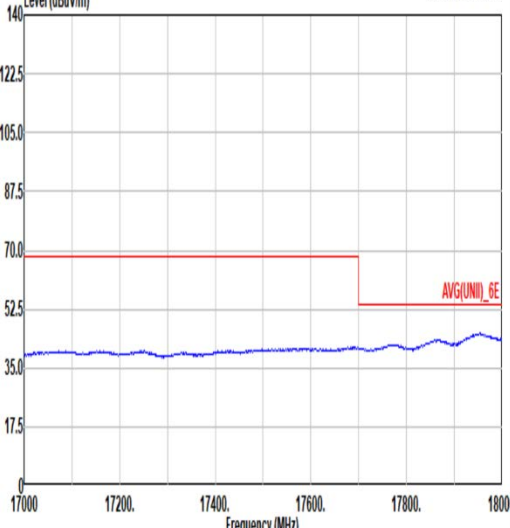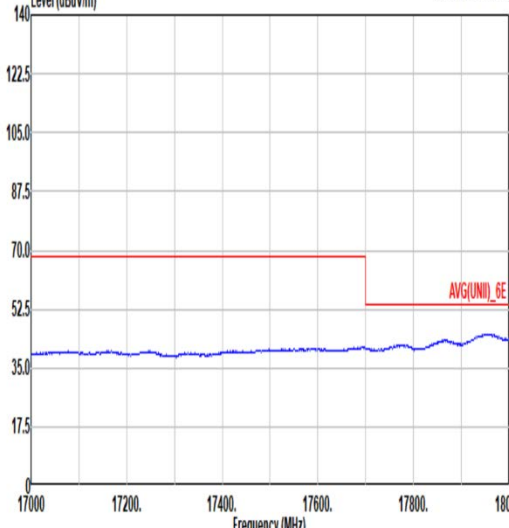

Mode	11	
	Harmonic	
	U-NII-8_6.875-7.125_802.11ax HE80_CH215_Full RU_7025MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL
	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 HORIZONTAL	Level (dBuV/m) Date: 2026-02-14  Site : 03CH16-HY Condition: AVG(UNII)_6E 3m 91280-1522_250327 VERTICAL



Mode	12																																																																																																																																																																																													
	LF																																																																																																																																																																																													
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full RU_7085MHz																																																																																																																																																																																													
ANT	4+3																																																																																																																																																																																													
Pol.	Horizontal					Vertical																																																																																																																																																																																								
QP/ Peak	Level (dBuV/m) Date: 2026-02-24 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>38.73</td><td>24.37</td><td>40.00</td><td>-15.63</td><td>35.34</td><td>20.12</td><td>1.15</td><td>32.25</td><td>0.01 -- -- Peak</td></tr><tr><td>2</td><td>198.78</td><td>30.72</td><td>43.50</td><td>-12.78</td><td>45.76</td><td>14.66</td><td>2.39</td><td>32.16</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>272.58</td><td>30.83</td><td>46.00</td><td>-15.17</td><td>41.70</td><td>18.49</td><td>2.79</td><td>32.22</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>276.38</td><td>32.51</td><td>46.00</td><td>-13.49</td><td>43.46</td><td>18.39</td><td>2.81</td><td>32.22</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>754.59</td><td>28.85</td><td>46.00</td><td>-17.15</td><td>28.94</td><td>27.53</td><td>4.56</td><td>32.32</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>942.77</td><td>32.92</td><td>46.00</td><td>-13.08</td><td>29.01</td><td>29.84</td><td>5.10</td><td>31.24</td><td>0.21 -- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	38.73	24.37	40.00	-15.63	35.34	20.12	1.15	32.25	0.01 -- -- Peak	2	198.78	30.72	43.50	-12.78	45.76	14.66	2.39	32.16	0.07 -- -- Peak	3	272.58	30.83	46.00	-15.17	41.70	18.49	2.79	32.22	0.07 -- -- Peak	4	276.38	32.51	46.00	-13.49	43.46	18.39	2.81	32.22	0.07 -- -- Peak	5	754.59	28.85	46.00	-17.15	28.94	27.53	4.56	32.32	0.14 -- -- Peak	6	942.77	32.92	46.00	-13.08	29.01	29.84	5.10	31.24	0.21 -- -- Peak	Level (dBuV/m) Date: 2026-02-24 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>38.73</td><td>32.33</td><td>40.00</td><td>-7.67</td><td>43.30</td><td>20.12</td><td>1.15</td><td>32.25</td><td>0.01 199 219 QP</td></tr><tr><td>2</td><td>178.41</td><td>28.26</td><td>43.50</td><td>-15.24</td><td>43.36</td><td>14.76</td><td>2.30</td><td>32.18</td><td>0.02 -- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>23.76</td><td>46.00</td><td>-22.24</td><td>33.65</td><td>19.51</td><td>2.75</td><td>32.22</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>407.33</td><td>26.87</td><td>46.00</td><td>-19.13</td><td>34.44</td><td>21.22</td><td>3.35</td><td>32.21</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>735.19</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>29.57</td><td>27.24</td><td>4.51</td><td>32.35</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>957.32</td><td>32.45</td><td>46.00</td><td>-13.55</td><td>27.91</td><td>30.27</td><td>5.14</td><td>31.09</td><td>0.22 -- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	38.73	32.33	40.00	-7.67	43.30	20.12	1.15	32.25	0.01 199 219 QP	2	178.41	28.26	43.50	-15.24	43.36	14.76	2.30	32.18	0.02 -- -- Peak	3	264.74	23.76	46.00	-22.24	33.65	19.51	2.75	32.22	0.07 -- -- Peak	4	407.33	26.87	46.00	-19.13	34.44	21.22	3.35	32.21	0.07 -- -- Peak	5	735.19	29.11	46.00	-16.89	29.57	27.24	4.51	32.35	0.14 -- -- Peak	6	957.32	32.45	46.00	-13.55	27.91	30.27	5.14	31.09	0.22 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																					
1	38.73	24.37	40.00	-15.63	35.34	20.12	1.15	32.25	0.01 -- -- Peak																																																																																																																																																																																					
2	198.78	30.72	43.50	-12.78	45.76	14.66	2.39	32.16	0.07 -- -- Peak																																																																																																																																																																																					
3	272.58	30.83	46.00	-15.17	41.70	18.49	2.79	32.22	0.07 -- -- Peak																																																																																																																																																																																					
4	276.38	32.51	46.00	-13.49	43.46	18.39	2.81	32.22	0.07 -- -- Peak																																																																																																																																																																																					
5	754.59	28.85	46.00	-17.15	28.94	27.53	4.56	32.32	0.14 -- -- Peak																																																																																																																																																																																					
6	942.77	32.92	46.00	-13.08	29.01	29.84	5.10	31.24	0.21 -- -- Peak																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																					
1	38.73	32.33	40.00	-7.67	43.30	20.12	1.15	32.25	0.01 199 219 QP																																																																																																																																																																																					
2	178.41	28.26	43.50	-15.24	43.36	14.76	2.30	32.18	0.02 -- -- Peak																																																																																																																																																																																					
3	264.74	23.76	46.00	-22.24	33.65	19.51	2.75	32.22	0.07 -- -- Peak																																																																																																																																																																																					
4	407.33	26.87	46.00	-19.13	34.44	21.22	3.35	32.21	0.07 -- -- Peak																																																																																																																																																																																					
5	735.19	29.11	46.00	-16.89	29.57	27.24	4.51	32.35	0.14 -- -- Peak																																																																																																																																																																																					
6	957.32	32.45	46.00	-13.55	27.91	30.27	5.14	31.09	0.22 -- -- Peak																																																																																																																																																																																					




Mode	13																																																																																																	
	SHF																																																																																																	
	U-NII-8_6.875-7.125_802.11ax HE40_CH227_Full RU_7085MHz																																																																																																	
ANT	4+3																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak	Level (dBuV/m) Date: 2026-02-15 PEAK(UNII)_6E AVG(UNII)_6E 180002240026800312003560040000 Frequency (MHz) Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBH49170_1223_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>39857.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>60.32</td><td>44.73</td><td>8.41</td><td>56.00</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	39857.00	47.92	74.00	-26.08	60.32	44.73	8.41	56.00	-9.54	--	Peak	Level (dBuV/m) Date: 2026-02-15 PEAK(UNII)_6E AVG(UNII)_6E 180002240026800312003560040000 Frequency (MHz) Site : 03CH16-HY Condition: PEAK(UNII)_6E 1m BBH49170_1223_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>38944.00</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>61.75</td><td>44.38</td><td>8.27</td><td>56.92</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	38944.00	47.94	74.00	-26.06	61.75	44.38	8.27	56.92	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	39857.00	47.92	74.00	-26.08	60.32	44.73	8.41	56.00	-9.54	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	38944.00	47.94	74.00	-26.06	61.75	44.38	8.27	56.92	-9.54	--	Peak																																																																																							



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
4+3	802.11a	99.51	-	-	10Hz	0.02
4+3	802.11ax HE20 Full RU	99.31	-	-	10Hz	0.03
4+3	802.11ax HE20 26 RU	97.88	1615	0.62	680Hz	0.09
4+3	802.11ax HE20 52 RU	97.99	1460	0.68	750Hz	0.09
4+3	802.11ax HE20 106 RU	97.75	1305	0.77	820Hz	0.10
4+3	802.11ax HE40 Full RU	98.66	-	-	10Hz	0.06
4+3	802.11ax HE80 Full RU	97.35	736	1.36	1.5kHz	0.12

MIMO <Ant. 4+3>

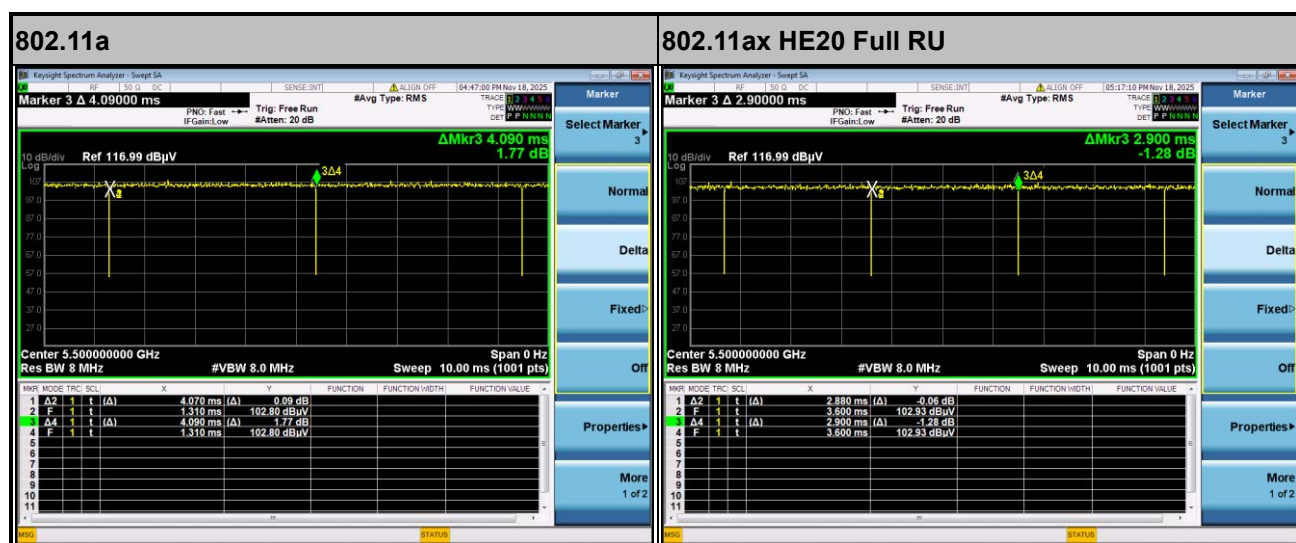




802.11ax HE20 26 RU

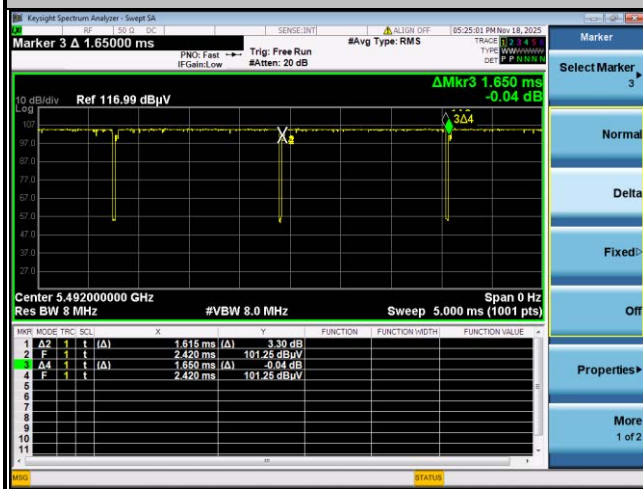

802.11ax HE20 52 RU




802.11ax HE20 106 RU

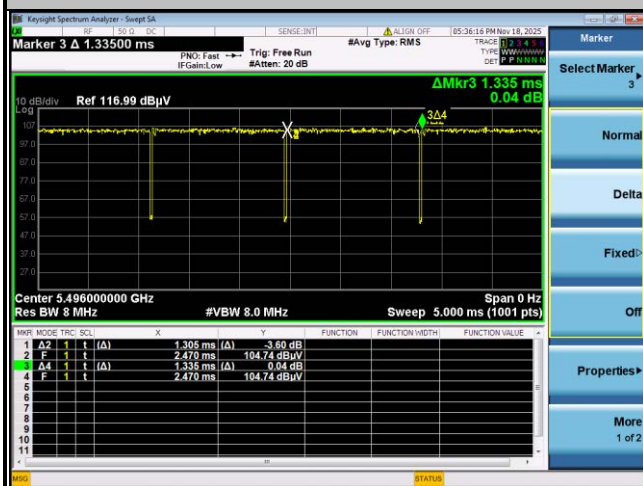

802.11ax HE40 Full RU



802.11ax HE80 Full RU

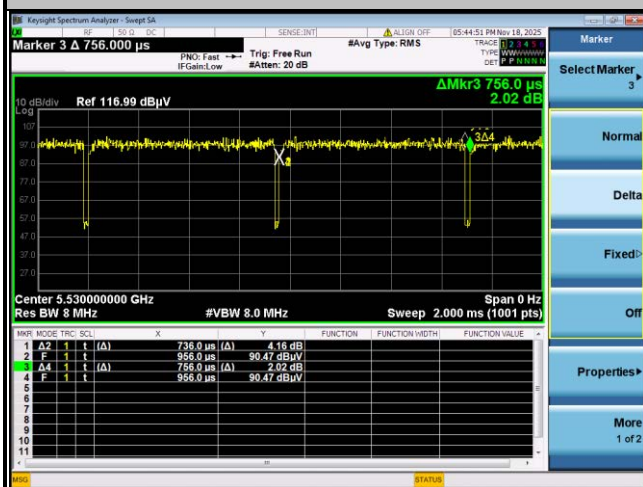

—THE END—