Mode	107	
	Harmonic	
	U-NII-4_5.85-5.895_802.11n HT40_CH175_5875MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	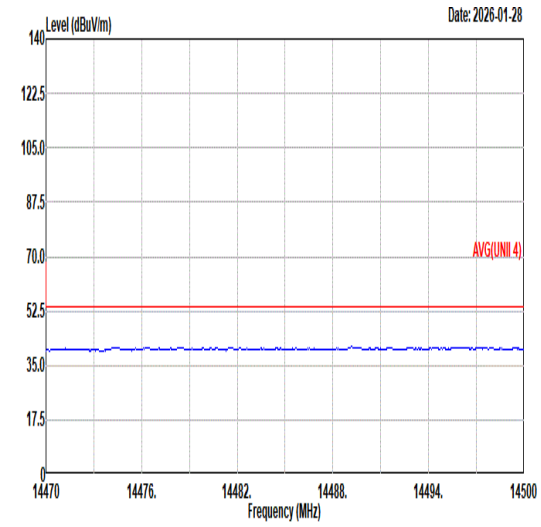 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	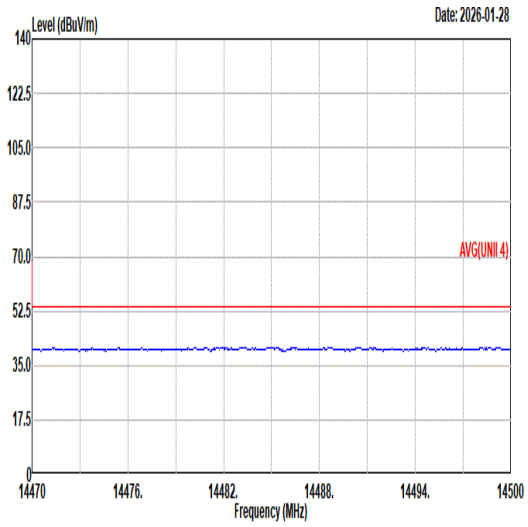 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	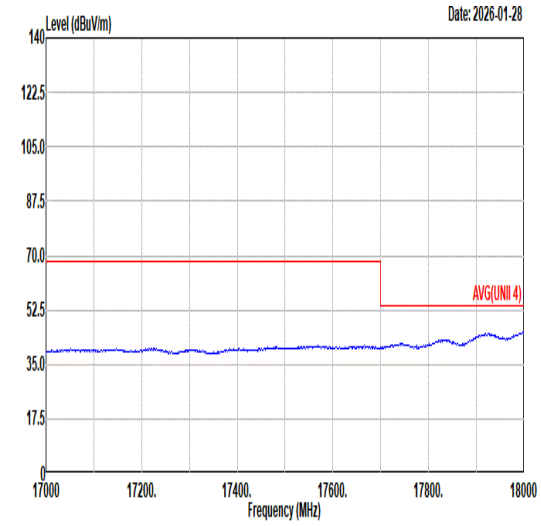 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	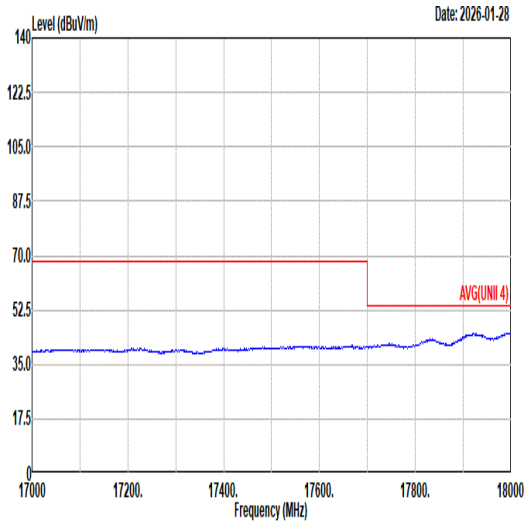 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	108	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	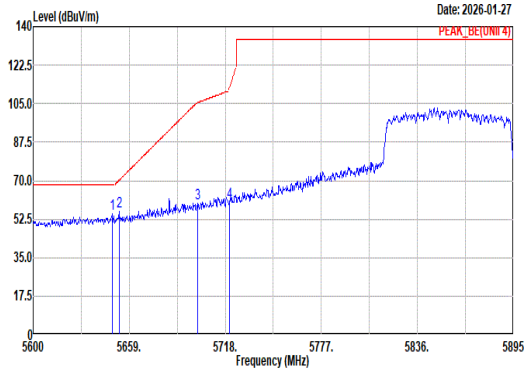 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5648.68 54.82 68.20 -13.38 45.94 33.19 11.96 36.27 0.00 100 59 Peak 2 5652.81 55.79 70.28 -14.49 46.88 33.22 11.96 36.27 0.00 100 59 Peak 3 5700.89 59.88 105.45 -45.57 50.55 33.60 12.01 36.28 0.00 100 59 Peak 4 5720.36 60.43 111.62 -51.19 51.01 33.68 12.03 36.29 0.00 100 59 Peak	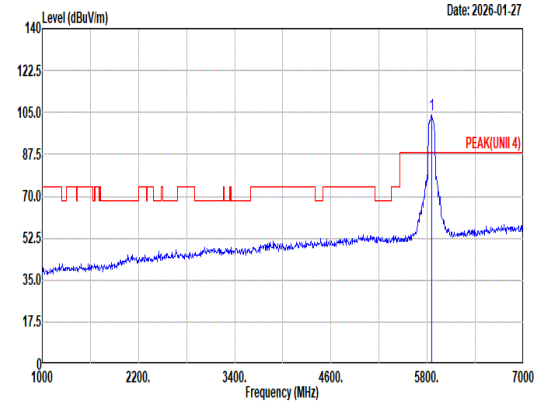 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 104.09 ------ ------ 94.03 34.21 12.17 36.32 0.00 100 59 Peak
Avg	Blank	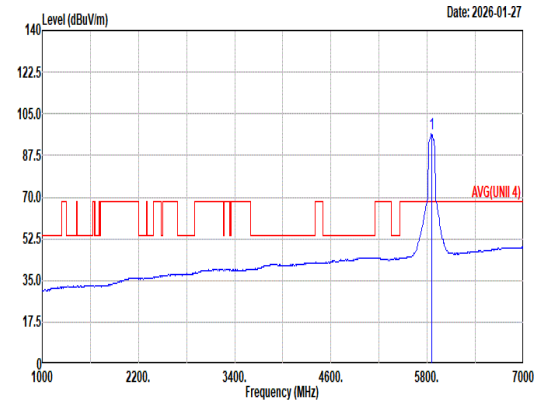 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 96.87 ------ ------ 86.83 34.19 12.17 36.32 0.00 100 59 Average

Mode	108	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	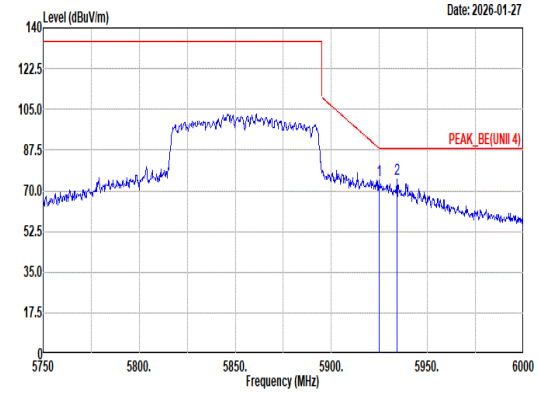 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.75 74.36 88.38 -14.02 64.15 34.30 12.25 36.34 0.00 100 59 Peak 2 5934.00 75.10 88.20 -13.10 64.88 34.30 12.26 36.34 0.00 100 59 Peak	Blank
Avg	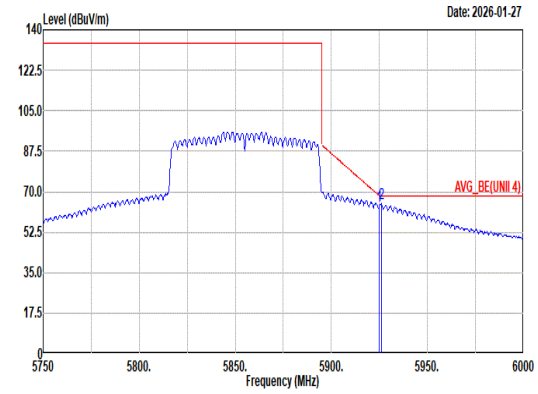 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 64.13 68.20 -4.07 53.92 34.30 12.25 36.34 0.00 100 59 Average 2 5926.25 64.83 68.20 -3.37 54.61 34.30 12.26 36.34 0.00 100 59 Average	Blank

Mode	108	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	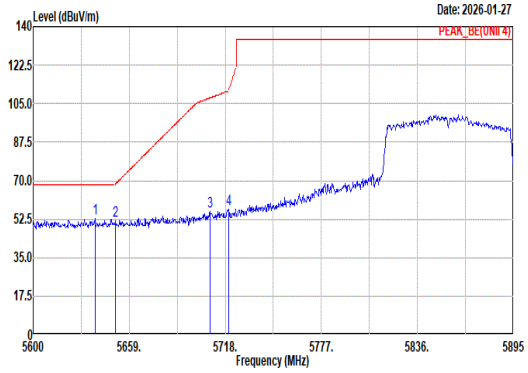 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5638.06 53.00 68.20 -15.20 44.17 33.15 11.95 36.27 0.00 300 68 Peak 2 5650.74 51.59 68.75 -17.16 42.69 33.21 11.96 36.27 0.00 300 68 Peak 3 5708.86 55.85 107.68 -51.83 46.47 33.64 12.02 36.28 0.00 300 68 Peak 4 5720.07 57.04 110.95 -53.91 47.62 33.68 12.03 36.29 0.00 300 68 Peak	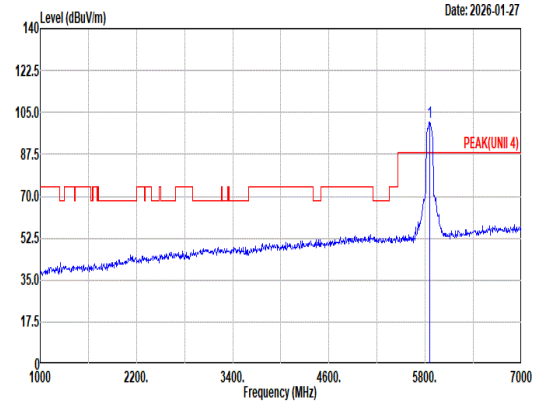 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 100.83 ------ ------ 90.79 34.19 12.17 36.32 0.00 300 68 Peak
Avg	Blank	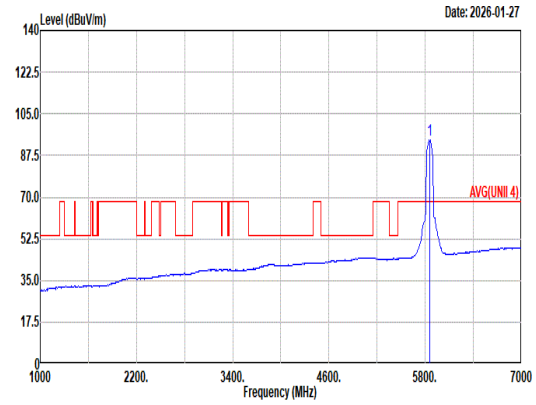 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 94.13 ------ ------ 84.09 34.19 12.17 36.32 0.00 300 68 Average

Mode	108	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	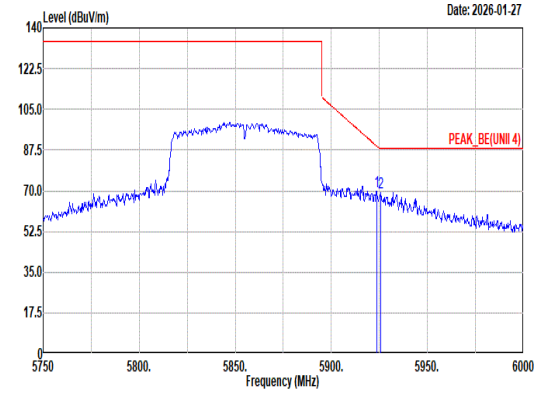 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 69.54 89.30 -19.76 59.33 34.30 12.25 36.34 0.00 300 68 Peak 2 5925.75 69.29 88.20 -18.91 59.08 34.30 12.25 36.34 0.00 300 68 Peak	Blank
Avg	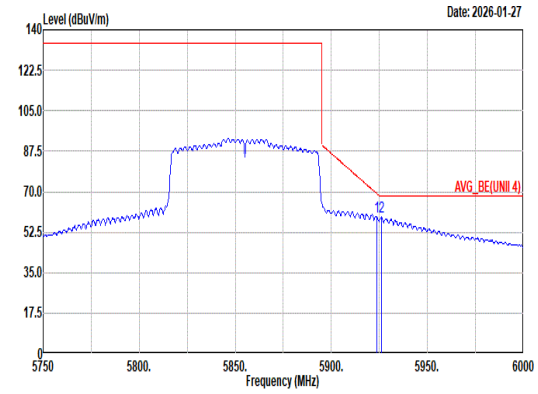 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.200kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.75 59.32 69.11 -9.79 49.11 34.30 12.25 36.34 0.00 300 68 Average 2 5926.00 58.95 68.20 -9.25 48.74 34.30 12.25 36.34 0.00 300 68 Average	Blank

Mode	108	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	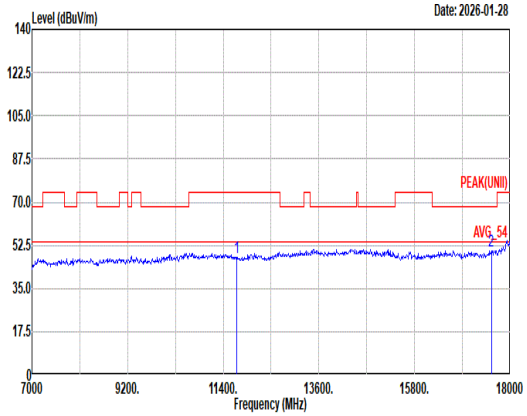 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 47.80 74.00 -26.20 57.42 38.62 17.16 66.13 0.73 -- -- Peak 2 17565.00 50.18 68.20 -18.02 54.33 39.53 21.18 65.69 0.83 -- -- Peak	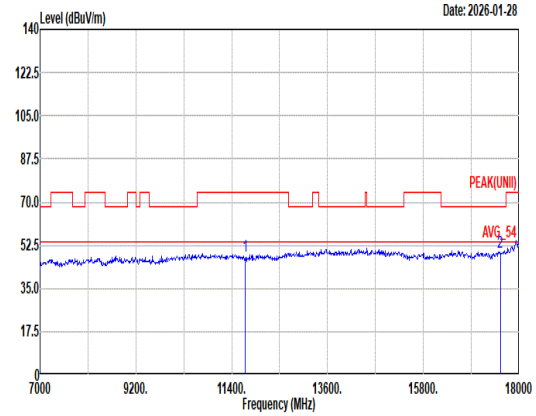 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 47.82 74.00 -26.18 57.44 38.62 17.16 66.13 0.73 -- -- Peak 2 17565.00 49.84 68.20 -18.36 53.99 39.53 21.18 65.69 0.83 -- -- Peak

Mode	108	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	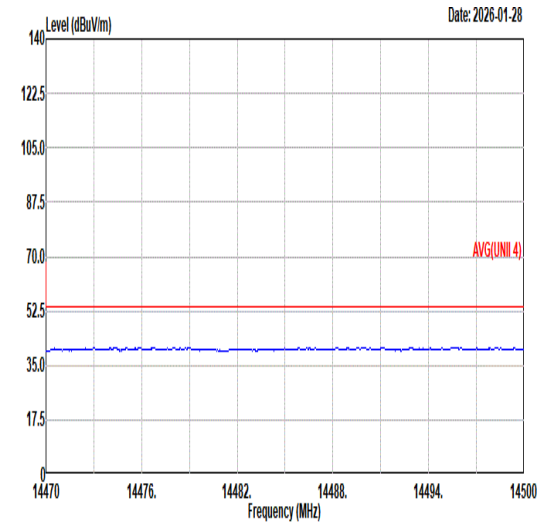 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	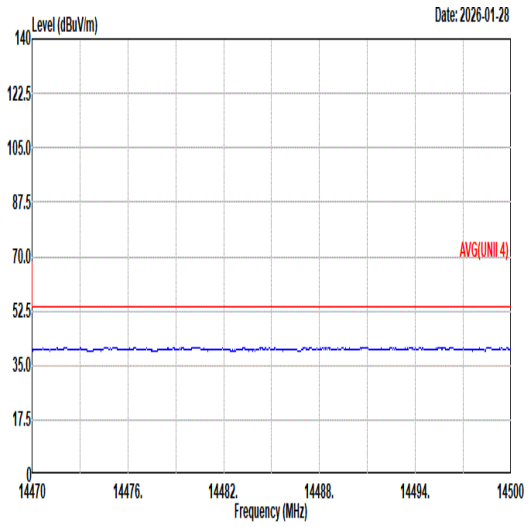 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	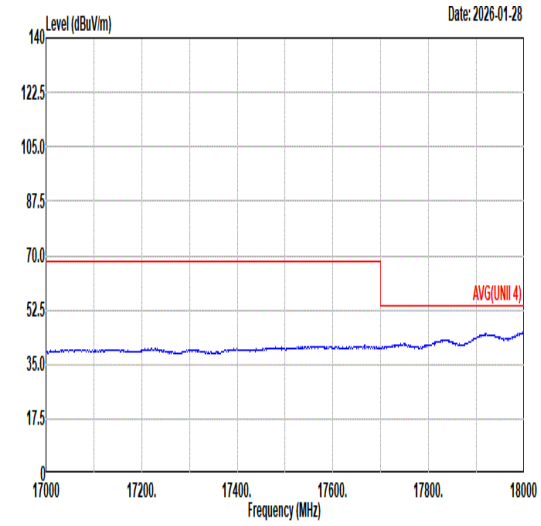 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	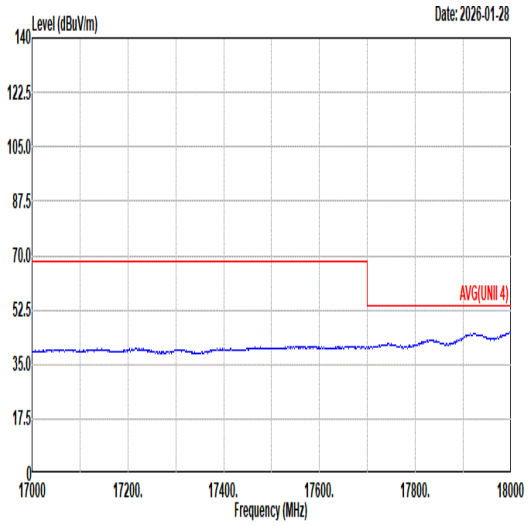 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	109
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	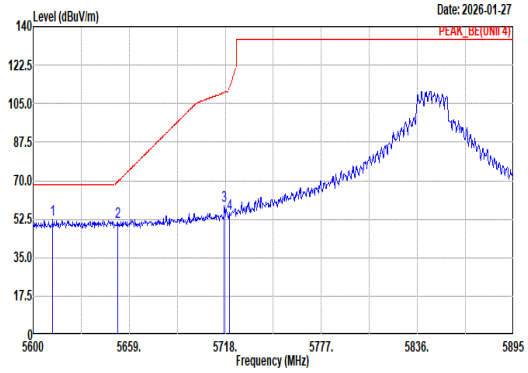 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5612.10 52.14 68.20 -16.06 43.43 33.05 11.92 36.26 0.00 100 60 Peak 2 5651.92 51.27 69.63 -18.36 42.36 33.22 11.96 36.27 0.00 100 60 Peak 3 5717.41 58.53 110.08 -51.55 49.12 33.67 12.03 36.29 0.00 100 60 Peak 4 5720.36 55.00 111.62 -56.62 45.58 33.68 12.03 36.29 0.00 100 60 Peak	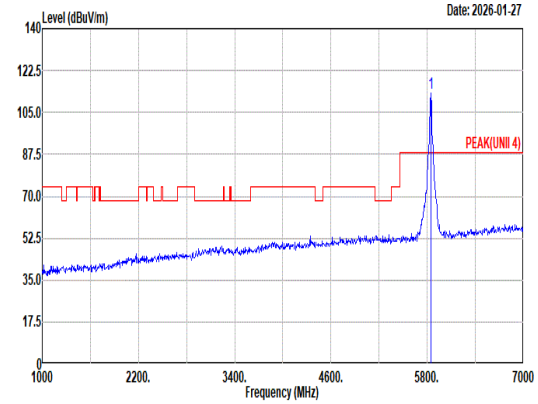 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 113.26 ------ ------ 103.25 34.17 12.16 36.32 0.00 100 60 Peak
Avg	Blank	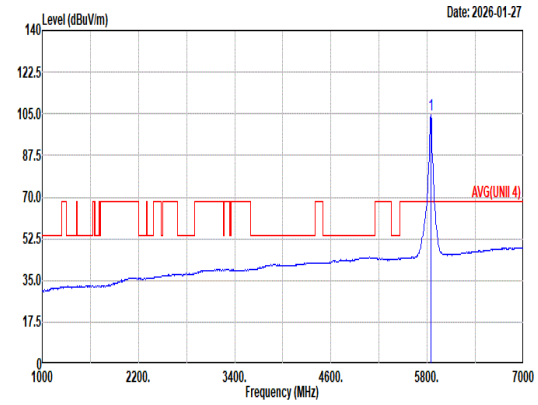 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 104.67 ------ ------ 94.66 34.17 12.16 36.32 0.00 100 60 Average

Mode	109	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	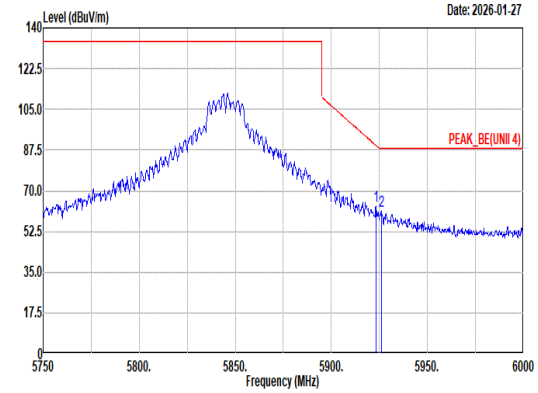 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.25 63.27 89.48 -26.21 53.06 34.30 12.25 36.34 0.00 100 60 Peak 2 5926.00 61.49 88.20 -26.71 51.28 34.30 12.25 36.34 0.00 100 60 Peak	Blank
Avg	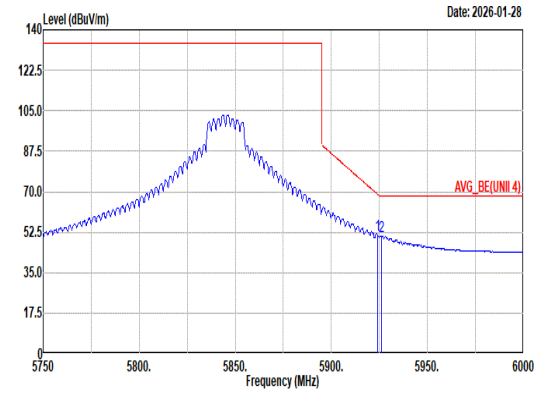 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 51.47 68.93 -17.46 41.26 34.30 12.25 36.34 0.00 100 60 Average 2 5926.00 50.96 68.20 -17.24 40.75 34.30 12.25 36.34 0.00 100 60 Average	Blank

Mode	109	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	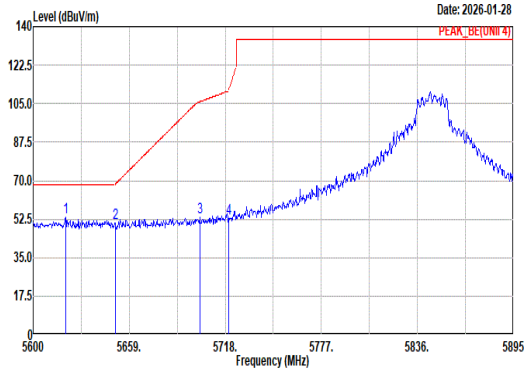 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5620.06 53.31 68.20 -14.89 44.56 33.08 11.93 36.26 0.00 300 77 Peak 2 5650.45 50.88 68.53 -17.65 41.99 33.20 11.96 36.27 0.00 300 77 Peak 3 5702.37 53.13 105.86 -52.73 43.79 33.61 12.01 36.28 0.00 300 77 Peak 4 5720.07 52.76 110.95 -58.19 43.34 33.68 12.03 36.29 0.00 300 77 Peak	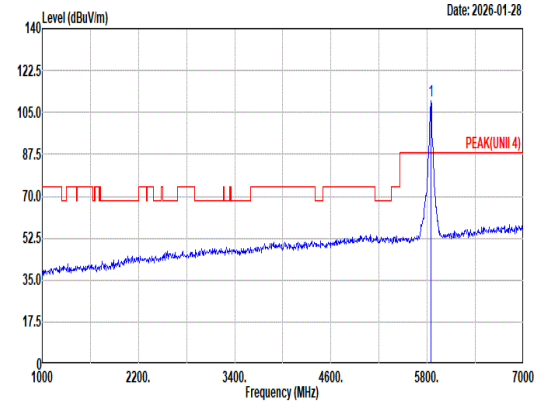 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 109.77 ------ ------ 99.73 34.19 12.17 36.32 0.00 300 77 Peak
Avg	Blank	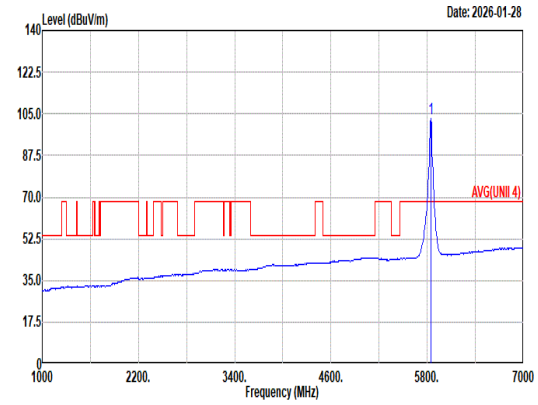 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 103.01 ------ ------ 92.97 34.19 12.17 36.32 0.00 300 77 Average

Mode	109	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	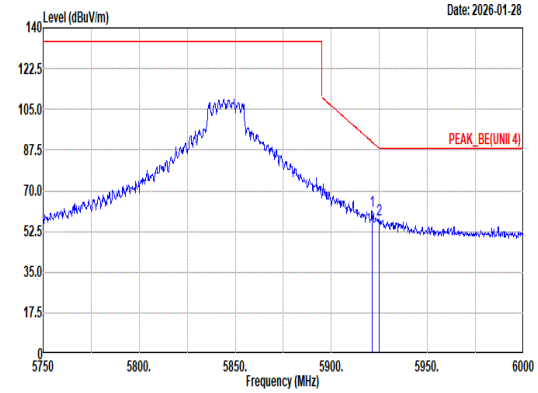 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5921.25 61.28 90.94 -29.66 51.07 34.30 12.25 36.34 0.00 300 77 Peak 2 5925.00 57.74 88.20 -30.46 47.53 34.30 12.25 36.34 0.00 300 77 Peak	Blank
Avg	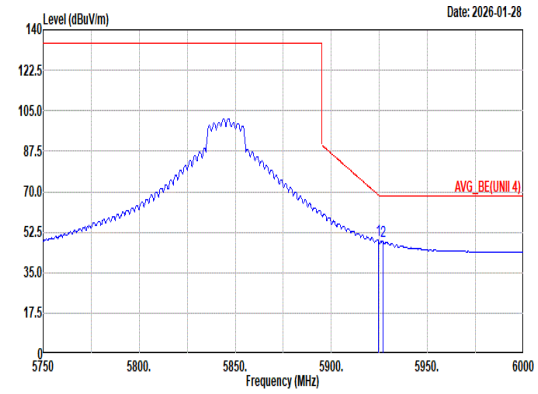 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.50 48.92 68.57 -19.65 38.71 34.30 12.25 36.34 0.00 300 77 Average 2 5926.75 48.47 68.20 -19.73 38.25 34.30 12.26 36.34 0.00 300 77 Average	Blank

Mode	109	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	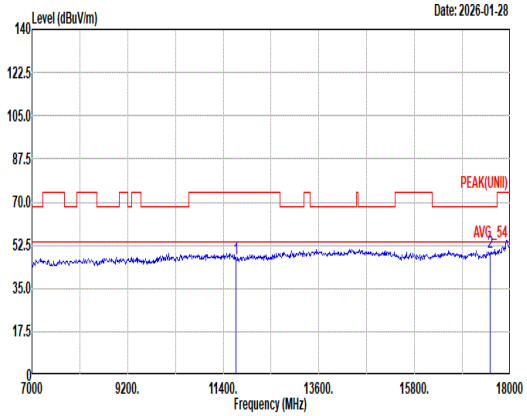 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 47.17 74.00 -26.83 56.80 38.60 17.15 66.12 0.74 -- -- Peak 2 17535.00 49.49 68.20 -18.71 53.84 39.38 21.16 65.72 0.83 -- -- Peak	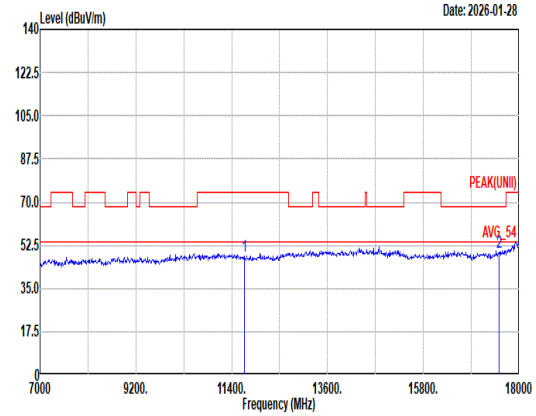 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11690.00 47.95 74.00 -26.05 57.58 38.60 17.15 66.12 0.74 -- -- Peak 2 17535.00 49.90 68.20 -18.30 54.25 39.38 21.16 65.72 0.83 -- -- Peak

Mode	109	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	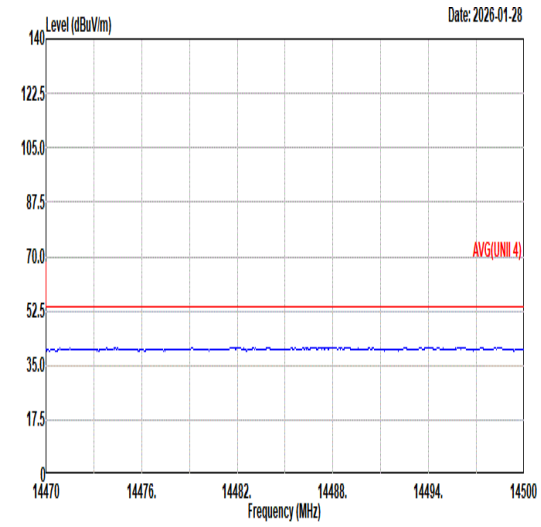 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	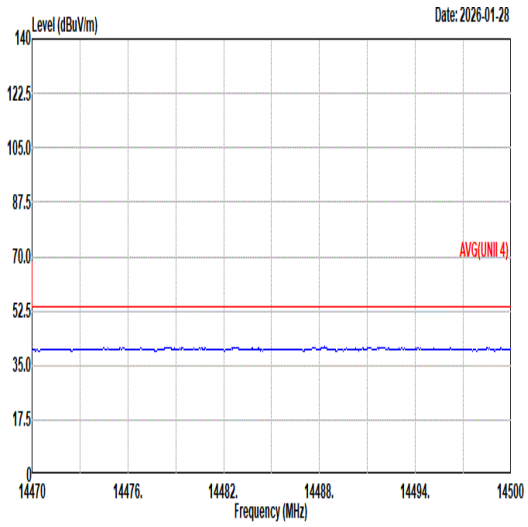 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	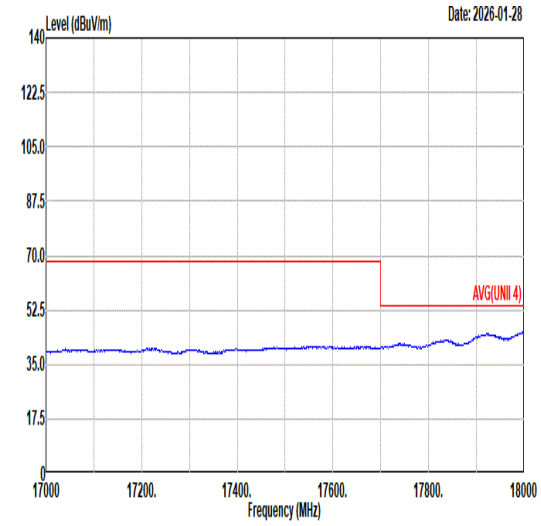 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	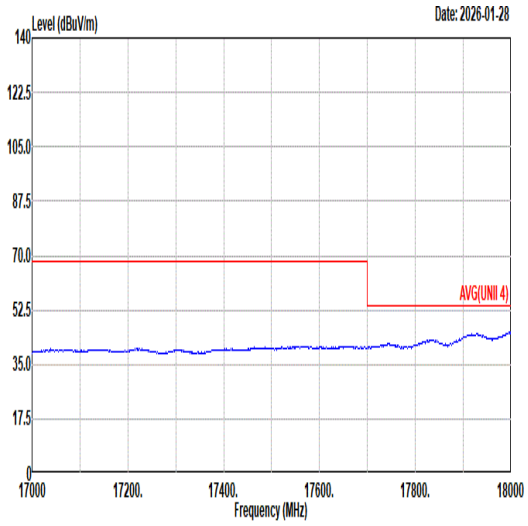 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	110
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_ 26/0 RU_5845MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	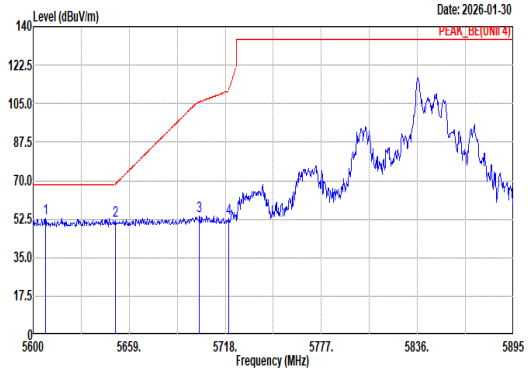 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5607.67 52.96 68.20 -15.24 44.27 33.03 11.92 36.26 0.00 101 60 Peak 2 5650.74 51.52 68.75 -17.23 42.62 33.21 11.96 36.27 0.00 101 60 Peak 3 5702.07 53.84 105.78 -51.94 44.50 33.61 12.01 36.28 0.00 101 60 Peak 4 5720.07 53.00 110.95 -57.95 43.58 33.68 12.03 36.29 0.00 101 60 Peak	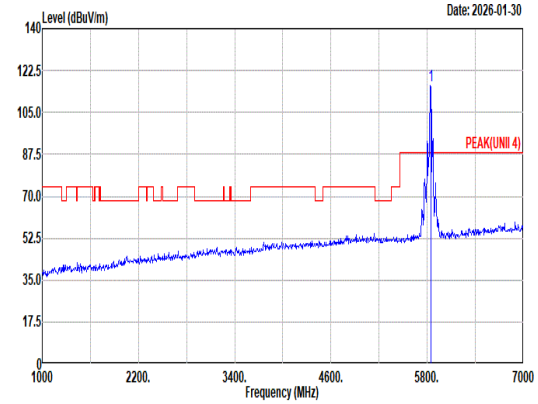 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 116.03 ------ ------ 106.06 34.14 12.15 36.32 0.00 101 60 Peak
Avg	Blank	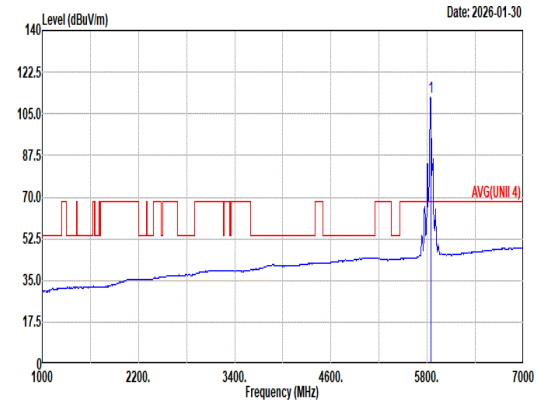 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 111.91 ------ ------ 101.94 34.14 12.15 36.32 0.00 101 60 Average

Mode	110	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_ 26/0 RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	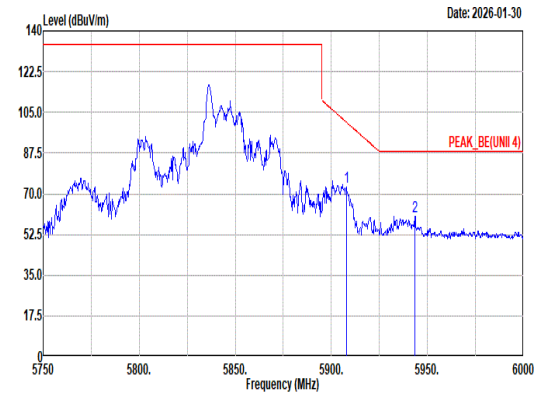 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5907.75 72.95 100.84 -27.89 62.76 34.30 12.23 36.34 0.00 101 60 Peak 2 5943.50 60.35 88.20 -27.85 50.12 34.30 12.28 36.35 0.00 101 60 Peak	Blank
Avg	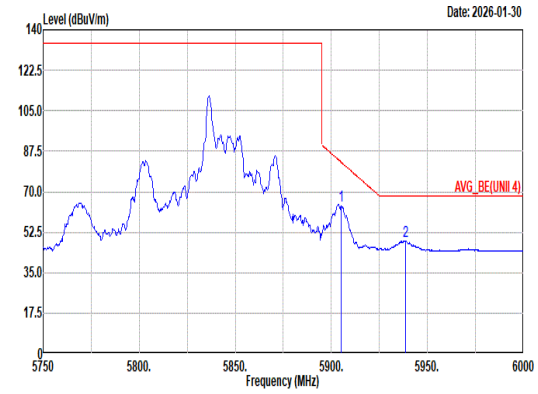 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5905.25 64.04 82.67 -18.63 53.85 34.30 12.23 36.34 0.00 101 60 Average 2 5938.50 48.65 68.20 -19.55 38.42 34.30 12.27 36.34 0.00 101 60 Average	Blank

Mode	110	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_ 26/0 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	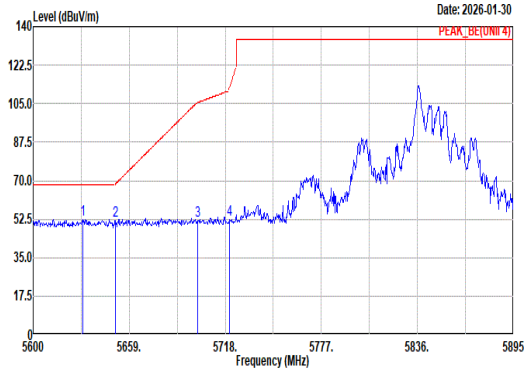 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.68 52.32 68.20 -15.88 43.52 33.12 11.94 36.26 0.00 300 94 Peak 2 5650.45 51.83 68.53 -16.70 42.94 33.20 11.96 36.27 0.00 300 94 Peak 3 5701.19 51.83 105.53 -53.70 42.50 33.60 12.01 36.28 0.00 300 94 Peak 4 5720.36 52.21 111.62 -59.41 42.79 33.68 12.03 36.29 0.00 300 94 Peak	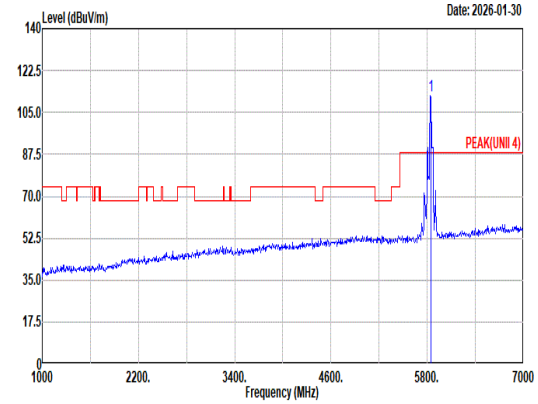 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 112.21 ------ ------ 102.24 34.14 12.15 36.32 0.00 300 94 Peak
Avg	Blank	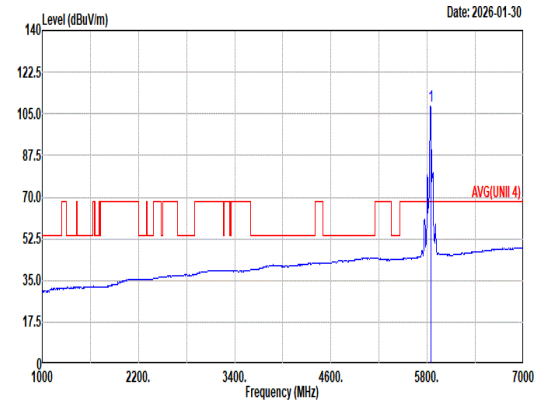 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 108.42 ------ ------ 98.45 34.14 12.15 36.32 0.00 300 94 Average

Mode	110	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_ 26/0 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	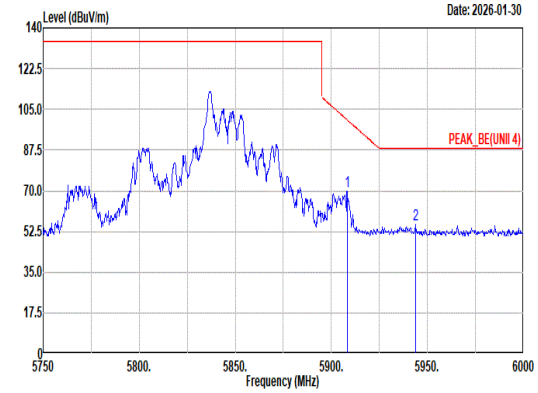 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5908.25 69.51 100.47 -30.96 59.32 34.30 12.23 36.34 0.00 300 94 Peak 2 5943.75 55.22 88.20 -32.98 44.99 34.30 12.28 36.35 0.00 300 94 Peak	Blank
Avg	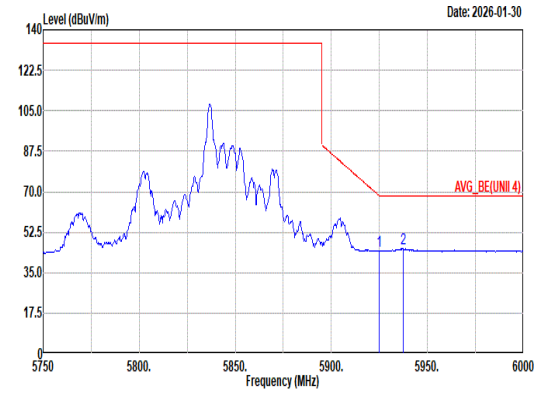 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 44.16 68.20 -24.04 33.95 34.30 12.25 36.34 0.00 300 94 Average 2 5937.50 45.29 68.20 -22.91 35.06 34.30 12.27 36.34 0.00 300 94 Average	Blank

Mode	111	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_52/37 RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	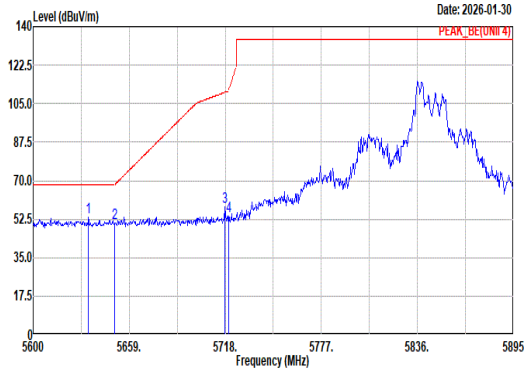 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5633.93 53.16 68.20 -15.04 44.34 33.14 11.94 36.26 0.00 100 57 Peak 2 5650.15 50.58 68.31 -17.73 41.69 33.20 11.96 36.27 0.00 100 57 Peak 3 5717.71 57.87 110.16 -52.29 48.46 33.67 12.03 36.29 0.00 100 57 Peak 4 5720.07 54.11 110.95 -56.84 44.69 33.68 12.03 36.29 0.00 100 57 Peak	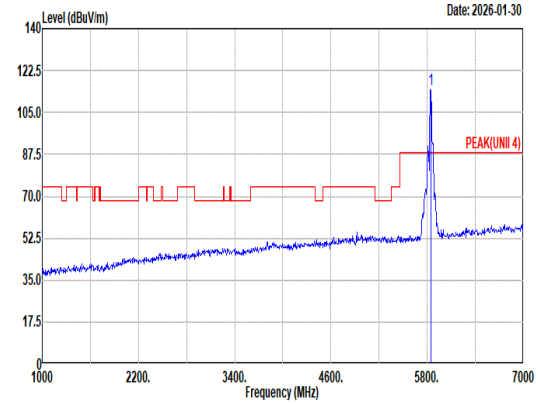 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 114.66 ------ ------ 104.69 34.14 12.15 36.32 0.00 100 57 Peak
Avg	Blank	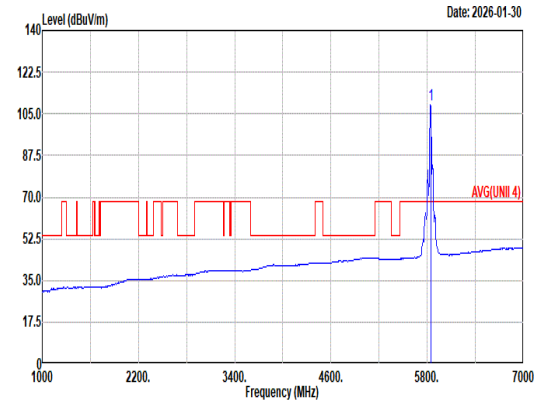 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 109.05 ------ ------ 99.08 34.14 12.15 36.32 0.00 100 57 Average

Mode	111	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_52/37 RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	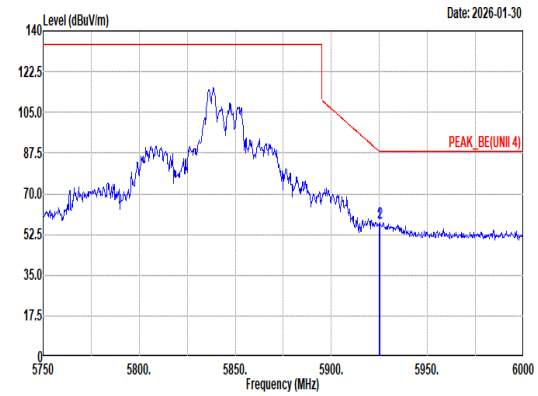 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 57.18 88.20 -31.02 46.97 34.30 12.25 36.34 0.00 100 57 Peak 2 5925.25 57.67 88.20 -30.53 47.46 34.30 12.25 36.34 0.00 100 57 Peak	Blank
Avg	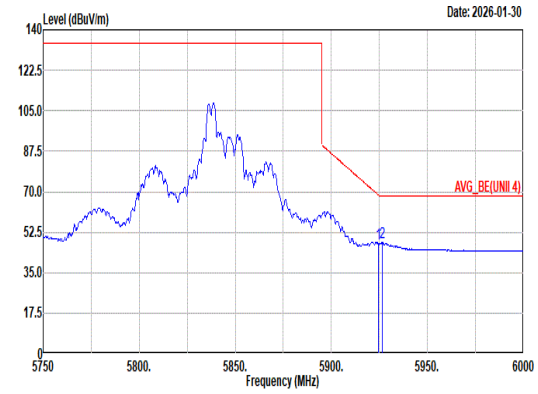 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.50 47.64 68.57 -20.93 37.43 34.30 12.25 36.34 0.00 100 57 Average 2 5926.50 47.96 68.20 -20.24 37.74 34.30 12.26 36.34 0.00 100 57 Average	Blank

Mode	111	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_52/37 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	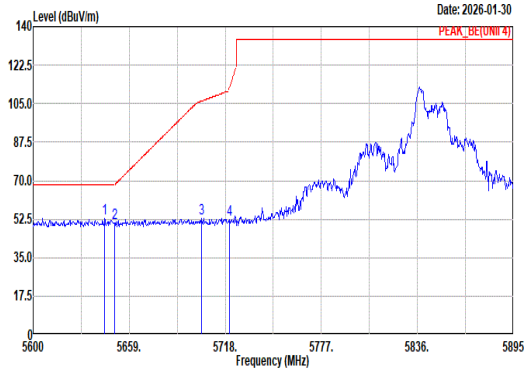 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5643.96 52.97 68.20 -15.23 44.11 33.18 11.95 36.27 0.00 397 66 Peak 2 5650.15 50.85 68.31 -17.46 41.96 33.20 11.96 36.27 0.00 397 66 Peak 3 5703.25 52.79 106.11 -53.32 43.45 33.61 12.01 36.28 0.00 397 66 Peak 4 5720.36 52.15 111.62 -59.47 42.73 33.68 12.03 36.29 0.00 397 66 Peak	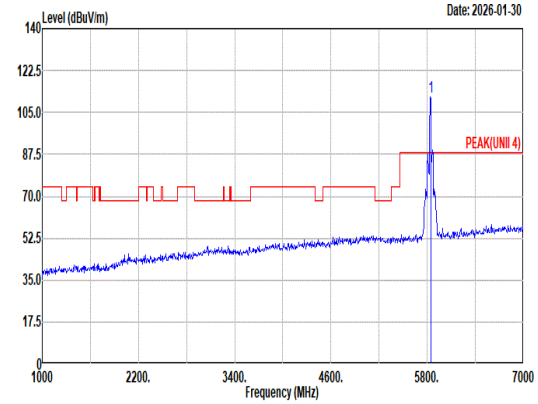 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 111.43 ------ ------ 101.46 34.14 12.15 36.32 0.00 397 66 Peak
Avg	Blank	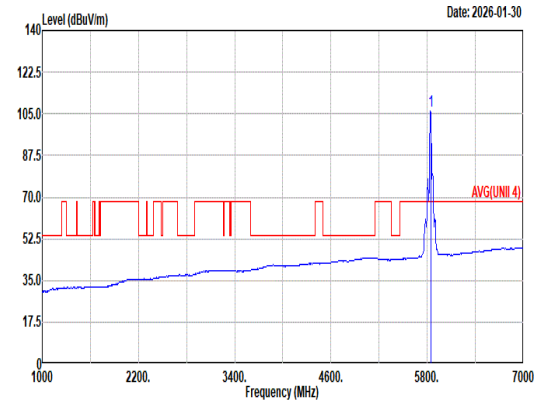 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 106.27 ------ ------ 96.30 34.14 12.15 36.32 0.00 397 66 Average

Mode	111	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_52/37 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	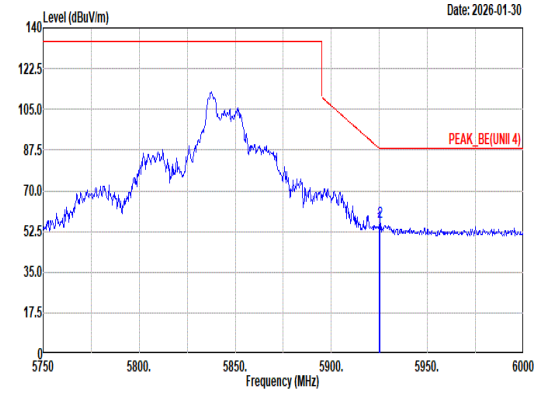 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 54.99 88.20 -33.21 44.78 34.30 12.25 36.34 0.00 397 66 Peak 2 5925.25 56.76 88.20 -31.44 46.55 34.30 12.25 36.34 0.00 397 66 Peak	Blank
Avg	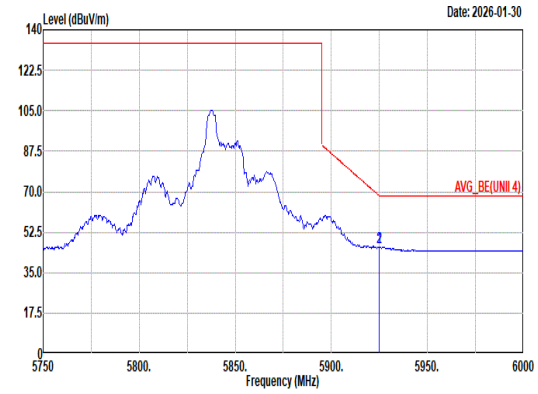 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 46.14 68.20 -22.06 35.93 34.30 12.25 36.34 0.00 397 66 Average 2 5925.00 46.14 68.20 -22.06 35.93 34.30 12.25 36.34 0.00 397 66 Average	Blank

Mode	112	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53 RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	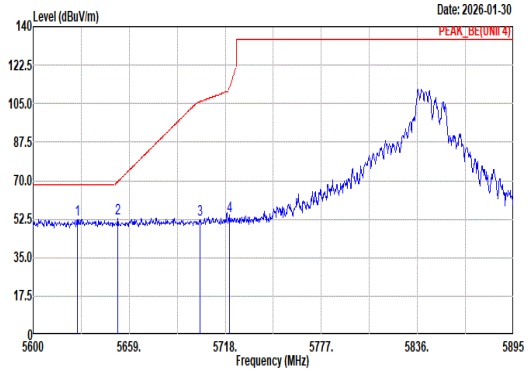 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5627.14 52.32 68.20 -15.88 43.53 33.11 11.94 36.26 0.00 100 227 Peak 2 5651.92 52.81 69.63 -16.82 43.90 33.22 11.96 36.27 0.00 100 227 Peak 3 5702.66 52.37 105.95 -53.58 43.03 33.61 12.01 36.28 0.00 100 227 Peak 4 5720.36 53.89 111.62 -57.73 44.47 33.68 12.03 36.29 0.00 100 227 Peak	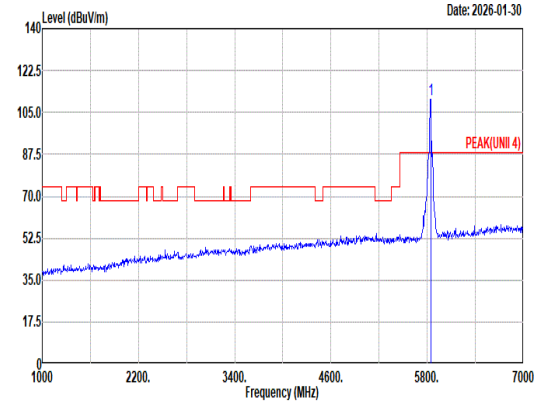 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 110.23 ------ ------ 100.22 34.17 12.16 36.32 0.00 100 227 Peak
Avg	Blank	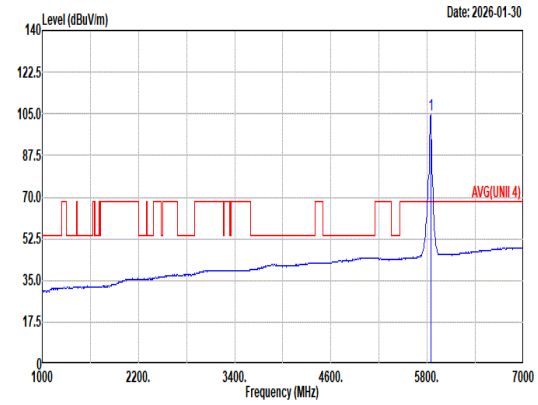 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 104.72 ------ ------ 94.71 34.17 12.16 36.32 0.00 100 227 Average

Mode	112	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53 RU_5845MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	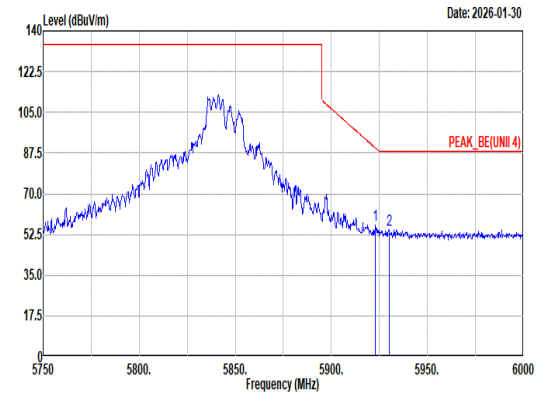 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.00 56.31 89.66 -33.35 46.10 34.30 12.25 36.34 0.00 100 227 Peak 2 5930.00 54.67 88.20 -33.53 44.45 34.30 12.26 36.34 0.00 100 227 Peak	Blank
Avg	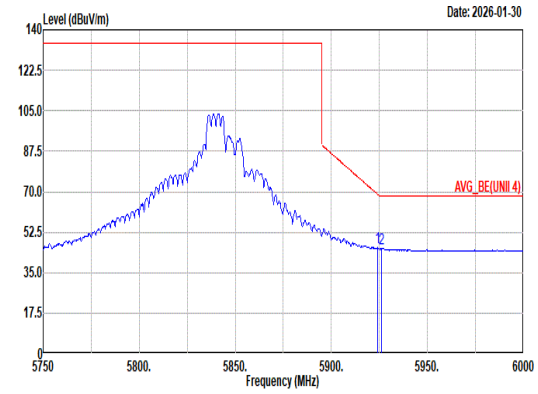 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 45.76 68.75 -22.99 35.55 34.30 12.25 36.34 0.00 100 227 Average 2 5926.25 45.51 68.20 -22.69 35.29 34.30 12.26 36.34 0.00 100 227 Average	Blank

Mode	112	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	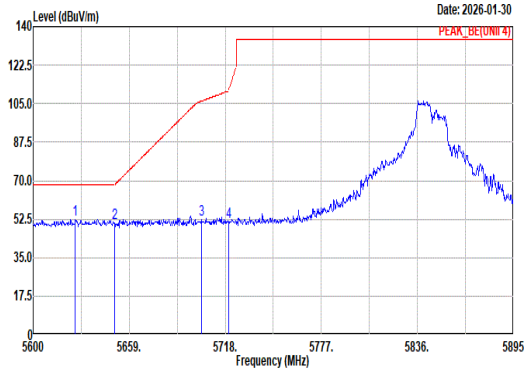 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.96 52.27 68.20 -15.93 43.49 33.10 11.94 36.26 0.00 100 296 Peak 2 5650.15 50.61 68.31 -17.70 41.72 33.20 11.96 36.27 0.00 100 296 Peak 3 5703.25 52.28 106.11 -53.83 42.94 33.61 12.01 36.28 0.00 100 296 Peak 4 5720.07 51.00 110.95 -59.95 41.58 33.68 12.03 36.29 0.00 100 296 Peak	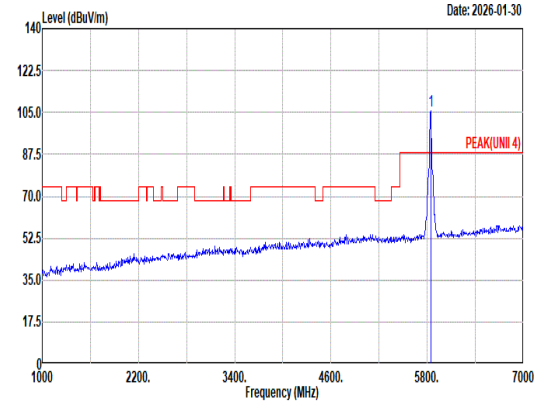 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 105.55 ------ ------ 95.54 34.17 12.16 36.32 0.00 100 296 Peak
Avg	Blank	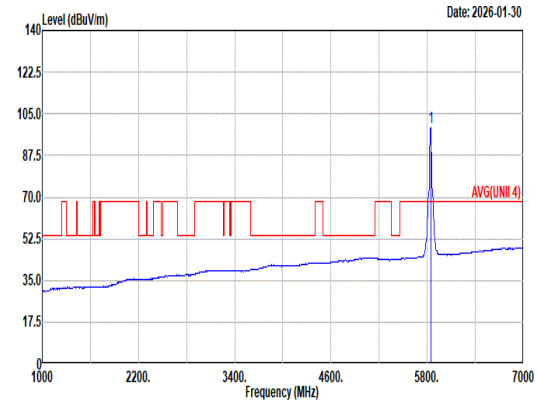 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5845.00 99.50 ------ ------ 89.49 34.17 12.16 36.32 0.00 100 296 Average

Mode	112	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_106/53 RU_5845MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	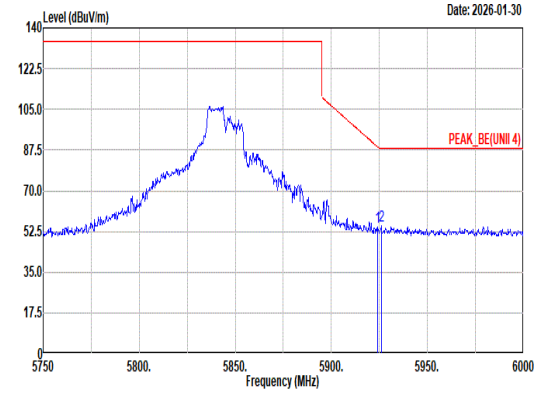 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 54.39 88.75 -34.36 44.18 34.30 12.25 36.34 0.00 100 296 Peak 2 5926.00 54.72 88.20 -33.48 44.51 34.30 12.25 36.34 0.00 100 296 Peak	Blank
Avg	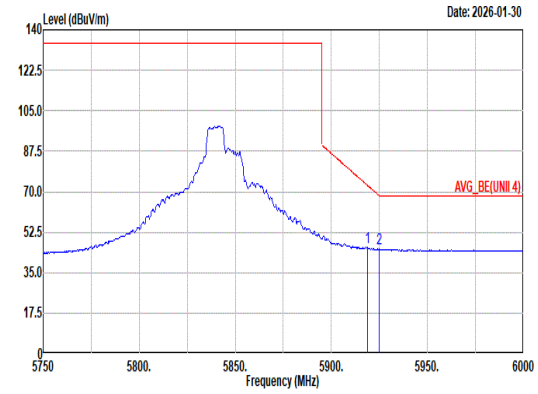 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5919.00 45.88 72.59 -26.71 35.67 34.30 12.25 36.34 0.00 100 296 Average 2 5925.00 45.31 68.20 -22.89 35.10 34.30 12.25 36.34 0.00 100 296 Average	Blank

Mode	113	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	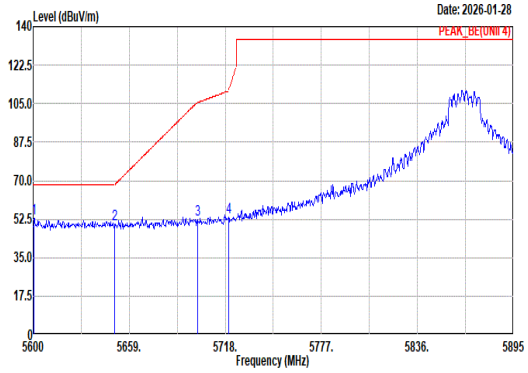 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5600.59 52.69 68.20 -15.51 44.04 33.00 11.91 36.26 0.00 100 60 Peak 2 5650.15 50.23 68.31 -18.08 41.34 33.20 11.96 36.27 0.00 100 60 Peak 3 5700.89 52.50 105.45 -52.95 43.17 33.60 12.01 36.28 0.00 100 60 Peak 4 5720.07 53.29 110.95 -57.66 43.87 33.68 12.03 36.29 0.00 100 60 Peak	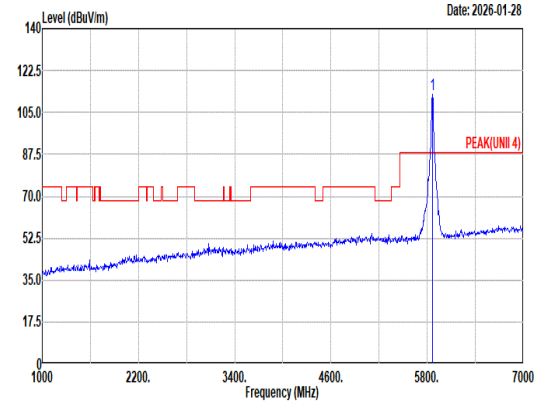 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 112.33 ------ ------ 102.24 34.23 12.19 36.33 0.00 100 60 Peak
Avg	Blank	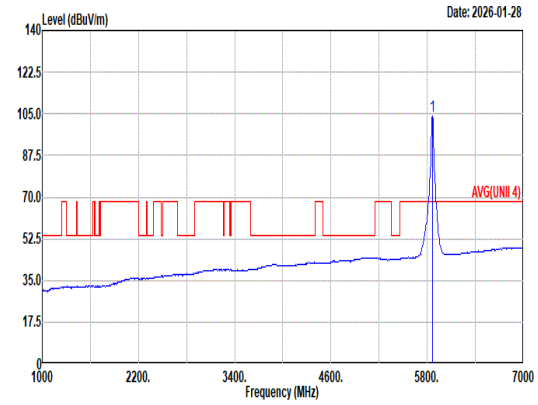 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 104.22 ------ ------ 94.13 34.23 12.19 36.33 0.00 100 60 Average

Mode	113	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	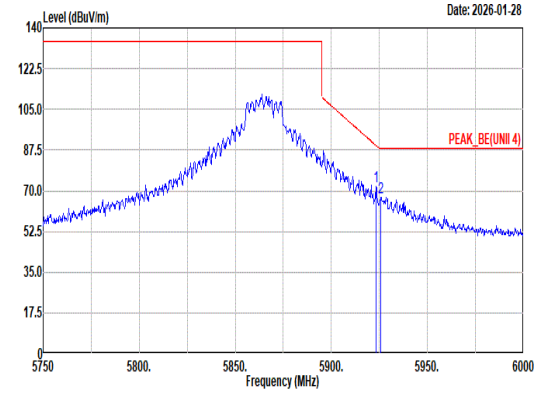 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.25 71.78 89.48 -17.70 61.57 34.30 12.25 36.34 0.00 100 60 Peak 2 5925.75 67.31 88.20 -20.89 57.10 34.30 12.25 36.34 0.00 100 60 Peak	Blank
Avg	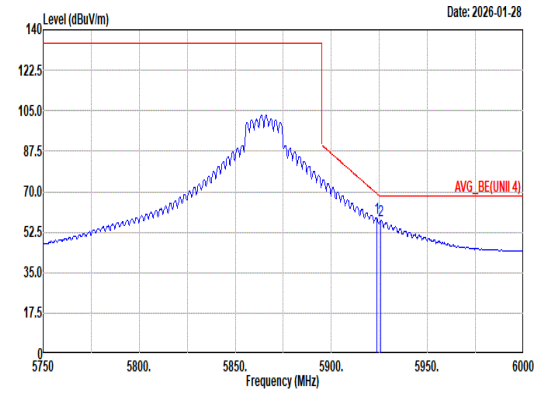 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 58.63 69.30 -10.67 48.42 34.30 12.25 36.34 0.00 100 60 Average 2 5925.75 57.67 68.20 -10.53 47.46 34.30 12.25 36.34 0.00 100 60 Average	Blank

Mode	113
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	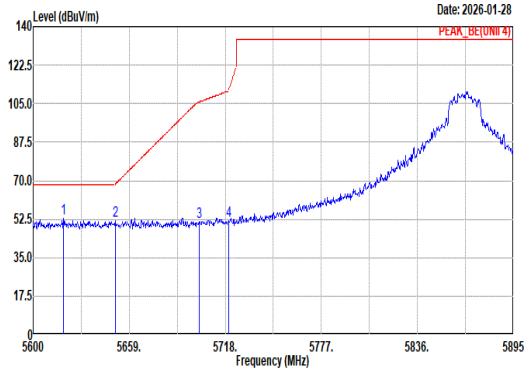 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5618.59 52.69 68.20 -15.51 43.95 33.07 11.93 36.26 0.00 297 66 Peak 2 5650.74 51.79 68.75 -16.96 42.89 33.21 11.96 36.27 0.00 297 66 Peak 3 5701.78 51.49 105.70 -54.21 42.15 33.61 12.01 36.28 0.00 297 66 Peak 4 5720.07 52.01 110.95 -58.94 42.59 33.68 12.03 36.29 0.00 297 66 Peak	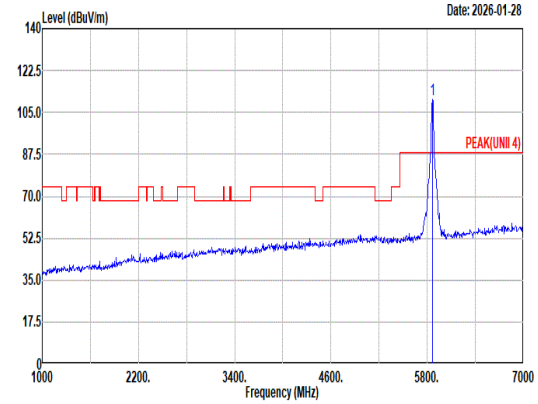 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 110.53 ------ ------ 100.44 34.23 12.19 36.33 0.00 297 66 Peak
Avg	Blank	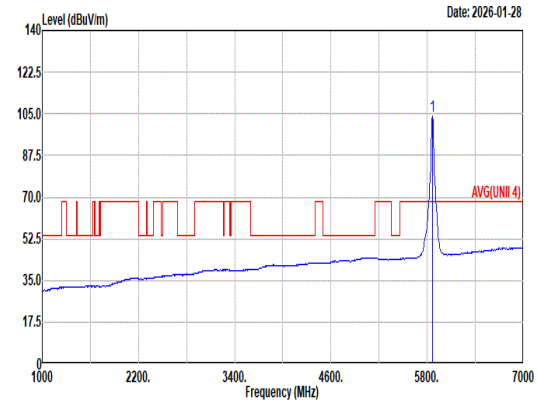 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5865.00 103.98 ------ ------ 93.89 34.23 12.19 36.33 0.00 297 66 Average

Mode	113	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	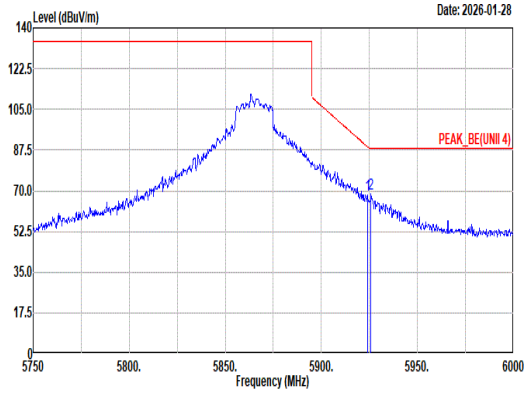 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 68.00 88.93 -20.93 57.79 34.30 12.25 36.34 0.00 297 66 Peak 2 5925.75 68.77 88.20 -19.43 58.56 34.30 12.25 36.34 0.00 297 66 Peak	Blank
Avg	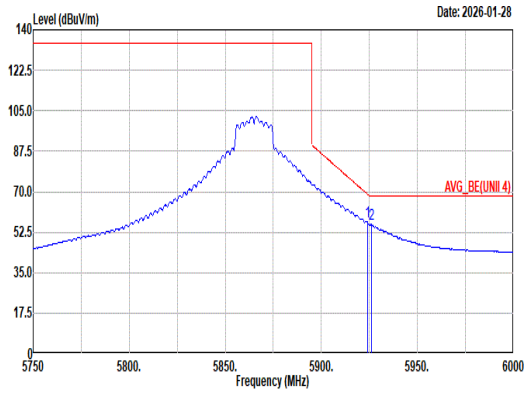 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 56.93 68.93 -12.00 46.72 34.30 12.25 36.34 0.00 297 66 Average 2 5926.00 55.77 68.20 -12.43 45.56 34.30 12.25 36.34 0.00 297 66 Average	Blank

Mode	113	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	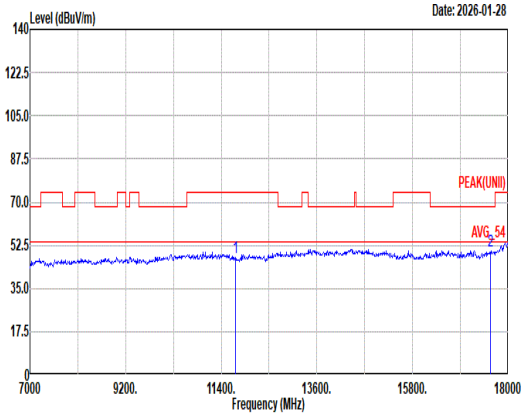 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 47.53 74.00 -26.47 57.10 38.66 17.18 66.14 0.73 -- -- Peak 2 17595.00 50.05 68.20 -18.15 54.09 39.59 21.20 65.66 0.83 -- -- Peak	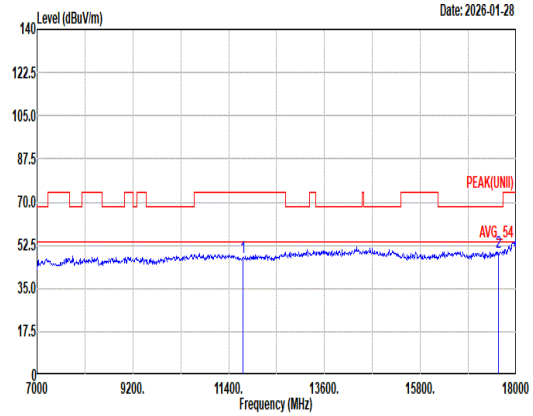 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11730.00 47.76 74.00 -26.24 57.33 38.66 17.18 66.14 0.73 -- -- Peak 2 17595.00 49.59 68.20 -18.61 53.63 39.59 21.20 65.66 0.83 -- -- Peak

Mode	113	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	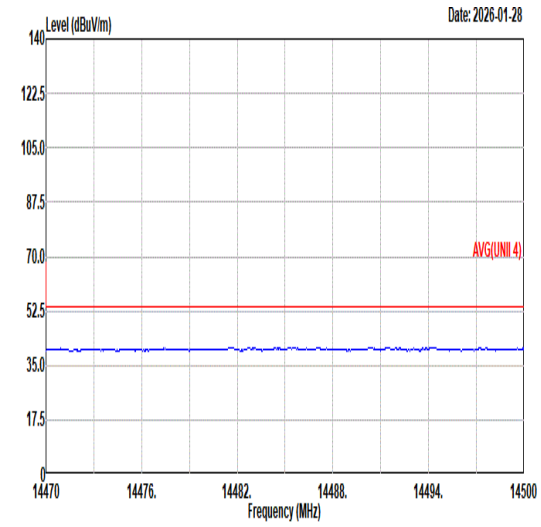 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	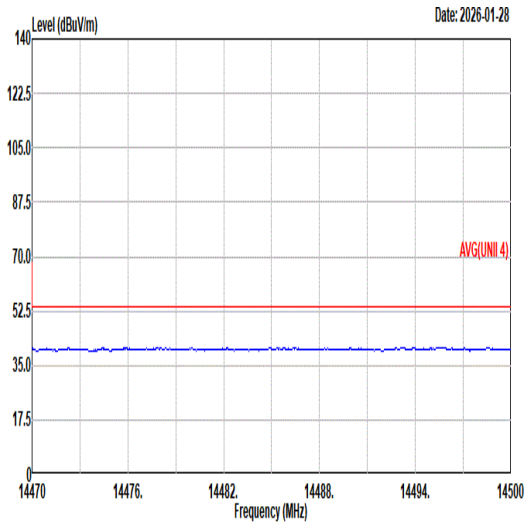 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	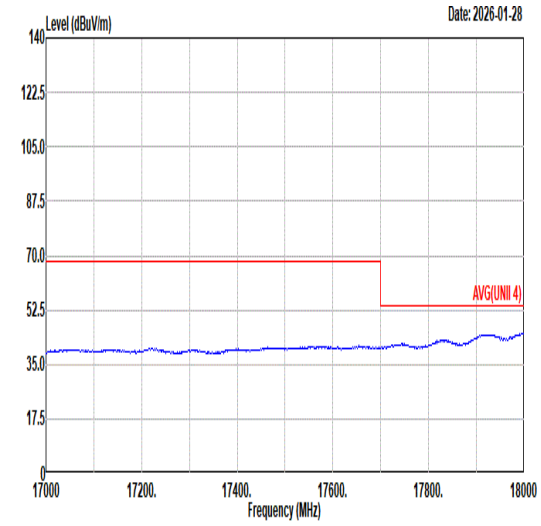 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	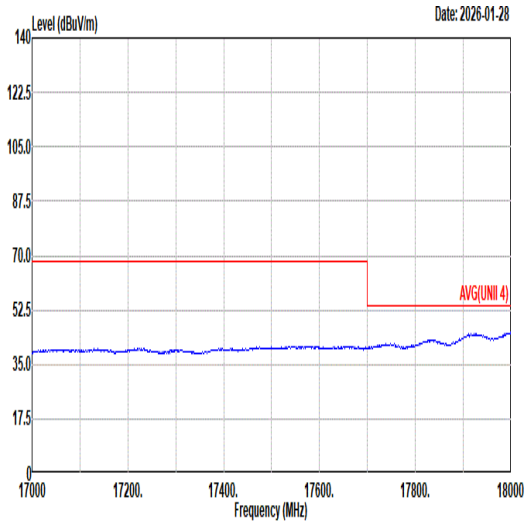 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	114	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	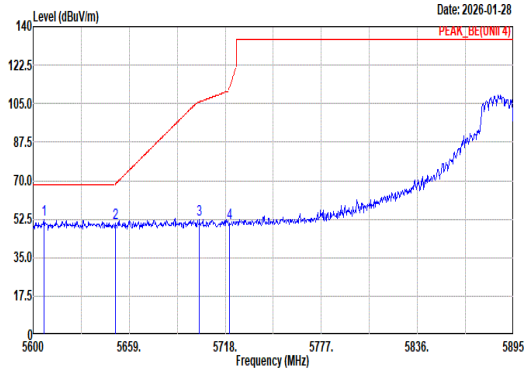 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5606.49 52.15 68.20 -16.05 43.46 33.03 11.92 36.26 0.00 100 62 Peak 2 5650.74 50.62 68.75 -18.13 41.72 33.21 11.96 36.27 0.00 100 62 Peak 3 5702.07 52.45 105.78 -53.33 43.11 33.61 12.01 36.28 0.00 100 62 Peak 4 5720.36 50.55 111.62 -61.07 41.13 33.68 12.03 36.29 0.00 100 62 Peak	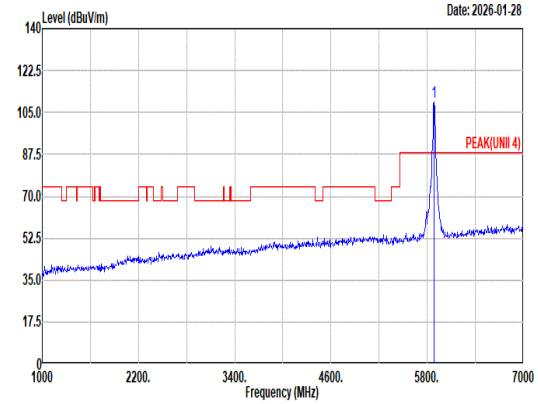 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 109.46 ------ ------ 99.31 34.27 12.21 36.33 0.00 100 62 Peak
Avg	Blank	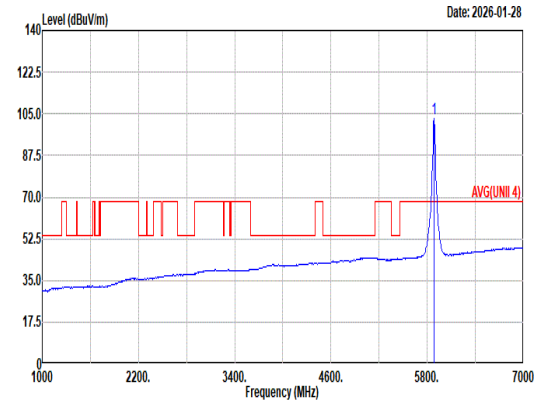 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 102.80 ------ ------ 92.65 34.27 12.21 36.33 0.00 100 62 Average

Mode	114	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	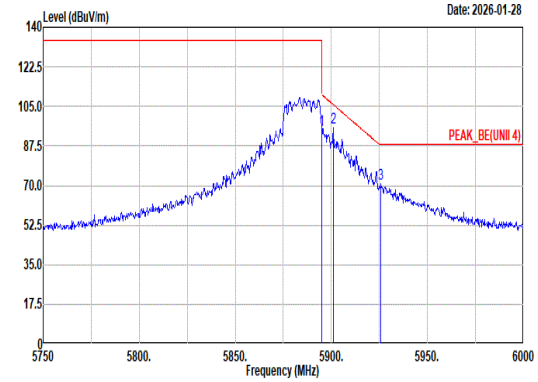 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 94.72 110.20 -15.48 84.54 34.29 12.22 36.33 0.00 100 62 Peak 2 5901.00 95.57 105.79 -10.22 85.37 34.30 12.23 36.33 0.00 100 62 Peak 3 5925.75 70.92 88.20 -17.28 60.71 34.30 12.25 36.34 0.00 100 62 Peak	Blank
Avg	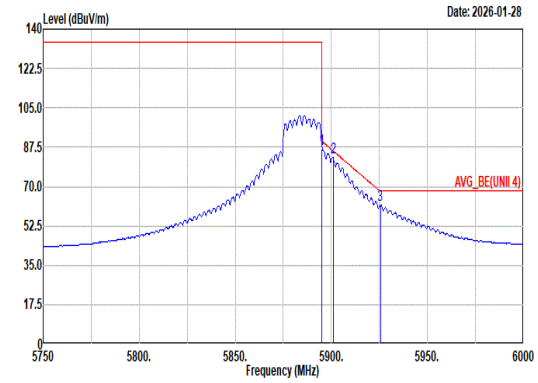 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 86.54 90.20 -3.66 76.36 34.29 12.22 36.33 0.00 100 62 Average 2 5901.00 82.76 85.79 -3.03 72.56 34.30 12.23 36.33 0.00 100 62 Average 3 5925.50 61.77 68.20 -6.43 51.56 34.30 12.25 36.34 0.00 100 62 Average	Blank

Mode	114	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	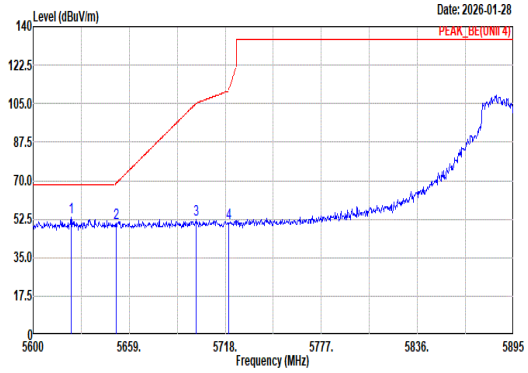 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5623.31 53.48 68.20 -14.72 44.72 33.09 11.93 36.26 0.00 375 72 Peak 2 5651.04 50.62 68.97 -18.35 41.72 33.21 11.96 36.27 0.00 375 72 Peak 3 5700.30 52.34 105.28 -52.94 43.01 33.60 12.01 36.28 0.00 375 72 Peak 4 5720.07 50.54 110.95 -60.41 41.12 33.68 12.03 36.29 0.00 375 72 Peak	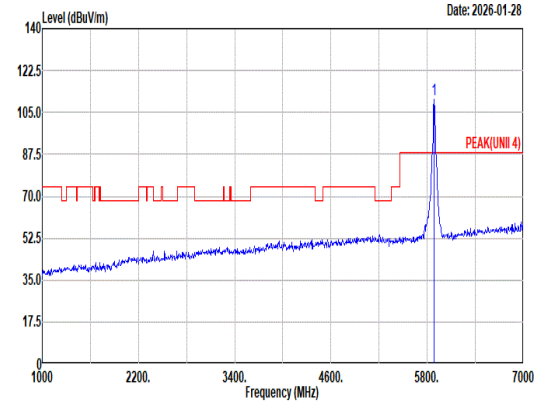 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 110.50 ------ ------ 100.34 34.28 12.21 36.33 0.00 375 72 Peak
Avg	Blank	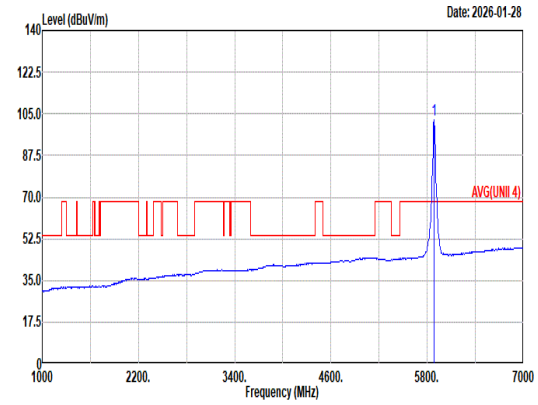 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 102.50 ------ ------ 92.35 34.27 12.21 36.33 0.00 375 72 Average

Mode	114	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	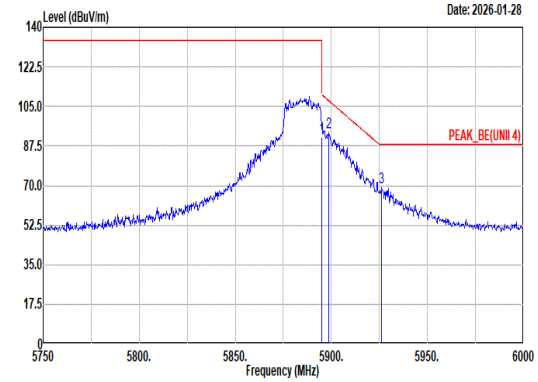 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 91.60 110.20 -18.60 81.42 34.29 12.22 36.33 0.00 375 72 Peak 2 5898.75 93.55 107.44 -13.89 83.36 34.30 12.22 36.33 0.00 375 72 Peak 3 5926.25 69.39 88.20 -18.81 59.17 34.30 12.26 36.34 0.00 375 72 Peak	Blank
Avg	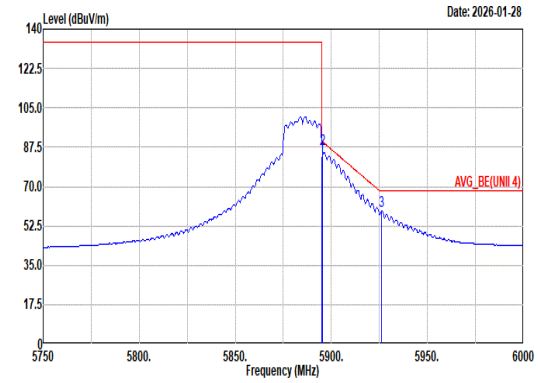 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.00 83.69 90.20 -6.51 73.51 34.29 12.22 36.33 0.00 375 72 Average 2 5895.25 86.70 90.02 -3.32 76.52 34.29 12.22 36.33 0.00 375 72 Average 3 5926.25 59.02 68.20 -9.18 48.80 34.30 12.26 36.34 0.00 375 72 Average	Blank

Mode	114	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	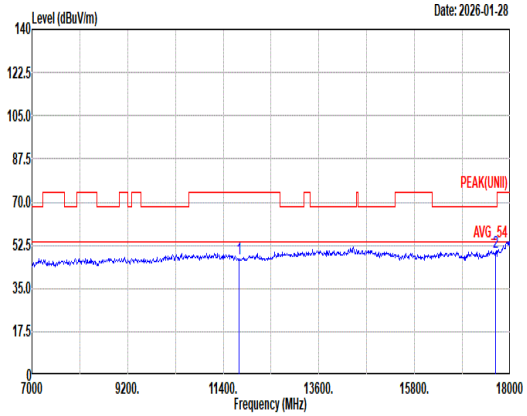 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL 1 11770.00 47.24 74.00 -26.76 56.77 38.70 17.21 66.16 0.72 -- -- Peak 2 17655.00 49.87 68.20 -18.33 53.65 39.75 21.23 65.60 0.84 -- -- Peak	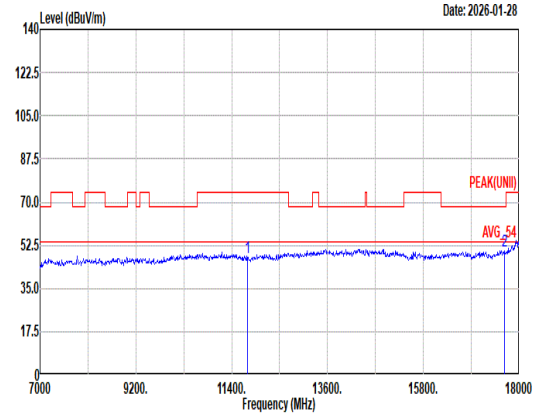 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL 1 11770.00 47.80 74.00 -26.20 57.33 38.70 17.21 66.16 0.72 -- -- Peak 2 17655.00 50.00 68.20 -18.20 53.78 39.75 21.23 65.60 0.84 -- -- Peak

Mode	114	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	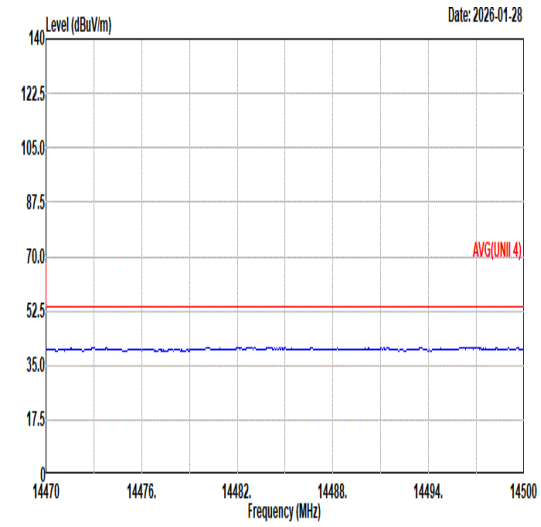 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	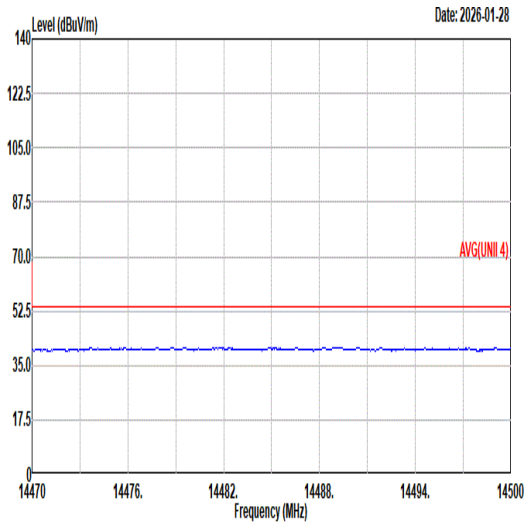 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	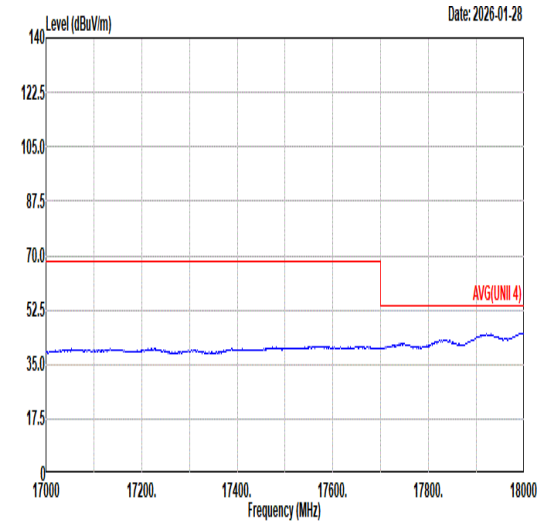 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	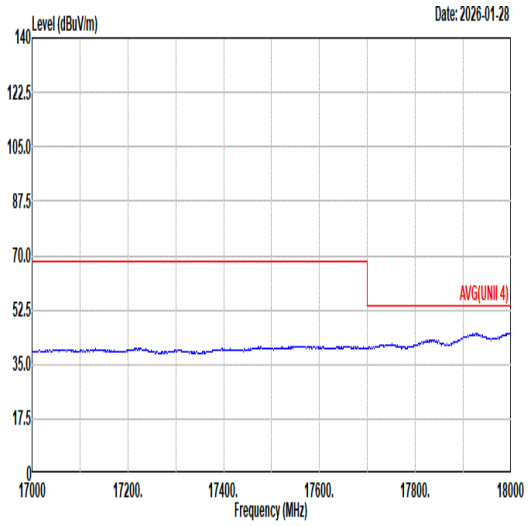 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	115	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_26/8 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	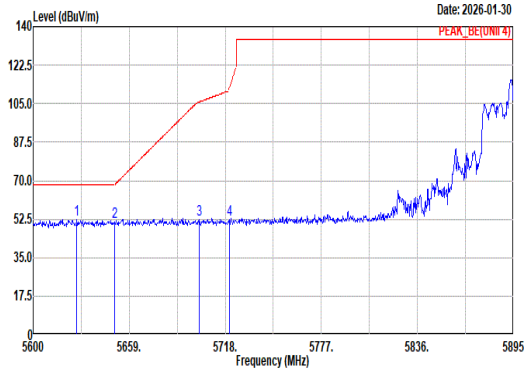 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5626.85 52.28 68.20 -15.92 43.49 33.11 11.94 36.26 0.00 102 59 Peak 2 5650.15 51.35 68.31 -16.96 42.46 33.20 11.96 36.27 0.00 102 59 Peak 3 5702.07 52.22 105.78 -53.56 42.88 33.61 12.01 36.28 0.00 102 59 Peak 4 5720.36 52.18 111.62 -59.44 42.76 33.68 12.03 36.29 0.00 102 59 Peak	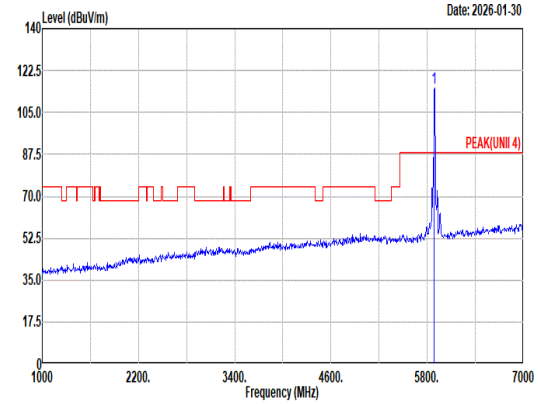 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 115.11 ------ ------ 104.93 34.29 12.22 36.33 0.00 102 59 Peak
Avg	Blank	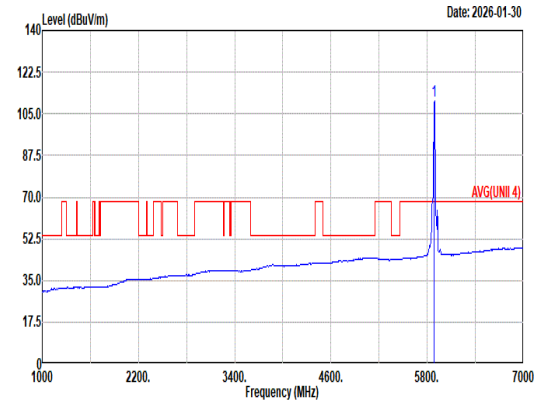 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 110.45 ------ ------ 100.27 34.29 12.22 36.33 0.00 102 59 Average

Mode	115	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_26/8 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	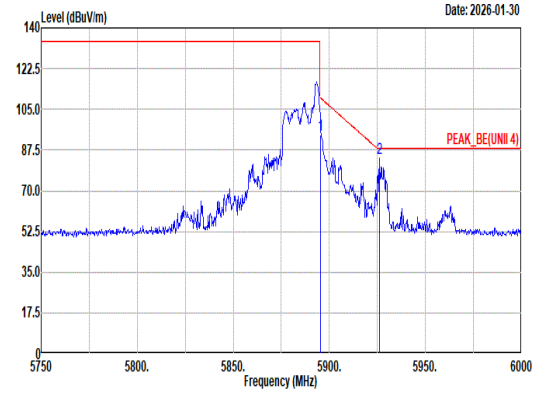 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 93.98 110.02 -16.04 83.80 34.29 12.22 36.33 0.00 102 59 Peak 2 5926.00 84.14 88.20 -4.06 73.93 34.30 12.25 36.34 0.00 102 59 Peak	Blank
Avg	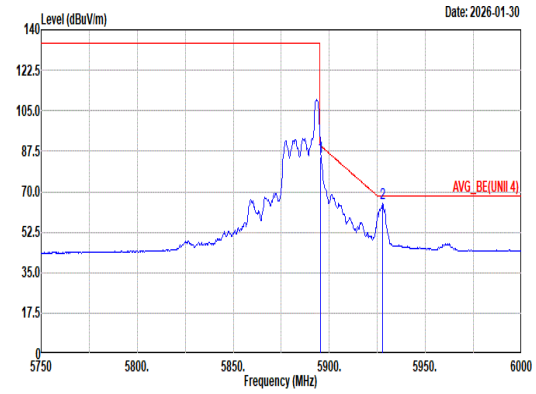 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 84.86 90.02 -5.16 74.68 34.29 12.22 36.33 0.00 102 59 Average 2 5927.75 65.17 68.20 -3.03 54.95 34.30 12.26 36.34 0.00 102 59 Average	Blank

Mode	115
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_26/8 RU_5885MHz
ANT	4+3

Pol.	Vertical	Fundamental
Peak	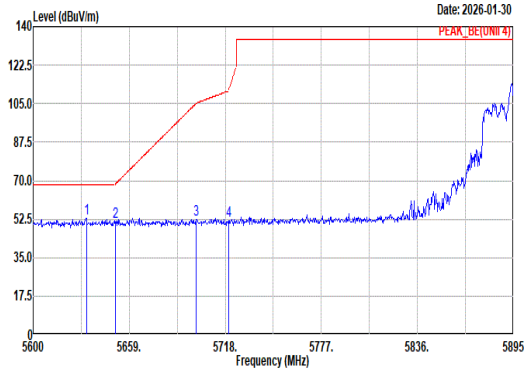 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5632.75 53.02 68.20 -15.18 44.21 33.13 11.94 36.26 0.00 400 63 Peak 2 5650.45 51.35 68.53 -17.18 42.46 33.20 11.96 36.27 0.00 400 63 Peak 3 5700.30 52.50 105.28 -52.78 43.17 33.60 12.01 36.28 0.00 400 63 Peak 4 5720.07 51.70 110.95 -59.25 42.28 33.68 12.03 36.29 0.00 400 63 Peak	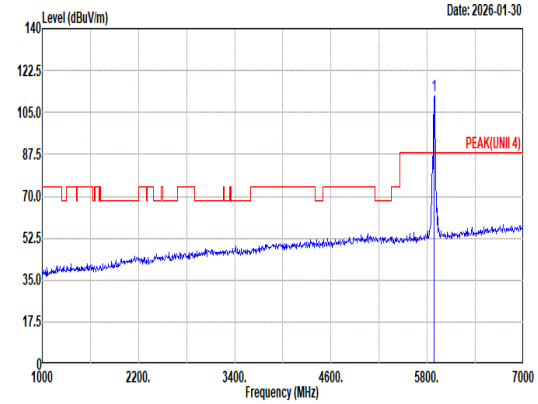 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 112.08 ------ ------ 101.90 34.29 12.22 36.33 0.00 400 63 Peak
Avg	Blank	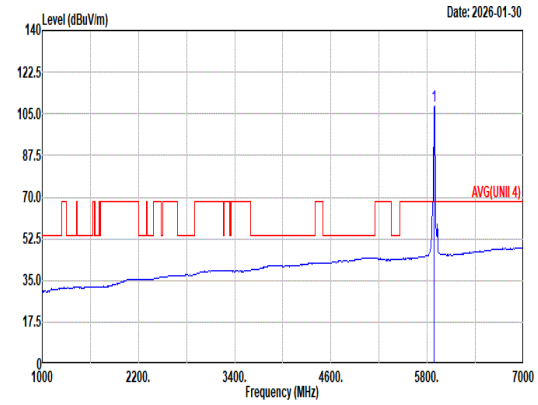 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 108.25 ------ ------ 98.07 34.29 12.22 36.33 0.00 400 63 Average

Mode	115	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_26/8 RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	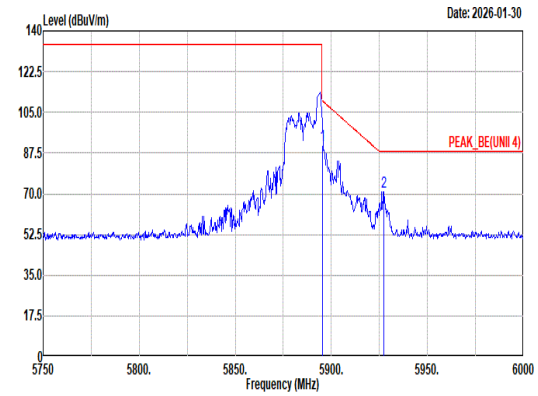 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 91.11 110.02 -18.91 80.93 34.29 12.22 36.33 0.00 400 63 Peak 2 5927.25 71.02 88.20 -17.18 60.80 34.30 12.26 36.34 0.00 400 63 Peak	Blank
Avg	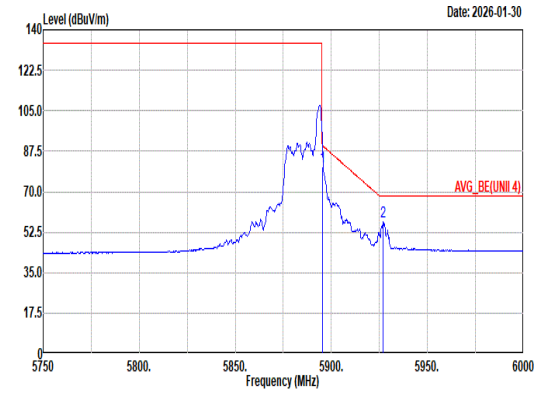 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.680kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 81.09 90.02 -8.93 70.91 34.29 12.22 36.33 0.00 400 63 Average 2 5927.00 56.84 68.20 -11.36 46.62 34.30 12.26 36.34 0.00 400 63 Average	Blank

Mode	116	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_52/40 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	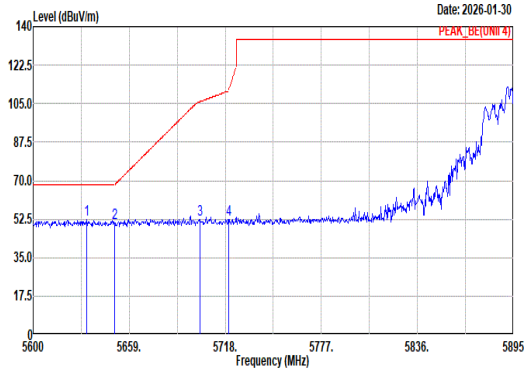 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5633.04 52.37 68.20 -15.83 43.56 33.13 11.94 36.26 0.00 100 122 Peak 2 5650.15 50.49 68.31 -17.82 41.60 33.20 11.96 36.27 0.00 100 122 Peak 3 5702.37 52.16 105.86 -53.70 42.82 33.61 12.01 36.28 0.00 100 122 Peak 4 5720.07 52.55 110.95 -58.40 43.13 33.68 12.03 36.29 0.00 100 122 Peak	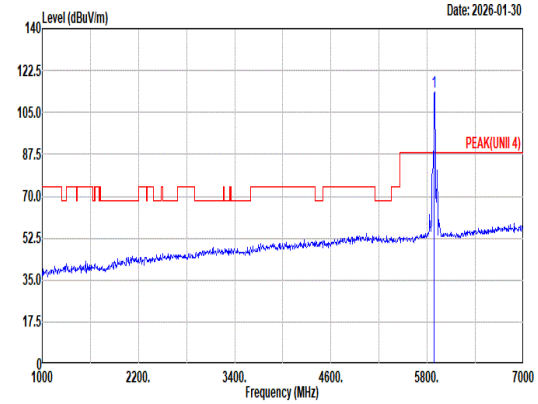 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 113.45 ------ ------ 103.27 34.29 12.22 36.33 0.00 100 122 Peak
Avg	Blank	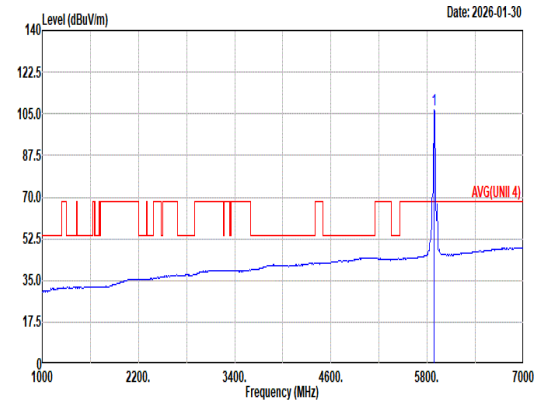 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 106.52 ------ ------ 96.36 34.28 12.21 36.33 0.00 100 122 Average

Mode	116	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_52/40 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	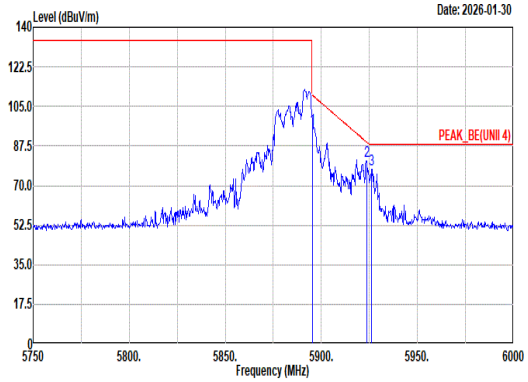 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 94.92 110.02 -15.10 84.74 34.29 12.22 36.33 0.00 100 122 Peak 2 5923.50 80.80 89.30 -8.50 70.59 34.30 12.25 36.34 0.00 100 122 Peak 3 5926.25 77.08 88.20 -11.12 66.86 34.30 12.26 36.34 0.00 100 122 Peak	Blank
Avg	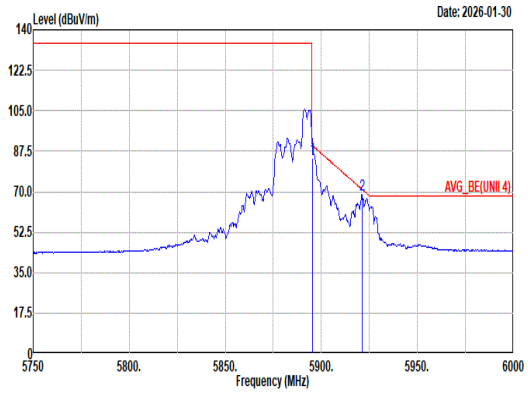 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 84.68 90.02 -5.34 74.50 34.29 12.22 36.33 0.00 100 122 Average 2 5921.25 68.82 70.94 -2.12 58.61 34.30 12.25 36.34 0.00 100 122 Average	Blank

Mode	116	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_52/40 RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	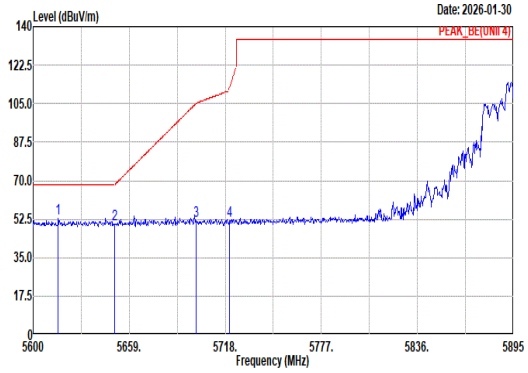 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5615.34 52.90 68.20 -15.30 44.17 33.06 11.93 36.26 0.00 360 68 Peak 2 5650.15 50.36 68.31 -17.95 41.47 33.20 11.96 36.27 0.00 360 68 Peak 3 5700.01 51.66 105.20 -53.54 42.33 33.60 12.01 36.28 0.00 360 68 Peak 4 5720.36 51.58 111.62 -60.04 42.16 33.68 12.03 36.29 0.00 360 68 Peak	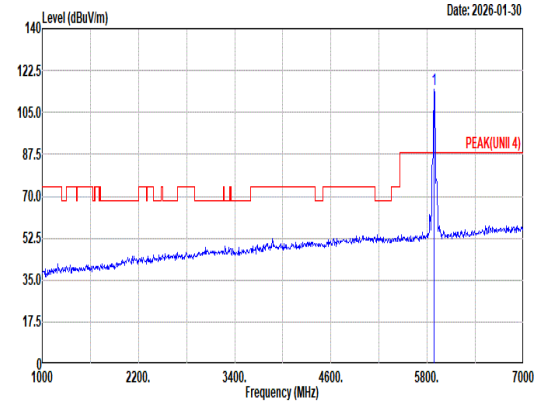 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 114.70 ------ ------ 104.54 34.28 12.21 36.33 0.00 360 68 Peak
Avg	Blank	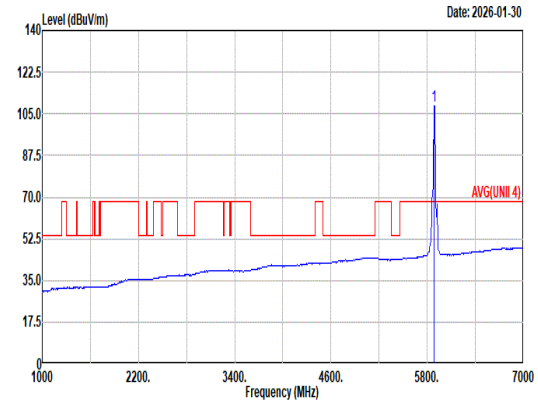 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 108.43 ------ ------ 98.27 34.28 12.21 36.33 0.00 360 68 Average

Mode	116	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_52/40 RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	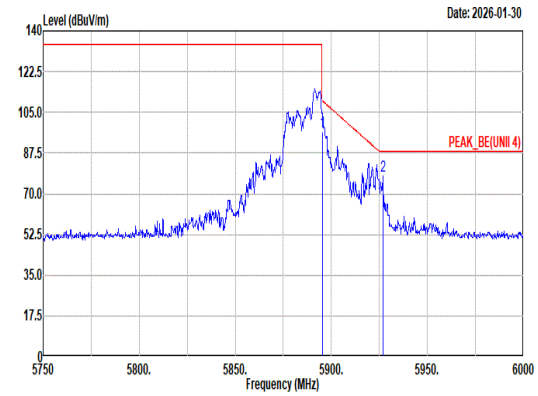 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 96.76 110.02 -13.26 86.58 34.29 12.22 36.33 0.00 360 68 Peak 2 5926.75 77.46 88.20 -10.74 67.24 34.30 12.26 36.34 0.00 360 68 Peak	Blank
Avg	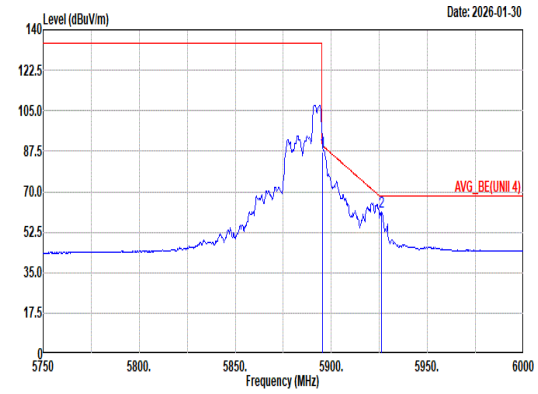 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 87.34 90.02 -2.68 77.16 34.29 12.22 36.33 0.00 360 68 Average 2 5926.00 61.12 68.20 -7.08 50.91 34.30 12.25 36.34 0.00 360 68 Average	Blank

Mode	117	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	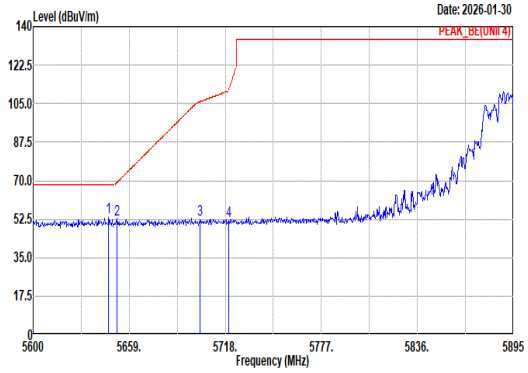 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5646.32 53.47 68.20 -14.73 44.59 33.19 11.96 36.27 0.00 100 123 Peak 2 5651.33 52.41 69.19 -16.78 43.51 33.21 11.96 36.27 0.00 100 123 Peak 3 5702.66 52.55 105.95 -53.40 43.21 33.61 12.01 36.28 0.00 100 123 Peak 4 5720.07 51.85 110.95 -59.10 42.43 33.68 12.03 36.29 0.00 100 123 Peak	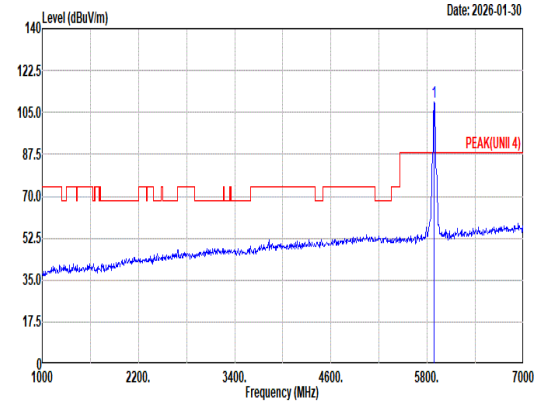 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 109.31 ------ ------ 99.15 34.28 12.21 36.33 0.00 100 123 Peak
Avg	Blank	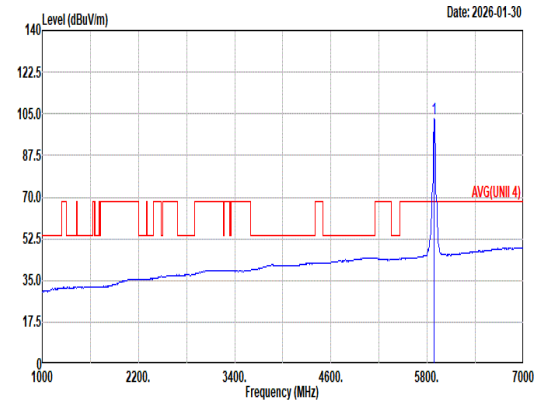 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 103.21 ------ ------ 93.05 34.28 12.21 36.33 0.00 100 123 Average

Mode	117	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54 RU_5885MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	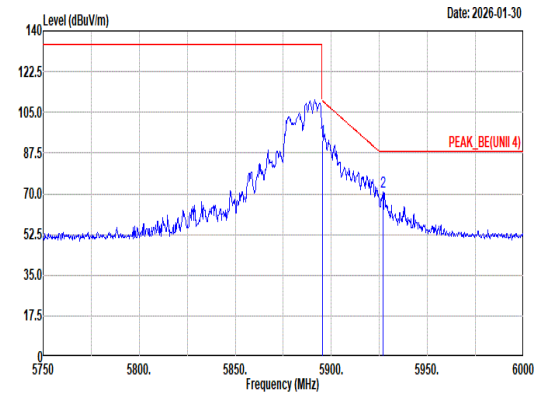 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 92.90 110.02 -17.12 82.72 34.29 12.22 36.33 0.00 100 123 Peak 2 5927.00 70.76 88.20 -17.44 60.54 34.30 12.26 36.34 0.00 100 123 Peak	Blank
Avg	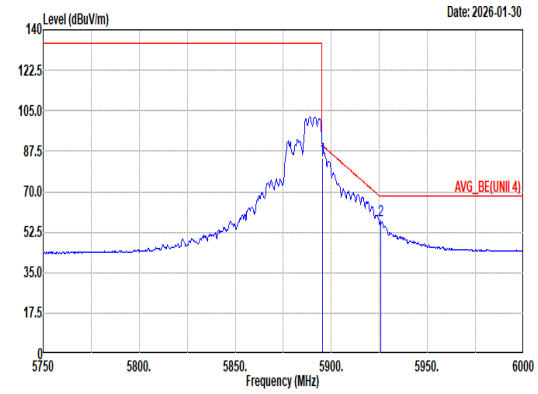 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 84.51 90.02 -5.51 74.33 34.29 12.22 36.33 0.00 100 123 Average 2 5925.75 57.38 68.20 -10.82 47.17 34.30 12.25 36.34 0.00 100 123 Average	Blank

Mode	117	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54 RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	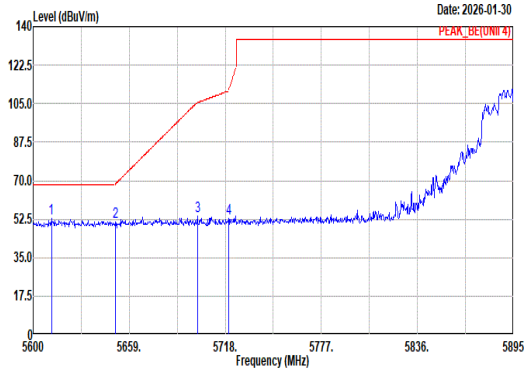 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5611.21 52.66 68.20 -15.54 43.96 33.04 11.92 36.26 0.00 400 64 Peak 2 5650.45 51.22 68.53 -17.31 42.33 33.20 11.96 36.27 0.00 400 64 Peak 3 5700.89 53.73 105.45 -51.72 44.40 33.60 12.01 36.28 0.00 400 64 Peak 4 5720.07 52.67 110.95 -58.28 43.25 33.68 12.03 36.29 0.00 400 64 Peak	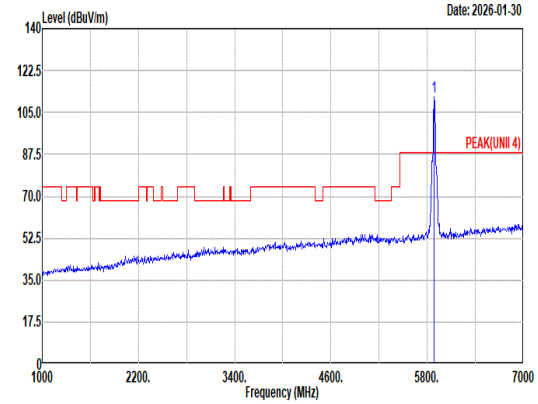 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 111.49 ------ ------ 101.33 34.28 12.21 36.33 0.00 400 64 Peak
Avg	Blank	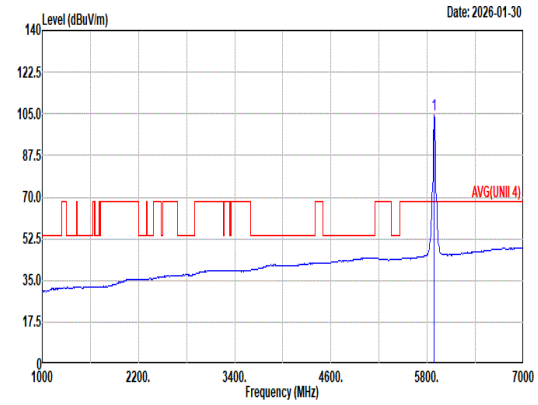 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5885.00 104.51 ------ ------ 94.35 34.28 12.21 36.33 0.00 400 64 Average

Mode	117	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_106/54 RU_5885MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	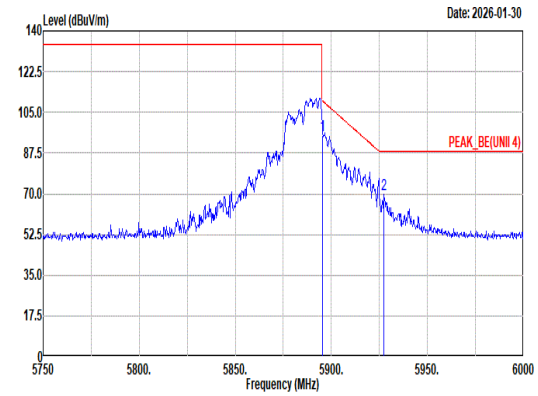 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 94.96 110.02 -15.06 84.78 34.29 12.22 36.33 0.00 400 64 Peak 2 5927.50 69.95 88.20 -18.25 59.73 34.30 12.26 36.34 0.00 400 64 Peak	Blank
Avg	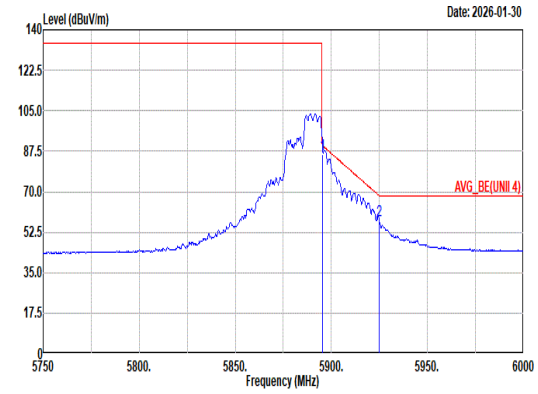 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5895.25 86.06 90.02 -3.96 75.88 34.29 12.22 36.33 0.00 400 64 Average 2 5925.00 57.58 68.20 -10.62 47.37 34.30 12.25 36.34 0.00 400 64 Average	Blank

Mode	118	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	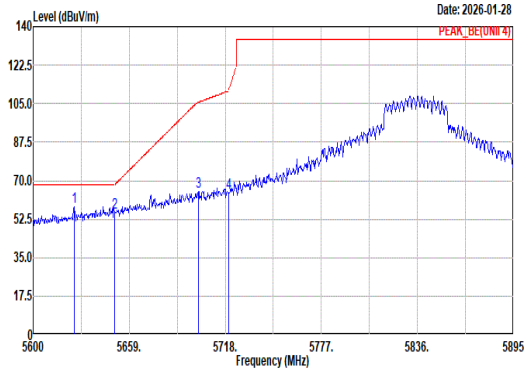 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5625.08 58.36 68.20 -9.84 49.58 33.10 11.94 36.26 0.00 100 60 Peak 2 5650.15 55.47 68.31 -12.84 46.58 33.20 11.96 36.27 0.00 100 60 Peak 3 5701.48 64.86 105.62 -40.76 55.52 33.61 12.01 36.28 0.00 100 60 Peak 4 5720.07 64.38 110.95 -46.57 54.96 33.68 12.03 36.29 0.00 100 60 Peak	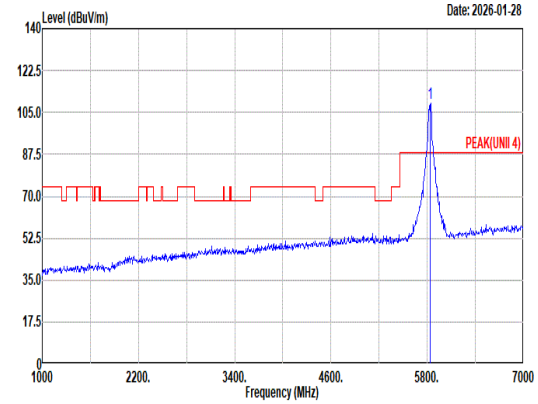 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 109.04 ------ ------ 99.03 34.17 12.16 36.32 0.00 100 60 Peak
Avg	Blank	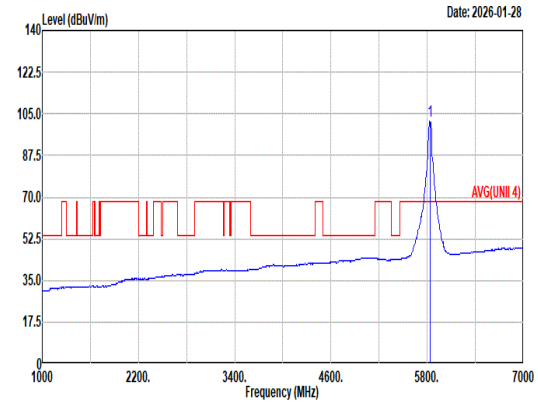 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 101.80 ------ ------ 91.86 34.12 12.14 36.32 0.00 100 60 Average

Mode	118	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	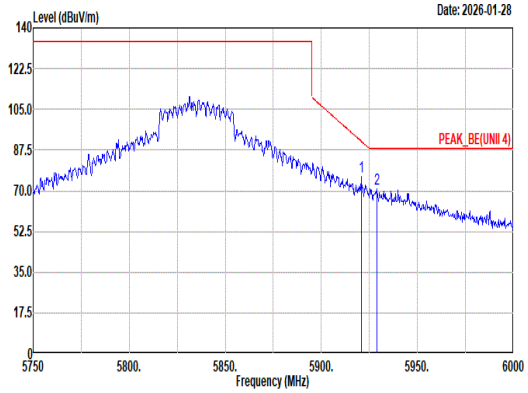 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5920.75 76.18 91.31 -15.13 65.97 34.30 12.25 36.34 0.00 100 60 Peak 2 5928.75 70.72 88.20 -17.48 60.50 34.30 12.26 36.34 0.00 100 60 Peak	Blank
Avg	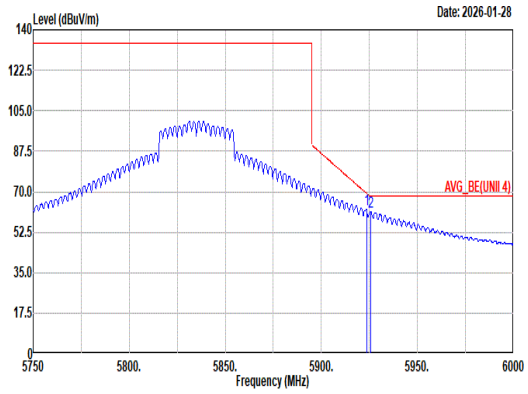 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 62.14 69.30 -7.16 51.93 34.30 12.25 36.34 0.00 100 60 Average 2 5925.75 61.51 68.20 -6.69 51.30 34.30 12.25 36.34 0.00 100 60 Average	Blank

Mode	118	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	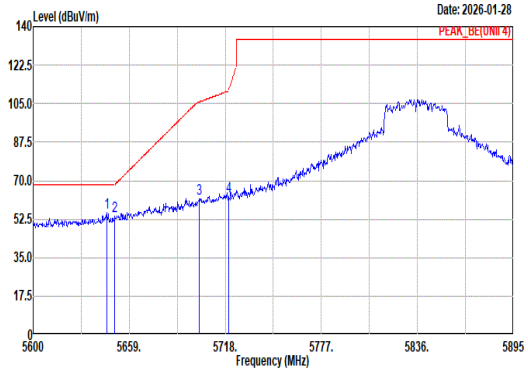 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5645.14 55.28 68.20 -12.92 46.41 33.18 11.96 36.27 0.00 300 69 Peak 2 5650.15 53.69 68.31 -14.62 44.80 33.20 11.96 36.27 0.00 300 69 Peak 3 5702.07 61.63 105.78 -44.15 52.29 33.61 12.01 36.28 0.00 300 69 Peak 4 5720.07 62.79 110.95 -48.16 53.37 33.68 12.03 36.29 0.00 300 69 Peak	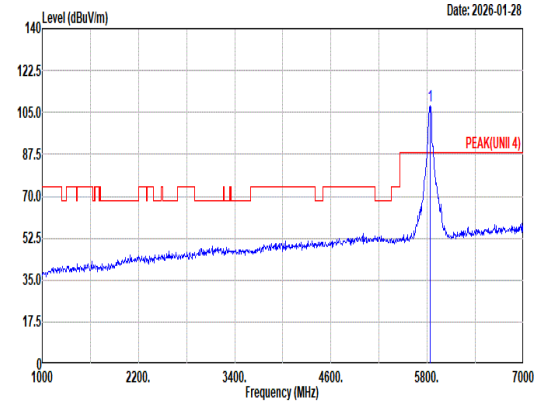 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 107.80 ------ ------ 97.83 34.14 12.15 36.32 0.00 300 69 Peak
Avg	Blank	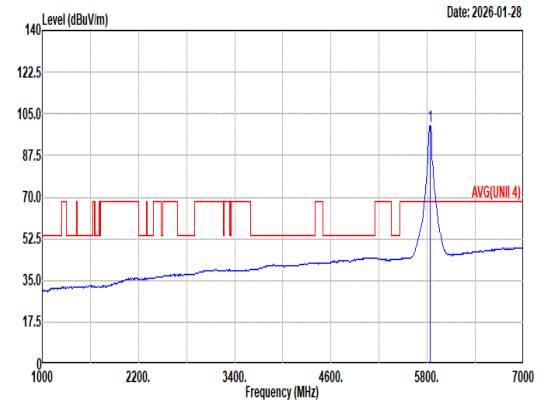 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5835.00 100.08 ------ ------ 90.07 34.17 12.16 36.32 0.00 300 69 Average

Mode	118	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	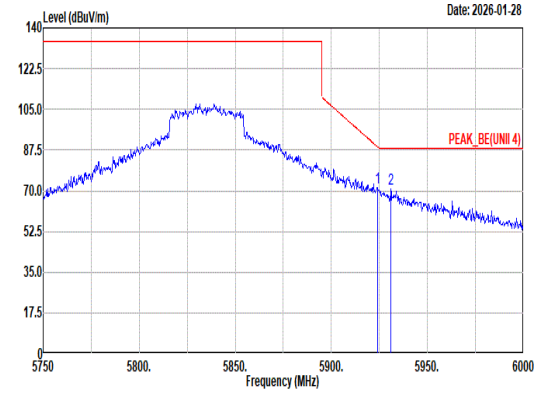 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 71.40 88.75 -17.35 61.19 34.30 12.25 36.34 0.00 300 69 Peak 2 5931.00 70.96 88.20 -17.24 60.74 34.30 12.26 36.34 0.00 300 69 Peak	Blank
Avg	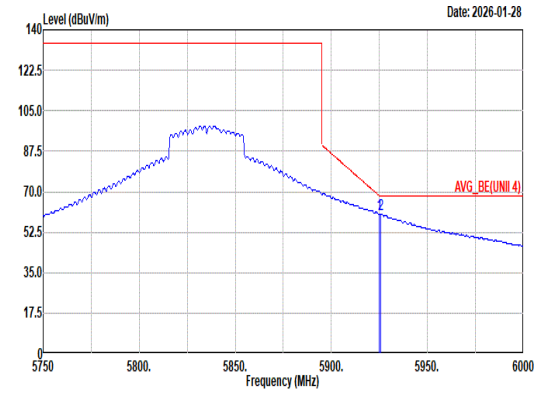 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Limit Read Ant Cable Preamp Aux APos TPos Freq Level Line Margin Level Factor Loss Factor Factor Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5925.00 60.38 68.20 -7.82 50.17 34.30 12.25 36.34 0.00 300 69 Average 2 5925.75 60.47 68.20 -7.73 50.26 34.30 12.25 36.34 0.00 300 69 Average	Blank

Mode	118	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	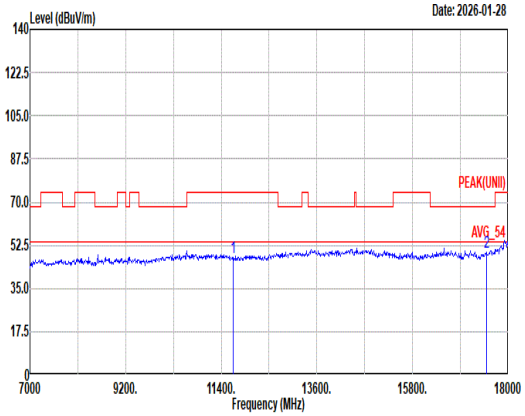 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 47.81 74.00 -26.19 57.45 38.60 17.13 66.11 0.74 -- -- Peak 2 17505.00 49.85 68.20 -18.35 54.50 39.14 21.14 65.75 0.82 -- -- Peak	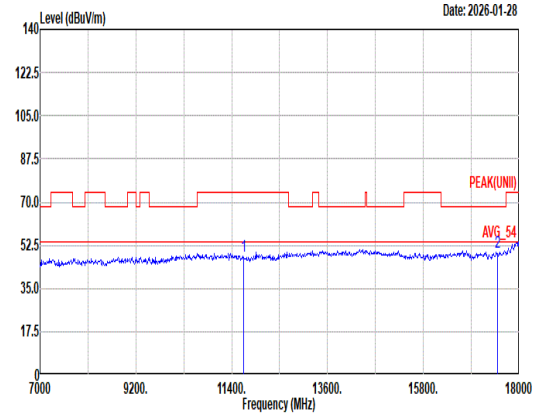 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11670.00 47.90 74.00 -26.10 57.54 38.60 17.13 66.11 0.74 -- -- Peak 2 17505.00 49.75 68.20 -18.45 54.40 39.14 21.14 65.75 0.82 -- -- Peak

Mode	118	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	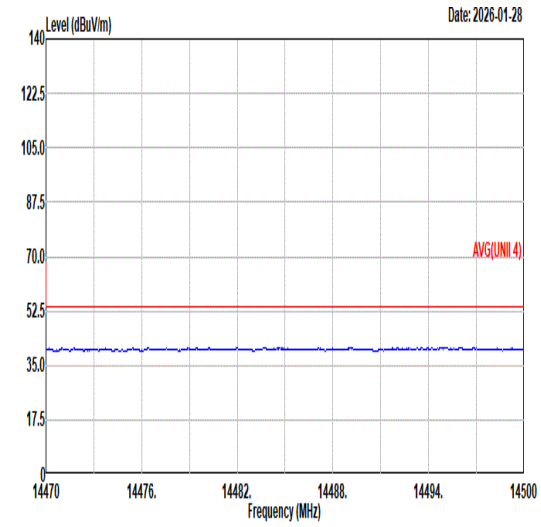 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	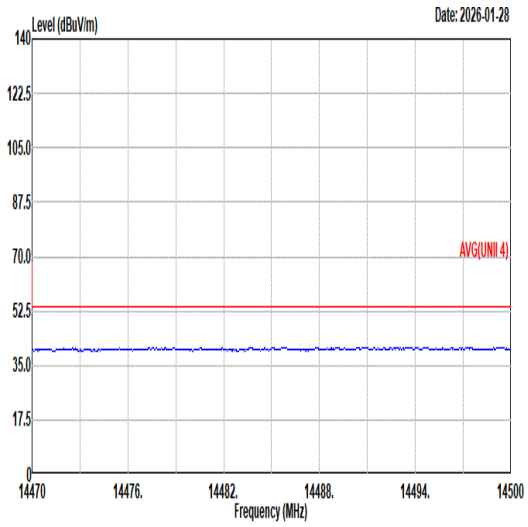 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	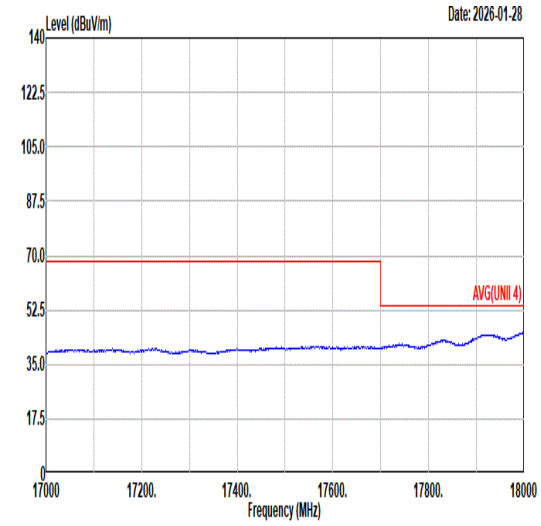 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	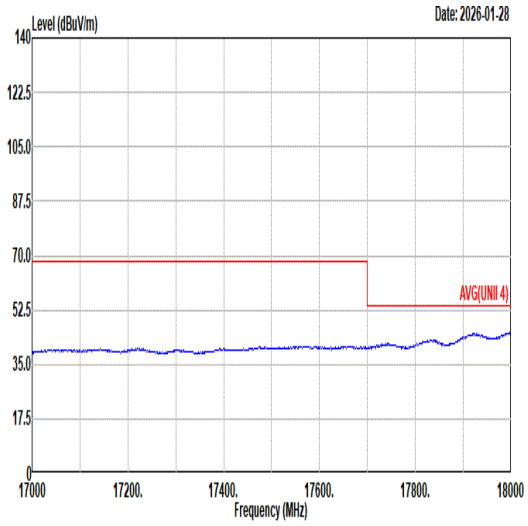 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	119	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	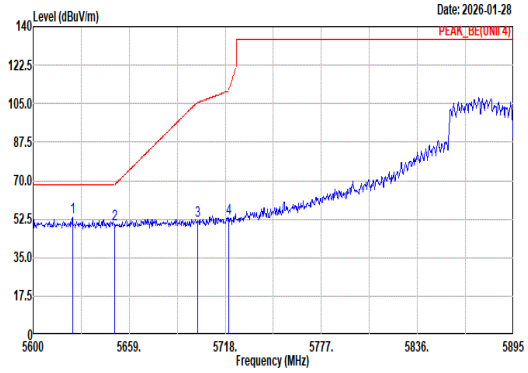 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5624.19 53.25 68.20 -14.95 44.48 33.10 11.93 36.26 0.00 100 59 Peak 2 5650.15 49.93 68.31 -18.38 41.04 33.20 11.96 36.27 0.00 100 59 Peak 3 5701.19 51.82 105.53 -53.71 42.49 33.60 12.01 36.28 0.00 100 59 Peak 4 5720.07 52.65 110.95 -58.30 43.23 33.68 12.03 36.29 0.00 100 59 Peak	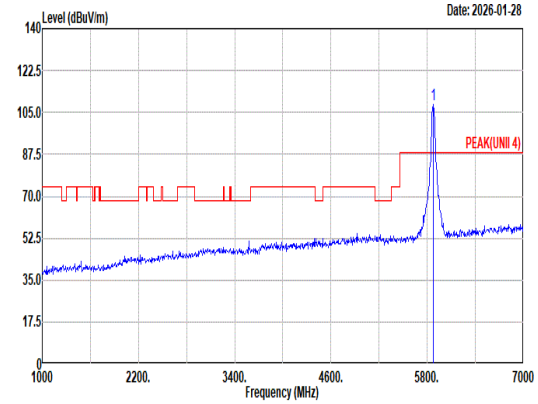 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 108.19 ------ ------ 98.06 34.26 12.20 36.33 0.00 100 59 Peak
Avg	Blank	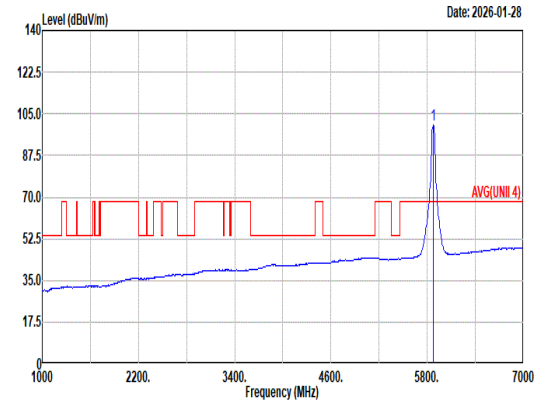 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5875.00 100.44 ------ ------ 90.31 34.26 12.20 36.33 0.00 100 59 Average

Mode	119	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	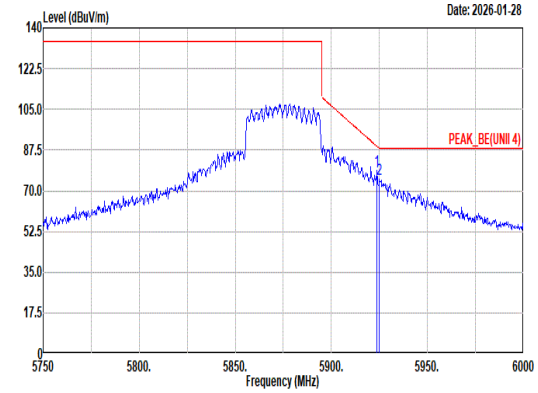 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.75 78.85 89.11 -10.26 68.64 34.30 12.25 36.34 0.00 100 59 Peak 2 5925.00 75.03 88.20 -13.17 64.82 34.30 12.25 36.34 0.00 100 59 Peak	Blank
Avg	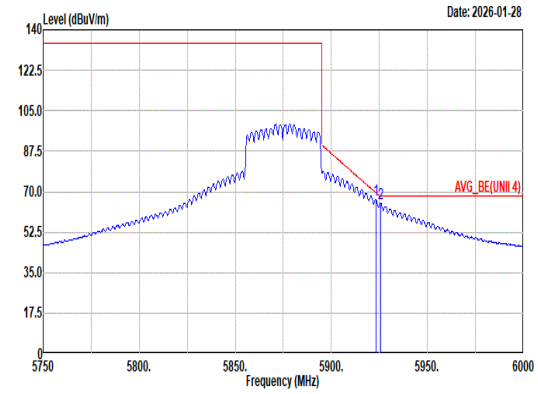 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.25 66.58 69.48 -2.90 56.37 34.30 12.25 36.34 0.00 100 59 Average 2 5925.75 65.06 68.20 -3.14 54.85 34.30 12.25 36.34 0.00 100 59 Average	Blank

Mode	119	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	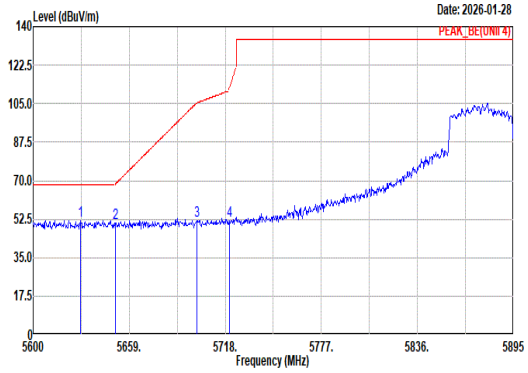 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5628.91 51.99 68.20 -16.21 43.19 33.12 11.94 36.26 0.00 339 65 Peak 2 5650.74 50.55 68.75 -18.20 41.65 33.21 11.96 36.27 0.00 339 65 Peak 3 5700.60 51.62 105.37 -53.75 42.29 33.60 12.01 36.28 0.00 339 65 Peak 4 5720.36 51.75 111.62 -59.87 42.33 33.68 12.03 36.29 0.00 339 65 Peak	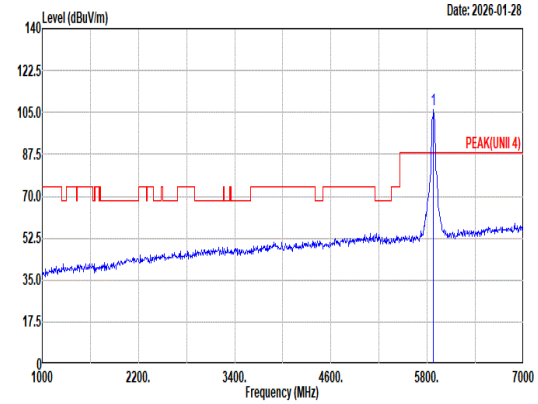 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto 1 5875.00 106.00 ------ ------ 95.87 34.26 12.20 36.33 0.00 339 65 Peak
Avg	Blank	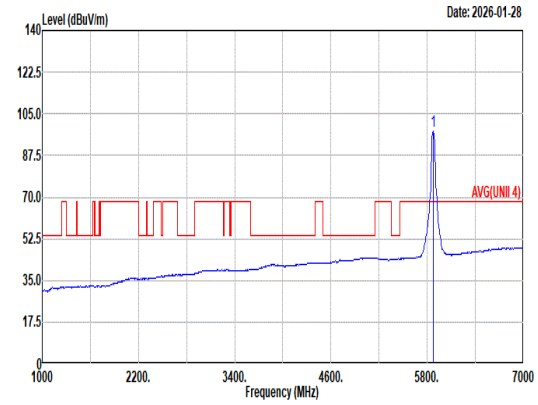 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto 1 5875.00 97.85 ------ ------ 87.75 34.24 12.19 36.33 0.00 339 65 Average

Mode	119	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	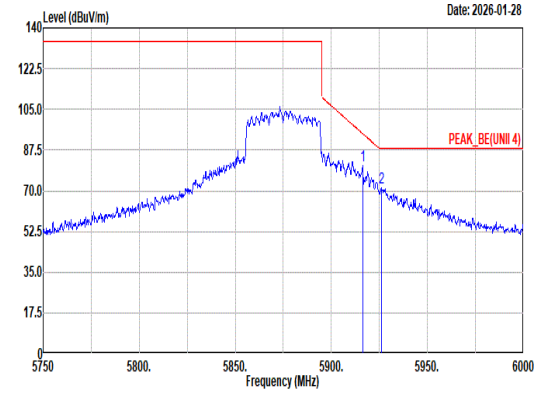 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5916.25 80.67 94.61 -13.94 70.47 34.30 12.24 36.34 0.00 339 65 Peak 2 5926.00 71.27 88.20 -16.93 61.06 34.30 12.25 36.34 0.00 339 65 Peak	Blank
Avg	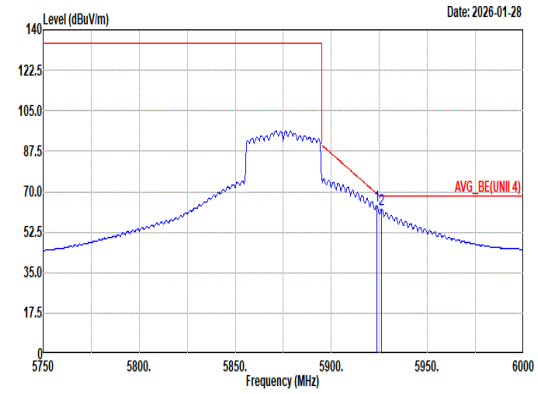 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.75 63.98 69.11 -5.13 53.77 34.30 12.25 36.34 0.00 339 65 Average 2 5926.00 62.41 68.20 -5.79 52.20 34.30 12.25 36.34 0.00 339 65 Average	Blank

Mode	119	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	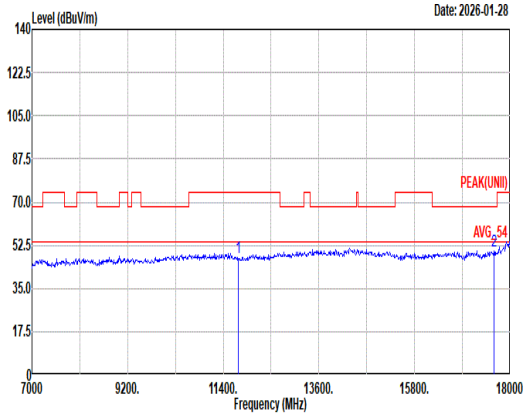 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 47.78 74.00 -26.22 57.31 38.70 17.19 66.15 0.73 -- -- Peak 2 17625.00 50.04 68.20 -18.16 53.97 39.65 21.22 65.63 0.83 -- -- Peak	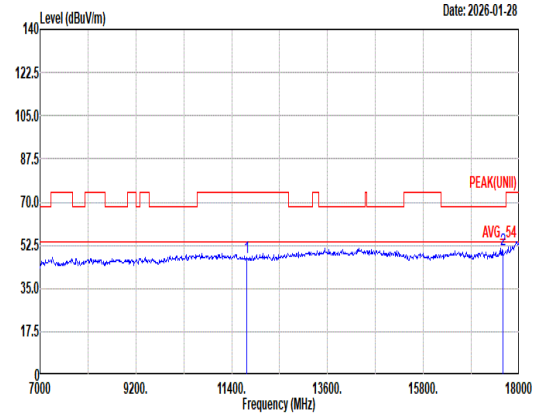 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11750.00 47.64 74.00 -26.36 57.17 38.70 17.19 66.15 0.73 -- -- Peak 2 17625.00 50.47 68.20 -17.73 54.40 39.65 21.22 65.63 0.83 -- -- Peak

Mode	119	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	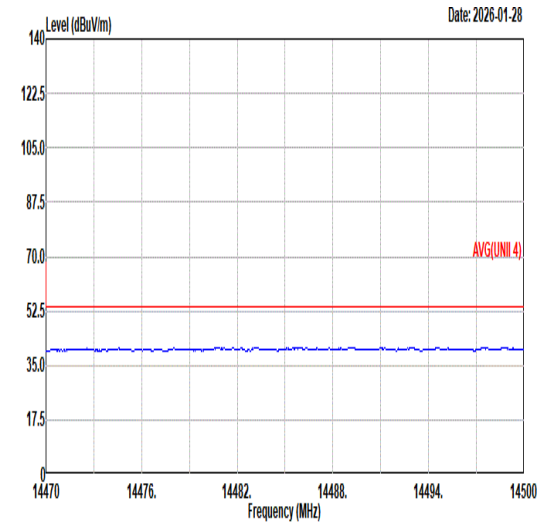 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	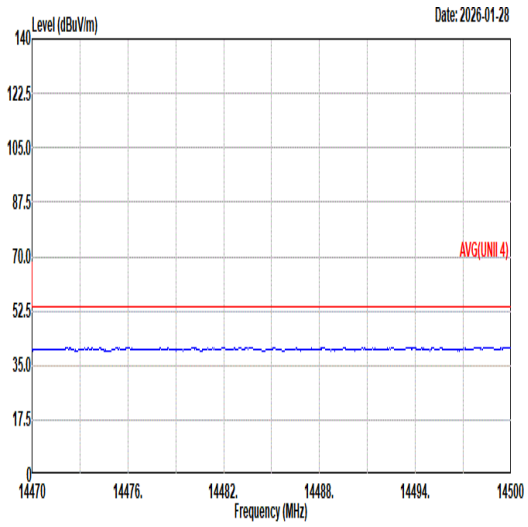 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	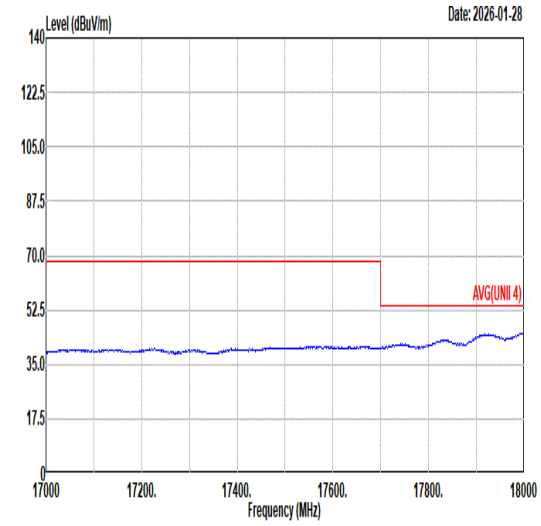 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	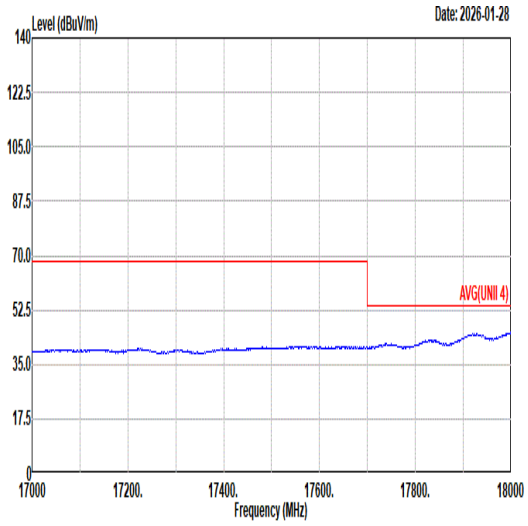 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	120
	Band Edge - L
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz
ANT	4+3

Pol.	Horizontal	Fundamental
Peak	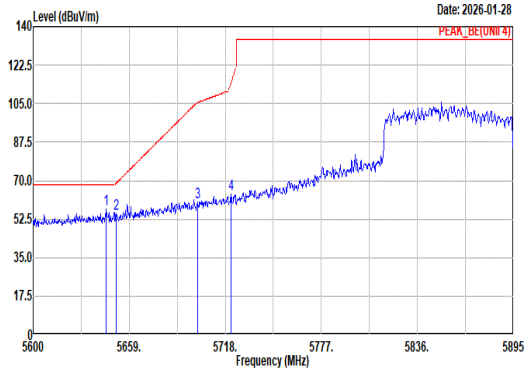 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5644.84 56.81 68.20 -11.39 47.95 33.18 11.95 36.27 0.00 101 58 Peak 2 5651.04 54.99 68.97 -13.98 46.09 33.21 11.96 36.27 0.00 101 58 Peak 3 5701.19 60.48 105.53 -45.05 51.15 33.60 12.01 36.28 0.00 101 58 Peak 4 5721.54 64.17 114.31 -50.14 54.74 33.69 12.03 36.29 0.00 101 58 Peak	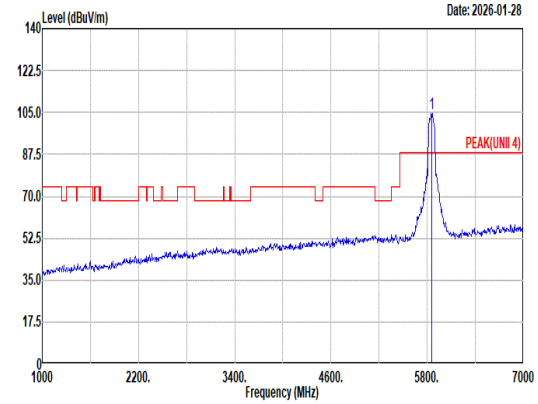 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 104.76 ------ ------ 94.72 34.19 12.17 36.32 0.00 101 58 Peak
Avg	Blank	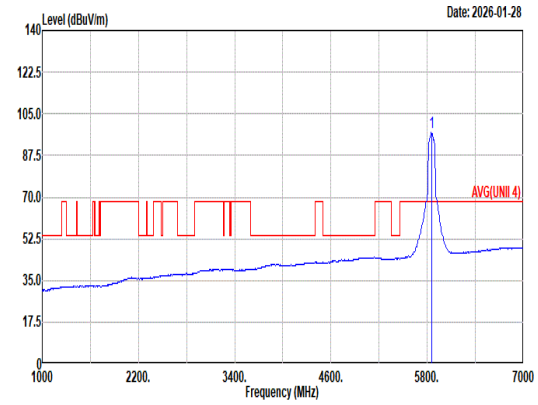 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 97.10 ------ ------ 87.06 34.19 12.17 36.32 0.00 101 58 Average

Mode	120	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Fundamental
Peak	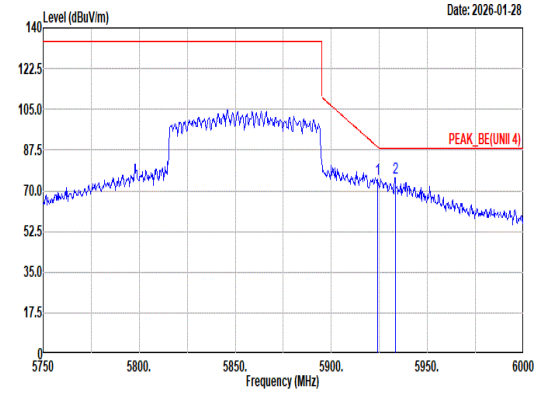 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.25 74.86 88.75 -13.89 64.65 34.30 12.25 36.34 0.00 101 58 Peak 2 5933.25 75.70 88.20 -12.50 65.48 34.30 12.26 36.34 0.00 101 58 Peak	Blank
Avg	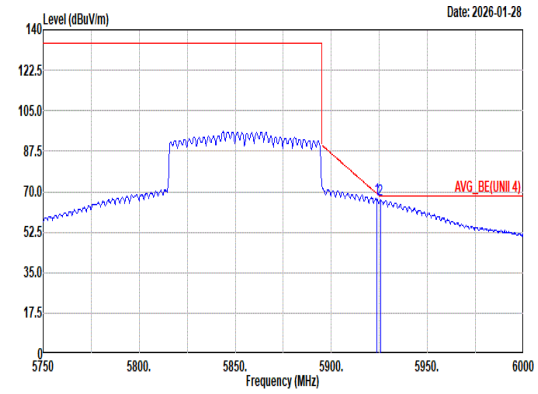 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.50 66.86 69.30 -2.44 56.65 34.30 12.25 36.34 0.00 101 58 Average 2 5925.50 66.35 68.20 -1.85 56.14 34.30 12.25 36.34 0.00 101 58 Average	Blank

Mode	120	
	Band Edge - L	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	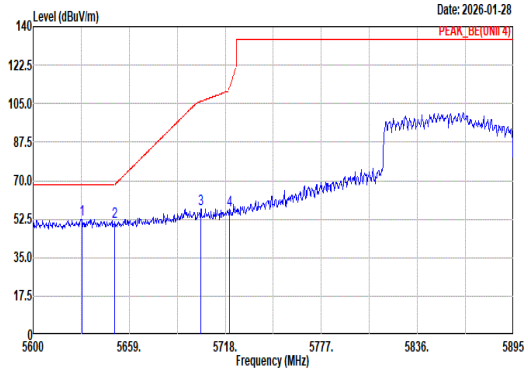 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5630.09 52.36 68.20 -15.84 43.56 33.12 11.94 36.26 0.00 303 78 Peak 2 5650.15 51.46 68.31 -16.85 42.57 33.20 11.96 36.27 0.00 303 78 Peak 3 5702.96 57.07 106.03 -48.96 47.73 33.61 12.01 36.28 0.00 303 78 Peak 4 5720.36 56.68 111.62 -54.94 47.26 33.68 12.03 36.29 0.00 303 78 Peak	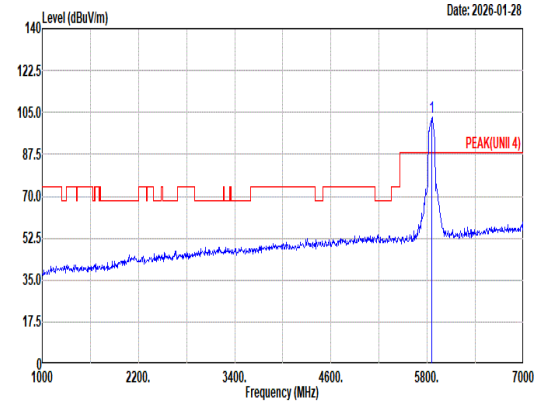 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 102.85 ------ ------ 92.76 34.23 12.19 36.33 0.00 303 78 Peak
Avg	Blank	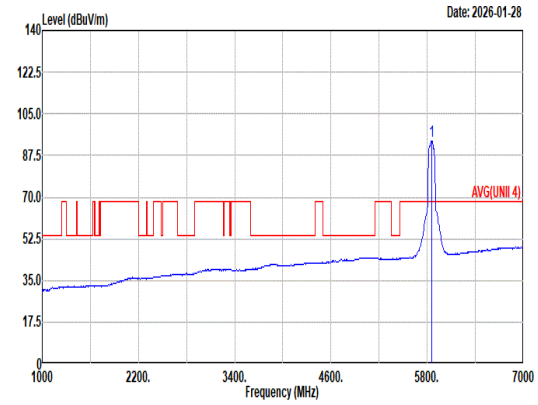 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5855.00 93.48 ------ ------ 83.47 34.17 12.16 36.32 0.00 303 78 Average

Mode	120	
	Band Edge - R	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Vertical	Fundamental
Peak	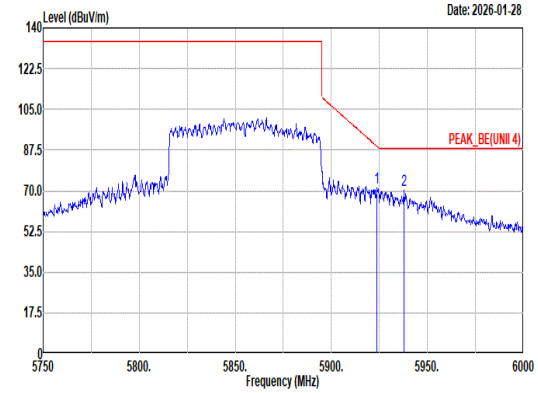 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5923.75 71.39 89.11 -17.72 61.18 34.30 12.25 36.34 0.00 303 78 Peak 2 5937.75 70.19 88.20 -18.01 59.96 34.30 12.27 36.34 0.00 303 78 Peak	Blank
Avg	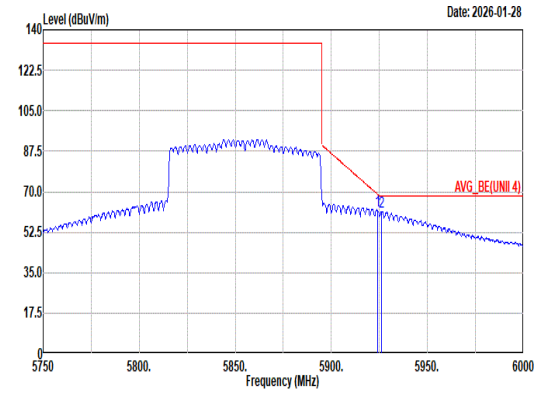 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 9120D-1522_250327 VERTICAL : RBW:1000.000kHz VBW:1.500kHz SWT:Auto Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 5924.00 62.00 68.93 -6.93 51.79 34.30 12.25 36.34 0.00 303 78 Average 2 5926.00 61.51 68.20 -6.69 51.30 34.30 12.25 36.34 0.00 303 78 Average	Blank

Mode	120	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak Avg	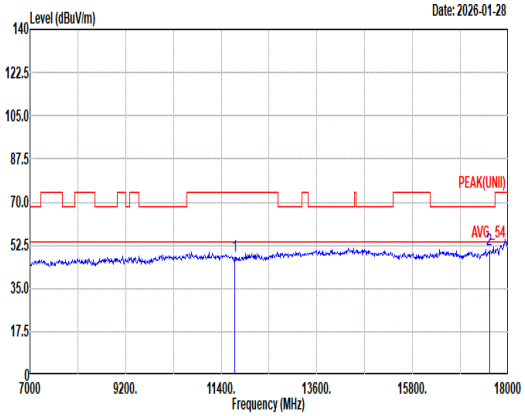 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 47.95 74.00 -26.05 57.57 38.62 17.16 66.13 0.73 -- -- Peak 2 17565.00 50.47 68.20 -17.73 54.62 39.53 21.18 65.69 0.83 -- -- Peak	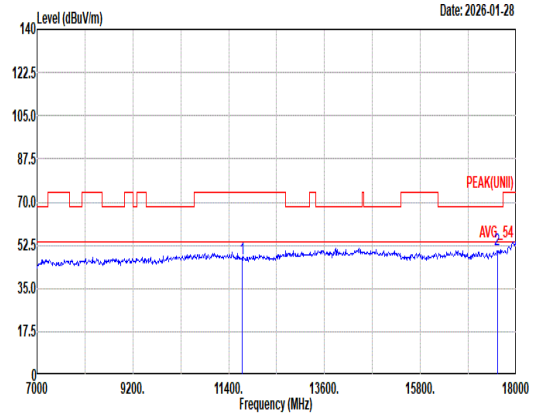 Site : 03CH16-HY Condition: PEAK(UNII) 3m 9120D-1522_250327 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 11710.00 47.16 74.00 -26.84 56.78 38.62 17.16 66.13 0.73 -- -- Peak 2 17565.00 50.46 68.20 -17.74 54.61 39.53 21.18 65.69 0.83 -- -- Peak

Mode	120	
	Harmonic	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	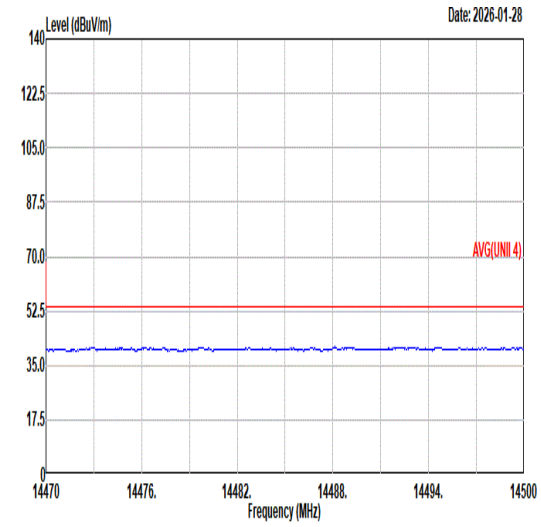 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	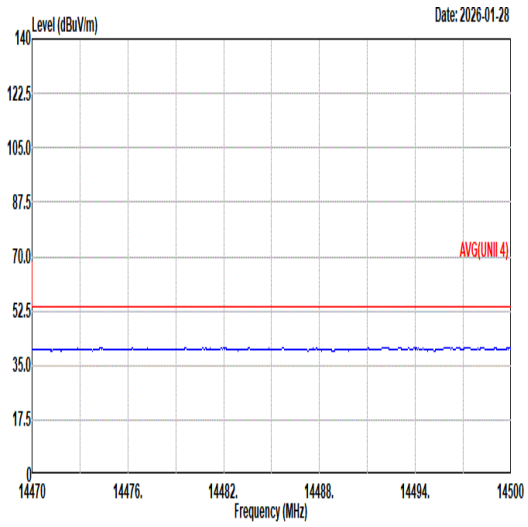 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL
17G ~18G Avg	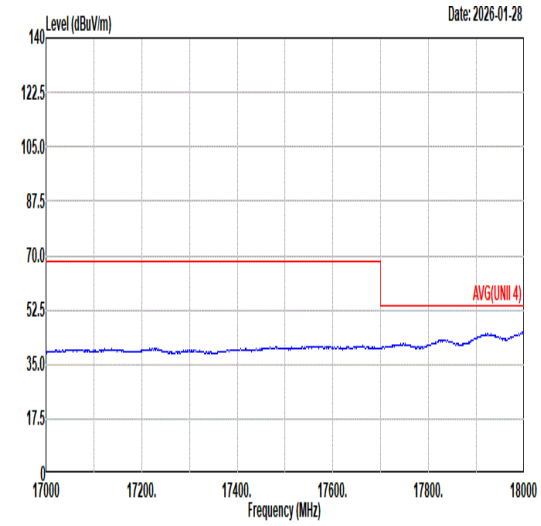 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 HORIZONTAL	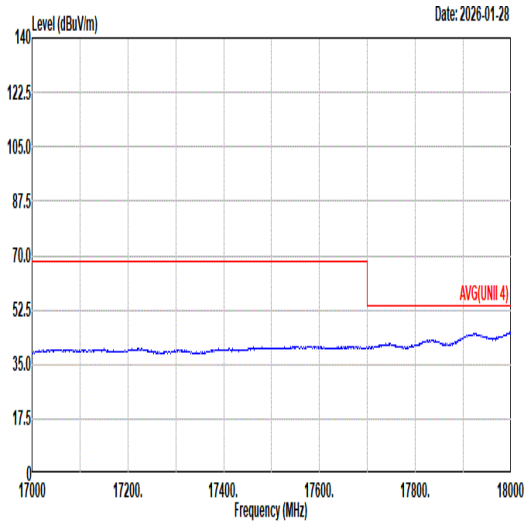 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 9120D-1522_250327 VERTICAL

Mode	121	
	LF	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
QP/ Peak	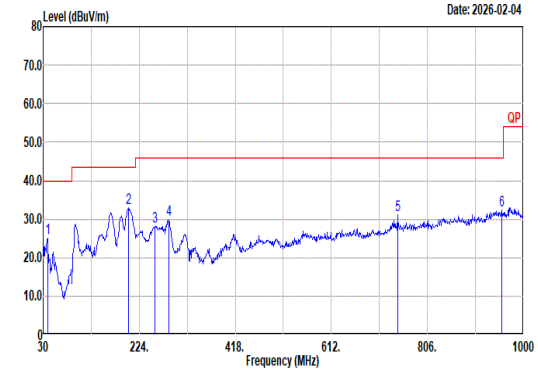	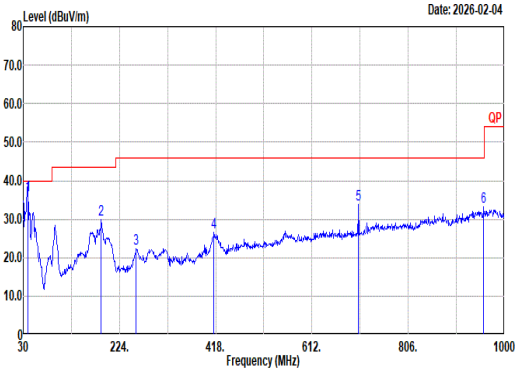

Site : 03CH16-HY
Condition: QP 3m CBL6111D&00802N1D01N-06 _47020 & 06_251004 HORIZONTAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	38.73	24.98	40.00	-15.02	35.95	20.12	1.15	32.25	0.01	--	--	Peak
2	201.69	32.80	43.50	-10.70	47.80	14.69	2.40	32.16	0.07	--	--	Peak
3	256.01	28.19	46.00	-17.81	38.58	19.04	2.71	32.22	0.08	--	--	Peak
4	284.14	29.87	46.00	-16.13	40.52	18.65	2.85	32.22	0.07	--	--	Peak
5	745.86	31.18	46.00	-14.82	31.36	27.48	4.54	32.34	0.14	--	--	Peak
6	956.35	32.43	46.00	-13.57	27.94	30.23	5.14	31.10	0.22	--	--	Peak

Site : 03CH16-HY
Condition: QP 3m CBL6111D&00802N1D01N-06 _47020 & 06_251004 VERTICAL

	Freq	Level	Limit Line	Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	38.73	36.11	40.00	-3.89	47.08	20.12	1.15	32.25	0.01	100	0	QP
2	187.14	29.91	43.50	-13.59	45.21	14.49	2.34	32.17	0.04	--	--	Peak
3	257.95	22.49	46.00	-23.51	32.56	19.35	2.72	32.22	0.08	--	--	Peak
4	414.12	26.47	46.00	-19.53	33.79	21.45	3.38	32.22	0.07	--	--	Peak
5	706.09	33.88	46.00	-12.12	35.73	25.98	4.42	32.39	0.14	--	--	Peak
6	958.29	33.08	46.00	-12.92	28.50	30.30	5.14	31.08	0.22	--	--	Peak

Mode	122	
	SHF	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz	
ANT	4+3	
Pol.	Horizontal	Vertical
Peak	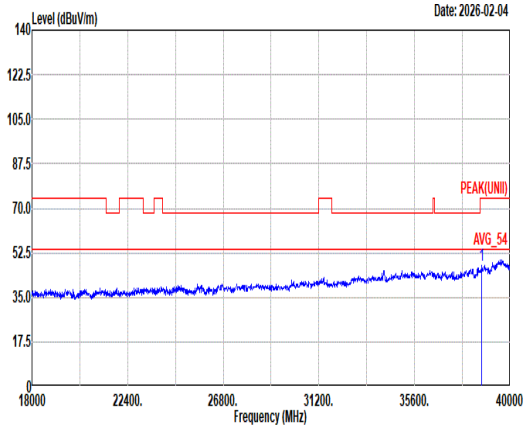 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 HORIZONTAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 38702.00 47.56 74.00 -26.44 61.06 44.98 8.08 57.02 -9.54 -- -- Peak	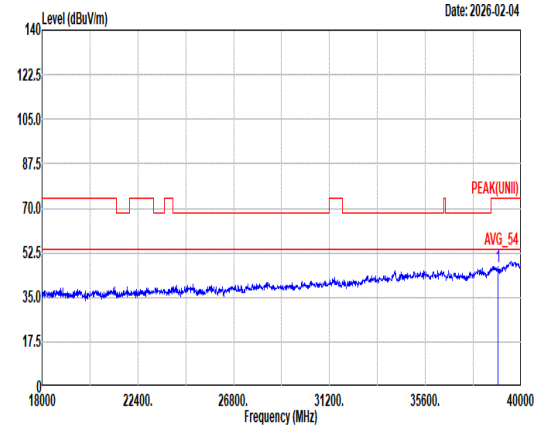 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 VERTICAL Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor Aux Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg 1 38944.00 47.08 74.00 -26.92 60.34 45.14 8.06 56.92 -9.54 -- -- Peak

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
4+3	802.11a	99.51	-	-	10Hz	0.02
4+3	802.11an HT20	99.47	-	-	10Hz	0.02
4+3	802.11an HT40	98.92	-	-	10Hz	0.05
4+3	802.11ac VHT20	99.47	-	-	10Hz	0.02
4+3	802.11ac VHT40	98.92	-	-	10Hz	0.05
4+3	802.11ac VHT80	97.98	873	1.15	1.2kHz	0.09
4+3	802.11ax HE20 Full RU	99.31	-	-	10Hz	0.03
4+3	802.11ax HE20 26 RU	97.88	1615	0.62	680Hz	0.09
4+3	802.11ax HE20 52 RU	97.99	1460	0.68	750Hz	0.09
4+3	802.11ax HE20 106 RU	97.75	1305	0.77	820Hz	0.10
4+3	802.11ax HE40 Full RU	98.66	-	-	10Hz	0.06
4+3	802.11ax HE80 Full RU	97.35	736	1.36	1.5kHz	0.12

MIMO <Ant. 4+3>

802.11a

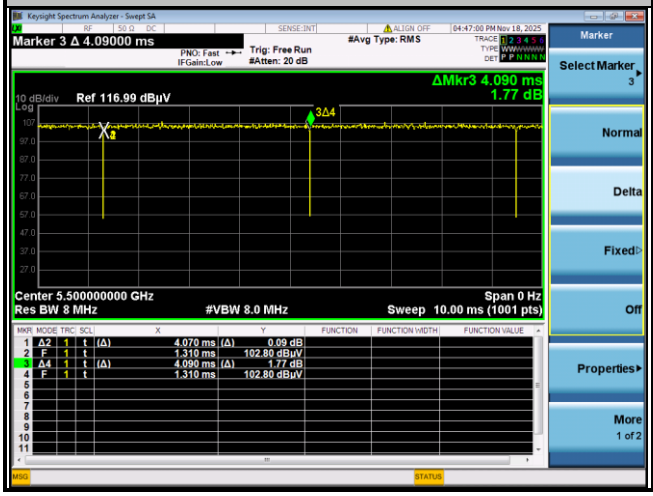

802.11an HT20

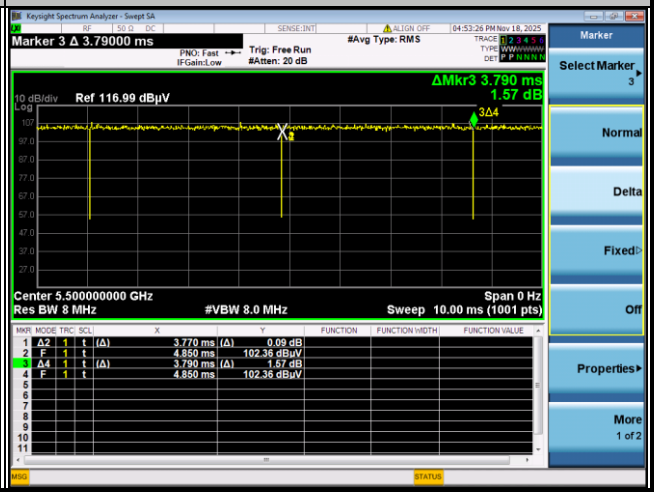

802.11an HT40

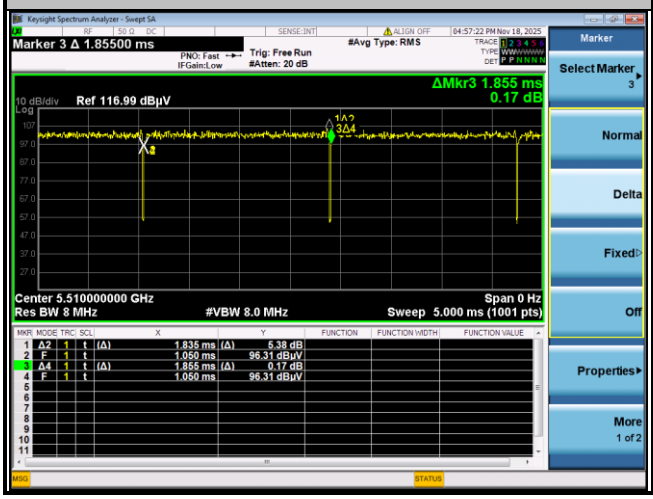

802.11ac VHT20

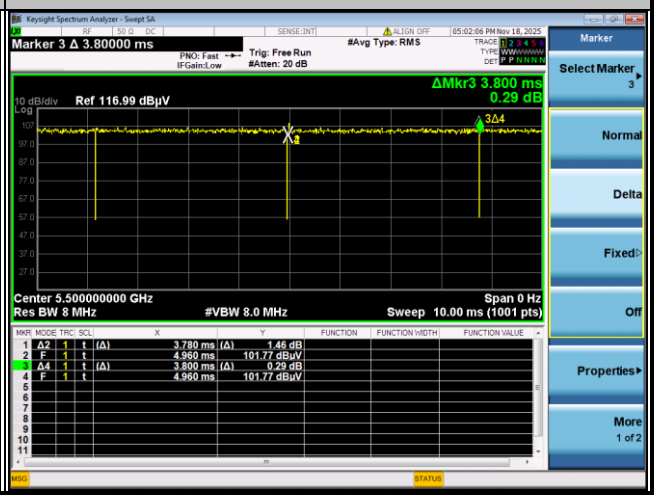

802.11ac VHT40

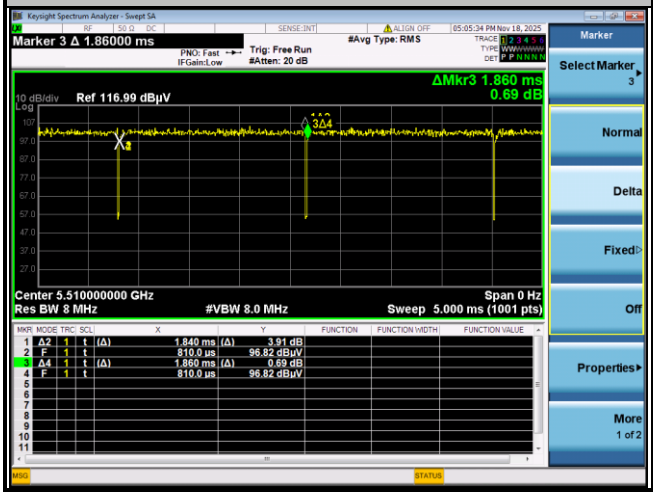

802.11ac VHT80

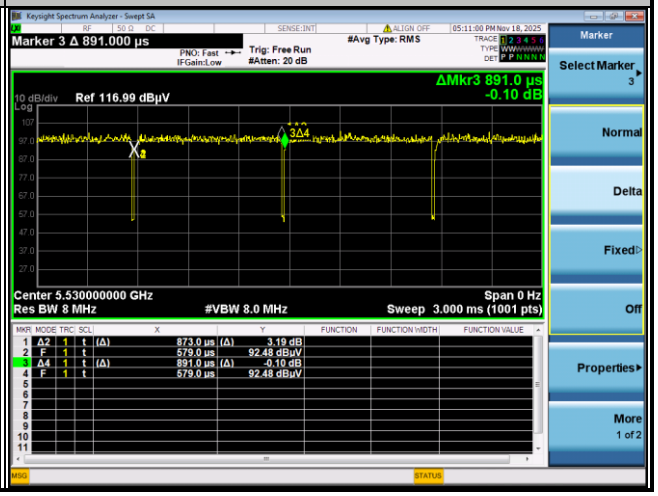

802.11ax HE20 Full RU

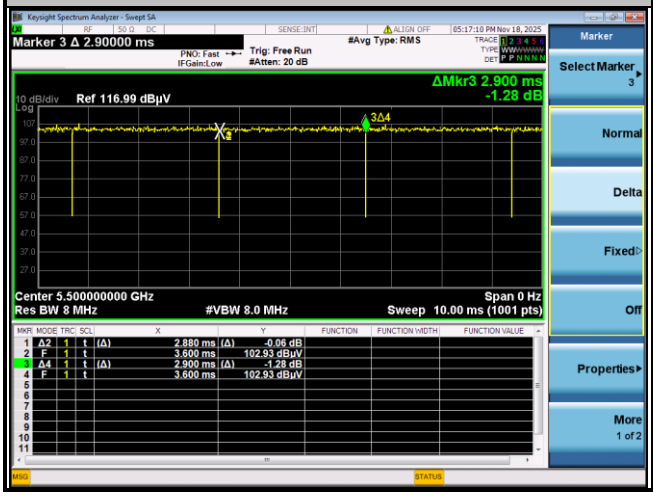

802.11ax HE20 26 RU

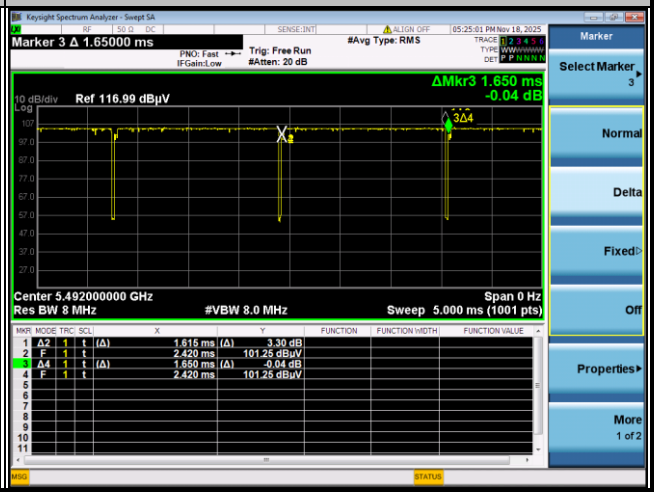

802.11ax HE20 52 RU

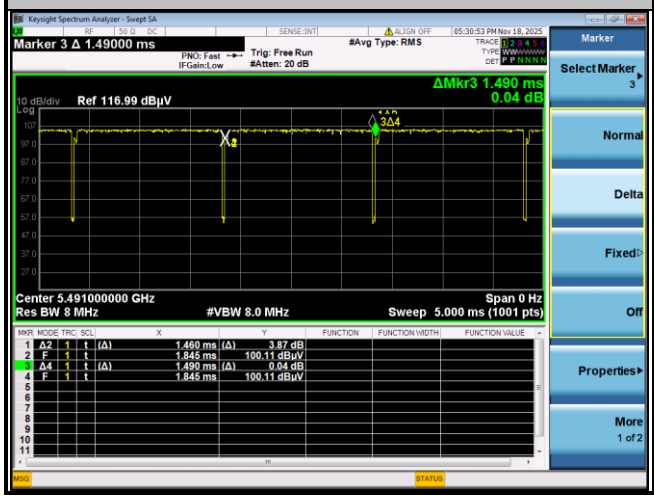

802.11ax HE20 106 RU

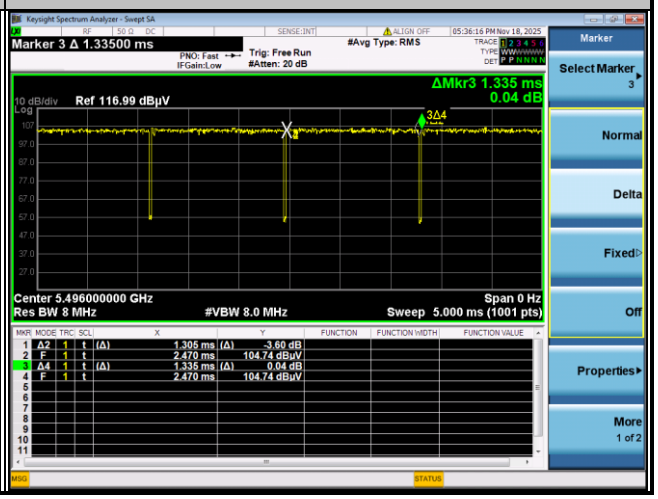

802.11ax HE40 Full RU

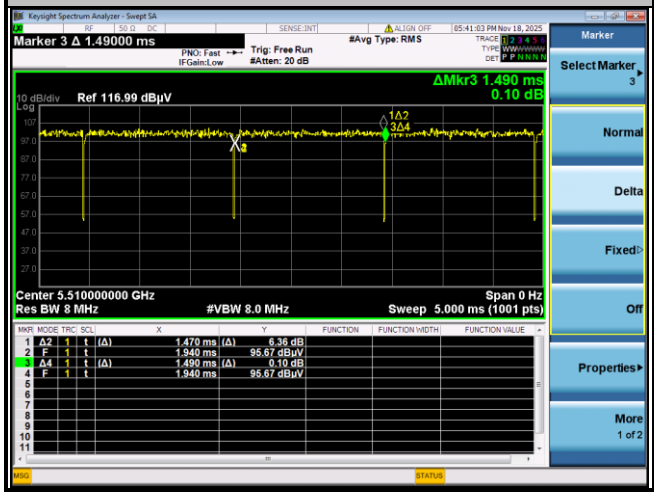

802.11ax HE80 Full RU

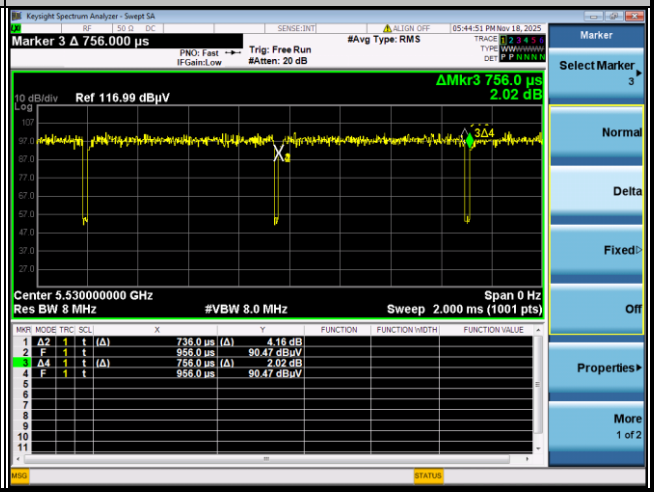

——THE END——