


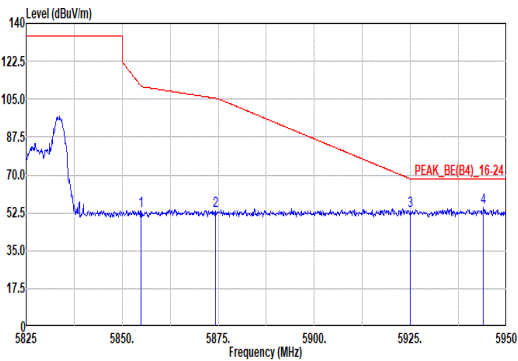
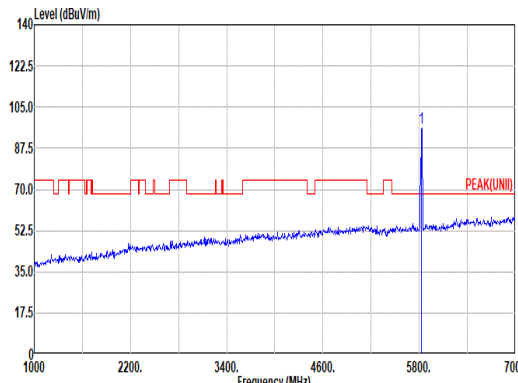
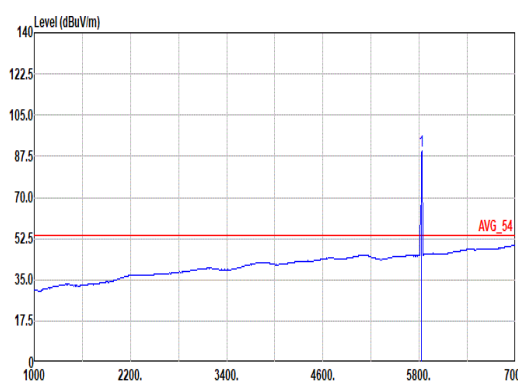




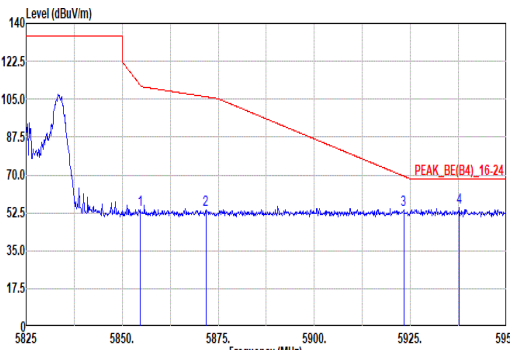


	16																																																																																																															
Mode	Band Edge																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5854.88</td><td>53.36</td><td>111.08</td><td>-57.72</td><td>38.95</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 400 210 PEAK</td></tr><tr><td>2</td><td>5874.25</td><td>53.30</td><td>105.41</td><td>-52.11</td><td>38.81</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00 400 210 PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>53.23</td><td>68.20</td><td>-14.97</td><td>38.57</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 400 210 PEAK</td></tr><tr><td>4</td><td>5944.00</td><td>54.80</td><td>68.20</td><td>-13.40</td><td>40.10</td><td>32.69</td><td>11.98</td><td>29.97</td><td>0.00 400 210 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.88	53.36	111.08	-57.72	38.95	32.42	11.91	29.92	0.00 400 210 PEAK	2	5874.25	53.30	105.41	-52.11	38.81	32.50	11.92	29.93	0.00 400 210 PEAK	3	5925.00	53.23	68.20	-14.97	38.57	32.65	11.97	29.96	0.00 400 210 PEAK	4	5944.00	54.80	68.20	-13.40	40.10	32.69	11.98	29.97	0.00 400 210 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>96.35</td><td>-----</td><td>-----</td><td>82.02</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00 400 210 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5825.00	96.35	-----	-----	82.02	32.34	11.89	29.90	0.00 400 210 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5854.88	53.36	111.08	-57.72	38.95	32.42	11.91	29.92	0.00 400 210 PEAK																																																																																																							
2	5874.25	53.30	105.41	-52.11	38.81	32.50	11.92	29.93	0.00 400 210 PEAK																																																																																																							
3	5925.00	53.23	68.20	-14.97	38.57	32.65	11.97	29.96	0.00 400 210 PEAK																																																																																																							
4	5944.00	54.80	68.20	-13.40	40.10	32.69	11.98	29.97	0.00 400 210 PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5825.00	96.35	-----	-----	82.02	32.34	11.89	29.90	0.00 400 210 PEAK																																																																																																							
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>89.80</td><td>-----</td><td>-----</td><td>75.47</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00 400 210 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5825.00	89.80	-----	-----	75.47	32.34	11.89	29.90	0.00 400 210 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																								
1	5825.00	89.80	-----	-----	75.47	32.34	11.89	29.90	0.00 400 210 AVERAGE																																																																																																							



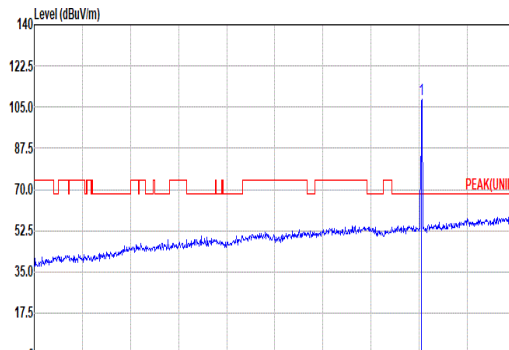


		16																																																																																																																																																					
Mode		Band Edge																																																																																																																																																					
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 26/8_5825MHz																																																																																																																																																					
Pol.	Vertical										Fundamental																																																																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.63</td><td>53.64</td><td>111.65</td><td>-58.01</td><td>39.23</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>2</td><td>5871.75</td><td>53.95</td><td>106.11</td><td>-52.16</td><td>39.47</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>3</td><td>5923.25</td><td>53.97</td><td>69.49</td><td>-15.52</td><td>39.32</td><td>32.65</td><td>11.96</td><td>29.96</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr><tr><td>4</td><td>5937.75</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>40.08</td><td>32.68</td><td>11.98</td><td>29.96</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5854.63	53.64	111.65	-58.01	39.23	32.42	11.91	29.92	0.00	283	217	PEAK	2	5871.75	53.95	106.11	-52.16	39.47	32.49	11.92	29.93	0.00	283	217	PEAK	3	5923.25	53.97	69.49	-15.52	39.32	32.65	11.96	29.96	0.00	283	217	PEAK	4	5937.75	54.78	68.20	-13.42	40.08	32.68	11.98	29.96	0.00	283	217	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>108.06</td><td>-----</td><td>-----</td><td>93.73</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>283</td><td>217</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5825.00	108.06	-----	-----	93.73	32.34	11.89	29.90	0.00	283	217	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																														
1	5854.63	53.64	111.65	-58.01	39.23	32.42	11.91	29.92	0.00	283	217	PEAK																																																																																																																																											
2	5871.75	53.95	106.11	-52.16	39.47	32.49	11.92	29.93	0.00	283	217	PEAK																																																																																																																																											
3	5923.25	53.97	69.49	-15.52	39.32	32.65	11.96	29.96	0.00	283	217	PEAK																																																																																																																																											
4	5937.75	54.78	68.20	-13.42	40.08	32.68	11.98	29.96	0.00	283	217	PEAK																																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																														
1	5825.00	108.06	-----	-----	93.73	32.34	11.89	29.90	0.00	283	217	PEAK																																																																																																																																											
Avg	Blank										 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>99.07</td><td>-----</td><td>-----</td><td>84.74</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>283</td><td>217</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5825.00	99.07	-----	-----	84.74	32.34	11.89	29.90	0.00	283	217	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																														
1	5825.00	99.07	-----	-----	84.74	32.34	11.89	29.90	0.00	283	217	AVERAGE																																																																																																																																											



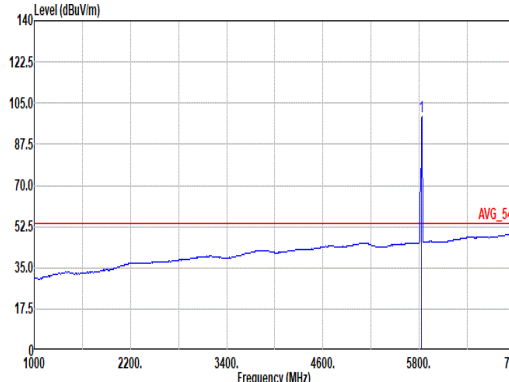


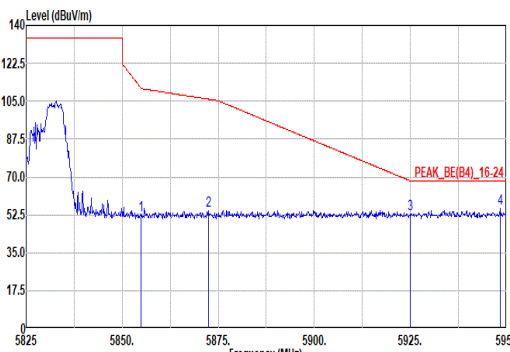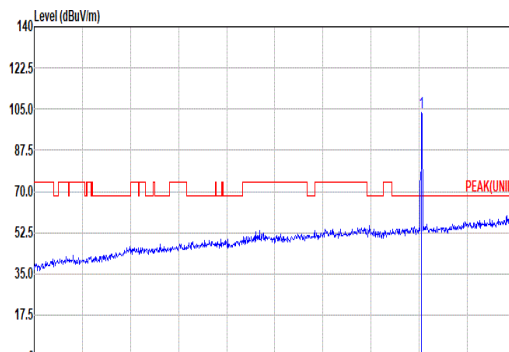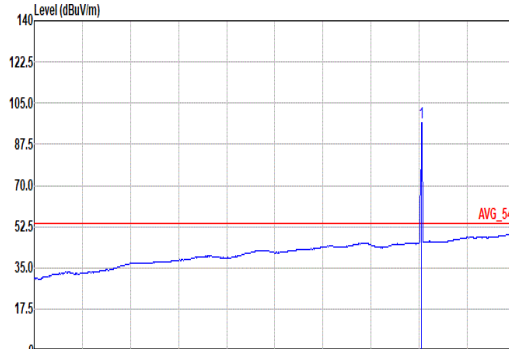Mode	17																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5854.88</td><td>52.51</td><td>111.08</td><td>-58.57</td><td>38.10</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>2 5872.38</td><td>54.24</td><td>105.93</td><td>-51.69</td><td>39.76</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>3 5924.88</td><td>52.62</td><td>68.29</td><td>-15.67</td><td>37.96</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr><tr><td>4 5948.38</td><td>55.49</td><td>68.20</td><td>-12.71</td><td>40.77</td><td>32.70</td><td>11.99</td><td>29.97</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5854.88	52.51	111.08	-58.57	38.10	32.42	11.91	29.92	0.00	100	183 PEAK	2 5872.38	54.24	105.93	-51.69	39.76	32.49	11.92	29.93	0.00	100	183 PEAK	3 5924.88	52.62	68.29	-15.67	37.96	32.65	11.97	29.96	0.00	100	183 PEAK	4 5948.38	55.49	68.20	-12.71	40.77	32.70	11.99	29.97	0.00	100	183 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>103.68</td><td>-----</td><td>-----</td><td>89.37</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>183 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	103.68	-----	-----	89.37	32.32	11.89	29.90	0.00	100	183 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1 5854.88	52.51	111.08	-58.57	38.10	32.42	11.91	29.92	0.00	100	183 PEAK																																																																																																													
2 5872.38	54.24	105.93	-51.69	39.76	32.49	11.92	29.93	0.00	100	183 PEAK																																																																																																													
3 5924.88	52.62	68.29	-15.67	37.96	32.65	11.97	29.96	0.00	100	183 PEAK																																																																																																													
4 5948.38	55.49	68.20	-12.71	40.77	32.70	11.99	29.97	0.00	100	183 PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1 5825.00	103.68	-----	-----	89.37	32.32	11.89	29.90	0.00	100	183 PEAK																																																																																																													
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5825.00</td><td>96.81</td><td>-----</td><td>-----</td><td>82.50</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>183 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5825.00	96.81	-----	-----	82.50	32.32	11.89	29.90	0.00	100	183 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1 5825.00	96.81	-----	-----	82.50	32.32	11.89	29.90	0.00	100	183 AVERAGE																																																																																																													

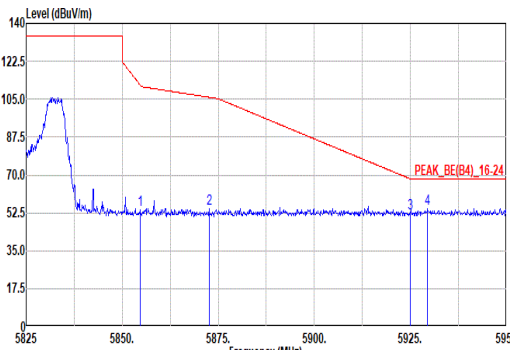
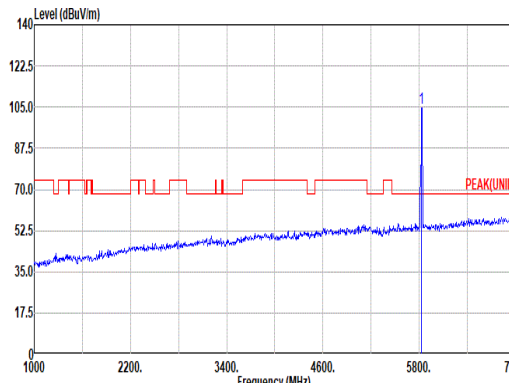
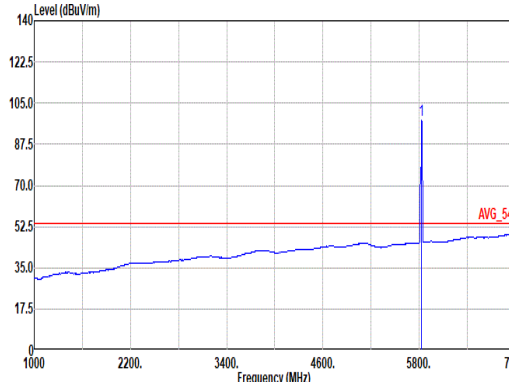


		17																																																																																																																																																							
Mode		Band Edge																																																																																																																																																							
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 52/40_5825MHz																																																																																																																																																							
Pol.																																																																																																																																																									
Peak	Vertical	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.75</td><td>53.77</td><td>111.37</td><td>-57.60</td><td>39.36</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>5872.63</td><td>54.38</td><td>105.86</td><td>-51.48</td><td>39.90</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>3</td><td>5925.00</td><td>52.17</td><td>68.20</td><td>-16.03</td><td>37.51</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>4</td><td>5929.50</td><td>54.59</td><td>68.20</td><td>-13.61</td><td>39.92</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5854.75	53.77	111.37	-57.60	39.36	32.42	11.91	29.92	0.00	100	219	PEAK	2	5872.63	54.38	105.86	-51.48	39.90	32.49	11.92	29.93	0.00	100	219	PEAK	3	5925.00	52.17	68.20	-16.03	37.51	32.65	11.97	29.96	0.00	100	219	PEAK	4	5929.50	54.59	68.20	-13.61	39.92	32.66	11.97	29.96	0.00	100	219	PEAK	Fundamental	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>104.83</td><td>-----</td><td>-----</td><td>90.50</td><td>32.34</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5825.00	104.83	-----	-----	90.50	32.34	11.89	29.90	0.00	100	219	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																
1	5854.75	53.77	111.37	-57.60	39.36	32.42	11.91	29.92	0.00	100	219	PEAK																																																																																																																																													
2	5872.63	54.38	105.86	-51.48	39.90	32.49	11.92	29.93	0.00	100	219	PEAK																																																																																																																																													
3	5925.00	52.17	68.20	-16.03	37.51	32.65	11.97	29.96	0.00	100	219	PEAK																																																																																																																																													
4	5929.50	54.59	68.20	-13.61	39.92	32.66	11.97	29.96	0.00	100	219	PEAK																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																
1	5825.00	104.83	-----	-----	90.50	32.34	11.89	29.90	0.00	100	219	PEAK																																																																																																																																													
Avg	Blank	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5825.00</td><td>97.87</td><td>-----</td><td>-----</td><td>83.56</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	5825.00	97.87	-----	-----	83.56	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																																
1	5825.00	97.87	-----	-----	83.56	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																																																																													

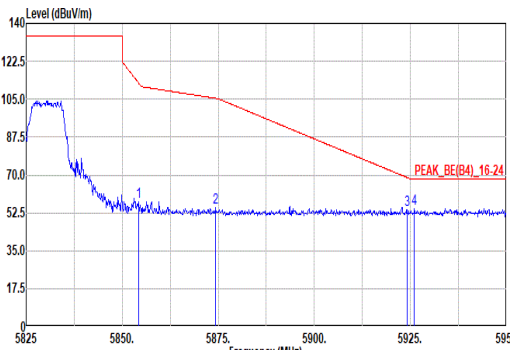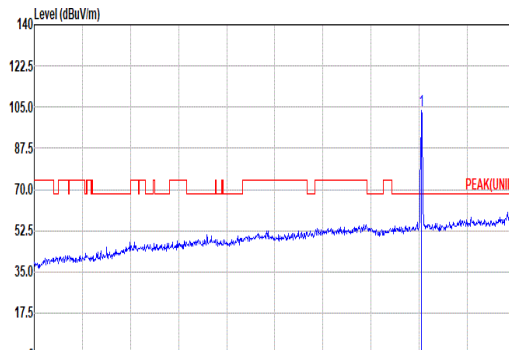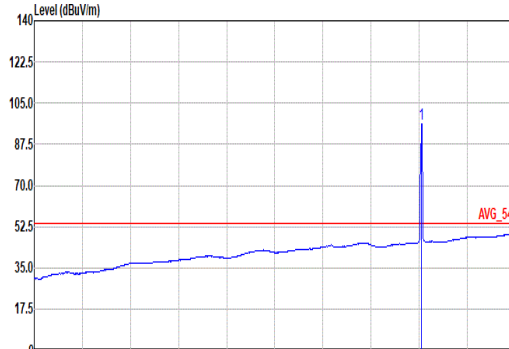

		18																																																																																																																																																						
Mode		Band Edge																																																																																																																																																						
		U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																																																																						
Pol.		Horizontal					Fundamental																																																																																																																																																	
Peak		 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5854.25</td><td>57.66</td><td>112.51</td><td>-54.85</td><td>43.25</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>2</td><td>5874.25</td><td>54.86</td><td>105.41</td><td>-50.55</td><td>40.37</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>3</td><td>5924.13</td><td>53.97</td><td>68.84</td><td>-14.87</td><td>39.31</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>4</td><td>5926.00</td><td>54.29</td><td>68.20</td><td>-13.91</td><td>39.63</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5854.25	57.66	112.51	-54.85	43.25	32.42	11.91	29.92	0.00	100	182	PEAK	2	5874.25	54.86	105.41	-50.55	40.37	32.50	11.92	29.93	0.00	100	182	PEAK	3	5924.13	53.97	68.84	-14.87	39.31	32.65	11.97	29.96	0.00	100	182	PEAK	4	5926.00	54.29	68.20	-13.91	39.63	32.65	11.97	29.96	0.00	100	182	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>103.80</td><td>-----</td><td>-----</td><td>89.49</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5825.00	103.80	-----	-----	89.49	32.32	11.89	29.90	0.00	100	182	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																
1	5854.25	57.66	112.51	-54.85	43.25	32.42	11.91	29.92	0.00	100	182	PEAK																																																																																																																																												
2	5874.25	54.86	105.41	-50.55	40.37	32.50	11.92	29.93	0.00	100	182	PEAK																																																																																																																																												
3	5924.13	53.97	68.84	-14.87	39.31	32.65	11.97	29.96	0.00	100	182	PEAK																																																																																																																																												
4	5926.00	54.29	68.20	-13.91	39.63	32.65	11.97	29.96	0.00	100	182	PEAK																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																
1	5825.00	103.80	-----	-----	89.49	32.32	11.89	29.90	0.00	100	182	PEAK																																																																																																																																												
Avg		Blank					 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.220kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>96.41</td><td>-----</td><td>-----</td><td>82.10</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>182</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	5825.00	96.41	-----	-----	82.10	32.32	11.89	29.90	0.00	100	182	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																
1	5825.00	96.41	-----	-----	82.10	32.32	11.89	29.90	0.00	100	182	AVERAGE																																																																																																																																												

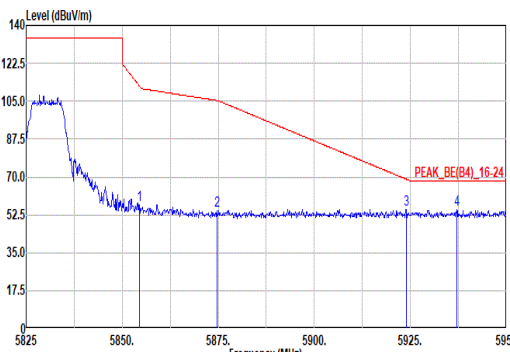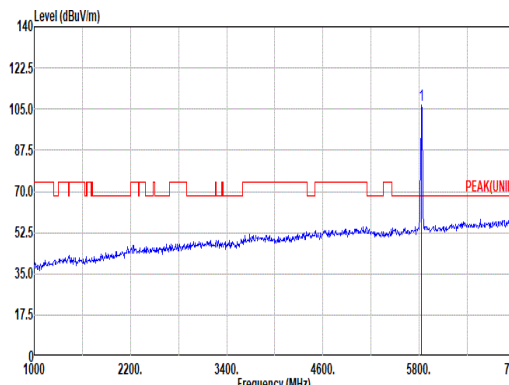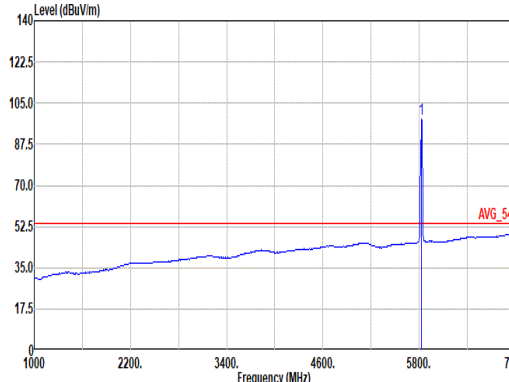


Mode	18																																																																																																																																
	Band Edge																																																																																																																																
	U-NII-3_5.725-5.85_802.11ax HE20_CH165_Partial RU 106/54_5825MHz																																																																																																																																
Pol.	Vertical	Fundamental																																																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16.24 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.50</td><td>57.11</td><td>111.94</td><td>-54.83</td><td>42.70</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>2</td><td>5874.75</td><td>54.27</td><td>105.27</td><td>-51.00</td><td>39.78</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>3</td><td>5923.88</td><td>54.90</td><td>69.03</td><td>-14.13</td><td>40.24</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr><tr><td>4</td><td>5937.00</td><td>54.86</td><td>68.20</td><td>-13.34</td><td>40.17</td><td>32.67</td><td>11.98</td><td>29.96</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5854.50	57.11	111.94	-54.83	42.70	32.42	11.91	29.92	0.00	100	219	PEAK	2	5874.75	54.27	105.27	-51.00	39.78	32.50	11.92	29.93	0.00	100	219	PEAK	3	5923.88	54.90	69.03	-14.13	40.24	32.65	11.97	29.96	0.00	100	219	PEAK	4	5937.00	54.86	68.20	-13.34	40.17	32.67	11.98	29.96	0.00	100	219	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII) Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>106.82</td><td>-----</td><td>-----</td><td>92.51</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	106.82	-----	-----	92.51	32.32	11.89	29.90	0.00	100	219	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5854.50	57.11	111.94	-54.83	42.70	32.42	11.91	29.92	0.00	100	219	PEAK																																																																																																																					
2	5874.75	54.27	105.27	-51.00	39.78	32.50	11.92	29.93	0.00	100	219	PEAK																																																																																																																					
3	5923.88	54.90	69.03	-14.13	40.24	32.65	11.97	29.96	0.00	100	219	PEAK																																																																																																																					
4	5937.00	54.86	68.20	-13.34	40.17	32.67	11.98	29.96	0.00	100	219	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	106.82	-----	-----	92.51	32.32	11.89	29.90	0.00	100	219	PEAK																																																																																																																					
Avg	Blank	 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.220kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5825.00</td><td>98.18</td><td>-----</td><td>-----</td><td>83.87</td><td>32.32</td><td>11.89</td><td>29.90</td><td>0.00</td><td>100</td><td>219</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5825.00	98.18	-----	-----	83.87	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	5825.00	98.18	-----	-----	83.87	32.32	11.89	29.90	0.00	100	219	AVERAGE																																																																																																																					





















		19									
Mode	Band Edge - L										
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz										
Pol.	Horizontal										
Peak											

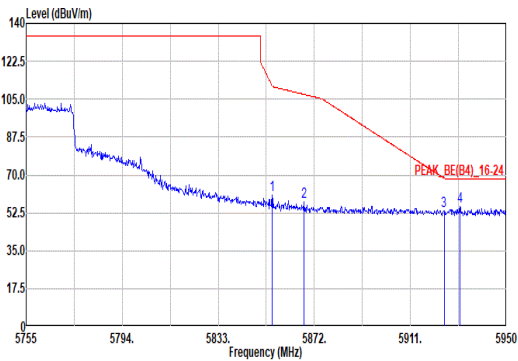


Mode	19																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.84</td><td>60.63</td><td>111.17</td><td>-50.54</td><td>46.22</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>2</td><td>5867.91</td><td>57.58</td><td>107.18</td><td>-49.60</td><td>43.11</td><td>32.47</td><td>11.92</td><td>29.92</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>3</td><td>5924.65</td><td>53.38</td><td>68.46</td><td>-15.08</td><td>38.72</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr><tr><td>4</td><td>5931.09</td><td>55.28</td><td>68.20</td><td>-12.92</td><td>40.61</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>182</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.84	60.63	111.17	-50.54	46.22	32.42	11.91	29.92	0.00	100	182	PEAK	2	5867.91	57.58	107.18	-49.60	43.11	32.47	11.92	29.92	0.00	100	182	PEAK	3	5924.65	53.38	68.46	-15.08	38.72	32.65	11.97	29.96	0.00	100	182	PEAK	4	5931.09	55.28	68.20	-12.92	40.61	32.66	11.97	29.96	0.00	100	182	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.84	60.63	111.17	-50.54	46.22	32.42	11.91	29.92	0.00	100	182	PEAK																																																																									
2	5867.91	57.58	107.18	-49.60	43.11	32.47	11.92	29.92	0.00	100	182	PEAK																																																																									
3	5924.65	53.38	68.46	-15.08	38.72	32.65	11.97	29.96	0.00	100	182	PEAK																																																																									
4	5931.09	55.28	68.20	-12.92	40.61	32.66	11.97	29.96	0.00	100	182	PEAK																																																																									

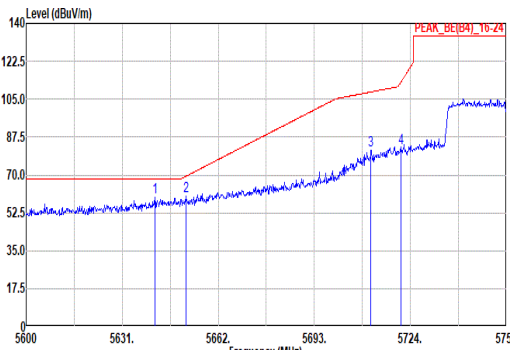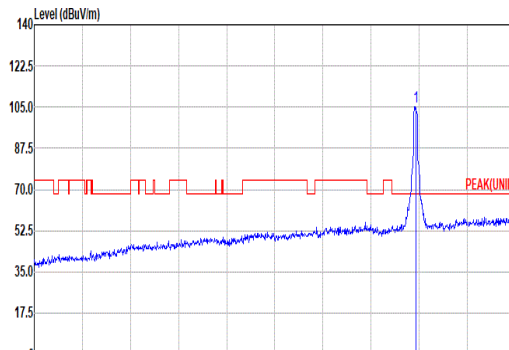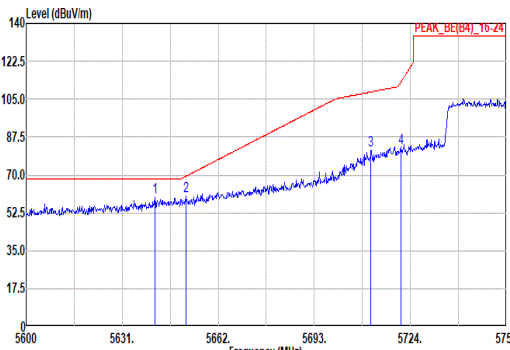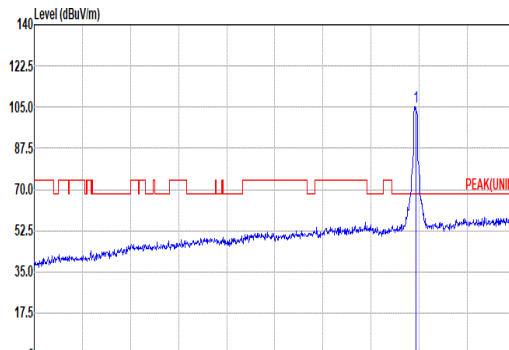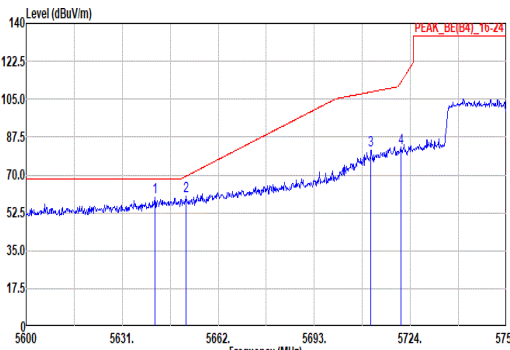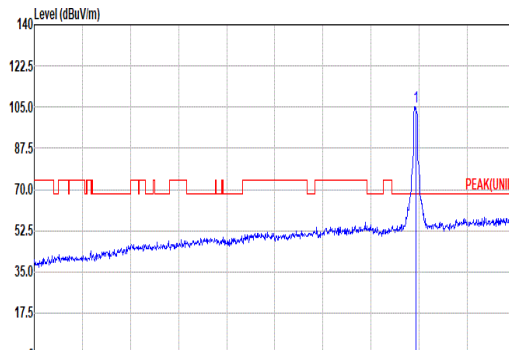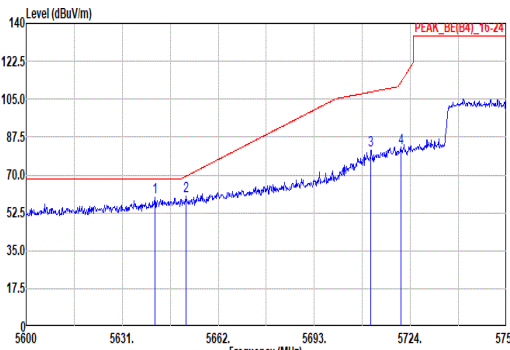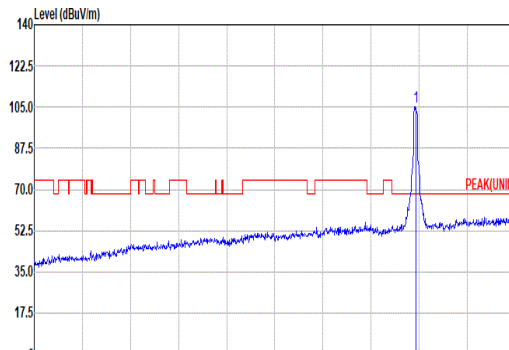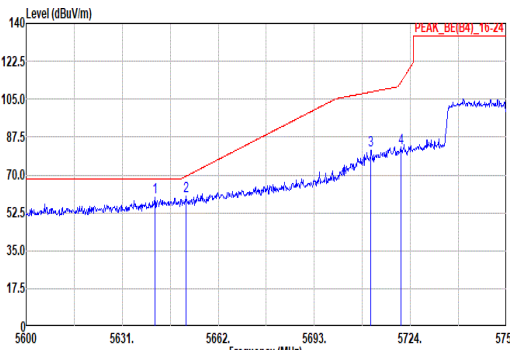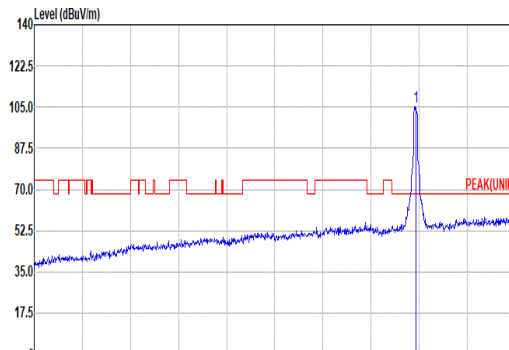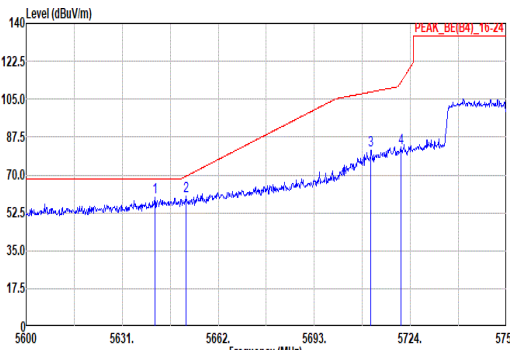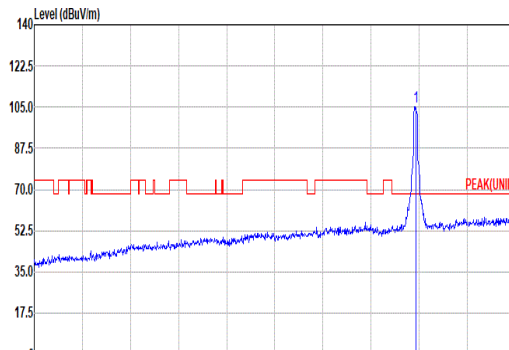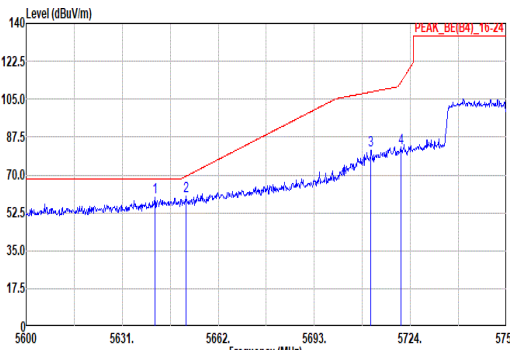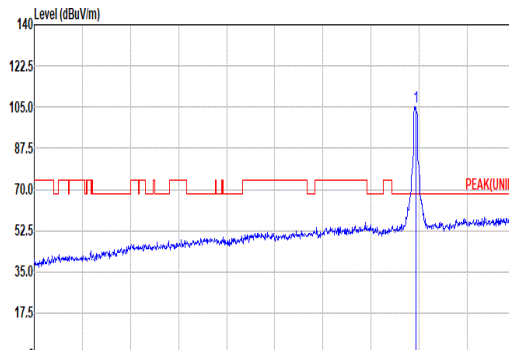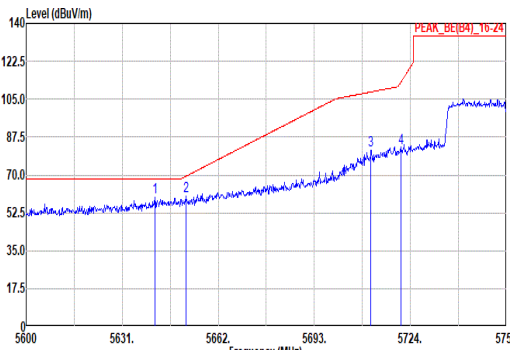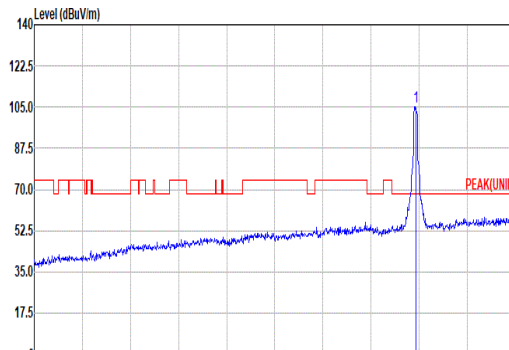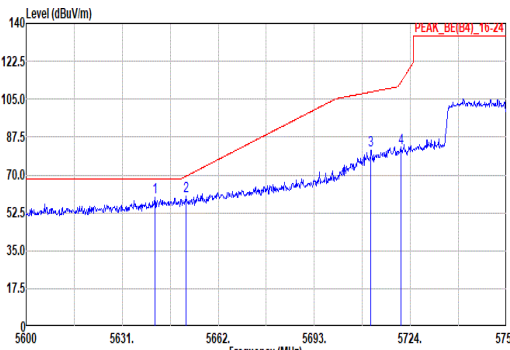
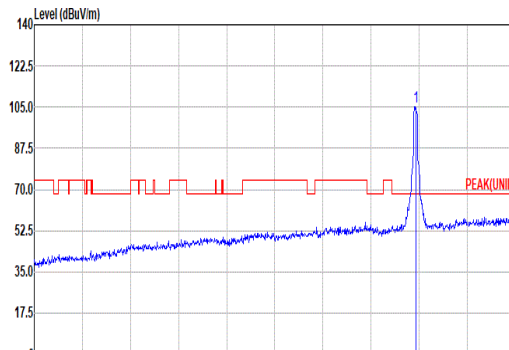


		19																																																																																																																																											
Mode		Band Edge - L																																																																																																																																											
		U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																											
Pol.		Vertical					Fundamental																																																																																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Avg	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Blank	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Avg	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Blank	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Avg	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Blank	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Avg	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			
Blank	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5641.54</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>46.17</td><td>31.87</td><td>11.69</td><td>29.79</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>2</td><td>5651.62</td><td>60.41</td><td>69.40</td><td>-8.99</td><td>46.60</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>3</td><td>5711.29</td><td>81.30</td><td>100.36</td><td>-27.06</td><td>67.26</td><td>32.10</td><td>11.77</td><td>29.83</td><td>0.00</td><td>271 213 PEAK</td></tr><tr><td>4</td><td>5720.90</td><td>82.47</td><td>112.85</td><td>-30.38</td><td>68.43</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK	2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK	3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK	4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.98</td><td>32.10</td><td>11.80</td><td>29.85</td><td>0.00</td><td>271 213 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5641.54	59.94	68.20	-8.26	46.17	31.87	11.69	29.79	0.00	271 213 PEAK																																																																																																																																			
2	5651.62	60.41	69.40	-8.99	46.60	31.91	11.70	29.80	0.00	271 213 PEAK																																																																																																																																			
3	5711.29	81.30	100.36	-27.06	67.26	32.10	11.77	29.83	0.00	271 213 PEAK																																																																																																																																			
4	5720.90	82.47	112.85	-30.38	68.43	32.10	11.78	29.84	0.00	271 213 PEAK																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	5755.00	105.03	-----	-----	90.98	32.10	11.80	29.85	0.00	271 213 PEAK																																																																																																																																			




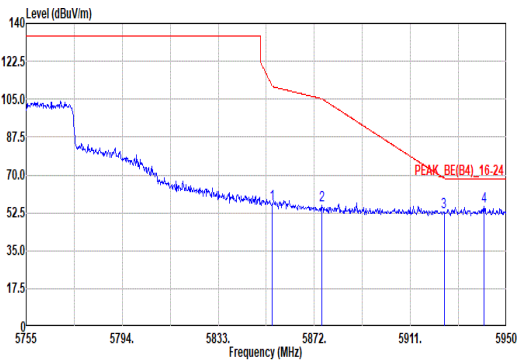


Mode	19																																																																																			
	Band Edge - R																																																																																			
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.84</td><td>56.46</td><td>111.17</td><td>-54.71</td><td>42.05</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>2</td><td>5874.93</td><td>55.76</td><td>105.22</td><td>-49.46</td><td>41.27</td><td>32.50</td><td>11.92</td><td>29.93</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>3</td><td>5924.65</td><td>52.99</td><td>68.46</td><td>-15.47</td><td>38.33</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr><tr><td>4</td><td>5940.04</td><td>55.30</td><td>68.20</td><td>-12.90</td><td>40.61</td><td>32.68</td><td>11.98</td><td>29.97</td><td>0.00</td><td>271</td><td>213</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB		1	5854.84	56.46	111.17	-54.71	42.05	32.42	11.91	29.92	0.00	271	213	PEAK	2	5874.93	55.76	105.22	-49.46	41.27	32.50	11.92	29.93	0.00	271	213	PEAK	3	5924.65	52.99	68.46	-15.47	38.33	32.65	11.97	29.96	0.00	271	213	PEAK	4	5940.04	55.30	68.20	-12.90	40.61	32.68	11.98	29.97	0.00	271	213	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																																												
1	5854.84	56.46	111.17	-54.71	42.05	32.42	11.91	29.92	0.00	271	213	PEAK																																																																								
2	5874.93	55.76	105.22	-49.46	41.27	32.50	11.92	29.93	0.00	271	213	PEAK																																																																								
3	5924.65	52.99	68.46	-15.47	38.33	32.65	11.97	29.96	0.00	271	213	PEAK																																																																								
4	5940.04	55.30	68.20	-12.90	40.61	32.68	11.98	29.97	0.00	271	213	PEAK																																																																								

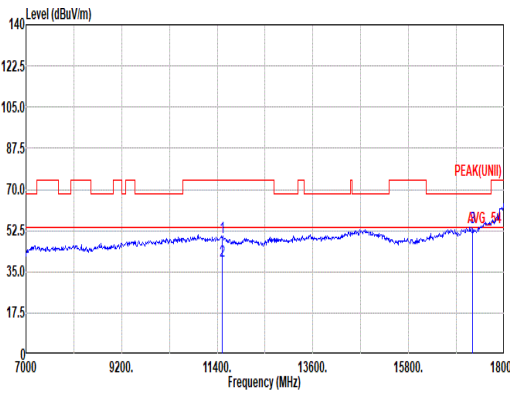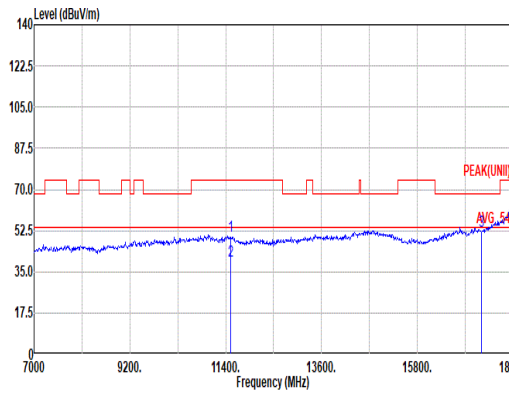

Mode	19																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91280-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>49.91</td><td>74.00</td><td>-24.09</td><td>58.20</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>39.82</td><td>54.00</td><td>-14.18</td><td>48.11</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>17265.00</td><td>53.88</td><td>68.20</td><td>-14.32</td><td>55.90</td><td>40.66</td><td>21.05</td><td>64.35</td><td>0.62</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	49.91	74.00	-24.09	58.20	40.10	16.75	65.73	0.59	--	PEAK	2	11510.00	39.82	54.00	-14.18	48.11	40.10	16.75	65.73	0.59	--	AVERAGE	3	17265.00	53.88	68.20	-14.32	55.90	40.66	21.05	64.35	0.62	--	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91280-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11510.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>58.39</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>11510.00</td><td>39.81</td><td>54.00</td><td>-14.19</td><td>48.10</td><td>40.10</td><td>16.75</td><td>65.73</td><td>0.59</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>17265.00</td><td>52.36</td><td>68.20</td><td>-15.84</td><td>54.38</td><td>40.66</td><td>21.05</td><td>64.35</td><td>0.62</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11510.00	50.10	74.00	-23.90	58.39	40.10	16.75	65.73	0.59	--	PEAK	2	11510.00	39.81	54.00	-14.19	48.10	40.10	16.75	65.73	0.59	--	AVERAGE	3	17265.00	52.36	68.20	-15.84	54.38	40.66	21.05	64.35	0.62	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11510.00	49.91	74.00	-24.09	58.20	40.10	16.75	65.73	0.59	--	PEAK																																																																																																																													
2	11510.00	39.82	54.00	-14.18	48.11	40.10	16.75	65.73	0.59	--	AVERAGE																																																																																																																													
3	17265.00	53.88	68.20	-14.32	55.90	40.66	21.05	64.35	0.62	--	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	11510.00	50.10	74.00	-23.90	58.39	40.10	16.75	65.73	0.59	--	PEAK																																																																																																																													
2	11510.00	39.81	54.00	-14.19	48.10	40.10	16.75	65.73	0.59	--	AVERAGE																																																																																																																													
3	17265.00	52.36	68.20	-15.84	54.38	40.66	21.05	64.35	0.62	--	PEAK																																																																																																																													

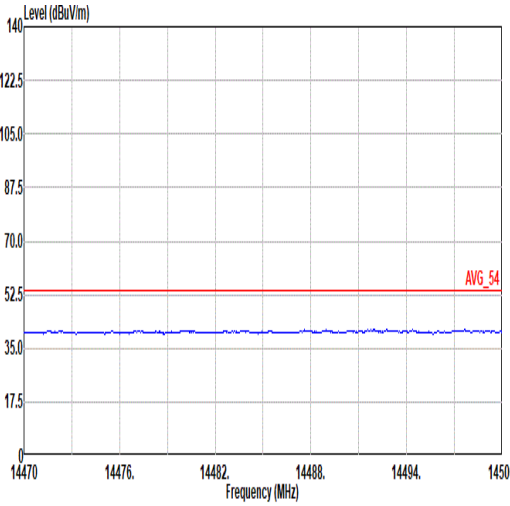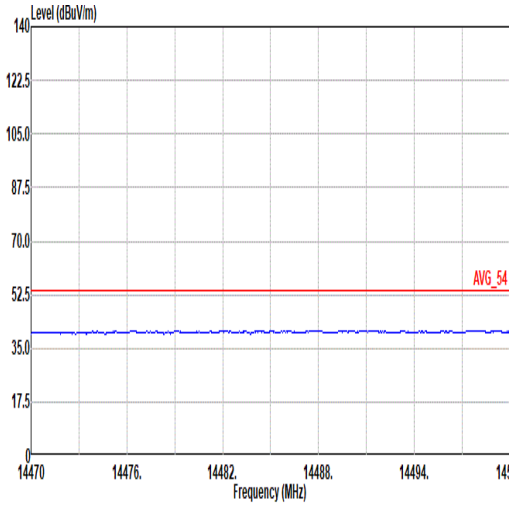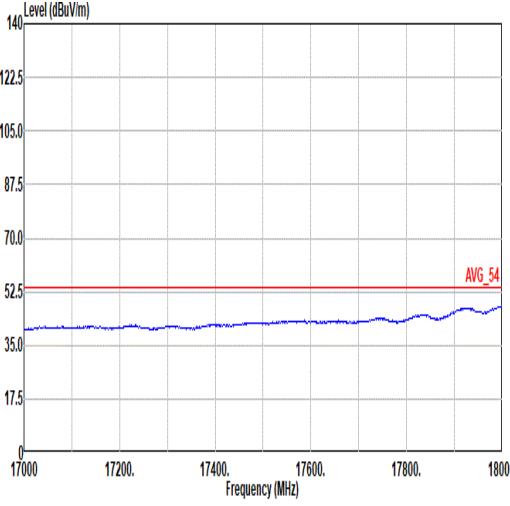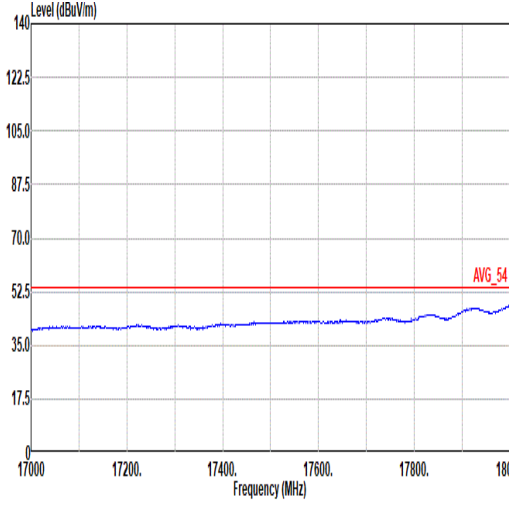


Mode	19	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH151_Full RU_5755MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL






Mode	20																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5648.95</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>41.59</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00 100 182 PEAK</td></tr><tr><td>2</td><td>5652.07</td><td>55.83</td><td>69.73</td><td>-13.90</td><td>42.02</td><td>31.91</td><td>11.70</td><td>29.80</td><td>0.00 100 182 PEAK</td></tr><tr><td>3</td><td>5700.43</td><td>63.00</td><td>105.32</td><td>-41.72</td><td>49.57</td><td>32.10</td><td>11.76</td><td>29.83</td><td>0.00 100 182 PEAK</td></tr><tr><td>4</td><td>5728.12</td><td>65.14</td><td>111.07</td><td>-45.93</td><td>51.10</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00 100 182 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5648.95	55.39	68.20	-12.81	41.59	31.90	11.70	29.80	0.00 100 182 PEAK	2	5652.07	55.83	69.73	-13.90	42.02	31.91	11.70	29.80	0.00 100 182 PEAK	3	5700.43	63.00	105.32	-41.72	49.57	32.10	11.76	29.83	0.00 100 182 PEAK	4	5728.12	65.14	111.07	-45.93	51.10	32.10	11.78	29.84	0.00 100 182 PEAK	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5795.00</td><td>103.20</td><td>-----</td><td>-----</td><td>89.07</td><td>32.16</td><td>11.84</td><td>29.87</td><td>0.00 100 182 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5795.00	103.20	-----	-----	89.07	32.16	11.84	29.87	0.00 100 182 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	5648.95	55.39	68.20	-12.81	41.59	31.90	11.70	29.80	0.00 100 182 PEAK																																																																																																															
2	5652.07	55.83	69.73	-13.90	42.02	31.91	11.70	29.80	0.00 100 182 PEAK																																																																																																															
3	5700.43	63.00	105.32	-41.72	49.57	32.10	11.76	29.83	0.00 100 182 PEAK																																																																																																															
4	5728.12	65.14	111.07	-45.93	51.10	32.10	11.78	29.84	0.00 100 182 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	5795.00	103.20	-----	-----	89.07	32.16	11.84	29.87	0.00 100 182 PEAK																																																																																																															
Avg	Blank					Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:0.560kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5795.00</td><td>94.51</td><td>-----</td><td>-----</td><td>80.36</td><td>32.18</td><td>11.85</td><td>29.88</td><td>0.00 100 182 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5795.00	94.51	-----	-----	80.36	32.18	11.85	29.88	0.00 100 182 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																
1	5795.00	94.51	-----	-----	80.36	32.18	11.85	29.88	0.00 100 182 AVERAGE																																																																																																															

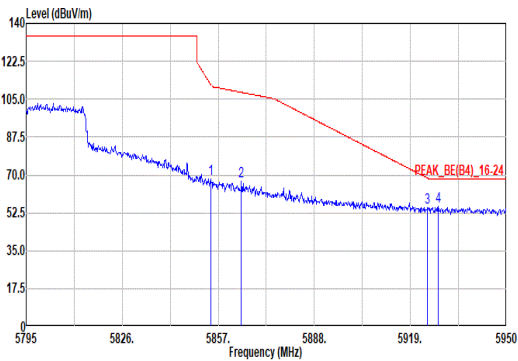


Mode	20																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.52</td><td>68.19</td><td>111.89</td><td>-43.70</td><td>53.78</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>2</td><td>5864.44</td><td>66.88</td><td>108.15</td><td>-41.27</td><td>52.43</td><td>32.46</td><td>11.91</td><td>29.92</td><td>0.00 100 182 PEAK</td></tr><tr><td>3</td><td>5924.58</td><td>54.71</td><td>68.51</td><td>-13.80</td><td>40.05</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr><tr><td>4</td><td>5927.99</td><td>55.44</td><td>68.20</td><td>-12.76</td><td>40.77</td><td>32.66</td><td>11.97</td><td>29.96</td><td>0.00 100 182 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.52	68.19	111.89	-43.70	53.78	32.42	11.91	29.92	0.00 100 182 PEAK	2	5864.44	66.88	108.15	-41.27	52.43	32.46	11.91	29.92	0.00 100 182 PEAK	3	5924.58	54.71	68.51	-13.80	40.05	32.65	11.97	29.96	0.00 100 182 PEAK	4	5927.99	55.44	68.20	-12.76	40.77	32.66	11.97	29.96	0.00 100 182 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.52	68.19	111.89	-43.70	53.78	32.42	11.91	29.92	0.00 100 182 PEAK																																																															
2	5864.44	66.88	108.15	-41.27	52.43	32.46	11.91	29.92	0.00 100 182 PEAK																																																															
3	5924.58	54.71	68.51	-13.80	40.05	32.65	11.97	29.96	0.00 100 182 PEAK																																																															
4	5927.99	55.44	68.20	-12.76	40.77	32.66	11.97	29.96	0.00 100 182 PEAK																																																															

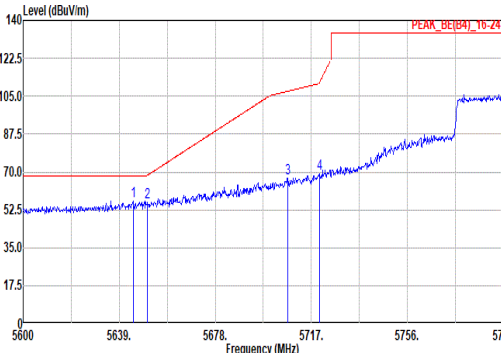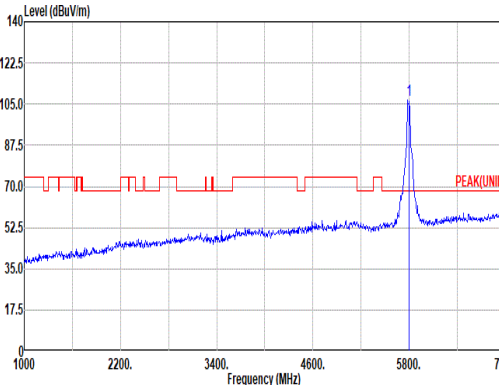
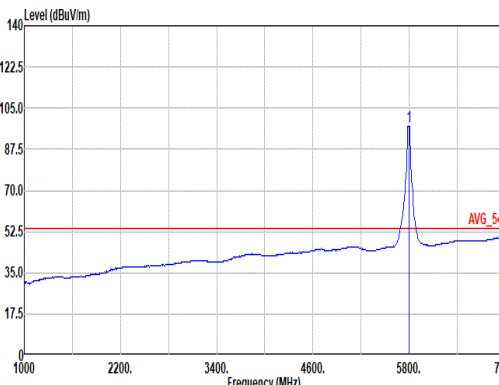


Mode	20																																																																																																																																																					
	Band Edge - L																																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																																					
Pol.	Vertical						Fundamental																																																																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(B4)_16-24 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5644.66</td><td>56.68</td><td>68.20</td><td>-11.52</td><td>42.89</td><td>31.88</td><td>11.70</td><td>29.79</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>PEAK</td></tr><tr><td>2</td><td>5650.51</td><td>56.04</td><td>68.58</td><td>-12.54</td><td>42.24</td><td>31.90</td><td>11.70</td><td>29.80</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>PEAK</td></tr><tr><td>3</td><td>5707.45</td><td>66.97</td><td>107.29</td><td>-40.32</td><td>52.94</td><td>32.10</td><td>11.76</td><td>29.83</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>PEAK</td></tr><tr><td>4</td><td>5728.32</td><td>69.22</td><td>111.52</td><td>-42.30</td><td>55.18</td><td>32.10</td><td>11.78</td><td>29.84</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>PEAK</td></tr></tbody></table>													Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5644.66	56.68	68.20	-11.52	42.89	31.88	11.70	29.79	0.00	264	264	221	PEAK	2	5650.51	56.04	68.58	-12.54	42.24	31.90	11.70	29.80	0.00	264	264	221	PEAK	3	5707.45	66.97	107.29	-40.32	52.94	32.10	11.76	29.83	0.00	264	264	221	PEAK	4	5728.32	69.22	111.52	-42.30	55.18	32.10	11.78	29.84	0.00	264	264	221	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII) Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>106.45</td><td>-----</td><td>-----</td><td>92.34</td><td>32.15</td><td>11.83</td><td>29.87</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>PEAK</td></tr></tbody></table>													Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5795.00	106.45	-----	-----	92.34	32.15	11.83	29.87	0.00	264	264	221	PEAK
		Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																									
1	5644.66	56.68	68.20	-11.52	42.89	31.88	11.70	29.79	0.00	264	264	221	PEAK																																																																																																																																									
2	5650.51	56.04	68.58	-12.54	42.24	31.90	11.70	29.80	0.00	264	264	221	PEAK																																																																																																																																									
3	5707.45	66.97	107.29	-40.32	52.94	32.10	11.76	29.83	0.00	264	264	221	PEAK																																																																																																																																									
4	5728.32	69.22	111.52	-42.30	55.18	32.10	11.78	29.84	0.00	264	264	221	PEAK																																																																																																																																									
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																									
1	5795.00	106.45	-----	-----	92.34	32.15	11.83	29.87	0.00	264	264	221	PEAK																																																																																																																																									
Avg	Blank												 Level (dBuV/m) Frequency (MHz) AVG_54 Site : 03CH16-HY Condition: AVG_54 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:0.560kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Level</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5795.00</td><td>97.37</td><td>-----</td><td>-----</td><td>83.22</td><td>32.18</td><td>11.85</td><td>29.88</td><td>0.00</td><td>264</td><td>264</td><td>221</td><td>AVERAGE</td></tr></tbody></table>													Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5795.00	97.37	-----	-----	83.22	32.18	11.85	29.88	0.00	264	264	221	AVERAGE																																																																																				
	Freq	Limit	Level	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																									
1	5795.00	97.37	-----	-----	83.22	32.18	11.85	29.88	0.00	264	264	221	AVERAGE																																																																																																																																									




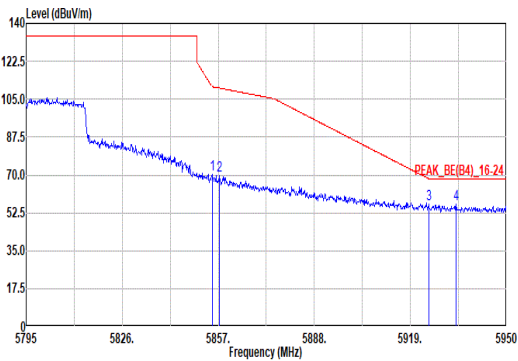


Mode	20																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.99</td><td>70.15</td><td>110.83</td><td>-40.68</td><td>55.74</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 264 221 PEAK</td></tr><tr><td>2</td><td>5857.47</td><td>69.85</td><td>110.11</td><td>-40.26</td><td>55.43</td><td>32.43</td><td>11.91</td><td>29.92</td><td>0.00 264 221 PEAK</td></tr><tr><td>3</td><td>5924.09</td><td>56.46</td><td>68.28</td><td>-11.82</td><td>41.80</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 264 221 PEAK</td></tr><tr><td>4</td><td>5933.73</td><td>56.71</td><td>68.20</td><td>-11.49</td><td>42.03</td><td>32.67</td><td>11.97</td><td>29.96</td><td>0.00 264 221 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.99	70.15	110.83	-40.68	55.74	32.42	11.91	29.92	0.00 264 221 PEAK	2	5857.47	69.85	110.11	-40.26	55.43	32.43	11.91	29.92	0.00 264 221 PEAK	3	5924.09	56.46	68.28	-11.82	41.80	32.65	11.97	29.96	0.00 264 221 PEAK	4	5933.73	56.71	68.20	-11.49	42.03	32.67	11.97	29.96	0.00 264 221 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.99	70.15	110.83	-40.68	55.74	32.42	11.91	29.92	0.00 264 221 PEAK																																																															
2	5857.47	69.85	110.11	-40.26	55.43	32.43	11.91	29.92	0.00 264 221 PEAK																																																															
3	5924.09	56.46	68.28	-11.82	41.80	32.65	11.97	29.96	0.00 264 221 PEAK																																																															
4	5933.73	56.71	68.20	-11.49	42.03	32.67	11.97	29.96	0.00 264 221 PEAK																																																															

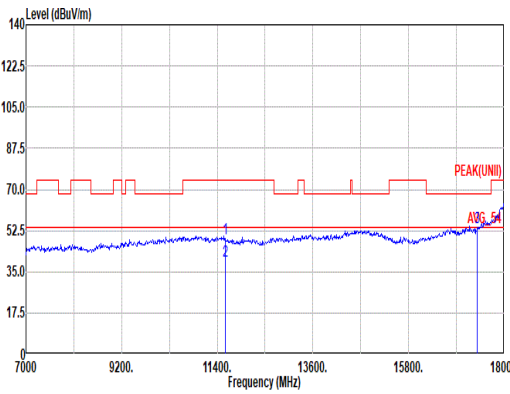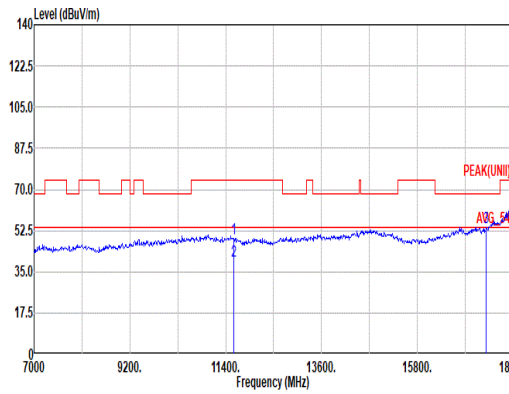

Mode	20																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>49.12</td><td>74.00</td><td>-24.88</td><td>57.70</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>88</td><td>PEAK</td></tr><tr><td>2</td><td>11590.00</td><td>39.52</td><td>54.00</td><td>-14.48</td><td>48.10</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>88</td><td>AVERAGE</td></tr><tr><td>3</td><td>17385.00</td><td>53.84</td><td>68.20</td><td>-14.36</td><td>54.56</td><td>41.48</td><td>21.21</td><td>64.03</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	49.12	74.00	-24.88	57.70	39.78	16.82	65.76	0.58	100	88	PEAK	2	11590.00	39.52	54.00	-14.48	48.10	39.78	16.82	65.76	0.58	100	88	AVERAGE	3	17385.00	53.84	68.20	-14.36	54.56	41.48	21.21	64.03	0.62	--	--	PEAK	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11590.00</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>57.95</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>104</td><td>PEAK</td></tr><tr><td>2</td><td>11590.00</td><td>39.58</td><td>54.00</td><td>-14.42</td><td>48.16</td><td>39.78</td><td>16.82</td><td>65.76</td><td>0.58</td><td>100</td><td>104</td><td>AVERAGE</td></tr><tr><td>3</td><td>17385.00</td><td>53.88</td><td>68.20</td><td>-14.32</td><td>54.60</td><td>41.48</td><td>21.21</td><td>64.03</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11590.00	49.37	74.00	-24.63	57.95	39.78	16.82	65.76	0.58	100	104	PEAK	2	11590.00	39.58	54.00	-14.42	48.16	39.78	16.82	65.76	0.58	100	104	AVERAGE	3	17385.00	53.88	68.20	-14.32	54.60	41.48	21.21	64.03	0.62	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11590.00	49.12	74.00	-24.88	57.70	39.78	16.82	65.76	0.58	100	88	PEAK																																																																																																																																		
2	11590.00	39.52	54.00	-14.48	48.10	39.78	16.82	65.76	0.58	100	88	AVERAGE																																																																																																																																		
3	17385.00	53.84	68.20	-14.36	54.56	41.48	21.21	64.03	0.62	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11590.00	49.37	74.00	-24.63	57.95	39.78	16.82	65.76	0.58	100	104	PEAK																																																																																																																																		
2	11590.00	39.58	54.00	-14.42	48.16	39.78	16.82	65.76	0.58	100	104	AVERAGE																																																																																																																																		
3	17385.00	53.88	68.20	-14.32	54.60	41.48	21.21	64.03	0.62	--	--	PEAK																																																																																																																																		

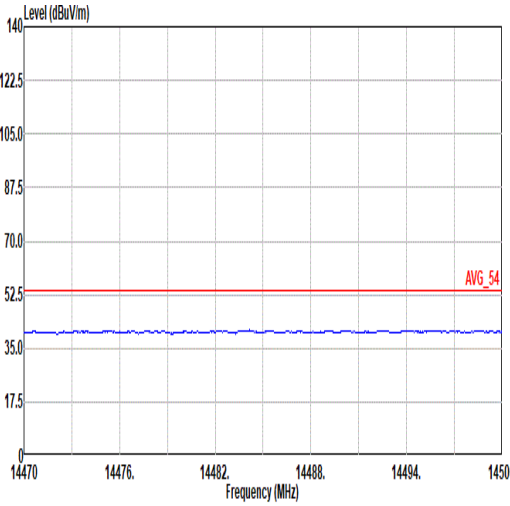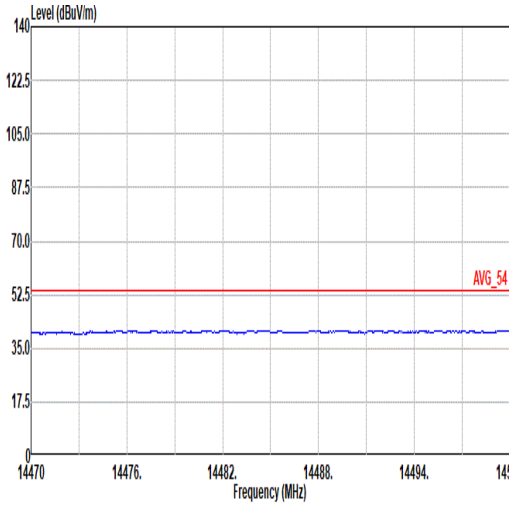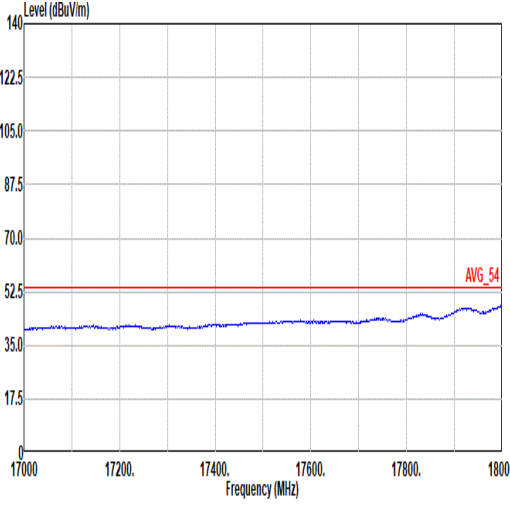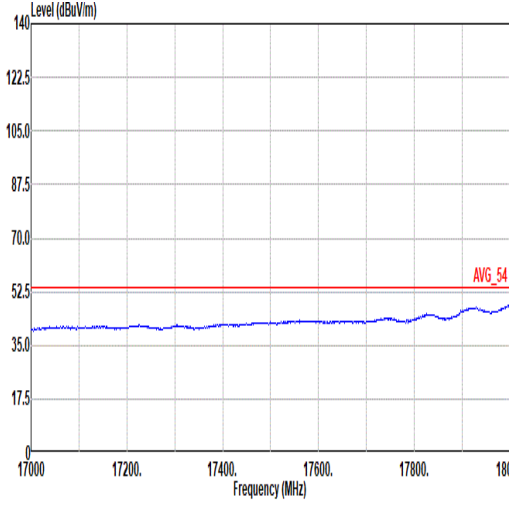


Mode	20	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE40_CH159_Full RU_5795MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL



		21									
Mode	Band Edge - L										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz										
Pol.	Horizontal										
Peak											

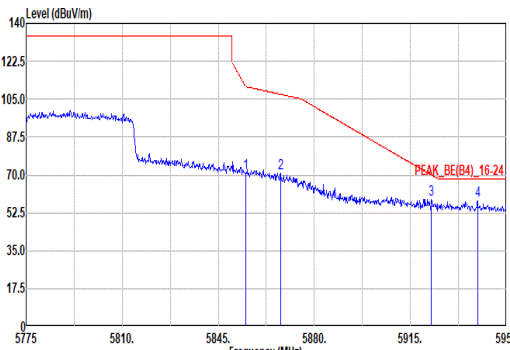


Mode	21																																																																																				
	Band Edge - R																																																																																				
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>70.79</td><td>110.86</td><td>-40.07</td><td>56.38</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>2</td><td>5867.75</td><td>70.75</td><td>107.23</td><td>-36.48</td><td>56.28</td><td>32.47</td><td>11.92</td><td>29.92</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>3</td><td>5922.70</td><td>58.45</td><td>69.09</td><td>-11.44</td><td>43.00</td><td>32.65</td><td>11.96</td><td>29.96</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr><tr><td>4</td><td>5939.50</td><td>58.25</td><td>68.20</td><td>-9.95</td><td>43.55</td><td>32.60</td><td>11.98</td><td>29.96</td><td>0.00</td><td>100</td><td>181</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	70.79	110.86	-40.07	56.38	32.42	11.91	29.92	0.00	100	181	PEAK	2	5867.75	70.75	107.23	-36.48	56.28	32.47	11.92	29.92	0.00	100	181	PEAK	3	5922.70	58.45	69.09	-11.44	43.00	32.65	11.96	29.96	0.00	100	181	PEAK	4	5939.50	58.25	68.20	-9.95	43.55	32.60	11.98	29.96	0.00	100	181	PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5854.98	70.79	110.86	-40.07	56.38	32.42	11.91	29.92	0.00	100	181	PEAK																																																																									
2	5867.75	70.75	107.23	-36.48	56.28	32.47	11.92	29.92	0.00	100	181	PEAK																																																																									
3	5922.70	58.45	69.09	-11.44	43.00	32.65	11.96	29.96	0.00	100	181	PEAK																																																																									
4	5939.50	58.25	68.20	-9.95	43.55	32.60	11.98	29.96	0.00	100	181	PEAK																																																																									



		21									
Mode	Band Edge - L										
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz										
Pol.	Vertical										
Peak	<										




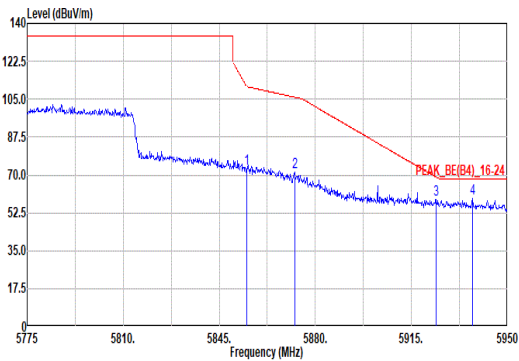


Mode	21																																																																							
	Band Edge - R																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 Site : 03CH16-HY Condition: PEAK_BE(B4)_16-24 3m 91200-1328_241206 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>73.16</td><td>110.86</td><td>-37.70</td><td>58.75</td><td>32.42</td><td>11.91</td><td>29.92</td><td>0.00 276 220 PEAK</td></tr><tr><td>2</td><td>5872.48</td><td>71.51</td><td>105.91</td><td>-34.40</td><td>57.03</td><td>32.49</td><td>11.92</td><td>29.93</td><td>0.00 276 220 PEAK</td></tr><tr><td>3</td><td>5923.93</td><td>58.78</td><td>68.99</td><td>-10.21</td><td>44.12</td><td>32.65</td><td>11.97</td><td>29.96</td><td>0.00 276 220 PEAK</td></tr><tr><td>4</td><td>5937.23</td><td>59.30</td><td>68.20</td><td>-8.90</td><td>44.61</td><td>32.67</td><td>11.98</td><td>29.96</td><td>0.00 276 220 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5854.98	73.16	110.86	-37.70	58.75	32.42	11.91	29.92	0.00 276 220 PEAK	2	5872.48	71.51	105.91	-34.40	57.03	32.49	11.92	29.93	0.00 276 220 PEAK	3	5923.93	58.78	68.99	-10.21	44.12	32.65	11.97	29.96	0.00 276 220 PEAK	4	5937.23	59.30	68.20	-8.90	44.61	32.67	11.98	29.96	0.00 276 220 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																
1	5854.98	73.16	110.86	-37.70	58.75	32.42	11.91	29.92	0.00 276 220 PEAK																																																															
2	5872.48	71.51	105.91	-34.40	57.03	32.49	11.92	29.93	0.00 276 220 PEAK																																																															
3	5923.93	58.78	68.99	-10.21	44.12	32.65	11.97	29.96	0.00 276 220 PEAK																																																															
4	5937.23	59.30	68.20	-8.90	44.61	32.67	11.98	29.96	0.00 276 220 PEAK																																																															







Mode	21																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>57.83</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>200</td><td>207</td><td>PEAK</td></tr><tr><td>2</td><td>11550.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>48.42</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>200</td><td>207</td><td>AVERAGE</td></tr><tr><td>3</td><td>17325.00</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>55.50</td><td>41.00</td><td>21.13</td><td>64.19</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.55	74.00	-24.45	57.83	40.10	16.78	65.75	0.59	200	207	PEAK	2	11550.00	40.14	54.00	-13.86	48.42	40.10	16.78	65.75	0.59	200	207	AVERAGE	3	17325.00	54.06	68.20	-14.14	55.50	41.00	21.13	64.19	0.62	--	--	PEAK	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1328_241206 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>49.46</td><td>74.00</td><td>-24.54</td><td>57.74</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>300</td><td>275</td><td>PEAK</td></tr><tr><td>2</td><td>11550.00</td><td>40.15</td><td>54.00</td><td>-13.85</td><td>48.43</td><td>40.10</td><td>16.78</td><td>65.75</td><td>0.59</td><td>300</td><td>275</td><td>AVERAGE</td></tr><tr><td>3</td><td>17325.00</td><td>53.39</td><td>68.20</td><td>-14.81</td><td>54.83</td><td>41.00</td><td>21.13</td><td>64.19</td><td>0.62</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	49.46	74.00	-24.54	57.74	40.10	16.78	65.75	0.59	300	275	PEAK	2	11550.00	40.15	54.00	-13.85	48.43	40.10	16.78	65.75	0.59	300	275	AVERAGE	3	17325.00	53.39	68.20	-14.81	54.83	41.00	21.13	64.19	0.62	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11550.00	49.55	74.00	-24.45	57.83	40.10	16.78	65.75	0.59	200	207	PEAK																																																																																																																																		
2	11550.00	40.14	54.00	-13.86	48.42	40.10	16.78	65.75	0.59	200	207	AVERAGE																																																																																																																																		
3	17325.00	54.06	68.20	-14.14	55.50	41.00	21.13	64.19	0.62	--	--	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11550.00	49.46	74.00	-24.54	57.74	40.10	16.78	65.75	0.59	300	275	PEAK																																																																																																																																		
2	11550.00	40.15	54.00	-13.85	48.43	40.10	16.78	65.75	0.59	300	275	AVERAGE																																																																																																																																		
3	17325.00	53.39	68.20	-14.81	54.83	41.00	21.13	64.19	0.62	--	--	PEAK																																																																																																																																		

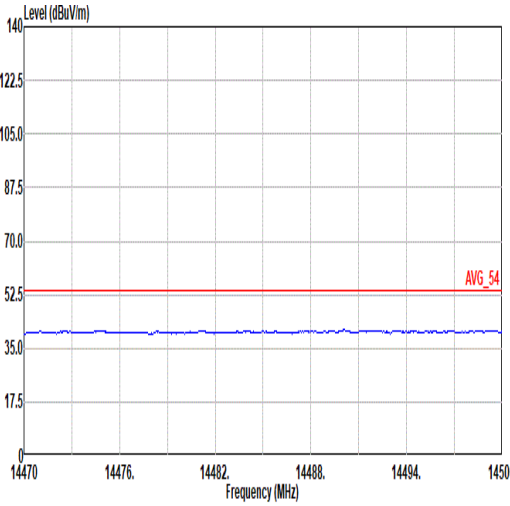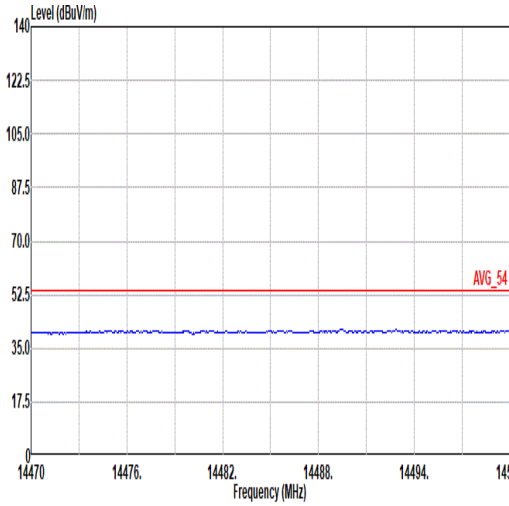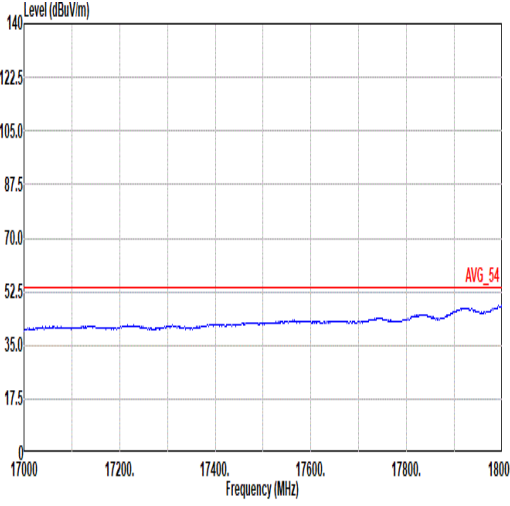
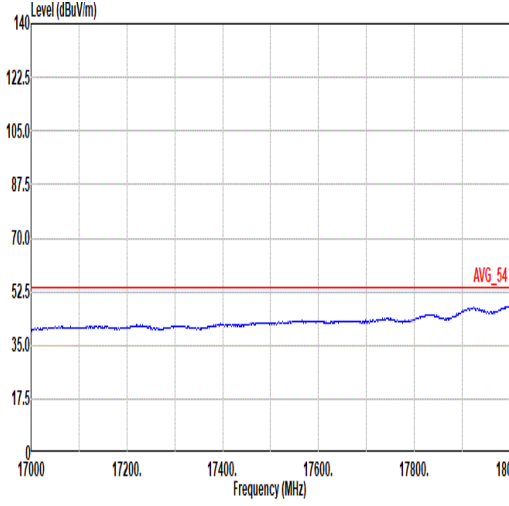


Mode	21	
	Harmonic	
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL
17G ~18G Avg	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 HORIZONTAL	 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_250327 VERTICAL

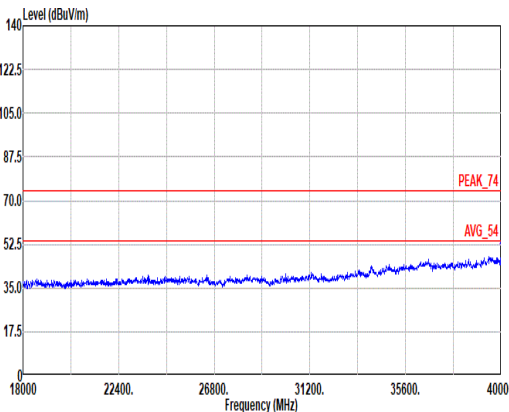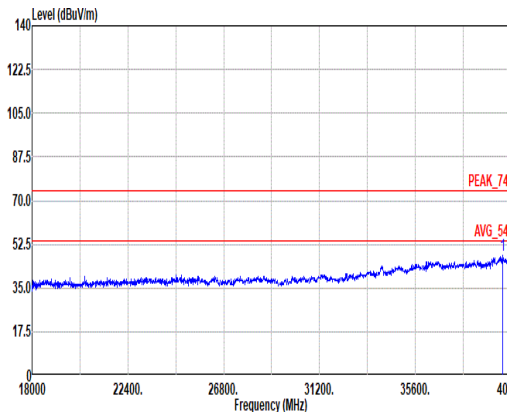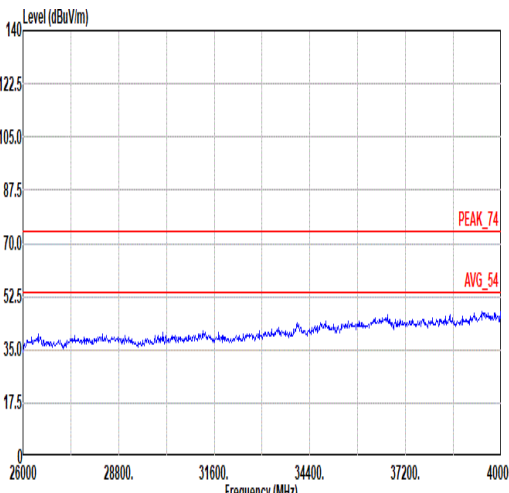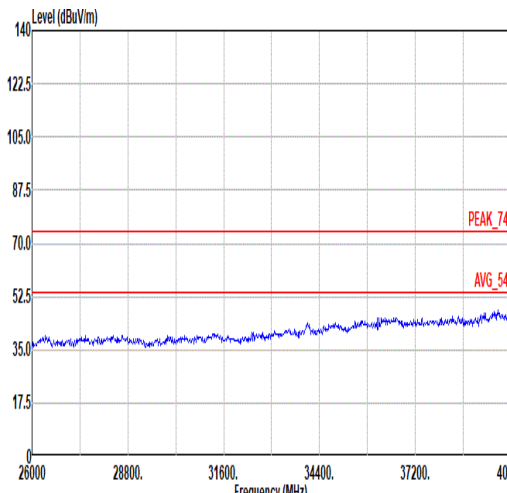

Mode	22																																																																																																			
	SHF																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1 39989.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>59.34</td><td>44.67</td><td>8.44</td><td>55.42</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 39989.00	47.49	74.00	-26.51	59.34	44.67	8.44	55.42	-9.54	--	-- Peak	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1 39604.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>59.36</td><td>45.15</td><td>8.90</td><td>56.03</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 39604.00	47.84	74.00	-26.16	59.36	45.15	8.90	56.03	-9.54	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1 39989.00	47.49	74.00	-26.51	59.34	44.67	8.44	55.42	-9.54	--	-- Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																												
1 39604.00	47.84	74.00	-26.16	59.36	45.15	8.90	56.03	-9.54	--	-- Peak																																																																																										
Avg	 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 HORIZONTAL						 Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1223_240622 VERTICAL																																																																																													

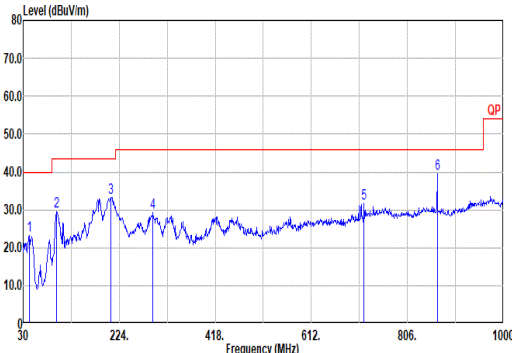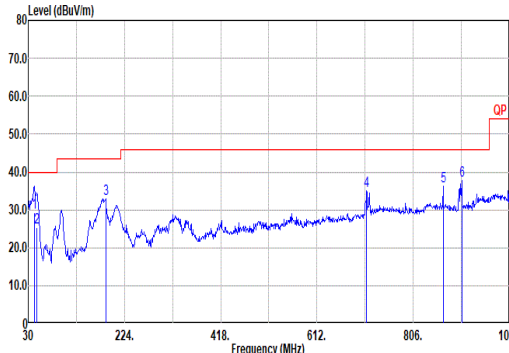



Mode	23																																																																																																																																																																																																															
	LF																																																																																																																																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																																																														
QPI Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802NID01N-06_47020 & 06_241005 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>42.61</td><td>23.24</td><td>40.00</td><td>-16.76</td><td>36.54</td><td>18.15</td><td>1.01</td><td>32.51</td><td>0.05</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>96.93</td><td>29.44</td><td>43.50</td><td>-14.06</td><td>44.66</td><td>15.71</td><td>1.51</td><td>32.51</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>207.51</td><td>33.34</td><td>43.50</td><td>-10.16</td><td>48.29</td><td>15.31</td><td>2.24</td><td>32.57</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>291.90</td><td>29.15</td><td>46.00</td><td>-16.85</td><td>39.41</td><td>19.23</td><td>2.64</td><td>32.20</td><td>0.07</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>718.70</td><td>31.62</td><td>46.00</td><td>-14.38</td><td>32.26</td><td>27.20</td><td>4.17</td><td>32.15</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>866.14</td><td>39.47</td><td>46.00</td><td>-6.53</td><td>37.60</td><td>29.31</td><td>4.59</td><td>32.21</td><td>0.18</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	42.61	23.24	40.00	-16.76	36.54	18.15	1.01	32.51	0.05	--	Peak	2	96.93	29.44	43.50	-14.06	44.66	15.71	1.51	32.51	0.07	--	Peak	3	207.51	33.34	43.50	-10.16	48.29	15.31	2.24	32.57	0.07	--	Peak	4	291.90	29.15	46.00	-16.85	39.41	19.23	2.64	32.20	0.07	--	Peak	5	718.70	31.62	46.00	-14.38	32.26	27.20	4.17	32.15	0.14	--	Peak	6	866.14	39.47	46.00	-6.53	37.60	29.31	4.59	32.21	0.18	--	Peak	 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802NID01N-06_47020 & 06_241005 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>42.61</td><td>29.26</td><td>40.00</td><td>-10.74</td><td>42.56</td><td>18.15</td><td>1.01</td><td>32.51</td><td>0.05</td><td>100</td><td>53 QP</td></tr><tr><td>2</td><td>47.46</td><td>25.46</td><td>40.00</td><td>-14.54</td><td>41.07</td><td>15.72</td><td>1.07</td><td>32.45</td><td>0.05</td><td>100</td><td>99 QP</td></tr><tr><td>3</td><td>186.17</td><td>33.02</td><td>43.50</td><td>-10.48</td><td>48.04</td><td>15.10</td><td>2.12</td><td>32.32</td><td>0.08</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>711.91</td><td>35.06</td><td>46.00</td><td>-10.94</td><td>36.04</td><td>26.89</td><td>4.15</td><td>32.16</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>866.14</td><td>36.19</td><td>46.00</td><td>-9.81</td><td>34.32</td><td>29.31</td><td>4.59</td><td>32.21</td><td>0.18</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>903.97</td><td>37.60</td><td>46.00</td><td>-8.40</td><td>35.72</td><td>29.26</td><td>4.68</td><td>32.23</td><td>0.17</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	42.61	29.26	40.00	-10.74	42.56	18.15	1.01	32.51	0.05	100	53 QP	2	47.46	25.46	40.00	-14.54	41.07	15.72	1.07	32.45	0.05	100	99 QP	3	186.17	33.02	43.50	-10.48	48.04	15.10	2.12	32.32	0.08	--	Peak	4	711.91	35.06	46.00	-10.94	36.04	26.89	4.15	32.16	0.14	--	Peak	5	866.14	36.19	46.00	-9.81	34.32	29.31	4.59	32.21	0.18	--	Peak	6	903.97	37.60	46.00	-8.40	35.72	29.26	4.68	32.23	0.17	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																						
1	42.61	23.24	40.00	-16.76	36.54	18.15	1.01	32.51	0.05	--	Peak																																																																																																																																																																																																					
2	96.93	29.44	43.50	-14.06	44.66	15.71	1.51	32.51	0.07	--	Peak																																																																																																																																																																																																					
3	207.51	33.34	43.50	-10.16	48.29	15.31	2.24	32.57	0.07	--	Peak																																																																																																																																																																																																					
4	291.90	29.15	46.00	-16.85	39.41	19.23	2.64	32.20	0.07	--	Peak																																																																																																																																																																																																					
5	718.70	31.62	46.00	-14.38	32.26	27.20	4.17	32.15	0.14	--	Peak																																																																																																																																																																																																					
6	866.14	39.47	46.00	-6.53	37.60	29.31	4.59	32.21	0.18	--	Peak																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																						
1	42.61	29.26	40.00	-10.74	42.56	18.15	1.01	32.51	0.05	100	53 QP																																																																																																																																																																																																					
2	47.46	25.46	40.00	-14.54	41.07	15.72	1.07	32.45	0.05	100	99 QP																																																																																																																																																																																																					
3	186.17	33.02	43.50	-10.48	48.04	15.10	2.12	32.32	0.08	--	Peak																																																																																																																																																																																																					
4	711.91	35.06	46.00	-10.94	36.04	26.89	4.15	32.16	0.14	--	Peak																																																																																																																																																																																																					
5	866.14	36.19	46.00	-9.81	34.32	29.31	4.59	32.21	0.18	--	Peak																																																																																																																																																																																																					
6	903.97	37.60	46.00	-8.40	35.72	29.26	4.68	32.23	0.17	--	Peak																																																																																																																																																																																																					



Appendix D. Duty Cycle Plots


<For Radiated Spurious Emission test>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	90.48	1425	0.70	750Hz
5GHz 802.11n HT20	89.90	1335	0.75	820Hz
5GHz 802.11n HT40	94.30	2480	0.40	430Hz
5GHz 802.11ac VHT80	88.64	1170	0.85	910Hz
5GHz 802.11ax HE20 Full RU	87.66	1044	0.96	1kHz
5GHz 802.11ax HE20 26 RU	83.23	5260	0.19	200Hz
5GHz 802.11ax HE20 52 RU	83.45	5145	0.19	200Hz
5GHz 802.11ax HE20 106 RU	82.60	4770	0.21	220Hz
5GHz 802.11ax HE40 Full RU	92.96	1980	0.51	560Hz
5GHz 802.11ax HE80 Full RU	86.67	975	1.03	1.1KHz

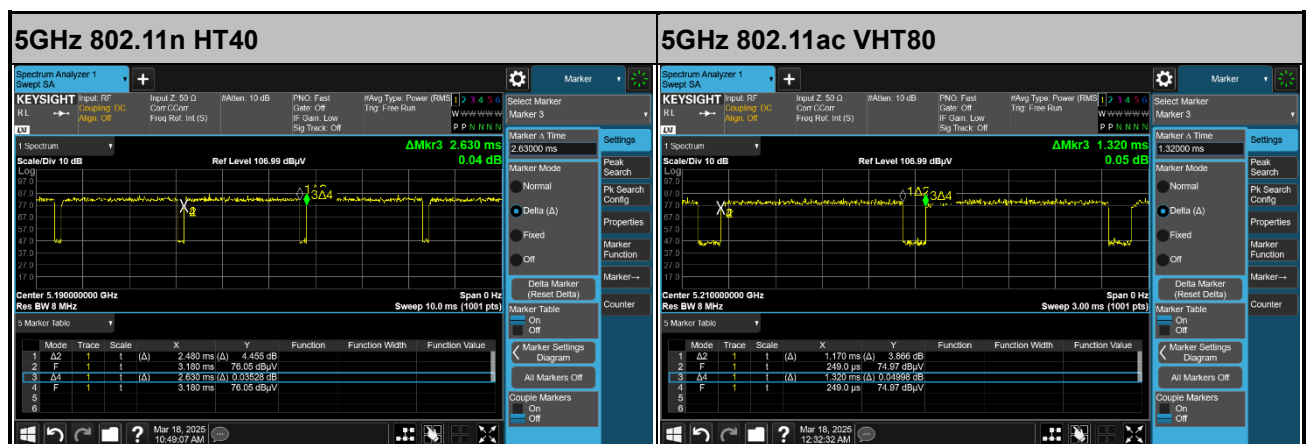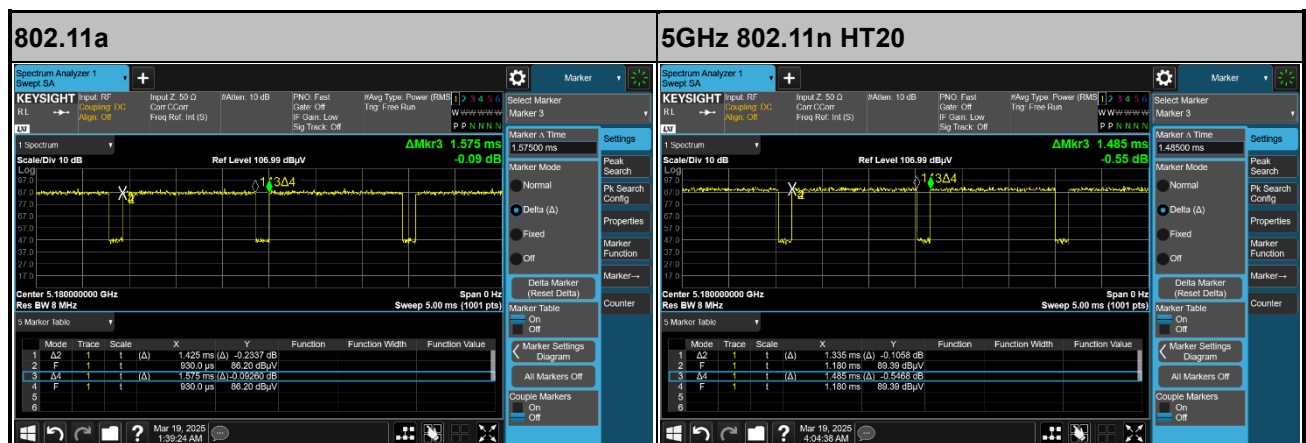





5GHz 802.11ax HE20 Full RU

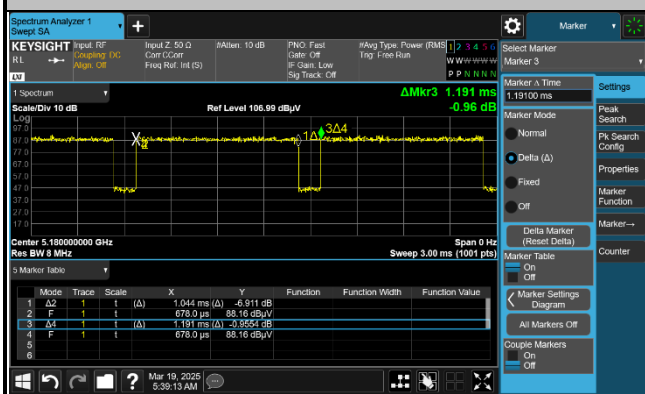


5GHz 802.11ax HE20 26 RU

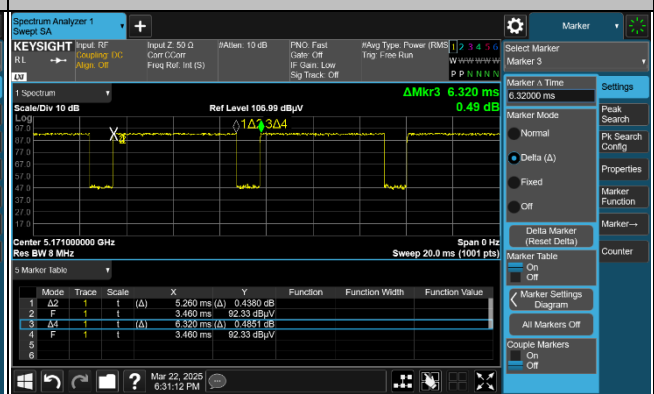


5GHz 802.11ax HE20 52 RU

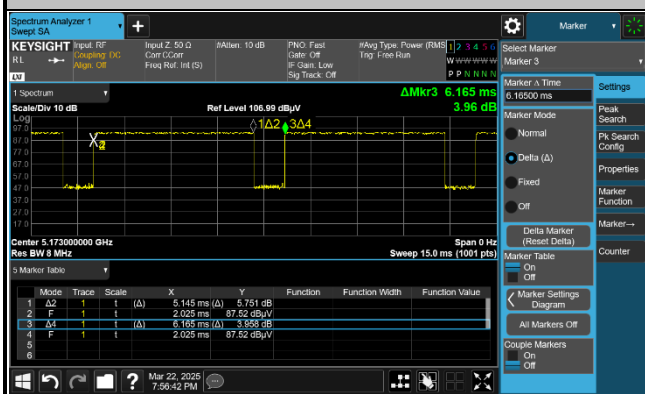


5GHz 802.11ax HE20 106 RU

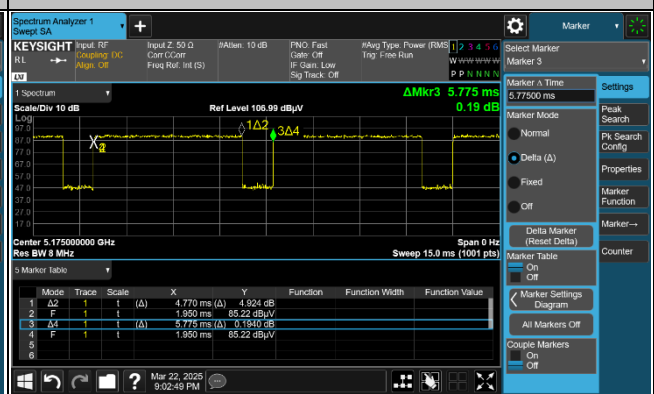

5GHz 802.11ax HE40 Full RU

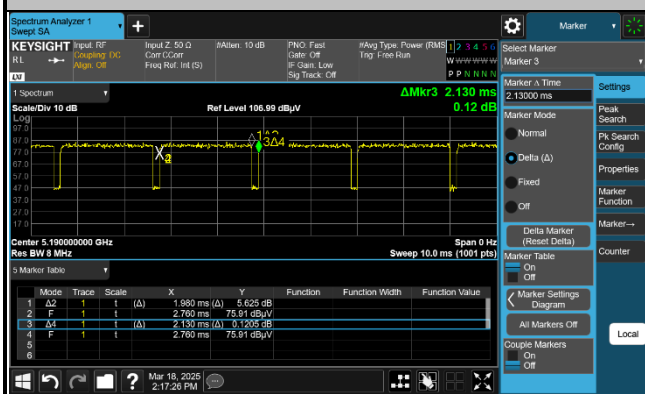


5GHz 802.11ax HE80 Full RU

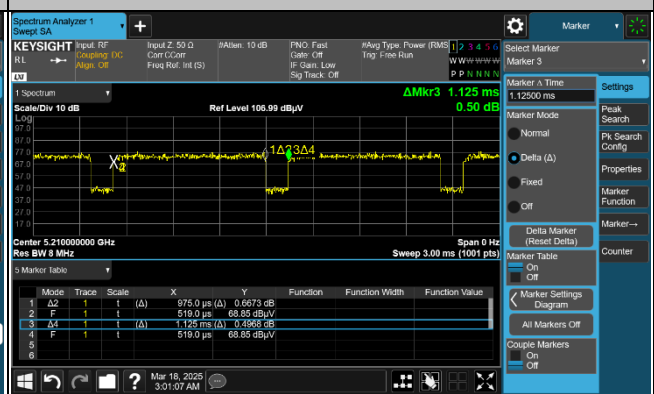

**<For Conducted test>**

Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
For B1~B3			
802.11a	90.53	1424	0.43
5GHz 802.11n HT20	90.14	1334	0.45
5GHz 802.11n HT40	94.38	2484	0.25
5GHz 802.11ac VHT80	88.69	1168	0.52
5GHz 802.11ax HE20 Full RU	87.56	1042	0.58
5GHz 802.11ax HE20 26 RU	84.18	5320	0.75
5GHz 802.11ax HE20 52 RU	83.73	5147	0.77
5GHz 802.11ax HE20 106 RU	82.64	4760	0.83
5GHz 802.11ax HE40 Full RU	92.98	1974	0.32
5GHz 802.11ax HE80 Full RU	86.72	973	0.62
For B4			
802.11a	90.56	1429	0.43
5GHz 802.11n HT20	90.10	1338	0.45
5GHz 802.11n HT40	89.43	1269	0.49
5GHz 802.11ac VHT80	88.65	1172	0.52
5GHz 802.11ax HE20 Full RU	87.59	1045	0.58
5GHz 802.11ax HE20 26 RU	84.14	5307	0.75
5GHz 802.11ax HE20 52 RU	83.73	5146	0.77
5GHz 802.11ax HE20 106 RU	82.68	4773	0.83
5GHz 802.11ax HE40 Full RU	93.00	1979	0.32
5GHz 802.11ax HE80 Full RU	86.69	977	0.62

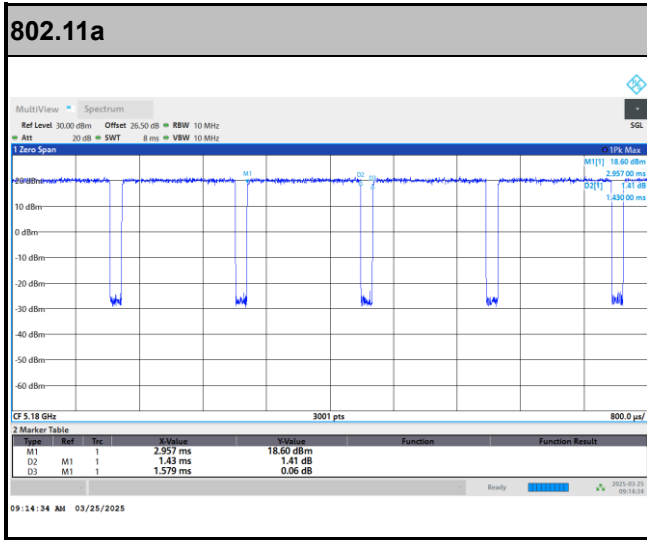

————THE END————