

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260320 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.96 W/kg; SAR (10g) = 2.25 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 8.32 W/kg; SAR (8g) = 2.78 W/kg; SAR (10g) = 2.40 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.0 %

TSL Correction: Positive only

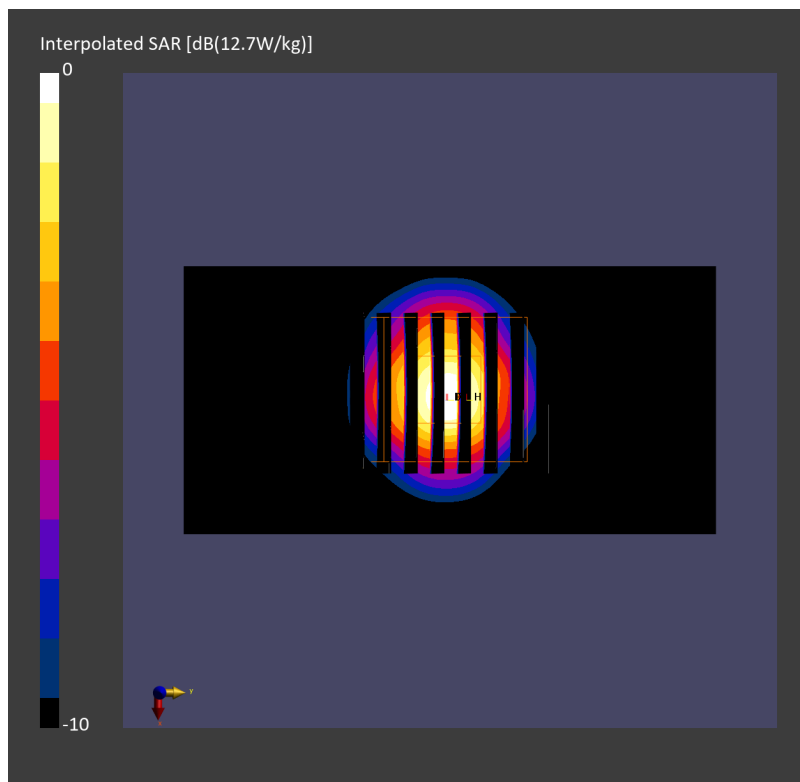

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260324 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.60 W/kg; SAR (10g) = 2.16 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 7.94 W/kg; SAR (8g) = 2.67 W/kg; SAR (10g) = 2.30 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.0 %

TSL Correction: Positive only

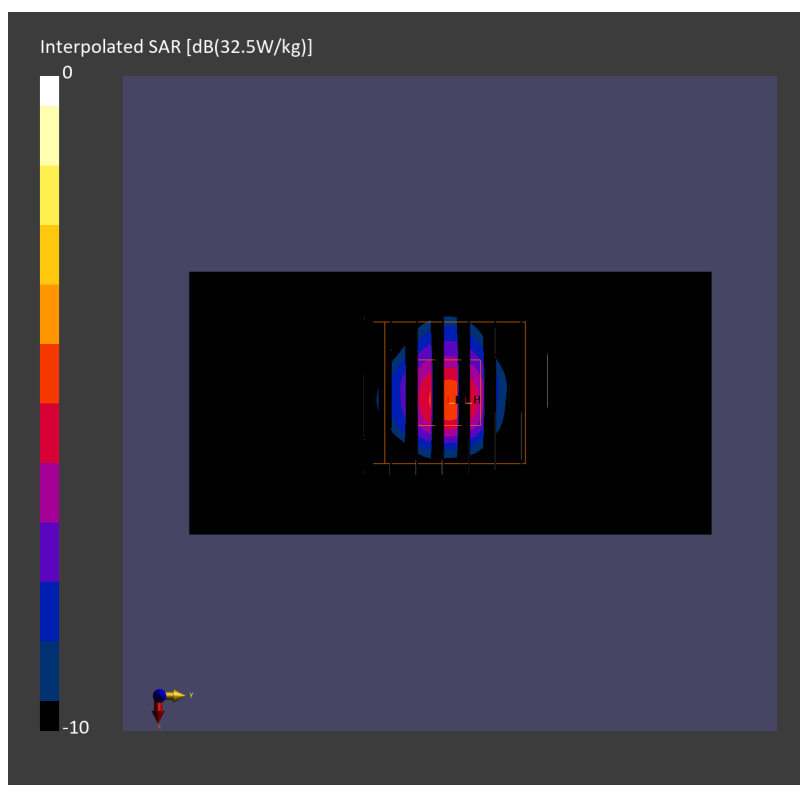

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260325 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.95 W/kg; SAR (10g) = 2.28 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 8.36 W/kg; SAR (8g) = 2.82 W/kg; SAR (10g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

TSL Correction: Positive only

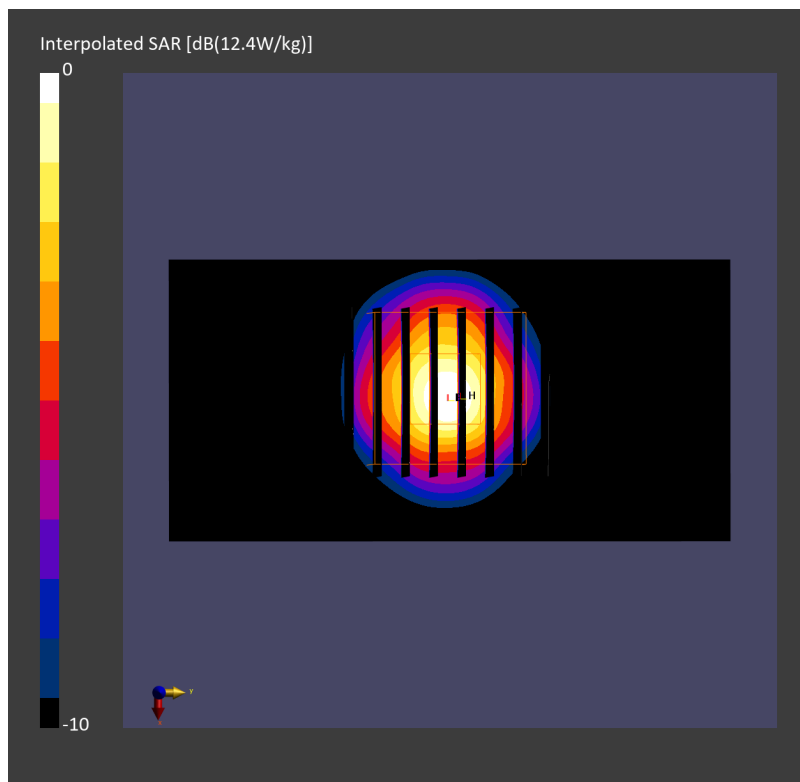

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.30$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.58 W/kg; SAR (10g) = 1.03 W/kg;

TSL Correction: Positive only

Pin=17.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 3.85 W/kg; SAR (8g) = 1.30 W/kg; SAR (10g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.6 %

TSL Correction: Positive only

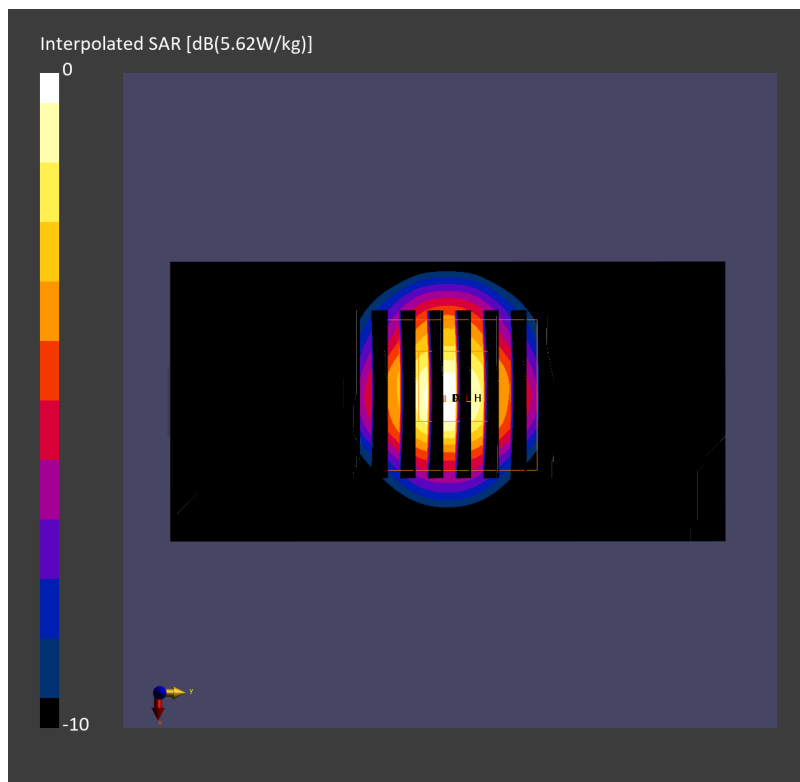

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.30$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.27, 5.13, 5.13); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.73 W/kg; SAR (10g) = 1.05 W/kg;

TSL Correction: Positive only

Pin=17.0dBm/Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 3.86 W/kg; SAR (8g) = 1.28 W/kg; SAR (10g) = 1.10 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.8 %

TSL Correction: Positive only

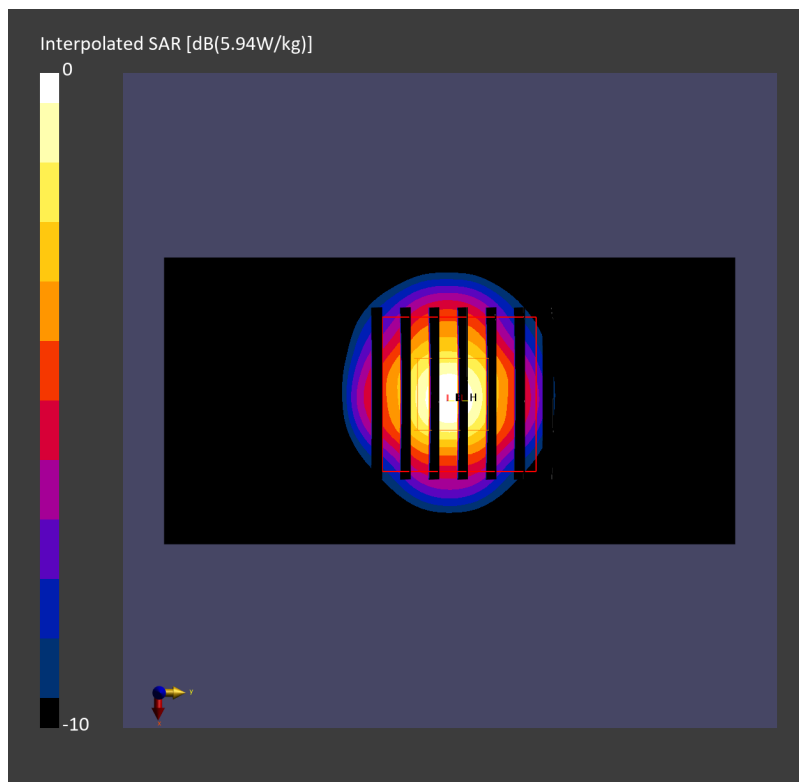

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.56 W/kg; SAR (10g) = 1.02 W/kg;

TSL Correction: Positive only

Pin=17.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 3.84 W/kg; SAR (8g) = 1.30 W/kg; SAR (10g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

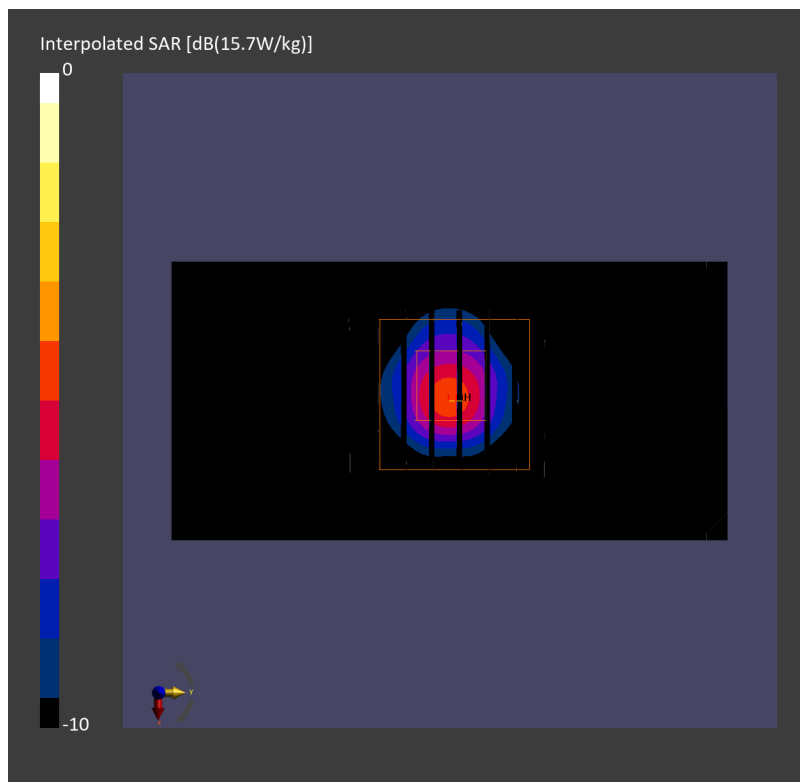

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.27, 5.13, 5.13); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.46 W/kg; SAR (10g) = 0.991 W/kg;

TSL Correction: Positive only

Pin=17.0dBm/Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 3.78 W/kg; SAR (8g) = 1.26 W/kg; SAR (10g) = 1.09 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.4 %

TSL Correction: Positive only

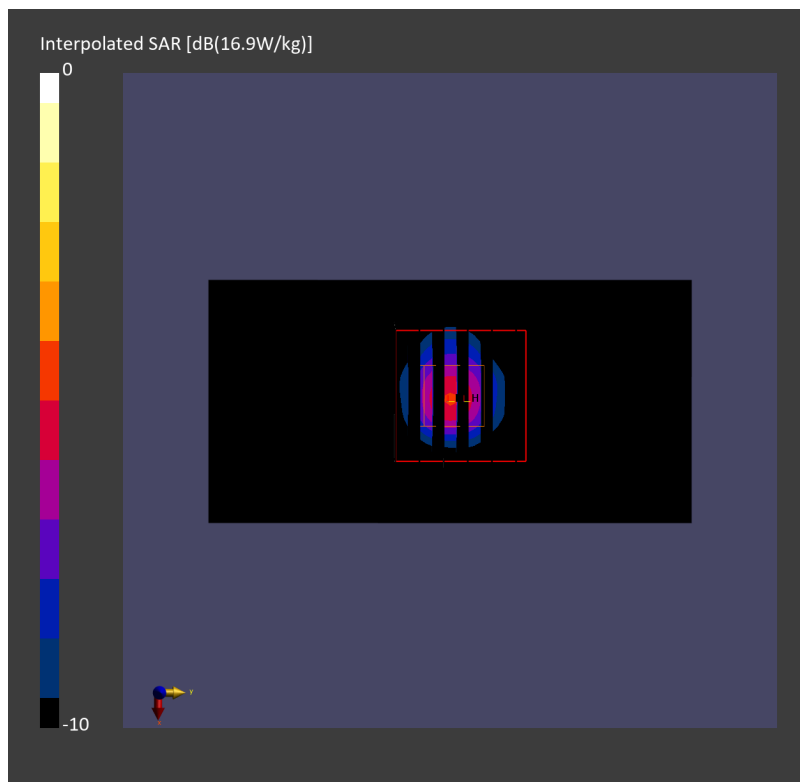

System Check_Head_5800MHz

DUT: D5GHzV2 - SN1171

Communication System: CW; Frequency: 5800.000 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 5800.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.34, 3.93, 5.0); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=17.0dBm/Area Scan (40.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.59 W/kg; SAR (10g) = 1.02 W/kg;

TSL Correction: Positive only

Pin=17.0dBm/Zoom Scan (24.0 mm x 28.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 3.83 W/kg; SAR (8g) = 1.29 W/kg; SAR (10g) = 1.12 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

TSL Correction: Positive only

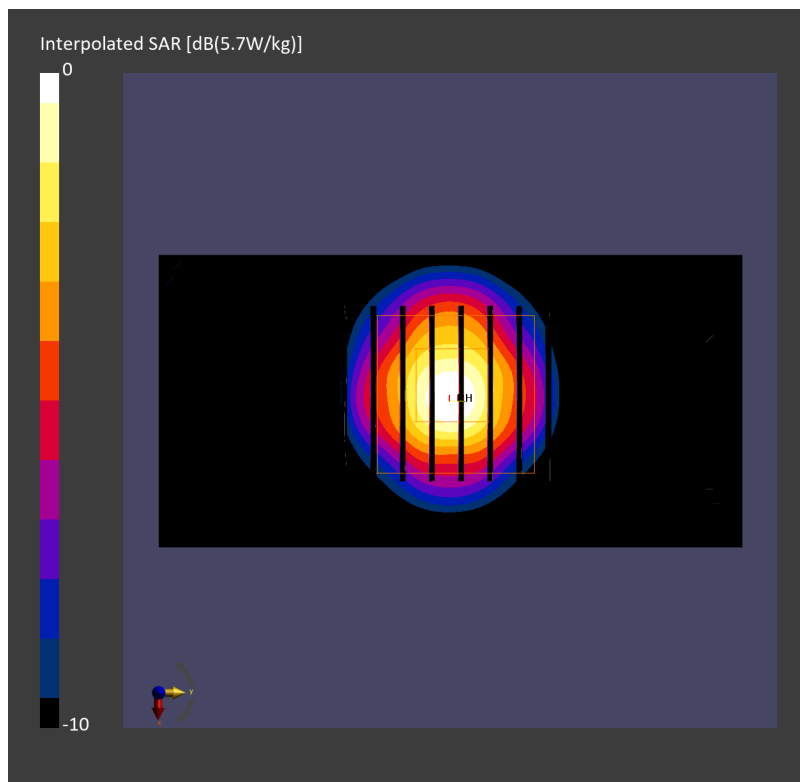

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260320 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.42, 4.9, 6.24); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 29.4 W/kg; SAR (10g) = 5.56 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (23.8 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.04 dB


SAR (1g) = 30.8 W/kg; SAR (8g) = 7.01 W/kg; SAR (10g) = 5.77 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.6 %

psAPD (1.0cm², sq) = 308 [W/m²]; psAPD (4.0cm², sq) = 140 [W/m²]

TSL Correction: Positive only

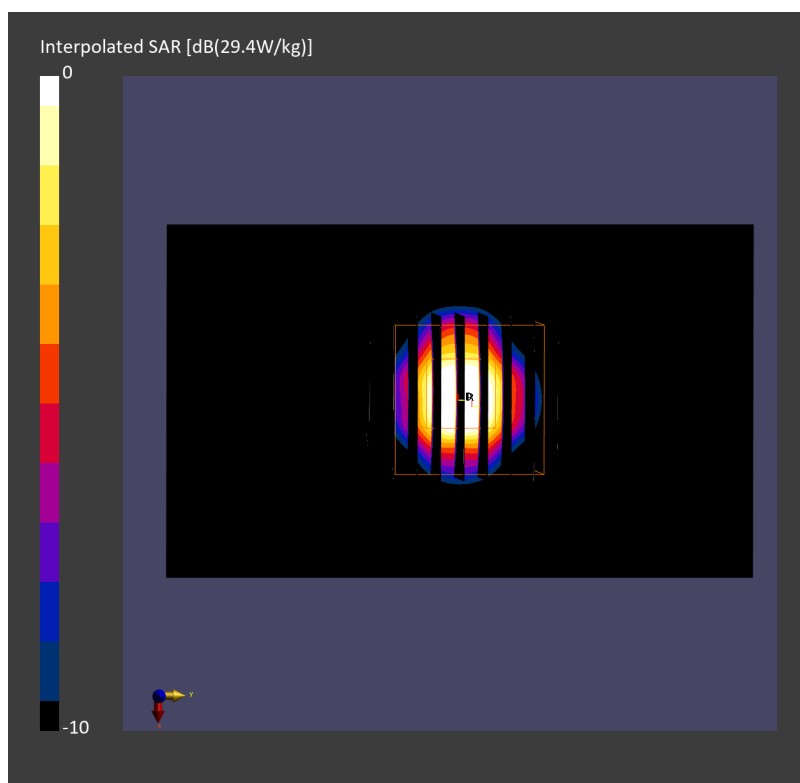

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1003

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260326 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.40$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.36, 5.21, 5.21); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 27.8 W/kg; SAR (10g) = 5.47 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (27.2 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.00 dB


SAR (1g) = 32.1 W/kg; SAR (8g) = 7.19 W/kg; SAR (10g) = 5.94 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.9 %

psAPD (1.0cm², sq) = 321 [W/m²]; psAPD (4.0cm², sq) = 144 [W/m²]

TSL Correction: Positive only

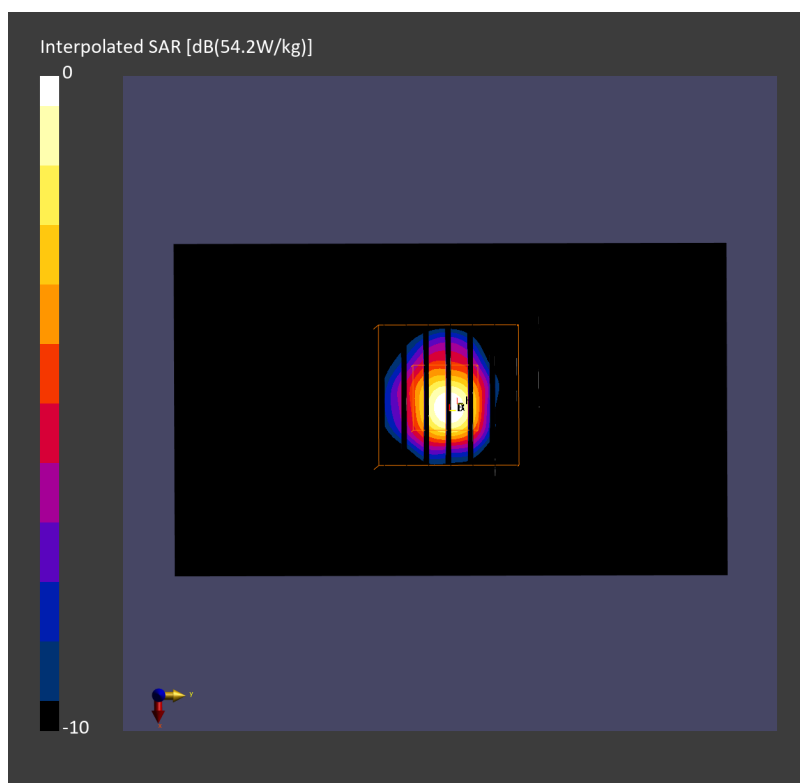

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.42, 4.9, 6.24); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 29.6 W/kg; SAR (10g) = 5.63 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (23.8 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.06 dB


SAR (1g) = 30.9 W/kg; SAR (8g) = 7.06 W/kg; SAR (10g) = 5.81 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.3 %

psAPD (1.0cm², sq) = 309 [W/m²]; psAPD (4.0cm², sq) = 141 [W/m²]

TSL Correction: Positive only

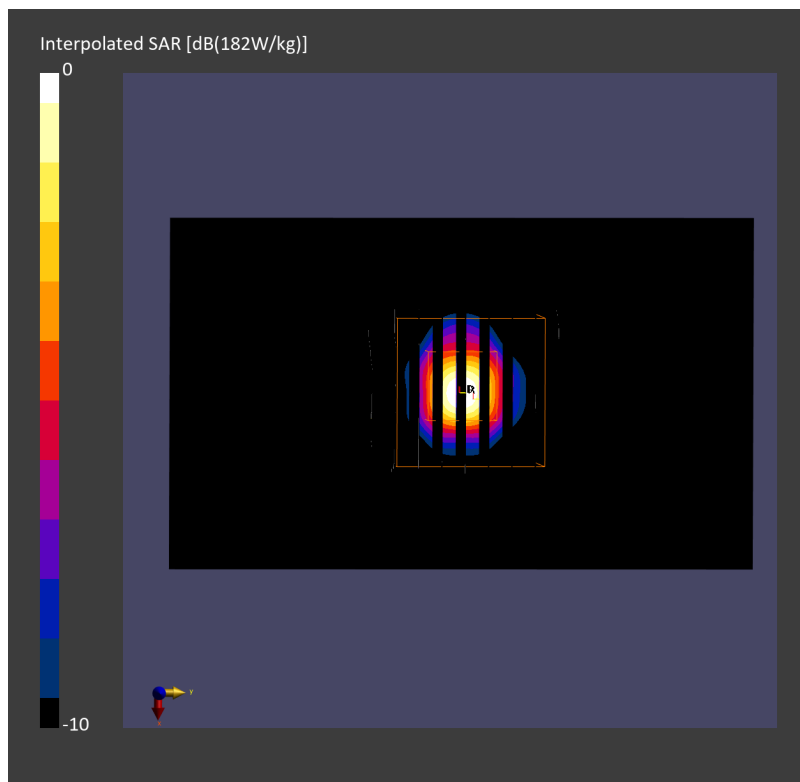

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1003

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260327 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.36, 5.21, 5.21); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 26.9 W/kg; SAR (10g) = 5.39 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (27.2 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.04 dB


SAR (1g) = 32.6 W/kg; SAR (8g) = 7.31 W/kg; SAR (10g) = 6.04 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.8 %

psAPD (1.0cm², sq) = 326 [W/m²]; psAPD (4.0cm², sq) = 146 [W/m²]

TSL Correction: Positive only

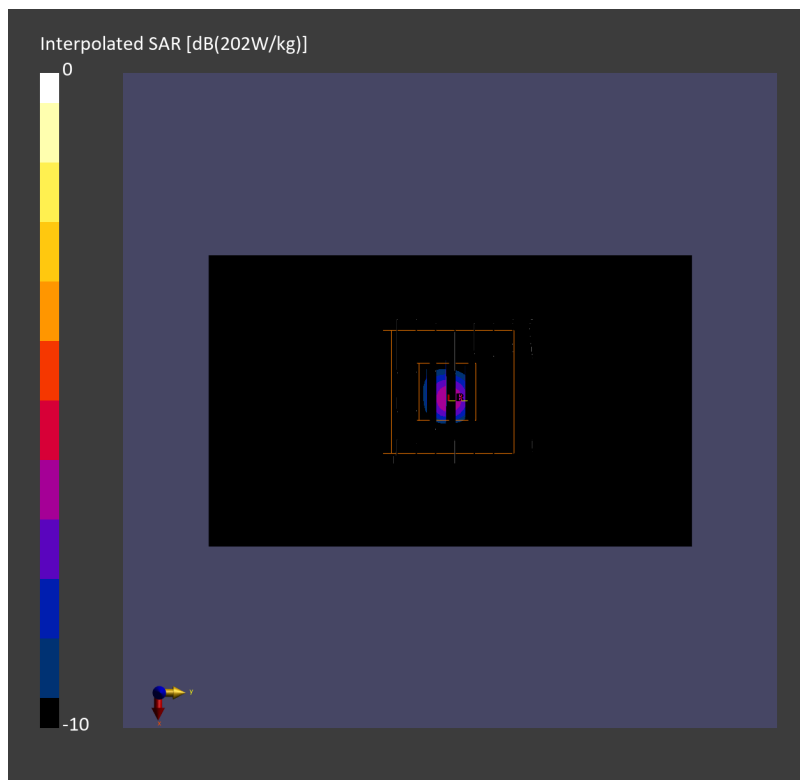

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.42, 4.9, 6.24); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 29.4 W/kg; SAR (10g) = 5.61 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (23.8 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.10 dB


SAR (1g) = 31.3 W/kg; SAR (8g) = 7.16 W/kg; SAR (10g) = 5.89 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.6 %

psAPD (1.0cm², sq) = 313 [W/m²]; psAPD (4.0cm², sq) = 143 [W/m²]

TSL Correction: Positive only

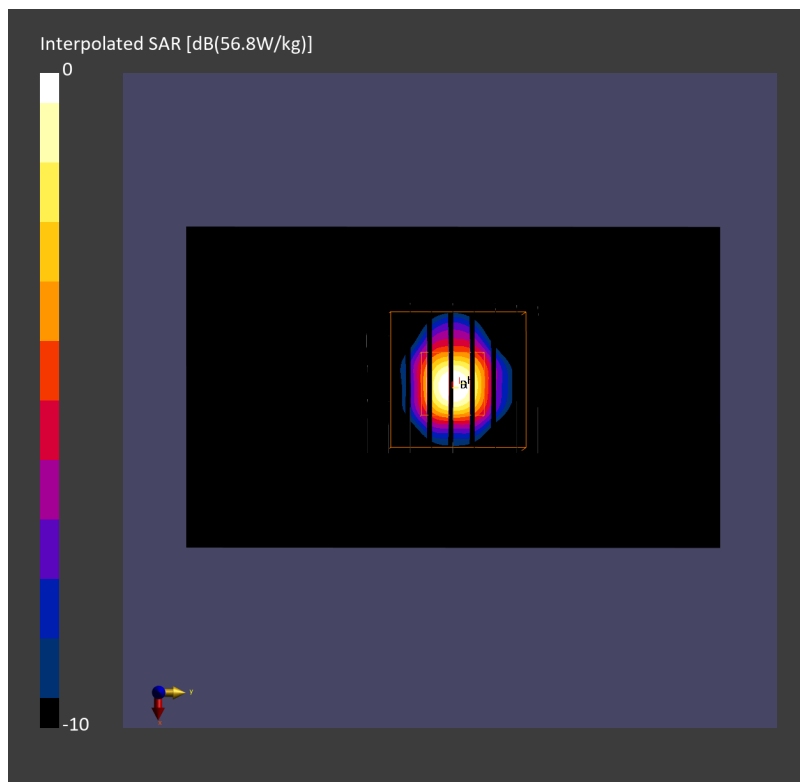

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1003

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260329 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7590; ConvF(5.36, 5.21, 5.21); Calibrated: 2026-03-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1512; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 24.3 W/kg; SAR (10g) = 4.87 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (27.2 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB


SAR (1g) = 29.5 W/kg; SAR (8g) = 6.62 W/kg; SAR (10g) = 5.47 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.7 %

psAPD (1.0cm², sq) = 295 [W/m²]; psAPD (4.0cm², sq) = 132 [W/m²]

TSL Correction: Positive only

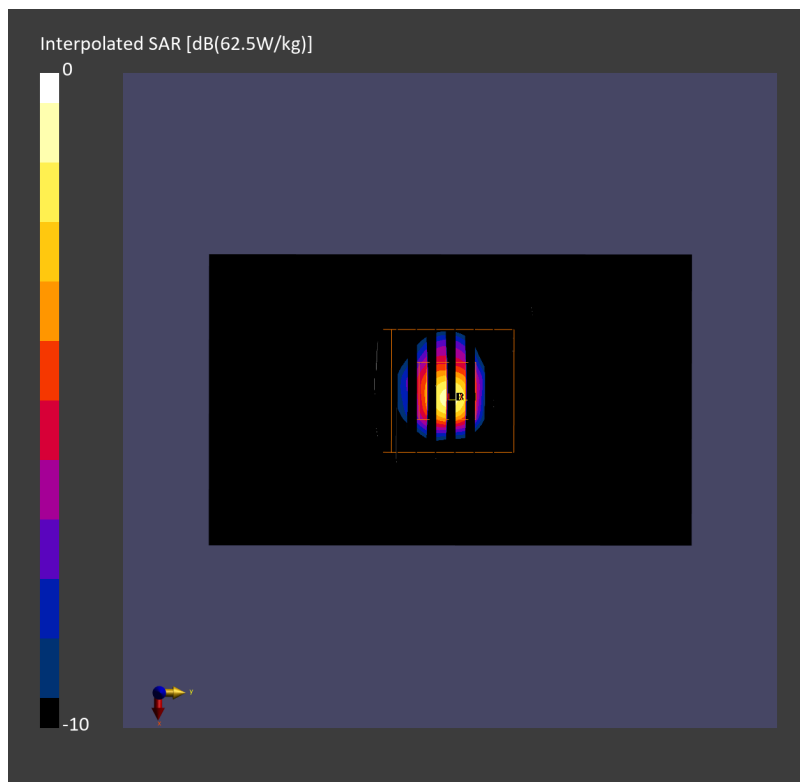

System Check_Head_6500MHz

DUT: D6.5GHzV2 - SN1083

Communication System: CW; Frequency: 6500.000 MHz

Medium: HSL_600-7200_260401 Medium parameters used: $f = 6500.000$ MHz; $\sigma = 6.05$ S/m; $\epsilon_r = 33.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(5.42, 4.9, 6.24); Calibrated: 2025-04-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025-07-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2149_GAP; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Pin=20.0dBm/Area Scan (51.0 mm x 85.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 28.8 W/kg; SAR (10g) = 5.47 W/kg;

TSL Correction: Positive only

Pin=20.0dBm/Zoom Scan (23.8 mm x 27.2 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 30.1 W/kg; SAR (8g) = 6.86 W/kg; SAR (10g) = 5.64 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.3 %

psAPD (1.0cm², sq) = 301 [W/m²]; psAPD (4.0cm², sq) = 137 [W/m²]

TSL Correction: Positive only

