



FCC CO-LOCATION RADIO TEST REPORT

FCC ID : A4RGZDQ6
Equipment : Phone
Model Name : GZDQ6
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 27, 2026 and testing was performed from Apr. 13, 2026 to Apr. 13, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Connection Diagram of Test System.....	8
2.3 EUT Operation Test Setup	8
3 Test Result	9
3.1 Unwanted Emissions Measurement.....	9
3.2 Antenna Requirements.....	15
4 List of Measuring Equipment.....	16
5 Measurement Uncertainty	17
Appendix A. Radiated Spurious Emission Test Data	
Appendix B. Duty Cycle Plots	
Appendix C. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5O0118M	01	Initial issue of report	May 11, 2026
FR5O0118M	02	Revise Revise Antenna information in section 1.1 This report is an updated version, replacing the report issued on May 11, 2026.	May 20, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(d) 15.407(b)	Unwanted Emissions	Pass	-
3.2	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: William Chen

Report Producer: Aya Yang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs GSM/WCDMA/LTE/5G NR/NTN, Bluetooth, BLE, BLE channel sounding, Thread, Wi-Fi 802.11be, NFC, WPC Rx, UWB and GNSS Rx.
Antenna Type WLAN, Bluetooth: <Ant. 3> : IFA Antenna <Ant. 4> : ILA Antenna

EUT Information List	
S/N	Performed Test Item
61261FDDJ000CU	Radiated Spurious Emission

Antenna information (worst case from open and close mode)		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	Ant.3: -5.89 Ant.4: -1.61
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	<5G_Ant4 + 5G_Ant3> Correlated: -5.15 Uncorrelated: -8.11
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	<6G_Ant4 + 6G_Ant3> Correlated: -2.88 Uncorrelated: -5.48

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT (Open and Close) and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane open with Adapter as worst plane.

2.1 Carrier Frequency and Channel

2400-2483.5 MHz			
Bluetooth – LE 1Mbps		802.11g	
Channel	Channel	Channel	Freq. (MHz)
39	2480	06	2437


5150-5250 MHz			
802.11ax HE20		802.11be EHT20	
Channel	Channel	Channel	Freq. (MHz)
36	5180	36	5180

5925-6425 MHz	
802.11a	
Channel	Freq. (MHz)
01	5955

<Co-Location>

Modulation	Data Rate	Worst Plane
2.4GHz 802.11g for MIMO <Ant. 4+3> + 5GHz 802.11ax HE20 for MIMO <Ant. 4+3>	6 Mbps + MCS0	X Plane with Adapter
2.4GHz 802.11g for MIMO <Ant. 4+3> + 6GHz 802.11a for MIMO <Ant. 4+3>	6 Mbps + 6 Mbps	X Plane with Adapter
Bluetooth-LE_GFSK for MIMO < Ant. 4+3> + 5GHz 802.11be EHT20 for MIMO < Ant. 4+3>	1 Mbps + MCS0	X Plane with Adapter

2.2 Connection Diagram of Test System



Radiation Tx Test Setup								
No.	Power Source	Connection Type	Test Mode					
			1~3	-	-	-	-	-
B1	AC : 120V/60Hz (Adapter)	USB Cable	X	-	-	-	-	-

2.3 EUT Operation Test Setup

The RF test items, utility “WLAN DUT Control” and “BT DUT Control 09-04-25” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

<For 2402 MHz ~ 2480 MHz>

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

<For 5150 MHz ~ 5250 MHz>

For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

<For 5925 MHz ~ 6425 MHz>

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

According 987594 D02 U-NII 6GHz EMC Measurement v01 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(2) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.1.4 Test Setup


For radiated emissions below 30MHz

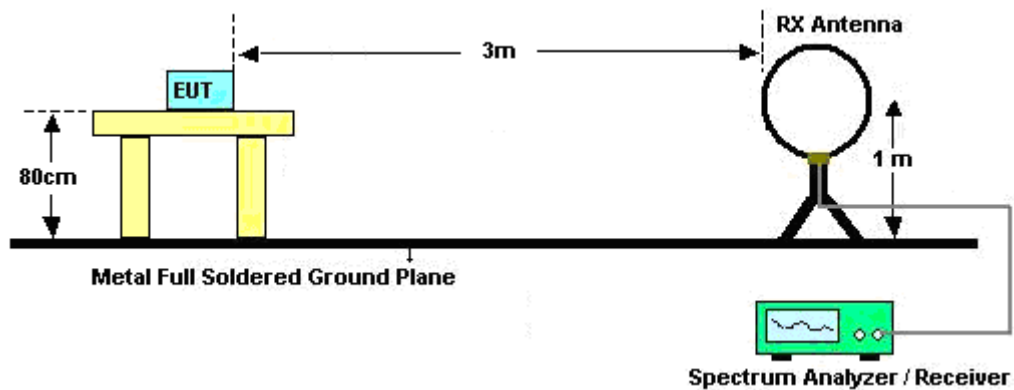


For radiated emissions from 30MHz to 1GHz

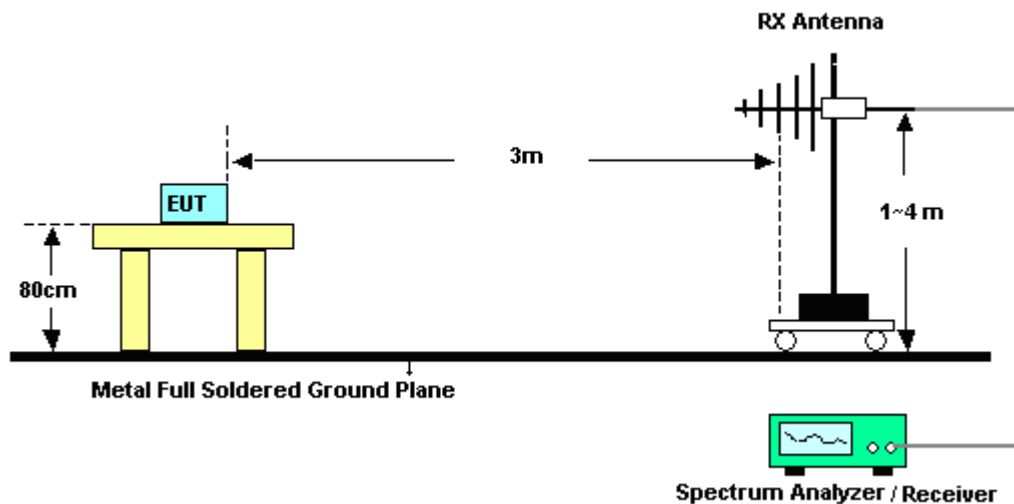

For radiated test from 1GHz to 18GHz

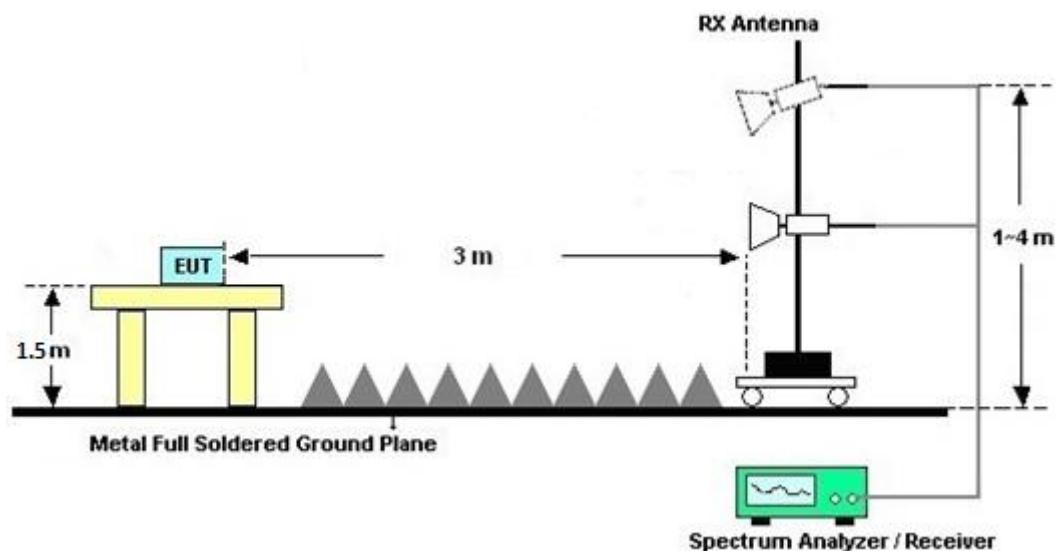

For radiated test above 18GHz

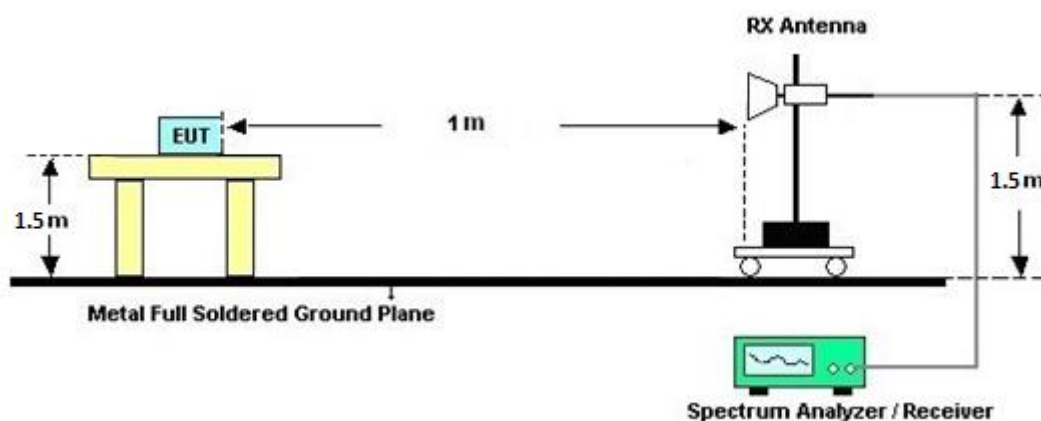

3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.1.6 Duty Cycle

Please refer to Appendix B.

3.1.7 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.2.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

(3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Apr. 13, 2026~ Apr. 13, 2026	Dec. 10, 2026	Radiation (03CH23-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Apr. 13, 2026~ Apr. 13, 2026	Nov. 25, 2026	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 13, 2025	Apr. 13, 2026~ Apr. 13, 2026	Jul. 12, 2026	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	1GHz~18GHz	Sep. 26, 2025	Apr. 13, 2026~ Apr. 13, 2026	Sep. 25, 2026	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul. 02, 2025	Apr. 13, 2026~ Apr. 13, 2026	Jul. 01, 2026	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 26, 2025	Apr. 13, 2026~ Apr. 13, 2026	Aug. 25, 2026	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Apr. 13, 2026~ Apr. 13, 2026	Aug. 25, 2026	Radiation (03CH23-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9170	1225	18GHz~40GHz	Jul. 02, 2025	Apr. 13, 2026~ Apr. 13, 2026	Jul. 01, 2026	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP210001	N/A	Nov. 06, 2025	Apr. 13, 2026~ Apr. 13, 2026	Nov. 05, 2026	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 13, 2026~ Apr. 13, 2026	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 13, 2026~ Apr. 13, 2026	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 13, 2026~ Apr. 13, 2026	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019 122	RK-002348	N/A	N/A	Apr. 13, 2026~ Apr. 13, 2026	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	30MHz~40GHz	Nov. 25, 2025	Apr. 13, 2026~ Apr. 13, 2026	Nov. 24, 2026	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/23111 9/231122	30MHz~40GHz	Nov. 25, 2025	Apr. 13, 2026~ Apr. 13, 2026	Nov. 24, 2026	Radiation (03CH23-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70 dB
--	---------



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou	Temperature :	19.2~22.3°C
		Relative Humidity :	48.6~63.2%

Note symbol

-L	Low channel location
-R	High channel location

A1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	2400-2483.5+5.15-5.25	4+3	802.11g + 802.11ax HE20	6+36	2462+5180	6Mbps+MCS0	Full RU	-
Mode 2	U-NII-5	2400-2483.5+5.925-6.425	4+3	802.11g + 802.11a	6+1	2437+5955	6Mbps+6Mbps	Full RU	-
Mode 3	U-NII-1	2400-2483.5+5.15-5.25	4+3	Bluetooth-LE_GFSK + 802.11be EHT20	39+36	2480+5180	1Mbps+MCS0	Full RU	-



A2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11g + 802.11ax HE20	6+36	31.94	34.50	40.00	-5.50	V	QP	Pass	Full RU	Harmonic
2	802.11g + 802.11a	6+1	17865.00	46.85	54.00	-7.15	H	Avg.	Pass	Full RU	Harmonic
3	Bluetooth-LE_GFSK + 802.11be EHT20	39+36	15540.00	46.98	54.00	-7.02	V	Avg.	Pass	Full RU	Harmonic



Mode	1																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	Co-location Harmonic																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
	802.11g CH6 + 802.11ax HE20 CH36																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
ANT	4+3																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Peak	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>86.26</td><td>29.53</td><td>40.00</td><td>-10.47</td><td>46.27</td><td>14.68</td><td>1.00</td><td>32.51</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>215.27</td><td>30.54</td><td>43.50</td><td>-12.96</td><td>46.30</td><td>14.90</td><td>1.74</td><td>32.51</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>217.21</td><td>30.40</td><td>46.00</td><td>-15.60</td><td>46.11</td><td>14.94</td><td>1.75</td><td>32.51</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>340.40</td><td>27.59</td><td>46.00</td><td>-18.41</td><td>37.52</td><td>20.05</td><td>2.34</td><td>32.57</td><td>0.25</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>744.89</td><td>39.53</td><td>46.00</td><td>-6.47</td><td>40.30</td><td>28.07</td><td>3.51</td><td>32.55</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>900.09</td><td>33.76</td><td>46.00</td><td>-12.24</td><td>32.22</td><td>29.17</td><td>3.89</td><td>31.69</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>4874.00</td><td>47.01</td><td>74.00</td><td>-26.99</td><td>34.43</td><td>32.60</td><td>10.56</td><td>32.29</td><td>1.71</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>7311.00</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>35.44</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>7311.00</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>24.88</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>10</td><td>10360.00</td><td>50.82</td><td>68.20</td><td>-17.38</td><td>34.83</td><td>37.66</td><td>15.20</td><td>39.00</td><td>2.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>11</td><td>15540.00</td><td>56.18</td><td>74.00</td><td>-17.82</td><td>38.70</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>12</td><td>15540.00</td><td>45.62</td><td>54.00</td><td>-8.38</td><td>28.14</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>13</td><td>39604.00</td><td>50.57</td><td>74.00</td><td>-23.43</td><td>45.31</td><td>46.26</td><td>31.65</td><td>63.11</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>14</td><td>39604.00</td><td>40.33</td><td>54.00</td><td>-13.67</td><td>35.07</td><td>46.26</td><td>31.65</td><td>63.11</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table> <td> Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.94</td><td>34.50</td><td>40.00</td><td>-5.50</td><td>43.28</td><td>23.23</td><td>0.47</td><td>32.57</td><td>0.09</td><td>100</td><td>260</td><td>QP</td><td></td></tr><tr><td>2</td><td>172.59</td><td>29.97</td><td>43.50</td><td>-13.53</td><td>44.97</td><td>15.69</td><td>1.55</td><td>32.40</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>218.18</td><td>26.65</td><td>46.00</td><td>-19.35</td><td>42.29</td><td>15.00</td><td>1.76</td><td>32.51</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>400.30</td><td>26.62</td><td>46.00</td><td>-19.38</td><td>34.39</td><td>22.18</td><td>2.52</td><td>32.64</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>745.86</td><td>29.46</td><td>46.00</td><td>-16.54</td><td>30.23</td><td>28.06</td><td>3.52</td><td>32.55</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>886.51</td><td>37.43</td><td>46.00</td><td>-8.57</td><td>36.08</td><td>29.06</td><td>3.90</td><td>31.78</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>4874.00</td><td>46.54</td><td>74.00</td><td>-27.46</td><td>33.96</td><td>32.60</td><td>10.56</td><td>32.29</td><td>1.71</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>7311.00</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>33.78</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>7311.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>23.22</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>10</td><td>10360.00</td><td>50.75</td><td>68.20</td><td>-17.45</td><td>34.76</td><td>37.66</td><td>15.20</td><td>39.00</td><td>2.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>11</td><td>15540.00</td><td>56.70</td><td>74.00</td><td>-17.30</td><td>39.22</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>12</td><td>15540.00</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>28.66</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>13</td><td>39582.00</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>45.99</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>14</td><td>39582.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>35.76</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table> </td>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	86.26	29.53	40.00	-10.47	46.27	14.68	1.00	32.51	0.09	--	--	--	Peak	2	215.27	30.54	43.50	-12.96	46.30	14.90	1.74	32.51	0.11	--	--	--	Peak	3	217.21	30.40	46.00	-15.60	46.11	14.94	1.75	32.51	0.11	--	--	--	Peak	4	340.40	27.59	46.00	-18.41	37.52	20.05	2.34	32.57	0.25	--	--	--	Peak	5	744.89	39.53	46.00	-6.47	40.30	28.07	3.51	32.55	0.20	--	--	--	Peak	6	900.09	33.76	46.00	-12.24	32.22	29.17	3.89	31.69	0.17	--	--	--	Peak	7	4874.00	47.01	74.00	-26.99	34.43	32.60	10.56	32.29	1.71	--	--	--	Peak	8	7311.00	51.94	74.00	-22.06	35.44	37.24	12.78	35.68	2.16	--	--	--	Peak	9	7311.00	41.38	54.00	-12.62	24.88	37.24	12.78	35.68	2.16	--	--	--	Average	10	10360.00	50.82	68.20	-17.38	34.83	37.66	15.20	39.00	2.13	--	--	--	Peak	11	15540.00	56.18	74.00	-17.82	38.70	41.00	18.71	44.69	2.46	--	--	--	Peak	12	15540.00	45.62	54.00	-8.38	28.14	41.00	18.71	44.69	2.46	--	--	--	Average	13	39604.00	50.57	74.00	-23.43	45.31	46.26	31.65	63.11	-9.54	--	--	--	Peak	14	39604.00	40.33	54.00	-13.67	35.07	46.26	31.65	63.11	-9.54	--	--	--	Average	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition: PEAK(UNII) 1m BBHA9170_1225_250702 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.94</td><td>34.50</td><td>40.00</td><td>-5.50</td><td>43.28</td><td>23.23</td><td>0.47</td><td>32.57</td><td>0.09</td><td>100</td><td>260</td><td>QP</td><td></td></tr><tr><td>2</td><td>172.59</td><td>29.97</td><td>43.50</td><td>-13.53</td><td>44.97</td><td>15.69</td><td>1.55</td><td>32.40</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>218.18</td><td>26.65</td><td>46.00</td><td>-19.35</td><td>42.29</td><td>15.00</td><td>1.76</td><td>32.51</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>400.30</td><td>26.62</td><td>46.00</td><td>-19.38</td><td>34.39</td><td>22.18</td><td>2.52</td><td>32.64</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>745.86</td><td>29.46</td><td>46.00</td><td>-16.54</td><td>30.23</td><td>28.06</td><td>3.52</td><td>32.55</td><td>0.20</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>886.51</td><td>37.43</td><td>46.00</td><td>-8.57</td><td>36.08</td><td>29.06</td><td>3.90</td><td>31.78</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>4874.00</td><td>46.54</td><td>74.00</td><td>-27.46</td><td>33.96</td><td>32.60</td><td>10.56</td><td>32.29</td><td>1.71</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>7311.00</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>33.78</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>7311.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td>23.22</td><td>37.24</td><td>12.78</td><td>35.68</td><td>2.16</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>10</td><td>10360.00</td><td>50.75</td><td>68.20</td><td>-17.45</td><td>34.76</td><td>37.66</td><td>15.20</td><td>39.00</td><td>2.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>11</td><td>15540.00</td><td>56.70</td><td>74.00</td><td>-17.30</td><td>39.22</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>12</td><td>15540.00</td><td>46.14</td><td>54.00</td><td>-7.86</td><td>28.66</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>13</td><td>39582.00</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>45.99</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>14</td><td>39582.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>35.76</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	31.94	34.50	40.00	-5.50	43.28	23.23	0.47	32.57	0.09	100	260	QP		2	172.59	29.97	43.50	-13.53	44.97	15.69	1.55	32.40	0.24	--	--	--	Peak	3	218.18	26.65	46.00	-19.35	42.29	15.00	1.76	32.51	0.11	--	--	--	Peak	4	400.30	26.62	46.00	-19.38	34.39	22.18	2.52	32.64	0.17	--	--	--	Peak	5	745.86	29.46	46.00	-16.54	30.23	28.06	3.52	32.55	0.20	--	--	--	Peak	6	886.51	37.43	46.00	-8.57	36.08	29.06	3.90	31.78	0.17	--	--	--	Peak	7	4874.00	46.54	74.00	-27.46	33.96	32.60	10.56	32.29	1.71	--	--	--	Peak	8	7311.00	50.28	74.00	-23.72	33.78	37.24	12.78	35.68	2.16	--	--	--	Peak	9	7311.00	39.72	54.00	-14.28	23.22	37.24	12.78	35.68	2.16	--	--	--	Average	10	10360.00	50.75	68.20	-17.45	34.76	37.66	15.20	39.00	2.13	--	--	--	Peak	11	15540.00	56.70	74.00	-17.30	39.22	41.00	18.71	44.69	2.46	--	--	--	Peak	12	15540.00	46.14	54.00	-7.86	28.66	41.00	18.71	44.69	2.46	--	--	--	Average	13	39582.00	51.22	74.00	-22.78	45.99	46.19	31.64	63.06	-9.54	--	--	--	Peak	14	39582.00	40.99	54.00	-13.01	35.76	46.19	31.64	63.06	-9.54	--	--	--	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																																																																																																																																						
1	86.26	29.53	40.00	-10.47	46.27	14.68	1.00	32.51	0.09	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
2	215.27	30.54	43.50	-12.96	46.30	14.90	1.74	32.51	0.11	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
3	217.21	30.40	46.00	-15.60	46.11	14.94	1.75	32.51	0.11	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
4	340.40	27.59	46.00	-18.41	37.52	20.05	2.34	32.57	0.25	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
5	744.89	39.53	46.00	-6.47	40.30	28.07	3.51	32.55	0.20	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
6	900.09	33.76	46.00	-12.24	32.22	29.17	3.89	31.69	0.17	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
7	4874.00	47.01	74.00	-26.99	34.43	32.60	10.56	32.29	1.71	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
8	7311.00	51.94	74.00	-22.06	35.44	37.24	12.78	35.68	2.16	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
9	7311.00	41.38	54.00	-12.62	24.88	37.24	12.78	35.68	2.16	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					
10	10360.00	50.82	68.20	-17.38	34.83	37.66	15.20	39.00	2.13	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
11	15540.00	56.18	74.00	-17.82	38.70	41.00	18.71	44.69	2.46	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
12	15540.00	45.62	54.00	-8.38	28.14	41.00	18.71	44.69	2.46	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					
13	39604.00	50.57	74.00	-23.43	45.31	46.26	31.65	63.11	-9.54	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
14	39604.00	40.33	54.00	-13.67	35.07	46.26	31.65	63.11	-9.54	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																																																																																																																																						
1	31.94	34.50	40.00	-5.50	43.28	23.23	0.47	32.57	0.09	100	260	QP																																																																																																																																																																																																																																																																																																																																																																																																																																																						
2	172.59	29.97	43.50	-13.53	44.97	15.69	1.55	32.40	0.24	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
3	218.18	26.65	46.00	-19.35	42.29	15.00	1.76	32.51	0.11	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
4	400.30	26.62	46.00	-19.38	34.39	22.18	2.52	32.64	0.17	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
5	745.86	29.46	46.00	-16.54	30.23	28.06	3.52	32.55	0.20	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
6	886.51	37.43	46.00	-8.57	36.08	29.06	3.90	31.78	0.17	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
7	4874.00	46.54	74.00	-27.46	33.96	32.60	10.56	32.29	1.71	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
8	7311.00	50.28	74.00	-23.72	33.78	37.24	12.78	35.68	2.16	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
9	7311.00	39.72	54.00	-14.28	23.22	37.24	12.78	35.68	2.16	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					
10	10360.00	50.75	68.20	-17.45	34.76	37.66	15.20	39.00	2.13	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
11	15540.00	56.70	74.00	-17.30	39.22	41.00	18.71	44.69	2.46	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
12	15540.00	46.14	54.00	-7.86	28.66	41.00	18.71	44.69	2.46	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					
13	39582.00	51.22	74.00	-22.78	45.99	46.19	31.64	63.06	-9.54	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																																																																																																																																					
14	39582.00	40.99	54.00	-13.01	35.76	46.19	31.64	63.06	-9.54	--	--	--	Average																																																																																																																																																																																																																																																																																																																																																																																																																																																					



Mode	2																																																																																																																																																																																																																													
	Co-location Harmonic																																																																																																																																																																																																																													
	802.11g CH6 + 802.11a CH1																																																																																																																																																																																																																													
ANT	4+3																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																												
Peak	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1225_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4874.00</td><td>45.42</td><td>74.00</td><td>-28.58</td><td>32.84</td><td>32.60</td><td>10.56</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7311.00</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>33.22</td><td>37.24</td><td>12.78</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7311.00</td><td>38.93</td><td>54.00</td><td>-15.07</td><td>22.66</td><td>37.24</td><td>12.78</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr><tr><td>4 11910.00</td><td>52.66</td><td>74.00</td><td>-21.34</td><td>35.13</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>-- -- Peak</td></tr><tr><td>5 11910.00</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>24.57</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>-- -- Average</td></tr><tr><td>6 17865.00</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>39.73</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>-- -- Peak</td></tr><tr><td>7 17865.00</td><td>46.85</td><td>54.00</td><td>-7.15</td><td>29.17</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>-- -- Average</td></tr><tr><td>8 29775.00</td><td>50.23</td><td>88.20</td><td>-37.97</td><td>58.11</td><td>40.30</td><td>24.48</td><td>63.12</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4874.00	45.42	74.00	-28.58	32.84	32.60	10.56	32.29	1.71	-- -- Peak	2 7311.00	49.49	74.00	-24.51	33.22	37.24	12.78	35.68	1.93	-- -- Peak	3 7311.00	38.93	54.00	-15.07	22.66	37.24	12.78	35.68	1.93	-- -- Average	4 11910.00	52.66	74.00	-21.34	35.13	38.68	16.36	40.34	0.50	-- -- Peak	5 11910.00	42.10	54.00	-11.90	24.57	38.68	16.36	40.34	0.50	-- -- Average	6 17865.00	57.41	74.00	-16.59	39.73	40.36	20.04	46.76	0.71	-- -- Peak	7 17865.00	46.85	54.00	-7.15	29.17	40.36	20.04	46.76	0.71	-- -- Average	8 29775.00	50.23	88.20	-37.97	58.11	40.30	24.48	63.12	-9.54	-- -- Peak	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition: PEAK(UNII)_6E 1m BBHA9170_1225_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4874.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>32.96</td><td>32.60</td><td>10.56</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7311.00</td><td>49.54</td><td>74.00</td><td>-24.46</td><td>33.27</td><td>37.24</td><td>12.78</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7311.00</td><td>38.98</td><td>54.00</td><td>-15.02</td><td>22.71</td><td>37.24</td><td>12.78</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr><tr><td>4 11910.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>35.96</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>-- -- Peak</td></tr><tr><td>5 11910.00</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>25.40</td><td>38.68</td><td>16.36</td><td>40.34</td><td>0.50</td><td>-- -- Average</td></tr><tr><td>6 17865.00</td><td>57.09</td><td>74.00</td><td>-16.91</td><td>39.41</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>-- -- Peak</td></tr><tr><td>7 17865.00</td><td>46.53</td><td>54.00</td><td>-7.47</td><td>28.85</td><td>40.36</td><td>20.04</td><td>46.76</td><td>0.71</td><td>-- -- Average</td></tr><tr><td>8 29775.00</td><td>54.44</td><td>88.20</td><td>-33.76</td><td>62.32</td><td>40.30</td><td>24.48</td><td>63.12</td><td>-9.54</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4874.00	45.54	74.00	-28.46	32.96	32.60	10.56	32.29	1.71	-- -- Peak	2 7311.00	49.54	74.00	-24.46	33.27	37.24	12.78	35.68	1.93	-- -- Peak	3 7311.00	38.98	54.00	-15.02	22.71	37.24	12.78	35.68	1.93	-- -- Average	4 11910.00	53.49	74.00	-20.51	35.96	38.68	16.36	40.34	0.50	-- -- Peak	5 11910.00	42.93	54.00	-11.07	25.40	38.68	16.36	40.34	0.50	-- -- Average	6 17865.00	57.09	74.00	-16.91	39.41	40.36	20.04	46.76	0.71	-- -- Peak	7 17865.00	46.53	54.00	-7.47	28.85	40.36	20.04	46.76	0.71	-- -- Average	8 29775.00	54.44	88.20	-33.76	62.32	40.30	24.48	63.12	-9.54	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																					
1 4874.00	45.42	74.00	-28.58	32.84	32.60	10.56	32.29	1.71	-- -- Peak																																																																																																																																																																																																																					
2 7311.00	49.49	74.00	-24.51	33.22	37.24	12.78	35.68	1.93	-- -- Peak																																																																																																																																																																																																																					
3 7311.00	38.93	54.00	-15.07	22.66	37.24	12.78	35.68	1.93	-- -- Average																																																																																																																																																																																																																					
4 11910.00	52.66	74.00	-21.34	35.13	38.68	16.36	40.34	0.50	-- -- Peak																																																																																																																																																																																																																					
5 11910.00	42.10	54.00	-11.90	24.57	38.68	16.36	40.34	0.50	-- -- Average																																																																																																																																																																																																																					
6 17865.00	57.41	74.00	-16.59	39.73	40.36	20.04	46.76	0.71	-- -- Peak																																																																																																																																																																																																																					
7 17865.00	46.85	54.00	-7.15	29.17	40.36	20.04	46.76	0.71	-- -- Average																																																																																																																																																																																																																					
8 29775.00	50.23	88.20	-37.97	58.11	40.30	24.48	63.12	-9.54	-- -- Peak																																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																					
1 4874.00	45.54	74.00	-28.46	32.96	32.60	10.56	32.29	1.71	-- -- Peak																																																																																																																																																																																																																					
2 7311.00	49.54	74.00	-24.46	33.27	37.24	12.78	35.68	1.93	-- -- Peak																																																																																																																																																																																																																					
3 7311.00	38.98	54.00	-15.02	22.71	37.24	12.78	35.68	1.93	-- -- Average																																																																																																																																																																																																																					
4 11910.00	53.49	74.00	-20.51	35.96	38.68	16.36	40.34	0.50	-- -- Peak																																																																																																																																																																																																																					
5 11910.00	42.93	54.00	-11.07	25.40	38.68	16.36	40.34	0.50	-- -- Average																																																																																																																																																																																																																					
6 17865.00	57.09	74.00	-16.91	39.41	40.36	20.04	46.76	0.71	-- -- Peak																																																																																																																																																																																																																					
7 17865.00	46.53	54.00	-7.47	28.85	40.36	20.04	46.76	0.71	-- -- Average																																																																																																																																																																																																																					
8 29775.00	54.44	88.20	-33.76	62.32	40.30	24.48	63.12	-9.54	-- -- Peak																																																																																																																																																																																																																					




Mode	3																																																																																																																																																																																																																																																																																									
	Co-location Harmonic																																																																																																																																																																																																																																																																																									
	Bluetooth-LE Ch39 + 802.11be EHT20 CH36																																																																																																																																																																																																																																																																																									
ANT	4+3																																																																																																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																								
Peak	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition : PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL Mode : 3 Setting : BLE Setting: 5G Setting : 78 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>47.09</td><td>74.00</td><td>-26.91</td><td></td><td>34.08</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>51.03</td><td>74.00</td><td>-22.97</td><td></td><td>34.70</td><td>37.14</td><td>12.90</td><td>35.78</td><td>2.07</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>40.64</td><td>54.00</td><td>-13.36</td><td></td><td>24.31</td><td>37.14</td><td>12.90</td><td>35.78</td><td>2.07</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>10360.00</td><td>49.69</td><td>68.20</td><td>-18.51</td><td></td><td>33.70</td><td>37.66</td><td>15.20</td><td>39.00</td><td>2.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>15540.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td></td><td>38.58</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>15540.00</td><td>45.50</td><td>54.00</td><td>-8.50</td><td></td><td>28.02</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>39604.00</td><td>51.57</td><td>74.00</td><td>-22.43</td><td></td><td>46.31</td><td>46.26</td><td>31.65</td><td>63.11</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>39604.00</td><td>41.01</td><td>54.00</td><td>-12.99</td><td></td><td>35.75</td><td>46.26</td><td>31.65</td><td>63.11</td><td>-9.54</td><td>--</td><td>--</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	47.09	74.00	-26.91		34.08	32.92	10.62	32.24	1.71	--	--	Peak	2	7440.00	51.03	74.00	-22.97		34.70	37.14	12.90	35.78	2.07	--	--	Peak	3	7440.00	40.64	54.00	-13.36		24.31	37.14	12.90	35.78	2.07	--	--	Average	4	10360.00	49.69	68.20	-18.51		33.70	37.66	15.20	39.00	2.13	--	--	Peak	5	15540.00	56.06	74.00	-17.94		38.58	41.00	18.71	44.69	2.46	--	--	Peak	6	15540.00	45.50	54.00	-8.50		28.02	41.00	18.71	44.69	2.46	--	--	Average	7	39604.00	51.57	74.00	-22.43		46.31	46.26	31.65	63.11	-9.54	--	--	Peak	8	39604.00	41.01	54.00	-12.99		35.75	46.26	31.65	63.11	-9.54	--	--	Average	Level (dBuV/m) Date: 2026-04-13 Site : 03CH23-HY Condition : PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL Mode : 3 Setting : BLE Setting: 5G Setting : 78 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4960.00</td><td>46.21</td><td>74.00</td><td>-27.79</td><td></td><td>33.20</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>48.98</td><td>74.00</td><td>-25.02</td><td></td><td>32.65</td><td>37.14</td><td>12.90</td><td>35.78</td><td>2.07</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>39.72</td><td>54.00</td><td>-14.28</td><td></td><td>23.39</td><td>37.14</td><td>12.90</td><td>35.78</td><td>2.07</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>10360.00</td><td>49.76</td><td>68.20</td><td>-18.44</td><td></td><td>33.77</td><td>37.66</td><td>15.20</td><td>39.00</td><td>2.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>15540.00</td><td>57.54</td><td>74.00</td><td>-16.46</td><td></td><td>40.06</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>15540.00</td><td>46.98</td><td>54.00</td><td>-7.02</td><td></td><td>29.50</td><td>41.00</td><td>18.71</td><td>44.69</td><td>2.46</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>39582.00</td><td>52.22</td><td>74.00</td><td>-21.78</td><td></td><td>46.99</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>39582.00</td><td>41.66</td><td>54.00</td><td>-12.34</td><td></td><td>36.43</td><td>46.19</td><td>31.64</td><td>63.06</td><td>-9.54</td><td>--</td><td>--</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	4960.00	46.21	74.00	-27.79		33.20	32.92	10.62	32.24	1.71	--	--	Peak	2	7440.00	48.98	74.00	-25.02		32.65	37.14	12.90	35.78	2.07	--	--	Peak	3	7440.00	39.72	54.00	-14.28		23.39	37.14	12.90	35.78	2.07	--	--	Average	4	10360.00	49.76	68.20	-18.44		33.77	37.66	15.20	39.00	2.13	--	--	Peak	5	15540.00	57.54	74.00	-16.46		40.06	41.00	18.71	44.69	2.46	--	--	Peak	6	15540.00	46.98	54.00	-7.02		29.50	41.00	18.71	44.69	2.46	--	--	Average	7	39582.00	52.22	74.00	-21.78		46.99	46.19	31.64	63.06	-9.54	--	--	Peak	8	39582.00	41.66	54.00	-12.34		36.43	46.19	31.64	63.06	-9.54	--	--	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																														
1	4960.00	47.09	74.00	-26.91		34.08	32.92	10.62	32.24	1.71	--	--	Peak																																																																																																																																																																																																																																																																													
2	7440.00	51.03	74.00	-22.97		34.70	37.14	12.90	35.78	2.07	--	--	Peak																																																																																																																																																																																																																																																																													
3	7440.00	40.64	54.00	-13.36		24.31	37.14	12.90	35.78	2.07	--	--	Average																																																																																																																																																																																																																																																																													
4	10360.00	49.69	68.20	-18.51		33.70	37.66	15.20	39.00	2.13	--	--	Peak																																																																																																																																																																																																																																																																													
5	15540.00	56.06	74.00	-17.94		38.58	41.00	18.71	44.69	2.46	--	--	Peak																																																																																																																																																																																																																																																																													
6	15540.00	45.50	54.00	-8.50		28.02	41.00	18.71	44.69	2.46	--	--	Average																																																																																																																																																																																																																																																																													
7	39604.00	51.57	74.00	-22.43		46.31	46.26	31.65	63.11	-9.54	--	--	Peak																																																																																																																																																																																																																																																																													
8	39604.00	41.01	54.00	-12.99		35.75	46.26	31.65	63.11	-9.54	--	--	Average																																																																																																																																																																																																																																																																													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																														
1	4960.00	46.21	74.00	-27.79		33.20	32.92	10.62	32.24	1.71	--	--	Peak																																																																																																																																																																																																																																																																													
2	7440.00	48.98	74.00	-25.02		32.65	37.14	12.90	35.78	2.07	--	--	Peak																																																																																																																																																																																																																																																																													
3	7440.00	39.72	54.00	-14.28		23.39	37.14	12.90	35.78	2.07	--	--	Average																																																																																																																																																																																																																																																																													
4	10360.00	49.76	68.20	-18.44		33.77	37.66	15.20	39.00	2.13	--	--	Peak																																																																																																																																																																																																																																																																													
5	15540.00	57.54	74.00	-16.46		40.06	41.00	18.71	44.69	2.46	--	--	Peak																																																																																																																																																																																																																																																																													
6	15540.00	46.98	54.00	-7.02		29.50	41.00	18.71	44.69	2.46	--	--	Average																																																																																																																																																																																																																																																																													
7	39582.00	52.22	74.00	-21.78		46.99	46.19	31.64	63.06	-9.54	--	--	Peak																																																																																																																																																																																																																																																																													
8	39582.00	41.66	54.00	-12.34		36.43	46.19	31.64	63.06	-9.54	--	--	Average																																																																																																																																																																																																																																																																													
Avg																																																																																																																																																																																																																																																																																										




Appendix B. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
4+3	Bluetooth - LE for 1Mbps	60.32	376	2.66	2.7kHz
4+3	2.4GHz 802.11g	99.51	-	-	10Hz
4+3	2.4GHz 802.11ax HE20 Full RU	99.31	-	-	10Hz
4+3	2.4GHz 802.11be EHT20 Full RU	99.31	-	-	10Hz
4+3	5GHz 802.11a	99.51	-	-	10Hz

MIMO <Ant. 4+3>

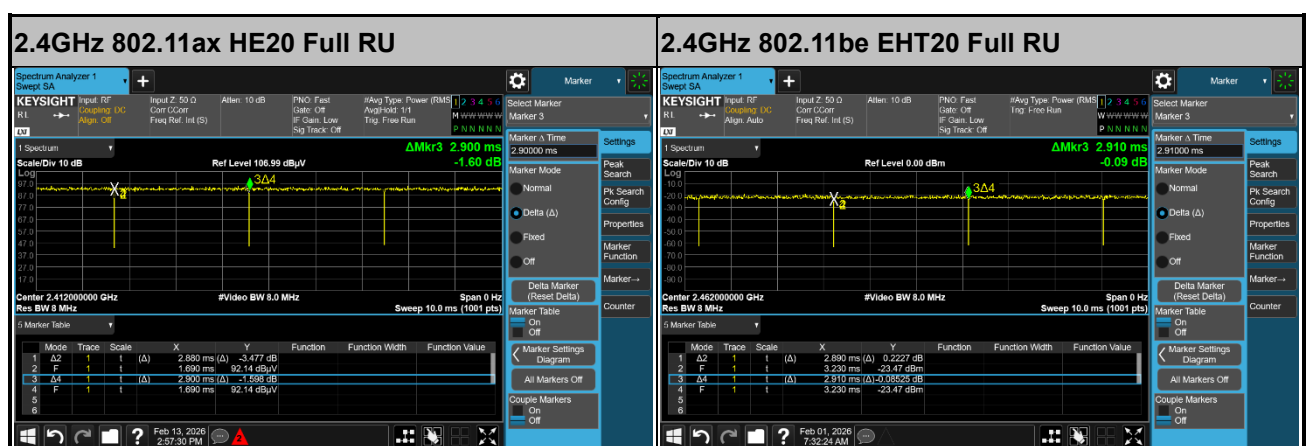

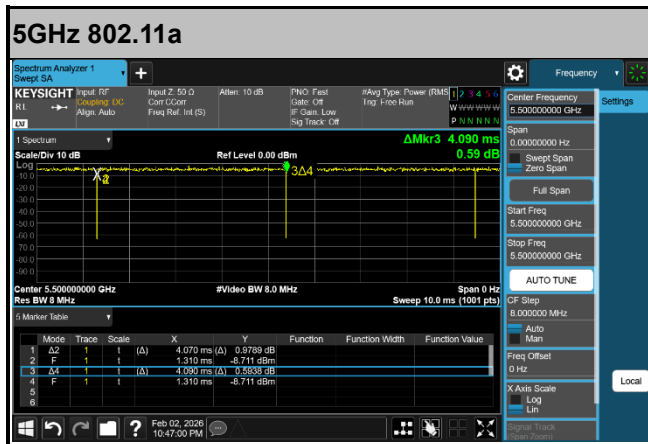

————THE END————