



FCC 47 CFR MPE REPORT

CE LINK LIMITED

Two-in-one Travel Charger

Model Number: PD35U-1TGA-MPP25

FCC ID: A4X-PD35UMPP25

Applicant:	CE LINK LIMITED
Address:	22 Dongkang Road, Dalingshan Town, Dongguan City,
	Guangdong Province, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	

Report Number:	ESTE-R2609014
Date of Test:	Jul. 06, 2026 to Aug. 28, 2026
Date of Report:	Sep. 03, 2026


Applicant:	CE LINK LIMITED		
Address:	22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China		
Manufacturer:	CE LINK LIMITED		
Address:	22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China		
E.U.T:	Two-in-one Travel Charger		
Model Number:	PD35U-1TGA-MPP25		
Power Supply:	Input: 100-240V~ 50/60Hz 1.2A Max USB-C: 15V=3A 45W Max Single Output: USB-C: DC 5V=3A 15W, 9V=3A 27W, 12V=2.91A 35W, 15V=2.33A 35W, PPS:5-11V=3A 33W Max Wireless:25W Dual Output: USB-C: 5V=3A 15W, 9V=2.22A 20W, 12V=1.67A 20W, PPS:5-11V=2.2A 20W Max Wireless:15W		
Trade Name:	-----	Sample No.:	EST-260706008-002
Date of Receipt:	Jul. 07, 2026	Date of Test:	Jul. 07, 2026 to Aug. 28, 2026
Test Specification:	FCC CFR 47 Part 1.1307(b)&1.1310 KDB 680106 D01 RF Exposure Wireless Charging Apps v04r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC CFR 47 Part 1.1307(b)&1.1310 requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		

Date: Sep. 07, 2026


Prepared by:

Reviewed by:

Approved by:



Ring Yang / Assistant

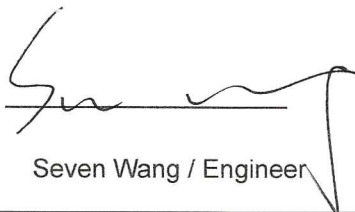

Seven Wang / Engineer



Iceman Hu / Manager

Other Aspects: None.

Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd. The statement of compliance in this report is based on the limit in the test standard, the measurement uncertainty is not considered.

1. Summary of test

1.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	Maximum Permissible Exposure	Part 1.1307(b)&1.1310	PASS

1.2. Test Mode

Test Item	Test Mode
Maximum Permissible Exposure	Wireless Charging with 5W
	Wireless Charging with 7.5W
	Wireless Charging with 10W
	Wireless Charging with 15W
	Wireless Charging with 25W
	Standby
Note: All modes have been tested. The report only reflects the worst case of full load test data.	

1.3. Test Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Electric and Magnetic Field Probe-Analyzer	Narda S.T.S./PMM	EHP-200A	EST-E106	June 11,26	June 10,27
Test Software	Narda	EHP200-TS	Rel 1.92	N/A	N/A
Note: Test uncertainty: ± 1.62 dB (H-field); ± 1.64 dB (E-field) at a level of confidence of 95%.					

1.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
1	Wireless load	-	YBZ BPP	-	-

Item	Shielded Type	Ferrite Core	Length	Model Name/Type No.	Note
-	-	-	-	-	-

2. Maximum Permissible Exposure


2.1. Limit

Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

Note: f = frequency in MHz * = Plane-wave equivalent power density.

2.2. Test Setup

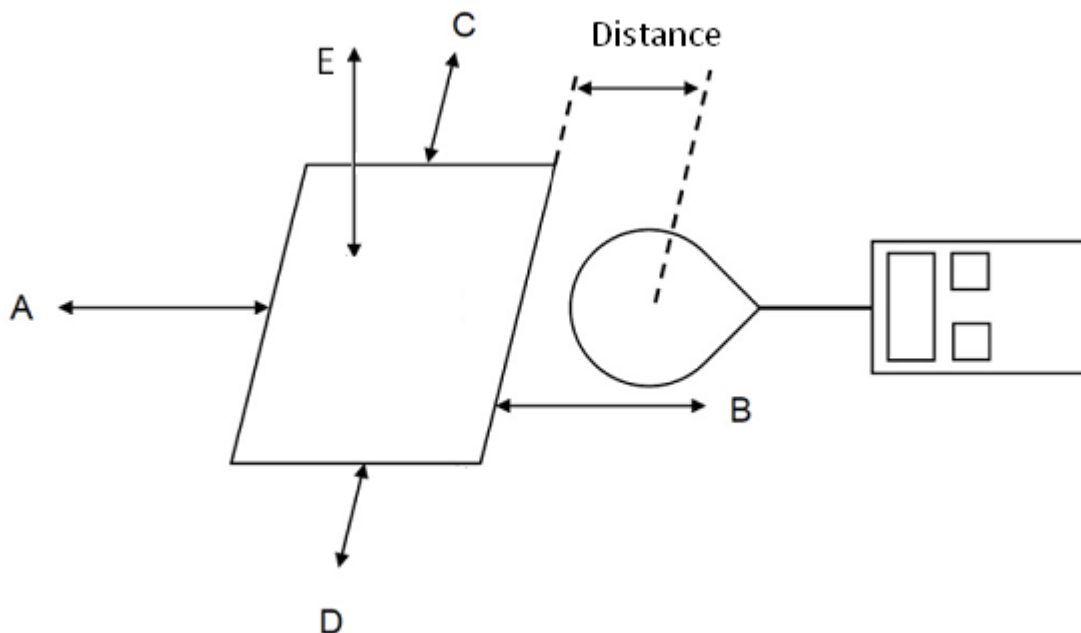

2.3. Test Procedure

- The test was performed on 360 degree turn table in anechoic chamber.
- The probe was placed at 20 cm surrounding, for test setup.
- The highest emission level was recorded and compared with limit as soon as measurement of each point; A, B, C, D, E were completed.


2.4. Test Result for Test setup :

E-field strength						
Frequency Range	110.5~205kHz				360kHz	
Test Mode	Standby	5W	7.5W	10W	15W	25W
Position A(V/m)	0.326	1.241	1.132	1.388	2.116	2.059
Position B(V/m)	0.364	1.515	1.103	1.229	2.863	2.594
Position C(V/m)	0.359	1.064	1.009	1.167	2.887	2.418
Position D(V/m)	0.372	1.352	1.168	1.238	2.774	2.591
Position E(V/m)	0.385	2.726	2.957	2.034	3.712	3.984
Limits (V/m)	614					

H-field strength						
Frequency Range	110.5~205kHz				360kHz	
Test Mode	Standby	5W	7.5W	10W	15W	25W
Position A(A/m)	0.038	0.069	0.066	0.068	0.079	0.072
Position B(A/m)	0.042	0.070	0.063	0.062	0.075	0.069
Position C(A/m)	0.039	0.061	0.067	0.069	0.072	0.073
Position D(A/m)	0.041	0.070	0.060	0.068	0.071	0.074
Position E(A/m)	0.045	0.086	0.089	0.085	0.094	0.098
Limits (A/m)	1.630					

3. Test photo

Position E

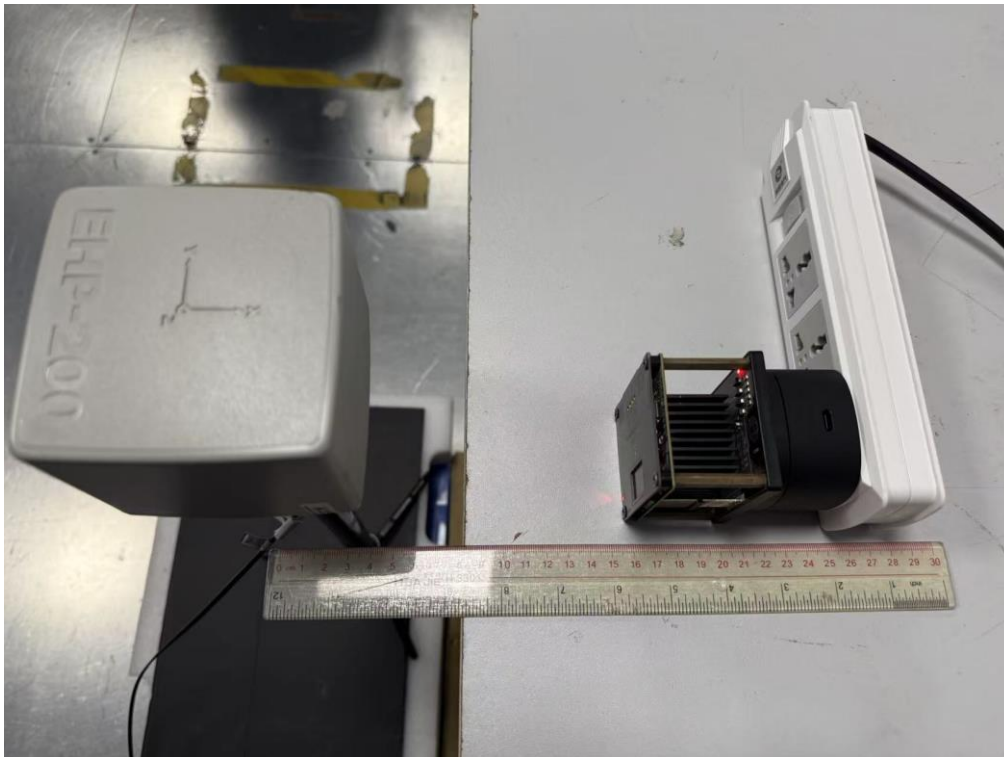

End of Test Report