

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/1/9

P01 BT_DH5_Rear of Headset_Ch39

DUT: EUT


Communication System: UID 0, BT; Frequency: 2441 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.819 \text{ S/m}$; $\epsilon_r = 37.974$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.77, 7.28, 6.72) @ 2441 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (61x81x1):** Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.348 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.033 V/m ; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.521 W/kg
 $\text{SAR}(1 \text{ g}) = 0.214 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.096 \text{ W/kg}$
Smallest distance from peaks to all points 3 dB below = 6.3 mm
Ratio of SAR at M2 to SAR at M1 = 42.9%
Maximum value of SAR (measured) = 0.379 W/kg

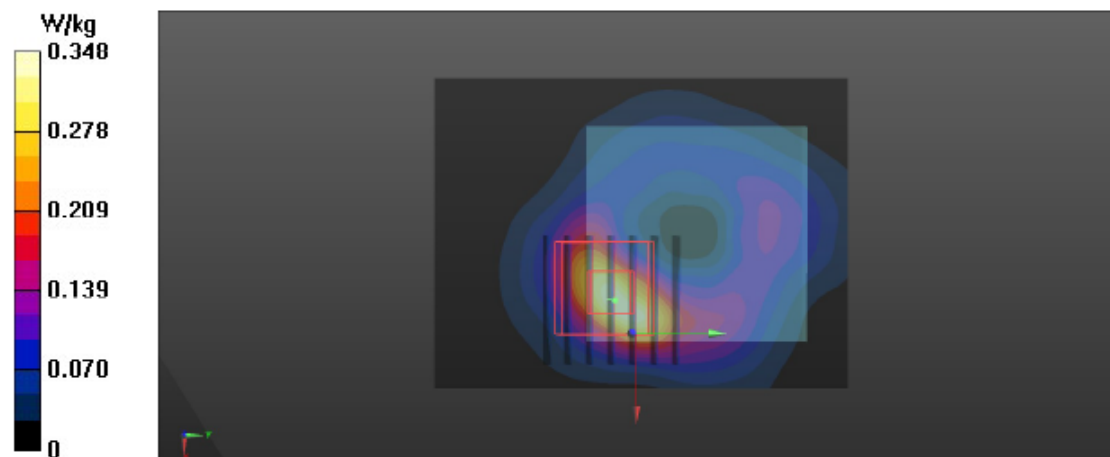

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/1/9

P02 BLE_1M_Rear of Headset_Ch19

DUT: EUT


Communication System: UID 0, BT; Frequency: 2440 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 37.974$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.77, 7.28, 6.72) @ 2440 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (61x81x1):** Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.464 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.597 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.563 W/kg
 $\text{SAR}(1 \text{ g}) = 0.236 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.105 \text{ W/kg}$
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 38.6%
Maximum value of SAR (measured) = 0.422 W/kg

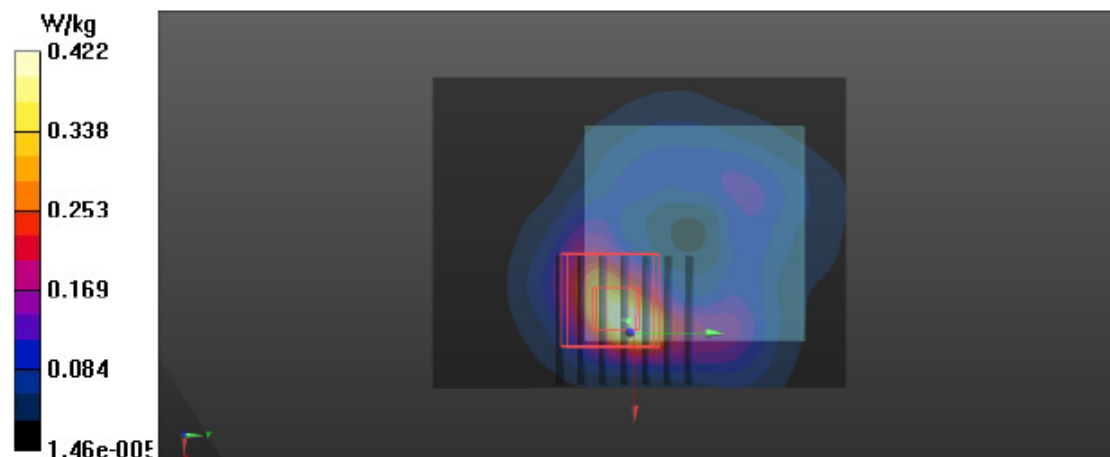

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2026/1/9

P03 SDR-2.4G_2M_Rear of Headset_Ch19

DUT: EUT

Communication System: UID 0, BT; Frequency: 2440 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.818 \text{ S/m}$; $\epsilon_r = 37.974$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.77, 7.28, 6.72) @ 2440 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2025/11/21
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (61x81x1):** Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.230 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.147 V/m ; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.311 W/kg
 $\text{SAR}(1 \text{ g}) = 0.126 \text{ W/kg}$; $\text{SAR}(10 \text{ g}) = 0.056 \text{ W/kg}$
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 32.8%
Maximum value of SAR (measured) = 0.220 W/kg

