

Appendix A: Test Results of Bluetooth BR & EDR

APPENDIX A: TEST RESULTS OF BLUETOOTH BR & EDR	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Test Result.....	2
Test Graphs.....	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH.....	5
Test Result.....	5
Test Graphs.....	6
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	8
Test Result.....	8
Test Graphs.....	9
APPENDIX A.4: TEST RESULTS OF TIME OF OCCUPANCY.....	10
Test Result.....	10
Test Graphs.....	11
APPENDIX A.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	15
Test Result.....	15
Test Graphs.....	16
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	17
Test Result.....	17
Test Graphs.....	18
APPENDIX A.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION.....	21
Test Result.....	21
Test Graphs.....	22
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	28
30 MHz - 1GHz	28
1GHz - 18GHz.....	30
APPENDIX A.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	42
APPENDIX A.10: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	46

Appendix A.1: Test Results of 20dB Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.891	2401.541	2402.432	---	PASS
		2441	0.888	2440.541	2441.429	---	PASS
		2480	0.888	2479.541	2480.429	---	PASS
3DH5	Ant1	2402	1.374	2401.319	2402.693	---	PASS
		2441	1.356	2440.316	2441.672	---	PASS
		2480	1.377	2479.313	2480.690	---	PASS

Test Graphs






Appendix A.2: Test Results of 99% Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.85158	2401.5681	2402.4196	---	PASS
		2441	0.84465	2440.5729	2441.4176	---	PASS
		2480	0.85893	2479.5651	2480.4240	---	PASS
3DH5	Ant1	2402	1.2354	2401.3746	2402.6100	---	PASS
		2441	1.2390	2440.3741	2441.6131	---	PASS
		2480	1.2482	2479.3683	2480.6165	---	PASS

Test Graphs

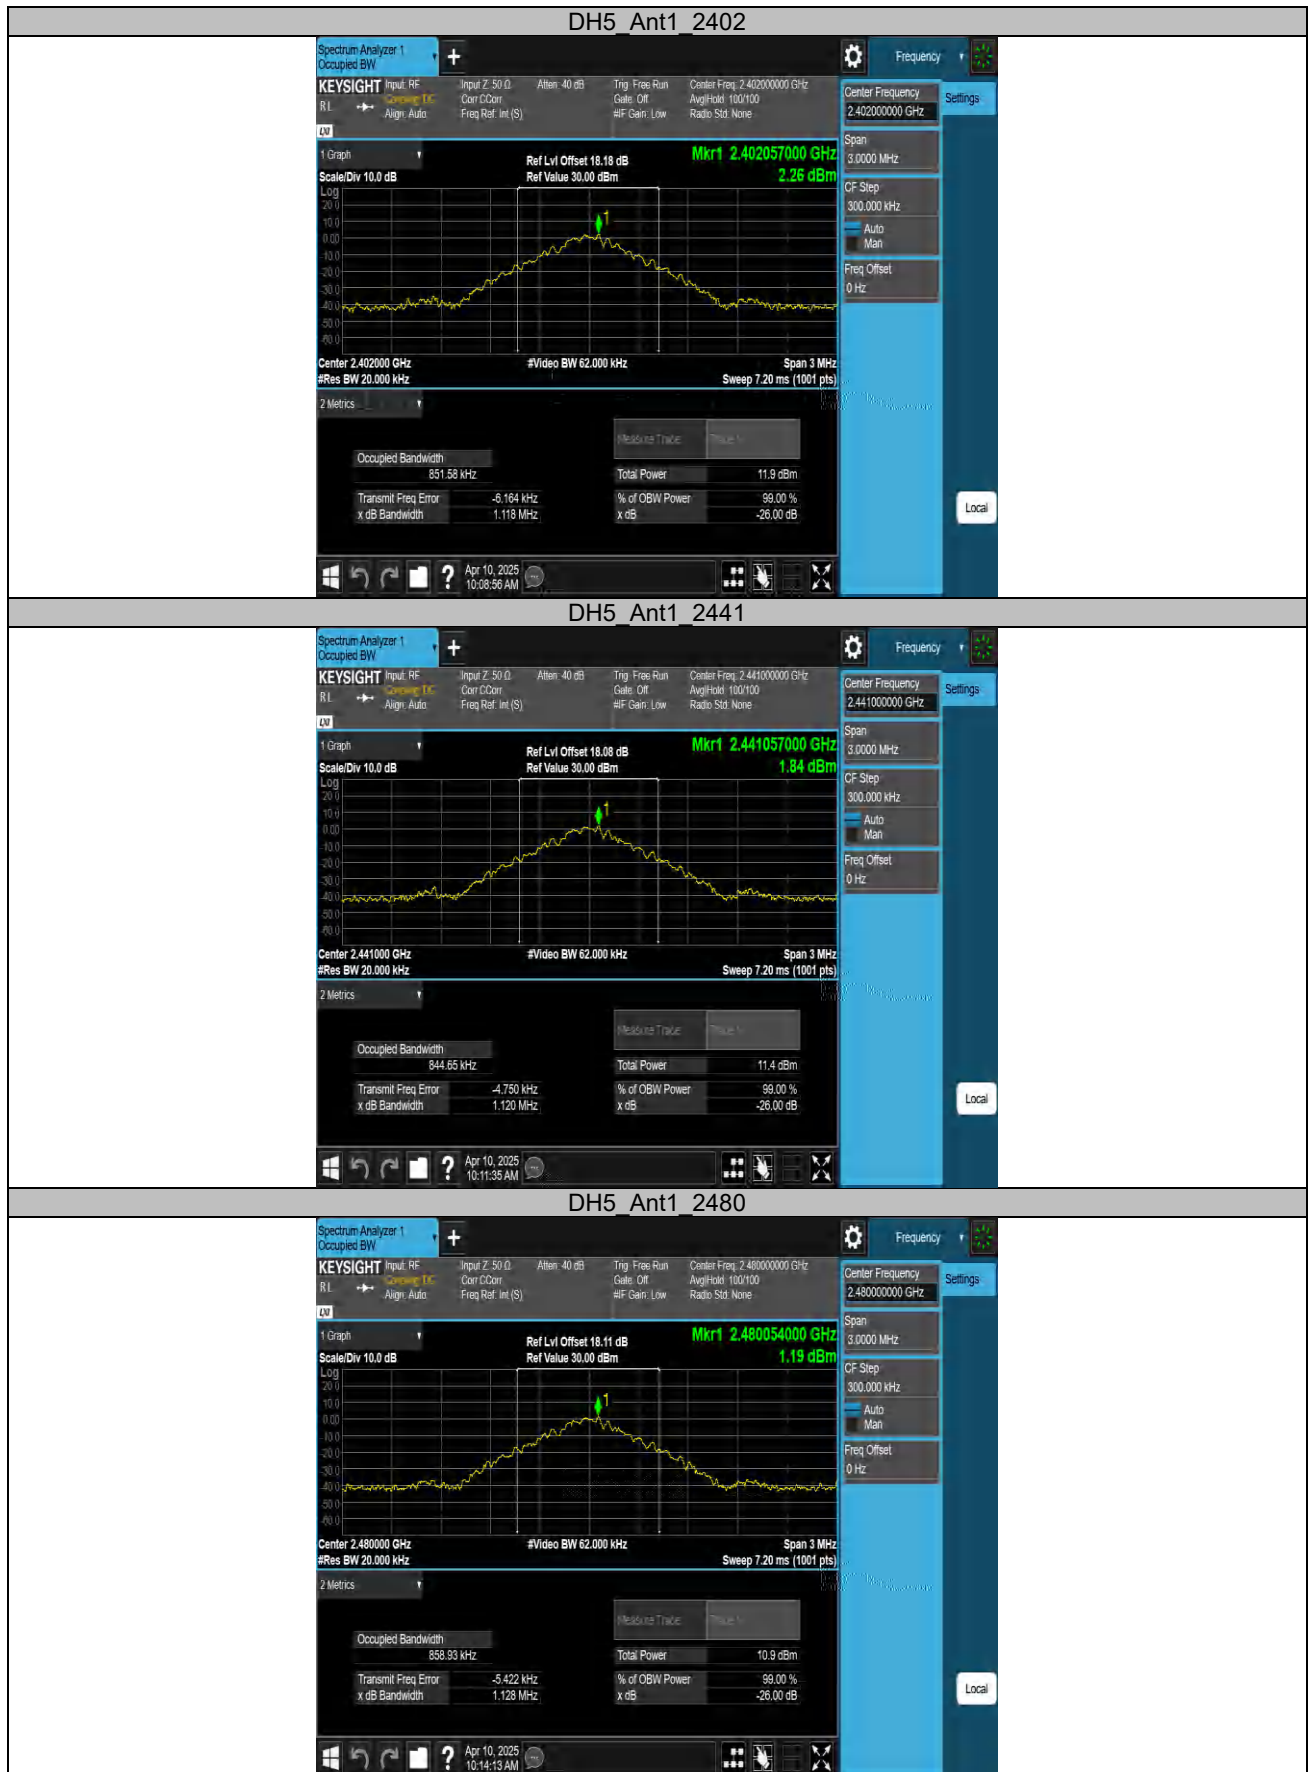



Appendix A.3: Test Results of Carrier Frequency Separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.952	≥ 0.891	PASS
3DH5	Ant1	Hop	0.97	≥ 0.918	PASS

Test Graphs





Appendix A.4: Test Results of Time of Occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.365	319	0.116	≤0.4	PASS
DH3	Ant1	Hop	1.623	159	0.258	≤0.4	PASS
DH5	Ant1	Hop	2.870	107	0.307	≤0.4	PASS
3DH1	Ant1	Hop	0.375	319	0.12	≤0.4	PASS
3DH3	Ant1	Hop	1.626	159	0.259	≤0.4	PASS
3DH5	Ant1	Hop	2.878	107	0.308	≤0.4	PASS

Test Graphs

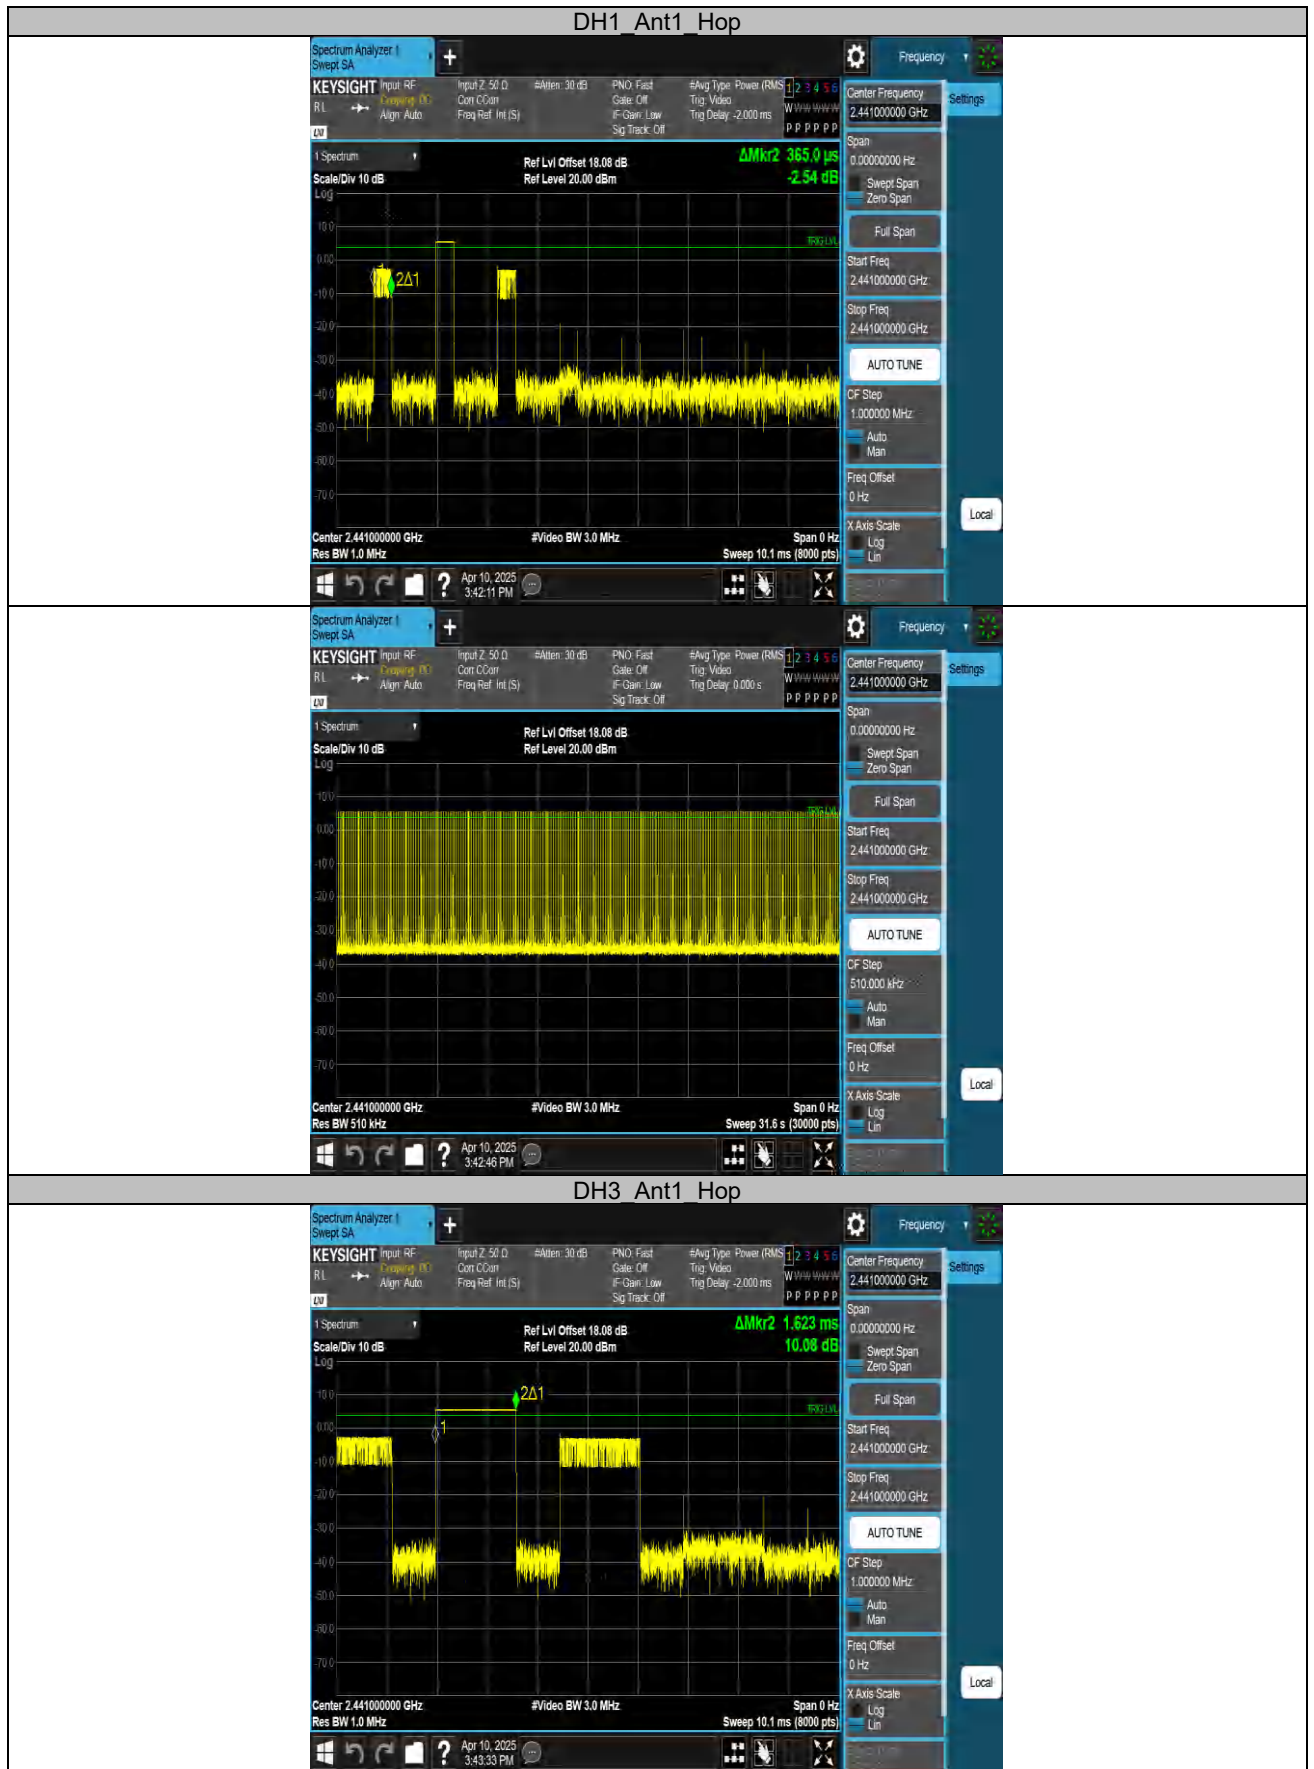


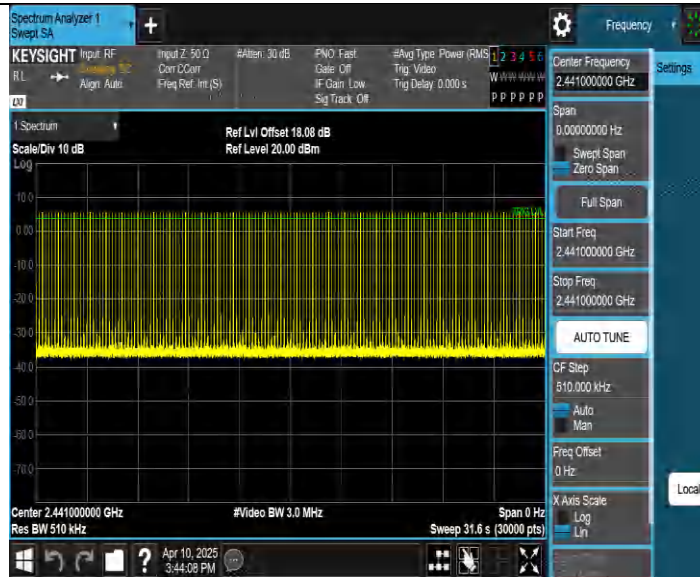

DH5 Ant1 Hop




3DH1 Ant1 Hop

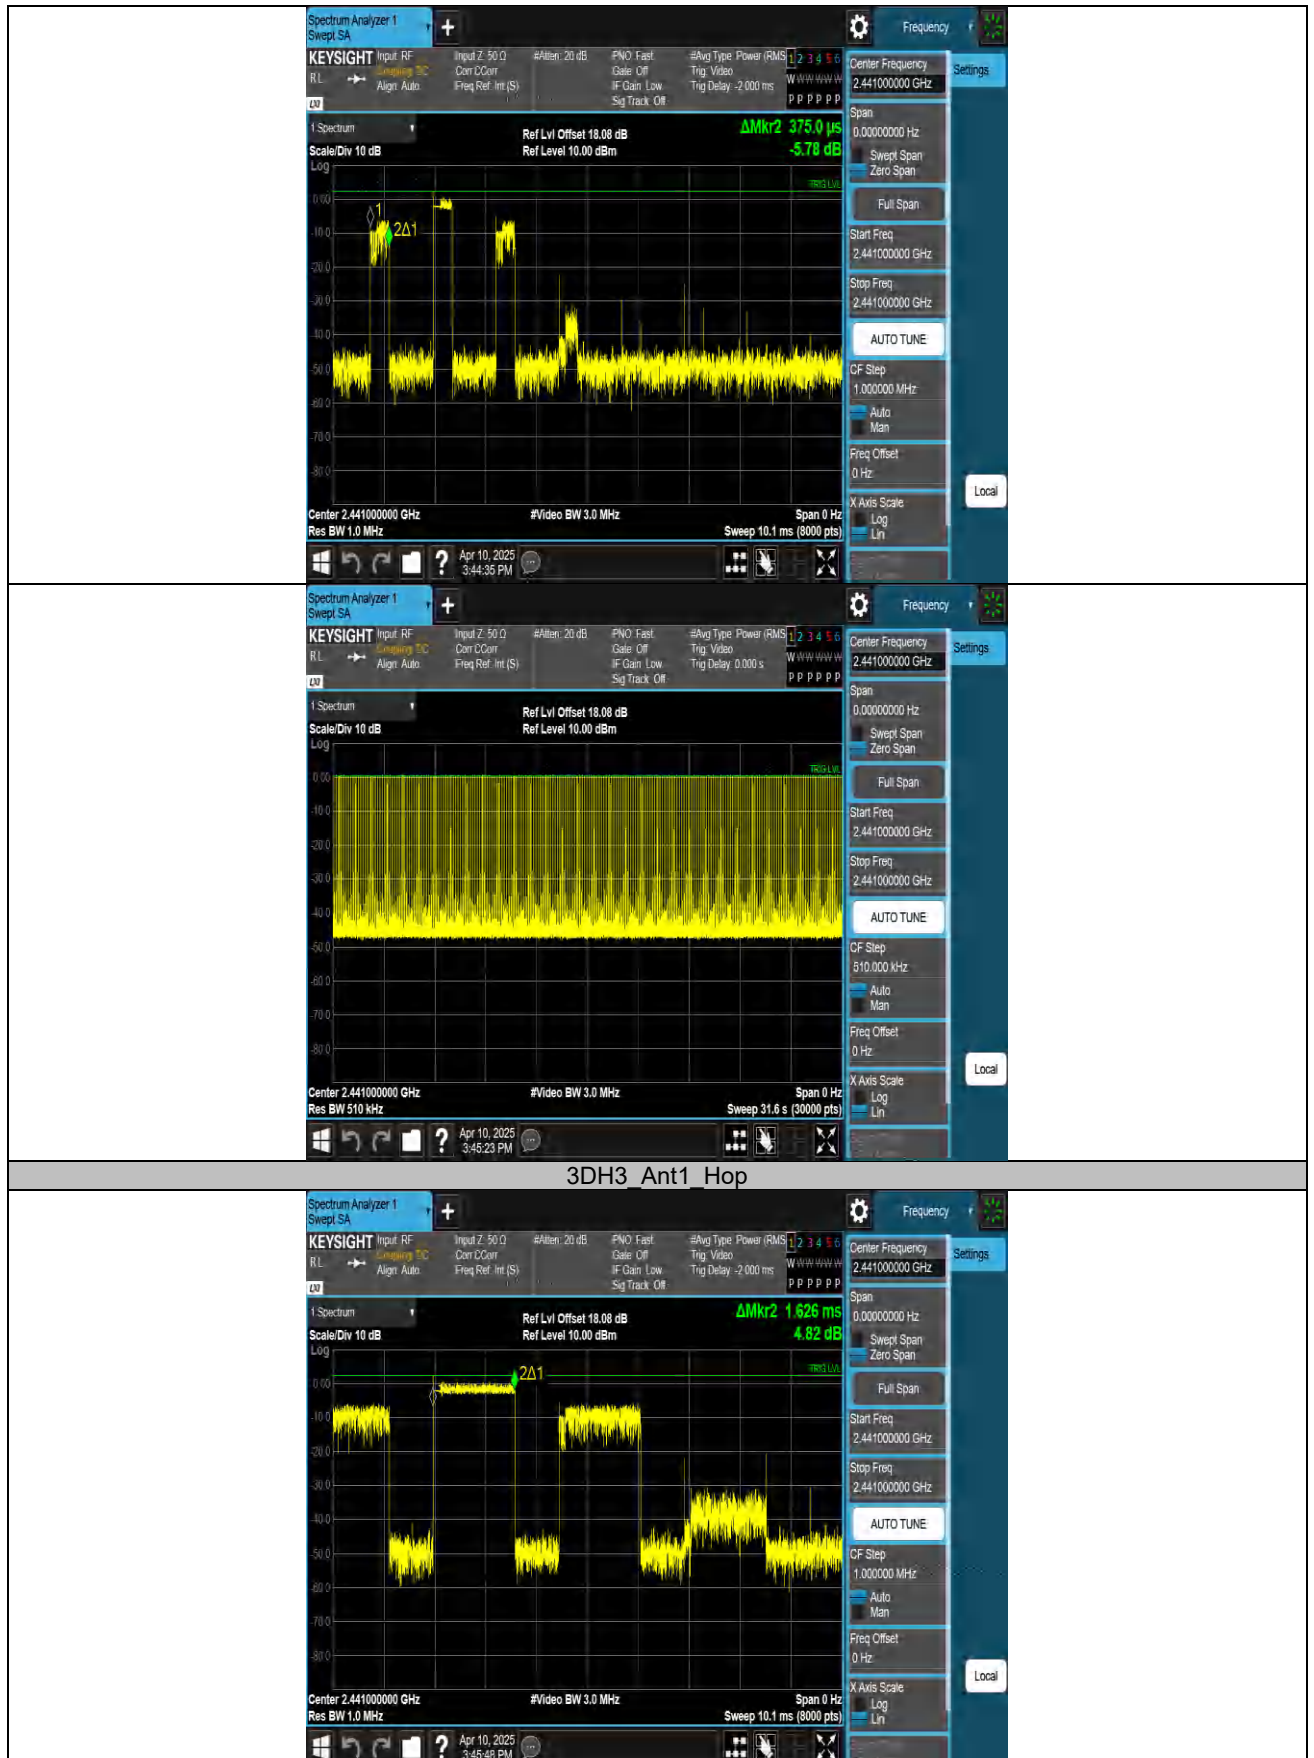



3DH5 Ant1 Hop

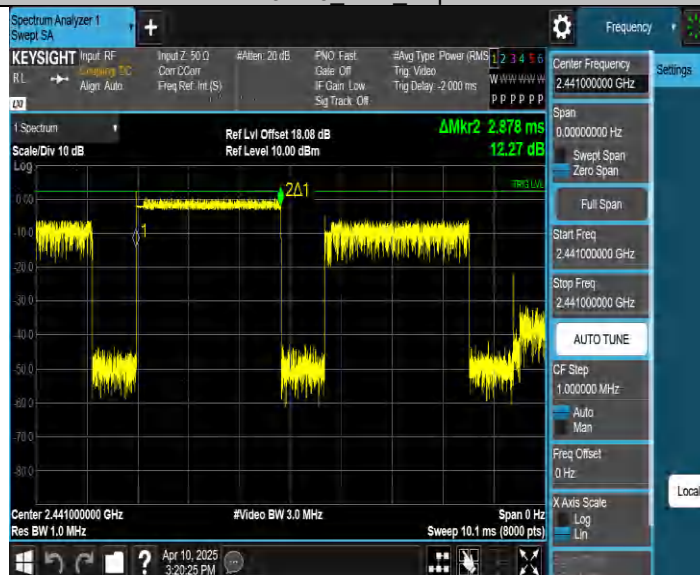

Appendix A.5: Test Results of Number of Hopping Frequency

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs



Appendix A.6: Test Results of Band Edge Measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.44	-44.26	≤-14.56	PASS
		High	2480	4.52	-43.81	≤-15.48	PASS
3DH5	Ant1	Low	2402	-3.38	-44.24	≤-23.38	PASS
		High	2480	-4.21	-44.16	≤-24.21	PASS
DH5	Ant1	Hopping	2402	5.26	-43.09	≤-14.74	PASS
		Hopping	2480	3.99	-45.30	≤-16.01	PASS
3DH5	Ant1	Hopping	2402	-2.95	-43.96	≤-22.95	PASS
		Hopping	2480	-5.05	-43.42	≤-25.05	PASS

Test Graphs







3DH5_Ant1_Hopping 2480




Appendix A.7: Test Results of Conducted Spurious Emission


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	4.72	4.72	---	PASS
			30~1000	4.72	-41.46	≤-15.28	PASS
			1000~26500	4.72	-32.44	≤-15.28	PASS
		2441	Reference	4.85	4.85	---	PASS
			30~1000	4.85	-41.27	≤-15.15	PASS
			1000~26500	4.85	-33.01	≤-15.15	PASS
		2480	Reference	4.04	4.04	---	PASS
			30~1000	4.04	-40.54	≤-15.96	PASS
			1000~26500	4.04	-32.66	≤-15.96	PASS
3DH5	Ant1	2402	Reference	-3.67	-3.67	---	PASS
			30~1000	-3.67	-41.53	≤-23.67	PASS
			1000~26500	-3.67	-32	≤-23.67	PASS
		2441	Reference	-3.98	-3.98	---	PASS
			30~1000	-3.98	-40.91	≤-23.98	PASS
			1000~26500	-3.98	-32.51	≤-23.98	PASS
		2480	Reference	-5.00	-5.00	---	PASS
			30~1000	-5.00	-41.24	≤-25	PASS
			1000~26500	-5.00	-31.46	≤-25	PASS

Test Graphs

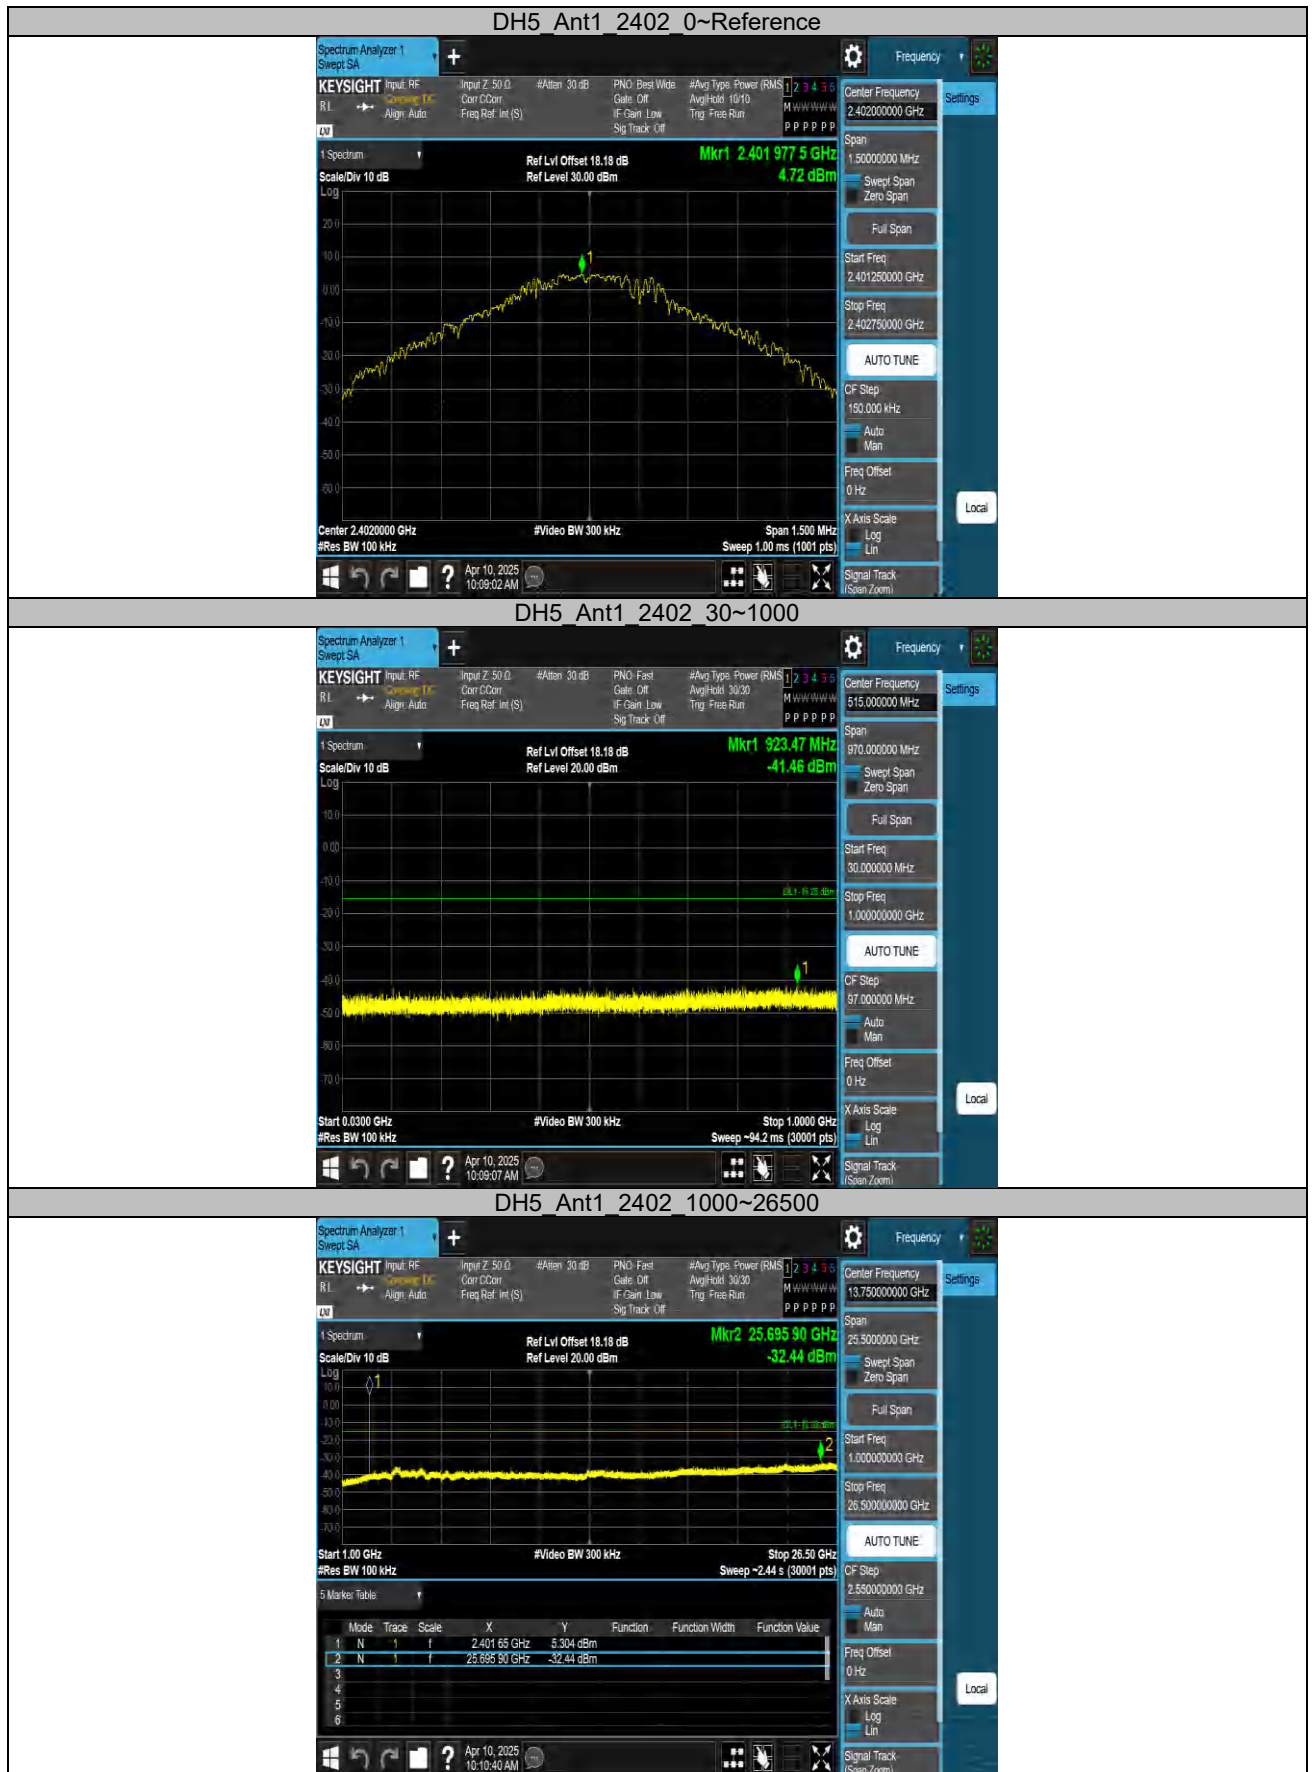



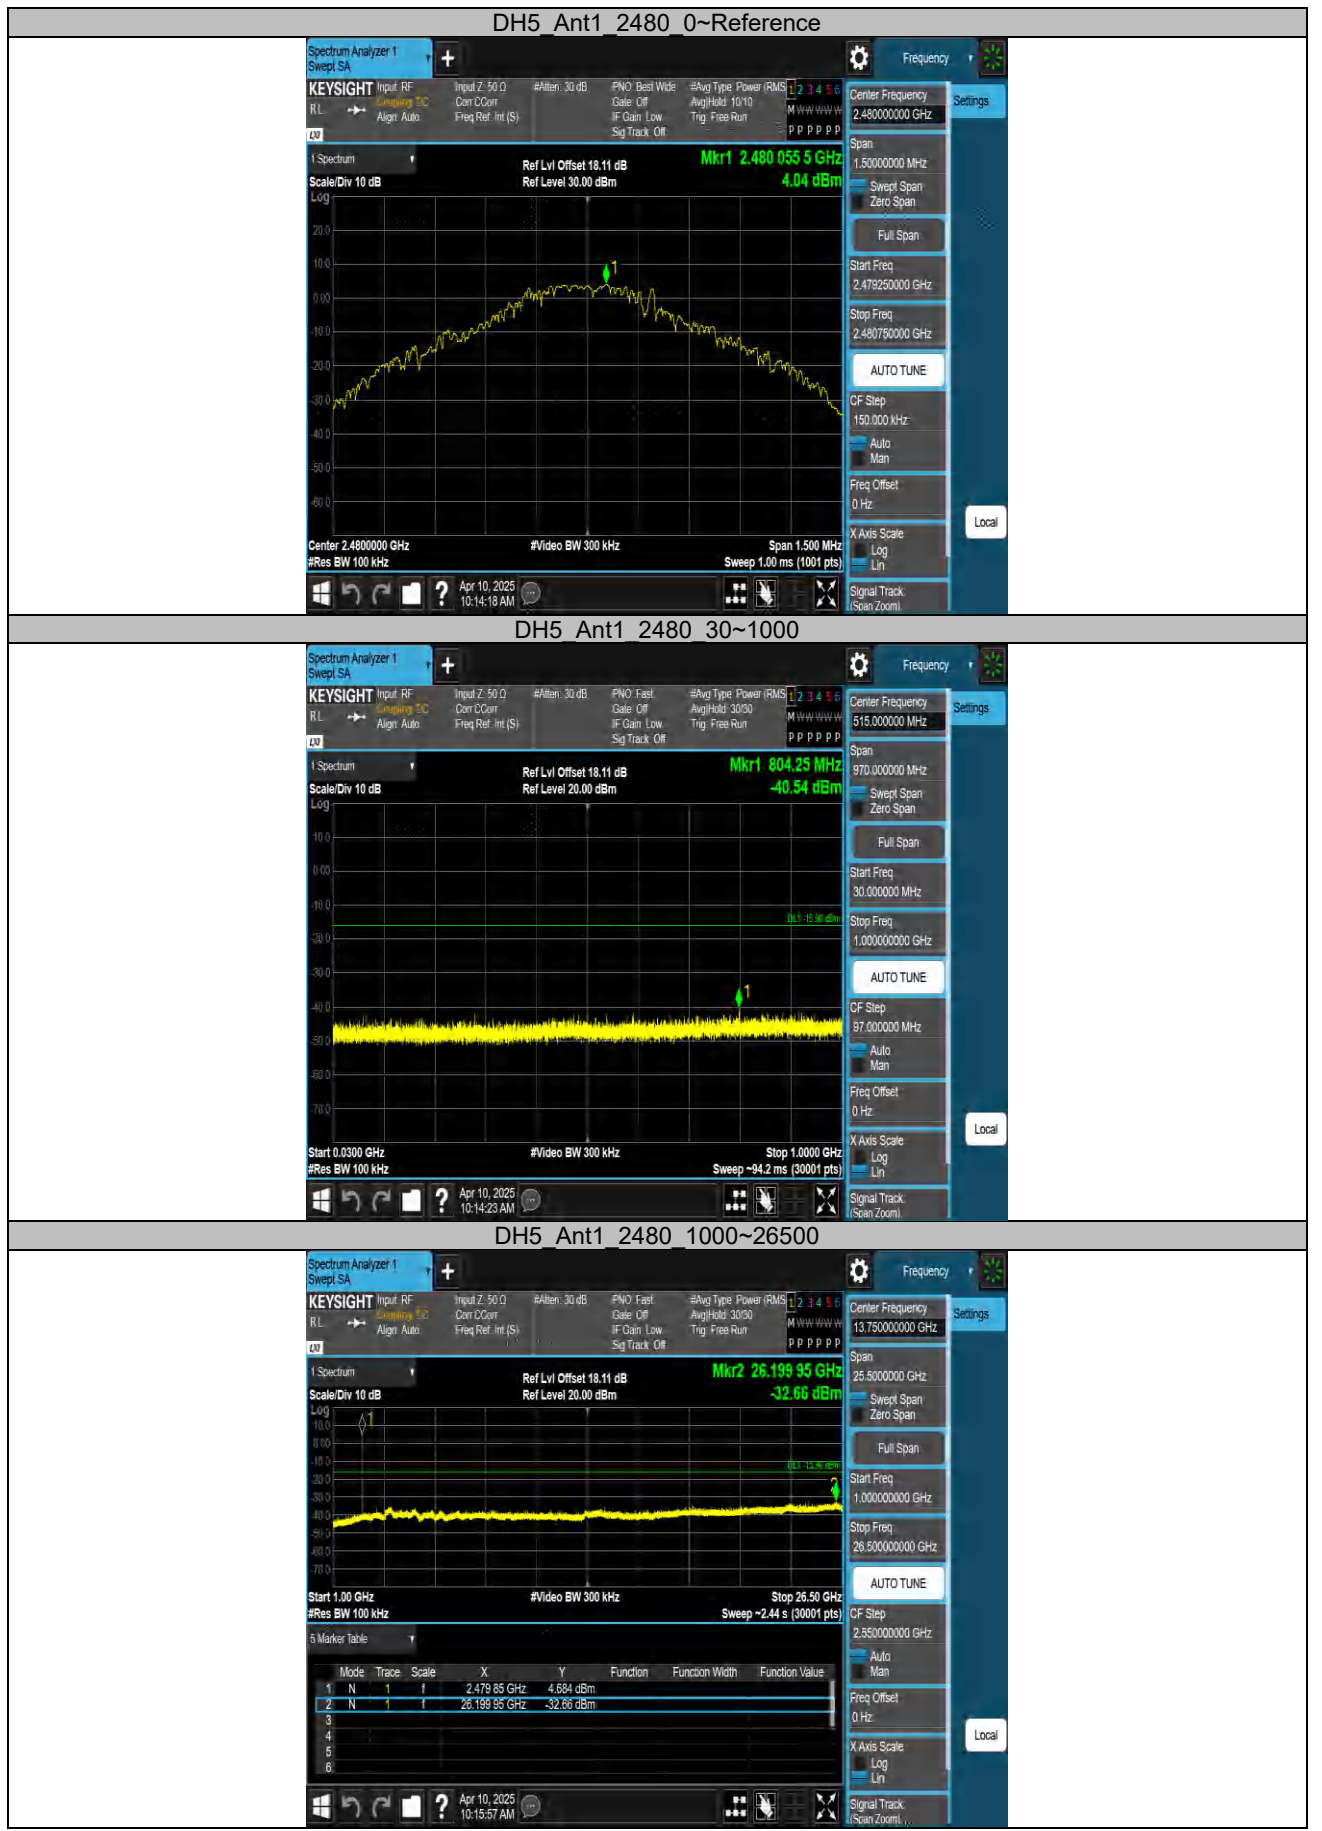





3DH5 Ant1 2480 0~Reference



3DH5 Ant1 2480 30~1000



3DH5 Ant1 2480 1000~26500



Appendix A.8: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

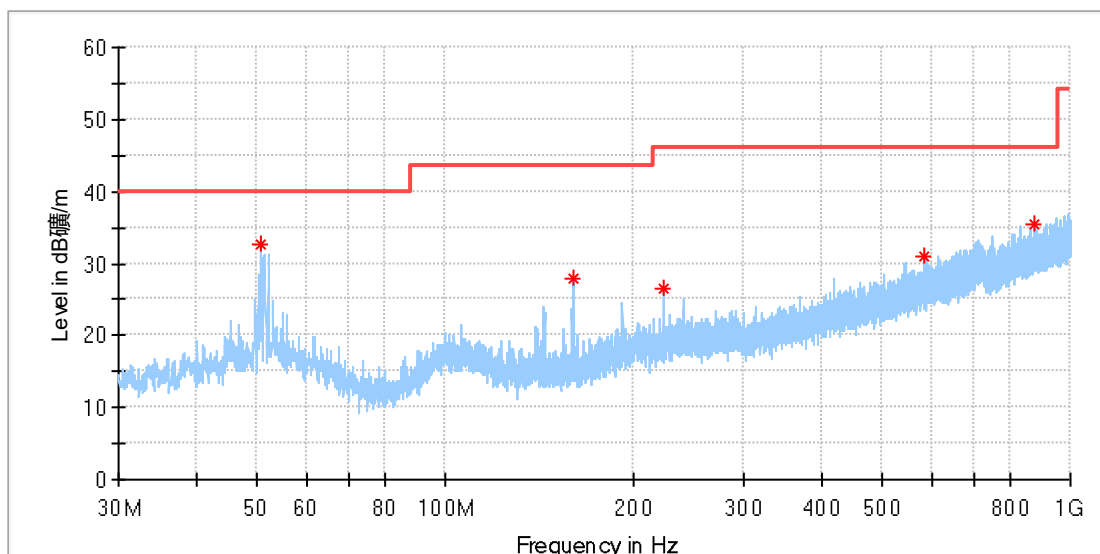

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.705769	32.58	40.00	7.42	100.0	H	247.0	-18.4
160.017308	27.79	43.50	15.71	100.0	H	83.0	-21.8
224.000000	26.45	46.00	19.55	100.0	H	279.0	-18.4
581.930000	30.84	46.00	15.16	100.0	H	297.0	-10.1
875.765385	35.45	46.00	10.55	100.0	H	25.0	-5.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Wireless Speakerphone 6000
Model: SPK6000
Test Mode: BR_DH5_Mid channel
Order No/Sample No: 168542146/A003935154-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

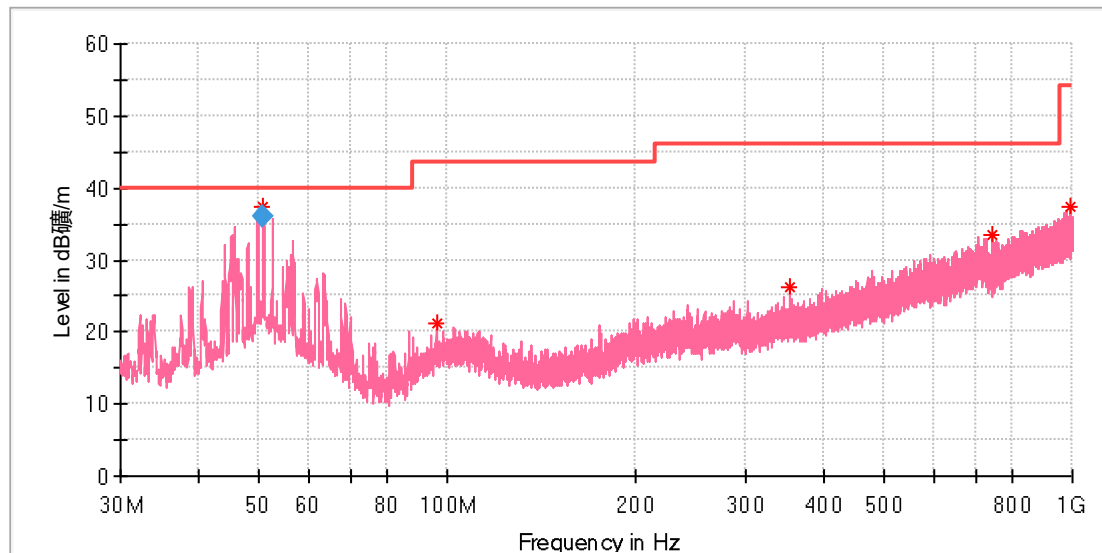

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.780385	37.26	40.00	2.74	100.0	V	290.0	-18.4
95.997308	21.34	43.50	22.16	100.0	V	274.0	-19.7
352.114615	26.26	46.00	19.74	100.0	V	28.0	-14.8
742.502308	33.58	46.00	12.42	100.0	V	241.0	-7.2
993.545769	37.43	54.00	16.57	100.0	V	241.0	-3.6

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.780385	36.03	40.00	3.97	100.0	V	295.0	-18.4

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

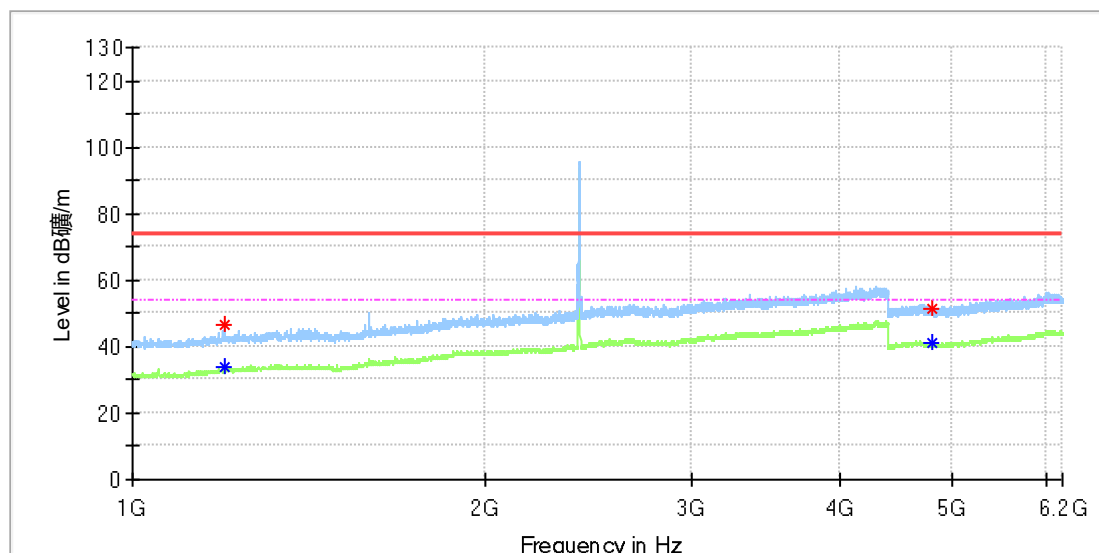

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.000000	46.26	---	74.00	27.74	150.0	H	149.0	1.8
1197.000000	---	33.90	54.00	20.10	150.0	H	149.0	1.8
4800.000000	51.34	---	74.00	22.66	150.0	H	224.0	13.3
4801.500000	---	41.01	54.00	12.99	150.0	H	335.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

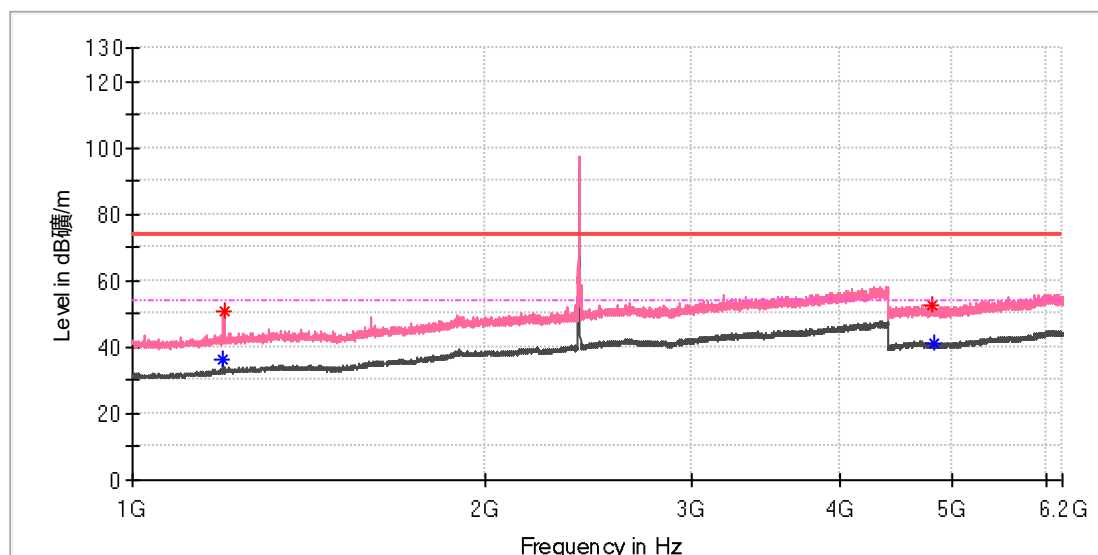

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.500000	---	36.03	54.00	17.97	150.0	V	29.0	1.7
1197.500000	50.65	---	74.00	23.35	150.0	V	7.0	1.8
4802.500000	52.84	---	74.00	21.16	150.0	V	233.0	13.3
4812.000000	---	41.21	54.00	12.79	150.0	V	271.0	13.3


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

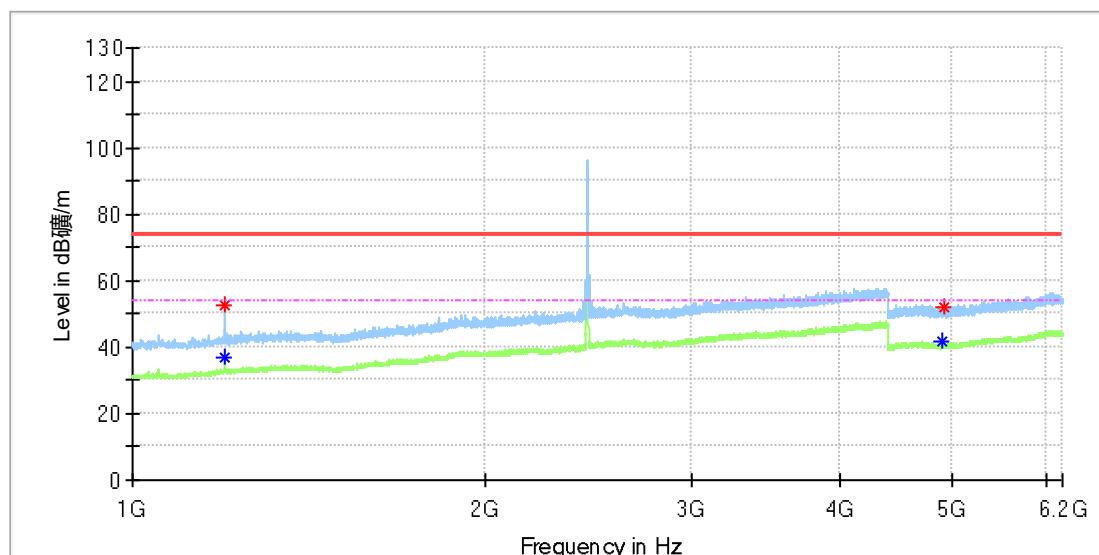

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.000000	52.81	---	74.00	21.19	150.0	H	297.0	1.8
1197.000000	---	36.91	54.00	17.09	150.0	H	297.0	1.8
4903.000000	---	41.47	54.00	12.53	150.0	H	108.0	13.3
4909.500000	51.84	---	74.00	22.16	150.0	H	35.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

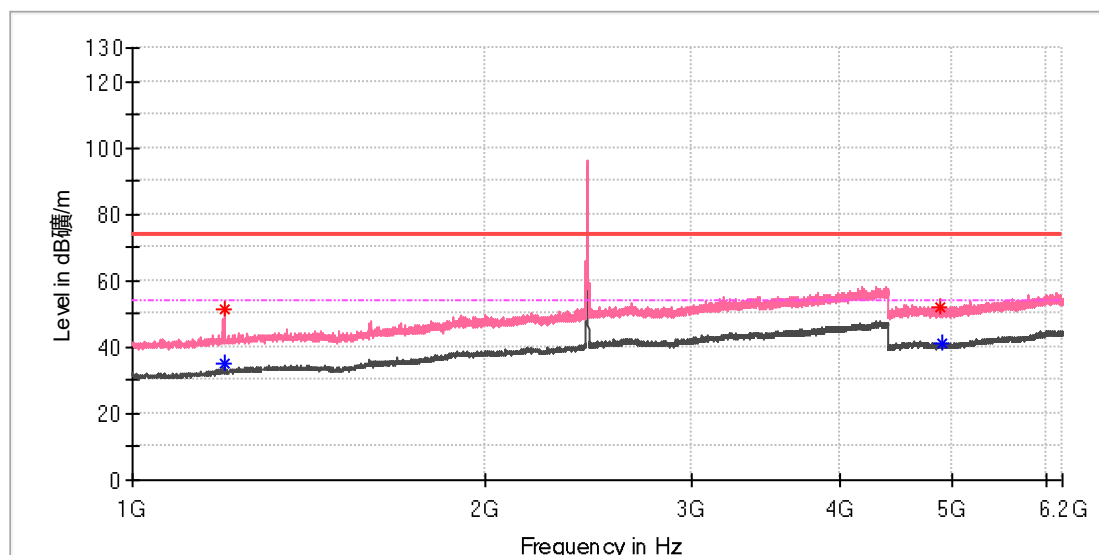

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.500000	51.18	---	74.00	22.82	150.0	V	79.0	1.8
1196.500000	---	34.87	54.00	19.13	150.0	V	79.0	1.8
4875.500000	51.97	---	74.00	22.03	150.0	V	45.0	13.3
4904.500000	---	40.99	54.00	13.01	150.0	V	9.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

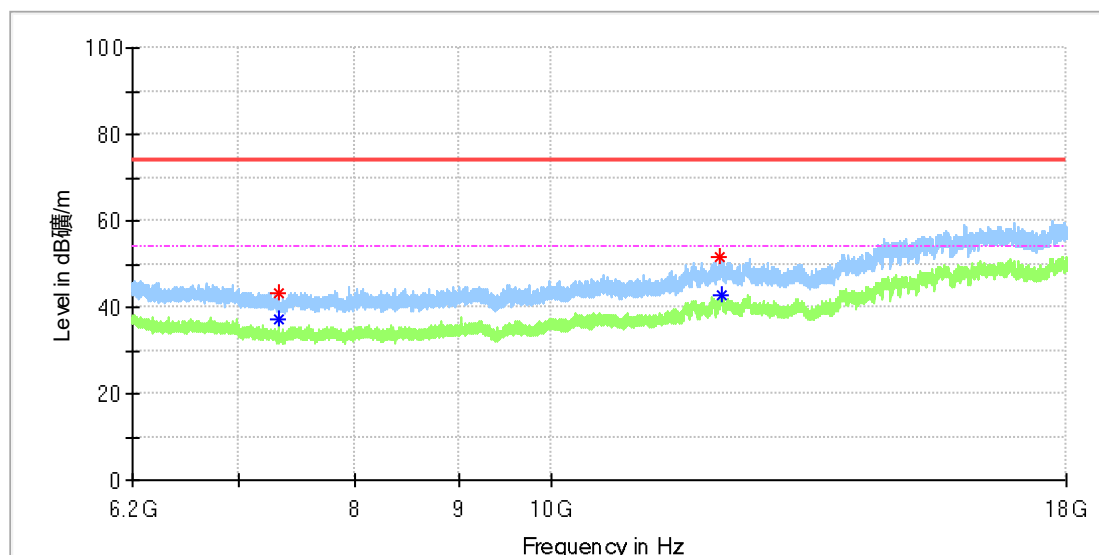

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7323.950000	43.35	---	74.00	30.65	150.0	H	86.0	8.2
7324.441667	---	37.28	54.00	16.72	150.0	H	146.0	8.2
12126.058333	51.52	---	74.00	22.48	150.0	H	178.0	16.1
12143.758333	---	42.78	54.00	11.22	150.0	H	359.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

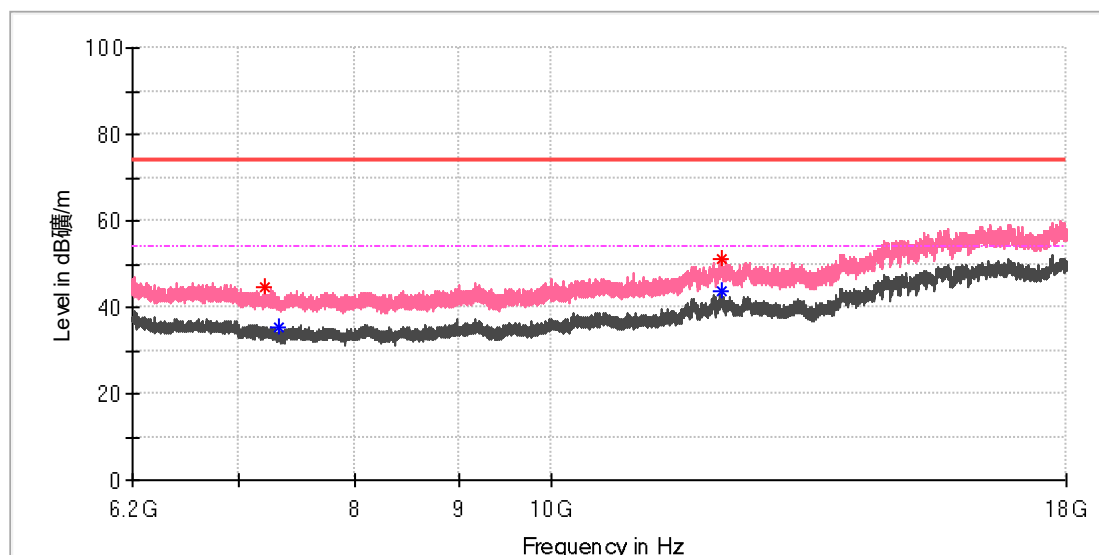

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7212.341667	44.51	---	74.00	29.49	150.0	V	185.0	8.7
7324.441667	---	35.23	54.00	18.77	150.0	V	24.0	8.2
12142.775000	---	43.53	54.00	10.47	150.0	V	218.0	16.5
12151.625000	51.31	---	74.00	22.69	150.0	V	150.0	16.6

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

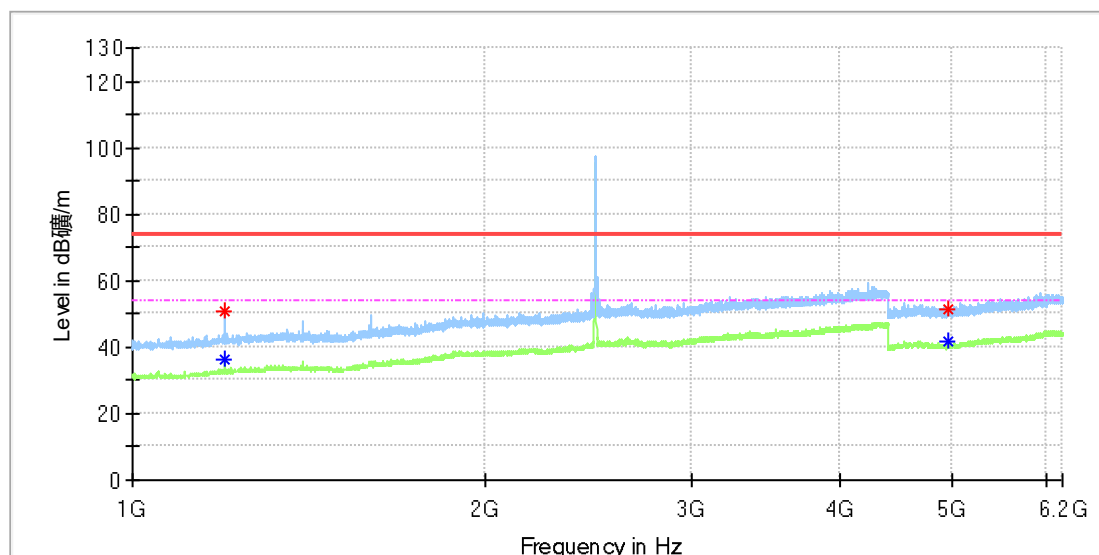

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.000000	50.97	---	74.00	23.03	150.0	H	248.0	1.8
1197.000000	---	36.47	54.00	17.53	150.0	H	248.0	1.8
4956.000000	51.64	---	74.00	22.36	150.0	H	167.0	13.3
4959.000000	---	41.77	54.00	12.23	150.0	H	48.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

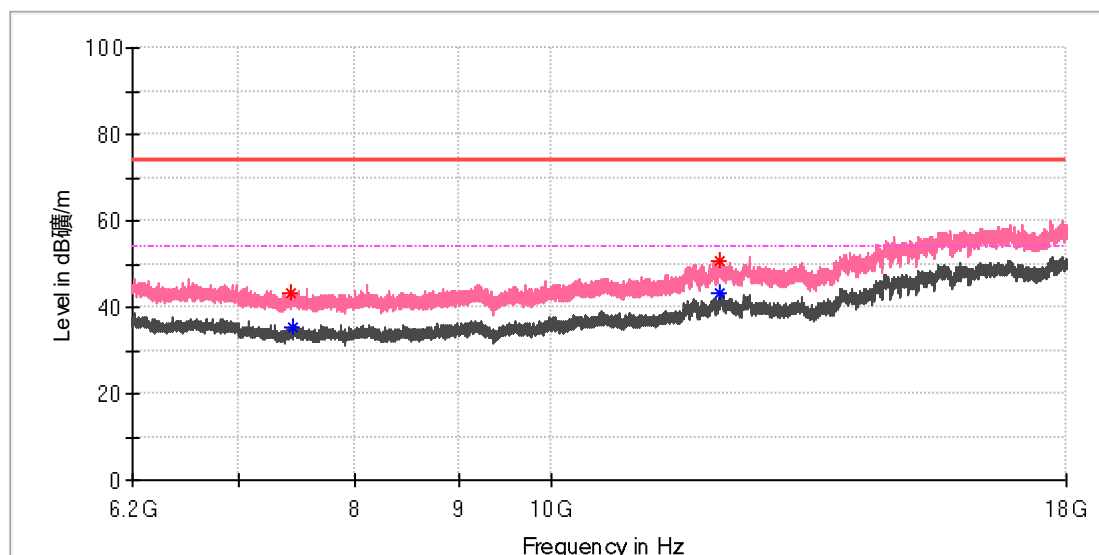

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7436.050000	43.37	---	74.00	30.63	150.0	V	321.0	8.4
7439.000000	---	35.56	54.00	18.44	150.0	V	116.0	8.4
12112.291667	---	43.24	54.00	10.76	150.0	V	179.0	8.8
12129.500000	50.72	---	74.00	23.28	150.0	V	332.0	16.2


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

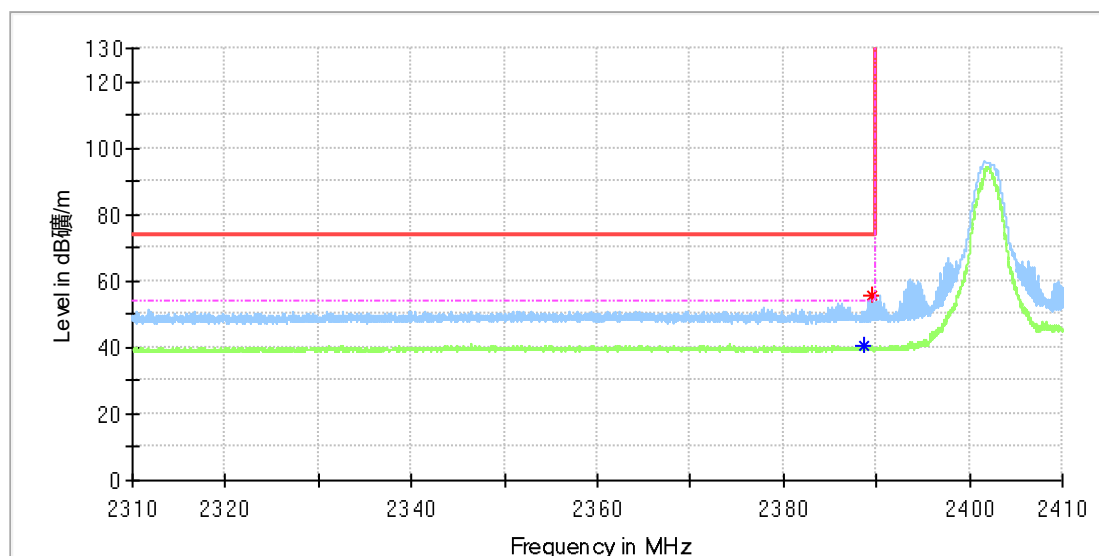

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.691177	---	40.37	54.00	13.63	150.0	H	333.0	8.5
2389.617647	55.75	---	74.00	18.25	150.0	H	210.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Model:	SPK6000
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168542146/A003935154-006
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

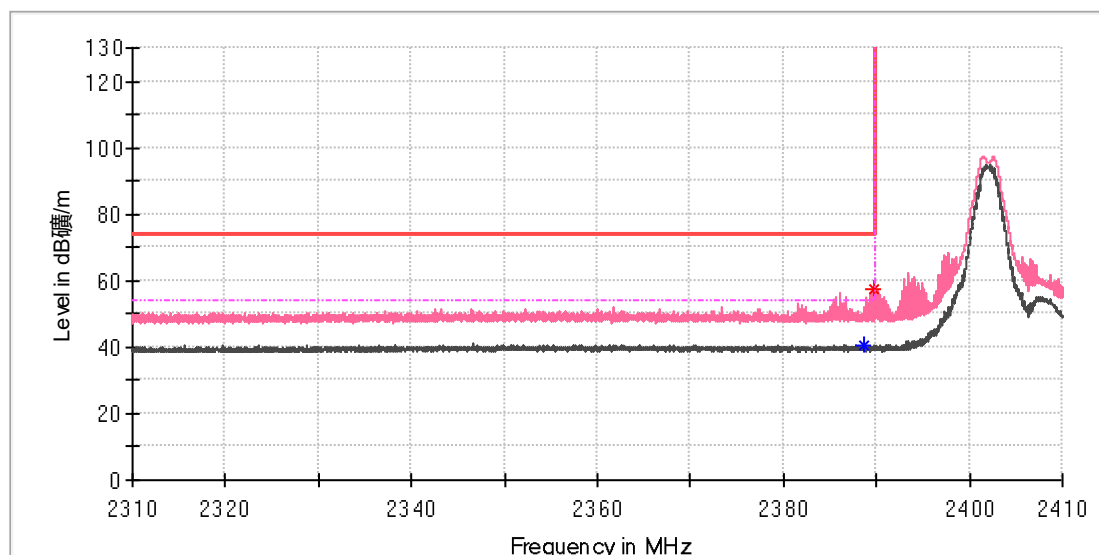

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.720588	---	40.67	54.00	13.33	150.0	V	97.0	8.5
2389.691177	57.21	---	74.00	16.79	150.0	V	112.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Wireless Speakerphone 6000
Model: SPK6000
Test Mode: BR_DH5_High channel
Order No/Sample No: 168542146/A003935154-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

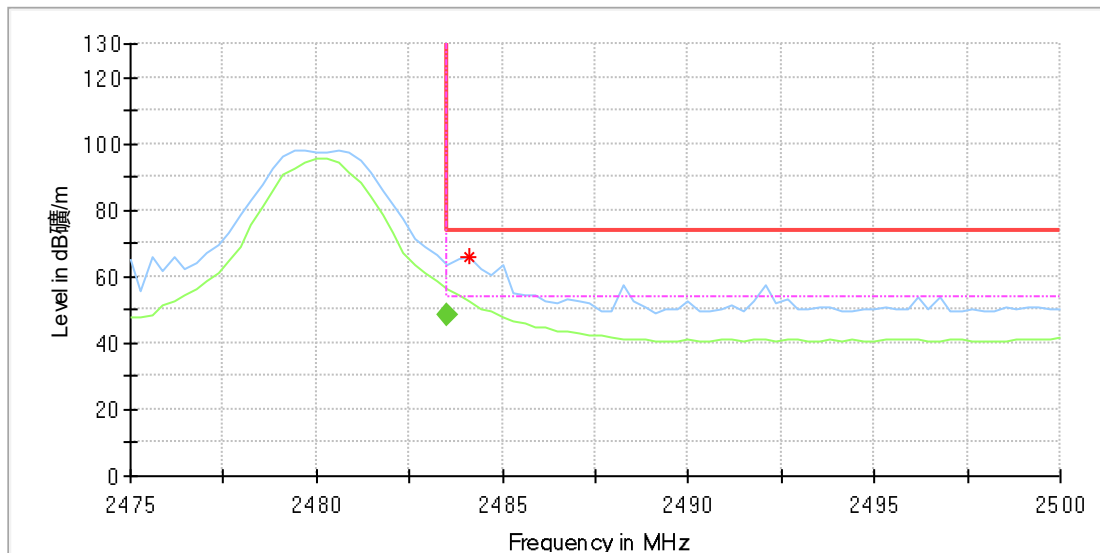

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.117647	65.87	---	74.00	8.13	150.0	H	118.0	9.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	48.63	54.00	5.37	150.0	H	135.0	9.0

EUT Information

EUT Name: Lenovo Wireless Speakerphone 6000
Model: SPK6000
Test Mode: BR_DH5_High channel
Order No/Sample No: 168542146/A003935154-006
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

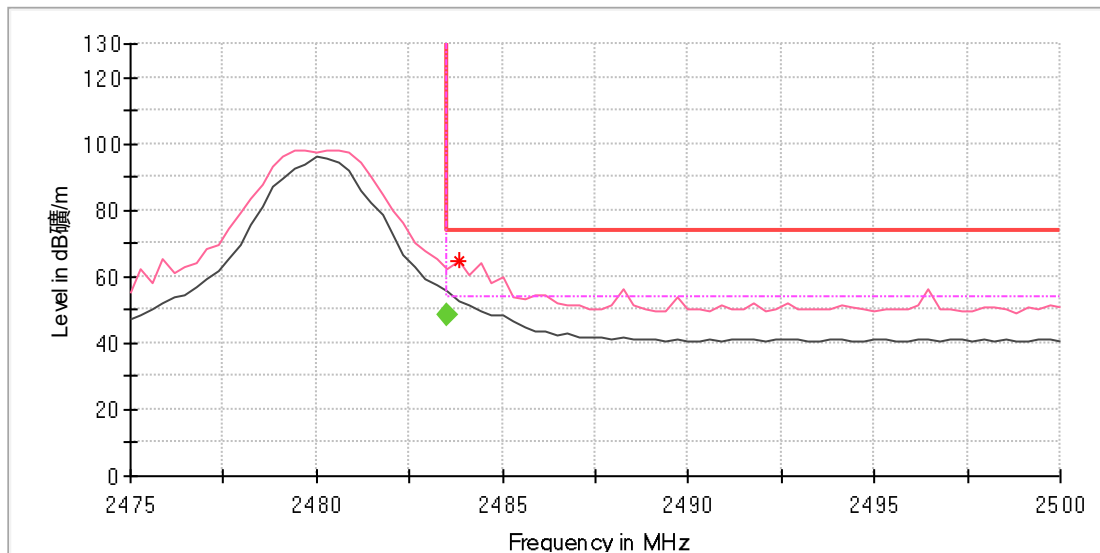

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.823529	64.79	---	74.00	9.21	150.0	V	325.0	9.0


Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.529412	---	48.32	54.00	5.68	150.0	V	325.0	9.0

Appendix A.10: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Order Number:	168542146
Model:	SPK6000
Test Mode:	Bluetooth +Charging(AC/DC Adapter)
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC 15C
Test By:/Review By:	Steve Lan/ Shower Dai
Tem./Hum./Pressure:	24.9°C/50.4%/101kPa
Remark:	SR2

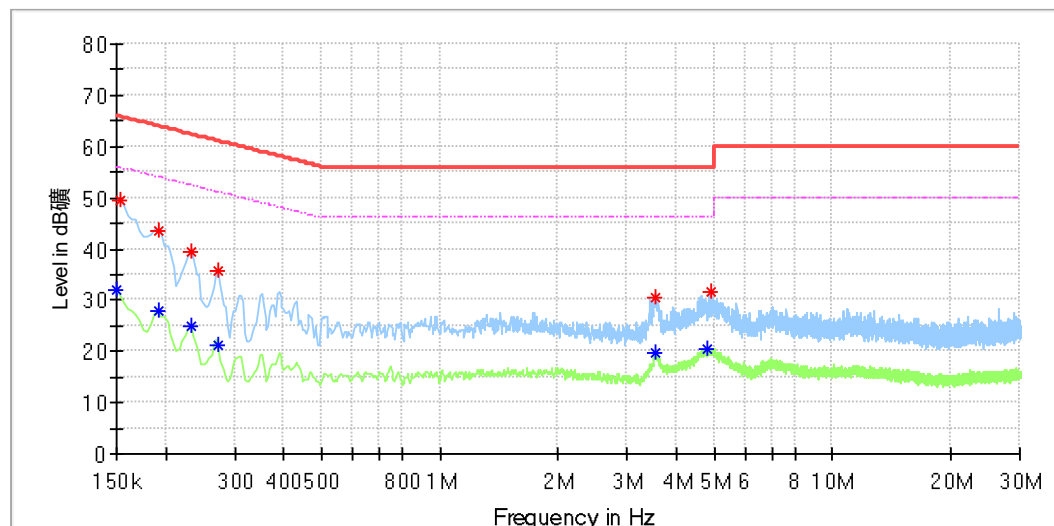

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	---	31.93	56.00	24.07	L1	9.8
0.153731	49.36	---	65.80	16.43	L1	9.8
0.191044	---	27.85	53.99	26.14	L1	9.8
0.191044	43.61	---	63.99	20.38	L1	9.8
0.232088	---	24.78	52.38	27.60	L1	9.8
0.232088	39.45	---	62.38	22.92	L1	9.8
0.273131	---	21.04	51.02	29.98	L1	9.8
0.273131	35.83	---	61.02	25.19	L1	9.8
3.526781	30.68	---	56.00	25.32	L1	10.1
3.552900	---	19.81	46.00	26.19	L1	10.1
4.799138	---	20.34	46.00	25.66	L1	10.1
4.914806	31.61	---	56.00	24.39	L1	10.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
--------------------	---------------------	-------------------	-----------------	----------------	--------------------	--------------------	------	---------------

EUT Information

EUT Name:	Lenovo Wireless Speakerphone 6000
Order Number:	168542146
Model:	SPK6000
Test Mode:	Bluetooth +Charging(AC/DC Adapter)
Test Voltage:	AC 120V/60Hz
Test Standard:	FCC 15C
Test By:/Review By:	Steve Lan/ Shower Dai
Tem./Hum./Pressure:	24.9°C/50.4%/101kPa
Remark:	SR2

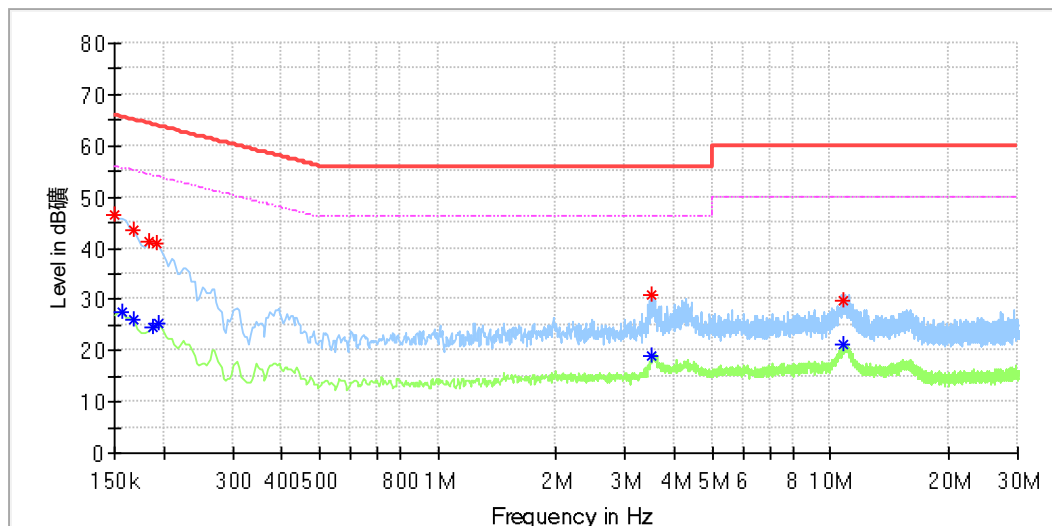

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	46.58	---	66.00	19.42	N	9.7
0.157463	---	27.44	55.60	28.16	N	9.7
0.168656	43.58	---	65.03	21.45	N	9.7
0.168656	---	26.08	55.03	28.95	N	9.7
0.183581	41.29	---	64.32	23.03	N	9.7
0.187313	---	24.44	54.16	29.72	N	9.7
0.191044	41.11	---	63.99	22.88	N	9.7
0.194775	---	25.21	53.83	28.62	N	9.7
3.489469	---	19.00	46.00	27.00	N	9.8
3.508125	30.70	---	56.00	25.30	N	9.8
10.784063	29.69	---	60.00	30.31	N	9.9
10.836300	---	21.18	50.00	28.82	N	9.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
90.0	100.0	95.0	105.0	10.0	100.0	10.0	1	0.0