ACCREDITED
Certificate # 3939.01

FCC TEST REPORT

(PART 24)

Applicant:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France

Manufacturer or Supplier:	MUNIC
Address:	100 Avenue de Stalingrad 94800 Villejuif – France
Product:	Telematic embedded system
Brand Name:	Metromile/ MUNIC
Model Name:	C4D-4MUSAA_V8
FCC ID:	A6GC4D-4MUSV8
Date of tests:	Jan. 25, 2021 ~ Mar. 01, 2021

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E** ☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
Simon Date: Mar. 02, 2021	Luke Lu Date: Mar. 02, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute you unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS 5

1.1 MEASUREMENT UNCERTAINTY 6
1.2 TEST SITE AND INSTRUMENTS 7

2 GENERAL INFORMATION 8

2.1 GENERAL DESCRIPTION OF EUT 8
2.2 CONFIGURATION OF SYSTEM UNDER TEST 10
2.3 DESCRIPTION OF SUPPORT UNITS 11
2.4 TEST ITEM AND TEST CONFIGURATION 11
2.5 EUT OPERATING CONDITIONS 13
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 13

3 TEST TYPES AND RESULTS 14

3.1 OUTPUT POWER MEASUREMENT 14
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 14
3.1.2 TEST PROCEDURES 14
3.1.3 TEST SETUP 15
3.1.4 TEST RESULTS 15
3.2 FREQUENCY STABILITY MEASUREMENT 21
3.2.1 LIMITS OF FREQUENCY STABILIITY MEASUREMENT 21
3.2.2 TEST PROCEDURE 21
3.2.3 TEST SETUP 21
3.2.4 TEST RESULTS 21
3.3 OCCUPIED BANDWIDTH MEASUREMENT 22
3.3.1 TEST PROCEDURES 22
3.3.2 TEST SETUP 22
3.3.3 TEST RESULTS 22
3.4 BAND EDGE MEASUREMENT 23
3.4.1 LIMITS OF BAND EDGE MEASUREMENT 23
3.4.2 TEST SETUP 23
3.4.3 TEST PROCEDURES 24
3.4.4. TEST RESULTS 24
3.5 CONDUCTED SPURIOUS EMISSIONS 25
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 25
3.5.2 TEST PROCEDURE 25
3.5.3 TEST SETUP 25
3.5.4 TEST RESULTS 25
3.6 RADIATED EMISSION MEASUREMENT 26
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 26
3.6.2 TEST PROCEDURES 26
3.6.3 DEVIATION FROM TEST STANDARD 26
3.6.4 TEST SETUP 27
3.6.5 TEST RESULTS 28
3.7 PEAK TO AVERAGE RATIO 54
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT 54
3.7.2 TEST SETUP 54
3.7.3 TEST PROCEDURES 54
3.7.4 TEST RESULTS 54

4 INFORMATION ON THE TESTING LABORATORIES 55

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB 56

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFA210125W001-1	Original release	Mar. 02, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	**TEST TYPE**	**RESULT**
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	See Note
2.1049 24.238(b)	Occupied Bandwidth	See Note
24.232(d)	Peak to average ratio	See Note
24.238(b)	Band Edge Measurements	See Note
2.1051 24.238	Conducted Spurious Emissions	See Note
2.1053 24.238	Radiated Spurious Emissions	Compliance

Note: Test data re-use from certified module BG96, BG96 MINIPCIE, more details please refer test report R2007A0435-R5 (FCC ID: XMR201707BG96).

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	±76.97Hz
Radiated emissions & Radiated Power (30MHz~1GMHz)	±4.98dB
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	±4.70dB
Radiated emissions (6GMHz ~18GMHz)	±4.60dB
Radiated emissions (18GMHz ~40GMHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,20	Apr. 26,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Mar. 27,20	Mar. 26,21
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 27,20	Mar. 26,21
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 27,20	Mar. 26,21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 24, 20	Nov. 23, 21
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,21	Feb. 25,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,20	Apr. 29,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,20	Jun. 02,21
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP-AR	IAA1504-001	Jun. 02,20	Jun. 01,21
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 11,20	Mar. 10,21
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.

3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Telematic embedded system	
BRAND NAME	Metromile/ MUNIC	
MODEL NAME	C4D-4MUSAA_V8	
NOMINAL VOLTAGE	DC 13.7V	
MODULATION TYPE	**LTE CAT-M1:** QPSK, 16QAM	
FREQUENCY RANGE	**LTE Band 2 Channel Bandwidth: 1.4MHz**	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
MAX. EIRP POWER	**LTE Band 2 Channel Bandwidth: 1.4MHz**	247mW
	LTE Band 2 Channel Bandwidth: 3MHz	247mW
	LTE Band 2 Channel Bandwidth: 5MHz	245mW
	LTE Band 2 Channel Bandwidth: 10MHz	247mW
	LTE Band 2 Channel Bandwidth: 15MHz	247mW
	LTE Band 2 Channel Bandwidth: 20MHz	248mW

EMISSION DESIGNATOR	**LTE Band 2 Channel Bandwidth: 1.4MHz**	QPSK: 1M11G7D
		16QAM: 948KW7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 1M16G7D
		16QAM: 985KW7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 1M17G7D
		16QAM: 1M01W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 1M19G7D
		16QAM: 1M19W7D

	LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 1M22G7D
		16QAM: 1M90W7D
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 1M25G7D
		16QAM: 1M15W7D
ANTENNA TYPE	FPC Antenna with 0.8dBi gain LTE Band 2	
HW VERSION	HC4D-4MUSAA_V8.01	
SW VERSION	SC4D-4MUSAA_V8.01	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT was powered by the following battery:

BATTERY 1	
BRAND:	Howell
MODEL:	Li-polymer 552535H
CAPACITY:	450 mAh
MANUFACTURER:	Howell

3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

5. There are two different samples evaluated in this report，However, three parts of the changes were reflect，The sample show in this report is verify the second sources component, details are as follows：

（1）There are two manufacturers of Ferrite, all specifications and parameters are the same

（2）TCXO (Temperature Controlled Crystal Oscillator) have the same Placement but different dimension, The specifications and parameters are the same, four different manufacturers

(3) Accelerometer has two scenarios, and there should be two different components combinations

More details information please refer to the Product Equivalence Declaration provided by the manufacturer

Based on the above,we pre-scan the differences of all different manufacturers about Ferrite and TCXO, but accelerometer difference two alternative of match Ferrite and TCXO, which we provide two alternative of worst cases RSE above 1G data, Accelerome alternative 1 test all data, Accelerome Alternative 2 validates Worst Case

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION

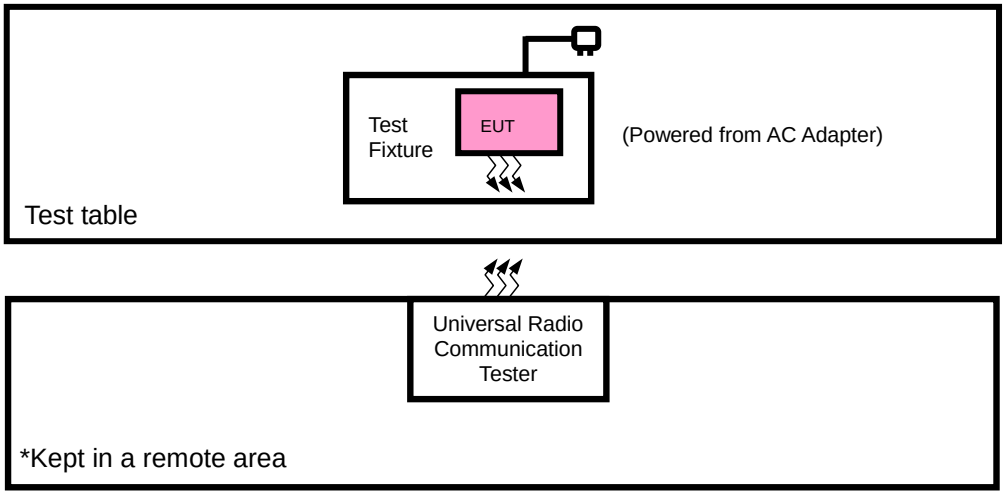

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
The worst case in EIRP and radiated emission was found when positioned on X-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	**EUT + LTE link**
B	EUT + **LTE link**

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC13.7V	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	DC13.7V	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determing the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

ERP or EIRP = $P_{Meas} + G_T - L_C$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.92	22.89	23.10	0
		1	5	22.94	22.83	23.10	0
		3	0	22.93	22.83	23.12	0
		3	3	22.95	22.86	23.03	0
		6	0	22.93	22.80	23.07	1
	16QAM	1	0	22.86	22.76	23.01	1
		1	5	22.86	22.72	23.01	1
		3	0	22.89	22.80	23.03	1
		3	3	22.84	22.83	23.02	1
		6	0	22.81	22.77	22.97	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/ 3	QPSK	1	0	22.94	22.91	23.09	0
		1	5	22.90	22.84	23.10	0
		3	0	22.92	22.86	23.12	1
		3	3	22.88	22.86	23.05	1
		6	0	22.90	22.81	23.01	1
	16QAM	1	0	22.83	22.82	23.04	1
		1	5	22.83	22.75	22.99	1
		3	0	22.85	22.81	23.03	2
		3	3	22.89	22.78	23.05	2
		6	0	22.81	22.71	23.00	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	22.95	22.86	23.10	0
		1	5	22.95	22.81	23.10	0
		3	0	22.95	22.86	23.09	1
		3	3	22.88	22.87	23.06	1
		6	0	22.88	22.84	23.04	1
	16QAM	1	0	22.84	22.78	23.04	1
		1	5	22.80	22.78	22.98	1
		3	0	22.85	22.79	23.00	2
		3	3	22.86	22.82	23.01	2
		6	0	22.81	22.72	22.97	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.92	22.89	23.10	0
		1	5	22.95	22.81	23.11	0
		3	0	22.96	22.85	23.12	1
		3	3	22.94	22.81	23.06	1
		6	0	22.93	22.84	23.01	1
	16QAM	1	0	22.84	22.75	23.00	1
		1	5	22.85	22.74	23.01	1
		3	0	22.87	22.77	23.06	2
		3	3	22.90	22.76	23.06	2
		6	0	22.85	22.71	23.01	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.99	22.89	23.07	0
		1	5	22.93	22.86	23.06	0
		3	0	22.93	22.86	23.13	1
		3	3	22.95	22.86	23.06	1
		6	0	22.93	22.82	23.06	1
	16QAM	1	0	22.88	22.82	23.00	1
		1	5	22.84	22.75	23.01	1
		3	0	22.91	22.77	23.07	2
		3	3	22.84	22.80	23.02	2
		6	0	22.86	22.74	22.94	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	23.00	22.93	**23.15**	0
		1	5	22.97	22.89	23.12	0
		3	0	22.99	22.91	23.14	1
		3	3	22.96	22.88	23.11	1
		6	0	22.94	22.86	23.09	1
	16QAM	1	0	22.91	22.83	23.06	1
		1	5	22.88	22.80	23.03	1
		3	0	22.93	22.85	23.08	2
		3	3	22.92	22.84	23.07	2
		6	0	22.87	22.79	23.02	2

EIRP POWER (dBm)

LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.95	0.8	23.75	237.14	2
18900	1880.0	22.89	0.8	23.69	233.88	2
19193	1909.3	23.12	0.8	23.92	**246.6**	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.89	0.8	23.69	233.88	2
18900	1880.0	22.83	0.8	23.63	230.67	2
19193	1908.3	23.03	0.8	23.83	241.55	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.94	0.8	23.74	236.59	2
18900	1880.0	22.91	0.8	23.71	234.96	2
19185	1908.5	23.12	0.8	23.92	**246.6**	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.89	0.8	23.69	233.88	2
18900	1880.0	22.82	0.8	23.62	230.14	2
19185	1908.5	23.05	0.8	23.85	242.66	2

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.95	0.8	23.75	237.14	2
18900	1880.0	22.87	0.8	23.67	232.81	2
19175	1907.5	23.1	0.8	23.9	**245.47**	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.86	0.8	23.66	232.27	2
18900	1880.0	22.82	0.8	23.62	230.14	2
19175	1907.5	23.04	0.8	23.84	242.1	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.96	0.8	23.76	237.68	2
18900	1880.0	22.89	0.8	23.69	233.88	2
19150	1905.0	23.12	0.8	23.92	**246.6**	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.9	0.8	23.7	234.42	2
18900	1880.0	22.77	0.8	23.57	227.51	2
19150	1905.0	23.06	0.8	23.86	243.22	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.99	0.8	23.79	239.33	2
18900	1880.0	22.89	0.8	23.69	233.88	2
19125	1902.5	23.13	0.8	23.93	**247.17**	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.91	0.8	23.71	234.96	2
18900	1880.0	22.82	0.8	23.62	230.14	2
19125	1902.5	23.07	0.8	23.87	243.78	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	23	0.8	23.8	239.88	2
18900	1880	22.93	0.8	23.73	236.05	2
19100	1900	23.15	0.8	23.95	**248.31**	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G_T-L_C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.93	0.8	23.73	236.05	2
18900	1880	22.85	0.8	23.65	231.74	2
19100	1900	23.08	0.8	23.88	244.34	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILIITY MEASUREMENT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.

b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.

c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ±0.5℃ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

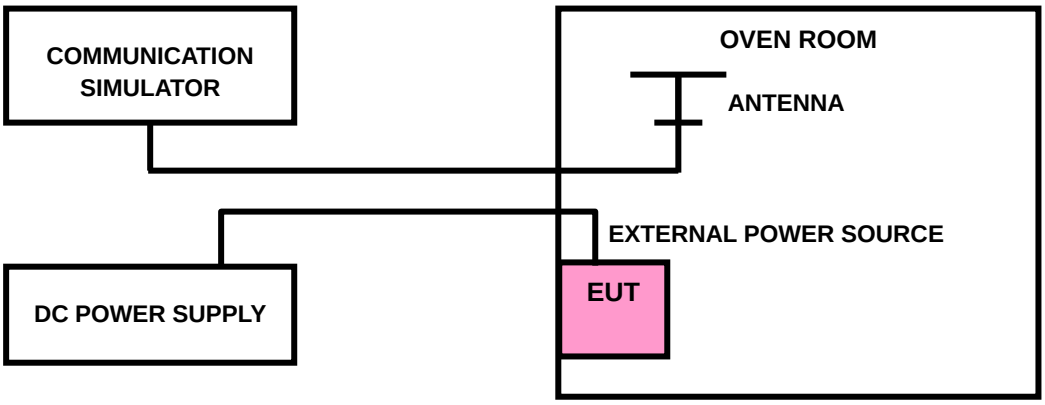

3.2.4 TEST RESULTS

The test results was recorded in Report No.: R2007A0435-R5 (FCC ID: XMR201707BG96).

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

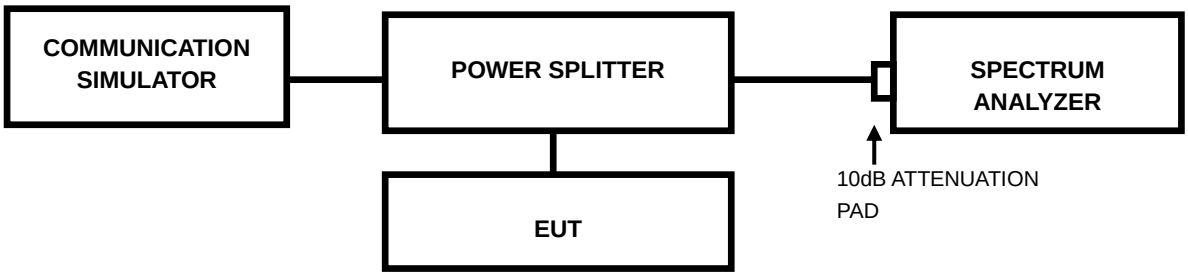

3.3.3 TEST RESULTS

The test results was recorded in Report No.: R2007A0435-R5 (FCC ID: XMR201707BG96).

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

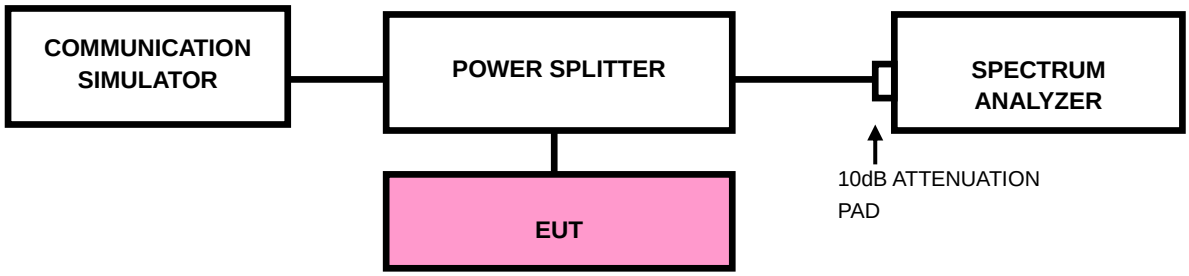

3.4.3 TEST PROCEDURES

a. All measurements were done at low and high operational frequency range.

b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/ EDGE).

c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)

d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)

e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)

f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)

g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)

h. he center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)

i. Record the max trace plot into the test report.

3.4.4. TEST RESULTS

The test results was recorded in Report No.: R2007A0435-R5 (FCC ID: XMR201707BG96).

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to –13dBm.

3.5.2 TEST PROCEDURE

a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.

b. Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

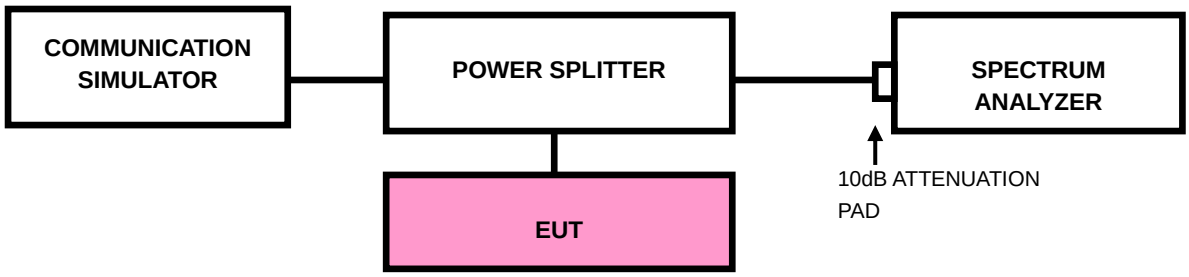

3.5.4 TEST RESULTS

The test results was recorded in Report No.: R2007A0435-R5 (FCC ID: XMR201707BG96).

3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to –13dBm.

3.6.2 TEST PROCEDURES

a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.

b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G

c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.6.3 DEVIATION FROM TEST STANDARD

No deviation

3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

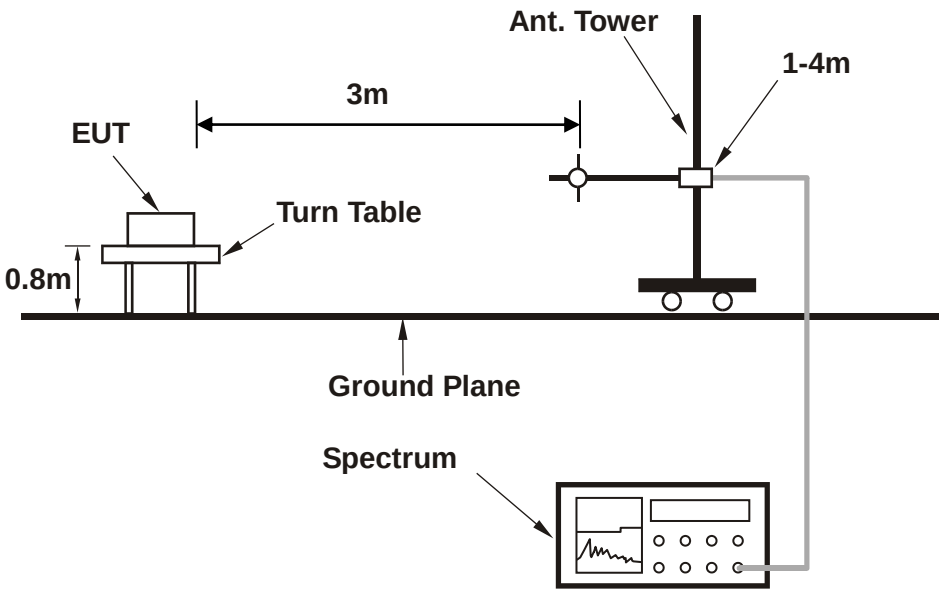

<Frequency Range above 1GHz>

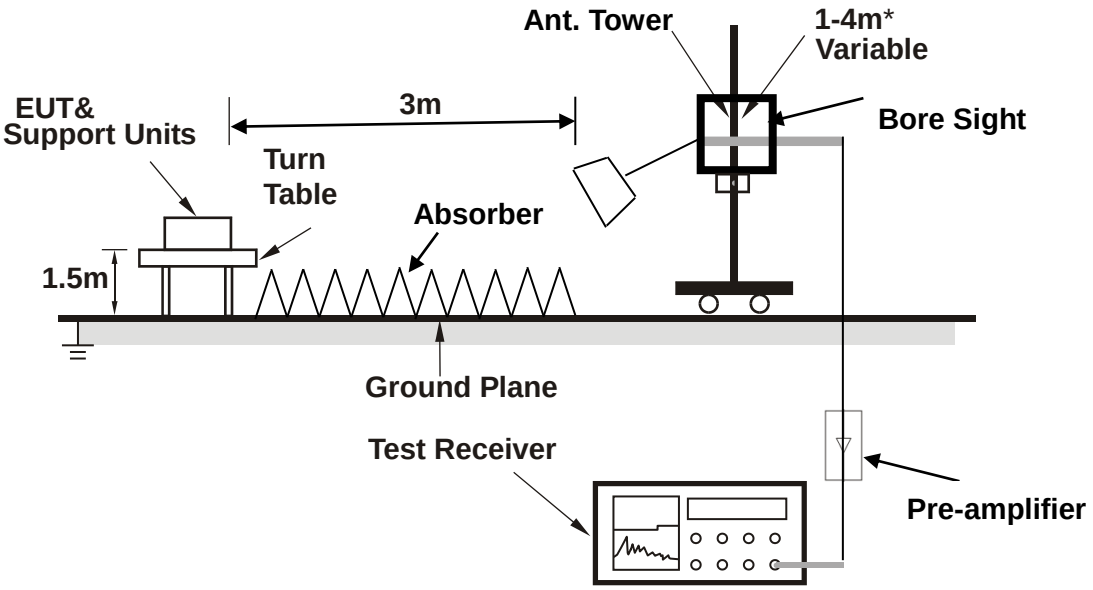

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

30 MHz – 1GHz data:

LTE Band 2

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	**FREQUENCY RANGE**	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	**INPUT POWER**	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	31.940	-45.52	-62.19	-13.00	-32.52	16.67	Peak	Horizontal
2		113.420	-62.32	-48.36	-13.00	-49.32	-13.96	Peak	Horizontal
3		276.380	-63.36	-48.39	-13.00	-50.36	-14.97	Peak	Horizontal
4		380.170	-61.19	-50.07	-13.00	-48.19	-11.12	Peak	Horizontal
5		482.990	-60.27	-49.88	-13.00	-47.27	-10.39	Peak	Horizontal
6		644.980	-66.67	-59.47	-13.00	-53.67	-7.20	Peak	Horizontal

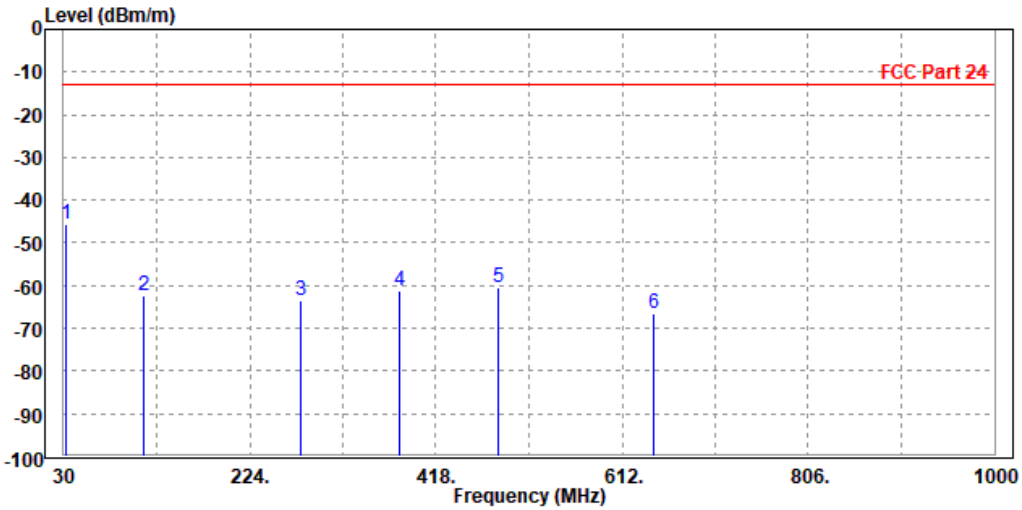

MODE	TX channel 18900	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	53.280	-50.01	-42.78	-13.00	-37.01	-7.23	Peak	Vertical
2		125.060	-61.44	-49.23	-13.00	-48.44	-12.21	Peak	Vertical
3		240.490	-65.06	-53.71	-13.00	-52.06	-11.35	Peak	Vertical
4		364.650	-65.70	-54.64	-13.00	-52.70	-11.06	Peak	Vertical
5		422.850	-65.66	-55.57	-13.00	-52.66	-10.09	Peak	Vertical
6		482.020	-60.76	-52.85	-13.00	-47.76	-7.91	Peak	Vertical

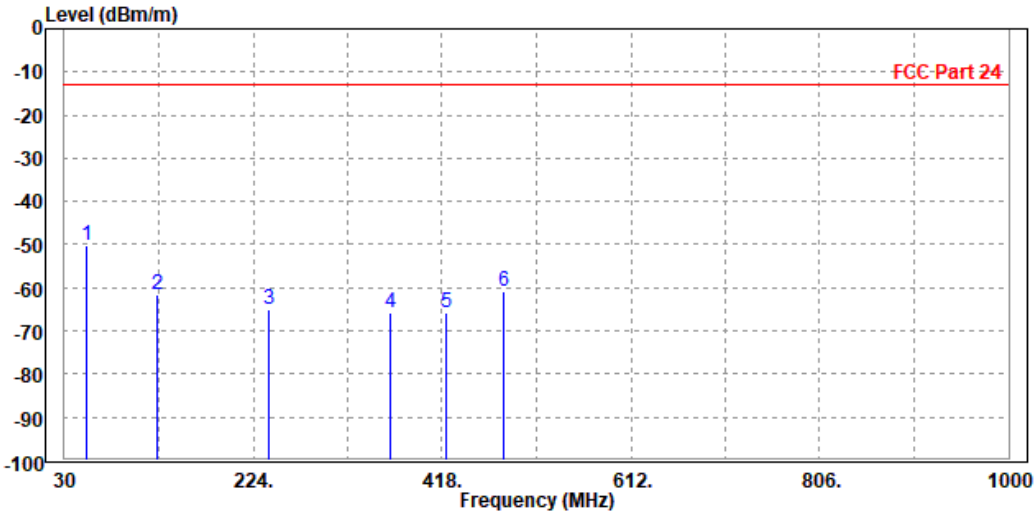

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.

Acceleromete alternative 1:

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	**FREQUENCY RANGE**	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	**INPUT POWER**	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-44.53	-53.38	-13.00	-31.53	8.85	Peak	Horizontal
2	5640.000	-48.25	-58.73	-13.00	-35.25	10.48	Peak	Horizontal

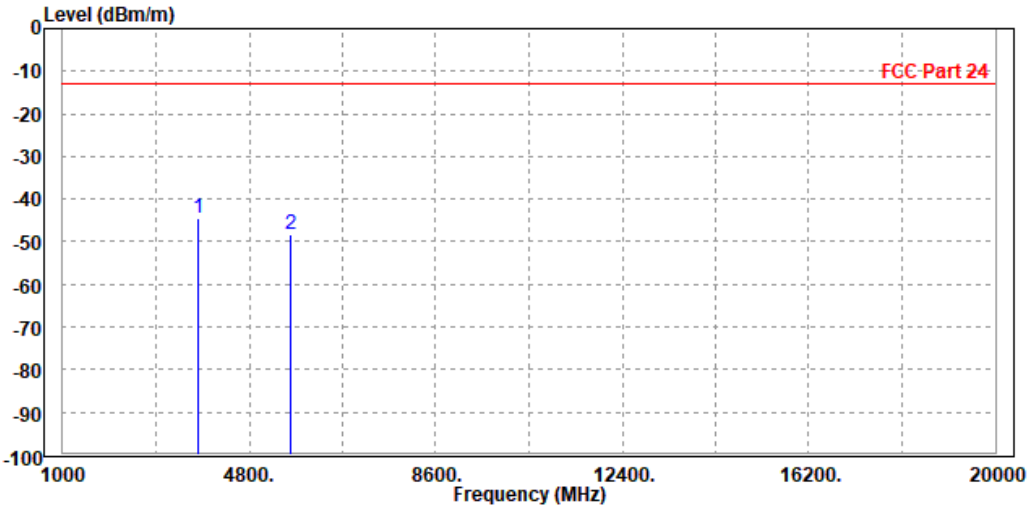

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1		3755.000	-49.14	-58.41	-13.00	-36.14	9.27	Peak	Vertical
2	PP	5640.000	-48.61	-58.86	-13.00	-35.61	10.25	Peak	Vertical

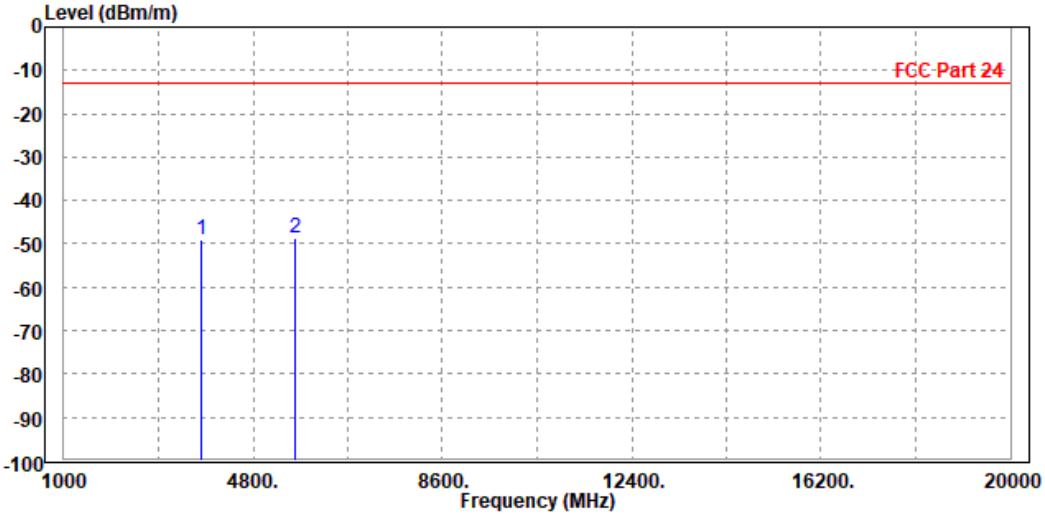

CHANNEL BANDWIDTH: 3MHz / QPSK

CH 18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-41.35	-50.20	-13.00	-28.35	8.85	Peak	Horizontal
2	5640.000	-47.53	-58.01	-13.00	-34.53	10.48	Peak	Horizontal

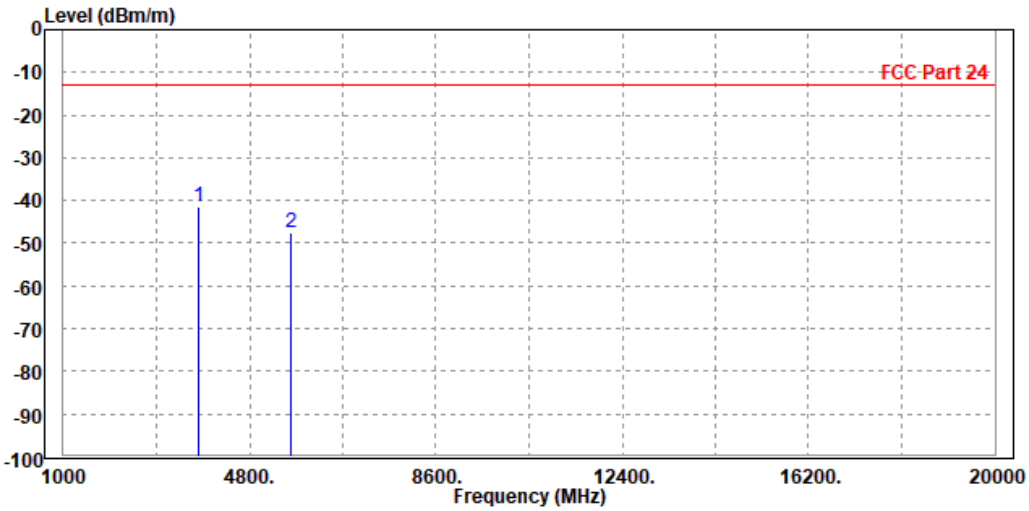

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-45.73	-55.00	-13.00	-32.73	9.27	Peak	Vertical
2		5640.000	-48.23	-58.48	-13.00	-35.23	10.25	Peak	Vertical

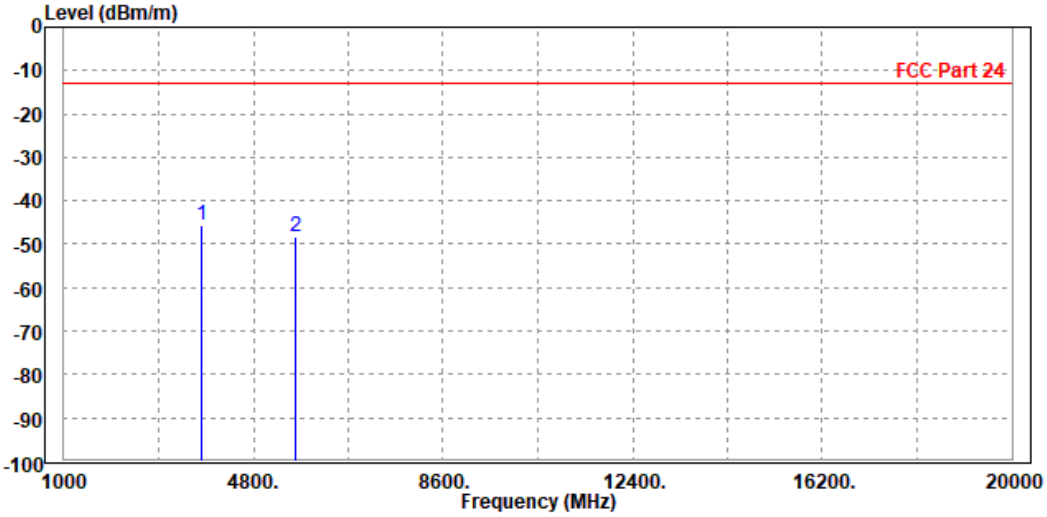

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-42.89	-51.74	-13.00	-29.89	8.85	Peak	Horizontal
2		5640.000	-48.34	-58.82	-13.00	-35.34	10.48	Peak	Horizontal

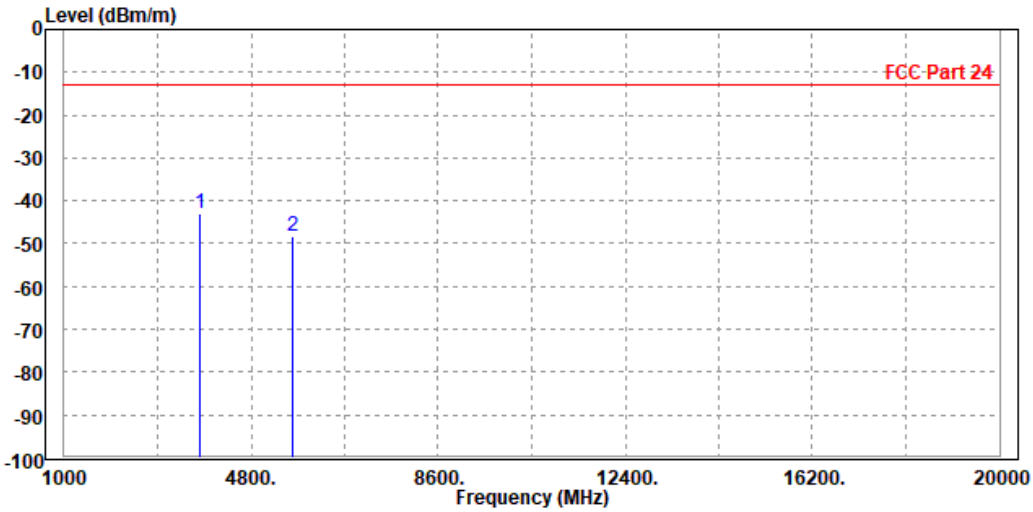

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-47.71	-56.98	-13.00	-34.71	9.27	Peak	Vertical
2		5640.000	-49.18	-59.43	-13.00	-36.18	10.25	Peak	Vertical

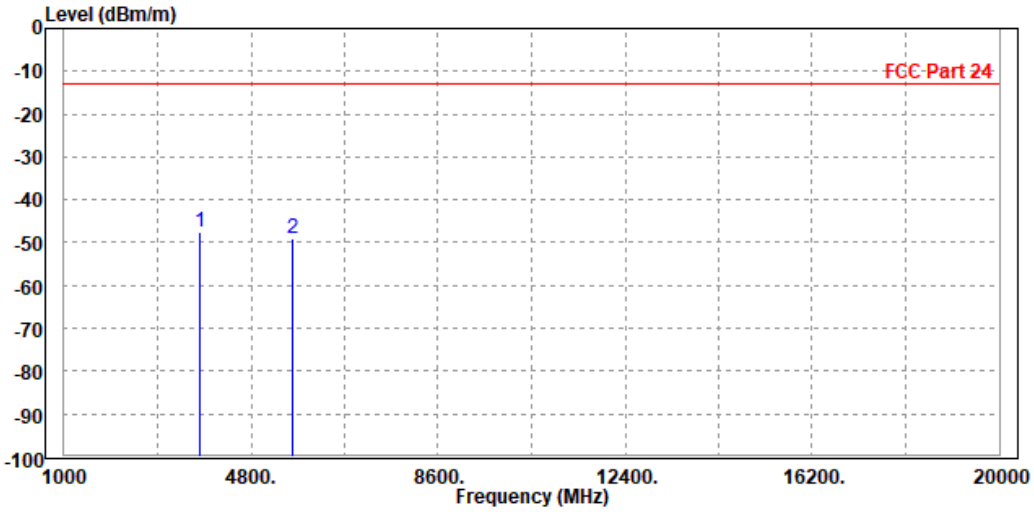

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-42.86	-51.71	-13.00	-29.86	8.85	Peak	Horizontal
2	5640.000	-48.41	-58.89	-13.00	-35.41	10.48	Peak	Horizontal

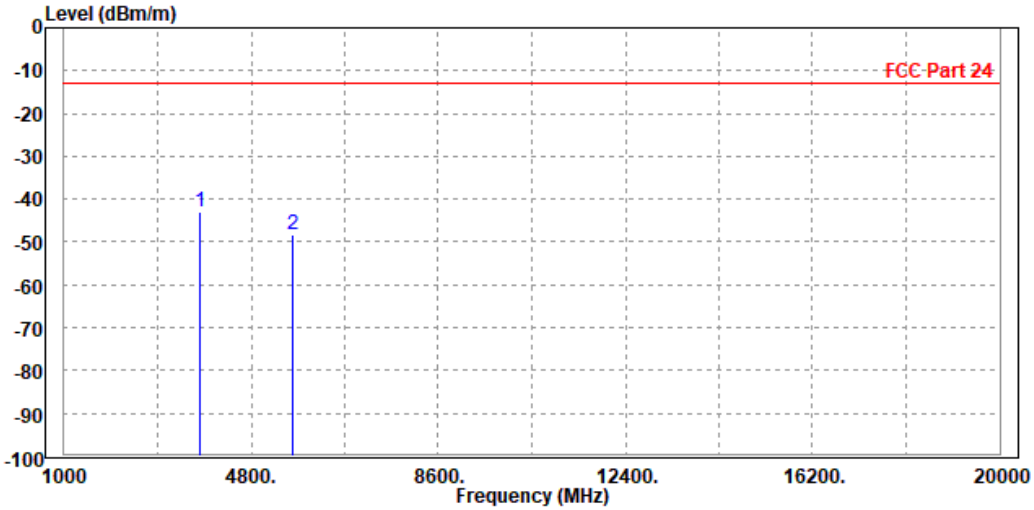

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-44.91	-54.18	-13.00	-31.91	9.27	Peak	Vertical
2		5640.000	-48.74	-58.99	-13.00	-35.74	10.25	Peak	Vertical

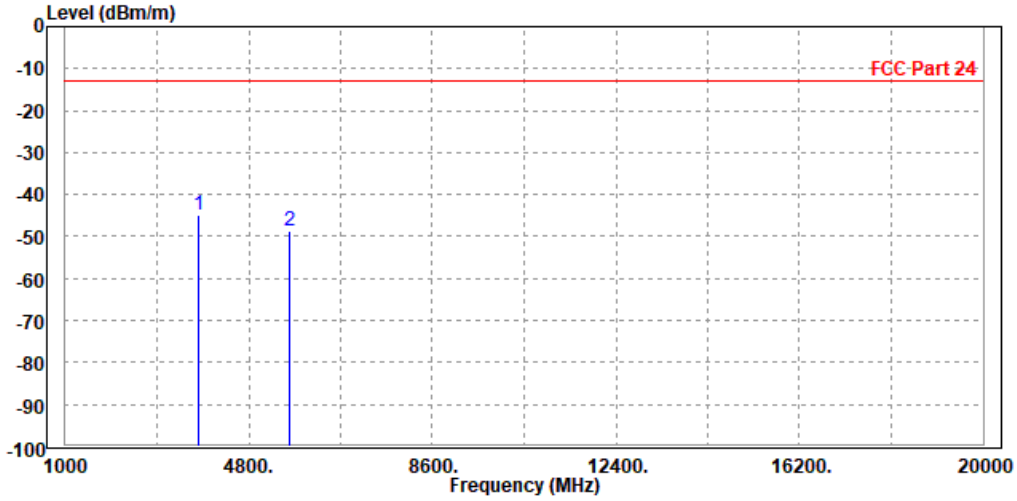

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-42.03	-50.88	-13.00	-29.03	8.85	Peak	Horizontal
2		5640.000	-49.24	-59.72	-13.00	-36.24	10.48	Peak	Horizontal

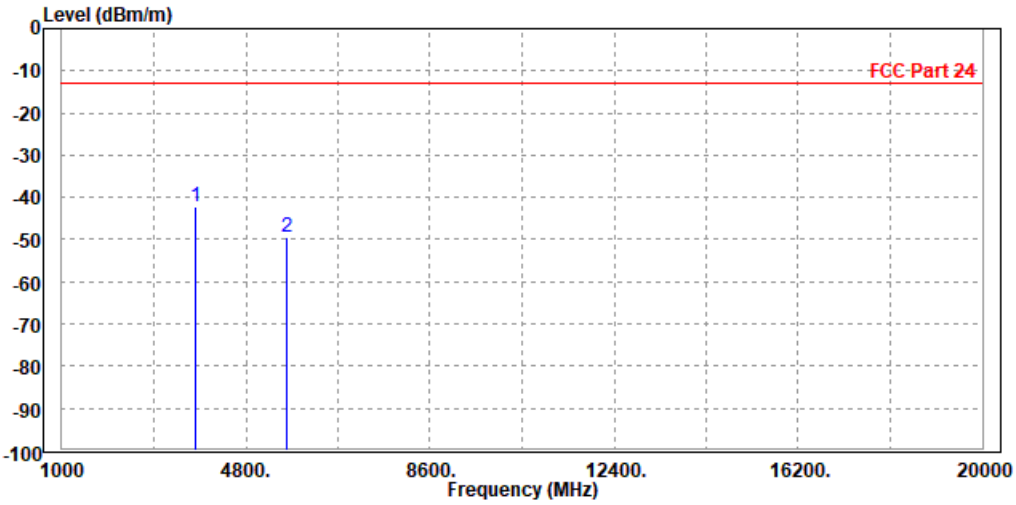

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-44.95	-54.22	-13.00	-31.95	9.27	Peak	Vertical
2		5640.000	-48.85	-59.10	-13.00	-35.85	10.25	Peak	Vertical

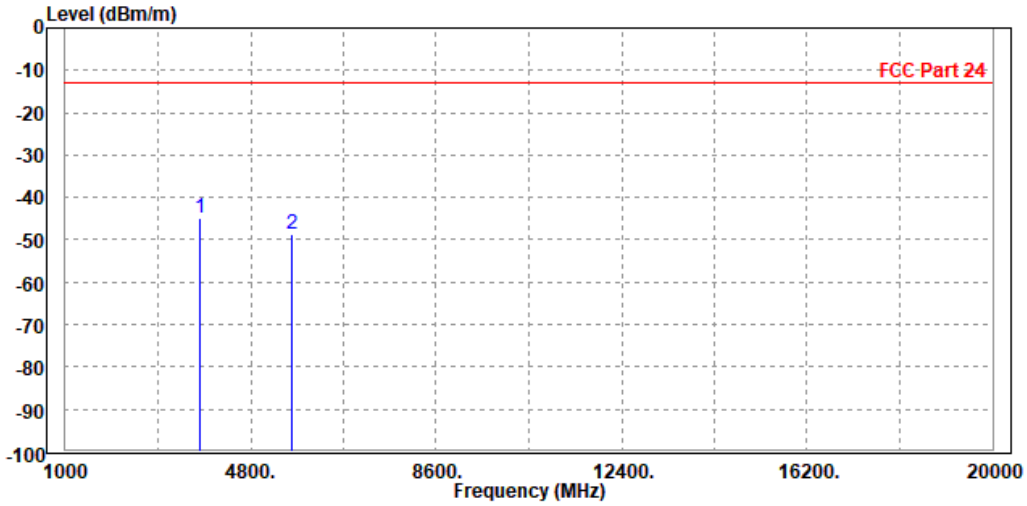

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-48.56	-57.41	-13.00	-35.56	8.85	Peak	Horizontal
2 PP	5640.000	-48.21	-58.69	-13.00	-35.21	10.48	Peak	Horizontal

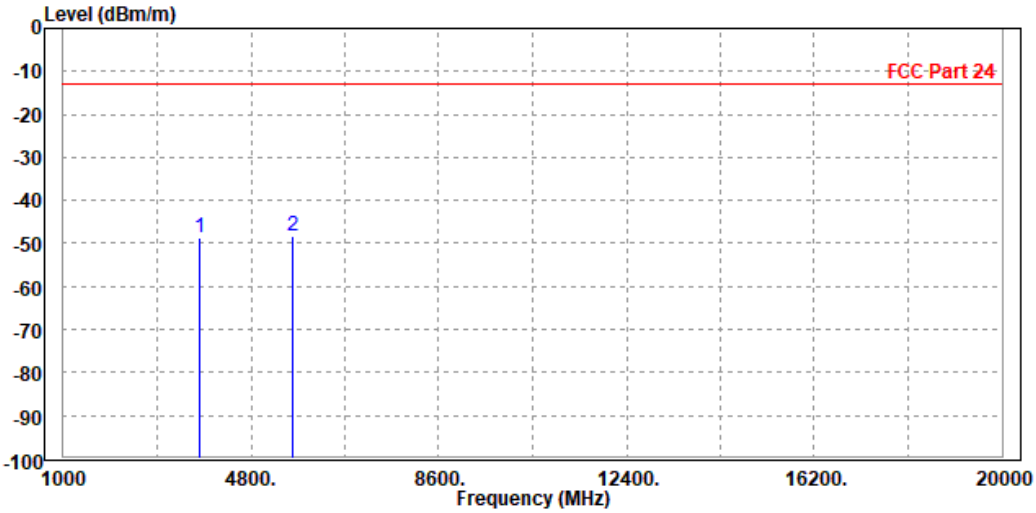

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1		3755.000	-48.71	-57.98	-13.00	-35.71	9.27	Peak	Vertical
2	PP	5640.000	-48.66	-58.91	-13.00	-35.66	10.25	Peak	Vertical

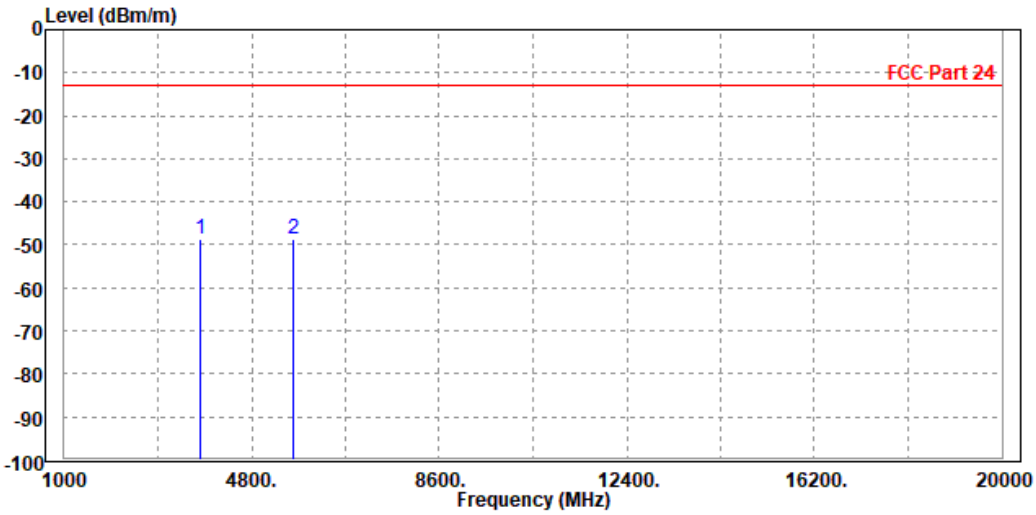

Acceleromete alternative 2 worst case:

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	**FREQUENCY RANGE**	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	**INPUT POWER**	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3700.000	-48.15	-56.94	-13.00	-35.15	8.79	Peak	Horizontal
2		5557.200	-48.63	-58.84	-13.00	-35.63	10.21	Peak	Horizontal

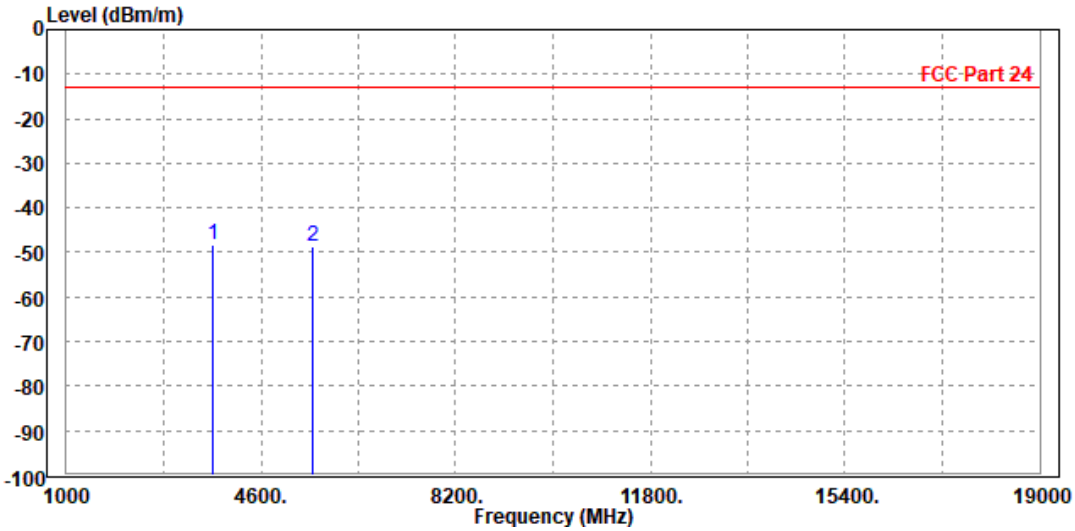

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3700.000	-47.31	-56.56	-13.00	-34.31	9.25	Peak	Vertical
2		5557.200	-49.55	-59.48	-13.00	-36.55	9.93	Peak	Vertical

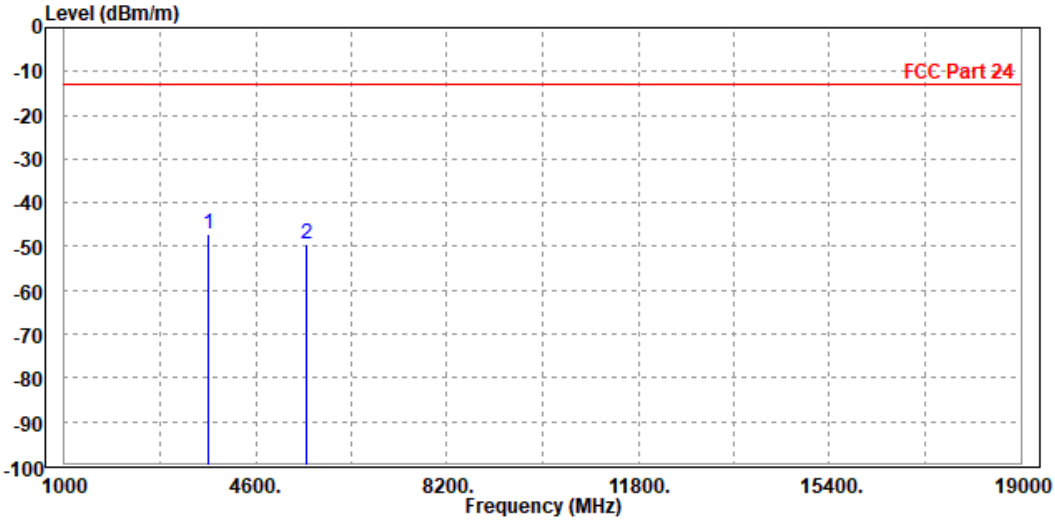

CHANNEL BANDWIDTH: 3MHz / QPSK

CH 18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	3755.000	-44.91	-54.18	-13.00	-31.91	9.27	Peak	Vertical
2	5640.000	-48.74	-58.99	-13.00	-35.74	10.25	Peak	Vertical

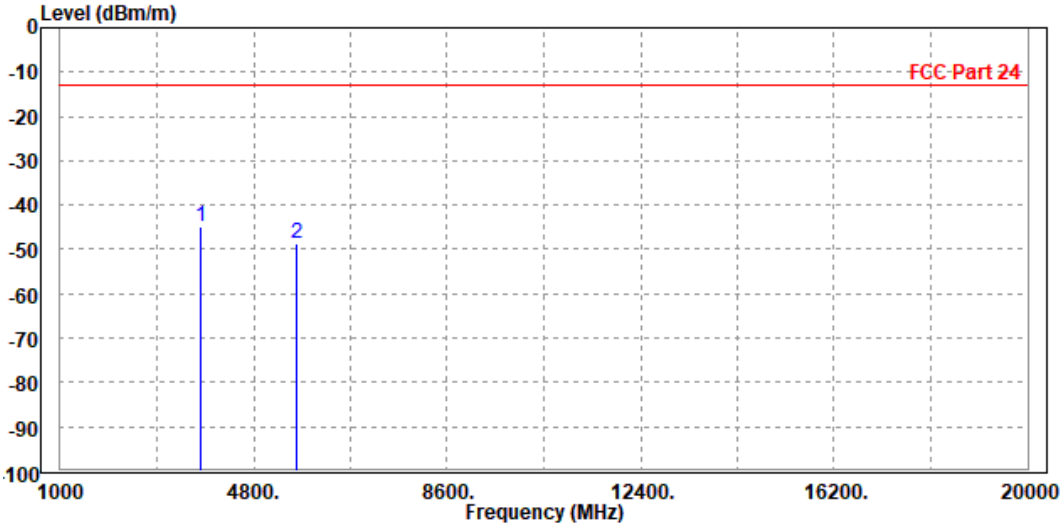

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3755.000	-42.86	-51.71	-13.00	-29.86	8.85	Peak	Horizontal
2		5640.000	-48.41	-58.89	-13.00	-35.41	10.48	Peak	Horizontal

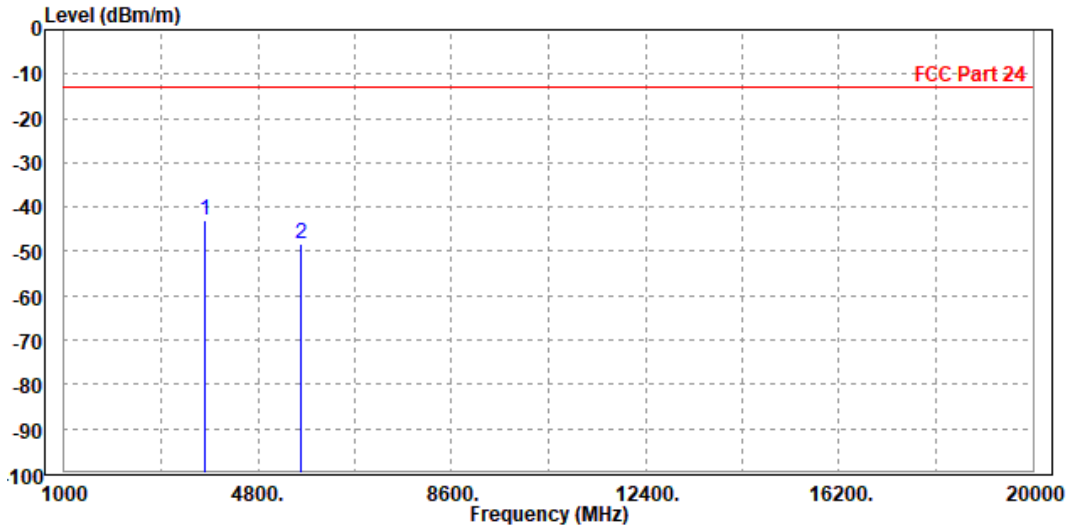

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3754.000	-47.18	-56.45	-13.00	-34.18	9.27	Peak	Vertical
2		5640.000	-48.52	-58.77	-13.00	-35.52	10.25	Peak	Vertical

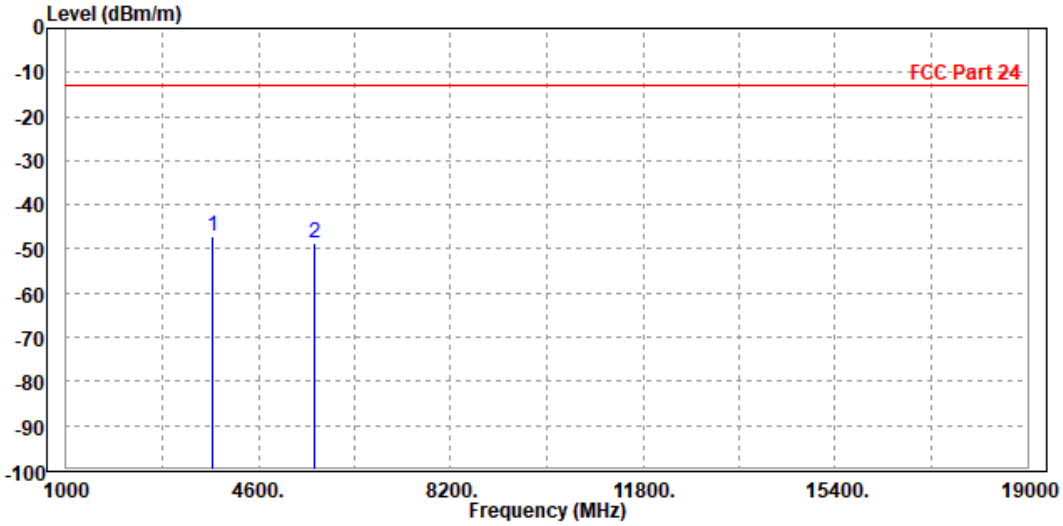

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-48.50	-57.34	-13.00	-35.50	8.84	Peak	Horizontal
2 PP	5640.000	-48.22	-58.70	-13.00	-35.22	10.48	Peak	Horizontal

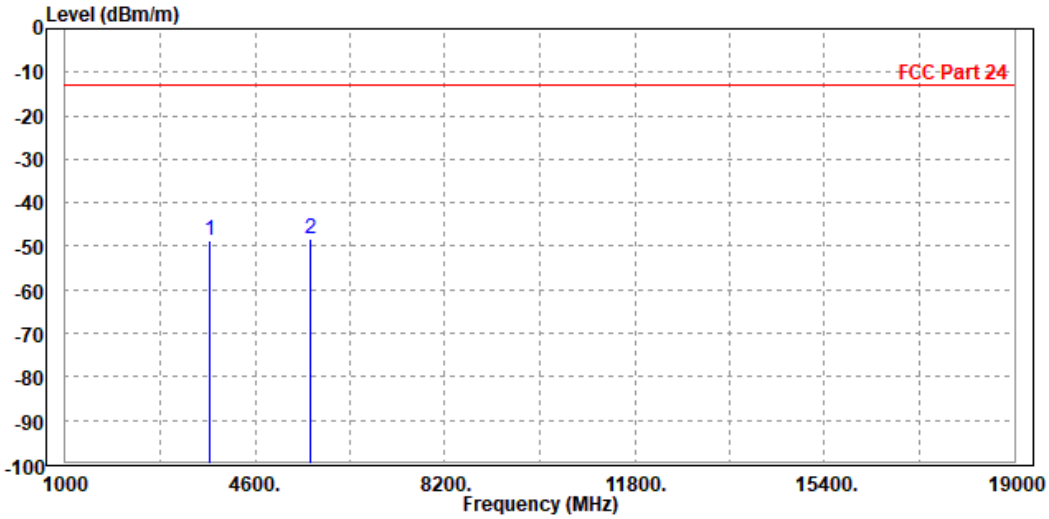

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3812.000	-42.26	-51.17	-13.00	-29.26	8.91	Peak	Horizontal
2		5725.500	-47.22	-57.99	-13.00	-34.22	10.77	Peak	Horizontal

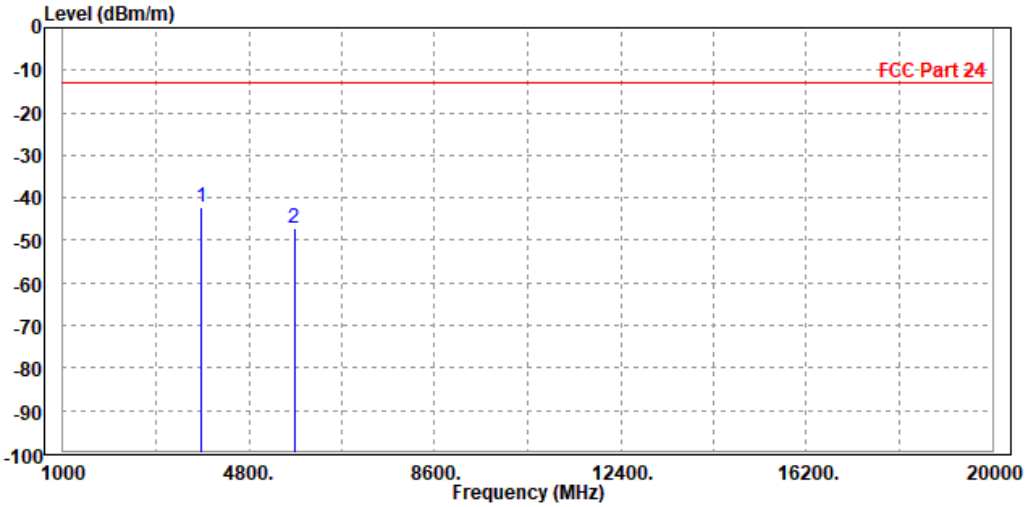

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3812.000	-45.87	-55.16	-13.00	-32.87	9.29	Peak	Vertical
2		5725.500	-46.97	-57.55	-13.00	-33.97	10.58	Peak	Vertical

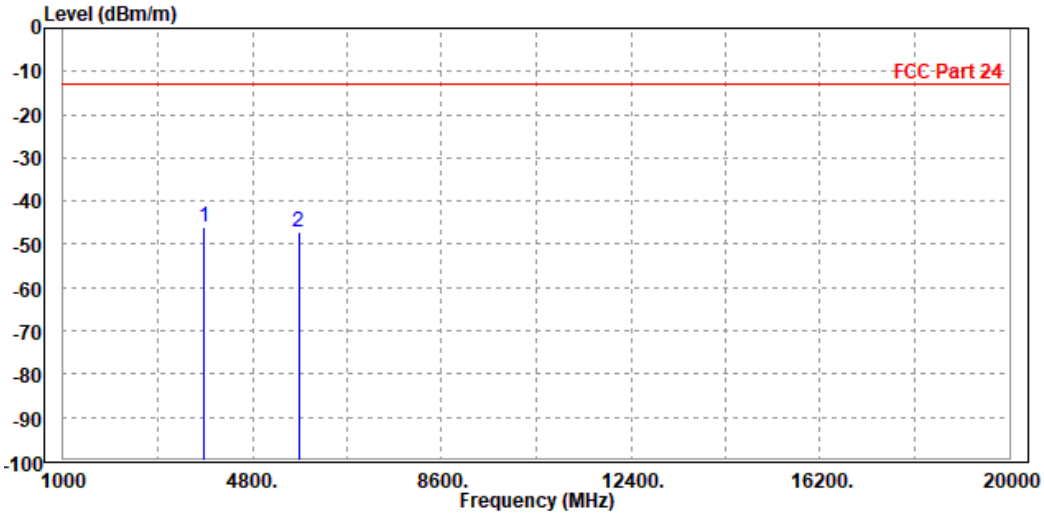

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3754.000	-48.01	-56.85	-13.00	-35.01	8.84	Peak	Horizontal
2		5640.000	-48.10	-58.58	-13.00	-35.10	10.48	Peak	Horizontal

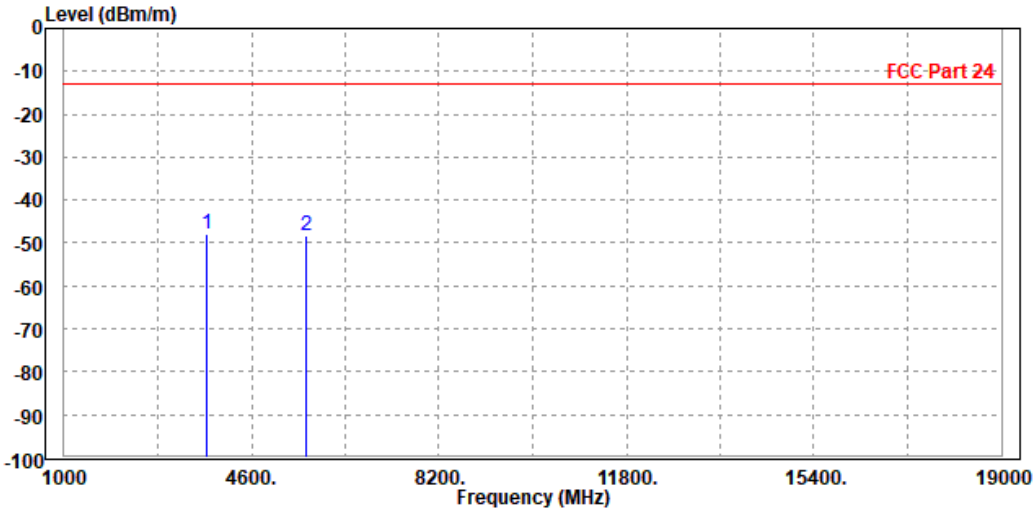

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	3754.000	-48.05	-57.32	-13.00	-35.05	9.27	Peak	Vertical
2		5640.000	-48.57	-58.82	-13.00	-35.57	10.25	Peak	Vertical

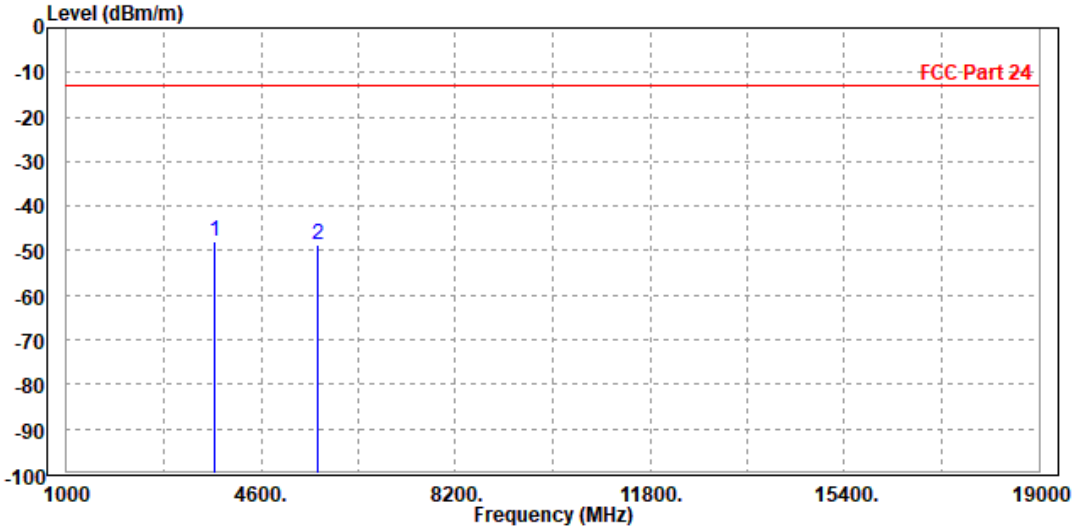

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3808.000	-47.57	-56.47	-13.00	-34.57	8.90	Peak	Horizontal
2 PP	5722.800	-46.21	-56.97	-13.00	-33.21	10.76	Peak	Horizontal

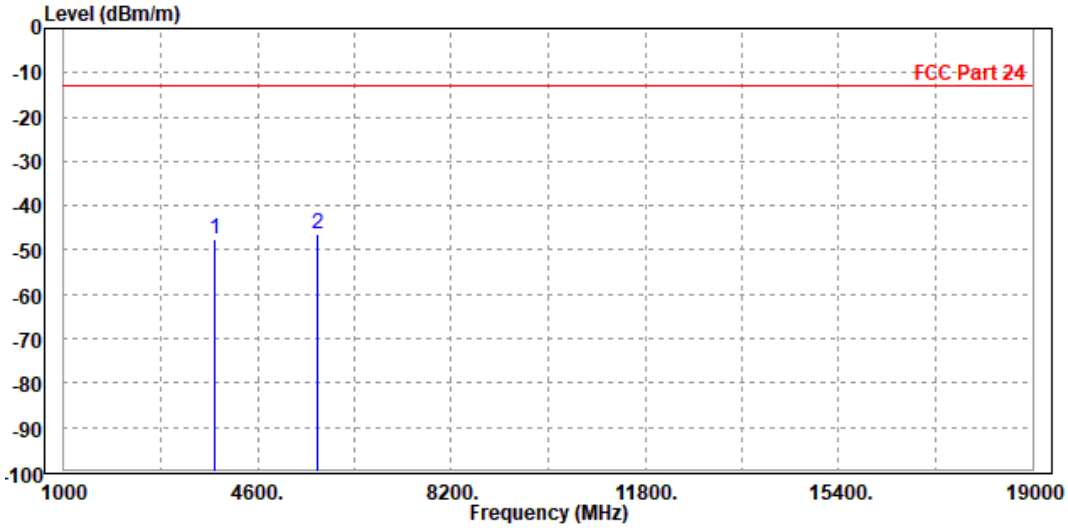

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 13.7V
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1		3808.000	-47.66	-56.94	-13.00	-34.66	9.28	Peak	Vertical
2	PP	5722.800	-46.61	-57.18	-13.00	-33.61	10.57	Peak	Vertical

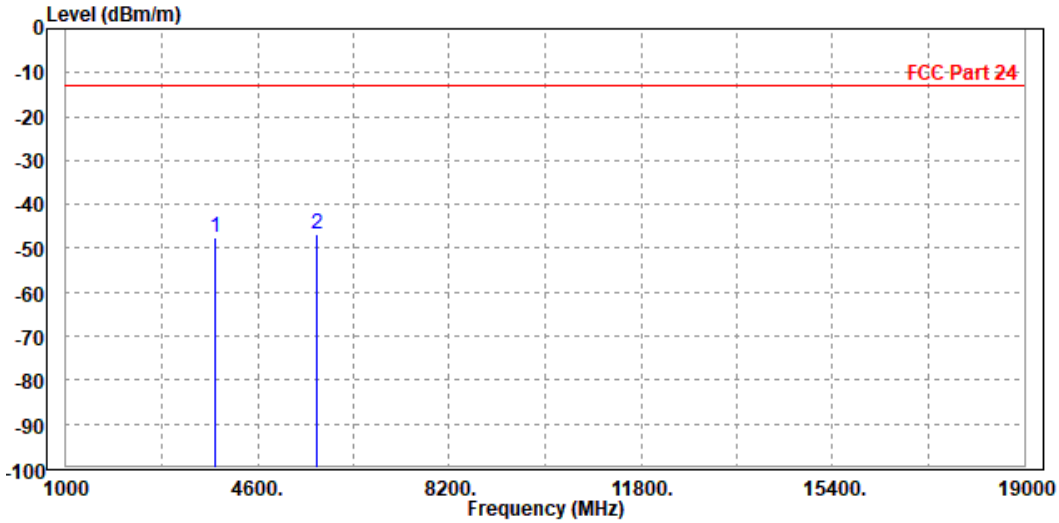

3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

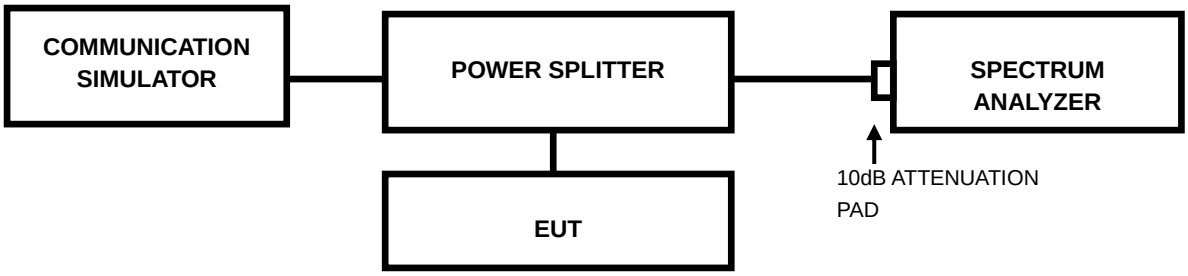

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

The test results was recorded in Report No.: R2007A0435-R5 (FCC ID: XMR201707BG96).

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:
Tel: +86-755-88696566
Fax: +86-755-88696577

Email: customerservice.dg@cn.bureauveritas.com
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---