

FCC Part 15C

Measurement and Test Report

For

AwoX

93 Place Pierre Duhem, Montpellier, France

FCC ID: A7K-ST2W

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>HDMI Wi-Fi Smart TV stick 2</u>
Tested Model:	<u>ST2-W</u>
Report No.:	<u>STR14038267I-1</u>
Tested Date:	<u>2014-03-14 to 2014-03-22</u>
Issued Date:	<u>2014-03-25</u>
Tested By:	<u>Susan Su / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>
Prepared By:	

Susan Su

Lahm peng

Jandyso

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
2. SUMMARY OF TEST RESULTS	6
3. RF EXPOSURE	7
3.1 STANDARD APPLICABLE.....	7
3.2 TEST RESULT.....	7
4. ANTENNA REQUIREMENT	8
4.1 STANDARD APPLICABLE.....	8
4.2 EVALUATION INFORMATION	8
5. POWER SPECTRAL DENSITY	9
5.1 STANDARD APPLICABLE.....	9
5.2 TEST EQUIPMENT LIST AND DETAILS	9
5.3 TEST PROCEDURE.....	9
5.4 ENVIRONMENTAL CONDITIONS	9
5.5 SUMMARY OF TEST RESULTS/PLOTS	10
6. 6DB BANDWIDTH	16
6.1 STANDARD APPLICABLE.....	16
6.2 TEST EQUIPMENT LIST AND DETAILS	16
6.3 TEST PROCEDURE.....	16
6.4 ENVIRONMENTAL CONDITIONS	16
6.5 SUMMARY OF TEST RESULTS/PLOTS	17
7. RF OUTPUT POWER.....	23
7.1 STANDARD APPLICABLE.....	23
7.2 TEST EQUIPMENT LIST AND DETAILS	23
7.3 TEST PROCEDURE.....	23
7.4 ENVIRONMENTAL CONDITIONS	23
7.5 SUMMARY OF TEST RESULTS/PLOTS	24
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	30
8.1 MEASUREMENT UNCERTAINTY	30
8.2 STANDARD APPLICABLE.....	30
8.3 TEST EQUIPMENT LIST AND DETAILS	30
8.4 TEST PROCEDURE.....	31
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	31
8.6 ENVIRONMENTAL CONDITIONS	32
8.7 SUMMARY OF TEST RESULTS/PLOTS	32
9. OUT OF BAND EMISSIONS.....	54
9.1 STANDARD APPLICABLE.....	54
9.2 TEST EQUIPMENT LIST AND DETAILS	54
9.3 TEST PROCEDURE.....	54
9.4 ENVIRONMENTAL CONDITIONS	55
9.5 SUMMARY OF TEST RESULTS/PLOTS	55
10. CONDUCTED EMISSIONS	62
10.1 MEASUREMENT UNCERTAINTY	62
10.2 TEST EQUIPMENT LIST AND DETAILS	62
10.3 TEST PROCEDURE.....	62
10.4 BASIC TEST SETUP BLOCK DIAGRAM.....	62
10.5 ENVIRONMENTAL CONDITIONS	63
10.6 TEST RECEIVER SETUP	63
10.7 SUMMARY OF TEST RESULTS/PLOTS	63
10.8 CONDUCTED EMISSIONS TEST DATA.....	63

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: AwoX
Address of applicant: 93 Place Pierre Duhem, Montpellier, France

Manufacturer: SHENZHEN GAEA ELECTRONICS CO., LTD
Address of manufacturer: 2-3, Datian Xiaoqu, Tongfuyu Industrial Zone, Buyong, Shajing Street, Bao'an District, Shenzhen, Guangdong Province, China

General Description of EUT	
Product Name:	HDMI Wi-Fi Smart TV stick 2
Trade Name:	Awox StrimSTICK
Model No.:	ST2-W
Adding Model(s):	A20
Rated Voltage:	DC 5V
Power Adaptor Model:	ECF0500100U1BU Input: AC 100-240V, 50-60Hz Output: DC 5V
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2472MHz
RF Output Power:	9.83 dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels	13
Channel Separation:	5MHz
Type of Antenna:	PCB
Antenna Gain:	0 dBi

1.2 Test Standards

The following report is prepared on behalf of the AwoX in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice KDB 558074 D01 V03 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2442MHz, 2472MHz
TM2	802.11g	2412MHz, 2442MHz, 2472MHz
TM3	802.11n-HT20	2412MHz, 2442MHz, 2472MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
--	--	--	--

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite
HDMI Cable	0.5	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Display	BENQ	VP2212	---
Mouse	DELL	MS111-P	---

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

5.3 Test Procedure

According to the KDB 558074 D01 V03, the test method of power spectral density as below:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW ≥ 3 kHz.
5. Set the VBW $\geq 3 \times$ RBW.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-14.40	8
	2442	-15.03	8
	2472	-16.07	8
802.11g	2412	-18.83	8
	2442	-18.54	8
	2472	-19.01	8
802.11n-HT20	2412	-17.99	8
	2442	-18.36	8
	2472	-18.86	8

Please refer to the following test plots:


802.11b-Low Channel

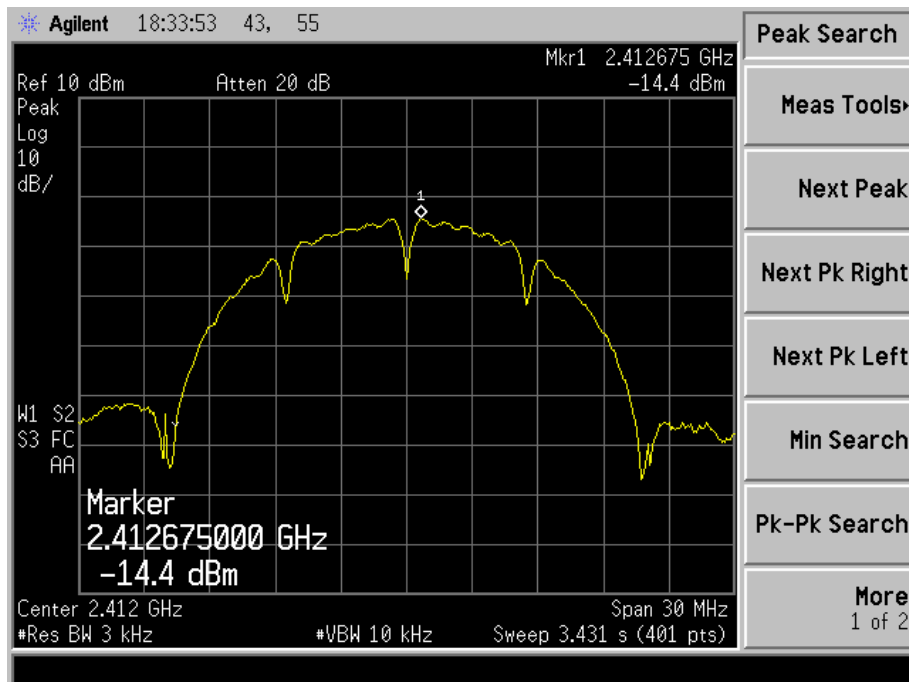


802.11b-Middle Channel

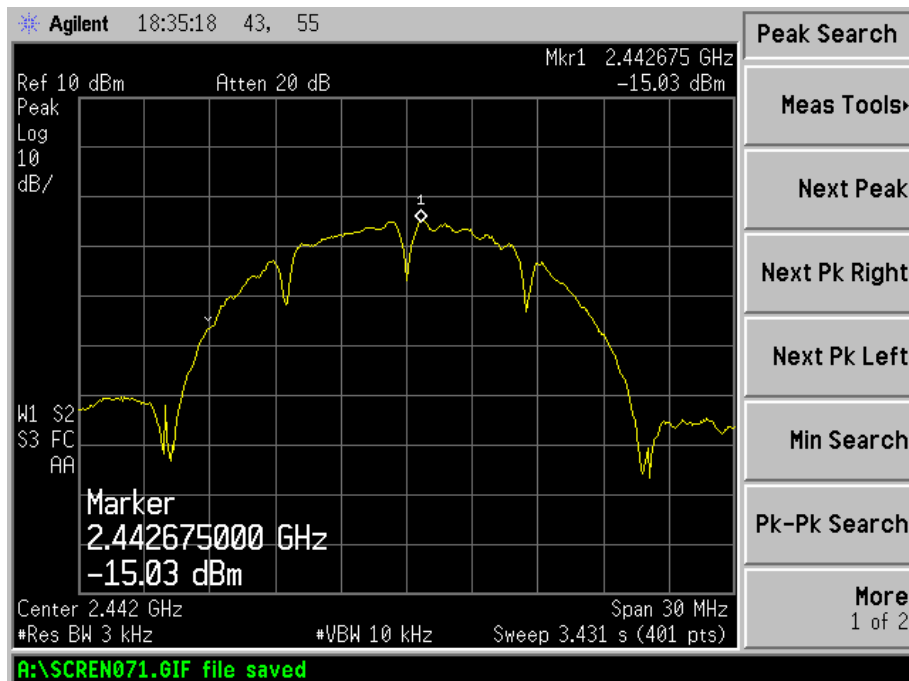


802.11b-High Channel

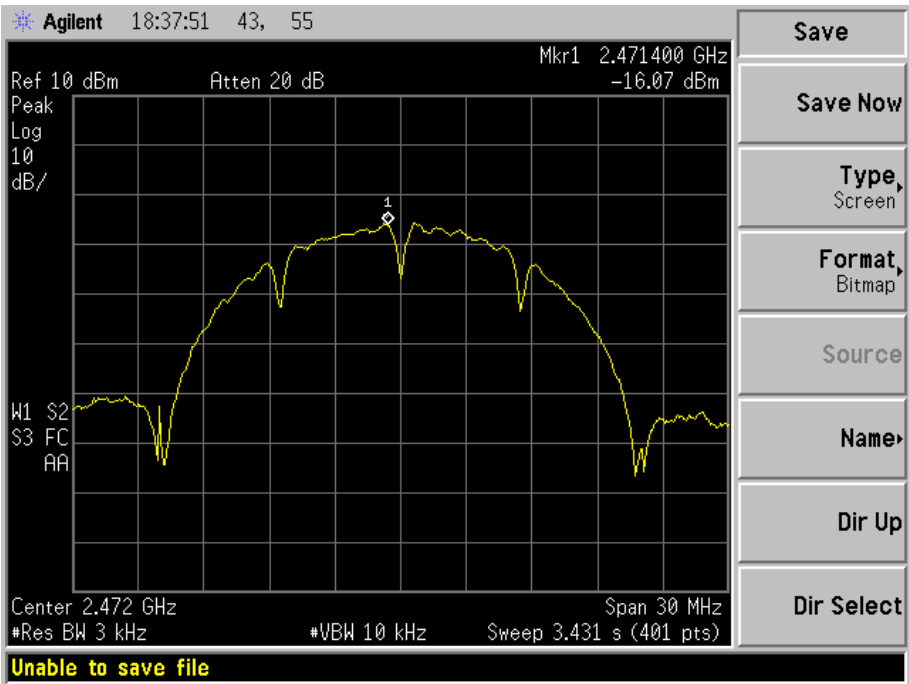


802.11g-Low Channel

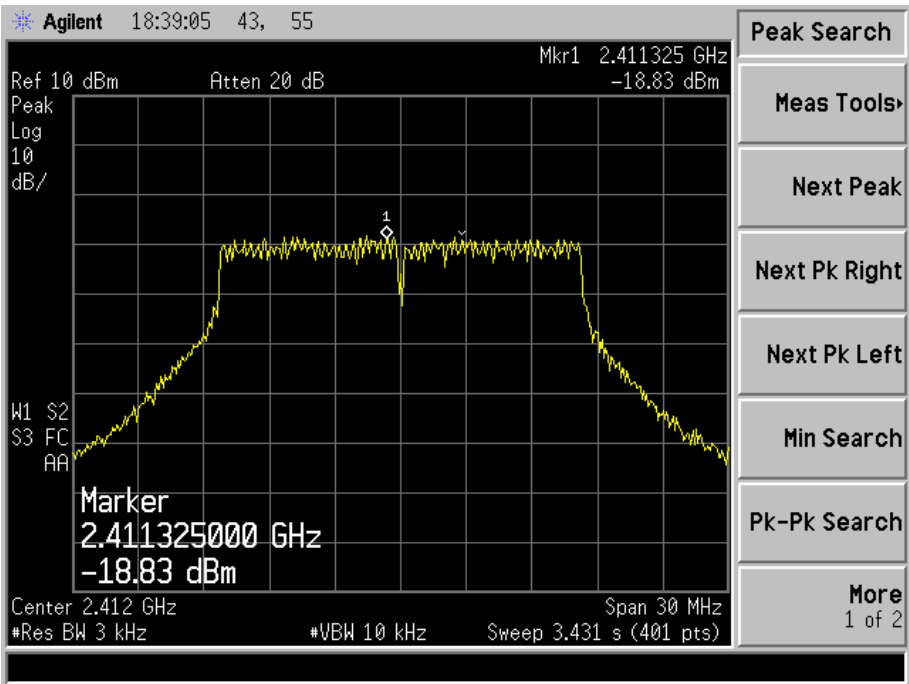


802.11g-Middle Channel

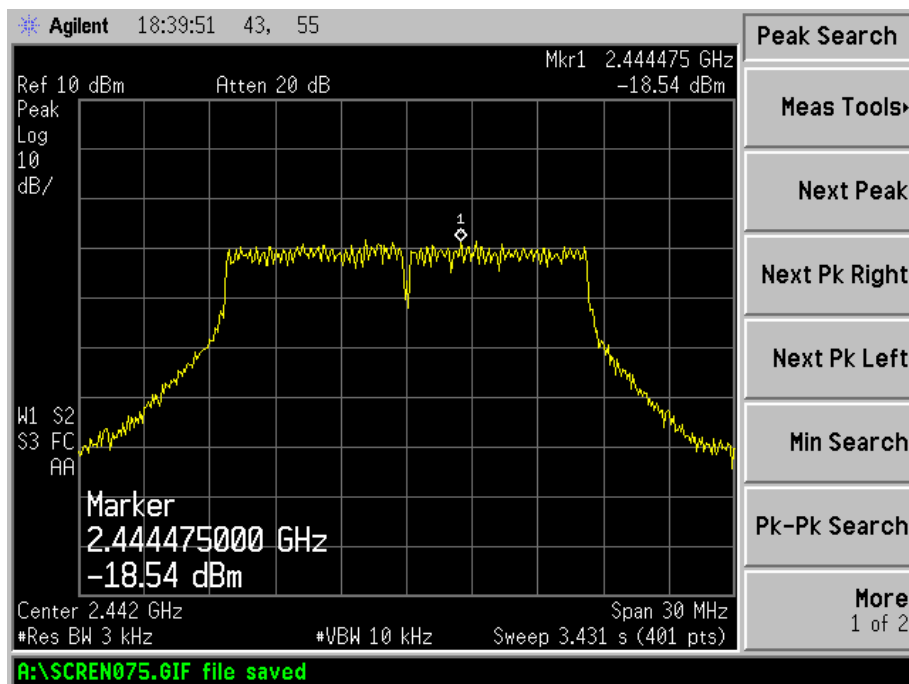


802.11g-High Channel

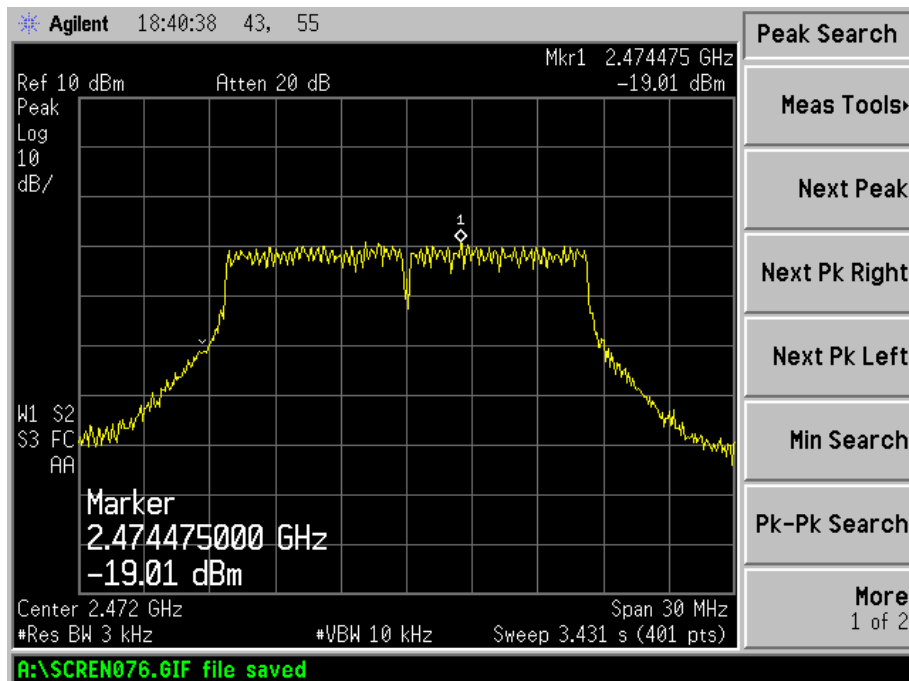


802.11n-HT20-Low Channel

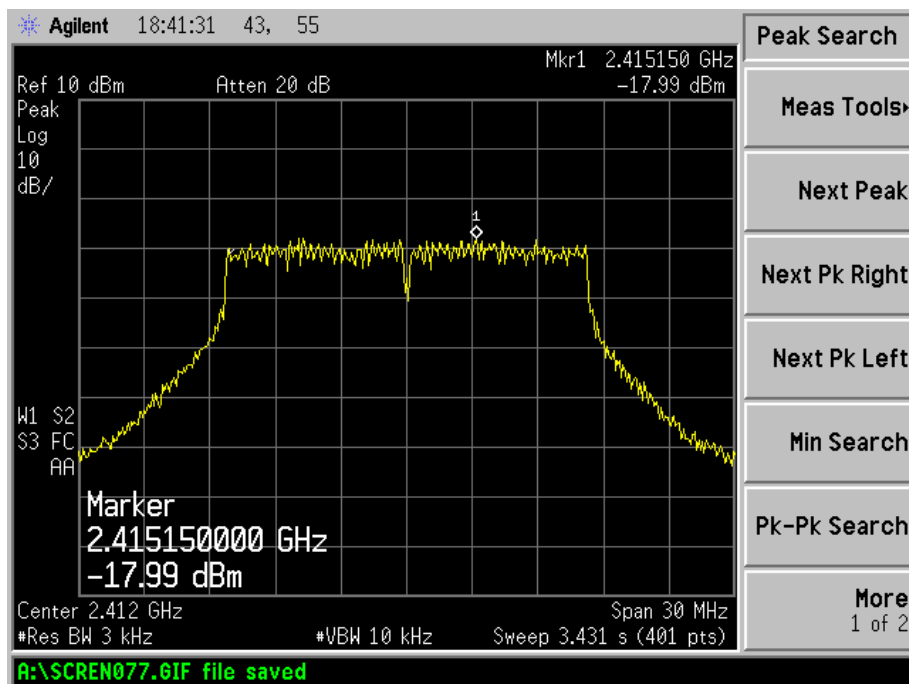

802.11n-HT20-Middle Channel

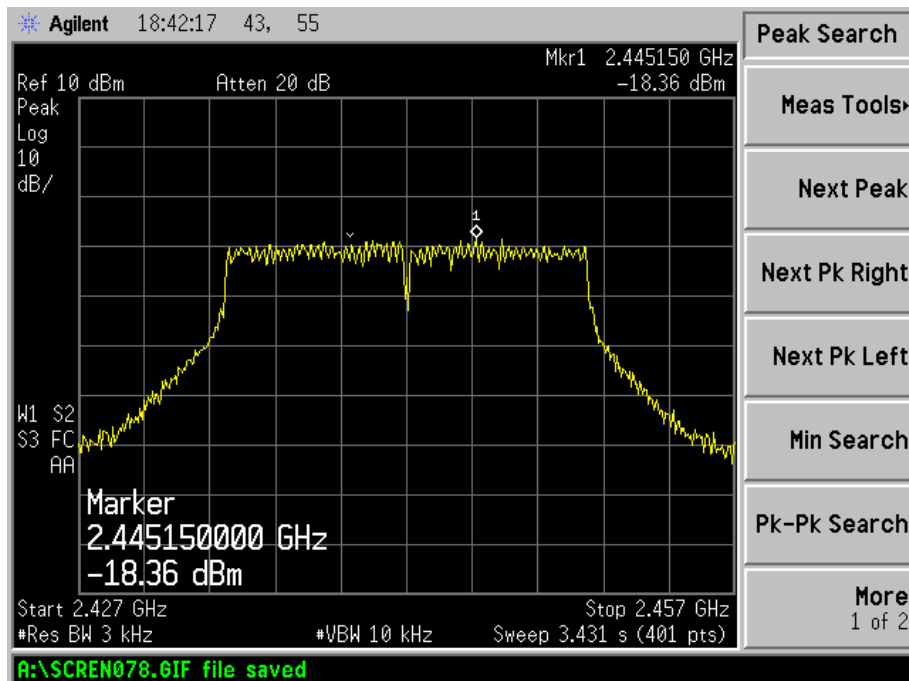

802.11n-HT20-High Channel

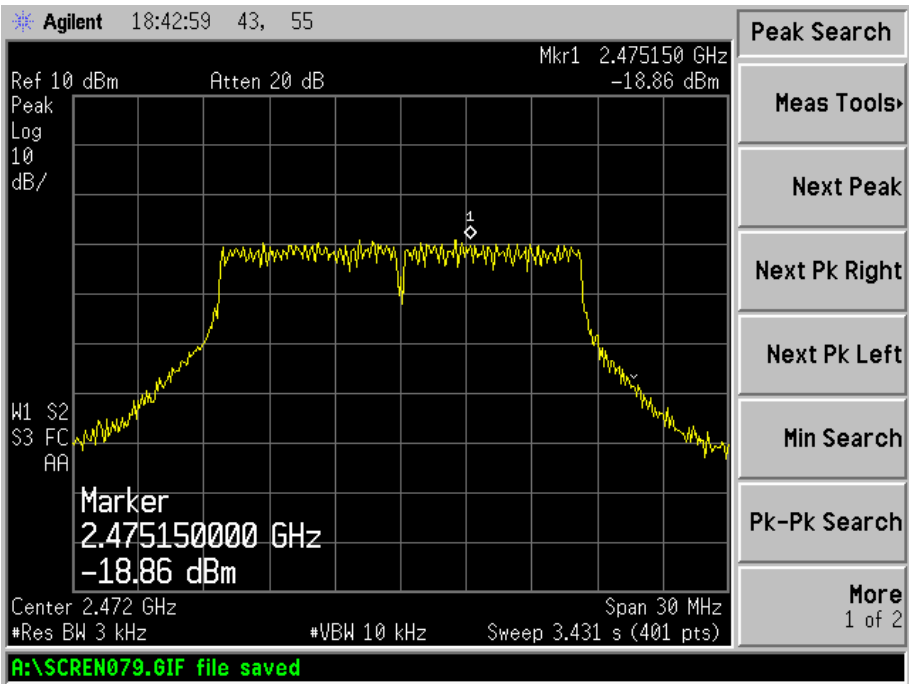

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission..

6.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	10088	14969.0	500
	2442	10094	15055.8	500
	2472	10052	15177.2	500
802.11g	2412	16540	16445.4	500
	2442	16571	16448.1	500
	2472	16544	16442.0	500
802.11n-HT20	2412	16603	16480.6	500
	2442	16587	16465.3	500
	2472	16520	16430.7	500

Please refer to the following test plots:


802.11b-Low Channel

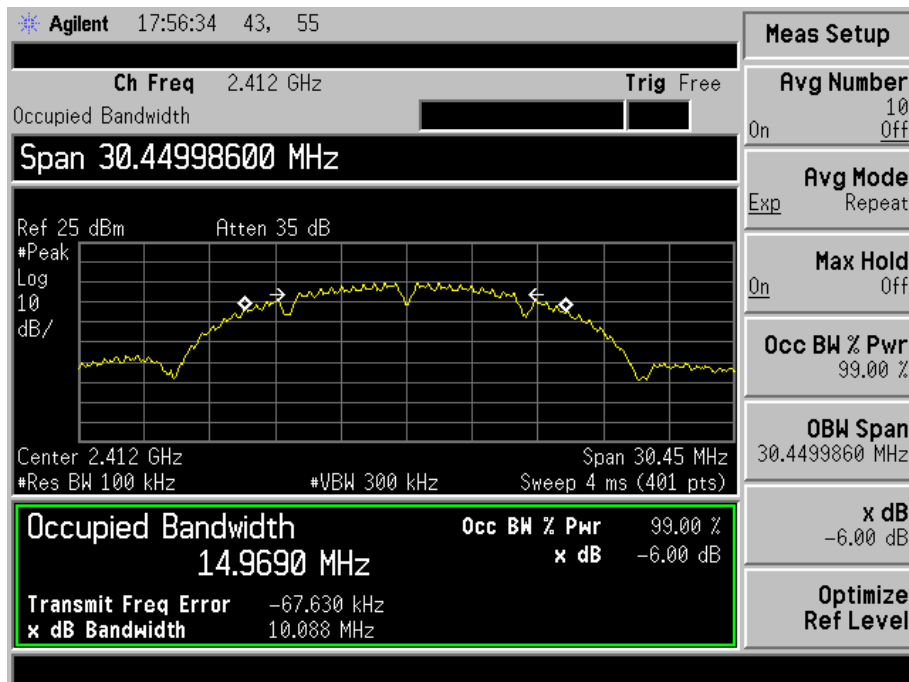


802.11b-Middle Channel

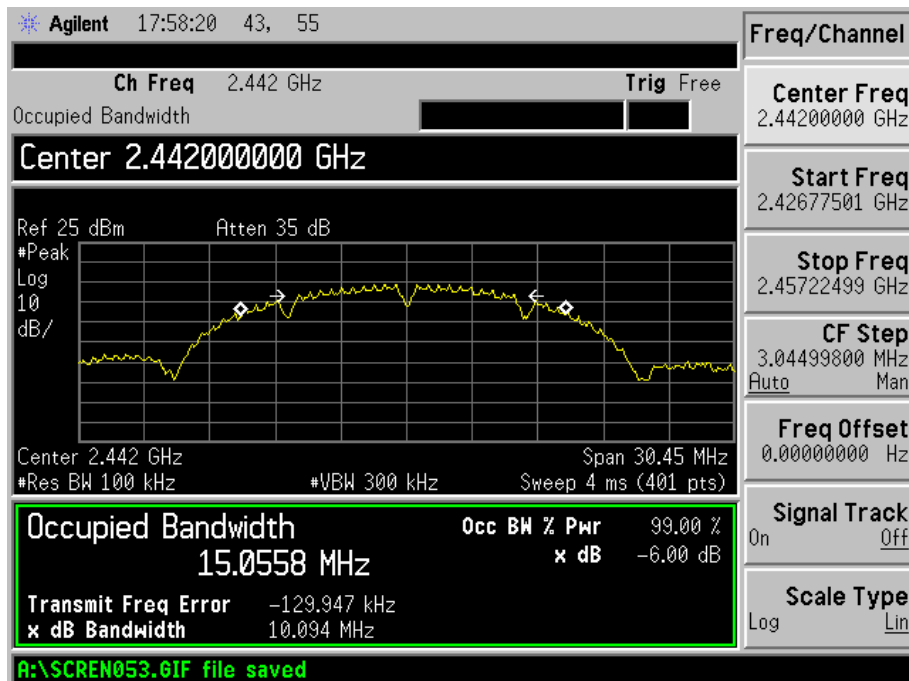


802.11b-High Channel

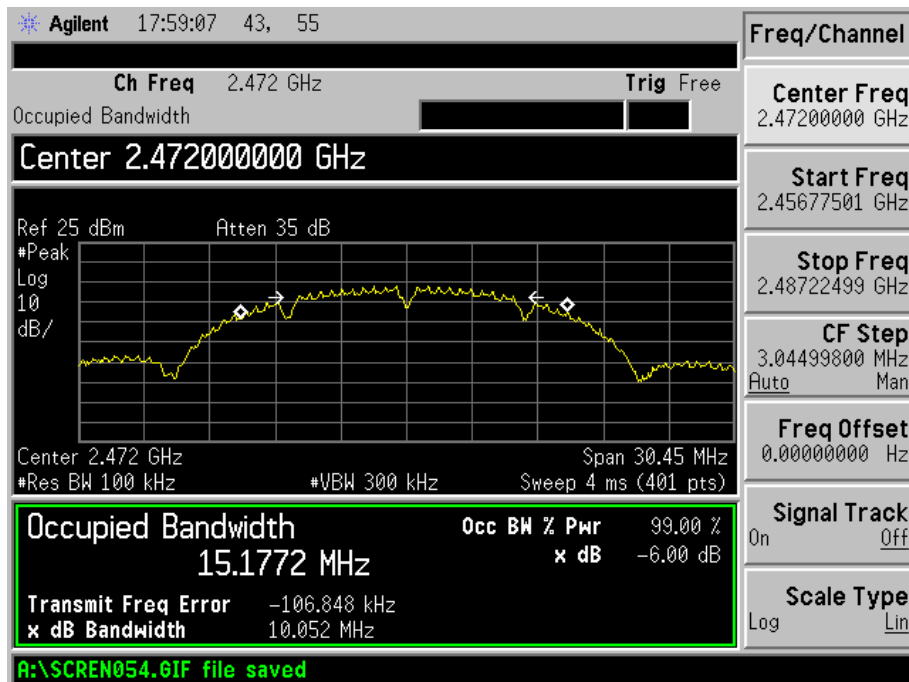


802.11g-Low Channel

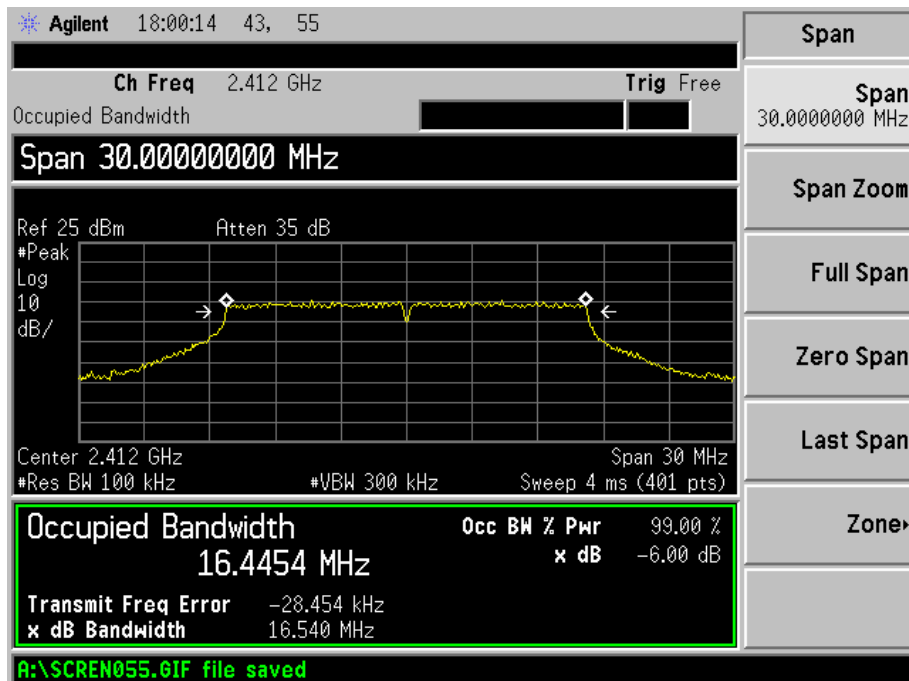


802.11g-Middle Channel

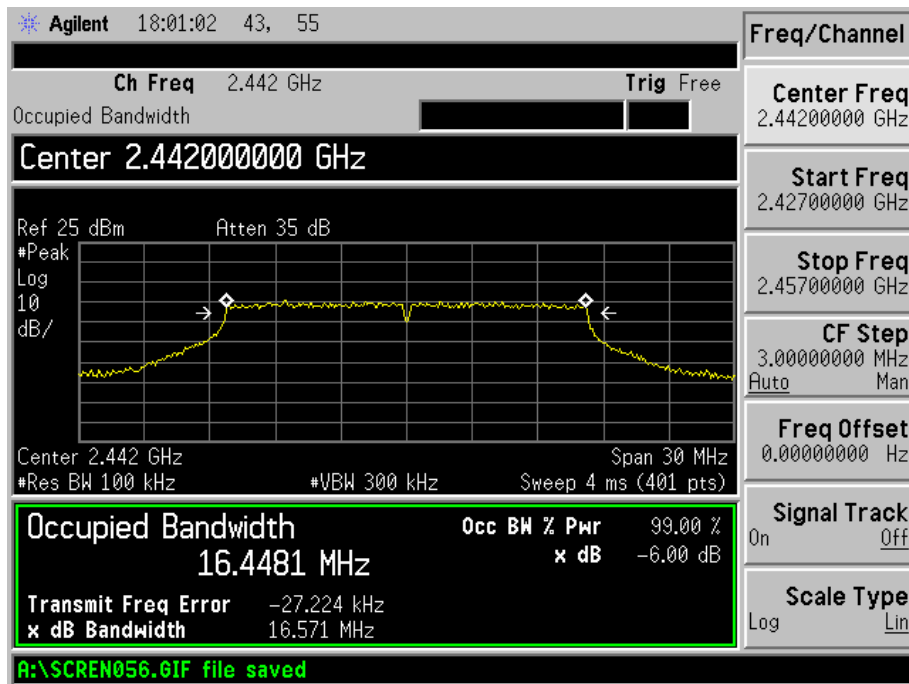


802.11g-High Channel

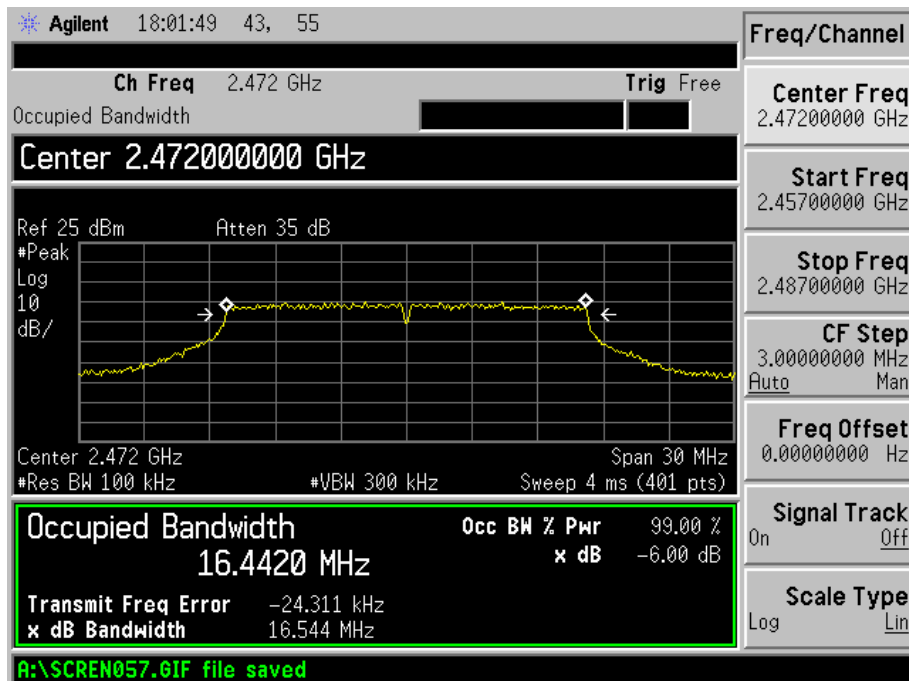


802.11n-HT20-Low Channel

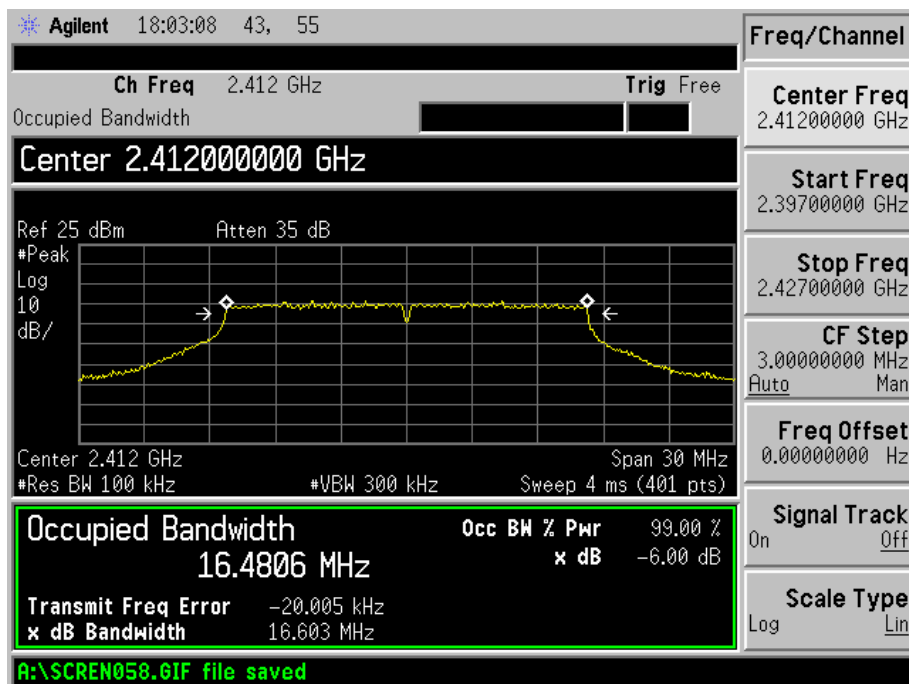

802.11n-HT20-Middle Channel

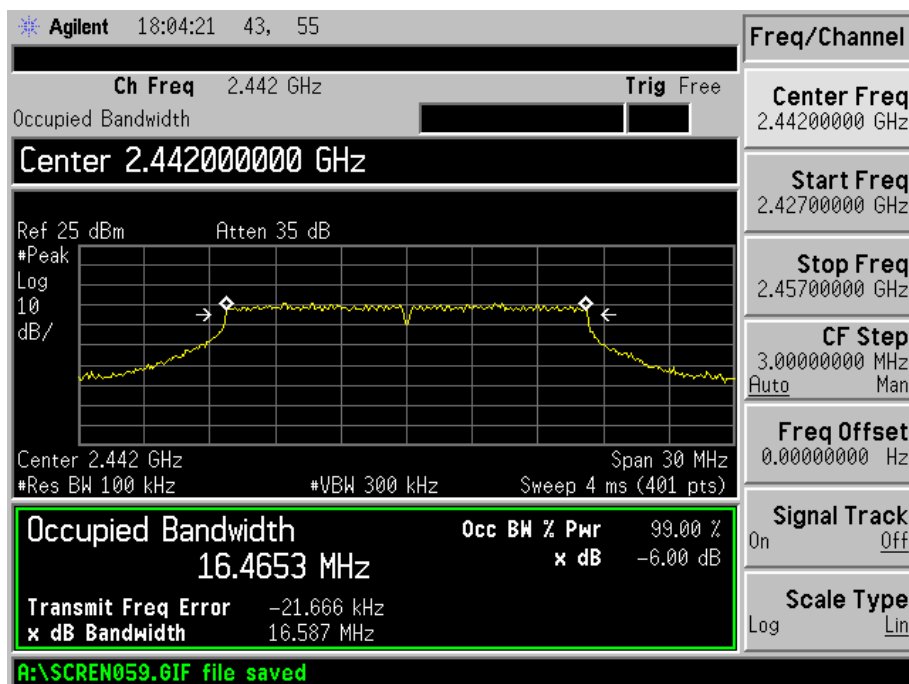

802.11n-HT20-High Channel

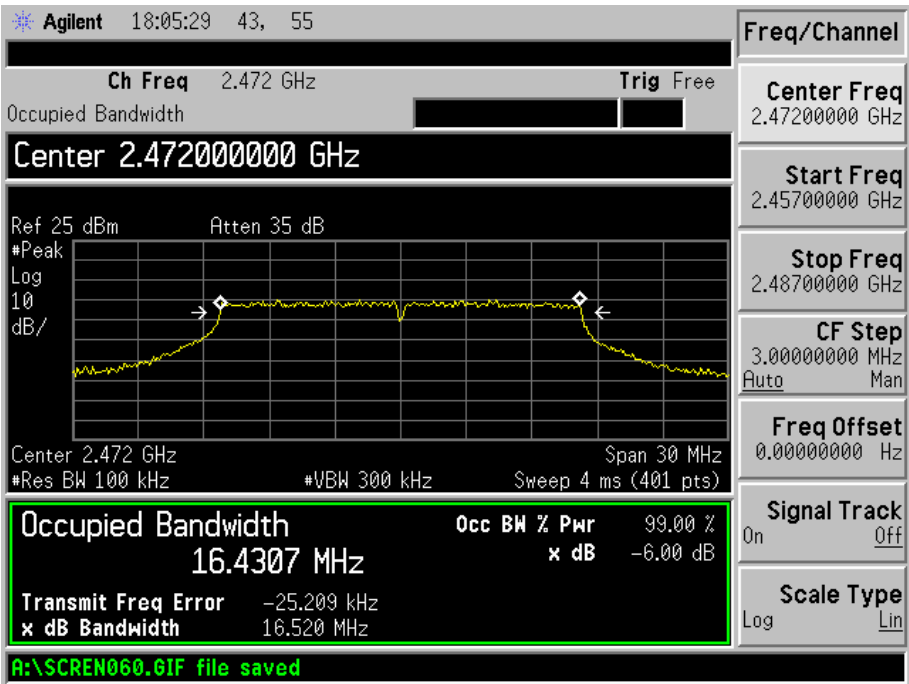

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2013-05-07	2014-05-06
Attenuator	ATTEN	ATS100-4-20	/	2013-05-07	2014-05-06

7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03 (2013), 8.1.2 Option 2 (channel integration method) this procedure should only be used when the maximum available RBW of the spectrum/signal analyzer is less than the DTS bandwidth.

1. Set the RBW = maximum available (at least 1 MHz).
2. Set the VBW = 3 x RBW or maximum available setting (must be $\geq$ RBW).
3. Set the span to fully encompass the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the spectrum analyzer's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some analyzers, this may require a manual override to ensure use of peak detector).

7.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b	2412	9.74	9.4189	1000
	2442	9.22	8.3560	1000
	2472	9.06	8.0538	1000
802.11g	2412	9.18	8.2794	1000
	2442	9.02	7.9799	1000
	2472	9.13	8.1846	1000
802.11n-HT20	2412	9.66	9.2470	1000
	2442	9.26	8.4333	1000
	2472	9.83	9.6161	1000

Please refer to the following test plots:


802.11b-Low Channel

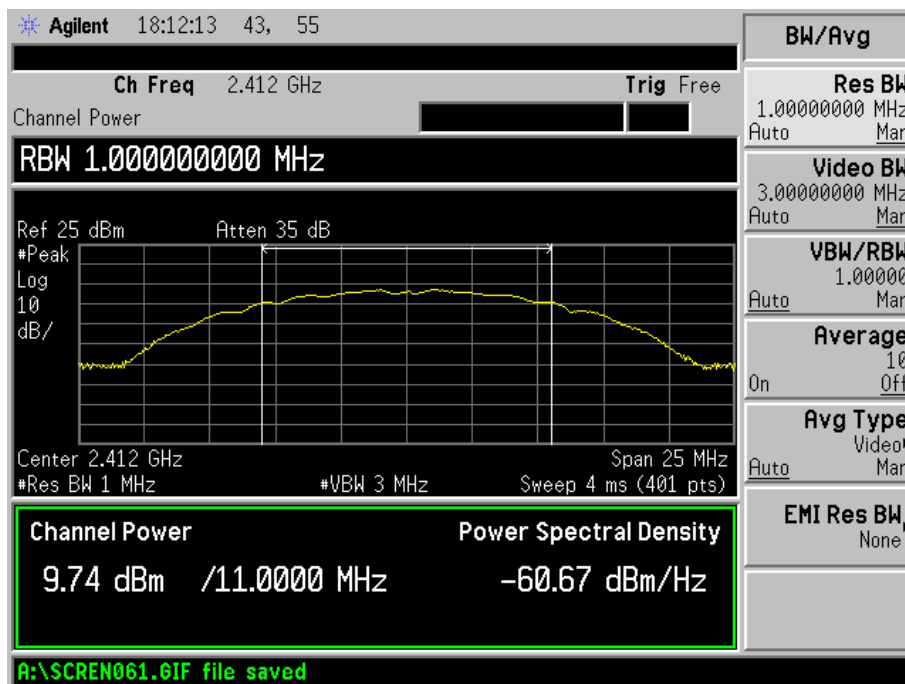


802.11b-Middle Channel

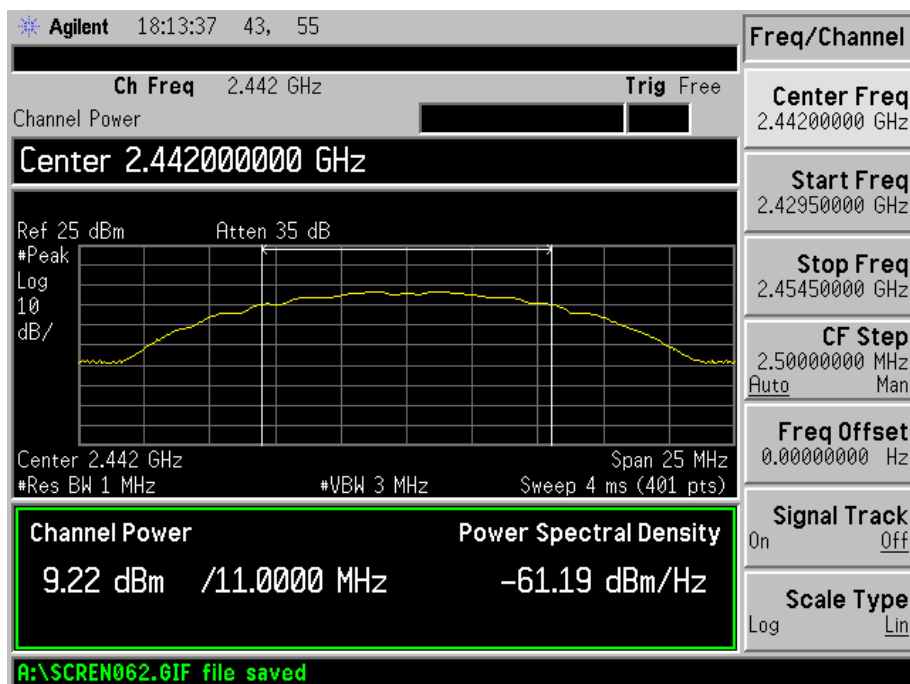


802.11b-High Channel

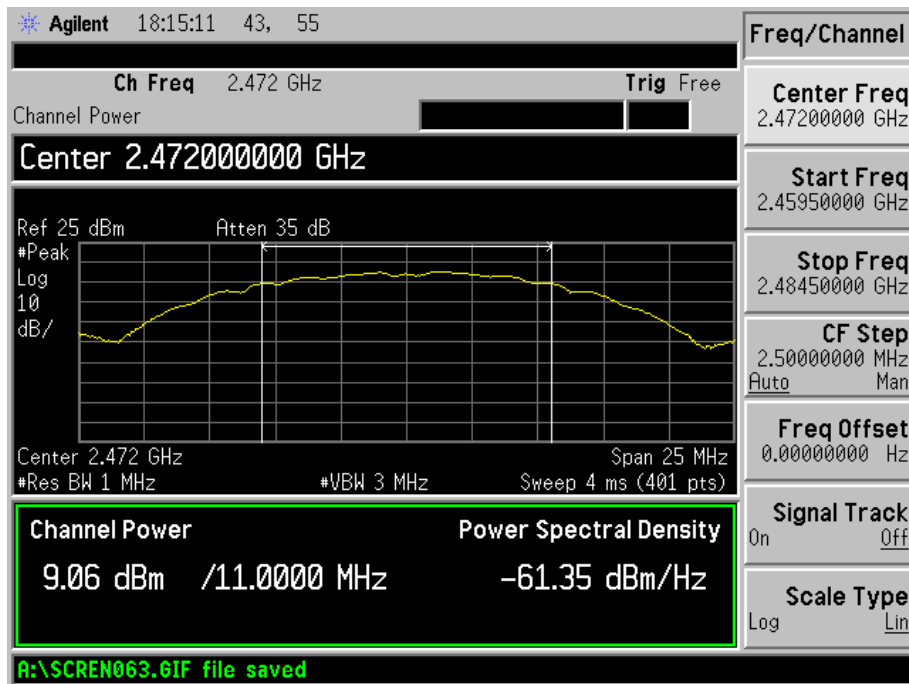


802.11g-Low Channel

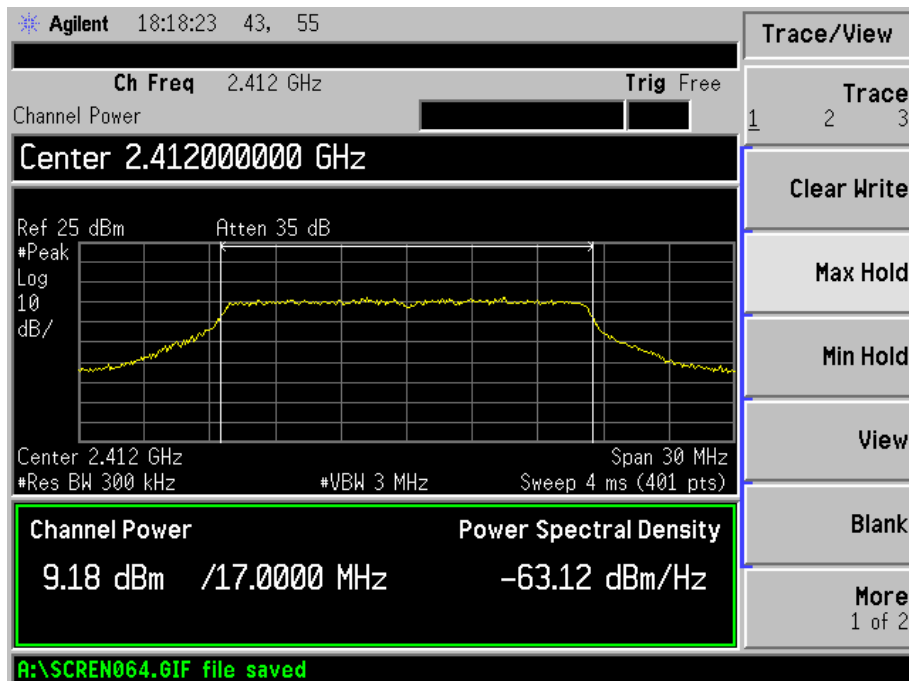


802.11g-Middle Channel

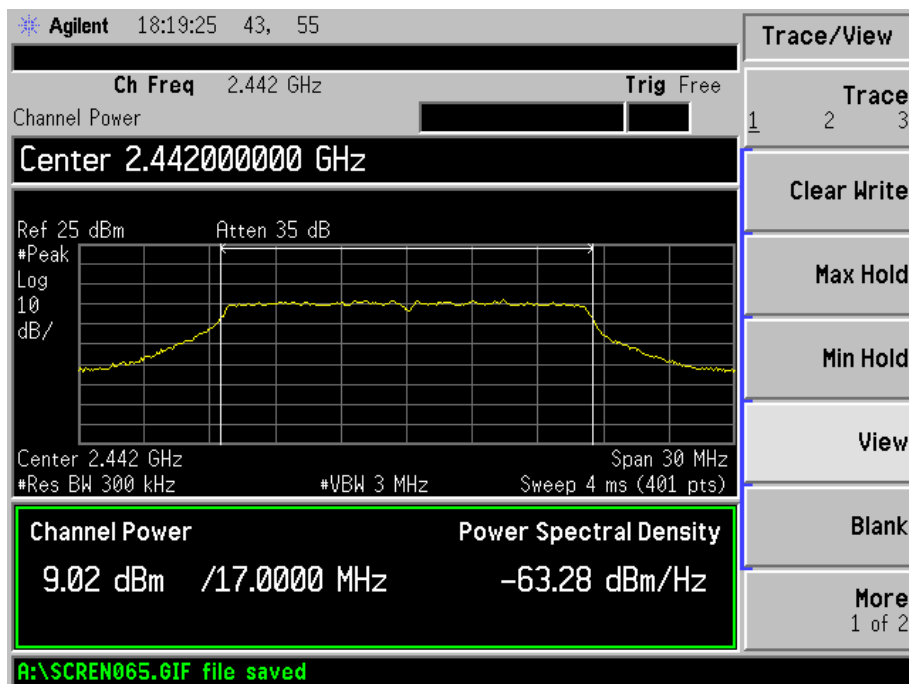


802.11g-High Channel

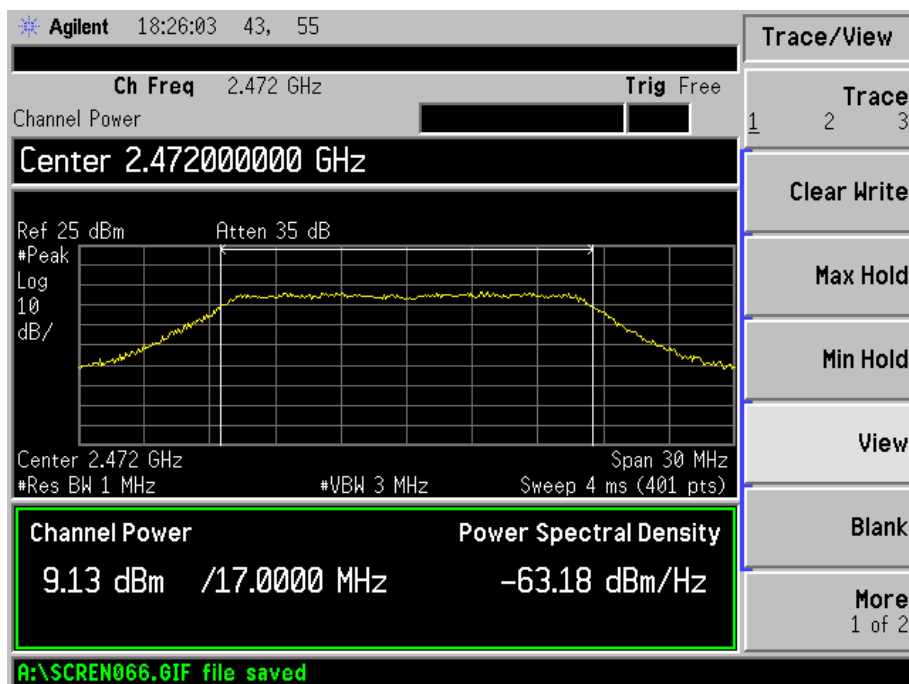


802.11n-HT20-Low Channel

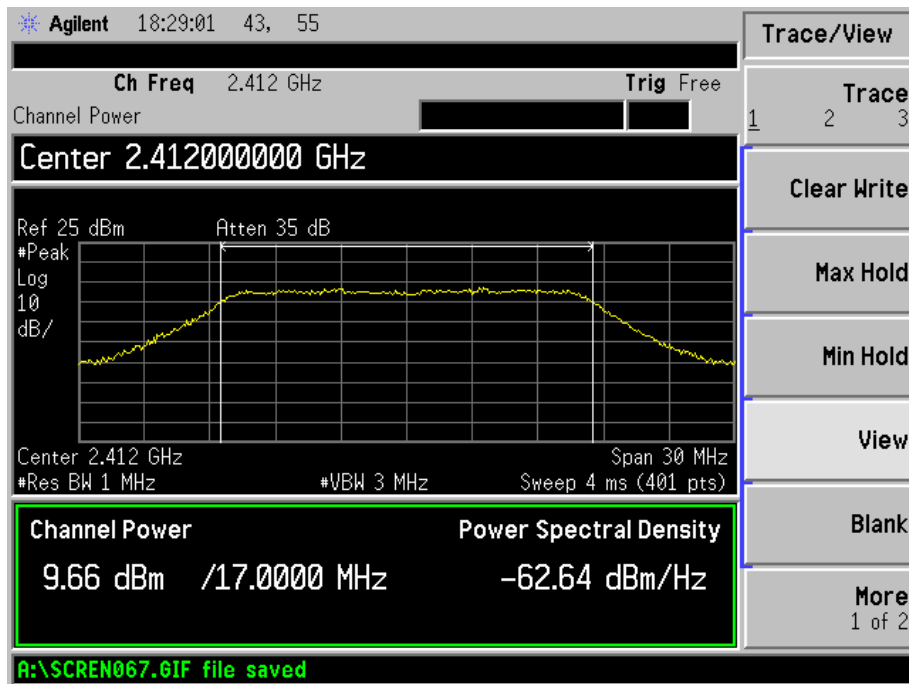

802.11n-HT20-Middle Channel

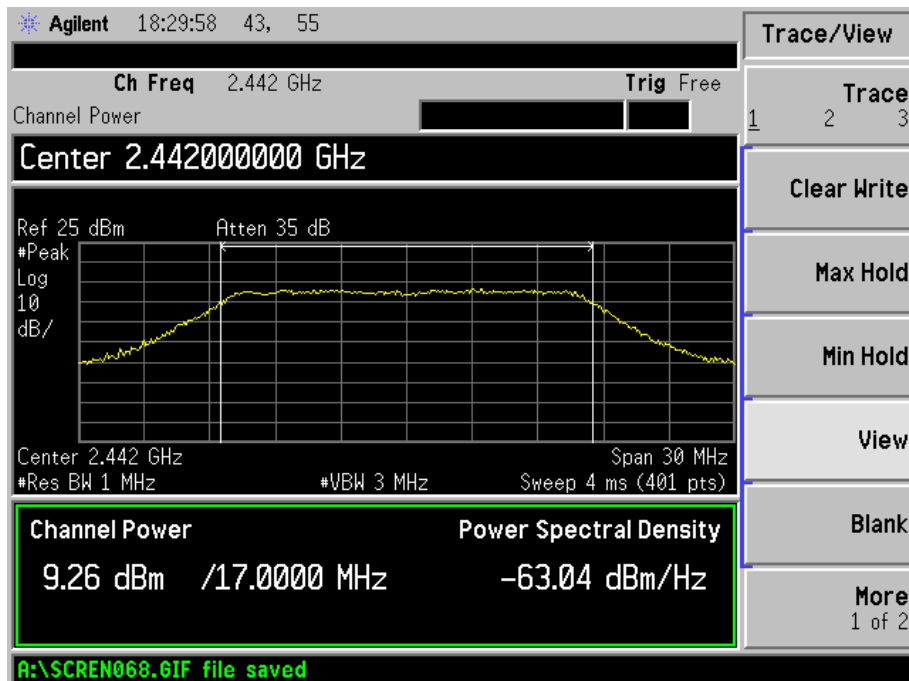

802.11n-HT20-High Channel

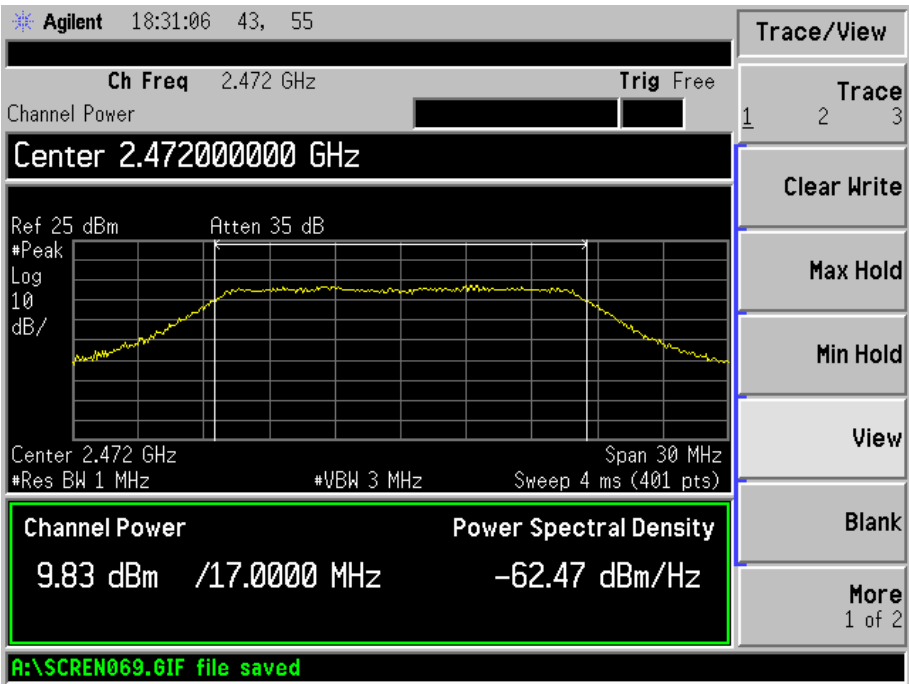

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Horn Antenna	ETS	3116B	00088203	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2013-04-20	2014-04-19

8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

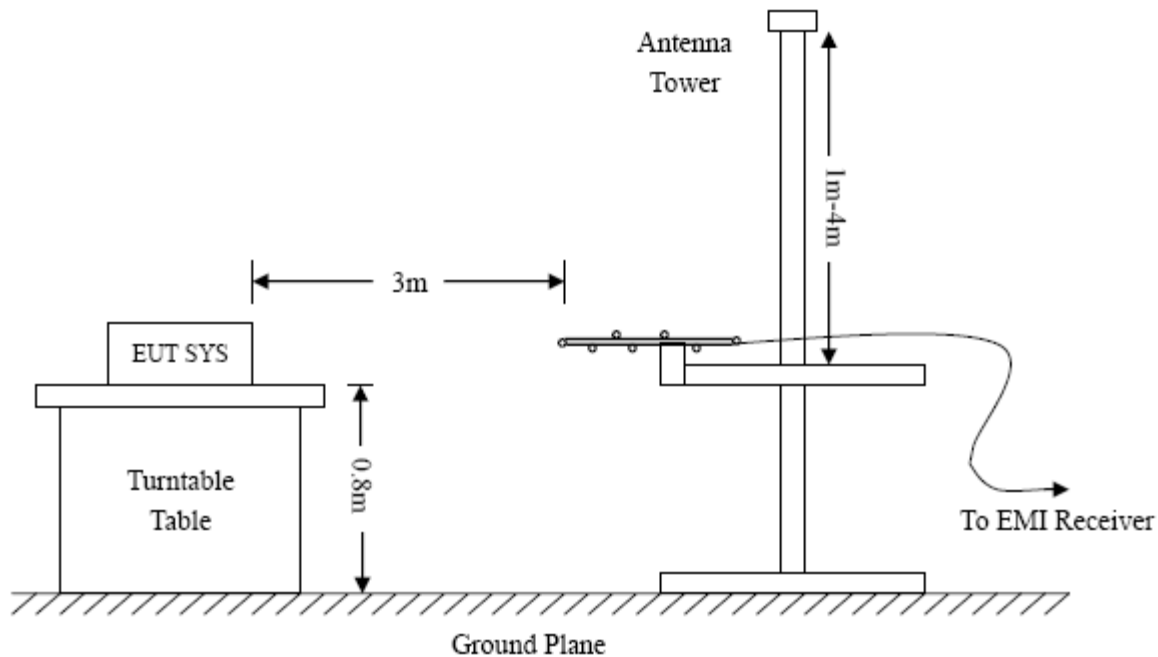

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: HDMI Wi-Fi Smart TV stick 2

Tested Model: ST2-W

Operating Condition: 802.11b Transmitting Low Channel-2412MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

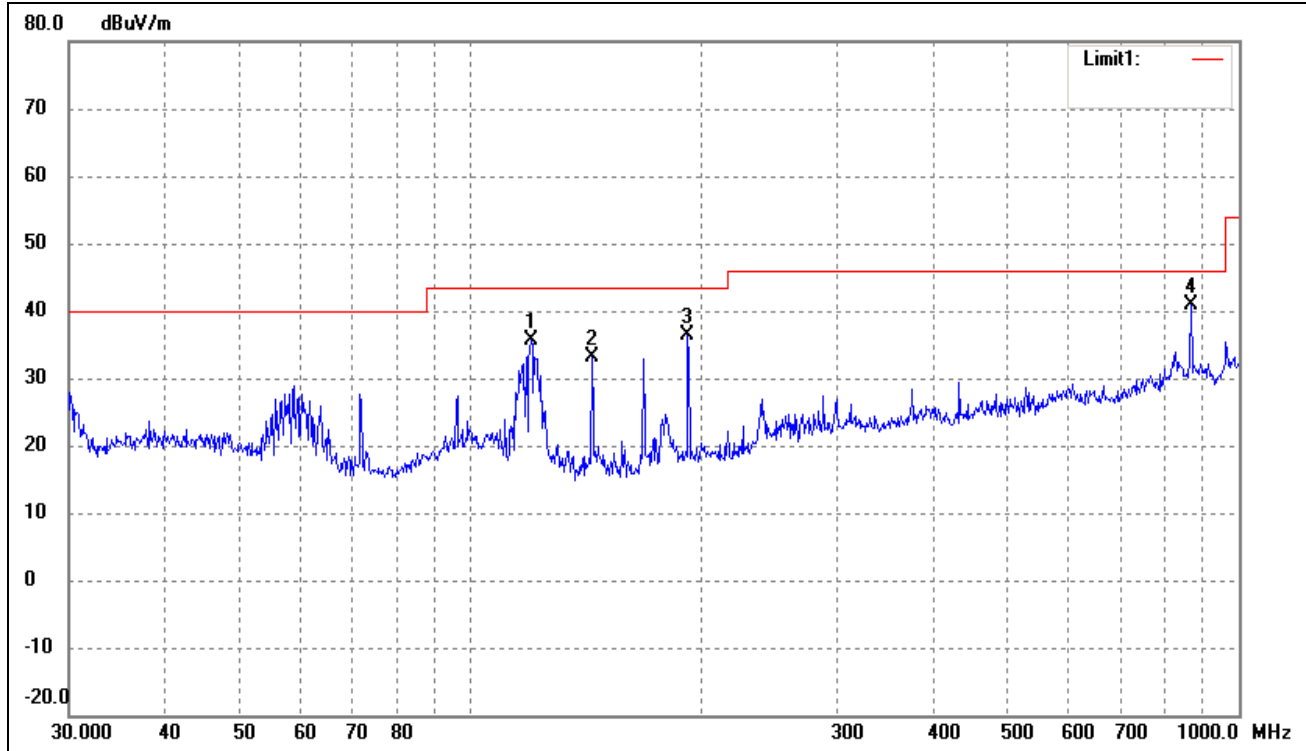

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	119.8556	31.49	4.04	35.53	43.50	-7.97	360	100	peak
2	143.8295	30.56	2.45	33.01	43.50	-10.49	360	100	peak
3	191.7450	33.05	3.29	36.34	43.50	-7.16	360	100	peak
4*	866.0879	24.47	16.45	40.92	46.00	-5.08	360	100	peak

Test Specification: Vertical

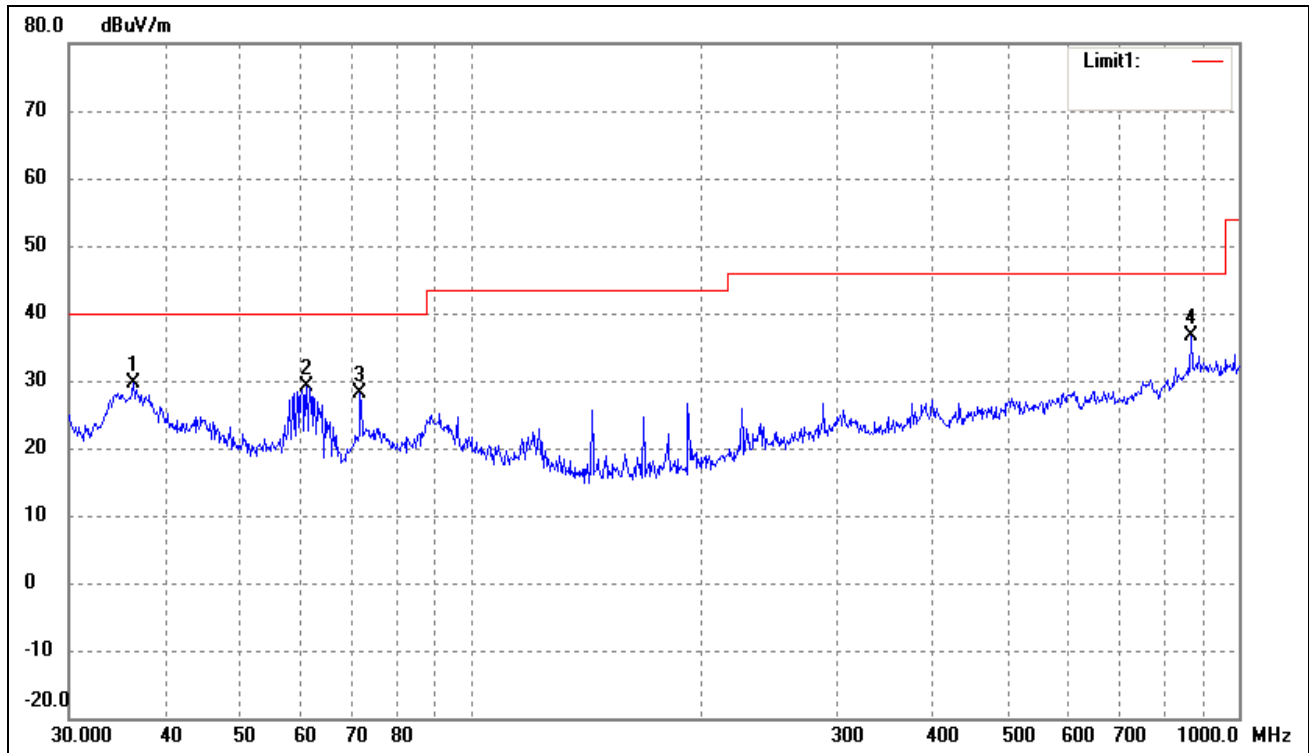


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	36.3814	21.02	8.64	29.66	40.00	-10.34	360	100	peak
2	61.1316	23.99	5.02	29.01	40.00	-10.99	360	100	peak
3	71.8320	26.11	1.97	28.08	40.00	-11.92	360	100	peak
4*	866.0879	20.25	16.45	36.70	46.00	-9.30	360	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2442MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

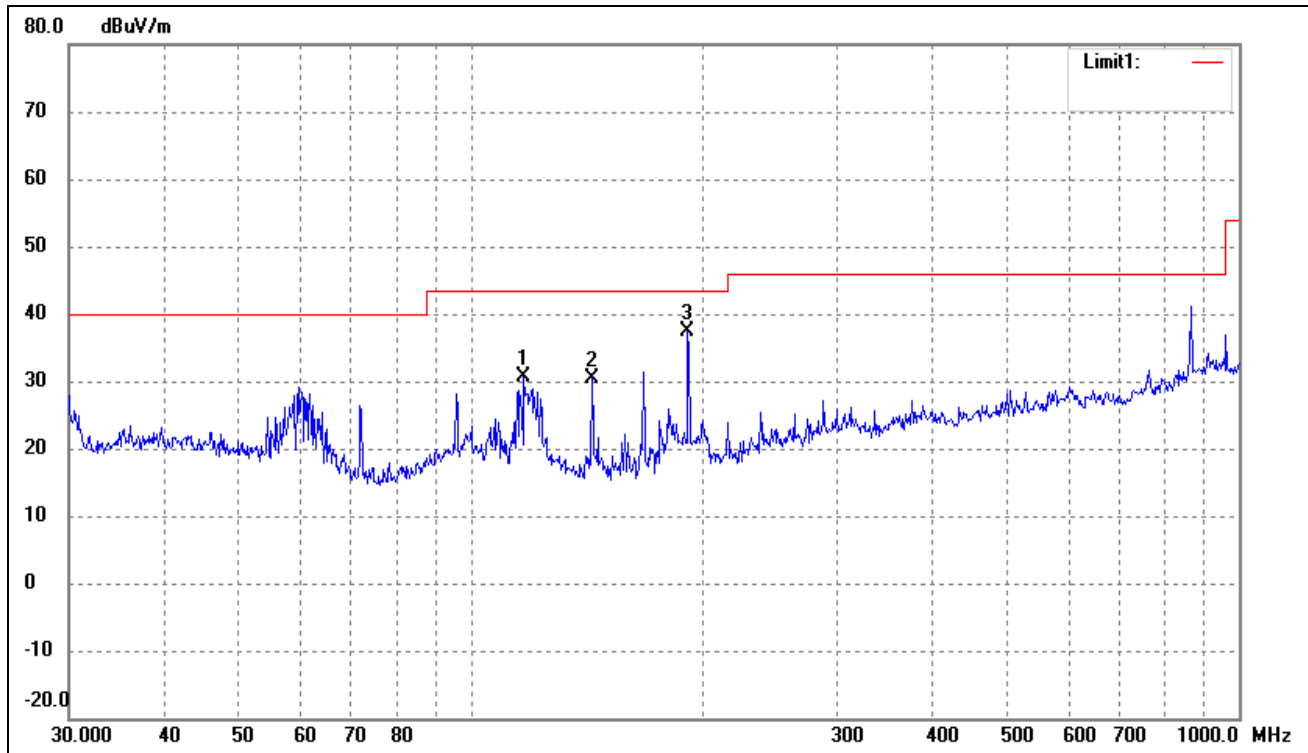

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	117.3603	26.35	4.29	30.64	43.50	-12.86	360	100	peak
2	143.8295	28.05	2.45	30.50	43.50	-13.00	360	100	peak
3*	191.7450	34.08	3.29	37.37	43.50	-6.13	360	100	peak

Test Specification: Vertical

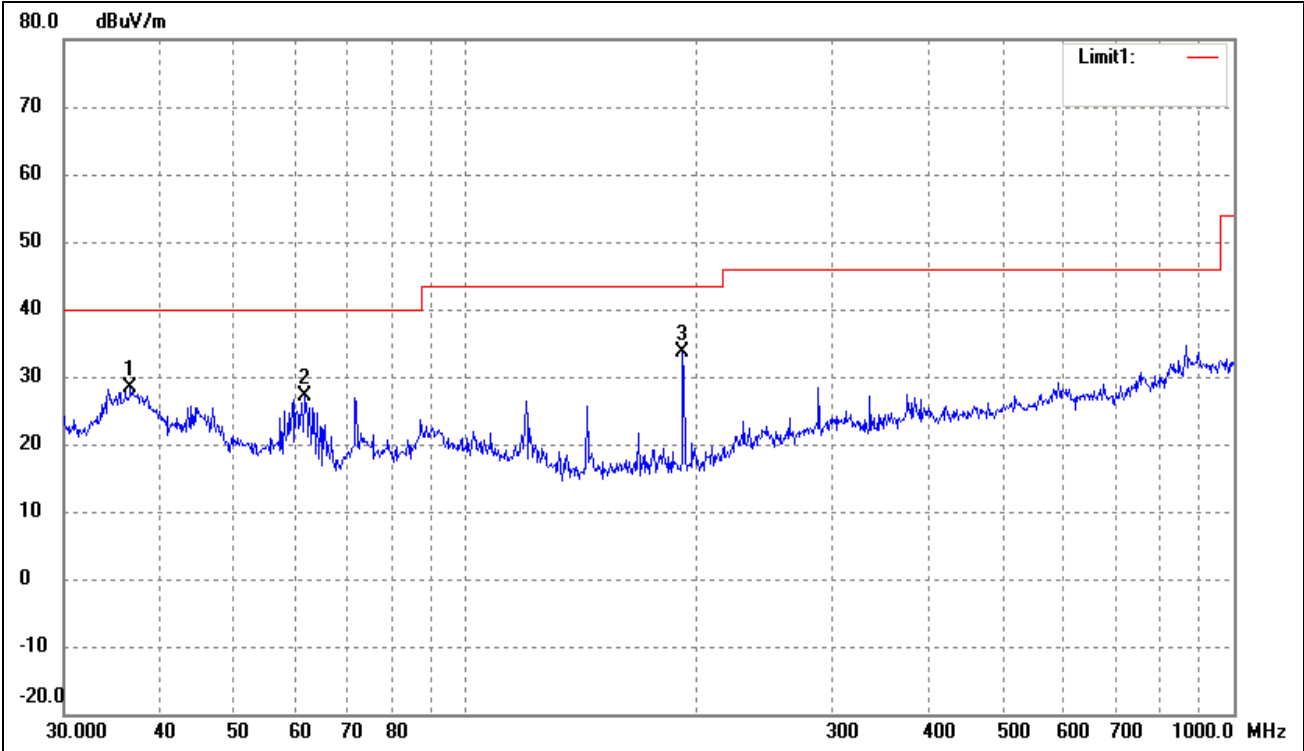


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	36.6375	19.71	8.68	28.39	40.00	-11.61	360	100	peak
2	61.7781	22.41	4.81	27.22	40.00	-12.78	360	100	peak
3*	191.7450	30.40	3.29	33.69	43.50	-9.81	360	100	peak

Operating Condition: 802.11b Transmitting High Channel-2472MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

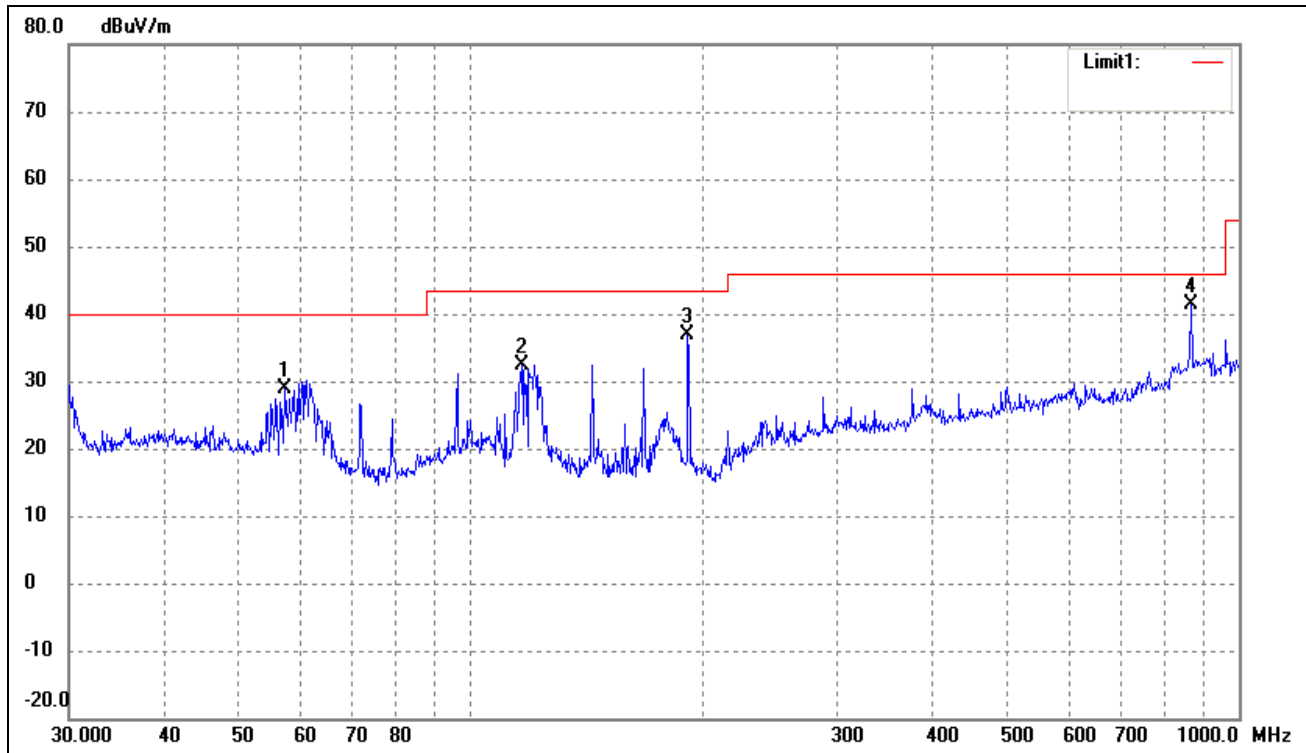

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	57.3923	23.27	5.60	28.87	40.00	-11.13	360	100	peak
2	116.5401	28.04	4.38	32.42	43.50	-11.08	360	100	peak
3	191.7450	33.68	3.29	36.97	43.50	-6.53	360	100	peak
4*	866.0879	24.96	16.45	41.41	46.00	-4.59	360	100	peak

Test Specification: Vertical

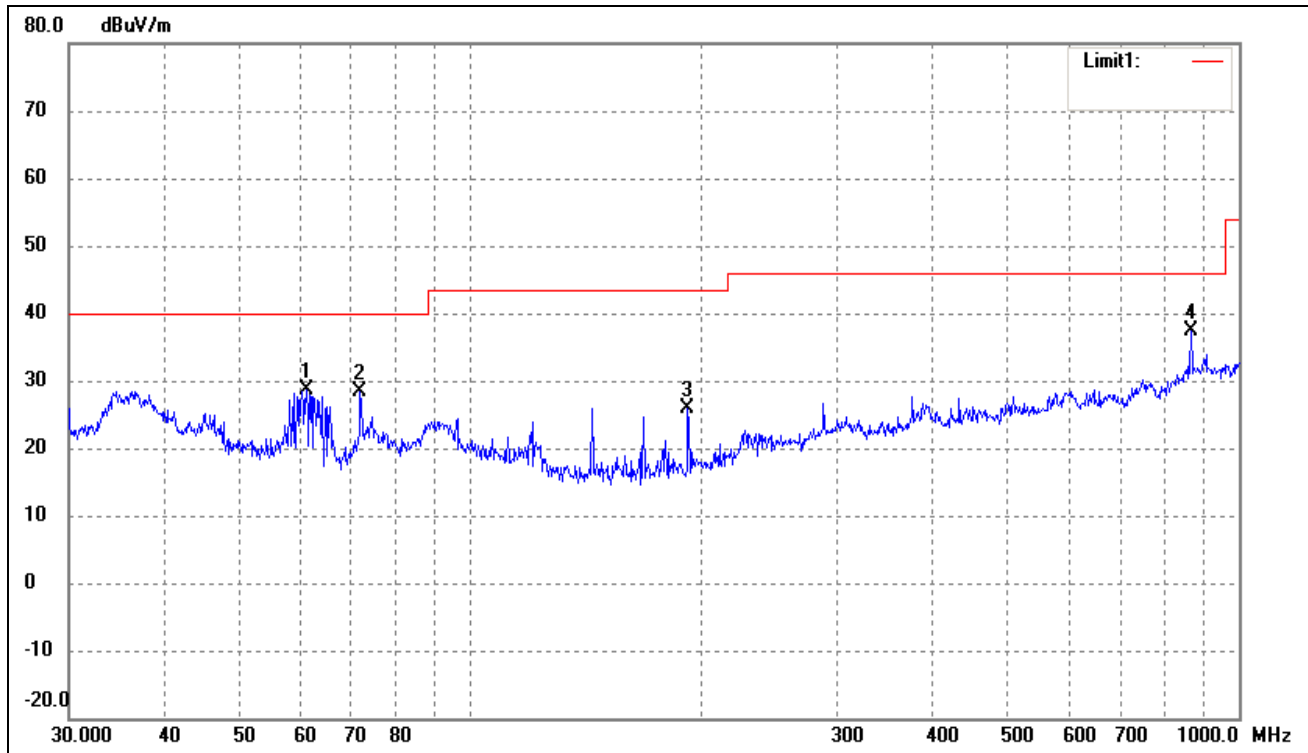


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	61.1316	23.63	5.02	28.65	40.00	-11.35	360	100	peak
2	71.8320	26.51	1.97	28.48	40.00	-11.52	360	100	peak
3	191.7450	22.60	3.29	25.89	43.50	-17.61	360	100	peak
4*	866.0879	20.93	16.45	37.38	46.00	-8.62	360	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: HDMI Wi-Fi Smart TV stick 2
 Tested Model: ST2-W
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz
 Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

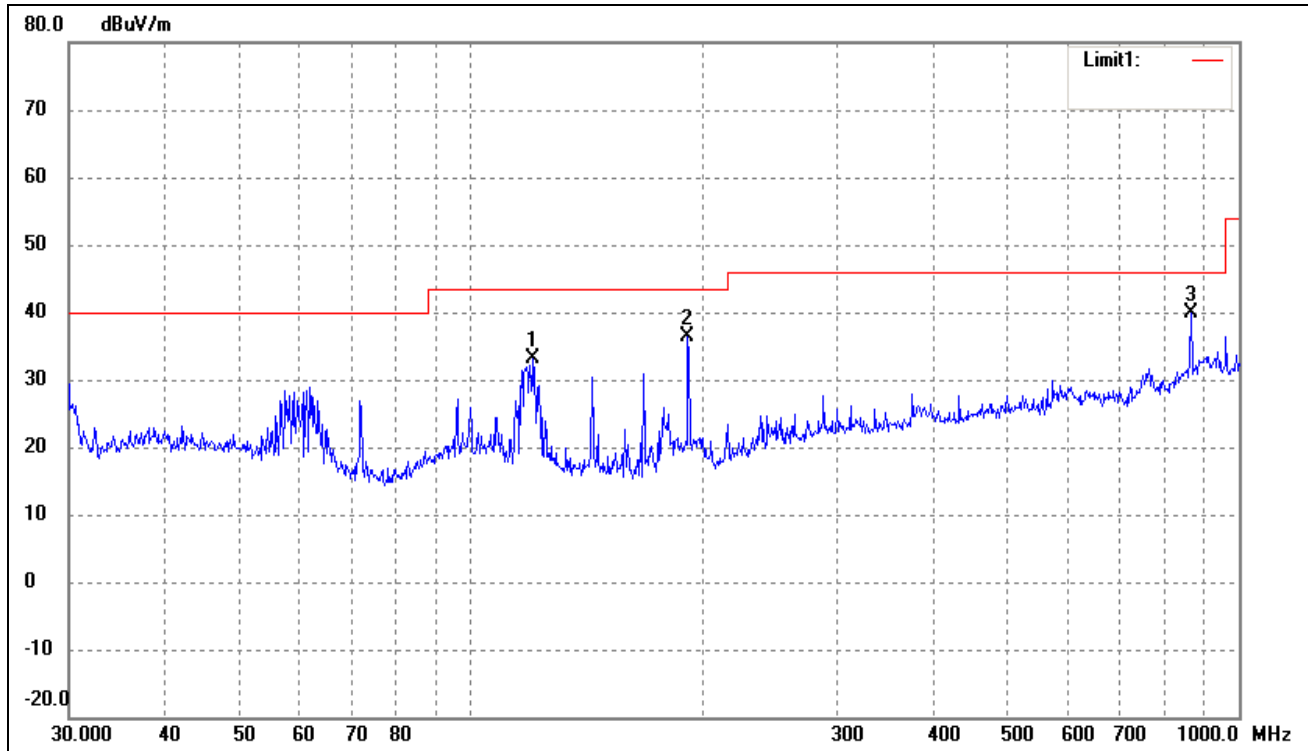

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	120.2766	29.24	4.00	33.24	43.50	-10.26	360	100	peak
2	191.7450	33.07	3.29	36.36	43.50	-7.14	360	100	peak
3*	866.0879	23.35	16.45	39.80	46.00	-6.20	360	100	peak

Test Specification: Vertical

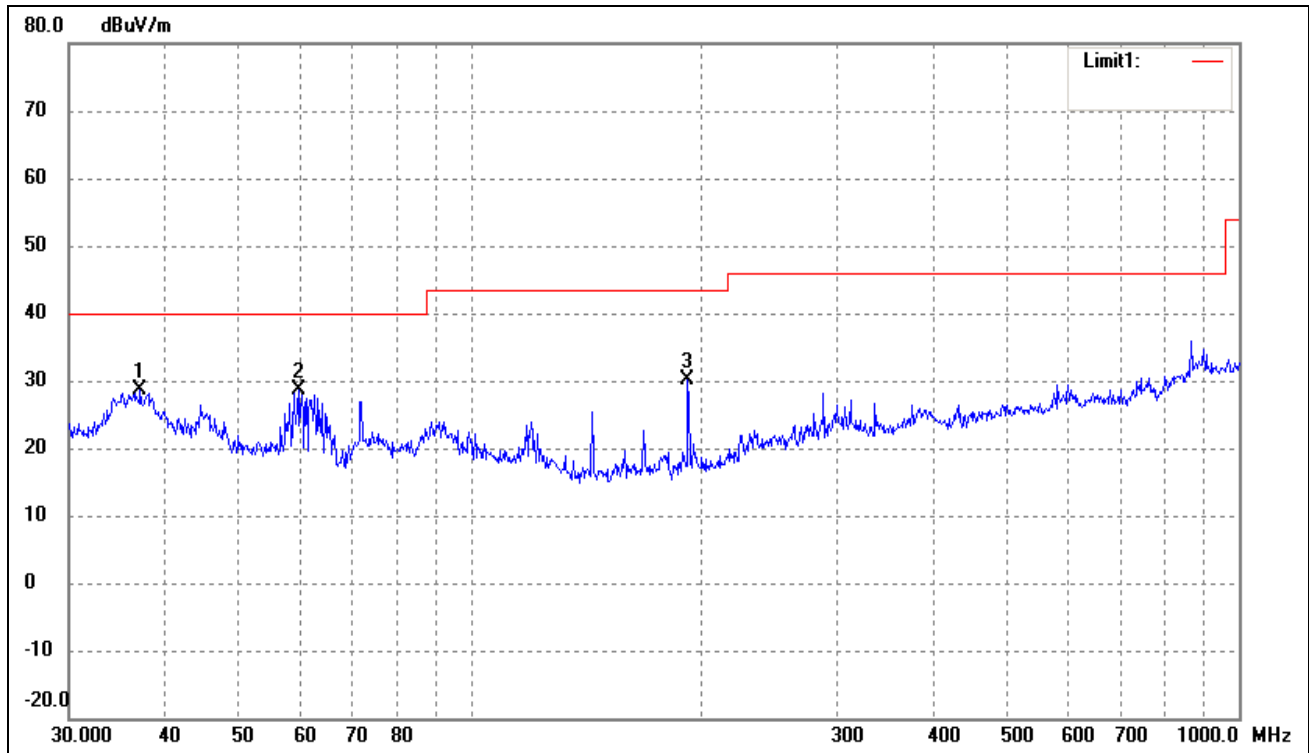


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1*	37.1550	19.96	8.76	28.72	40.00	-11.28	360	100	peak
2	59.6493	23.29	5.41	28.70	40.00	-11.30	360	100	peak
3	191.7450	26.90	3.29	30.19	43.50	-13.31	360	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2442MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

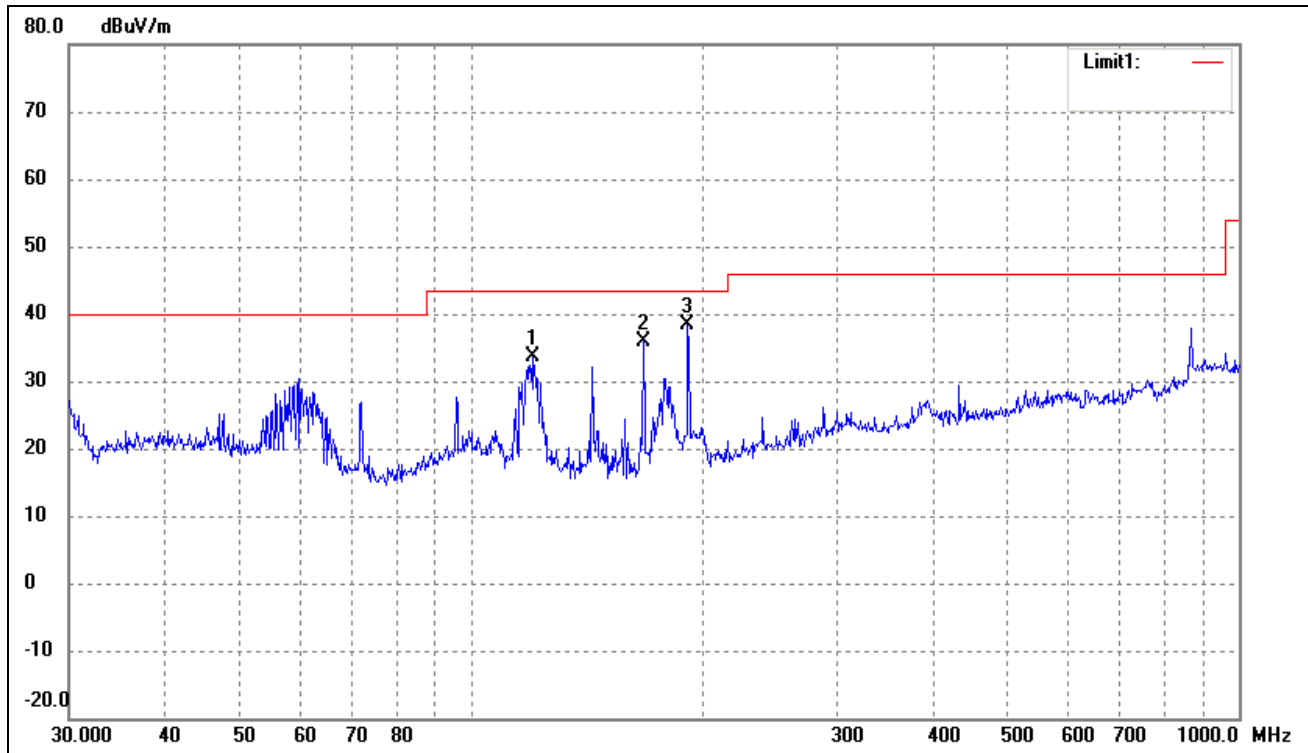

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	120.2766	29.75	4.00	33.75	43.50	-9.75	360	100	peak
2	167.8243	33.33	2.67	36.00	43.50	-7.50	360	100	peak
3*	191.7450	35.12	3.29	38.41	43.50	-5.09	360	100	peak

Test Specification: Vertical

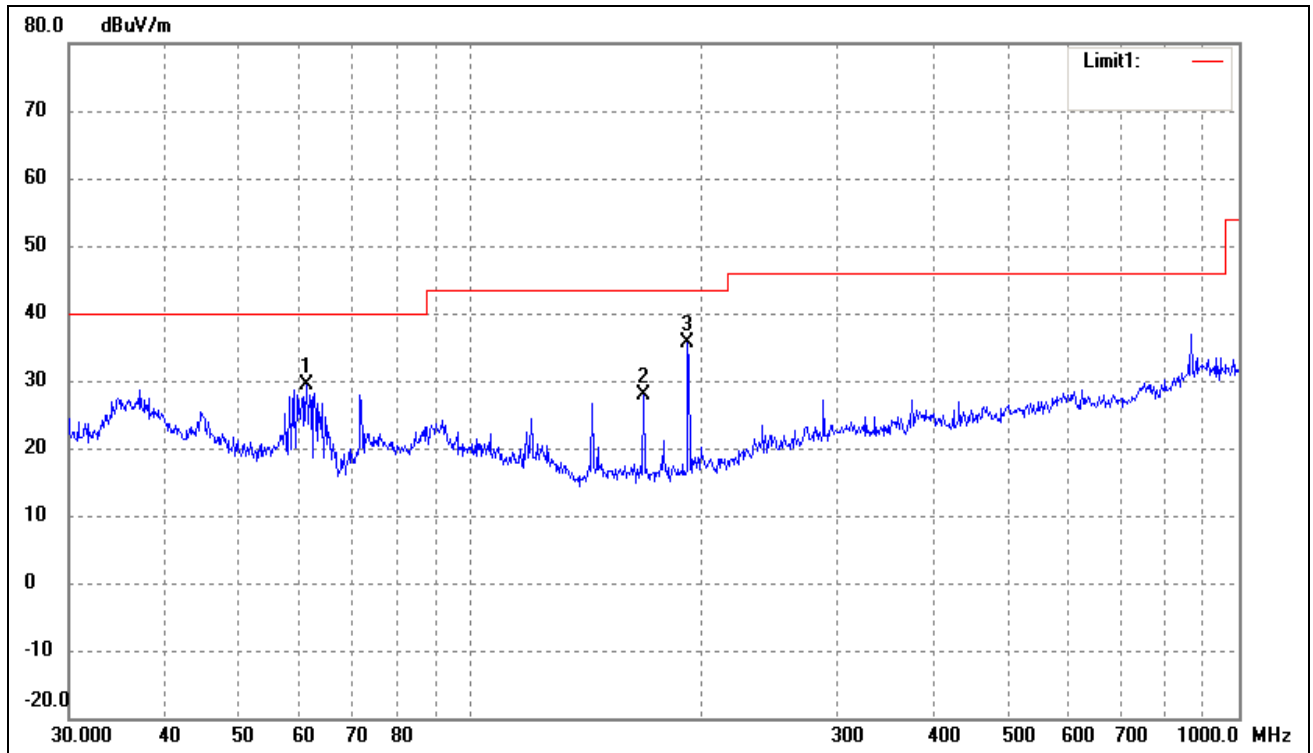


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	61.1316	24.38	5.02	29.40	40.00	-10.60	360	100	peak
2	167.8243	25.31	2.67	27.98	43.50	-15.52	360	100	peak
3*	191.7450	32.30	3.29	35.59	43.50	-7.91	360	100	peak

Operating Condition: 802.11g Transmitting High Channel-2472MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

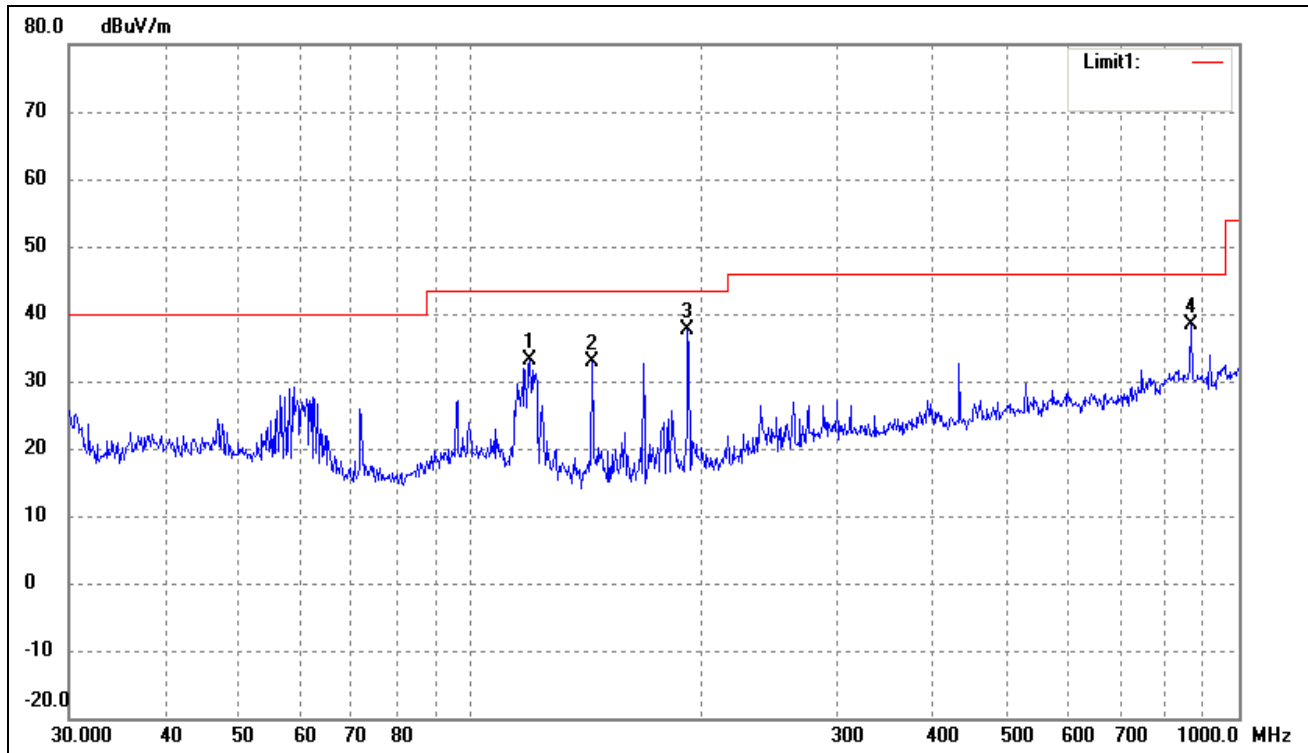

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	119.4361	28.95	4.08	33.03	43.50	-10.47	360	100	peak
2	143.8295	30.33	2.45	32.78	43.50	-10.72	360	100	peak
3*	191.7450	34.28	3.29	37.57	43.50	-5.93	360	100	peak
4	866.0879	21.86	16.45	38.31	46.00	-7.69	360	100	peak

Test Specification: Vertical

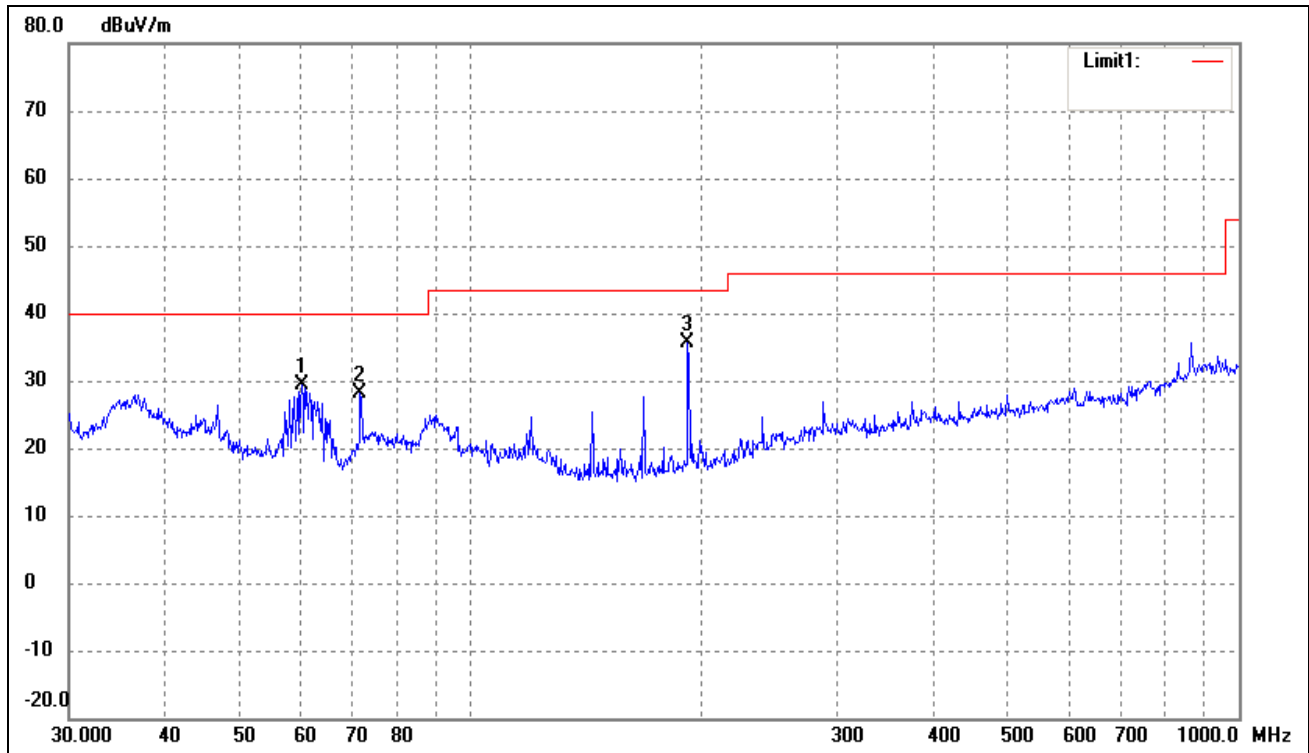


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	60.2801	24.16	5.29	29.45	40.00	-10.55	360	100	peak
2	71.8320	26.10	1.97	28.07	40.00	-11.93	360	100	peak
3*	191.7450	32.25	3.29	35.54	43.50	-7.96	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

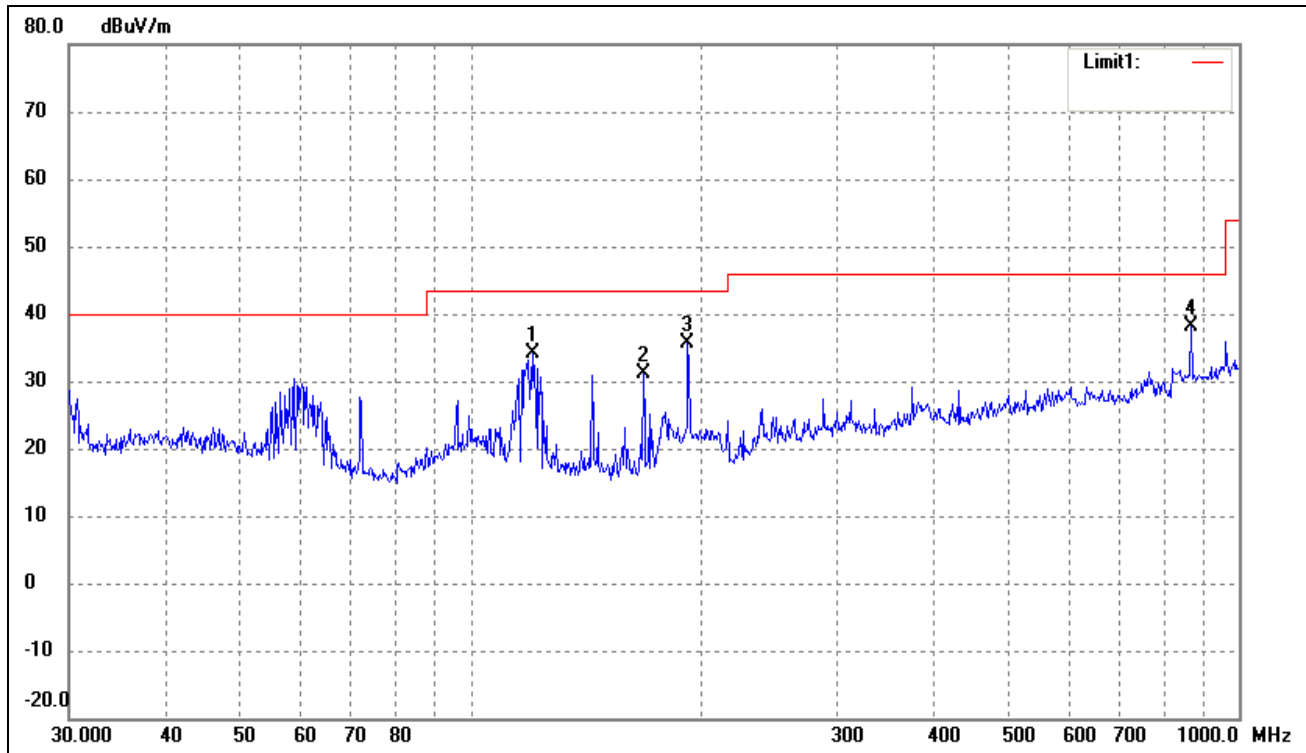

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	120.2766	30.19	4.00	34.19	43.50	-9.31	360	100	peak
2	167.8243	28.34	2.67	31.01	43.50	-12.49	360	100	peak
3	191.7450	32.36	3.29	35.65	43.50	-7.85	360	100	peak
4*	866.0879	21.74	16.45	38.19	46.00	-7.81	360	100	peak

Test Specification: Vertical

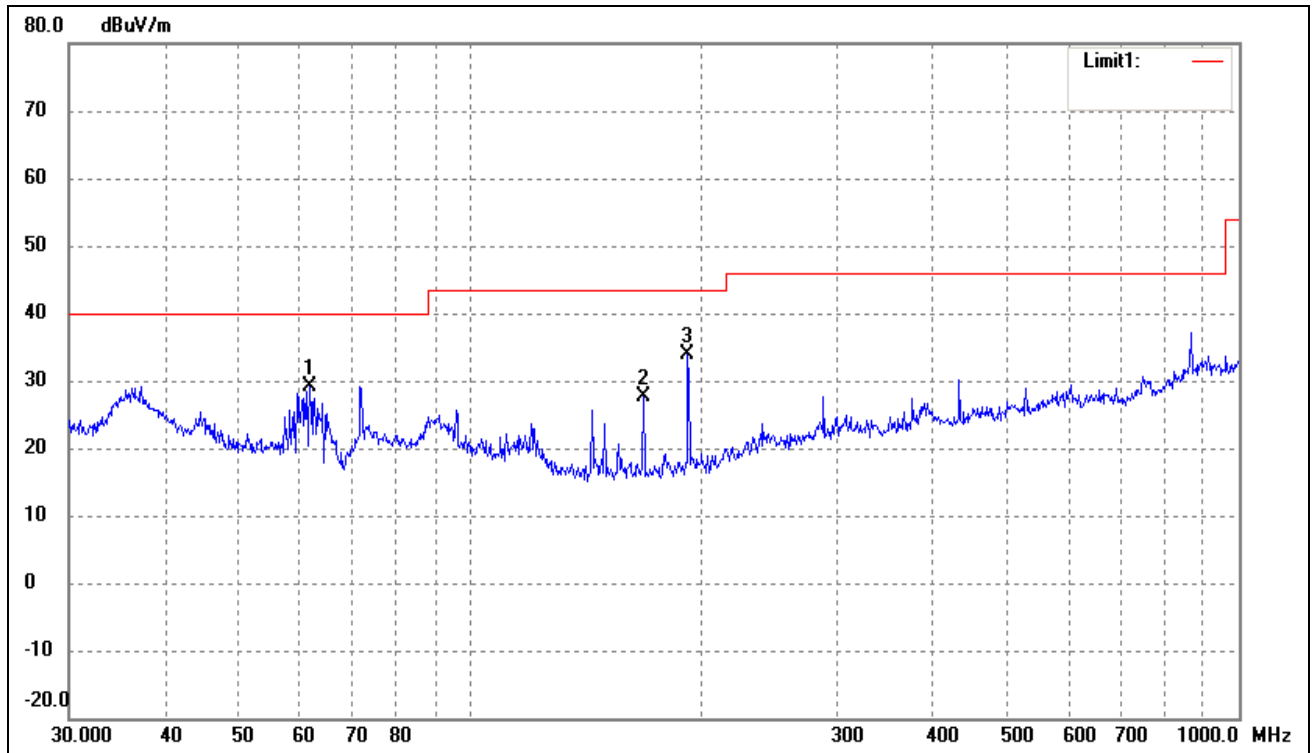


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	61.7781	24.21	4.81	29.02	40.00	-10.98	360	100	peak
2	167.8243	24.88	2.67	27.55	43.50	-15.95	360	100	peak
3*	191.7450	30.63	3.29	33.92	43.50	-9.58	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2442MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

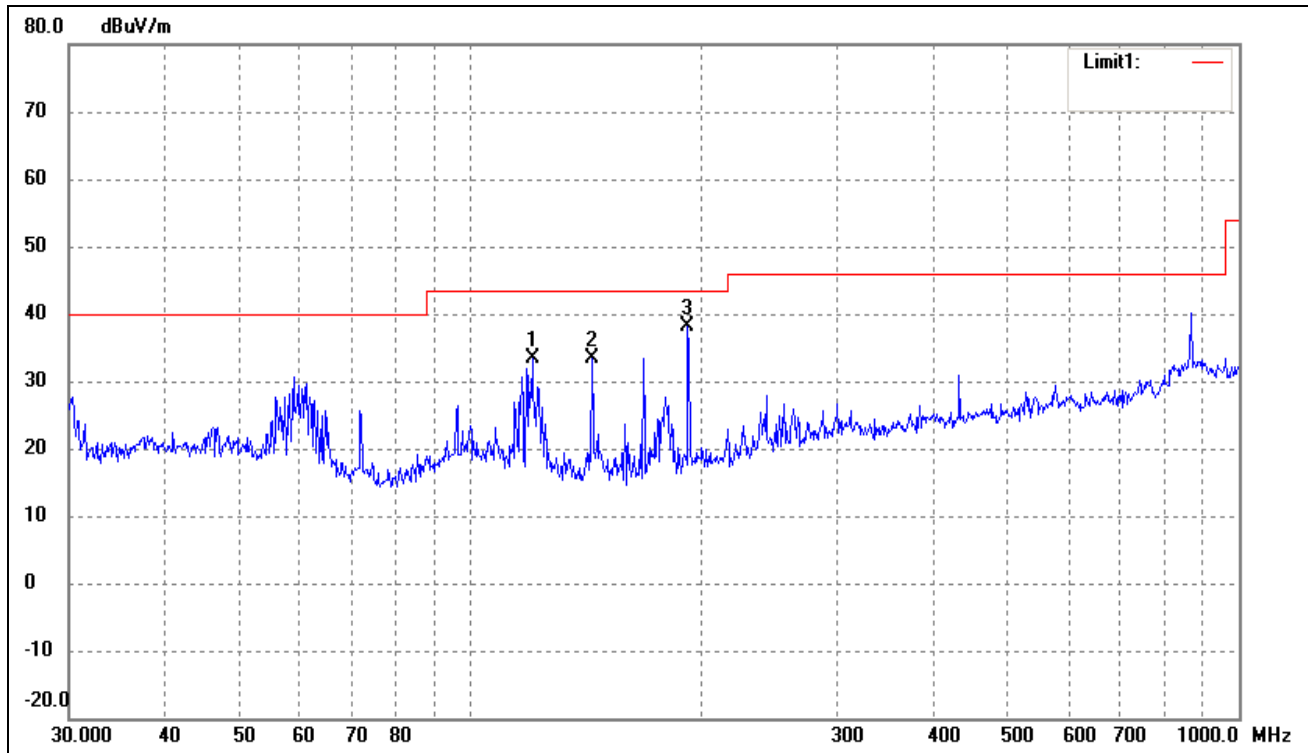

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	120.2766	29.32	4.00	33.32	43.50	-10.18	360	100	peak
2	143.8295	31.04	2.45	33.49	43.50	-10.01	360	100	peak
3*	191.7450	34.95	3.29	38.24	43.50	-5.26	360	100	peak

Test Specification: Vertical

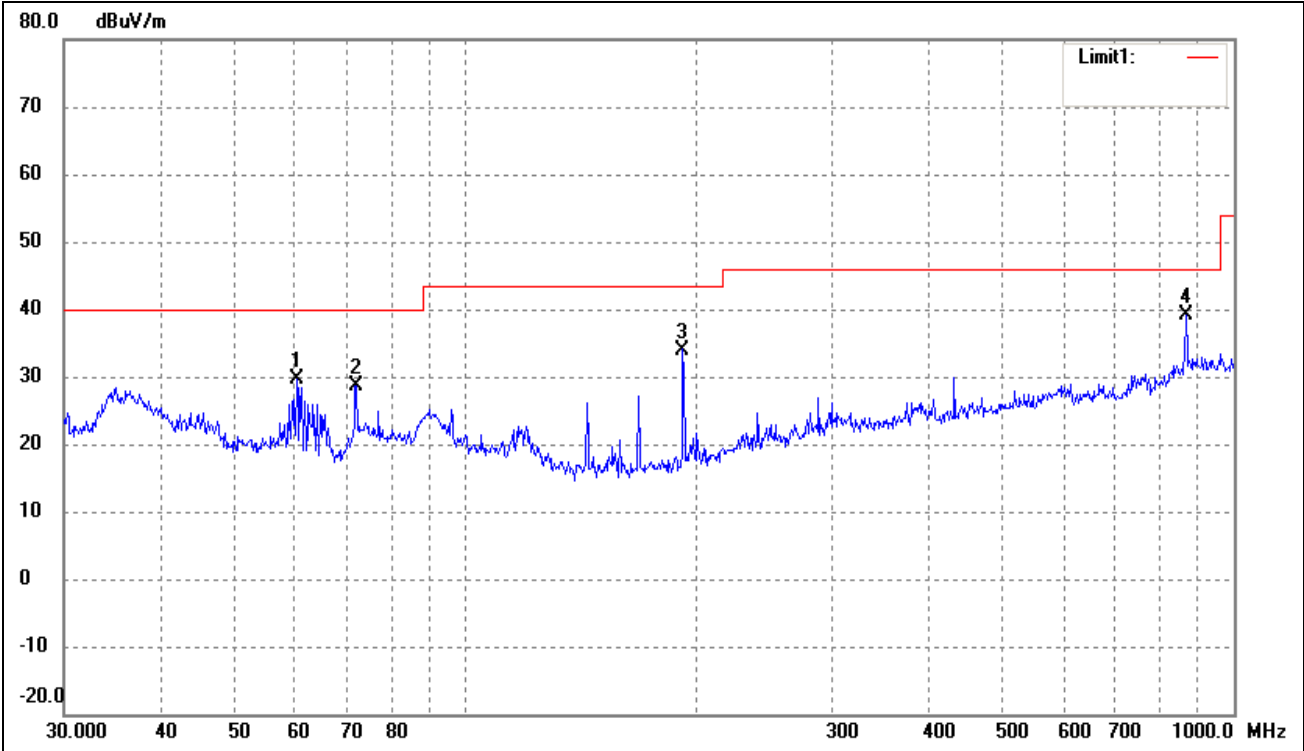


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	60.2801	24.36	5.29	29.65	40.00	-10.35	360	100	peak
2	72.0843	26.72	1.94	28.66	40.00	-11.34	360	100	peak
3	191.7450	30.71	3.29	34.00	43.50	-9.50	360	100	peak
4*	866.0879	22.65	16.45	39.10	46.00	-6.90	360	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2472MHz


Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Horizontal

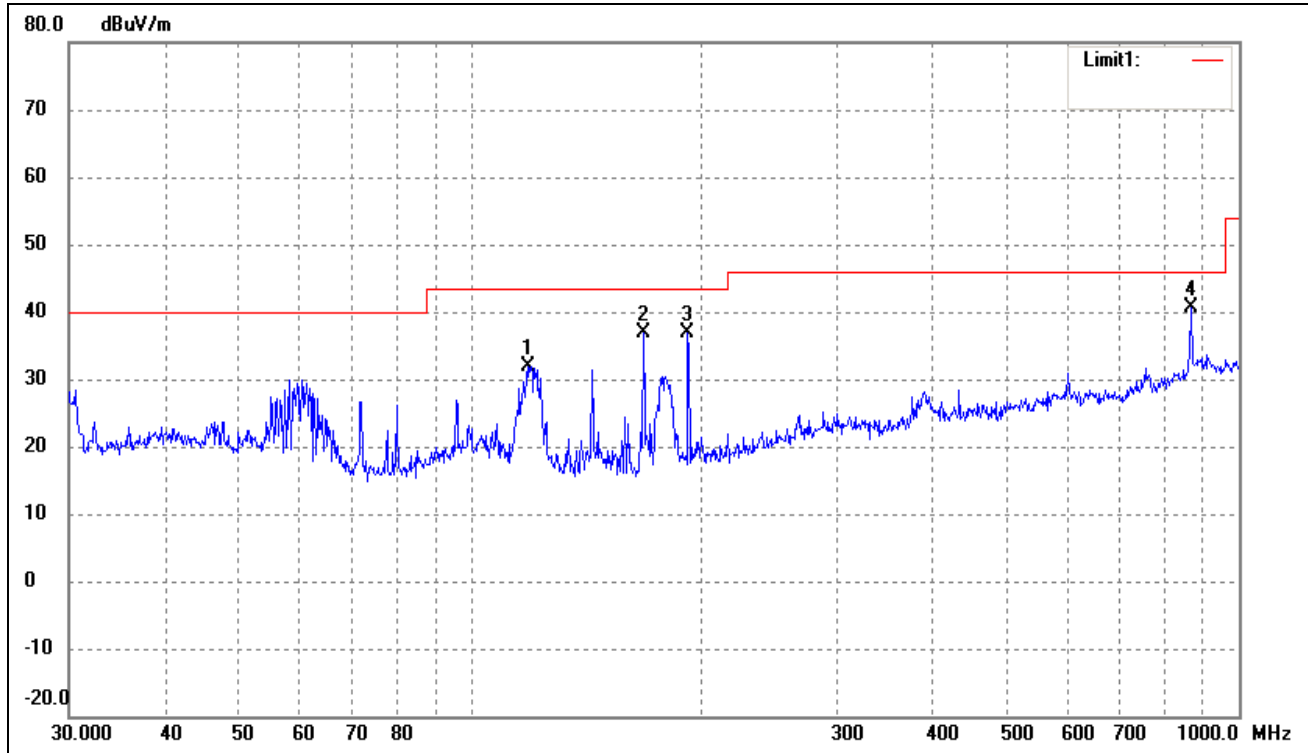

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	118.6014	27.74	4.17	31.91	43.50	-11.59	360	100	peak
2	167.8243	34.32	2.67	36.99	43.50	-6.51	360	100	peak
3	191.7450	33.66	3.29	36.95	43.50	-6.55	360	100	peak
4*	866.0879	24.20	16.45	40.65	46.00	-5.35	360	100	peak

Test Specification: Vertical

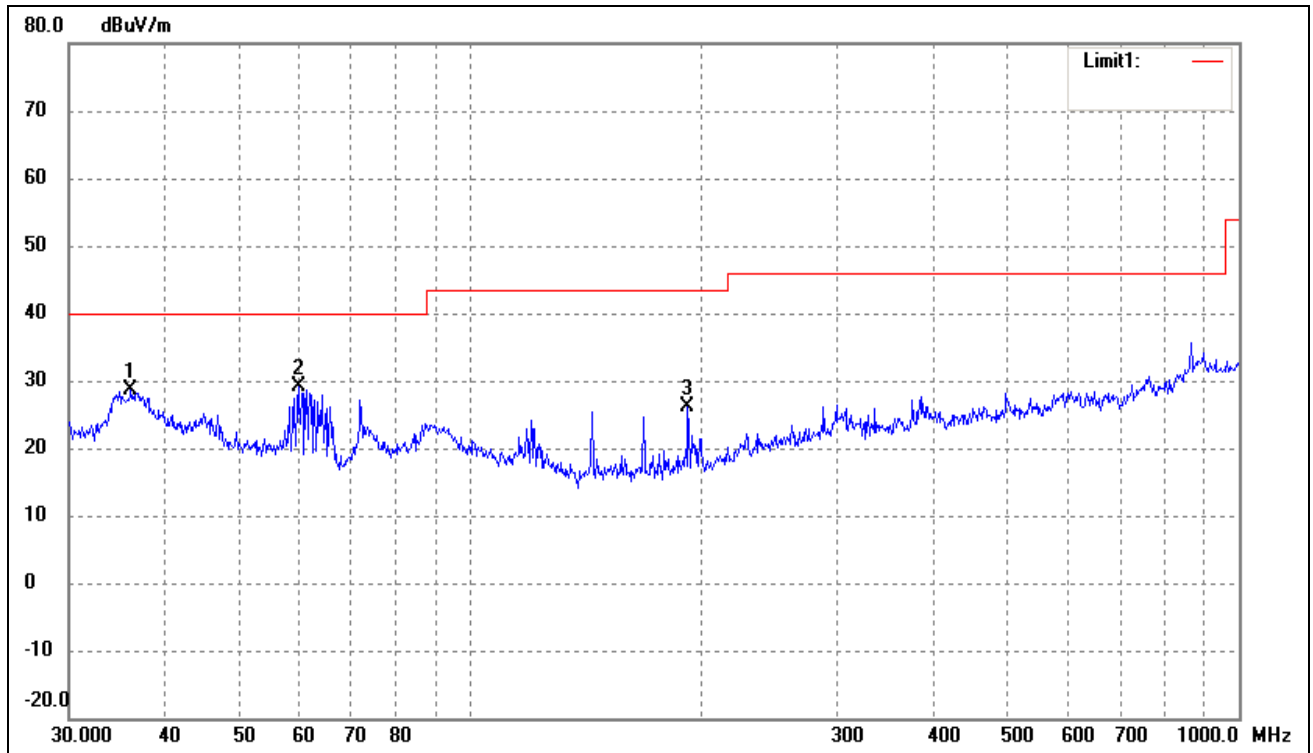

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Detector
1	36.1272	20.09	8.58	28.67	40.00	-11.33	360	100	peak
2*	59.6493	23.65	5.41	29.06	40.00	-10.94	360	100	peak
3	191.7450	22.95	3.29	26.24	43.50	-17.26	360	100	peak

*Spurious Emissions Above 1GHz**Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	50.63	0.57	51.20	74.00	-21.80	H	PK
4824.000	35.80	0.57	36.37	54.00	-17.63	H	AV
7236.000	41.69	3.69	45.38	74.00	-28.62	H	PK
7236.000	30.76	3.69	34.45	54.00	-19.55	H	AV
4824.000	52.45	0.57	53.02	74.00	-20.98	V	PK
4824.000	37.30	0.57	37.87	54.00	-16.13	V	AV
7236.000	41.86	3.69	45.55	74.00	-28.45	V	PK
7236.000	30.75	3.69	34.44	54.00	-19.56	V	AV
Middle Channel-2442MHz							
4884.000	51.18	0.64	51.82	74.00	-22.18	H	PK
4884.000	41.02	0.64	41.66	54.00	-12.34	H	AV
7326.000	42.88	3.75	46.63	74.00	-27.37	H	PK
7326.000	31.48	3.75	35.23	54.00	-18.77	H	AV
4884.000	48.16	0.64	48.80	74.00	-25.20	V	PK
4884.000	36.70	0.64	37.34	54.00	-16.66	V	AV
7326.000	42.50	3.75	46.25	74.00	-27.75	V	PK
7326.000	31.37	3.75	35.12	54.00	-18.88	V	AV
High Channel-2472MHz							
4944.000	52.19	0.72	52.91	74.00	-21.09	H	PK
4944.000	38.64	0.72	39.36	54.00	-14.64	H	AV
7416.000	44.28	3.81	48.09	74.00	-25.91	H	PK
7416.000	31.50	3.81	35.31	54.00	-18.69	H	AV
4944.000	48.76	0.72	49.48	74.00	-24.52	V	PK
4944.000	36.13	0.72	36.85	54.00	-17.15	V	AV
7416.000	43.13	3.81	46.94	74.00	-27.06	V	PK
7416.000	31.33	3.81	35.14	54.00	-18.86	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	44.05	0.57	44.62	74.00	-29.38	H	PK
4824.000	32.53	0.57	33.10	54.00	-20.90	H	AV
7236.000	42.07	3.69	45.76	74.00	-28.24	H	PK
7236.000	30.98	3.69	34.67	54.00	-19.33	H	AV
4824.000	49.67	0.57	50.24	74.00	-23.76	V	PK
4824.000	36.05	0.57	36.62	54.00	-17.38	V	AV
7236.000	42.16	3.69	45.85	74.00	-28.15	V	PK
7236.000	31.08	3.69	34.77	54.00	-19.23	V	AV
Middle Channel-2442MHz							
4884.000	45.23	0.64	45.87	74.00	-28.13	H	PK
4884.000	34.02	0.64	34.66	54.00	-19.34	H	AV
7326.000	42.52	3.75	46.27	74.00	-27.73	H	PK
7326.000	31.55	3.75	35.30	54.00	-18.70	H	AV
4884.000	57.02	0.64	57.66	74.00	-16.34	V	PK
4884.000	42.33	0.64	42.97	54.00	-11.03	V	AV
7326.000	45.59	3.75	49.34	74.00	-24.66	V	PK
7326.000	31.31	3.75	35.06	54.00	-18.94	V	AV
High Channel-2472MHz							
4944.000	45.12	0.72	45.84	74.00	-28.16	H	PK
4944.000	33.29	0.72	34.01	54.00	-19.99	H	AV
7416.000	42.83	3.81	46.64	74.00	-27.36	H	PK
7416.000	31.53	3.81	35.34	54.00	-18.66	H	AV
4944.000	52.45	0.72	53.17	74.00	-20.83	V	PK
4944.000	40.15	0.72	40.87	54.00	-13.13	V	AV
7416.000	43.28	3.81	47.09	74.00	-26.91	V	PK
7416.000	31.47	3.81	35.28	54.00	-18.72	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.60	-3.86	51.74	74.00	-22.26	H	PK
4824.000	40.54	-3.86	36.68	54.00	-17.32	H	AV
7236.000	47.26	1.10	48.36	74.00	-25.64	H	PK
7236.000	34.44	1.10	35.54	54.00	-18.46	H	AV
4824.000	56.71	-3.86	52.85	74.00	-21.15	V	PK
4824.000	43.18	-3.86	39.32	54.00	-14.68	V	AV
7236.000	49.21	1.10	50.31	74.00	-23.69	V	PK
7236.000	35.77	1.10	36.87	54.00	-17.13	V	AV
Middle Channel-2442MHz							
4884.000	54.16	-3.74	50.42	74.00	-23.58	H	PK
4884.000	42.48	-3.74	38.74	54.00	-15.26	H	AV
7326.000	48.74	1.47	50.21	74.00	-23.79	H	PK
7326.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4884.000	54.92	-3.74	51.18	74.00	-22.82	V	PK
4884.000	42.62	-3.74	38.88	54.00	-15.12	V	AV
7326.000	48.49	1.47	49.96	74.00	-24.04	V	PK
7326.000	35.20	1.47	36.67	54.00	-17.33	V	AV
High Channel-2472MHz							
4944.000	53.90	-3.59	50.31	74.00	-23.69	H	PK
4944.000	43.23	-3.59	39.64	54.00	-14.36	H	AV
7416.000	48.31	1.79	50.10	74.00	-23.90	H	PK
7416.000	36.10	1.79	37.89	54.00	-16.11	H	AV
4944.000	55.70	-3.59	52.11	74.00	-21.89	V	PK
4944.000	41.48	-3.59	37.89	54.00	-16.11	V	AV
7416.000	48.55	1.79	50.34	74.00	-23.66	V	PK
7416.000	35.36	1.79	37.15	54.00	-16.85	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19

9.3 Test Procedure

According to the KDB 558074, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.4 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

Please refer to the test plots as below.

802.11b-Lowest Bandedge


Horizontal (Worst case)

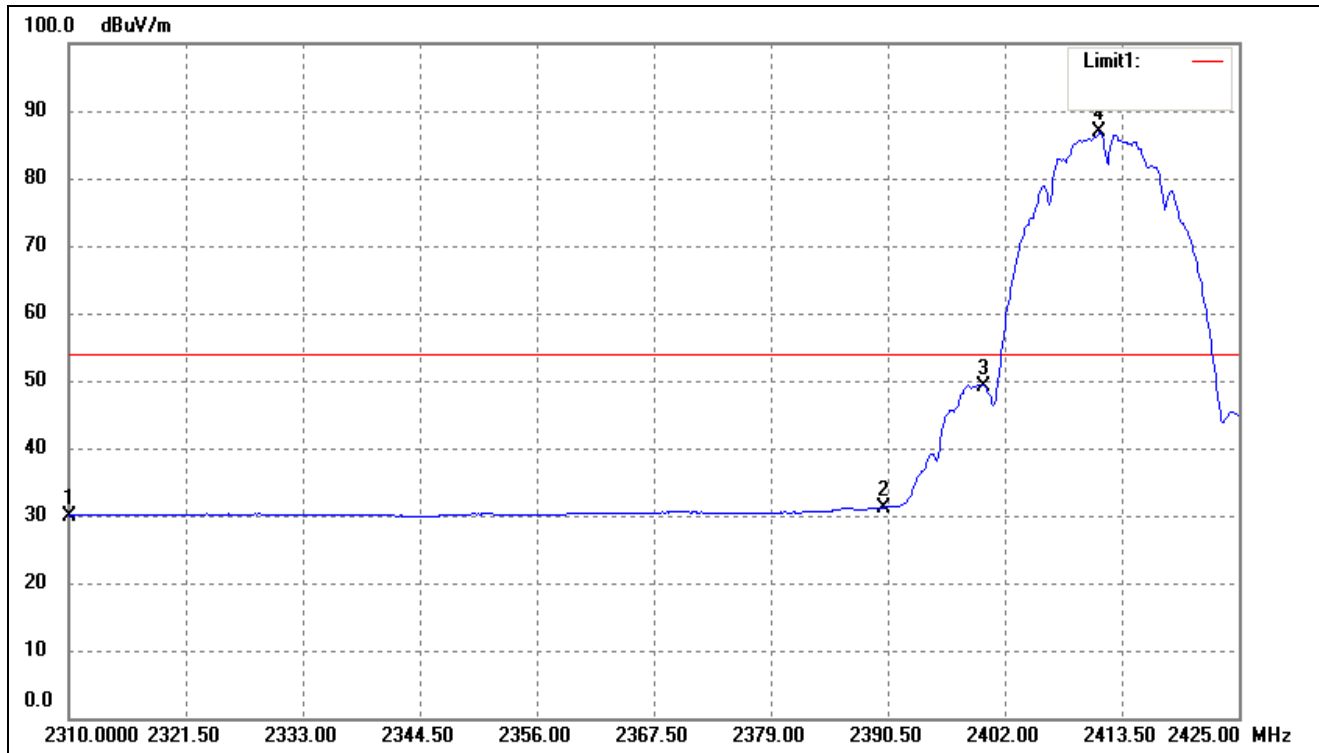

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	33.69	-3.71	29.98	54.00	-24.02	Average
	2310.000	48.49	-3.71	44.78	74.00	-29.22	Peak
2	2390.000	34.78	-3.54	31.24	54.00	-22.76	Average
	2390.000	50.57	-3.54	47.03	74.00	-26.97	Peak
3	2400.000	52.76	-3.51	49.25	54.00	-4.75	Average
	2400.000	58.53	-3.51	55.02	74.00	-18.98	Peak
4	2411.315	90.29	-3.48	86.81	--	--	Average

802.11b-Highest Bandedge


Horizontal (Worst case)

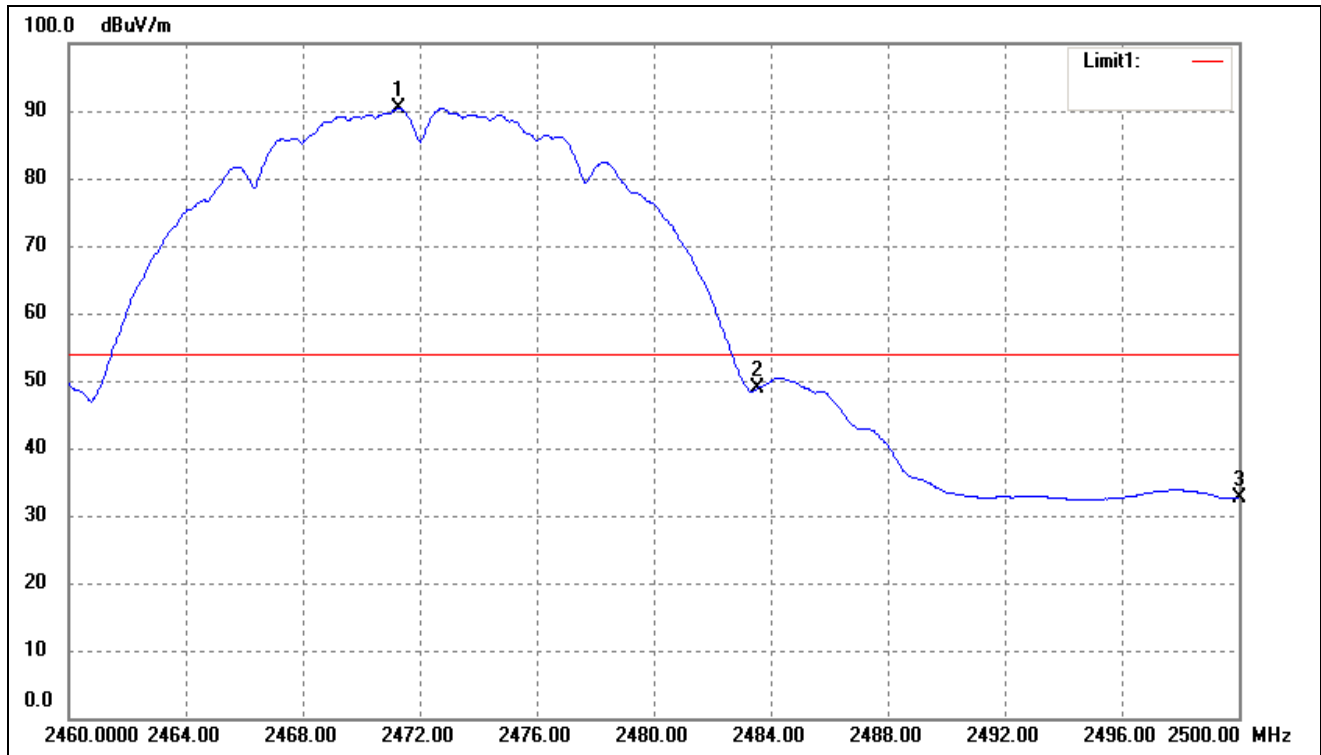

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2471.280	93.69	-3.35	90.34	--	--	Average
2	2483.500	52.15	-3.33	48.82	54.00	-5.18	Average
	2483.500	59.49	-3.33	56.16	74.00	-17.84	Peak
3	2500.000	35.86	-3.28	32.58	54.00	-21.42	Average
	2500.000	49.21	-3.28	45.93	74.00	-28.07	Peak

802.11g-Lowest Bandedge


Horizontal (Worst case)

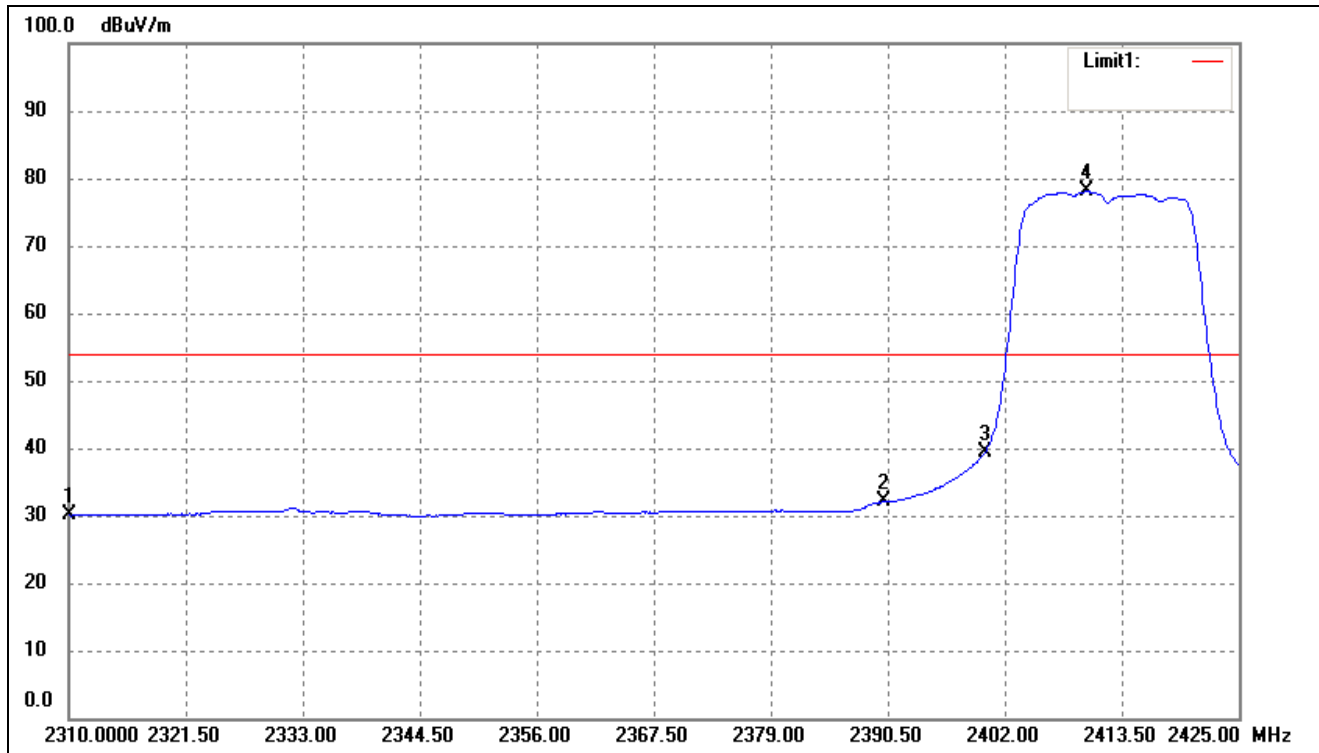

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	33.73	-3.71	30.02	54.00	-23.98	Average
	2310.000	47.03	-3.71	43.32	74.00	-30.68	Peak
2	2390.000	35.69	-3.54	32.15	54.00	-21.85	Average
	2390.000	51.83	-3.54	48.29	74.00	-25.71	Peak
3	2400.000	42.95	-3.51	39.44	54.00	-14.56	Average
	2400.000	67.83	-3.51	64.32	74.00	-9.68	Peak
4	2410.050	81.53	-3.48	78.05	--	--	Average

802.11g-Highest Bandedge


Horizontal (Worst case)

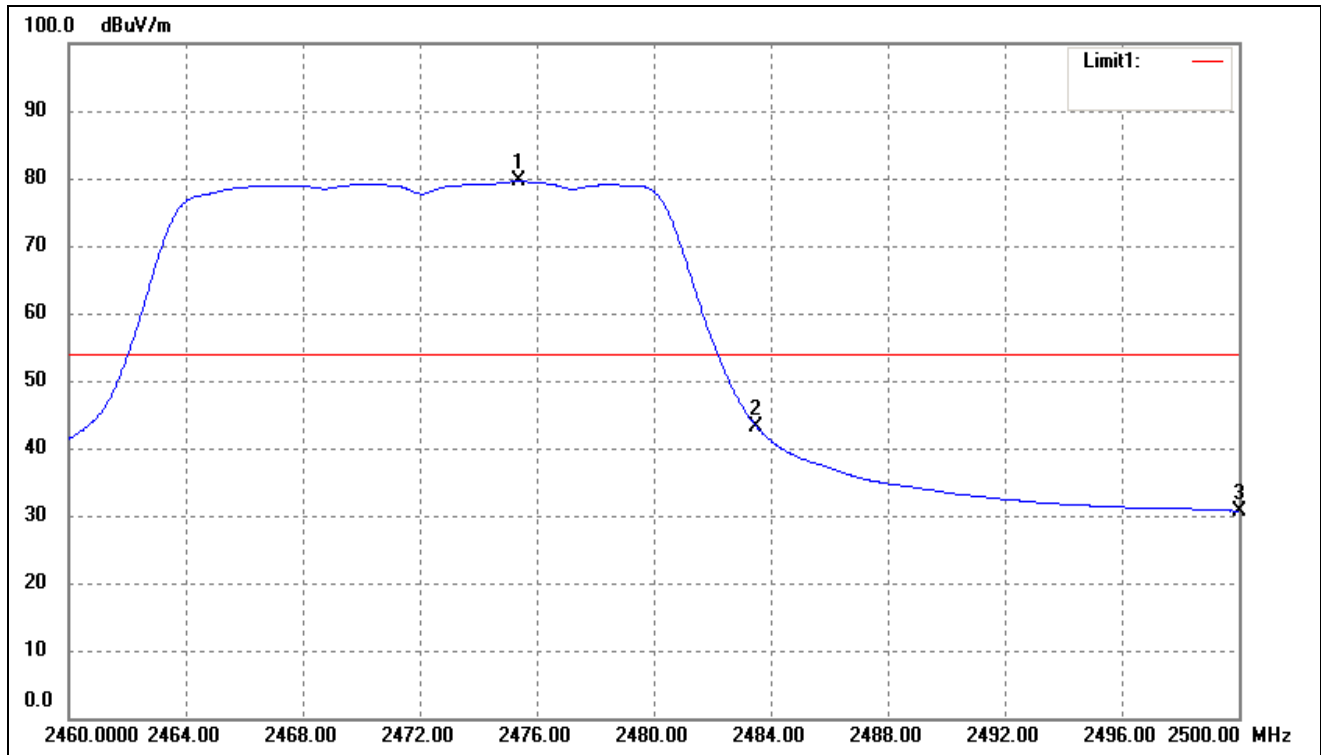

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2475.400	82.90	-3.34	79.56	--	--	Average
2	2483.500	46.52	-3.33	43.19	54.00	-10.81	Average
	2483.500	69.91	-3.33	66.58	74.00	-7.42	Peak
3	2500.000	33.99	-3.28	30.71	54.00	-23.29	Average
	2500.000	47.93	-3.28	44.65	74.00	-29.35	Peak

802.11n-HT20-Lowest Bandedge


Horizontal (Worst case)

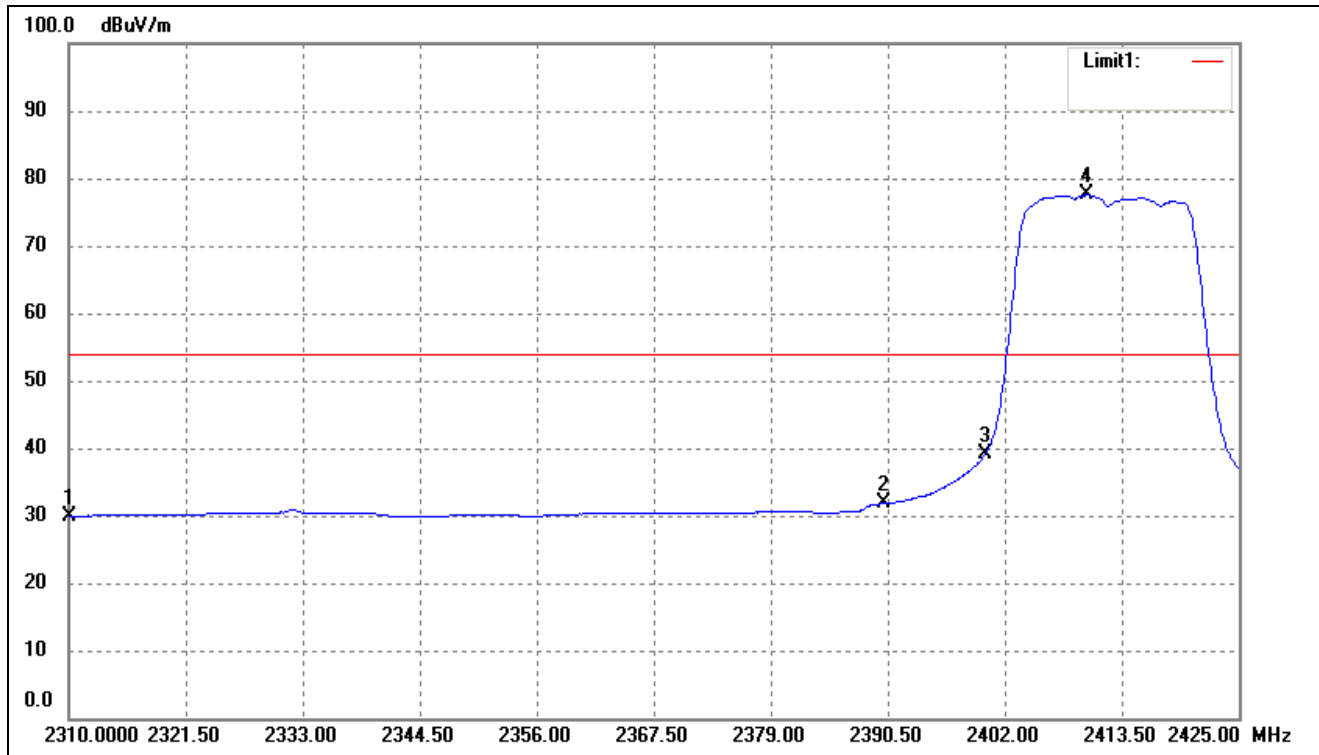

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2310.000	33.64	-3.71	29.93	54.00	-24.07	Average
	2310.000	47.85	-3.71	44.14	74.00	-29.86	Peak
2	2390.000	35.37	-3.54	31.83	54.00	-22.17	Average
	2390.000	50.84	-3.54	47.30	74.00	-26.70	Peak
3	2400.000	42.60	-3.51	39.09	54.00	-14.91	Average
	2400.000	67.36	-3.51	63.85	74.00	-10.15	Peak
4	2410.050	81.00	-3.48	77.52	--	--	Average

802.11n-HT20-Highest Bandedge

Horizontal (Worst case)

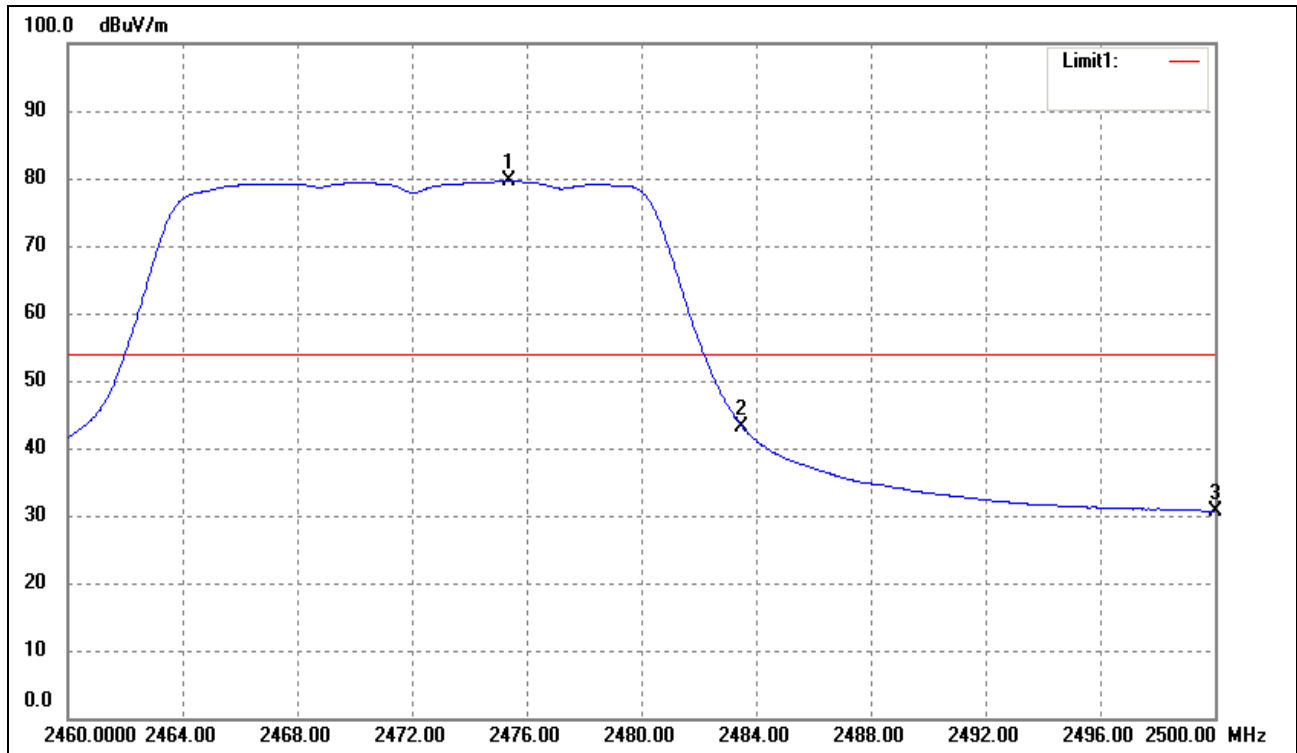

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2475.400	83.00	-3.34	79.66	--	--	Average
2	2483.500	46.50	-3.33	43.17	54.00	-10.83	Average
	2483.500	70.05	-3.33	66.72	74.00	-7.28	Peak
3	2500.000	33.92	-3.28	30.64	54.00	-23.36	Average
	2500.000	47.58	-3.28	44.30	74.00	-29.70	Peak

10. Conducted Emissions

10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06


10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

10.4 Basic Test Setup Block Diagram

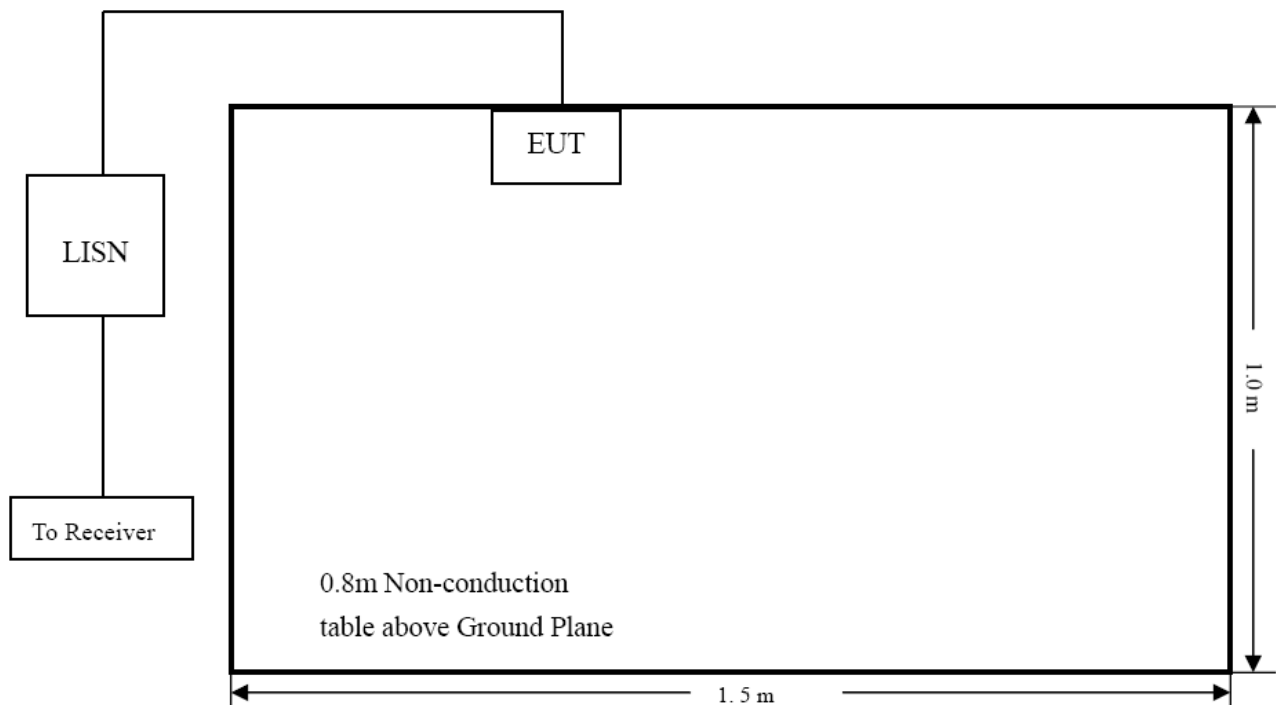

10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.7 Summary of Test Results/Plots

According to the data in section 10.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-16.01 dB at 0.510 MHz in the Line mode, Average detector, 0.15-30MHz

10.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: HDMI Wi-Fi Smart TV stick 2
 Tested Model: ST2-W
 Operating Condition: Transmitting(Wi-Fi)
 Comment: AC 120V/60Hz; adapter DC 5V

Test Specification: Neutral

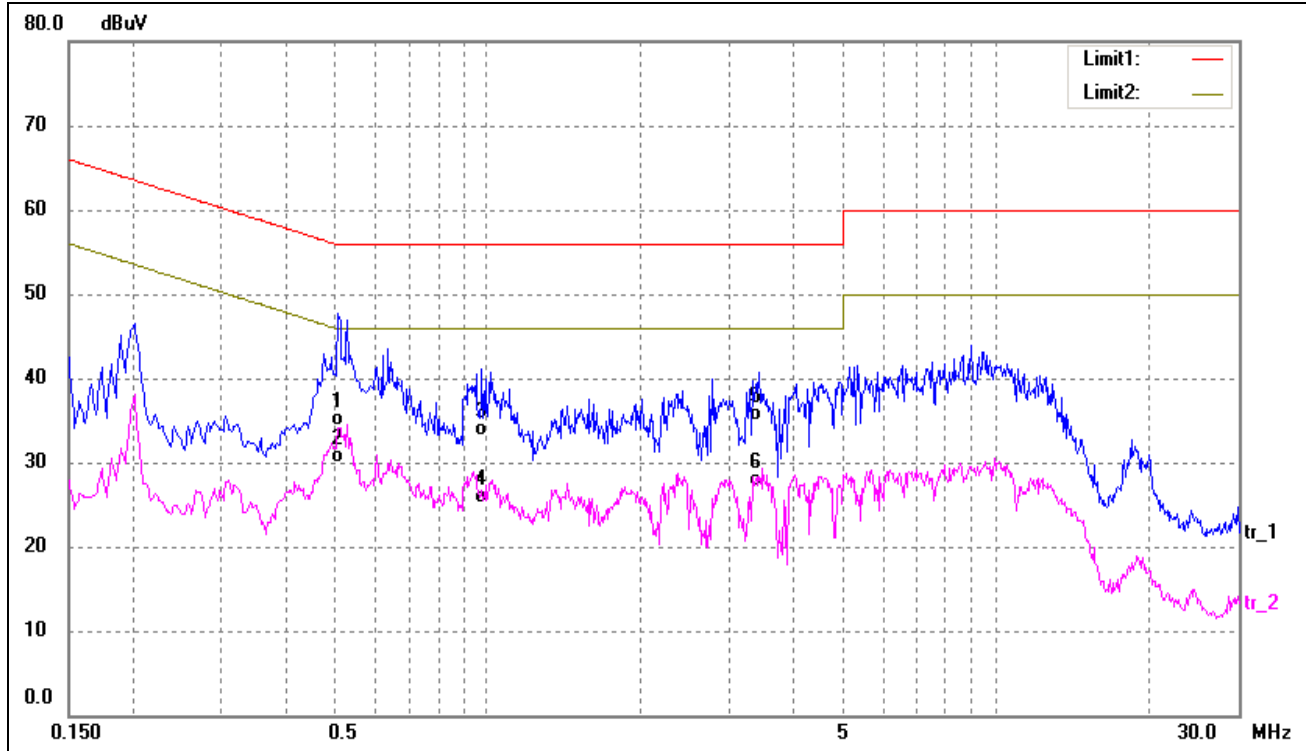

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB/m)	(dBuV)	(dBuV)	(dB)	
1	0.5100	24.88	9.51	34.39	56.00	-21.61	QP
2*	0.5100	20.48	9.51	29.99	46.00	-16.01	AVG
3	0.9780	23.07	9.98	33.05	56.00	-22.95	QP
4	0.9780	15.17	9.98	25.15	46.00	-20.85	AVG
5	3.4340	25.00	10.00	35.00	56.00	-21.00	QP
6	3.4340	17.09	10.00	27.09	46.00	-18.91	AVG

Test Specification: Line

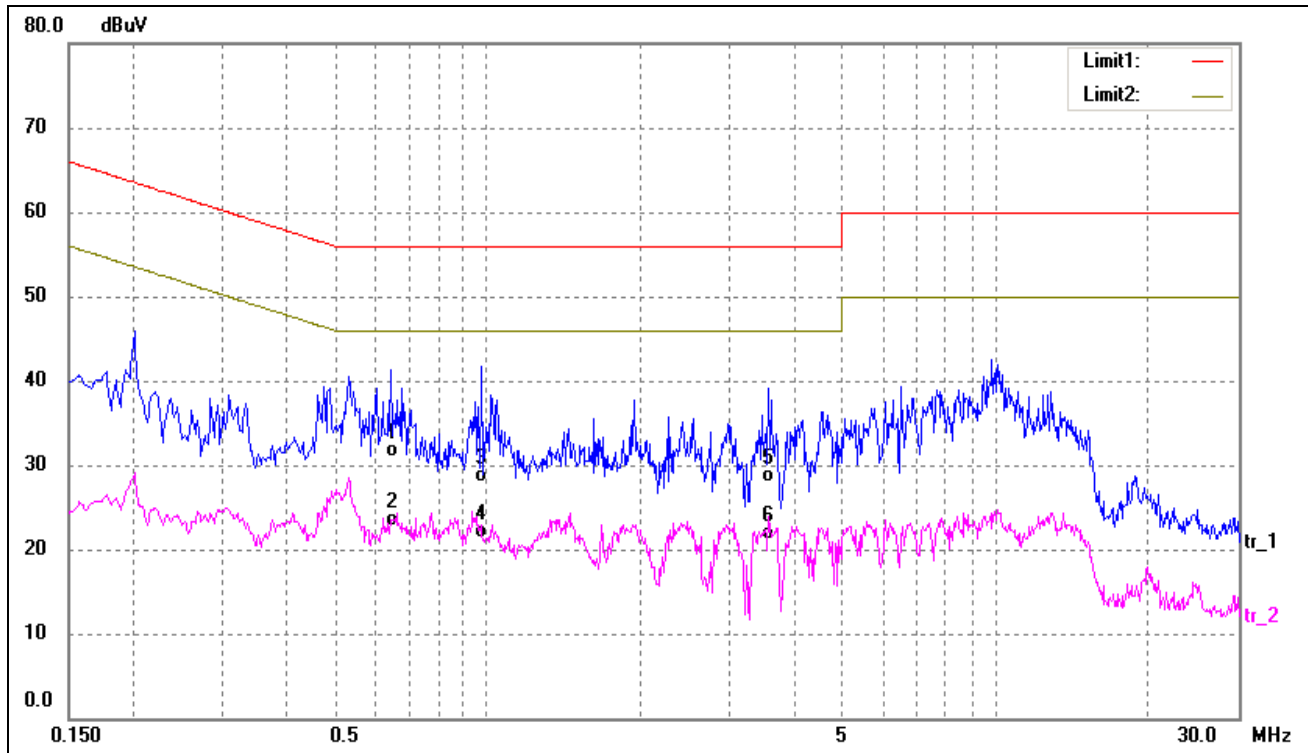

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6460	21.25	9.65	30.90	56.00	-25.10	QP
2*	0.6460	13.08	9.65	22.73	46.00	-23.27	AVG
3	0.9780	18.01	9.98	27.99	56.00	-28.01	QP
4	0.9780	11.35	9.98	21.33	46.00	-24.67	AVG
5	3.5780	17.95	10.00	27.95	56.00	-28.05	QP
6	3.5780	11.08	10.00	21.08	46.00	-24.92	AVG

***** END OF REPORT *****