


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

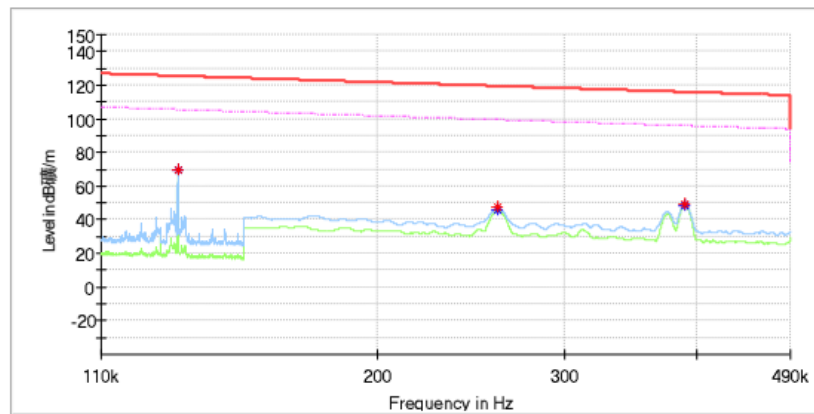

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.129972	---	69.43	105.32	35.89	100.0	X	223.0	20.0
0.129972	69.72	---	125.32	55.60	100.0	X	223.0	20.0
0.259950	---	45.53	99.30	53.78	100.0	X	249.0	20.0
0.260000	47.06	---	119.30	72.24	100.0	X	249.0	20.0
0.389950	49.08	---	115.78	66.70	100.0	X	217.0	20.0
0.390000	---	48.46	95.78	47.32	100.0	X	217.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

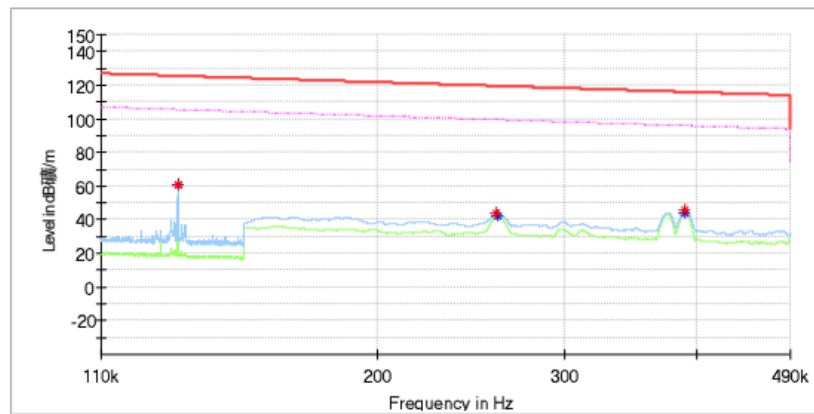

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.129972	61.16	---	125.32	64.16	100.0	Y	140.0	20.0
0.129972	---	60.61	105.32	44.71	100.0	Y	140.0	20.0
0.259300	43.94	---	119.33	75.38	100.0	Y	327.0	20.0
0.260000	---	42.36	99.30	56.94	100.0	Y	327.0	20.0
0.389700	45.40	---	115.79	70.39	100.0	Y	316.0	20.0
0.390000	---	44.36	95.78	51.43	100.0	Y	316.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

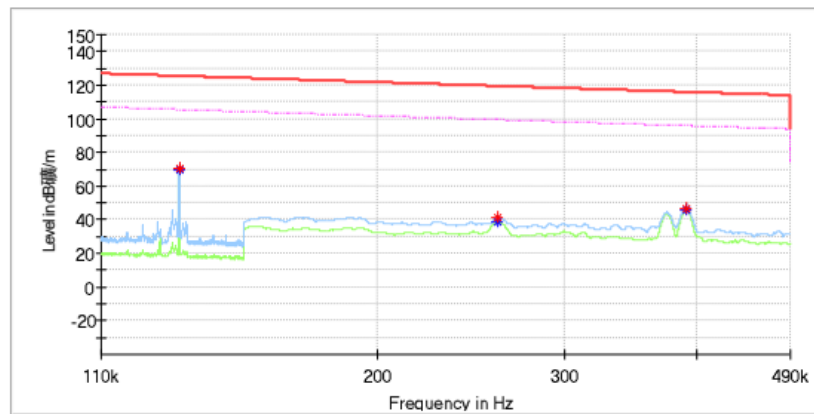

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.130314	---	69.95	105.30	35.35	100.0	Z	171.0	20.0
0.130314	70.03	---	125.30	55.27	100.0	Z	171.0	20.0
0.259850	---	38.39	99.31	60.92	100.0	Z	254.0	20.0
0.260150	41.20	---	119.30	78.09	100.0	Z	254.0	20.0
0.390850	46.76	---	115.76	69.00	100.0	Z	178.0	20.0
0.391000	---	45.75	95.76	50.01	100.0	Z	186.0	20.0

12/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

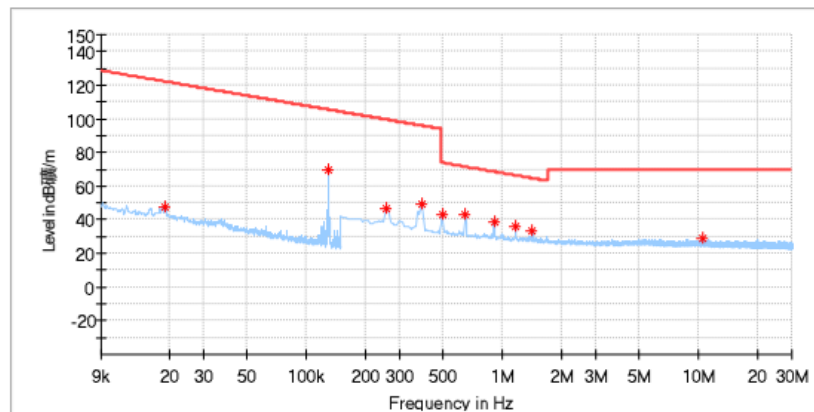

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.79	121.94	74.14	100.0	X	187.0	19.9
0.129958	69.51	105.32	35.81	100.0	X	218.0	19.9
0.255353	47.01	99.46	52.45	100.0	X	248.0	19.9
0.387044	49.18	95.85	46.67	100.0	X	237.0	19.9
0.496787	42.72	73.68	30.96	100.0	X	16.0	19.9
0.646037	43.10	71.41	28.31	100.0	X	48.0	19.9
0.909419	39.08	68.44	29.36	100.0	X	45.0	19.9
1.168412	36.02	66.27	30.25	100.0	X	30.0	19.9
1.427405	33.07	64.54	31.46	100.0	X	20.0	19.9
10.540434	28.60	69.50	40.90	100.0	X	320.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
----	----	----	----	----		----	----

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

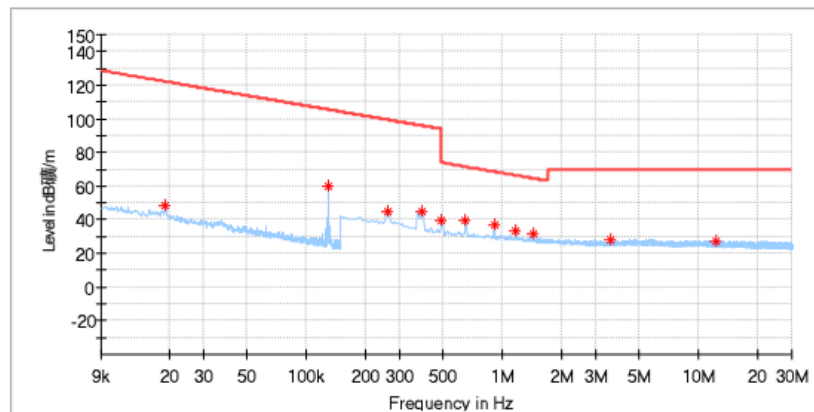

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	48.18	121.94	73.76	100.0	Y	237.0	19.9
0.130562	60.20	105.28	45.08	100.0	Y	346.0	19.9
0.259743	44.44	99.31	54.87	100.0	Y	331.0	19.9
0.391434	45.01	95.75	50.74	100.0	Y	315.0	19.9
0.492397	39.66	73.76	34.10	100.0	Y	297.0	19.9
0.650427	39.74	71.35	31.60	100.0	Y	142.0	19.9
0.909419	36.51	68.44	31.93	100.0	Y	117.0	19.9
1.172802	33.47	66.24	32.77	100.0	Y	315.0	19.9
1.431794	31.16	64.51	33.35	100.0	Y	290.0	20.0
3.591530	27.95	69.50	41.55	100.0	Y	114.0	20.1
12.243640	27.28	69.50	42.22	100.0	Y	168.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

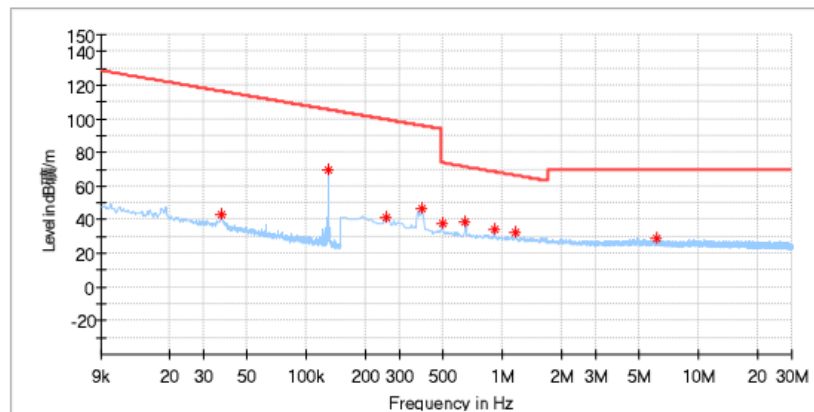

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.037099	43.15	116.20	73.05	100.0	Z	326.0	19.9
0.130361	69.85	105.30	35.45	100.0	Z	170.0	19.9
0.255353	41.59	99.46	57.87	100.0	Z	229.0	19.9
0.391434	46.84	95.75	48.91	100.0	Z	131.0	19.9
0.496787	37.57	73.68	36.11	100.0	Z	3.0	19.9
0.650427	38.77	71.35	32.58	100.0	Z	19.0	19.9
0.909419	34.39	68.44	34.05	100.0	Z	34.0	19.9
1.168412	32.59	66.27	33.68	100.0	Z	23.0	19.9
6.115610	28.58	69.50	40.92	100.0	Z	145.0	20.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

12/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

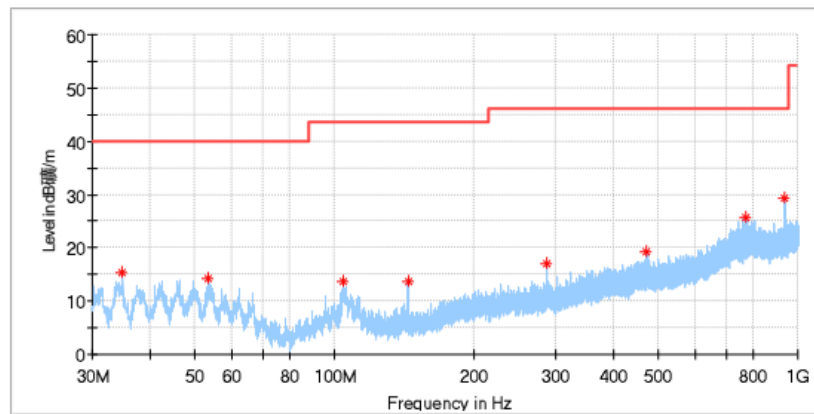

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.850000	15.25	40.00	24.75	100.0	H	0.0	-22.0
53.549444	14.18	40.00	25.82	100.0	H	132.0	-18.5
104.528333	13.75	43.50	29.75	100.0	H	59.0	-18.9
144.028889	13.77	43.50	29.74	100.0	H	317.0	-22.4
288.020000	17.08	46.00	28.92	100.0	H	87.0	-16.6
469.517778	19.22	46.00	26.78	100.0	H	69.0	-12.4
773.720556	25.61	46.00	20.39	100.0	H	218.0	-6.6
938.405000	29.30	46.00	16.70	100.0	H	359.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

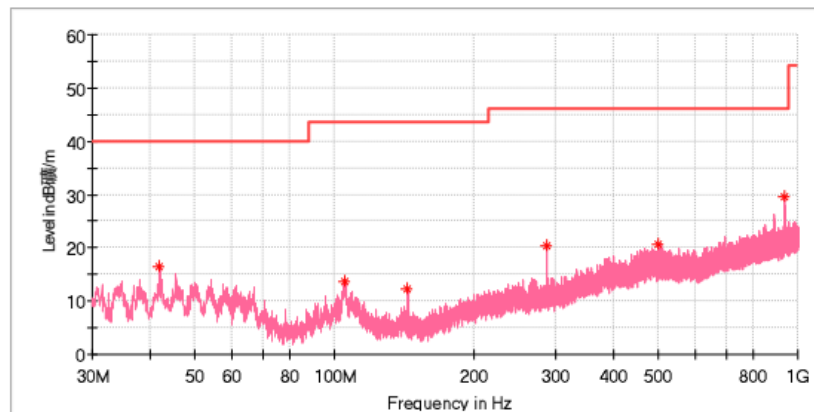

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.963333	16.43	40.00	23.57	100.0	V	261.0	-19.7
105.282778	13.76	43.50	29.74	100.0	V	295.0	-18.9
143.975000	12.41	43.50	31.09	100.0	V	172.0	-22.4
288.020000	20.46	46.00	25.54	100.0	V	217.0	-16.6
498.402222	20.57	46.00	25.43	100.0	V	353.0	-11.9
938.405000	29.66	46.00	16.34	100.0	V	147.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026

Wireless charging (15W)


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No./Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

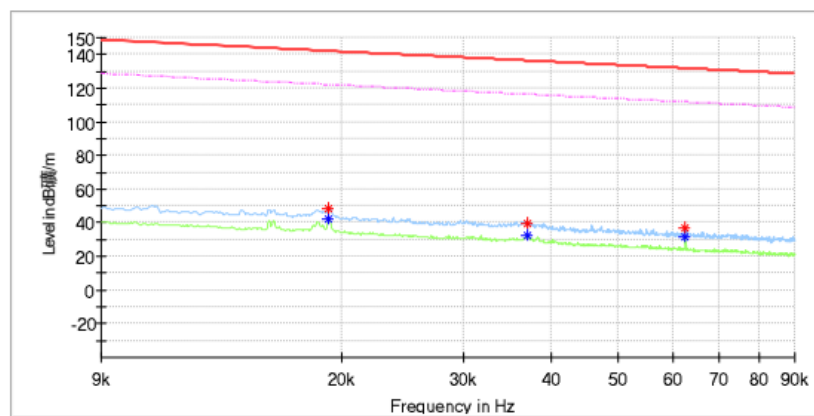

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	48.56	---	141.93	93.37	100.0	X	262.0	20.0
0.019183	---	42.27	121.93	79.66	100.0	X	262.0	20.0
0.037061	---	32.84	116.21	83.37	100.0	X	238.0	20.0
0.037119	39.85	---	136.20	96.35	100.0	X	238.0	20.0
0.062576	36.56	---	131.67	95.11	100.0	X	231.0	20.0
0.062576	---	31.43	111.67	80.23	100.0	X	231.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

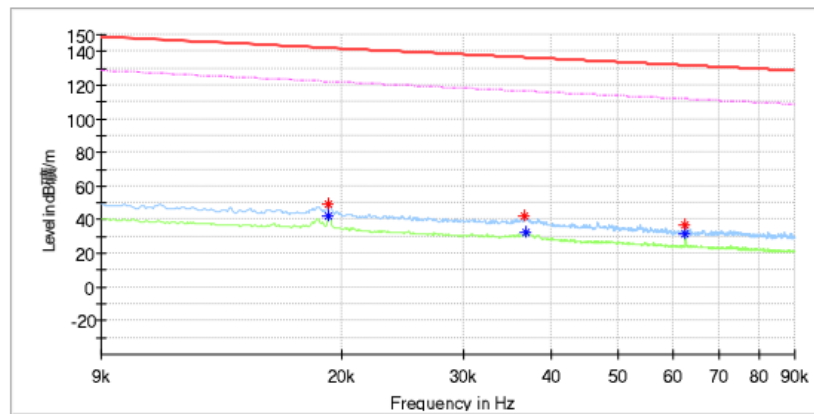

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	48.87	---	141.93	93.06	100.0	Y	174.0	20.0
0.019183	---	42.33	121.93	79.60	100.0	Y	174.0	20.0
0.036714	42.18	---	136.30	94.11	100.0	Y	199.0	20.0
0.036829	---	32.15	116.27	84.12	100.0	Y	40.0	20.0
0.062576	36.51	---	131.67	95.15	100.0	Y	211.0	20.0
0.062576	---	31.43	111.67	80.24	100.0	Y	211.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

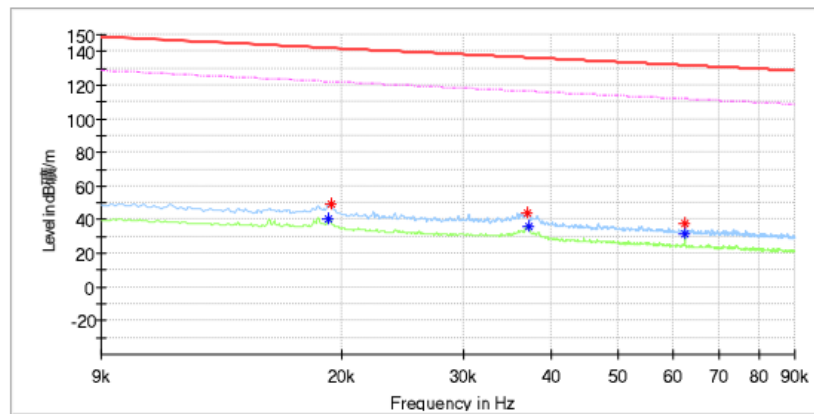

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019183	---	40.62	121.93	81.31	100.0	Z	256.0	20.0
0.019299	48.96	---	141.88	92.92	100.0	Z	245.0	20.0
0.037061	44.32	---	136.21	91.90	100.0	Z	40.0	20.0
0.037176	---	36.36	116.19	79.83	100.0	Z	316.0	20.0
0.062460	37.68	---	131.68	94.00	100.0	Z	323.0	20.0
0.062460	---	31.50	111.68	80.18	100.0	Z	323.0	20.0

12/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

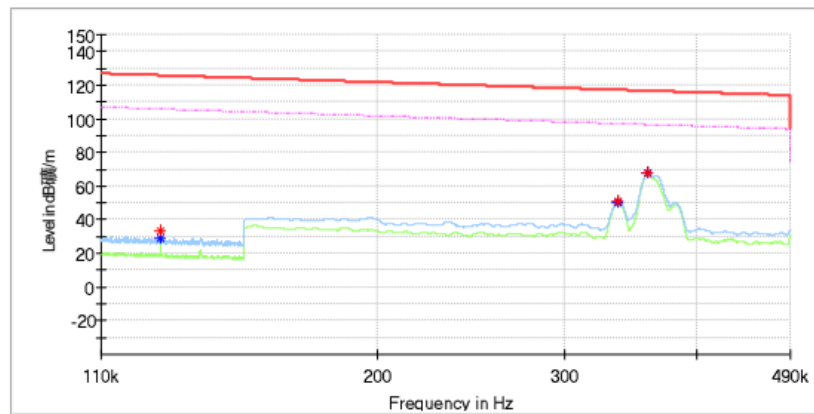

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125114	33.09	---	125.65	92.56	100.0	X	293.0	20.0
0.125114	---	29.33	105.65	76.32	100.0	X	293.0	20.0
0.337450	50.91	---	117.04	66.12	100.0	X	237.0	20.0
0.337450	---	50.47	97.04	46.57	100.0	X	237.0	20.0
0.360050	---	67.47	96.48	29.01	100.0	X	233.0	20.0
0.360050	67.54	---	116.48	48.94	100.0	X	233.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

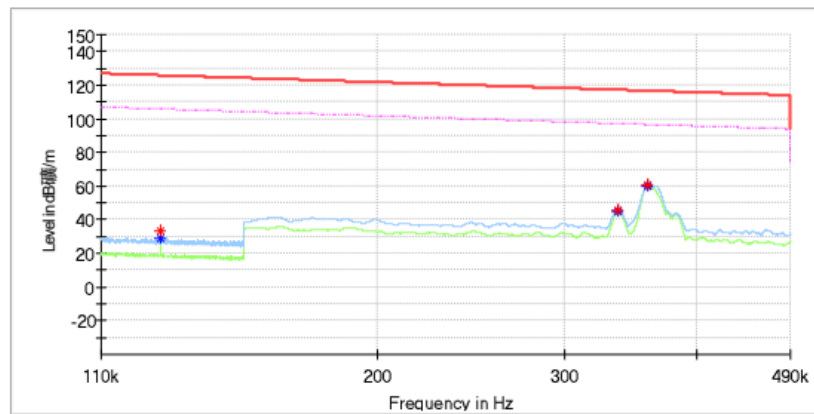

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.125114	33.51	---	125.65	92.14	100.0	Y	243.0	20.0
0.125114	---	29.32	105.65	76.33	100.0	Y	243.0	20.0
0.337250	45.57	---	117.04	71.47	100.0	Y	125.0	20.0
0.337650	---	44.41	97.03	52.62	100.0	Y	125.0	20.0
0.360050	---	60.29	96.48	36.19	100.0	Y	285.0	20.0
0.360050	60.48	---	116.48	55.99	100.0	Y	285.0	20.0

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

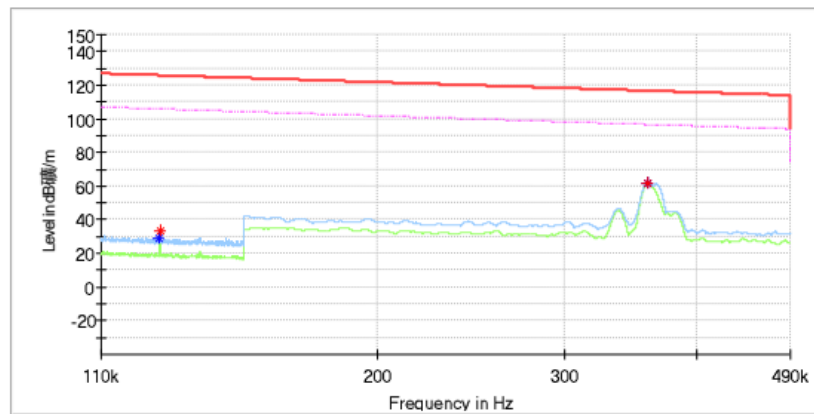

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124914	---	29.35	105.67	76.31	100.0	Z	227.0	20.0
0.124943	33.40	---	125.66	92.27	100.0	Z	227.0	20.0
0.360000	61.97	---	116.48	54.51	100.0	Z	190.0	20.0
0.360050	---	61.88	96.48	34.59	100.0	Z	190.0	20.0

12/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No./Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

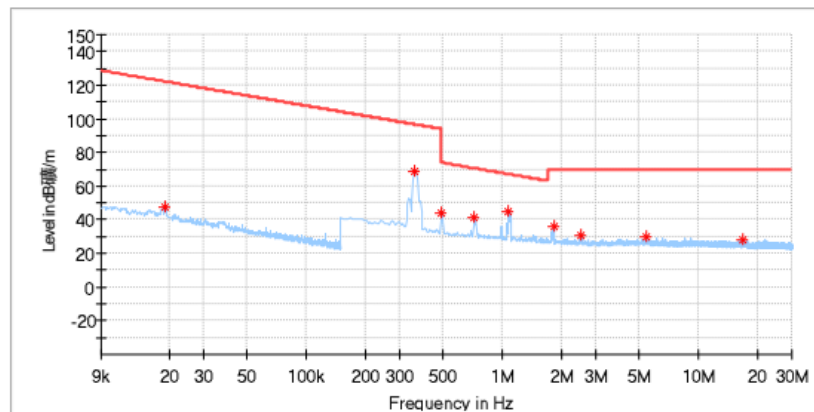

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.91	121.94	74.03	100.0	X	317.0	19.9
0.356316	68.84	96.57	27.73	100.0	X	206.0	19.9
0.492397	44.07	73.76	29.68	100.0	X	177.0	19.9
0.716272	41.62	70.51	28.89	100.0	X	247.0	19.9
1.080618	44.63	66.95	22.32	100.0	X	240.0	19.9
1.831257	35.56	69.50	33.94	100.0	X	240.0	20.0
2.516052	30.34	69.50	39.16	100.0	X	258.0	20.0
5.400088	29.84	69.50	39.66	100.0	X	95.0	20.1
16.852831	28.06	69.50	41.44	100.0	X	348.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

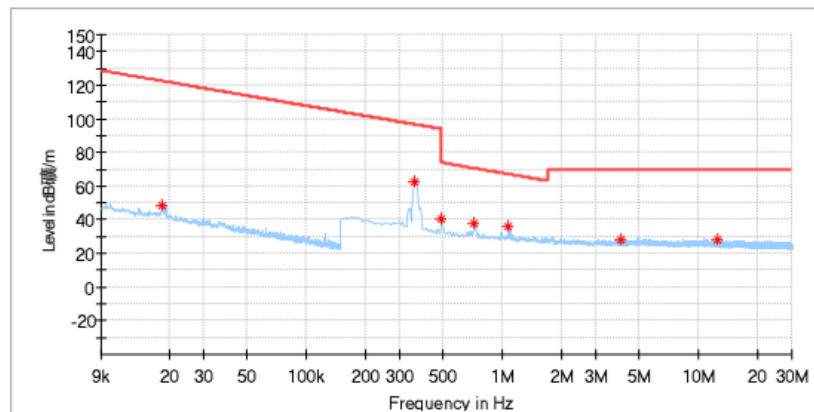

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	48.45	122.26	73.81	100.0	Y	1.0	19.9
0.356316	62.92	96.57	33.64	100.0	Y	126.0	19.9
0.492397	40.15	73.76	33.60	100.0	Y	270.0	19.9
0.720662	38.01	70.46	32.45	100.0	Y	144.0	19.9
1.076228	36.02	66.99	30.96	100.0	Y	126.0	19.9
4.039280	28.43	69.50	41.07	100.0	Y	134.0	20.1
12.445566	28.10	69.50	41.40	100.0	Y	205.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

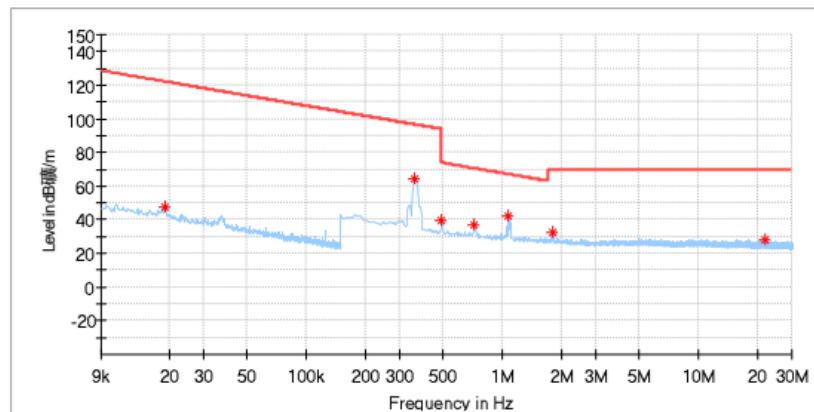

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019172	47.86	121.94	74.08	100.0	Z	7.0	19.9
0.356316	64.31	96.57	32.25	100.0	Z	194.0	19.9
0.492397	39.46	73.76	34.30	100.0	Z	180.0	19.9
0.716272	36.50	70.51	34.01	100.0	Z	226.0	19.9
1.076228	42.45	66.99	24.54	100.0	Z	194.0	19.9
1.796140	32.22	69.50	37.28	100.0	Z	119.0	20.0
21.813199	27.90	69.50	41.60	100.0	Z	270.0	20.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

12/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

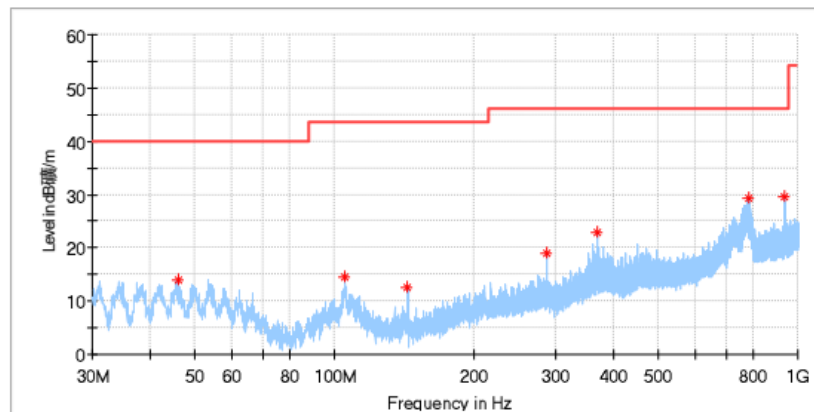

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.897222	13.85	40.00	26.15	100.0	H	310.0	-18.8
105.498333	14.50	43.50	29.00	100.0	H	94.0	-18.9
143.975000	12.63	43.50	30.87	100.0	H	130.0	-22.4
288.020000	18.84	46.00	27.16	100.0	H	102.0	-16.6
369.769444	22.94	46.00	23.06	100.0	H	283.0	-14.4
786.007222	29.19	46.00	16.81	100.0	H	238.0	-6.4
938.405000	29.63	46.00	16.37	100.0	H	338.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Charging
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

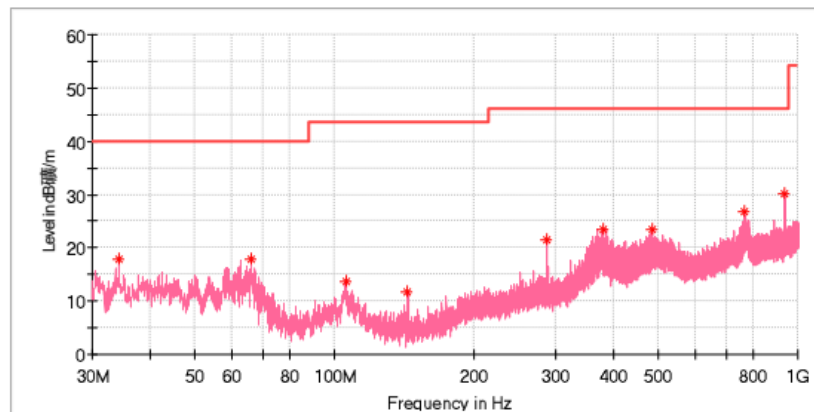

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
34.257222	17.75	40.00	22.25	100.0	V	311.0	-22.2
66.159444	17.81	40.00	22.19	100.0	V	146.0	-20.6
105.713889	13.60	43.50	29.90	100.0	V	330.0	-18.9
143.975000	11.72	43.50	31.78	100.0	V	229.0	-22.4
288.020000	21.49	46.00	24.51	100.0	V	155.0	-16.6
381.086111	23.47	46.00	22.53	100.0	V	330.0	-14.2
486.277222	23.36	46.00	22.64	100.0	V	0.0	-12.0
767.523333	26.73	46.00	19.27	100.0	V	321.0	-6.8
938.405000	30.21	46.00	15.79	100.0	V	174.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026

Standby mode


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Standby
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

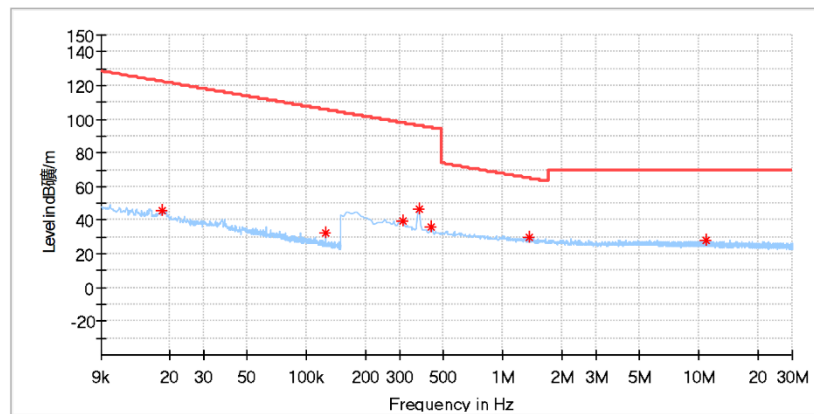

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018467	46.06	122.26	76.20	100.0	X	218.0	19.9
0.125325	32.70	105.64	72.94	100.0	X	280.0	19.9
0.312419	39.62	97.71	58.09	100.0	X	180.0	19.9
0.373875	46.40	96.15	49.75	100.0	X	26.0	19.9
0.435331	35.63	94.83	59.20	100.0	X	173.0	19.9
1.379118	29.49	64.84	35.35	100.0	X	36.0	19.9
10.860882	27.77	69.50	41.73	100.0	X	209.0	20.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
***	***	***	***	***		***	***

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Standby
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

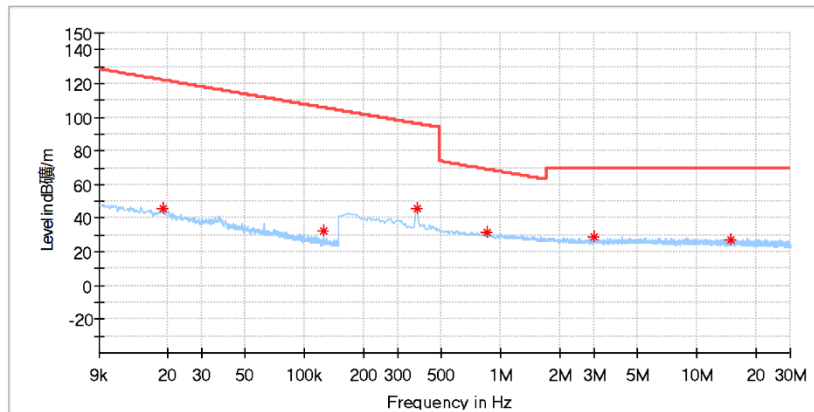

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	45.33	121.98	76.65	100.0	Y	0.0	19.9
0.125325	32.79	105.64	72.85	100.0	Y	6.0	19.9
0.373875	46.14	96.15	50.01	100.0	Y	250.0	19.9
0.852353	31.61	69.01	37.40	100.0	Y	200.0	19.9
2.976971	28.71	69.50	40.79	100.0	Y	80.0	20.0
14.916971	27.29	69.50	42.21	100.0	Y	232.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Standby
Order No./Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

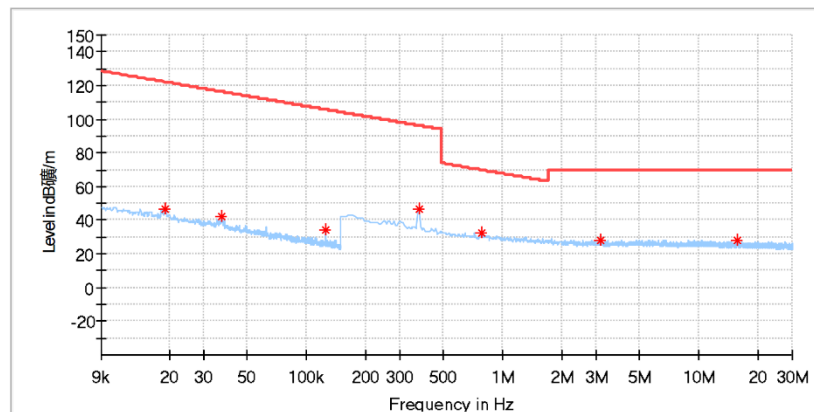

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.019071	46.18	121.98	75.80	100.0	Z	0.0	19.9
0.037099	42.07	116.20	74.13	100.0	Z	212.0	19.9
0.125325	33.81	105.64	71.82	100.0	Z	340.0	19.9
0.373875	46.17	96.15	49.98	100.0	Z	163.0	19.9
0.786508	32.07	69.70	37.63	100.0	Z	282.0	19.9
3.139390	28.26	69.50	41.24	100.0	Z	55.0	20.0
15.614934	28.19	69.50	41.31	100.0	Z	235.0	20.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Standby
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

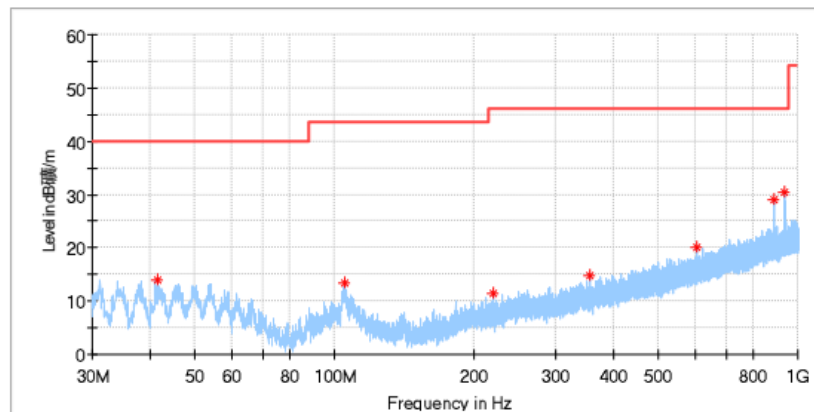

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.586111	14.04	40.00	25.96	100.0	H	176.0	-19.8
105.067222	13.44	43.50	30.06	100.0	H	40.0	-18.9
220.281667	11.38	46.00	34.62	100.0	H	193.0	-18.6
355.273333	14.66	46.00	31.34	100.0	H	176.0	-14.7
603.916667	20.08	46.00	25.92	100.0	H	203.0	-9.6
890.982778	29.00	46.00	17.00	100.0	H	301.0	-4.9
938.405000	30.34	46.00	15.66	100.0	H	203.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	Standby
Order No/Sample No:	27233775/A004281872-002
Test Voltage:	Battery
Remark:	Temp 23.8°C Humi:57%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

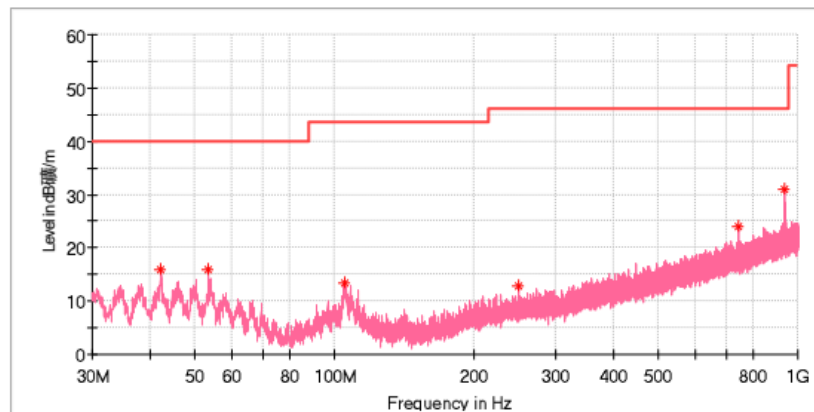

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.232778	15.83	40.00	24.17	100.0	V	26.0	-19.6
53.549444	15.93	40.00	24.07	100.0	V	44.0	-18.5
104.959444	13.29	43.50	30.21	100.0	V	16.0	-18.9
250.028333	12.92	46.00	33.08	100.0	V	249.0	-17.4
742.465000	24.12	46.00	21.88	100.0	V	54.0	-7.2
938.405000	31.02	46.00	14.98	100.0	V	71.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

11/6/2026

Appendix A.3: Test Results of Conducted Emission on AC Mains


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name: Magnetic Power Bank
Model: HJ7110
Test Mode: USB-C input(DC 5V 3A)+Wireless Charging(5W)
Test Voltage: AC 120V 60Hz via adapter
Standard: FCC Part 15
Test By:/Review By: Steve Lan/ Charlie Zha
Tem./Hum./Pressure: 23.3°C/51.2%/101kPa

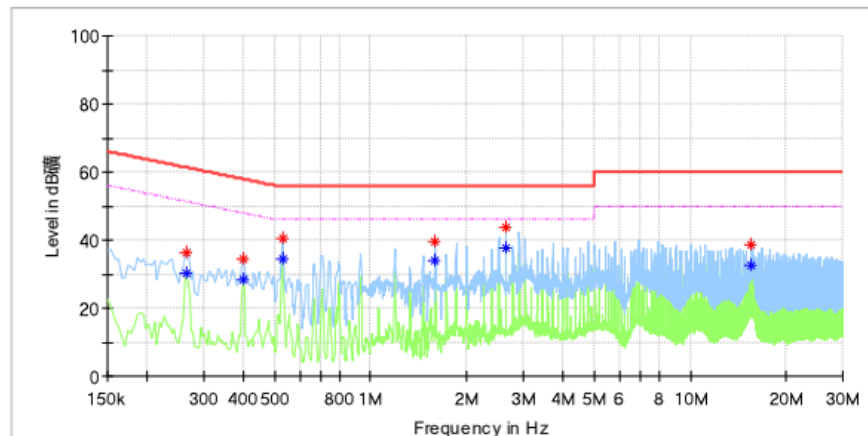

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.27	---	30.23	51.24	21.01	L1	10.24
0.27	36.12	---	61.24	25.12	L1	10.24
0.40	---	28.20	47.90	19.70	L1	10.25
0.40	34.23	---	57.90	23.66	L1	10.25
0.53	---	34.42	46.00	11.58	L1	10.26
0.53	40.23	---	56.00	15.77	L1	10.26
1.59	---	34.13	46.00	11.87	L1	10.30
1.59	39.65	---	56.00	16.35	L1	10.30
2.65	---	37.86	46.00	8.14	L1	10.32
2.65	43.66	---	56.00	12.34	L1	10.32
15.41	---	32.53	50.00	17.47	L1	10.80
15.41	38.80	---	60.00	21.21	L1	10.80

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
---	---	---	---	---	---	---	---	---


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name: Magnetic Power Bank
Model: HJ7110
Test Mode: USB-C input(DC 5V 3A)+Wireless Charging(5W)
Test Voltage: AC 120V 60Hz via adapter
Standard: FCC Part 15
Test By:/Review By: Steve Lan/ Charlie Zha
Tem./Hum./Pressure: 23.3°C/51.2%/101kPa

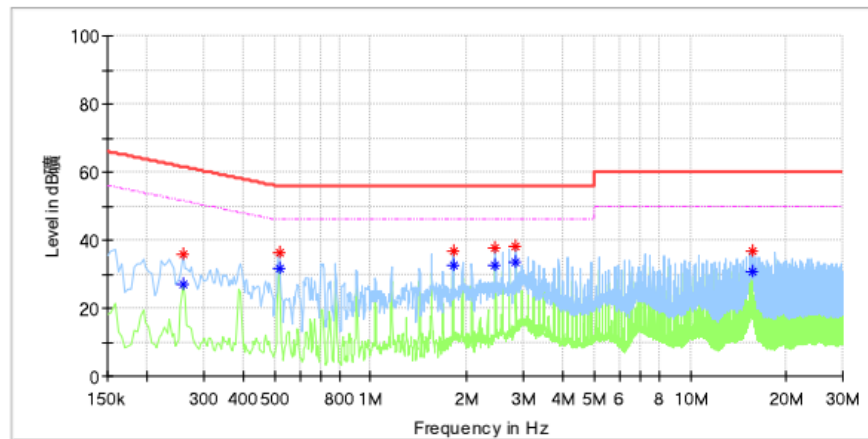

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.26	---	27.07	51.50	24.42	N	10.25
0.26	35.82	---	61.50	25.67	N	10.25
0.52	36.47	---	56.00	19.53	N	10.27
0.52	---	31.41	46.00	14.59	N	10.27
1.81	36.87	---	56.00	19.13	N	10.31
1.81	---	32.48	46.00	13.52	N	10.31
2.45	---	32.53	46.00	13.47	N	10.32
2.45	37.48	---	56.00	18.52	N	10.32
2.84	38.31	---	56.00	17.69	N	10.34
2.84	---	33.54	46.00	12.46	N	10.34
15.69	36.92	---	60.00	23.08	N	10.79
15.70	---	30.61	50.00	19.39	N	10.80

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
---	---	---	---	---	---	---	---	---

2026-06-09


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	USB-C input(DC 9V 1.8A)+Wireless Charging(7.5W)
Test Voltage:	AC 120V 60Hz via adapter
Standard:	FCC Part 15
Test By:/Review By:	Steve Lan/ Charlie Zha
Tem./Hum./Pressure:	23.3°C/51.2%/101kPa

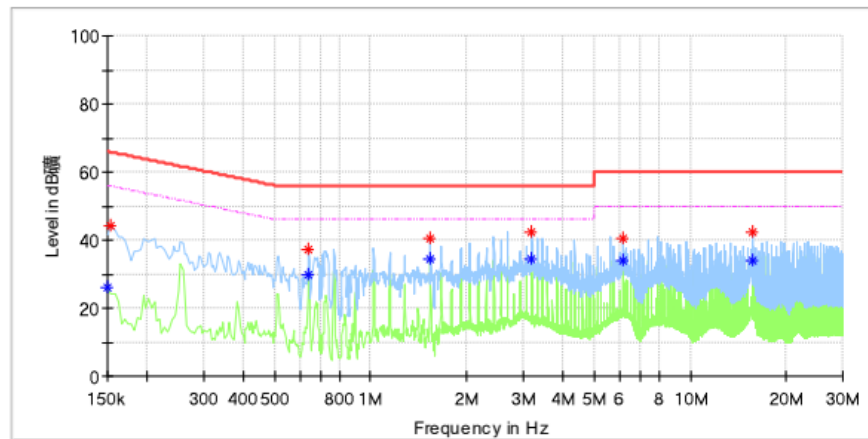

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.15	---	26.09	56.00	29.91	L1	10.23
0.15	44.12	---	65.78	21.66	L1	10.24
0.64	---	29.88	46.00	16.12	L1	10.27
0.64	37.26	---	56.00	18.74	L1	10.27
1.53	---	34.64	46.00	11.36	L1	10.29
1.53	40.50	---	56.00	15.50	L1	10.29
3.19	---	34.43	46.00	11.57	L1	10.35
3.19	42.52	---	56.00	13.48	L1	10.35
6.13	---	33.73	50.00	16.27	L1	10.49
6.13	40.53	---	60.00	19.47	L1	10.49
15.59	---	33.96	50.00	16.04	L1	10.81
15.59	42.39	---	60.00	17.61	L1	10.81

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
---	---	---	---	---	---	---	---	---

2026-06-09


TÜV Rheinland (Shenzhen) Co., Ltd.

1 / 1

Test Report

EUT Information

EUT Name:	Magnetic Power Bank
Model:	HJ7110
Test Mode:	USB-C input(DC 9V 1.8A)+Wireless Charging(7.5W)
Test Voltage:	AC 120V 60Hz via adapter
Standard:	FCC Part 15
Test By:/Review By:	Steve Lan/ Charlie Zha
Tem./Hum./Pressure:	23.3°C/51.2%/101kPa

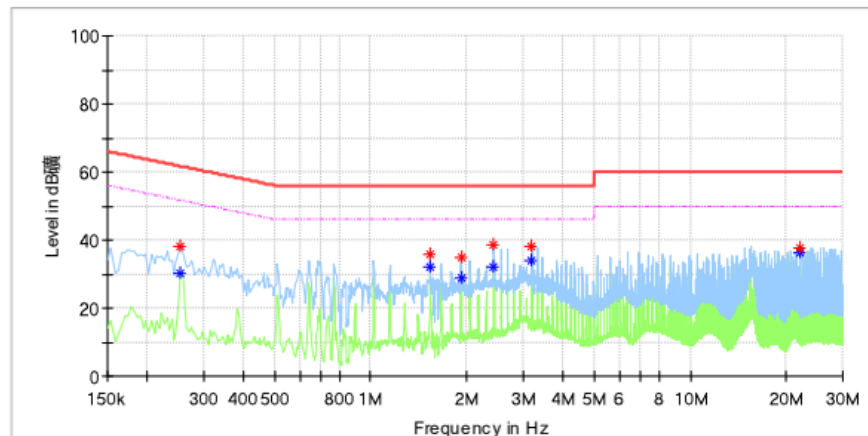

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.25	38.34	---	61.63	23.29	N	10.25
0.25	---	30.20	51.63	21.42	N	10.25
1.53	---	32.32	46.00	13.68	N	10.30
1.53	35.82	---	56.00	20.18	N	10.30
1.92	---	28.73	46.00	17.27	N	10.31
1.92	34.69	---	56.00	21.31	N	10.31
2.43	38.78	---	56.00	17.22	N	10.32
2.43	---	32.21	46.00	13.79	N	10.32
3.19	---	34.09	46.00	11.91	N	10.35
3.19	38.10	---	56.00	17.90	N	10.35
21.98	---	36.12	50.00	13.88	N	11.20
21.98	37.76	---	60.00	22.24	N	11.20

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
---	---	---	---	---	---	---	---	---

2026-06-09