

FCC Test Report

Report No.: RF180607C03-1

FCC ID: A8J-ECM355AP

Test Model: ECM355AP

Received Date: Jun. 07, 2018

Test Date: Jul. 03 ~ Jul. 16, 2018

Issued Date: Jul. 25, 2018

Applicant: EnGenius Technologies

Address: 1580 Scenic Avenue, Costa Mesa, CA92626

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures	18
4.1.4 Deviation from Test Standard	18
4.1.5 Test Setup	19
4.1.6 EUT Operating Conditions	20
4.1.7 Test Results	21
4.2 Conducted Emission Measurement	41
4.2.1 Limits of Conducted Emission Measurement	41
4.2.2 Test Instruments	41
4.2.3 Test Procedures	42
4.2.4 Deviation from Test Standard	42
4.2.5 Test Setup	42
4.2.6 EUT Operating Conditions	42
4.2.7 Test Results	43
4.3 Transmit Power Measurement	47
4.3.1 Limits of Transmit Power Measurement	47
4.3.2 Test Setup	47
4.3.3 Test Instruments	47
4.3.4 Test Procedure	48
4.3.5 Deviation from Test Standard	48
4.3.6 EUT Operating Conditions	48
4.3.7 Test Result	49
4.4 Occupied Bandwidth Measurement	51
4.4.1 Test Setup	51
4.4.2 Test Instruments	51
4.4.3 Test Procedure	51
4.4.4 Test Result	52
4.5 Peak Power Spectral Density Measurement	54
4.5.1 Limits of Peak Power Spectral Density Measurement	54
4.5.2 Test Setup	54
4.5.3 Test Instruments	54
4.5.4 Test Procedures	54
4.5.5 Deviation from Test Standard	55
4.5.6 EUT Operating Conditions	55
4.5.7 Test Results	56
4.6 Frequency Stability	61
4.6.1 Limits of Frequency Stability Measurement	61

4.6.2	Test Setup	61
4.6.3	Test Instruments	61
4.6.4	Test Procedure	61
4.6.5	Deviation from Test Standard	61
4.6.6	EUT Operating Condition	61
4.6.7	Test Results	62
4.7	6dB Bandwidth Measurement	63
4.7.1	Limits of 6dB Bandwidth Measurement	63
4.7.2	Test Setup	63
4.7.3	Test Instruments	63
4.7.4	Test Procedure	63
4.7.5	Deviation from Test Standard	63
4.7.6	EUT Operating Condition	63
4.7.7	Test Results	64
5	Pictures of Test Arrangements	66
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	67
	Appendix – Information on the Testing Laboratories	70

Release Control Record

Issue No.	Description	Date Issued
RF180607C03-1	Original release	Jul. 25, 2018

1 Certificate of Conformity

Product: AC1300 Indoor ceiling mount Managed Access Point

Brand: EnGenius®

Test Model: ECM355AP

Sample Status: Engineering sample

Applicant: EnGenius Technologies

Test Date: Jul. 03 ~ Jul. 16, 2018

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Jul. 25, 2018
Celine Chou / Specialist

Approved by : Bruce Chen , **Date:** Jul. 25, 2018
Bruce Chen / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -11.54dB at 0.46500MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is IPEX not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC1300 Indoor ceiling mount Managed Access Point
Brand	
Test Model	ECM355AP
Sample Status	Engineering sample
Power Supply Rating	12Vdc from Adapter 54Vdc from PoE
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180 ~ 5240MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180 ~ 5240MHz: 242.412mW 5745 ~ 5825MHz: 266.373mW Beamforming Mode: 5180 ~ 5240MHz: 100.290mW 5745 ~ 5825MHz: 133.196mW
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	Beamforming Mode	TX Function
802.11a	Not Support	2TX
802.11n (HT20)	Support	2TX
802.11n (HT40)	Support	2TX
802.11ac (VHT20)	Support	2TX
802.11ac (VHT40)	Support	2TX
802.11ac (VHT80)	Support	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT consumes power from the following adapter and PoE.

Adapter	
Brand	DVE
Model	DSA-12PFT-12 FUS 120100
Input	100-240Vac, 50-60Hz 0.5A
Output	12Vdc, 1A
Power Line	1.45m DC cable without core attached on adapter

PoE (Support unit only)	
Brand	EnGenius
Model	EPA5006GP
Input	100-240Vac, 50-60Hz 0.8A
Output	54Vdc, 0.6A PIN 4,5: 54Vdc PIN 7,8: RETURN

3. The following antennas were provided to the EUT.

Ant. No.	1	2	3 (BT-BLE)	4	5	6
Ant. Type	PIFA	PIFA	PIFA	PIFA	PIFA	PIFA
Ant. Connector	IPEX	IPEX	IPEX	IPEX	IPEX	IPEX
Frequency (MHz)	2400-2500			5150-5850		2400-2500 5150-5850
Peak Gain (dBi)	3.98	3.75	3.47	5.50	5.84	2.90 5.72
Remark	Radio 1		-	Radio 2		Radio 3 (RX only)

3.2 Description of Test Modes

For 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Powered by adapter
B	-	√	√	-	Powered by POE

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B	802.11a	5180-5240	36 to 48	40	OFDM	6.0
	802.11a	5745-5825	149 to 165		OFDM	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A, B	802.11a	5180-5240	36 to 48	40	OFDM	6.0
	802.11a	5745-5825	149 to 165		OFDM	6.0

Peak Power Spectral Density, Bandwidth and Frequency Stability Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Transmit Power Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
CDD Mode						
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3
Beamforming Mode						
A	802.11n (HT20)	5180-5240	36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
A	802.11n (HT20)	5745-5825	149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 65% RH	120Vac, 60Hz	Willy Cheng
RE $<$ 1G	26 deg. C, 67% RH	120Vac, 60Hz 54Vdc	Willy Cheng
PLC	22 deg. C, 66% RH	120Vac, 60Hz 54Vdc	Adair Peng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Chris Lin

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor is required.

802.11a: Duty cycle = 2.023/2.131 = 0.949, Duty factor = 10 * log (1/0.949) = 0.23

802.11n (HT20): Duty cycle = 4.932/5.064 = 0.974, Duty factor = 10 * log (1/0.974) = 0.11

802.11n (HT40): Duty cycle = 2.406/2.492 = 0.965, Duty factor = 10 * log (1/0.965) = 0.15

802.11ac (VHT80): Duty cycle = 1.132/1.215 = 0.932, Duty factor = 10 * log (1/0.932) = 0.31

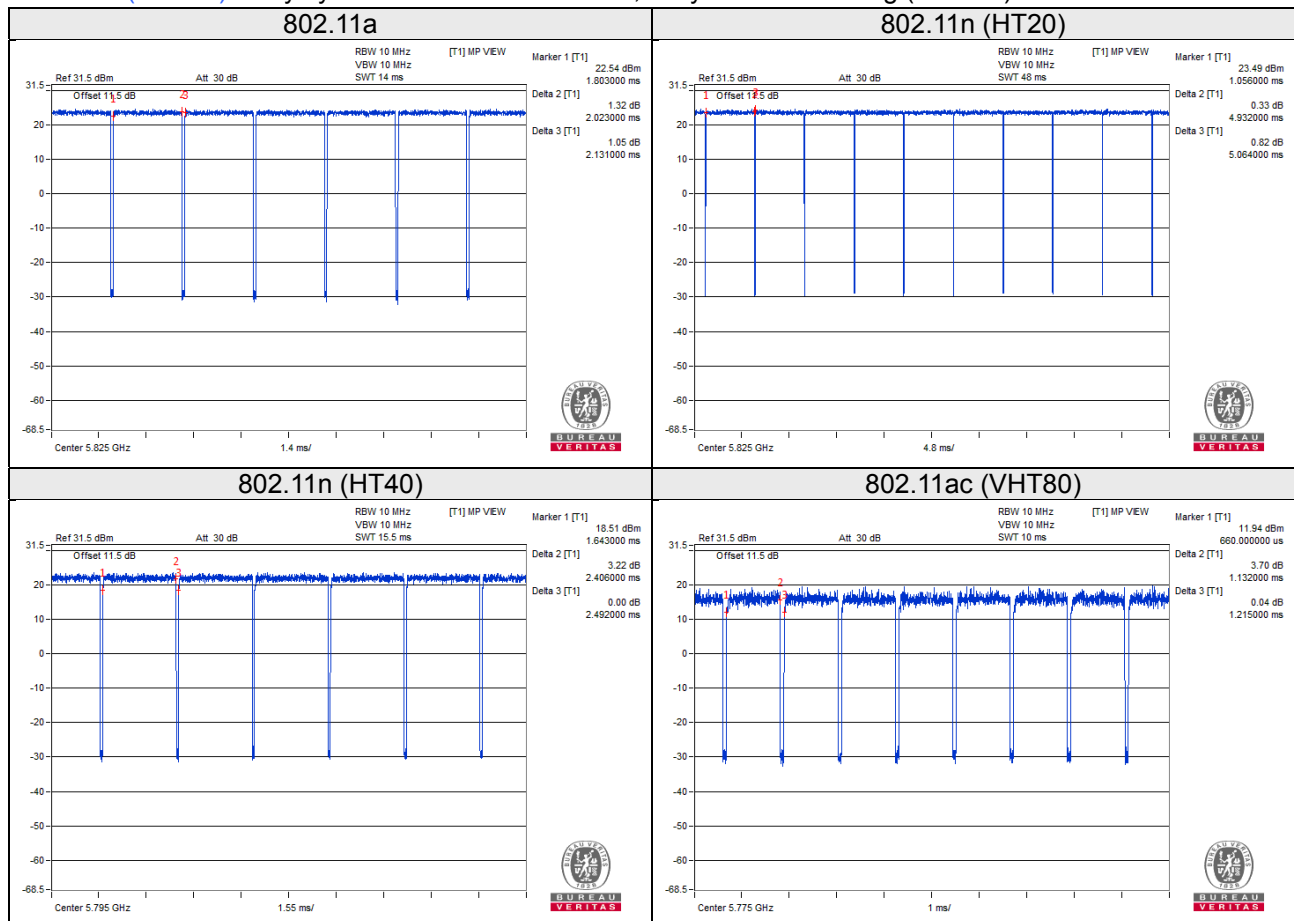

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	PoE	EnGenius	EPA5006GP	NA	NA	Provided by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	1	1.8	N	0	-

3.4.1 Configuration of System under Test

Test Mode A

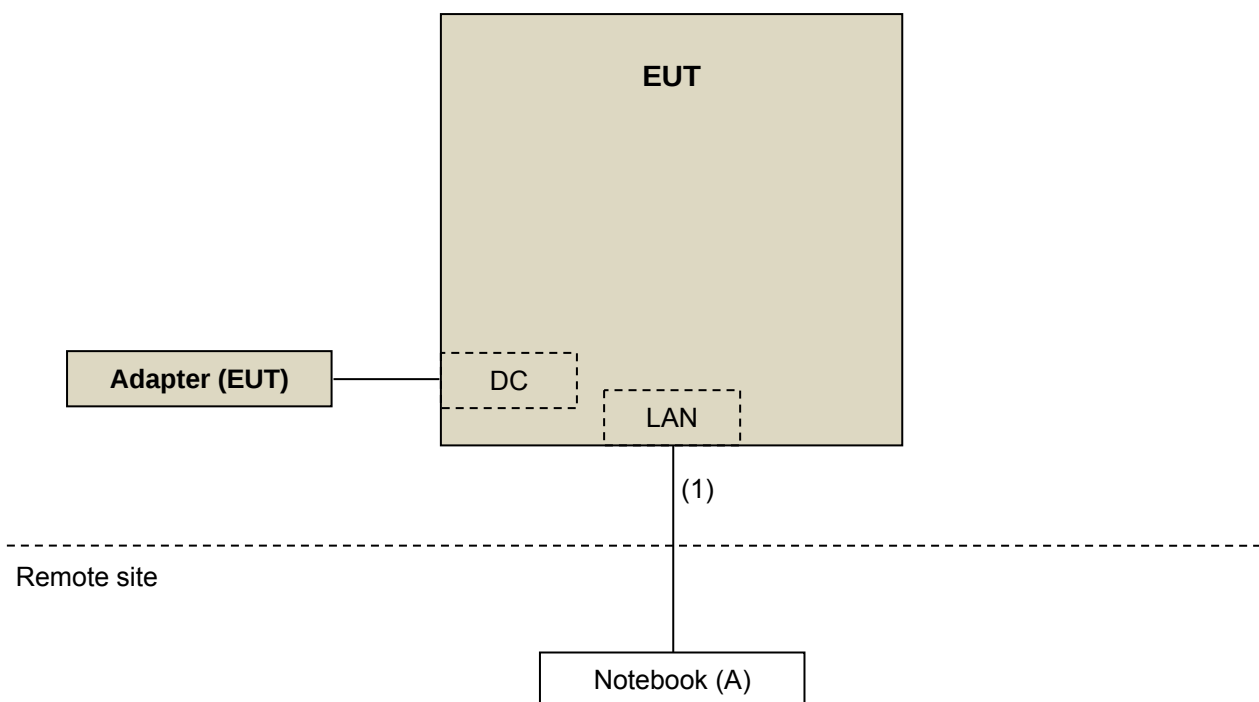

Test Mode B

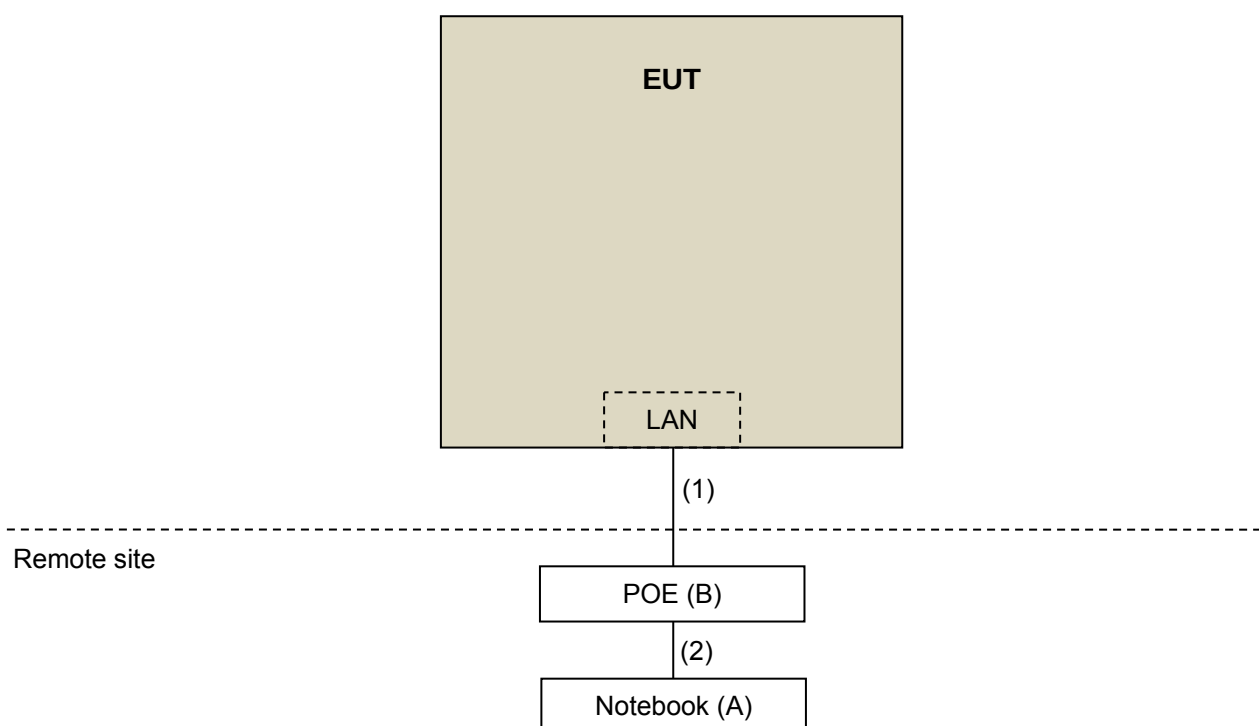

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v02r01			Field Strength at 3m	
			PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 29, 2018	May 28, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 12, 2017	Dec. 11, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 11, 2017	Dec. 10, 2018
HORN Antenna SCHWARZBECK	9120D	209	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 01, 2017	Nov. 30, 2018
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Aug. 21, 2017	Aug. 20, 2018
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Apr. 03, 2018	Apr. 02, 2019
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Aug. 21, 2017	Aug. 20, 2018
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM-SM-8 000	Cable-CH3-03 (309224+170907)	Sep.11, 2017	Sep. 10, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
26GHz ~ 40GHz Amplifier Agilent	8449B	3008A1960	Aug. 08, 2017	Aug. 07, 2018
High Speed Peak Power Meter	ML2495A	0824012	Aug. 18, 2017	Aug. 17, 2018
Power Sensor	MA2411B	0738171	Aug. 18, 2017	Aug. 17, 2018
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 04, 2018	Jun. 03, 2019

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

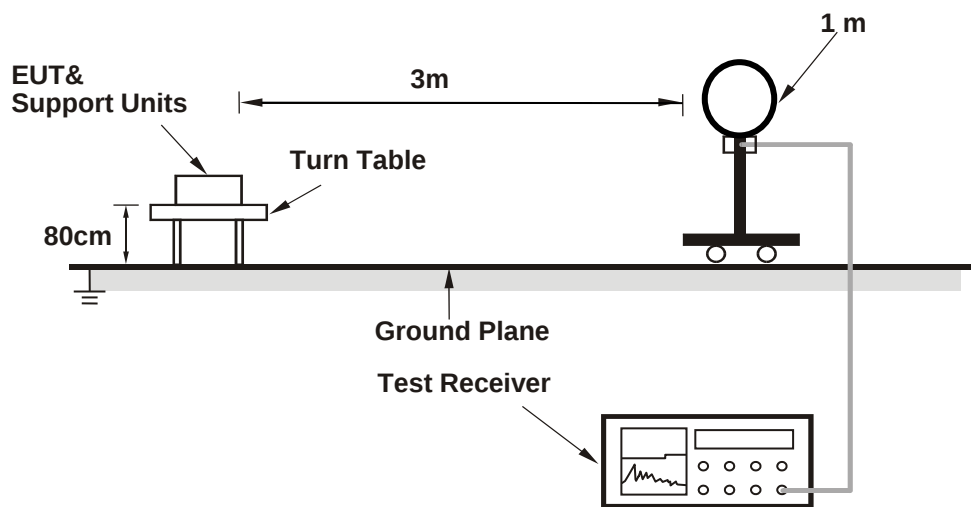

For Radiated emission 30MHz to 1GHz

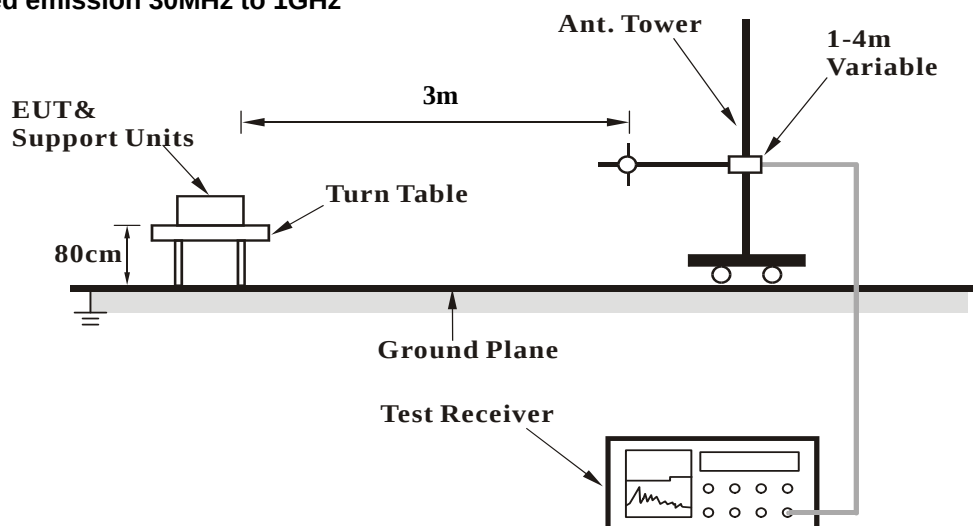

For Radiated emission above 1GHz

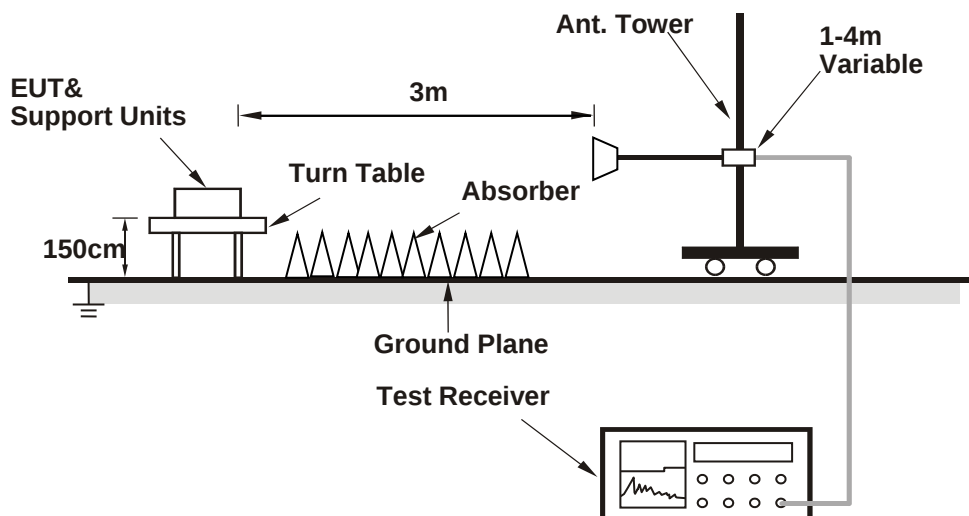

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 36	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	1.75 H	210	56.3	3.9
2	5150.00	44.2 AV	54.0	-9.8	1.75 H	210	40.3	3.9
3	*5180.00	105.2 PK			1.93 H	215	65.6	39.6
4	*5180.00	95.1 AV			1.93 H	215	55.5	39.6
5	#10360.00	53.3 PK	68.2	-14.9	2.31 H	123	37.5	15.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	2.43 V	101	62.6	3.9
2	5150.00	49.5 AV	54.0	-4.5	2.43 V	101	45.6	3.9
3	*5180.00	115.8 PK			2.62 V	227	76.2	39.6
4	*5180.00	105.6 AV			2.62 V	227	66.0	39.6
5	#10360.00	53.8 PK	68.2	-14.4	1.59 V	267	38.0	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	2.23 H	208	53.3	3.9
2	5150.00	42.8 AV	54.0	-11.2	2.23 H	208	38.9	3.9
3	*5200.00	98.3 PK			2.07 H	215	58.7	39.6
4	*5200.00	88.0 AV			2.07 H	215	48.4	39.6
5	#10400.00	53.4 PK	68.2	-14.8	1.88 H	236	37.5	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	2.36 V	278	63.1	3.9
2	5150.00	50.0 AV	54.0	-4.0	2.36 V	278	46.1	3.9
3	*5200.00	120.1 PK			2.75 V	227	80.5	39.6
4	*5200.00	109.9 AV			2.75 V	227	70.3	39.6
5	#10400.00	52.4 PK	68.2	-15.8	2.01 V	232	36.5	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.7 PK			2.41 H	214	69.3	39.4
2	*5240.00	98.5 AV			2.41 H	214	59.1	39.4
3	5350.00	55.5 PK	74.0	-18.5	2.56 H	198	51.5	4.0
4	5350.00	42.4 AV	54.0	-11.6	2.56 H	198	38.4	4.0
5	#10480.00	52.7 PK	68.2	-15.5	2.33 H	154	36.0	16.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.8 PK			2.57 V	226	80.4	39.4
2	*5240.00	109.5 AV			2.57 V	226	70.1	39.4
3	5350.00	56.3 PK	74.0	-17.7	2.62 V	183	52.3	4.0
4	5350.00	43.5 AV	54.0	-10.5	2.62 V	183	39.5	4.0
5	#10480.00	52.9 PK	68.2	-15.3	2.77 V	198	36.2	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.90	54.3 PK	68.2	-13.9	2.87 H	108	49.8	4.5
2	*5745.00	109.5 PK			2.87 H	108	69.4	40.1
3	*5745.00	99.4 AV			2.87 H	108	59.3	40.1
4	#5935.26	56.1 PK	68.2	-12.1	2.87 H	108	51.0	5.1
5	11490.00	53.4 PK	74.0	-20.6	2.58 H	231	35.8	17.6
6	11490.00	41.5 AV	54.0	-12.5	2.58 H	231	23.9	17.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5641.67	54.6 PK	68.2	-13.6	2.77 V	114	50.0	4.6
2	*5745.00	116.9 PK			2.77 V	114	76.8	40.1
3	*5745.00	106.9 AV			2.77 V	114	66.8	40.1
4	#5925.64	56.6 PK	68.2	-11.6	2.77 V	114	51.4	5.2
5	11490.00	56.3 PK	74.0	-17.7	1.14 V	358	38.7	17.6
6	11490.00	42.1 AV	54.0	-11.9	1.14 V	358	24.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.90	55.3 PK	68.2	-12.9	3.65 H	90	50.8	4.5
2	*5785.00	111.3 PK			3.65 H	90	71.0	40.3
3	*5785.00	101.3 AV			3.65 H	90	61.0	40.3
4	#5935.90	56.3 PK	68.2	-11.9	3.65 H	90	51.2	5.1
5	11570.00	58.1 PK	74.0	-15.9	3.22 H	142	40.2	17.9
6	11570.00	45.8 AV	54.0	-8.2	3.22 H	142	27.9	17.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.67	54.2 PK	68.2	-14.0	2.62 V	89	49.7	4.5
2	*5785.00	117.9 PK			2.62 V	89	77.6	40.3
3	*5785.00	107.8 AV			2.62 V	89	67.5	40.3
4	#5929.49	56.5 PK	68.2	-11.7	2.62 V	89	51.3	5.2
5	11570.00	61.9 PK	74.0	-12.1	1.11 V	204	44.0	17.9
6	11570.00	48.2 AV	54.0	-5.8	1.11 V	204	30.3	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.26	54.7 PK	68.2	-13.5	3.65 H	83	50.2	4.5
2	*5825.00	112.2 PK			3.65 H	83	71.7	40.5
3	*5825.00	102.0 AV			3.65 H	83	61.5	40.5
4	#5932.69	56.9 PK	68.2	-11.3	3.65 H	83	51.7	5.2
5	11650.00	59.6 PK	74.0	-14.4	3.67 H	246	42.1	17.5
6	11650.00	46.2 AV	54.0	-7.8	3.67 H	246	28.7	17.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5614.74	54.0 PK	68.2	-14.2	2.87 V	90	49.5	4.5
2	*5825.00	118.6 PK			2.87 V	90	78.1	40.5
3	*5825.00	108.8 AV			2.87 V	90	68.3	40.5
4	#5925.64	57.3 PK	68.2	-10.9	2.87 V	90	52.1	5.2
5	11650.00	61.2 PK	74.0	-12.8	1.20 V	204	43.7	17.5
6	11650.00	48.7 AV	54.0	-5.3	1.20 V	204	31.2	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.98 H	215	52.0	3.9
2	5150.00	42.1 AV	54.0	-11.9	1.98 H	215	38.2	3.9
3	*5180.00	104.9 PK			2.31 H	216	65.3	39.6
4	*5180.00	94.8 AV			2.31 H	216	55.2	39.6
5	#10360.00	53.1 PK	68.2	-15.1	2.68 H	146	37.3	15.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	2.43 V	102	62.5	3.9
2	5150.00	48.9 AV	54.0	-5.1	2.43 V	102	45.0	3.9
3	*5180.00	115.5 PK			3.20 V	227	75.9	39.6
4	*5180.00	105.3 AV			3.20 V	227	65.7	39.6
5	#10360.00	53.8 PK	68.2	-14.4	2.28 V	259	38.0	15.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.16 H	221	51.6	3.9
2	5150.00	43.3 AV	54.0	-10.7	2.16 H	221	39.4	3.9
3	*5200.00	108.5 PK			2.45 H	215	68.9	39.6
4	*5200.00	98.3 AV			2.45 H	215	58.7	39.6
5	#10400.00	52.8 PK	68.2	-15.4	2.67 H	166	36.9	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	3.10 V	231	62.6	3.9
2	5150.00	50.1 AV	54.0	-3.9	3.10 V	231	46.2	3.9
3	*5200.00	118.8 PK			2.50 V	227	79.2	39.6
4	*5200.00	128.6 AV			2.50 V	227	89.0	39.6
5	#10400.00	52.4 PK	68.2	-15.8	1.94 V	236	36.5	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.4 PK			2.44 H	213	70.0	39.4
2	*5240.00	99.1 AV			2.44 H	213	59.7	39.4
3	5350.00	55.9 PK	74.0	-18.1	2.58 H	226	51.9	4.0
4	5350.00	43.2 AV	54.0	-10.8	2.58 H	226	39.2	4.0
5	#10480.00	53.2 PK	68.2	-15.0	2.62 H	155	36.5	16.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.4 PK			2.53 V	227	80.0	39.4
2	*5240.00	109.3 AV			2.53 V	227	69.9	39.4
3	5350.00	57.2 PK	74.0	-16.8	2.94 V	175	53.2	4.0
4	5350.00	42.3 AV	54.0	-11.7	2.94 V	175	38.3	4.0
5	#10480.00	53.2 PK	68.2	-15.0	2.21 V	129	36.5	16.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5612.82	55.2 PK	68.2	-13.0	3.04 H	91	50.7	4.5
2	*5745.00	110.9 PK			3.04 H	91	70.8	40.1
3	*5745.00	100.8 AV			3.04 H	91	60.7	40.1
4	#5928.85	56.5 PK	68.2	-11.7	3.04 H	91	51.3	5.2
5	11490.00	53.5 PK	74.0	-20.5	2.69 H	283	35.9	17.6
6	11490.00	41.6 AV	54.0	-12.4	2.69 H	283	24.0	17.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5625.00	54.8 PK	68.2	-13.4	2.69 V	86	50.3	4.5
2	*5745.00	116.2 PK			2.69 V	86	76.1	40.1
3	*5745.00	106.4 AV			2.69 V	86	66.3	40.1
4	#5939.10	57.4 PK	68.2	-10.8	2.69 V	86	52.3	5.1
5	11490.00	57.2 PK	74.0	-16.8	1.19 V	203	39.6	17.6
6	11490.00	44.0 AV	54.0	-10.0	1.19 V	203	26.4	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5627.56	54.0 PK	68.2	-14.2	3.13 H	90	49.5	4.5
2	*5785.00	111.6 PK			3.13 H	90	71.3	40.3
3	*5785.00	101.7 AV			3.13 H	90	61.4	40.3
4	#5943.59	56.0 PK	68.2	-12.2	3.13 H	90	50.8	5.2
5	11570.00	57.6 PK	74.0	-16.4	3.23 H	143	39.7	17.9
6	11570.00	44.4 AV	54.0	-9.6	3.23 H	143	26.5	17.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.03	53.9 PK	68.2	-14.3	2.62 V	89	49.4	4.5
2	*5785.00	118.1 PK			2.62 V	89	77.8	40.3
3	*5785.00	107.9 AV			2.62 V	89	67.6	40.3
4	#5935.90	57.0 PK	68.2	-11.2	2.62 V	89	51.9	5.1
5	11570.00	62.1 PK	74.0	-11.9	1.03 V	205	44.2	17.9
6	11570.00	49.2 AV	54.0	-4.8	1.03 V	205	31.3	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.97	54.3 PK	68.2	-13.9	3.68 H	89	49.8	4.5
2	*5825.00	111.9 PK			3.68 H	89	71.4	40.5
3	*5825.00	102.0 AV			3.68 H	89	61.5	40.5
4	#5938.46	56.8 PK	68.2	-11.4	3.68 H	89	51.7	5.1
5	11650.00	59.5 PK	74.0	-14.5	3.67 H	246	42.0	17.5
6	11650.00	46.4 AV	54.0	-7.6	3.67 H	246	28.9	17.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.05	53.8 PK	68.2	-14.4	2.61 V	89	49.3	4.5
2	*5825.00	118.5 PK			2.61 V	89	78.0	40.5
3	*5825.00	108.6 AV			2.61 V	89	68.1	40.5
4	#5943.59	56.3 PK	68.2	-11.9	2.61 V	89	51.1	5.2
5	11650.00	63.1 PK	74.0	-10.9	1.02 V	353	45.6	17.5
6	11650.00	50.6 AV	54.0	-3.4	1.02 V	353	33.1	17.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.5 PK	74.0	-15.5	1.51 H	211	54.6	3.9
2	5150.00	43.3 AV	54.0	-10.7	1.51 H	211	39.4	3.9
3	*5190.00	99.7 PK			1.89 H	214	60.1	39.6
4	*5190.00	90.2 AV			1.89 H	214	50.6	39.6
5	#10380.00	53.4 PK	68.2	-14.8	2.64 H	181	37.5	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	2.71 V	313	63.2	3.9
2	5150.00	53.3 AV	54.0	-0.7	2.71 V	313	49.4	3.9
3	*5190.00	111.2 PK			2.92 V	227	71.6	39.6
4	*5190.00	100.9 AV			2.92 V	227	61.3	39.6
5	#10380.00	53.6 PK	68.2	-14.6	2.58 V	132	37.7	15.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	2.54 H	211	54.5	3.9
2	5150.00	45.2 AV	54.0	-8.8	2.54 H	211	41.3	3.9
3	*5230.00	106.3 PK			2.22 H	214	66.9	39.4
4	*5230.00	96.1 AV			2.22 H	214	56.7	39.4
5	5350.00	55.9 PK	74.0	-18.1	1.96 H	247	51.9	4.0
6	5350.00	42.8 AV	54.0	-11.2	1.96 H	247	38.8	4.0
7	#10460.00	53.3 PK	68.2	-14.9	2.79 H	126	36.9	16.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	2.71 V	315	63.2	3.9
2	5150.00	53.4 AV	54.0	-0.6	2.71 V	315	49.5	3.9
3	*5230.00	115.7 PK			2.84 V	227	76.3	39.4
4	*5230.00	105.4 AV			2.84 V	227	66.0	39.4
5	5350.00	62.5 PK	74.0	-11.5	2.71 V	314	58.5	4.0
6	5350.00	44.6 AV	54.0	-9.4	2.71 V	314	40.6	4.0
7	#10460.00	53.5 PK	68.2	-14.7	2.31 V	145	37.1	16.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.74	54.6 PK	68.2	-13.6	1.22 H	203	50.1	4.5
2	#5650.00	59.2 PK	68.2	-9.0	2.84 H	95	54.6	4.6
3	*5755.00	103.8 PK			1.22 H	203	63.7	40.1
4	*5755.00	93.9 AV			1.22 H	203	53.8	40.1
5	#5950.64	56.1 PK	68.2	-12.1	1.22 H	203	50.9	5.2
6	11510.00	55.2 PK	74.0	-18.8	3.99 H	245	37.6	17.6
7	11510.00	42.3 AV	54.0	-11.7	3.99 H	245	24.7	17.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	66.6 PK	68.2	-1.6	2.74 V	226	62.0	4.6
2	#5650.00	62.0 PK	68.2	-6.2	2.64 V	89	57.4	4.6
3	*5755.00	114.7 PK			2.64 V	89	74.6	40.1
4	*5755.00	104.8 AV			2.64 V	89	64.7	40.1
5	#5935.26	57.5 PK	68.2	-10.7	2.64 V	89	52.4	5.1
6	11510.00	55.2 PK	74.0	-18.8	1.02 V	322	37.6	17.6
7	11510.00	42.1 AV	54.0	-11.9	1.02 V	322	24.5	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5600.64	54.0 PK	68.2	-14.2	3.49 H	301	49.5	4.5
2	*5795.00	109.7 PK			3.49 H	301	69.4	40.3
3	*5795.00	99.5 AV			3.49 H	301	59.2	40.3
4	#5928.85	56.4 PK	68.2	-11.8	3.49 H	301	51.2	5.2
5	11590.00	57.6 PK	74.0	-16.4	3.44 H	142	39.7	17.9
6	11590.00	44.2 AV	54.0	-9.8	3.44 H	142	26.3	17.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.51	56.5 PK	68.2	-11.7	2.81 V	111	51.9	4.6
2	*5795.00	116.0 PK			2.81 V	111	75.7	40.3
3	*5795.00	106.1 AV			2.81 V	111	65.8	40.3
4	#5937.82	61.4 PK	68.2	-6.8	2.81 V	111	56.3	5.1
5	11590.00	60.9 PK	74.0	-13.1	1.06 V	201	43.0	17.9
6	11590.00	48.1 AV	54.0	-5.9	1.06 V	201	30.2	17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	2.51 H	213	53.4	3.9
2	5150.00	44.2 AV	54.0	-9.8	2.51 H	213	40.3	3.9
3	*5210.00	98.2 PK			2.26 H	215	58.7	39.5
4	*5210.00	88.0 AV			2.26 H	215	48.5	39.5
5	5350.00	56.4 PK	74.0	-17.6	2.62 H	224	52.4	4.0
6	5350.00	42.9 AV	54.0	-11.1	2.62 H	224	38.9	4.0
7	#10420.00	53.2 PK	68.2	-15.0	1.92 H	118	37.2	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.5 PK	74.0	-7.5	2.71 V	311	62.6	3.9
2	5150.00	53.5 AV	54.0	-0.5	2.71 V	311	49.6	3.9
3	*5210.00	107.7 PK			2.94 V	225	68.2	39.5
4	*5210.00	97.5 AV			2.94 V	225	58.0	39.5
5	5350.00	56.8 PK	74.0	-17.2	2.65 V	223	52.8	4.0
6	5350.00	43.5 AV	54.0	-10.5	2.65 V	223	39.5	4.0
7	#10420.00	52.7 PK	68.2	-15.5	2.26 V	143	36.7	16.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.00	58.5 PK	68.2	-9.7	2.72 H	105	53.9	4.6
2	#5650.00	55.9 PK	68.2	-12.3	2.65 H	264	51.3	4.6
3	*5775.00	100.3 PK			2.65 H	264	60.1	40.2
4	*5775.00	90.5 AV			2.65 H	264	50.3	40.2
5	#5925.00	58.8 PK	68.2	-9.4	2.96 H	108	53.6	5.2
6	#5925.64	58.3 PK	68.2	-9.9	2.65 H	264	53.1	5.2
7	11550.00	54.2 PK	74.0	-19.8	3.24 H	287	36.4	17.8
8	11550.00	41.8 AV	54.0	-12.2	3.24 H	287	24.0	17.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.59	61.3 PK	68.2	-6.9	2.87 V	90	56.7	4.6
2	#5650.00	66.3 PK	68.2	-1.9	2.76 V	206	61.7	4.6
3	*5775.00	108.7 PK			2.87 V	90	68.5	40.2
4	*5775.00	98.6 AV			2.87 V	90	58.4	40.2
5	#5925.00	66.5 PK	68.2	-1.7	2.76 V	203	61.3	5.2
6	#5925.64	61.0 PK	68.2	-7.2	2.87 V	90	55.8	5.2
7	11550.00	54.4 PK	74.0	-19.6	1.02 V	348	36.6	17.8
8	11550.00	42.1 AV	54.0	-11.9	1.02 V	348	24.3	17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data:

802.11a

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.84	29.6 QP	40.0	-10.4	1.00 H	91	40.6	-11.0
2	57.12	27.4 QP	40.0	-12.6	2.00 H	255	36.9	-9.5
3	70.73	25.9 QP	40.0	-14.1	2.00 H	288	37.2	-11.3
4	123.23	26.6 QP	43.5	-16.9	1.50 H	251	37.7	-11.1
5	228.22	24.8 QP	46.0	-21.2	1.50 H	232	35.7	-10.9
6	589.86	33.9 QP	46.0	-12.1	1.50 H	175	34.7	-0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.03	32.2 QP	40.0	-7.8	1.00 V	91	41.7	-9.5
2	61.01	29.8 QP	40.0	-10.2	1.00 V	6	39.6	-9.8
3	94.06	30.1 QP	43.5	-13.4	1.00 V	124	44.4	-14.3
4	179.61	23.4 QP	43.5	-20.1	1.00 V	120	33.3	-9.9
5	214.61	22.5 QP	43.5	-21.0	1.49 V	16	33.6	-11.1
6	560.69	28.9 QP	46.0	-17.1	1.00 V	217	30.7	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.62	28.0 QP	40.0	-12.0	1.51 H	57	38.1	-10.1
2	57.12	27.8 QP	40.0	-12.2	2.00 H	59	37.3	-9.5
3	68.79	27.5 QP	40.0	-12.5	1.51 H	80	38.3	-10.8
4	107.67	25.0 QP	43.5	-18.5	1.51 H	235	37.6	-12.6
5	317.65	27.4 QP	46.0	-18.6	1.00 H	113	34.1	-6.7
6	589.86	34.9 QP	46.0	-11.1	1.51 H	184	35.7	-0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.39	35.6 QP	40.0	-4.4	1.00 V	115	45.9	-10.3
2	66.84	35.8 QP	40.0	-4.2	1.00 V	9	46.2	-10.4
3	140.72	25.7 QP	43.5	-17.8	1.00 V	9	35.1	-9.4
4	181.55	26.0 QP	43.5	-17.5	1.00 V	220	36.2	-10.2
5	317.65	27.2 QP	46.0	-18.8	1.00 V	159	33.9	-6.7
6	552.91	30.1 QP	46.0	-15.9	1.00 V	242	32.0	-1.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESR3	102412	Feb. 08, 2018	Feb. 07, 2019
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 08, 2017	Sep. 07, 2018
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 05, 2018	Feb. 04, 2019
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Aug. 02, 2017	Aug. 01, 2018
Software ADT	BV ADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 2.

3. The VCCI Site Registration No. is C-2047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

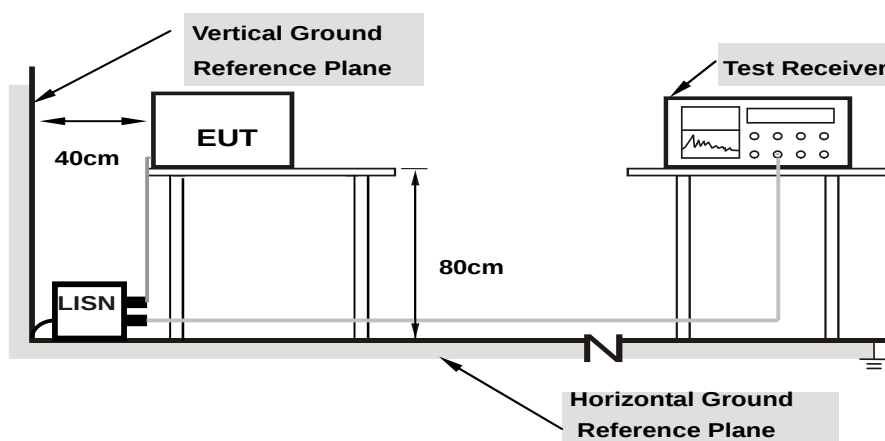

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16125	10.29	32.91	15.80	43.20	26.09	65.40	55.40	-22.20	-29.31
2	0.20625	10.31	35.14	20.05	45.45	30.36	63.35	53.35	-17.90	-22.99
3	0.39284	10.34	25.59	15.69	35.93	26.03	58.00	48.00	-22.07	-21.97
4	0.97575	10.41	19.33	11.10	29.74	21.51	56.00	46.00	-26.26	-24.49
5	9.99600	10.61	24.07	15.84	34.68	26.45	60.00	50.00	-25.32	-23.55
6	19.34700	10.91	23.59	16.81	34.50	27.72	60.00	50.00	-25.50	-22.28

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

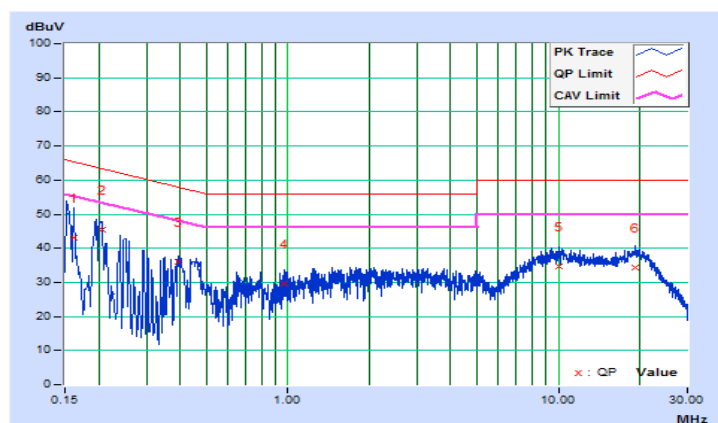


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15715	10.34	38.07	20.94	48.41	31.28	65.61	55.61	-17.20	-24.33
2	0.19950	10.30	36.03	22.37	46.33	32.67	63.63	53.63	-17.30	-20.96
3	0.39077	10.31	22.43	11.91	32.74	22.22	58.05	48.05	-25.31	-25.83
4	1.25025	10.43	11.48	4.20	21.91	14.63	56.00	46.00	-34.09	-31.37
5	9.77550	10.70	19.58	13.22	30.28	23.92	60.00	50.00	-29.72	-26.08
6	19.99725	11.06	19.81	14.24	30.87	25.30	60.00	50.00	-29.13	-24.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

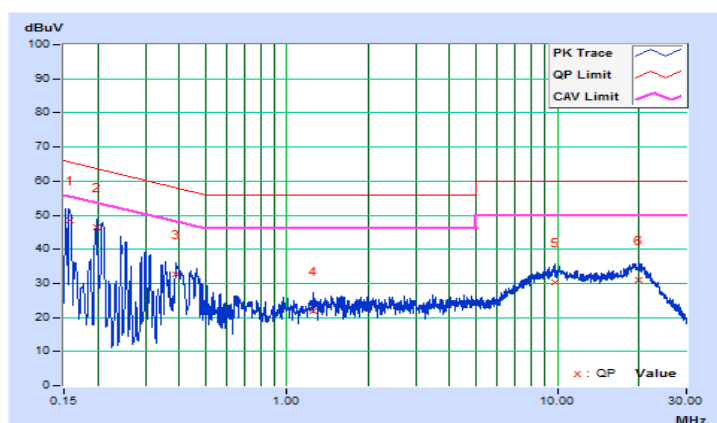


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18825	10.25	33.22	18.34	43.47	28.59	64.11	54.11	-20.64	-25.52
2	0.47400	10.28	29.22	24.04	39.50	34.32	56.44	46.44	-16.94	-12.12
3	1.24800	10.34	18.52	14.77	28.86	25.11	56.00	46.00	-27.14	-20.89
4	2.73975	10.41	17.70	13.62	28.11	24.03	56.00	46.00	-27.89	-21.97
5	6.31275	10.50	16.56	11.22	27.06	21.72	60.00	50.00	-32.94	-28.28
6	11.22450	10.60	20.74	15.40	31.34	26.00	60.00	50.00	-28.66	-24.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

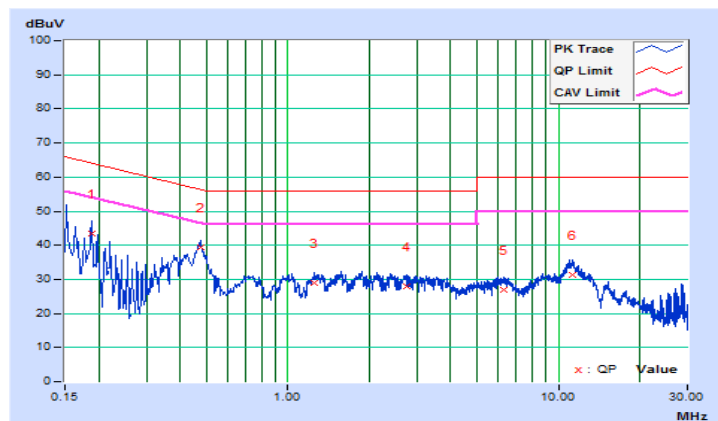


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17475	10.26	34.85	20.46	45.11	30.72	64.73	54.73	-19.62	-24.01
2	0.46500	10.29	30.41	24.77	40.70	35.06	56.60	46.60	-15.90	-11.54
3	0.99600	10.33	15.45	12.36	25.78	22.69	56.00	46.00	-30.22	-23.31
4	3.25050	10.44	12.92	8.00	23.36	18.44	56.00	46.00	-32.64	-27.56
5	7.79775	10.58	13.05	8.05	23.63	18.63	60.00	50.00	-36.37	-31.37
6	11.47200	10.69	18.17	12.65	28.86	23.34	60.00	50.00	-31.14	-26.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

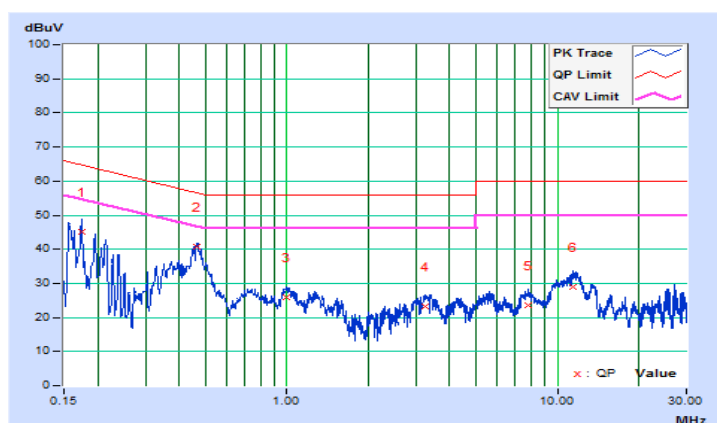

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

For Power Output

802.11a, 802.11n (HT20), 802.11n (HT40)

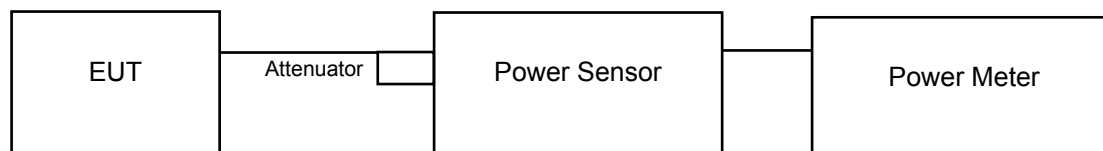

802.11ac (VHT80)



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to “free run”.
- c. Set RBW = 1 MHz.
- d. Set VBW $\geq$ 3 MHz.
- e. Number of points in sweep $\geq$ 2 Span / RBW.
- f. Sweep time $\leq$ (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	17.31	17.68	112.441	20.51	30.00	Pass
40	5200	20.79	20.88	242.412	23.85	30.00	Pass
48	5240	20.54	20.29	220.145	23.43	30.00	Pass
149	5745	20.49	20.76	231.068	23.64	30.00	Pass
157	5785	20.34	20.62	223.488	23.49	30.00	Pass
165	5825	20.26	20.72	224.202	23.51	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	16.25	16.58	87.669	19.43	30.00	Pass
40	5200	19.91	20.05	199.107	22.99	30.00	Pass
48	5240	19.58	20.04	191.707	22.83	30.00	Pass
149	5745	20.41	20.63	225.512	23.53	30.00	Pass
157	5785	20.35	20.55	221.894	23.46	30.00	Pass
165	5825	20.25	20.69	223.145	23.49	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	14.96	15.22	64.599	18.10	30.00	Pass
46	5230	19.87	20.15	200.565	23.02	30.00	Pass
151	5755	20.86	21.14	251.916	24.01	30.00	Pass
159	5795	21.04	21.44	266.373	24.25	30.00	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	14.69	14.99	60.994	17.85	30.00	Pass
155	5775	17.84	18.24	127.495	21.05	30.00	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	13.24	13.57	43.837	16.42	27.15	Pass
40	5200	16.90	17.04	99.560	19.98	27.15	Pass
48	5240	16.57	17.03	95.860	19.82	27.15	Pass
149	5745	17.40	17.62	112.764	20.52	27.15	Pass
157	5785	17.34	17.54	110.954	20.45	27.15	Pass
165	5825	17.24	17.68	111.580	20.48	27.15	Pass

Note: Directional gain = 5.84dBi + 10log(2) = 8.85dBi > 6dBi, so the power limit shall be reduced to 30-(8.85-6) = 27.15dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	11.95	12.21	32.302	15.09	27.15	Pass
46	5230	16.86	17.14	100.290	20.01	27.15	Pass
151	5755	17.85	18.13	125.967	21.00	27.15	Pass
159	5795	18.03	18.43	133.196	21.24	27.15	Pass

Note: Directional gain = 5.84dBi + 10log(2) = 8.85dBi > 6dBi, so the power limit shall be reduced to 30-(8.85-6) = 27.15dBm.


802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	11.68	11.98	30.499	14.84	27.15	Pass
155	5775	14.83	15.23	63.752	18.04	27.15	Pass

Note: Directional gain = 5.84dBi + 10log(2) = 8.85dBi > 6dBi, so the power limit shall be reduced to 30-(8.85-6) = 27.15dBm.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.56	16.56
40	5200	20.04	23.04
48	5240	17.83	19.68
149	5745	25.32	28.56
157	5785	23.04	27.60
165	5825	22.20	27.60

802.11n (HT20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.64	17.64
40	5200	18.12	18.72
48	5240	18.44	18.52
149	5745	26.64	29.76
157	5785	24.24	29.16
165	5825	23.28	28.68

802.11n (HT40)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.12	36.12
46	5230	36.72	36.96
151	5755	41.16	47.28
159	5795	41.28	48.24

802.11ac (VHT80)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	75.84
155	5775	75.84	76.08

Spectrum Plot of Worst Value


802.11a

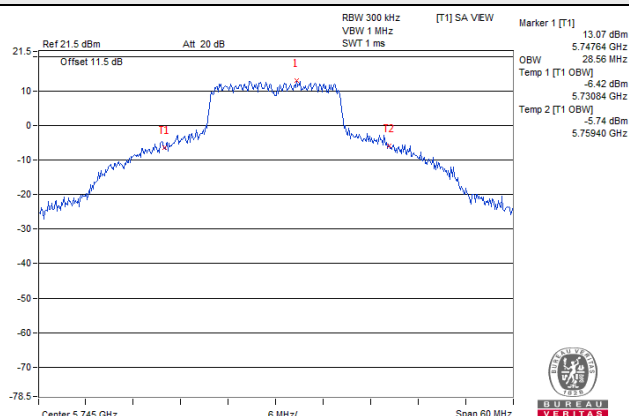


802.11n (HT20)

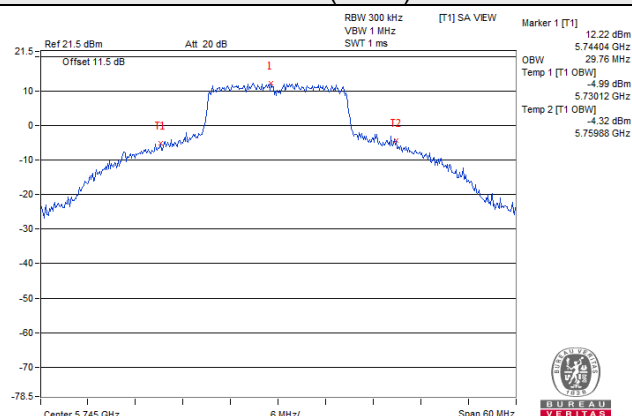

802.11n (HT40)

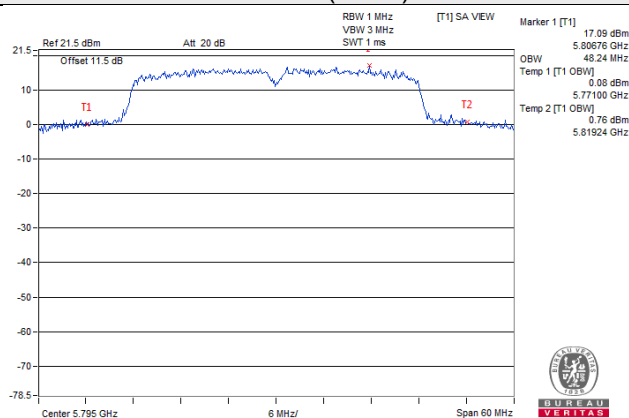

802.11ac (VHT80)

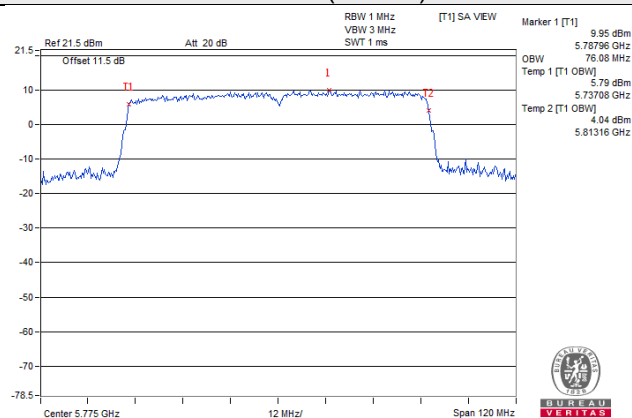


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1 band:

Using method SA-2

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- Set Channel power measure = 1MHz
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 band:

802.11a

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	4.30	4.47	0.23	7.62	14.15	Pass
40	5200	7.76	7.68	0.23	10.96	14.15	Pass
48	5240	7.90	7.36	0.23	10.87	14.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.85-6) = 14.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	3.02	3.26	0.11	6.27	14.15	Pass
40	5200	6.73	6.68	0.11	9.83	14.15	Pass
48	5240	7.70	7.24	0.11	10.60	14.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.85-6) = 14.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	-1.08	-0.85	0.15	2.20	14.15	Pass
46	5230	4.14	4.30	0.15	7.38	14.15	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(8.85-6) = 14.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD with Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-4.76	-4.77	0.31	-1.45	14.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (8.85 - 6) = 14.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

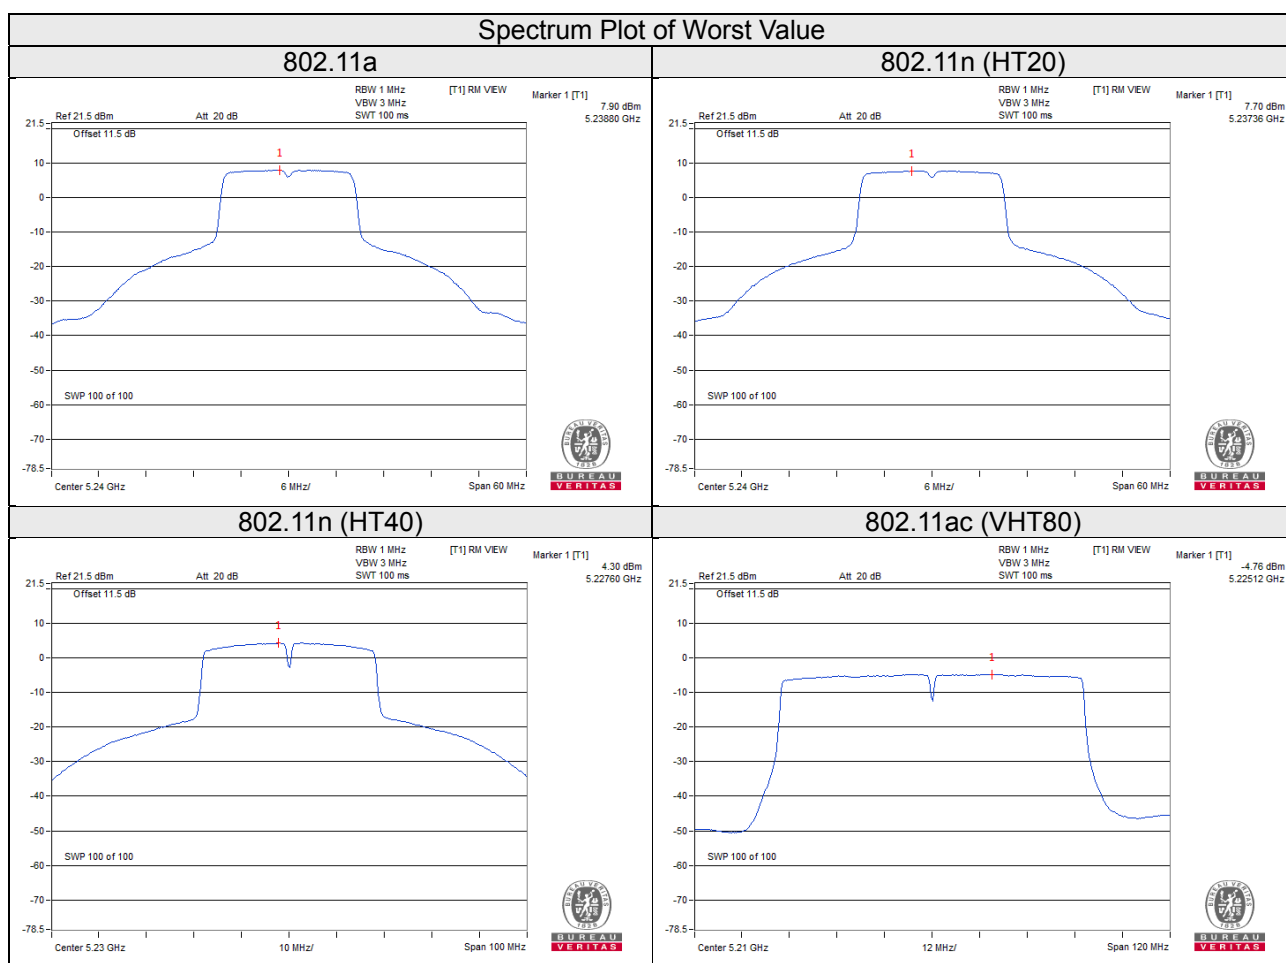

For U-NII-3 band:

802.11a

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-0.46	1.76	3.01	0.23	5.00	27.15	Pass
	157	5785	-0.26	1.96	3.01	0.23	5.20	27.15	Pass
	165	5825	-0.10	2.12	3.01	0.23	5.36	27.15	Pass
1	149	5745	-0.25	1.97	3.01	0.23	5.21	27.15	Pass
	157	5785	-0.27	1.95	3.01	0.23	5.19	27.15	Pass
	165	5825	0.04	2.26	3.01	0.23	5.50	27.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.84dBi + 10log(2) = 8.85dBi > 6dBi, so the power density limit shall be reduced to 30-(8.85-6) = 27.15dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	149	5745	-0.88	1.34	3.01	0.11	4.46	27.15	Pass
	157	5785	-0.69	1.53	3.01	0.11	4.65	27.15	Pass
	165	5825	-0.61	1.61	3.01	0.11	4.73	27.15	Pass
1	149	5745	-0.77	1.45	3.01	0.11	4.57	27.15	Pass
	157	5785	-0.62	1.60	3.01	0.11	4.72	27.15	Pass
	165	5825	-0.42	1.80	3.01	0.11	4.92	27.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.84dBi + 10log(2) = 8.85dBi > 6dBi, so the power density limit shall be reduced to 30-(8.85-6) = 27.15dBm.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	151	5755	-3.36	-1.14	3.01	0.15	2.02	27.15	Pass
	159	5795	-3.07	-0.85	3.01	0.15	2.31	27.15	Pass
1	151	5755	-3.28	-1.06	3.01	0.15	2.10	27.15	Pass
	159	5795	-2.85	-0.63	3.01	0.15	2.53	27.15	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.85 - 6) = 27.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-9.75	-7.53	3.01	0.31	-4.21	27.15	Pass
1	155	5775	-9.50	-7.28	3.01	0.31	-3.96	27.15	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $5.84\text{dBi} + 10\log(2) = 8.85\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (8.85 - 6) = 27.15\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a

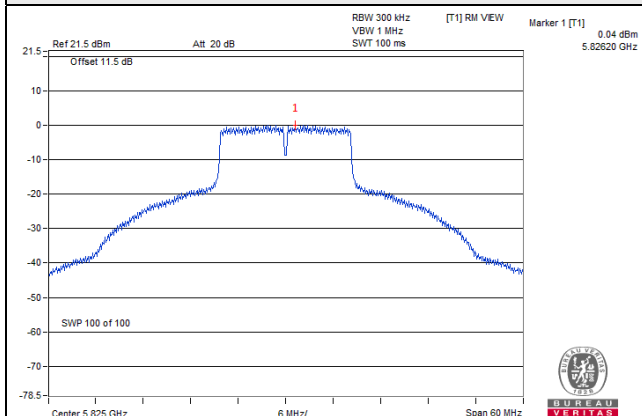


802.11n (HT20)

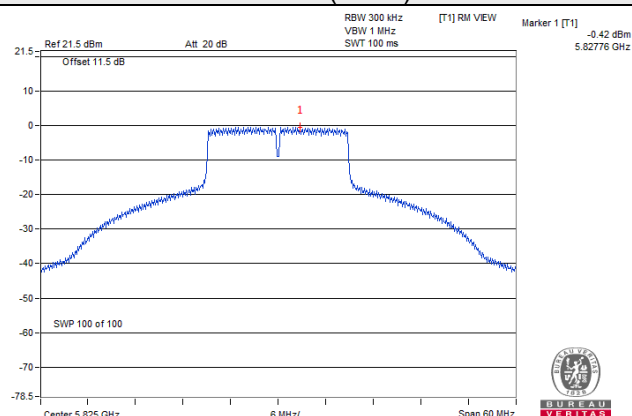

802.11n (HT40)

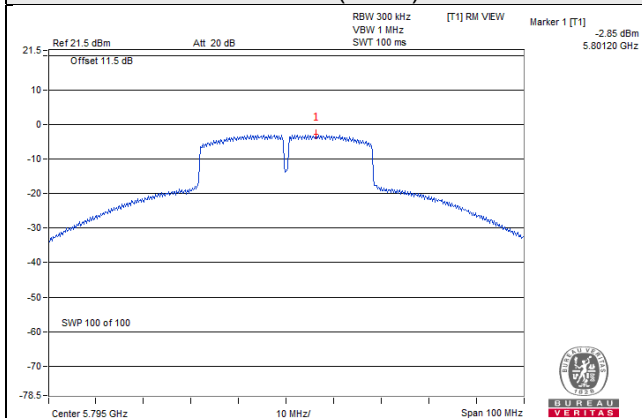

802.11ac (VHT80)

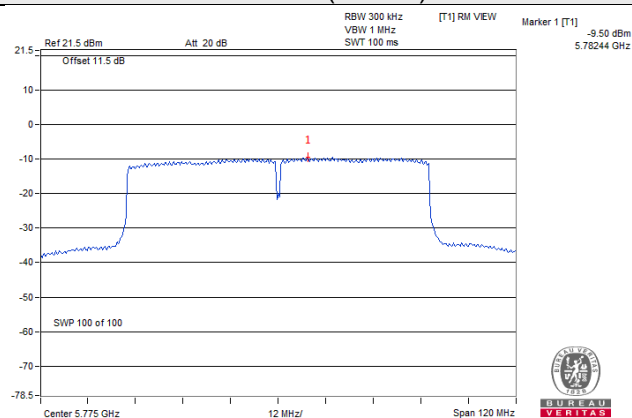


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

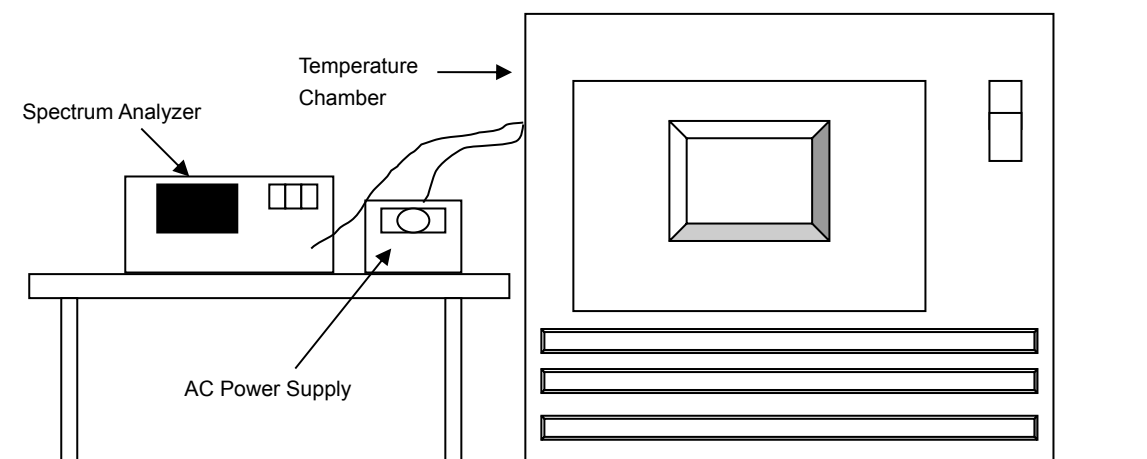

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
50	120	5179.9928	Pass	5179.9945	Pass	5179.9944	Pass	5179.9934	Pass
40	120	5179.9952	Pass	5179.994	Pass	5179.9921	Pass	5179.9935	Pass
30	120	5179.9983	Pass	5179.9988	Pass	5179.9993	Pass	5179.9978	Pass
20	120	5180.0085	Pass	5180.0126	Pass	5180.0111	Pass	5180.0115	Pass
10	120	5180.0023	Pass	5179.9988	Pass	5180.0017	Pass	5179.9987	Pass
0	120	5179.9998	Pass	5180.0014	Pass	5180.0034	Pass	5180.0027	Pass
-10	120	5179.9883	Pass	5179.9909	Pass	5179.9874	Pass	5179.9915	Pass
-20	120	5180.0098	Pass	5180.012	Pass	5180.0092	Pass	5180.0134	Pass
-30	120	5179.9995	Pass	5180.0008	Pass	5179.9996	Pass	5179.9991	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5180.0094	Pass	5180.0132	Pass	5180.0106	Pass	5180.0124	Pass
	120	5180.0085	Pass	5180.0126	Pass	5180.0111	Pass	5180.0115	Pass
	102	5180.0083	Pass	5180.0131	Pass	5180.0119	Pass	5180.0119	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.39	16.40	0.5	Pass
157	5785	16.38	16.39	0.5	Pass
165	5825	16.40	16.39	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.63	17.62	0.5	Pass
157	5785	17.60	17.64	0.5	Pass
165	5825	17.62	17.65	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.20	35.33	0.5	Pass
159	5795	35.21	35.32	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	75.66	75.66	0.5	Pass

Spectrum Plot of Worst Value


802.11a

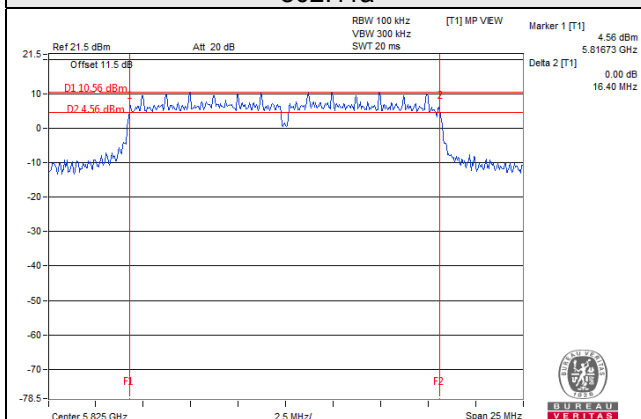


802.11n (HT20)

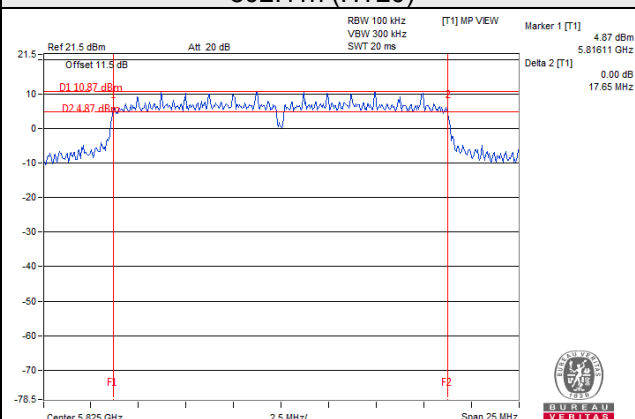

802.11n (HT40)

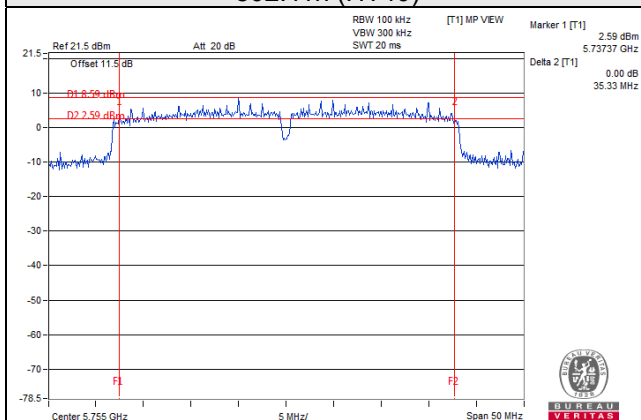

802.11ac (VHT80)

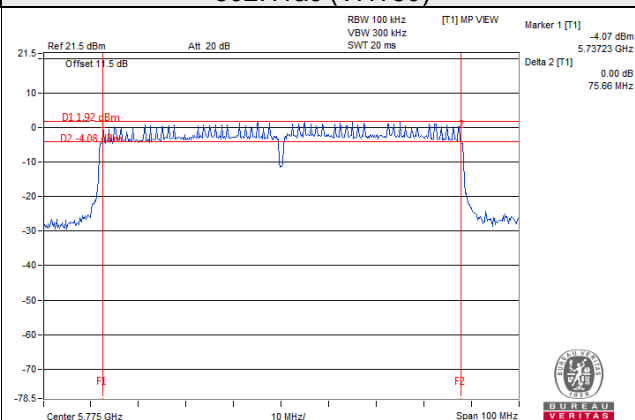


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

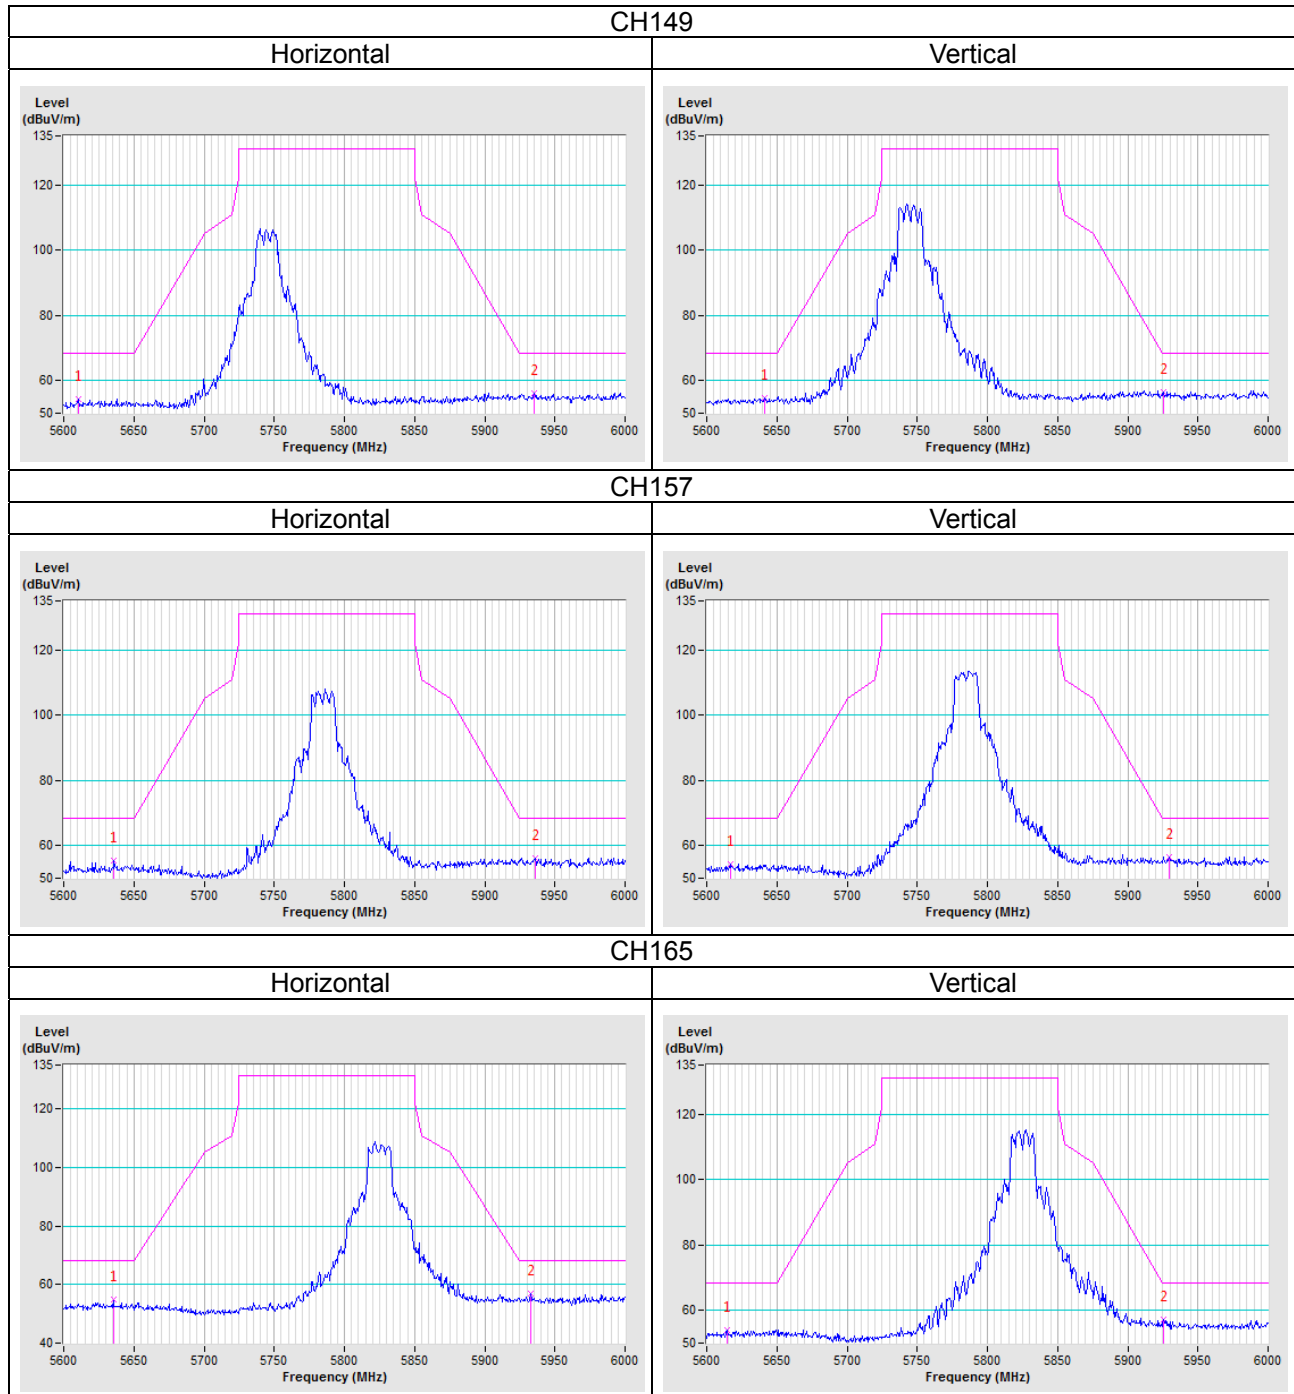


802.11n (HT20)

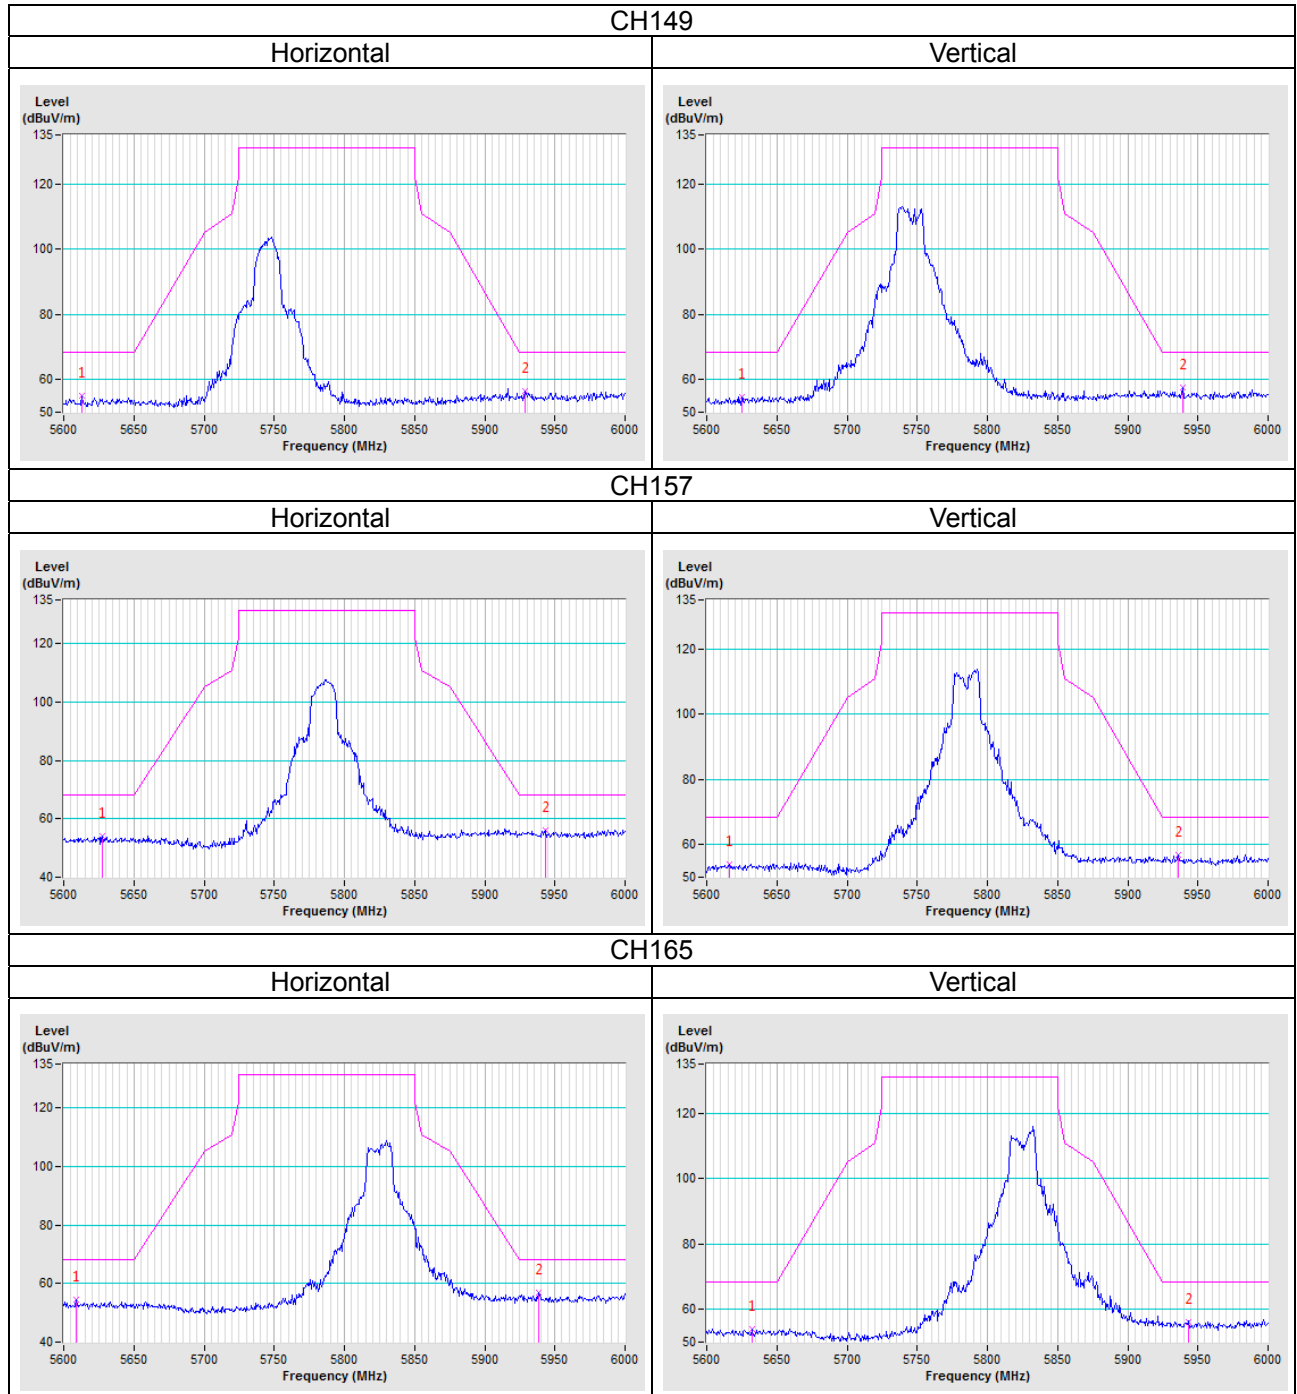

802.11n (HT40)

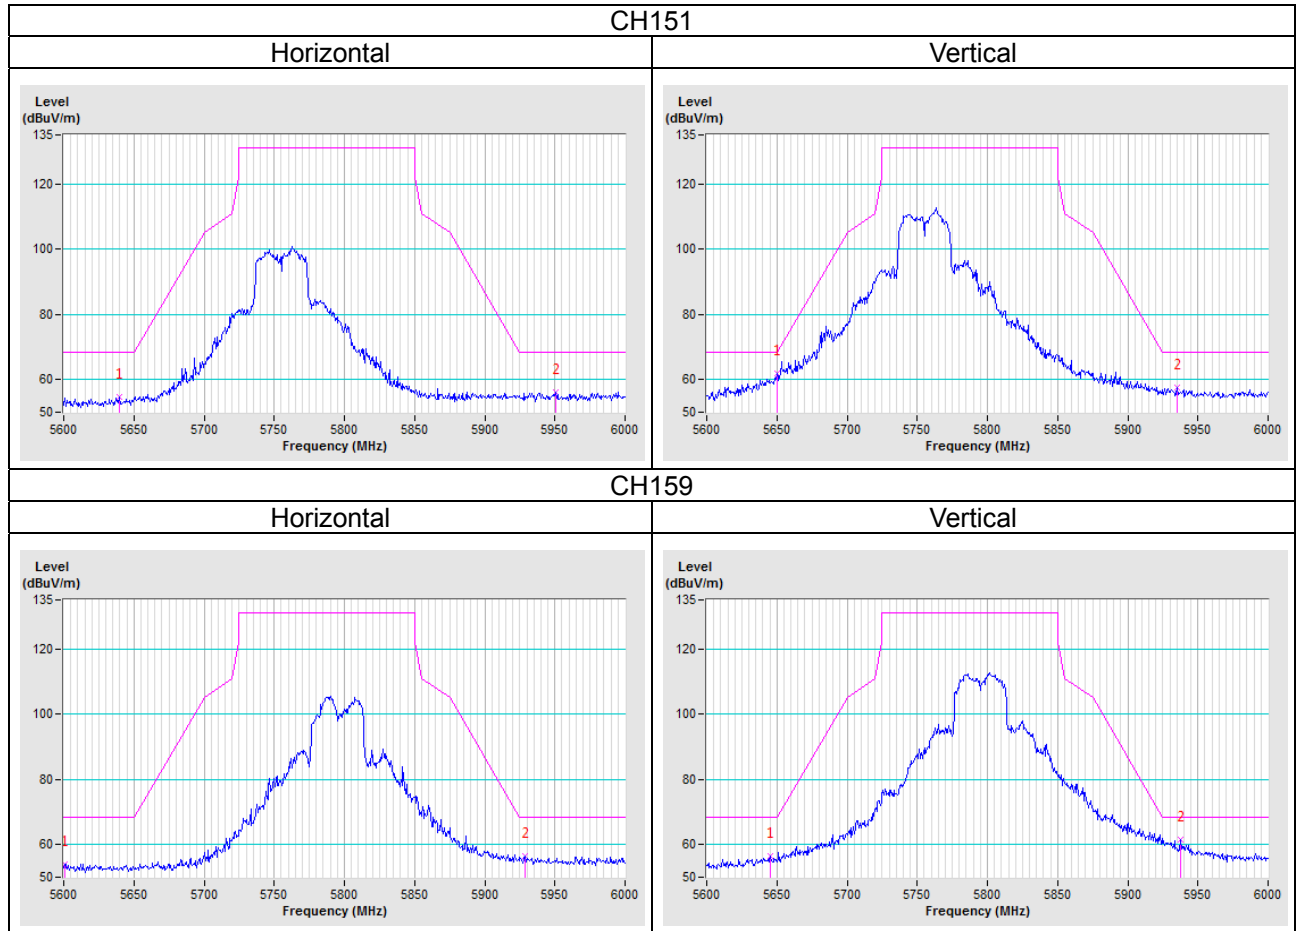

802.11ac (VHT80)

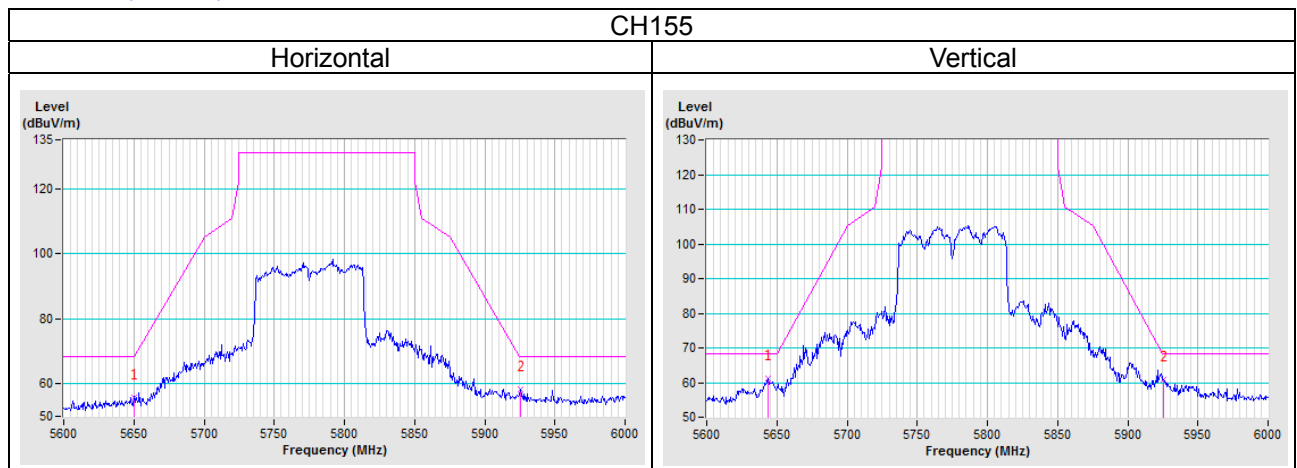

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---