

User Manual



ENH202
version 1.0

Long Range Wireless N300 CPE

TABLE OF CONTENTS

Conventions	0-vi
Copyright	0-viii
Product Overview	
Package Contents	1-1
Product Overview	1-2
Key Features	1-2
Benefits	1-3
Technical Specification	1-4
Wireless Specification	1-4
Hardware Specification	1-4
Software Specification	1-4
Product Layout	1-5
Installation	
System Requirements	2-1

Installing the Device 2-2

 Pre-Installation Guidelines 2-2

 Installing the Device 2-2

Web Configuration

Logging In 3-1

 Best Practices 3-2

Basic Network Settings

System Status 4-1

 Using Save/Reload 4-1

 Viewing System Information 4-2

 Viewing Wireless Client List 4-6

 Viewing System Log 4-7

 Viewing Connection Status 4-8

 Viewing DHCP Client Table 4-9

 Viewing WDS Link List 4-10

System Setup 4-11

Configuring Operation Mode	4-11
Configuring IP Settings	4-12
Configuring Spanning Tree Settings	4-13
Router Setup	4-14
Configuring WAN Settings	4-14
Static IP.	4-14
Dynamic IP.	4-15
Point-to-Point Protocol over Ethernet (PPPoE).	4-16
Point-to-Point Tunnelling Protocol (PPTP)	4-17
Configuring LAN Settings	4-19
Configuring VPN Pass-Through	4-20
Configuring Port Forwarding	4-21
Configuring Demilitarized Zone	4-23
Configuring Wireless LAN	4-24
Configuring Wireless Settings	4-24
Access Point Mode	4-24
Client Bridge Mode	4-26
WDS Bridge Mode	4-28
Client Router Mode	4-30
Configuring Wireless Security	4-32

- Wired Equivalent Privacy (WEP) 4-32
- Wi-Fi Protected Access Pre-Shared Key (WPA-PSK) 4-33
- Wi-Fi Protected Access 2 Pre-Shared Key (WPA2-PSK) 4-34
- Wi-Fi Protected Access Pre-Shared Key (WPA-PSK) Mixed 4-35
- Wi-Fi Protected Access (WPA) 4-36
- Wi-Fi Protected Access 2 (WPA2) 4-37
- Wi-Fi Protected Access (WPA) Mixed 4-38
- Configuring Wireless MAC Filter 4-39
- Configuring WDS Link Settings 4-40
- Configuring Advanced Network Settings 4-41
 - Wireless Traffic Shaping 4-41
 - Client Limit 4-42
- Management Setup 4-43
 - Configuring Administrator Account 4-43
 - Configuring Management VLAN 4-44
 - Configuring SNMP 4-45
 - Configuring Backup/Restore Settings 4-47
 - Configuring Auto Reboot Settings 4-48
 - Configuring Firmware Upgrade 4-49
 - Configuring System Time 4-50

Configuring Wi-Fi Schedule 4-51

 Add a Schedule Service 4-51

 Schedule Services Table. 4-52

Configuring Command Line Interface 4-53

Configuring Logging 4-54

Configuring Diagnostics 4-55

Viewing Device Discovery 4-56

Configure Denial of Service Protection 4-57

Logging Out 4-58

Appendix A

Federal Communication Commission Interference StatementA-1

Appendix B

Europe – EU Declaration of Conformity B-1

Appendix C

Industry Canada Statement C-1

Conventions

The following conventions are used to give the user additional information about specific procedures or content. It is important to pay attention to these conventions as they provide information to prevent damage to equipment or personal injury.

General Conventions

The following general conventions are used in this document.



CAUTION!

CAUTIONS APPEAR BEFORE THE TEXT IT REFERENCES. CAUTIONS APPEAR IN CAPITAL LETTERS TO EMPHASIZE THAT THE MESSAGE CONTAINS VITAL HEALTH AND SAFETY INFORMATION.



WARNING!

Warning information appears before the text it references to emphasize that the content may prevent damage to the device or equipment.



Important:

Indicates information that is important to know for the proper completion of a procedure, choice of an option, or completing a task.



Note:

Indicates additional information that is relevant to the current process or procedure.



Example:

Indicates information used to demonstrate or explain an associated concept.

N/A:

Indicates that a component or a procedure is not applicable to this model.

Prerequisite:

Indicates a requirement that must be addressed before proceeding with the current function or procedure.

Typographical Conventions

The following typographical conventions are used in this document:

Italics

Indicates book titles, directory names, file names, path names, and program/process names.

Constant width

Indicates computer output shown on a computer screen, including menus, prompts, responses to input, and error messages.

Constant width bold

Indicates commands lines as entered on the computer. Variables contained within user input are shown in angle brackets (< >).

Bold

Indicates keyboard keys that are pressed by the user.

Copyright

This user guide and its content is copyright of © EnGenius Networks, 2011. All rights reserved.

Any redistribution or reproduction in part or in whole in any form is prohibited.

Do not distribute, transmit, store in any form of electronic retrieval system or commercially exploit the content without the expressed written permission of EnGenius Networks.

Product Overview

Chapter 1

1.1 Package Contents

- ENH202
- Quick Start Guide
- Technical Support Card
- Pole Mounting Strap x2
- Wall Mounting Screw Set
- PoE Injector (EPE-24R) with Power Adapter

1.2 Product Overview

Thank you for choosing ENH202. The ENH202 is a long range, high performance IEEE 802.11b/g/n network solution that provides Access Point, Client Bridge, WDS, and Client Router functions in a single device.

In addition to providing the latest wireless technology, the ENH202 supports Power over Ethernet and Power by Adapter capabilities, which allow the device to be installed easily in nearly any indoor or outdoor location. Advanced features include power level control, traffic shaping, and Real time RSSI indication.

A variety of security features help to protect your data and privacy while you are online. Security features include Wi-Fi Protected Access (WPA PSK/WPA2 PSK), 64/128/152 bit WEP Encryption, and IEEE 802.1x with RADIUS.

Key Features

- High-speed data rates up to 300 Mbps make the ENH202 ideally suited for handling heavy data payloads such as MPEG video streaming
- High output power up to 28 dBm delivers superior range and coverage
- Fully Interoperable with IEEE 802.11b/IEEE 802.11g/IEEE 802.11n-compliant devices
- Multi-function capabilities enable users to use different modes in various environments

- Point-to-point and point-to-multipoint wireless connectivity enable data transfers between two or more buildings
- Channel bandwidth selection allows the appropriate bandwidth to be used to reach various distances
- RSSI indicator makes it easy to select the best signal for Access Point connections
- Power-over-Ethernet capabilities allow for flexible installation locations and cost savings
- Four SSIDs let clients access different networks through a single Access Point, and assign different policies and functions for each SSID
- WPA2/WPA/ WEP/ IEEE 802.1x support and MAC address filtering ensure secure network connections
- PPPoE/PPTP function support make it easy to access the Internet via Internet Service Provider (ISP) service authentication
- SNMP Remote Configuration Management helps administrators remotely configure or manage the Access Point
- QoS (WMM) support enhances performance and user experiences

Benefits

The ENH202 is the ideal product around which you can build your WLAN. The following list summarizes a few key advantages that WLANs have over wired networks:

Ideal for hard-to-wire environments

There are many scenarios where cables cannot be used to connect networking devices. Historic and older buildings, open areas, and busy streets, for example, make wired LAN installations difficult, expensive, or impossible.

Temporary workgroups

WLANs make it easy to provide connectivity to temporary workgroups that will later be removed. Examples include parks, athletic arenas, exhibition centers, disaster-recovery shelters, temporary offices, and construction sites.

Ability to access real-time information

With a WLAN, workers who rely on access to real-time information, such as doctors and nurses, point-of-sale employees, mobile workers, and warehouse personnel, can access the data they need and increase productivity, without having to look for a place to plug into the network.

Frequently changed environments

WLANs are well suited for showrooms, meeting rooms, retail stores, and manufacturing sites where workplaces are rearranged frequently.

Wireless extensions to Ethernet networks

WLANs enable network managers in dynamic environments to minimize overhead caused by moves, extensions to networks, and other changes.

Wired LAN backup

Network managers can implement WLANs to provide backup for mission-critical applications running on wired networks.

Mobility within training/educational facilities

Training sites at corporations and students at universities are a few examples where wireless connectivity can be used to facilitate access to information, information exchanges, and learning.

Technical Specification

Wireless Specification

- IEEE802.11b/g/n, 2T2R, 300Mbps
- 2.400 to 2.484 GHz

Hardware Specification

- Physical Interface: 2 x 10/100Mbps LAN Ports, 1 x Reset Button
- Power Supply: Passive PoE, 24V/0.6A Power Adapter
- Dimension: 260mm(L) x 84mm(W) x 55mm(H)
- Embedded high gain directional antenna

Software Specification


- Operation Mode: Client Bridge, Access Point, Client Router, WDS AP, WDS Bridge, WDS Station
- Multiple SSID, Preferred SSID
- PPPoE, PPTP, L2TP Pass-through
- WMM, Traffic Shaping
- CLI Interface, SNMP v1/v2c/v3
- Recovery Page
- Port Forwarding/DMZ

1.3 Product Layout



Figure 1-1: Back Panel View

BACK PANEL VIEW		DESCRIPTION
A	Power LED	OFF = ENH202 is not receiving power ON = ENH202 is receiving power
B	LAN (2) LEDs	OFF = ENH202 is not connected to the network. ON = ENH202 is connected to the network, but not sending or receiving data Blink = ENH202 is sending or receiving data
C	WLAN LED	(Access Point or Client Bridge Mode) OFF = ENH202 radio is off and the device is not sending or receiving data over the wireless LAN. ON = ENH202 radio is on, and the device is not sending or receiving data over the wireless LAN. Blinking = ENH202 radio is on, and the device is sending or receiving data over the wireless LAN.
D	Signal Indicator LED	(Client Bridge, WDS Station and Client Router Mode) Green - Signal is good Orange - Signal is normal Red - Signal is weak or non-existent

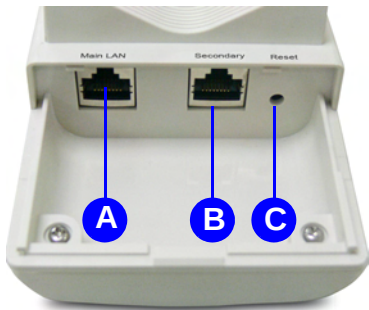

BOTTOM VIEW		DESCRIPTION
A	LAN Connector	To configure the ENH202, connect to an Ethernet adapter in a computer. For more information
B	PoE LAN Connector	The PoE interface allows the ENH202 to be powered using the supplied PoE injector
C	Reset Button	To reset to factory settings, press button for > 10 seconds.

Installation

Chapter 2

2.1 System Requirements

To install the ENH202, you need the following:

- Computer (Windows, Linux, Mac OS X Operating System)
- Web Browser (Internet Explorer, Firefox, Chrome, Safari)
- Network Interface equipped: (one of the following)
 - **Wired connectivity:** Network Interface with an open RJ-45 Ethernet Port
 - **Wireless Connectivity:**
 - Embedded 802.11n Wi-Fi wireless networking, IEEE 802.11a/b/g compatible
 - Wi-Fi Card, USB Wi-Fi Dongle (802.11 b/g/n)
- An existing router or access point (AP) with SSID broadcast
- 1x CAT5e Ethernet Cable

2.2 Installing the Device

Installing the ENH202 on a pole or wall optimizes the wireless access range.

**Note:**

Only experienced installation professionals who are familiar with local building and safety codes and, wherever applicable, are licensed by the appropriate government regulatory authorities should install the ENH202.

Pre-Installation Guidelines

Select the optimal location for the equipment using the following guidelines:

- The ENH202 should be mounted on a 1"-4" pole. Its location should enable easy access to the unit and its connectors for installation and testing.
- The higher the placement of the antenna, the better the achievable link quality.
- The antenna should be installed to provide a direct, or near line of sight with the Base Station antenna. The antenna should be aligned to face the general direction of the Base Station.

Installing the Device

To install the ENH202, use the following procedure to mount the device on a pole and refer to the figure below.

1. Remove the bottom cover protecting the RJ-45 connectors.
2. Insert an Ethernet cable into the RJ-45 port labeled LAN.
3. Install the bottom cover to protect the RJ-45 connectors.
4. Remove the power cord and PoE injector from the box and plug the power cord into the DC port of the PoE injector.

**CAUTION!**

ONLY USE THE POWER ADAPTER SUPPLIED WITH THE ENH202. USING A DIFFERENT POWER ADAPTER MIGHT DAMAGE THE ENH202.

5. Plug the other end of the Ethernet cable into the PoE port of the PoE injector.

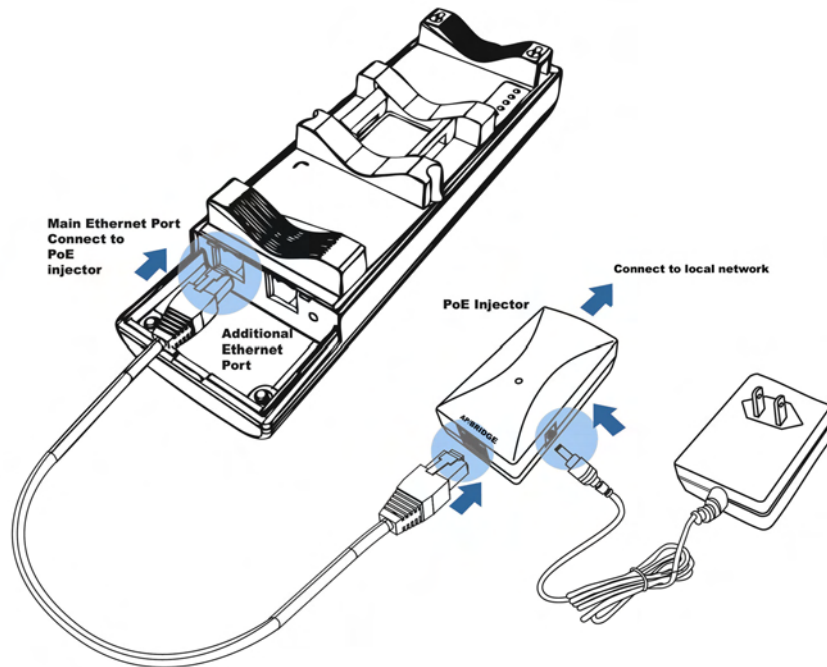


Figure 2-1: Installing the ENH202

6. Turn over the ENH202. Then insert the pole mounting strap through the middle hole of the ENH202. Use a screwdriver to unlock the pole-mounting ring putting it through the ENH202.
7. Mount the ENH202 securely to the pole by locking the strap tightly.

This completes the installation procedure.

Web Configuration

Chapter 3

3.1 Logging In

The ENH202 has a built-in Web Configurator that lets you manage the unit from any location using a Web browser that supports HTTP and has Javascript installed.

After configuring the computer for TCP/IP using the procedure appropriate for your operating system, use that computer's Web browser to log in to the ENH202 Web Configurator.

1. Launch your Web browser.
2. In the browser address bar, type **192.168.1.1** and press the Enter key.

**Note:**

If you changed the ENH202 LAN IP address, enter the correct IP address.

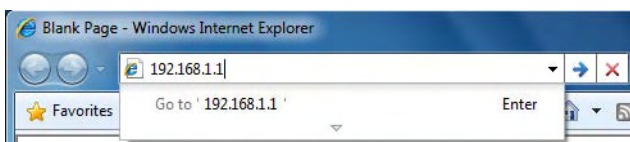


Figure 3-1: Web Browser Address Bar

3. When the login screen appears, enter **admin** for the user-name in the top field and **admin** for the password in the bottom field.

Figure 3-2: Windows Security Login Dialog

4. Click Login to continue or Reset to abort the login.

You are now ready to use the instructions in the following chapters to configure the ENH202.

Best Practices

Perform the following procedures regularly to make the ENH202 more secure and manage the ENH202 more effectively.

- **Change the default password** Use a password that is not easy to guess and that contains different characters, such as numbers and letters. The ENH202 username cannot be changed. For more information, see *Configuring Administrator Account*.
- **Back up the configuration** and be sure you know how to restore it. Restoring an earlier working configuration can be useful if the ENH202 becomes unstable or crashes. If you forget your password, you will have to reset the ENH202 to its factory default settings and lose any customized override settings you configured. However, if you back up an earlier configuration, you will not have to completely reconfigure the ENH202. You can simply restore your last configuration. For more information, see *Configuring Backup/Restore Settings*.

Basic Network Settings

Chapter 4

4.1 System Status

View the summary of the current system status including system (hardware/software version, date/time), wired network (LAN) and wireless network (WLAN) information.

4.1.1 Using Save/Reload

Save and apply the settings shown in the Unsaved changes list, or cancel the unsaved changes and revert to the previous settings that were in effect.

Save/Reload

HomeReset

Unsaved changes list

network.sys.opmode=ap'
wireless.wifi0.countryName=N/A

Caution: Network Setting changed, redirect IP to 192.168.1.1

Save & ApplyRevert

4.1.2 Viewing System Information

Displays status information about the current operating mode.

System Information shows the general system information such as operating mode, system up time, firmware version, serial number, kernel version, and application version.

System Information

Device Name	ENH202
Ethernet Main MAC Address	88:DC:96:05:FF:12
Ethernet Secondary MAC Address	88:DC:96:05:FF:12
Wireless MAC Address	88:DC:96:05:FF:12
Country	N/A
Current Time	Wed Jul 3 12:40:30 UTC 2013
Firmware Version	1.6.0

LAN Settings

IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0
DHCP Client	Disabled
IPv6 IP Address	2002:C0A8:101:1::1
IPv6 Link-Local Address	FE80::8ADC:96FF:FE05:FF12
IPv6 Default Gateway	
IPv6 Primary DNS	
IPv6 Secondary DNS	
RX(Packets)	37.0615 KB (480 PKts.)
TX(Packets)	129.269 KB (197 PKts.)

LAN Settings shows Local Area Network settings such as the LAN IP address, subnet mask, and MAC address.

LAN Settings	
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
Primary DNS	0.0.0.0
Secondary DNS	0.0.0.0
DHCP Client	Disabled
IPv6 IP Address	None
IPv6 Link-Local Address	FE80::202:6FFF:FE11:2207
IPv6 Default Gateway	
IPv6 Primary DNS	
IPv6 Secondary DNS	
RX(Packets)	588.181 KB (4270 PKts.)
TX(Packets)	671.421 KB (5395 PKts.)

WAN Settings shows Wide Area Network settings such as the MAC address, connection type, connection status, LAN IP address, subnet mask, primary and secondary DNS.

WAN Settings	
MAC Address	88:DC:96:05:FF:12
Connection Type	DHCP
Connection Status	Down
IP Address	
IP Subnet Mask	
Primary DNS	
Secondary DNS	
RX(Packets)	0 B (0 PKts.)
TX(Packets)	2.67969 KB (56 PKts.)

IPv6 Connection Information	
IPv6 Connection Type	Link-local only
Network Status	Down
WAN IPv6 Address	
IPv6 Default Gateway	
LAN IPv6 Address	
LAN IPv6 Link-Local Address	FE80::8ADC:96FF:FE05:FF13
Primary DNS Address	
Secondary DNS Address	
DHCP-PD	

Current Wireless Settings	
Operation Mode	Client Router
Wireless Mode	IEEE 802.11b/g/n Mixed
Channel Bandwidth	20/40 MHz
Frequency/Channel	2.417 GHz (Channel 2)
Wireless Network Name (SSID)	AP SSID
Security	None
Distance	1 Km
RX(Packets)	0 B (0 PKts.)
TX(Packets)	5.50293 KB (116 PKts.)

Current Wireless Settings shows wireless information such as frequency and channel. Since the ENH202 supports multiple-SSIDs, information about each SSID, such as its ESSID and security settings, are displayed.

Current Wireless Settings	
Operation Mode	Client Router
Wireless Mode	IEEE 802.11b/g/n Mixed
Channel Bandwidth	20/40 MHz
Frequency/Channel	2.452 GHz (Channel 9)
Wireless Network Name (SSID)	AP SSID
Security	None
Distance	1 Km
RX(Packets)	0 B (0 PKts.)
TX(Packets)	10.3838 KB (217 PKts.)

4.1.3 Viewing Wireless Client List

Client List

Home

Reset

SSID:#	MAC Address	TX(Bytes)	RX(Bytes)	RSSI(dBm)	Kick and Ban
--------	-------------	-----------	-----------	-----------	--------------

Refresh

Displays a list of clients associated to the ENH202, along with the MAC addresses and signal strength for each client. To remove an SSID client from the list, click the button that appears in the Kick and Ban column.

Click the Refresh button to update the client list.

4.1.4 Viewing System Log

System Log
Home
Reset

Show log type All

```

Jul  3 12:51:25 ENH202 user.warn kernel: ath_tx_edma_tasklet: TXQ[3] tailindex 1
Jul  3 12:50:01 ENH202 user.notice root: starting ntpd
Jul  3 12:50:01 ENH202 cron.info crond[3988]: crond: USER root pid 1382 cmd . /etc/hotplug.d/iface/20-ntpclient start
Jul  3 12:47:34 ENH202 daemon.warn dnsmasq[1164]: failed to access /tmp/resolv.conf.auto: No such file or directory
Jul  3 12:47:34 ENH202 daemon.info dnsmasq[1164]: using local addresses only for domain lan
Jul  3 12:47:34 ENH202 daemon.info dnsmasq[1164]: started, version 2.52 cachesize 150
Jul  3 12:47:34 ENH202 daemon.info dnsmasq[1164]: read /etc/hosts - 1 addresses
Jul  3 12:47:34 ENH202 daemon.info dnsmasq[1164]: compile time options: IPv6 GNU-getopt no-DBus no-I18N DHCP TFTP
Jul  3 12:47:34 ENH202 daemon.info dnsmasq-dhcp[1164]: DHCP, IP range 192.168.1.100 -- 192.168.1.200, lease time 1d
Jul  3 12:47:34 ENH202 daemon.err dnsmasq-dhcp[1164]: failed to read /etc/ethers: No such file or directory
Jul  3 12:47:33 ENH202 daemon.warn dnsmasq[819]: failed to access /tmp/resolv.conf: No such file or directory
Jul  3 12:47:33 ENH202 daemon.info dnsmasq[819]: exiting on receipt of SIGTERM
Jul  3 12:47:31 ENH202 user.info kernel: ADDRCONF(NETDEV_UP): ath0: link is not ready
Jul  3 12:47:20 ENH202 user.warn kernel: Scan in progress.. Cancelling it
Jul  3 12:47:16 ENH202 user.warn kernel: wlan_vap_create : exit. devhandle=0x83ab82c0, opmode=IEEE80211_M_STA, flags=0x3.
Jul  3 12:47:16 ENH202 user.warn kernel: wlan_vap_create : enter. devhandle=0x83ab82c0, opmode=IEEE80211_M_STA, flags=0x3
Jul  3 12:47:16 ENH202 user.warn kernel: DES SSID SET=AP SSID
Jul  3 12:47:16 ENH202 user.warn kernel:
Jul  3 12:47:16 ENH202 user.notice root: ATH-LSDK:loaddriver
Jul  3 12:47:16 ENH202 user.info kernel: VAP device ath0 created
Jul  3 12:47:15 ENH202 user.warn kernel: ath_get_caps[5154] rx chainmask mismatch actual 3 sc_chainmak 0
Jul  3 12:47:15 ENH202 user.warn kernel: ath_get_caps[5129] tx chainmask mismatch actual 3 sc_chainmak 0

```

Save Refresh Clear

The ENH202 automatically logs events to internal memory.

Note:

The oldest events are deleted from the log when memory is full.

Click the Refresh button to update the client list or the Clear button to remove all events.

4.1.5 Viewing Connection Status

Displays the current status of the network.

The WLAN information shown includes network type, SSID, BSSID, connection status, wireless mode, current channel, security, data rate, noise level, and signal strength.

Wireless	
Network Type	Client Router
SSID	AP SSID
BSSID	N/A
Connection Status	N/A
Wireless Mode	N/A
Current Channel	N/A
Security	N/A
Tx Data Rates(Mbps)	N/A
Current noise level	N/A
Signal strength	N/A

The WAN information shown includes the MAC address, connection type, connection status, IP address, IP subnet mask, primary DNS and secondary DNS.

WAN	
MAC Address	00:02:6F:E4:61:C0
Connection Type	DHCP RenewRelease
Connection Status	Down
IP Address	
IP Subnet Mask	255.255.255.0
Primary DNS	
Secondary DNS	

Click the ReFresh button to update the client list or the CLeAr button to remove all events.

4.1.6 Viewing DHCP Client Table

DHCP Client List

Home

Reset

MAC addr	IP	Host Name	Expires	Revoke	Reserve
Refresh					

Displays the clients that are associated to the ENH202 through DHCP. The MAC addresses and signal strength for each client are also shown.

Click the Refresh button to update the client list.

4.1.7 Viewing WDS Link List

WDS Link Status

Home

Reset

WDS Link ID	MAC Address	Link Status	RSSI (dBm)
-------------	-------------	-------------	------------

Refresh

Displays the clients that are associated to the ENH202 through WDS. The MAC addresses, link status and signal strength for each client are also shown.

Click the Refresh button to update the client list.

4.2 System Setup

The following sections explain the features and functionality of the ENH202 in access point mode, client bridge mode, WDS access point mode, WDS bridge mode, WDS station mode and client router mode.

4.2.1 Configuring Operation Mode

Set the primary function of the device. The function that is selected affects which items are available in the main menu.

Device Name Enter a name for the device. The name you type appears in SNMP management. This name is not the SSID and is not broadcast to other devices.

Operation Mode Use the radio button to select an operating mode.

Click **Save & Apply** to save changes or **Cancel** to abort.

The screenshot shows the 'System Properties' configuration page. At the top right are 'Home' and 'Reset' buttons. The page title is 'System Properties'. Below the title is a table with the following fields:

System Properties	
Device Name	ENH202 (1 to 32 characters) ☒ Green
Country/Region	United States
Operation Mode	☐ Access Point ☒ Client Bridge ☐ WDS ☐ Client Router

At the bottom of the page are 'Save & Apply' and 'Cancel' buttons.

4.2.2 Configuring IP Settings

Configure the ENH202 LAN settings for the ENH202 using a static or dynamic IP address.

IP Network Setting Configure the network connection type using either a static IP or dynamic IP.

IP Address Enter the LAN IP address of the ENH202.

Subnet Mask Enter the subnet mask of the ENH202.

Default Gateway Enter the default gateway of the ENH202.

Primary DNS Enter the primary DNS address of the ENH202.

Secondary DNS Enter the secondary DNS address of the ENH202.

Use Link-Local Address Click to enable a link-local address for the device.

IPv6 IP Address Enter the IPv6 LAN IP address of the ENH202.

IPv6 Subnet Prefix Length Enter the IPv6 subnet prefix length of the ENH202.

IPv6 Default Gateway Enter the IPv6 default gateway of the ENH202.

IPv6 Primary DNS Enter the IPv6 primary DNS of the ENH202.

IPv6 Secondary DNS Enter the IPv6 secondary DNS of the ENH202.

Click Apply to save the settings or Cancel to discard changes.

IP Settings

System Information	
IP Network Setting	☐ Obtain an IP address automatically (DHCP) ☒ Specify an IP address
IP Address	192 . 168 . 1 . 220
IP Subnet Mask	255 . 255 . 255 . 0
Default Gateway	192 . 168 . 1 . 1
Primary DNS	0 . 0 . 0 . 0
Secondary DNS	0 . 0 . 0 . 0
Use Link-Local Address	☒
IPv6 IP Address	
IPv6 Subnet Prefix Length	
IPv6 Default Gateway	
IPv6 Primary DNS	
IPv6 Secondary DNS	

Accept Cancel

4.2.3 Configuring Spanning Tree Settings

Spanning Tree Status Enable or disable the ENH202 Spanning Tree function.

Bridge Hello Time Specify Bridge Hello Time, in seconds. This value determines how often the ENH202 sends hello packets to communicate information about the topology throughout the entire Bridged Local Area Network

Bridge Max Age Specify Bridge Max Age, in seconds. If another bridge in the spanning tree does not send a hello packet for a long period of time, it is assumed to be dead.

Bridge Forward Delay Specify Bridge Forward Delay, in seconds. Forwarding delay time is the time spent in each of the Listening and Learning states before the Forwarding state is entered. This delay is provided so that when a new bridge comes onto a busy network, it looks at some traffic before participating.

Priority Specify the Priority number. Smaller numbers have greater priority.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

Spanning Tree Settings

Spanning Tree Status	☐ On ☒ Off
Bridge Hello Time	2 seconds (1-10)
Bridge Max Age	20 seconds (6-40)
Bridge Forward Delay	4 seconds (4-30)
Priority	32768 (0-65535)

Accept

Cancel

4.3 Router Setup

4.3.1 Configuring WAN Settings

Configure the WAN settings for the ENH202 using a static or dynamic IP address, PPPoE or PPTP.

Static IP

Setting a static IP address allows an administrator to set a specific IP address for the router and guarantees that it can not be assigned a different address.

Account Name Enter the account name provided by your ISP.

Domain Name Enter the domain name provided by your ISP.

MTU The maximum transmission unit (MTU) specifies the largest packet size permitted for an internet transmission. The factory default MTU size for static IP is 1500. The MTU size can be set between 576 and 1500.

IP Address Enter the router's WAN IP address.

Subnet Mask Enter the router's WAN subnet mask.

Default Gateway Enter the WAN gateway address.

Primary DNS Enter the primary DNS server address.

WAN Settings Home Reset

Internet Connection Type: Static IP

Options

Account Name (if required):

Domain Name (if required):

MTU: Auto 1500 (576 - 1500)

Internet IP Address

IP Address: 192 . 168 . 10 . 1

IP Subnet Mask: 255 . 255 . 255 . 0

Gateway IP Address: 0 . 0 . 0 . 0

Domain Name Server (DNS) Address

Primary DNS: 0 . 0 . 0 . 0

Secondary DNS: 0 . 0 . 0 . 0

WAN Ping

Discard Ping on WAN: ☒

Accept Cancel

Secondary DNS Enter the secondary DNS server address.

Discard Ping on WAN Check to Enable to recognize pings on the ENH202 WAN interface or Disable to block pings on the ENH202 WAN interface. Note: Pinging IP addresses is a common method used by hackers to test whether the IP address is valid. Blocking pings provides some extra security from hackers.

Click **Accept** to save the settings or **Cancel** to discard changes.

Dynamic IP

Dynamic IP addressing assigns a different IP address each time a device connects to an ISP service provider. The service is most commonly used by ISP cable providers.

Account Name Enter the account name provided by your ISP.

Domain Name Enter the domain name provided by your ISP.

MTU The maximum transmission unit (MTU) specifies the largest packet size permitted for an internet transmission. The factory default MTU size for Dynamic IP is 1500. The MTU size can be set between 576 and 1500.

Get Automatically From ISP Click the radio button to obtain the DNS automatically from the DHCP server.

Use These DNS Servers Click the radio button to set up the Primary DNS and Secondary DNS servers manually.

Discard Ping on WAN Check to Enable to recognize pings on the ENH202 WAN interface or Disable to block pings on the ENH202 WAN interface. Note: Pinging IP addresses is a common method used by hackers to test whether the IP address is valid. Blocking pings provides some extra security from hackers.

Click **Accept** to save the settings or **Cancel** to discard changes.

WAN Settings Home Reset

Internet Connection Type: DHCP

Options

Account Name (if required):

Domain Name (if required):

MTU: Auto 1500 (576 - 1500)

Domain Name Server (DNS) Address

☒ Get Automatically From ISP

☐ Use These DNS Servers

Primary DNS: 0 . 0 . 0 . 0

Secondary DNS: 0 . 0 . 0 . 0

WAN Ping

Discard Ping on WAN: ☒

Accept Cancel

Point-to-Point Protocol over Ethernet (PPPoE)

Point-to-Point Protocol over Ethernet (PPPoE) is used mainly by ISPs that provide DSL modems to connect to the Internet.

MTU Enter the maximum transmission unit (MTU). The MTU specifies the largest packet size permitted for an internet transmission (PPPoE default: 1492). The MTU size can be set between 576 and 1492.

Login Enter the username assigned by an ISP.

Password Enter the password assigned by an ISP.

Service Name Enter the service name of an ISP (optional).

Connect on Demand Select the radio button to specify the maximum idle time. Internet connection will disconnect when it reach the maximum idle time, but it will automatically connect when user tries to access the network.

Keep Alive Select whether to keep the Internet connection always on, or enter a redial period once the internet lose connection.

Get Automatically From ISP Click the radio button to obtain the DNS automatically from the ISP.

Use These DNS Servers Click the radio button to set up the Primary DNS and Secondary DNS servers manually.

Discard Ping on WAN Check to Enable to recognize pings on the ENH202 WAN interface or Disable to block pings on the ENH202 WAN interface. Note: Pinging IP addresses is a common method used by hackers to test whether the IP address is valid. Blocking pings provides some extra security from hackers.

Click Accept to save the settings or Cancel to discard changes.

[Home](#)
[Reset](#)

WAN Settings

Internet Connection Type: PPPoE

Options

MTU: Auto 1492 (576 - 1492)

PPPoE Options

Login:

Password:

Service Name (if required):

☐ Connect on Demand: Max Idle Time Minutes
☒ Keep Alive: Redial Period Seconds

Domain Name Server (DNS) Address

☒ Get Automatically From ISP
☐ Use These DNS Servers

Primary DNS: . . .

Secondary DNS: . . .

WAN Ping

Discard Ping on WAN: ☒

[Accept](#)
[Cancel](#)

Point-to-Point Tunnelling Protocol (PPTP)

The point-to-point tunnelling protocol (PPTP) is used in association with virtual private networks (VPNs). There are two parts to a PPTP connection: the WAN interface settings and the PPTP settings.

MTU Enter the maximum transmission unit (MTU). The MTU specifies the largest packet size permitted for an internet transmission (PPPoE default: 1400). The MTU size can be set between 1200 and 1400.

IP Address Enter the router's WAN IP address.

Subnet Mask Enter the router's WAN subnet IP address.

Default Gateway Enter the router's WAN gateway IP address.

PPTP Server Enter the IP address of the PPTP server.

Username Enter the username provided by your ISP.

Password Enter the password provided by your ISP.

Connect on Demand If you want the ENH202 to end the Internet connection after it has been inactive for a period of time, select this option and enter the number of minutes you want that period of inactivity to last.

Keep Alive If you want the ENH202 to periodically check your Internet connection, select this option. Then specify how often you want the ENH202 to check the Internet connection. If the connection is down, the ENH202 automatically re-establishes your connection.

Get Automatically From ISP Obtains the DNS automatically from ISP.

[Home](#)
[Reset](#)

WAN Settings

Internet Connection Type: PPTP

Options

MTU: Auto (1200 - 1400)

PPTP Options

IP Address: 192 . 168 . 10 . 1

Subnet Mask: 255 . 255 . 255 . 0

Default Gateway: 0 . 0 . 0 . 0

PPTP Server: 0 . 0 . 0 . 0

Username:

Password:

☐ Connect on Demand: Max idle Time 15 Minutes
☒ Keep Alive: Redial Period 30 Seconds

Domain Name Server (DNS) Address

☒ Get Automatically From ISP
☐ Use These DNS Servers

Primary DNS: 0 . 0 . 0 . 0

Secondary DNS: 0 . 0 . 0 . 0

WAN Ping

Discard Ping on WAN: ☒

[Accept](#)
[Cancel](#)

Use These DNS Servers Click the radio button to set up the Primary DNS and Secondary DNS servers manually.

Discard Ping on WAN Check to Enable to recognize pings on the ENH202 WAN interface or Disable to block pings on the ENH202 WAN interface. Note: Pinging IP addresses is a common method used by hackers to test whether the IP address is valid. Blocking pings provides some extra security from hackers.

Click Accept to save the settings or Cancel to discard changes.

4.3.2 Configuring LAN Settings

IP Address Enter the LAN port IP address.

IP Subnet Mask Enter the LAN IP subnet mask.

WINS Server IP Enter the WINS Server IP.

Use Router As DHCP Server Check this option to enable the ENH202 internal DHCP server.

Starting IP Address Specify the starting IP address range for the pool of allocated for private IP addresses. The starting IP address must be on the same subnet as the ending IP address; that is the first three octets specified here must be the same as the first three octets in End IP Address.

Ending IP Address Specify the ending IP address range for the pool of allocated for private IP addresses. The ending IP address must be on the same subnet as the starting IP address; that is the first three octets specified here must be the same as the first three octets in Start IP Address.

WINS Server IP Enter the IP address of the WINS server.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

LAN Settings

LAN IP Setup

IP Address	192	168	1	153
IP Subnet Mask	255	255	255	0

☒ Use Router As DHCP Server

Starting IP Address	192	168	1	100
Ending IP Address	192	168	1	200
WINS Server IP	0	0	0	0

AcceptCancel

4.3.3 Configuring VPN Pass-Through


VPN Pass-through allows a secure virtual private network (VPN) connection between two computers. Enabling the options on this page opens a VPN port and enables connections to pass through the ENH202 without interruption.

PPTP Pass-through Check this option to enable PPTP pass-through mode.

L2TP Pass-through Check this option to enable L2TP pass-through mode.

IPSec Pass-through Check this option to enable IPSec pass-through mode.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

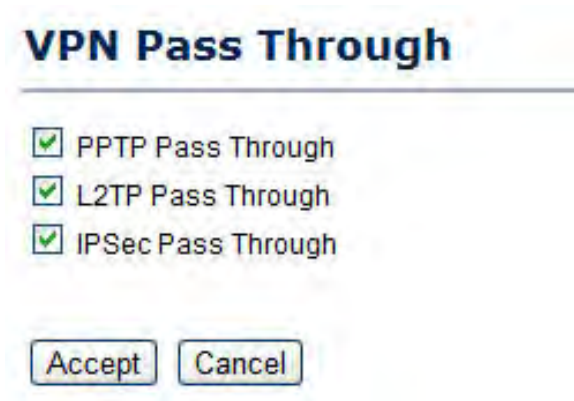

The image shows a screenshot of a configuration window titled "VPN Pass Through". The window has a title bar and a main content area. Inside the main content area, there are three checked checkboxes, each followed by its label: "PPTP Pass Through", "L2TP Pass Through", and "IPSec Pass Through". At the bottom of the window, there are two buttons: "Accept" and "Cancel".

VPN Pass Through	
☒	PPTP Pass Through
☒	L2TP Pass Through
☒	IPSec Pass Through
Accept Cancel	

4.3.4 Configuring Port Forwarding

Port forwarding enables multiple server applications on a LAN to serve clients on a WAN over a single WAN IP address. The router accepts incoming client packets, filters them based on the destination WAN, or public, port and protocol and forwards the packets to the appropriate LAN, or local, port. Unlike the DMZ feature, port forwarding protects LAN devices behind the firewall.

Port Forwarding
Home
Reset

#	Name	Protocol	Start Port	End Port	Server IP Address	Enable	Modify	Delete
Add Entry Accept								

NO. Displays the sequence number of the forwarded port.

Name Displays the name of the forwarded port.

Protocol Displays the protocol to use for mapping from the following: TCP, UDP or Both.

Start Port Displays the LAN port number that WAN client packets will be forward to.

End Port Displays the port number that the WAN client packets are received.

Server IP Displays the IP address of the server for the forwarded port.

Enable Click to enable or disable the forwarded port profile.

Modify Click to modify the forwarded port profile.

Delete Click to delete the forwarded port profile.

Click Add Entry to add port forwarding rules.

Click Accept to confirm the changes.

- Service Name** Enter a name for the port forwarding rule.
- Protocol** Select a protocol for the application: Choices are Both, TCP, and UDP.
- Starting Port** Enter a starting port number.
- Ending Port** Enter an ending port number. All ports numbers between the starting and ending ports will forward users to the IP address specified in the IP Address field.
- IP Address** Enter the IP address of the server computer on the LAN network where users will be redirected.
- Click Save to apply the changes or Cancel to return previous settings.

Port Forwarding

Service Name	
Protocol	BOTH ▼
Starting Port	(1~65535)
Ending Port	(1~65535)
IP Address	. . .

Save

Cancel

4.3.5 Configuring Demilitarized Zone

Configuring a device on the LAN as a demilitarized zone (DMZ) host allows unrestricted two-way Internet access for Internet applications, such as online video games, to run from behind the NAT firewall. The DMZ function allows the router to redirect all packets going to the WAN port IP address to a particular IP address on the LAN. The difference between the virtual server and the DMZ function is that a virtual server redirects a particular service or Internet application, such as FTP, to a particular LAN client or server, whereas a DMZ redirects all packets, regardless of the service, going to the WAN IP address to a particular LAN client or server.



WARNING!

The PC defined as a DMZ host is not protected by the firewall and is vulnerable to malicious network attacks. Do not store or manage sensitive information on the DMZ host.

DMZ Hosting Select **Enable DMZ** to activate DMZ functionality.

DMZ Address Enter an IP address of a device on the LAN.

Click **Accept** to confirm the changes or **Cancel** to cancel and return previous settings.

DMZ

DMZ Hosting	Disable ▾
DMZ Address	0 . 0 . 0 . 0

4.4 Configuring Wireless LAN

4.4.1 Configuring Wireless Settings

Instructions on how to configure the wireless and security settings for each of the possible operating modes.



WARNING!
Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

Access Point Mode

The ENH202 supports Access Point Mode. In this mode, users with a wireless client device within range can connect to the ENH202 to access the WLAN.

Wireless Mode Wireless mode supports 802.11b/g/n mixed modes.

Channel HT Mode The default channel bandwidth is 20/40 MHz. The larger the channel, the better the transmission quality and speed.

Extension Channel Select upper or lower channel. Your selection may affect the Auto channel function.

Channel / Frequency Select the channel and frequency appropriate

Auto Check this option to enable auto-channel selection.

Wireless Network

HomeReset

Wireless Mode802.11 B/G/N Mixed

Channel HT Mode20/40MHz

Extension ChannelLower Channel

Channel / FrequencyCh5-2.432GHzAuto

AP DetectionScan

Current Profiles

SSID	Security	Isolation	VID	Enable	Edit
EnGeniusE461C0	None	☐	1	☒	Edit
EnGeniusE461C0_2	None	☐	2	☐	Edit
EnGeniusE461C0_3	None	☐	3	☐	Edit
EnGeniusE461C0_4	None	☐	4	☐	Edit

AcceptCancel

AP Detection AP Detection can select the best channel to use by scanning nearby areas for Access Points.

Current Profile Configure up to four different SSIDs. If many client devices will be accessing the network, you can arrange the devices into SSID groups. Click **Edit** to configure the profile and check whether you want to enable extra SSIDs.

Click **Accept** to confirm the changes or **Cancel** to cancel and return previous settings.

SSID Specify the SSID for the current profile.

VLAN ID Specify the VLAN tag for the current profile.

Suppressed SSID Check this option to hide the SSID from clients. If checked, the SSID will not appear in the site survey.

Station Separation Click the appropriate radio button to allow or prevent communication between client devices.

Wireless Security See the Wireless Security section.

Click **Save** to accept the changes or **Cancel** to cancel and return previous settings.

SSID Profile

Wireless Setting

SSID	EnGeniusE461C0	(1 to 32 characters)
VLAN ID	1	(1~4094)
Suppressed SSID	☐	
Station Separation	☐ Enable ☒ Disable	

Wireless Security

Security Mode	Disabled
---------------	----------

Save

Cancel

Client Bridge Mode

Client Bridge Mode lets you connect two LAN segments via a wireless link as though they are on the same physical network. Since the computers are on the same subnet, broadcasts reach all machines. As a result, DHCP information generated by the server reach all client computers as though the clients residing on one physical network.

Wireless Mode Wireless mode supports 802.11b/g/n mixed modes.

SSID Specify the SSID if known. This field is completed automatically if you select an Access Point in the Site Survey.

Site Survey Scans nearby locations for Access Points. You can select a discovered Access Point to establish a connection.

Prefer BSSID Enter the MAC address if known. If you select an Access Point in the Site Survey, this field is completed automatically.

Wireless Security For details on wireless security settings, see *Configuring Wireless Security*.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

Wireless Network

Home

Reset

Wireless Mode	802.11 B/G/N Mixed
SSID	Specify the static SSID : AP SSID (1 to 32 characters) Or press the button to search for any available WLAN Service. Site Survey
Prefered BSSID	☐ : : : : :

Wireless Security

Changing the wireless security settings may cause this wireless client to associate with a different one. This may temporarily disrupt your configuration session.

Security Mode	Disabled
---------------	----------

Accept

Cancel

Profile If you used the Site Survey, the Web Configurator shows nearby Access Points. To connect to an Access Point, click the Access Point’s BSSID.

Wireless Security See *Configuring Wireless Security*.

Click Refresh to scan again.

Site Survey

2GHz Site Survey

InfrastructureAd_hoc

BSSID	SSID	Channel	Signal Level	Type	Security	Mode
08:10:74:96:17:04	DT-200N	6	-93 dBm	11g/n	none	i
00:16:01:93:C8:6F	00160193C86E	11	-81 dBm	11b/g	WEP	i
04:4F:AA:5B:88:C1	annie	1	-93 dBm	11b/g	WEP	i
02:2F:4F:42:BC:41	HPCP1525-9b886b	6	-91 dBm	11b/g	none	Ad_hoc
90:E6:BA:BE:8A:46	james wifi	1	-84 dBm	11b/g	WPA/WPA2-PSK	i
F0:B4:79:06:0C:8D	AE	1	-96 dBm	11g/n	WPA2-PSK	i
00:19:70:22:05:96	NOVA Technical Institute	7	-55 dBm	11g/n	WPA2-PSK	i
4C:E8:76:43:1E:6B	mike	11	-79 dBm	11g/n	WPA-PSK	i
00:1F:1F:23:F9:F0	kao	11	-86 dBm	11g/n	WPA-PSK	i
34:08:04:DD:81:02	RouterforTecom	11	-83 dBm	11b/g	WPA/WPA2-PSK	i
5C:D9:98:E1:56:94	TW FlyKiwi	6	-94 dBm	11g/n	WPA/WPA2-PSK	i

Refresh

WDS Bridge Mode

Unlike traditional bridging, WDS Bridge Mode allows you to create large wireless networks by linking several wireless access points with WDS links. WDS is normally used in large, open areas, where pulling wires is cost prohibitive, restricted or physically impossible.

Wireless Mode Wireless mode supports 802.11b/g/n mixed modes.

Channel HT Mode The default channel bandwidth is 40 MHz. The larger the channel, the better the transmission quality and speed.

Extension Channel Select upper or lower channel. Your selection may affect the Auto channel function.

Channel / Frequency Select the channel and frequency appropriate

Click **Accept** to confirm the changes or **Cancel** to cancel and return previous settings.

Wireless Network

Wireless Mode	802.11 B/G/N Mixed ▾
Channel HT Mode	40MHz ▾
Extension Channel	Lower Channel ▾
Channel / Frequency	Ch6-2.437GHz ▾

Accept

Cancel

Security Select the type of WDS security: None, WEP, or AES.

WEP Key Enter the WEP key.

AES Pass phrase Enter the AES pass phrase.

MAC Address Enter the MAC address of the Access Point to which you want to extend wireless connectivity.

Mode Select Disable or Enable to disable or enable WDS.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

WDS Link Settings

Home Reset

Security	None	
WEP Key		40/64-bit(10 hex digits)
AES Passphrase		

ID	MAC Address	Mode
1	: : : : : :	Disable
2	: : : : : :	Disable
3	: : : : : :	Disable
4	: : : : : :	Disable

Accept Cancel

Client Router Mode

In Client Router Mode, you can access the Internet wirelessly with the support of a WISP. In AP Router Mode, the ENH202 can access the Internet via a cable or DSL modem. In this mode, the ENH202 can be configured to turn off the wireless network name (SSID) broadcast, so that only stations that have the SSID can be connected. The ENH202 also provides wireless LAN 64/128/152-bit WEP encryption security, WPA/WPA2, and WPA-PSK/WPA2-PSK authentication, as well as TKIP/AES encryption security. It also supports VPN pass-through for sensitive data secure transmission.

Wireless Mode Wireless mode supports 802.11b/g/n mixed modes.

SSID Specify the SSID if known. This field is completed automatically if you select an Access Point in the Site Survey.

Site Survey Scans nearby locations for Access Points. You can select a discovered Access Point to establish a connection.

Prefer BSSID Enter the MAC address if known. If you select an Access Point in the Site Survey, this field is completed automatically.

Wireless Security See *Configuring Wireless Security*.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

Wireless Network

Home

Reset

Wireless Mode

802.11 B/G/N Mixed

SSID

Specify the static SSID :

AP SSID

(1 to 32 characters)

Or press the button to search for any available WLAN Service.

Site Survey

Preferred BSSID

☐ : : : : :

Wireless Security

Changing the wireless security settings may cause this wireless client to associate with a different one. This may temporarily disrupt your configuration session.

Security Mode

Disabled

Accept

Cancel

Profile If you used the Site Survey, the Web Configurator shows nearby Access Points. To connect to an Access Point, click the Access Point’s BSSID.

Wireless Security See *Configuring Wireless Security*.

Click Refresh to scan again.

Site Survey

2GHz Site Survey

InfrastructureAd_hoc

BSSID	SSID	Channel	Signal Level	Type	Security	Mode
08:10:74:96:17:04	DT-200N	6	-93 dBm	11g/n	none	i
00:16:01:93:C8:6F	00160193C86E	11	-81 dBm	11b/g	WEP	i
04:4F:AA:5B:88:C1	annie	1	-93 dBm	11b/g	WEP	i
02:2F:4F:42:BC:41	HPCP1525-9b886b	6	-91 dBm	11b/g	none	Ad_hoc
90:E6:BA:BE:8A:46	james wifi	1	-84 dBm	11b/g	WPA/WPA2-PSK	i
F0:B4:79:06:0C:8D	AE	1	-96 dBm	11g/n	WPA2-PSK	i
00:19:70:22:05:96	NOVA Technical Institute	7	-55 dBm	11g/n	WPA2-PSK	i
4C:E8:76:43:1E:6B	mike	11	-79 dBm	11g/n	WPA-PSK	i
00:1F:1F:23:F9:F0	kao	11	-86 dBm	11g/n	WPA-PSK	i
34:08:04:DD:81:02	RouterforTecom	11	-83 dBm	11b/g	WPA/WPA2-PSK	i
5C:D9:98:E1:56:94	TW FlyKiwi	6	-94 dBm	11g/n	WPA/WPA2-PSK	i

Refresh

4.4.2 Configuring Wireless Security

The Wireless Security Settings section lets you configure the ENH202's security modes: WEP, WPA-PSK, WPA2-PSK, WPA-PSK Mixed, WPA, WPA2, and WPA Mixed. We strongly recommend you use WPA2-PSK.

Wired Equivalent Privacy (WEP)

Security Mode Select WEP from the drop-down list to begin the configuration.

Auth Type Select Open System or Shared.

Input Type Select an input type of Hex or ASCII.

Key Length Level of WEP encryption applied to all WEP keys. Select a 64/128/152-bit password lengths.

Default Key Specify which of the four WEP keys the ENH202 uses as its default.

Key1 - Key4 Specify a password for the security key index. For security, each typed character is masked by a dot.

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WEP
Auth Type	Open System
Input Type	Hex
Key Length	40/64-bit (10 hex digits or 5 ASCII char)
Default Key	1
Key1	
Key2	
Key3	
Key4	

**Note:**

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access Pre-Shared Key (WPA-PSK)

Security Mode Select WPA-PSK from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Passphrase Specify the security password. For security, each typed character is masked by a dot.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA-PSK
Encryption	Both(TKIP+AES)
Passphrase	 (8 to 63 characters) or (64 Hexadecimal characters)
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)
Save Cancel	



Note:

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access 2 Pre-Shared Key (WPA2-PSK)

Security Mode Select WPA2-PSK from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Passphrase Specify the security password. For security, each typed character is masked by a dot.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA2-PSK
Encryption	Both(TKIP+AES)
Passphrase	 (8 to 63 characters) or (64 Hexadecimal characters)
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)
Save Cancel	



Note:

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access Pre-Shared Key (WPA-PSK) Mixed

Security Mode Select WPA2-PSK Mixed from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Passphrase Specify the security password. For security, each typed character is masked by a dot.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA-PSK Mixed ▾
Encryption	Both(TKIP+AES) ▾
Passphrase	(8 to 63 characters) or (64 Hexadecimal characters)
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)



Note:

WPA-PSK Mixed can allow multiple security modes at the same time. 802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access (WPA)

Security Mode Select WPA from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Radius Server Specify the IP address of the RADIUS server.

Radius Port Specify the port number that your RADIUS server uses for authentication. Default port is 1812.

Radius Secret Specify RADIUS secret furnished by the RADIUS server.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Radius Accounting Select to enable or disable RADIUS accounting.

Radius Accounting Server Specify the IP address of the RADIUS accounting server.

Radius Accounting Port Specify the port number that your RADIUS accounting server uses for authentication. Default port is 1813.

Radius Accounting Secret Specify RADIUS accounting secret furnished by the RADIUS server.

Interem Accounting Interval Specify the interem accounting interval (60 - 600 seconds).

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA
Encryption	Both(TKIP+AES)
Radius Server	
Radius Port	1812
Radius Secret	
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)
Radius Accounting	Enable
Radius Accounting Server	
Radius Accounting Port	1813
Radius Accounting Secret	
Interim Accounting Interval	600 seconds(60~600)

Save Cancel



Note:

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access 2 (WPA2)

Security Mode Select WPA2 from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Radius Server Specify the IP address of the RADIUS server.

Radius Port Specify the port number that your RADIUS server uses for authentication. Default port is 1812.

Radius Secret Specify RADIUS secret furnished by the RADIUS server.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Radius Accounting Select to enable or disable RADIUS accounting.

Radius Accounting Server Specify the IP address of the RADIUS accounting server.

Radius Accounting Port Specify the port number that your RADIUS accounting server uses for authentication. Default port is 1813.

Radius Accounting Secret Specify RADIUS accounting secret furnished by the RADIUS server.

Interem Accounting Interval Specify the interem accounting interval (60 - 600 seconds).

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA2
Encryption	Both(TKIP+AES)
Radius Server	
Radius Port	1812
Radius Secret	
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)
Radius Accounting	Enable
Radius Accounting Server	
Radius Accounting Port	1813
Radius Accounting Secret	
Interim Accounting Interval	600 seconds(60~600)

Save Cancel



Note:

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

Wi-Fi Protected Access (WPA) Mixed

Security Mode Select WPA Mixed from the drop-down list to begin the configuration.

Encryption Select Both, TKIP, or AES as the encryption type.

- Both = uses TKIP and AES.
- TKIP = automatic encryption with WPA-PSK; requires passphrase.
- AES = automatic encryption with WPA2-PSK; requires passphrase.

Radius Server Specify the IP address of the RADIUS server.

Radius Port Specify the port number that your RADIUS server uses for authentication. Default port is 1812.

Radius Secret Specify RADIUS secret furnished by the RADIUS server.

Group Key Update Interval Specify how often, in seconds, the group key changes.

Radius Accounting Select to enable or disable RADIUS accounting.

Radius Accounting Server Specify the IP address of the RADIUS accounting server.

Radius Accounting Port Specify the port number that your RADIUS accounting server uses for authentication. Default port is 1813.

Radius Accounting Secret Specify RADIUS accounting secret furnished by the RADIUS server.

Interem Accounting Interval Specify the interem accounting interval (60 - 600 seconds).

Click Save to save the changes or Cancel to cancel and return previous settings.

Wireless Security	
Security Mode	WPA Mixed
Encryption	Both(TKIP+AES)
Radius Server	
Radius Port	1812
Radius Secret	
Group Key Update Interval	3600 seconds(30~3600, 0: disabled)
Radius Accounting	Enable
Radius Accounting Server	
Radius Accounting Port	1813
Radius Accounting Secret	
Interim Accounting Interval	600 seconds(60~600)

Save Cancel



Note:

802.11n does not allow WEP/WPA-PSK TKIP/WPA2-PSK TKIP security mode. The connection mode will change from 802.11n to 802.11g.

4.4.3 Configuring Wireless MAC Filter

**Note:**
This section applies to Access Point and WDS Access point mode.

Wireless MAC Filters are used to allow or deny network access to wireless clients according to their MAC addresses. You can manually add a MAC address to restrict the permission to access ENH202. The default setting is Disable Wireless MAC Filters.

Wireless MAC Filter

HomeReset

ACL Mode Disabled

Add

#	MAC Address
---	-------------

Accept

ACL Mode Determines whether network access is granted or denied to clients whose MAC addresses appear in the MAC Address table on this page. Choices are Disable, Deny MAC in the list, or Allow MAC in the list.

MAC Address Filter Enter the MAC address of the device.

Click Add to add the MAC address to the MAC Address table.

Click Apply to apply the changes.

4.4.4 Configuring WDS Link Settings

Using WDS Link Settings, you can create a wireless backbone link between multiple access points that are part of the same wireless network. This allows a wireless network to be expanded using multiple Access Points without the need for a wired backbone to link them, as is traditionally required.

Security Select the type of WDS security: None, WEP, or AES.

WEP Key Enter the WEP key.

AES Passphrase Enter the AES passphrase.

MAC Address Enter the MAC address of the Access Point to which you want to extend wireless connectivity.

Mode Select Disable or Enable to disable or enable WDS.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

WDS Link Settings

Home

Reset

Security	None	
WEP Key	40/64-bit(10 hex digits)	
AES Passphrase	 (8-63 ASCII characters or 64 hexadecimal digits)	

ID	MAC Address	Mode
1	: : : : :	Disable
2	: : : : :	Disable
3	: : : : :	Disable
4	: : : : :	Disable

Accept

Cancel

**Note:** The Access Point to which you want to extend wireless connectivity must enter the ENH202’s MAC address into its configuration. For more information, refer to the documentation for the Access Point. Not all Access Point supports this feature.

4.4.5 Configuring Advanced Network Settings

Configure the advanced wireless settings for your access point using the screens in this section. Leave these settings to their default values if you are not sure what values to enter.

Data Rate Select a data rate from the drop-down list. The data rate affects throughput. If you select a low data rate value, for example, the throughput is reduced but the transmission distance increases.

Transmit Power Lets you increase or decrease transmit power. Higher transmit power may prevent connections to the network, while the lower transmit power can prevent clients from connecting to the device.

RTS/CTS Threshold Specify the threshold package size for RTC/CTS. A small number causes RTS/CTS packets to be sent more often and consumes more bandwidth.

Distance Specify the distance between Access Points and clients. Longer distances may drop high-speed connections.

Aggregation Merges data packets into one packet. This option reduces the number of packets, but increases packet sizes.

Wireless Advanced Settings

Data Rate	Auto
Transmit Power	20 dBm ☐ Obey Regulatory Power
RTS/CTS Threshold (1 - 2346)	2346 bytes
Distance (1-30km)	1 km
Aggregation:	☒ Enable ☐ Disable 32 Frames 50000 Bytes(Max)

Wireless Traffic Shaping

Enable Traffic Shaping Enable or disable the regulation of packet flow leaving an interface for improved QoS.

Incoming Traffic Limit Specify the wireless transmission speed used for downloading.

Outgoing Traffic Limit Specify the wireless transmission speed used for uploading.

Total Percentage Specify the total percentage of the wireless traffic that is shaped.

SSID1 to SSID4 Specify the percentage of the wireless traffic that is shaped for a specific SSID.

Wireless Traffic Shaping

Enable Traffic Shaping	☒ Enable ☐ Disable
Incoming Traffic Limit	1000 kbit/s (512-99999999)
Outgoing Traffic Limit	180000 kbit/s (512-99999999)
Total Percentage	10 %
SSID #1 : EnGenius1	10 %
SSID #2 : (Off)	10 %
SSID #3 : (Off)	10 %
SSID #4 : (Off)	10 %

Client Limit

Enable Client Limit to specify the number of clients (Default: 64, maximum: 64) allowed to connect to this access point.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

Client limit

Frequency	Enable	Max Client
2.4G	☒	64

4.5 Management Setup

The Management section lets you configure administration, management VLAN, SNMP settings, backup/restore settings, firmware upgrade, time settings, and log settings. This chapter describes these settings.

4.5.1 Configuring Administrator Account

Click the Administration link under the Management menu to change the user name and password used to log on to the ENH202 Web Configurator. The default user name is admin and the default password is admin. Changing these settings protects the ENH202 configuration settings from being accessed by unauthorized users.

New Name Enter a new username for logging in to the Web Configurator.

New Password Enter a new password for logging in to the Web Configurator

Confirm Password Re-enter the new password for confirmation.

Click Save/Apply to apply the changes or Cancel to return previous settings.

Login Setting		Home	Reset
New Name	admin		
New Password			
Confirm Password			
Save/Apply Cancel Logout			

Remote Management Enable or disable remote management.

Remote Upgrade Specify whether the ENH202 firmware can be upgraded remotely.

Remote Management Port If remote management is enabled, enter the port number to be used for remote management. For example: If you specify the port number 8080, enter **http://<IP address>:8080** to access the ENH202 Web Configurator.

Click Accept to apply the changes or Cancel to return previous settings.

Remote Access	
Remote Management	☒ Enable ☐ Disable
Remote Upgrade	☒ Enable ☐ Disable
Remote Management Port	8080
Accept Cancel	

4.5.2 Configuring Management VLAN

Click the Management VLAN link under the Management menu to assign a VLAN tag to the packets. A VLAN is a group of computers on a network whose software has been configured so that they behave as if they were on a separate Local Area Network (LAN). Computers on VLAN do not have to be physically located next to one another on the LAN.

Management VLAN Settings

[Home](#)[Reset](#)

Caution: If you reconfigure the Management VLAN ID, you may lose connectivity to the access point. Verify that the switch and DHCP server can support the reconfigured VLAN ID, and then re-connect to the new IP address.

Management VLAN ID

☒ No VLAN tag☐ Specified VLAN ID

(must be in the range 1 ~ 4094.)

[Accept](#)[Cancel](#)

Management VLAN ID If your network includes VLANs and if tagged packets need to pass through the Access Point, enter the VLAN ID. Otherwise, click No VLAN tag.

Click Accept to confirm the changes or Cancel to cancel and return previous settings.

**Note:**

If you reconfigure the Management VLAN ID, you may lose your connection to the ENH202. Verify that the DHCP server supports the reconfigured VLAN ID and then reconnect to the ENH202 using the new IP address.

4.5.3 Configuring SNMP

SNMP is used in network management systems to monitor network-attached devices for conditions that warrant administrative attention.

SNMP Enable or disable the ENH202 SNMP function.

Contact Enter the contact details of the device.

Location Enter the location of the device.

Community Name (Read Only) Enter the password for accessing the SNMP community for read-only access.

Community Name (Read/Write) Enter the password for accessing the SNMP community for read and write access.

Trap Destination Address Enter the IP address where SNMP traps are to be sent.

Trap Destination Community Name Enter the password of the SNMP trap community.

SNMPv3 Enable or Disable the SNMPv3 feature.

User Name Specify the username for SNMPv3.

Auth Protocol Select the authentication protocol type: MD5 or SHA.

Auth Key (8-32 Characters) Specify the authentication key for authentication.

Priv Protocol Select the privacy protocol type: DES.

Priv Key (8-32 Characters) Specify the privacy key for privacy.



The image shows a web-based configuration form titled "SNMP Settings". At the top right are "Home" and "Reset" buttons. The form contains the following fields and controls:

- SNMP**: Radio buttons for "Enable" (selected) and "Disable".
- Contact**: A text input field.
- Location**: A text input field.
- Community Name (Read Only)**: A text input field with the value "public".
- Community Name (Read/Write)**: A text input field with the value "private".
- Trap Destination Address**: A text input field.
- Trap Destination Community Name**: A text input field with the value "public".
- SNMPv3**: Radio buttons for "v3Enable" (selected) and "v3Disable".
- User Name**: A text input field with the value "admin".
- Auth Protocol**: A dropdown menu showing "MD5".
- Auth Key (8-32 Characters)**: A text input field with the value "12345678".
- Priv Protocol**: A dropdown menu showing "DES".
- Priv Key (8-32 Characters)**: A text input field with the value "12345678".
- Engine ID**: A text input field.

At the bottom of the form are "Save/Apply" and "Cancel" buttons.

Engine ID Specify the engine ID for SNMPv3.

Click Save/Apply to apply the changes or Cancel to return previous settings.

4.5.4 Configuring Backup/Restore Settings

Click the Backup/Restore Setting link under the Management menu to save the ENH202's current settings in a file on your local disk or load settings onto the device from a local disk. This feature is particularly convenient administrators who have several ENH202 devices that need to be configured with the same settings.

This page also lets you return the ENH202 to its factory default settings. If you perform this procedure, any changes made to the ENH202 default settings will be lost.

Backup/Restore Settings

[Home](#)[Reset](#)

Save A Copy of Current Settings

[Backup](#)

Restore Saved Settings from A File

[Choose File](#)

No file chosen

[Restore](#)

Revert to Factory Default Settings

[Factory Default](#)

Save A Copy of Current Settings Click Backup to save the current configured settings.

Restore Saved Settings from A File To restore settings that have been previously backed up, click Browse, select the file, and click Restore.

Revert to Factory Default Settings Click Factory Default to restore the ENH202 to its factory default settings.

4.5.5 Configuring Auto Reboot Settings

Click the Auto Reboot Settings link under the Management menu to enable or disable the Auto Reboot function. This feature is particularly convenient to administrators for the scheduling of auto rebooting on the device.

This page also allows you to set the frequency of this function.

Auto Reboot Settings

HomeReset

Auto Reboot Setting	Disable ▾	
Frequency of Auto Reboot	Min ▾	10 Mins ▾

Save/Apply

Cancel

Auto Reboot Setting Select Enable from the drop-down menu to setup this function.

Frequency of Auto Reboot Select the frequency interval using the drop-down menus.

Save/Apply Click Save/Apply to set the new configuration.

Cancel Click Cancel to delete the settings.

4.5.6 Configuring Firmware Upgrade

Firmware is system software that operates and allows the administrator to interact with the router.



WARNING!

Upgrading firmware through a wireless connection is not recommended. Firmware upgrading must be performed while connected to an Ethernet (LAN port) with all other clients disconnected.

The firmware upgrade procedure can take several minutes. Do not power off the ENH202 during the firmware upgrade, as it can cause the device to crash or become unusable.

To update the firmware version, follow these steps:

1. Download the appropriate firmware approved by EnGenius Networks from an approved web site.



Note:

Save the firmware file to a local hard drive.

2. Click Choose File.
3. Browse the file system and select the firmware file.
4. Click Upload.
5. The ENH202 restarts automatically after the upgrade completes.

Firmware Upgrade

Current firmware version: 1.1.13

Locate and select the upgrade file from your hard disk:

No file chosen

4.5.7 Configuring System Time

Change the system time of the ENH202 by manually entering the information, synchronizing the device with a PC, or setup automatic updates through a network time (NTP) protocol server.

Manually Set Date and Time Enter the date and time values in the date and time fields or click the Synchronize with PC button to get the date and time values from the administrator's PC.

Automatically Get Date and Time Select a time zone from the drop-down list and check whether you want to enter the IP address of an NTP server or use the default NTP server.

Enable Daylight Saving Click to enable or disable daylight savings time. Select the start and stop times from the Start Time and Stop Time dropdown lists.

Click Save/Apply to apply the changes or Cancel to return previous settings.

Time Settings

Time

☐ Manually Set Date and Time

2012 / 08 / 31 09 : 36 Synchronize with PC

☒ Automatically Get Date and Time

Time Zone: UTC+00:00 Gambia, Liberia, Morocco

☐ User defined NTP Server: 209.81.9.7

☐ Enable Daylight Saving

Start Time: January 1st Sun 12 am

End Time: January 1st Mon 12 am

Save/Apply Cancel

4.5.8 Configuring Wi-Fi Schedule

Use the Wi-Fi schedule function to control the wireless power ON/OFF service that operates on a routine basis.

Add a Schedule Service

Create a schedule service type and date/time parameters for a specific service.

Schedule Name Enter the description of the schedule service.

Service Select the type of schedule service, either Wireless Power ON or Wireless Power OFF.

Day Select the days of the week to enable the schedule service.

Time of Day Set the start time that the service is active.

Click Add to append the schedule service to the schedule service table, or Cancel to discard changes.

Wifi Schedule

Wifi Schedule	Disable ▾
Schedule Name	
Service	☒ Wireless Power ON ☐ Wireless Power OFF
Day	Mon ▾
Time of day	: (use 24-hour clock)
Add Cancel	

Schedule Services Table

The Schedule function relies on the GMT time setting acquired from a network time protocol (NTP) server. For details on how to connect the ENH202 to an NTP server, see *Configuring System Time*.

Schedule Table

#	Name	Service	Schedule	Select
Delete Selected Delete All Reset				

Accept

Cancel

Schedule Table Displays a list of scheduled services for the ENH202. The properties of each service displayed are:

Displays the ID number of the service in the table.

Name Displays the description of the service.

Service Displays the type of service, either Wireless Power ON or Wireless Power OFF.

Schedule Displays the schedule information of when the service is active.

Select Select one or more services to edit or delete.

Click Delete Selected to delete the selected services or Delete All to delete all services.


Click Apply to save the settings or Cancel to discard changes.

4.5.9 Configuring Command Line Interface

Most users will configure the ENH202 through the graphical user interface (GUI). However, for those who prefer an alternative method there is the command line interface (CLI). The CLI can be accessed through a command console, modem or Telnet connection.

CLI Select to enable or disable the ability to modify the ENH202 via a command line interface (CLI).

Click Save/Apply to apply the changes or Cancel to return previous settings.

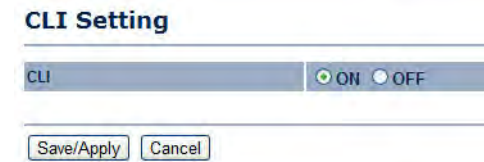A screenshot of a web-based configuration dialog box titled "CLI Setting". The dialog has a blue header bar with the title. Below the header, there is a label "CLI" on the left and a radio button control on the right. The "ON" radio button is selected, indicated by a green dot. Below the radio buttons, there are two buttons: "Save/Apply" and "Cancel".

CLI Setting	
CLI	☒ ON ☐ OFF
Save/Apply Cancel	

4.5.10 Configuring Logging

Display a list of events that are triggered on the ENH202 Ethernet and wireless interfaces. You can consult this log if an unknown error occurs on the system or when a report needs to be sent to the technical support department for debugging purposes.

Syslog Enable or disable the ENH202 syslog function.

Log Server IP Address Enter the IP address of the log server.

Local Log Enable or disable the local log service.

Click Save/Apply to apply the changes or Cancel to return previous settings.

Log

Syslog

Syslog	Disable
Log Server IP Address / Computer Name	0.0.0.0

Local log

Local Log	Enable
-----------	--------

Save/Apply

Cancel

4.5.11 Configuring Diagnostics

The diagnosis feature allow the administrator to verify that another device is available on the network and is accepting request packets. If the ping result returns a Live, it means a device is on line. This feature does not work if the target device is behind a firewall or has security software installed.

Target IP / Domain Name Enter the IP address you would like to search.

Ping Packet Size Enter the packet size of each ping.

Number of Pings Enter the number of times you want to ping.

Start Ping Click Start Ping to begin pinging.

Trace route target Enter an IP address or domain name you want to trace.

Start Traceroute Click Start Traceroute to begin the traceroute operation.

Target Address Enter the IP address of the target PC.

Time period Enter time period for the speed test.

Check Interval Enter the interval for the speed test.

Start Speed Test Click Start Speed Test to begin the speed test operation.

IPv4 Port Displays the IPv4 port number of the ENH202.

IPv6 Port Displays the IPv6 port number of the ENH202.

Diagnostics

Ping Test Parameters

Target IP / Domain Name		
Ping Packet Size	64	Bytes
Number of Pings	4	

Start Ping

Traceroute Test Parameters

Traceroute target	
-------------------	----------------------

Start Traceroute

Speed Test

Target Address		
Time period	20	Sec
Check Interval	5	Sec
IPv4 Port	5001	
IPv6 Port	5002	

Start Speed Test

4.5.12 Viewing Device Discovery

Device Discovery

Device Name	Operation Mode	IP Address	System MAC Address	Firmware Version
Refresh				

Device Name Displays the name of the devices connected to the network.

Operation Mode Displays the operation mode of the devices connected to the network.

IP Address Displays the IP address of the devices connected to the network.

System MAC Address Displays the system MAC address of the devices connected to the network.

Firmware Version Displays the firmware version of the devices connected to the network.

4.5.13 Configure Denial of Service Protection

Use TCP SYN Cookies Protection Click to enable TCP SYN cookies protection.

SYN Flood Attack Protection Click to enable or disable SYN Flood Attack Protection.

Match Interval Per Second Enter the allowed number of packets per second.

Limit Packets Enter the maximum number of packets allowed per request.

UDP Flood Attack Protection Click to enable or disable UDP Flood Attack Protection.

Match Interval Per Second Enter the allowed number of packets per second.

Limit Packets Enter the maximum number of packets allowed per request.

Ping Attack Protection Click to enable or disable ping attack protection.

Click Save/Apply to apply the changes or Cancel to return previous settings.

Dos Protection

	☐ Use TCP SYN Cookies Protection
SYN Flood Attack Protection	☐ Enable ☒ Disable Match Interval 50 Per Second Limit 5 Packets
UDP Flood Attack Protection	☐ Enable ☒ Disable Match Interval 50 Per Second Limit 5 Packets
Ping Attack Protection	☐ Enable ☒ Disable

Save/Apply Cancel

4.5.14 Logging Out

Click Logout to logout from the ENH202.



Appendix A

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 26 cm between the radiator & your body.

Appendix B

Europe – EU Declaration of Conformity

This device complies with the essential requirements of the R&TTE Directive 1999/5/EC. The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the R&TTE Directive 1999/5/EC:

- EN60950-1
Safety of Information Technology Equipment
- EN50385
Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz - 300 GHz)
- EN 300 328
Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- EN 301 489-1
Electromagnetic compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
- EN 301 489-17
Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment



[cs] Česky [Czech]	<i>[Jméno výrobce]</i> tímto prohlašuje, že tento <i>[typ zařízení]</i> je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
[da] Dansk [Danish]	Undertegnede <i>[fabrikantens navn]</i> erklærer herved, at følgende udstyr <i>[udstyrets typebetegnelse]</i> overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
[de] Deutsch [German]	Hiermit erkläre <i>[Name des Herstellers]</i> , dass sich das Gerät <i>[Gerätetyp]</i> in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
[et] Eesti [Estonian]	Käesolevaga kinnitab <i>[tootja nimi = name of manufacturer]</i> seadme <i>[seadme tüüp = type of equipment]</i> vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
[en] English	Hereby, <i>[name of manufacturer]</i> , declares that this <i>[type of equipment]</i> is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
[es] Español [Spanish]	Por medio de la presente <i>[nombre del fabricante]</i> declara que el <i>[clase de equipo]</i> cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
[el] Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ <i>[name of manufacturer]</i> ΔΗΛΩΝΕΙ ΟΤΙ <i>[type of equipment]</i> ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
[fr] Français [French]	Par la présente <i>[nom du fabricant]</i> déclare que l'appareil <i>[type d'appareil]</i> est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
[it] Italiano [Italian]	Con la presente <i>[nome del costruttore]</i> dichiara che questo <i>[tipo di apparecchio]</i> è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Latviski [Latvian]	Ar šo <i>[name of manufacturer / izgatavotāja nosaukums]</i> deklarē, ka <i>[type of equipment / iekārtas tips]</i> atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo <i>[manufacturer name]</i> deklaruojama, kad šis <i>[equipment type]</i> atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
 Nederlands [Dutch]	Hierbij verklaart <i>[naam van de fabrikant]</i> dat het toestel <i>[type van toestel]</i> in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
 Malti [Maltese]	Hawnhekk, <i>[isem tal-manifattur]</i> , jiddikjara li dan <i>[il-mudel tal-prodott]</i> jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Direttiva 1999/5/EC.
 Magyar [Hungarian]	Alulírott, <i>[gyártó neve]</i> nyilatkozom, hogy a <i>[... típus]</i> megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
 Polski [Polish]	Niniejszym <i>[nazwa producenta]</i> oświadczam, że <i>[nazwa wyrobu]</i> jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
 Português [Portuguese]	<i>[Nome do fabricante]</i> declara que este <i>[tipo de equipamento]</i> está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
 Slovensko [Slovenian]	<i>[Ime proizvajalca]</i> izjavlja, da je ta <i>[tip opreme]</i> v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovensky [Slovak]	<i>[Meno výrobcu]</i> týmto vyhlasuje, že <i>[typ zariadenia]</i> spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
 Suomi [Finnish]	<i>[Valmistaja = manufacturer]</i> vakuuttaa täten että <i>[type of equipment = laitteen tyyppimerkintä]</i> tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
 Svenska [Swedish]	Härmed intygar <i>[företag]</i> att denna <i>[utrustningstyp]</i> står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

Appendix C

Industry Canada Statement

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 26 cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 26 cm de distance entre la source de rayonnement et votre corps.