

FCC TEST REPORT (15.247)

REPORT NO.: RF130926C10

MODEL NO.: ESR1200

FCC ID: A8JESR1200

RECEIVED: Sep. 26, 2013

TESTED: Oct. 08 ~ Oct. 11, 2013

ISSUED: Nov. 04, 2013

APPLICANT: EnGenius Technologies

ADDRESS: 1580 Scenic Avenue, Costa Mesa, CA92626

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



A D T

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. CERTIFICATION	6
2. SUMMARY OF TEST RESULTS	7
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 DUTY CYCLE OF TEST SIGNAL	15
3.4 DESCRIPTION OF SUPPORT UNITS	17
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	18
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	19
4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)	20
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	20
4.1.2 TEST INSTRUMENTS	21
4.1.3 TEST PROCEDURES	22
4.1.4 DEVIATION FROM TEST STANDARD	22
4.1.5 TEST SETUP	23
4.1.6 EUT OPERATING CONDITIONS	24
4.1.7 TEST RESULTS	25
4.2 CONDUCTED EMISSION MEASUREMENT	38
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	38
4.2.2 TEST INSTRUMENTS	38
4.2.3 TEST PROCEDURES	39
4.2.4 DEVIATION FROM TEST STANDARD	39
4.2.5 TEST SETUP	39
4.2.6 EUT OPERATING CONDITIONS	39
4.2.7 TEST RESULTS	40
4.3 6dB BANDWIDTH MEASUREMENT	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2 TEST SETUP	42
4.3.3 TEST INSTRUMENTS	42
4.3.4 TEST PROCEDURE	42
4.3.5 DEVIATION FROM TEST STANDARD	42
4.3.6 EUT OPERATING CONDITIONS	42
4.3.7 TEST RESULTS	43
4.4 CONDUCTED OUTPUT POWER	45
4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	45
4.4.2 TEST SETUP	45



4.4.3	TEST INSTRUMENTS	45
4.4.4	TEST PROCEDURES.....	45
4.4.5	DEVIATION FROM TEST STANDARD.....	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS.....	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.2	TEST SETUP	49
4.5.3	TEST INSTRUMENTS	49
4.5.4	TEST PROCEDURE	49
4.5.5	DEVIATION FROM TEST STANDARD.....	49
4.5.6	EUT OPERATING CONDITION.....	49
4.5.7	TEST RESULTS.....	50
4.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	53
4.6.2	TEST SETUP	53
4.6.3	TEST INSTRUMENTS	53
4.6.4	TEST PROCEDURE	54
4.6.5	DEVIATION FROM TEST STANDARD.....	54
4.6.6	EUT OPERATING CONDITION.....	54
4.6.7	TEST RESULTS.....	54
5.	TEST TYPES AND RESULTS (FOR 5.0GHz BAND)	63
5.1	RADIATED EMISSION MEASUREMENT	63
5.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	63
5.1.2	TEST INSTRUMENTS	64
5.1.3	TEST PROCEDURES.....	64
5.1.4	DEVIATION FROM TEST STANDARD.....	64
5.1.5	TEST SETUP	64
5.1.6	EUT OPERATING CONDITIONS	64
5.1.7	TEST RESULTS.....	65
5.2	CONDUCTED EMISSION MEASUREMENT	75
5.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	75
5.2.2	TEST INSTRUMENTS	75
5.2.3	TEST PROCEDURES.....	75
5.2.4	DEVIATION FROM TEST STANDARD.....	75
5.2.5	TEST SETUP	75
5.2.6	EUT OPERATING CONDITIONS	75
5.2.7	TEST RESULTS.....	76
5.3	6dB BANDWIDTH MEASUREMENT	78
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	78
5.3.2	TEST SETUP	78
5.3.3	TEST INSTRUMENTS	78



A D T

5.3.4	TEST PROCEDURE	78
5.3.5	DEVIATION FROM TEST STANDARD.....	78
5.3.6	EUT OPERATING CONDITIONS	78
5.3.7	TEST RESULTS.....	79
5.4	CONDUCTED OUTPUT POWER.....	81
5.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	81
5.4.2	TEST SETUP	81
5.4.3	INSTRUMENTS	81
5.4.4	TEST PROCEDURES.....	82
5.4.5	DEVIATION FROM TEST STANDARD.....	82
5.4.6	EUT OPERATING CONDITIONS	82
5.4.7	TEST RESULTS.....	83
5.5	POWER SPECTRAL DENSITY MEASUREMENT	85
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	85
5.5.2	TEST SETUP	85
5.5.3	TEST INSTRUMENTS	85
5.5.4	TEST PROCEDURE	85
5.5.5	DEVIATION FROM TEST STANDARD.....	85
5.5.6	EUT OPERATING CONDITION.....	85
5.5.7	TEST RESULTS.....	86
5.6	CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	89
5.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	89
5.6.2	TEST SETUP	89
5.6.3	TEST INSTRUMENTS	89
5.6.4	TEST PROCEDURE	89
5.6.5	DEVIATION FROM TEST STANDARD.....	89
5.6.6	EUT OPERATING CONDITION.....	89
5.6.7	TEST RESULTS.....	89
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	98
7.	INFORMATION ON THE TESTING LABORATORIES	99
8.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	100



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130926C10	Original release.	Nov. 04, 2013



A D T

1. CERTIFICATION

PRODUCT: Dual Band Wireless AC1200 Router
MODEL NO.: ESR1200
BRAND: EnGenius
APPLICANT: EnGenius Technologies
TESTED: Oct. 08 ~ Oct. 11, 2013
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (model: ESR1200) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Sunt Lee , **DATE :** Nov. 04, 2013
Sunt Lee / Specialist

APPROVED BY : Ken Liu , **DATE :** Nov. 04, 2013
Ken Liu / Senior Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.63dB at 0.46280MHz.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 2390.00, 5725.00, 11550.00, 11570.00MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Dual Band Wireless AC1200 Router
MODEL NO.	ESR1200
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11a/g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5.0GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
OUTPUT POWER	2.4GHz: 971.309mW 5.0GHz: 523.836mW
ANTENNA TYPE	2.4GHz: PCB antenna with 2.45dBi gain 5.0GHz: PCB antenna with 5.51dBi gain
ANTENNA CONNECTOR	IPEX
DATA CABLE	0.5m non-shielded RJ45 cable without core
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter

NOTE:

1. The EUT incorporates a MIMO function. The EUT provides 2 completed transmitters and 2 receivers.

MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11a	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT20)	2TX
802.11ac (VHT40)	2TX
802.11ac (VHT80)	2TX

* The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT consumes power from following adapter.

Brand	Shenzhen Gongjin Electronics Co., Ltd.
Model	S24B12-120A150-04
Input Power	100-240Vac, 50/60Hz, Max 0.7A LPS
Output Power	12Vdc, 1.5A
Power Line	1.4m cable without core attached on adapter

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5.0GHz (5745 ~ 5825MHz):

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

CHANNEL	FREQUENCY
155	5775MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR 2.4GHz:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of X-plane and Z-plane. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 11	6	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (HT20)	1 to 11	6	OFDM	BPSK	7.2

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	15.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	7.2
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	15.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Alan Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee

FOR 5.0GHz (5745 ~ 5825MHz):

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of X-plane and Z-plane. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11ac (VHT20)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	58.5

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11ac (VHT20)	149 to 165	149	OFDM	BPSK	7.2

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11ac (VHT20)	149 to 165	149	OFDM	BPSK	7.2

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 165	OFDM	BPSK	6.0
-	802.11ac (VHT20)	149 to 165	149, 165	OFDM	BPSK	7.2
-	802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	58.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	149 to 165	149, 157, 165	OFDM	BPSK	6.0
-	802.11ac (VHT20)	149 to 165	149, 157, 165	OFDM	BPSK	7.2
-	802.11ac (VHT40)	151 to 159	151, 159	OFDM	BPSK	15.0
-	802.11ac (VHT80)	155	155	OFDM	BPSK	58.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Martin Lee
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
PLC	24deg. C, 64%RH	120Vac, 60Hz	Match Tsui
APCM	25deg. C, 60%RH	120Vac, 60Hz	Antony Lee

3.3 DUTY CYCLE OF TEST SIGNAL


For 2.4GHz Band:

802.11b: Duty cycle of test signal is > 98 %

802.11g: Duty cycle = $2.023/2.074 = 0.975$

802.11n (HT20): Duty cycle = $1.886/1.937 = 0.974$

802.11n (HT40): Duty cycle = $0.924/0.967 = 0.956$

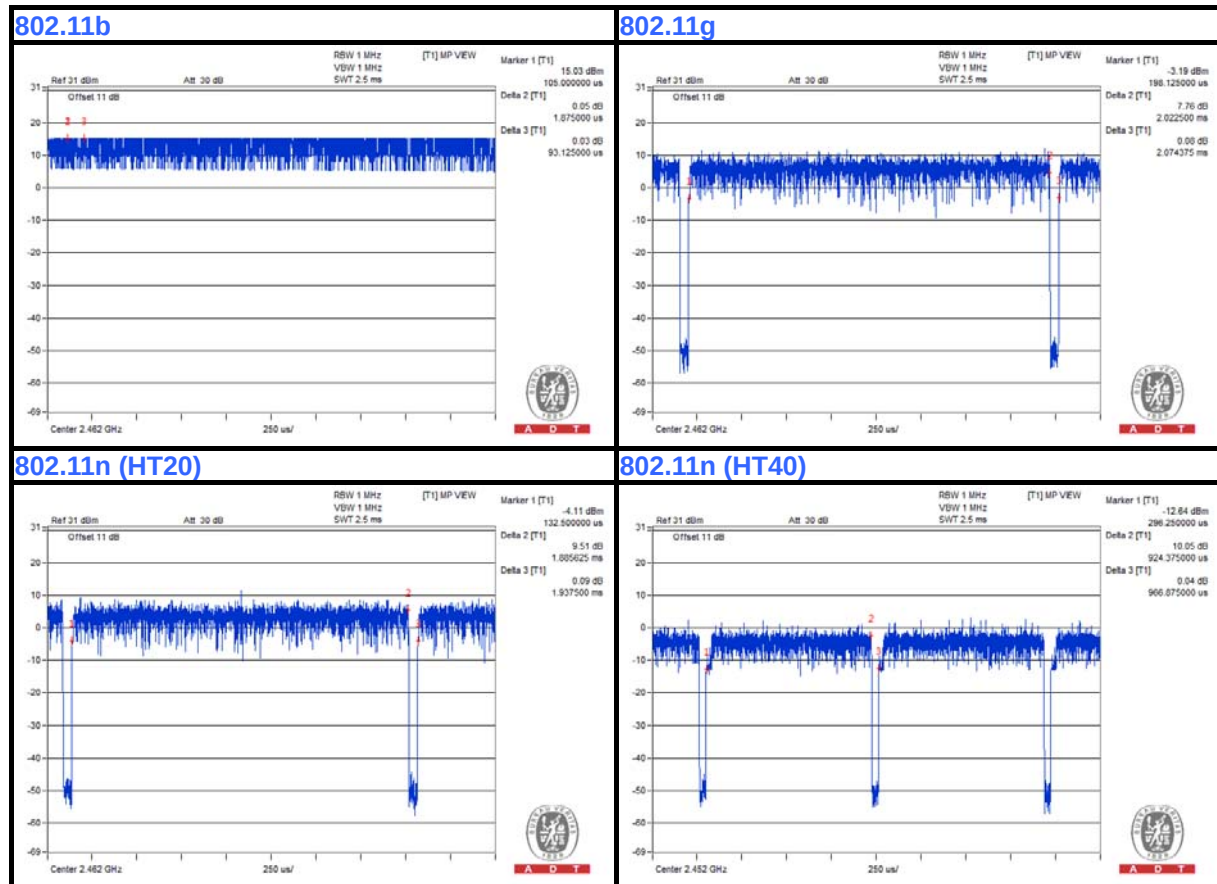


For 5GHz Band:

802.11a: Duty cycle = $2.02/2.08 = 0.971$

802.11ac (VHT20): Duty cycle = $1.89/1.96 = 0.964$

802.11ac (VHT40): Duty cycle = $0.93/0.99 = 0.939$

802.11ac (VHT80): Duty cycle = $0.455/0.517 = 0.88$

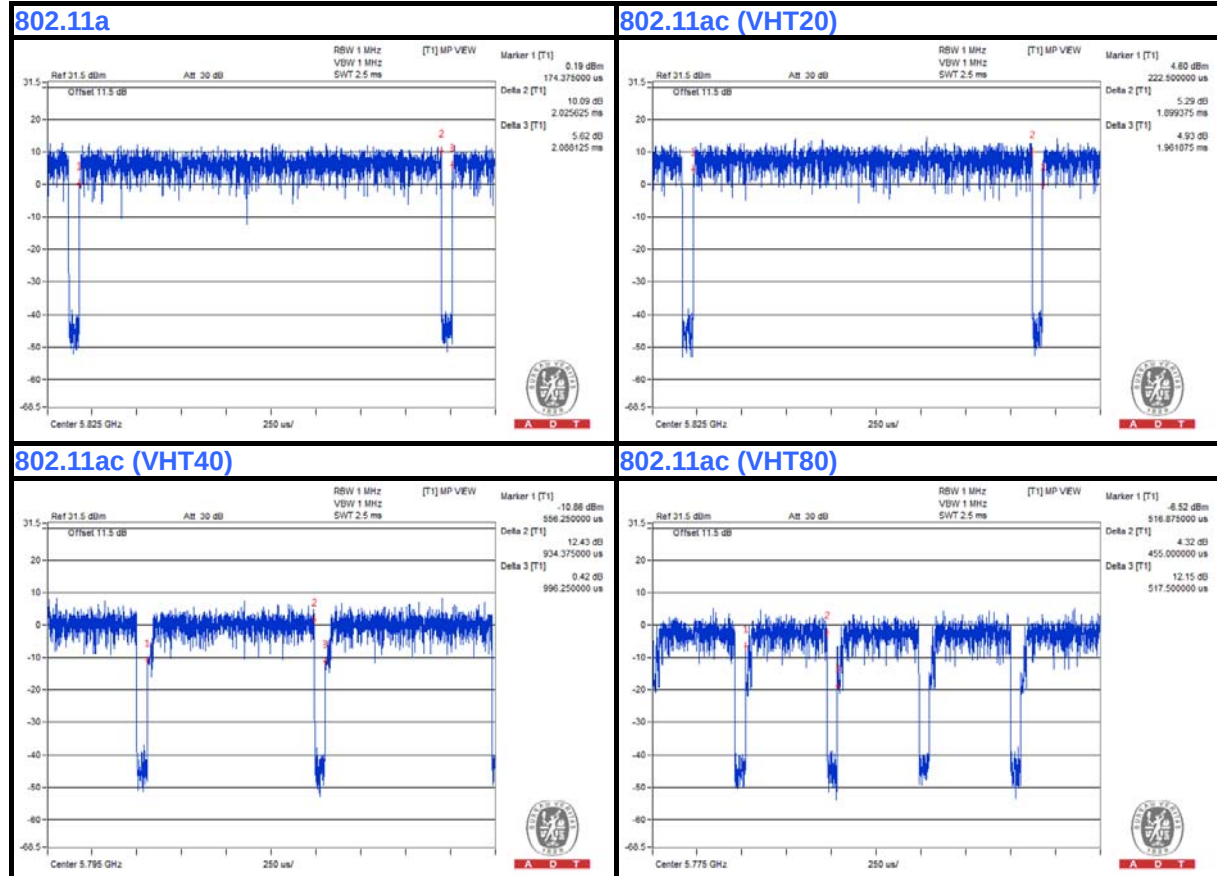

**A D T**

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	D531	CN-0XM006-48643-8 1U-2610	QDS-BRCM1020
2	USB Flash Drive	Transcend	V85	538455 4488	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m RJ45 UTP cable
2	NA

NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

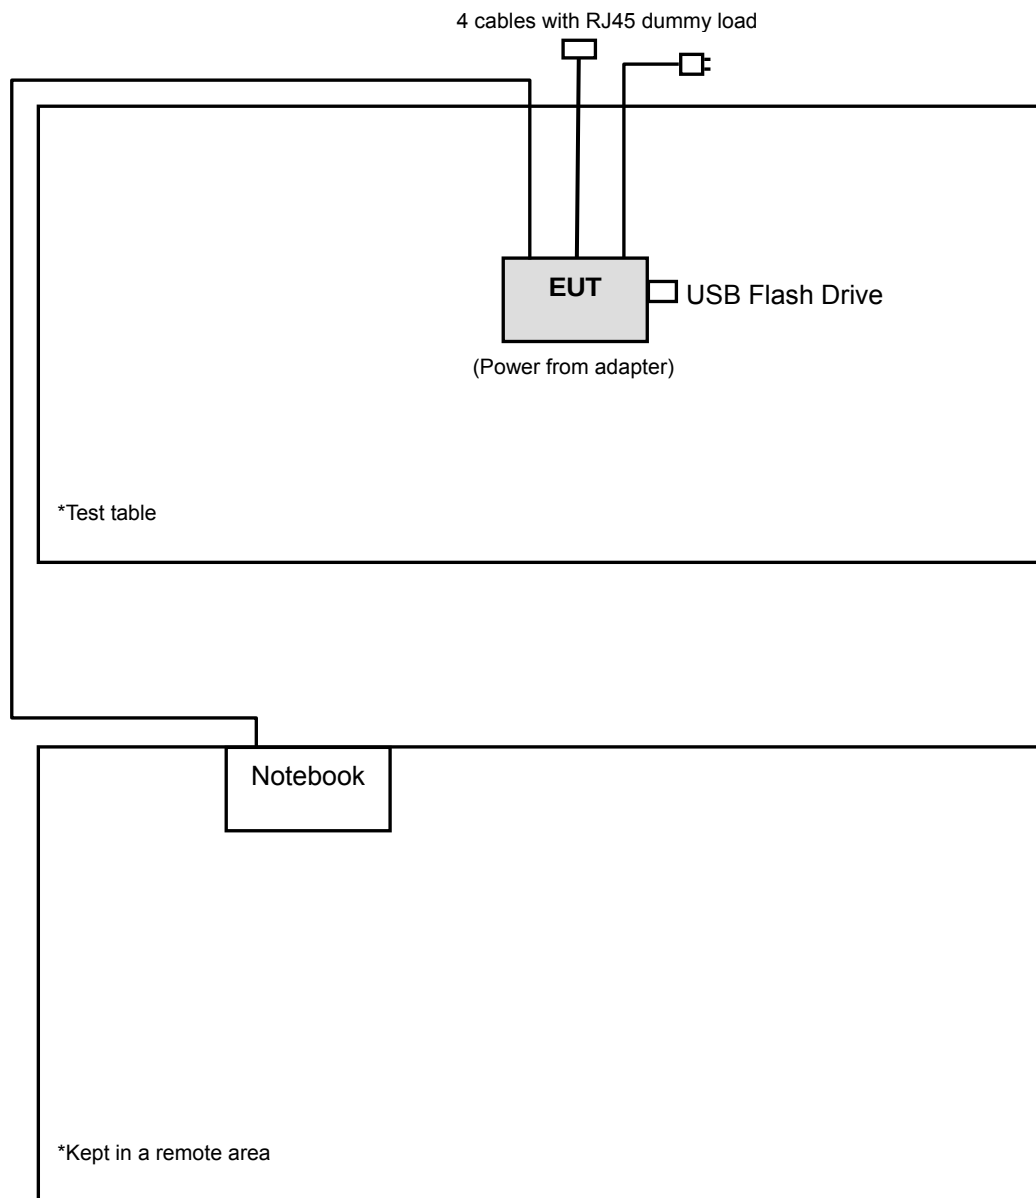



A D T

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

662911 D01 Multiple Transmitter Output v02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS (FOR 2.4GHz BAND)

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jan. 28, 2013	Jan. 27, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Mar. 22, 2013	Mar. 21, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	209	Sep. 12, 2013	Sep. 11, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 15, 2013	Jul. 14, 2014
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8449B	3008A01911	Aug. 22, 2013	Aug. 21, 2014
Preamplifier Agilent	8447D	2944A10638	Oct. 25, 2012	Oct. 24, 2013
			Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309222/4 248780/4 274392/4	Aug. 22, 2013	Aug. 21, 2014
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 11, 2013	Aug. 10, 2014
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
			Oct. 18, 2013	Oct. 17, 2014
High Speed Peak Power Meter	ML2495A	0824011	Jul. 29, 2013	Jul. 28, 2014
Power Sensor	MA2411B	0738171	Jul. 29, 2013	Jul. 28, 2014

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. The test was performed in HwaYa Chamber 9.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

5. The FCC Site Registration No. is 215374.

6. The IC Site Registration No. is IC 7450F-9.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $> 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Frequency range 30MHz~1GHz

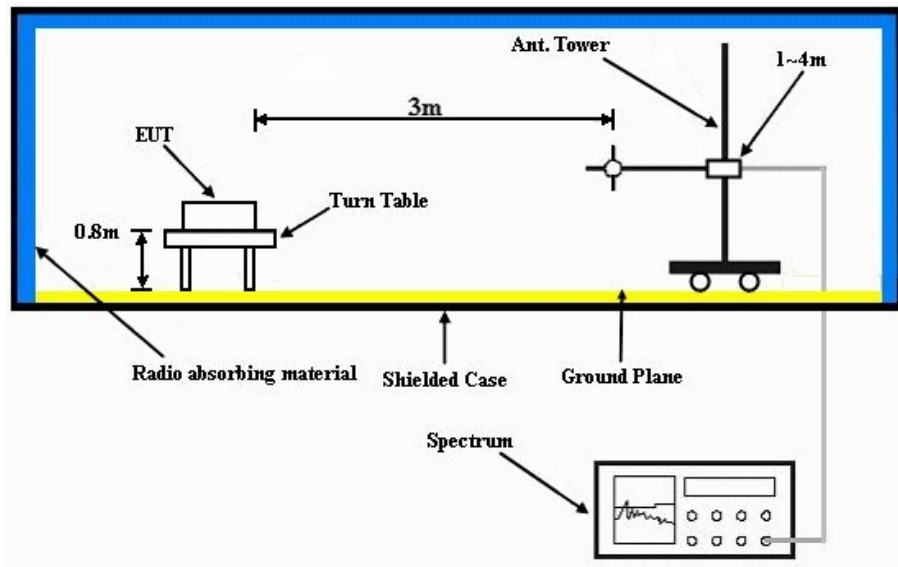

Frequency range above 1GHz

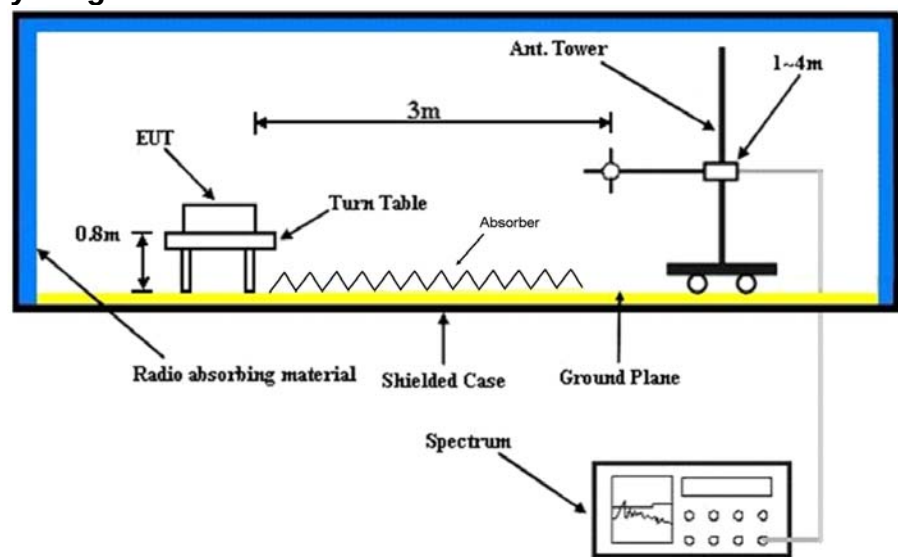

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared a notebook to act as a communication partner and placed it outside of testing area.
- c. The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partners sent data to EUT by command "PING".
- e. The necessary accessories enabled the system in full functions.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.00 H	236	23.90	33.40
2	2390.00	45.0 AV	54.0	-9.0	1.00 H	236	11.60	33.40
3	*2412.00	107.6 PK			1.00 H	236	74.10	33.50
4	*2412.00	104.7 AV			1.00 H	236	71.20	33.50
5	4824.00	56.9 PK	74.0	-17.1	1.00 H	48	53.30	3.60
6	4824.00	52.5 AV	54.0	-1.5	1.00 H	48	48.90	3.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.00 V	9	23.60	33.40
2	2390.00	44.5 AV	54.0	-9.5	1.00 V	9	11.10	33.40
3	*2412.00	103.4 PK			1.00 V	10	69.90	33.50
4	*2412.00	100.2 AV			1.00 V	10	66.70	33.50
5	4824.00	52.5 PK	74.0	-21.5	1.00 V	279	48.90	3.60
6	4824.00	45.7 AV	54.0	-8.3	1.00 V	279	42.10	3.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.2 PK			1.58 H	12	80.70	33.50
2	*2437.00	110.4 AV			1.58 H	12	76.90	33.50
3	4874.00	56.4 PK	74.0	-17.6	1.00 H	219	52.60	3.80
4	4874.00	52.7 AV	54.0	-1.3	1.00 H	219	48.90	3.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.5 PK			1.00 V	24	77.00	33.50
2	*2437.00	107.0 AV			1.00 V	24	73.50	33.50
3	4874.00	53.0 PK	74.0	-21.0	1.00 V	275	49.20	3.80
4	4874.00	46.9 AV	54.0	-7.1	1.00 V	275	43.10	3.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.5 PK			1.00 H	17	79.90	33.60
2	*2462.00	109.9 AV			1.00 H	17	76.30	33.60
3	2483.50	59.5 PK	74.0	-14.5	1.00 H	221	25.80	33.70
4	2483.50	47.3 AV	54.0	-6.7	1.00 H	221	13.60	33.70
5	4924.00	56.0 PK	74.0	-18.0	1.00 H	205	52.10	3.90
6	4924.00	52.2 AV	54.0	-1.8	1.00 H	205	48.30	3.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.6 PK			1.00 V	208	71.00	33.60
2	*2462.00	101.3 AV			1.00 V	208	67.70	33.60
3	2483.50	56.4 PK	74.0	-17.6	1.00 V	209	22.70	33.70
4	2483.50	44.7 AV	54.0	-9.3	1.00 V	209	11.00	33.70
5	4924.00	52.7 PK	74.0	-21.3	1.00 V	276	48.80	3.90
6	4924.00	46.6 AV	54.0	-7.4	1.00 V	276	42.70	3.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.07 H	15	35.40	33.40
2	2390.00	52.6 AV	54.0	-1.4	1.07 H	15	19.20	33.40
3	*2412.00	111.5 PK			1.06 H	18	78.00	33.50
4	*2412.00	101.8 AV			1.06 H	18	68.30	33.50
5	4824.00	61.1 PK	74.0	-12.9	1.00 H	173	57.50	3.60
6	4824.00	44.6 AV	54.0	-9.4	1.00 H	173	41.00	3.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	1.07 V	97	29.00	33.40
2	2390.00	48.9 AV	54.0	-5.1	1.07 V	97	15.50	33.40
3	*2412.00	106.4 PK			1.10 V	97	72.90	33.50
4	*2412.00	96.6 AV			1.10 V	97	63.10	33.50
5	4824.00	57.1 PK	74.0	-16.9	1.07 V	287	53.50	3.60
6	4824.00	40.8 AV	54.0	-13.2	1.07 V	287	37.20	3.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.1 PK			1.00 H	7	77.60	33.50
2	*2437.00	102.1 AV			1.00 H	7	68.60	33.50
3	4874.00	61.7 PK	74.0	-12.3	1.00 H	170	57.90	3.80
4	4874.00	44.9 AV	54.0	-9.1	1.00 H	170	41.10	3.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.1 PK			1.11 V	107	73.60	33.50
2	*2437.00	97.2 AV			1.11 V	107	63.70	33.50
3	4874.00	58.1 PK	74.0	-15.9	1.03 V	281	54.30	3.80
4	4874.00	41.5 AV	54.0	-12.5	1.03 V	281	37.70	3.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.4 PK			1.00 H	16	76.80	33.60
2	*2462.00	100.8 AV			1.00 H	16	67.20	33.60
3	2483.50	69.0 PK	74.0	-5.0	1.00 H	4	35.30	33.70
4	2483.50	52.8 AV	54.0	-1.2	1.00 H	4	19.10	33.70
5	4924.00	60.2 PK	74.0	-13.8	1.00 H	170	56.30	3.90
6	4924.00	44.0 AV	54.0	-10.0	1.00 H	170	40.10	3.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.4 PK			1.09 V	98	71.80	33.60
2	*2462.00	95.8 AV			1.09 V	98	62.20	33.60
3	2483.50	66.6 PK	74.0	-7.4	1.08 V	91	32.90	33.70
4	2483.50	49.5 AV	54.0	-4.5	1.08 V	91	15.80	33.70
5	4924.00	56.8 PK	74.0	-17.2	1.09 V	287	52.90	3.90
6	4924.00	39.8 AV	54.0	-14.2	1.09 V	287	35.90	3.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11n (HT20)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.05 H	328	35.70	33.40
2	2390.00	52.3 AV	54.0	-1.7	1.05 H	328	18.90	33.40
3	*2412.00	111.2 PK			1.05 H	6	77.70	33.50
4	*2412.00	101.5 AV			1.05 H	6	68.00	33.50
5	4824.00	59.2 PK	74.0	-14.8	1.00 H	173	55.60	3.60
6	4824.00	43.5 AV	54.0	-10.5	1.00 H	173	39.90	3.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.15 V	16	35.20	33.40
2	2390.00	51.6 AV	54.0	-2.4	1.15 V	16	18.20	33.40
3	*2412.00	108.2 PK			1.15 V	16	74.70	33.50
4	*2412.00	98.5 AV			1.15 V	16	65.00	33.50
5	4824.00	56.4 PK	74.0	-17.6	1.01 V	281	52.80	3.60
6	4824.00	39.7 AV	54.0	-14.3	1.01 V	281	36.10	3.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.4 PK			1.04 H	350	77.90	33.50
2	*2437.00	102.4 AV			1.04 H	350	68.90	33.50
3	4874.00	60.0 PK	74.0	-14.0	1.00 H	173	56.20	3.80
4	4874.00	43.0 AV	54.0	-11.0	1.00 H	173	39.20	3.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.3 PK			1.13 V	13	75.80	33.50
2	*2437.00	98.3 AV			1.13 V	13	64.80	33.50
3	4874.00	57.5 PK	74.0	-16.5	1.03 V	289	53.70	3.80
4	4874.00	40.5 AV	54.0	-13.5	1.03 V	289	36.70	3.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.3 PK			1.00 H	355	77.70	33.60
2	*2462.00	100.5 AV			1.00 H	355	66.90	33.60
3	2483.50	69.4 PK	74.0	-4.6	1.00 H	350	35.70	33.70
4	2483.50	52.8 AV	54.0	-1.2	1.00 H	350	19.10	33.70
5	4924.00	59.1 PK	74.0	-14.9	1.00 H	170	55.20	3.90
6	4924.00	42.8 AV	54.0	-11.2	1.00 H	170	38.90	3.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.2 PK			1.14 V	15	73.60	33.60
2	*2462.00	97.0 AV			1.14 V	15	63.40	33.60
3	2483.50	63.5 PK	74.0	-10.5	1.18 V	15	29.80	33.70
4	2483.50	50.3 AV	54.0	-3.7	1.18 V	15	16.60	33.70
5	4924.00	56.0 PK	74.0	-18.0	1.03 V	283	52.10	3.90
6	4924.00	39.6 AV	54.0	-14.4	1.03 V	283	35.70	3.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



A D T

802.11n (HT40)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.06 H	18	33.20	33.40
2	2390.00	52.9 AV	54.0	-1.1	1.06 H	18	19.50	33.40
3	*2422.00	105.1 PK			1.05 H	3	71.60	33.50
4	*2422.00	95.4 AV			1.05 H	3	61.90	33.50
5	4844.00	51.9 PK	74.0	-22.1	1.00 H	178	48.20	3.70
6	4844.00	36.4 AV	54.0	-17.6	1.00 H	178	32.70	3.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	1.10 V	17	34.60	33.40
2	2390.00	51.9 AV	54.0	-2.1	1.10 V	17	18.50	33.40
3	*2422.00	103.8 PK			1.16 V	18	70.30	33.50
4	*2422.00	94.3 AV			1.16 V	18	60.80	33.50
5	4844.00	50.0 PK	74.0	-24.0	1.00 V	287	46.30	3.70
6	4844.00	34.0 AV	54.0	-20.0	1.00 V	287	30.30	3.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	1.00 H	346	34.60	33.40
2	2390.00	52.7 AV	54.0	-1.3	1.00 H	346	19.30	33.40
3	*2437.00	108.7 PK			1.00 H	344	75.20	33.50
4	*2437.00	98.5 AV			1.00 H	344	65.00	33.50
5	2483.50	69.7 PK	74.0	-4.3	1.00 H	344	36.00	33.70
6	2483.50	52.9 AV	54.0	-1.1	1.00 H	344	19.20	33.70
7	4874.00	52.7 PK	74.0	-21.3	1.00 H	174	48.90	3.80
8	4874.00	37.7 AV	54.0	-16.3	1.00 H	174	33.90	3.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.19 V	9	33.70	33.40
2	2390.00	50.8 AV	54.0	-3.2	1.19 V	9	17.40	33.40
3	*2437.00	107.1 PK			1.16 V	10	73.60	33.50
4	*2437.00	97.7 AV			1.16 V	10	64.20	33.50
5	2483.50	66.8 PK	74.0	-7.2	1.19 V	9	33.10	33.70
6	2483.50	52.1 AV	54.0	-1.9	1.19 V	9	18.40	33.70
7	4874.00	51.0 PK	74.0	-23.0	1.00 V	288	47.20	3.80
8	4874.00	34.6 AV	54.0	-19.4	1.00 V	288	30.80	3.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 9	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.8 PK			1.00 H	348	71.20	33.60
2	*2452.00	95.0 AV			1.00 H	348	61.40	33.60
3	2483.50	66.4 PK	74.0	-7.6	1.00 H	349	32.70	33.70
4	2483.50	52.6 AV	54.0	-1.4	1.00 H	349	18.90	33.70
5	4904.00	52.0 PK	74.0	-22.0	1.00 H	179	48.10	3.90
6	4904.00	37.0 AV	54.0	-17.0	1.00 H	179	33.10	3.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	103.7 PK			1.14 V	14	70.10	33.60
2	*2452.00	93.9 AV			1.14 V	14	60.30	33.60
3	2483.50	62.2 PK	74.0	-11.8	1.19 V	12	28.50	33.70
4	2483.50	49.6 AV	54.0	-4.4	1.19 V	12	15.90	33.70
5	4904.00	50.5 PK	74.0	-23.5	1.00 V	287	46.60	3.90
6	4904.00	34.5 AV	54.0	-19.5	1.00 V	287	30.60	3.90

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11n (HT20)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.06	30.6 QP	43.5	-12.9	2.00 H	266	46.30	-15.70
2	255.04	34.9 QP	46.0	-11.1	1.01 H	139	49.00	-14.10
3	375.32	32.9 QP	46.0	-13.1	1.01 H	236	43.70	-10.80
4	499.48	35.5 QP	46.0	-10.5	1.26 H	171	43.60	-8.10
5	625.58	34.7 QP	46.0	-11.3	1.26 H	181	40.40	-5.70
6	751.68	40.0 QP	46.0	-6.0	1.01 H	168	43.50	-3.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.18	35.5 QP	40.0	-4.5	1.23 V	10	50.90	-15.40
2	125.06	36.3 QP	43.5	-7.2	1.00 V	358	52.00	-15.70
3	499.48	33.9 QP	46.0	-12.1	1.00 V	213	42.00	-8.10
4	625.58	37.3 QP	46.0	-8.7	1.00 V	131	43.00	-5.70
5	751.68	41.3 QP	46.0	-4.7	1.00 V	260	44.80	-3.50
6	875.84	41.0 QP	46.0	-5.0	1.00 V	220	42.20	-1.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 04, 2013	Feb. 03, 2014
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 08, 2013	Jul. 07, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

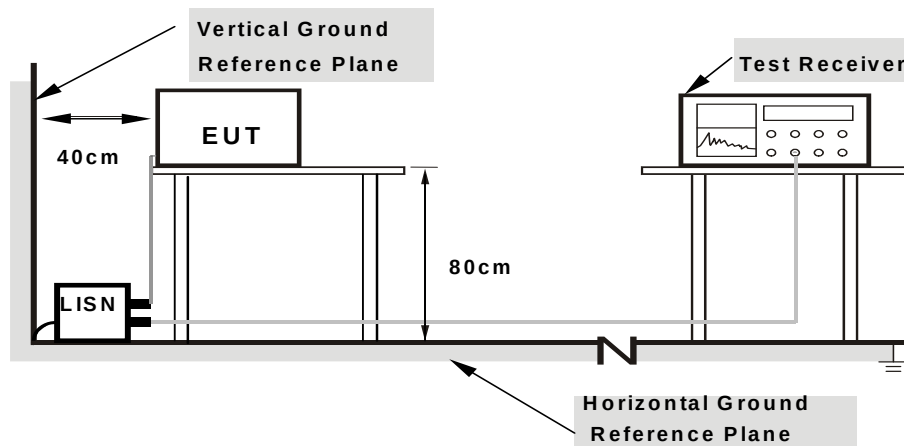

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11n (HT20)

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15782	0.16	50.59	46.22	50.75	46.38	65.58	55.58	-14.83	-9.20
2	0.25557	0.18	45.91	40.85	46.09	41.03	61.57	51.57	-15.48	-10.54
3	0.45695	0.23	53.31	43.61	53.54	43.84	56.75	46.75	-3.21	-2.91
4	0.76789	0.24	43.08	34.96	43.32	35.20	56.00	46.00	-12.68	-10.80
5	4.76380	0.44	37.91	32.80	38.35	33.24	56.00	46.00	-17.65	-12.76
6	9.42452	0.69	39.32	32.92	40.01	33.61	60.00	50.00	-19.99	-16.39

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

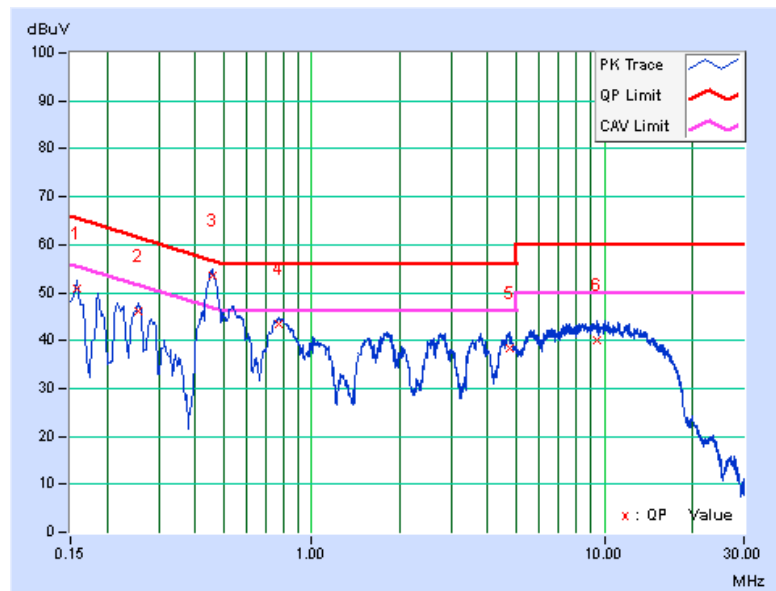


PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15760	0.17	49.82	45.74	49.99	45.91	65.59	55.59	-15.60	-9.68
2	0.25864	0.19	45.87	39.65	46.06	39.84	61.47	51.47	-15.41	-11.63
3	0.46280	0.24	53.38	44.77	53.62	45.01	56.64	46.64	-3.02	-1.63
4	0.78013	0.25	43.78	36.58	44.03	36.83	56.00	46.00	-11.97	-9.17
5	4.73022	0.41	38.62	33.74	39.03	34.15	56.00	46.00	-16.97	-11.85
6	8.58778	0.55	39.34	32.97	39.89	33.52	60.00	50.00	-20.11	-16.48

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

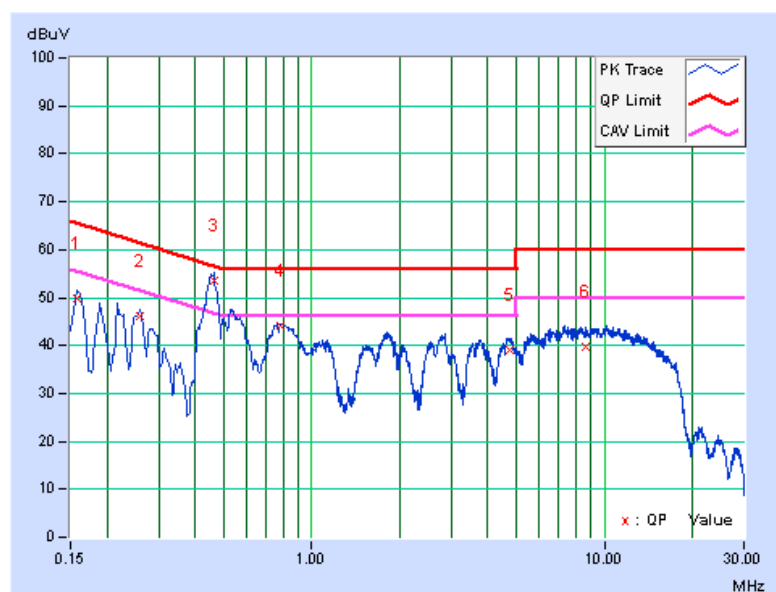


4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	6.06	6.11	0.5	PASS
6	2437	6.11	7.11	0.5	PASS
11	2462	6.58	6.07	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.50	16.47	0.5	PASS
6	2437	16.47	16.50	0.5	PASS
11	2462	16.50	16.46	0.5	PASS

802.11n (HT20)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.69	17.71	0.5	PASS
6	2437	17.70	17.67	0.5	PASS
11	2462	17.70	17.67	0.5	PASS

802.11n (HT40)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.43	36.44	0.5	PASS
6	2437	36.48	36.44	0.5	PASS
9	2452	36.42	36.47	0.5	PASS

SPECTRUM PLOT OF WORST VALUE


802.11b

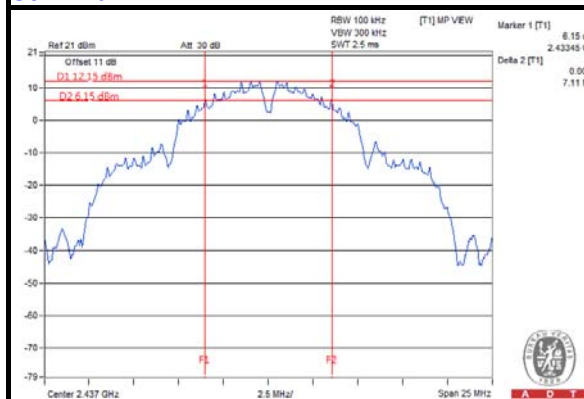


802.11g

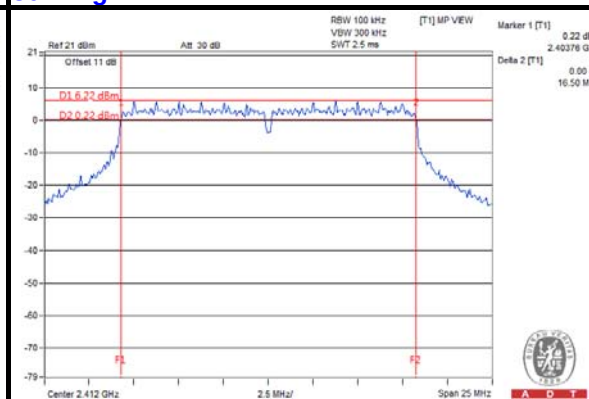

802.11n (HT20)

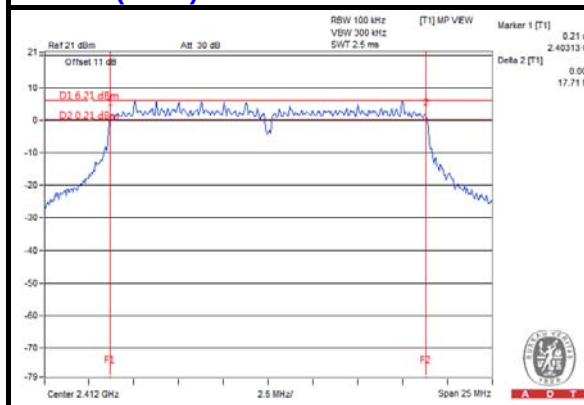

802.11n (HT40)

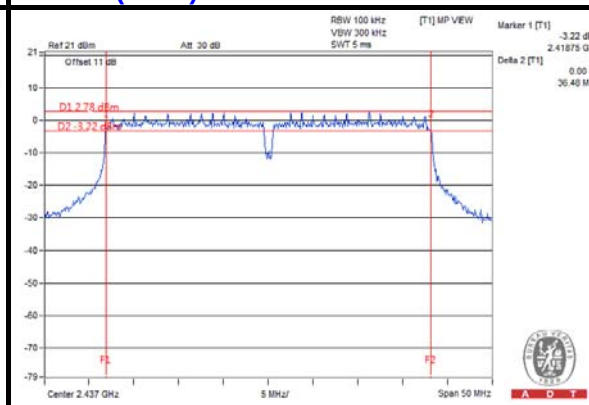

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 TEST SETUP

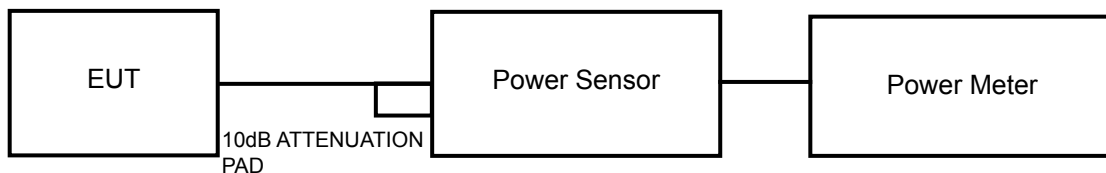

4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

4.4.7 TEST RESULTS

FOR PEAK POWER

802.11b

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	21.97	22.53	336.459	25.27	30	PASS
6	2437	24.86	25.74	681.169	28.33	30	PASS
11	2462	24.03	23.76	490.614	26.91	30	PASS

802.11g

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	26.67	26.78	940.946	29.74	30	PASS
6	2437	26.53	26.68	915.366	29.62	30	PASS
11	2462	26.56	26.35	884.417	29.47	30	PASS

802.11n (HT20)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	25.56	26.10	767.129	28.85	30	PASS
6	2437	26.39	27.29	971.309	29.87	30	PASS
11	2462	25.04	25.27	655.666	28.17	30	PASS

802.11n (HT40)

CHAN.	FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	23.55	24.39	501.253	27.00	30	PASS
6	2437	26.22	26.60	875.882	29.42	30	PASS
9	2452	23.70	24.18	496.241	26.96	30	PASS

FOR AVERAGE POWER

802.11b

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	18.20	18.69	140.030	21.46
6	2437	21.32	22.18	300.715	24.78
11	2462	20.34	20.05	209.301	23.21

802.11g

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	18.63	19.43	160.646	22.06
6	2437	18.68	18.93	151.953	21.82
11	2462	18.31	18.55	139.378	21.44

802.11n (HT20)

CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
1	2412	16.96	18.32	117.579	20.70
6	2437	18.70	18.94	152.474	21.83
11	2462	16.26	16.68	88.826	19.49

802.11n (HT40)


CHAN.	FREQUENCY (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
3	2422	15.31	15.11	66.397	18.22
6	2437	18.14	19.05	145.516	21.63
9	2452	14.35	14.80	57.427	17.59

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
- Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-3.60	3.01	-0.59	8	PASS
	6	2437	-0.16	3.01	2.85	8	PASS
	11	2462	-2.00	3.01	1.01	8	PASS
1	1	2412	-4.22	3.01	-1.21	8	PASS
	6	2437	-1.61	3.01	1.40	8	PASS
	11	2462	-2.48	3.01	0.53	8	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.45dBi + 10log(2) = 5.46dBi < 6dBi, so the limit no need to reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-8.13	3.01	-5.01	8	PASS
	6	2437	-8.03	3.01	-4.91	8	PASS
	11	2462	-8.16	3.01	-5.04	8	PASS
1	1	2412	-6.29	3.01	-3.17	8	PASS
	6	2437	-6.59	3.01	-3.47	8	PASS
	11	2462	-7.85	3.01	-4.73	8	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.45dBi + 10log(2) = 5.46dBi < 6dBi, so the limit no need to reduced.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	-8.77	3.01	-5.65	8	PASS
	6	2437	-6.73	3.01	-3.61	8	PASS
	11	2462	-9.20	3.01	-6.08	8	PASS
1	1	2412	-7.87	3.01	-4.75	8	PASS
	6	2437	-6.93	3.01	-3.81	8	PASS
	11	2462	-10.16	3.01	-7.04	8	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.45dBi + 10log(2) = 5.46dBi < 6dBi, so the limit no need to reduced.

802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-13.72	3.01	-10.51	8	PASS
	6	2437	-11.86	3.01	-8.65	8	PASS
	9	2452	-12.38	3.01	-9.17	8	PASS
1	3	2422	-11.90	3.01	-8.69	8	PASS
	6	2437	-10.31	3.01	-7.10	8	PASS
	9	2452	-14.10	3.01	-10.89	8	PASS

NOTE:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 2.45dBi + 10log(2) = 5.46dBi < 6dBi, so the limit no need to reduced.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b

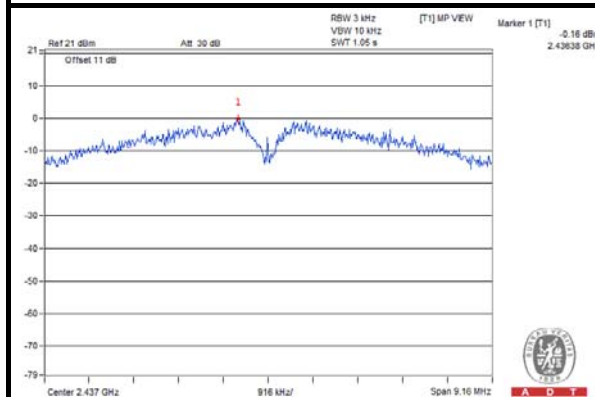


802.11g

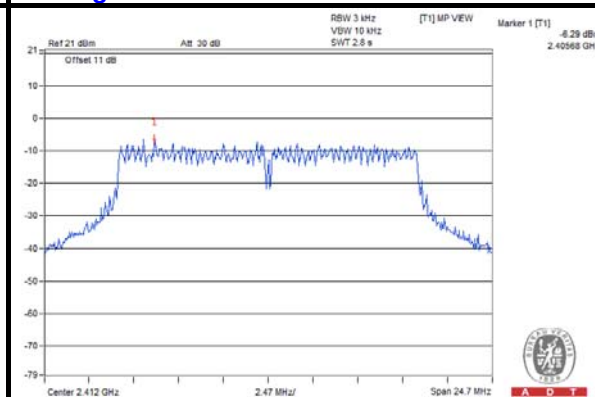

802.11n (HT20)

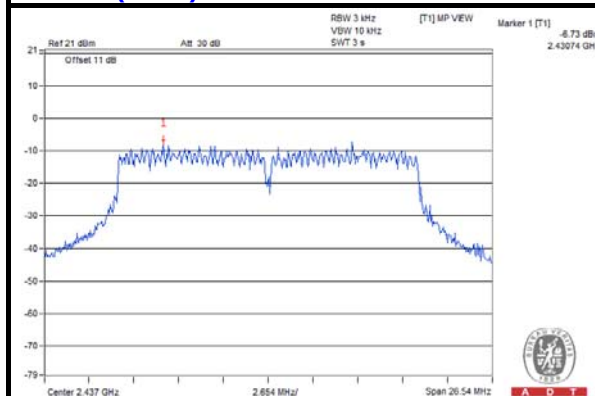

802.11n (HT40)

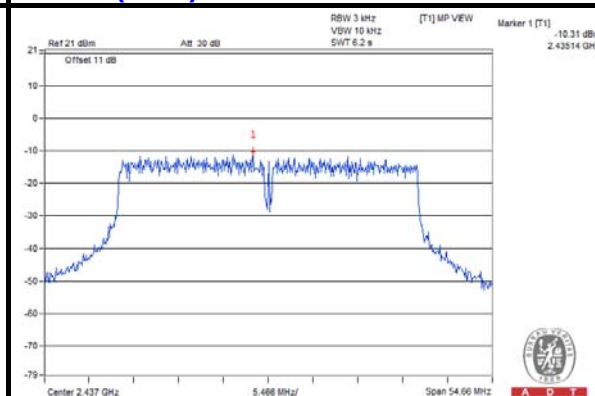


4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b CHAIN 0


CH 1

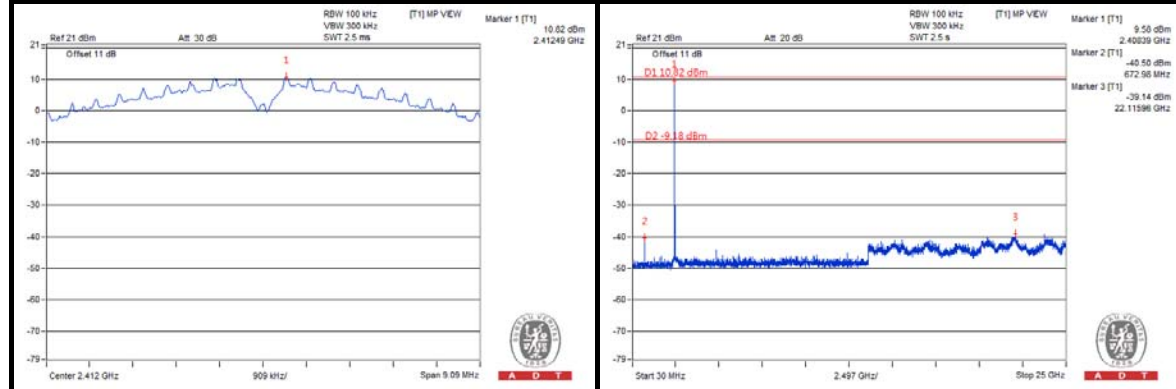


CH 6

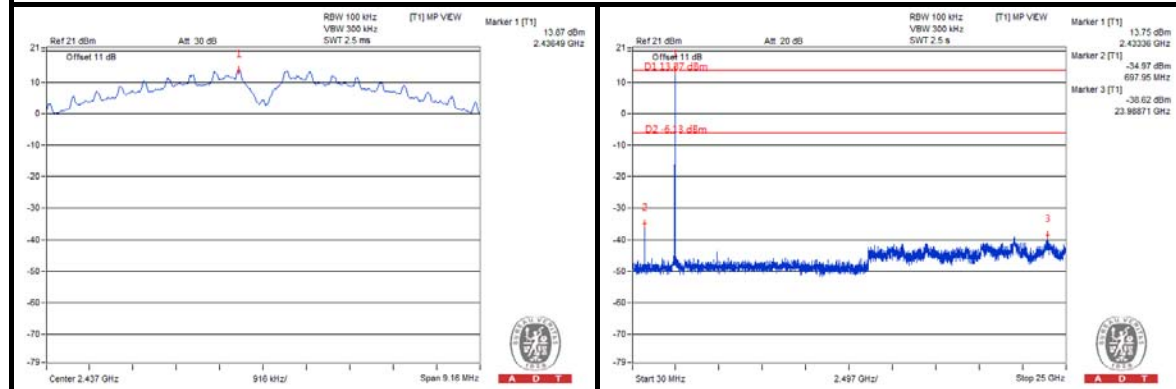


CH 11

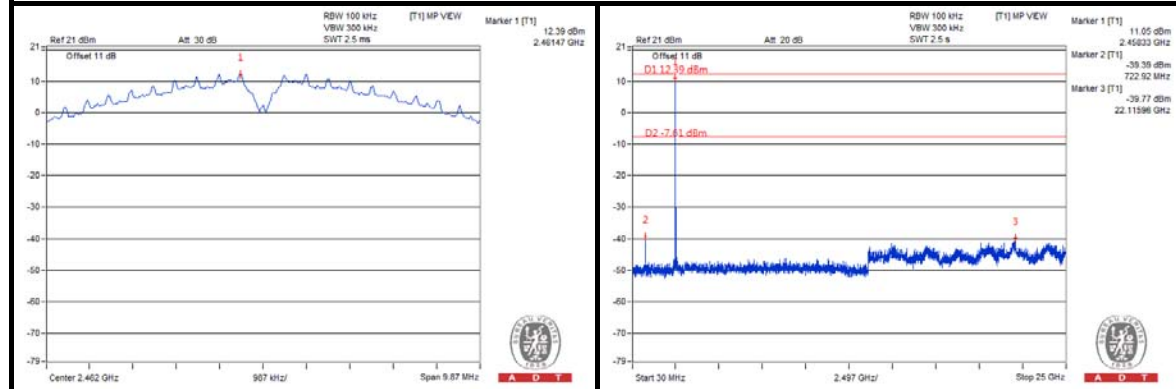

CH 1 Band edge

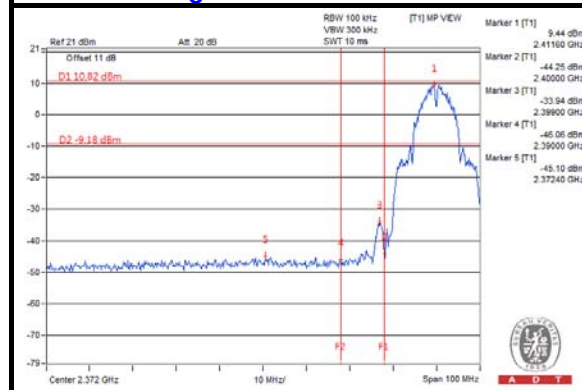

CH 11 Band edge

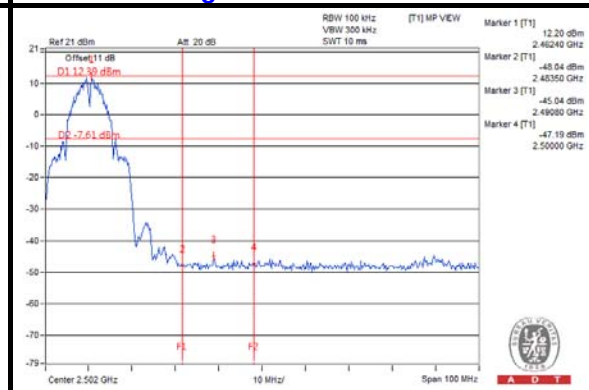





A D T

CHAIN 1


CH 1

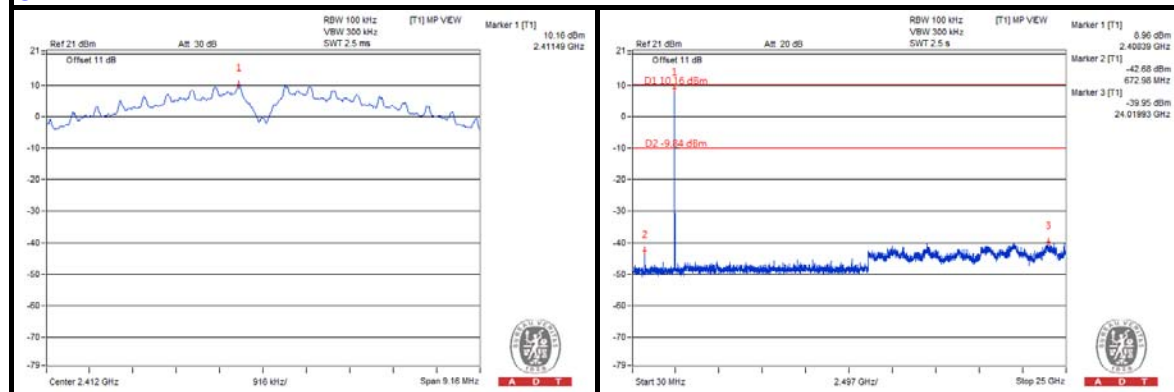


CH 6

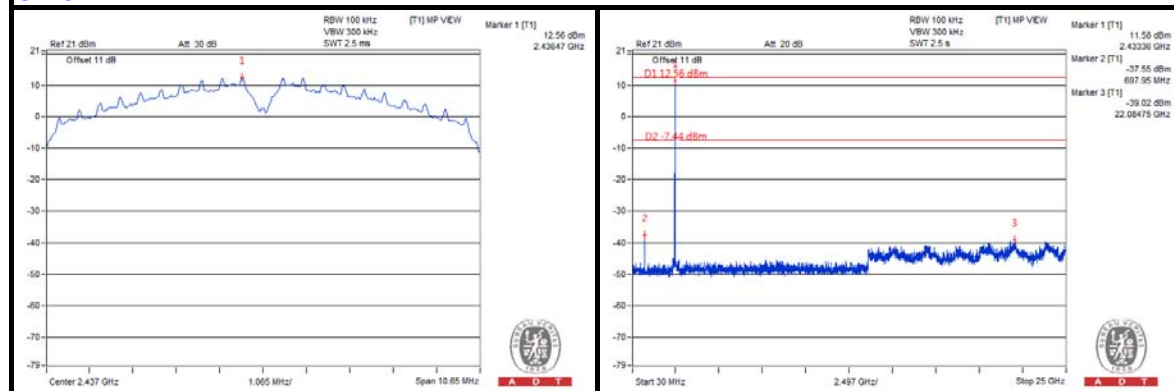

CH 11

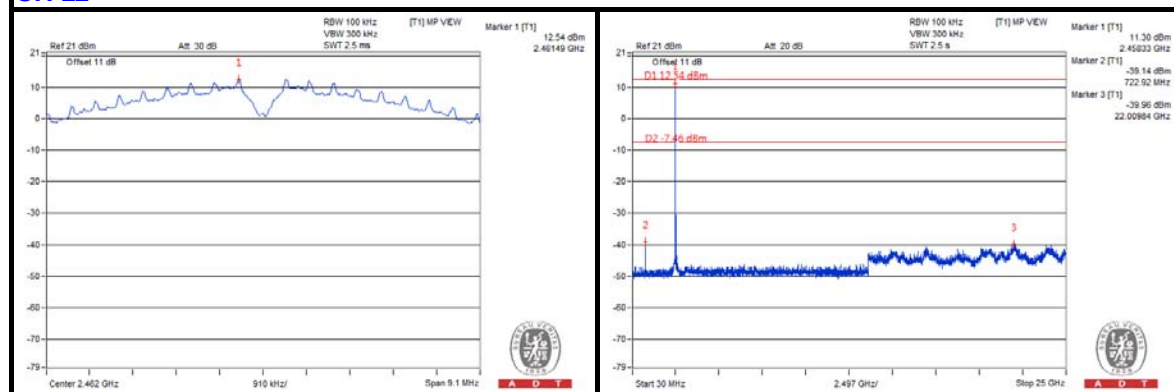

CH 1 Band edge

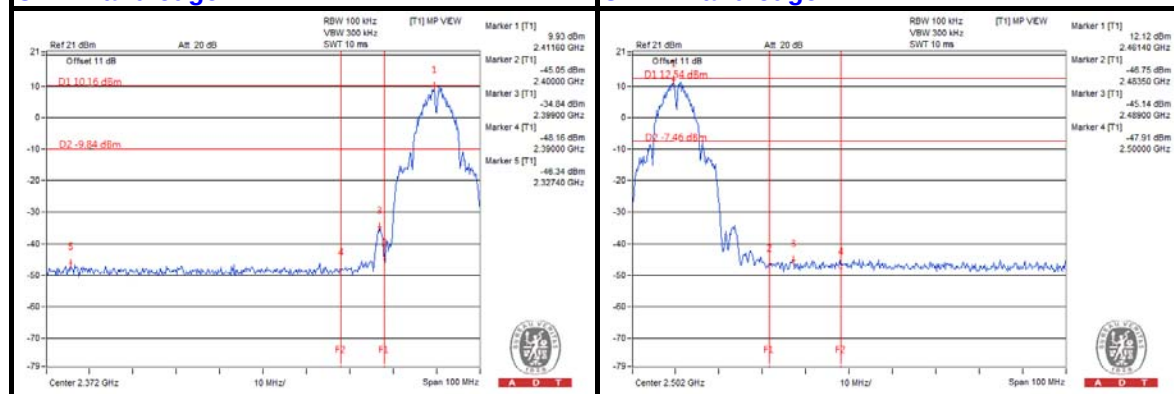





A D T

802.11g CHAIN 0


CH 1

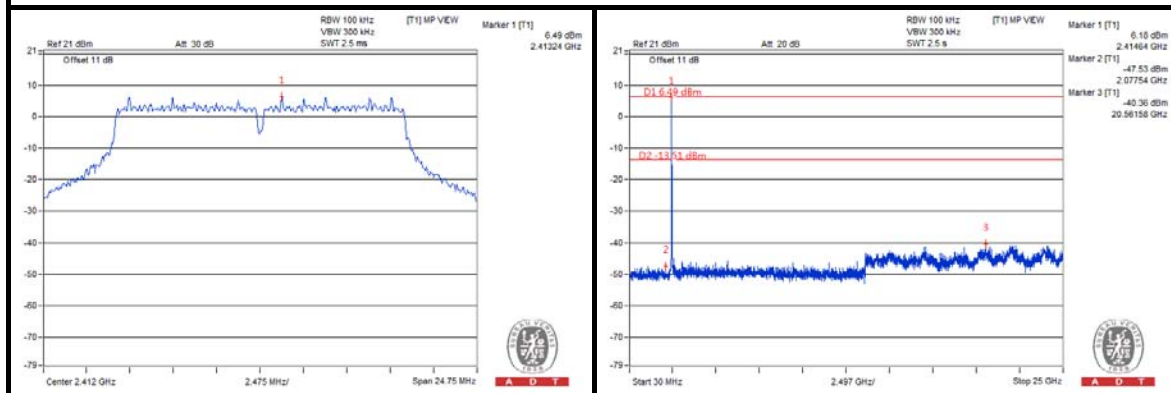


CH 6

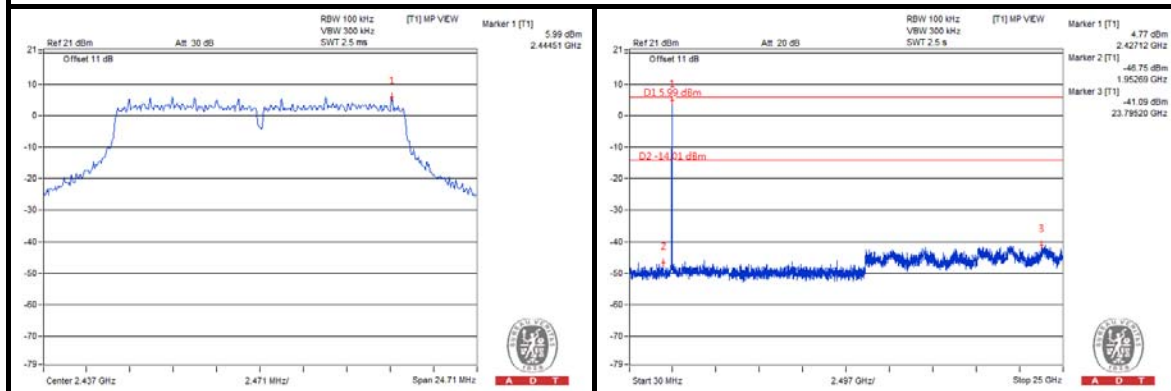


CH 11

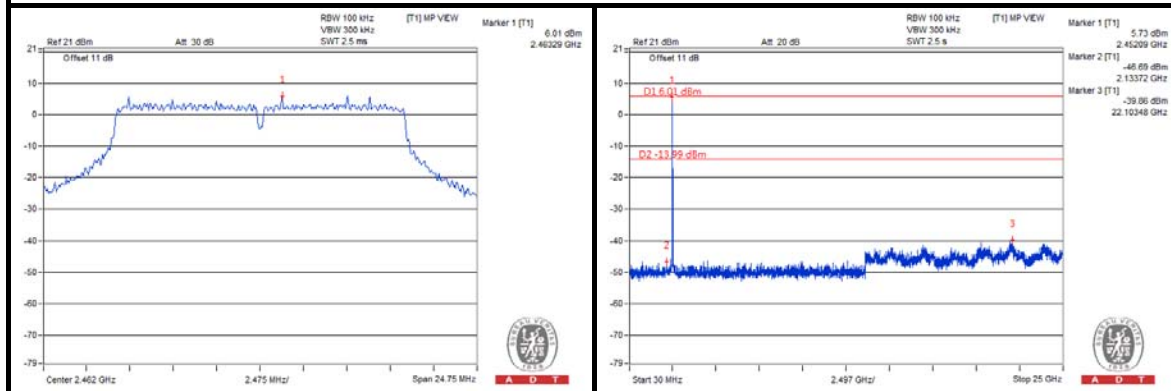

CH 1 Band edge

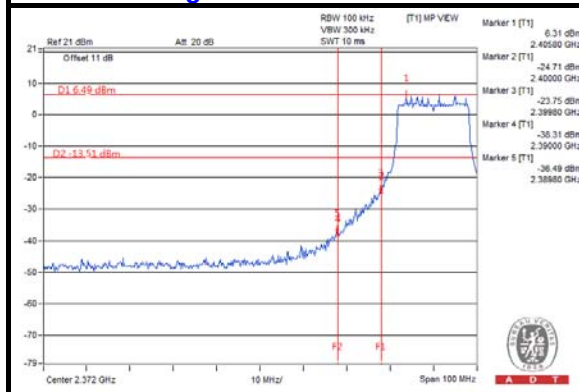

CH 11 Band edge

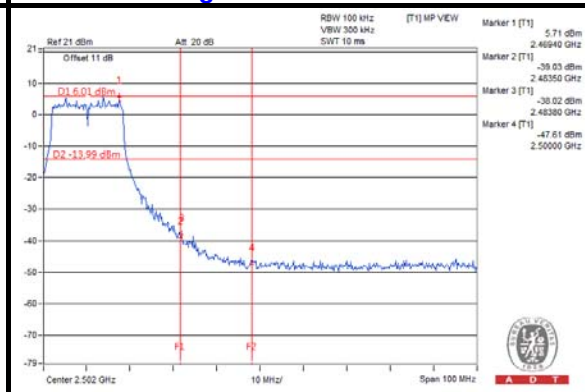





A D T

CHAIN 1


CH 1

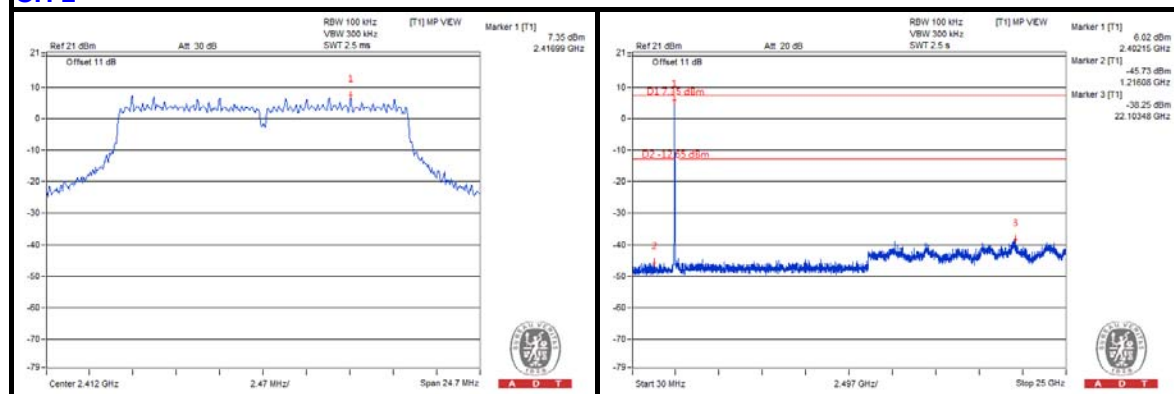


CH 6

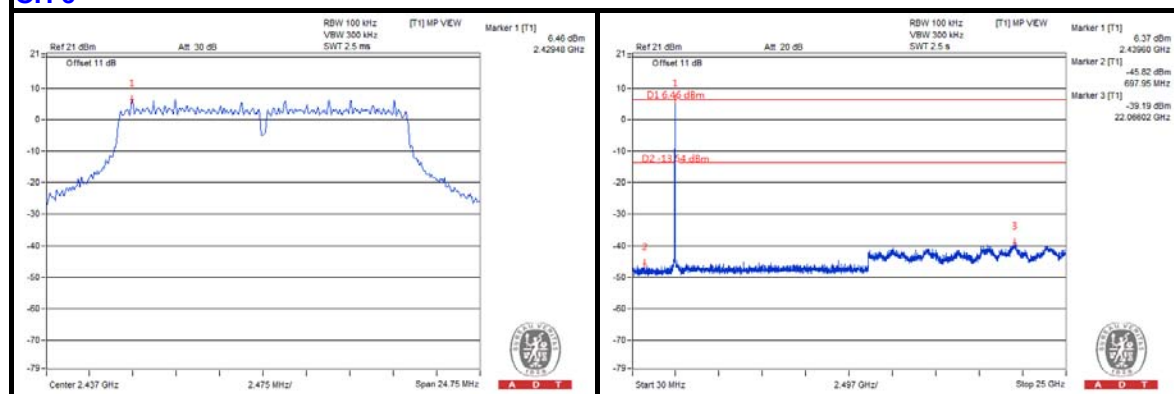

CH 11

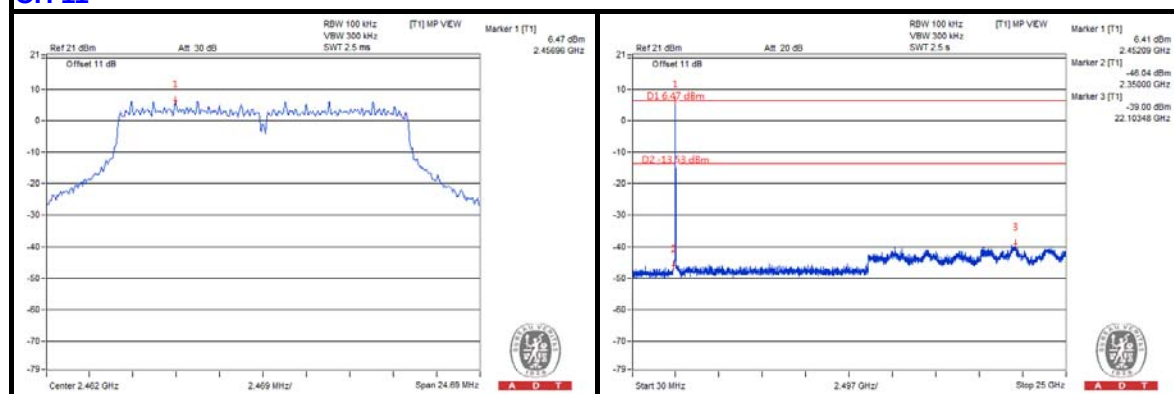


CH 1 Band edge

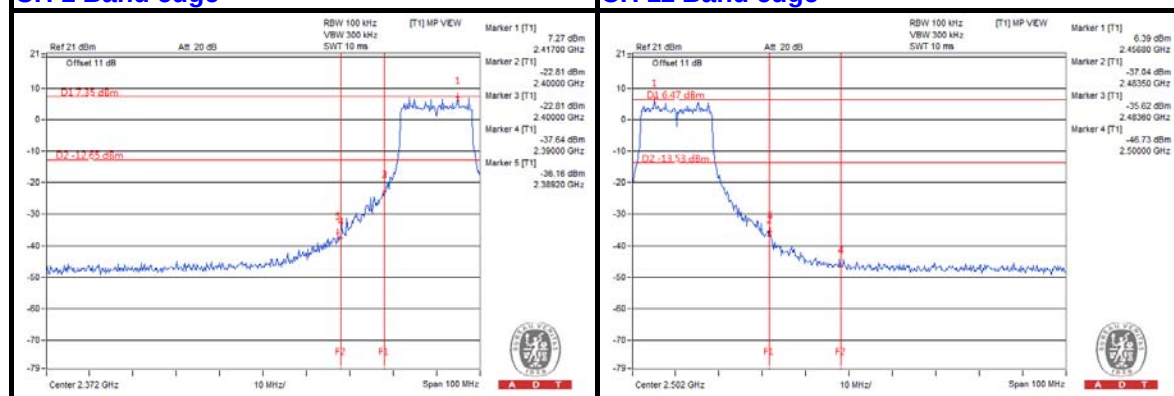


802.11n (HT20)

CHAIN 0


CH 1

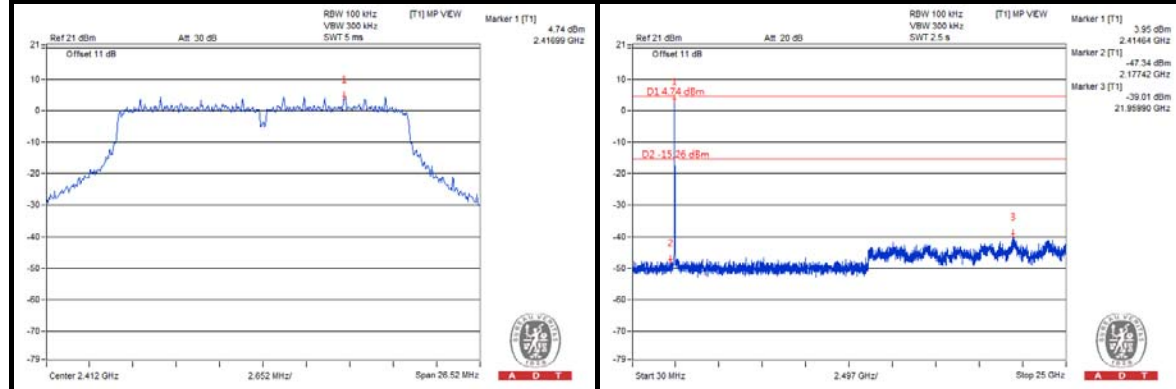


CH 6

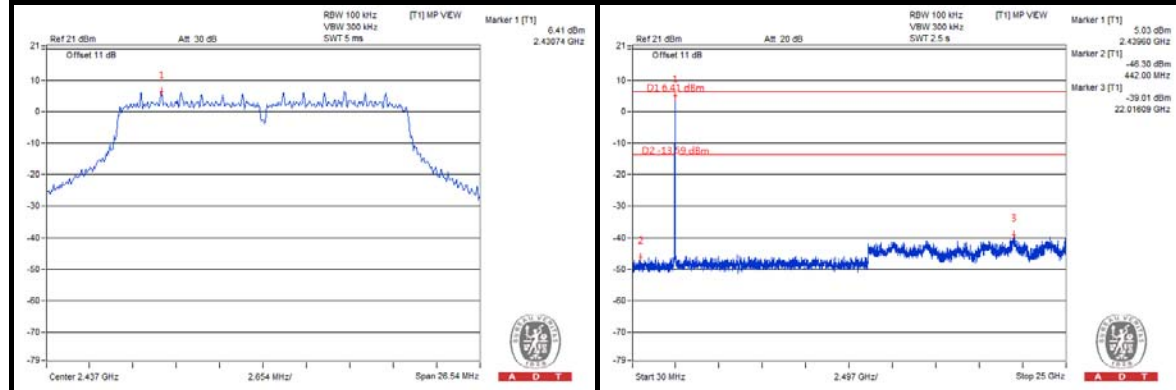


CH 11

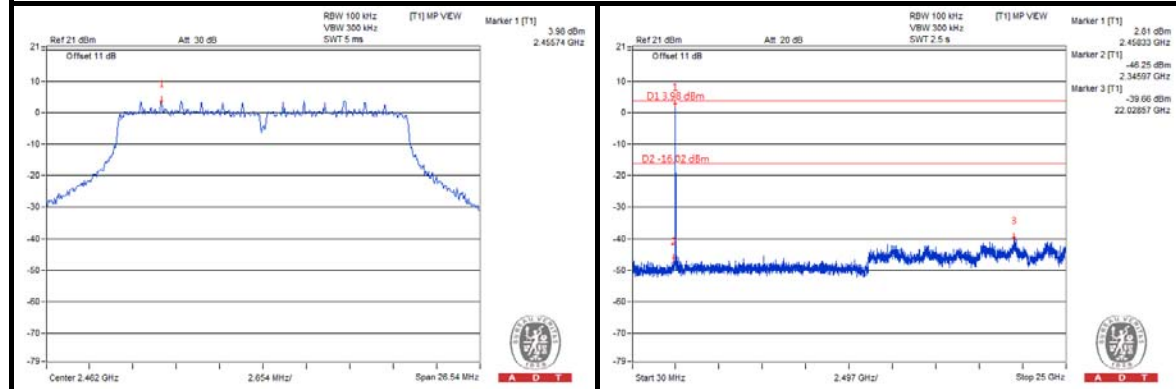

CH 1 Band edge

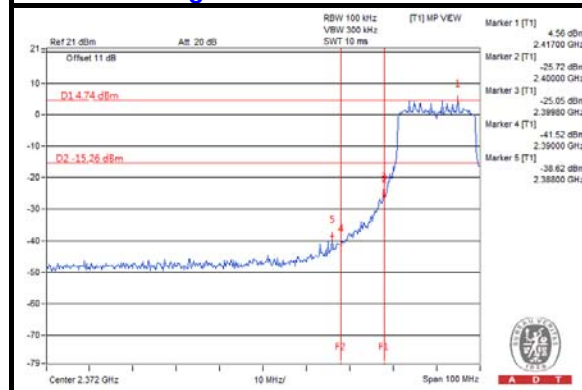

CH 11 Band edge

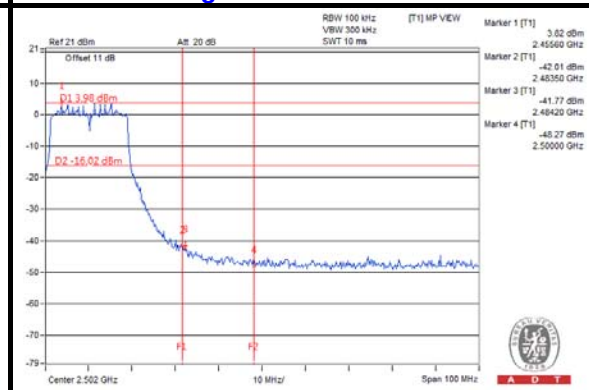





A D T

CHAIN 1


CH 1

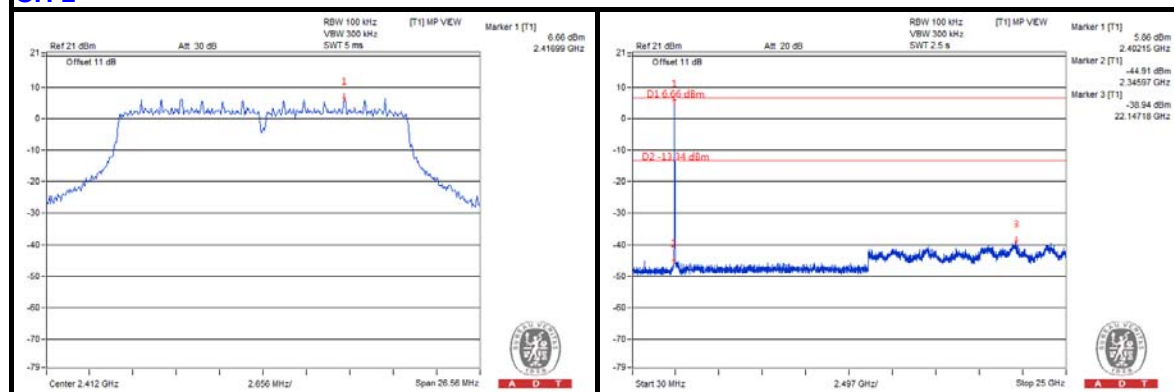


CH 6

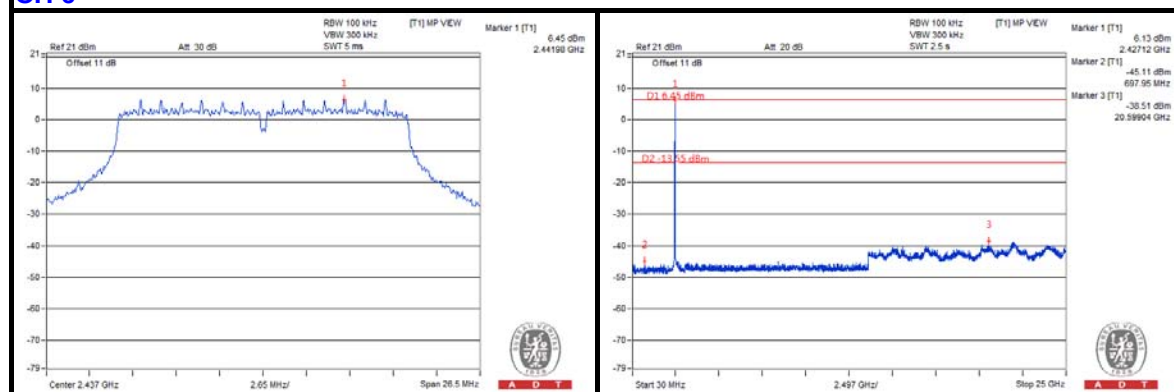

CH 11

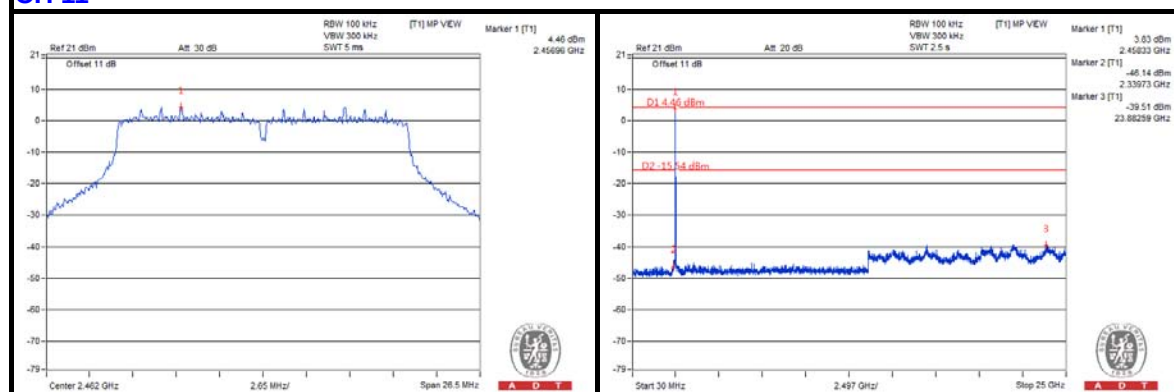

CH 1 Band edge

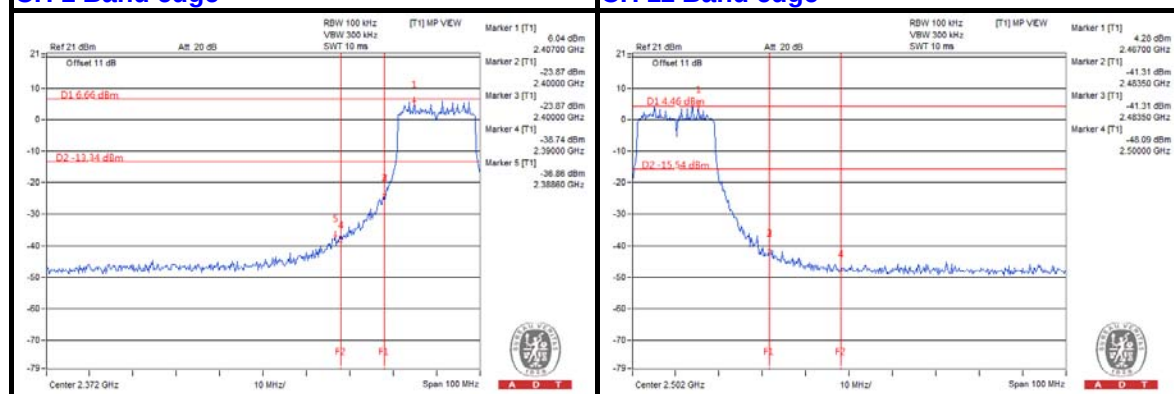




A D T


802.11n (HT40)

CHAIN 0


CH 3

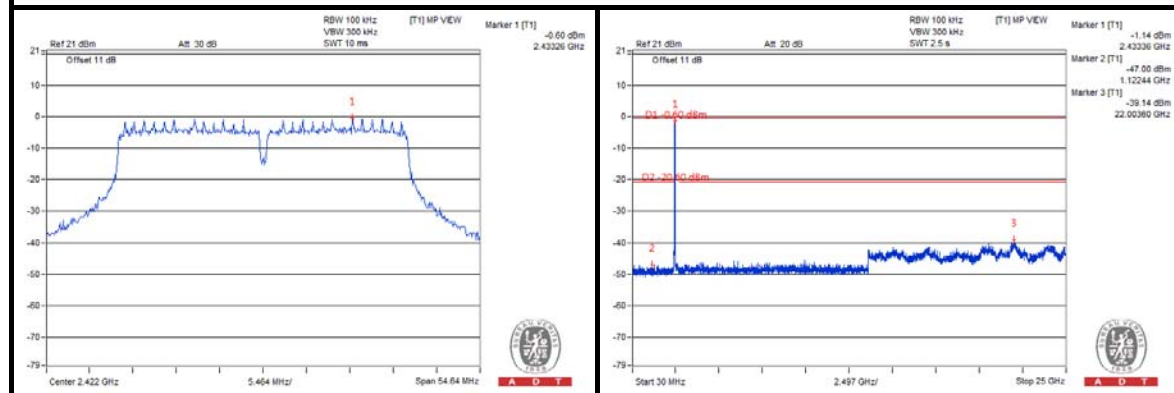


CH 6

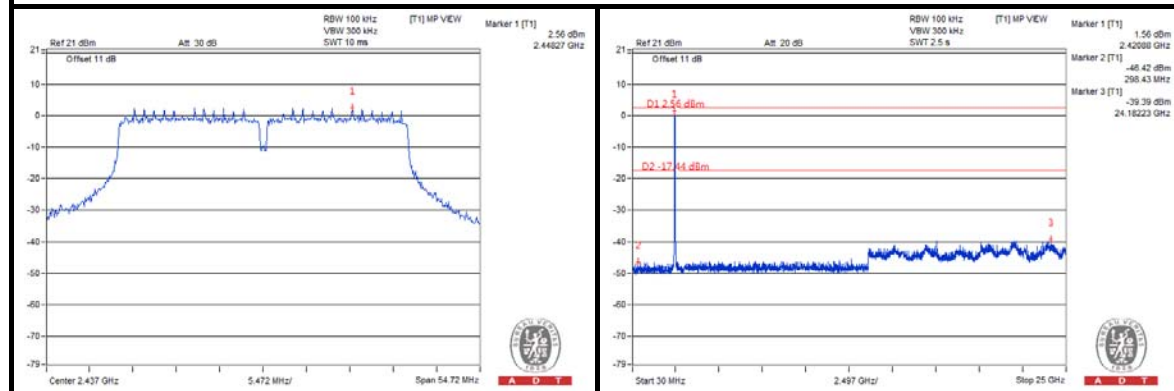


CH 9

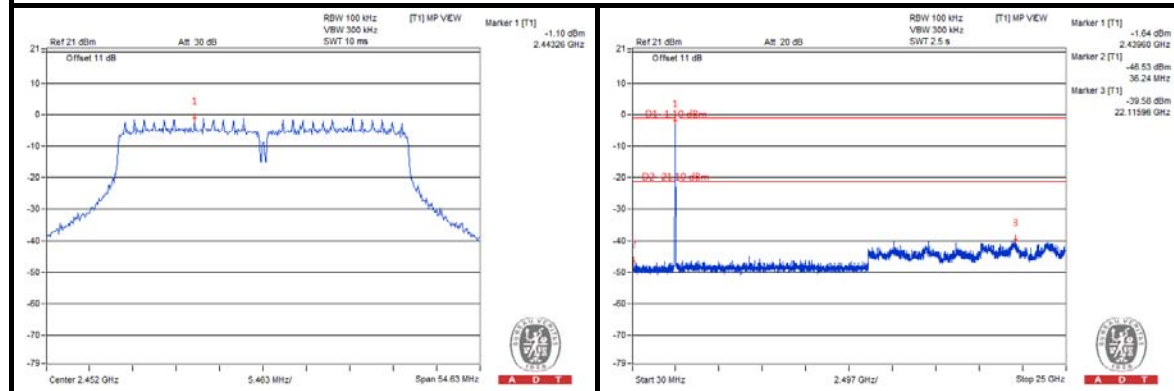

CH 3 Band edge

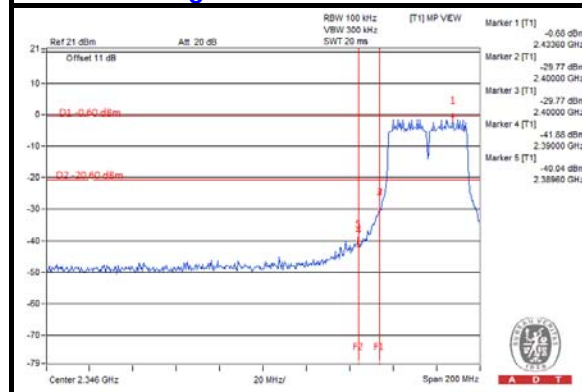

CH 9 Band edge

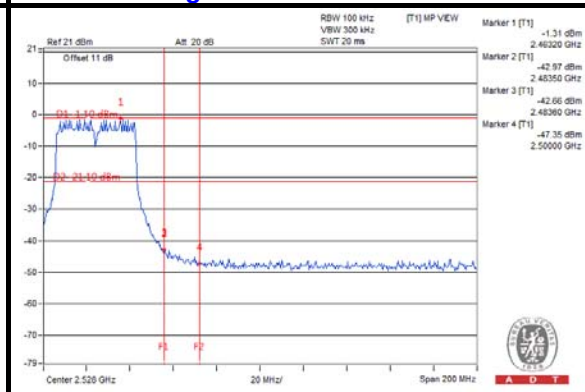





A D T

CHAIN 1


CH 3

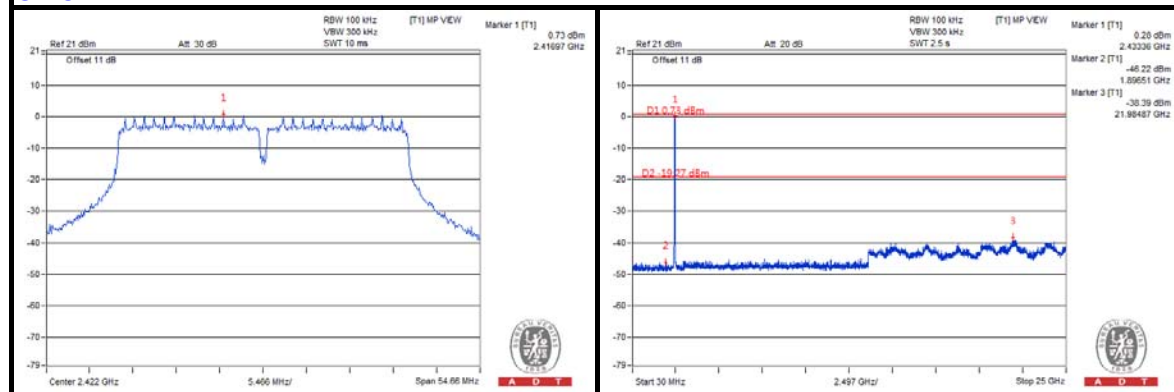


CH 6

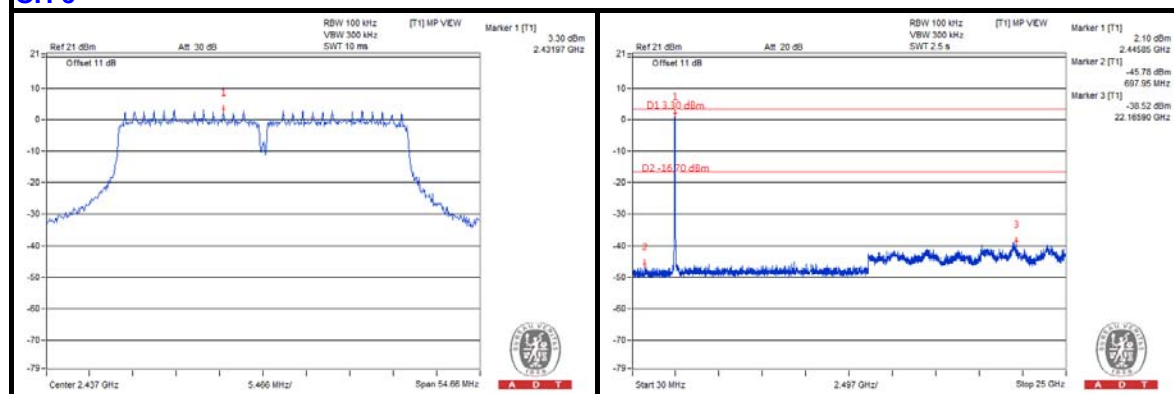

CH 9

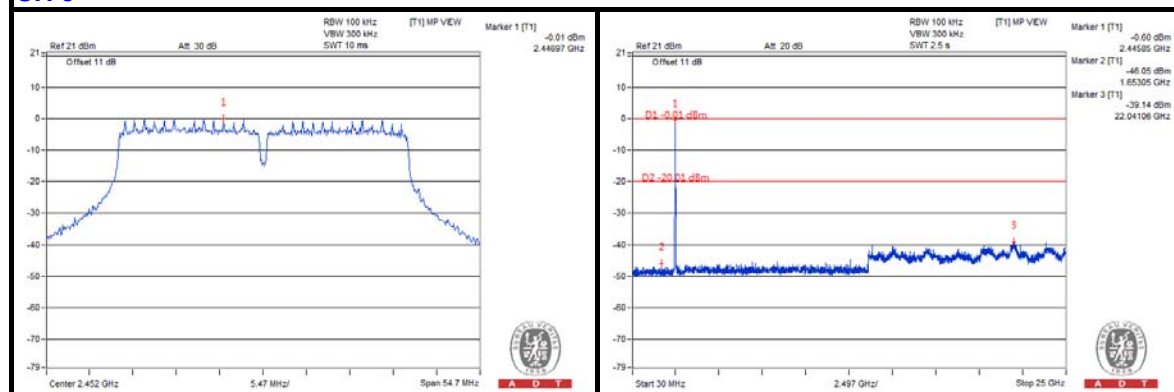

CH 3 Band edge

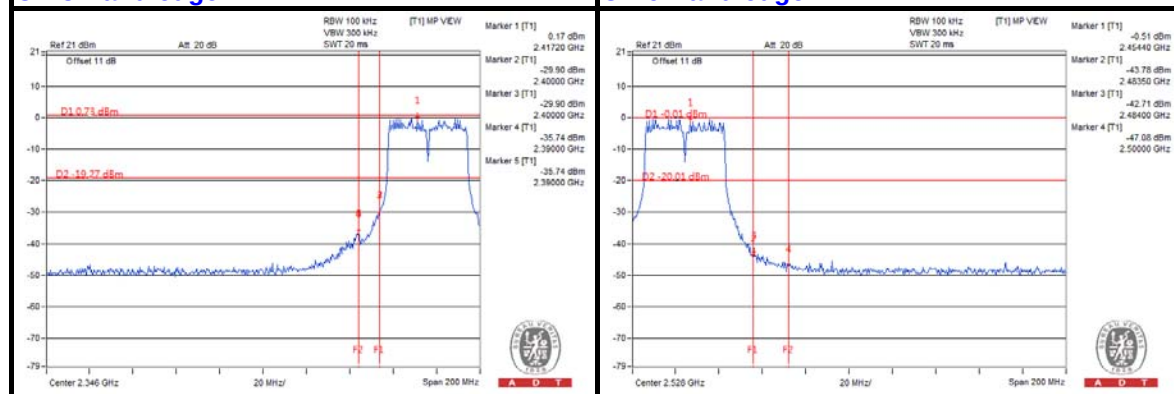

5. TEST TYPES AND RESULTS (FOR 5.0GHz BAND)

5.1 RADIATED EMISSION MEASUREMENT

5.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

5.1.2 TEST INSTRUMENTS

Same as item 4.1.2.

5.1.3 TEST PROCEDURES

Same as item 4.1.3.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation.

5.1.5 TEST SETUP

Same as item 4.1.5.

5.1.6 EUT OPERATING CONDITIONS

Same as item 4.1.6.



A D T

5.1.7 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	84.6 PK	95.4	-10.8	1.11 H	344	79.40	5.20
2	#5725.00	74.5 AV	85.3	-10.8	1.11 H	344	69.30	5.20
3	*5745.00	115.4 PK			1.11 H	344	73.20	42.20
4	*5745.00	105.3 AV			1.11 H	344	63.10	42.20
5	11490.00	66.3 PK	74.0	-7.7	1.14 H	195	53.00	13.30
6	11490.00	52.5 AV	54.0	-1.5	1.14 H	195	39.20	13.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	81.3 PK	92.1	-10.8	1.32 V	55	76.10	5.20
2	#5725.00	71.9 AV	82.7	-10.8	1.32 V	55	66.70	5.20
3	*5745.00	112.1 PK			1.32 V	55	69.90	42.20
4	*5745.00	102.7 AV			1.32 V	55	60.50	42.20
5	11490.00	64.2 PK	74.0	-9.8	1.10 V	166	50.90	13.30
6	11490.00	51.3 AV	54.0	-2.7	1.10 V	166	38.00	13.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.7 PK			1.15 H	345	73.50	42.20
2	*5785.00	105.5 AV			1.15 H	345	63.30	42.20
3	11570.00	66.8 PK	74.0	-7.2	1.45 H	254	53.40	13.40
4	11570.00	52.9 AV	54.0	-1.1	1.45 H	254	39.50	13.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.5 PK			1.32 V	56	70.30	42.20
2	*5785.00	102.8 AV			1.32 V	56	60.60	42.20
3	11570.00	64.6 PK	74.0	-9.4	1.10 V	168	51.20	13.40
4	11570.00	51.6 AV	54.0	-2.4	1.10 V	168	38.20	13.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.6 PK			1.23 H	345	72.30	42.30
2	*5825.00	104.5 AV			1.23 H	345	62.20	42.30
3	#5850.00	76.5 PK	94.6	-18.1	1.23 H	345	71.30	5.20
4	#5850.00	66.4 AV	84.5	-18.1	1.23 H	345	61.20	5.20
5	11650.00	64.2 PK	74.0	-9.8	1.11 H	259	50.50	13.70
6	11650.00	52.2 AV	54.0	-1.8	1.11 H	259	38.50	13.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	111.6 PK			1.00 V	315	69.30	42.30
2	*5825.00	101.7 AV			1.00 V	315	59.40	42.30
3	#5850.00	73.5 PK	91.6	-18.1	1.00 V	315	68.30	5.20
4	#5850.00	63.6 AV	81.7	-18.1	1.00 V	315	58.40	5.20
5	11650.00	63.9 PK	74.0	-10.1	1.15 V	166	50.20	13.70
6	11650.00	51.2 AV	54.0	-2.8	1.15 V	166	37.50	13.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.

802.11ac (VHT20)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	80.2 PK	95.0	-14.8	1.24 H	350	75.00	5.20
2	#5725.00	70.4 AV	85.2	-14.8	1.24 H	350	65.20	5.20
3	*5745.00	115.0 PK			1.24 H	350	72.80	42.20
4	*5745.00	105.2 AV			1.24 H	350	63.00	42.20
5	11490.00	65.0 PK	74.0	-9.0	1.00 H	193	51.70	13.30
6	11490.00	52.6 AV	54.0	-1.4	1.00 H	193	39.30	13.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	77.1 PK	91.9	-14.8	1.33 V	54	71.90	5.20
2	#5725.00	67.7 AV	82.5	-14.8	1.33 V	54	62.50	5.20
3	*5745.00	111.9 PK			1.33 V	54	69.70	42.20
4	*5745.00	102.5 AV			1.33 V	54	60.30	42.20
5	11490.00	63.4 PK	74.0	-10.6	1.14 V	65	50.10	13.30
6	11490.00	50.9 AV	54.0	-3.1	1.14 V	65	37.60	13.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 157	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	115.5 PK			1.25 H	347	73.30	42.20
2	*5785.00	105.5 AV			1.25 H	347	63.30	42.20
3	11570.00	65.2 PK	74.0	-8.8	1.10 H	256	51.80	13.40
4	11570.00	52.3 AV	54.0	-1.7	1.10 H	256	38.90	13.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5785.00	112.6 PK			1.33 V	28	70.40	42.20
2	*5785.00	102.6 AV			1.33 V	28	60.40	42.20
3	11570.00	64.7 PK	74.0	-9.3	1.12 V	168	51.30	13.40
4	11570.00	51.5 AV	54.0	-2.5	1.12 V	168	38.10	13.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 165	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	114.6 PK			1.28 H	346	72.30	42.30
2	*5825.00	105.1 AV			1.28 H	346	62.80	42.30
3	#5850.00	77.0 PK	94.6	-17.6	1.28 H	346	71.80	5.20
4	#5850.00	67.5 AV	85.1	-17.6	1.28 H	346	62.30	5.20
5	11650.00	66.2 PK	74.0	-7.8	1.36 H	248	52.50	13.70
6	11650.00	52.5 AV	54.0	-1.5	1.36 H	248	38.80	13.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5825.00	112.8 PK			1.00 V	325	70.50	42.30
2	*5825.00	102.2 AV			1.00 V	325	59.90	42.30
3	#5850.00	75.2 PK	92.8	-17.6	1.00 V	325	70.00	5.20
4	#5850.00	64.6 AV	82.2	-17.6	1.00 V	325	59.40	5.20
5	11650.00	64.2 PK	74.0	-9.8	1.15 V	325	50.50	13.70
6	11650.00	51.4 AV	54.0	-2.6	1.15 V	325	37.70	13.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

802.11ac (VHT40)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 151	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	86.4 PK	91.9	-5.5	1.25 H	345	81.20	5.20
2	#5725.00	76.3 AV	81.8	-5.5	1.25 H	345	71.10	5.20
3	*5755.00	111.9 PK			1.25 H	345	69.70	42.20
4	*5755.00	101.8 AV			1.25 H	345	59.60	42.20
5	11510.00	65.9 PK	74.0	-8.1	1.27 H	257	52.60	13.30
6	11510.00	52.2 AV	54.0	-1.8	1.27 H	257	38.90	13.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	83.3 PK	88.8	-5.5	1.13 V	215	78.10	5.20
2	#5725.00	73.1 AV	78.6	-5.5	1.13 V	215	67.90	5.20
3	*5755.00	108.8 PK			1.13 V	315	66.60	42.20
4	*5755.00	98.6 AV			1.13 V	315	56.40	42.20
5	11510.00	63.4 PK	74.0	-10.6	1.10 V	207	50.10	13.30
6	11510.00	50.5 AV	54.0	-3.5	1.10 V	207	37.20	13.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 159	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	111.2 PK			1.13 H	5	69.00	42.20
2	*5795.00	101.0 AV			1.13 H	5	58.80	42.20
3	#5850.00	71.2 PK	91.2	-20.0	1.13 H	5	66.00	5.20
4	#5850.00	61.0 AV	81.0	-20.0	1.13 H	5	55.80	5.20
5	11590.00	65.4 PK	74.0	-8.6	1.12 H	121	51.90	13.50
6	11590.00	52.1 AV	54.0	-1.9	1.12 H	121	38.60	13.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5795.00	108.7 PK			1.05 V	1	66.50	42.20
2	*5795.00	98.9 AV			1.05 V	1	56.70	42.20
3	#5850.00	68.7 PK	88.7	-20.0	1.05 V	1	63.50	5.20
4	#5850.00	58.9 AV	78.9	-20.0	1.05 V	1	53.70	5.20
5	11590.00	63.5 PK	74.0	-10.5	1.02 V	239	50.00	13.50
6	11590.00	48.5 AV	54.0	-5.5	1.02 V	239	35.00	13.50

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.
7. The limit value is defined as per 15.247.

802.11ac (VHT80)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 155	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Martin Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	89.0 PK	90.1	-1.1	1.08 H	350	83.80	5.20
2	#5725.00	79.1 AV	80.2	-1.1	1.08 H	350	73.90	5.20
3	*5775.00	110.1 PK			1.08 H	350	67.90	42.20
4	*5775.00	100.2 AV			1.08 H	350	58.00	42.20
5	#5850.00	81.2 PK	90.1	-8.9	1.08 H	350	76.00	5.20
6	#5850.00	71.3 AV	80.2	-8.9	1.08 H	350	66.10	5.20
7	11550.00	67.9 PK	74.0	-6.1	1.10 H	255	54.50	13.40
8	11550.00	52.9 AV	54.0	-1.1	1.10 H	255	39.50	13.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5725.00	87.4 PK	88.5	-1.1	1.04 V	61	82.20	5.20
2	#5725.00	75.0 AV	76.1	-1.1	1.04 V	61	69.80	5.20
3	*5775.00	108.5 PK			1.04 V	61	66.30	42.20
4	*5775.00	96.1 AV			1.04 V	61	53.90	42.20
5	#5850.00	79.6 PK	88.5	-8.9	1.04 V	61	74.40	5.20
6	#5850.00	67.2 AV	76.1	-8.9	1.04 V	61	62.00	5.20
7	11550.00	59.4 PK	74.0	-14.6	1.45 V	157	46.00	13.40
8	11550.00	47.3 AV	54.0	-6.7	1.45 V	157	33.90	13.40

REMARKS:

- Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission level – Limit value.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.
- The limit value is defined as per 15.247.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11ac (VHT20)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	191.02	34.5 QP	43.5	-9.0	1.24 H	235	50.90	-16.40
2	299.66	35.1 QP	46.0	-10.9	1.00 H	110	47.30	-12.20
3	375.32	33.0 QP	46.0	-13.0	1.00 H	240	43.80	-10.80
4	499.48	34.8 QP	46.0	-11.2	1.49 H	168	42.90	-8.10
5	625.58	33.1 QP	46.0	-12.9	1.99 H	219	38.80	-5.70
6	751.68	40.7 QP	46.0	-5.3	1.00 H	165	44.20	-3.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.06	36.9 QP	43.5	-6.6	1.01 V	18	52.60	-15.70
2	255.04	33.6 QP	46.0	-12.4	1.50 V	58	47.70	-14.10
3	499.48	33.9 QP	46.0	-12.1	1.01 V	207	42.00	-8.10
4	625.58	37.1 QP	46.0	-8.9	1.24 V	138	42.80	-5.70
5	751.68	40.7 QP	46.0	-5.3	1.01 V	252	44.20	-3.50
6	875.84	39.8 QP	46.0	-6.2	1.50 V	190	41.00	-1.20

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

5.2 CONDUCTED EMISSION MEASUREMENT

5.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.2.2 TEST INSTRUMENTS

Same as item 4.2.2.

5.2.3 TEST PROCEDURES

Same as item 4.2.3.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation.

5.2.5 TEST SETUP

Same as item 4.2.5.

5.2.6 EUT OPERATING CONDITIONS


Same as item 4.1.6.

PHASE	Line 2	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16569	0.17	47.92	39.78	48.09	39.95	65.17	55.17	-17.09	-15.23
2	0.25192	0.19	46.08	41.17	46.27	41.36	61.69	51.69	-15.43	-10.34
3	0.45455	0.24	53.99	44.50	54.23	44.74	56.79	46.79	-2.56	-2.05
4	0.77951	0.25	43.71	36.34	43.96	36.59	56.00	46.00	-12.04	-9.41
5	4.68169	0.40	38.20	32.66	38.60	33.06	56.00	46.00	-17.40	-12.94
6	9.28376	0.57	40.02	33.67	40.59	34.24	60.00	50.00	-19.41	-15.76

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

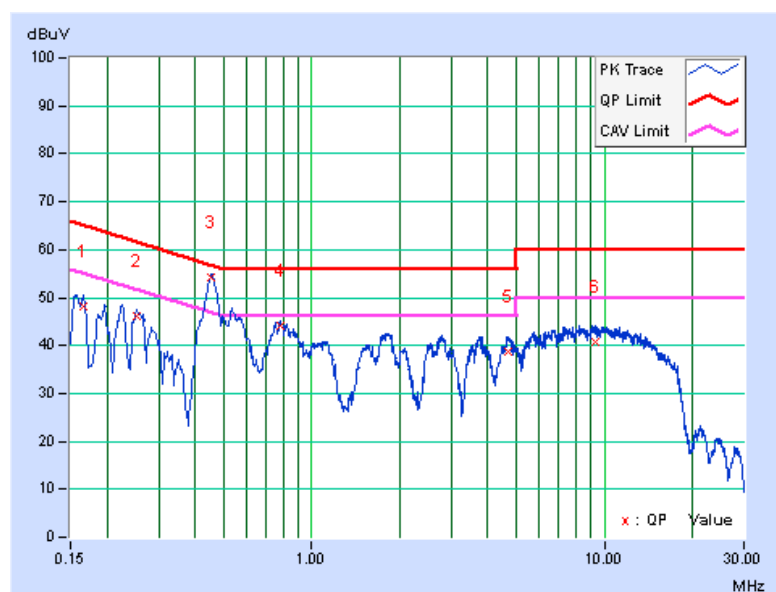

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

5.3.2 TEST SETUP

Same as item 4.3.2.

5.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.3.4 TEST PROCEDURE

Same as item 4.3.4.

5.3.5 DEVIATION FROM TEST STANDARD

No deviation.

5.3.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.

5.3.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	16.39	16.40	0.5	PASS
157	5785	16.38	16.38	0.5	PASS
165	5825	16.36	15.16	0.5	PASS

802.11ac (VHT20)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
149	5745	17.61	16.99	0.5	PASS
157	5785	17.17	15.75	0.5	PASS
165	5825	17.62	17.66	0.5	PASS

802.11ac (VHT40)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
151	5755	36.35	35.90	0.5	PASS
159	5795	35.88	36.13	0.5	PASS

802.11ac (VHT80)


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
155	5775	66.48	75.27	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

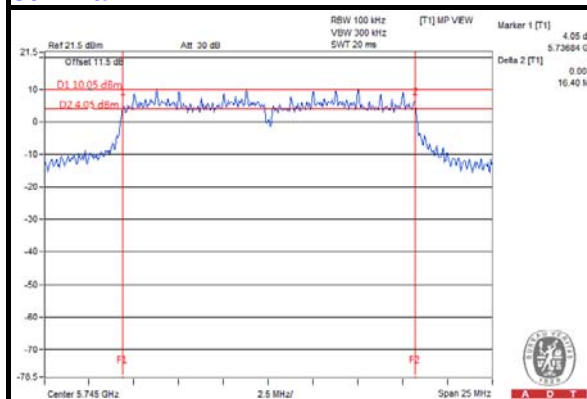


802.11ac (VHT20)

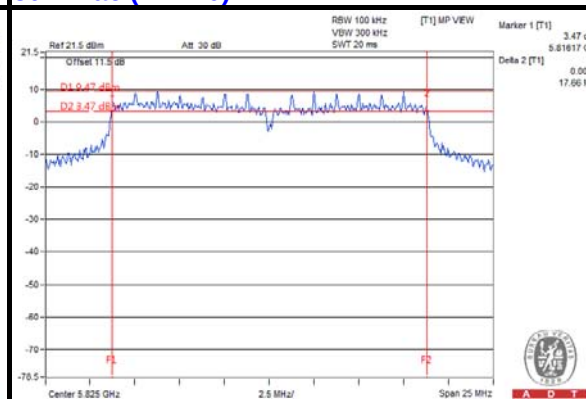

802.11ac (VHT40)

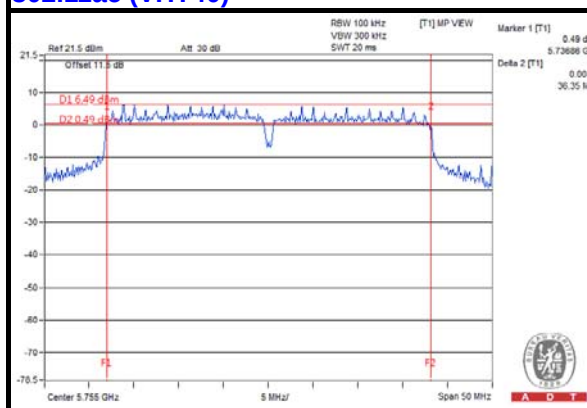

802.11ac (VHT80)

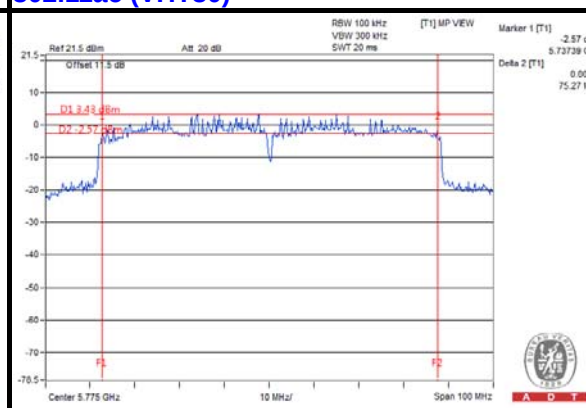

5.4 CONDUCTED OUTPUT POWER

5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 5725 –5850 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output v02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = $5 \log(NANT/NSS)$ dB or 3 dB, whichever is less for 20-MHz channel widths with $NANT \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(NANT/NSS)$ dB.

5.4.2 TEST SETUP

For 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

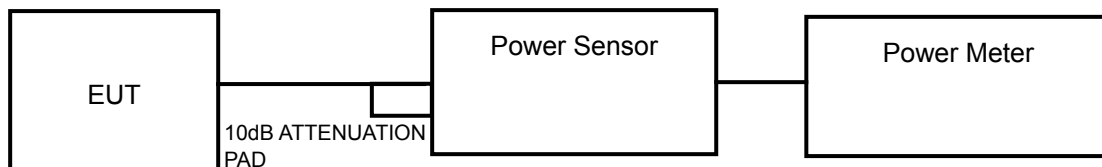

For 802.11ac (VHT80)



5.4.3 INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.4.4 TEST PROCEDURES

For 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- 1) Set the RBW = 1 MHz.
- 2) Set the VBW $\geq$ 3 RBW.
- 3) Set the span $\geq$ 1.5 x DTS bandwidth.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

5.4.5 DEVIATION FROM TEST STANDARD

No deviation.

5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.

5.4.7 TEST RESULTS

FOR PEAK POWER

802.11a

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	24.02	23.78	491.129	26.91	30	PASS
157	5785	23.69	23.63	464.559	26.67	30	PASS
165	5825	23.22	23.20	418.824	26.22	30	PASS

802.11ac (VHT20)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
149	5745	24.13	23.86	502.041	27.01	30	PASS
157	5785	23.65	23.52	456.644	26.60	30	PASS
165	5825	23.83	23.67	474.355	26.76	30	PASS

802.11ac (VHT40)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
151	5755	24.30	24.06	523.836	27.19	30	PASS
159	5795	24.13	23.87	502.602	27.01	30	PASS

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
155	5775	24.27	23.96	516.187	27.13	30	PASS

**A D T****FOR AVERAGE POWER****802.11a**

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	21.01	20.24	231.865	23.65
157	5785	20.11	20.08	204.424	23.11
165	5825	19.49	19.54	178.870	22.53

802.11ac (VHT20)

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
149	5745	20.84	20.18	225.571	23.53
157	5785	20.19	20.10	206.801	23.16
165	5825	20.35	20.14	211.669	23.26

802.11ac (VHT40)

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
151	5755	20.94	20.72	242.197	23.84
159	5795	20.64	20.50	228.080	23.58

802.11ac (VHT80)

CHANNEL	FREQUENCY (MHz)	AVG. POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)
		CHAIN 0	CHAIN 1		
155	5775	20.73	20.44	228.966	23.60

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST SETUP

Same as item 4.5.2.

5.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.5.4 TEST PROCEDURE.

Same as item 4.5.4.

5.5.5 DEVIATION FROM TEST STANDARD

No deviation.

5.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

5.5.7 TEST RESULTS

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-4.74	3.01	-1.60	5.48	PASS
	157	5785	-5.99	3.01	-2.85	5.48	PASS
	165	5825	-6.53	3.01	-3.39	5.48	PASS
1	149	5745	-5.53	3.01	-2.39	5.48	PASS
	157	5785	-6.00	3.01	-2.86	5.48	PASS
	165	5825	-6.79	3.01	-3.65	5.48	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.51dBi + 10log(2) = 8.52dBi > 6dBi , so the power density limit shall be reduced to 8-(8.52-6) = 5.48dBm.

802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	149	5745	-6.68	3.01	-3.51	5.48	PASS
	157	5785	-6.15	3.01	-2.98	5.48	PASS
	165	5825	-6.13	3.01	-2.96	5.48	PASS
1	149	5745	-6.38	3.01	-3.21	5.48	PASS
	157	5785	-6.36	3.01	-3.19	5.48	PASS
	165	5825	-7.18	3.01	-4.01	5.48	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.51dBi + 10log(2) = 8.52dBi > 6dBi , so the power density limit shall be reduced to 8-(8.52-6) = 5.48dBm.

802.11ac (VHT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	151	5755	-8.32	3.01	-5.04	5.48	PASS
	159	5795	-8.36	3.01	-5.08	5.48	PASS
1	151	5755	-7.93	3.01	-4.65	5.48	PASS
	159	5795	-8.59	3.01	-5.31	5.48	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.51dBi + 10log(2) = 8.52dBi > 6dBi , so the power density limit shall be reduced to 8-(8.52-6) = 5.48dBm.

802.11ac (VHT80)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	155	4775	-12.05	3.01	-8.48	5.48	PASS
1	155	4775	-12.78	3.01	-9.21	5.48	PASS

NOTE:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 5.51dBi + 10log(2) = 8.52dBi > 6dBi , so the power density limit shall be reduced to 8-(8.52-6) = 5.48dBm.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11a

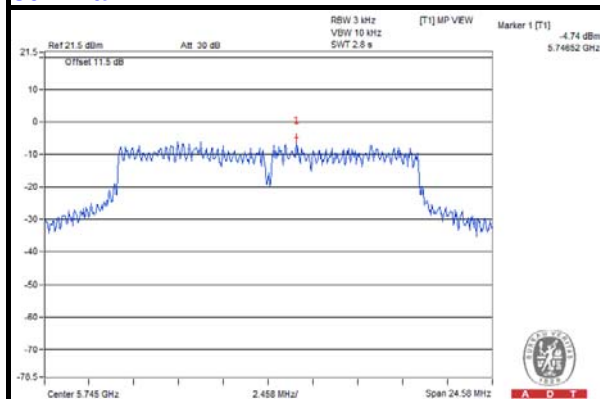


802.11ac (VHT20)

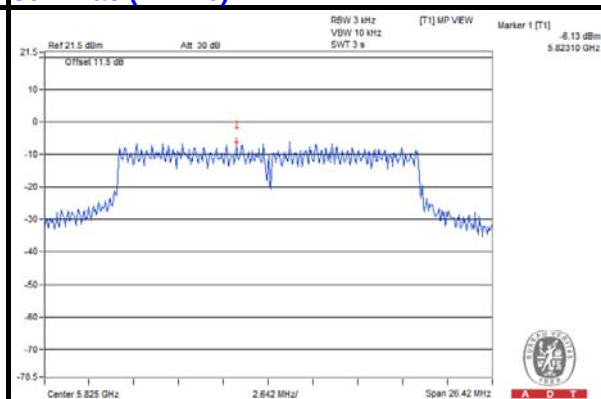

802.11ac (VHT40)

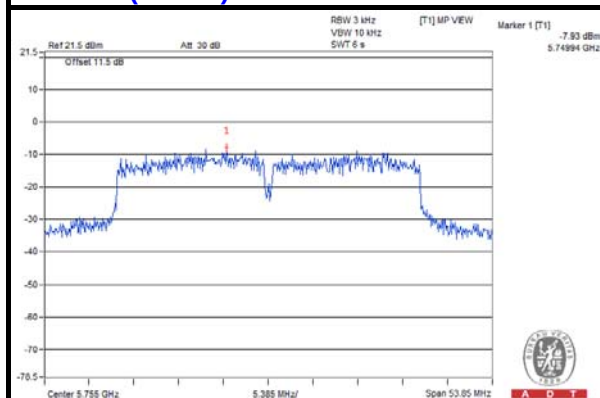

802.11ac (VHT80)

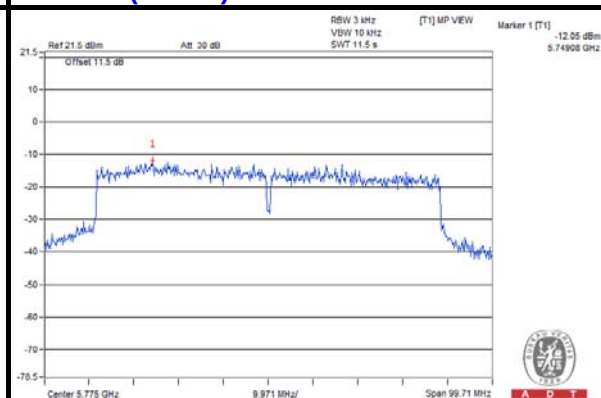

5.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

5.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST SETUP

Same as Item 4.6.2.

5.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

5.6.4 TEST PROCEDURE

Same as Item 4.6.4.

5.6.5 DEVIATION FROM TEST STANDARD

No deviation.

5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6.

5.6.7 TEST RESULTS


The conducted emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T


802.11a
CHAIN 0
CH 149

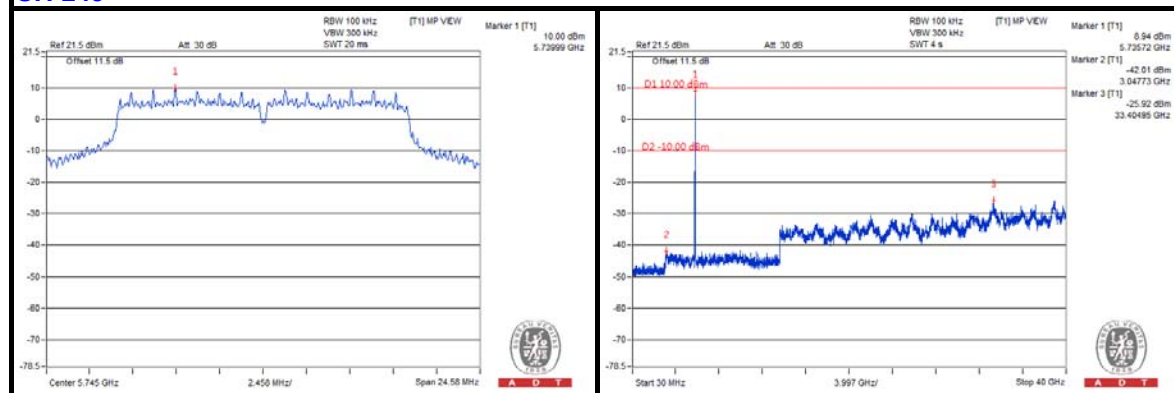


CH 157

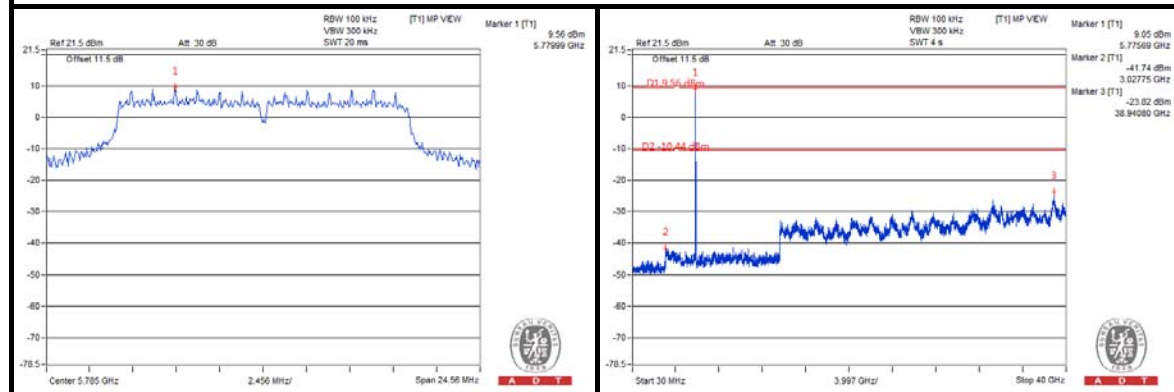


CH 165

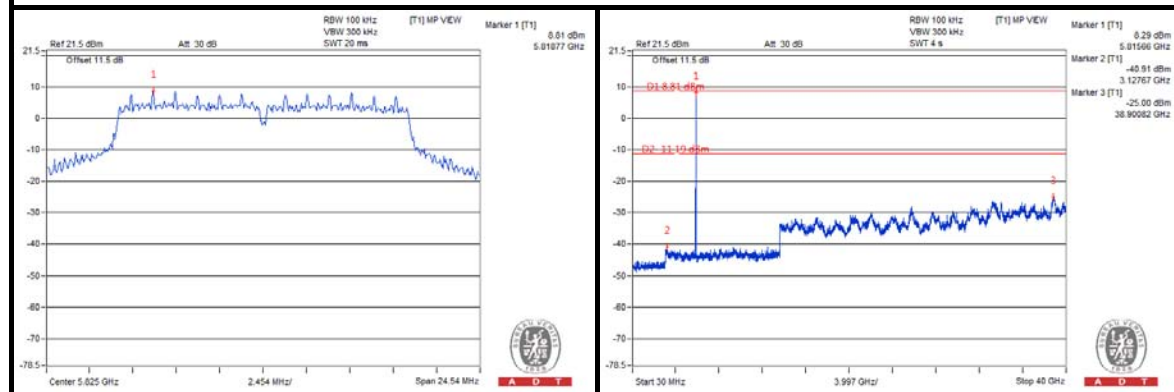

CH 149 Band edge

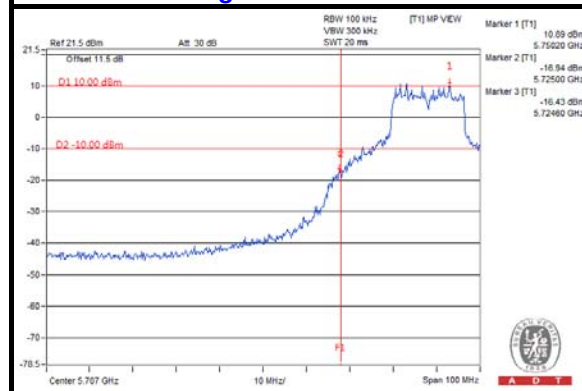

CH 165 Band edge

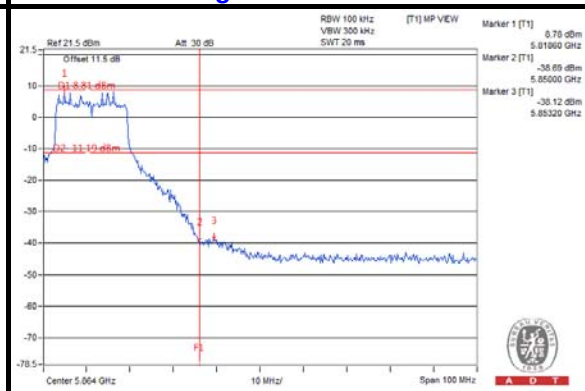





A D T

CHAIN 1


CH 149

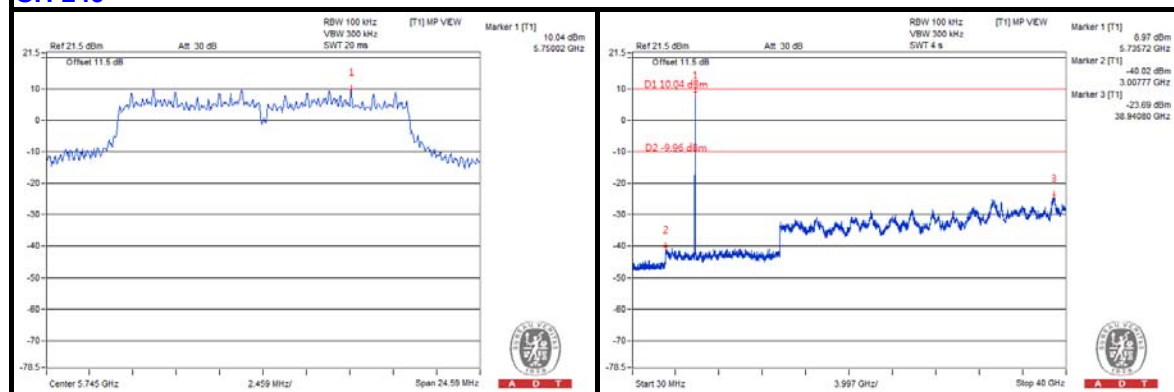


CH 157

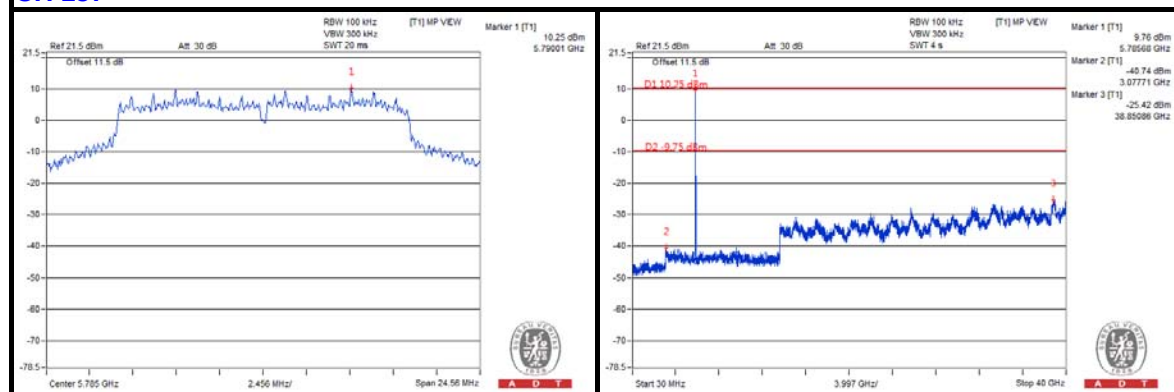


CH 165

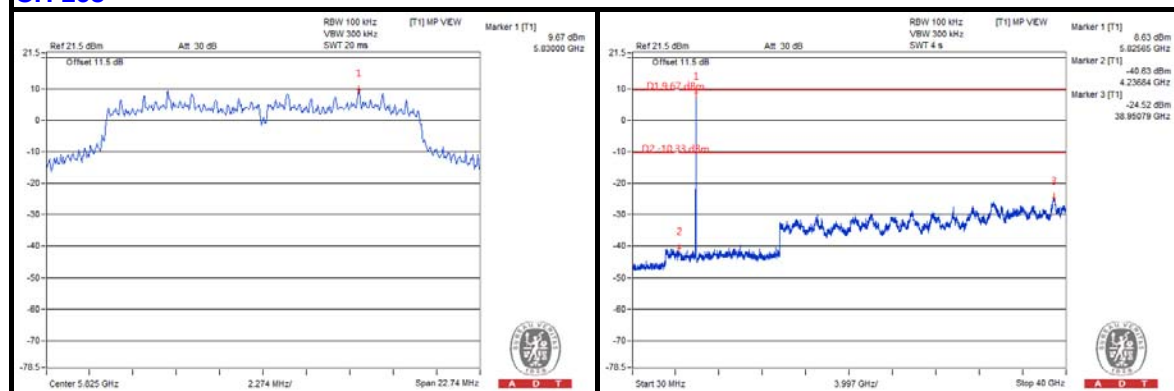

CH 149 Band edge

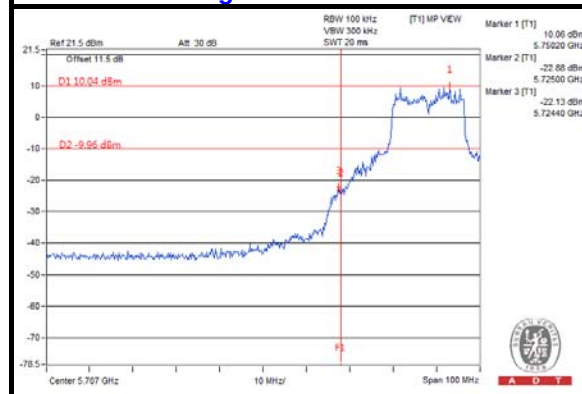

CH 165 Band edge


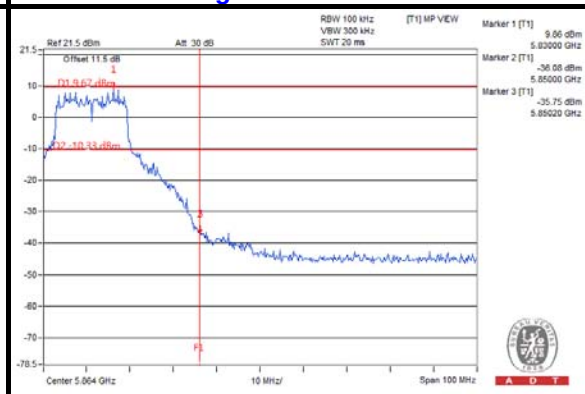






A D T

802.11ac (VHT20) CHAIN 0



CH 149

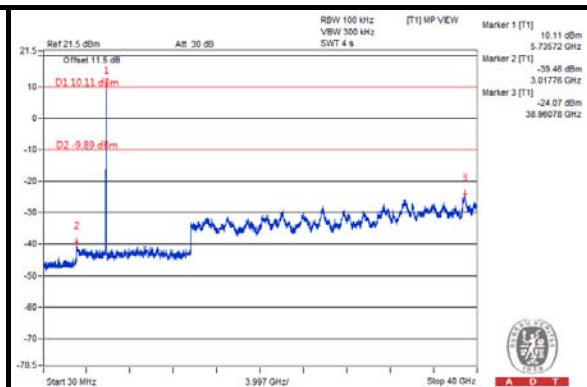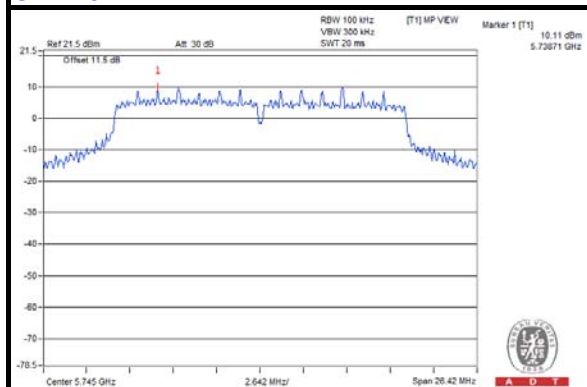


CH 157

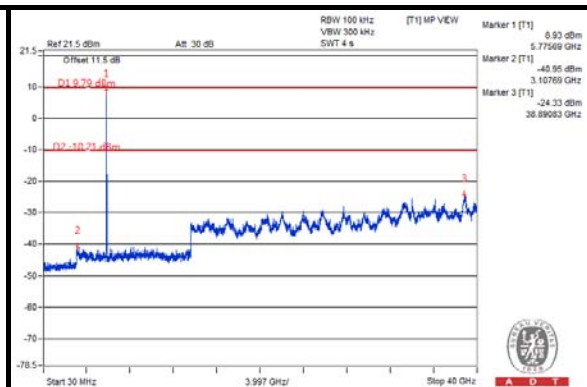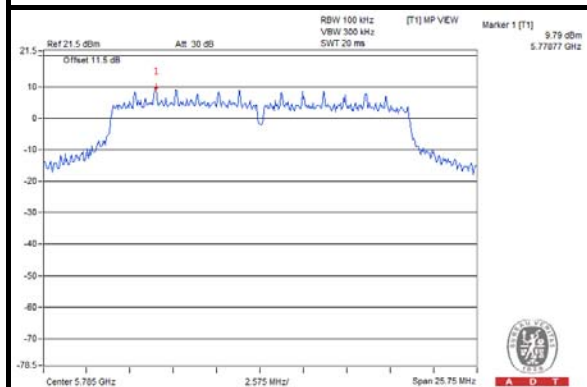


CH 165

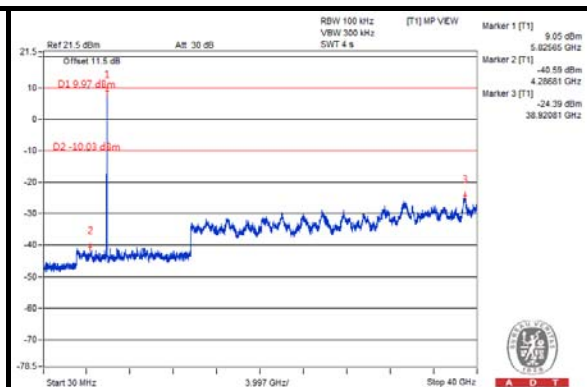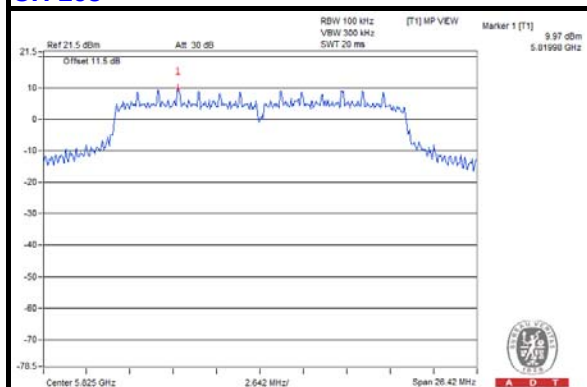

CH 149 Band edge

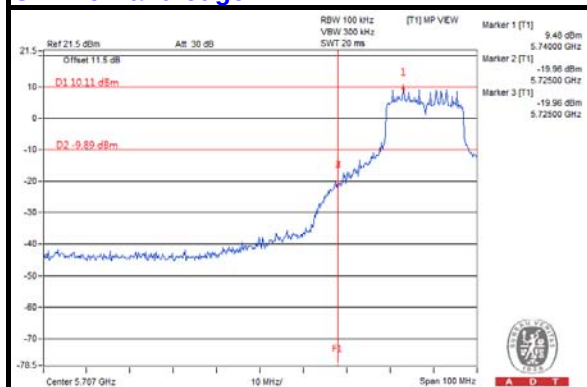

CH 165 Band edge

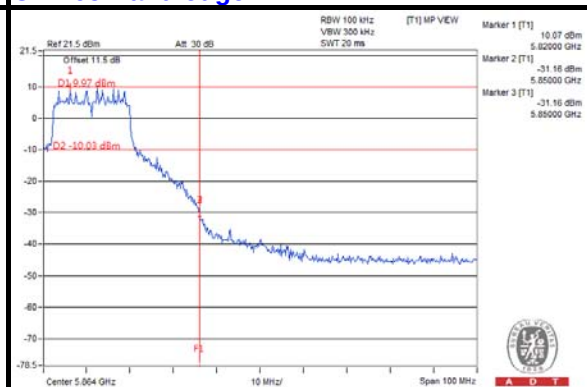





A D T

CHAIN 1


CH 149

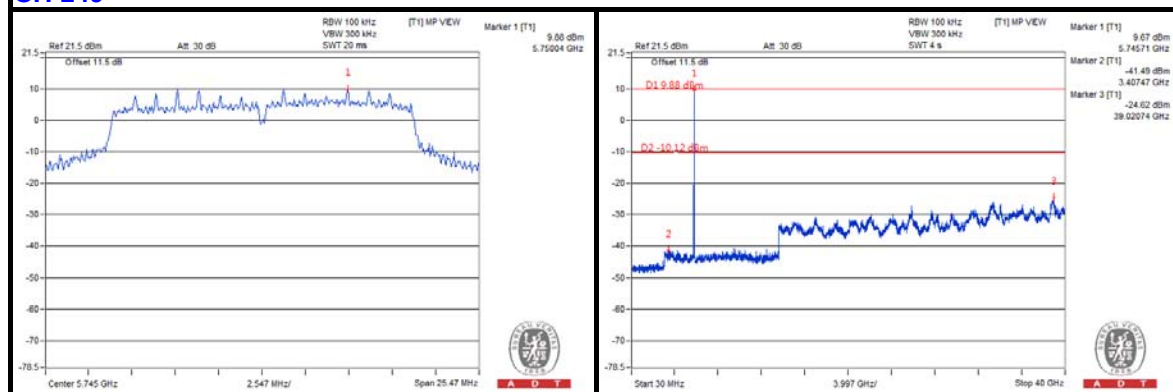


CH 157

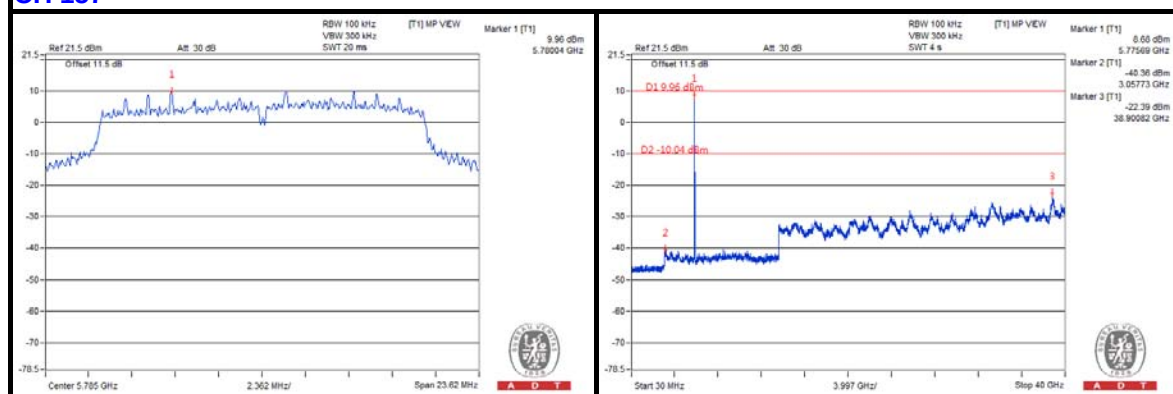


CH 165

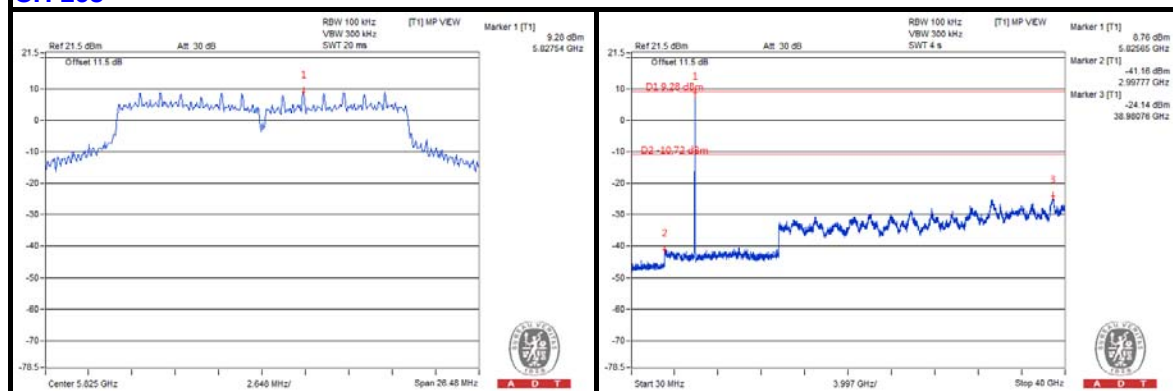

CH 149 Band edge

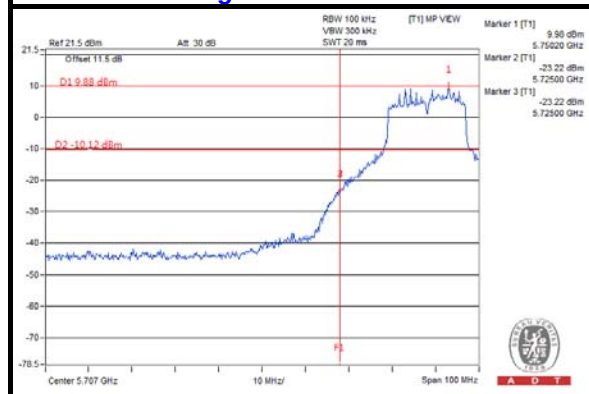

CH 165 Band edge


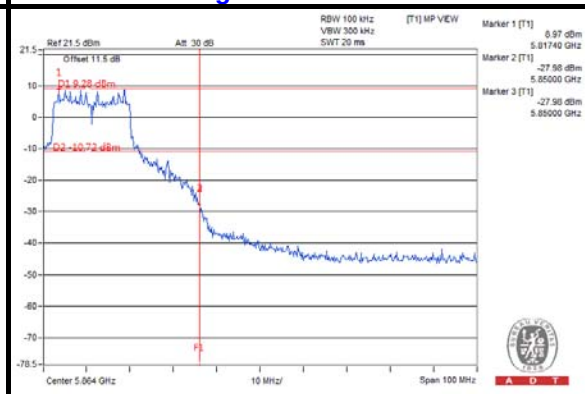






A D T

802.11ac (VHT40) CHAIN 0


CH 151

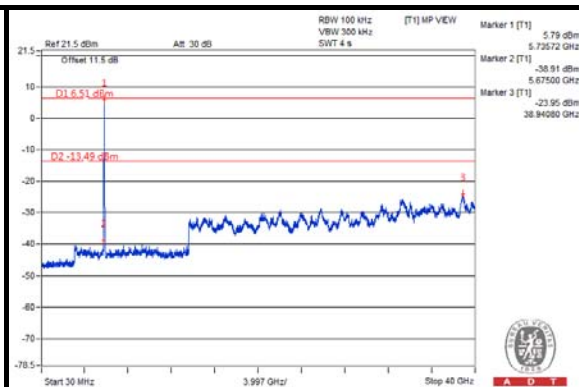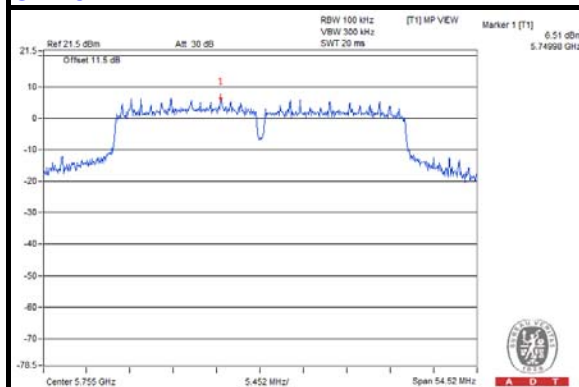


CH 159

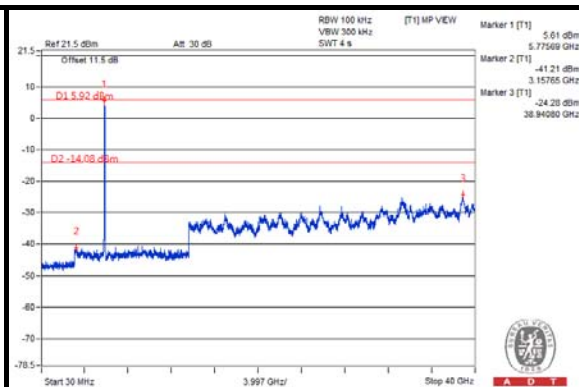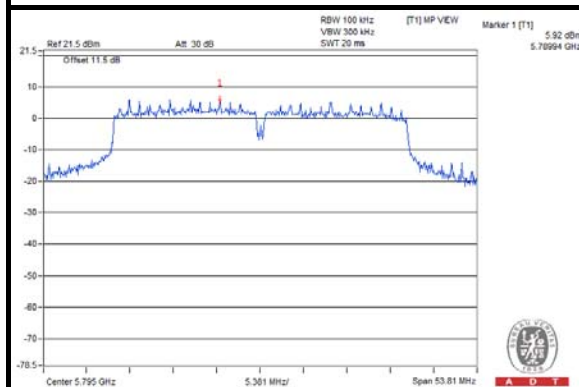

CH 151 Band edge

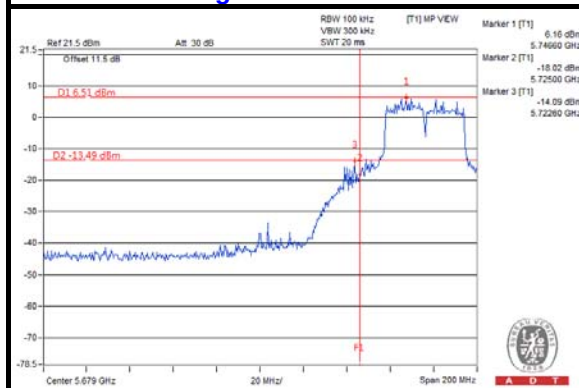

CH 159 Band edge

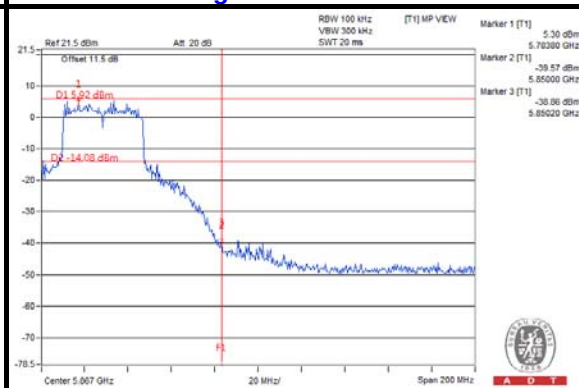





A D T

CHAIN 1


CH 151

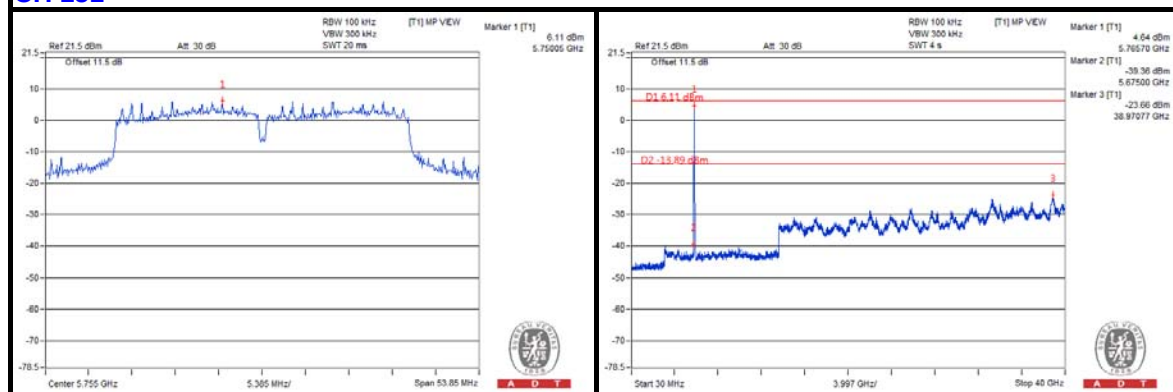


CH 159

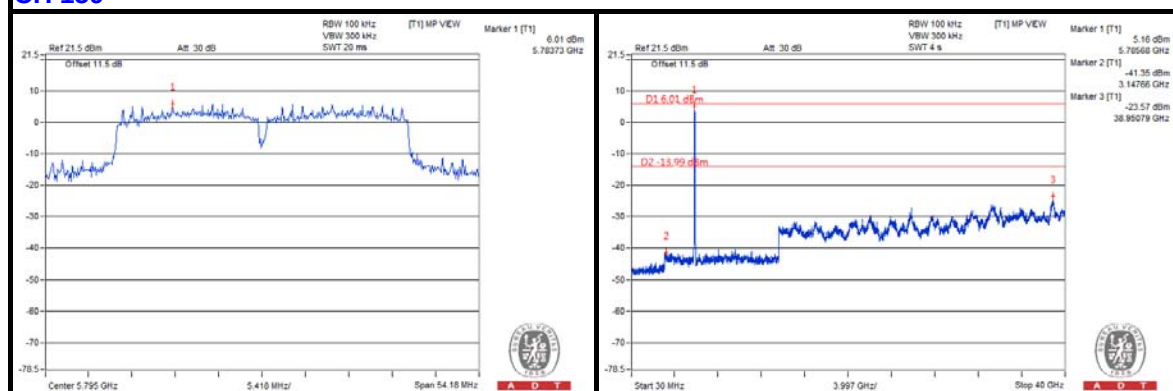

CH 151 Band edge

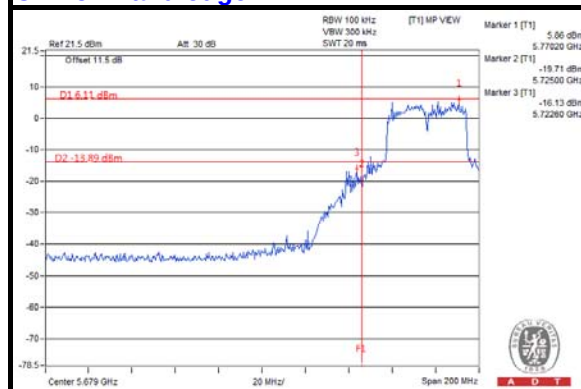

CH 159 Band edge

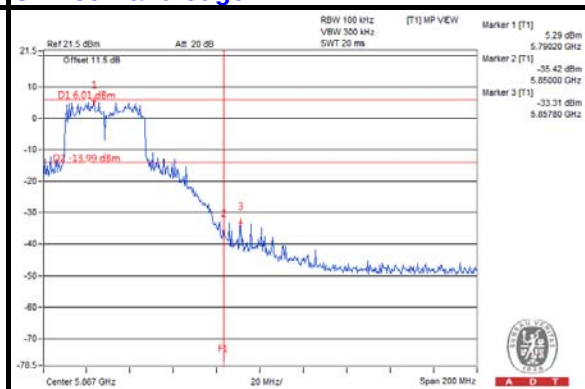




A D T


802.11ac (VHT80)

CHAIN 0


CH 155

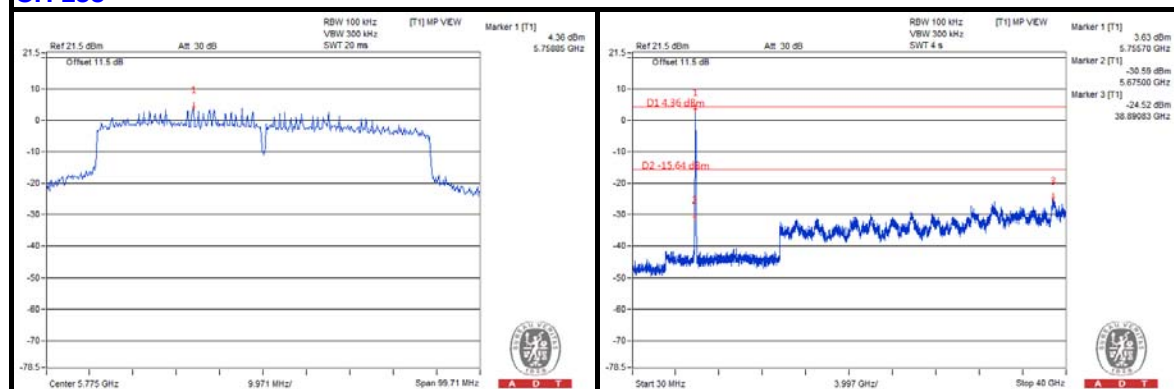

CH 155 Band edge

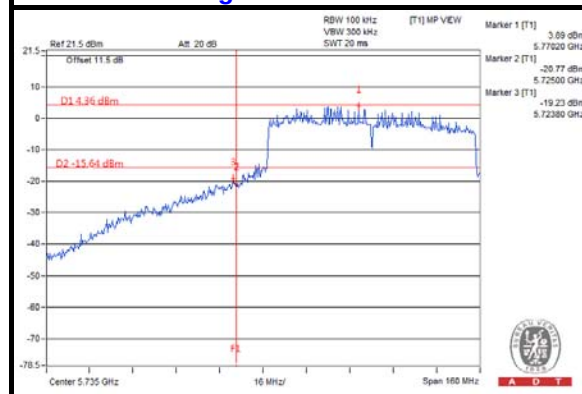

CH 155Band edge

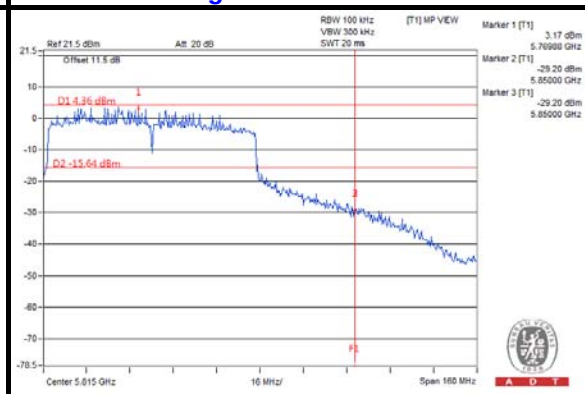





A D T

CHAIN 1


CH 155

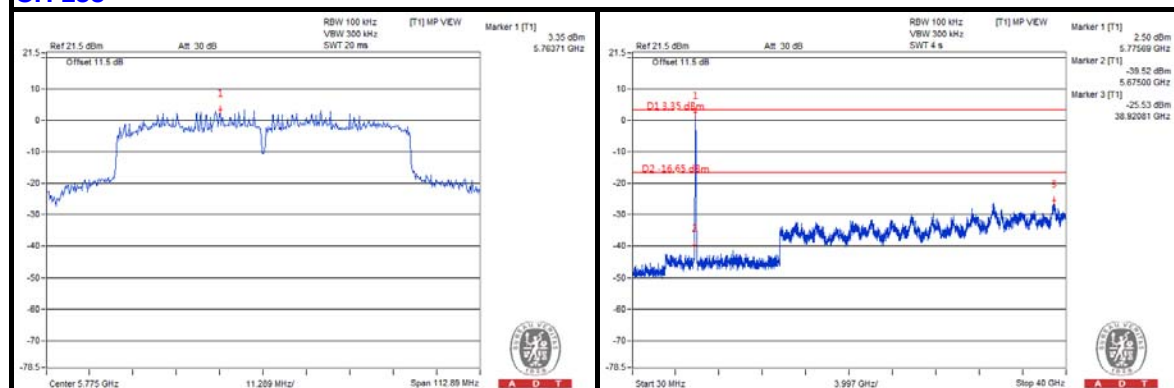

CH 155 Band edge

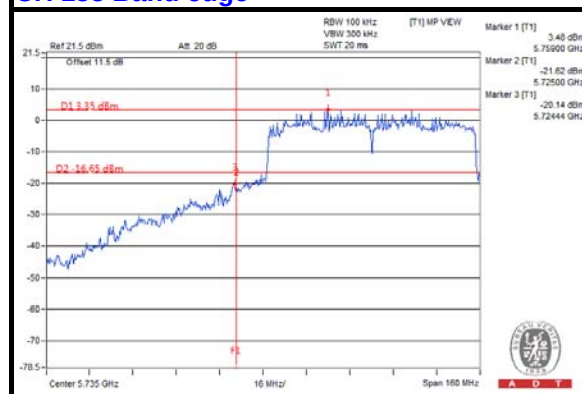

CH 155 Band edge

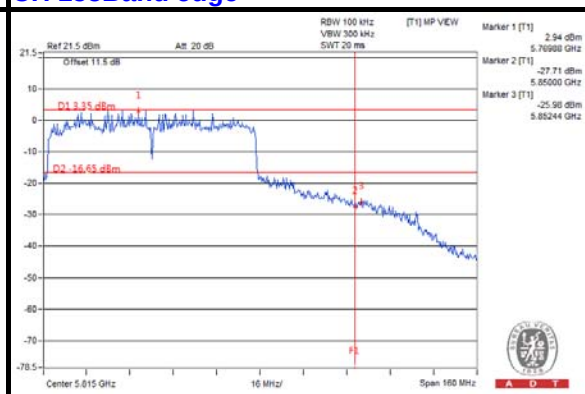



A D T

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

8. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---