

TEST REPORT

Report Number: 3056844.011

Project Number: 3056844

May 11, 2004

Testing performed on the
MFR based Reader Evaluation Kit

Model: S4110R

P/n: 001

FCC ID: A92S4110R

to

FCC part 15.225

For

Texas Instruments RFID

6550 Chase Oaks Blvd.

Plano, TX 75023


Test Performed at:
Intertek Testing Services, NA. Inc.
420 N Dorothy Drive
Richardson, TX 75081

Test Authorized by:
Texas Instruments RFID
6550 Chase Oaks Blvd.
Plano, TX 75023


Tested/Prepared
by:


Sudesh Kamble
EMC Team Leader

Date:


May 11, 2004

Reviewed by:


Candy Campbell
Compliance Investigator

Date:


May 11, 2004

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1.0	Summary of Tests	3
2.0	General Description.....	4
2.1	Product Description.....	4
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology.....	5
2.4	Test Facility	5
3.0	System Test Configuration	6
3.1	Support Equipment and description.....	6
3.2	Block Diagram of Test Setup	7
3.3	Justification	8
3.4	Software Exercise Program	8
3.5	Mode of operation during test	8
3.6	Modifications required for Compliance.....	8
3.8	Test Configurations/Variations in Product.....	9
4.0	Measurement Results.....	11
4.1	Transmitter Radiated Emissions.....	11
4.2	AC Line Conducted Emission.....	17
4.3	Occupied Bandwidth.....	26
5.0	Frequency Tolerance	27
6.0	List of test equipment	28
	Test Set UP.....	29

1.0 Summary of Tests

TEST	REFERENCE	RESULT
Field Strength of Fundamental	15.225(a)	Complies
Radiated Emissions outside the band	15.225(b), 15.209	Complies
Frequency tolerance of the carrier	15.225(c)	Complies
Line Conducted Emissions	15.207	Complies
Antenna requirement	15.203	Not Applicable. The antenna is permanently connected to the transmitter

2.0 General Description

2.1 Product Description

A92S4110R is MFR Evaluation kit used as RFID reader.

Overview of the EUT

Applicant name & address	Texas Instruments RFID 6550 Chase Oaks Blvd. Plano, TX 75023
Contact info	Mr. Steve Lazar
Model No. Part No.	Model No: S4110R Part No: 001
FCC Identifier	A92S4110R
Operating Frequency	13.560 MHz & 134.4 kHz
Number of Channels	1 channel
Operating Temperature	-20 ⁰ C to +70 ⁰ C
Antenna	Integral antenna, loop type,

A prototype version of the S4110R was received on April 1, 2004 in good operating condition. As declared by the Applicant, it is identical to production units.

2.2 Related Submittal(s) Grants

This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.

2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All measurements were performed in 3meters FCC accredited Anechoic Chamber. The site attenuation of the chamber is performed as per the procedure detailed in ANSI C63.4-1992-Alternate Test Site and is within the specified tolerance. For each scan, the procedure for maximizing emissions in Appendices D and E were followed.

The chamber contains a 2.5-meter diameter turntable for floor standing equipment, and a wooden table measuring 1 x 1.5 x 0.8 meters for table-top equipment to facilitate testing, also it has heat and air conditioning systems to control environmental test conditions.

Measurements from 9 kHz to 30 MHz are taken with Loop antenna, measurements from 30MHz to 1GHz are taken with Biconilog antenna and measurement above 1GHz was taken by Horn antenna. The mast to support the antennas is capable of a 1 meter to 4-meter height range, which meets CISPR and FCC requirements. The antenna mast is non-conductive and remotely controllable. The height of antenna and azimuth of the equipment was varied to obtain the maximum radiation during the measurement.

Since radiated emissions, and to a lesser extent, conducted emissions, are functions of cable placement, the cable placement is varied to encompass all configurations that an end user would encounter to determine the configuration resulting in maximum emissions. At least one cable for each I/O port type is attached to the EUT. If peripherals or modules are available, at least one of each available type is installed and noted in the report. Generally, only one of each type is used unless good engineering judgment dictates that the use of more will affect emission levels. Excess cable lengths are arranged into a 30 x 40-cm bundle. Cables requiring non-standard lead dress are recorded in the report.

For conducted emissions testing, the equipment is moved to an insulating platform over the ground plane, and the EUT is powered from a LISN. Both sides of the AC line are measured and the results are compared to the applicable limits. Measurements are taken using CISPR quasi-peak and average detectors when the peak readings approach or exceed the average limit. Only quasi-peak readings are taken when the EUT's emissions meet the average limit as measured with the quasi-peak detector.

The Test facility is registered with FCC under Registration # 101578.

3.0 System Test Configuration

3.1 Support Equipment and description

System Support Equipment


Description	Manufacturer	Model Number	Serial Number
Power supply	Globetek, Inc.	GT-21089-1509-T3 (p/n: TR9CD1700LCP-Y)	00243349/03
Notebook PC	Compaq	Armada 7400	---

Cables Associated with EUT

Description	Length	Shielding	Ferrites	Connection	
				From	To
CAT 5	36"	No	No	EUT	Notebook PC
Serial Port DB 9 connector Cable	44"	Yes	Yes ¹	EUT	Notebook PC
DC Power Cable	50"	No	Yes ²	Power Supply Output	EUT
AC power Cable	18" ³	No	No	Mains Supply Source	Power Supply Input

- Notes:
1. Two turns on ferrite (Ferrite Corp p/n: 0431167281) provided at computer end (4" from the serial port end) of the serial cable.
 2. Two turns on ferrite (Ferrite Corp p/n: 0431167281) provided at power supply DC output cable (2" from the power supply body).
 3. AC power cable length was reduced to meet the requirements of radiated emissions; only 18" cable must be used with the product to comply FCC 15.225 emission requirements.

3.2 Block Diagram of Test Setup

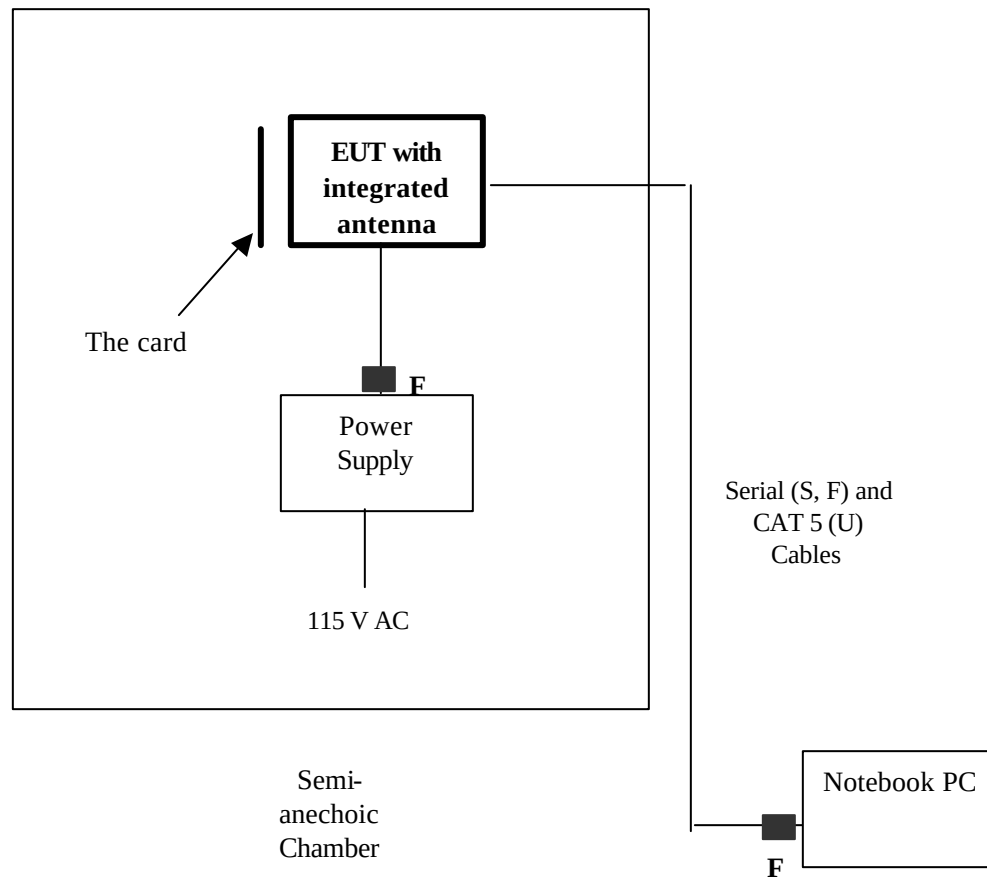

S = Shielded
U = Unshielded

F = With Ferrite
m = Meter

3.3 Justification

For emission testing, the test procedures, as described in American National Standards Institute C63.4-1992, were employed. The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it).

For radiated emission measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. The signal is maximized through rotation and placement in the three orthogonal axes. During testing, all cables were manipulated to produce worst-case emissions.

If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT was wired to transmit full power. Care was taken to ensure proper power supply voltages during testing.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

3.5 Mode of operation during test

For radiated and AC line conducted emission tests, the EUT was setup to transmit continuously in self-test mode (worst case emissions). For the occupied bandwidth and out-of-band conducted emission tests, the EUT was setup to transmit in normal operation mode.

3.6 Modifications required for Compliance

Following modifications were installed by Intertek Testing Services during compliance testing in order to bring the product into compliance (Please note that this does not include changes made specifically by Texas Instruments prior to compliance testing).

- i. Two turns on ferrite (Ferrite Corp p/n: 0431167281) provided at computer end (4" from the serial port end) of the serial cable.
- ii. Two turns on ferrite (Ferrite Corp p/n: 0431167281) provided at power supply DC output cable (2" from the power supply body).
- iii. AC power cable length was reduced to meet the requirements of radiated emissions; only 18" cable must be used with the product to comply FCC 15.225 emission requirements.

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.


3.8 Test Configurations/Variations in Product.

The product is assembled and tested in two configurations: Box Configuration and SDK Configuration
The Box and SDK configurations are identical in manufacturing operation and parts list except the antenna location.
The antenna is located over control PCB in Box configuration as shown in fig. 1

Fig.1 S4110R MFR Evaluation Kit “Box” Configuration




Box Configuration

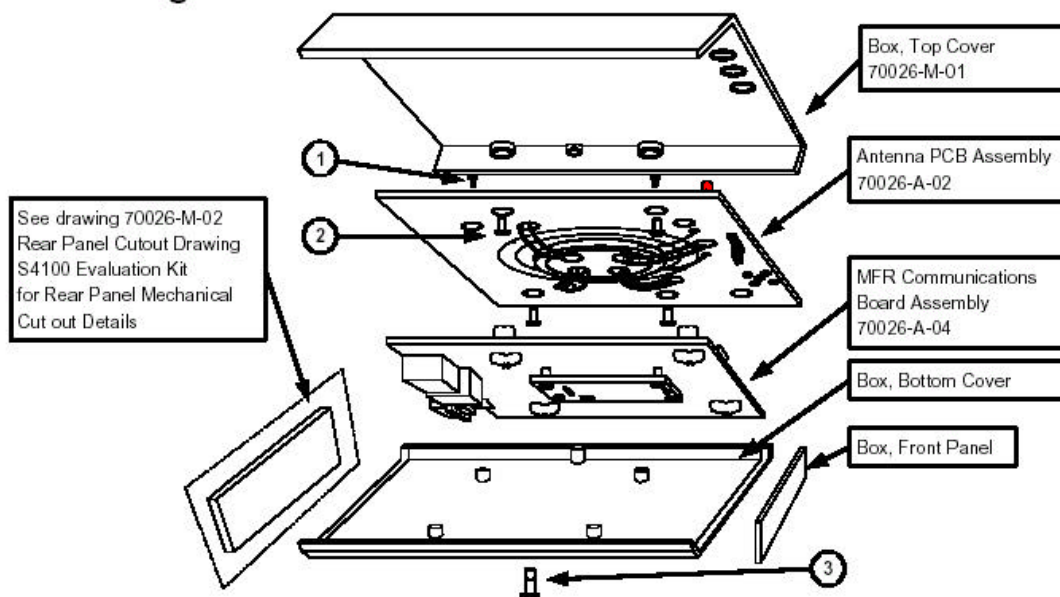

The antenna is located on side of control PCB in SDK configuration as shown in fig. 2

Fig.2 S4110R MFR Evaluation Kit “SDK” Configuration

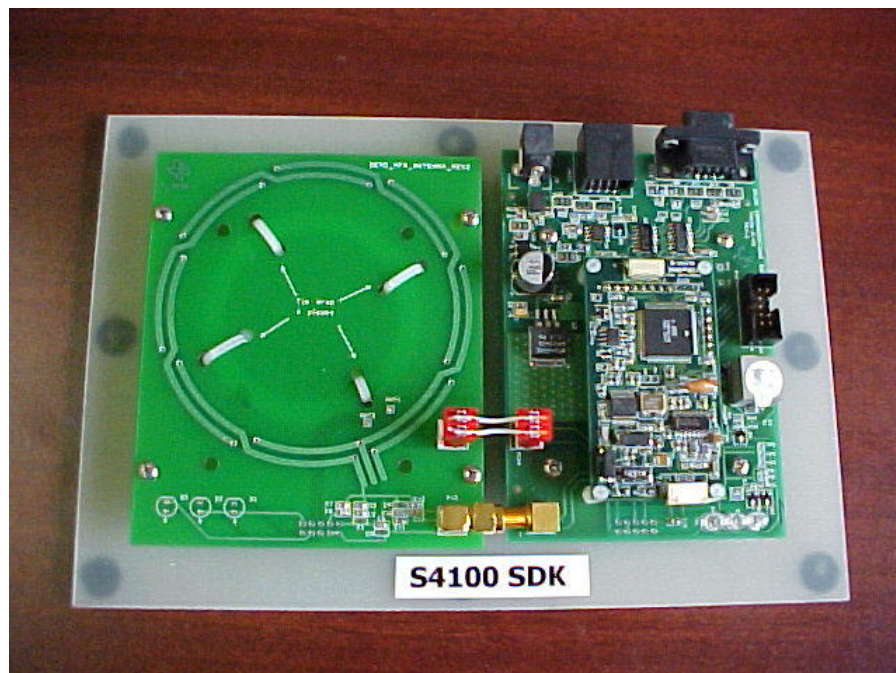

4.0 Measurement Results

4.1 Transmitter Radiated Emissions FCC Rules 15.225, 15.209

Requirements

The Field Strength of emissions at fundamental frequency shall not exceed 84 dB ($\mu\text{V}/\text{m}$) at 30m, Emissions radiated outside of the specified frequency band shall not exceed the general radiated emission limits in 15.209.

Procedure

During the test the EUT is rotated and the measuring antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

Radiated emission measurements were performed from 10 MHz to 1 GHz.
Analyzer resolution is:

9 kHz or greater for frequencies 30 MHz and below
100 kHz or greater for frequencies 1000 MHz and below,
For those frequencies quasi-peak value was measured.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB ($\mu\text{V}/\text{m}$)

RA = Receiver Amplitude (including preamplifier) in dB (μV)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB (1/m)

AG = Amplifier Gain in dB

Test Result

The data below shows the significant emission frequencies, the limit and the margin of compliance.

Table 1: Radiated emissions at fundamental frequency

Configuration Model	Frequency MHz	Antenna Polarization H/V	SA** Reading at 10m dB(uV)	Distance Correct. Factor dB	FS at 30 m dB(uV/m)	FS Limit at 30m dB(uV/m)	Margin dB
BOX	13.560	--	48.90	-20.0	28.90	84.0	-55.10
SDK	13.560	--	46.99	-20.0	26.99	84.0	-57.01

Configuration Model	Frequency kHz	Antenna Polarization H/V	SA** Reading at 3m dB(uV)	Distance Correct. Factor dB	FS at 300m dB(uV/m)	FS Limit at 300m dB(uV/m)	Margin dB
BOX	134.00	--	69.20	-80.0	-10.20	25	-35.20
SDK	134.00	--	68.85	-80.0	-11.15	25	-36.15

FS – Field Strength

FS was measured with loop antenna

** : Denotes the corrected reading with Antenna Factor and Cable Loss.

Table 2: Spurious Radiated emissions below 30 MHz

Configuration Model	Frequency MHz	Antenna Polarization H/V	SA** Reading At 10m dB(uV)	Distance Correct. Factor dB	FS at 30 m dB(uV/m)	FS Limit at 30m dB(uV/m)	Margin dB
BOX	27.122	--	28.27	-20.0	08.27	30	-21.73
SDK	27.122	--	27.72	-20.00	07.72	30	-22.28

Configuration Model	Frequency kHz	Antenna Polarization H/V	SA** Reading at 3m dB(uV)	Distance Correct. Factor dB	FS at 300m dB(uV/m)	FS Limit at 300m dB(uV/m)	Margin dB
BOX	168.00	--	68.53	-80.0	-11.45	18	-29.45
SDK	268.00	--	67.93	-80.0	-12.07	18	-30.07

** : Denotes the corrected reading with Antenna Factor and Cable Loss.

All other emissions not reported are noise floor, which is at least 20 dB below the limit.

Table 3: Out of band emissions below 30 MHz (Measured at band edge & fundamental frequencies)
BOX Configuration

Frequency MHz	SA** Reading at 10 m dB(uV)	Distance Correct. Factor dB	FS at 30 m dB(uV/m)	FS Limit at 30m dB(uV/m)	Margin dB
13.110	16.74	-20.00	-3.26	40.50	-43.76
13.410	16.95	-20.00	-3.05	40.50	-43.55
13.553	36.83	-20.00	16.83	50.50	-33.67
13.560	48.90	-20.00	28.90	84.00	-55.10
13.567	42.84	-20.00	22.84	50.50	-27.66
13.710	31.20	-20.00	11.20	50.50	-39.30
14.010	18.00	-20.00	-2.00	40.50	-42.50
13.720	32.01	-20.00	12.01	30.50	-18.49
13.556	44.19	-20.00	24.19	74.00	-49.81
27.122	28.27	-20.00	8.27	40.50	-32.23
18.364	34.66	-20.00	14.66	40.50	-25.84
14.438	12.99	-20.00	-7.01	40.50	-47.51
13.562	47.91	-20.00	27.91	84.00	-56.09
13.412	16.17	-20.00	-3.83	50.50	-54.33
13.356	16.06	-20.00	-3.94	40.50	-44.44
13.568	39.09	-20.00	19.09	50.50	-31.41
13.562	47.82	-20.00	27.82	84.00	-56.18
13.552	34.20	-20.00	14.20	50.50	-36.30
13.568	36.95	-20.00	16.95	50.50	-33.55
13.567	37.29	-20.00	17.29	50.50	-33.21
13.553	36.90	-20.00	16.90	50.50	-33.60
13.568	37.88	-20.00	17.88	50.50	-32.62
18.244	29.30	-20.00	9.30	40.50	-31.20

The emissions on the band-edge frequencies are more than 20 dB below the level on fundamental frequency.

** : Denotes the corrected reading with Antenna Factor and Cable Loss.

All other emissions not reported are noise floor, which is at least 20 dB below the limit.

Table 4: Out of band emissions below 30 MHz (Measured at band edge & fundamental frequencies)
SDK Configuration

Frequency MHz	SA** Reading at 10 m dB(uV)	Distance Correct. Factor dB	FS at 30 m dB(uV/m)	FS Limit at 30m dB(uV/m)	Margin dB
13.110	18.00	-20.00	-2.00	40.50	-42.50
13.410	16.17	-20.00	-3.83	40.50	-44.33
13.553	35.91	-20.00	15.91	50.50	-34.59
13.560	46.99	-20.00	26.99	84.00	-57.01
13.567	35.27	-20.00	15.27	50.50	-35.23
13.710	32.05	-20.00	12.05	50.50	-38.45
14.010	18.63	-20.00	-1.37	40.50	-41.87
13.720	34.01	-20.00	14.01	30.50	-16.49
13.556	42.23	-20.00	22.23	74.00	-51.77
27.122	27.72	-20.00	7.72	40.50	-32.78
18.364	32.00	-20.00	12.00	40.50	-28.50
14.438	13.51	-20.00	-6.49	40.50	-46.99
13.562	46.56	-20.00	26.56	84.00	-57.44
13.412	16.95	-20.00	-3.05	50.50	-53.55
13.356	16.06	-20.00	-3.94	40.50	-44.44
13.568	35.56	-20.00	15.56	50.50	-34.94
13.562	45.53	-20.00	25.53	84.00	-58.47
13.552	32.80	-20.00	12.80	50.50	-37.70
13.568	34.61	-20.00	14.61	50.50	-35.89
13.567	34.64	-20.00	14.64	50.50	-35.86
13.553	34.81	-20.00	14.81	50.50	-35.69
13.568	33.36	-20.00	13.36	50.50	-37.14
18.244	16.70	-20.00	-3.30	40.50	-43.80

The emissions on the band-edge frequencies are more than 20 dB below the level on fundamental frequency.

** : Denotes the corrected reading with Antenna Factor and Cable Loss.

All other emissions not reported are noise floor, which is at least 20 dB below the limit.

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.209
 Note: The table shows the worst-case radiated emissions.

Table 5: Spurious Radiated emissions (Quasi-peak Reading)
BOX Configuration

Frequency MHz	Antenna Polarization H/V	Antenna Height/Azimuth	Detector P/Q-P	FS** at 3m dB(μV/m)	FS Limit at 3m dB(μV/m)	Margin dB
40.68	V	1.0/-19	Q-P	36.52	40	-3.48
67.80	V	1.0/8	Q-P	30.92	40	-9.08
81.36	V	1.0/-165	Q-P	31.26	40	-8.74
94.92	V	1.0/180	Q-P	28.36	44	-15.64
108.48	V	1.0/-165	Q-P	39.00	44	-5.00
108.48	V	1.0/-55	Q-P	38.46	44	-5.54
122.04	V	1.0/-139	Q-P	30.62	44	-13.38
135.60	V	1.0/98	Q-P	31.07	44	-12.93
149.16	V	1.0/98	Q-P	31.20	44	-12.80
40.68	H	2.07/70	Q-P	29.40	40	-10.60
67.80	H	2.3/113	Q-P	32.50	40	-7.50
81.36	H	2.3/110	Q-P	31.01	40	-8.99
94.92	H	1.9/92	Q-P	36.15	44	-7.85
108.48	H	2.2/120	Q-P	36.21	44	-7.79
108.48	V	1.0/62	Q-P	36.53	44	-7.47

FS = Field Strength

P = Peak

Q-P = Quasi-Peak

** : Corrected radiated emission limits with Antenna factor and Cable loss.

The EUT passed the test by 3.5 dB

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.209
 Note: The table shows the worst-case radiated emissions.

Table 6: Spurious Radiated emissions (Quasi-peak Reading)
SDK Configuration

Frequency MHz	Antenna Polarization H/V	Antenna Height/Azimuth	Detector P/Q-P	FS** at 3m dB(μV/m)	FS Limit at 3m dB(μV/m)	Margin dB
135.60	V	1.0/180/0	Q-P	38.53	44	-5.47
122.04	V	1.0/0	Q-P	32.80	44	-11.20
108.48	V	1.0/0	Q-P	31.30	44	-12.70
94.92	V	1.0/0	Q-P	40.63	44	-3.37
81.36	V	1.0/0	Q-P	32.20	40	-7.80
67.80	V	1.0/0	Q-P	32.29	40	-7.71
40.68	V	1.0/0	Q-P	35.51	40	-4.49
40.68	H	2.0/153	Q-P	28.05	40	-11.95
67.80	H	1.8/78	Q-P	28.30	40	-11.70
81.36	H	1.8/80	Q-P	28.65	40	-11.35
94.92	H	1.9/82	Q-P	33.04	44	-10.96
108.48	H	2.0/89	Q-P	32.57	44	-11.43
122.04	H	1.7/90	Q-P	29.92	44	-14.08
135.60	H	1.65/90	Q-P	33.12	44	-10.88
311.88	H	1.0/0	Q-P	38.92	46	-7.08
325.44	H	1.0/0	Q-P	36.37	46	-9.63
339.00	H	1.0/0	Q-P	38.09	46	-7.91

FS = Field Strength

P = Peak

Q-P = Quasi-Peak

** : Corrected radiated emission limits with Antenna factor and Cable loss.

The EUT passed the test by 4 dB

4.2 AC Line Conducted Emission FCC Rule 15.207

AC line conducted emission test was performed according the ANSI C63.4 standard. The EUT was connected to DC Power Supply, which was connected to AC Line through the LISN.

A complete scan from 150 kHz - 30 MHz was made according to the FCC 02-157 (ET Docket 98-80).

A complete scan from 150 kHz - 30 MHz was made according to the FCC 02-157 (ET Docket 98-80). As emissions at the fundamental frequency of 13.560 was exceeding the limits, the Conducted emission measurements were preformed in two configurations:

Configuration 1: Normal-operating Conditions with Antenna connected to the device.
(Please refer Table 7, 8, 11 and 12 for the results)

Configuration 2: Normal-operating Conditions with Antenna disconnected to the device and the Substituted with equivalent resistive load (50 Ohm).
(Please refer Table 9, 10, 13 and 14 for the results)

From the measurement results it was inferred that the fundamental frequency emissions at 13.560 MHz are coupling through air on the port under measurement and is not conducted through the power cord conductively.

Conducted Emissions (BOX configuration with antenna)

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.207

Note: The table shows the worst-case conducted emissions.


Table 7: Line 1

Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.17	36.47	64.96	-28.49	28.15	54.96	-26.81
1.64	30.70	56.00	-25.30	26.52	46.00	-19.48
2.36	29.83	56.00	-26.17	23.73	46.00	-22.27
2.73	37.74	56.00	-18.26	30.53	46.00	-15.47
2.73	37.37	56.00	-18.63	27.82	46.00	-18.18
2.91	38.10	56.00	-17.90	29.12	46.00	-16.88
2.91	37.68	56.00	-18.32	28.47	46.00	-17.53
3.27	36.33	56.00	-19.67	28.01	46.00	-17.99
13.56	51.36	60.00	-8.64	51.32	50.00	1.32
29.99	28.17	60.00	-31.83	13.66	50.00	-36.34

Table 8: Line 2


Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.17	36.04	64.96	-28.92	25.64	54.96	-29.32
0.22	29.45	62.74	-33.30	18.83	52.74	-33.91
1.64	28.28	56.00	-27.72	24.76	46.00	-21.24
2.00	27.93	56.00	-28.07	22.57	46.00	-23.43
2.73	30.94	56.00	-25.06	23.70	46.00	-22.30
2.91	33.62	56.00	-22.38	24.17	46.00	-21.83
13.56	53.40	60.00	-6.60	53.36	50.00	3.36
29.48	28.11	60.00	-31.89	12.93	50.00	-37.07
29.96	28.75	60.00	-31.25	15.31	50.00	-34.69
29.99	28.58	60.00	-31.42	13.45	50.00	-36.55

Graph 1: Conducted Emission Line 1 (BOX configuration with antenna)

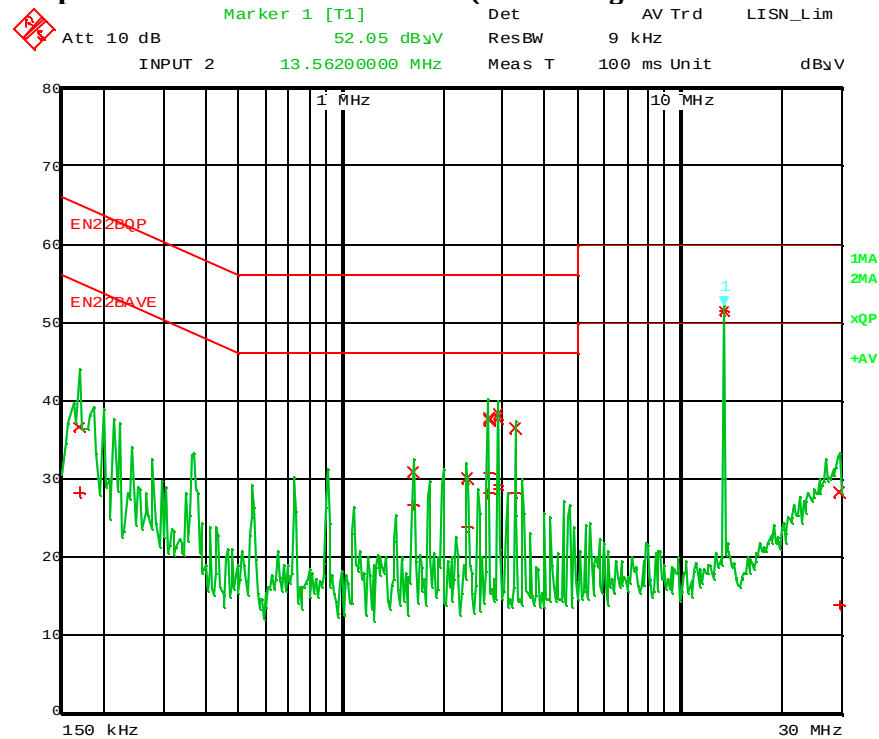

Date: 3.MAY.2004 13:25:55

Graph 2: Conducted Emission Line 2 (BOX configuration with antenna)

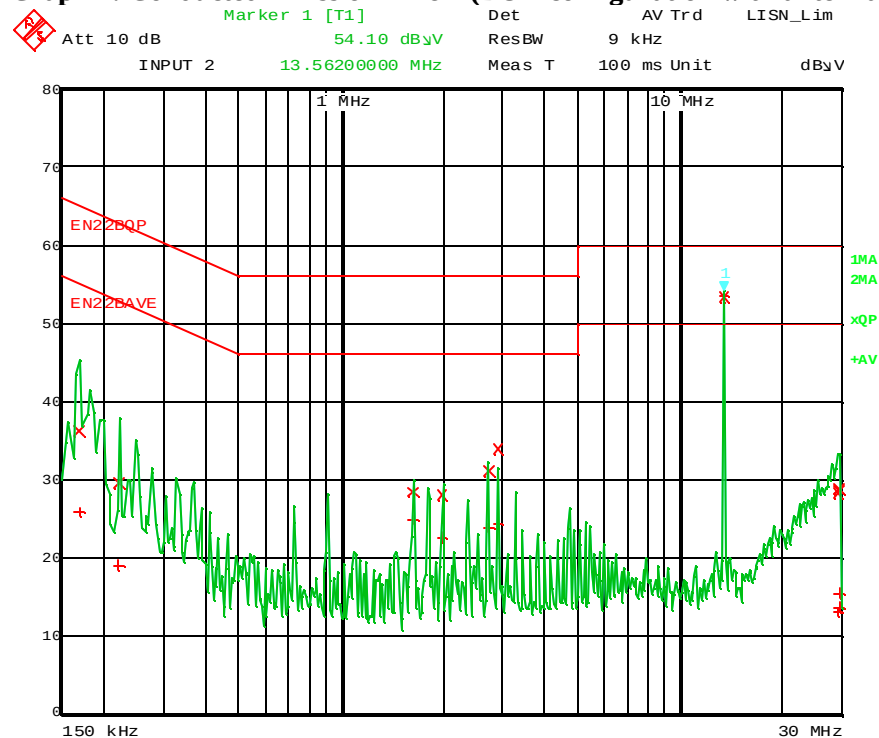

Date: 3.MAY.2004 13:28:04

Conducted Emissions (BOX configuration with antenna replaced by 50 ohm resistor)

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.207

Note: The table shows the worst-case conducted emissions.


Table 9: Line 1

Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.17	43.89	64.96	-21.07	42.76	54.96	-12.20
0.22	39.95	62.74	-22.80	37.44	52.74	-15.31
0.25	39.72	61.76	-22.04	37.76	51.76	-14.00
0.36	36.18	58.77	-22.60	32.49	48.77	-16.28
0.53	33.21	56.00	-22.79	28.73	46.00	-17.27
1.60	30.70	56.00	-25.30	9.57	46.00	-36.43
2.67	9.19	56.00	-46.81	23.53	46.00	-22.47
2.85	35.00	56.00	-21.00	23.82	46.00	-22.18
3.21	35.71	56.00	-20.29	27.10	46.00	-18.90
13.56	32.38	60.00	-27.62	32.02	50.00	-17.98

Table 10: Line 2


Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.18	44.54	64.58	-20.03	36.36	54.58	-18.22
0.21	30.28	63.05	-32.77	15.77	53.05	-37.28
2.71	23.17	56.00	-32.83	3.72	46.00	-42.28
2.73	8.66	56.00	-47.34	3.71	46.00	-42.29
2.84	32.36	56.00	-23.64	19.62	46.00	-26.38
2.91	8.66	56.00	-47.34	3.70	46.00	-42.30
3.19	30.11	56.00	-25.89	18.96	46.00	-27.04
3.27	8.10	56.00	-47.90	3.64	46.00	-42.36
13.56	33.03	60.00	-26.97	32.79	50.00	-17.21
29.99	25.39	60.00	-34.61	12.99	50.00	-37.01

Graph 3: Conducted Emission Line 1 (BOX configuration with antenna replaced by 50 ohm resistor)

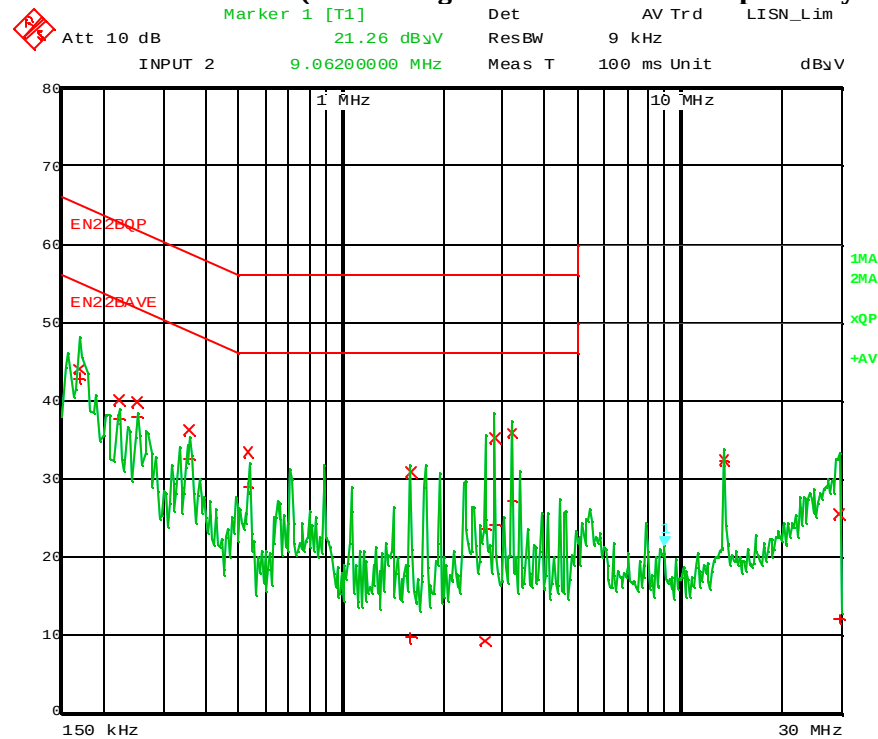

Date: 3.MAY.2004 13:36:23

Graph 4: Conducted Emission Line 2 (BOX configuration with antenna replaced by 50 ohm resistor)

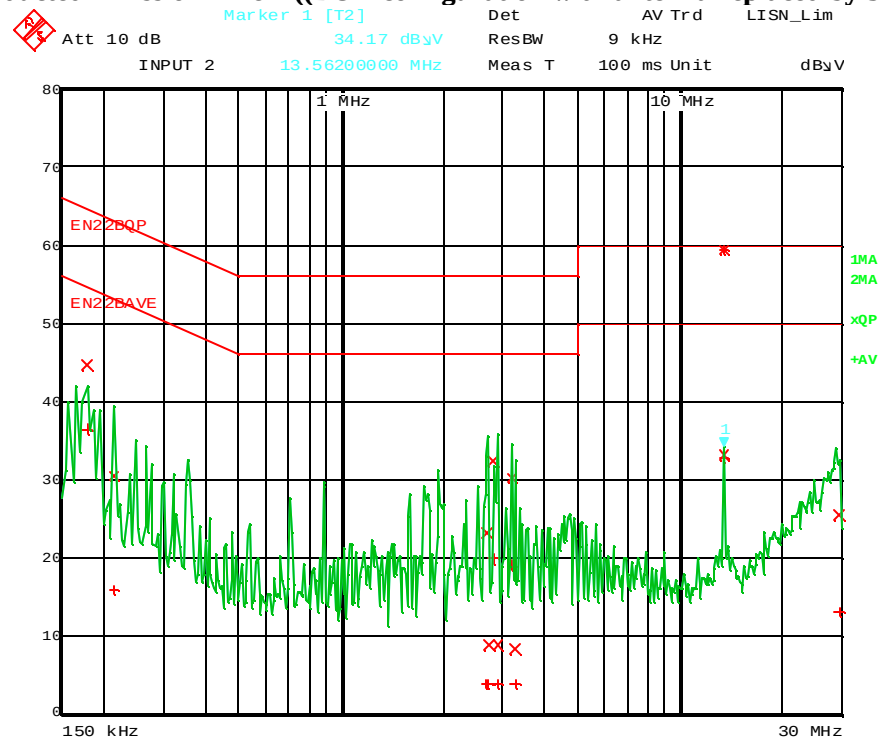

Date: 3.MAY.2004 13:32:23

Conducted Emissions (SDK configuration with antenna)

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.207

Note: The table shows the worst-case conducted emissions.


Table 11: Line 1

Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.16	48.03	65.57	-17.54	47.26	55.57	-8.31
0.19	40.50	64.21	-23.71	39.25	54.21	-14.96
0.22	39.96	62.74	-22.78	37.73	52.74	-15.02
0.24	40.51	62.17	-21.66	38.17	52.17	-14.00
2.79	32.91	56.00	-23.09	19.34	46.00	-26.66
2.95	37.13	56.00	-18.87	23.20	46.00	-22.80
2.96	39.88	56.00	-16.12	30.44	46.00	-15.56
3.13	37.53	56.00	-18.47	27.44	46.00	-18.56
13.56	39.86	60.00	-20.14	39.31	50.00	-10.69
29.99	25.31	60.00	-34.69	11.29	50.00	-38.71

Table 12: Line 2


Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.17	44.05	64.96	-20.92	40.16	54.96	-14.80
0.18	35.98	64.39	-28.41	28.25	54.39	-26.14
0.23	31.38	62.60	-31.22	25.97	52.60	-26.62
0.33	36.91	59.45	-22.55	31.34	49.45	-18.12
0.66	29.65	56.00	-26.35	25.05	46.00	-20.95
2.79	30.51	56.00	-25.49	15.38	46.00	-30.62
2.97	32.18	56.00	-23.82	23.69	46.00	-22.31
3.12	34.35	56.00	-21.65	22.09	46.00	-23.91
13.56	47.47	60.00	-12.53	47.43	50.00	-2.57
29.99	25.06	60.00	-34.94	11.04	50.00	-38.96

Graph 5: Conducted Emission Line 1 (SDK configuration with antenna)

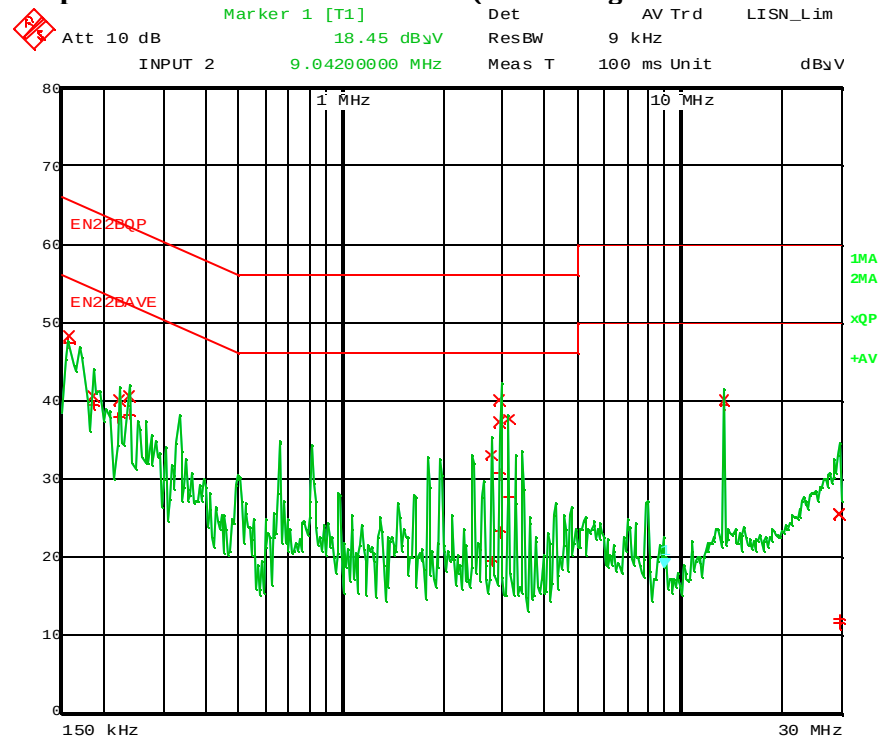

Date: 3.MAY.2004 13:42:23

Graph 6: Conducted Emission Line 2 (SDK configuration with antenna)

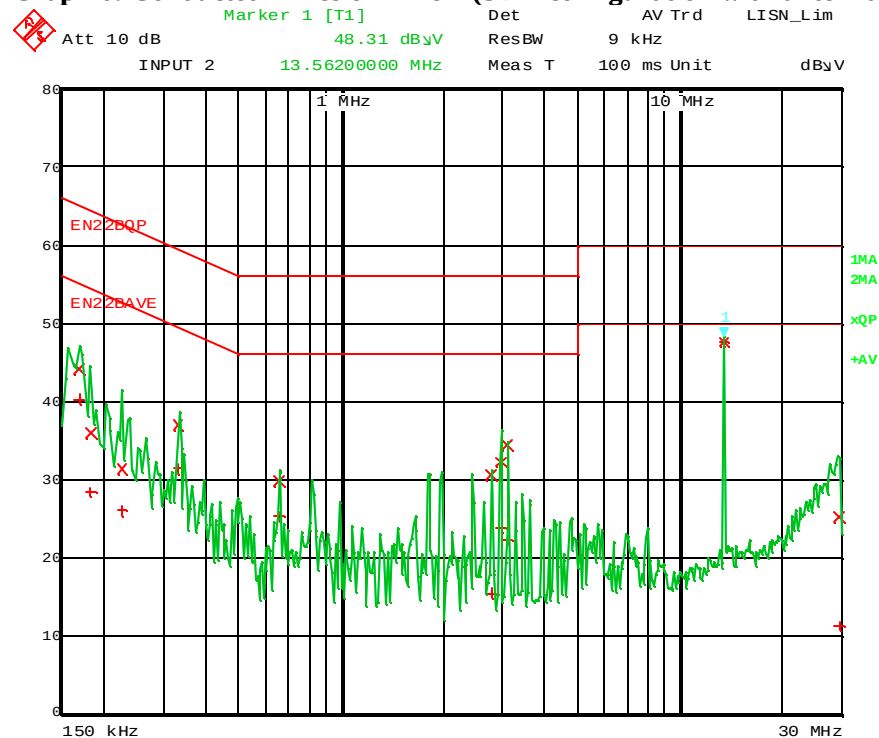

Date: 3.MAY.2004 13:45:36

Conducted Emissions (SDK configuration with antenna replaced by 50 ohm resistor)

Date: 05/03/04
 Company: Texas Instruments
 Equipment: MFR based Reader Evaluation Kit Model: S4110R
 Test Engineer: Sudesh Kamble
 Test Standard: FCC 15.207

Note: The table shows the worst-case conducted emissions.


Table 13: Line 1

Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.16	39.29	65.36	-26.07	16.00	55.36	-39.36
0.37	35.02	58.41	-23.40	30.47	48.41	-17.94
0.56	27.69	56.00	-28.31	25.94	46.00	-20.06
0.93	26.86	56.00	-29.14	22.10	46.00	-23.90
1.68	28.62	56.00	-27.38	22.50	46.00	-23.50
2.78	39.56	56.00	-16.44	30.59	46.00	-15.41
4.65	25.34	56.00	-30.66	17.00	46.00	-29.00
8.61	8.70	60.00	-51.30	4.74	50.00	-45.26
13.56	27.93	60.00	-32.07	27.28	50.00	-22.72
29.91	28.91	60.00	-31.09	13.74	50.00	-36.26

Table 14: Line 2


Frequency MHz	QP Reading dBμV	QP Limit dBμV	QP Margin dBμV	Ave Reading dBμV	Ave Limit dBμV	Ave Margin dBμV
0.15	41.01	66.00	-24.99	16.46	56.00	-39.54
0.26	29.16	61.50	-32.34	13.88	51.50	-37.62
0.47	16.97	56.51	-39.54	6.11	46.51	-40.41
0.93	25.71	56.00	-30.29	22.16	46.00	-23.84
2.05	25.17	56.00	-30.83	19.42	46.00	-26.58
2.97	33.43	56.00	-22.57	24.51	46.00	-21.49
4.85	15.95	56.00	-40.05	5.90	46.00	-40.10
6.13	15.48	60.00	-44.52	8.08	50.00	-41.92
13.56	25.76	60.00	-34.24	25.06	50.00	-24.94
29.52	26.32	60.00	-33.68	11.91	50.00	-38.09

Graph 7: Conducted Emission Line 1 (SDK configuration with antenna replaced by 50 ohm resistor)

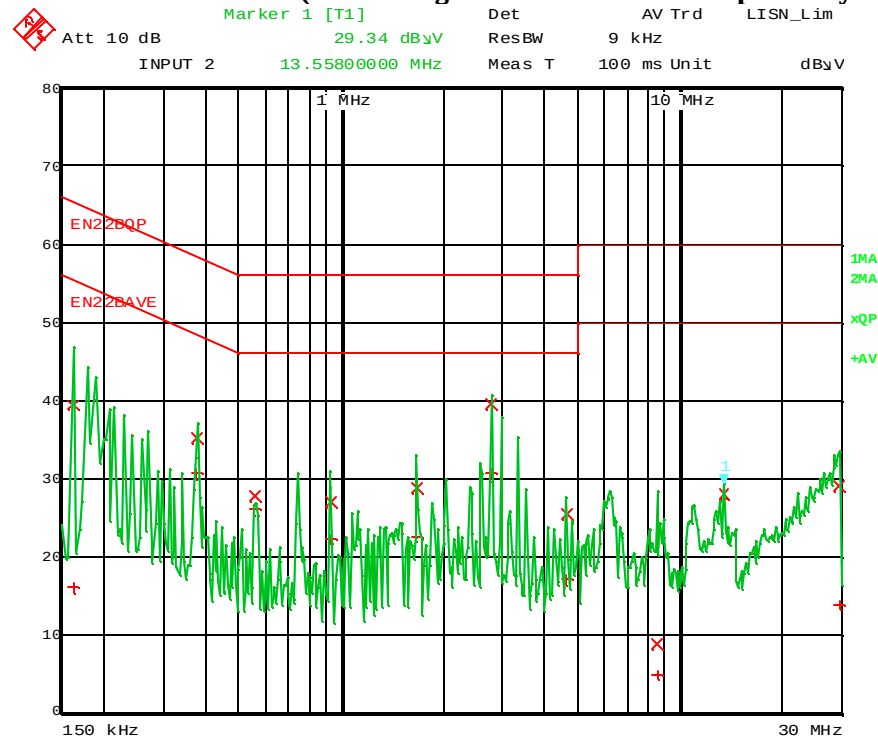

Date: 5.MAY.2004 09:29:34

Graph 8: Conducted Emission Line 2 (SDK configuration with antenna replaced by 50 ohm resistor)

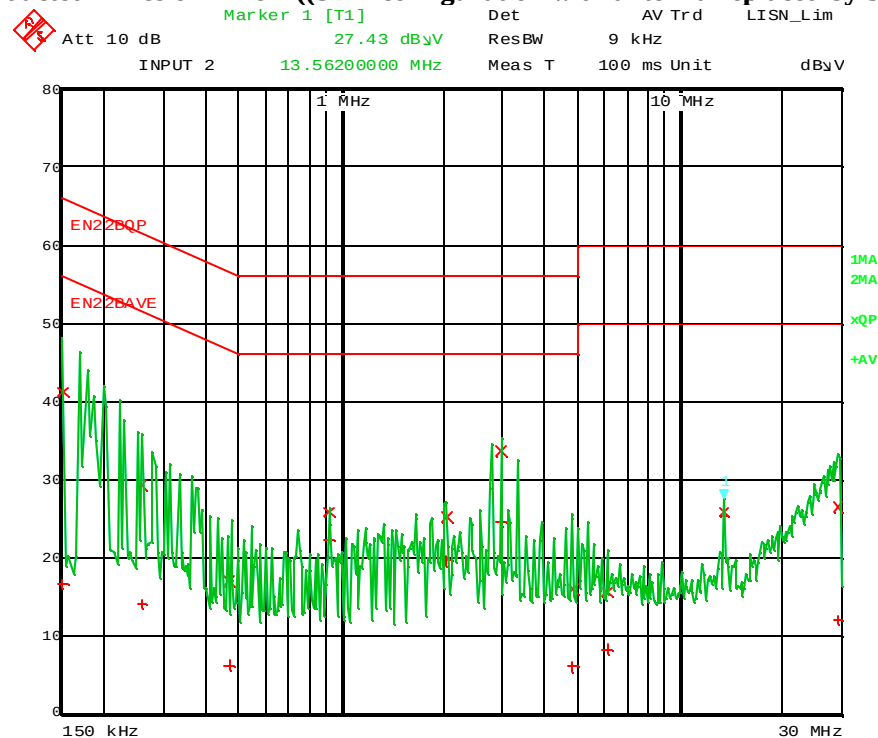


Date: 5.MAY.2004 09:31:16

4.3 Occupied Bandwidth

The EUT was setup to transmit in normal operating condition with continuous transmission for testing purpose. The following plots show the occupied bandwidth.

Graph # 9: 26 dB Bandwidth in In-Band Emission, RBW = 1 kHz

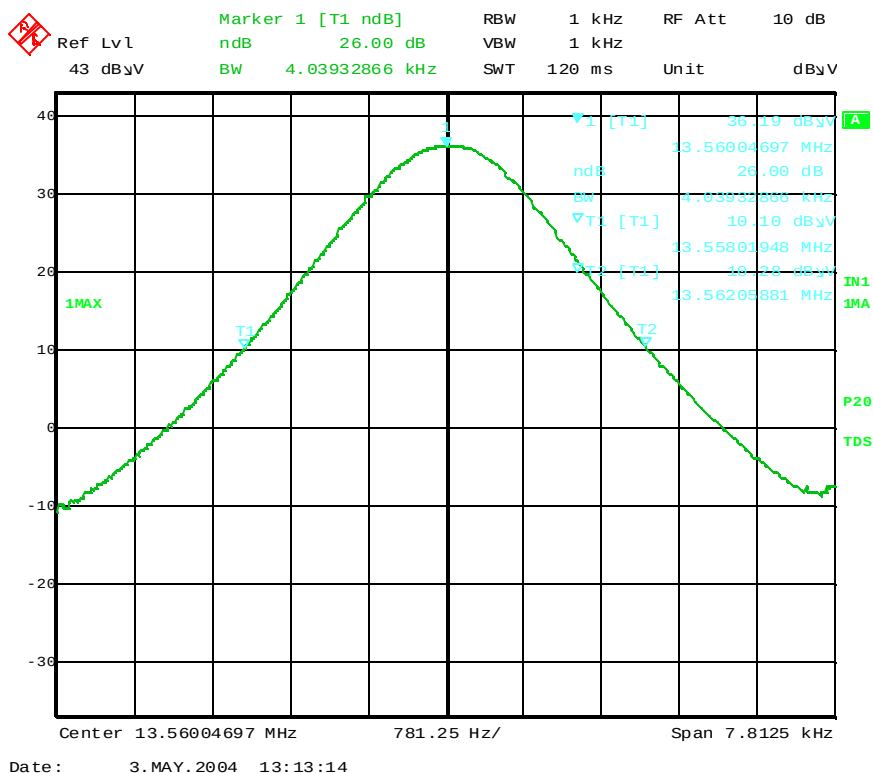

The 26-dB bandwidth is 4.0393 kHz.

5.0 Frequency Tolerance

Requirement

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of $+20^{\circ}\text{C}$.

Procedure

The EUT was placed in the temperature chamber and set to transmit unmodulated carrier. The transmitter was powered from a DC power supply Adapter (Rated 120 VAC Input). The Frequency Counter was connected to the transmitter output. For each temperature, the carrier frequency was recorded. In addition, the carrier frequency was recorded when the power was set to 138 VAC (115% of the maximum specified voltage 120 VAC) and to 97.75 VAC (85% of the minimum specified voltage 120 VAC).

Result

Nominal Frequency: 13.560 092MHz @ 20 deg C.

Temperature, $^{\circ}\text{C}$	Measured Frequency, MHz	Measured Frequency, MHz	Measured Frequency, MHz	Maximum difference, Hz
	120 VAC	138 VAC	97.75 VAC	
+50	13.560 092	13.560 093	13.560 089	-03
+20	13.560 120	13.560 119	13.560 118	+28
+10	13.560 136	13.560 135	13.560 136	+44
-20	13.560 129	13.560 130	13.560 129	+28

The frequency tolerance is within $\pm 0.01\%$.

6.0 List of test equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Receivers/Spectrum Analyzers

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
Agilent Technologies, E7405A, HP EMC System	US40240235	11/03	11/04	
R&S, ESI07, EMI Receiver	1088-7490	9/03	9/04	X
Pacific 140TMX Power Source/Harmonic Analyser	00724/0248	6/03	6/04	X
HP 5335A, Universal Frequency Counter	2044A00559	8/03	8/04	X

Antennas

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
Schaffner, CBL6112B, Log Periodic Antenna	2726	5/15/03	5/15/04	X
A H Systems, SAS-571, Horn Antenna	411	5/15/03	5/15/04	
A H Systems, SAS-562, Loop antenna	152	5/15/03	5/15/04	X


Artificial Mains Networks/Absorbing Clamps

DESCRIPTION	SERIAL NO.	LAST CAL	CAL DUE	USED
FCC-LISN-50-25-2-01	01021	5/15/03	5/15/04	X
FCC-LISN-50-50-4-02	01024	5/15/03	5/15/04	
FCC-LISN-50-25-2-01	01020	5/15/03	5/15/04	
AMZ 41	15957	5/15/03	5/15/04	

Test Set Up
BOX Configurations





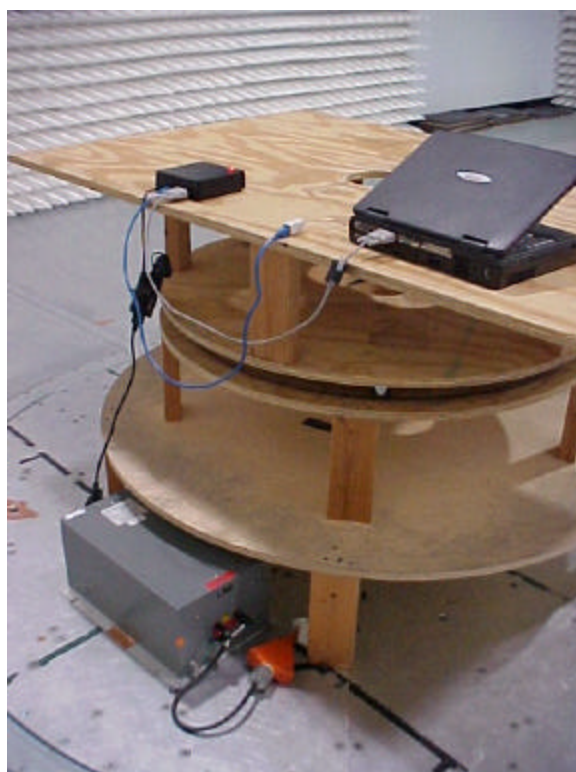

Test Set Up
SDK Configurations

