

TEST REPORT

Application No.: SZCR2504001687AT
Applicant: Bose Corporation
Address of Applicant: 100 The Mountain Rd, Framingham, Massachusetts 01701 United States
Manufacturer: BOSE CORPORATION
Address of Manufacturer: The Mountain FRAMINGHAM MA 01701 UNITED STATES
Equipment Under Test (EUT):
EUT Name: LIFESTYLE ULTRA SOUNDBAR
Model No.: 443535
Trade Mark: BOSE
FCC ID: A94443535
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-04-28
Date of Test: 2025-05-19 to 2025-07-04
Date of Issue: 2025-07-25

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705
Page: 2 of 204

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-07-25		Original

Authorized for issue by:				
				
		Leo Lai/Project Engineer		
				
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10-2020 Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		ANSI C63.10-2020 Section 12.4	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10-2020 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10-2020 Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10-2020 Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Duty Cycle		ANSI C63.10-2020 Section 12.3	ANSI C63.10-2020 Section 12.3	Pass
99% Bandwidth		ANSI C63.10-2020 Section 12.5	ANSI C63.10-2020 Section 12.5	Pass
26dB Emission bandwidth		ANSI C63.10-2020 Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		ANSI C63.10-2020 Section 6.9.2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Peak Power spectrum density		ANSI C63.10-2020 Section 12.5	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Frequency Stability		ANSI C63.10-2020 Section 6.8	47 CFR Part 15, Subpart E 15.407 (g)	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement	13
6.1.1 Test Requirement:	13
6.1.2 Conclusion	13
6.2 Transmission in the Absence of Data	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 Radio Spectrum Matter Test Results	15
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram	16
7.1.4 Measurement Procedure and Data	16
7.2 Maximum Conducted output power	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram	20
7.2.4 Measurement Procedure and Data	20
7.3 Radiated Emissions (Below 1GHz)	21
7.3.1 E.U.T. Operation	21
7.3.2 Test Mode Description	21
7.3.3 Test Setup Diagram	22
7.3.4 Measurement Procedure and Data	23
7.4 Radiated Emissions (Above 1GHz)	26
7.4.1 E.U.T. Operation	27
7.4.2 Test Mode Description	27
7.4.3 Test Setup Diagram	27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 5 of 204

7.4.4	Measurement Procedure and Data.....	28
7.5	Radiated Emissions which fall in the restricted bands	53
7.5.1	E.U.T. Operation	54
7.5.2	Test Mode Description	54
7.5.3	Test Setup Diagram	54
7.5.4	Measurement Procedure and Data.....	55
7.6	Duty Cycle	104
7.6.1	E.U.T. Operation	104
7.6.2	Test Mode Description	104
7.6.3	Test Setup Diagram	104
7.6.4	Measurement Procedure and Data.....	104
7.7	99% Bandwidth	105
7.7.1	E.U.T. Operation	105
7.7.2	Test Mode Description	105
7.7.3	Test Setup Diagram	105
7.7.4	Measurement Procedure and Data.....	105
7.8	26dB Emission bandwidth	106
7.8.1	E.U.T. Operation	106
7.8.2	Test Mode Description	106
7.8.3	Test Setup Diagram	106
7.8.4	Measurement Procedure and Data.....	106
7.9	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	107
7.9.1	E.U.T. Operation	107
7.9.2	Test Mode Description	107
7.9.3	Test Setup Diagram	107
7.9.4	Measurement Procedure and Data.....	107
7.10	Peak Power spectrum density.....	108
7.10.1	E.U.T. Operation.....	108
7.10.2	Test Mode Description.....	108
7.10.3	Test Setup Diagram.....	109
7.10.4	Measurement Procedure and Data	109
7.11	Frequency Stability.....	110
7.11.1	E.U.T. Operation.....	110
7.11.2	Test Mode Description.....	110
7.11.3	Test Setup Diagram.....	110
7.11.4	Measurement Procedure and Data	110
8	Test Setup Photo	111
9	EUT Constructional Details (EUT Photos)	111
10	Appendix.....	112



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 100-240V 50/60Hz Tested voltage: 120V~60Hz
Cable(s):	AC cable:150cm
Cable Loss (for RF conducted test):	1.5dB
Operation Frequency / Number of channels (20MHz):	U-NII-1: 5180-5240MHz (4 Channels); U-NII-3: 5745-5825MHz (5 Channels)
Operation Frequency / Number of channels (40MHz):	U-NII-1: 5190-5230MHz (2 Channels); U-NII-3: 5755-5795MHz (2 Channels)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz; 802.11n/ac/ax: 40MHz
TPC Function:	Without TPC function
Equipment Function:	Master
Antenna Type:	PCB antenna
Antenna Gain:	Band: 1 Ant1: 5.48dBi; Band: 3 Ant1: 6.04dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.1\text{dB}$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Frequency Stability	$\pm 7.25 \times 10^{-8}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 8 of 204

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-01-08	2026-01-07
Matching Pad	N/A	N/A	SEM021-23	2025-03-19	2026-03-18
Matching Pad	N/A	N/A	SEM021-24	2025-03-19	2026-03-18
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2024-07-06	2025-07-05
LISN	Rohde&Schwarz	ENV216	SEM007-01	2024-08-15	2025-08-14
LISN	ETS-LINDGREN	3816/2	SEM007-02	2025-03-03	2026-03-02

Maximum Conducted output power					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2025-03-04	2026-03-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2025-03-04	2026-03-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 10 of 204

Radiated Emissions (Below 1GHz)

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 11 of 204

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2024-08-14	2025-08-13
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2025-03-04	2026-03-03
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2024-09-14	2025-09-13
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2024-07-06	2025-07-05
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2025-03-03	2026-03-02
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2025-02-26	2026-02-25



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 12 of 204

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna are Band: 1 Ant1: 5.48dBi; Band: 3 Ant1: 6.04dBi.

Antenna location: Refer to internal photos



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10-2020 Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C

Humidity: 44.5 % RH


Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report



7.1.3 Test Setup Diagram

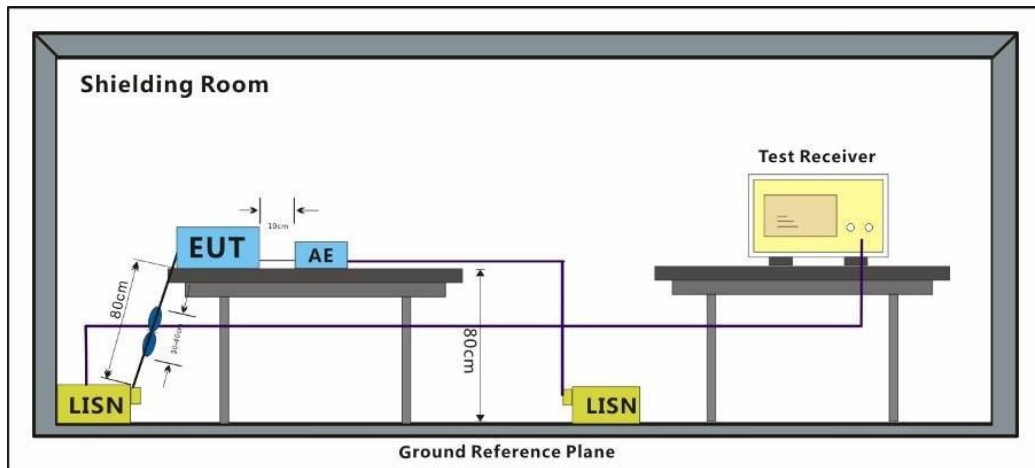

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark 1: Level=Read Level+ Cable Loss+ LISN Factor

Remark 2: Pre-test AC 120V/50-60Hz&AC 240V/50-60Hz then choose the AC 120/60Hz as worst case.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 17 of 204

Test Mode: 05; Line: Live line

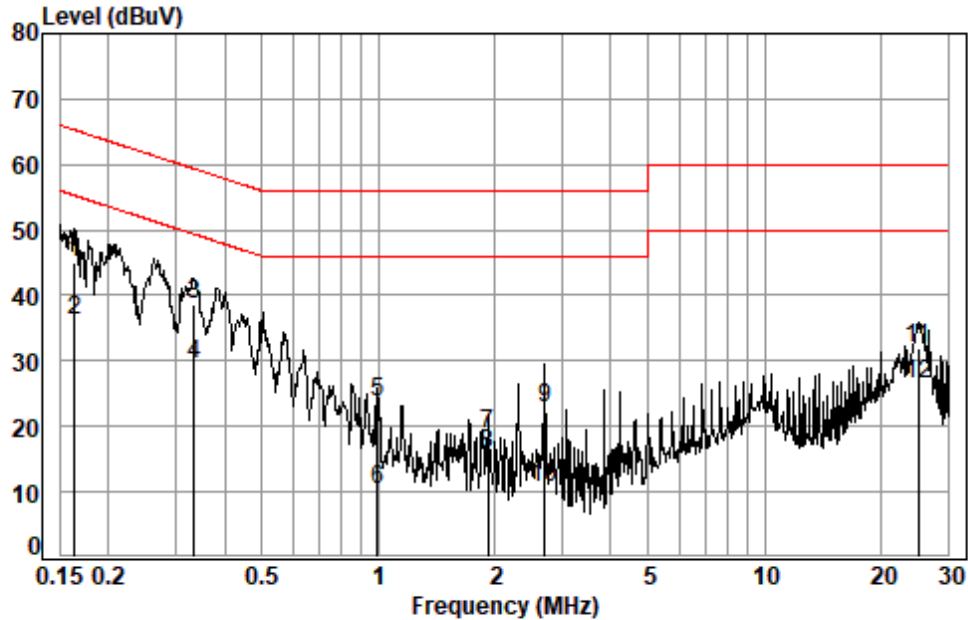

Site : Shielding Room
Condition: Line
Job No. : 01687AT/01688AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1633	0.06	9.81	35.19	45.06	65.30	-20.24	QP
2 *	0.1633	0.06	9.81	26.30	36.17	55.30	-19.13	Average
3	0.3338	0.07	9.74	28.93	38.74	59.35	-20.61	QP
4	0.3338	0.07	9.74	19.81	29.62	49.35	-19.73	Average
5	0.9944	0.09	9.71	13.87	23.67	56.00	-32.33	QP
6	0.9944	0.09	9.71	0.45	10.25	46.00	-35.75	Average
7	1.9182	0.10	9.66	9.12	18.88	56.00	-37.12	QP
8	1.9182	0.10	9.66	5.91	15.67	46.00	-30.33	Average
9	2.6925	0.11	9.65	12.92	22.68	56.00	-33.32	QP
10	2.6925	0.11	9.65	0.88	10.64	46.00	-35.36	Average
11	25.0545	0.34	10.26	21.25	31.85	60.00	-28.15	QP
12	25.0545	0.34	10.26	15.90	26.50	50.00	-23.50	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 18 of 204

Test Mode: 05; Line: Neutral Line

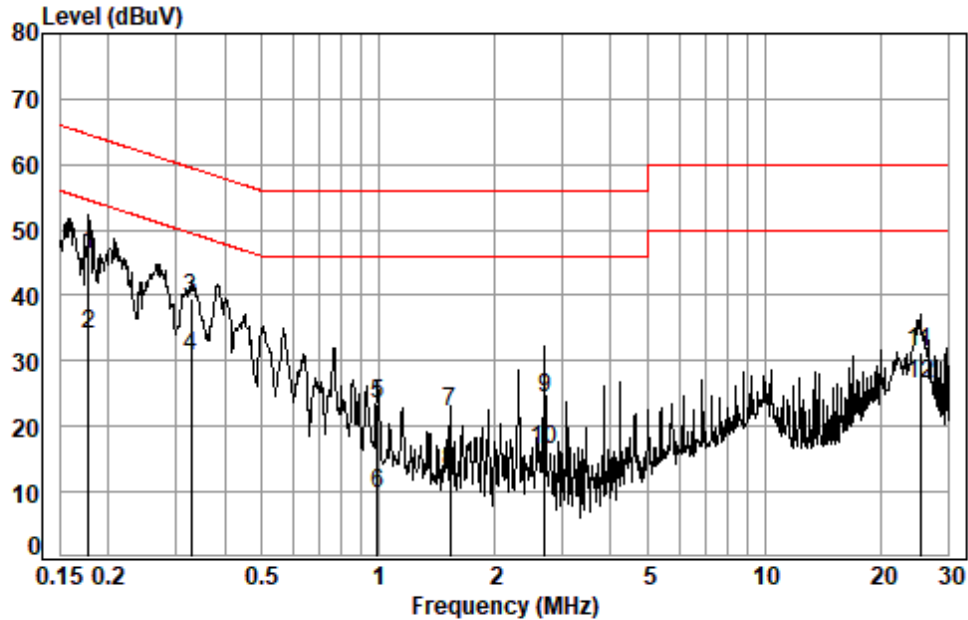

Site : Shielding Room
Condition: Neutral
Job No. : 01687AT/01688AT
Test mode: 05

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1777	0.06	9.82	36.25	46.13	64.59	-18.46	QP
2	0.1777	0.06	9.82	24.12	34.00	54.59	-20.59	Average
3	0.3268	0.07	9.78	29.67	39.52	59.53	-20.01	QP
4 *	0.3268	0.07	9.78	20.96	30.81	49.53	-18.72	Average
5	0.9944	0.09	9.73	13.54	23.36	56.00	-32.64	QP
6	0.9944	0.09	9.73	-0.11	9.71	46.00	-36.29	Average
7	1.5355	0.10	9.71	12.44	22.25	56.00	-33.75	QP
8	1.5355	0.10	9.71	3.38	13.19	46.00	-32.81	Average
9	2.6925	0.11	9.68	14.43	24.22	56.00	-31.78	QP
10	2.6925	0.11	9.68	6.56	16.35	46.00	-29.65	Average
11	25.3214	0.34	10.37	20.73	31.44	60.00	-28.56	QP
12	25.3214	0.34	10.37	15.83	26.54	50.00	-23.46	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (EMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020 Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 25.9 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report



7.2.3 Test Setup Diagram

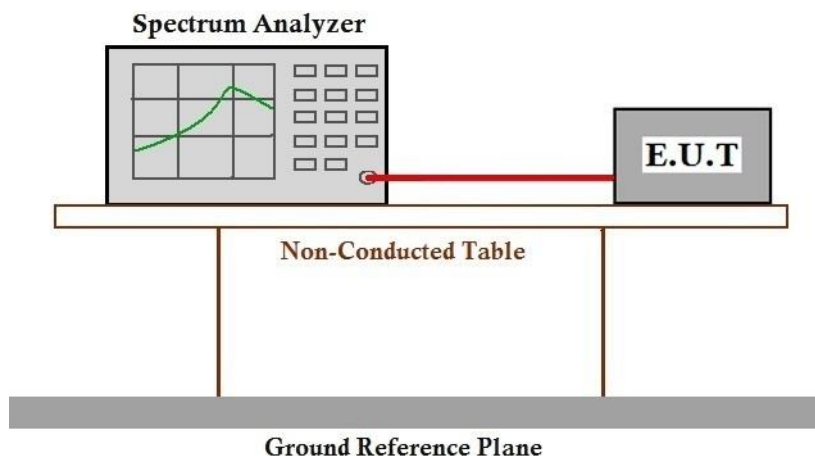

7.2.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details



7.3 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020 Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C

Humidity: 45.6 % RH


Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Pre-scan	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report



7.3.3 Test Setup Diagram

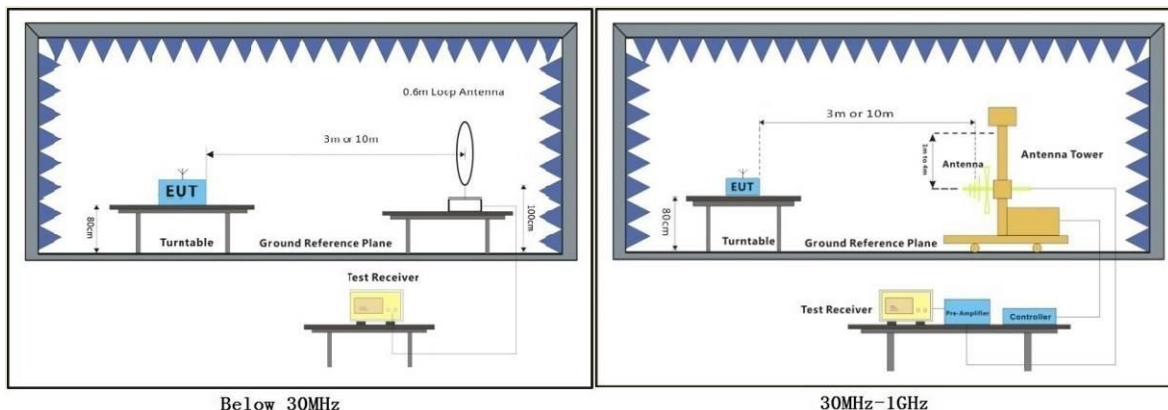

7.3.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 05; Polarity: Horizontal

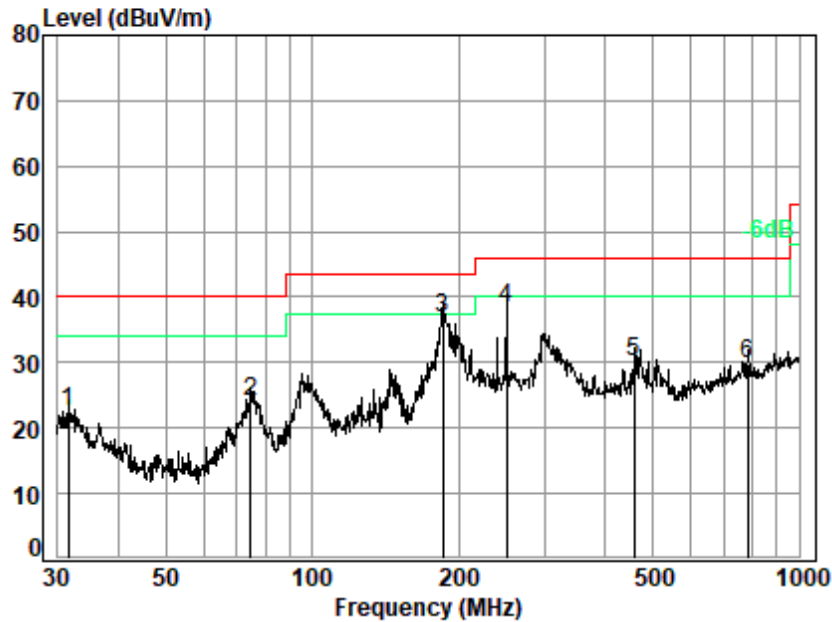

Site : chamber

Condition: 3m HORIZONTAL


Job No. : 01687AT/01688AT

Test Mode: 05

	Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.510	20.50	0.69	27.79	29.08	22.48	40.00	-17.52 QP
2	74.657	10.38	1.05	27.66	40.37	24.14	40.00	-15.86 QP
3 q	185.788	14.29	1.70	27.23	48.18	36.94	43.50	-6.56 QP
4	250.301	17.24	2.00	26.96	46.19	38.47	46.00	-7.53 QP
5	459.114	21.34	2.79	27.40	33.49	30.22	46.00	-15.78 QP
6	782.345	27.08	3.81	27.52	26.56	29.93	46.00	-16.07 QP



Test Mode: 05; Polarity: Vertical

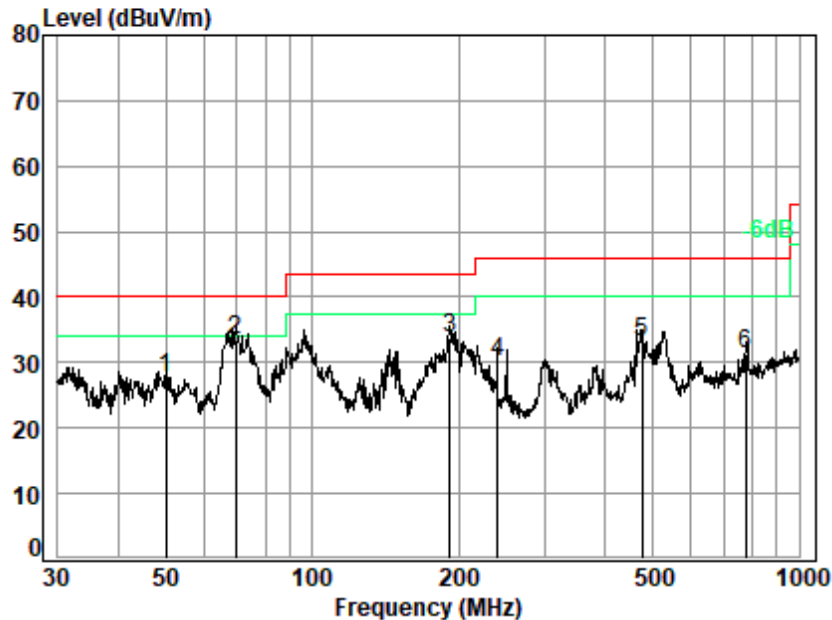

Site : chamber

Condition: 3m VERTICAL

Job No. : 01687AT/01688AT

Test Mode: 05

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	50.057	12.75	0.86	27.73	41.88	27.76	40.00	-12.24	QP
2 q	69.600	10.63	1.02	27.68	49.56	33.53	40.00	-6.47	QP
3	191.745	14.26	1.73	27.20	44.86	33.65	43.50	-9.85	QP
4	239.987	17.07	1.96	27.00	38.20	30.23	46.00	-15.77	QP
5	475.499	22.52	2.84	27.46	35.14	33.04	46.00	-12.96	QP
6	776.878	26.93	3.79	27.54	28.10	31.28	46.00	-14.72	QP



7.4 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020 Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 50.8 % RH

Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.4.3 Test Setup Diagram

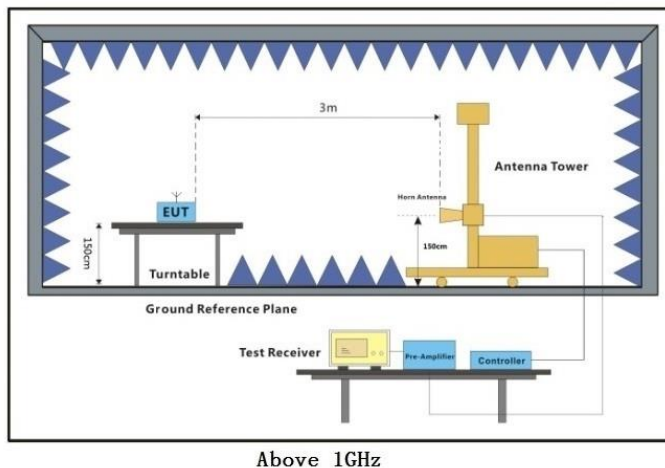


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



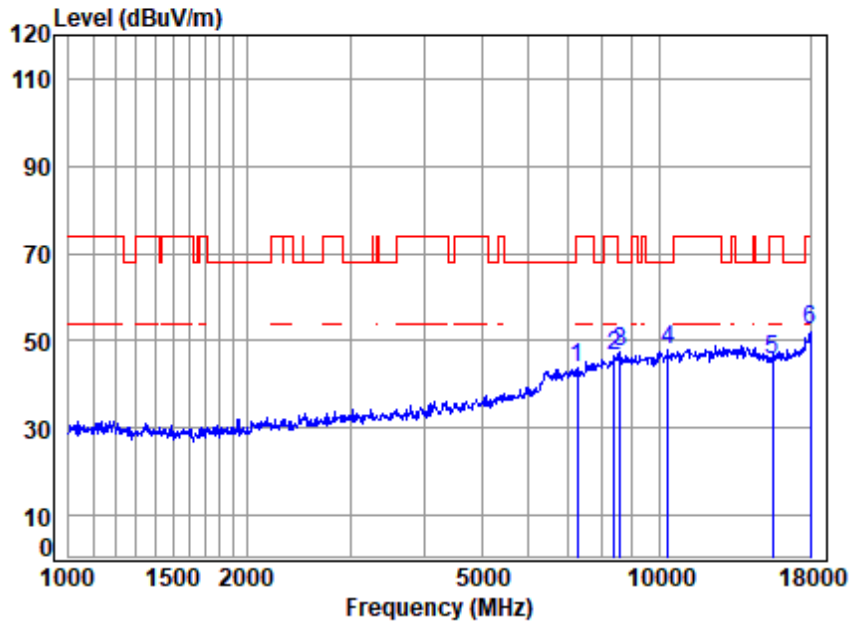

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7263.015	11.51	36.63	56.49	52.31	43.96	74.00	-30.04 peak
2	8392.292	11.64	38.62	55.55	51.72	46.43	74.00	-27.57 peak
3	8588.607	12.00	38.45	55.37	52.23	47.31	68.20	-20.89 peak
4	pp10360.000	13.60	39.00	53.88	49.17	47.89	68.20	-20.31 peak
5	15540.000	17.00	38.56	54.14	44.38	45.80	74.00	-28.20 peak
6	18000.000	18.35	43.80	54.50	44.78	52.43	74.00	-21.57 peak



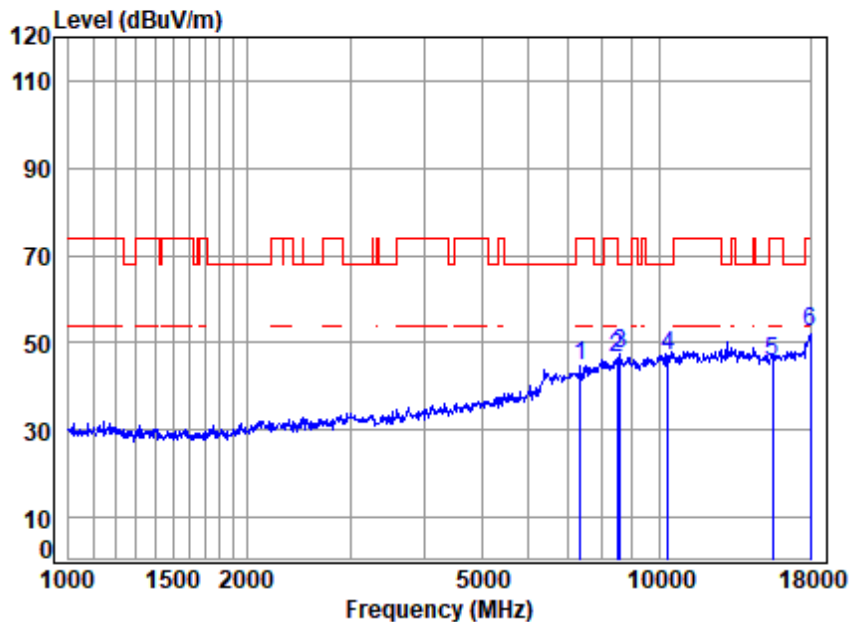

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7347.474	11.51	36.79	56.42	52.91	44.79	74.00 -29.21 peak
2	8489.882	12.24	38.32	55.46	51.65	46.75	74.00 -27.25 peak
3	pp 8588.607	12.00	38.45	55.37	52.37	47.45	68.20 -20.75 peak
4	10360.000	13.60	39.00	53.88	48.28	47.00	68.20 -21.20 peak
5	15540.000	17.00	38.56	54.14	44.24	45.66	74.00 -28.34 peak
6	18000.000	18.35	43.80	54.50	44.80	52.45	74.00 -21.55 peak



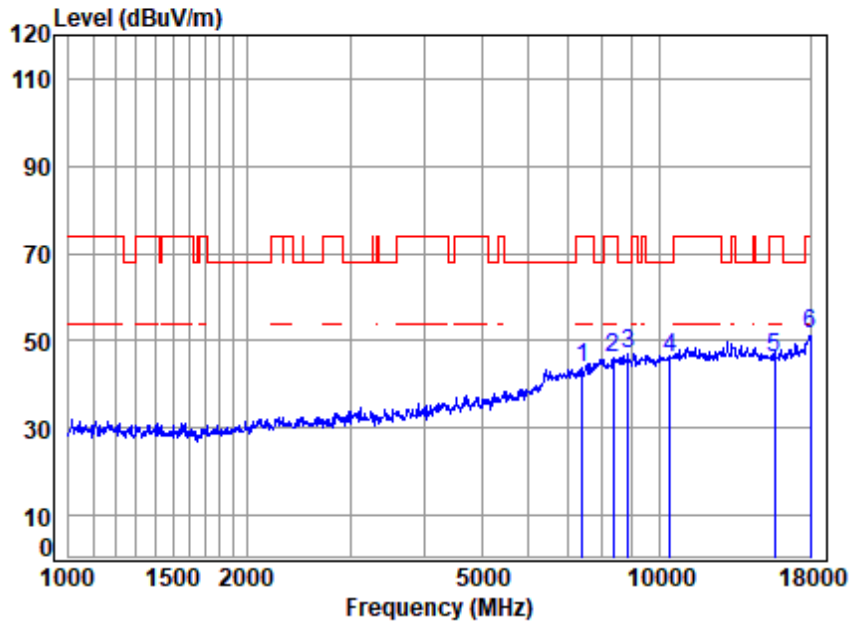

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5220 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7411.461	11.47	36.72	56.37	51.92	43.74	74.00	-30.26 peak
2	8368.069	11.67	38.66	55.57	51.11	45.87	74.00	-28.13 peak
3 pp	8840.473	12.24	38.50	55.14	51.24	46.84	68.20	-21.36 peak
4	10440.000	13.63	39.04	53.84	47.12	45.95	68.20	-22.25 peak
5	15660.000	17.23	38.56	54.10	44.23	45.92	74.00	-28.08 peak
6	18000.000	18.35	43.80	54.50	44.04	51.69	74.00	-22.31 peak



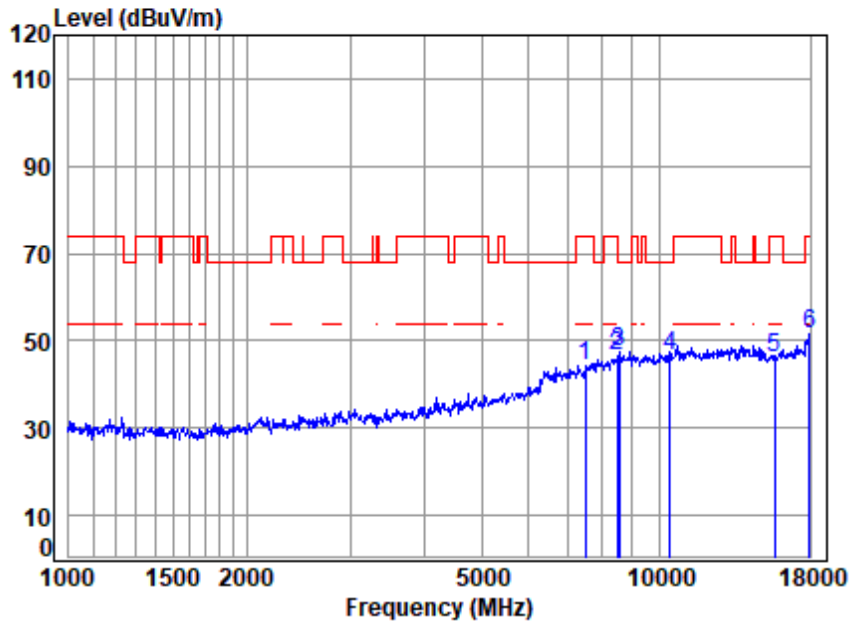

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5220 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7497.646	11.24	36.80	56.30	52.54	44.28	74.00	-29.72 peak
2	8489.882	12.24	38.32	55.46	51.39	46.49	74.00	-27.51 peak
3 pp	8539.102	12.17	38.30	55.41	52.52	47.58	68.20	-20.62 peak
4	10440.000	13.63	39.04	53.84	47.76	46.59	68.20	-21.61 peak
5	15660.000	17.23	38.56	54.10	44.17	45.86	74.00	-28.14 peak
6	17948.050	18.30	43.44	54.49	44.35	51.60	74.00	-22.40 peak



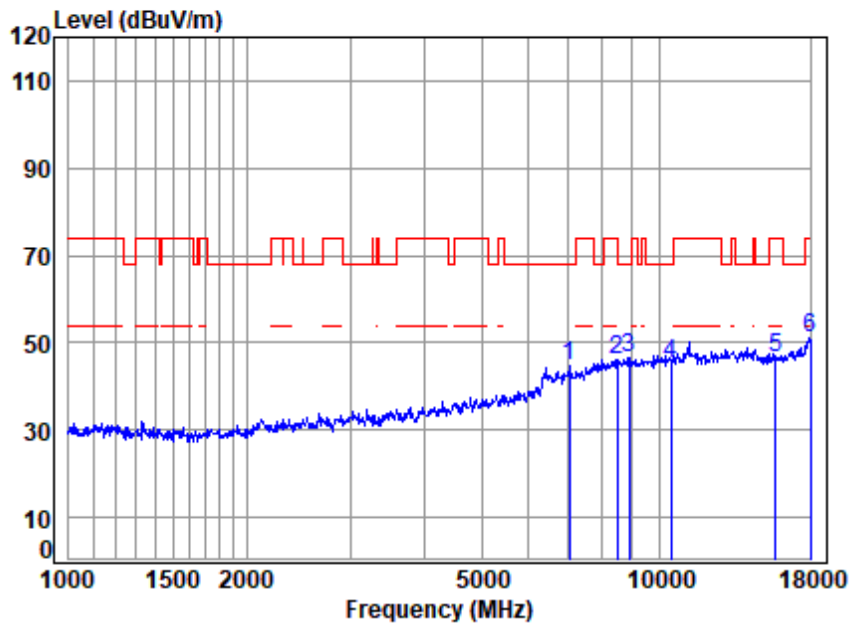

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7056.092	11.72	36.31	56.66	53.17	44.54	68.20	-23.66 peak
2	8489.882	12.24	38.32	55.46	51.11	46.21	74.00	-27.79 peak
3 pp	8891.725	12.22	38.58	55.10	50.97	46.67	68.20	-21.53 peak
4	10480.000	13.64	39.08	53.81	46.14	45.05	68.20	-23.15 peak
5	15720.000	17.22	38.58	54.08	44.80	46.52	74.00	-27.48 peak
6	18000.000	18.35	43.80	54.50	43.59	51.24	74.00	-22.76 peak



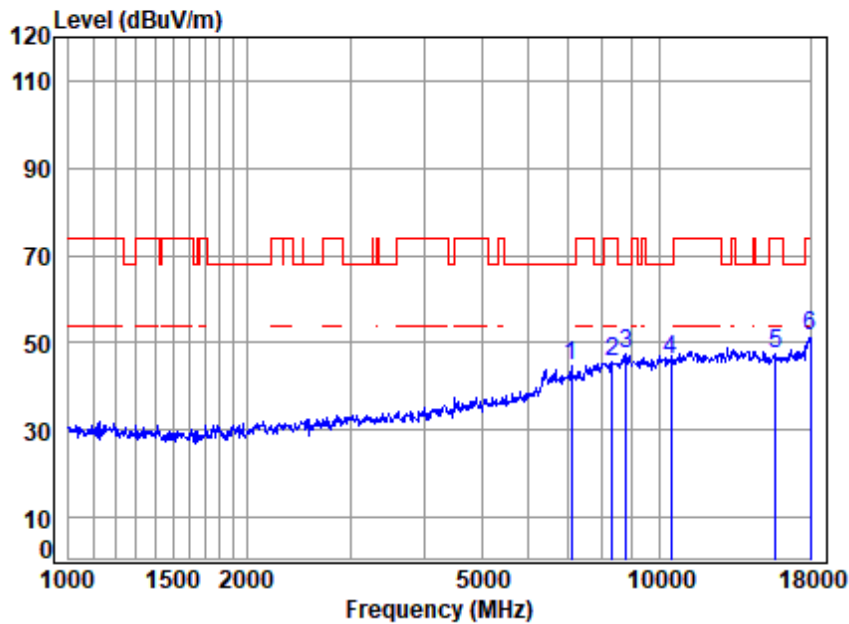

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7096.999	11.97	36.39	56.62	53.01	44.75	68.20	-23.45 peak
2	8319.836	11.73	38.22	55.61	51.37	45.71	74.00	-28.29 peak
3	pp 8789.516	12.23	38.50	55.19	52.01	47.55	68.20	-20.65 peak
4	10480.000	13.64	39.08	53.81	47.39	46.30	68.20	-21.90 peak
5	15720.000	17.22	38.58	54.08	45.70	47.42	74.00	-26.58 peak
6	18000.000	18.35	43.80	54.50	44.08	51.73	74.00	-22.27 peak



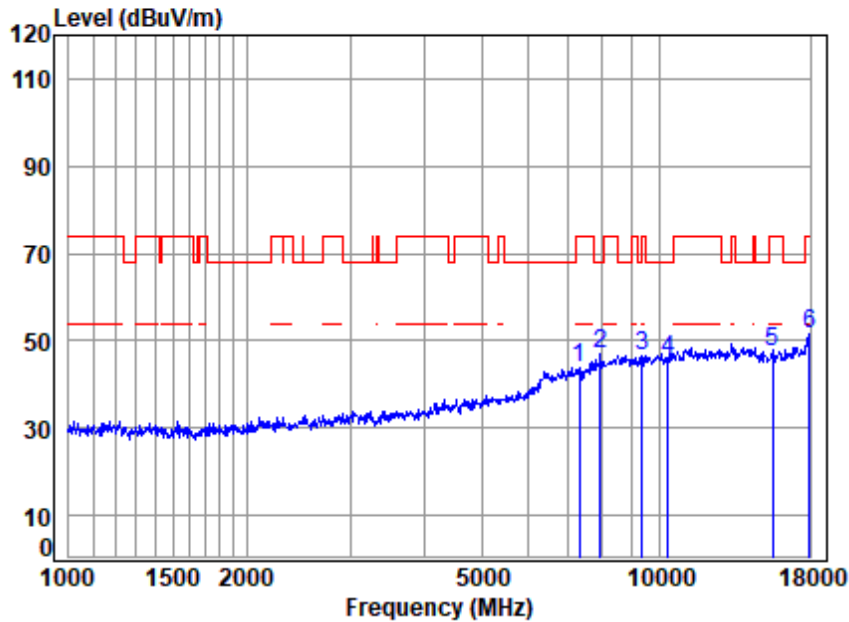

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT

Mode : 5180 TX RSE


: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.44	52.15	43.97	74.00	-30.03 peak
2	pp 7943.838	11.55	37.69	55.94	53.82	47.12	68.20	-21.08 peak
3	9366.577	12.26	38.80	54.67	50.30	46.69	74.00	-27.31 peak
4	10360.000	13.60	39.00	53.88	46.84	45.56	68.20	-22.64 peak
5	15540.000	17.00	38.56	54.14	45.82	47.24	74.00	-26.76 peak
6	17948.050	18.30	43.44	54.49	44.14	51.39	74.00	-22.61 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

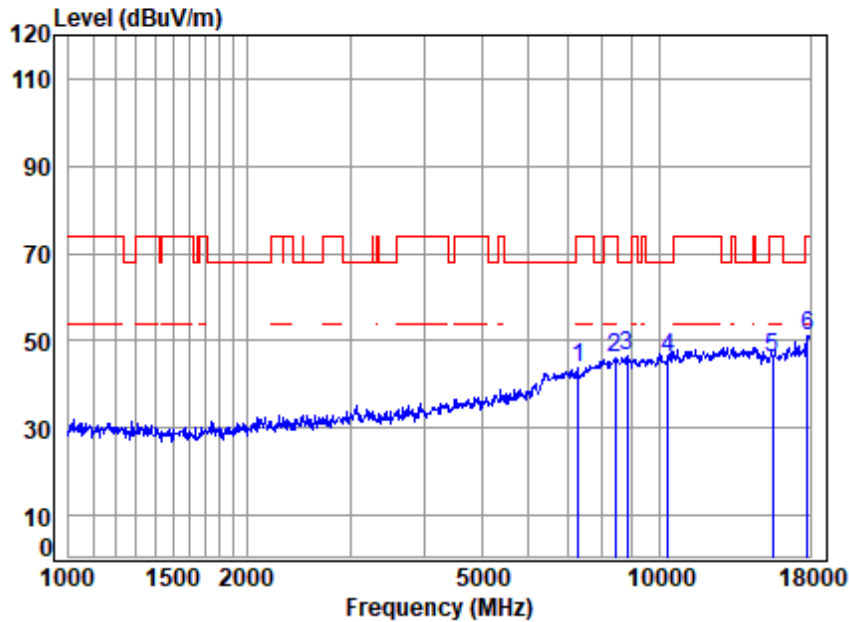

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5180 TX RSE


: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7284.038	11.51	36.67	56.47	52.31	44.02	74.00	-29.98 peak
2	8416.584	11.74	38.53	55.53	51.20	45.94	74.00	-28.06 peak
3 pp	8814.957	12.25	38.50	55.17	50.88	46.46	68.20	-21.74 peak
4	10360.000	13.60	39.00	53.88	47.40	46.12	68.20	-22.08 peak
5	15540.000	17.00	38.56	54.14	44.83	46.25	74.00	-27.75 peak
6	17844.590	18.21	42.77	54.47	44.80	51.31	74.00	-22.69 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

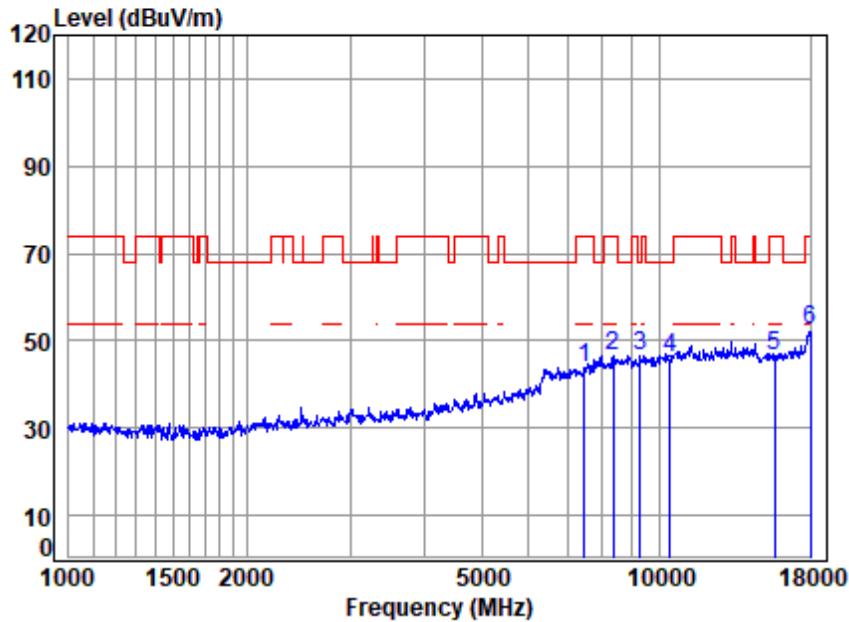

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5220 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7454.429	11.35	36.80	56.34	52.13	43.94	74.00	-30.06 peak
2	8343.918	11.70	38.60	55.59	51.88	46.59	74.00	-27.41 peak
3	9285.710	12.19	38.49	54.74	50.52	46.46	68.20	-21.74 peak
4	10440.000	13.63	39.04	53.84	47.40	46.23	68.20	-21.97 peak
5	15660.000	17.23	38.56	54.10	44.84	46.53	74.00	-27.47 peak
6	pp18000.000	18.35	43.80	54.50	44.88	52.53	74.00	-21.47 peak



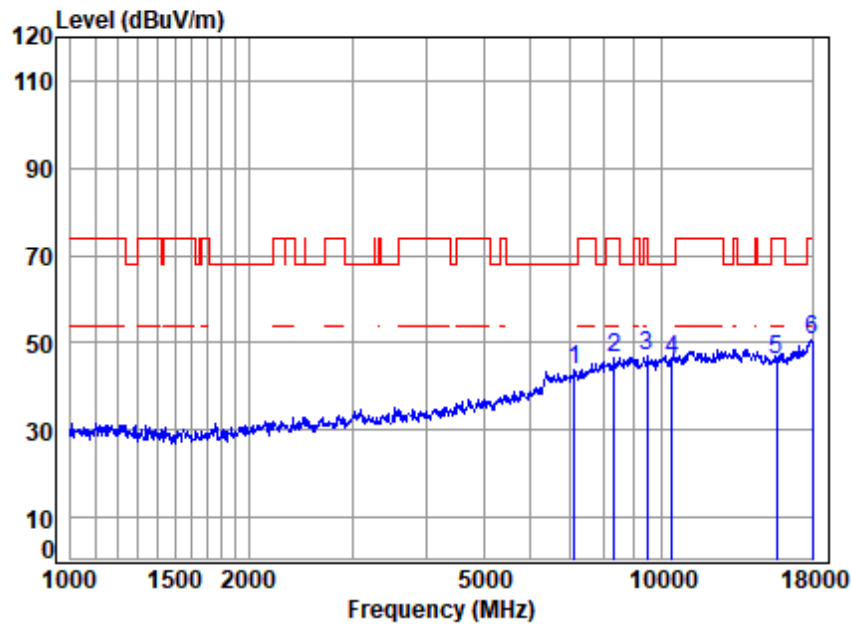

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5220 TX RSE


: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7117.542	11.91	36.44	56.61	52.16	43.90	68.20	-24.30 peak
2	8319.836	11.73	38.22	55.61	52.09	46.43	74.00	-27.57 peak
3	9448.149	12.43	38.80	54.60	50.31	46.94	74.00	-27.06 peak
4	pp10440.000	13.63	39.04	53.84	47.08	45.91	68.20	-22.29 peak
5	15660.000	17.23	38.56	54.10	44.59	46.28	74.00	-27.72 peak
6	18000.000	18.35	43.80	54.50	43.13	50.78	74.00	-23.22 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

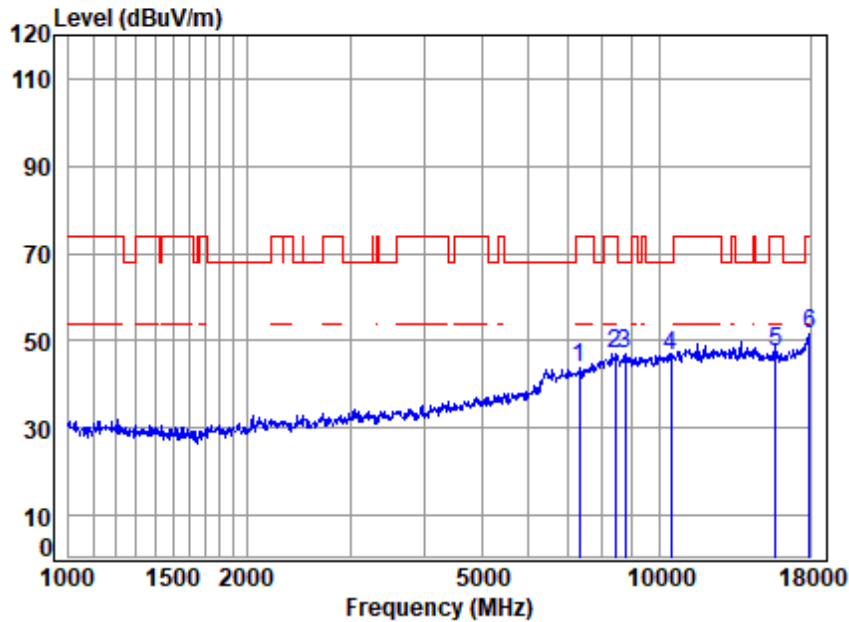


Condition: 3m HORIZONTAL
Job No : 01687AT/01688AT
Mode : 5240 TX RSE
: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.44	51.89	43.71	74.00	-30.29 peak
2	8416.584	11.74	38.53	55.53	52.47	47.21	74.00	-26.79 peak
3 pp	8738.852	12.15	38.52	55.24	51.46	46.89	68.20	-21.31 peak
4	10480.000	13.64	39.08	53.81	47.83	46.74	68.20	-21.46 peak
5	15720.000	17.22	38.58	54.08	45.53	47.25	74.00	-26.75 peak
6	17948.050	18.30	43.44	54.49	44.17	51.42	74.00	-22.58 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

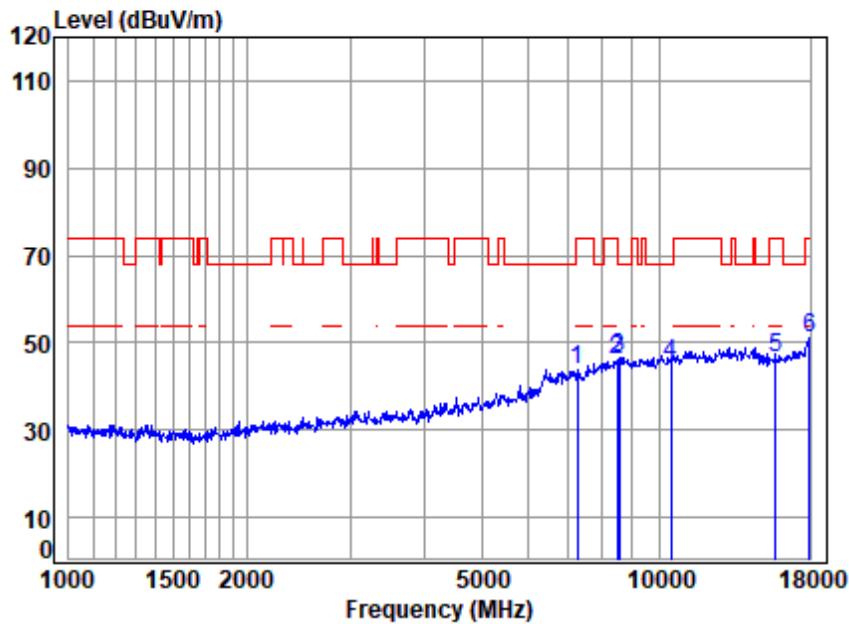

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5240 TX RSE


: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7263.015	11.51	36.63	56.49	52.01	43.66	74.00	-30.34 peak
2	8489.882	12.24	38.32	55.46	51.17	46.27	74.00	-27.73 peak
3 pp	8563.818	12.09	38.36	55.39	51.60	46.66	68.20	-21.54 peak
4	10480.000	13.64	39.08	53.81	46.48	45.39	68.20	-22.81 peak
5	15720.000	17.22	38.58	54.08	44.62	46.34	74.00	-27.66 peak
6	17948.050	18.30	43.44	54.49	43.99	51.24	74.00	-22.76 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

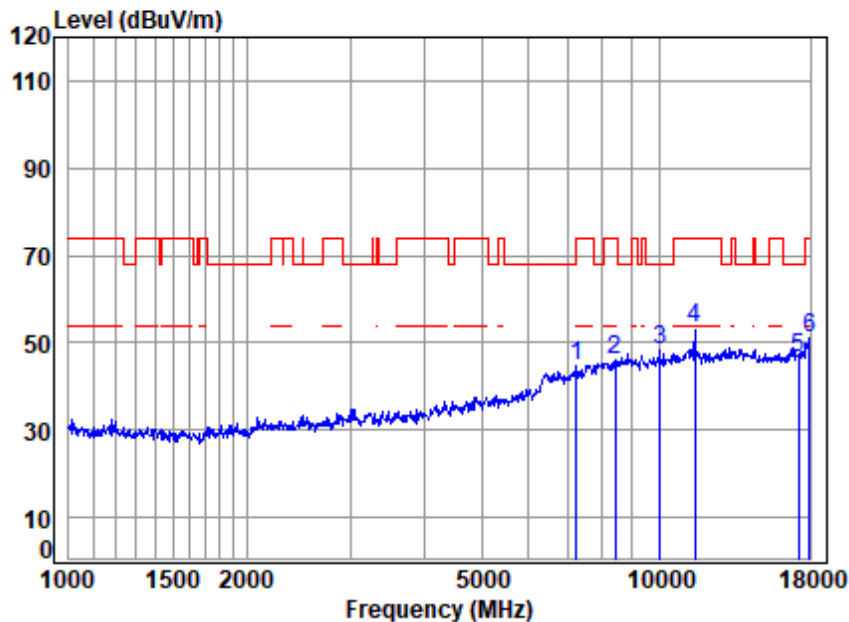

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5745 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7242.052	11.52	36.60	56.51	53.09	44.70	68.20	-23.50 peak
2	8416.584	11.74	38.53	55.53	51.37	46.11	74.00	-27.89 peak
3	pp10010.420	13.04	38.92	54.09	50.44	48.31	68.20	-19.89 peak
4	11490.000	14.97	39.61	53.65	52.53	53.46	74.00	-20.54 peak
5	17235.000	17.83	40.01	54.35	42.83	46.32	68.20	-21.88 peak
6	17948.050	18.30	43.44	54.49	43.95	51.20	74.00	-22.80 peak



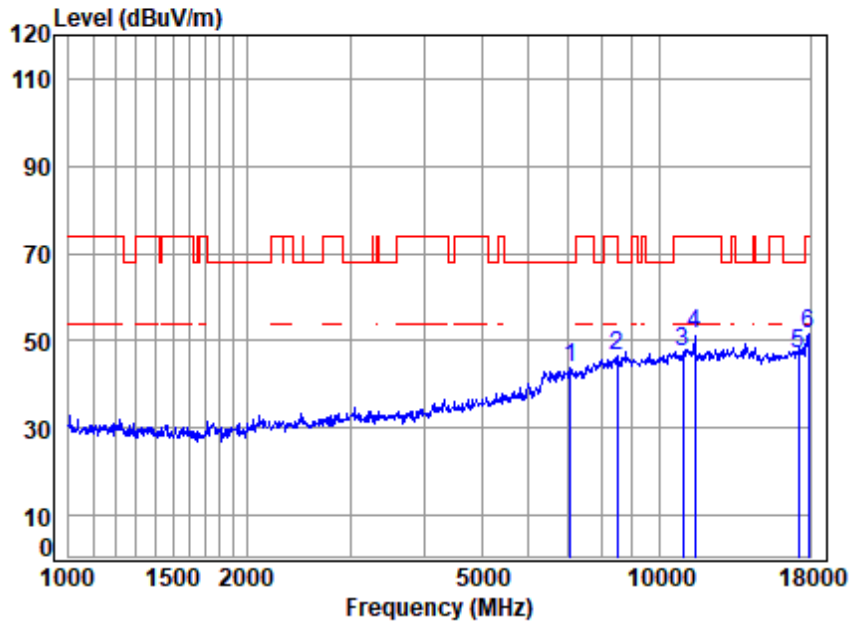

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5745 TX RSE


: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7076.516	11.85	36.35	56.64	52.46	44.02	68.20	-24.18 peak
2	8489.882	12.24	38.32	55.46	51.24	46.34	74.00	-27.66 peak
3	10948.780	14.06	39.35	53.53	47.64	47.52	74.00	-26.48 peak
4	11490.000	14.97	39.61	53.65	50.73	51.66	74.00	-22.34 peak
5	pp17235.000	17.83	40.01	54.35	43.70	47.19	68.20	-21.01 peak
6	17896.250	18.25	43.08	54.48	44.77	51.62	74.00	-22.38 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

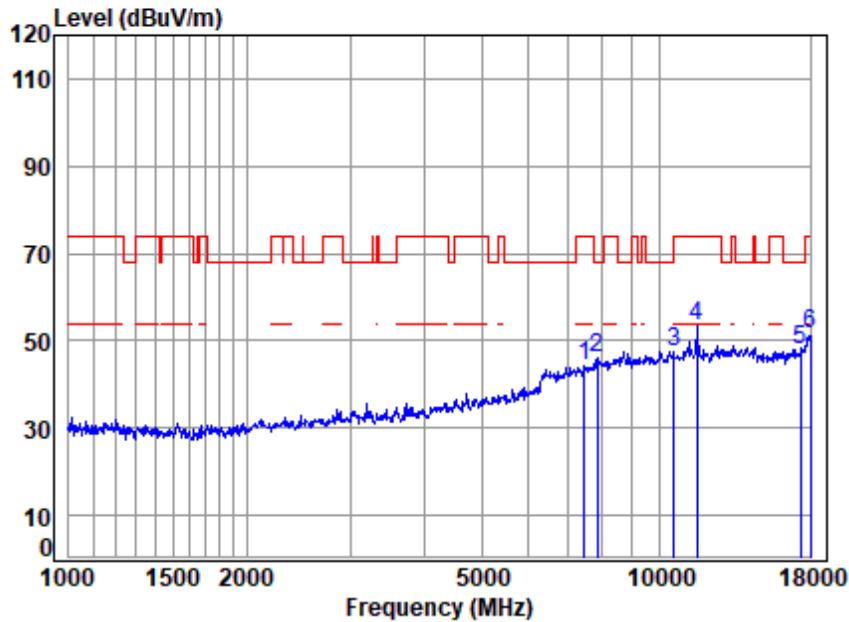

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5785 TX RSE

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7454.429	11.35	36.80	56.34	52.22	44.03	74.00	-29.97	peak
2	7852.524	11.43	37.41	56.02	53.15	45.97	68.20	-22.23	peak
3	10575.540	13.60	39.25	53.75	48.51	47.61	68.20	-20.59	peak
4	11570.000	14.78	39.60	53.67	52.63	53.34	74.00	-20.66	peak
5	pp17355.000	17.93	40.31	54.37	44.10	47.97	68.20	-20.23	peak
6	18000.000	18.35	43.80	54.50	43.75	51.40	74.00	-22.60	peak



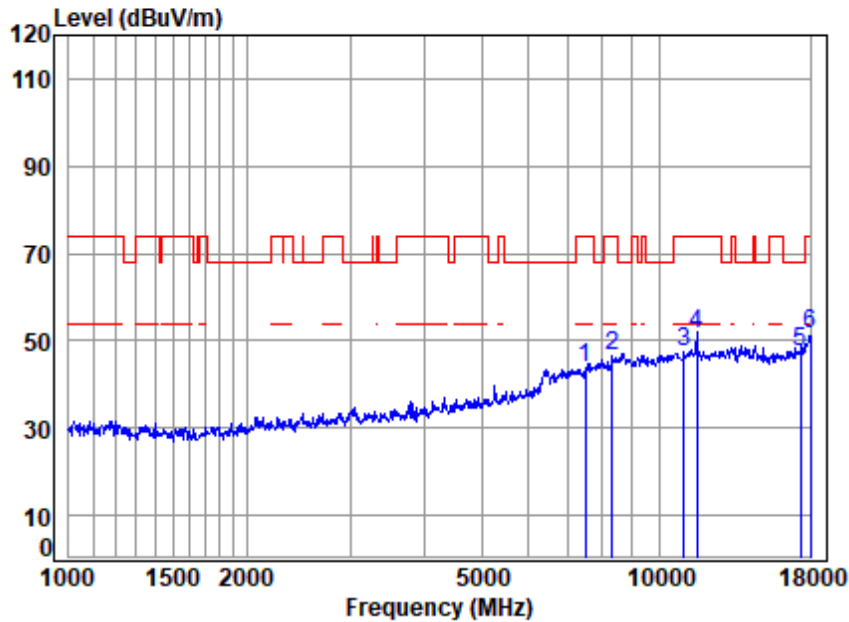

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5785 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7497.646	11.24	36.80	56.30	52.19	43.93	74.00	-30.07 peak
2	8319.836	11.73	38.22	55.61	52.27	46.61	74.00	-27.39 peak
3	11012.250	14.23	39.41	53.50	47.54	47.68	74.00	-26.32 peak
4	11570.000	14.78	39.60	53.67	50.78	51.49	74.00	-22.51 peak
5	pp17355.000	17.93	40.31	54.37	43.80	47.67	68.20	-20.53 peak
6	18000.000	18.35	43.80	54.50	43.95	51.60	74.00	-22.40 peak



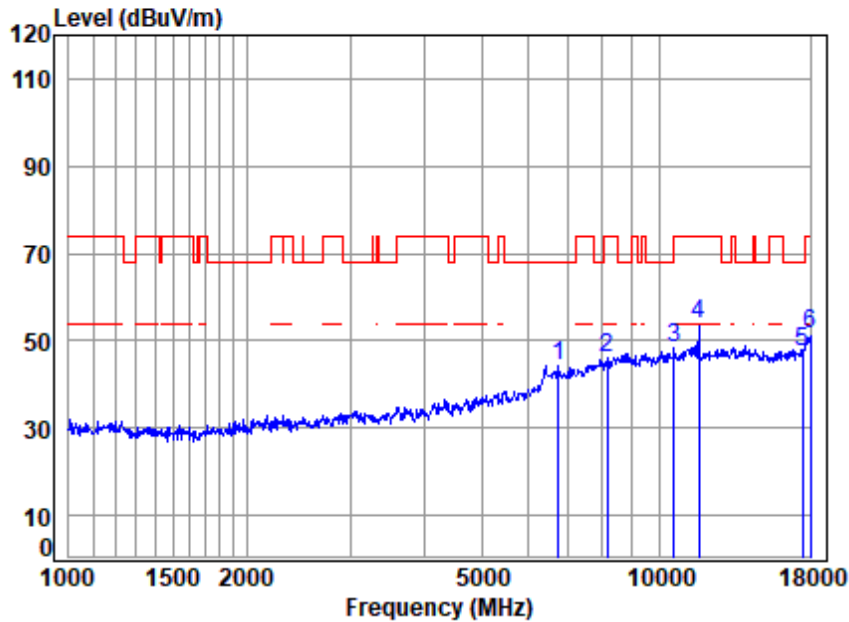

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5825 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6756.708	11.39	35.73	56.75	53.98	44.35	68.20	-23.85 peak
2	8153.195	11.51	37.91	55.76	52.61	46.27	74.00	-27.73 peak
3	10606.150	13.62	39.31	53.74	49.05	48.24	74.00	-25.76 peak
4	pp11650.000	14.70	39.55	53.69	53.36	53.92	74.00	-20.08 peak
5	17475.000	18.02	40.78	54.40	42.96	47.36	68.20	-20.84 peak
6	18000.000	18.35	43.80	54.50	43.87	51.52	74.00	-22.48 peak



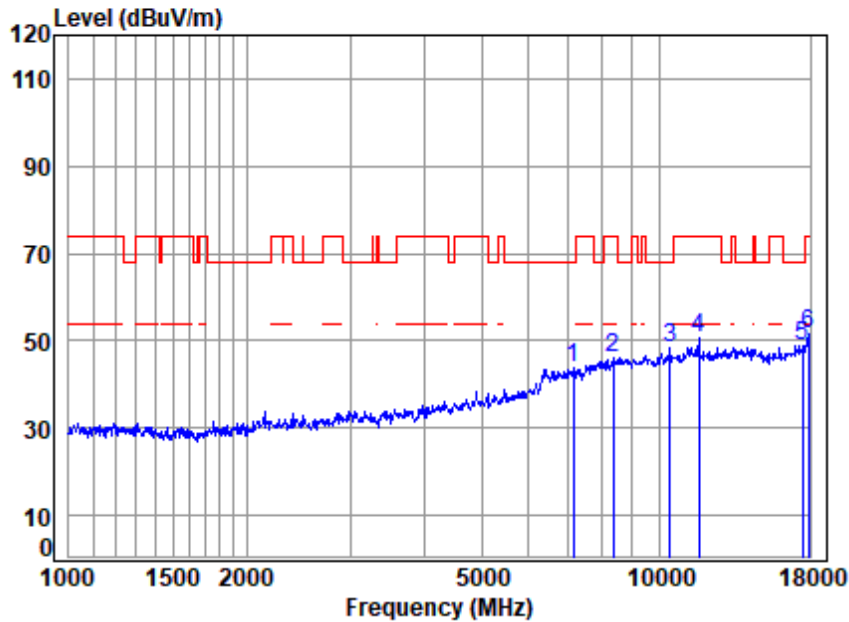

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5825 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7158.806	11.71	36.52	56.57	52.19	43.85	68.20 -24.35 peak
2	8368.069	11.67	38.66	55.57	51.42	46.18	74.00 -27.82 peak
3	10423.800	13.62	39.02	53.85	49.79	48.58	68.20 -19.62 peak
4	11650.000	14.70	39.55	53.69	50.04	50.60	74.00 -23.40 peak
5	pp17475.000	18.02	40.78	54.40	44.29	48.69	68.20 -19.51 peak
6	17896.250	18.25	43.08	54.48	44.72	51.57	74.00 -22.43 peak



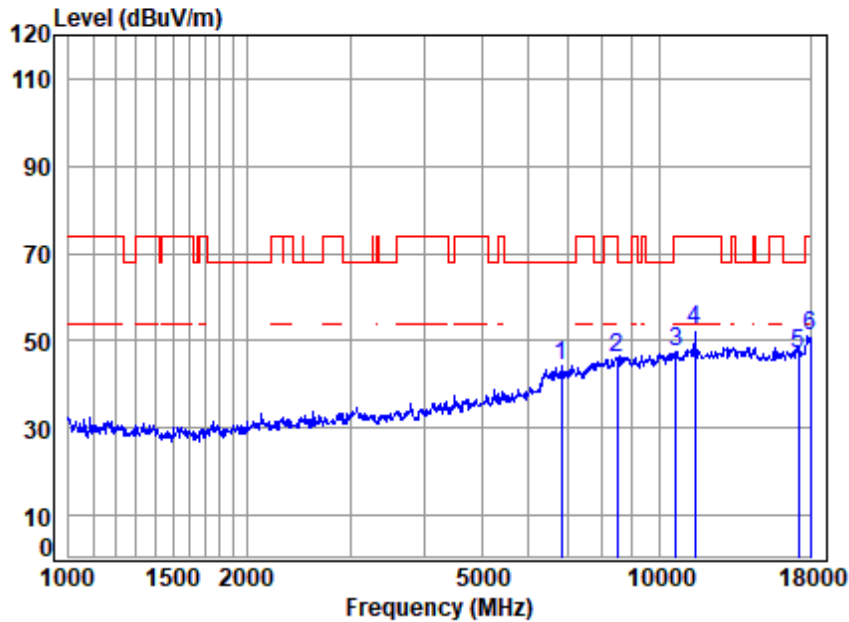

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5745 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6815.551	11.37	35.93	56.74	53.89	44.45	68.20	-23.75 peak
2	8489.882	12.24	38.32	55.46	51.12	46.22	74.00	-27.78 peak
3	10667.640	13.89	39.37	53.70	48.01	47.57	74.00	-26.43 peak
4	11490.000	14.97	39.61	53.65	51.46	52.39	74.00	-21.61 peak
5	pp17235.000	17.83	40.01	54.35	43.68	47.17	68.20	-21.03 peak
6	18000.000	18.35	43.80	54.50	43.47	51.12	74.00	-22.88 peak



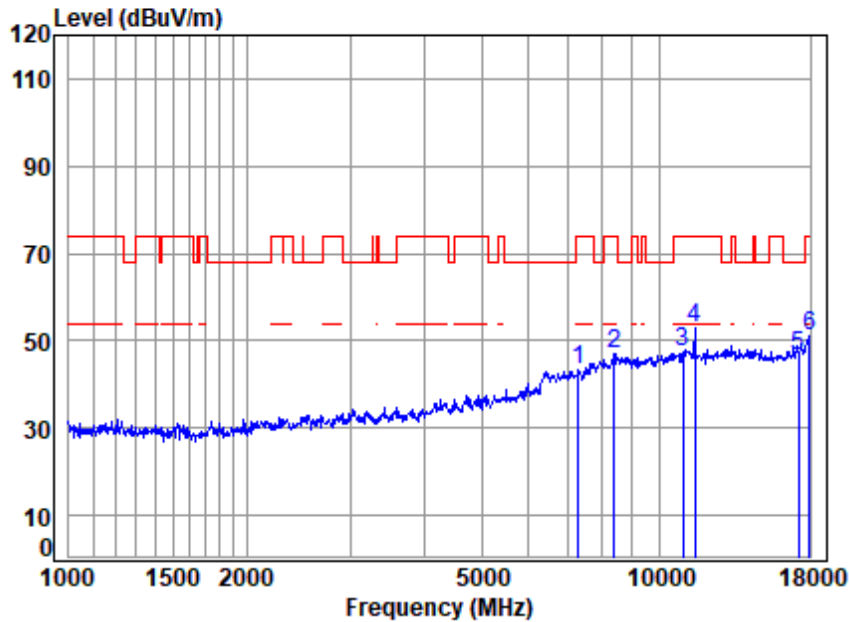

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5745 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	51.75	43.51	74.00	-30.49 peak
2	8392.292	11.64	38.62	55.55	52.14	46.85	74.00	-27.15 peak
3	10980.470	14.13	39.38	53.51	47.30	47.30	74.00	-26.70 peak
4	pp11490.000	14.97	39.61	53.65	52.08	53.01	74.00	-20.99 peak
5	17235.000	17.83	40.01	54.35	43.13	46.62	68.20	-21.58 peak
6	17948.050	18.30	43.44	54.49	43.78	51.03	74.00	-22.97 peak



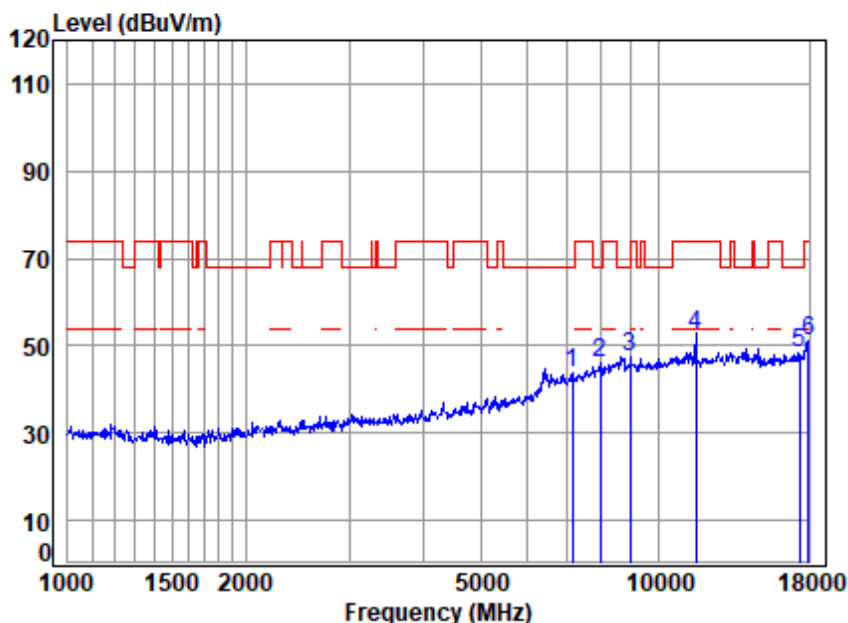

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5785 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	11.71	36.52	56.57	52.14	43.80	68.20	-24.40	peak
2	11.56	37.78	55.91	52.86	46.29	68.20	-21.91	peak
3	12.17	38.54	55.03	51.89	47.57	68.20	-20.63	peak
4	14.78	39.60	53.67	51.77	52.48	74.00	-21.52	peak
5	17.93	40.31	54.37	44.65	48.52	68.20	-19.68	peak
6	18.30	43.44	54.49	43.90	51.15	74.00	-22.85	peak



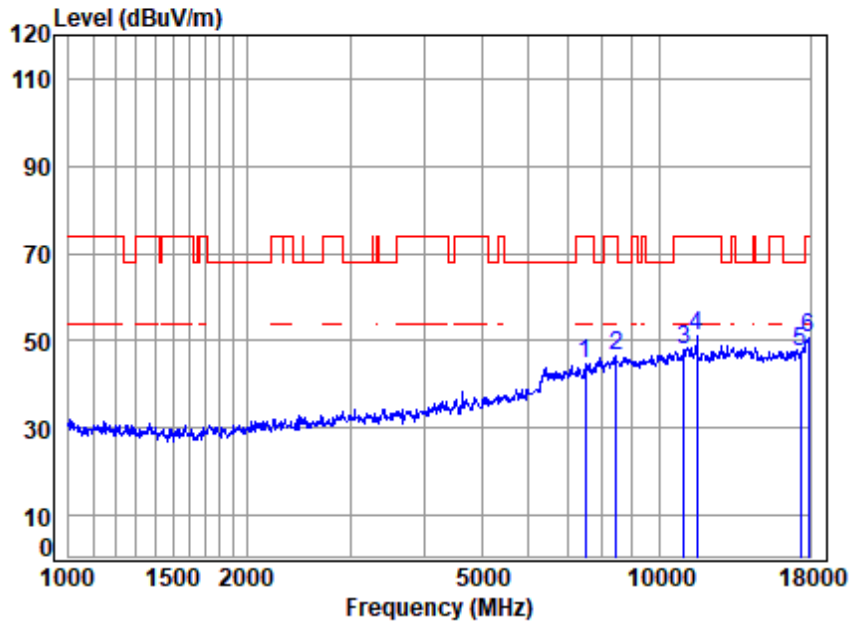

Condition: 3m VERTICAL


Job No : 01687AT/01688AT

Mode : 5785 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7497.646	11.24	36.80	56.30	52.75	44.49	74.00	-29.51 peak
2	8440.945	11.91	38.44	55.50	51.66	46.51	74.00	-27.49 peak
3	11012.250	14.23	39.41	53.50	47.67	47.81	74.00	-26.19 peak
4	11570.000	14.78	39.60	53.67	50.40	51.11	74.00	-22.89 peak
5	pp17355.000	17.93	40.31	54.37	43.68	47.55	68.20	-20.65 peak
6	17896.250	18.25	43.08	54.48	44.00	50.85	74.00	-23.15 peak



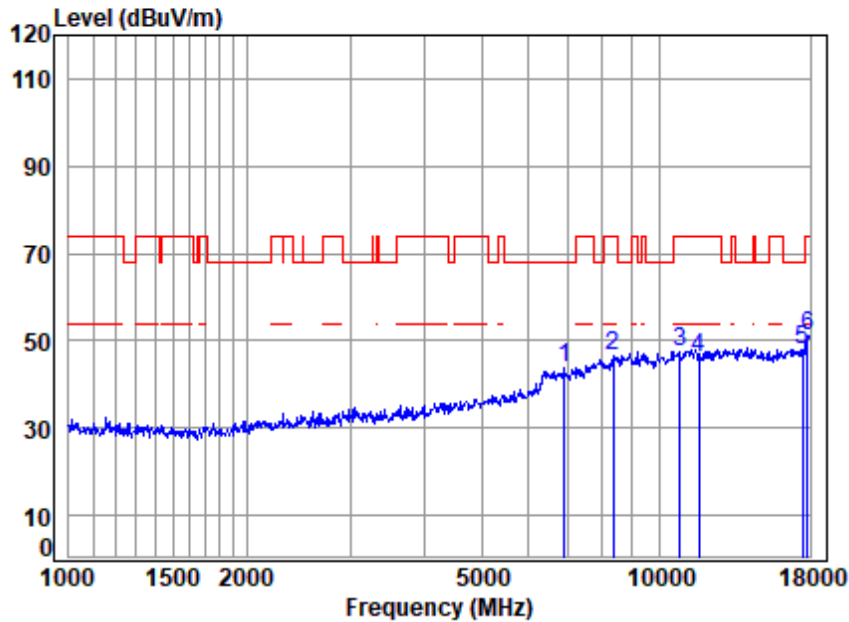

Condition: 3m HORIZONTAL


Job No : 01687AT/01688AT

Mode : 5825 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6914.763	11.37	36.17	56.72	53.03	43.85	68.20	-24.35 peak
2	8343.918	11.70	38.60	55.59	51.88	46.59	74.00	-27.41 peak
3	10822.920	13.74	39.30	53.61	48.25	47.68	74.00	-26.32 peak
4	11650.000	14.70	39.55	53.69	45.72	46.28	74.00	-27.72 peak
5	pp17475.000	18.02	40.78	54.40	43.52	47.92	68.20	-20.28 peak
6	17844.590	18.21	42.77	54.47	44.58	51.09	74.00	-22.91 peak



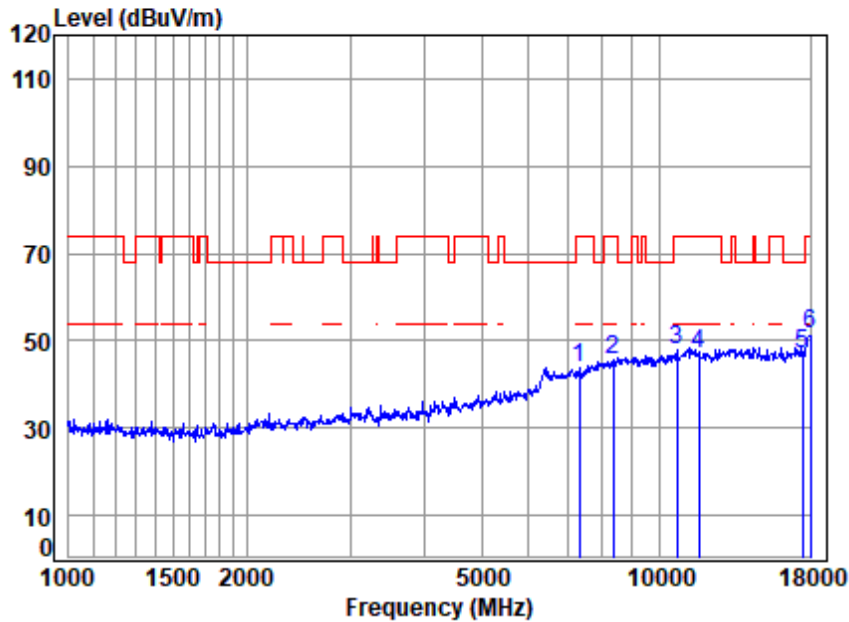

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5825 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.44	51.87	43.69	74.00	-30.31 peak
2	8343.918	11.70	38.60	55.59	51.14	45.85	74.00	-28.15 peak
3	10729.480	13.93	39.37	53.66	48.30	47.94	74.00	-26.06 peak
4	11650.000	14.70	39.55	53.69	46.44	47.00	74.00	-27.00 peak
5	pp17475.000	18.02	40.78	54.40	42.43	46.83	68.20	-21.37 peak
6	18000.000	18.35	43.80	54.50	43.73	51.38	74.00	-22.62 peak



7.5 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10-2020 Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 50.8 % RH

Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.5.3 Test Setup Diagram

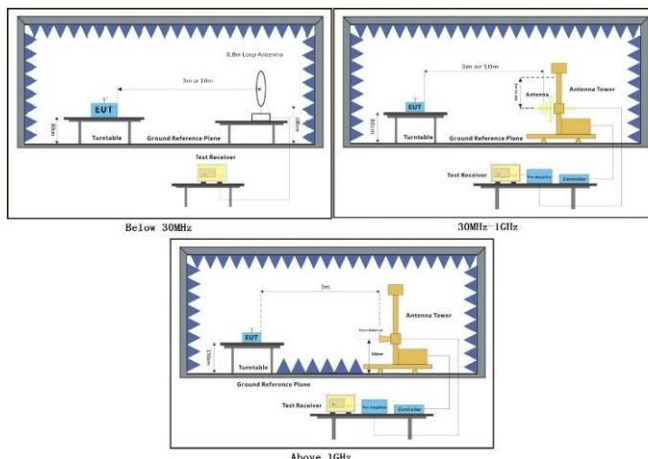

7.5.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



11a_TX_CH_36_Horizontal-Peak

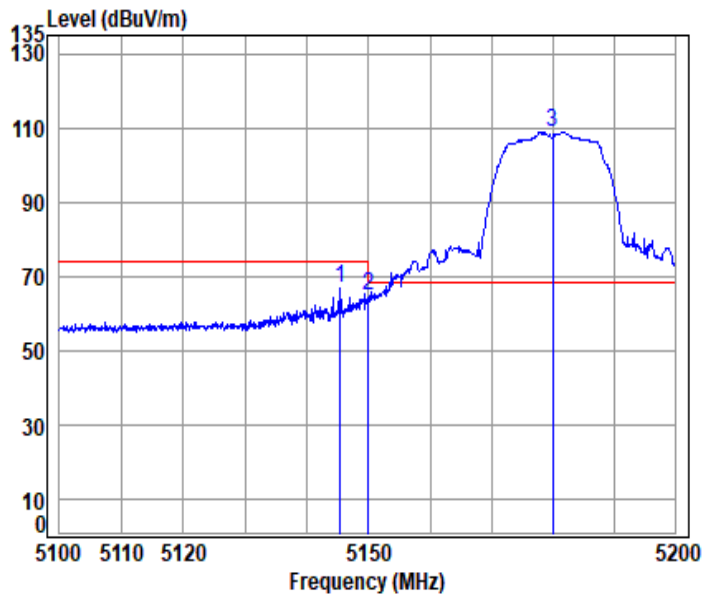

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT

Mode : 5180 Band edge

: 5G Wi-Fi 11a


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.459	10.12	32.39	30.84	55.25	66.92	74.00	-7.08	peak
2	5149.980	10.14	32.40	30.84	52.87	64.57	74.00	-9.43	peak
3 pp	5180.000	10.25	32.46	30.83	97.06	108.94	68.20	40.74	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

11a_TX_CH_36_Horizontal-Avg

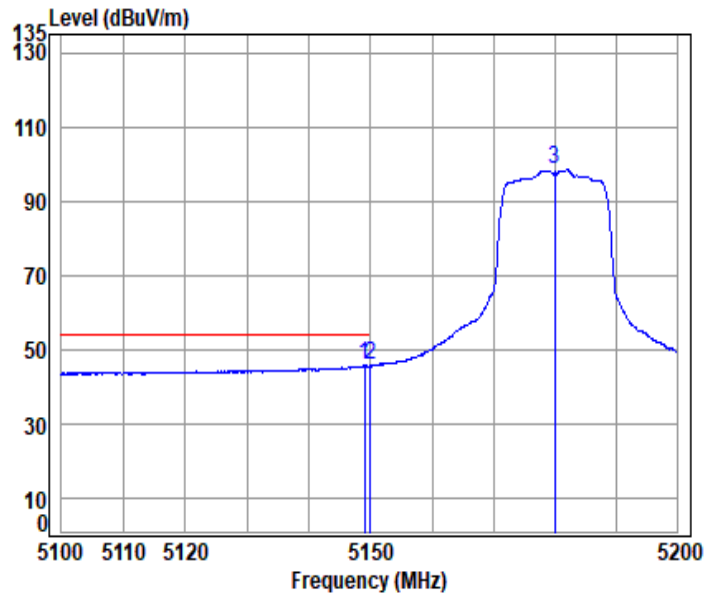

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.057	10.14	32.40	30.84	33.82	45.52	54.00	-8.48 Average
2	pp 5149.980	10.14	32.40	30.84	34.02	45.72	54.00	-8.28 Average
3	5180.000	10.25	32.46	30.83	86.49	98.37	-----	----- Average



11a_TX_CH_36_Verical-Peak

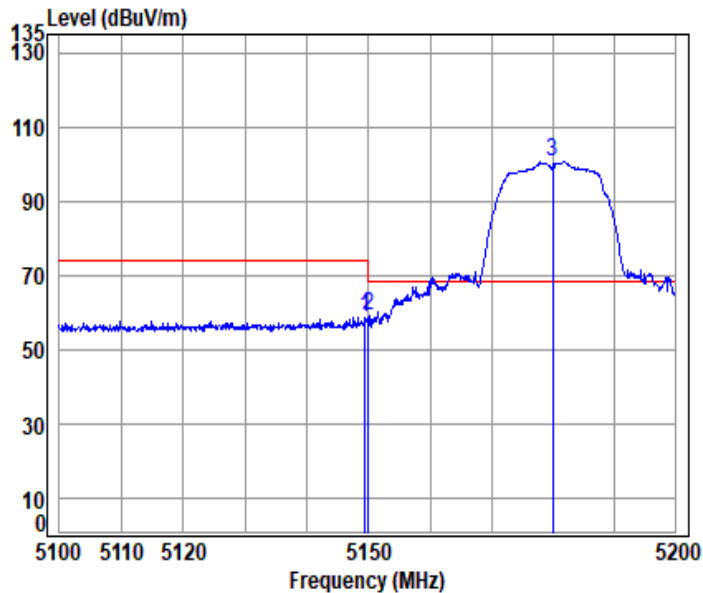

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.357	10.14	32.40	30.84	46.93	58.63	74.00	-15.37	peak
2	5149.980	10.14	32.40	30.84	47.42	59.12	74.00	-14.88	peak
3	pp 5180.000	10.25	32.46	30.83	88.70	100.58	68.20	32.38	peak



11a_TX_CH_36_Verical-Avg

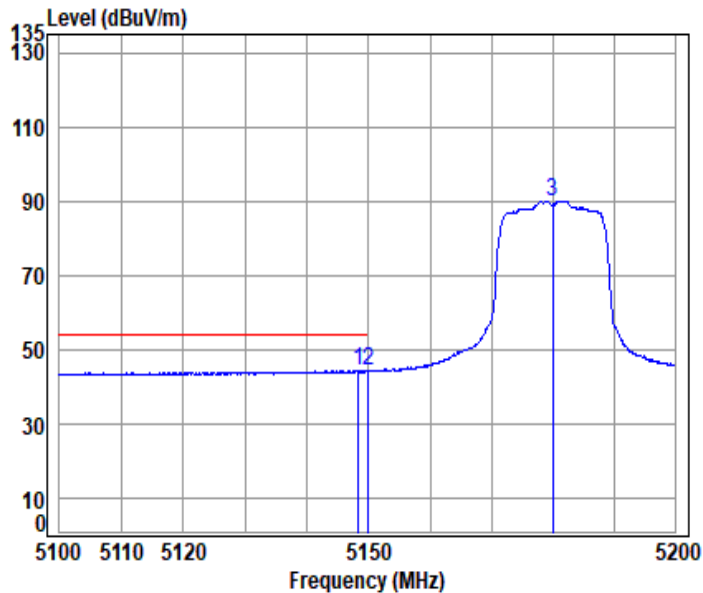

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.357	10.13	32.40	30.84	32.45	44.14	54.00	-9.86 Average
2	5149.980	10.14	32.40	30.84	32.54	44.24	54.00	-9.76 Average
3	5180.000	10.25	32.46	30.83	78.17	90.05	-----	----- Average



11n_HT(20M)_TX_CH_36_Horizontal-Peak

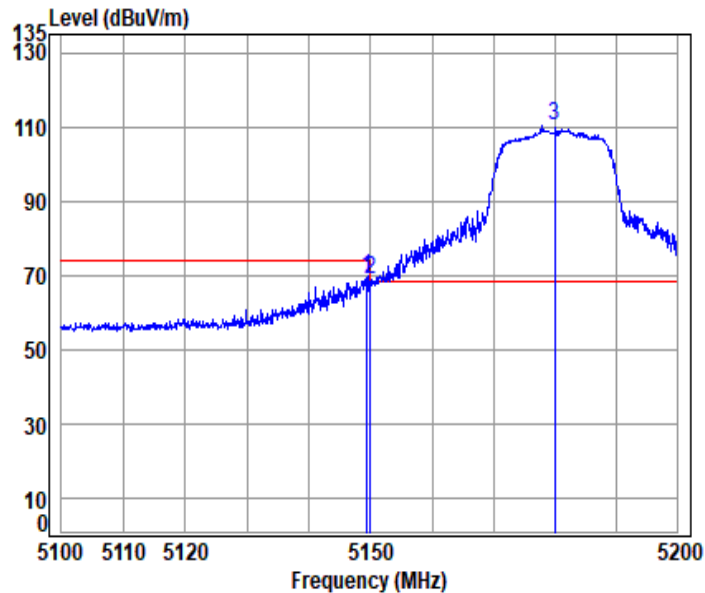

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.458	10.14	32.40	30.84	57.40	69.10	74.00 -4.90 peak
2	5149.980	10.14	32.40	30.84	57.11	68.81	74.00 -5.19 peak
3 pp	5180.000	10.25	32.46	30.83	98.50	110.38	68.20 42.18 peak



11n_HT(20M)_TX_CH_36_Horizontal-Avg

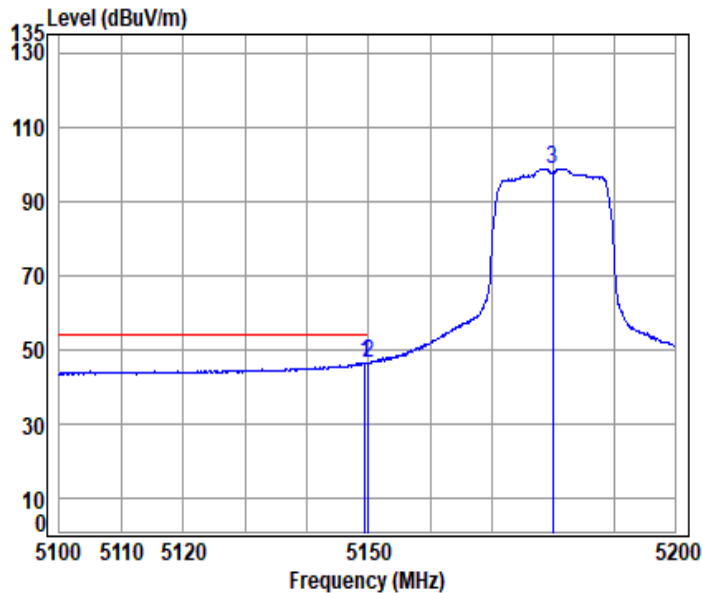

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.458	10.14	32.40	30.84	34.56	46.26	54.00	-7.74 Average
2 pp	5149.980	10.14	32.40	30.84	34.69	46.39	54.00	-7.61 Average
3	5180.000	10.25	32.46	30.83	86.93	98.81	-----	----- Average



11n_HT(20M)_TX_CH_36_Verical-Peak

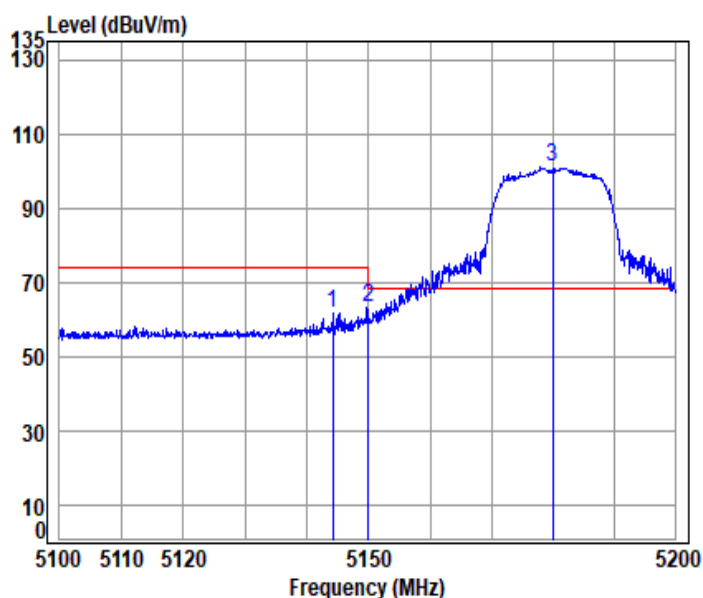

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.161	10.12	32.39	30.84	49.89	61.56	74.00	-12.44	peak
2	5149.980	10.14	32.40	30.84	51.46	63.16	74.00	-10.84	peak
3	5180.000	10.25	32.46	30.83	89.36	101.24	68.20	33.04	peak



11n_HT(20M)_TX_CH_36_Vertical-Avg

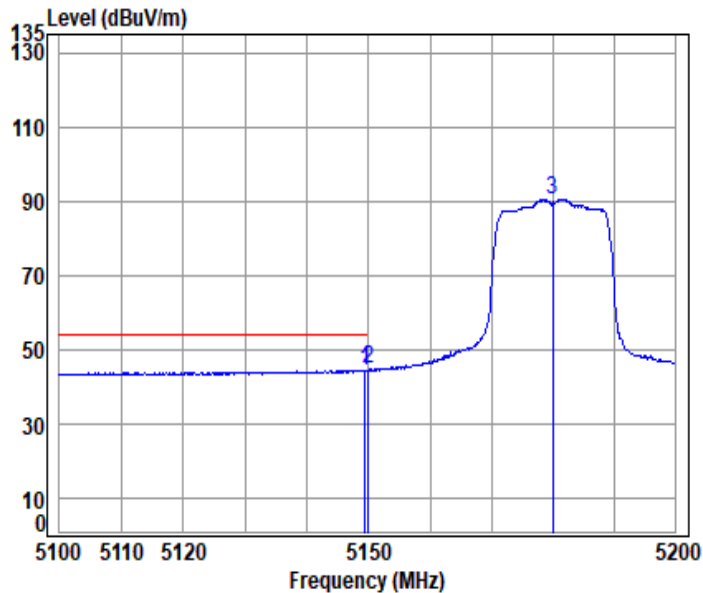

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.357	10.14	32.40	30.84	32.65	44.35	54.00	-9.65 Average
2 pp	5149.980	10.14	32.40	30.84	32.75	44.45	54.00	-9.55 Average
3	5180.000	10.25	32.46	30.83	78.53	90.41	-----	----- Average



11n_HT(40M)_TX_CH_38_Horizontal-Peak

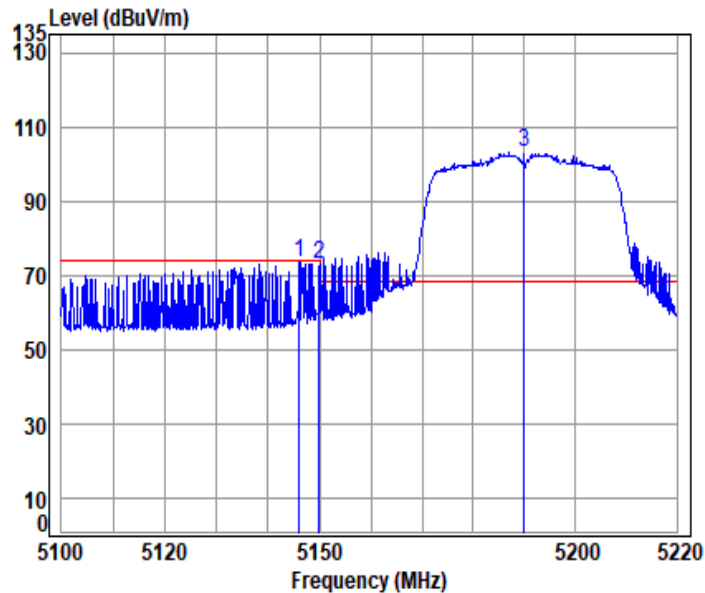

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5146.109	10.13	32.39	30.84	61.70	73.38	74.00 -0.62 peak
2	5149.980	10.14	32.40	30.84	61.32	73.02	74.00 -0.98 peak
3	pp 5190.000	10.29	32.48	30.82	91.11	103.06	68.20 34.86 peak



11n_HT(40M)_TX_CH_38_Horizontal-Avg

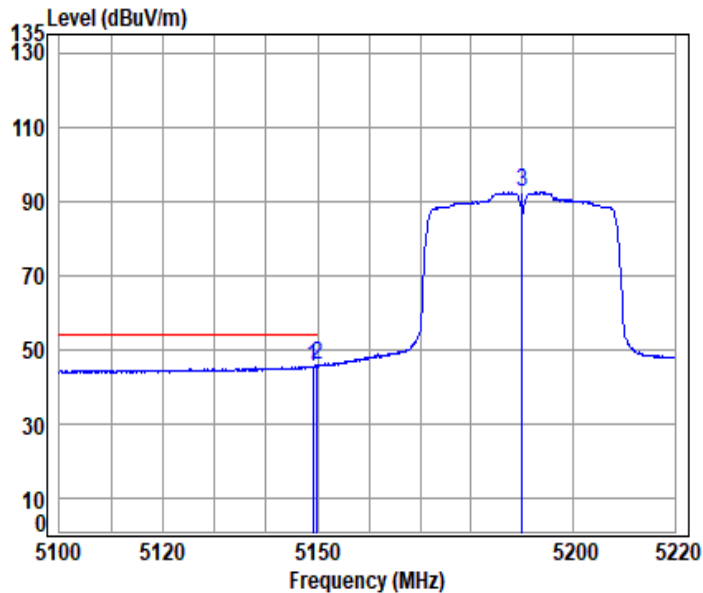

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT

Mode : 5190 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.102	10.14	32.40	30.84	33.72	45.42	54.00	-8.58 Average
2 pp	5149.980	10.14	32.40	30.84	33.87	45.57	54.00	-8.43 Average
3	5190.000	10.29	32.48	30.82	80.42	92.37	-----	----- Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

11n_HT(40M)_TX_CH_38_Verical-Peak

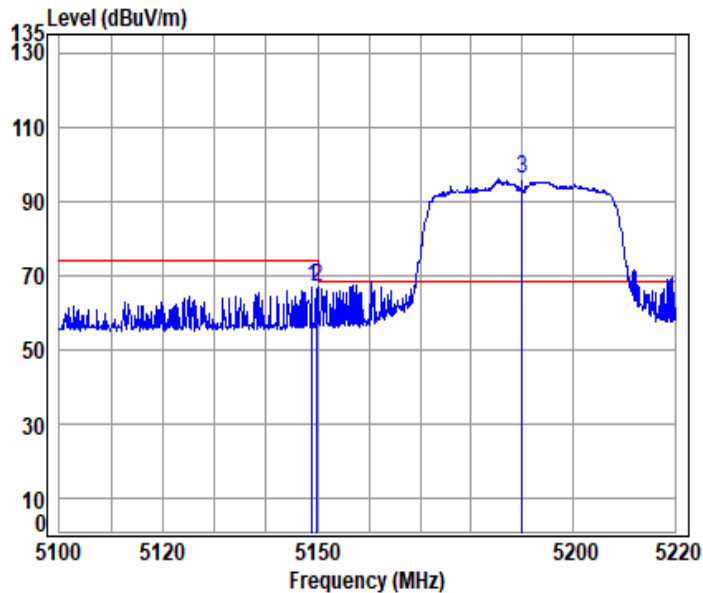

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.863	10.14	32.40	30.84	55.15	66.85	74.00	-7.15 peak
2	5149.980	10.14	32.40	30.84	54.98	66.68	74.00	-7.32 peak
3 pp	5190.000	10.29	32.48	30.82	83.87	95.82	68.20	27.62 peak



11n_HT(40M)_TX_CH_38_Verical-Avg

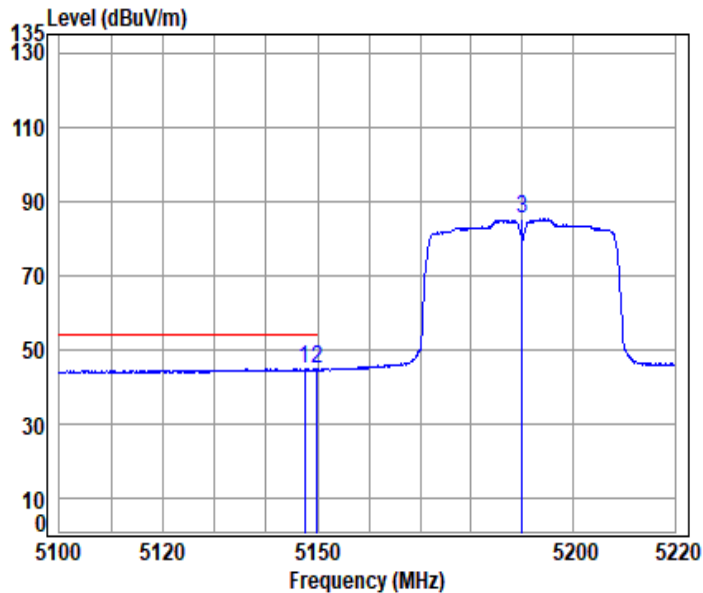

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5147.545	10.13	32.40	30.84	33.01	44.70	54.00	-9.30 Average
2	5149.980	10.14	32.40	30.84	32.79	44.49	54.00	-9.51 Average
3	5190.000	10.29	32.48	30.82	73.06	85.01	-----	----- Average



11n_HT(40M)_TX_CH_46_Horizontal-Peak

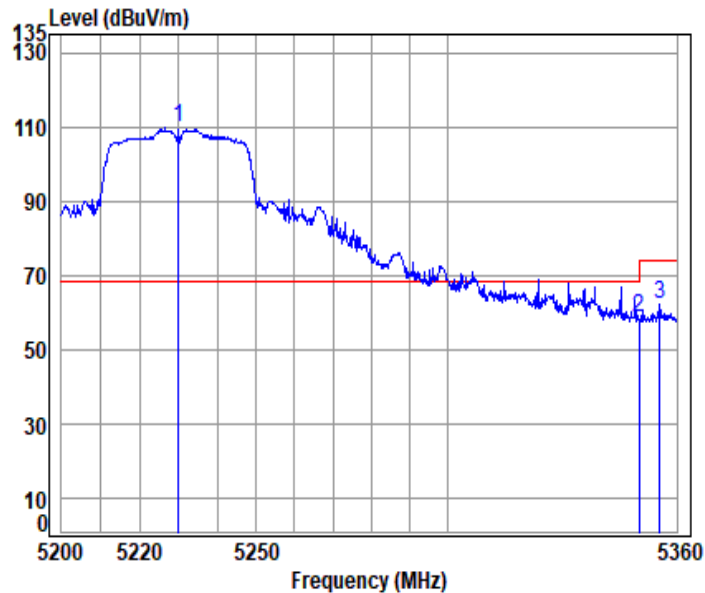

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT

Mode : 5230 Band edge

: 5G Wi-Fi 11n40


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5230.000	10.31	32.56	30.81	97.91	109.97	68.20	41.77	peak
2	5350.020	10.45	32.80	30.76	46.19	58.68	74.00	-15.32	peak
3	5355.454	10.47	32.80	30.76	49.59	62.10	74.00	-11.90	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

11n_HT(40M)_TX_CH_46_Horizontal-Avg

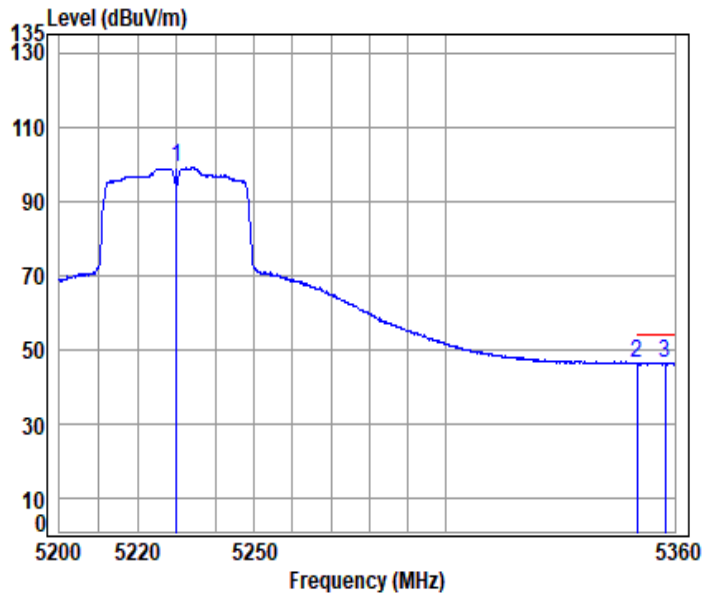

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5230 Band edge

: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5230.000	10.31	32.56	30.81	86.96	99.02	-----	----- Average
2 5350.020	10.45	32.80	30.76	33.67	46.16	54.00	-7.84 Average
3 pp 5357.402	10.48	32.80	30.76	33.80	46.32	54.00	-7.68 Average



11n_HT(40M)_TX_CH_46_Verical-Peak

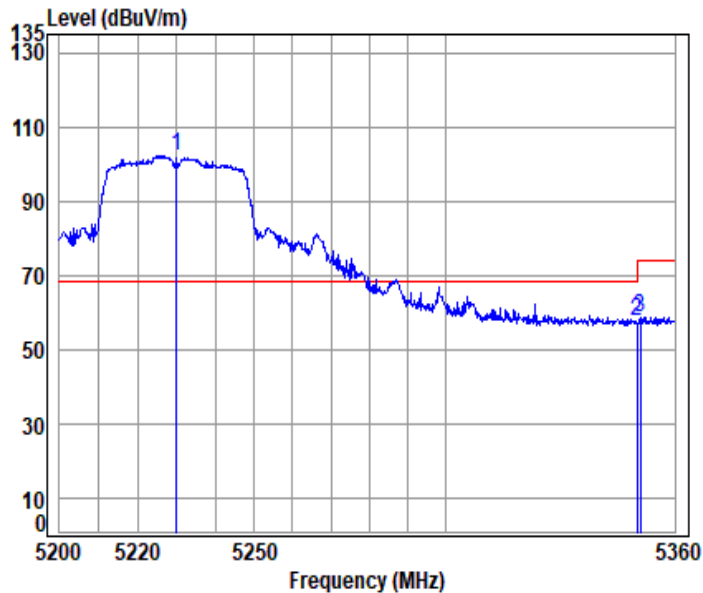

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5230 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5230.000	10.31	32.56	30.81	90.25	102.31	68.20	34.11	peak
2	5350.020	10.45	32.80	30.76	44.81	57.30	74.00	-16.70	peak
3	5350.911	10.45	32.80	30.76	46.16	58.65	74.00	-15.35	peak



11n_HT(40M)_TX_CH_46_Verical-Avg

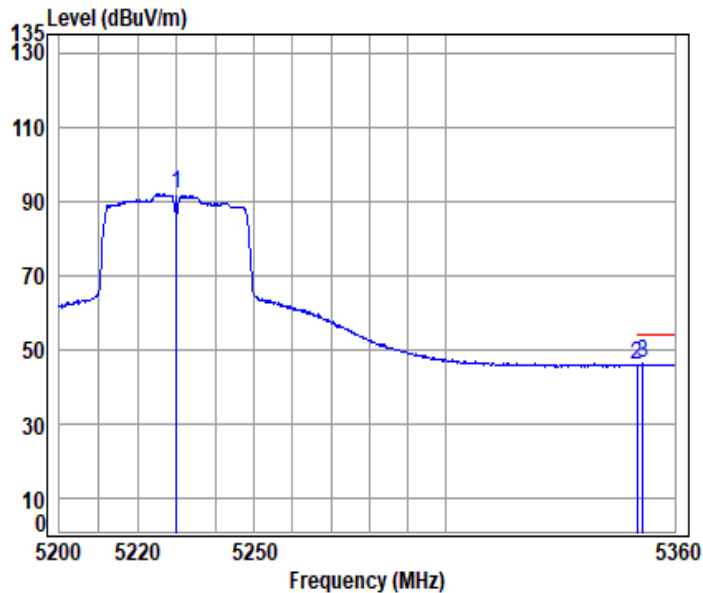

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5230 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	10.31	32.56	30.81	79.68	91.74	-----	-----	Average
2	5350.020	10.45	32.80	30.76	33.31	45.80	54.00	-8.20	Average
3	pp 5351.560	10.46	32.80	30.76	33.46	45.96	54.00	-8.04	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

11ax_20M_TX_CH_36_Horizontal-Peak

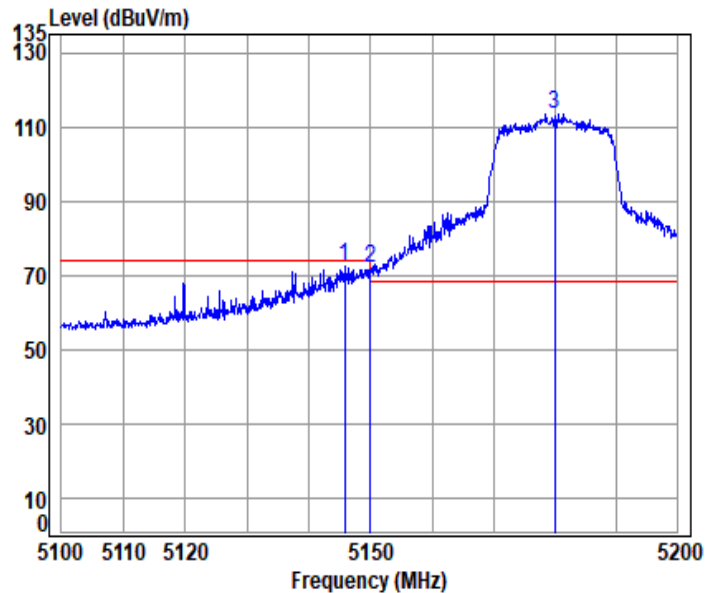

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5145.759	10.12	32.39	30.84	60.59	72.26	74.00 -1.74 peak
2	5149.980	10.14	32.40	30.84	60.11	71.81	74.00 -2.19 peak
3 pp	5180.000	10.25	32.46	30.83	101.64	113.52	68.20 45.32 peak



11ax_20M_TX_CH_36_Horizontal-Avg

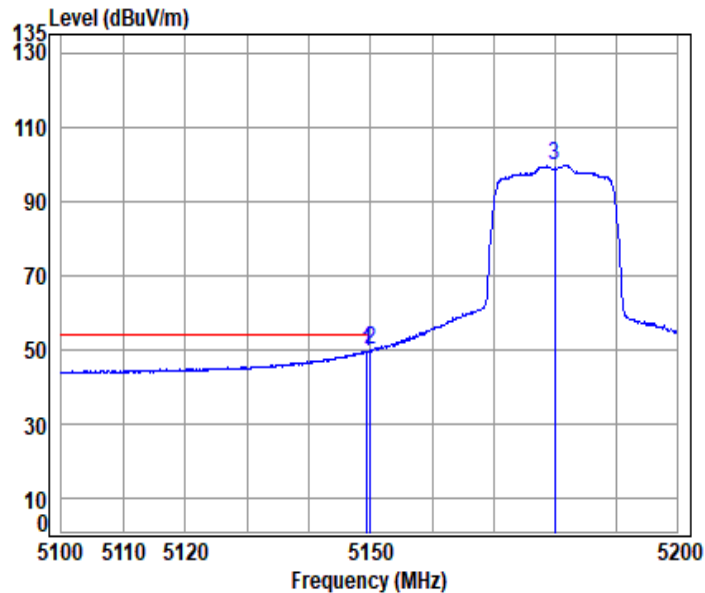

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.84	37.75	49.45	54.00	-4.55	Average
2	pp 5149.980	10.14	32.40	30.84	38.10	49.80	54.00	-4.20	Average
3	5180.000	10.25	32.46	30.83	87.71	99.59	-----	-----	Average



11ax_20M_TX_CH_36_Vertical-Peak

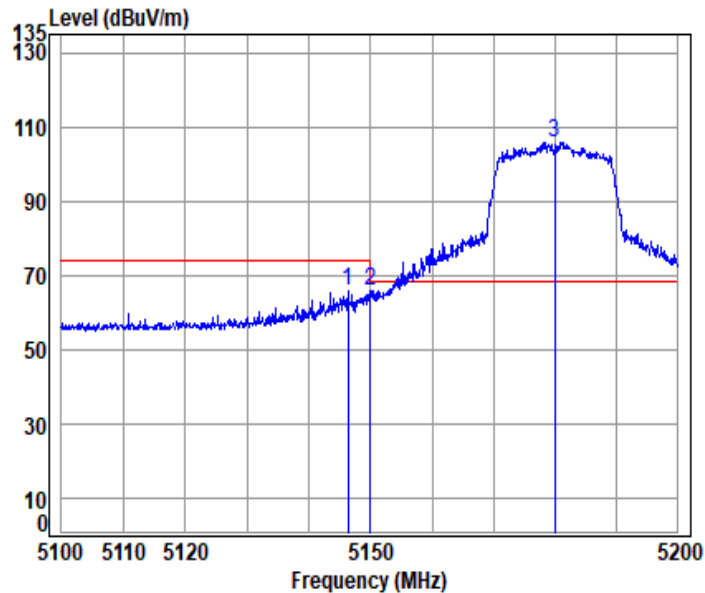

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5146.358	10.13	32.39	30.84	53.89	65.57	74.00 -8.43 peak
2	5149.980	10.14	32.40	30.84	53.99	65.69	74.00 -8.31 peak
3 pp	5180.000	10.25	32.46	30.83	93.98	105.86	68.20 37.66 peak



11ax_20M_TX_CH_36_Vertical-Avg

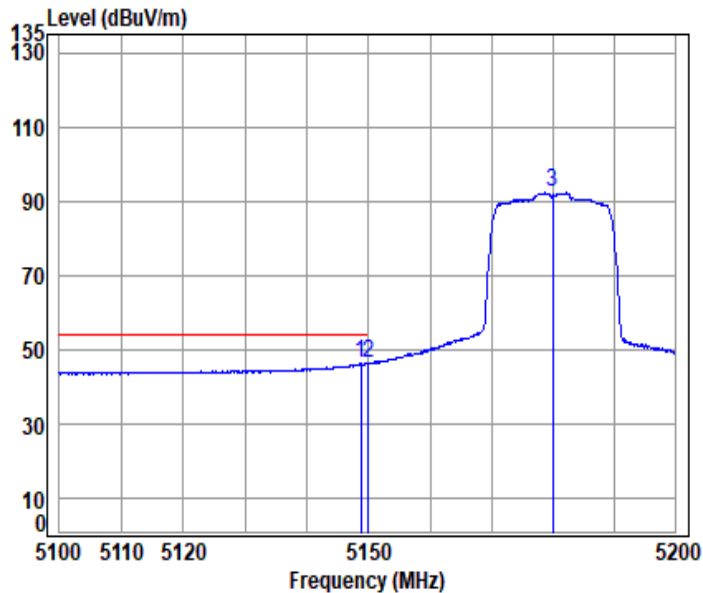

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.757	10.14	32.40	30.84	34.41	46.11	54.00	-7.89 Average
2 pp	5149.980	10.14	32.40	30.84	34.47	46.17	54.00	-7.83 Average
3	5180.000	10.25	32.46	30.83	80.32	92.20	-----	----- Average



11ax_40M_TX_CH_38_Horizontal-Peak

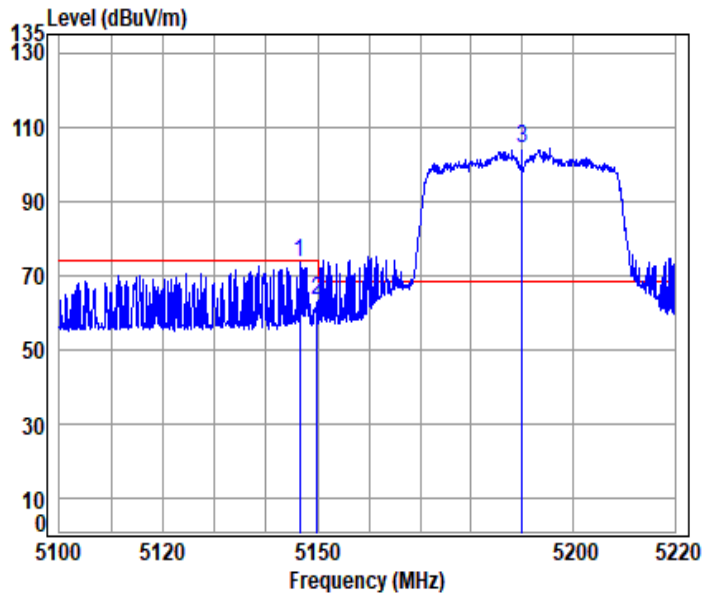

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.468	10.13	32.39	30.84	61.57	73.25	74.00	-0.75	peak
2	5149.980	10.14	32.40	30.84	51.33	63.03	74.00	-10.97	peak
3 pp	5190.000	10.29	32.48	30.82	92.22	104.17	68.20	35.97	peak



11ax_40M_TX_CH_38_Horizontal-Avg

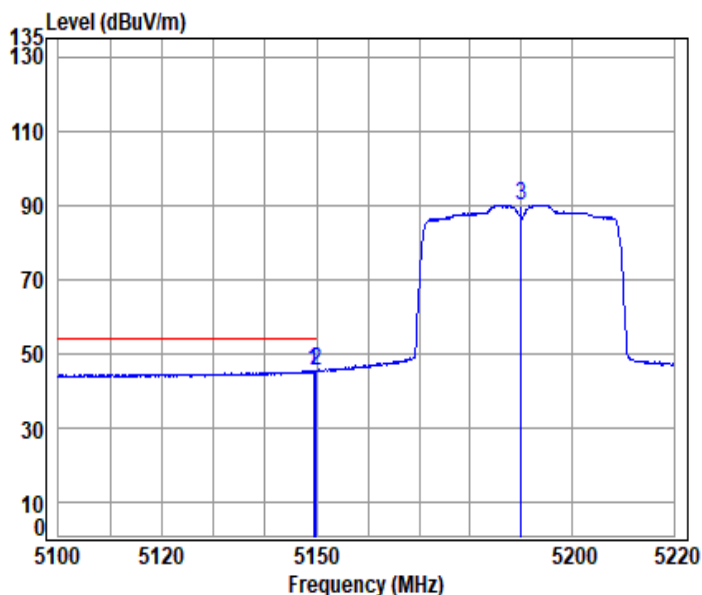

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.461	10.14	32.40	30.84	33.44	45.14	54.00	-8.86	Average
2 pp	5149.980	10.14	32.40	30.84	33.53	45.23	54.00	-8.77	Average
3	5190.000	10.29	32.48	30.82	77.91	89.86	-----	-----	Average



11ax_40M_TX_CH_38_Verical-Peak

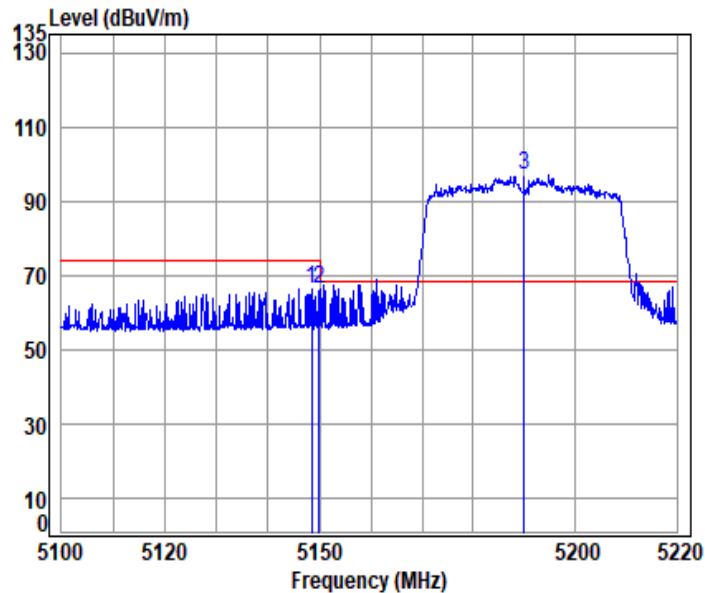

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5190 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.503	10.13	32.40	30.84	54.62	66.31	74.00	-7.69 peak
2	5149.980	10.14	32.40	30.84	54.50	66.20	74.00	-7.80 peak
3 pp	5190.000	10.29	32.48	30.82	85.14	97.09	68.20	28.89 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

11ax_40M_TX_CH_38_Verical-Avg

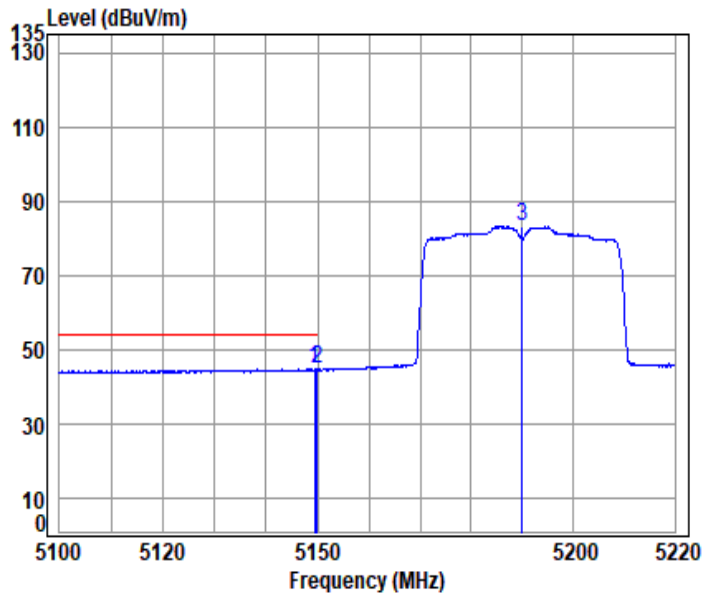

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5190 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5149.461	10.14	32.40	30.84	32.95	44.65	54.00	-9.35	Average
2	5149.980	10.14	32.40	30.84	32.83	44.53	54.00	-9.47	Average
3	5190.000	10.29	32.48	30.82	71.07	83.02	-----	-----	Average



11ax_40M_TX_CH_46_Horizontal-Peak

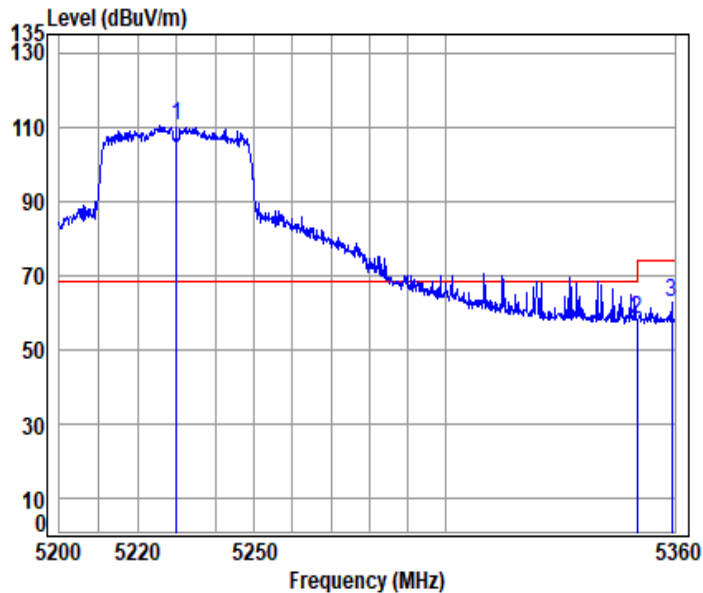

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5230 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5230.000	10.31	32.56	30.81	98.38	110.44	68.20	42.24	peak
2	5350.020	10.45	32.80	30.76	45.41	57.90	74.00	-16.10	peak
3	5359.188	10.48	32.80	30.76	50.21	62.73	74.00	-11.27	peak



11ax_40M_TX_CH_46_Horizontal-Avg

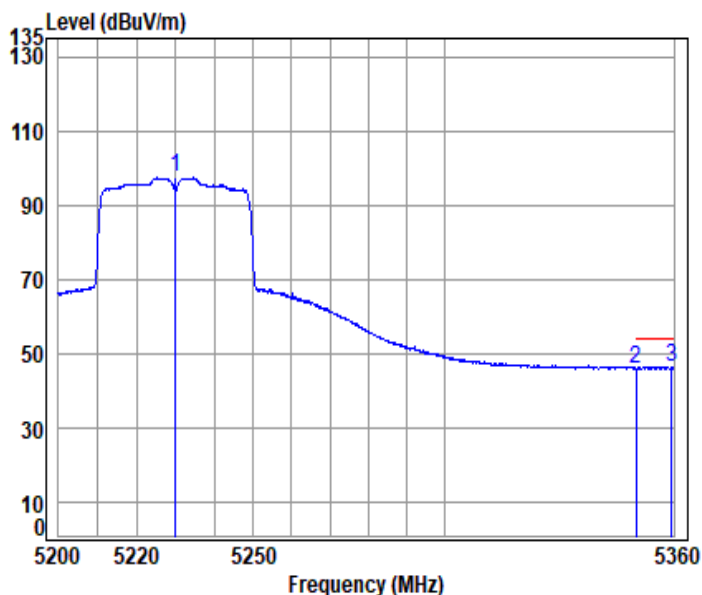

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5230 Band edge

: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5230.000	10.31	32.56	30.81	85.23	97.29	-----	-----	Average
2	5350.020	10.45	32.80	30.76	33.42	45.91	54.00	-8.09	Average
3	pp 5359.513	10.48	32.80	30.76	33.70	46.22	54.00	-7.78	Average



11ax_40M_TX_CH_46_Verical-Peak

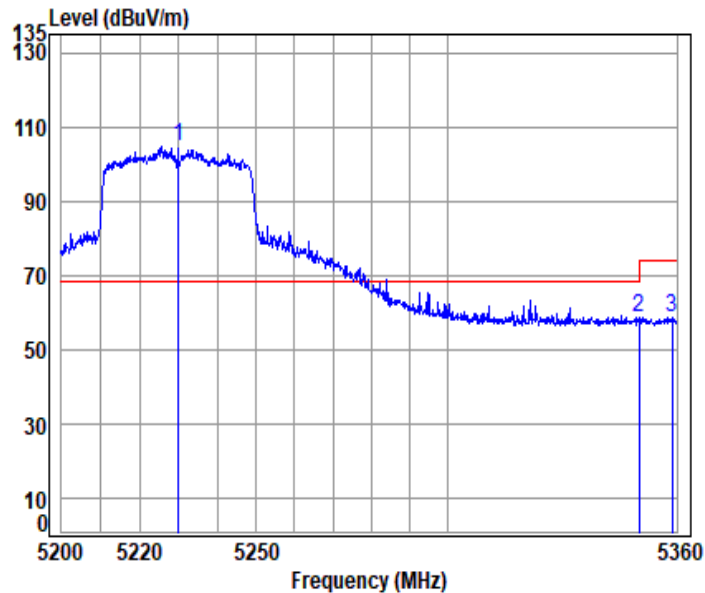

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5230 Band edge

: 5G Wi-Fi 11ax40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 5230.000	10.31	32.56	30.81	92.84	104.90	68.20	36.70 peak
2 5350.020	10.45	32.80	30.76	46.17	58.66	74.00	-15.34 peak
3 5358.701	10.48	32.80	30.76	46.10	58.62	74.00	-15.38 peak



11ax_40M_TX_CH_46_Verical-Avg

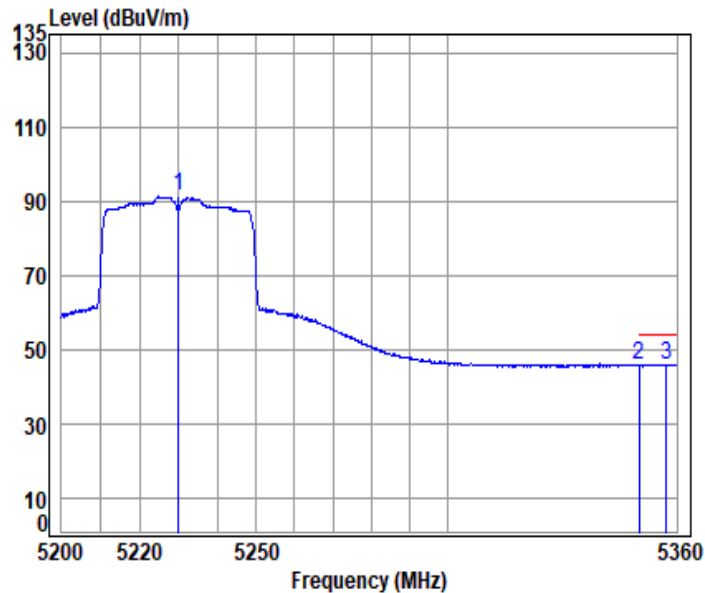

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5230 Band edge

: 5G Wi-Fi 11ax40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5230.000	10.31	32.56	30.81	79.14	91.20	-----	----- Average
2 5350.020	10.45	32.80	30.76	33.24	45.73	54.00	-8.27 Average
3 pp 5357.239	10.47	32.80	30.76	33.40	45.91	54.00	-8.09 Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 84 of 204

11a_TX_CH_149_Horizontal

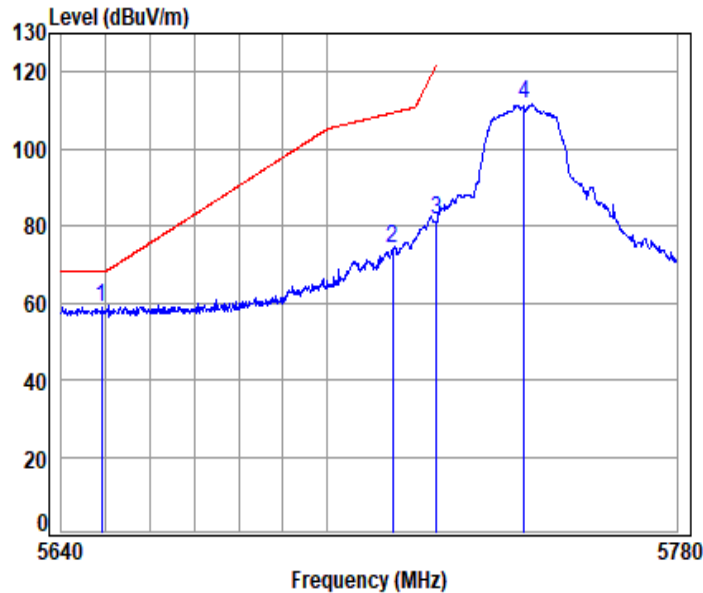

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT

Mode : 5745 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5648.996	10.48	33.10	30.64	45.87	58.81	68.20	-9.39 peak
2	5715.000	10.63	33.23	30.61	60.93	74.18	109.40	-35.22 peak
3	5725.000	10.68	33.25	30.61	68.13	81.45	122.20	-40.75 peak
4	5745.000	10.77	33.29	30.60	98.12	111.58	-----	----- peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

11a_TX_CH_149_Veritical

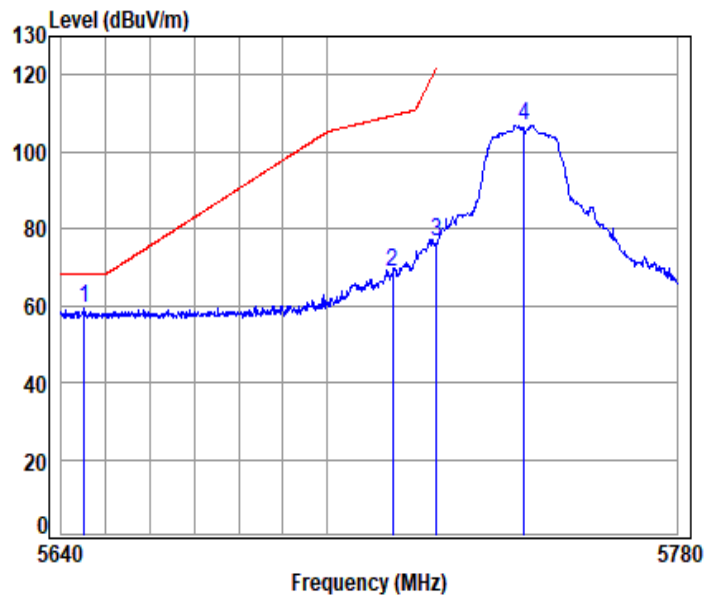

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5745 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5645.119	10.48	33.09	30.64	46.33	59.26	68.20	-8.94	peak
2	5715.000	10.63	33.23	30.61	55.54	68.79	109.40	-40.61	peak
3	5725.000	10.68	33.25	30.61	63.17	76.49	122.20	-45.71	peak
4	5745.000	10.77	33.29	30.60	93.40	106.86	-----	-----	peak



11a_TX_CH_165_Horizontal

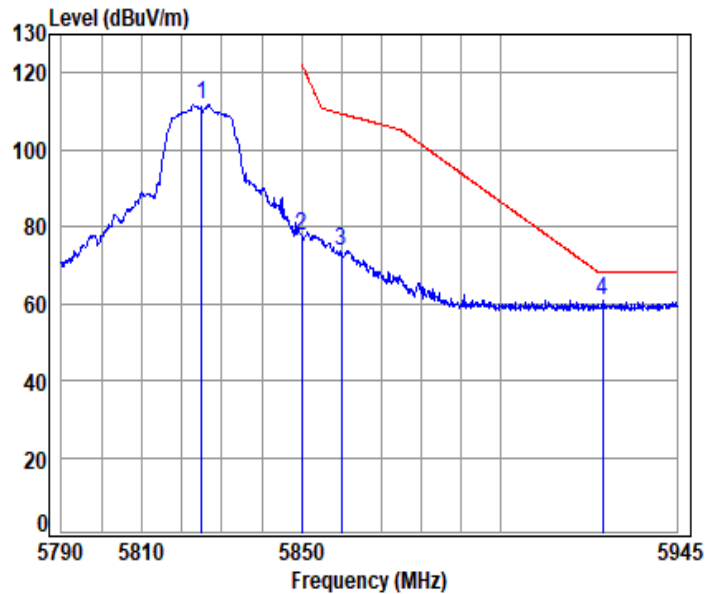

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5825 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	97.73	111.65	-----	-----	peak
2	5850.000	10.95	33.60	30.56	63.76	77.75	122.20	-44.45	peak
3	5860.000	10.94	33.58	30.56	59.92	73.88	109.40	-35.52	peak
4 pp	5926.026	10.87	33.55	30.53	46.83	60.72	68.20	-7.48	peak



11a_TX_CH_165_Verical

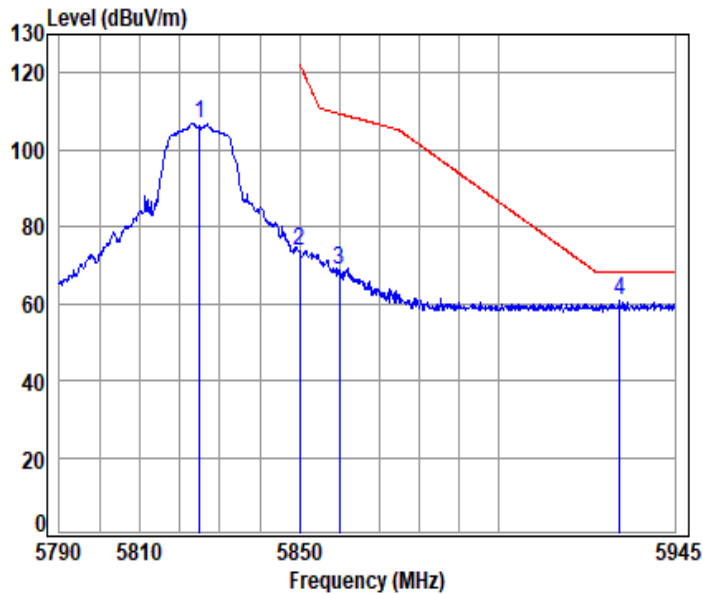

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5825 Band edge

: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	92.96	106.88	-----	----- peak
2	5850.000	10.95	33.60	30.56	59.66	73.65	122.20	-48.55 peak
3	5860.000	10.94	33.58	30.56	54.53	68.49	109.40	-40.91 peak
4	pp 5931.039	10.87	33.56	30.53	47.01	60.91	68.20	-7.29 peak



11n_HT(20M)_TX_CH_149_Horizontal

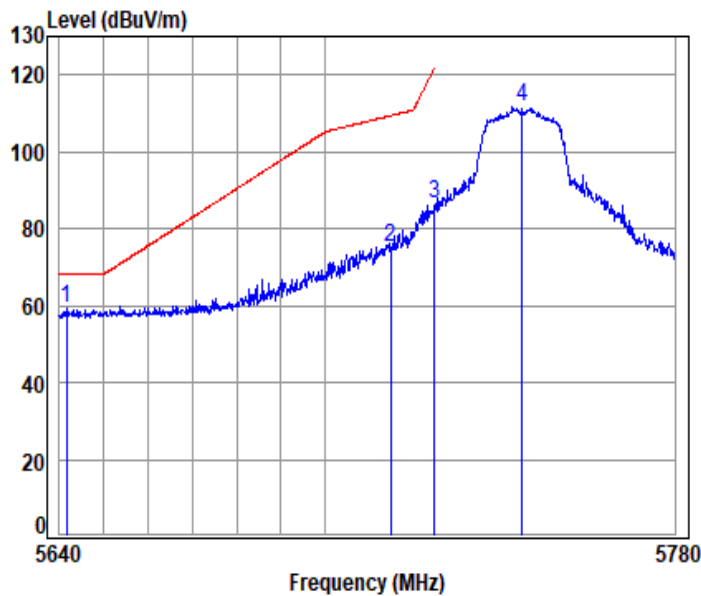

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5745 Band edge

: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5641.521	10.47	33.08	30.64	46.27	59.18	68.20	-9.02	peak
2	5715.000	10.63	33.23	30.61	61.64	74.89	109.40	-34.51	peak
3	5725.000	10.68	33.25	30.61	73.34	86.66	122.20	-35.54	peak
4	5745.000	10.77	33.29	30.60	98.20	111.66	-----	-----	peak



11n_HT(20M)_TX_CH_149_Vertical

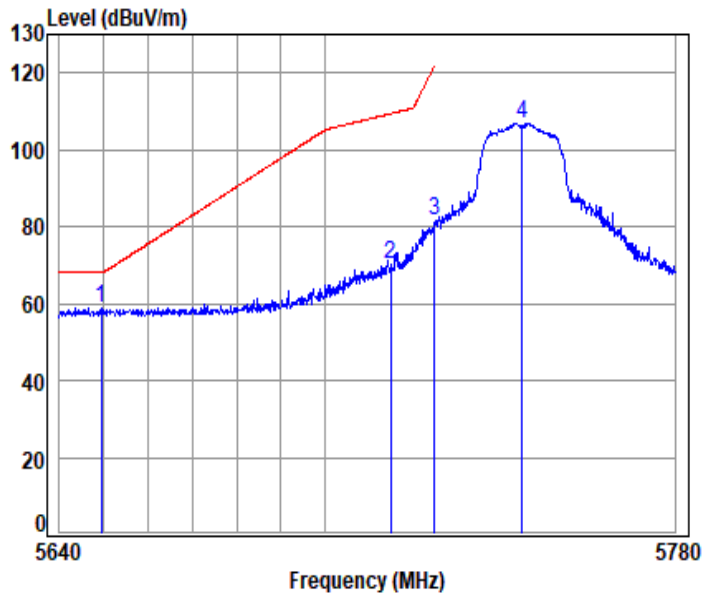

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5745 Band edge

: 5.8G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 5649.412	10.48	33.10	30.64	46.04	58.98	68.20	-9.22 peak
2 5715.000	10.63	33.23	30.61	57.13	70.38	109.40	-39.02 peak
3 5725.000	10.68	33.25	30.61	68.22	81.54	122.20	-40.66 peak
4 5745.000	10.77	33.29	30.60	93.38	106.84	-----	----- peak



11n_HT(20M)_TX_CH_165_Horizontal

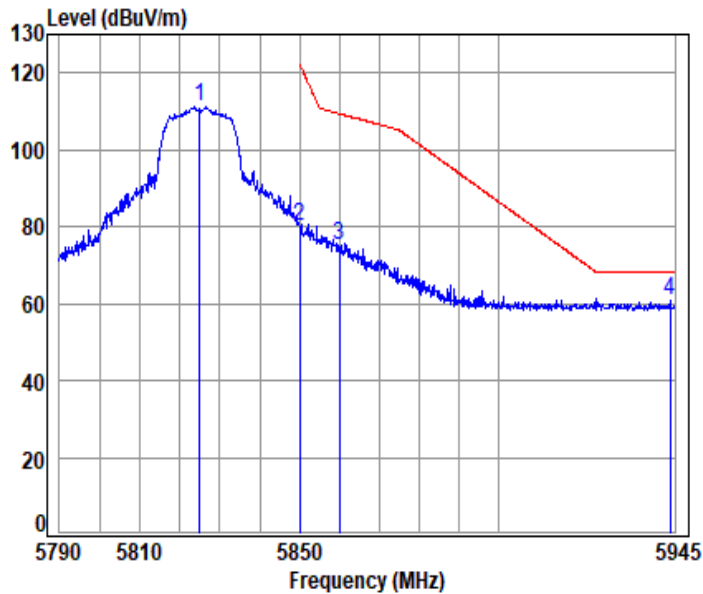

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5825 Band edge

: 5.8G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	97.12	111.04	-----	----- peak
2	5850.000	10.95	33.60	30.56	65.92	79.91	122.20	-42.29 peak
3	5860.000	10.94	33.58	30.56	61.18	75.14	109.40	-34.26 peak
4	pp 5943.744	10.86	33.59	30.52	46.64	60.57	68.20	-7.63 peak



11n_HT(20M)_TX_CH_165_Verical

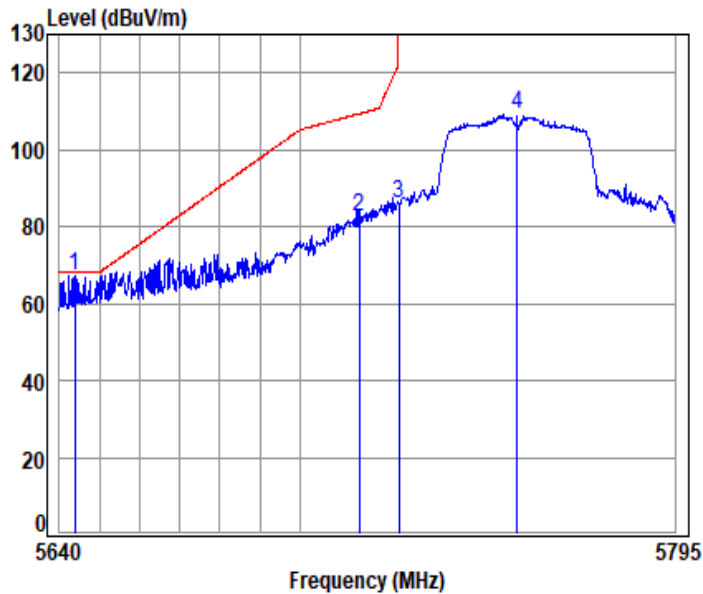

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 5643.824	10.48	33.09	30.64	54.50	67.43	68.20	-0.77 peak
2 5715.000	10.63	33.23	30.61	69.19	82.44	109.40	-26.96 peak
3 5725.000	10.68	33.25	30.61	72.92	86.24	122.20	-35.96 peak
4 5755.000	10.81	33.31	30.60	95.61	109.13	-----	----- peak



11n_HT(40M)_TX_CH_151_Horizontal

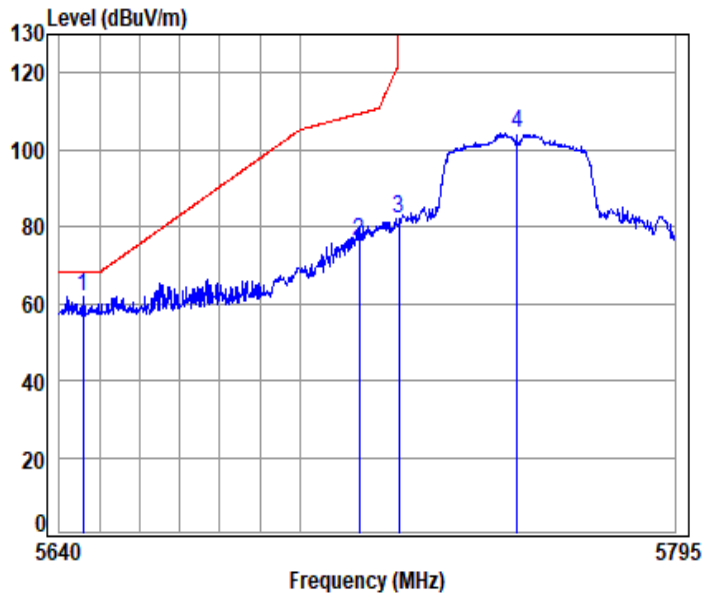

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5645.813	10.48	33.09	30.64	48.93	61.86	68.20	-6.34	peak
2 5715.000	10.63	33.23	30.61	62.66	75.91	109.40	-33.49	peak
3 5725.000	10.68	33.25	30.61	68.73	82.05	122.20	-40.15	peak
4 5755.000	10.81	33.31	30.60	90.74	104.26	-----	-----	peak



11n_HT(40M)_TX_CH_151_Vertical

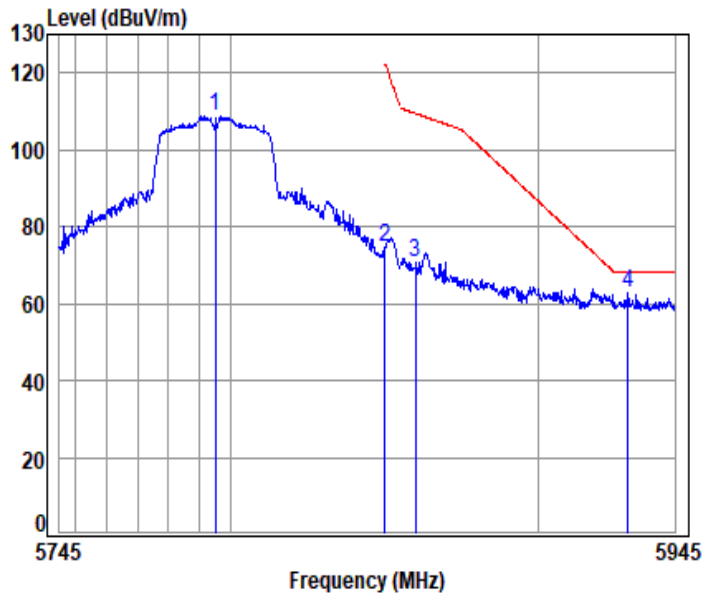

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5795.000	11.00	33.39	30.58	95.13	108.94	----- peak
2	5850.000	10.95	33.60	30.56	60.81	74.80	122.20 -47.40 peak
3	5860.000	10.94	33.58	30.56	56.60	70.56	109.40 -38.84 peak
4	pp 5929.559	10.87	33.56	30.53	48.70	62.60	68.20 -5.60 peak



11n_HT(40M)_TX_CH_159_Horizontal

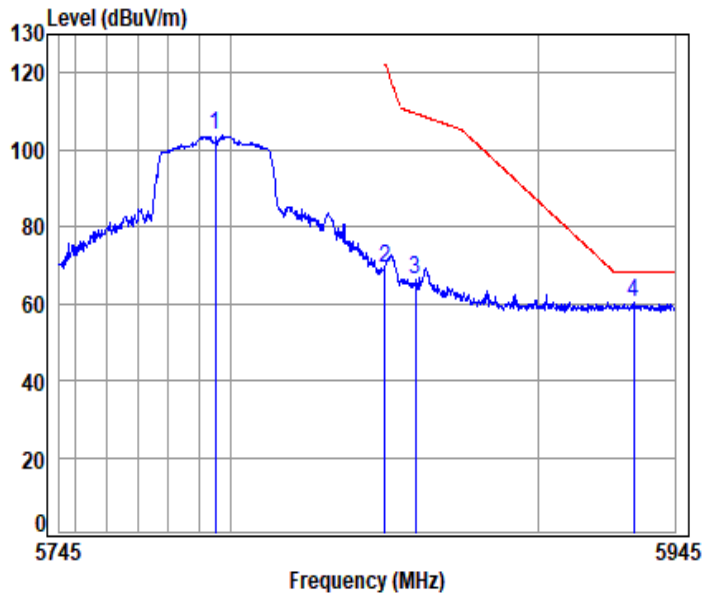

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5795.000	11.00	33.39	30.58	89.85	103.66	----- peak
2	5850.000	10.95	33.60	30.56	55.36	69.35	122.20 -52.85 peak
3	5860.000	10.94	33.58	30.56	52.48	66.44	109.40 -42.96 peak
4	pp 5931.385	10.86	33.56	30.53	46.36	60.25	68.20 -7.95 peak



11n_HT(40M)_TX_CH_159_Vertical

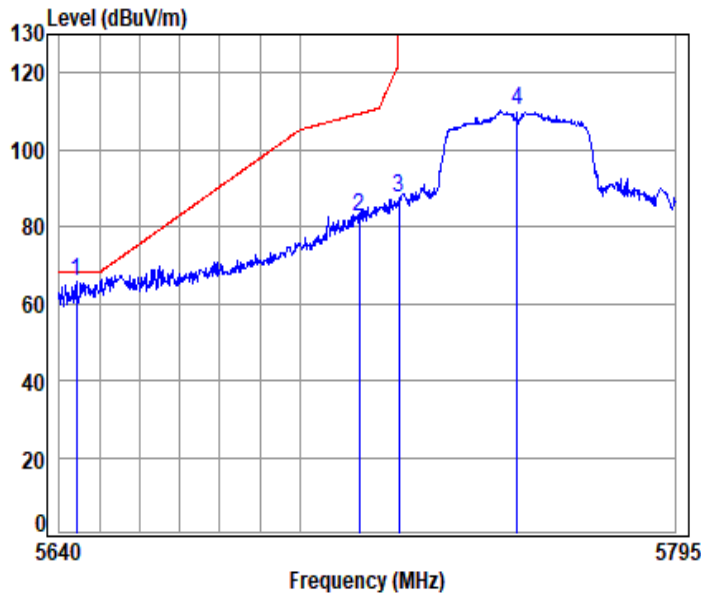

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 5644.283	10.48	33.09	30.64	53.02	65.95	68.20	-2.25 peak
2 5715.000	10.63	33.23	30.61	69.32	82.57	109.40	-26.83 peak
3 5725.000	10.68	33.25	30.61	74.17	87.49	122.20	-34.71 peak
4 5755.000	10.81	33.31	30.60	96.87	110.39	-----	----- peak



11ax_20M_TX_CH_149_Horizontal

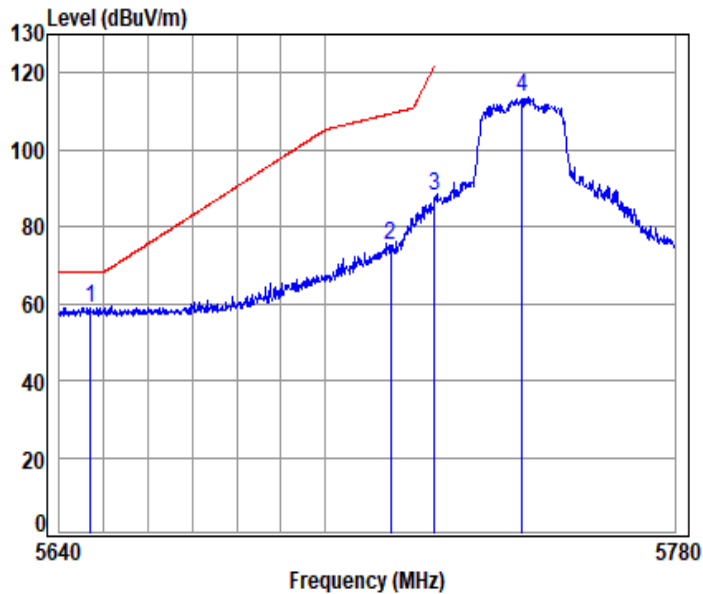

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5745 Band edge

: 5.8G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5647.057	10.48	33.09	30.64	45.98	58.91	68.20	-9.29	peak
2	5715.000	10.63	33.23	30.61	61.81	75.06	109.40	-34.34	peak
3	5725.000	10.68	33.25	30.61	74.69	88.01	122.20	-34.19	peak
4	5745.000	10.77	33.29	30.60	100.20	113.66	-----	-----	peak



11ax_20M_TX_CH_149_Vertical

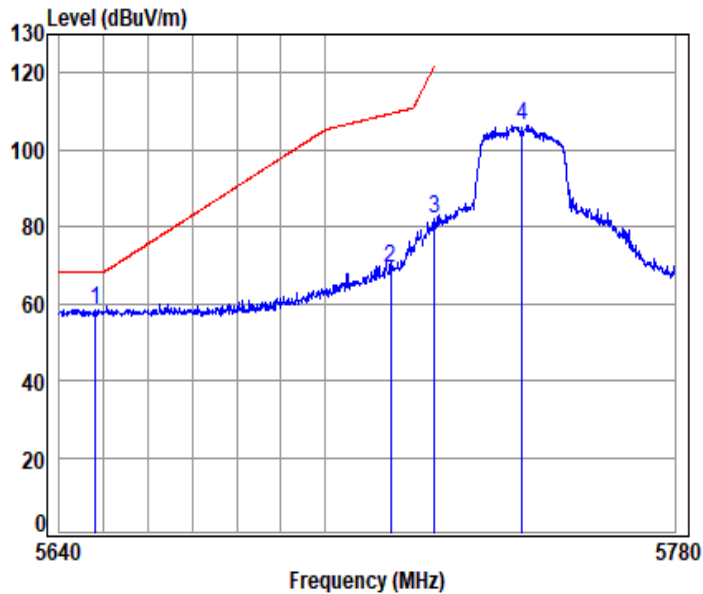

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5745 Band edge

: 5.8G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5648.165	10.48	33.10	30.64	45.47	58.41	68.20	-9.79	peak
2	5715.000	10.63	33.23	30.61	56.11	69.36	109.40	-40.04	peak
3	5725.000	10.68	33.25	30.61	68.73	82.05	122.20	-40.15	peak
4	5745.000	10.77	33.29	30.60	93.05	106.51	-----	-----	peak



11ax_20M_TX_CH_165_Horizontal

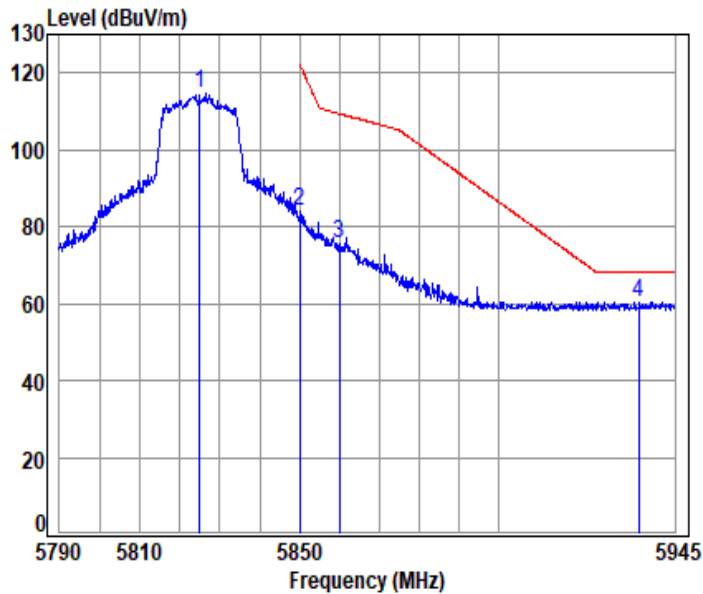

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5825 Band edge

: 5.8G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5825.000	10.99	33.50	30.57	100.51	114.43	----- peak
2	5850.000	10.95	33.60	30.56	70.21	84.20	122.20 -38.00 peak
3	5860.000	10.94	33.58	30.56	61.64	75.60	109.40 -33.80 peak
4	pp 5935.897	10.86	33.57	30.53	46.57	60.47	68.20 -7.73 peak



11ax_20M_TX_CH_165_Vertical

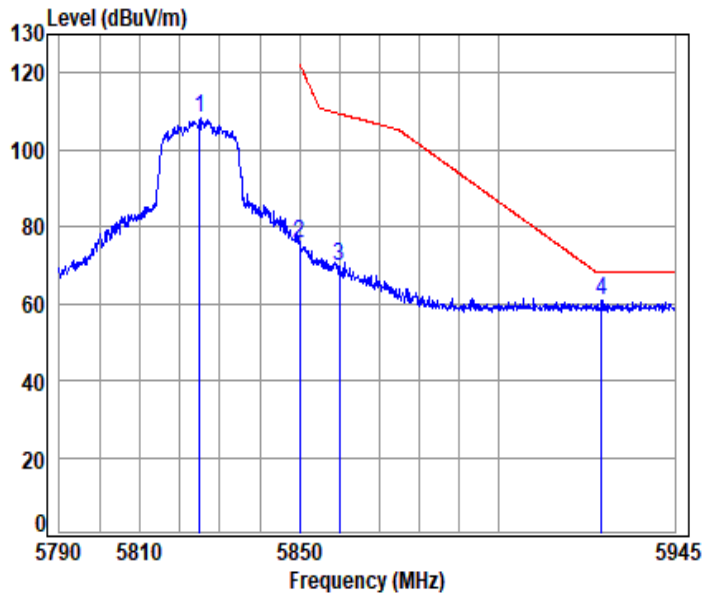

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5825 Band edge

: 5.8G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	94.14	108.06	-----	-----	peak
2	5850.000	10.95	33.60	30.56	61.63	75.62	122.20	-46.58	peak
3	5860.000	10.94	33.58	30.56	55.58	69.54	109.40	-39.86	peak
4 pp	5926.340	10.87	33.55	30.53	46.96	60.85	68.20	-7.35	peak



11ax_40M_TX_CH_151_Horizontal

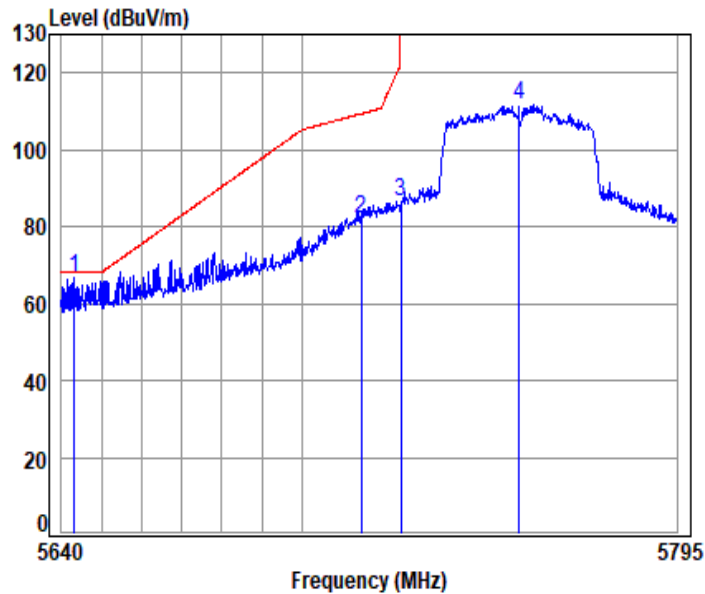

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5755 Band edge

: 5.8G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5643.212	10.47	33.09	30.64	53.68	66.60	68.20	-1.60	peak
2	5715.000	10.63	33.23	30.61	68.90	82.15	109.40	-27.25	peak
3	5725.000	10.68	33.25	30.61	73.34	86.66	122.20	-35.54	peak
4	5755.000	10.81	33.31	30.60	98.17	111.69	-----	-----	peak



11ax_40M_TX_CH_151_Vertical

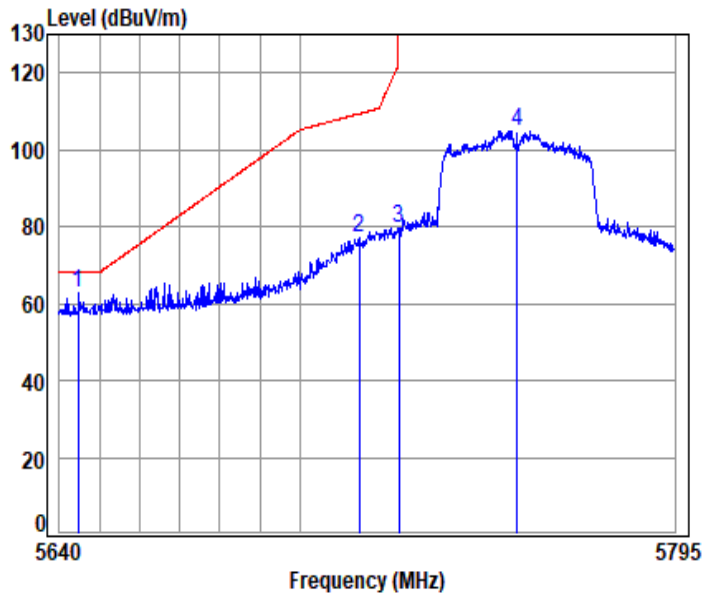

Condition: 3m VERTICAL

Job No : 01687AT/01688AT


Mode : 5755 Band edge

: 5.8G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5644.742	10.48	33.09	30.64	50.00	62.93	68.20	-5.27	peak
2	5715.000	10.63	33.23	30.61	63.66	76.91	109.40	-32.49	peak
3	5725.000	10.68	33.25	30.61	66.04	79.36	122.20	-42.84	peak
4	5755.000	10.81	33.31	30.60	91.43	104.95	-----	-----	peak



11ax_40M_TX_CH_159_Horizontal

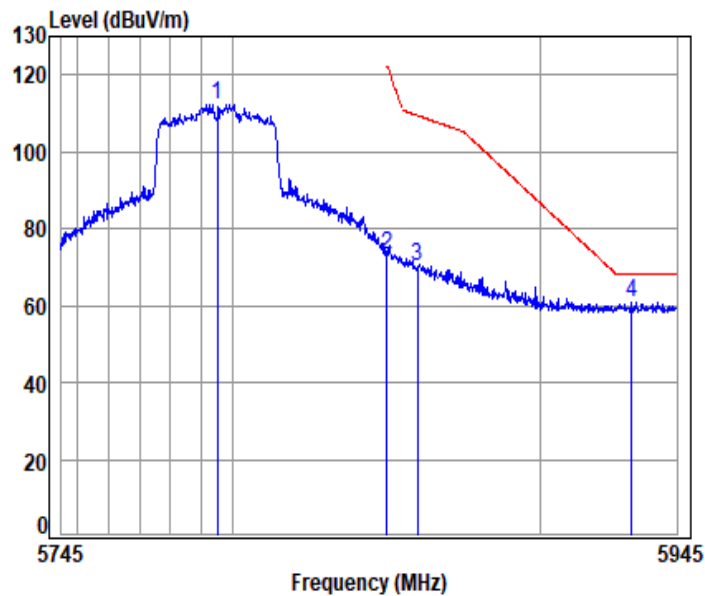

Condition: 3m HORIZONTAL

Job No : 01687AT/01688AT


Mode : 5795 Band edge

: 5.8G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	98.56	112.37	-----	-----	peak
2	5850.000	10.95	33.60	30.56	59.37	73.36	122.20	-48.84	peak
3	5860.000	10.94	33.58	30.56	56.37	70.33	109.40	-39.07	peak
4 pp	5929.964	10.87	33.56	30.53	47.03	60.93	68.20	-7.27	peak



11ax_40M_TX_CH_159_Vertical

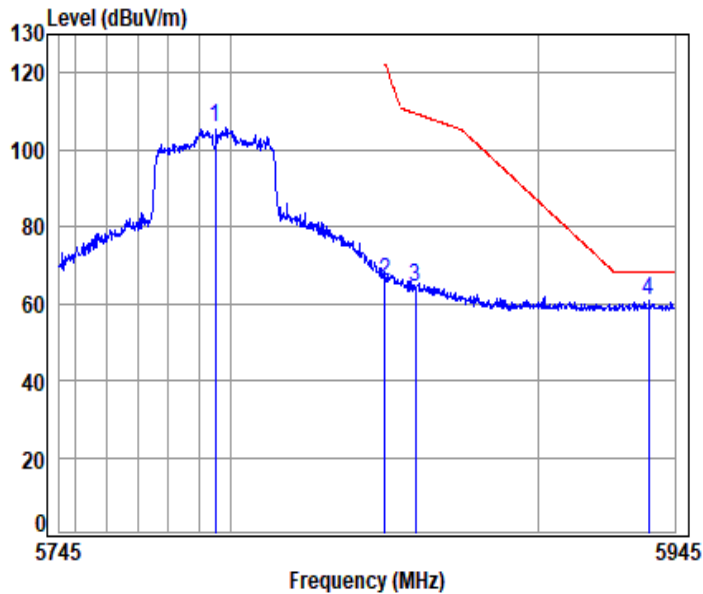

Condition: 3m VERTICAL

Job No : 01687AT/01688AT

Mode : 5795 Band edge

: 5.8G Wi-Fi 11ax40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5795.000	11.00	33.39	30.58	91.91	105.72	----- peak
2	5850.000	10.95	33.60	30.56	51.75	65.74	122.20 -56.46 peak
3	5860.000	10.94	33.58	30.56	50.36	64.32	109.40 -45.08 peak
4 pp	5936.461	10.86	33.57	30.53	46.69	60.59	68.20 -7.61 peak



7.6 Duty Cycle

Test Requirement ANSI C63.10-2020 Section 12.3

Test Method: ANSI C63.10-2020 Section 12.3

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 25.9 °C Humidity: 41.6 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.6.3 Test Setup Diagram

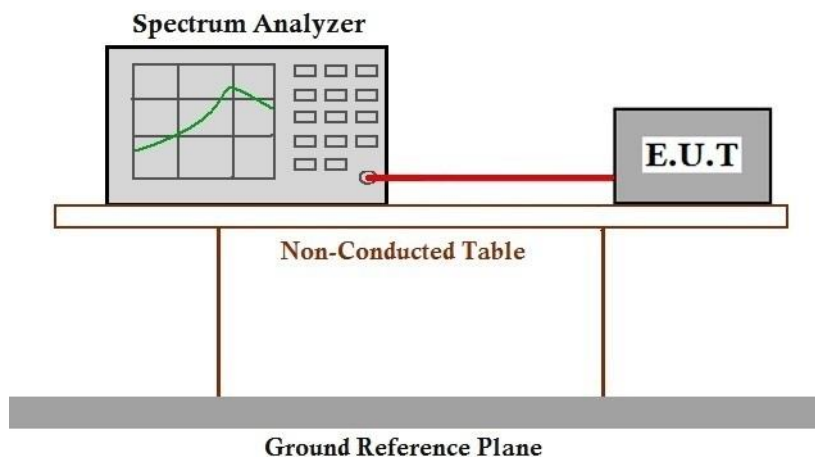

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.7 99% Bandwidth

Test Requirement ANSI C63.10-2020 Section 12.5

Test Method: ANSI C63.10-2020 Section 12.5

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 41.6 % RH

Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.7.3 Test Setup Diagram

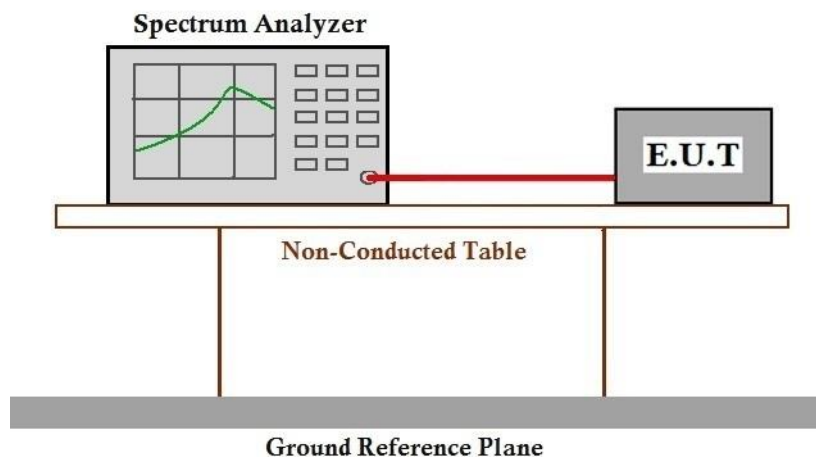

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.8 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020 Section 12.5

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 41.6 % RH

Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.8.3 Test Setup Diagram

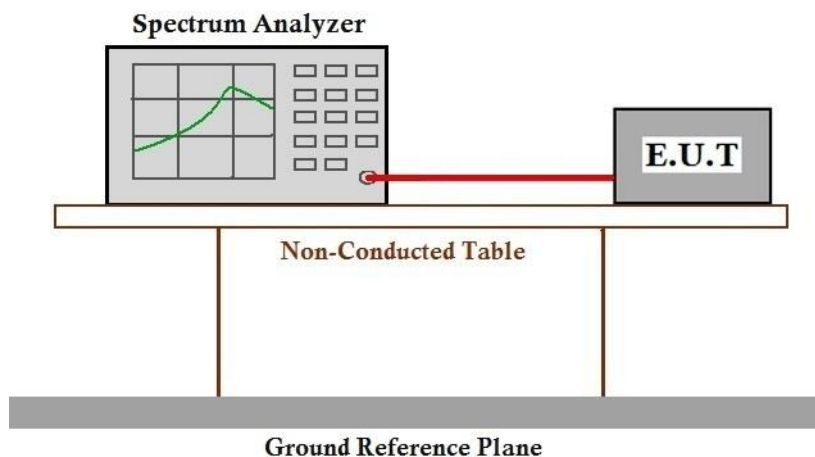

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



7.9 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10-2020 Section 6.9.2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 41.6 % RH

Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.9.3 Test Setup Diagram

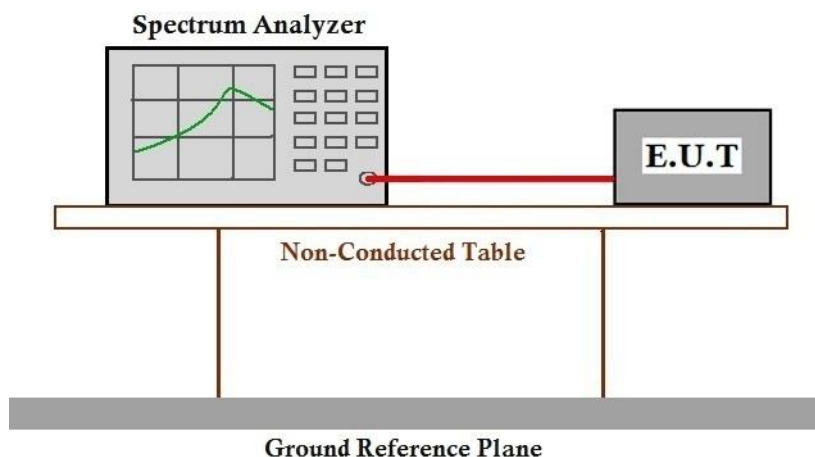

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.10 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020 Section 12.5

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C

Humidity: 41.6 % RH


Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report



7.10.3 Test Setup Diagram

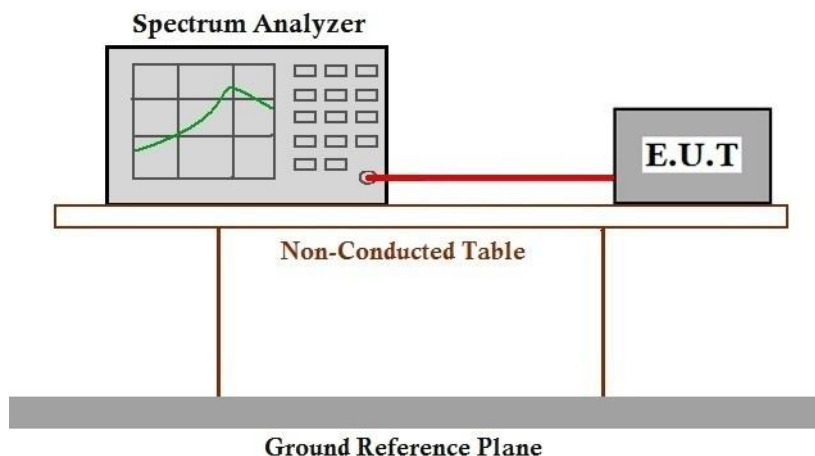

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details



7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10-2020 Section 6.8

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.9 °C


Humidity: 41.6 % RH

Atmospheric Pressure: 1020 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report
Final test	08	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report

7.11.3 Test Setup Diagram

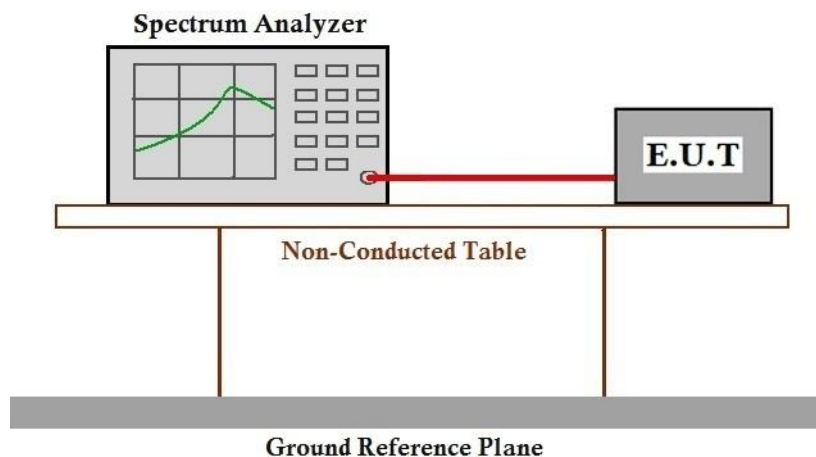

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details



8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2504001687AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2504001687AT



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	/	/	1.428	1.577	90.55	0.43	0.03
		5200	/	/	1.428	1.576	90.61	0.43	0.07
		5240	/	/	1.427	1.576	90.55	0.43	0.03
		5745	/	/	1.428	1.577	90.55	0.43	0.03
		5785	/	/	1.428	1.576	90.61	0.43	0.03
		5825	/	/	1.429	1.578	90.56	0.43	0.06
802.11n (HT20)	SISO	5180	/	/	0.169	0.316	53.48	2.72	0.13
		5200	/	/	0.170	0.317	53.63	2.71	0.07
		5240	/	/	0.170	0.317	53.63	2.71	0.08
		5745	/	/	0.168	0.317	53.00	2.76	0.08
		5785	/	/	0.170	0.317	53.63	2.71	0.07
		5825	/	/	0.170	0.316	53.80	2.69	0.07
802.11n (HT40)	SISO	5190	/	/	0.550	0.699	78.68	1.04	0.06
		5230	/	/	0.550	0.699	78.68	1.04	0.03
		5755	/	/	0.551	0.700	78.71	1.04	0.06
		5795	/	/	0.550	0.699	78.68	1.04	0.03
802.11ac (VHT20)	SISO	5180	/	/	0.153	0.300	51.00	2.92	0.10
		5200	/	/	0.156	0.301	51.83	2.85	0.17
		5240	/	/	0.153	0.300	51.00	2.92	0.12
		5745	/	/	0.157	0.301	52.16	2.83	0.10
		5785	/	/	0.157	0.301	52.16	2.83	0.05
		5825	/	/	0.153	0.300	51.00	2.92	0.10
802.11ac (VHT40)	SISO	5190	/	/	0.092	0.241	38.17	4.18	0.03
		5230	/	/	0.095	0.241	39.42	4.04	0.14
		5755	/	/	0.092	0.241	38.17	4.18	0.03
		5795	/	/	0.092	0.241	38.17	4.18	0.04
802.11ax	SISO	5180	RU242	Left	0.138	0.285	48.42	3.15	0.05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 113 of 204

(HEW20)		5200	RU242	Left	0.138	0.286	48.25	3.16	0.11
		5240	RU242	Left	0.139	0.286	48.60	3.13	0.12
		5745	RU242	Left	0.138	0.285	48.42	3.15	0.07
		5785	RU242	Left	0.139	0.286	48.60	3.13	0.09
		5825	RU242	Left	0.139	0.286	48.60	3.13	0.09
802.11ax (HEW40)	SISO	5190	RU484	Left	0.088	0.237	37.13	4.30	0.09
		5230	RU484	Left	0.087	0.236	36.86	4.33	0.06
		5755	RU484	Left	0.088	0.237	37.13	4.30	0.06
		5795	RU484	Left	0.088	0.237	37.13	4.30	0.04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph

1.2.1 Ant1

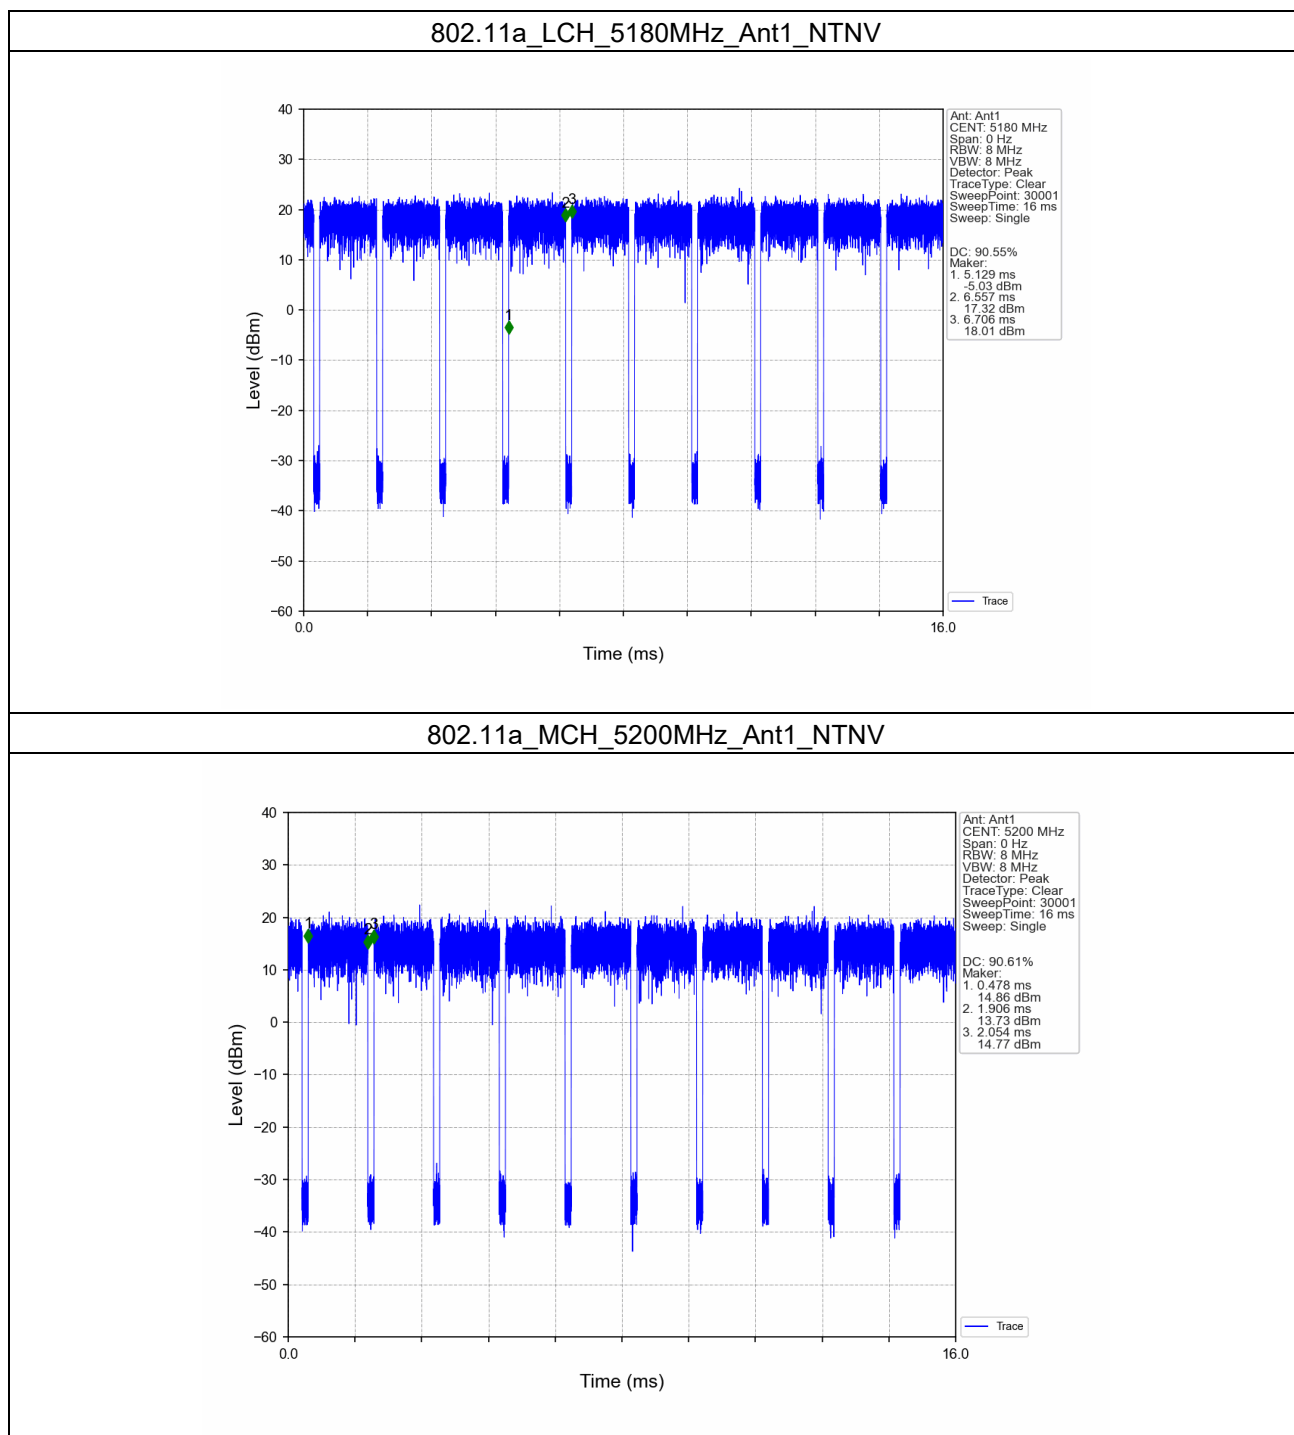


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


802.11a_HCH_5240MHz_Ant1_NTNV

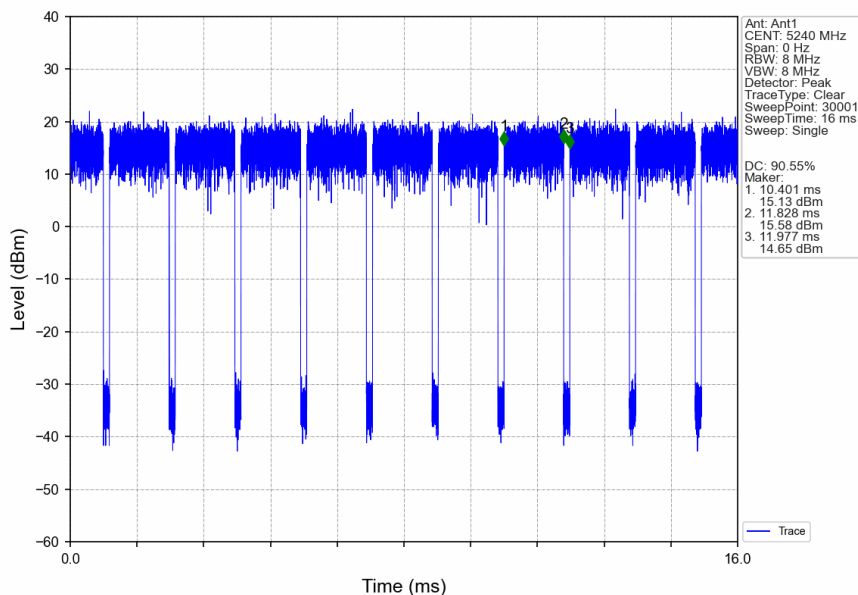


802.11a_LCH_5745MHz_Ant1_NTNV

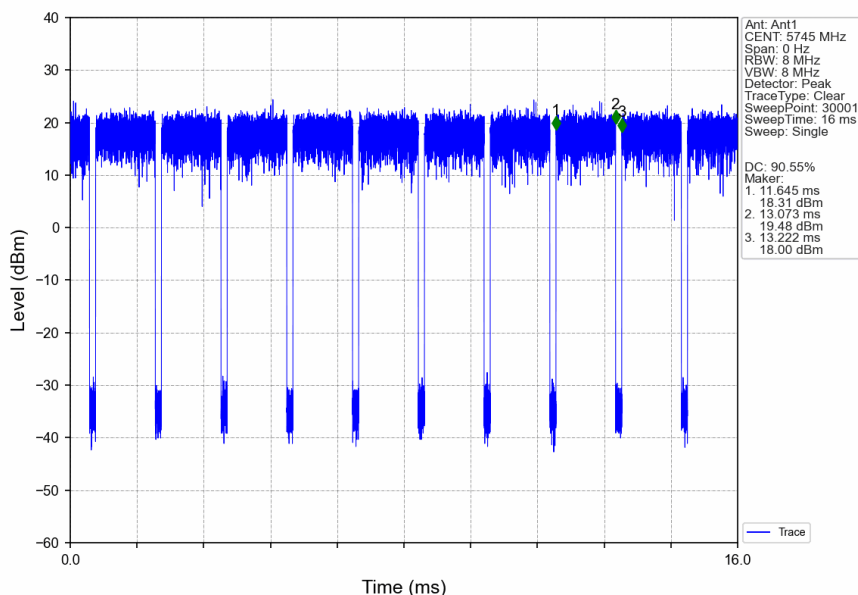


802.11a_MCH_5785MHz_Ant1_NTNV

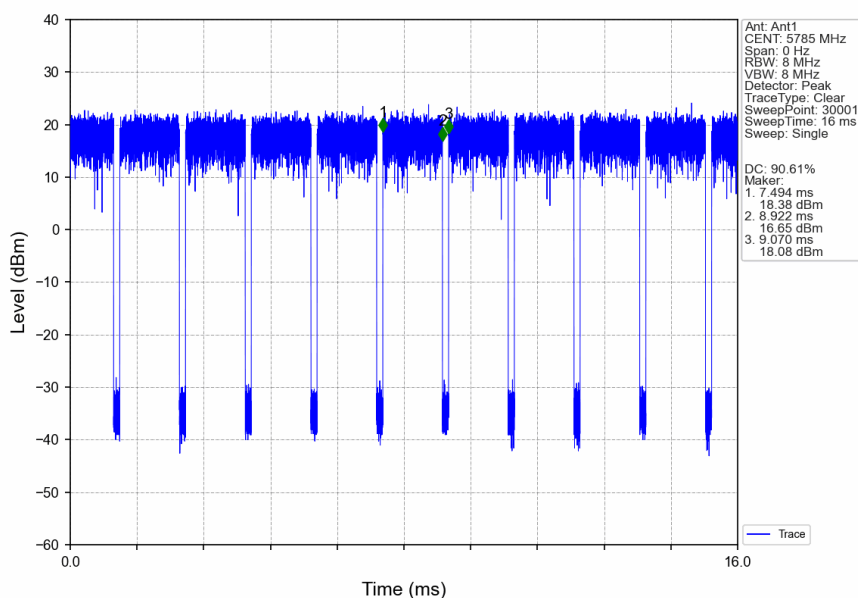


802.11a_HCH_5825MHz_Ant1_NTNV

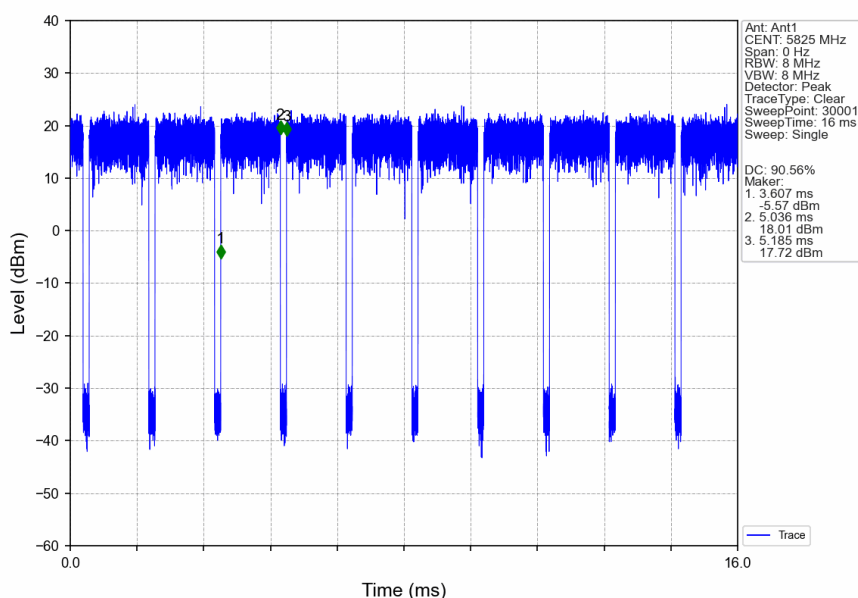


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

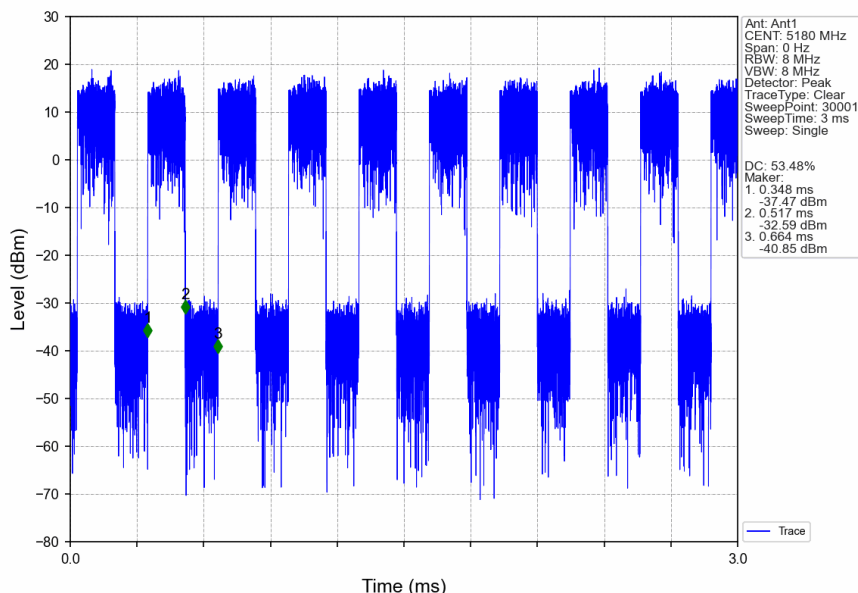


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

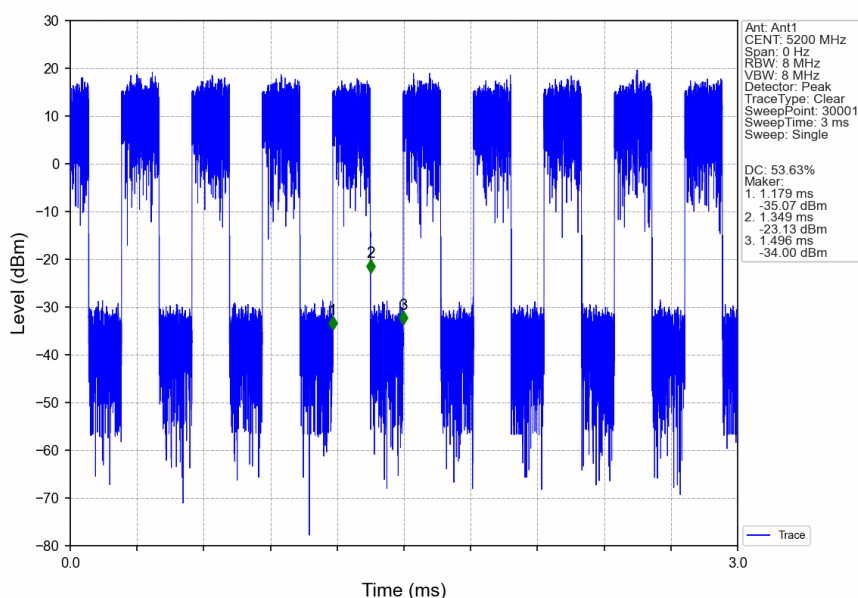


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

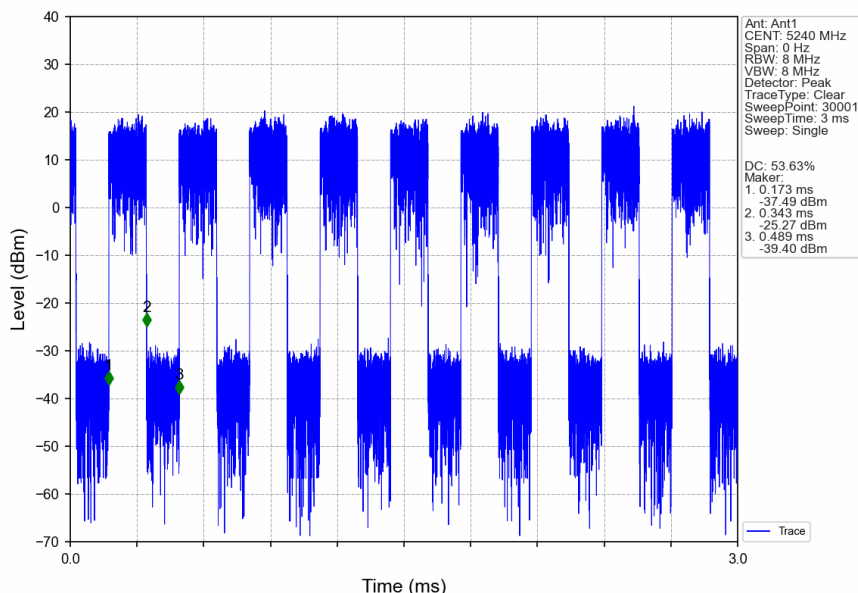


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

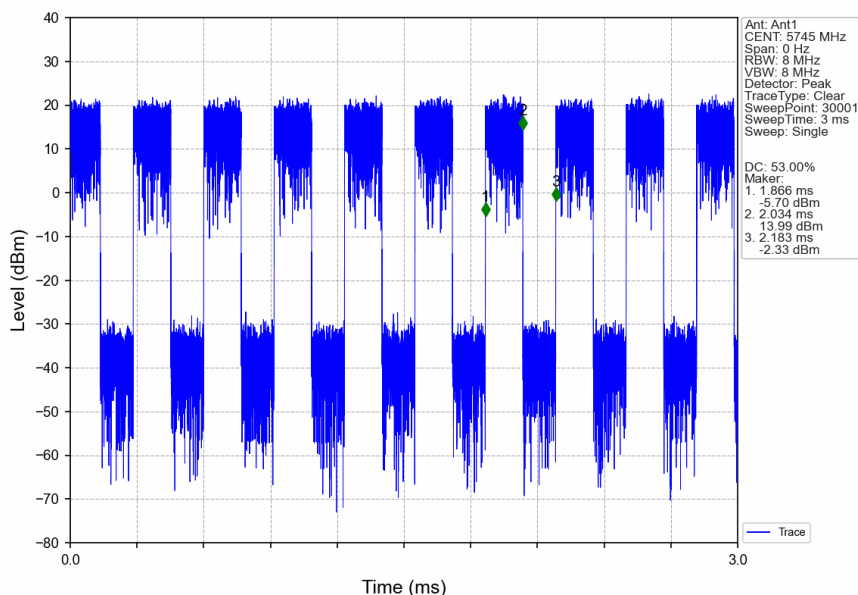


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

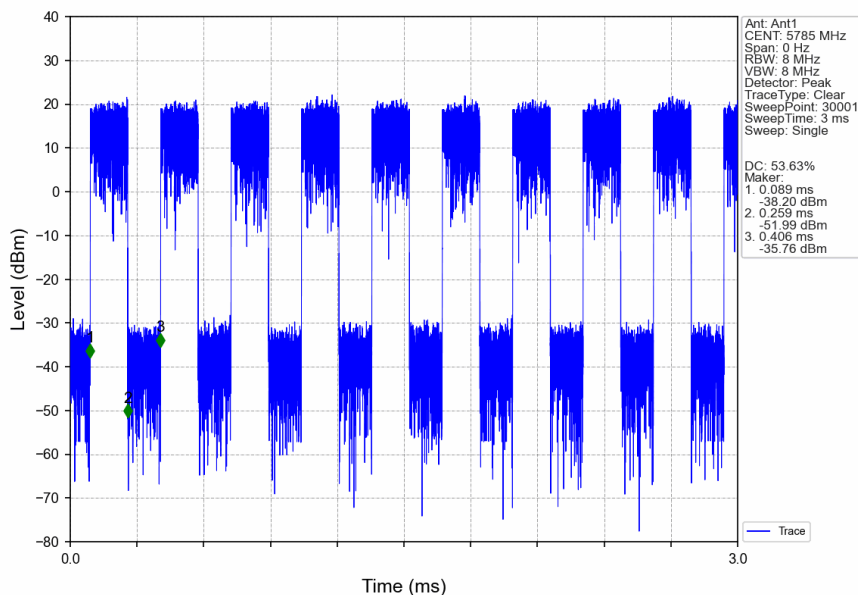


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

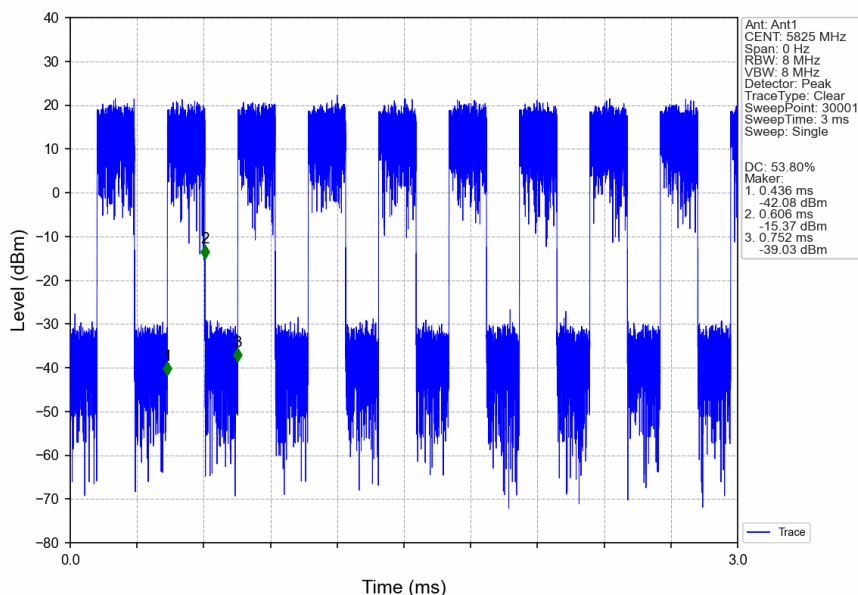


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

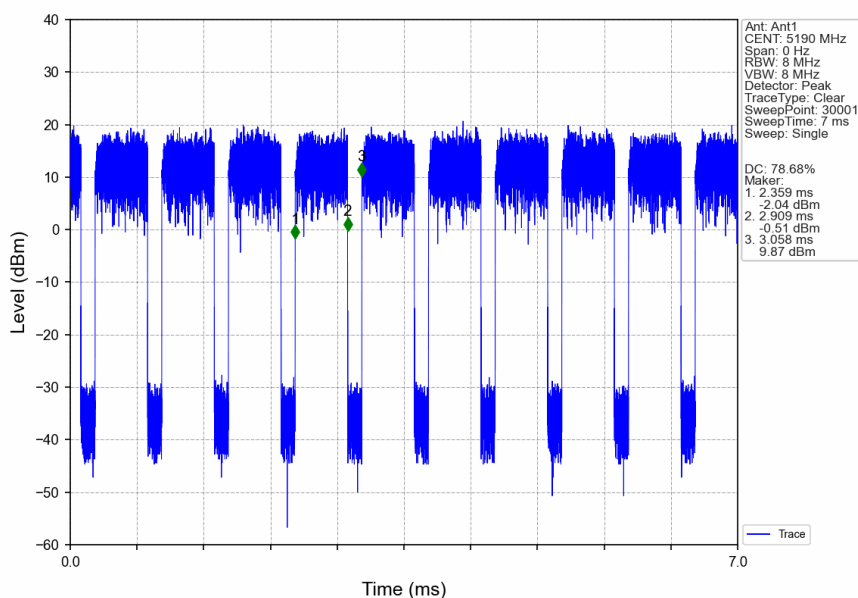


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

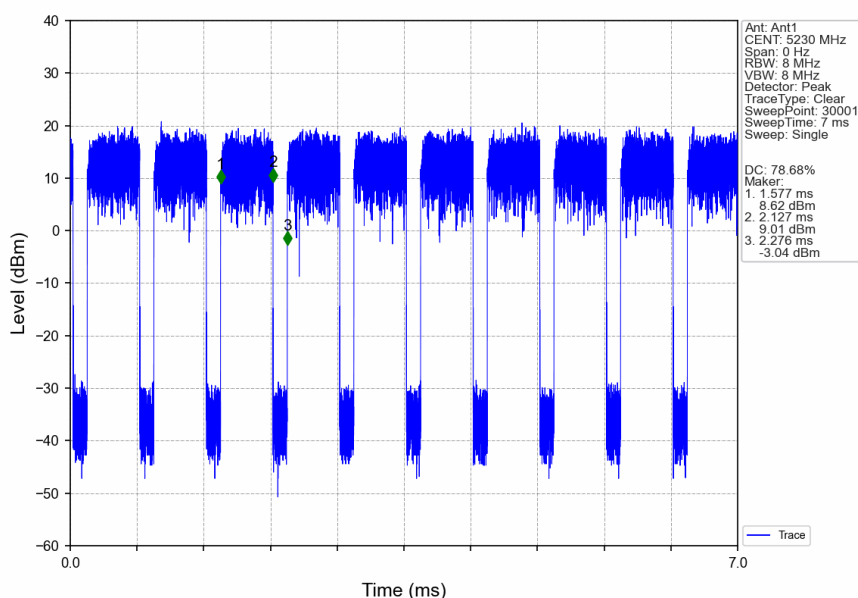


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

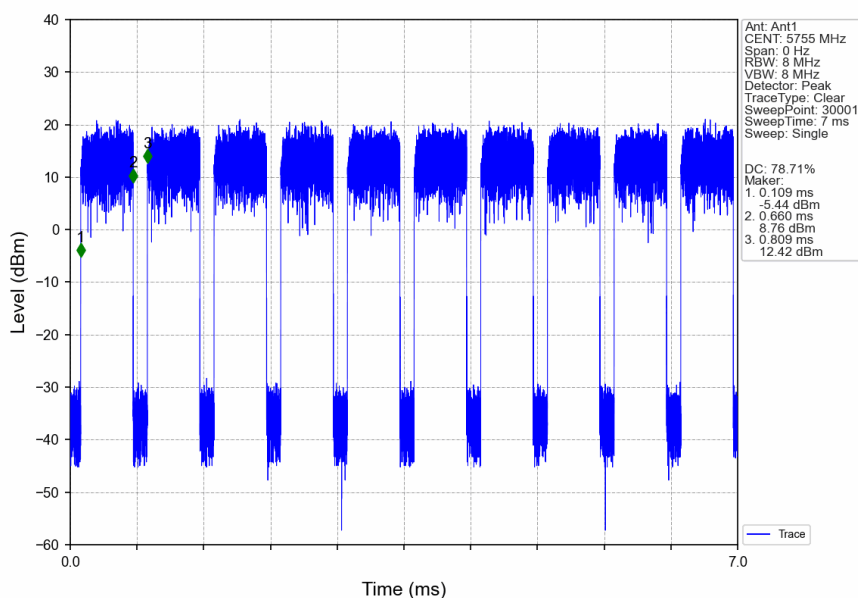


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

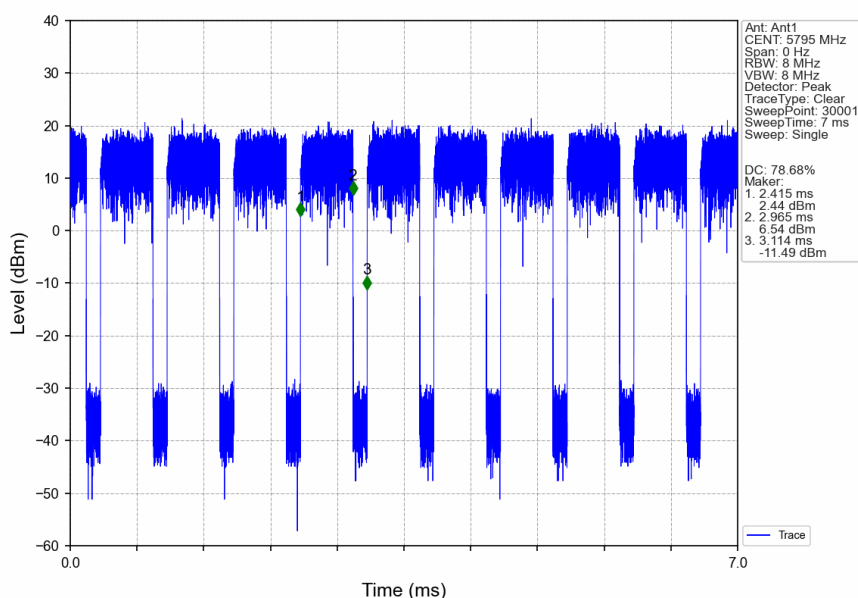


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

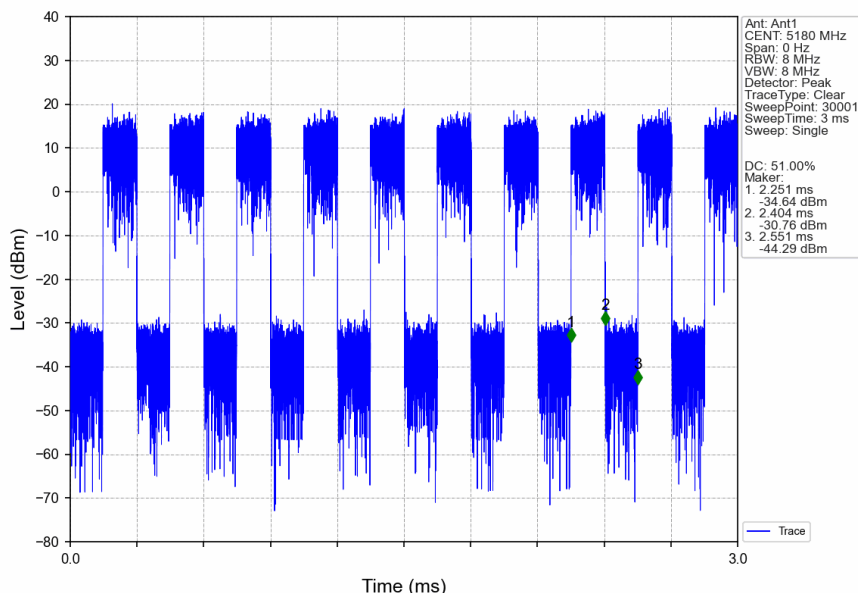


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

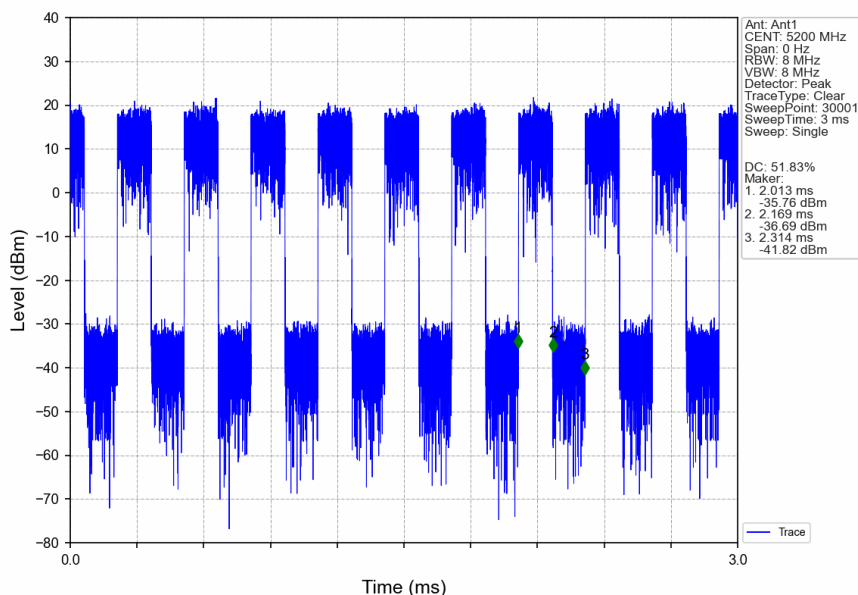


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

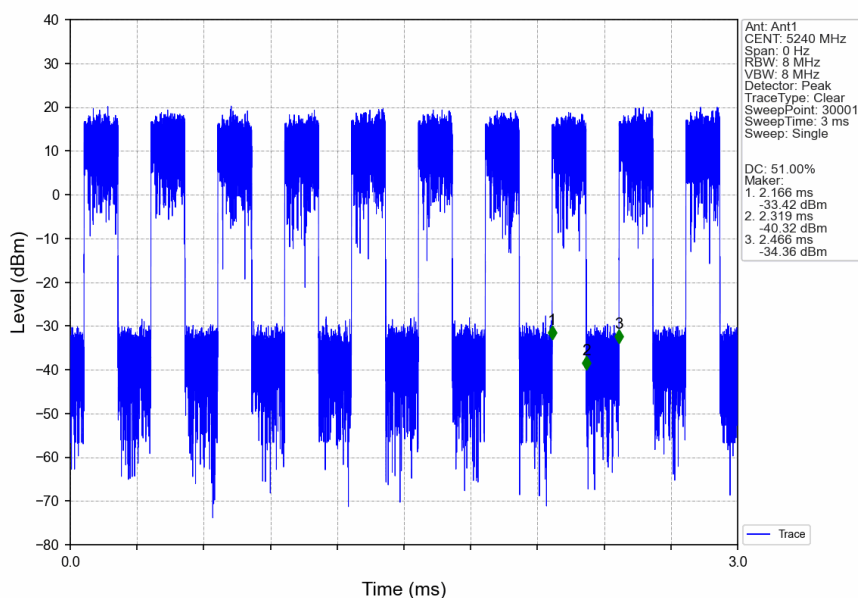


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

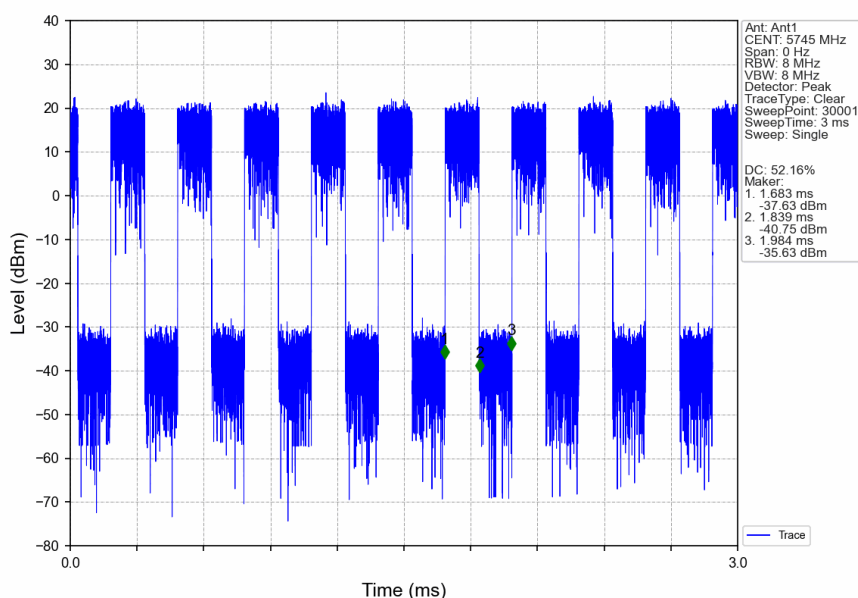


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

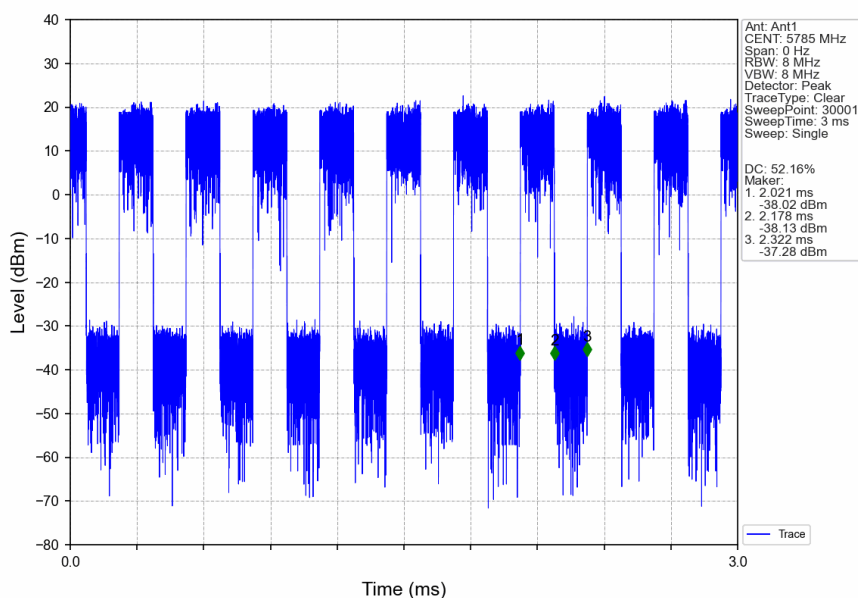


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

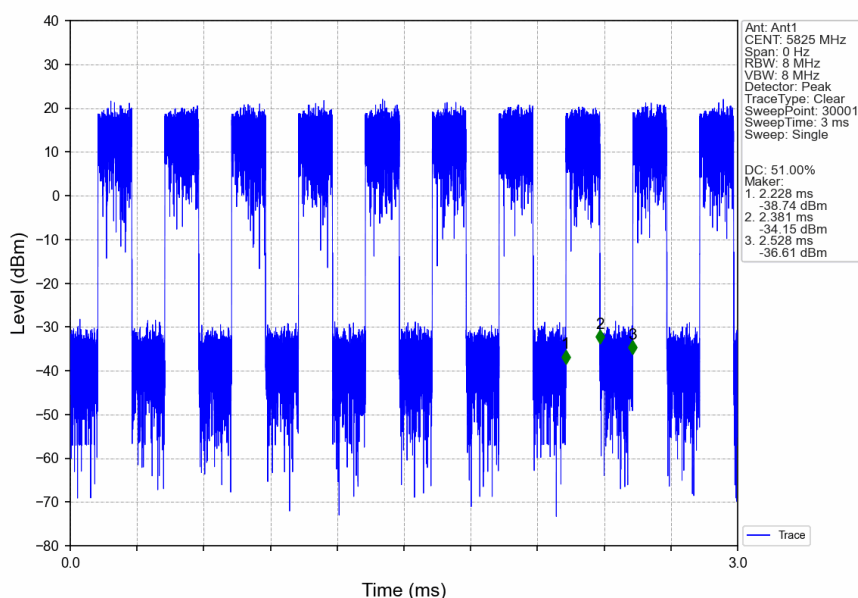


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

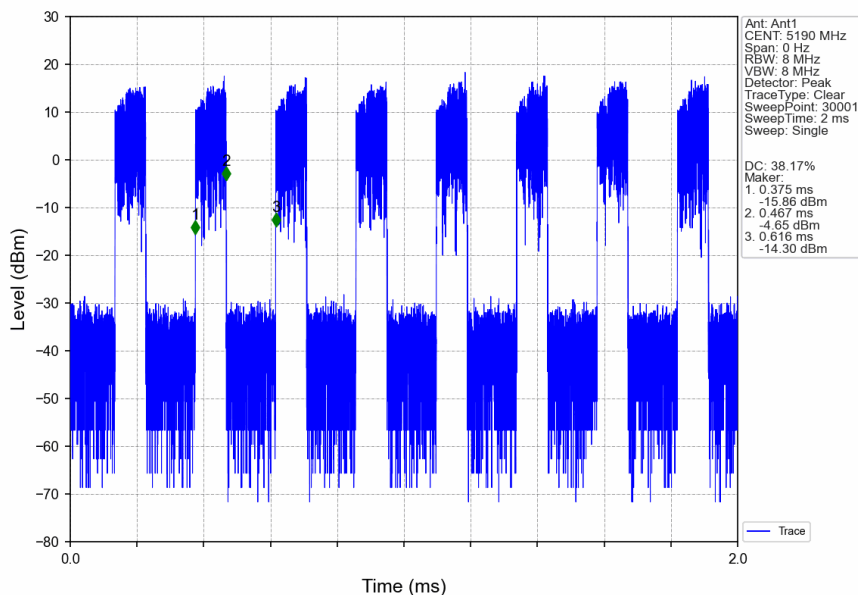


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

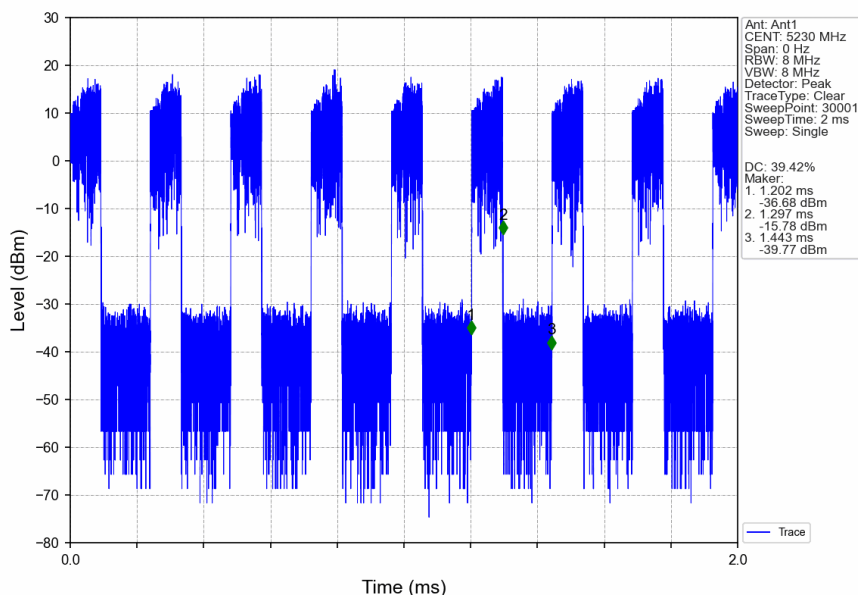


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

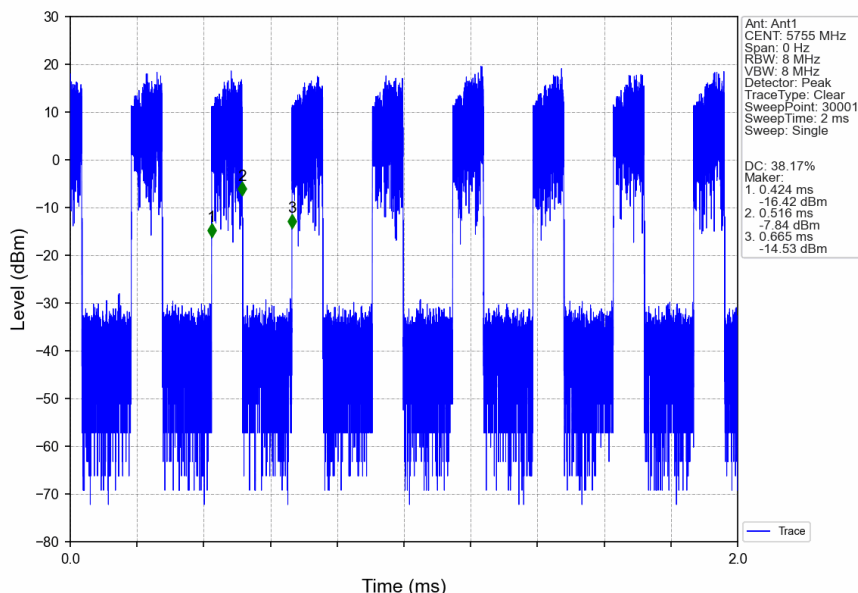


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

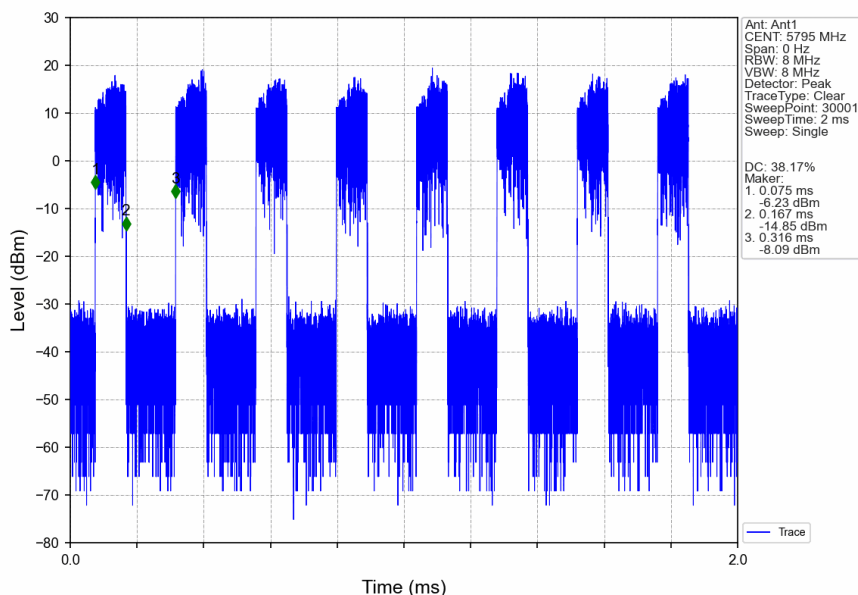


802.11ax(HEW20)_LCH_5180MHz_RU242_Left_Ant1_NTNV

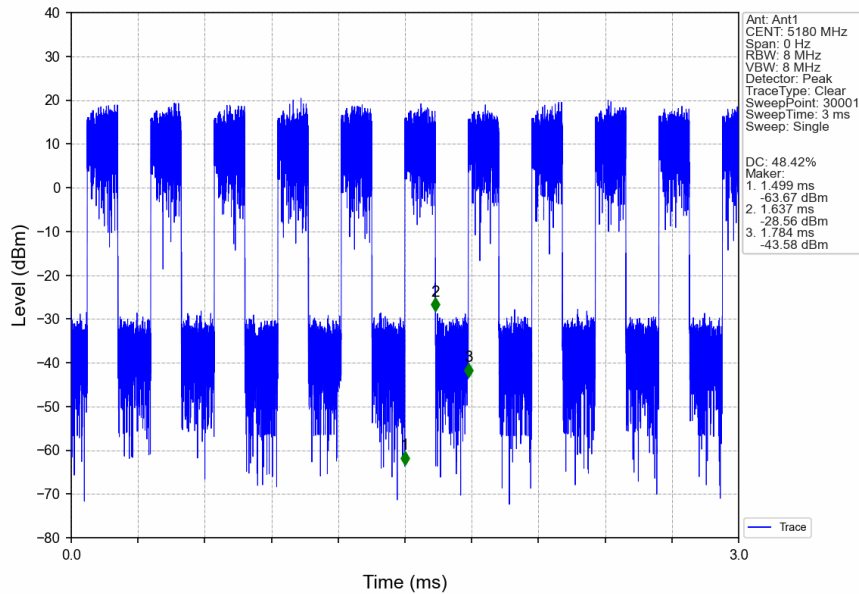


802.11ax(HEW20)_MCH_5200MHz_RU242_Left_Ant1_NTNV

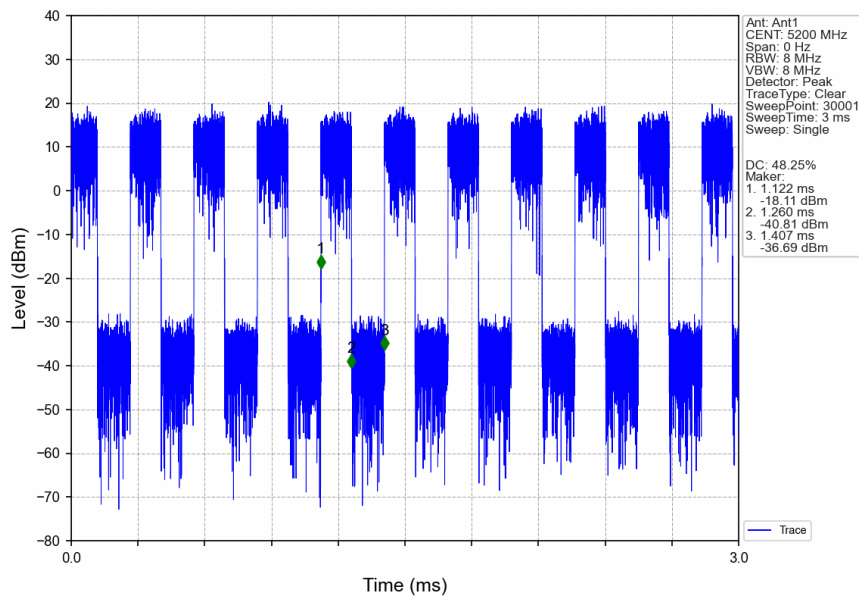


802.11ax(HEW20)_HCH_5240MHz_RU242_Left_Ant1_NTNV

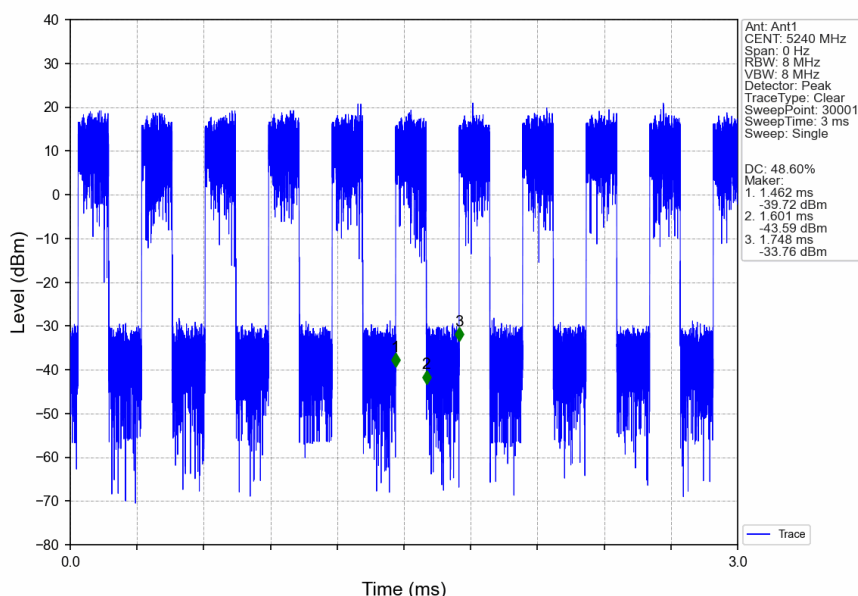


802.11ax(HEW20)_LCH_5745MHz_RU242_Left_Ant1_NTNV

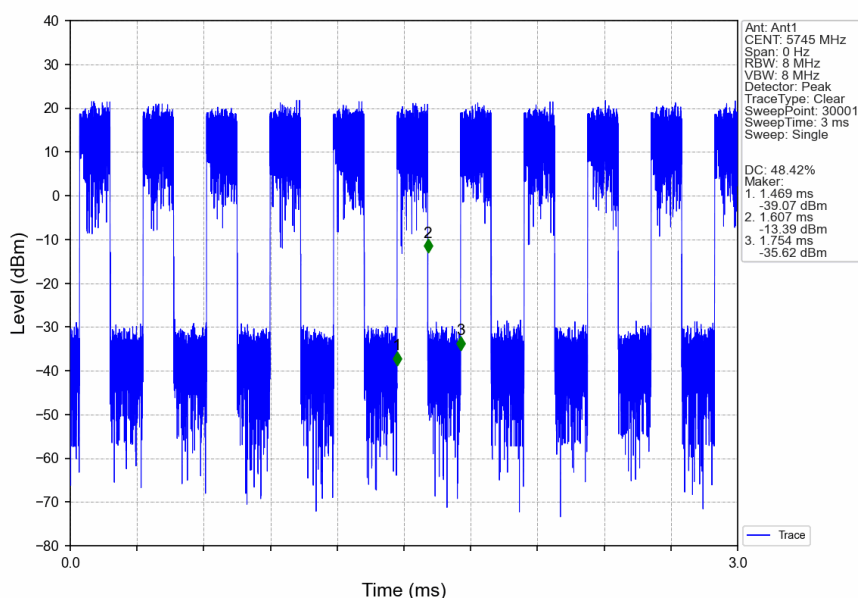


802.11ax(HEW20)_MCH_5785MHz_RU242_Left_Ant1_NTNV

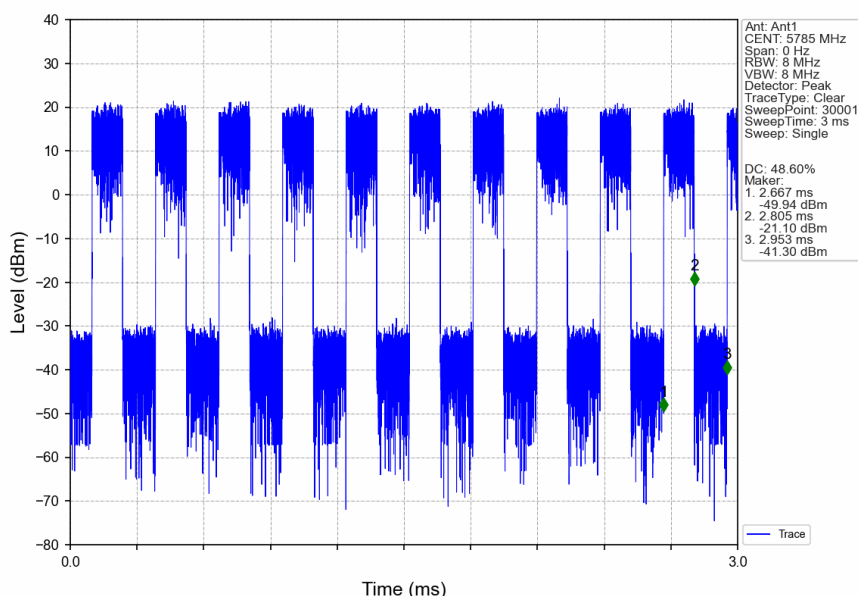


802.11ax(HEW20)_HCH_5825MHz_RU242_Left_Ant1_NTNV

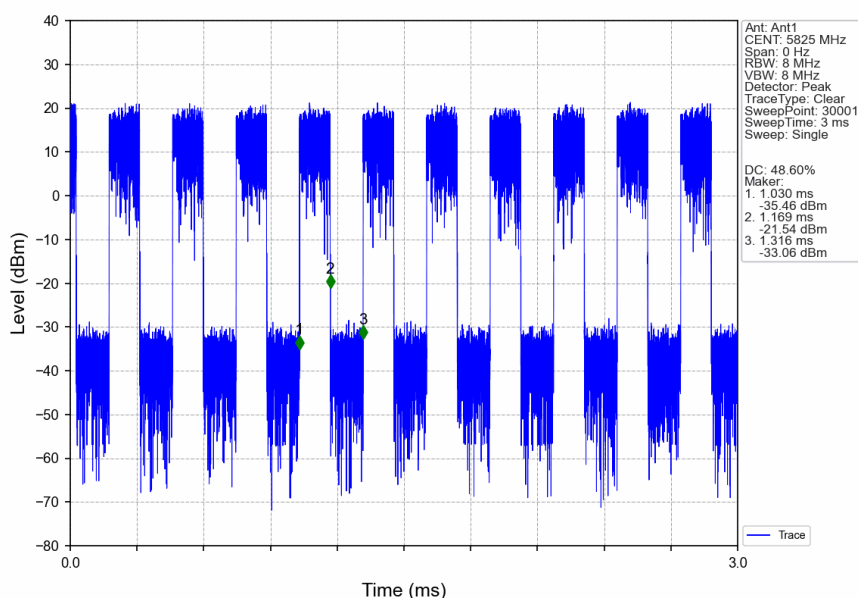

802.11ax(HEW40)_LCH_5190MHz_RU484_Left_Ant1_NTNV

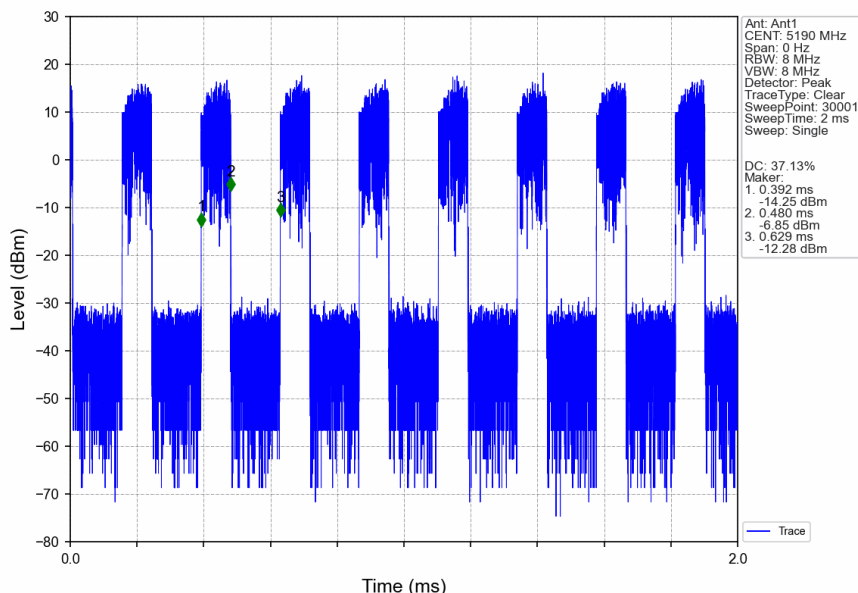


802.11ax(HEW40)_HCH_5230MHz_RU484_Left_Ant1_NTNV

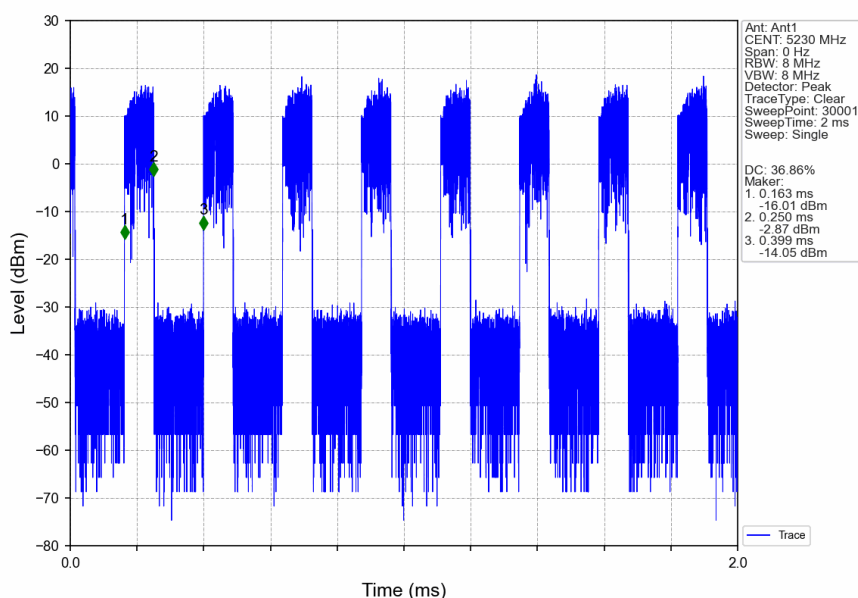


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

802.11ax(HEW40)_LCH_5755MHz_RU484_Left_Ant1_NTNV

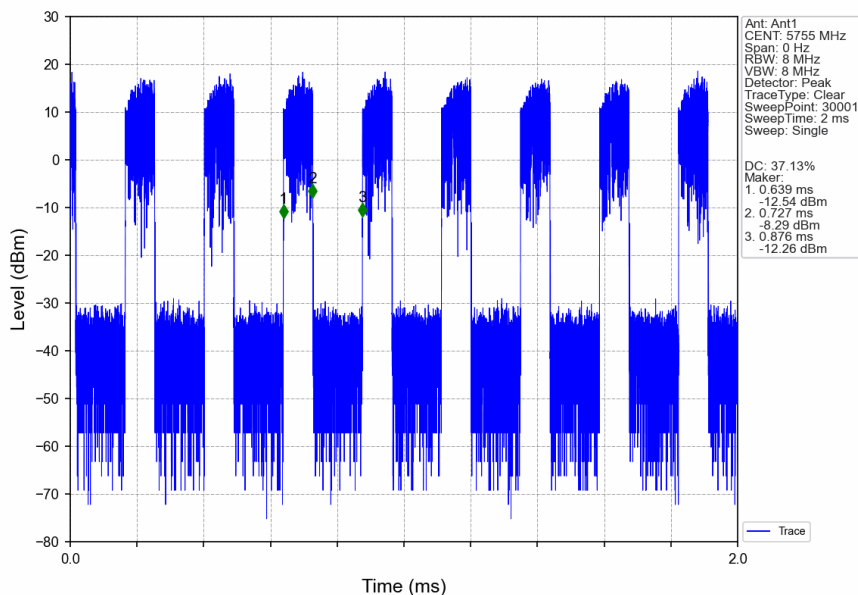

802.11ax(HEW40)_HCH_5795MHz_RU484_Left_Ant1_NTNV

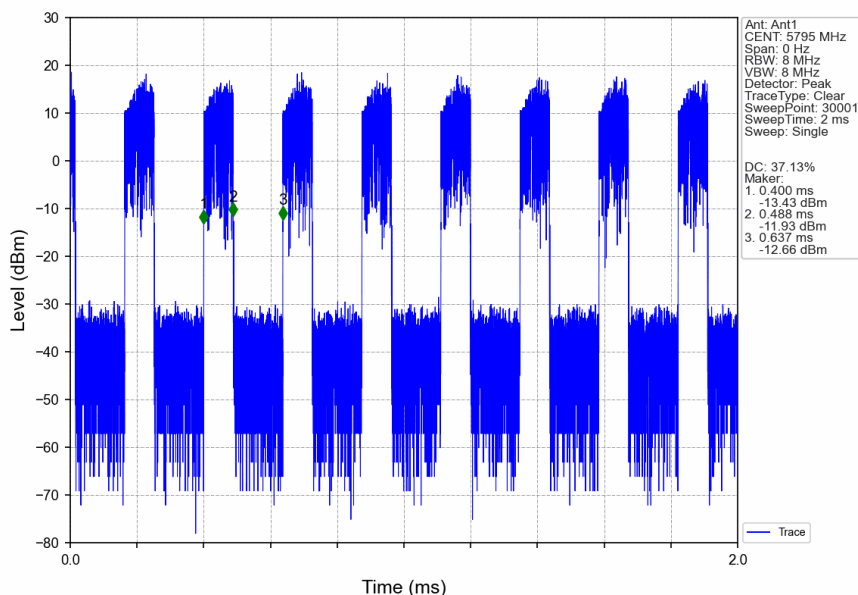

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	16.739	/	Pass
		5200	/	/	1	16.763	/	Pass
		5240	/	/	1	16.798	/	Pass
		5745	/	/	1	16.727	/	Pass
		5785	/	/	1	16.747	/	Pass
		5825	/	/	1	16.719	/	Pass
802.11n (HT20)	SISO	5180	/	/	1	17.812	/	Pass
		5200	/	/	1	17.858	/	Pass
		5240	/	/	1	17.871	/	Pass
		5745	/	/	1	17.880	/	Pass
		5785	/	/	1	17.839	/	Pass
		5825	/	/	1	17.850	/	Pass
802.11n (HT40)	SISO	5190	/	/	1	36.365	/	Pass
		5230	/	/	1	36.414	/	Pass
		5755	/	/	1	36.245	/	Pass
		5795	/	/	1	36.321	/	Pass
802.11ac (VHT20)	SISO	5180	/	/	1	17.816	/	Pass
		5200	/	/	1	17.815	/	Pass
		5240	/	/	1	17.853	/	Pass
		5745	/	/	1	17.850	/	Pass
		5785	/	/	1	17.975	/	Pass
		5825	/	/	1	17.907	/	Pass
802.11ac (VHT40)	SISO	5190	/	/	1	37.029	/	Pass
		5230	/	/	1	36.324	/	Pass
		5755	/	/	1	36.332	/	Pass
		5795	/	/	1	36.322	/	Pass
802.11ax (HEW20)	SISO	5180	RU242	Left	1	18.927	/	Pass
		5200	RU242	Left	1	18.965	/	Pass
		5240	RU242	Left	1	18.923	/	Pass
		5745	RU242	Left	1	18.932	/	Pass
		5785	RU242	Left	1	18.925	/	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 133 of 204

		5825	RU242	Left	1	18.951	/	Pass
802.11ax (HEW40)	SISO	5190	RU484	Left	1	37.818	/	Pass
		5230	RU484	Left	1	37.616	/	Pass
		5755	RU484	Left	1	37.602	/	Pass
		5795	RU484	Left	1	37.567	/	Pass

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	21.041	/	Pass
		5200	/	/	1	20.923	/	Pass
		5240	/	/	1	20.623	/	Pass
802.11n (HT20)	SISO	5180	/	/	1	20.955	/	Pass
		5200	/	/	1	21.192	/	Pass
		5240	/	/	1	21.256	/	Pass
802.11n (HT40)	SISO	5190	/	/	1	40.693	/	Pass
		5230	/	/	1	40.682	/	Pass
802.11ac (VHT20)	SISO	5180	/	/	1	21.097	/	Pass
		5200	/	/	1	20.970	/	Pass
		5240	/	/	1	21.058	/	Pass
802.11ac (VHT40)	SISO	5190	/	/	1	41.543	/	Pass
		5230	/	/	1	40.586	/	Pass
802.11ax (HEW20)	SISO	5180	RU242	Left	1	20.987	/	Pass
		5200	RU242	Left	1	21.039	/	Pass
		5240	RU242	Left	1	21.018	/	Pass
802.11ax (HEW40)	SISO	5190	RU484	Left	1	40.695	/	Pass
		5230	RU484	Left	1	40.178	/	Pass

2.1.3 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5745	/	/	1	16.339	>=0.5	Pass
		5785	/	/	1	16.331	>=0.5	Pass
		5825	/	/	1	16.266	>=0.5	Pass
802.11n (HT20)	SISO	5745	/	/	1	17.698	>=0.5	Pass
		5785	/	/	1	17.703	>=0.5	Pass
		5825	/	/	1	17.683	>=0.5	Pass
802.11n (HT40)	SISO	5755	/	/	1	35.649	>=0.5	Pass
		5795	/	/	1	35.084	>=0.5	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch / 深圳分公司 / SZEMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250400168705

Page: 134 of 204

802.11ac (VHT20)	SISO	5745	/	/	1	17.612	>=0.5	Pass
		5785	/	/	1	17.671	>=0.5	Pass
		5825	/	/	1	17.688	>=0.5	Pass
802.11ac (VHT40)	SISO	5755	/	/	1	36.426	>=0.5	Pass
		5795	/	/	1	36.435	>=0.5	Pass
802.11ax (HEW20)	SISO	5745	RU242	Left	1	19.008	>=0.5	Pass
		5785	RU242	Left	1	19.026	>=0.5	Pass
		5825	RU242	Left	1	18.998	>=0.5	Pass
802.11ax (HEW40)	SISO	5755	RU484	Left	1	37.892	>=0.5	Pass
		5795	RU484	Left	1	37.794	>=0.5	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2.2 Test Graph


2.2.1 OBW

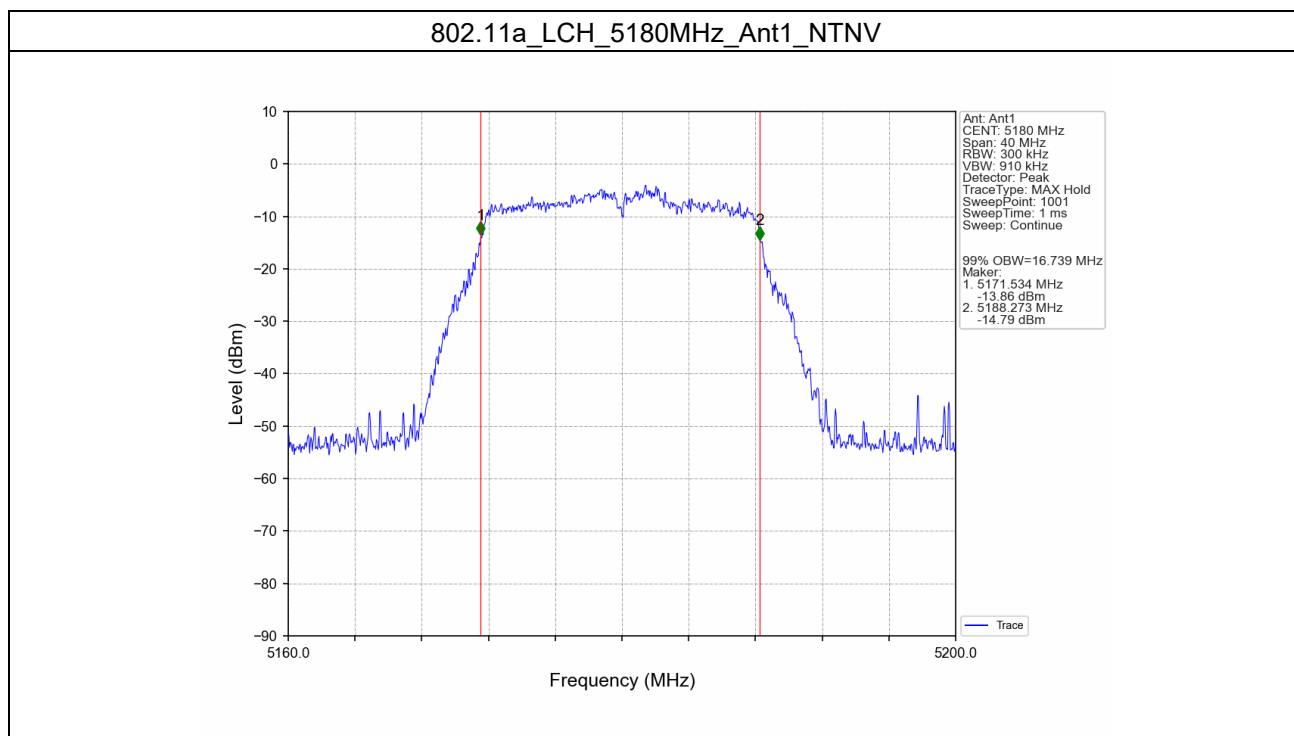


802.11a_MCH_5200MHz_Ant1_NTNV

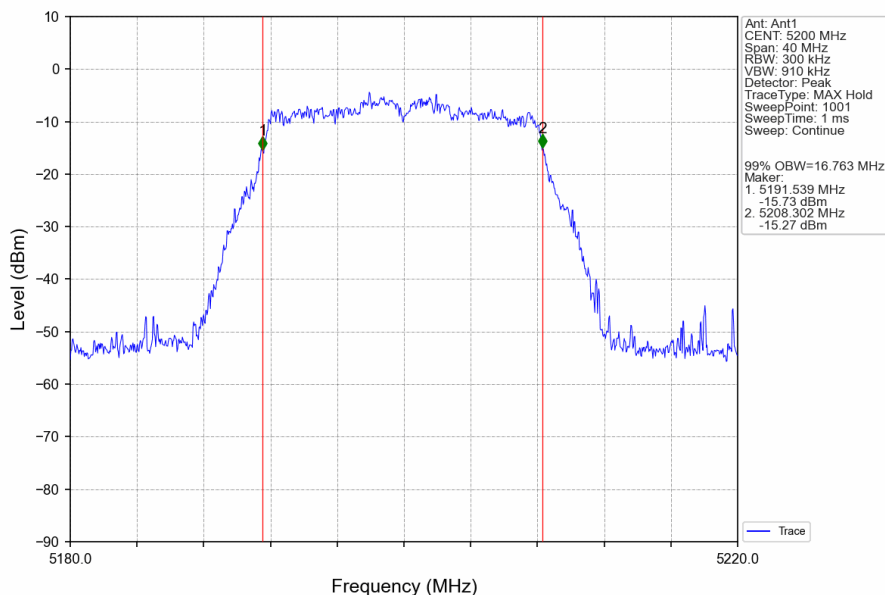


802.11a_HCH_5240MHz_Ant1_NTNV

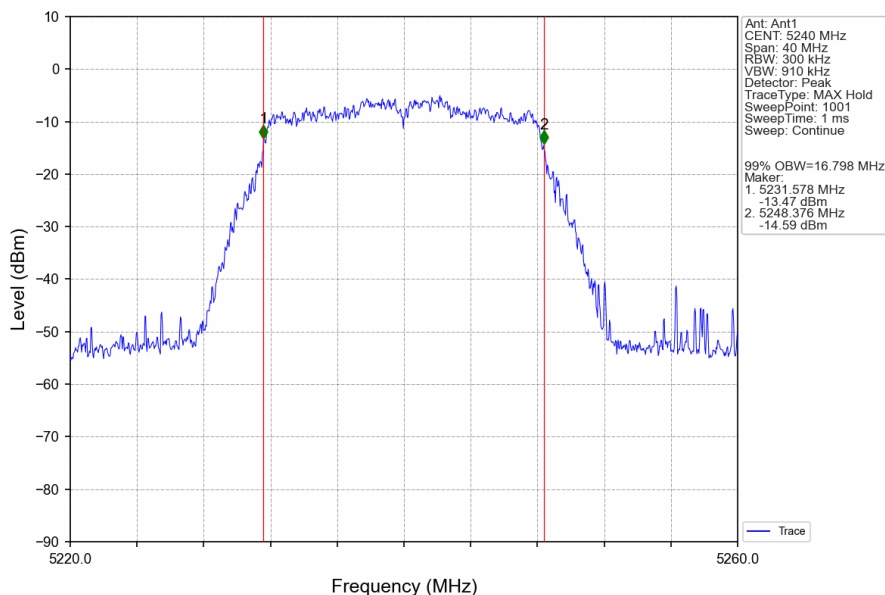


802.11a_LCH_5745MHz_Ant1_NTNV

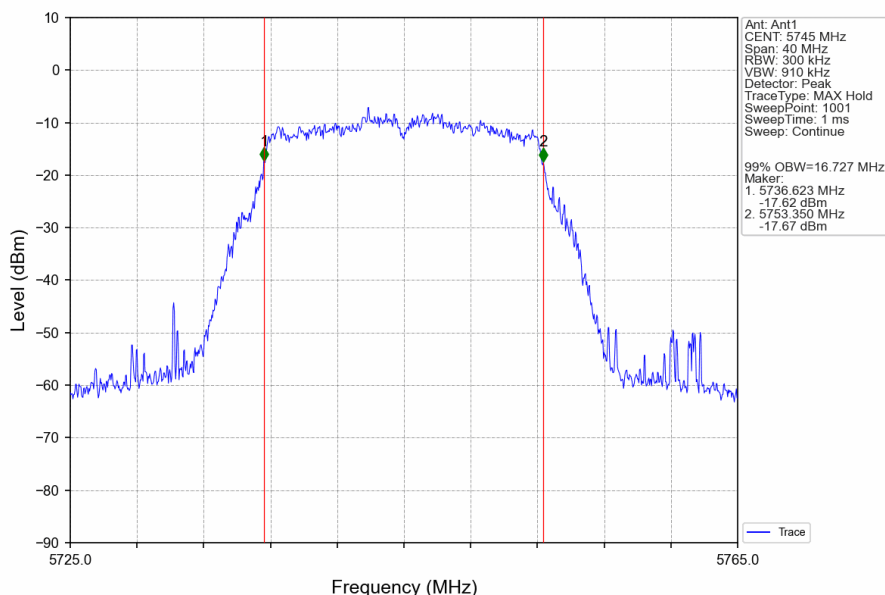


802.11a_MCH_5785MHz_Ant1_NTNV

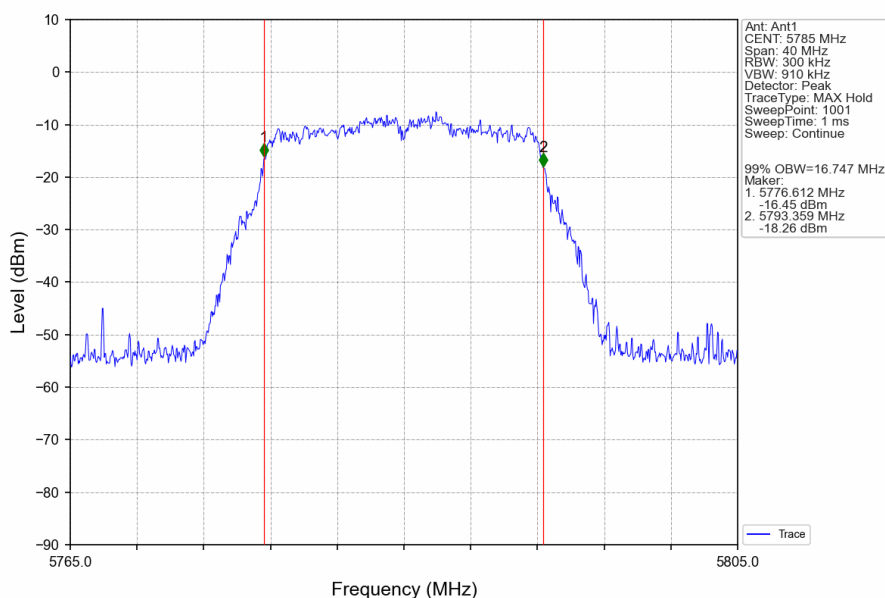


802.11a_HCH_5825MHz_Ant1_NTNV

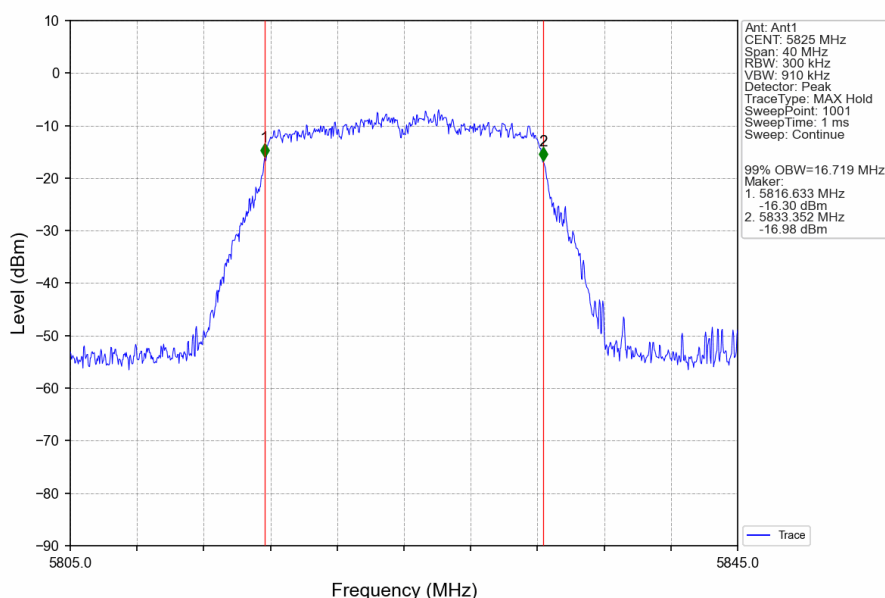


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

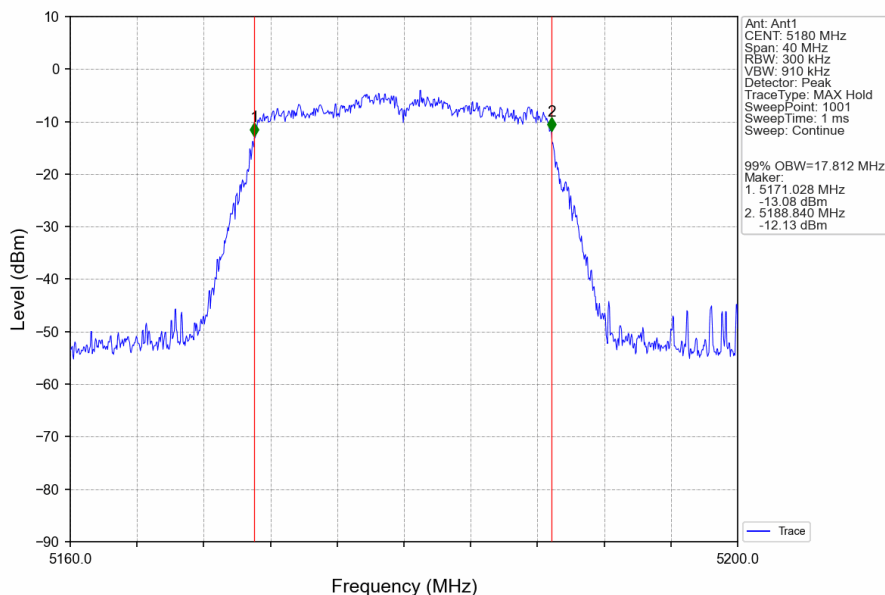


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

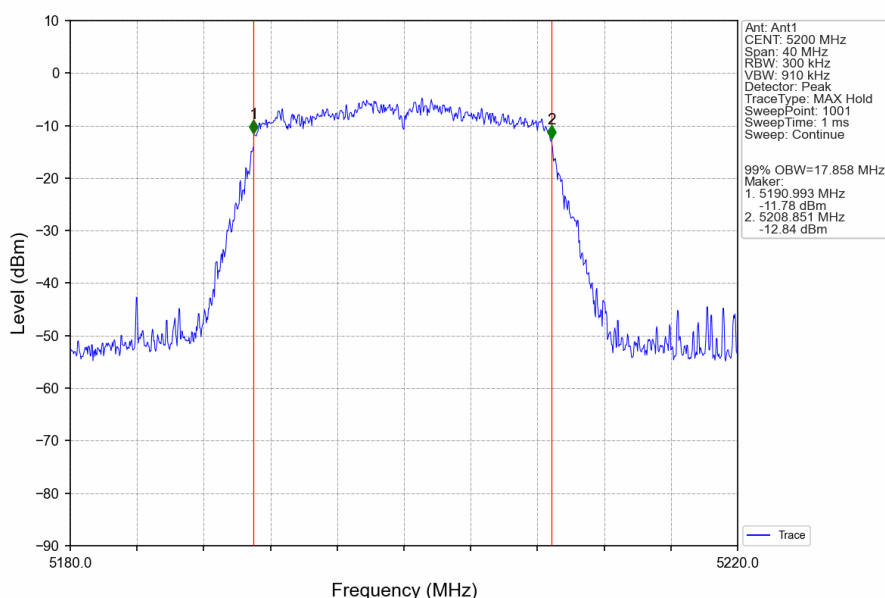


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

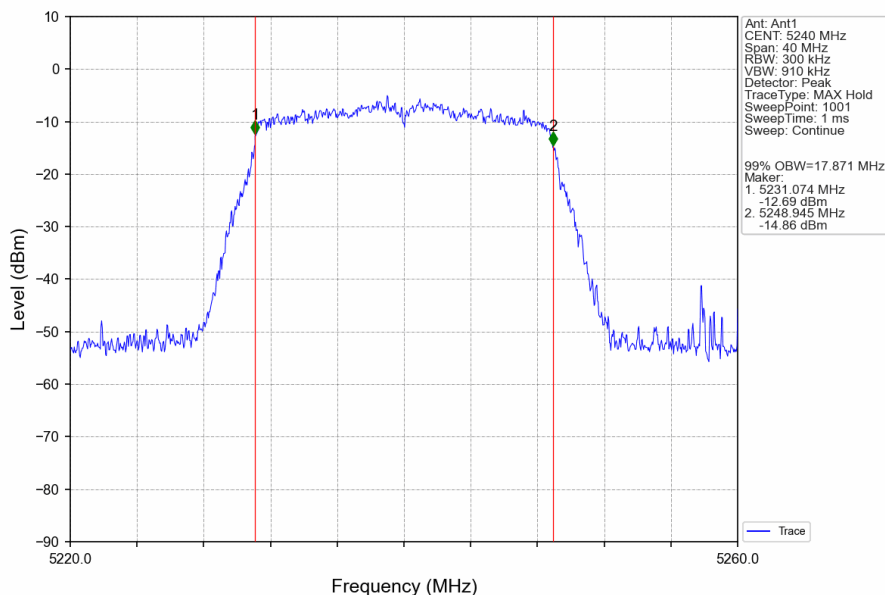


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

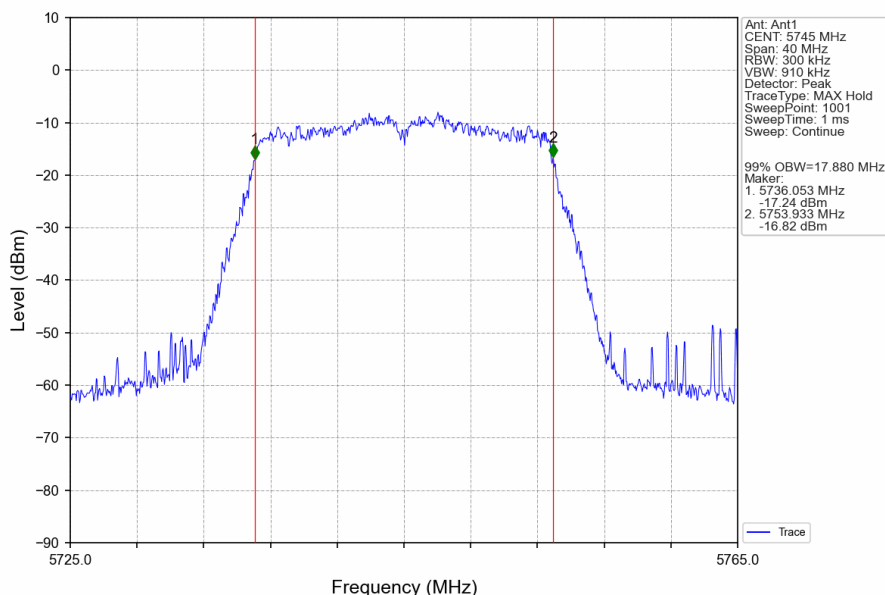


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

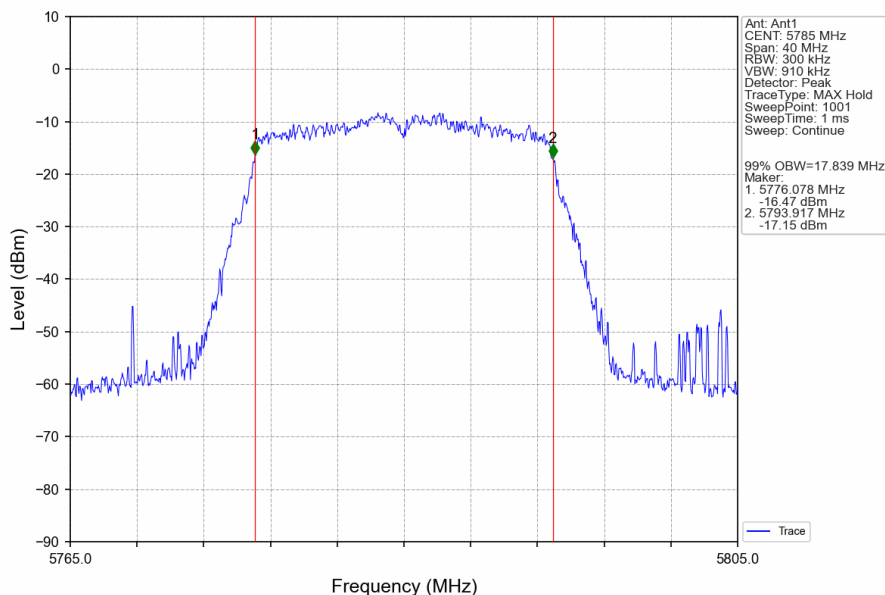


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

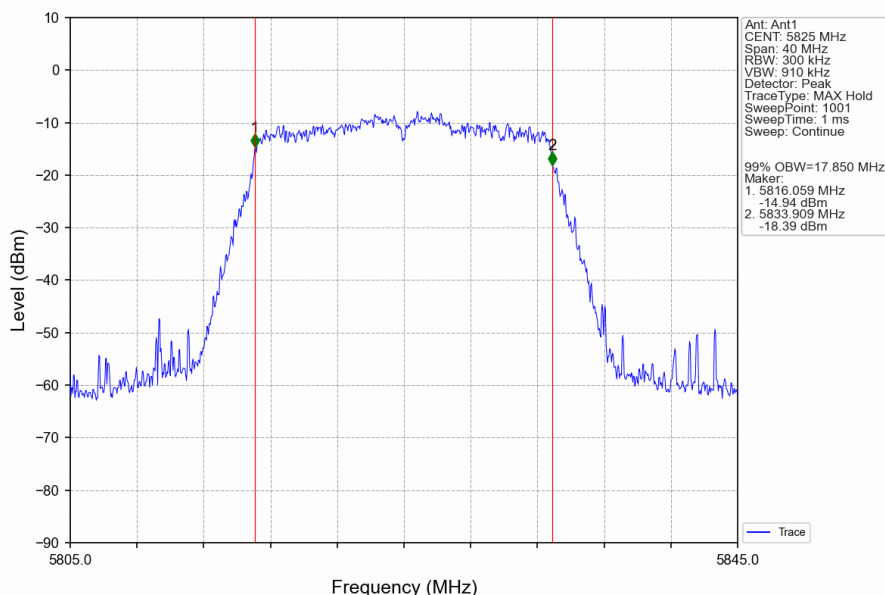


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

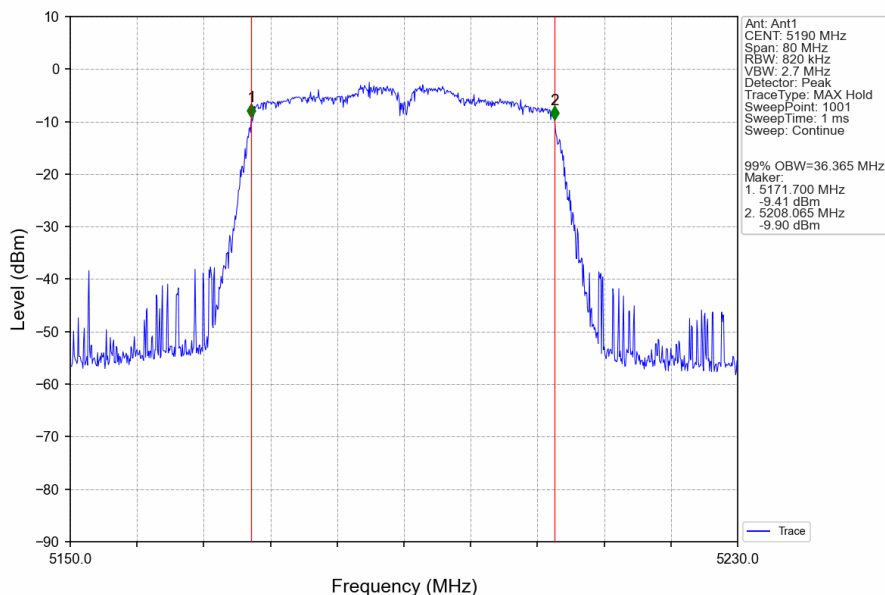


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

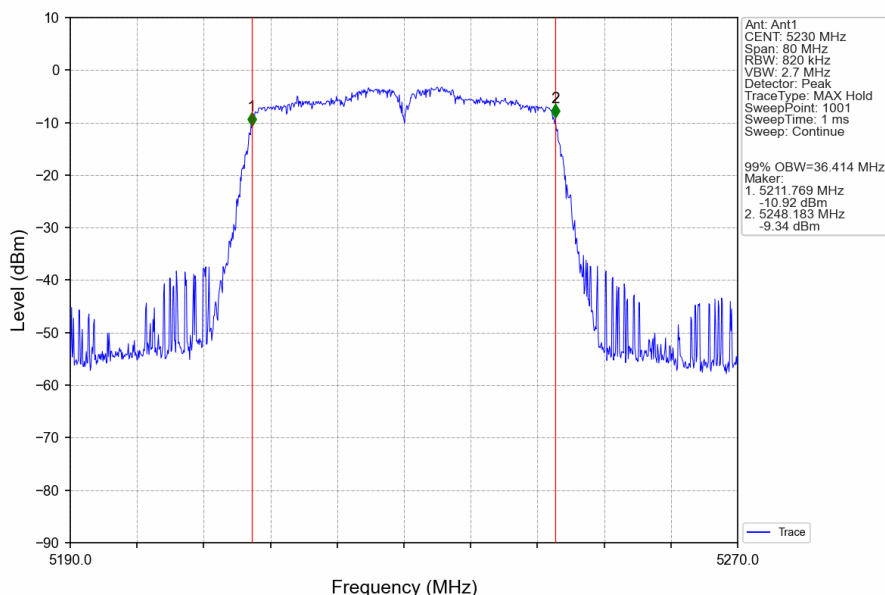


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

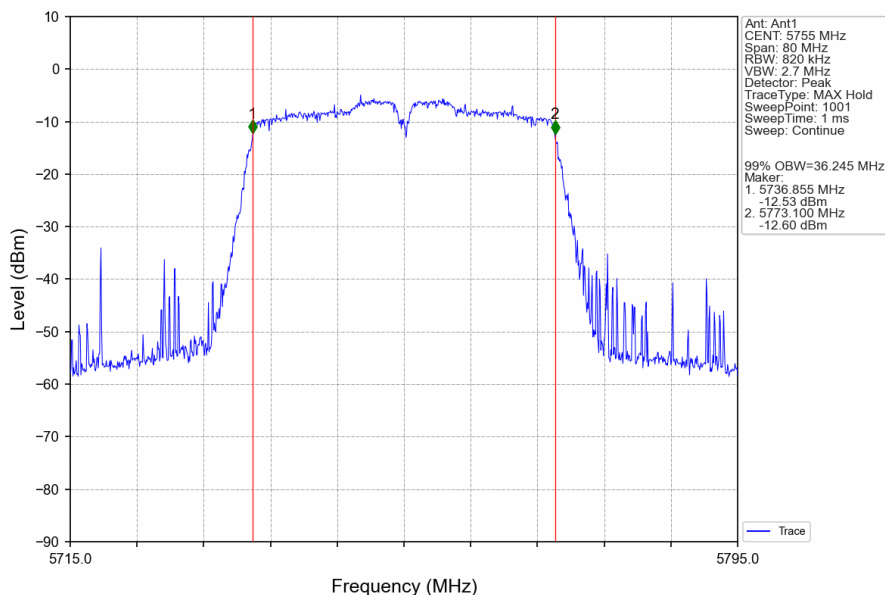


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

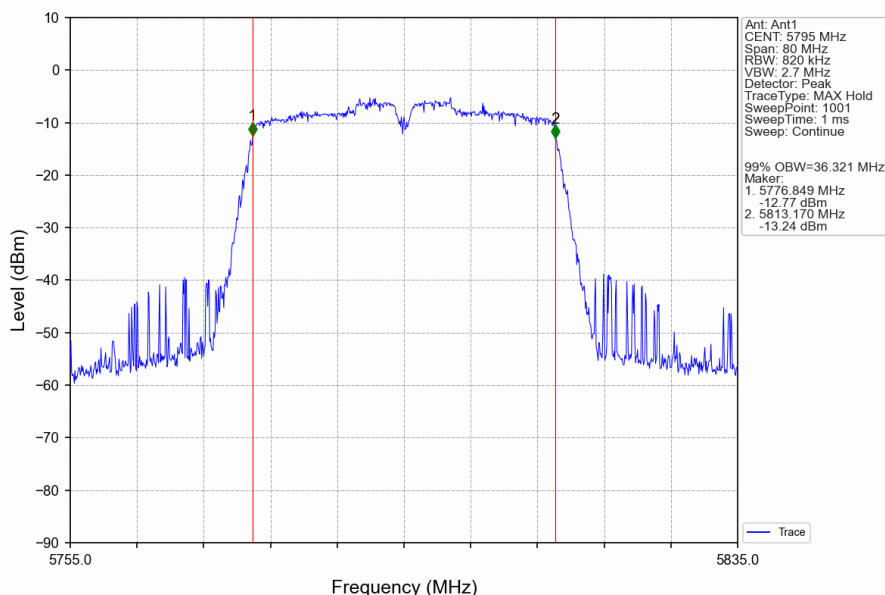


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

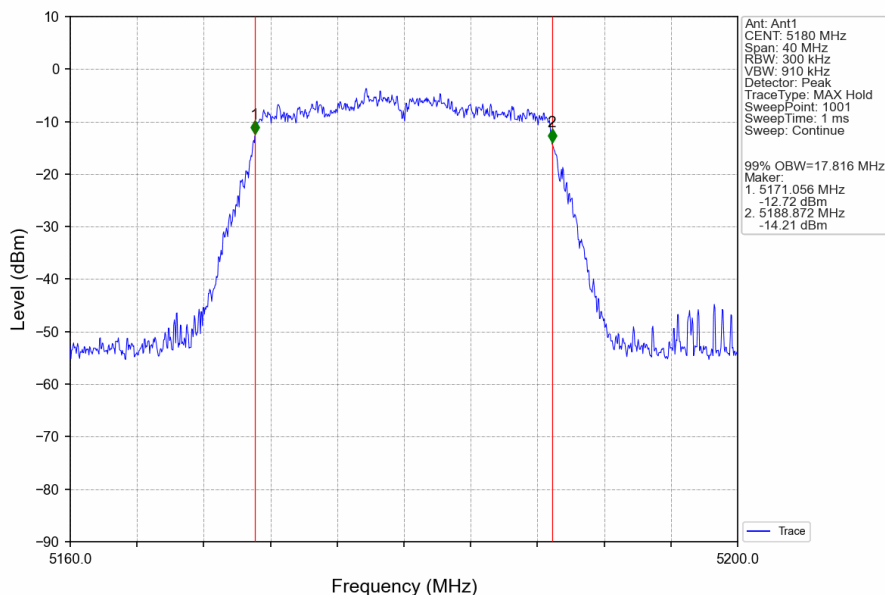


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

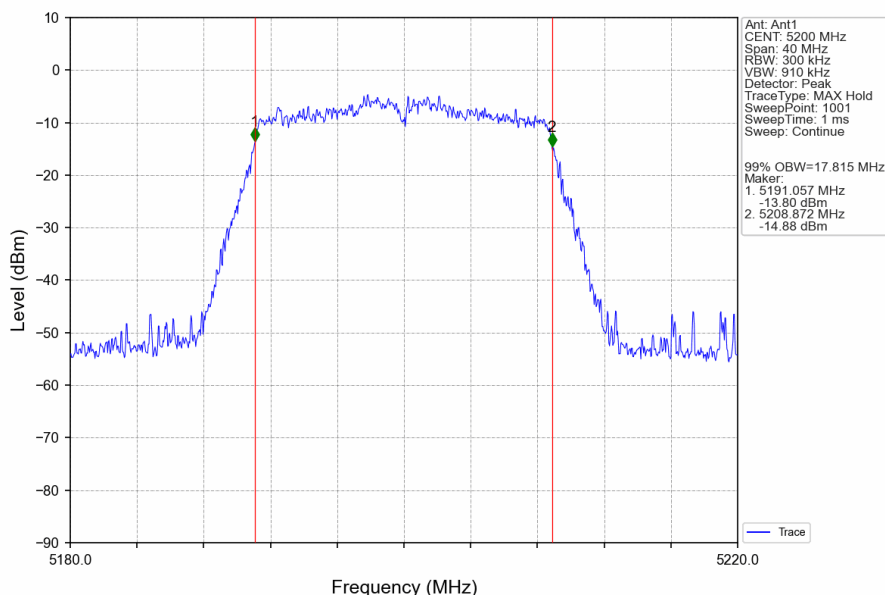


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

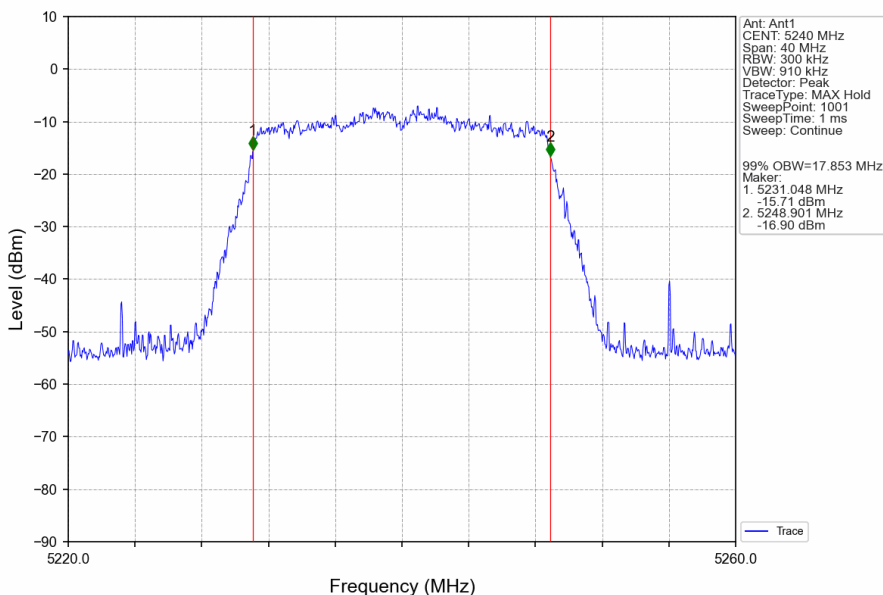

802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

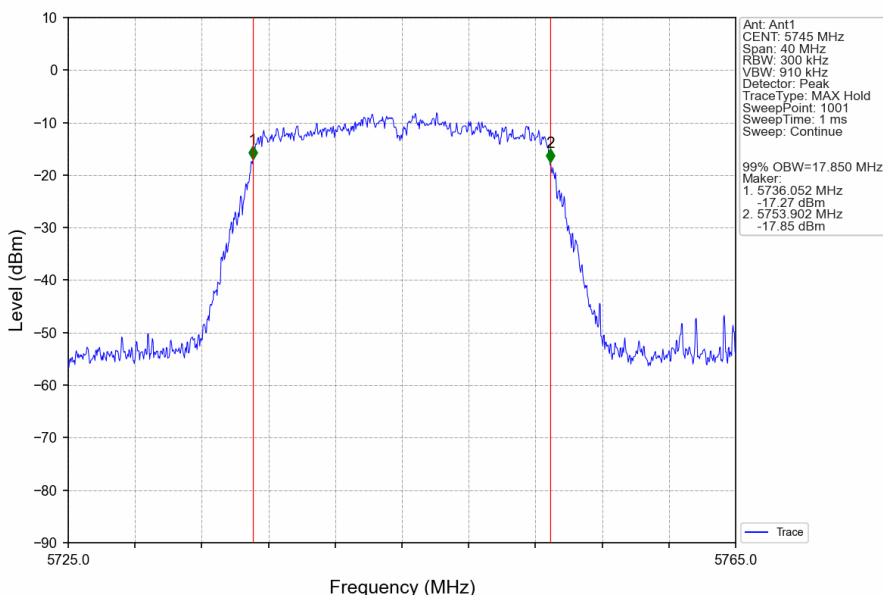

802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

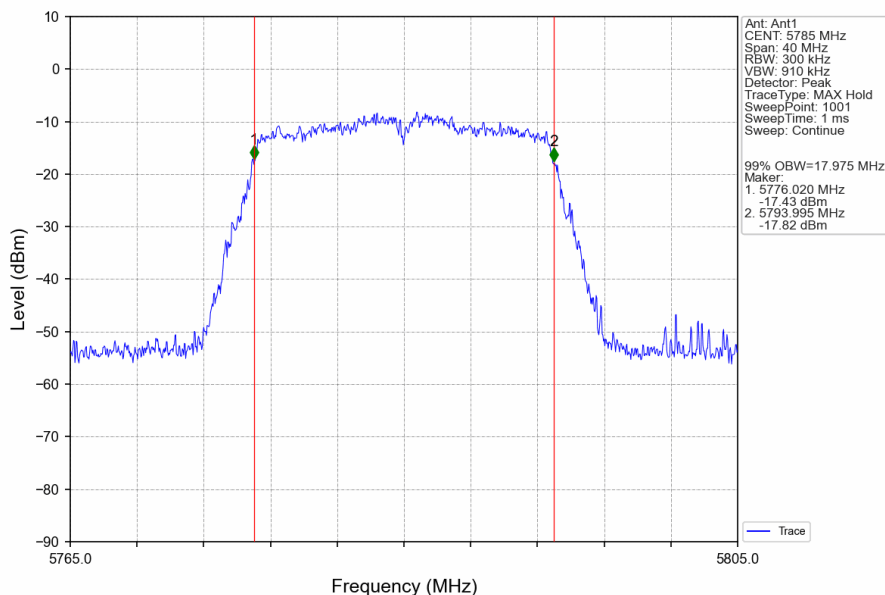

802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

